


Inverted F Antenna Specification


Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MH	2450MH	2500MH	2400MH	2450MH	2500MH
	-1.814	-0.7825	-0.7565	-7.486	-4.864	-3.542
MAX. Gain	-0.7565 dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	38.20mm					
Manufacture	Shenzhen YongShunChuang Technology Co., Ltd					
Address	301 Blg, 18 Shapuwei Community Entrepreneurship Songgang Street., Shenzhen.					

Antenna Photo & Length (mm)

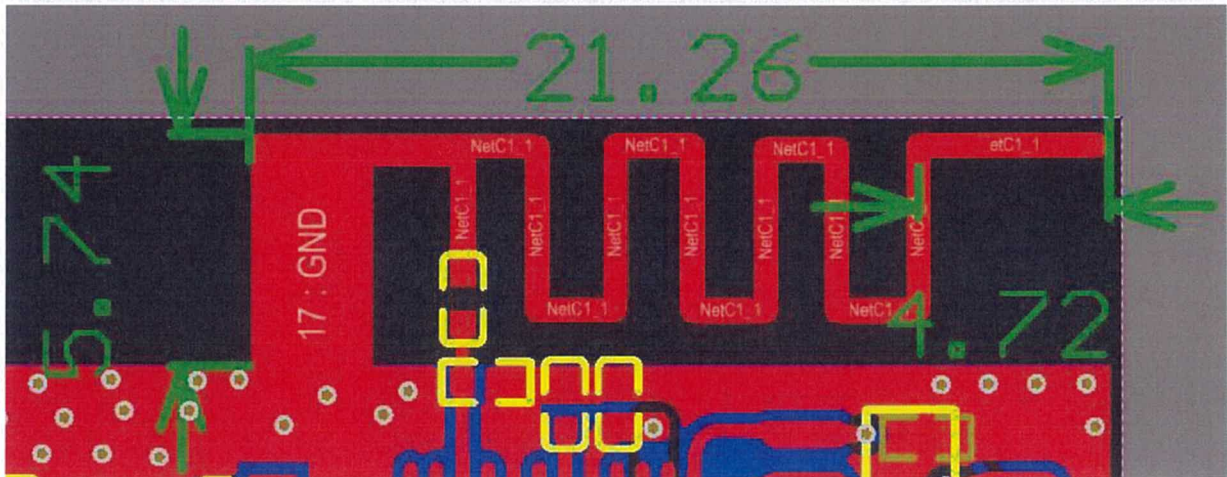


Horizontal: 2400 MHz 2450 MHz 2500 MHz
 Power (dBm)
 Max: 0 Min: -40 Scale: 5/div

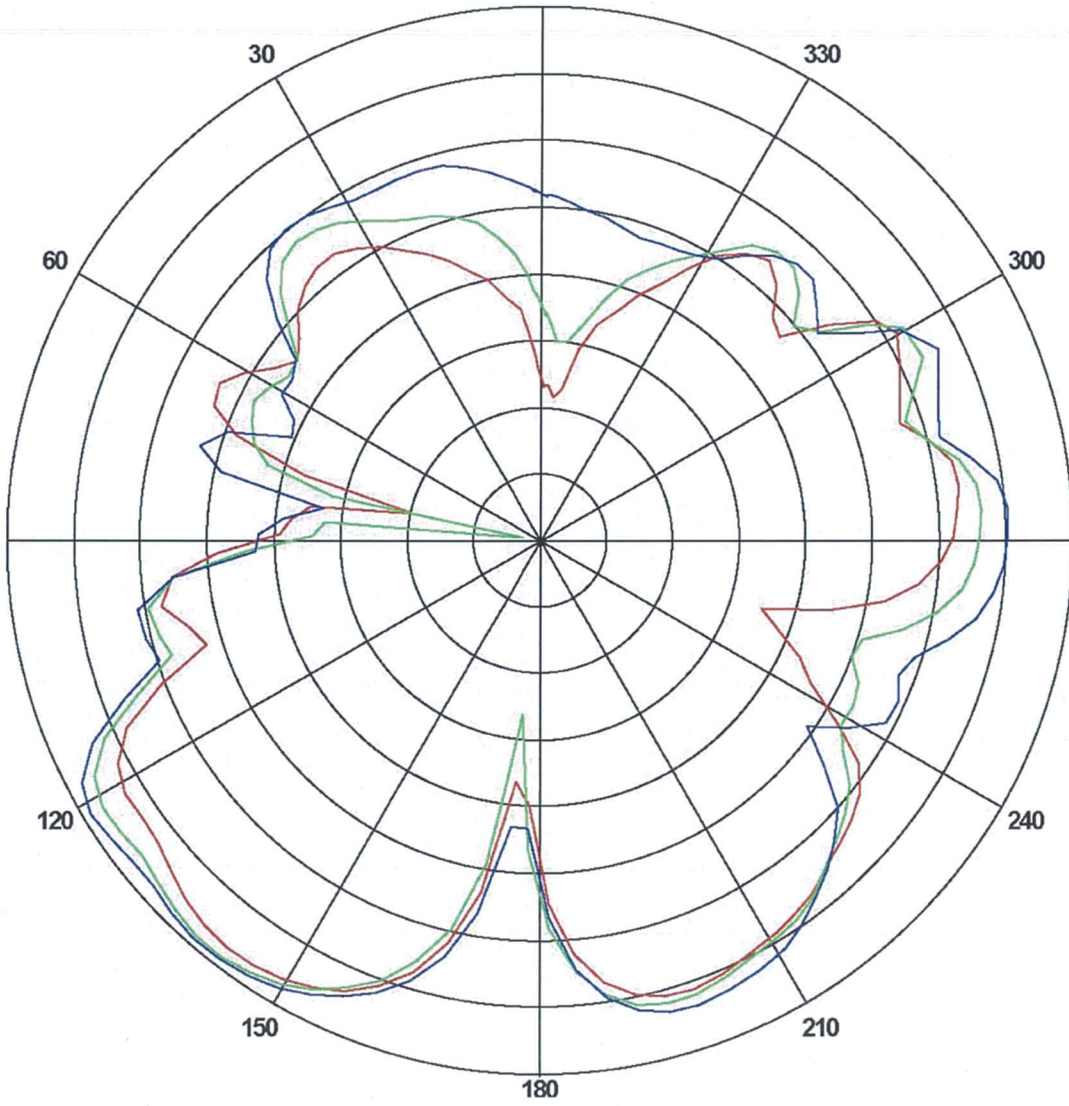

Frequency	Gain (dBi)		
	Max	Min	Avg
2400	-1.81424	-32.1254	-9.45763
2450	-0.782596	-29.2598	-6.86541
2500	-0.756558	-25.6589	-6.12688

Vertical: 2400 MHz 2450 MHz 2500 MHz
 Power (dBm)
 Max: 0 Min: -30 Scale: 5/div

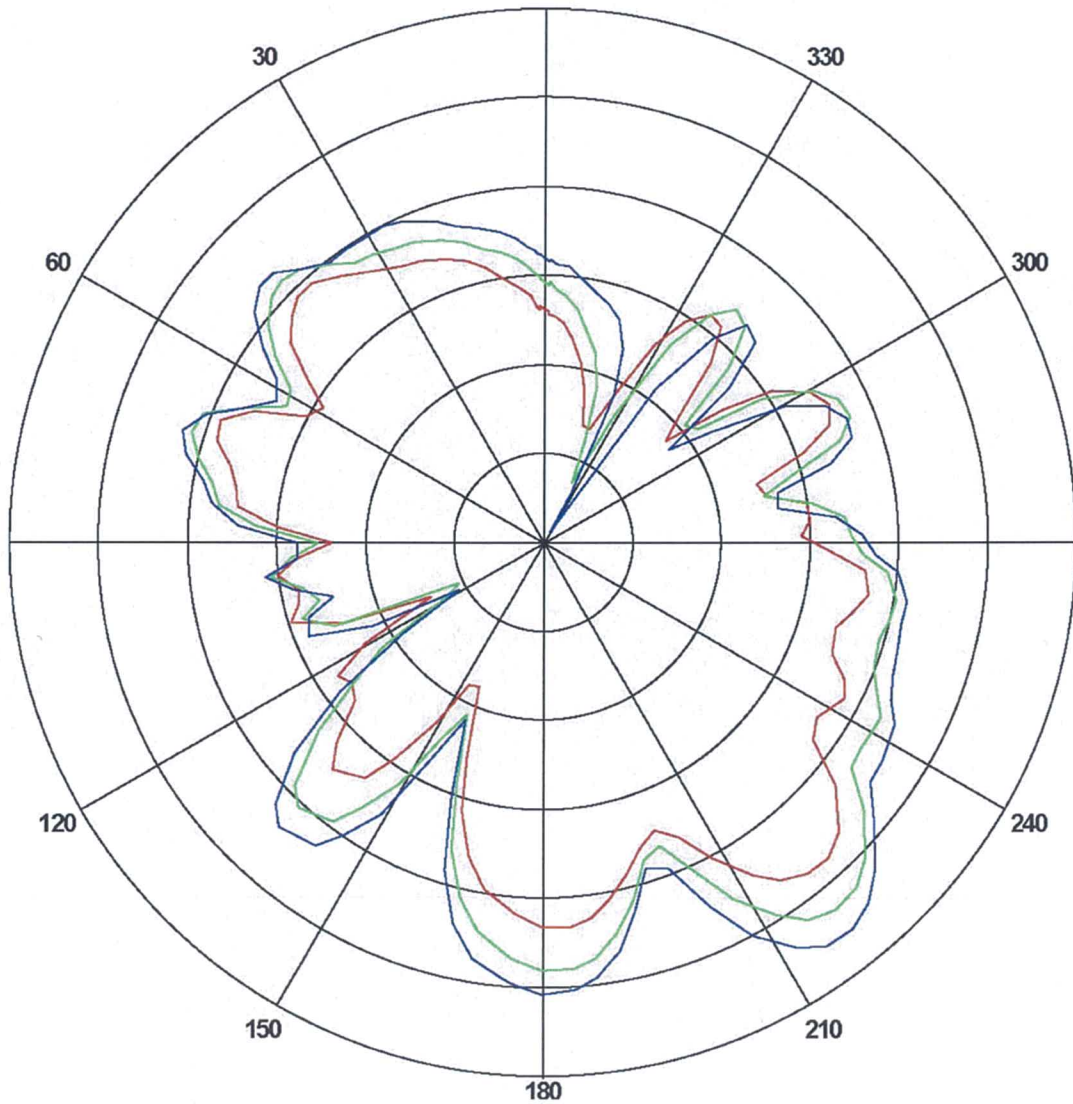

Frequency	Gain (dBi)		
	Max	Min	Avg
2400	-7.4865	-29.5621	-14.6589
2450	-4.8642	-28.1256	-12.6525
2500	-3.5421	-25.5621	-8.2698