




# FCC Radio Test Report

## FCC ID: G95OWM7111

**This report concerns: Original Grant**

**Project No.** : 2406C089B  
**Equipment** : IoT gateway  
**Brand Name** : Vantiva  
**Test Model** : OWM7111IOT  
**Series Model** : OWM7111IOT1  
**Applicant** : Vantiva USA LLC  
**Address** : 4855 Peachtree Industrial Blvd. Suite 200 Norcross, Georgia 30092  
**Manufacturer** : Vantiva USA LLC  
**Address** : 4855 Peachtree Industrial Blvd. Suite 200 Norcross, Georgia 30092  
**Factory** : FUHONG PRECISION COMPONENT (BAC GIANG) COMPANY LIMITED  
**Address** : Dinh Tram Industrial Zone.Nenh Ward Viet Yen Town.Bac Giang Province. Vietnam  
**Date of Receipt** : Jun. 25, 2024  
**Date of Test** : Jun. 25, 2024 ~ Aug. 28, 2024  
**Issued Date** : Sep. 27, 2024  
**Report Version** : R00  
**Test Sample** : Engineering Sample No.: DG2024081298 for conducted, DG2024062512 and DG2024081298 for radiated, DG2024062512 for AC conducted power line emission,  
**Standard(s)** : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

**Prepared by** :   
 Antony Liang

**Approved by** : \_\_\_\_\_  
 Chay Cai

Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China

Tel: +86-769-8318-3000    Web: www.newbtl.com    Service mail: btl\_qa@newbtl.com

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective. Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>6</b>
<b>1 . APPLICABLE STANDARDS</b>	<b>7</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
<b>3 . GENERAL INFORMATION</b>	<b>10</b>
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	11
3.3 PARAMETERS OF TEST SOFTWARE	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 SUPPORT UNITS	13
3.6 CUSTOMER INFORMATION DESCRIPTION	13
<b>4 . AC POWER LINE CONDUCTED EMISSIONS</b>	<b>14</b>
4.1 LIMIT	14
4.2 TEST PROCEDURE	14
4.3 DEVIATION FROM TEST STANDARD	14
4.4 TEST SETUP	15
4.5 EUT OPERATING CONDITIONS	15
4.6 TEST RESULTS	15
<b>5 . RADIATED EMISSIONS</b>	<b>16</b>
5.1 LIMIT	16
5.2 TEST PROCEDURE	17
5.3 DEVIATION FROM TEST STANDARD	18
5.4 TEST SETUP	18
5.5 EUT OPERATING CONDITIONS	20
5.6 TEST RESULT - 9 KHZ TO 30 MHZ	20
5.7 TEST RESULT - 30 MHZ TO 1000 MHZ	20
5.8 TEST RESULT - ABOVE 1000 MHZ	20
<b>6 . BANDWIDTH</b>	<b>21</b>
6.1 LIMIT	21
6.2 TEST PROCEDURE	21

<b>Table of Contents</b>	<b>Page</b>
6.3 DEVIATION FROM STANDARD	21
6.4 TEST SETUP	21
6.5 EUT OPERATION CONDITIONS	21
6.6 TEST RESULTS	21
<b>7 . MAXIMUM OUTPUT POWER</b>	<b>22</b>
7.1 LIMIT	22
7.2 TEST PROCEDURE	22
7.3 DEVIATION FROM STANDARD	22
7.4 TEST SETUP	22
7.5 EUT OPERATION CONDITIONS	22
7.6 TEST RESULTS	22
<b>8 . CONDUCTED SPURIOUS EMISSION</b>	<b>23</b>
8.1 LIMIT	23
8.2 TEST PROCEDURE	23
8.3 DEVIATION FROM STANDARD	23
8.4 TEST SETUP	23
8.5 EUT OPERATION CONDITIONS	23
8.6 TEST RESULTS	23
<b>9 . POWER SPECTRAL DENSITY</b>	<b>24</b>
9.1 LIMIT	24
9.2 TEST PROCEDURE	24
9.3 DEVIATION FROM STANDARD	24
9.4 TEST SETUP	24
9.5 EUT OPERATION CONDITIONS	24
9.6 TEST RESULTS	24
<b>10 . MEASUREMENT INSTRUMENTS LIST</b>	<b>25</b>
<b>11 . EUT TEST PHOTO</b>	<b>27</b>
<b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>	<b>33</b>
<b>APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ</b>	<b>36</b>
<b>APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b>	<b>41</b>
<b>APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ</b>	<b>44</b>
<b>APPENDIX E - BANDWIDTH</b>	<b>61</b>

**Table of Contents****Page****APPENDIX F - MAXIMUM OUTPUT POWER****64****APPENDIX G - CONDUCTED SPURIOUS EMISSION****67****APPENDIX H - POWER SPECTRAL DENSITY****72**

**REPORT ISSUED HISTORY**

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-3-2406C089B	R00	Original Report.	Sep. 27, 2024	Valid

**1. APPLICABLE STANDARDS**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

**2. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan City, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

## 2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

### A. AC power line conducted emissions Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

### B. Radiated emissions Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 6GHz	4.08
		6GHz ~ 18GHz	4.62

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36

### C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Conducted Spurious Emission	1.9 dB
Power Spectral Density	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.



### 2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	25°C	60%	AC 120V/60Hz	Hayden Chen	Jul. 17, 2024
Radiated Emissions-9 kHz to 30 MHz	23°C	46%	AC 120V/60Hz	Hayden Chen	Aug. 05, 2024
Radiated Emissions-30 MHz to 1000 MHz	24°C	54%	AC 120V/60Hz	Allen Tong	Aug. 28, 2024
Radiated Emissions-Above 1000 MHz	23°C	54%	AC 120V/60Hz	Jensen Zhou	Aug. 16, 2024
	24°C	53%	AC 120V/60Hz	Allen Tong	Aug. 23, 2024
Bandwidth	26°C	47%	PoE 54V	Parker Yang	Aug. 15, 2024 ~ Aug. 23, 2024
Maximum Output Power	26°C	47%	PoE 54V	Parker Yang	Jul. 17, 2024 ~ Aug. 26, 2024
Conducted Spurious Emission	26°C	47%	PoE 54V	Parker Yang	Aug. 15, 2024 ~ Aug. 23, 2024
Power Spectral Density	26°C	47%	PoE 54V	Parker Yang	Aug. 15, 2024 ~ Aug. 23, 2024

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	IoT gateway
Brand Name	Vantiva
Test Model	OWM7111IOT
Series Model	OWM7111IOT1
Model Difference(s)	Indoor access point device model: OWM7111IOT Outdoor access point device model : OWM7111IOT1
Software Version	5043_OWM7111IOT_FSW_V07
Hardware Version	FGR
Power Source	DC Voltage supplied from PoE Power Supply. Model: ADP-46PH-54-2- 54046EPCU
Power Rating	INPUT: 100-240V~ 50/60Hz OUTPUT: 54.0V===0.85A
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	1Mbps, 2Mbps
Max. Output Power	2Mbps: 19.93 dBm (0.0984 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Ant.	Brand	IPN	Antenna Type	Connector	Gain (dBi)
1	Vantiva	6338357D	PCB	N/A	5.9

### 3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/38/39
Mode 2	TX Mode_2Mbps Channel 00/19/38/39
Mode 3	TX Mode_2Mbps Channel 00

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

<b>AC power line conducted emissions test</b>	
Final Test Mode	Description
Mode 3	TX Mode_2Mbps Channel 00

<b>Radiated emissions test - Below 1GHz</b>	
Final Test Mode	Description
Mode 3	TX Mode_2Mbps Channel 00

<b>Radiated emissions test - Above 1GHz</b>	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/38/39
Mode 2	TX Mode_2Mbps Channel 00/19/38/39

<b>Conducted test</b>	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/38/39
Mode 2	TX Mode_2Mbps Channel 00/19/38/39

Note:


- (1) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (2) For AC power line conducted emissions and radiated emissions below 1 GHz test, the 2Mbps Channel 00 is found to be the worst case and recorded.
- (3) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (4) For radiated emission above 1 GHz of Harmonic test: The polarization of Vertical and Horizontal are evaluated, the worst case is Horizontal and recorded.
- (5) For radiated emission above 1 GHz of Bandedge test: The polarization of Vertical and Horizontal are evaluated, the worst case is Vertical and recorded.

### 3.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	IPOP V4.1			
Frequency (MHz)	2402	2440	2478	2480
1Mbps	19	19	19	11
2Mbps	19	19	19	10

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

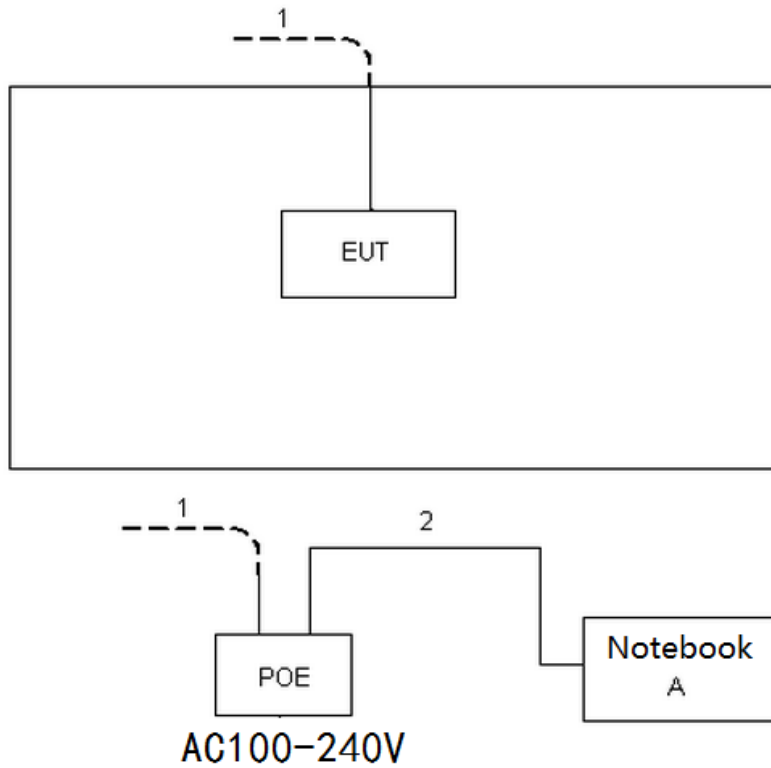

### 3.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	RJ45 Cable	NO	NO	10m
2	RJ45 Cable	NO	NO	1m

### 3.6 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

## 4. AC POWER LINE CONDUCTED EMISSIONS

### 4.1 LIMIT

Frequency of Emission (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)  
 Margin Level = Measurement Value – Limit Value

### 4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 4.3 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4 TEST SETUP

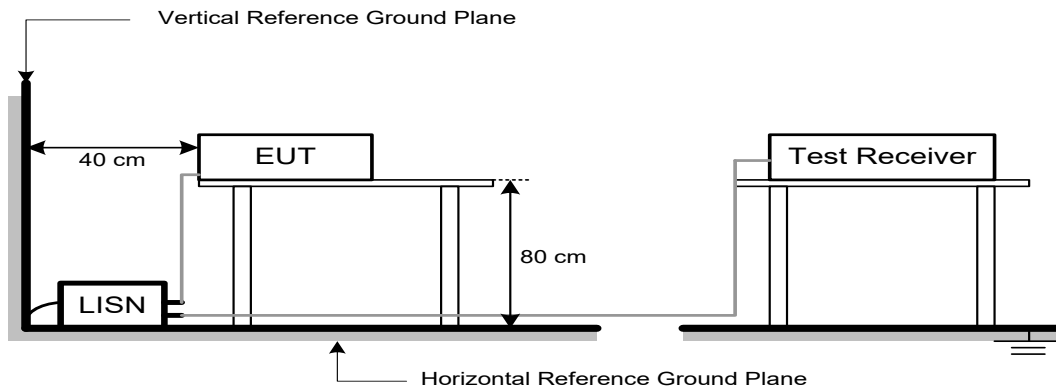

#### 4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

## 5. RADIATED EMISSIONS

### 5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dB $\mu$ V/m)		Harmonic at 1m (dB $\mu$ V/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 4)	63.5 (Note 4)

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left( \frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$20 \log (d_{\text{limit}}/d_{\text{measure}})=20 \log (3/1)=9.5 \text{ dB}$ .

$FS_{\text{limit}}$ : Harmonic at 3m Peak and Average limit.

$FS_{\text{max}}$ : Harmonic at 1m Peak and Average Maximum value.

$d_{\text{limit}}$ : Harmonic at 3m test distance.

$d_{\text{measure}}$ : Harmonic Actual test distance.



**5.2 TEST PROCEDURE**

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:



Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

**5.3 DEVIATION FROM TEST STANDARD**


No deviation.

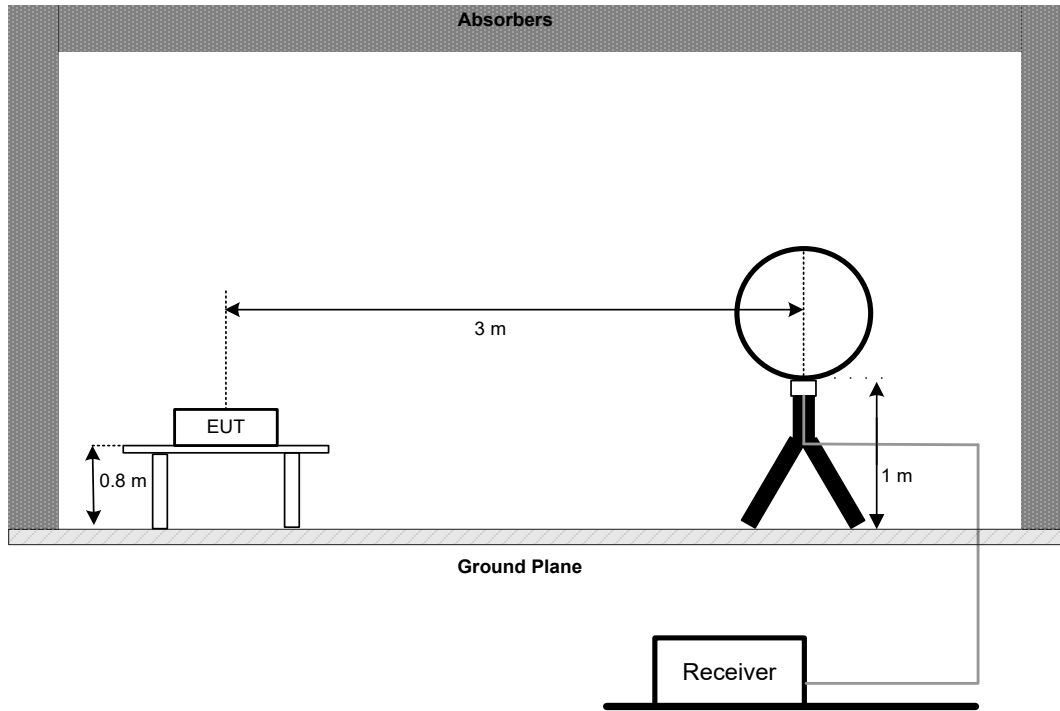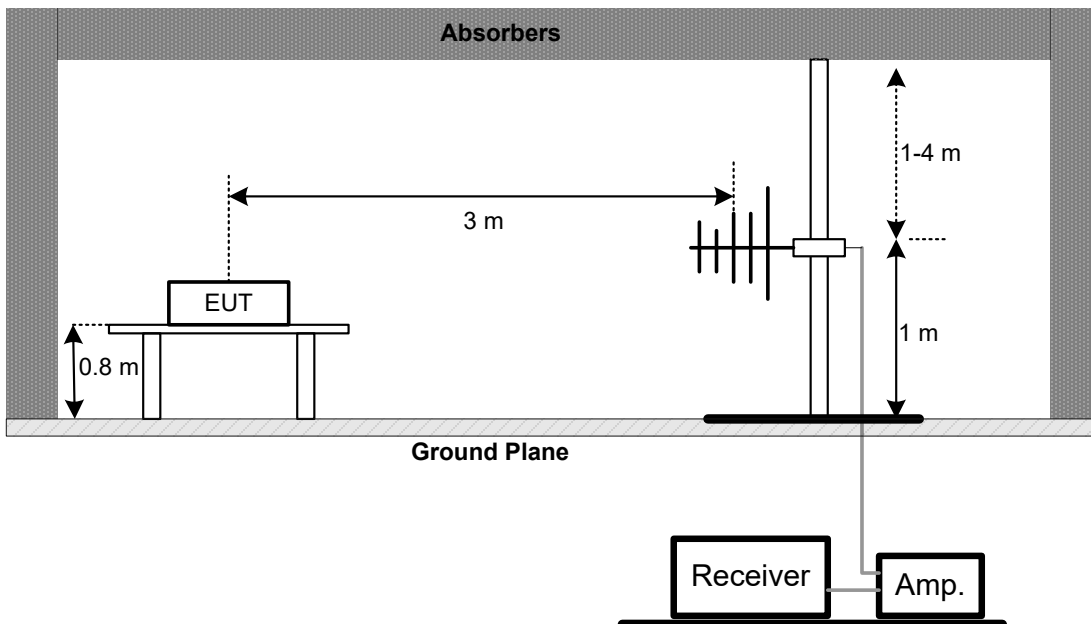**5.4 TEST SETUP****9 kHz to 30 MHz****30 MHz to 1 GHz**


**Above 1 GHz  
Band edge**

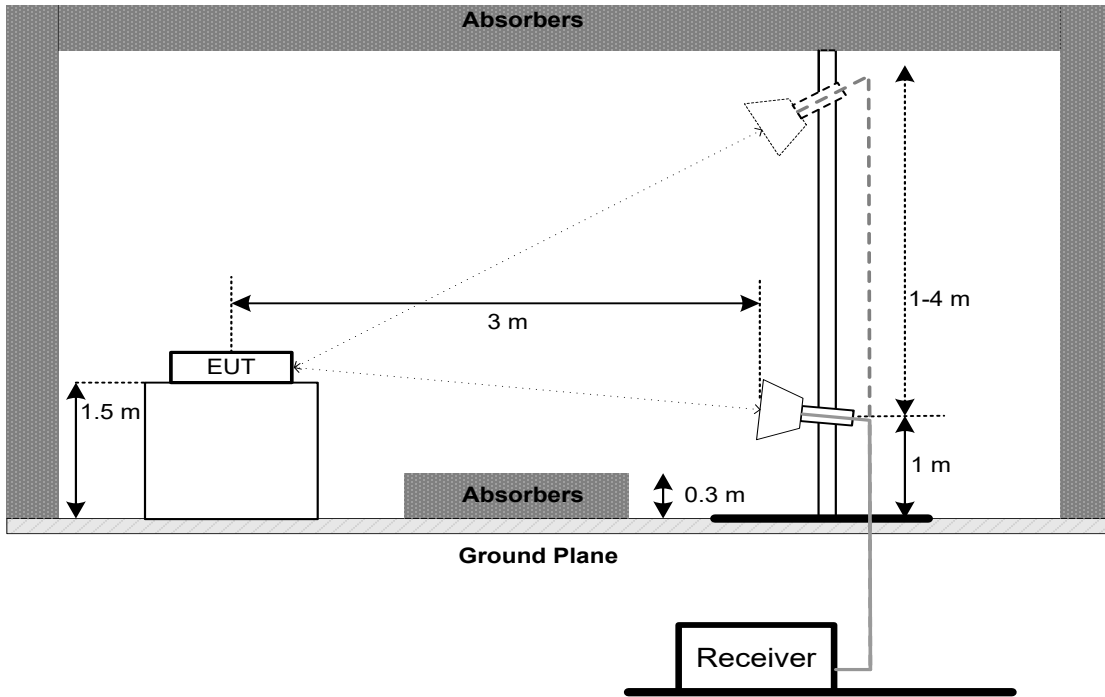

**Harmonic(1 GHz to 18 GHz)**

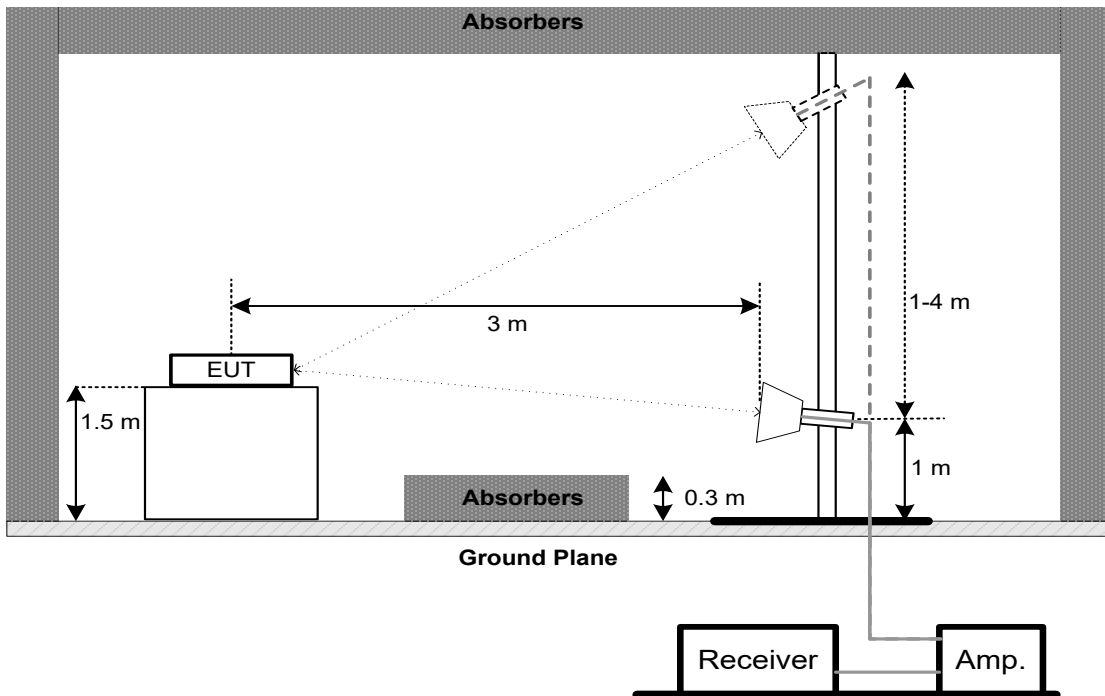

**Harmonic(18 GHz to 26.5 GHz)**

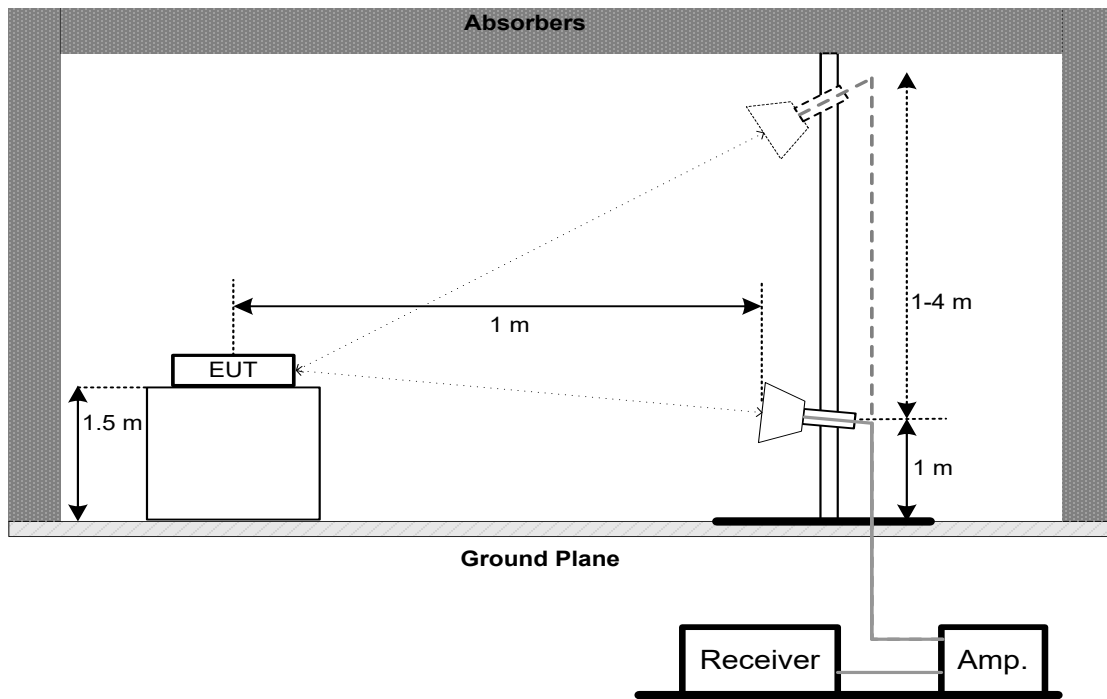

**5.5 EUT OPERATING CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**5.6 TEST RESULT - 9 kHz TO 30 MHz**

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

**5.7 TEST RESULT - 30 MHz TO 1000 MHz**

Please refer to the APPENDIX C.

**5.8 TEST RESULT - ABOVE 1000 MHz**

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 6. BANDWIDTH

### 6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	$\geq 500$ kHz
	99% Emission Bandwidth	-

### 6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	$>$ Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 6.6 TEST RESULTS

Please refer to the APPENDIX E.

## 7. MAXIMUM OUTPUT POWER

### 7.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00 dBm

### 7.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	$\geq 3 \times \text{RBW}$
RBW	3 MHz
VBW	3 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

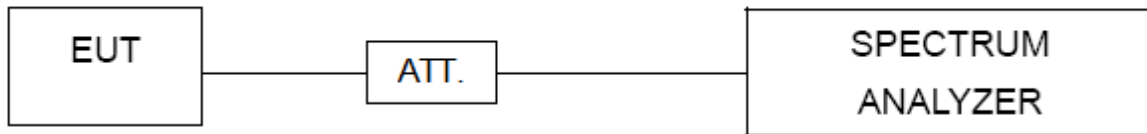

### 7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 7.6 TEST RESULTS

Please refer to the APPENDIX F.

## 8. CONDUCTED SPURIOUS EMISSION

### 8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

### 8.2 TEST PROCEDURE


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 8.6 TEST RESULTS

Please refer to the APPENDIX G.

## 9. POWER SPECTRAL DENSITY

### 9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

### 9.2 TEST PROCEDURE


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	2 MHz (1 Mbps) / 4 MHz (2 Mbps)
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP

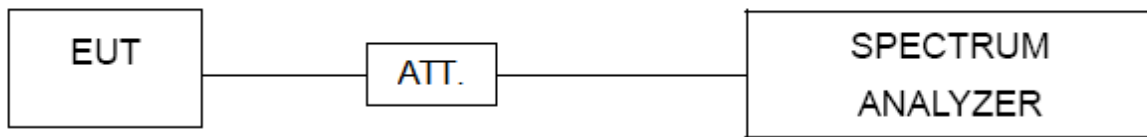

### 9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 9.6 TEST RESULTS

Please refer to the APPENDIX H.



**10. MEASUREMENT INSTRUMENTS LIST**

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 22, 2024
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 22, 2024
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 27, 2024
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60 B-034	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 22, 2024
3	Cable	N/A	RW2350-3.8A-NMB M-1.5M	N/A	Jun. 09, 2025
4	Cable	N/A	RG 213/U	N/A	Jun. 09, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	ETS	9*6*6	N/A	May 16, 2025


Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1462	Dec. 13, 2024
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 13, 2024
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	Nov. 17, 2024
4	Cable	RegalWay	LMR400-NMNM-12 .5m	N/A	Jun. 06, 2025
5	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jun. 06, 2025
6	Cable	RegalWay	LMR400-NMNM-0. 5m	N/A	Jun. 06, 2025
7	Receiver	Agilent	N9038A	MY52130039	Dec. 22, 2024
8	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
9	Positioning Controller	MF	MF-7802	N/A	N/A
10	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
11	966 Chamber room	CM	9*6*6	N/A	May 16, 2025

Radiated Emissions - 1 GHz to 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Dec. 22, 2024
2	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Nov. 17, 2024
3	Double Ridged Guide Antenna	ETS	3115	75789	Jun. 15, 2025
4	Cable	RegalWay	RWLP50-4.0A-SMS M-12.5M	N/A	Jul. 03, 2025
5	Cable	RegalWay	RWLP50-4.0A-NM RASM-2.5M	N/A	Jul. 03, 2025
6	Cable	RegalWay	RWLP50-4.0A-NM RASMRA-0.8M	N/A	Jul. 03, 2025
7	966 Chamber room	CM	9*6*6	N/A	May 19, 2025
8	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
9	Filter	STI	STI15-9912	N/A	May 31, 2025
10	Positioning Controller	MF	MF-7802	N/A	N/A
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Signal Analyzer	Keysight	N9010A	MY56480488	Dec. 22, 2024
2	Low Noise Amplifier	CONNPHY	CLN-18G40G-4330 -K	619413	Jul. 17, 2025
3	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 25, 2025
4	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 25, 2025
5	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170(3m)	9170-319	Jun.16, 2025
6	966 Chamber room	CM	9*6*6	N/A	May 19, 2025
7	Positioning Controller	MF	MF-7802	N/A	N/A
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A



Bandwidth & Maximum Output Power & Power Spectral Density & Conducted Spurious Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 31, 2025
2	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

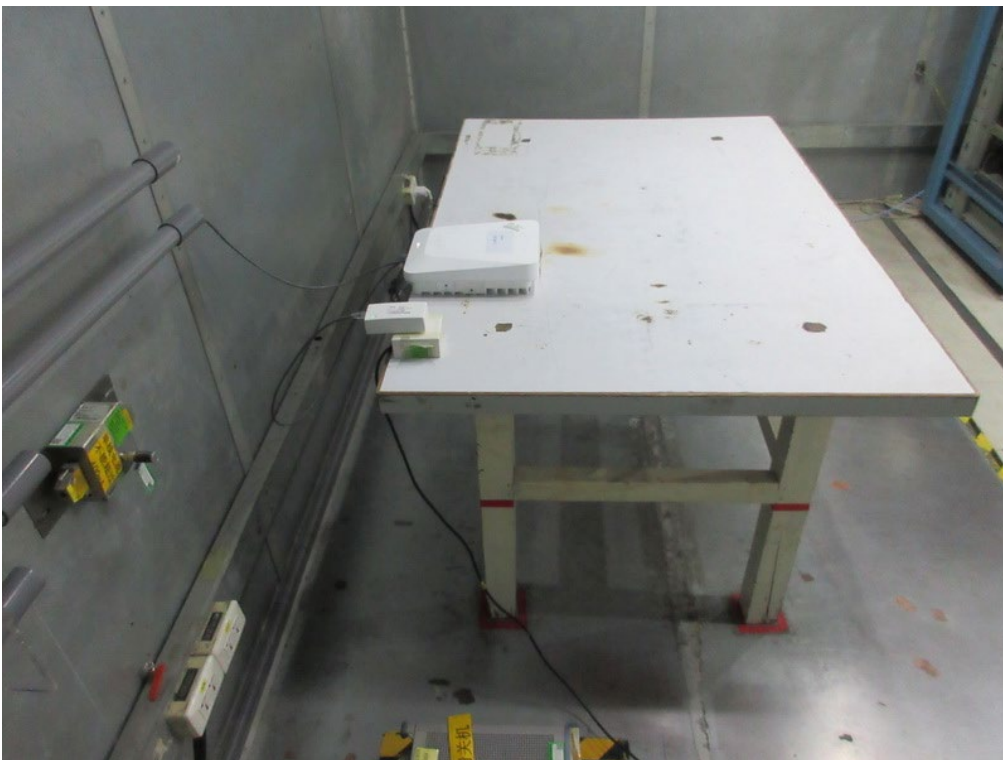**11. EUT TEST PHOTO****AC Power Line Conducted Emissions Test Photos**



**Radiated Emissions Test Photos**

**9 kHz to 30 MHz**

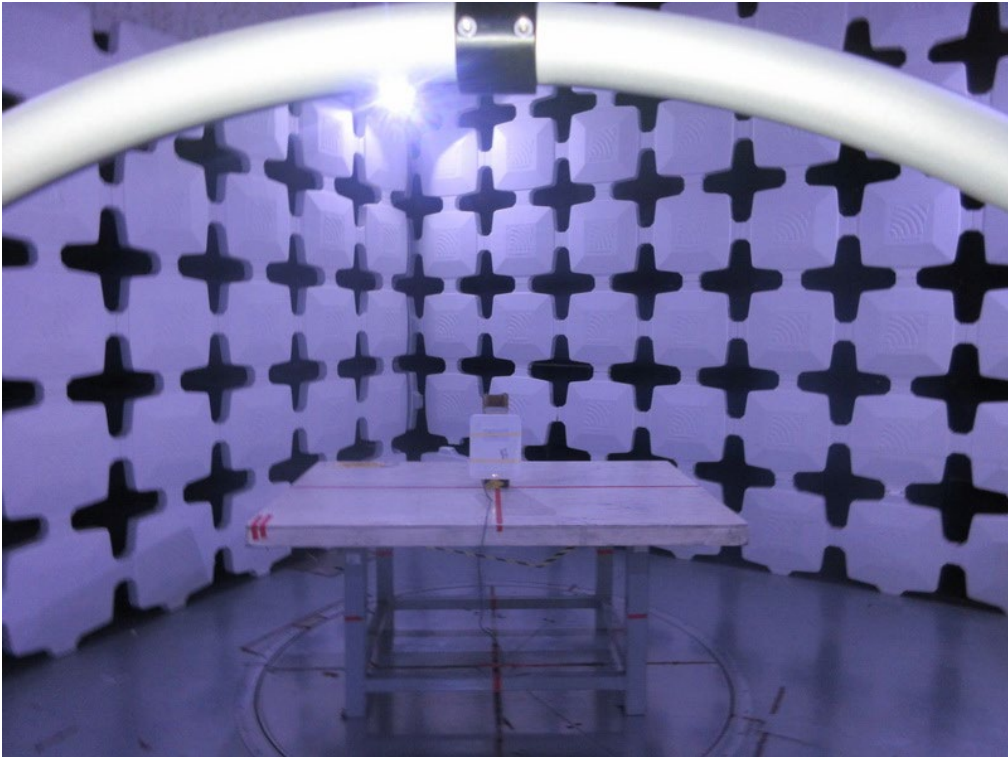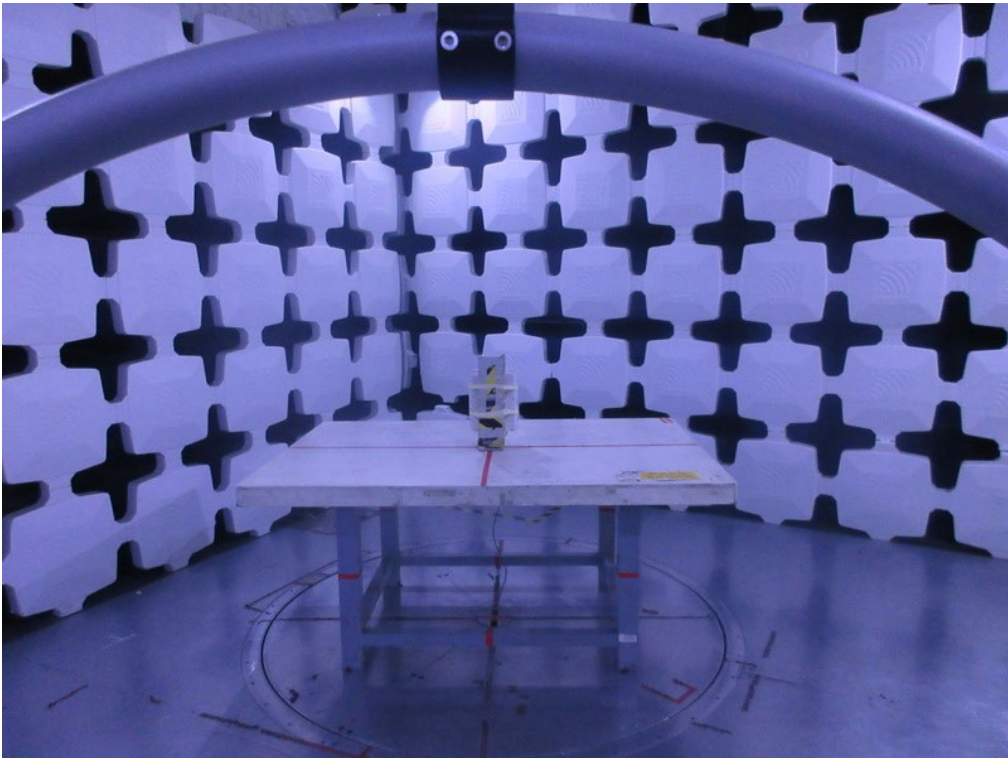


**Radiated Emissions Test Photos**

**30 MHz to 1000 MHz**

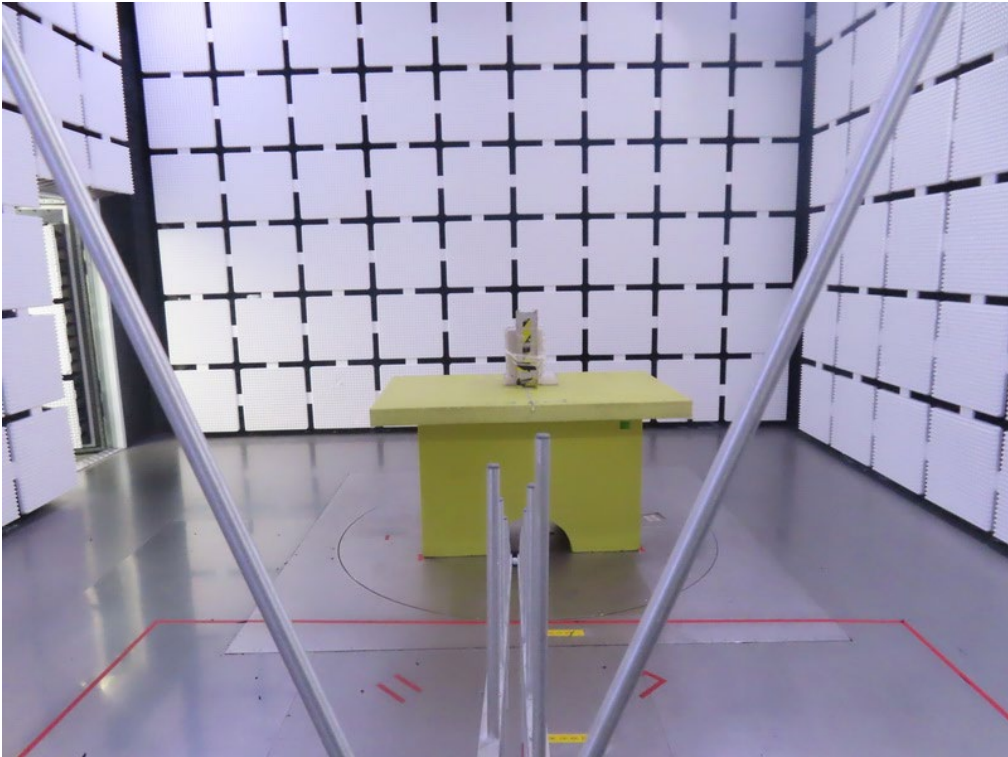
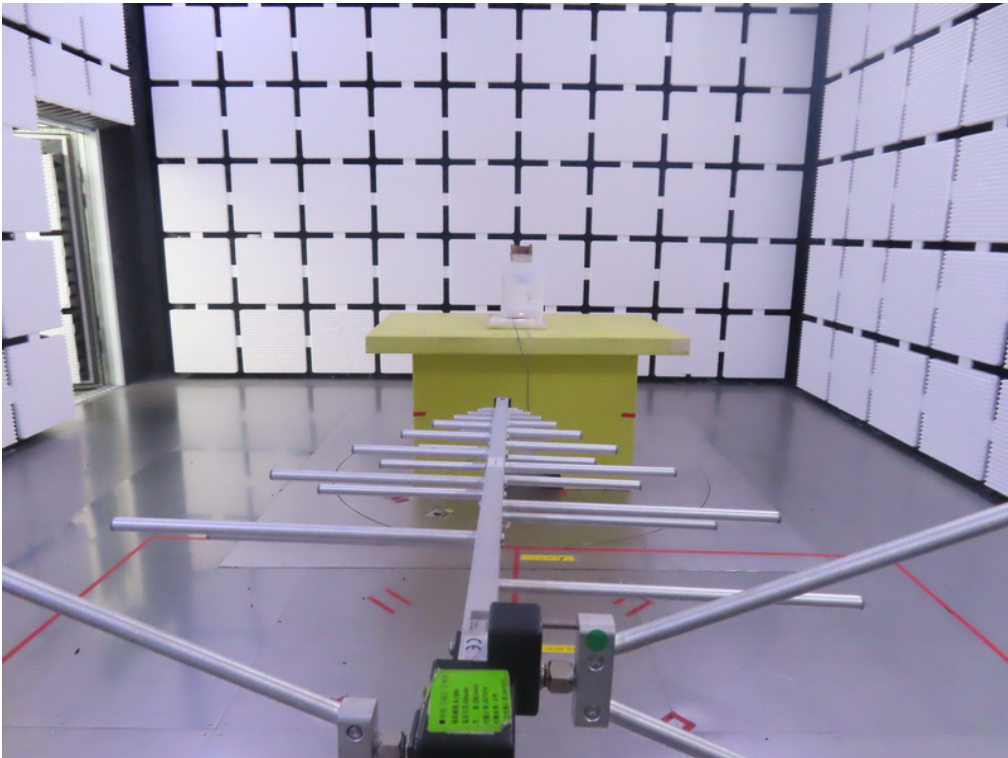


**Radiated Emissions Test Photos**


**1 GHz to 18 GHz**

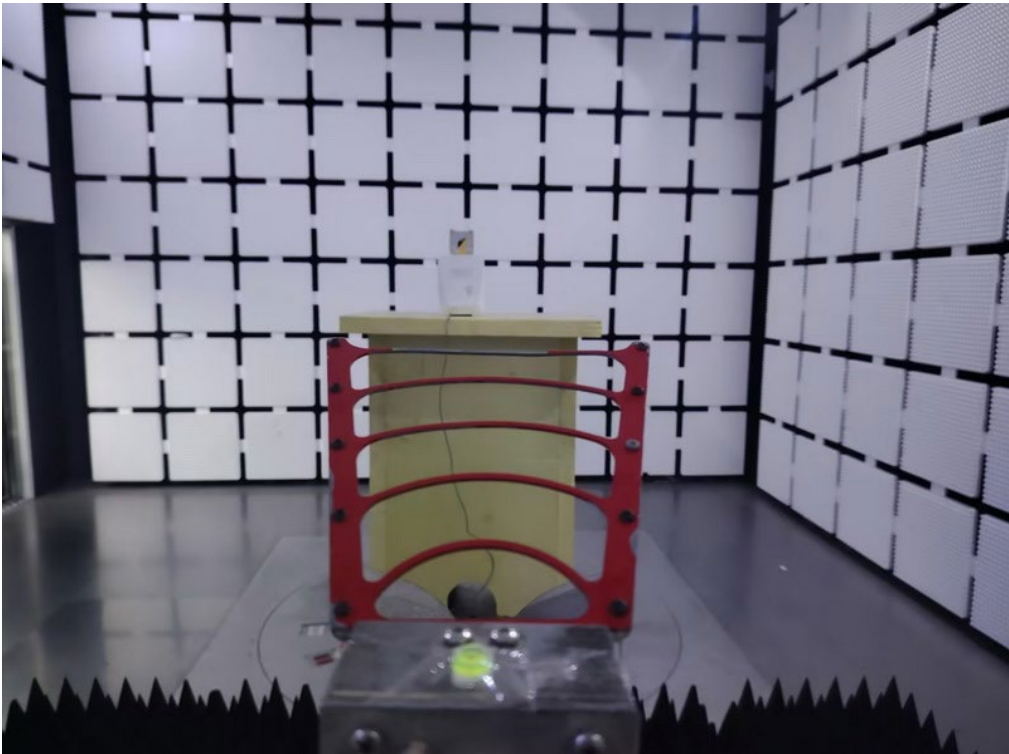

**Radiated Emissions Test Photos**  
**Above 18 GHz**

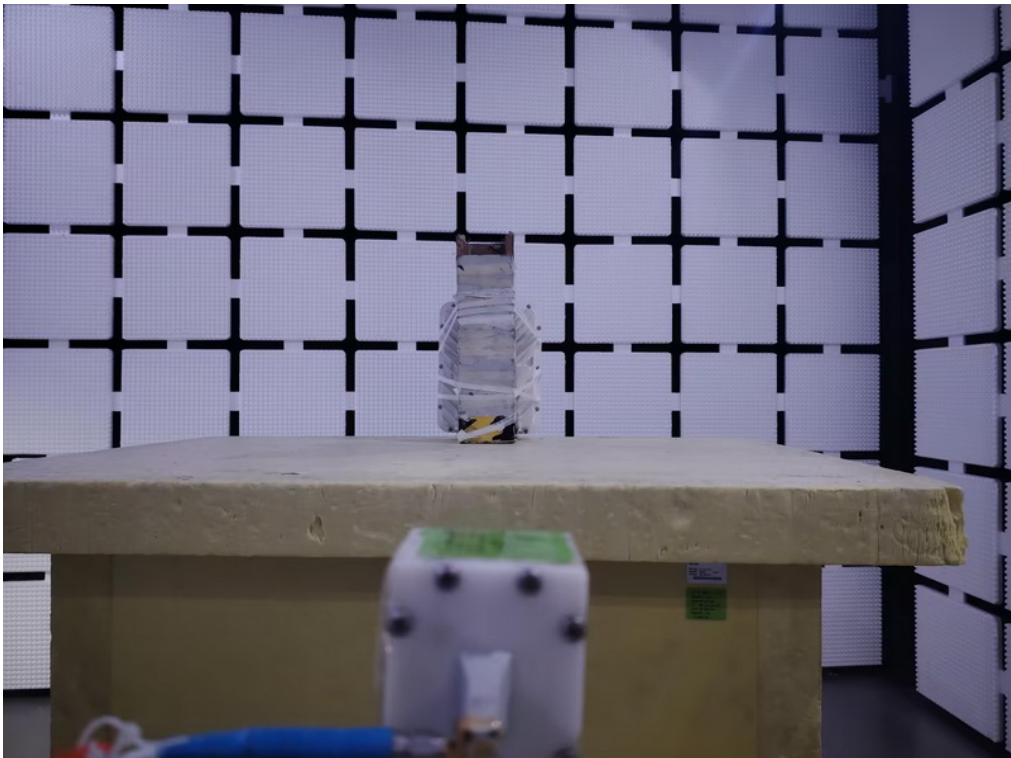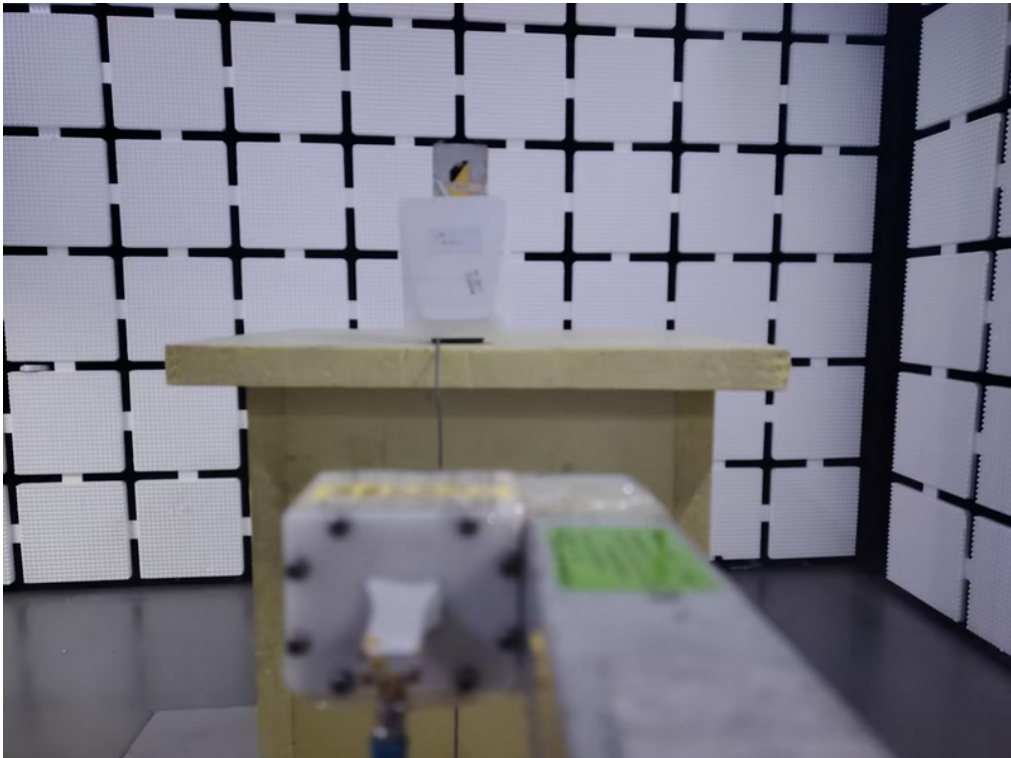


**Conducted Test Photos**

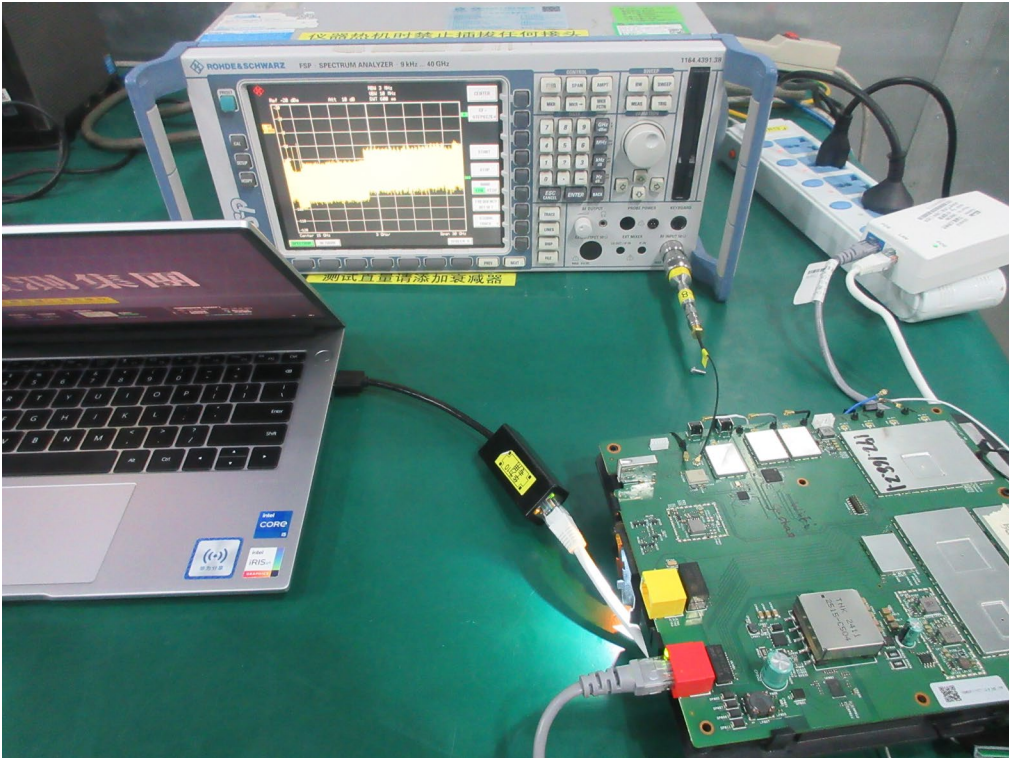



## **APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS**

Test Mode	TX Mode_2Mbps Channel 00	Phase	Line
-----------	--------------------------	-------	------

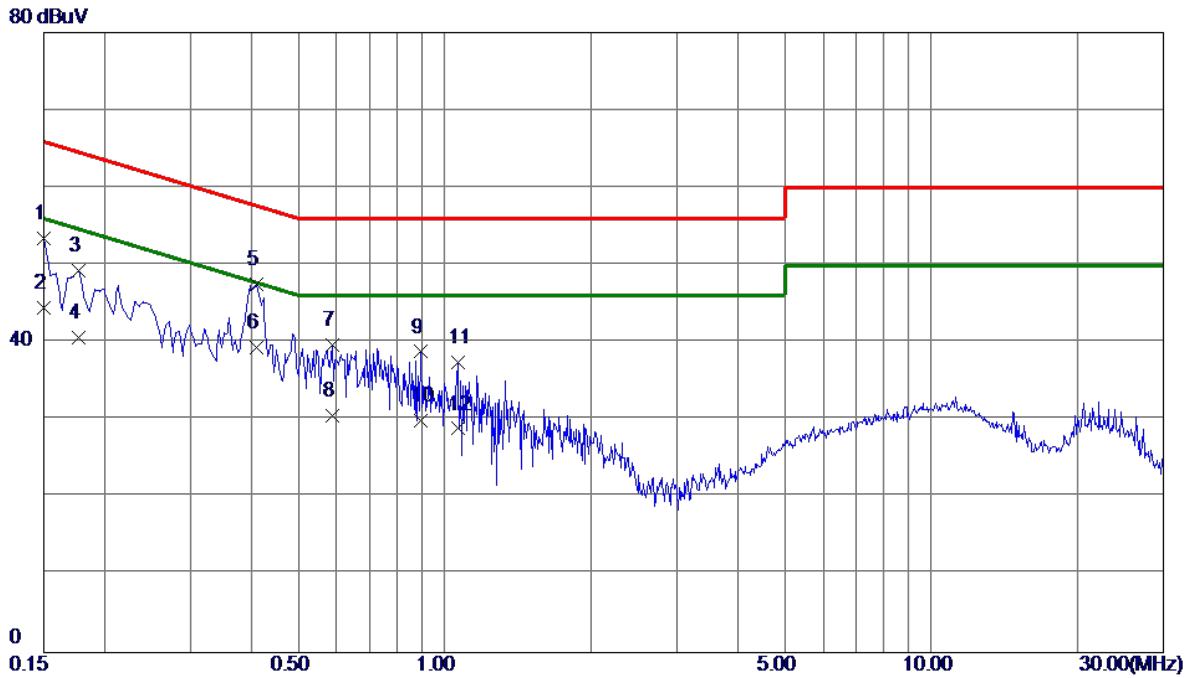


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	43.55	9.96	53.51	66.00	-12.49	QP	
2	0.1500	34.50	9.96	44.46	56.00	-11.54	AVG	
3	0.1770	39.30	9.97	49.27	64.63	-15.36	QP	
4	0.1770	30.60	9.97	40.57	54.63	-14.06	AVG	
5	0.4110	37.04	10.43	47.47	57.63	-10.16	QP	
6 *	0.4110	28.89	10.43	39.32	47.63	-8.31	AVG	
7	0.5865	28.95	10.80	39.75	56.00	-16.25	QP	
8	0.5865	19.80	10.80	30.60	46.00	-15.40	AVG	
9	0.8925	27.61	11.19	38.80	56.00	-17.20	QP	
10	0.8925	18.70	11.19	29.89	46.00	-16.11	AVG	
11	1.0635	26.21	11.28	37.49	56.00	-18.51	QP	
12	1.0635	17.60	11.28	28.88	46.00	-17.12	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 00	Phase	Neutral
-----------	--------------------------	-------	---------

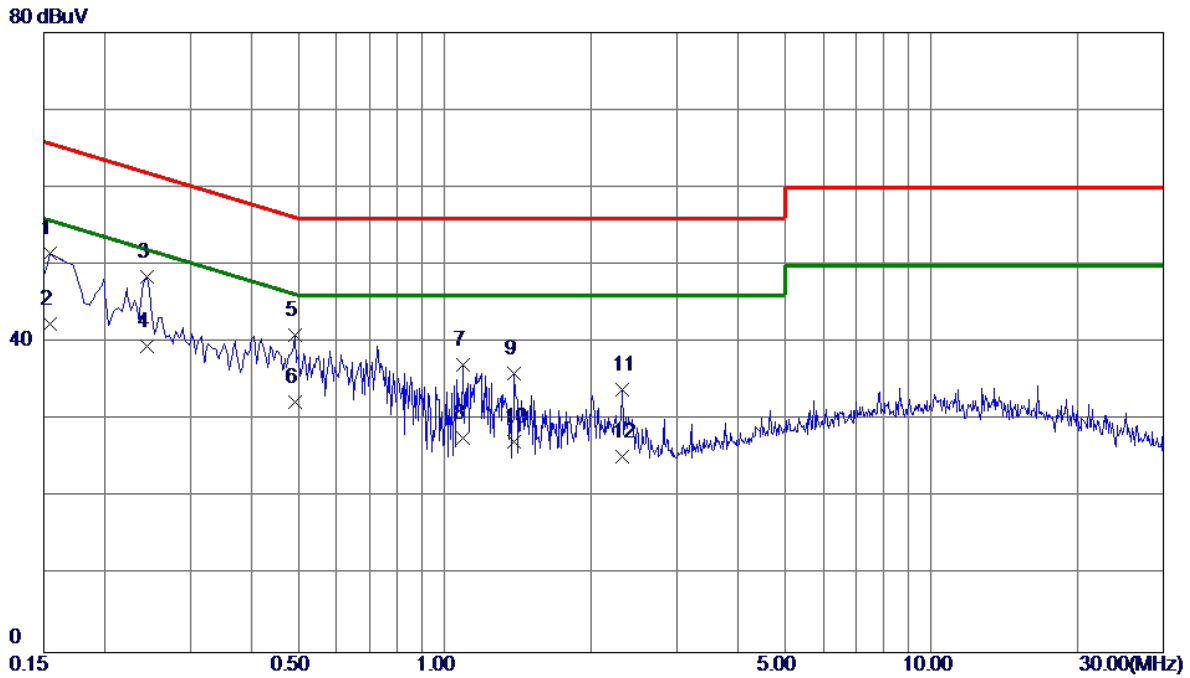


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	41.64	9.93	51.57	65.75	-14.18	QP	
2	0.1545	32.51	9.93	42.44	55.75	-13.31	AVG	
3	0.2445	38.41	10.02	48.43	61.94	-13.51	QP	
4 *	0.2445	29.49	10.02	39.51	51.94	-12.43	AVG	
5	0.4920	30.34	10.57	40.91	56.13	-15.22	QP	
6	0.4920	21.80	10.57	32.37	46.13	-13.76	AVG	
7	1.0905	25.84	11.24	37.08	56.00	-18.92	QP	
8	1.0905	16.40	11.24	27.64	46.00	-18.36	AVG	
9	1.3920	24.81	11.24	36.05	56.00	-19.95	QP	
10	1.3920	15.90	11.24	27.14	46.00	-18.86	AVG	
11	2.3190	23.25	10.68	33.93	56.00	-22.07	QP	
12	2.3190	14.61	10.68	25.29	46.00	-20.71	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ**

Test Mode	TX Mode_2Mbps Channel 00	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

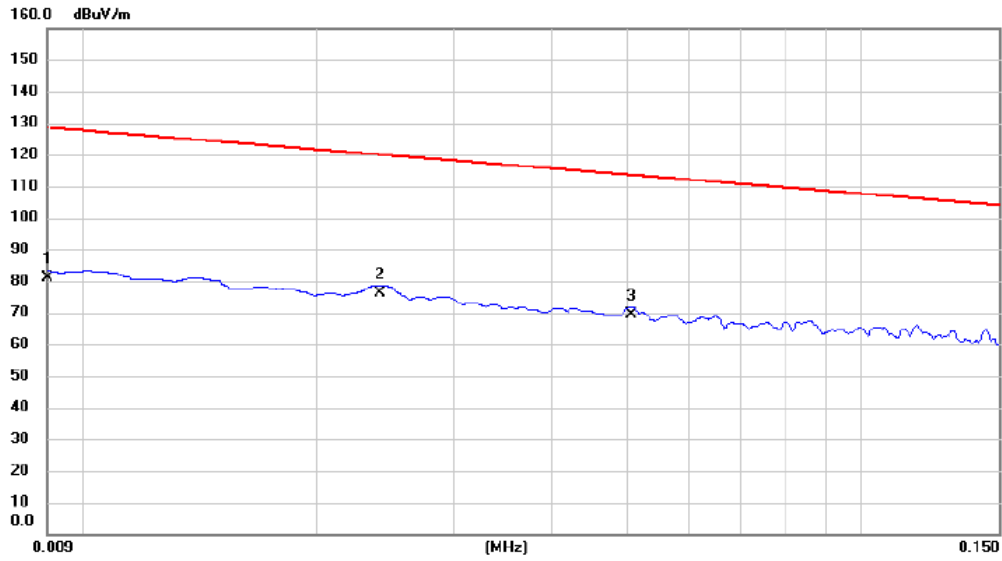


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.0090	60.78	20.40	81.18	128.52	-47.34	AVG	
2	*	0.0241	55.12	20.92	76.04	119.96	-43.92	AVG	
3		0.0507	48.26	21.20	69.46	113.50	-44.04	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 00	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

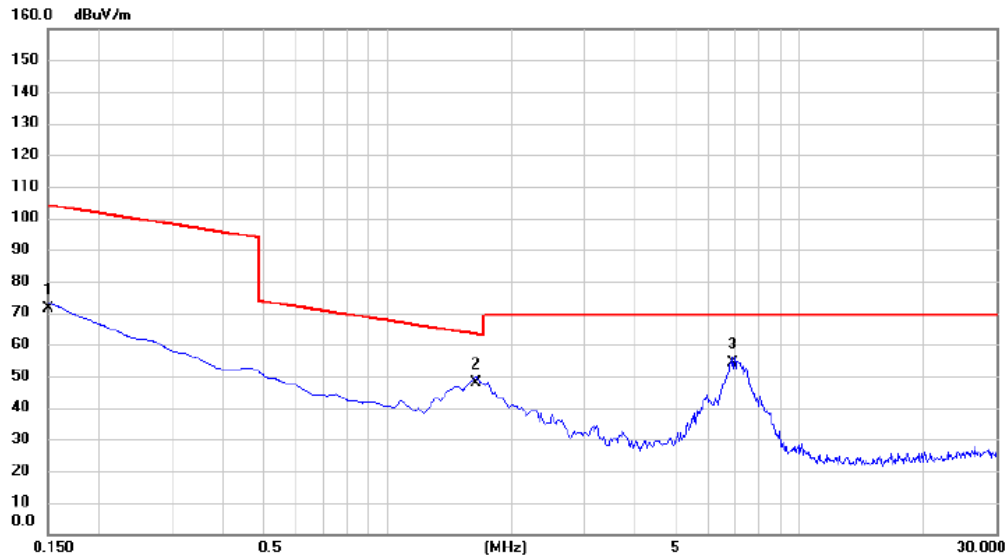


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.1500	50.32	21.27	71.59	104.09	-32.50	AVG	
2		1.6425	26.78	21.14	47.92	63.29	-15.37	QP	
3	*	6.8662	33.12	21.19	54.31	69.54	-15.23	QP	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 00	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

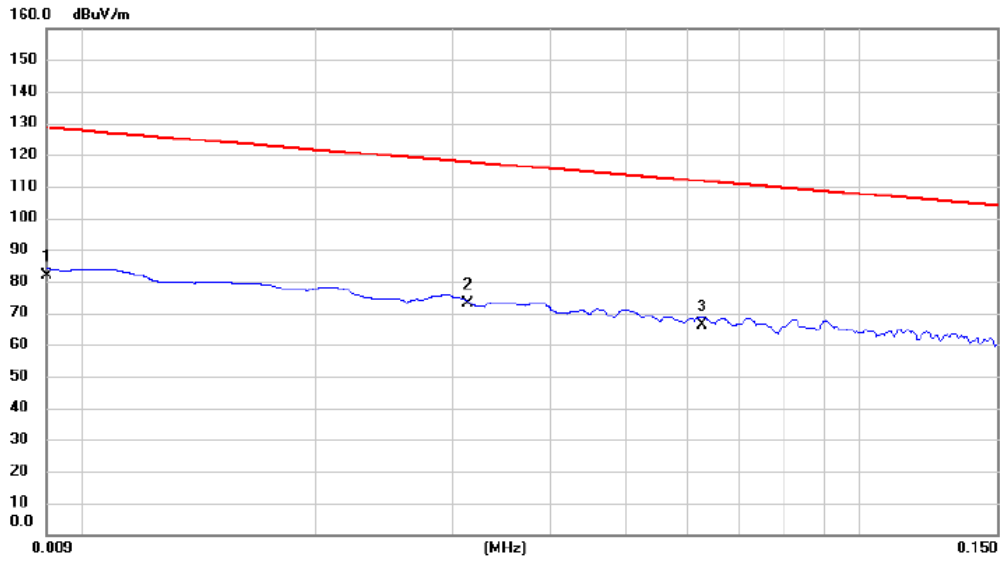


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	0.0090	61.32	20.40	81.72	128.52	-46.80	AVG	
2 *	0.0313	51.79	21.11	72.90	117.69	-44.79	AVG	
3	0.0627	45.15	21.24	66.39	111.66	-45.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 00	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

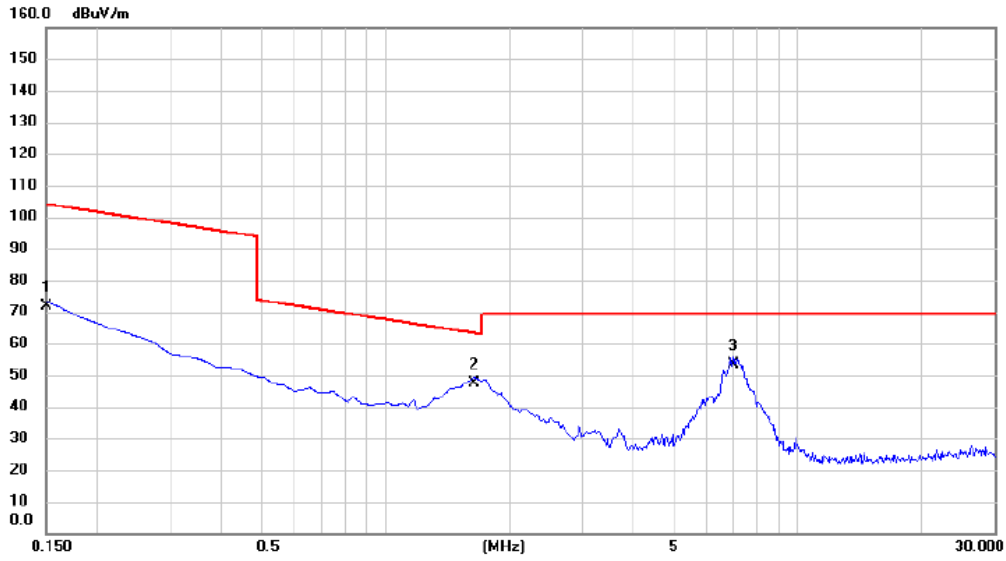

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.1500	50.36	21.27	71.63	104.09	-32.46	AVG	
2	*	1.6425	26.45	21.14	47.59	63.29	-15.70	QP	
3		6.9856	32.14	21.19	53.33	69.54	-16.21	QP	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



## **APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

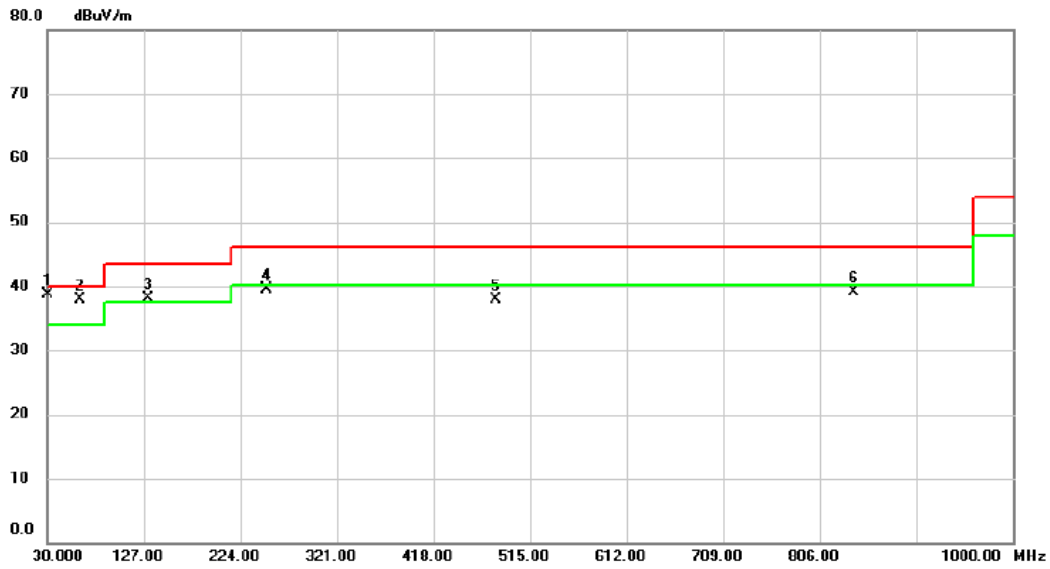


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.0000	51.92	-13.12	38.80	40.00	-1.20	peak	
2 !	62.4950	50.13	-12.31	37.82	40.00	-2.18	peak	
3 !	130.8800	50.55	-12.35	38.20	43.52	-5.32	peak	
4	250.1900	51.89	-12.35	39.54	46.02	-6.48	peak	
5	480.5650	44.28	-6.31	37.97	46.02	-8.05	peak	
6	839.9500	39.62	-0.56	39.06	46.02	-6.96	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

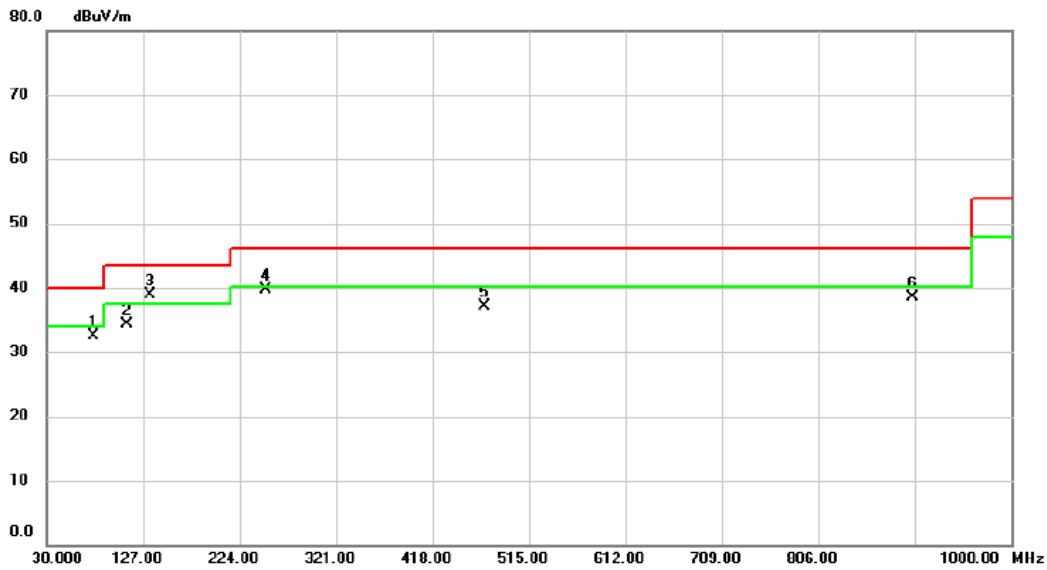


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	77.5300	47.41	-14.91	32.50	40.00	-7.50	peak	
2	110.9950	48.48	-14.15	34.33	43.52	-9.19	peak	
3 *	134.2750	50.94	-12.10	38.84	43.52	-4.68	peak	
4	250.1900	52.09	-12.35	39.74	46.02	-6.28	peak	
5	470.8650	43.52	-6.47	37.05	46.02	-8.97	peak	
6	901.0600	38.14	0.30	38.44	46.02	-7.58	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ**

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

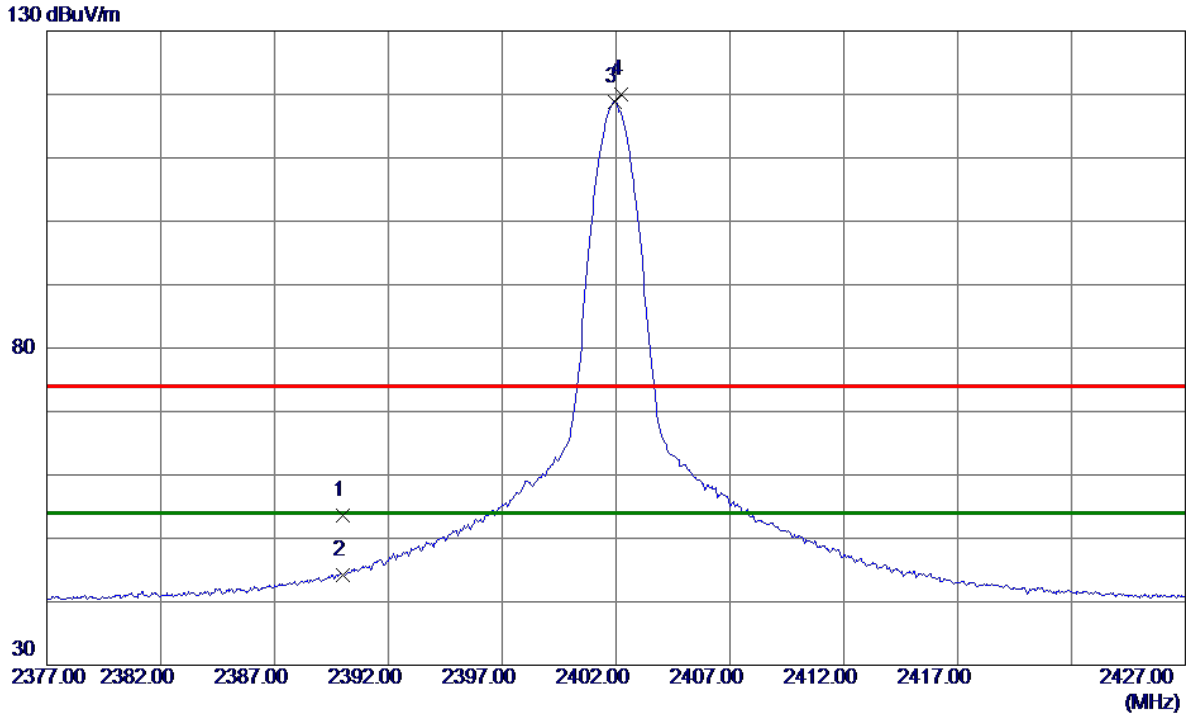


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	45.93	7.70	53.63	74.00	-20.37	Peak	
2	2390.0000	36.57	7.70	44.27	54.00	-9.73	AVG	
3 *	2401.9500	111.06	7.71	118.77	54.00	64.77	AVG	No Limit
4	2402.2250	112.34	7.71	120.05	74.00	46.05	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

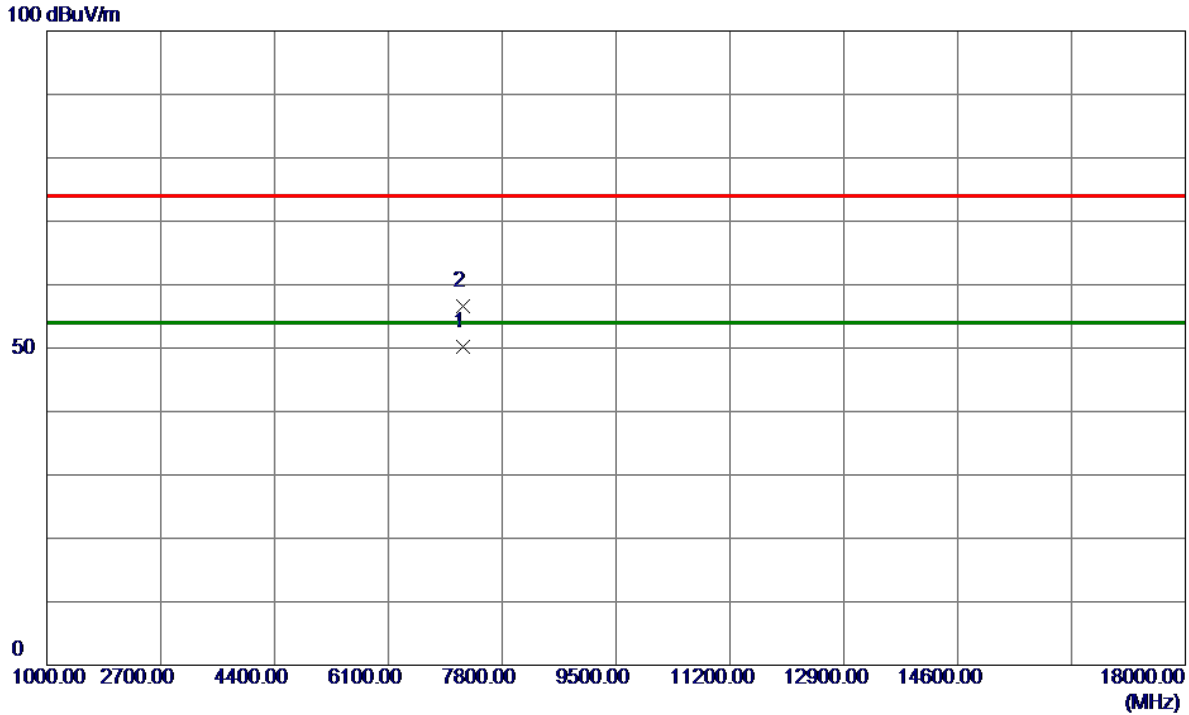


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7205.2000	41.95	8.30	50.25	54.00	-3.75	AVG	
2	7206.5000	48.35	8.30	56.65	74.00	-17.35	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

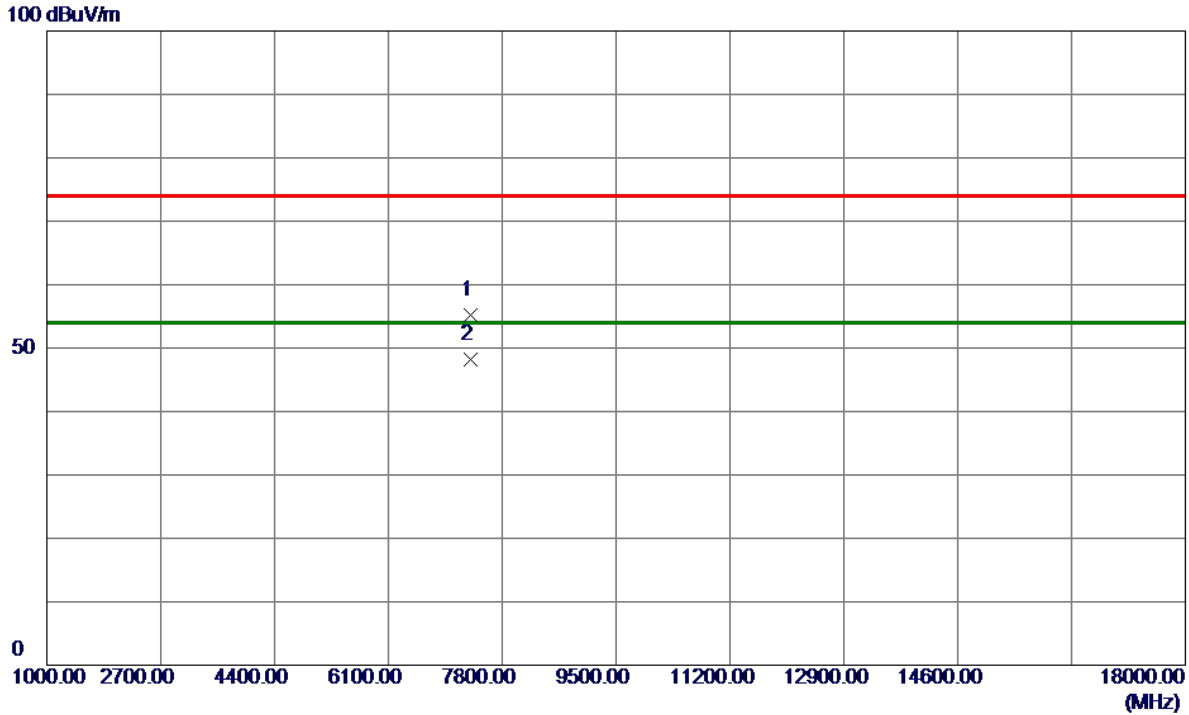


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7319.1500	46.92	8.31	55.23	74.00	-18.77	Peak	
2 *	7319.2250	39.90	8.31	48.21	54.00	-5.79	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2478 MHz _CH38_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

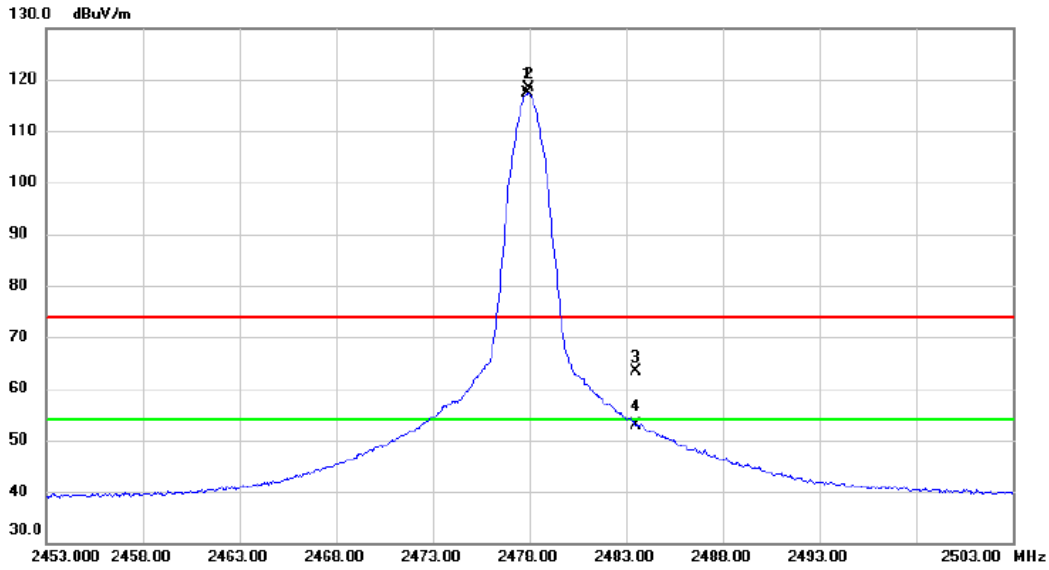


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2477.925	109.4	7.81	117.26	54.00	63.26	AVG	No Limit
2	X	2477.975	110.6	7.81	118.50	74.00	44.50	peak	No Limit
3		2483.500	55.55	7.81	63.36	74.00	-10.64	peak	
4		2483.500	45.19	7.81	53.00	54.00	-1.00	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	TX 2478 MHz _CH38_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

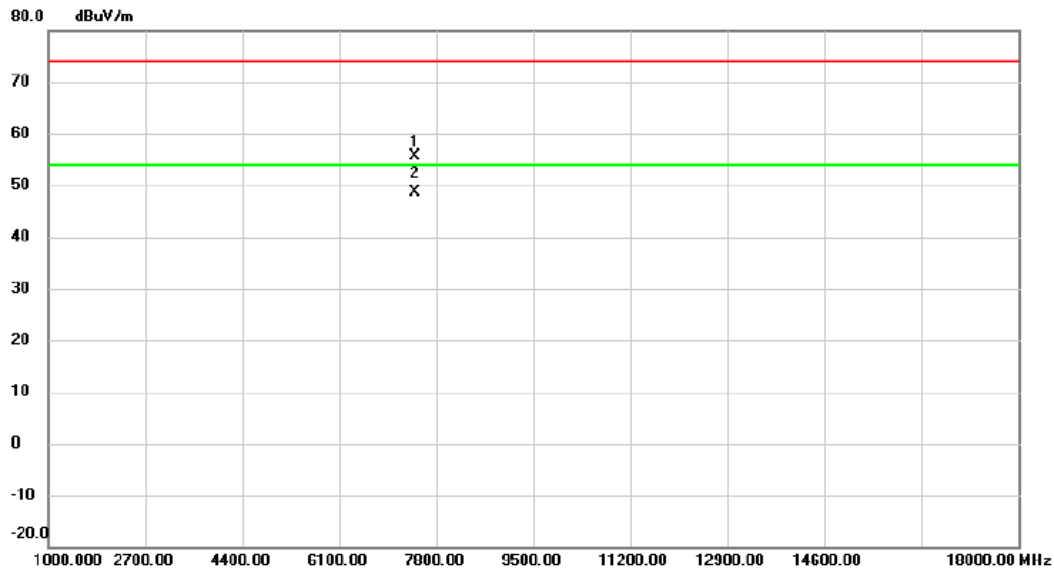


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7433.010	47.23	8.31	55.54	74.00	-18.46	peak	
2 *	7433.250	40.37	8.31	48.68	54.00	-5.32	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

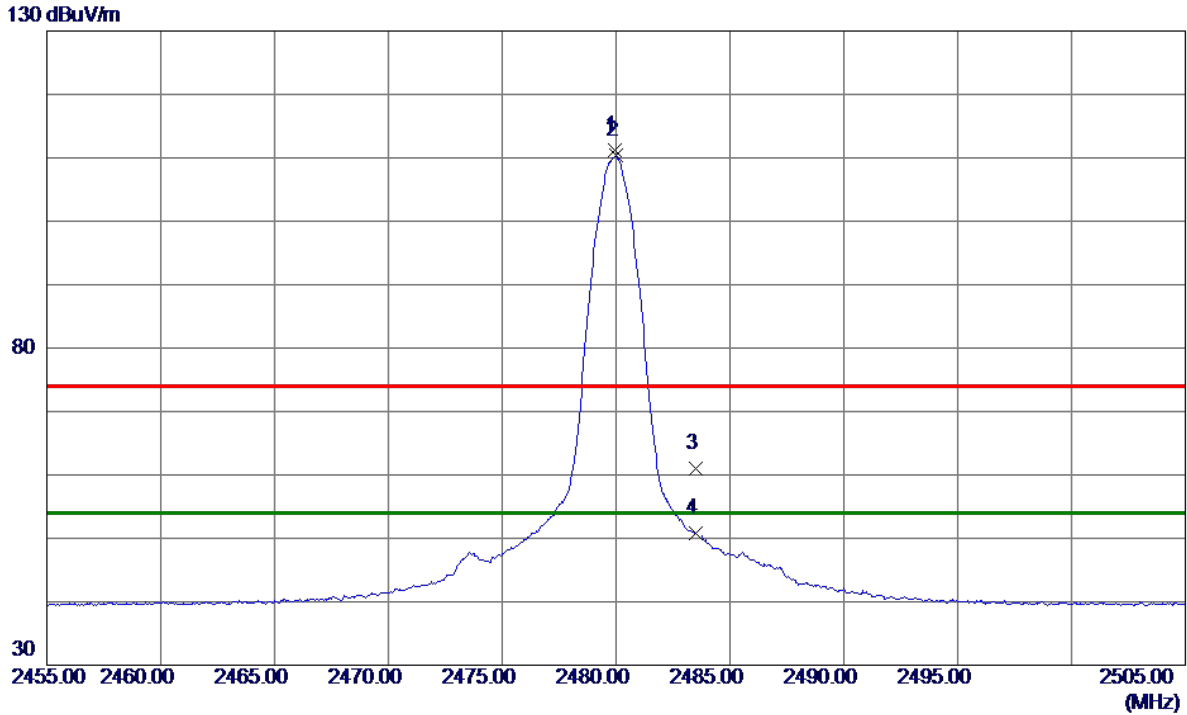


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.9500	103.46	7.81	111.27	74.00	37.27	Peak	No Limit
2 *	2480.0000	102.53	7.81	110.34	54.00	56.34	AVG	No Limit
3	2483.5000	53.24	7.81	61.05	74.00	-12.95	Peak	
4	2483.5000	42.98	7.81	50.79	54.00	-3.21	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

100 dBuV/m

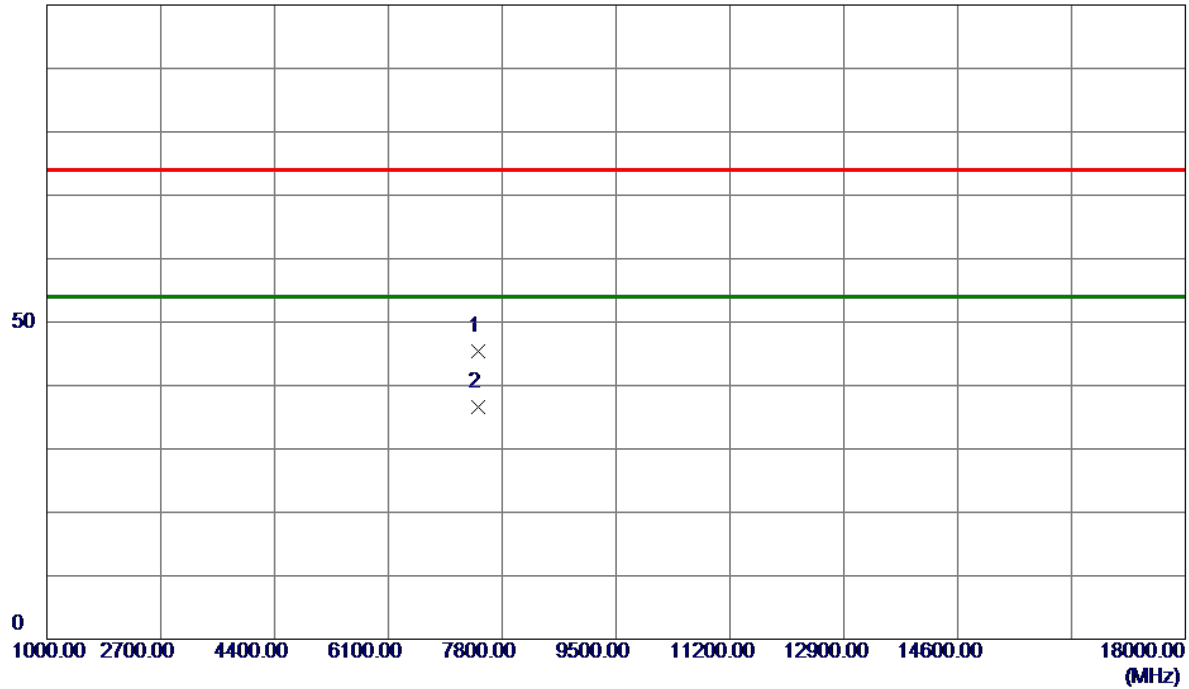


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7439.0500	37.16	8.32	45.48	74.00	-28.52	Peak	
2 *	7439.1250	28.35	8.32	36.67	54.00	-17.33	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

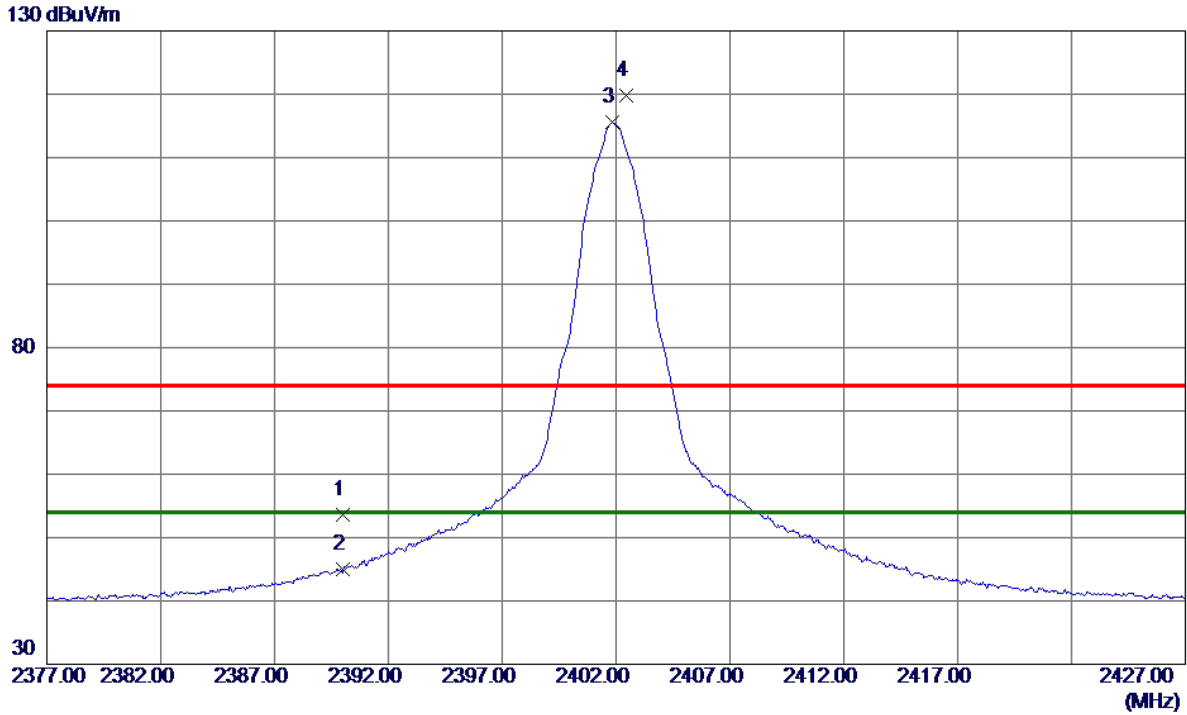


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	45.93	7.70	53.63	74.00	-20.37	Peak	
2	2390.0000	37.28	7.70	44.98	54.00	-9.02	AVG	
3 *	2401.8250	107.86	7.71	115.57	54.00	61.57	AVG	No Limit
4	2402.4250	112.13	7.71	119.84	74.00	45.84	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

100 dBuV/m

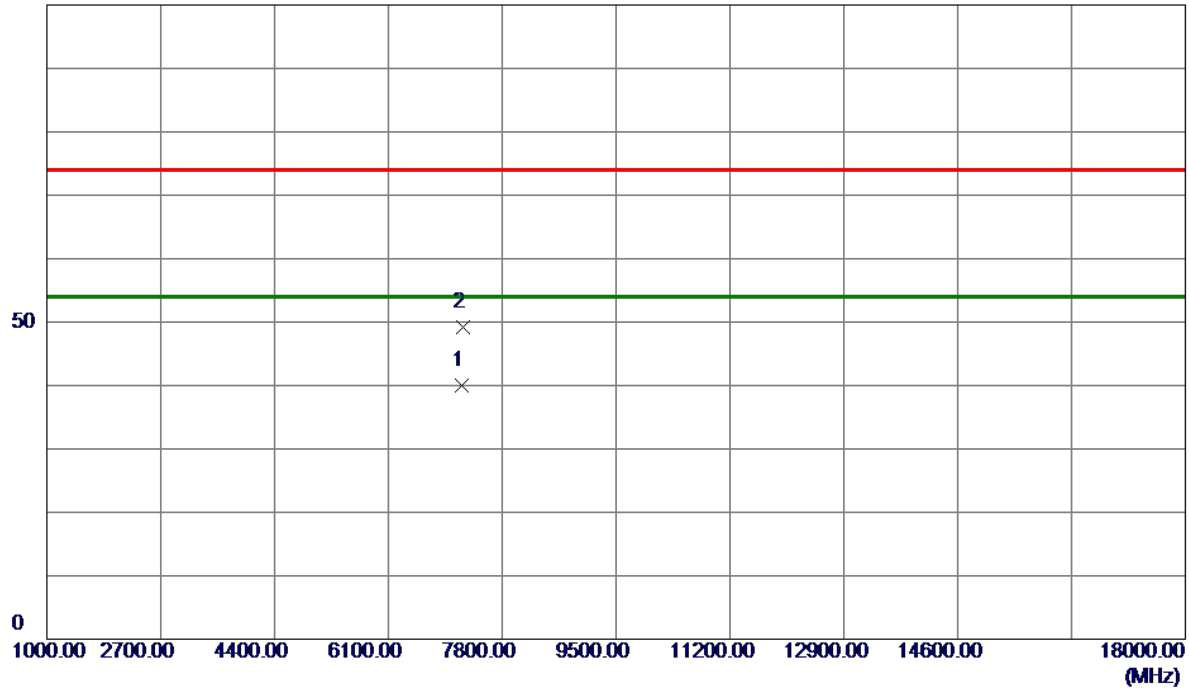


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7204.6250	31.62	8.30	39.92	54.00	-14.08	AVG	
2	7207.2500	40.81	8.30	49.11	74.00	-24.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

100 dBuV/m

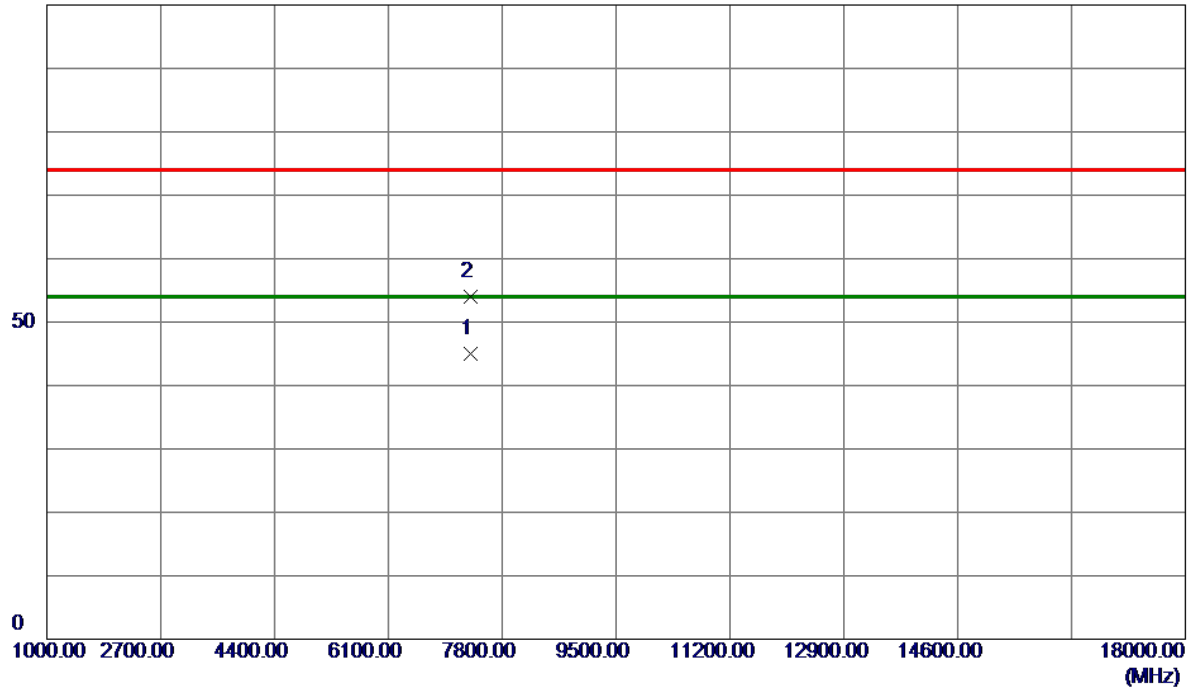


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7318.5500	36.71	8.31	45.02	54.00	-8.98	AVG	
2	7321.3000	45.60	8.31	53.91	74.00	-20.09	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2478 MHz _CH38_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

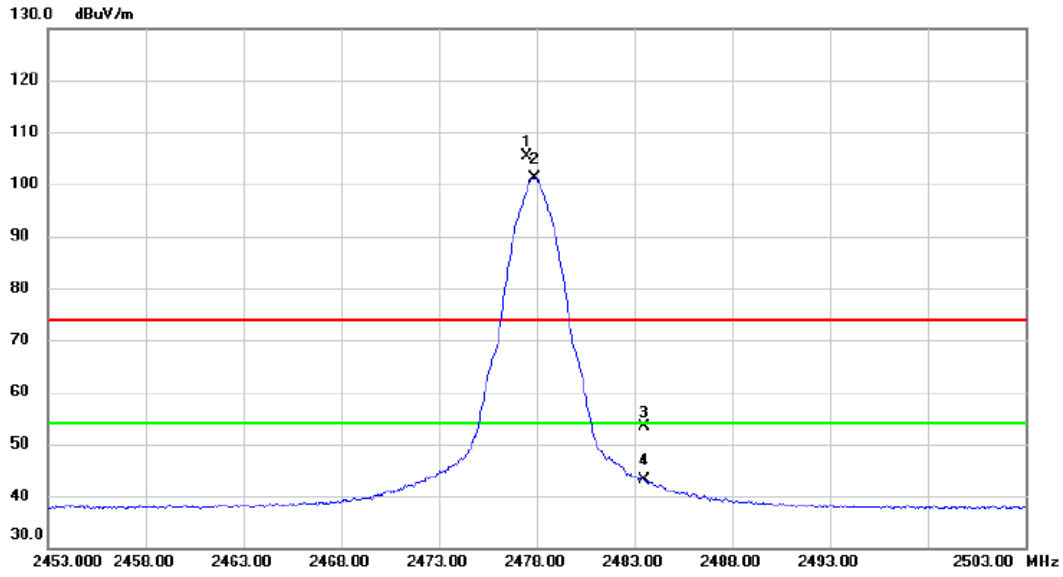


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2477.500	97.67	7.81	105.48	74.00	31.48	peak	No Limit
2	*	2477.875	93.40	7.81	101.21	54.00	47.21	AVG	No Limit
3		2483.500	45.65	7.81	53.46	74.00	-20.54	peak	
4		2483.500	35.22	7.81	43.03	54.00	-10.97	AVG	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2478 MHz _CH38_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

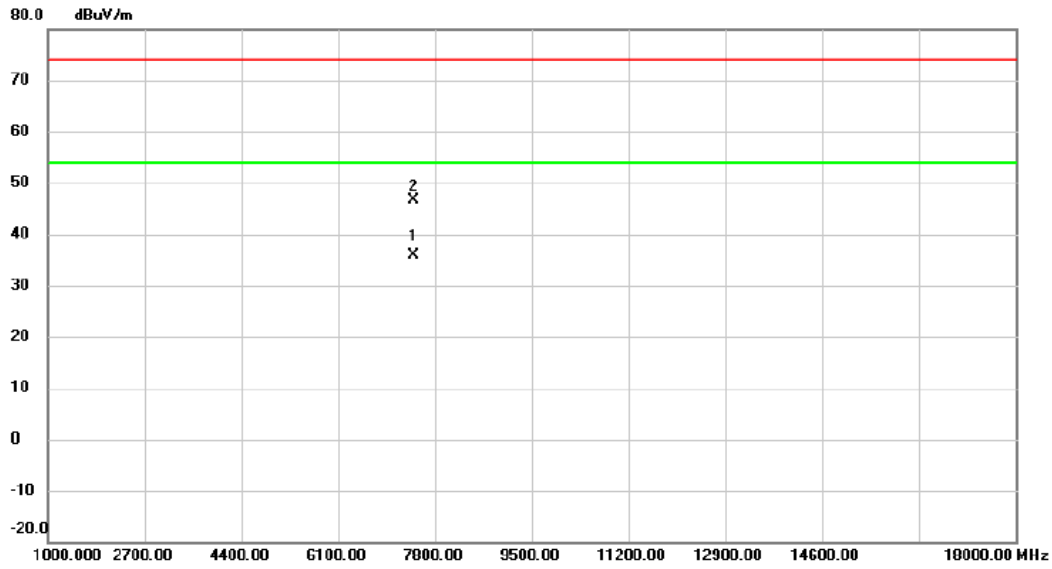


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7432.590	27.51	8.31	35.82	54.00	-18.18	AVG	
2		7432.665	38.44	8.31	46.75	74.00	-27.25	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

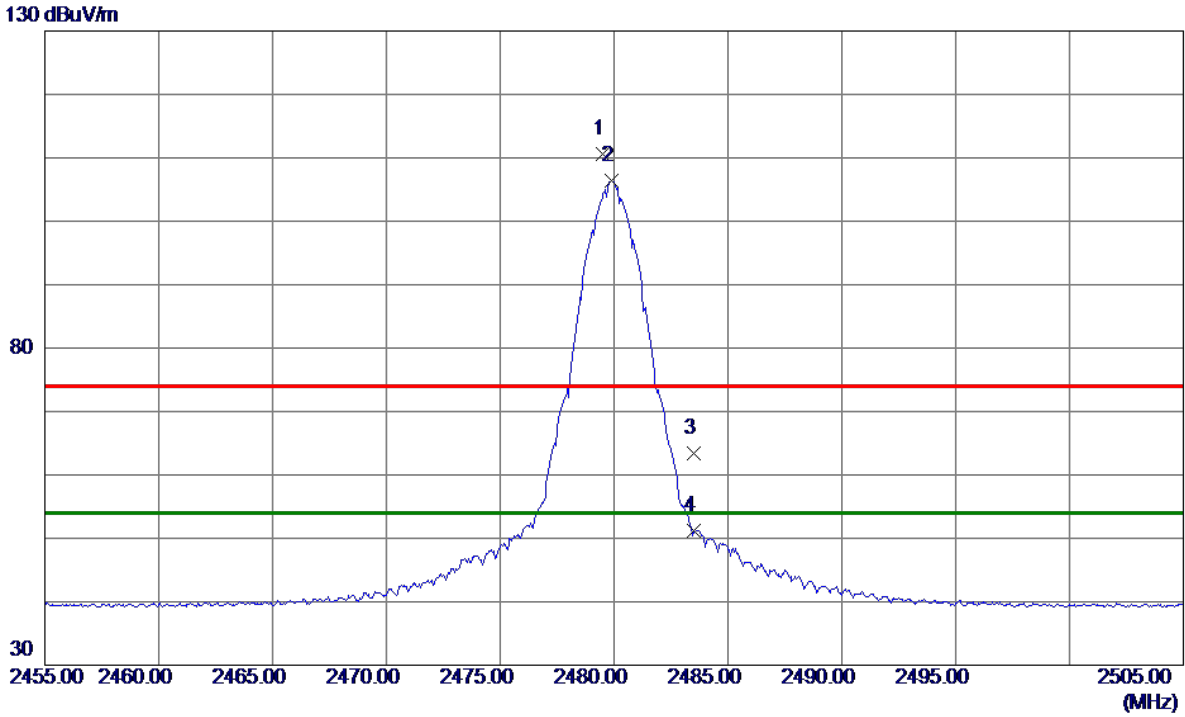


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.4750	102.75	7.81	110.56	74.00	36.56	Peak	No Limit
2 *	2479.9000	98.52	7.81	106.33	54.00	52.33	AVG	No Limit
3	2483.5000	55.57	7.81	63.38	74.00	-10.62	Peak	
4	2483.5000	43.33	7.81	51.14	54.00	-2.86	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

100 dBuV/m

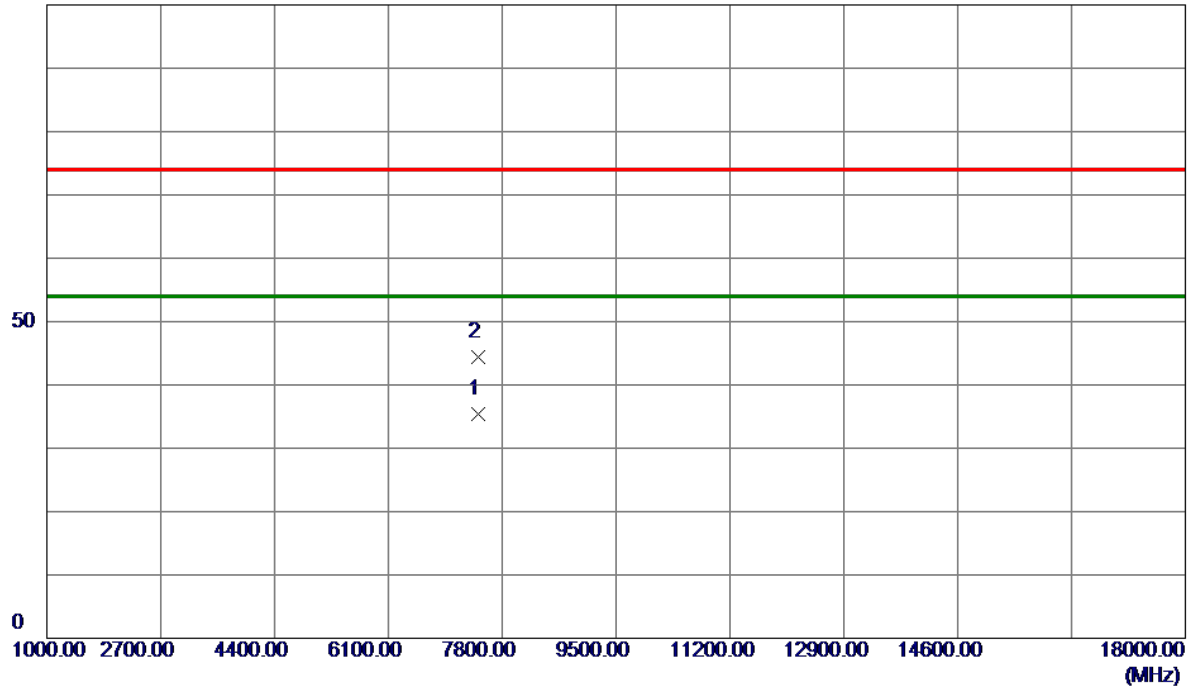


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7438.4000	27.15	8.32	35.47	54.00	-18.53	AVG	
2	7448.6000	36.06	8.32	44.38	74.00	-29.62	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

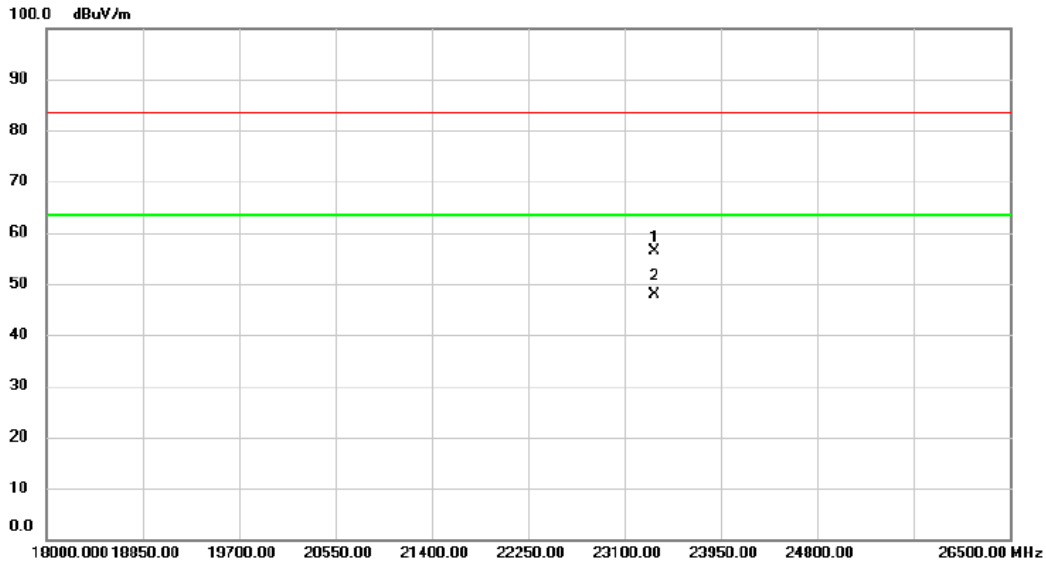


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	23367.75	46.15	10.32	56.47	83.50	-27.03	peak	
2 *	23367.75	37.49	10.32	47.81	63.50	-15.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

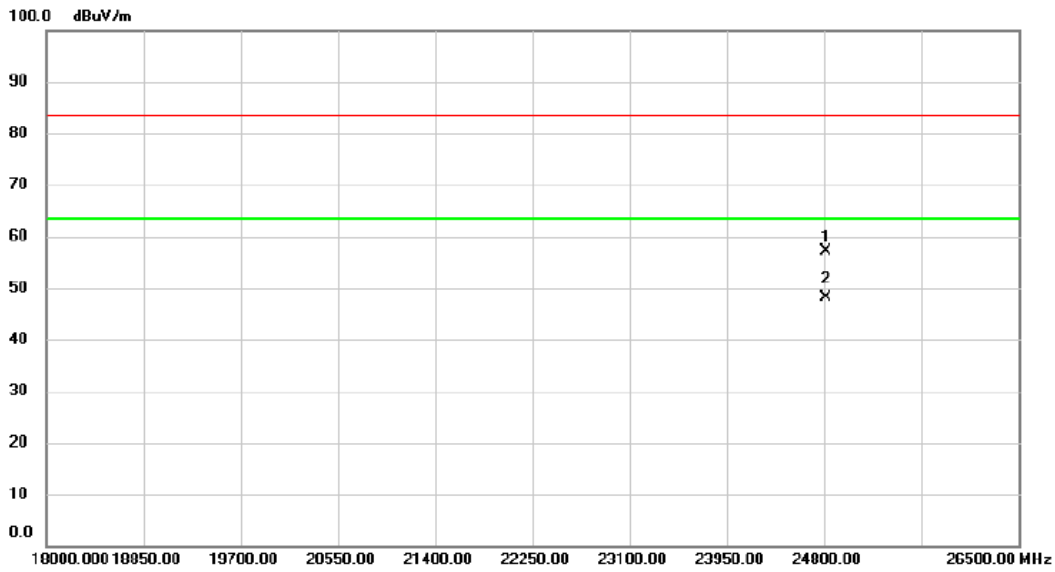

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	24817.00	45.49	11.60	57.09	83.50	-26.41	peak	
2 *	24817.00	36.58	11.60	48.18	63.50	-15.32	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## APPENDIX E - BANDWIDTH

Test Mode	TX Mode_1Mbps
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	0.676	1.036	0.5	Pass
19	2440	0.664	1.032	0.5	Pass
38	2478	0.668	1.036	0.5	Pass
39	2480	0.670	1.036	0.5	Pass

**CH00**

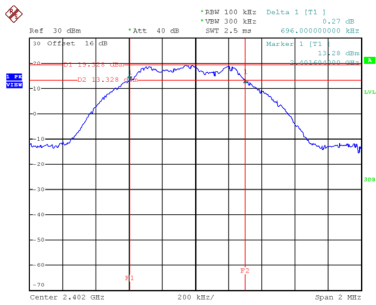


Date: 15.AUG.2024 10:34:29

**CH19**  
6 dB Bandwidth

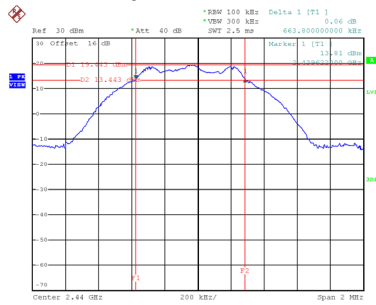


Date: 15.AUG.2024 10:38:24

**CH39**

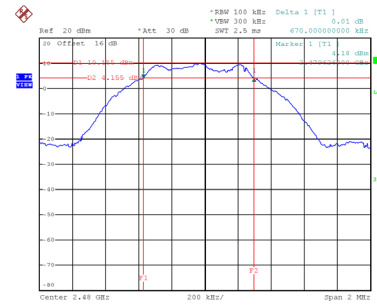


Date: 16.AUG.2024 15:40:42


**99 % Occupied Bandwidth**

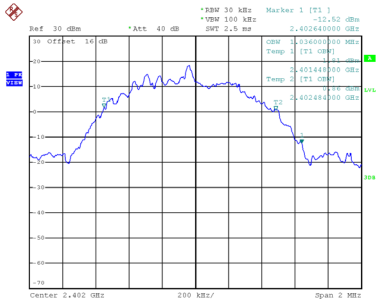

Date: 15.AUG.2024 10:33:52

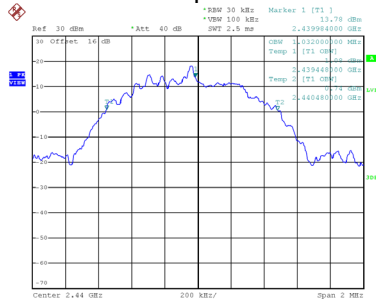


Date: 15.AUG.2024 10:38:30

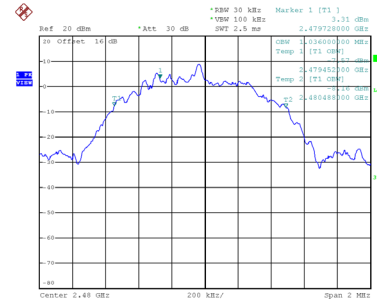

Date: 16.AUG.2024 15:40:48


**6 dB Bandwidth**

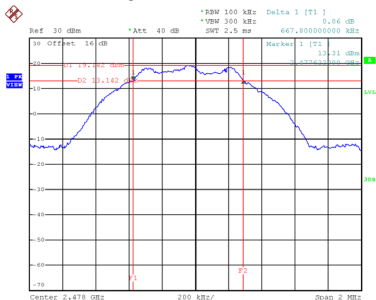

Date: 23.AUG.2024 10:56:15

**CH38**

**99 % Occupied Bandwidth**

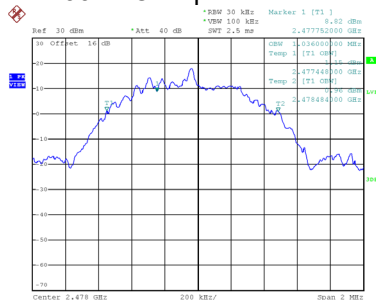


Date: 23.AUG.2024 10:56:21

Test Mode TX Mode \_2Mbps


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	1.092	2.040	0.5	Pass
19	2440	1.092	2.048	0.5	Pass
38	2478	1.056	2.056	0.5	Pass
39	2480	1.088	2.056	0.5	Pass

**CH00**

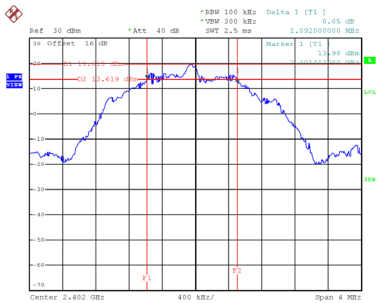


Date: 15.AUG.2024 10:45:17

**CH19**  
6 dB Bandwidth

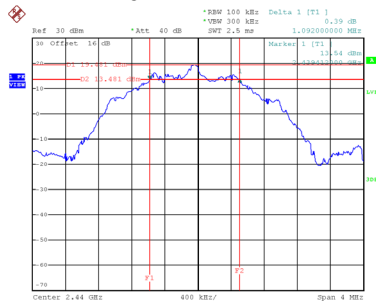


Date: 15.AUG.2024 10:50:46

**CH39**

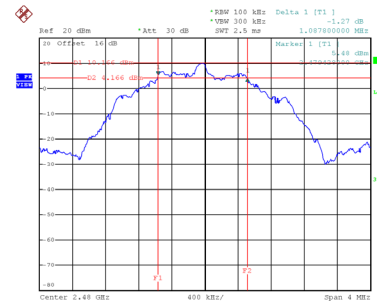


Date: 16.AUG.2024 16:16:27


**99 % Occupied Bandwidth**

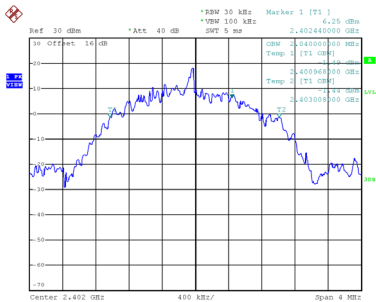

Date: 15.AUG.2024 11:30:26

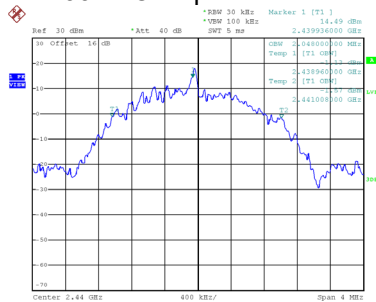


Date: 15.AUG.2024 10:50:52

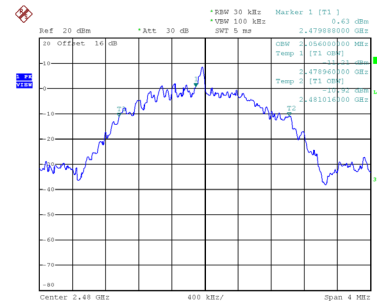

Date: 16.AUG.2024 16:16:33


**6 dB Bandwidth**

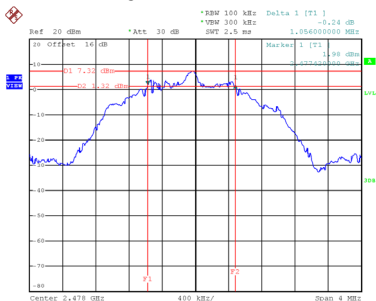

Date: 23.AUG.2024 11:03:00

**CH38**

**99 % Occupied Bandwidth**

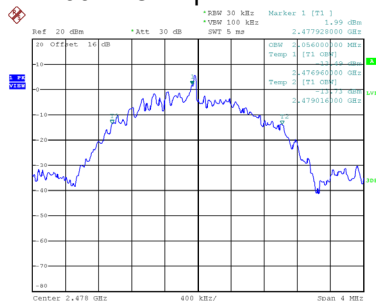

Date: 23.AUG.2024 11:03:05





## APPENDIX F - MAXIMUM OUTPUT POWER



Test Mode	TX Mode_1Mbps
-----------	---------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	19.77	0.0948	30.00	1.0000	Pass
2440	19.62	0.0916	30.00	1.0000	Pass
2478	19.13	0.0818	30.00	1.0000	Pass
2480	10.19	0.0104	30.00	1.0000	Pass





Note: Output power = Measure result + Cable loss

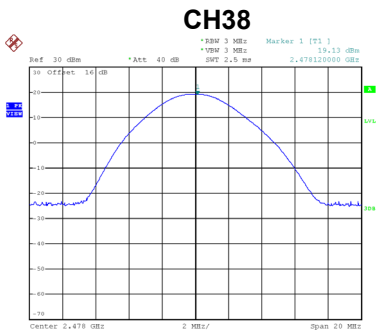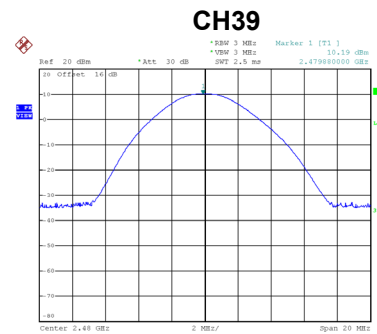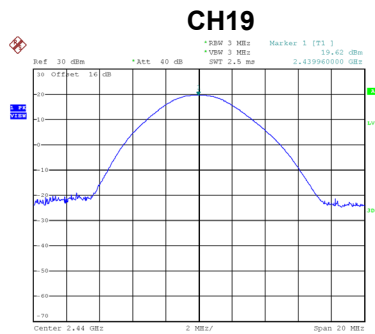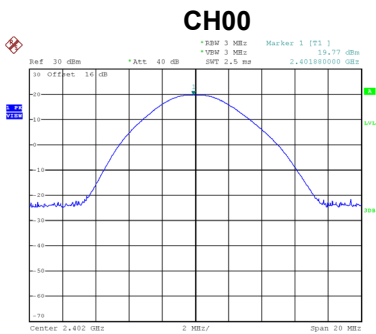

Test Mode	TX Mode_2Mbps
-----------	---------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	19.93	0.0984	30.00	1.0000	Pass
2440	19.29	0.0849	30.00	1.0000	Pass
2478	7.31	0.0073	30.00	1.0000	Pass
2480	10.22	0.0105	30.00	1.0000	Pass


Note: Output power = Measure result + Cable loss

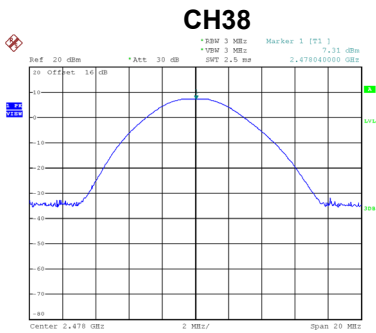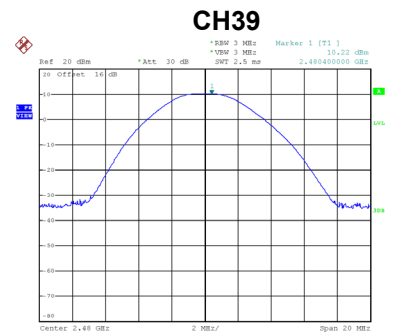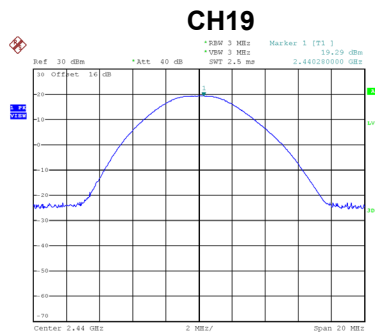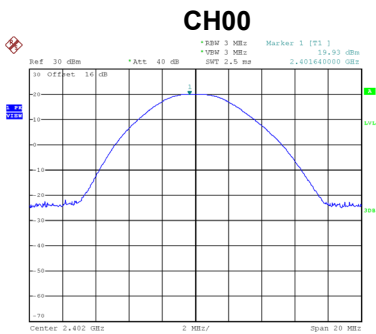


## **APPENDIX G - CONDUCTED SPURIOUS EMISSION**

Test Mode TX Mode\_1Mbps

### Bandedge CH00 (Lower)

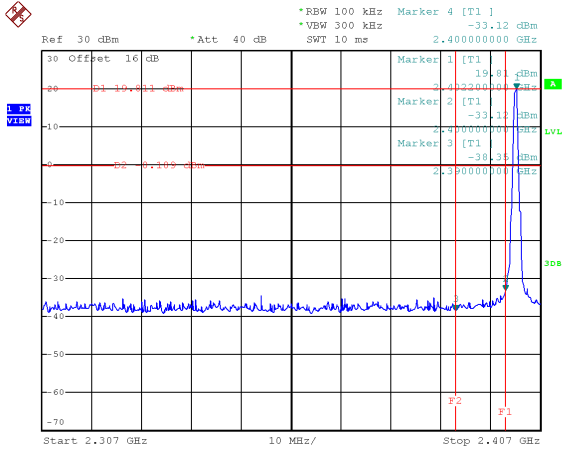


### Bandedge CH39 (Upper)

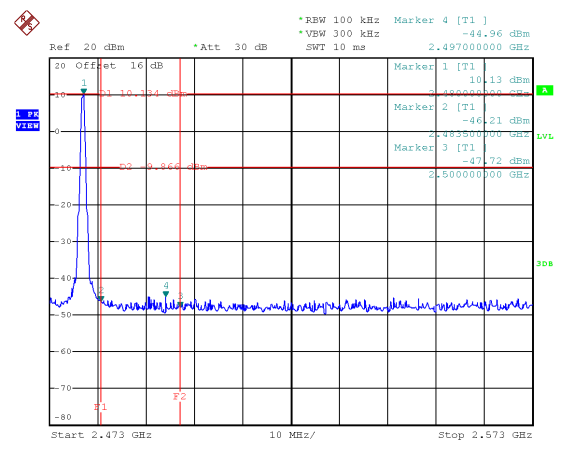

Date: 15.AUG.2024 10:34:37

Date: 16.AUG.2024 15:40:55

### CH00 – 10th Harmonic of the fundamental frequency

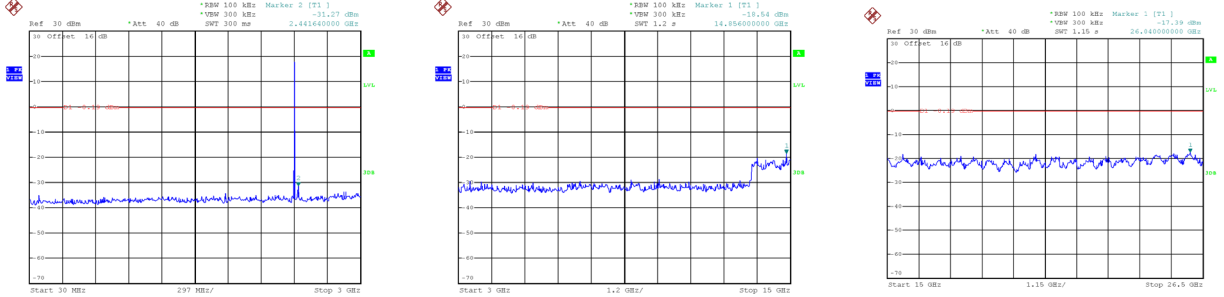


Date: 15.AUG.2024 10:34:50

Date: 15.AUG.2024 10:34:57

Date: 15.AUG.2024 10:35:04

### CH19 – 10th Harmonic of the fundamental frequency

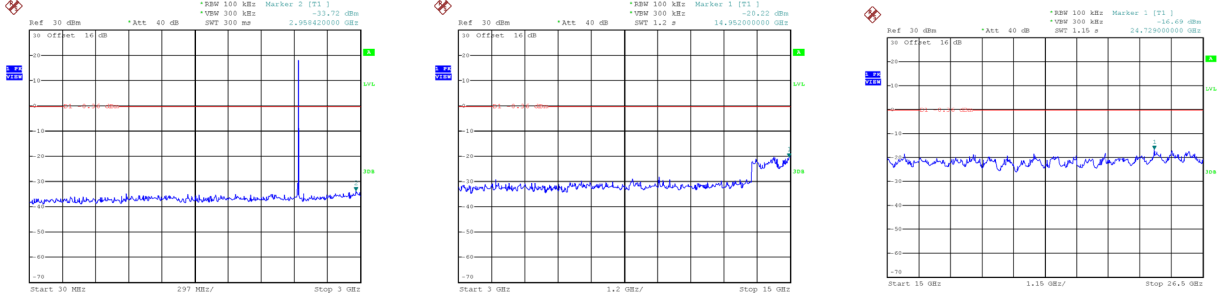


Date: 15.AUG.2024 10:38:50

Date: 15.AUG.2024 10:38:57

Date: 15.AUG.2024 10:39:04

### CH38 – 10th Harmonic of the fundamental frequency

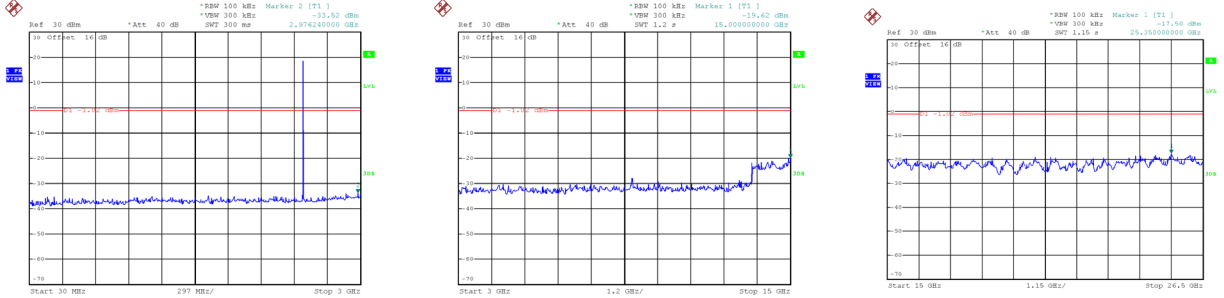


Date: 23.AUG.2024 17:33:26


Date: 23.AUG.2024 17:33:33

Date: 23.AUG.2024 17:33:40


## CH39 – 10th Harmonic of the fundamental frequency

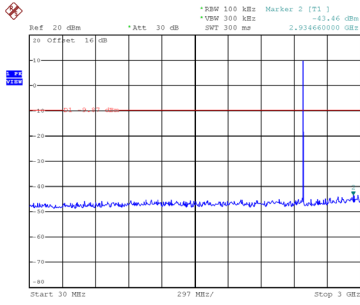

Date: 16.AUG.2024 15:41:09

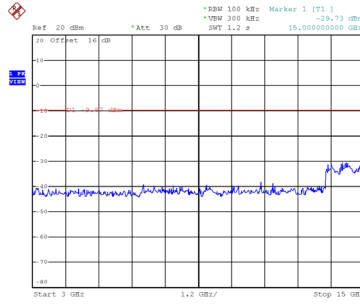


Date: 16.AUG.2024 15:41:16

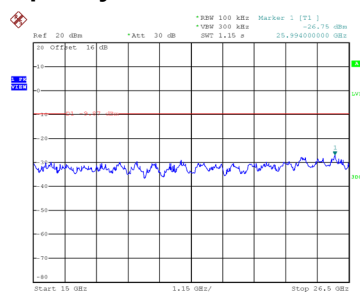


Date: 16.AUG.2024 15:41:23

Test Mode TX Mode\_2Mbps

### Bandedge CH00 (Lower)

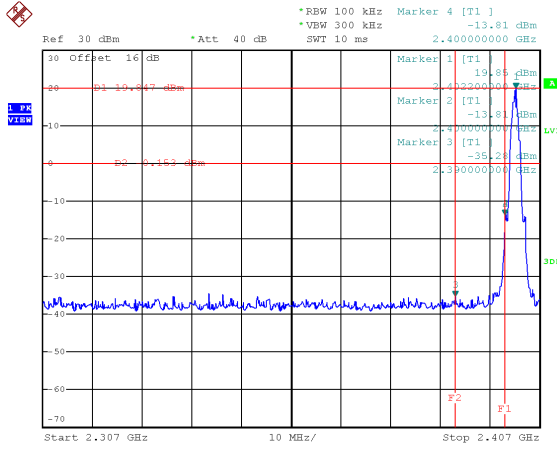




### Bandedge CH39 (Upper)

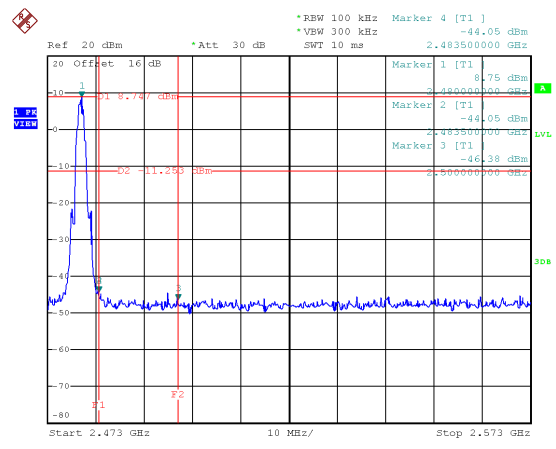

Date: 15.AUG.2024 10:47:23

Date: 16.AUG.2024 16:16:57

### CH00 – 10th Harmonic of the fundamental frequency

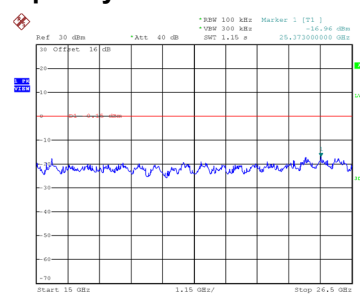
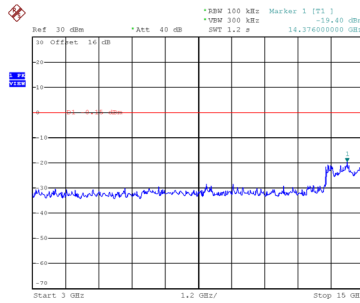
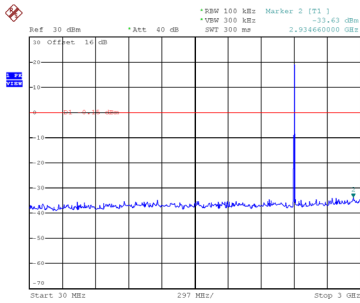


Date: 15.AUG.2024 10:47:36

Date: 15.AUG.2024 10:47:44

Date: 15.AUG.2024 10:47:51

### CH19 – 10th Harmonic of the fundamental frequency

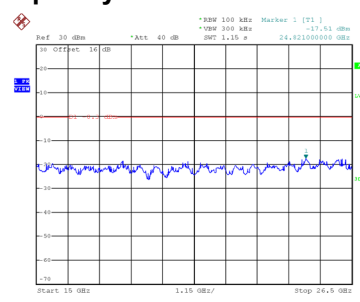
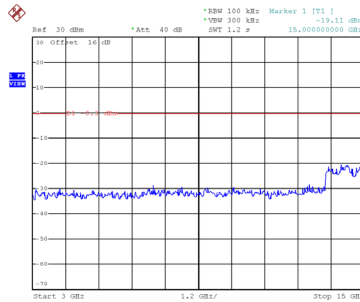
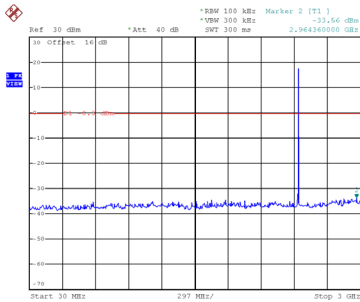


Date: 15.AUG.2024 10:51:30

Date: 15.AUG.2024 10:51:37

Date: 15.AUG.2024 10:51:49

### CH38 – 10th Harmonic of the fundamental frequency

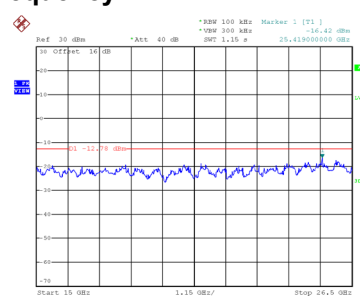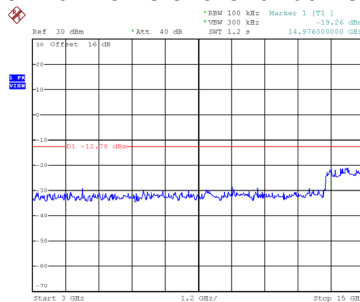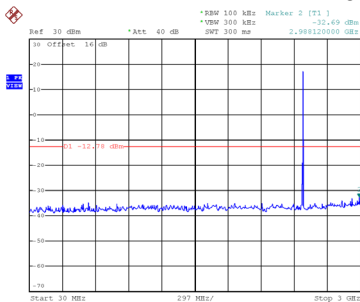


Date: 23.AUG.2024 17:30:55


Date: 23.AUG.2024 17:31:02

Date: 23.AUG.2024 17:31:09


## CH39 – 10th Harmonic of the fundamental frequency

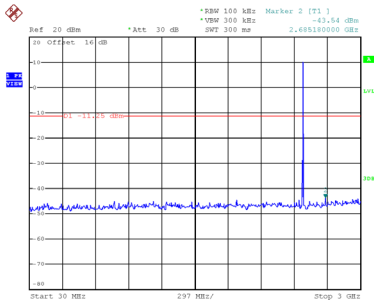

Date: 16.AUG.2024 16:17:10

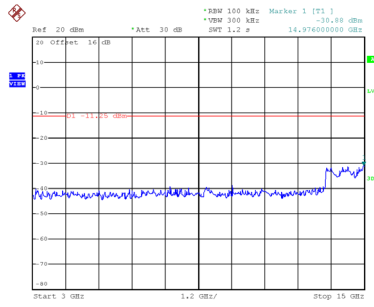

Date: 16.AUG.2024 16:17:18

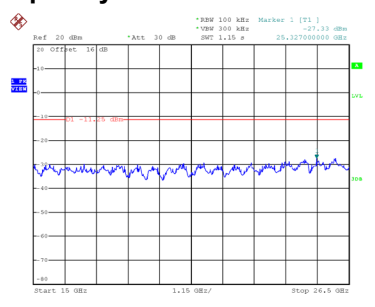

Date: 16.AUG.2024 16:17:25


## APPENDIX H - POWER SPECTRAL DENSITY



Test Mode TX Mode \_1Mbps


Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
00	2402	3.38	8.00	Pass
19	2440	3.32	8.00	Pass
38	2478	3.06	8.00	Pass
39	2480	-6.06	8.00	Pass

**CH00**

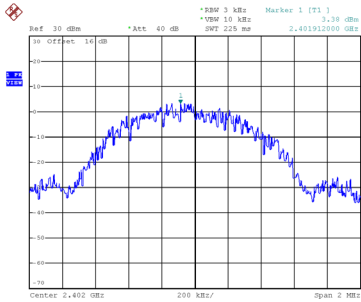


Date: 15.AUG.2024 10:35:10

**CH19**

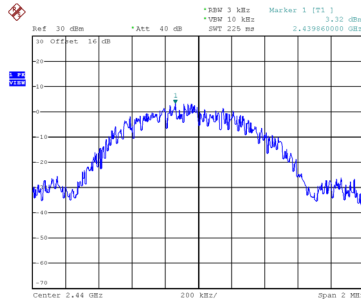


Date: 15.AUG.2024 10:39:10

**CH39**

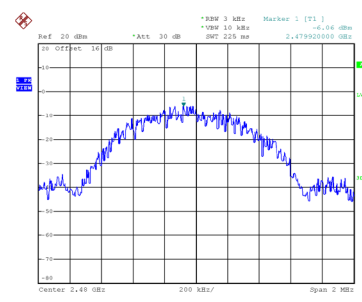

Date: 16.AUG.2024 16:14:36

**CH38**

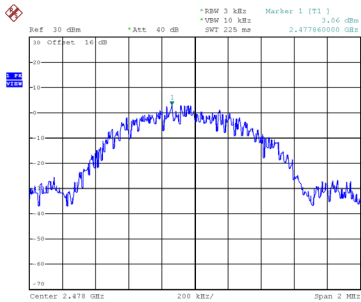


Date: 23.AUG.2024 10:57:16

Test Mode TX Mode \_2Mbps


Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
00	2402	3.05	8.00	Pass
19	2440	4.19	8.00	Pass
38	2478	-9.42	8.00	Pass
39	2480	-5.18	8.00	Pass

**CH00**

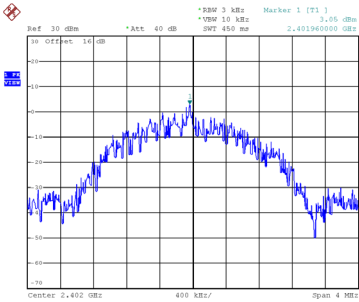


Date: 15.AUG.2024 11:30:47

**CH19**

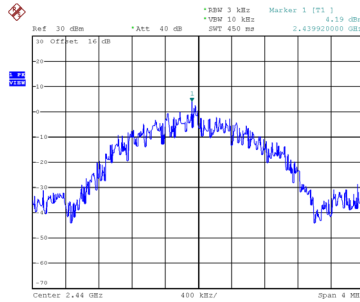


Date: 15.AUG.2024 10:51:50

**CH39**

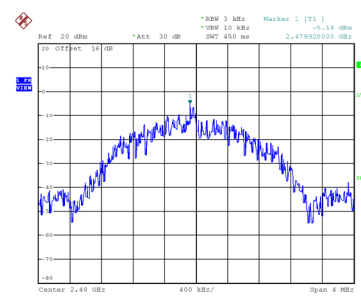

Date: 16.AUG.2024 16:17:30

**CH38**

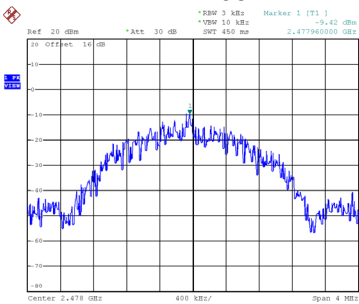

Date: 23.AUG.2024 11:03:44

End of Test Report