



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2211-1, XT2211-2, XT2211DL
FCC ID : IHDT56AA2
STANDARD : 47 CFR Part 2, 27(M)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Oct. 08, 2021 ~ Oct. 21, 2021

We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Specification of Accessory	6
1.7 Maximum ERP/EIRP Power and Emission Designator	7
1.8 Testing Location	9
1.9 Test Software	9
1.10 Applicable Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System	12
2.3 Support Unit used in test configuration and system	12
2.4 Measurement Results Explanation Example	12
2.5 Frequency List of Low/Middle/High Channels	13
3 CONDUCTED TEST ITEMS	16
3.1 Measuring Instruments	16
3.2 Test Setup	16
3.3 Test Result of Conducted Test	16
3.4 Conducted Output Power and ERP/EIRP	17
3.5 Peak-to-Average Ratio	18
3.6 Occupied Bandwidth	19
3.7 Conducted Band Edge	20
3.8 Conducted Spurious Emission	21
3.9 Frequency Stability	22
4 RADIATED TEST ITEMS	23
4.1 Measuring Instruments	23
4.2 Test Setup	23
4.3 Test Result of Radiated Test	24
4.4 Radiated Spurious Emission	25
5 LIST OF MEASURING EQUIPMENT	26
6 UNCERTAINTY OF EVALUATION	27
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG181714C	Rev. 01	Initial issue of report	Nov. 02, 2021

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	-	Report Only	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 7) (Band 38) (Band 41)	EIRP < 2Watt	PASS	-
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	-	Report Only	-
3.7	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7) (Band 38) (Band 41)	§27.53(m)(4)	PASS	-
3.8	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7) (Band 38) (Band 41)	< 55+10log ₁₀ (P[Watts])	PASS	-
3.9	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7) (Band 38) (Band 41)	< 55+10log ₁₀ (P[Watts])	PASS	Under limit 12.44 dB at 12630.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2211-1, XT2211-2, XT2211DL
FCC ID	IHDT56AA2
IMEI Code	Conducted: 358116610012140 for LTE Band 7/41 358116610011738 for LTE Band 41C Radiation: 35811661001461
HW Version	DVT2
SW Version	RRDE31.Q3-37
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz
Rx Frequency	LTE Band 7 : 2620 MHz ~ 2690 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz
Bandwidth	LTE Band 7 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 38 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 41 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	<Ant. 2> LTE Band 7 : 22.69 dBm LTE Band 38 : 22.75 dBm LTE Band 41 : 25.26 dBm LTE Band 41_CA : 21.96 dBm
Antenna Gain	LTE Band 7 : -1.41 dBi LTE Band 38 : -2.25 dBi LTE Band 41 : -3.01 dBi
Type of Modulation	QPSK / 16QAM / 64QAM

Note: LTE B41 supports HPUE mode.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola (Salcomp)	Model Name	MC-101
AC Adapter 2	Brand Name	Motorola (AOHAI)	Model Name	MC-101
AC Adapter 3	Brand Name	Motorola (Chenyang)	Model Name	MC-101
Battery	Brand Name	Motorola (ATL)	Model Name	MD50
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SC18D22297
USB Cable 2	Brand Name	Motorola (Cabletech)	Model Name	SC18D22298
USB Cable 3	Brand Name	Motorola (Luxshare)	Model Name	SC18D22299
Earphone	Brand Name	Motorola (NLD)	Model Name	NLD-EM313A-05SF



1.7 Maximum ERP/EIRP Power and Emission Designator

LTE Band 7		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2502.5 ~ 2567.5	0.1334	4M49G7D	0.1052	4M50W7D
10	2505.0 ~ 2565.0	0.1334	9M05G7D	0.1189	9M03W7D
15	2507.5 ~ 2562.5	0.1340	13M5G7D	0.1194	13M5W7D
20	2510.0 ~ 2560.0	0.1343	17M9G7D	0.1202	17M9W7D
LTE Band 38		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2572.5 ~ 2617.5	0.1633	4M51G7D	0.1191	4M50W7D
10	2575.0 ~ 2615.0	0.1603	9M05G7D	0.1194	9M05W7D
15	2577.5 ~ 2612.5	0.1570	13M6G7D	0.1183	13M5W7D
20	2580.0 ~ 2610.0	0.1679	17M9G7D	0.1247	17M9W7D
LTE Band 41		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2498.5 ~ 2687.5	0.1633	4M51G7D	0.1191	4M50W7D
10	2501.0 ~ 2685.0	0.1603	9M05G7D	0.1194	9M05W7D
15	2503.5 ~ 2682.5	0.1570	13M6G7D	0.1183	13M5W7D
20	2506.0 ~ 2680.0	0.1679	17M9G7D	0.1247	17M9W7D



LTE Band 41 CA	QPSK		16QAM/64QAM	
BW (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5MHz+20MHz	0.0753	23M3G7D	0.0728	23M3W7D
10MHz+20MHz	0.0750	28M2G7D	0.0714	28M1W7D
10MHz+15MHz	0.0731	23M7G7D	0.0708	23M5W7D
15MHz+15MHz	0.0767	28M7G7D	0.0745	28M7W7D
15MHz+20MHz	0.0762	32M9G7D	0.0728	32M9W7D
15MHz+10MHz	0.0736	23M7G7D	0.0710	23M5W7D
20MHz+5MHz	0.0748	23M3G7D	0.0719	23M4W7D
20MHz+10MHz	0.0752	28M1G7D	0.0721	28M1W7D
20MHz+15MHz	0.0766	33M0G7D	0.0735	33M0W7D
20MHz+20MHz	0.0785	37M7G7D	0.0762	37M9W7D

Note:

1. LTE Band 41 overlaps the entire frequency range of LTE Band 38. Therefore, the test results provided in this report covers Band 41 as well as Band 38.
2. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.8 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272

1.9 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a

1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 27(M)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	7	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	38	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	7	-	-				v	v	v	v	v		v	v	v	v
	41	-	-				v	v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	7	-	-	v	v	v	v	v	v	v			v	v	v	v
	41	-	-	v	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	7	-	-	v	v	v	v	v	v	v	v		v	v		v
	41	-	-	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	7	-	-	v	v	v	v	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v	v			v	v	v
Frequency Stability	7	-	-		v			v					v		v	
	41	-	-		v			v					v		v	
E.R.P / E.I.R.P	7	-	-	v	v	v	v	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	7	Worst Case													v	
	41	Worst Case													v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. LTE Band 41 overlaps the entire frequency range of LTE Band 38. Therefore, the test results provided in this report covers Band 41 as well as Band 38 for RSE testing.															



Test Items	Band	Bandwidth (MHz)										Modulation			RB #			Test Channel		
		20+20	20+15	15+20	20+10	10+20	20+5	5+20	15+15	15+10	10+15	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	41C_CA	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	41C_CA	v	v	v	v	v	v	v	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	41C_CA	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	41C_CA	v	v	v	v	v	v	v	v	v	v	v	v	v	v			v	v	v
E.I.R.P.	41C_CA	v	v	v	v	v	v	v	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	41C_CA	Worst Case																	v	
Note	1. The mark "v " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																			

2.2 Connection Diagram of Test System

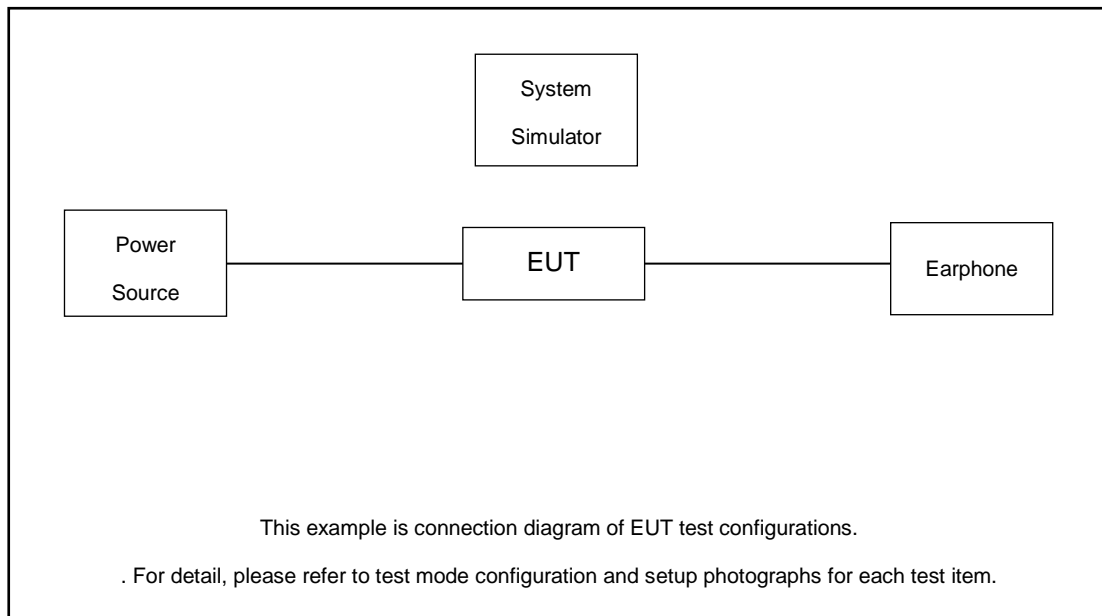

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	Fcc DoC	N/A	Shielded, 1.5m
3.	Earphone	Apple	N/A	Fcc DoC	N/A	Shielded, 1.5m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.0 + 10 = 15.0 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

LTE Band 38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	37850	38000	38150
	Frequency	2580	2595	2610
15	Channel	37825	38000	38175
	Frequency	2577.5	2595	2612.5
10	Channel	37800	38000	38200
	Frequency	2575	2595	2615
5	Channel	37775	38000	38225
	Frequency	2572.5	2595	2617.5

LTE Band 41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	39750	40620	41490
	Frequency	2506	2593	2680
15	Channel	39725	40620	41515
	Frequency	2503.5	2593	2682.5
10	Channel	39700	40620	41540
	Frequency	2501	2593	2685
5	Channel	39675	40620	41565
	Frequency	2498.5	2593	2687.5



LTE Band 41C_CA Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20 + 20	PCC	Channel	39750	40521	41292
		Frequency	2506.0	2583.1	2660.2
	SCC	Channel	39948	40719	41490
		Frequency	2525.8	2602.9	2680.0
20 + 15	PCC	Channel	39750	40546	41341
		Frequency	2506.0	2585.6	2665.1
	SCC	Channel	39921	40717	41512
		Frequency	2523.1	2602.7	2682.2
15 + 20	PCC	Channel	39728	40523	41319
		Frequency	2503.8	2593.3	2662.9
	SCC	Channel	39899	40694	41490
		Frequency	2520.9	2600.4	2680.0
20 + 10	PCC	Channel	39750	40571	41391
		Frequency	2506.0	2588.1	2670.1
	SCC	Channel	39894	40715	41535
		Frequency	2520.4	2602.5	2684.5
10 + 20	PCC	Channel	39705	40526	41346
		Frequency	2501.5	2583.6	2665.6
	SCC	Channel	39849	40670	41490
		Frequency	2515.9	2598.0	2680.0

LTE Band 41C_CA Channel and Frequency List					
20 + 5	PCC	Channel	39750	40595	41440
		Frequency	2506.0	2590.5	2675.0
	SCC	Channel	39867	40712	41557
		Frequency	2517.7	2602.2	2686.7
5 + 20	PCC	Channel	39683	40528	41373
		Frequency	2499.3	2583.8	2668.3
	SCC	Channel	39800	40645	41490
		Frequency	2511.0	2595.5	2680.0
15 + 15	PCC	Channel	39725	40545	41365
		Frequency	2503.5	2585.5	2667.5
	SCC	Channel	39875	40695	41515
		Frequency	2518.5	2600.5	2682.5
10 + 15	PCC	Channel	39703	40549	41395
		Frequency	2501.3	2585.9	2670.5
	SCC	Channel	39823	40669	41515
		Frequency	2513.3	2597.9	2682.5
15 + 10	PCC	Channel	39725	40571	41417
		Frequency	2503.5	2588.1	2672.7
	SCC	Channel	39845	40691	41537
		Frequency	2515.5	2600.1	2684.7


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

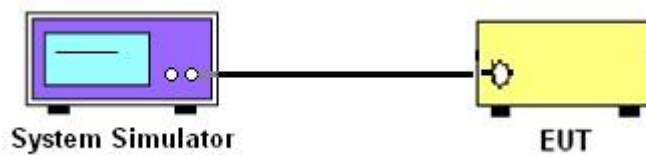

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

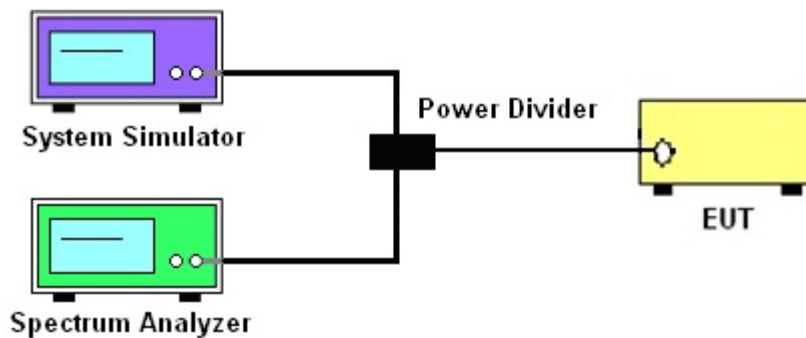

3.2.3 Frequency Stability

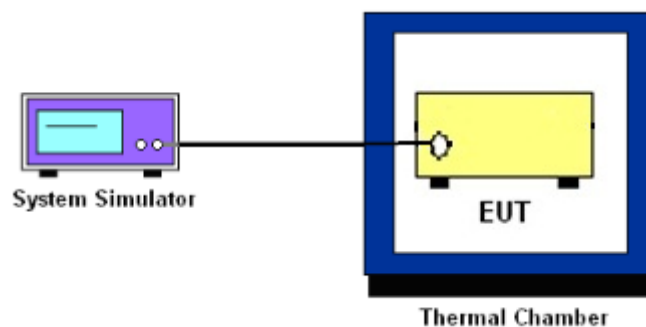

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 7 and Band 38 and Band 41.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. For LTE Band 7, 38, 41, the other 40 dB, and 55 dB have additionally applied same calculation above.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7,38,41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
11. For Band 7, 38, 41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

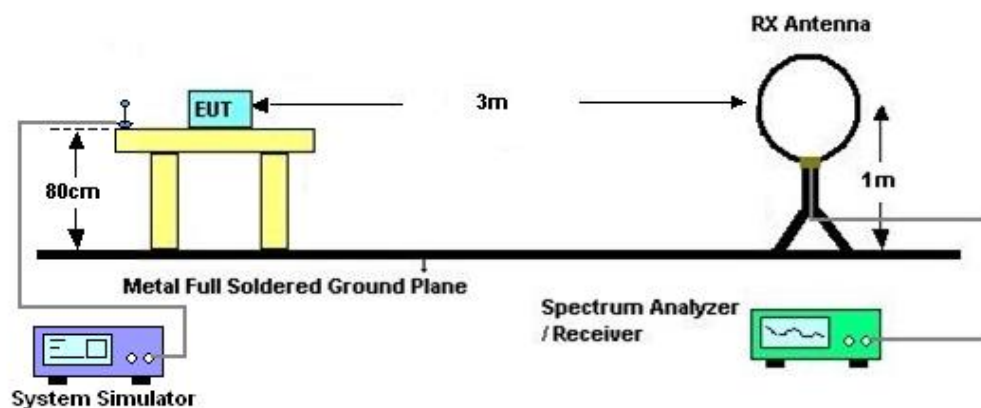

4.2.2 For radiated test from 30MHz to 1GHz

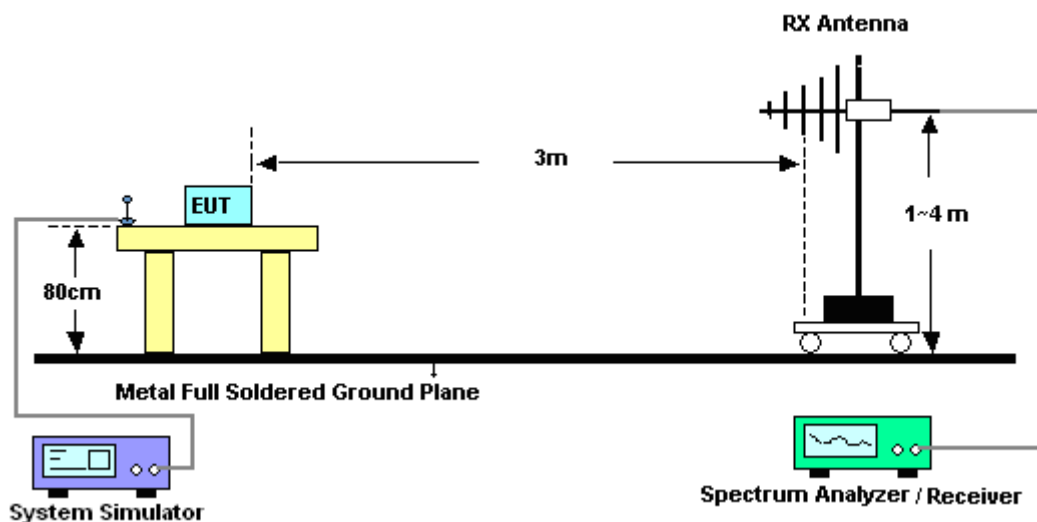

4.2.3 For radiated test above 1GHz

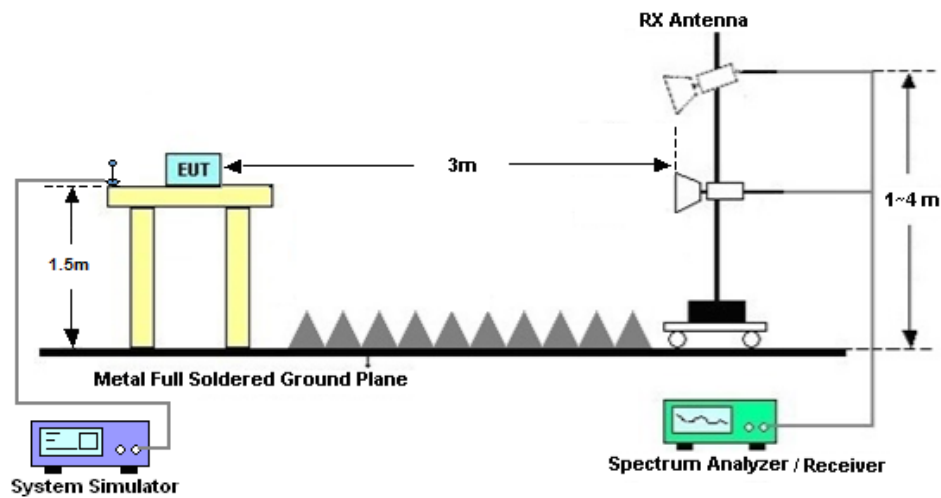

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7, 38, 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

13. For Band 7, 38, 41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Oct. 08, 2021~ Oct. 21, 2021	Apr. 07, 2022	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 15, 2020	Oct. 08, 2021~ Oct. 21, 2021	Oct. 14, 2021	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 14, 2021		Oct. 13, 2022	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 26, 2020	Oct. 08, 2021~ Oct. 21, 2021	Dec. 25, 2021	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhonggroup	LP-150U	H2014081803	-40~+150°C	Jul. 14, 2021	Oct. 08, 2021~ Oct. 21, 2021	Jul. 13, 2022	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 14, 2021	Oct. 13, 2021	Jul. 13, 2022	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Oct. 13, 2021	Jun. 21, 2022	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Jul. 14, 2021	Oct. 13, 2021	Jul. 13, 2022	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 25, 2021	Oct. 13, 2021	Jul. 24, 2022	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 14, 2021	Oct. 13, 2021	Jul. 13, 2022	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 11 2021	Oct. 13, 2021	Apr. 10, 2022	Radiation (03CH02-SZ)
LF Amplifier	Bur35407geon	BPA-530	102211	0.01~3000Mhz	Jul. 14, 2021	Oct. 13, 2021	Jul. 13, 2022	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 16, 2020	Oct. 13, 2021	Oct. 15, 2021	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Oct. 13, 2021	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Oct. 13, 2021	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Oct. 13, 2021	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.47dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72dB
---	--------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 7:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				20850	21100	21350
Frequency (MHz)				2510	2535	2560
20	QPSK	1	0	22.61	22.69	22.58
20	QPSK	1	49	22.50	22.51	22.47
20	QPSK	1	99	22.62	22.38	22.33
20	QPSK	50	0	21.42	21.66	21.53
20	QPSK	50	24	21.52	21.61	21.58
20	QPSK	50	50	21.62	21.56	21.55
20	QPSK	100	0	21.56	21.69	21.45
20	16QAM	1	0	22.18	21.80	21.76
20	16QAM	1	49	22.21	22.16	22.07
20	16QAM	1	99	21.95	21.84	21.82
20	16QAM	50	0	20.90	20.63	20.67
20	16QAM	50	24	20.93	20.75	20.69
20	16QAM	50	50	20.83	20.77	20.58
20	16QAM	100	0	20.86	20.70	20.61
20	64QAM	1	0	21.05	20.71	20.62
20	64QAM	1	49	21.10	21.01	20.93
20	64QAM	1	99	20.86	20.73	20.69
20	64QAM	50	0	19.89	19.62	19.66
20	64QAM	50	24	19.67	19.51	19.58
20	64QAM	50	50	19.66	19.56	19.48
20	64QAM	100	0	19.41	19.39	19.38
Channel				20825	21100	21375
Frequency (MHz)				2507.5	2535	2562.5
15	QPSK	1	0	22.68	22.63	22.50
15	QPSK	1	37	22.51	22.47	22.45
15	QPSK	1	74	22.63	22.29	22.32
15	QPSK	36	0	21.60	21.57	21.55
15	QPSK	36	20	21.71	21.51	21.53
15	QPSK	36	39	21.63	21.50	21.39
15	QPSK	75	0	21.48	21.65	21.35
15	16QAM	1	0	22.12	21.83	21.77
15	16QAM	1	37	22.03	22.18	22.05
15	16QAM	1	74	21.90	21.88	21.73
15	16QAM	36	0	20.73	20.67	20.70



15	16QAM	36	20	20.88	20.68	20.60
15	16QAM	36	39	20.73	20.74	20.44
15	16QAM	75	0	20.84	20.50	20.42
15	64QAM	1	0	20.55	20.65	20.54
15	64QAM	1	37	20.46	20.58	20.70
15	64QAM	1	74	20.73	20.53	20.63
15	64QAM	36	0	19.74	19.68	19.61
15	64QAM	36	20	19.49	19.44	19.61
15	64QAM	36	39	19.58	19.58	19.35
15	64QAM	75	0	19.33	19.32	19.41
Channel				20800	21100	21400
Frequency (MHz)				2505	2535	2565
10	QPSK	1	0	22.64	22.66	22.36
10	QPSK	1	25	22.39	22.49	22.28
10	QPSK	1	49	22.46	22.32	22.29
10	QPSK	25	0	21.64	21.58	21.51
10	QPSK	25	12	21.53	21.48	21.52
10	QPSK	25	25	21.62	21.54	21.37
10	QPSK	50	0	21.41	21.45	21.15
10	16QAM	1	0	22.16	21.80	21.67
10	16QAM	1	25	22.01	22.12	21.95
10	16QAM	1	49	21.80	21.77	21.76
10	16QAM	25	0	20.76	20.72	20.66
10	16QAM	25	12	20.79	20.64	20.46
10	16QAM	25	25	20.65	20.56	20.47
10	16QAM	50	0	20.68	20.53	20.44
10	64QAM	1	0	20.39	20.68	20.57
10	64QAM	1	25	20.24	20.49	20.67
10	64QAM	1	49	20.70	20.53	20.48
10	64QAM	25	0	19.57	19.65	19.49
10	64QAM	25	12	19.32	19.26	19.46
10	64QAM	25	25	19.47	19.55	19.19
10	64QAM	50	0	19.37	19.10	19.20
Channel				20775	21100	21425
Frequency (MHz)				2502.5	2535	2567.5
5	QPSK	1	0	22.55	22.60	22.43
5	QPSK	1	12	22.57	22.66	22.56
5	QPSK	1	24	22.54	22.37	22.38
5	QPSK	12	0	21.44	21.57	21.42
5	QPSK	12	7	21.30	21.52	21.44
5	QPSK	12	13	21.54	21.47	21.37
5	QPSK	25	0	21.45	21.48	21.35
5	16QAM	1	0	21.55	21.63	21.48
5	16QAM	1	12	21.53	21.51	21.59
5	16QAM	1	24	21.46	21.58	21.56



5	16QAM	12	0	20.59	20.51	20.40
5	16QAM	12	7	20.52	20.60	20.46
5	16QAM	12	13	20.79	20.58	20.56
5	16QAM	25	0	20.90	20.57	20.45
5	64QAM	1	0	20.54	20.64	20.48
5	64QAM	1	12	20.48	20.46	20.60
5	64QAM	1	24	20.60	20.66	20.59
5	64QAM	12	0	19.82	19.52	19.62
5	64QAM	12	7	19.76	19.58	19.70
5	64QAM	12	13	19.64	19.46	19.53
5	64QAM	25	0	19.40	19.33	19.45



LTE Band 38:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				37850	38000	38150
Frequency (MHz)				2580	2595	2610
20	QPSK	1	0	22.64	22.75	22.60
20	QPSK	1	49	22.69	22.73	22.52
20	QPSK	1	99	22.51	22.52	22.42
20	QPSK	50	0	21.58	21.68	21.60
20	QPSK	50	24	21.61	21.63	21.63
20	QPSK	50	50	21.64	21.62	21.57
20	QPSK	100	0	21.67	21.70	21.64
20	16QAM	1	0	21.58	21.60	21.61
20	16QAM	1	49	21.43	21.52	21.67
20	16QAM	1	99	21.56	21.57	21.70
20	16QAM	50	0	20.63	20.70	20.68
20	16QAM	50	24	20.66	20.78	20.67
20	16QAM	50	50	20.69	20.67	20.63
20	16QAM	100	0	20.69	20.77	20.76
20	64QAM	1	0	20.77	20.70	20.73
20	64QAM	1	49	20.68	20.73	20.59
20	64QAM	1	99	20.52	20.63	20.68
20	64QAM	50	0	19.76	19.80	19.71
20	64QAM	50	24	19.80	19.79	19.75
20	64QAM	50	50	19.85	19.82	19.77
20	64QAM	100	0	19.77	19.88	19.83
Channel				37825	38000	38175
Frequency (MHz)				2577.5	2595	2612.5
15	QPSK	1	0	22.70	22.72	22.46
15	QPSK	1	37	22.56	22.61	22.49
15	QPSK	1	74	22.43	22.45	22.45
15	QPSK	36	0	21.54	21.62	21.59
15	QPSK	36	20	21.61	21.68	21.67
15	QPSK	36	39	21.69	21.45	21.41
15	QPSK	75	0	21.66	21.61	21.74
15	16QAM	1	0	21.53	21.47	21.64
15	16QAM	1	37	21.42	21.58	21.63
15	16QAM	1	74	21.47	21.60	21.76
15	16QAM	36	0	20.67	20.56	20.75
15	16QAM	36	20	20.59	20.66	20.61
15	16QAM	36	39	20.69	20.77	20.72
15	16QAM	75	0	20.77	20.78	20.79
15	64QAM	1	0	20.78	20.66	20.81
15	64QAM	1	37	20.64	20.68	20.53
15	64QAM	1	74	20.48	20.56	20.78



15	64QAM	36	0	19.72	19.87	19.63
15	64QAM	36	20	19.64	19.70	19.66
15	64QAM	36	39	19.87	19.71	19.85
15	64QAM	75	0	19.67	19.86	19.90
Channel				37800	38000	38200
Frequency (MHz)				2575	2595	2615
10	QPSK	1	0	22.61	22.67	22.43
10	QPSK	1	25	22.74	22.71	22.44
10	QPSK	1	49	22.59	22.52	22.39
10	QPSK	25	0	21.53	21.48	21.66
10	QPSK	25	12	21.59	21.76	21.53
10	QPSK	25	25	21.67	21.50	21.63
10	QPSK	50	0	21.74	21.66	21.65
10	16QAM	1	0	21.52	21.55	21.68
10	16QAM	1	25	21.44	21.36	21.57
10	16QAM	1	49	21.44	21.60	21.72
10	16QAM	25	0	20.66	20.77	20.55
10	16QAM	25	12	20.54	20.77	20.66
10	16QAM	25	25	20.54	20.64	20.67
10	16QAM	50	0	20.77	20.83	20.67
10	64QAM	1	0	20.78	20.63	20.71
10	64QAM	1	25	20.78	20.64	20.51
10	64QAM	1	49	20.39	20.47	20.57
10	64QAM	25	0	19.78	19.85	19.67
10	64QAM	25	12	19.71	19.76	19.66
10	64QAM	25	25	19.71	19.71	19.87
10	64QAM	50	0	19.81	19.88	19.72
Channel				37775	38000	38225
Frequency (MHz)				2572.5	2595	2617.5
5	QPSK	1	0	22.67	22.73	22.50
5	QPSK	1	12	22.63	22.56	22.41
5	QPSK	1	24	22.41	22.44	22.40
5	QPSK	12	0	21.68	21.59	21.61
5	QPSK	12	7	21.61	21.65	21.64
5	QPSK	12	13	21.63	21.70	21.56
5	QPSK	25	0	21.76	21.55	21.69
5	16QAM	1	0	21.54	21.50	21.45
5	16QAM	1	12	21.51	21.36	21.59
5	16QAM	1	24	21.59	21.55	21.55
5	16QAM	12	0	20.50	20.81	20.51
5	16QAM	12	7	20.63	20.83	20.56
5	16QAM	12	13	20.58	20.65	20.67
5	16QAM	25	0	20.55	20.64	20.86
5	64QAM	1	0	20.77	20.72	20.62
5	64QAM	1	12	20.68	20.63	20.54



5	64QAM	1	24	20.44	20.56	20.76
5	64QAM	12	0	19.80	19.79	19.59
5	64QAM	12	7	19.75	19.70	19.61
5	64QAM	12	13	19.71	19.84	19.81
5	64QAM	25	0	19.66	19.95	19.83



LTE Band 41 (HPUE):

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40620	41490
Frequency (MHz)				2506	2593	2680
20	QPSK	1	0	25.03	25.26	24.84
20	QPSK	1	49	25.22	25.25	24.97
20	QPSK	1	99	24.94	24.99	24.80
20	QPSK	50	0	23.81	24.17	23.71
20	QPSK	50	24	23.98	24.11	23.74
20	QPSK	50	50	23.76	23.70	23.67
20	QPSK	100	0	24.03	24.04	23.82
20	16QAM	1	0	23.70	23.97	23.58
20	16QAM	1	49	23.85	23.83	23.78
20	16QAM	1	99	23.52	23.62	23.59
20	16QAM	50	0	22.74	23.14	22.68
20	16QAM	50	24	22.88	23.13	22.65
20	16QAM	50	50	22.87	22.65	22.73
20	16QAM	100	0	23.04	23.06	22.91
20	64QAM	1	0	22.67	22.98	22.70
20	64QAM	1	49	22.69	22.93	22.51
20	64QAM	1	99	22.65	22.54	22.60
20	64QAM	50	0	21.81	22.07	21.61
20	64QAM	50	24	21.96	22.04	21.68
20	64QAM	50	50	21.90	21.71	21.75
20	64QAM	100	0	21.98	22.06	21.85
Channel				39725	40620	41515
Frequency (MHz)				2503.5	2593	2682.5
15	QPSK	1	0	24.78	24.97	24.59
15	QPSK	1	37	24.74	24.87	24.66
15	QPSK	1	74	24.84	24.80	24.69
15	QPSK	36	0	23.61	23.89	23.56
15	QPSK	36	20	23.88	23.91	23.54
15	QPSK	36	39	23.57	23.55	23.52
15	QPSK	75	0	23.95	23.87	23.61
15	16QAM	1	0	23.57	23.67	23.51
15	16QAM	1	37	23.66	23.53	23.64
15	16QAM	1	74	23.54	23.74	23.69
15	16QAM	36	0	22.52	22.98	22.74
15	16QAM	36	20	22.66	22.83	22.77
15	16QAM	36	39	22.71	22.70	22.51
15	16QAM	75	0	22.76	22.89	22.79
15	64QAM	1	0	22.75	22.70	22.62
15	64QAM	1	37	22.68	22.77	22.53
15	64QAM	1	74	22.66	22.75	22.70



15	64QAM	36	0	21.52	21.92	21.74
15	64QAM	36	20	21.74	21.75	21.71
15	64QAM	36	39	21.72	21.61	21.66
15	64QAM	75	0	21.87	21.79	21.54
Channel				39700	40620	41540
Frequency (MHz)				2501	2593	2685
10	QPSK	1	0	24.91	25.06	24.62
10	QPSK	1	25	24.93	25.05	24.86
10	QPSK	1	49	24.64	24.71	24.59
10	QPSK	25	0	23.63	23.95	23.54
10	QPSK	25	12	23.79	23.99	23.76
10	QPSK	25	25	23.55	23.52	23.71
10	QPSK	50	0	23.93	23.84	23.51
10	16QAM	1	0	23.77	23.77	23.70
10	16QAM	1	25	23.77	23.70	23.55
10	16QAM	1	49	23.70	23.78	23.70
10	16QAM	25	0	22.63	23.01	22.59
10	16QAM	25	12	22.67	22.93	22.78
10	16QAM	25	25	22.65	22.76	22.72
10	16QAM	50	0	22.84	22.87	22.70
10	64QAM	1	0	22.72	22.72	22.74
10	64QAM	1	25	22.75	22.67	22.57
10	64QAM	1	49	22.55	22.73	22.64
10	64QAM	25	0	21.63	21.91	21.50
10	64QAM	25	12	21.88	21.82	21.57
10	64QAM	25	25	21.74	21.52	21.60
10	64QAM	50	0	21.84	21.87	21.53
Channel				39675	40620	41565
Frequency (MHz)				2498.5	2593	2687.5
5	QPSK	1	0	24.90	25.02	24.66
5	QPSK	1	12	25.14	25.05	24.77
5	QPSK	1	24	24.75	24.72	24.71
5	QPSK	12	0	23.55	23.88	23.62
5	QPSK	12	7	23.73	23.85	23.79
5	QPSK	12	13	23.51	23.56	23.56
5	QPSK	25	0	23.79	23.87	23.67
5	16QAM	1	0	23.76	23.75	23.73
5	16QAM	1	12	23.67	23.73	23.58
5	16QAM	1	24	23.61	23.77	23.67
5	16QAM	12	0	22.72	22.98	22.55
5	16QAM	12	7	22.57	22.86	22.74
5	16QAM	12	13	22.57	22.53	22.72
5	16QAM	25	0	22.73	22.93	22.65
5	64QAM	1	0	22.69	22.75	22.74
5	64QAM	1	12	22.75	22.63	22.61



5	64QAM	1	24	22.69	22.61	22.78
5	64QAM	12	0	21.67	21.85	21.68
5	64QAM	12	7	21.87	21.74	21.77
5	64QAM	12	13	21.65	21.62	21.77
5	64QAM	25	0	21.77	21.84	21.60

**CA Power and EIRP**

Combination 20MHz+20MHz (100RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	21.96	0.0785
M	QPSK	1	Max	1	0	21.86	0.0767
H	QPSK	1	Max	1	0	21.93	0.0780
L	16QAM	1	Max	1	0	21.83	0.0762
M	16QAM	1	Max	1	0	21.78	0.0753
H	16QAM	1	Max	1	0	21.79	0.0755
L	64QAM	1	Max	1	0	21.62	0.0726
M	64QAM	1	Max	1	0	21.54	0.0713
H	64QAM	1	Max	1	0	21.57	0.0718
Combination 20MHz+15MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	21.85	0.0766
L	16QAM	1	Max	1	0	21.67	0.0735
Combination 15MHz+20MHz (75RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	21.83	0.0762
L	16QAM	1	Max	1	0	21.63	0.0728
Combination 15MHz+15MHz (75RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	21.86	0.0767
L	16QAM	1	Max	1	0	21.73	0.0745
Combination 20MHz+10MHz (100RB+50RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	21.77	0.0752
L	16QAM	1	Max	1	0	21.59	0.0721
Combination 10MHz+20MHz (50RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	21.76	0.0750
L	16QAM	1	Max	1	0	21.55	0.0714
Combination 15MHz+10MHz (75RB+50RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	21.68	0.0736
L	16QAM	1	Max	1	0	21.52	0.0710



Combination 10MHz+15MHz (50RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	21.65	0.0731
L	16QAM	1	Max	1	0	21.51	0.0708
Combination 20MHz+5MHz (100RB+25RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	21.75	0.0748
L	16QAM	1	Max	1	0	21.58	0.0719
Combination 5MHz+20MHz (25RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	21.78	0.0753
L	16QAM	1	Max	1	0	21.63	0.0728

ERP/EIRP

LTE Band 7 (GT - LC = -1.41 dB) QPSK			
Bandwidth	5M		
Channel	20775	21100	21425
	(Low)	(Mid)	(High)
Frequency	2502.5	2535	2567.5
(MHz)			
Conducted Power (dBm)	22.57	22.66	22.56
Conducted Power (Watts)	0.1807	0.1845	0.1803
EIRP(dBm)	21.16	21.25	21.15
EIRP(Watts)	0.1306	0.1334	0.1303

LTE Band 7 (GT - LC = -1.41 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
(MHz)									
Conducted Power (dBm)	22.64	22.66	22.36	22.68	22.63	22.50	22.61	22.69	22.58
Conducted Power (Watts)	0.1837	0.1845	0.1722	0.1854	0.1832	0.1778	0.1824	0.1858	0.1811
EIRP(dBm)	21.23	21.25	20.95	21.27	21.22	21.09	21.20	21.28	21.17
EIRP(Watts)	0.1327	0.1334	0.1245	0.1340	0.1324	0.1285	0.1318	0.1343	0.1309

LTE Band 7 (GT - LC = -1.41 dB) 16QAM			
Bandwidth	5M		
Channel	20775	21100	21425
	(Low)	(Mid)	(High)
Frequency	2502.5	2535	2567.5
(MHz)			
Conducted Power (dBm)	21.55	21.63	21.48
Conducted Power (Watts)	0.1429	0.1455	0.1406
EIRP(dBm)	20.14	20.22	20.07
EIRP(Watts)	0.1033	0.1052	0.1016

LTE Band 7 (GT - LC = -1.41 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
(MHz)									
Conducted Power (dBm)	22.16	21.80	21.67	22.03	22.18	22.05	22.21	22.16	22.07
Conducted Power (Watts)	0.1644	0.1514	0.1469	0.1596	0.1652	0.1603	0.1663	0.1644	0.1611
EIRP(dBm)	20.75	20.39	20.26	20.62	20.77	20.64	20.80	20.75	20.66
EIRP(Watts)	0.1189	0.1094	0.1062	0.1153	0.1194	0.1159	0.1202	0.1189	0.1164



LTE Band 7 (GT - LC = -1.41 dB) 64QAM			
Bandwidth	5M		
Channel	20775	21100	21425
	(Low)	(Mid)	(High)
Frequency	2502.5	2535	2567.5
(MHz)			
Conducted Power (dBm)	20.60	20.66	20.59
Conducted Power (Watts)	0.1148	0.1164	0.1146
EIRP(dBm)	19.19	19.25	19.18
EIRP(Watts)	0.0830	0.0841	0.0828

LTE Band 7 (GT - LC = -1.41 dB) 64QAM									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
(MHz)									
Conducted Power (dBm)	20.70	20.53	20.48	20.73	20.53	20.63	21.10	21.01	20.93
Conducted Power (Watts)	0.1175	0.1130	0.1117	0.1183	0.1130	0.1156	0.1288	0.1262	0.1239
EIRP(dBm)	19.29	19.12	19.07	19.32	19.12	19.22	19.69	19.60	19.52
EIRP(Watts)	0.0849	0.0817	0.0807	0.0855	0.0817	0.0836	0.0931	0.0912	0.0895

LTE Band 41 ($G_T - L_C = -3.01$ dB) QPSK									
Bandwidth	5M			10M			15M		
Channel	39675	40620	41565	39700	40620	41540	39725	40620	41515
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2498.5	2593	2687.5	2501	2593	2685	2503.5	2593	2682.5
(MHz)									
Conducted Power (dBm)	25.14	25.05	24.77	24.91	25.06	24.62	24.78	24.97	24.59
Conducted Power (Watts)	0.3266	0.3199	0.2999	0.3097	0.3206	0.2897	0.3006	0.3141	0.2877
EIRP(dBm)	22.13	22.04	21.76	21.90	22.05	21.61	21.77	21.96	21.58
EIRP(Watts)	0.1633	0.1600	0.1500	0.1549	0.1603	0.1449	0.1503	0.1570	0.1439

LTE Band 41 ($G_T - L_C = -3.01$ dB) QPSK			
Bandwidth	20M		
Channel	39750	40620	41490
	(Low)	(Mid)	(High)
Frequency	2506	2593	2680
(MHz)			
Conducted Power (dBm)	25.03	25.26	24.84
Conducted Power (Watts)	0.3184	0.3357	0.3048
EIRP(dBm)	22.02	22.25	21.83
EIRP(Watts)	0.1592	0.1679	0.1524

LTE Band 41 ($G_T - L_C = -3.01$ dB) 16QAM									
Bandwidth	5M			10M			15M		
Channel	39675	40620	41565	39700	40620	41540	39725	40620	41515
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2498.5	2593	2687.5	2501	2593	2685	2503.5	2593	2682.5
(MHz)									
Conducted Power (dBm)	23.61	23.77	23.67	23.70	23.78	23.70	23.54	23.74	23.69
Conducted Power (Watts)	0.2296	0.2382	0.2328	0.2344	0.2388	0.2344	0.2259	0.2366	0.2339
EIRP(dBm)	20.60	20.76	20.66	20.69	20.77	20.69	20.53	20.73	20.68
EIRP(Watts)	0.1148	0.1191	0.1164	0.1172	0.1194	0.1172	0.1130	0.1183	0.1169

LTE Band 41 ($G_T - L_C = -3.01$ dB) 16QAM			
Bandwidth	20M		
Channel	39750	40620	41490
	(Low)	(Mid)	(High)
Frequency	2506	2593	2680
(MHz)			
Conducted Power (dBm)	23.70	23.97	23.58
Conducted Power (Watts)	0.2344	0.2495	0.2280
EIRP(dBm)	20.69	20.96	20.57
EIRP(Watts)	0.1172	0.1247	0.1140

LTE Band 41 ($G_T - L_C = -3.01$ dB) 64QAM									
Bandwidth	5M			10M			15M		
Channel	39675	40620	41565	39700	40620	41540	39725	40620	41515
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2498.5	2593	2687.5	2501	2593	2685	2503.5	2593	2682.5
(MHz)									
Conducted Power (dBm)	22.69	22.61	22.78	22.75	22.67	22.57	22.68	22.77	22.53
Conducted Power (Watts)	0.1858	0.1824	0.1897	0.1884	0.1849	0.1807	0.1854	0.1892	0.1791
EIRP(dBm)	19.68	19.60	19.77	19.74	19.66	19.56	19.67	19.76	19.52
EIRP(Watts)	0.0929	0.0912	0.0948	0.0942	0.0925	0.0904	0.0927	0.0946	0.0895







LTE Band 41 ($G_T - L_C = -3.01$ dB) 64QAM			
Bandwidth	20M		
Channel	39750	40620	41490
	(Low)	(Mid)	(High)
Frequency	2506	2593	2680
(MHz)			
Conducted Power (dBm)	22.67	22.98	22.70
Conducted Power (Watts)	0.1849	0.1986	0.1862
EIRP(dBm)	19.66	19.97	19.69
EIRP(Watts)	0.0925	0.0993	0.0931









LTE Band 7

Peak-to-Average Ratio

Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.46	5.25	5.65	6.14	PASS
Middle CH	4.96	5.19	5.97	6.12	
Highest CH	4.64	5.22	5.83	6.12	
Mode	LTE Band 7 / 20MHz				
Mod.	64QAM				Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH	6.32	6.41	-	-	PASS
Middle CH	6.49	6.35	-	-	
Highest CH	6.20	6.38	-	-	

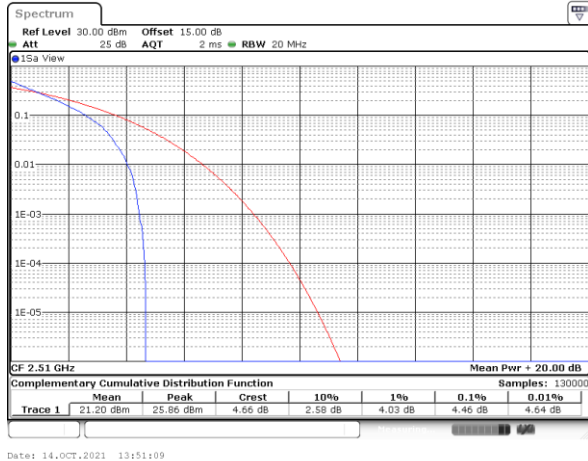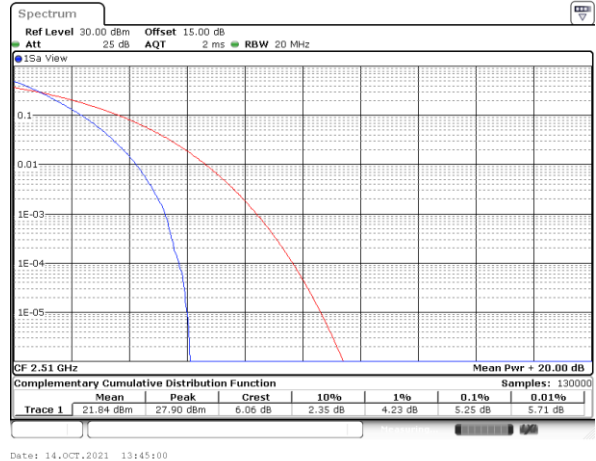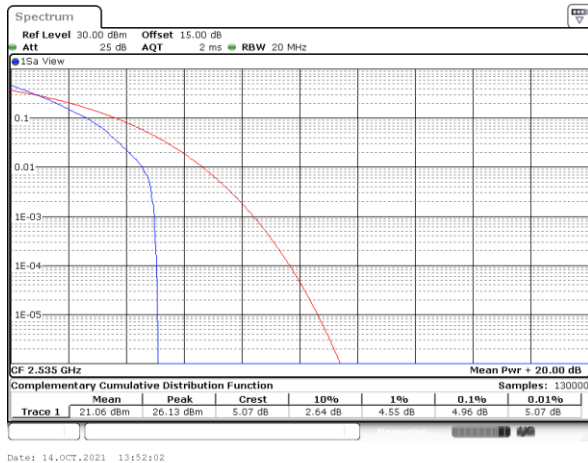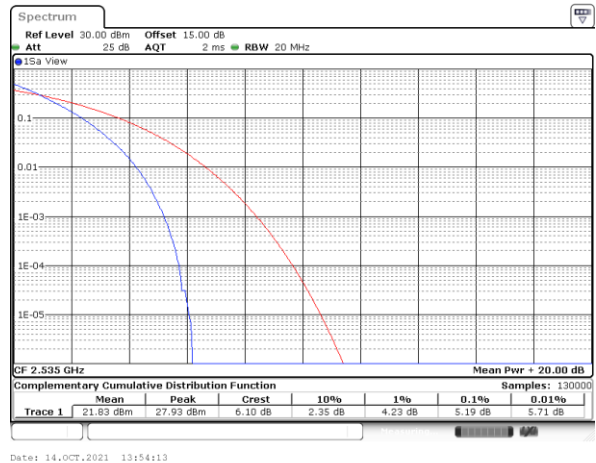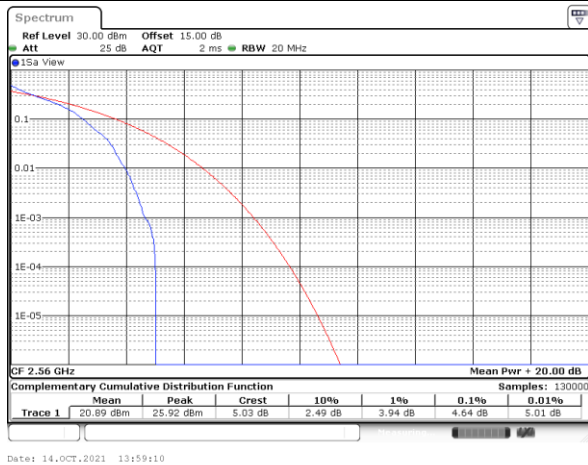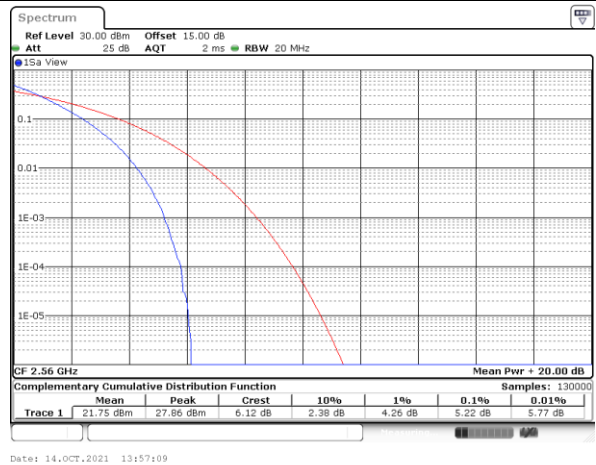
LTE Band 7 / 20MHz / QPSK
Lowest Channel / 1RB

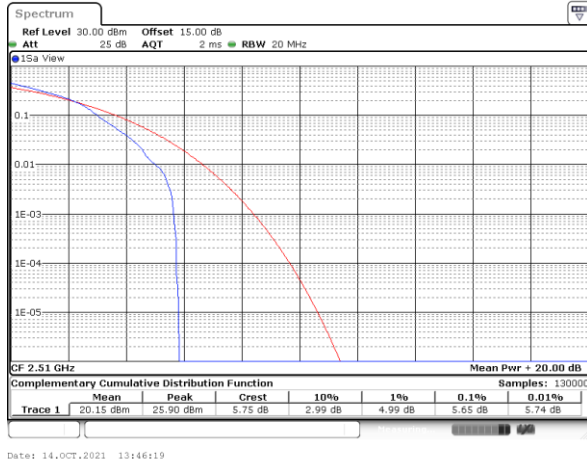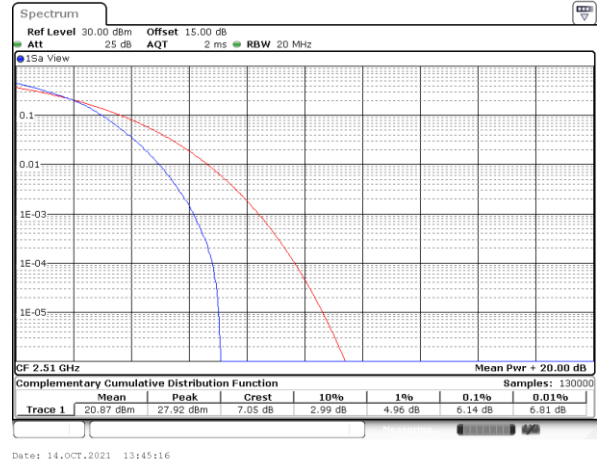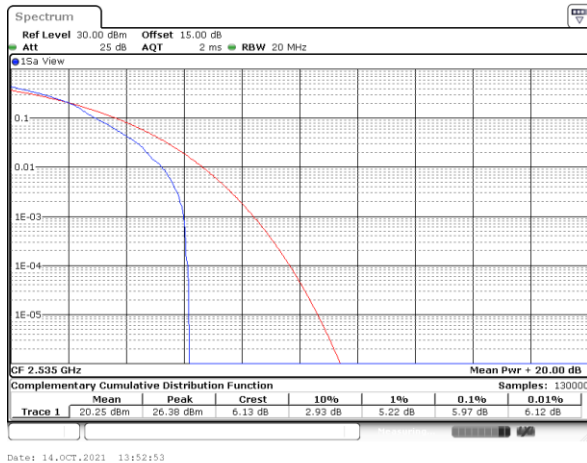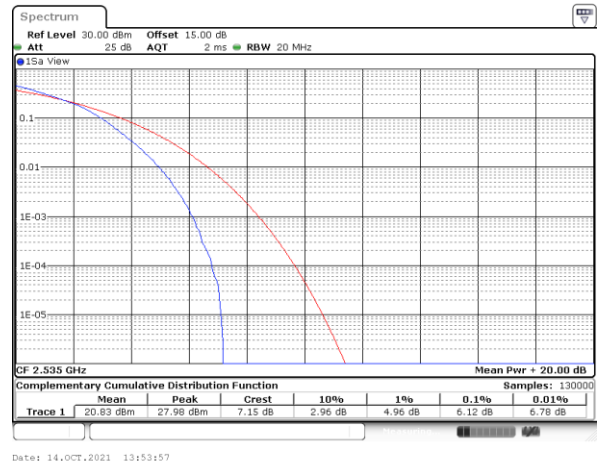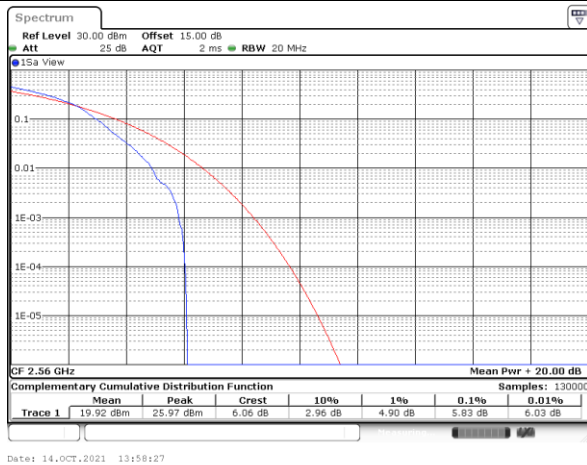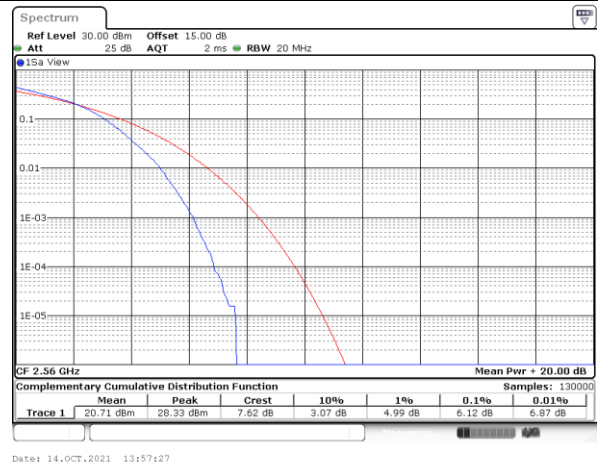Lowest Channel / Full RB

Middle Channel / 1RB

Middle Channel / Full RB

Highest Channel / 1RB

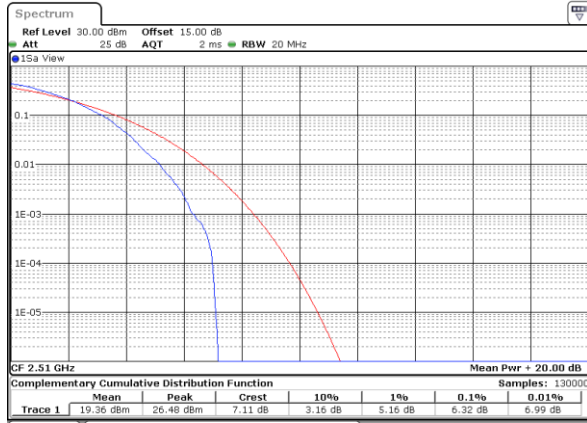Highest Channel / Full RB


LTE Band 7 / 20MHz / 16QAM
Lowest Channel / 1RB

Lowest Channel / Full RB

Middle Channel / 1RB

Middle Channel / Full RB

Highest Channel / 1RB

Highest Channel / Full RB


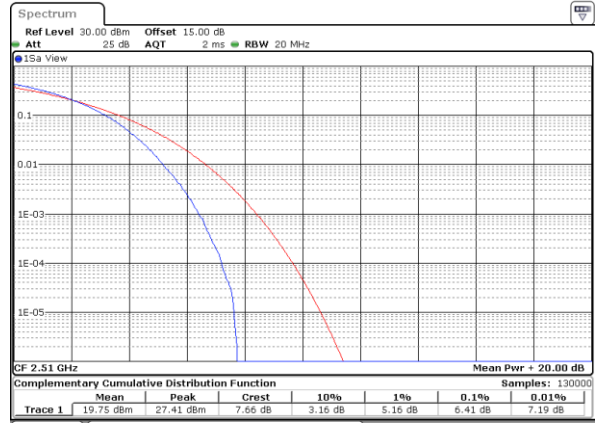


LTE Band 7 / 20MHz / 64QAM


Lowest Channel / 1RB



Lowest Channel / Full RB



Middle Channel / 1RB

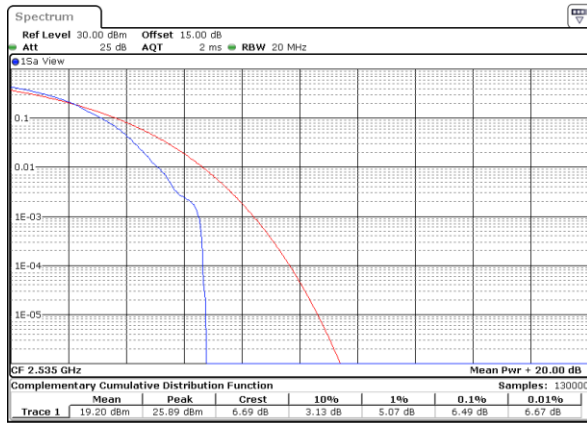


Middle Channel / Full RB



Highest Channel / 1RB



Highest Channel / Full RB

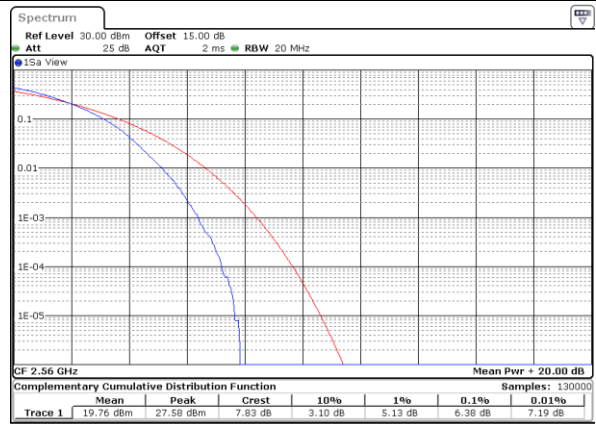


**26dB Bandwidth**

Mode	LTE Band 7 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.94	4.86	9.67	9.81	14.36	14.45	18.90	18.82
Middle CH	-	-	-	-	4.87	4.87	9.67	9.85	14.27	14.18	18.86	18.74
Highest CH	-	-	-	-	4.82	4.78	9.77	9.71	14.33	14.33	18.94	18.82
Mode	LTE Band 7 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.90	-	9.85	-	14.33	-	18.90	-
Middle CH	-	-	-	-	4.79	-	9.69	-	14.36	-	18.74	-
Highest CH	-	-	-	-	4.85	-	9.67	-	14.27	-	18.86	-




LTE Band 7


Lowest Channel / 5MHz / QPSK

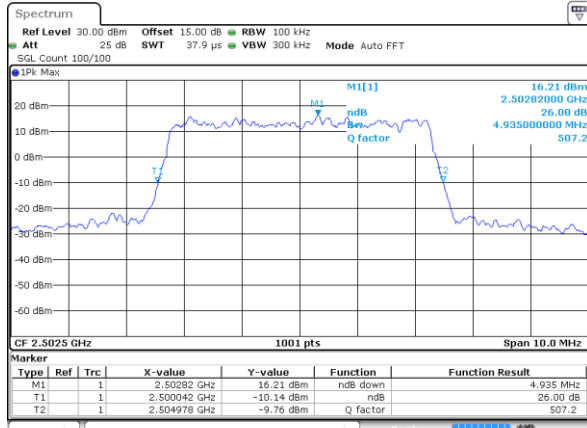


Lowest Channel / 5MHz / 16QAM

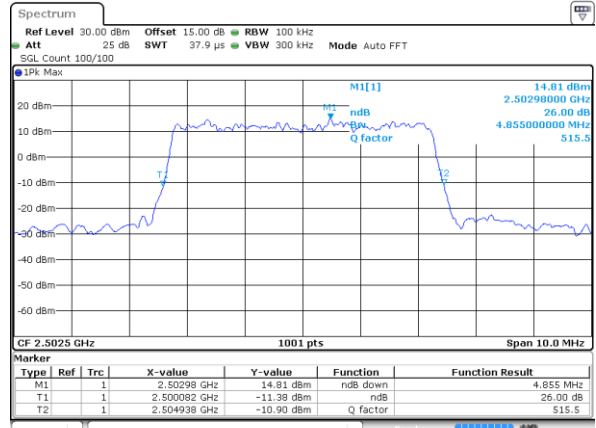


Middle Channel / 5MHz / QPSK

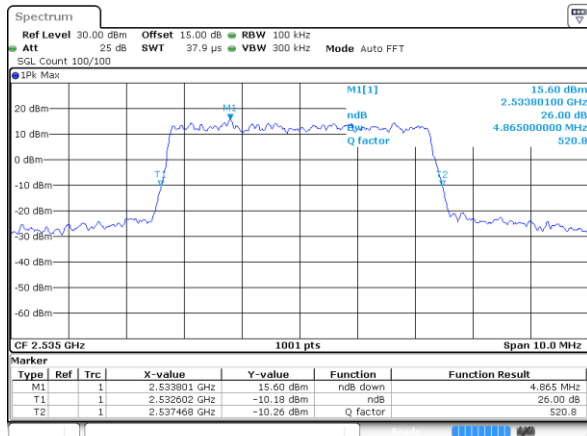


Middle Channel / 5MHz / 16QAM

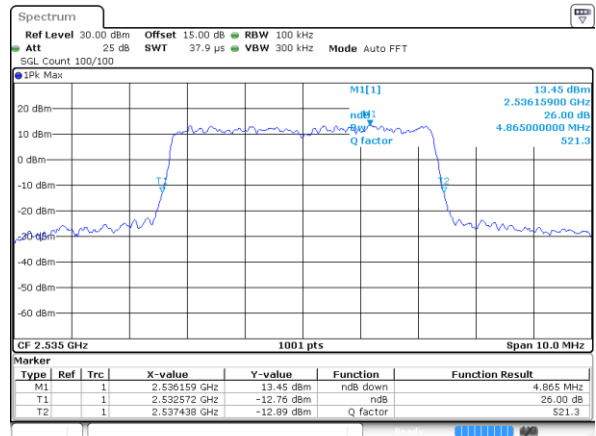

Highest Channel / 5MHz / QPSK

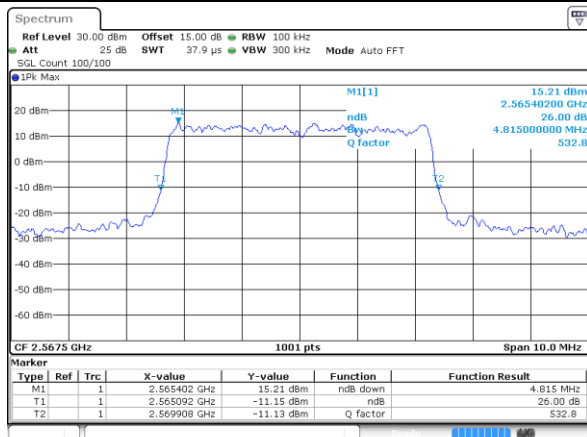


Highest Channel / 5MHz / 16QAM

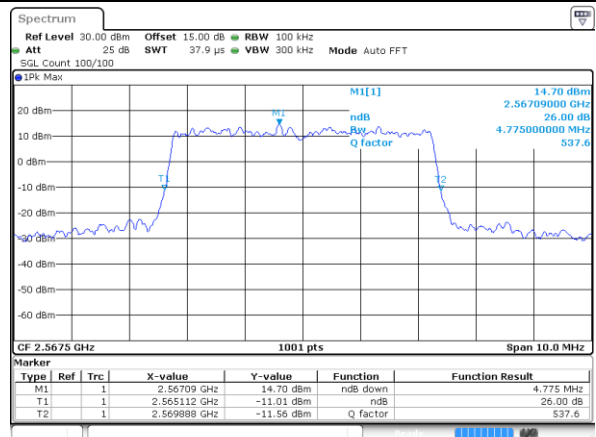




LTE Band 7

Lowest Channel / 10MHz / QPSK

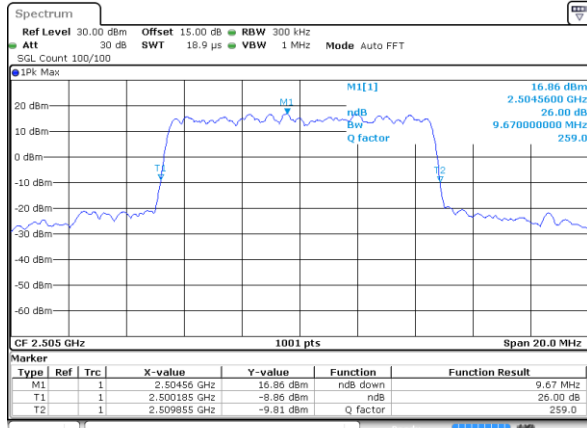


Date: 8.OCT.2021 18:43:56

Lowest Channel / 10MHz / 16QAM

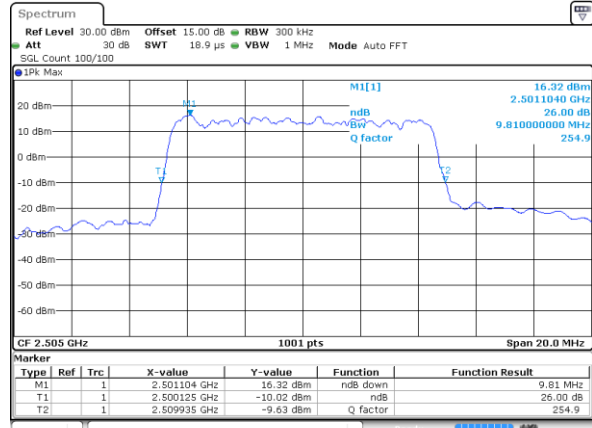


Date: 8.OCT.2021 18:44:07

Middle Channel / 10MHz / QPSK

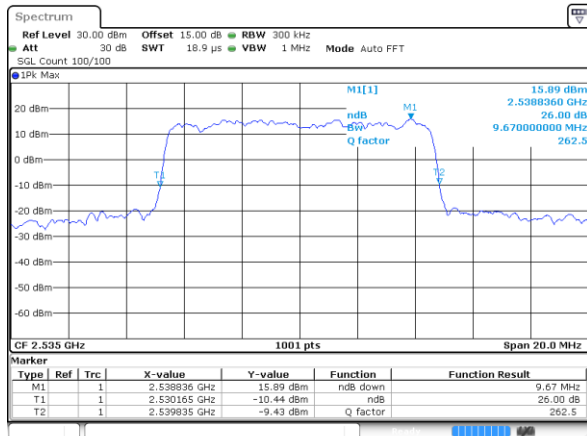


Date: 8.OCT.2021 18:49:06

Middle Channel / 10MHz / 16QAM

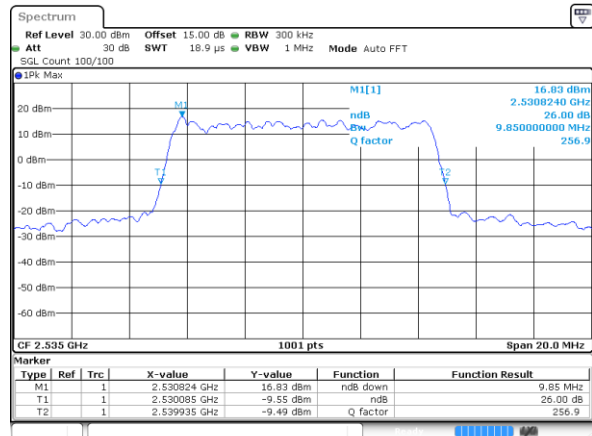


Date: 8.OCT.2021 18:49:17

Highest Channel / 10MHz / QPSK

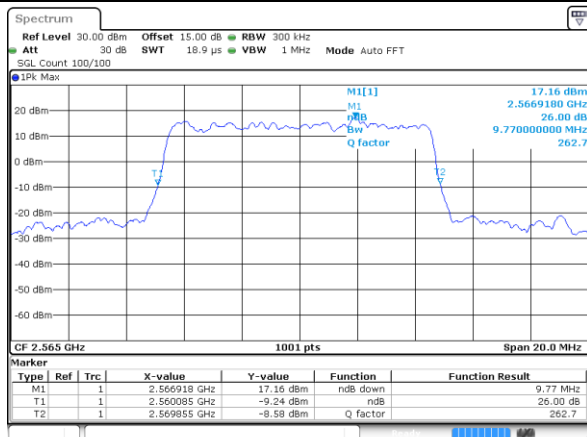

Date: 8.OCT.2021 18:51:17

Highest Channel / 10MHz / 16QAM

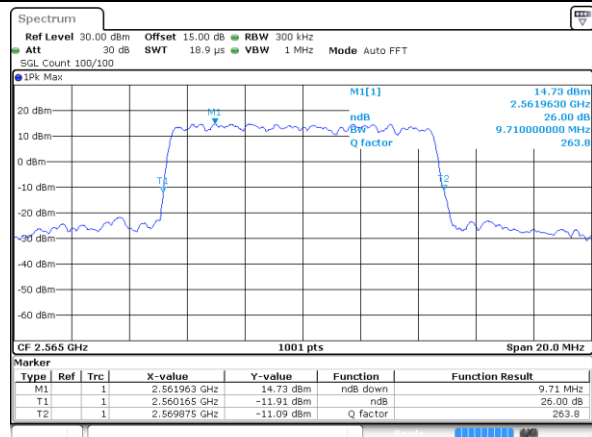


Date: 8.OCT.2021 18:51:28




LTE Band 7

Lowest Channel / 15MHz / QPSK

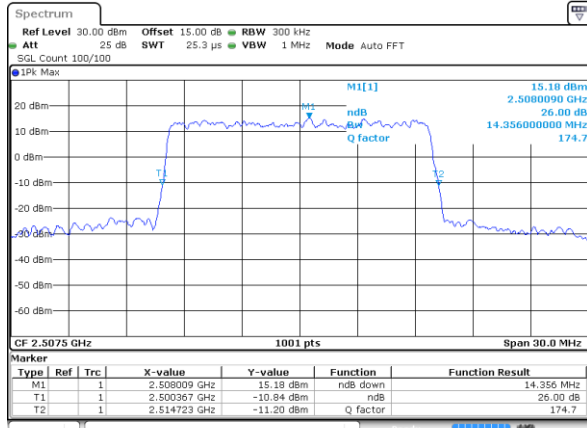


Date: 8.OCT.2021 19:02:42

Lowest Channel / 15MHz / 16QAM

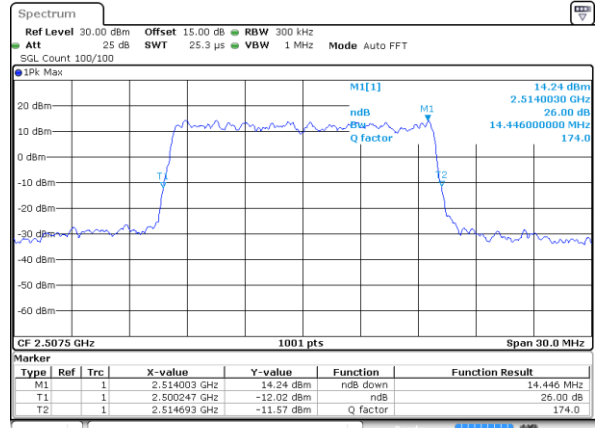


Date: 8.OCT.2021 19:02:53

Middle Channel / 15MHz / QPSK

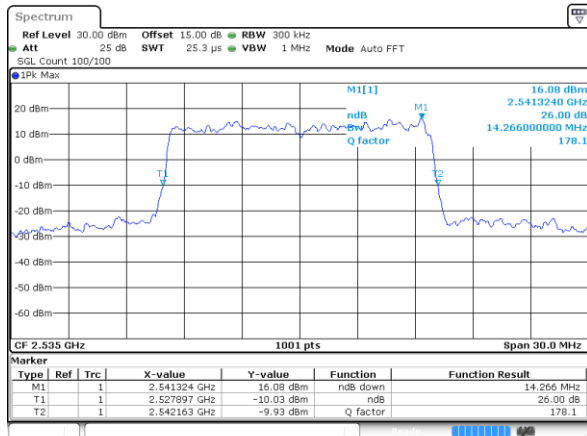


Date: 8.OCT.2021 19:07:53

Middle Channel / 15MHz / 16QAM

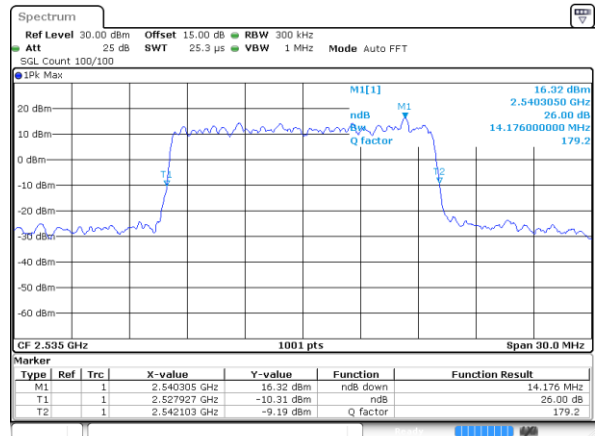


Date: 8.OCT.2021 19:08:04

Highest Channel / 15MHz / QPSK

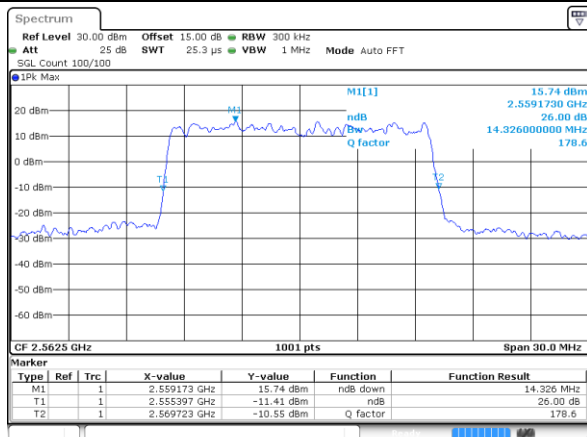

Date: 8.OCT.2021 19:10:04

Highest Channel / 15MHz / 16QAM

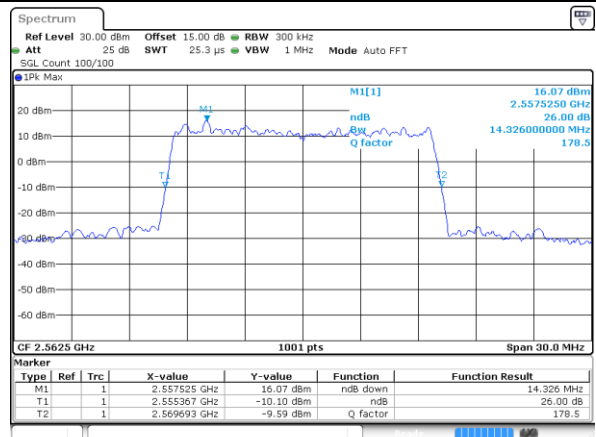


Date: 8.OCT.2021 19:10:15




LTE Band 7

Lowest Channel / 20MHz / QPSK

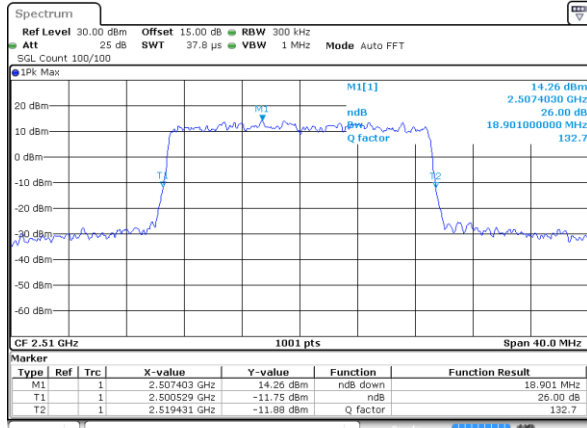


Date: 8.OCT.2021 19:21:30

Lowest Channel / 20MHz / 16QAM

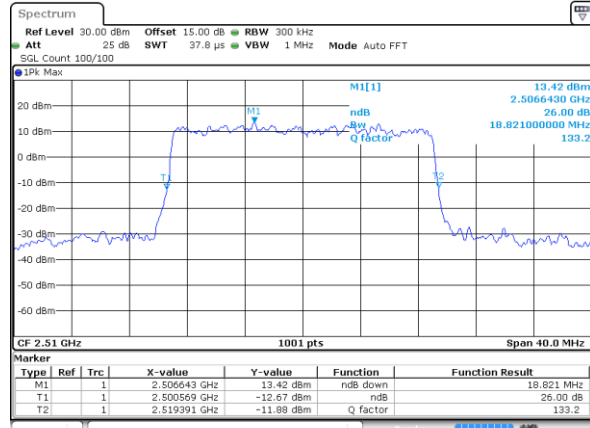


Date: 8.OCT.2021 19:21:42

Middle Channel / 20MHz / QPSK

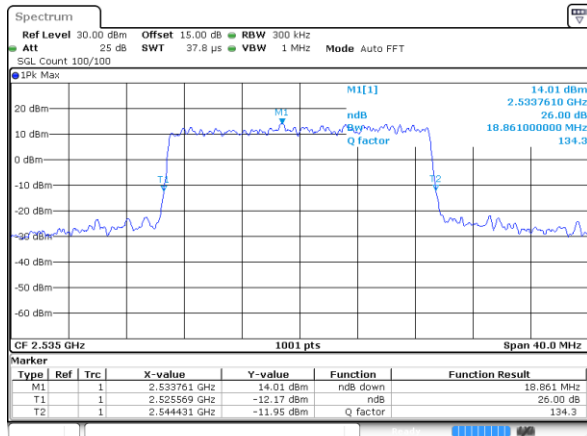


Date: 8.OCT.2021 19:26:44

Middle Channel / 20MHz / 16QAM

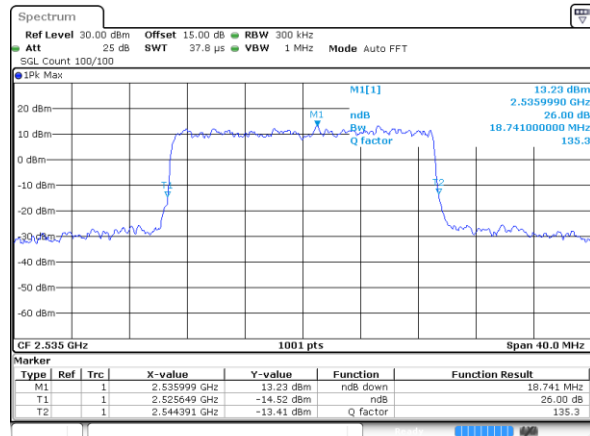


Date: 8.OCT.2021 19:26:55

Highest Channel / 20MHz / QPSK

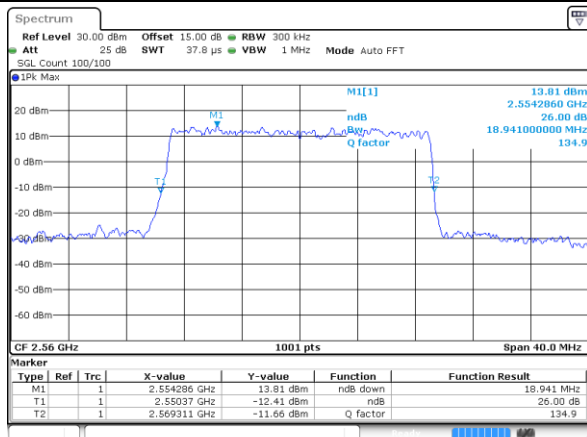

Date: 8.OCT.2021 19:28:56

Highest Channel / 20MHz / 16QAM

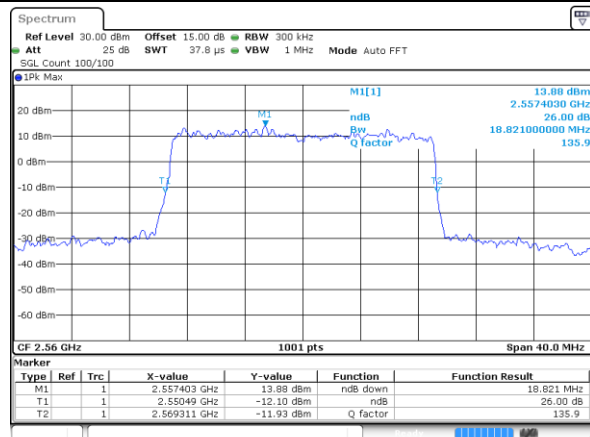


Date: 8.OCT.2021 19:29:07




LTE Band 7

Lowest Channel / 5MHz / 64QAM

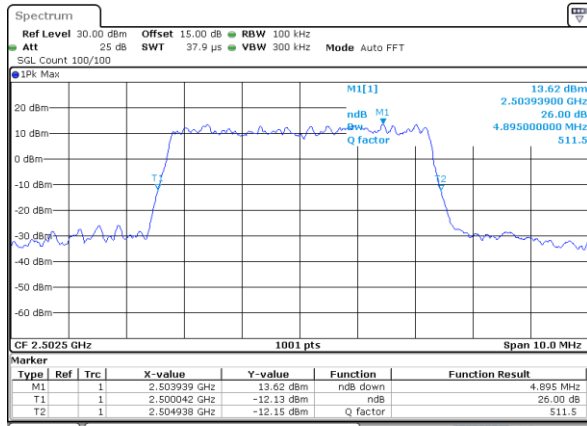


Date: 8.OCT.2021 18:37:29

Lowest Channel / 10MHz / 64QAM

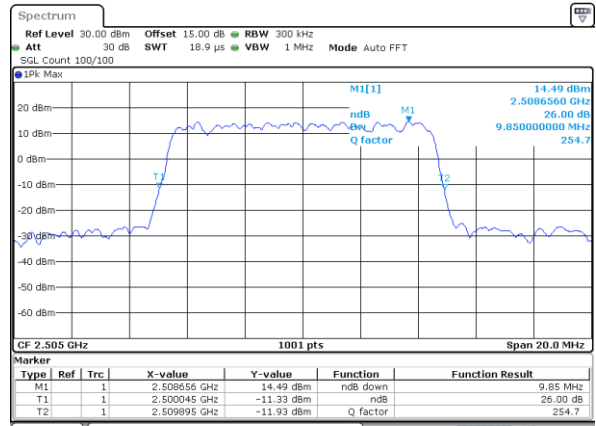


Date: 8.OCT.2021 18:56:15

Middle Channel / 5MHz / 64QAM

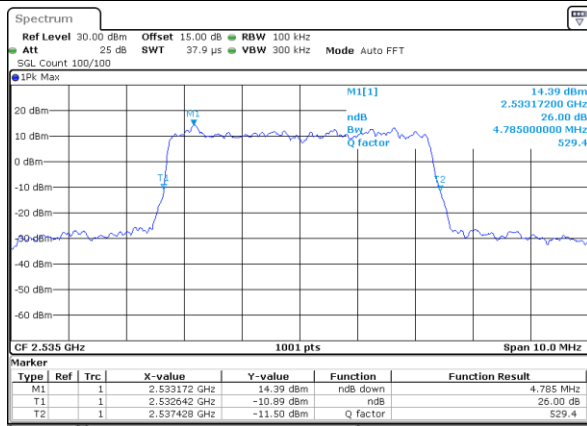


Date: 8.OCT.2021 18:40:05

Middle Channel / 10MHz / 64QAM

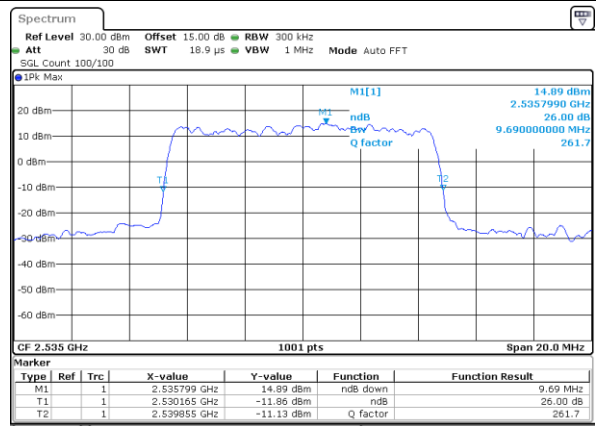


Date: 8.OCT.2021 18:58:50

Highest Channel / 5MHz / 64QAM

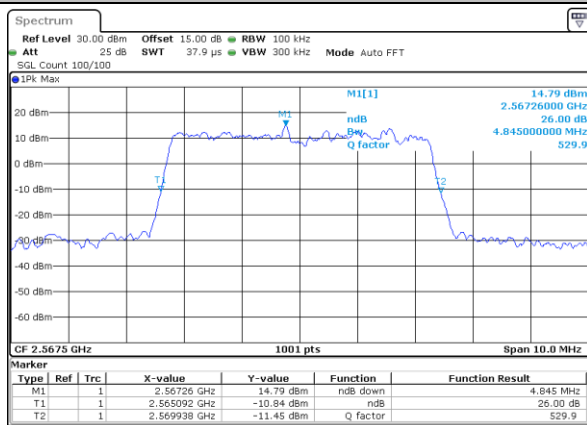

Date: 8.OCT.2021 18:41:11

Highest Channel / 10MHz / 64QAM

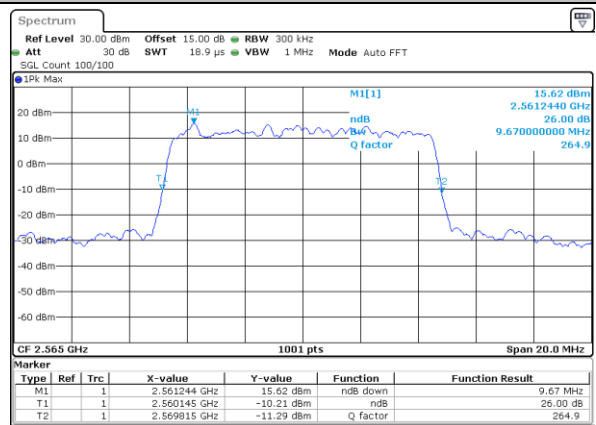


Date: 8.OCT.2021 18:59:56




LTE Band 7

Lowest Channel / 15MHz / 64QAM

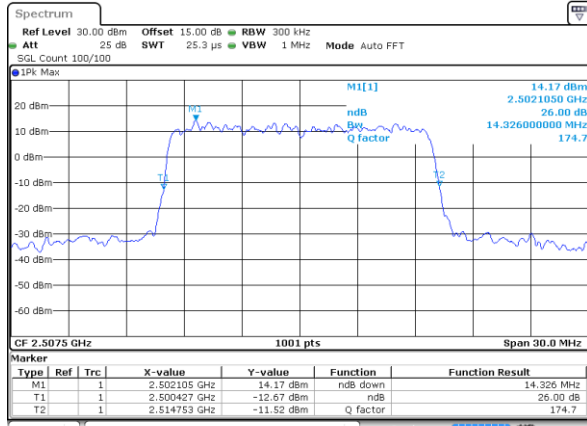


Date: 8.OCT.2021 19:15:03

Lowest Channel / 20MHz / 64QAM

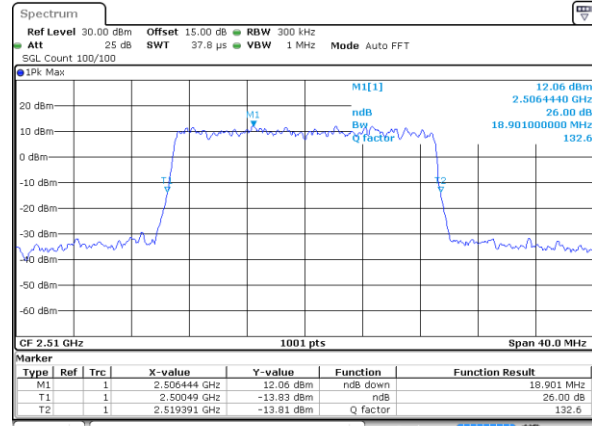


Date: 8.OCT.2021 19:33:54

Middle Channel / 15MHz / 64QAM

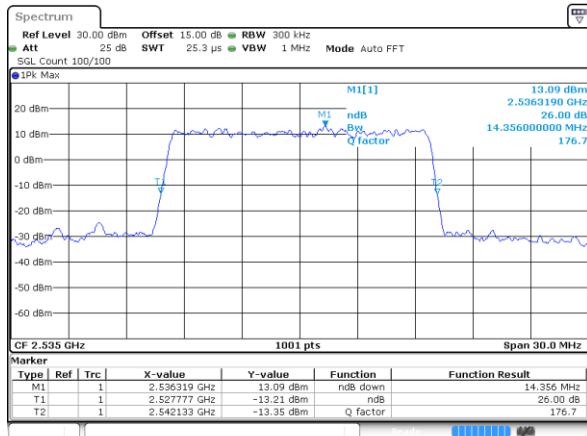


Date: 8.OCT.2021 19:17:38

Middle Channel / 20MHz / 64QAM

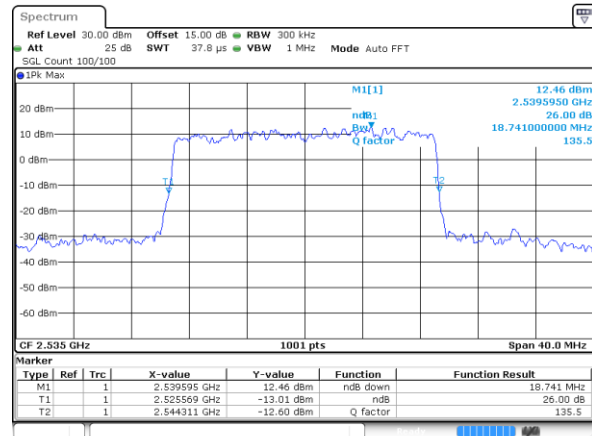


Date: 8.OCT.2021 19:36:29

Highest Channel / 15MHz / 64QAM

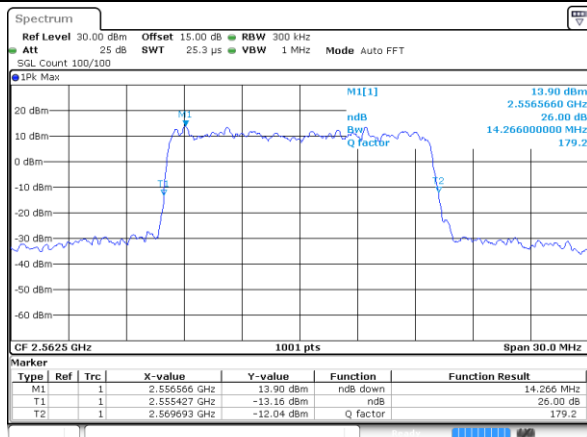

Date: 8.OCT.2021 19:18:44

Highest Channel / 20MHz / 64QAM

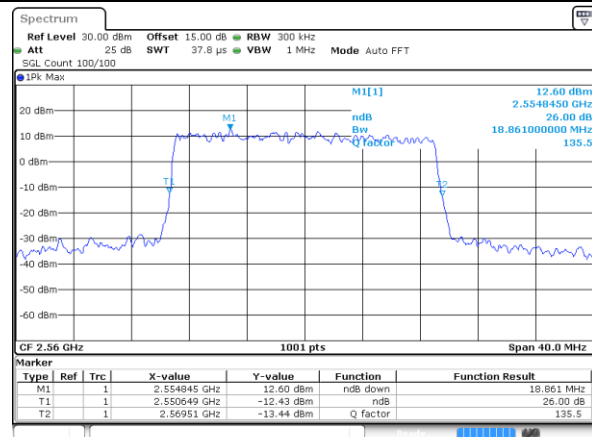

Date: 8.OCT.2021 19:37:35


**Occupied Bandwidth**

Mode	LTE Band 7 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.48	4.50	9.05	9.03	13.40	13.52	17.94	17.82
Middle CH	-	-	-	-	4.49	4.48	9.05	9.03	13.40	13.43	17.90	17.82
Highest CH	-	-	-	-	4.48	4.49	9.01	9.03	13.46	13.49	17.94	17.90
Mode	LTE Band 7 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.49	-	9.01	-	13.46	-	17.86	-
Middle CH	-	-	-	-	4.49	-	9.03	-	13.40	-	17.94	-
Highest CH	-	-	-	-	4.52	-	9.01	-	13.40	-	17.90	-




LTE Band 7

Lowest Channel / 5MHz / QPSK

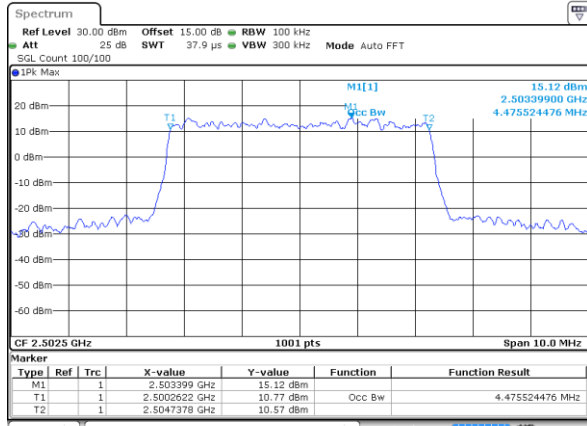


Date: 8.OCT.2021 17:59:36

Lowest Channel / 5MHz / 16QAM

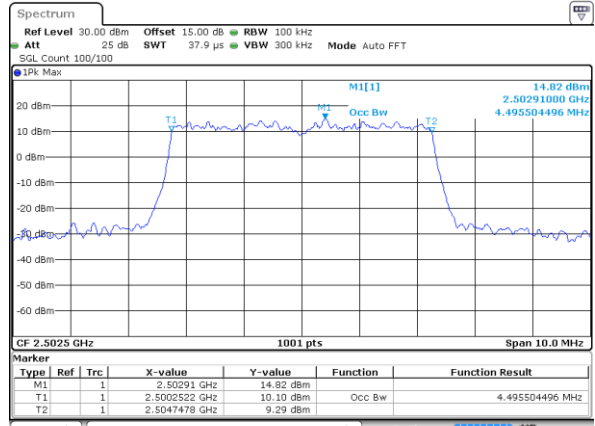


Date: 8.OCT.2021 17:59:47

Middle Channel / 5MHz / QPSK

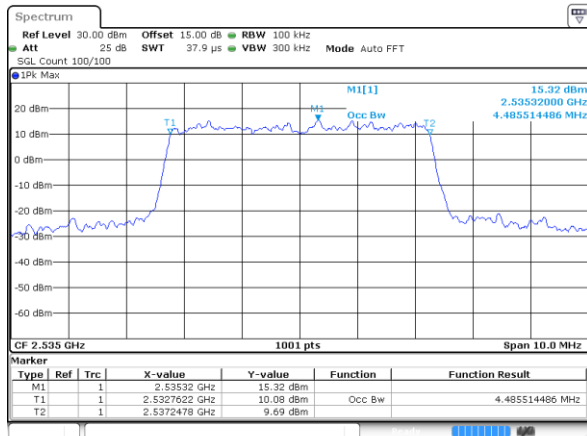


Date: 8.OCT.2021 18:04:47

Middle Channel / 5MHz / 16QAM

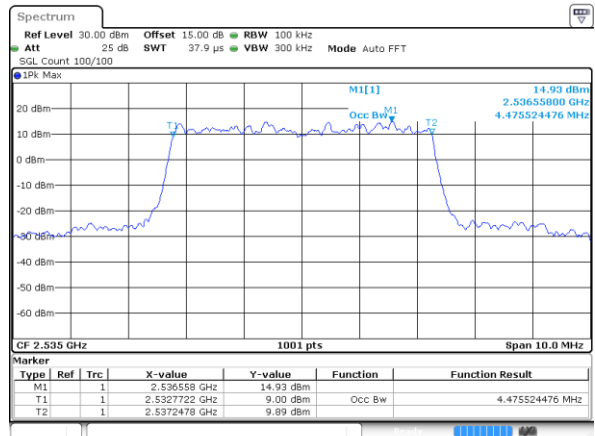


Date: 8.OCT.2021 18:04:58

Highest Channel / 5MHz / QPSK

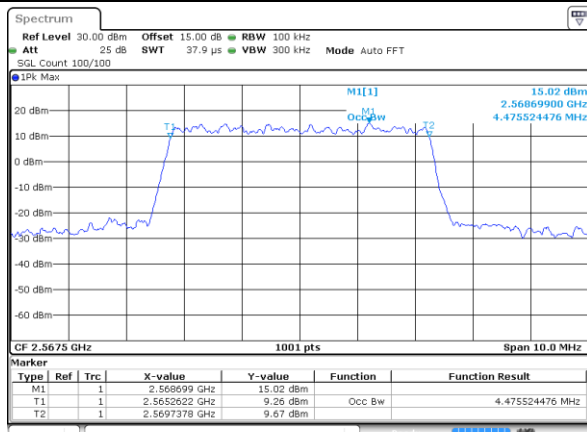

Date: 8.OCT.2021 18:06:59

Highest Channel / 5MHz / 16QAM

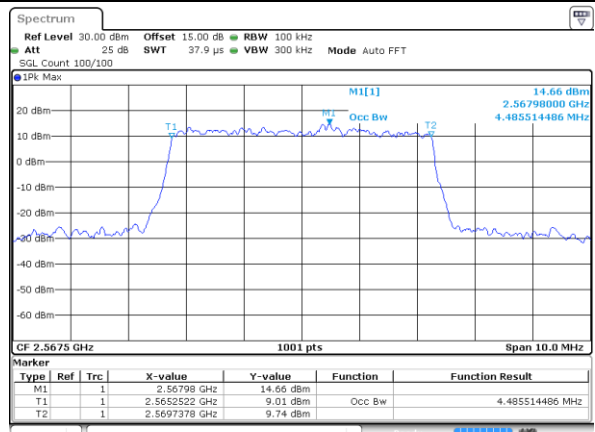


Date: 8.OCT.2021 20:26:35




LTE Band 7

Lowest Channel / 10MHz / QPSK

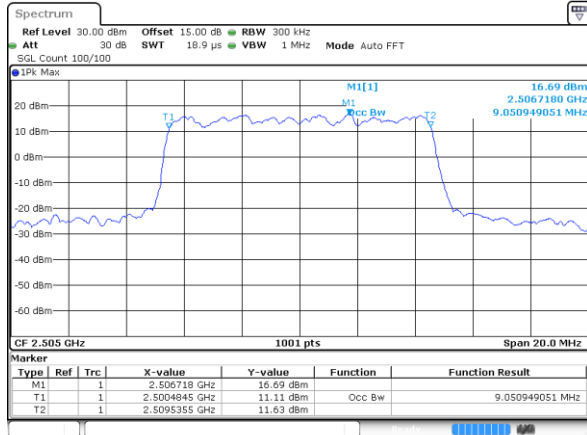


Date: 8.OCT.2021 18:43:34

Lowest Channel / 10MHz / 16QAM

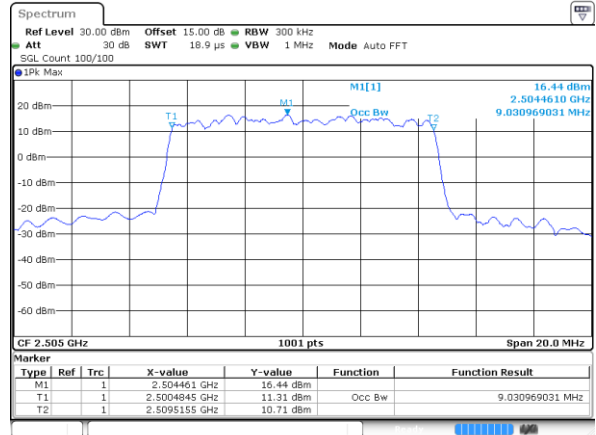


Date: 8.OCT.2021 20:29:34

Middle Channel / 10MHz / QPSK

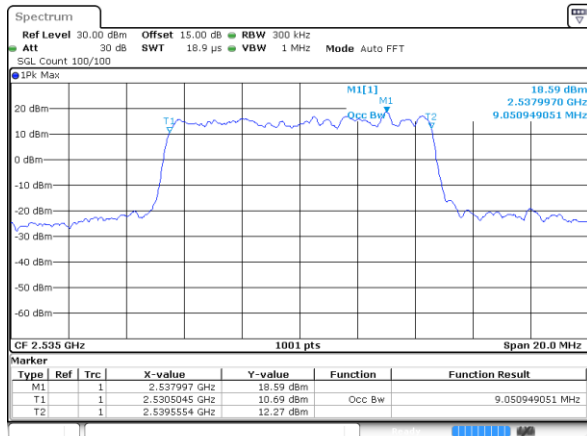


Date: 8.OCT.2021 18:48:43

Middle Channel / 10MHz / 16QAM

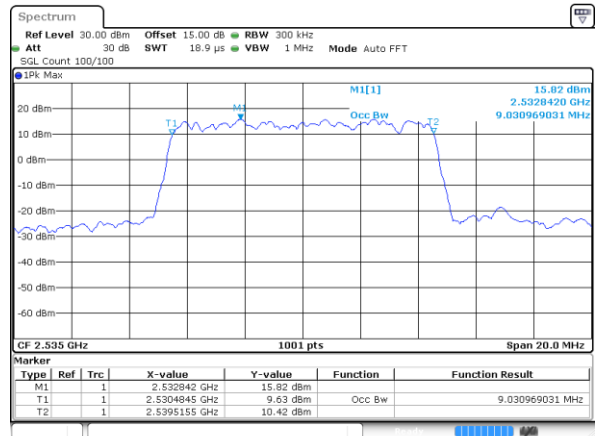


Date: 8.OCT.2021 18:48:54

Highest Channel / 10MHz / QPSK

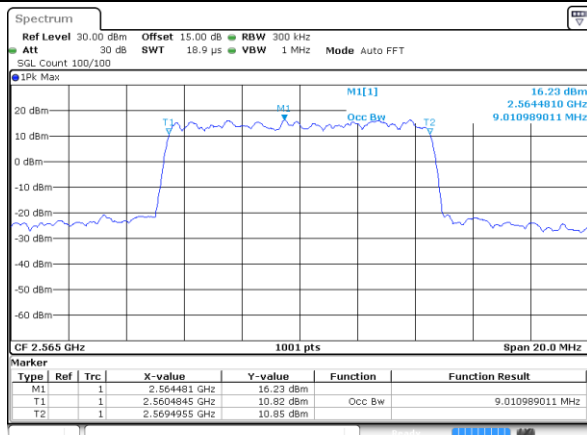

Date: 8.OCT.2021 18:50:55

Highest Channel / 10MHz / 16QAM

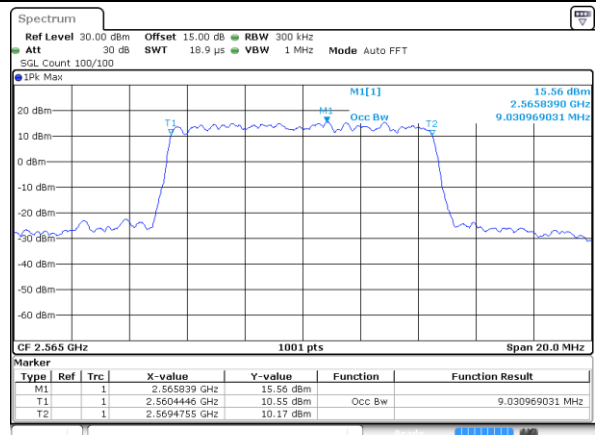


Date: 8.OCT.2021 18:51:06




LTE Band 7

Lowest Channel / 15MHz / QPSK

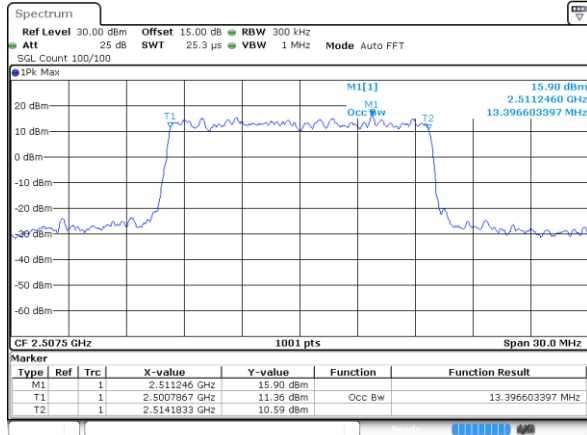


Date: 8.OCT.2021 19:02:19

Lowest Channel / 15MHz / 16QAM

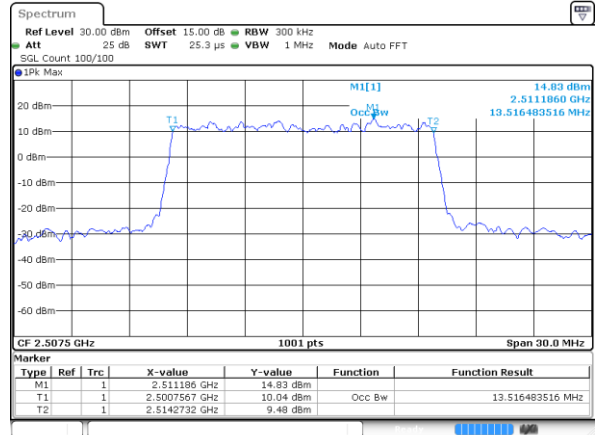


Date: 8.OCT.2021 19:02:30

Middle Channel / 15MHz / QPSK

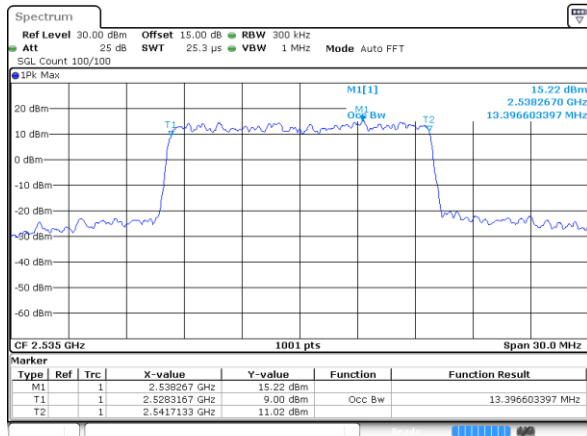


Date: 8.OCT.2021 19:07:30

Middle Channel / 15MHz / 16QAM

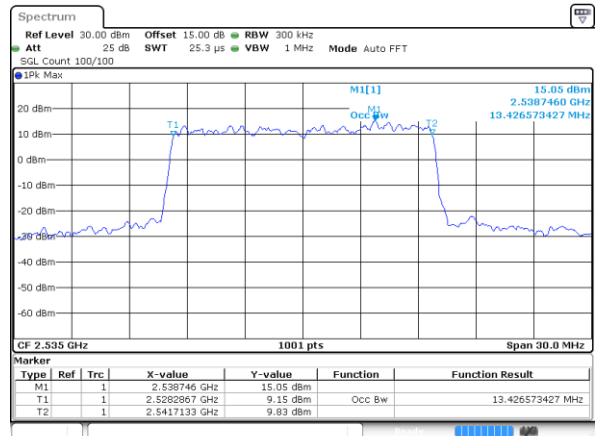


Date: 8.OCT.2021 19:07:42

Highest Channel / 15MHz / QPSK

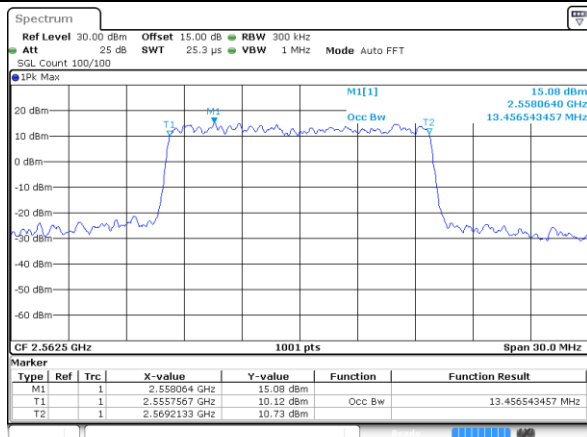

Date: 8.OCT.2021 19:09:42

Highest Channel / 15MHz / 16QAM

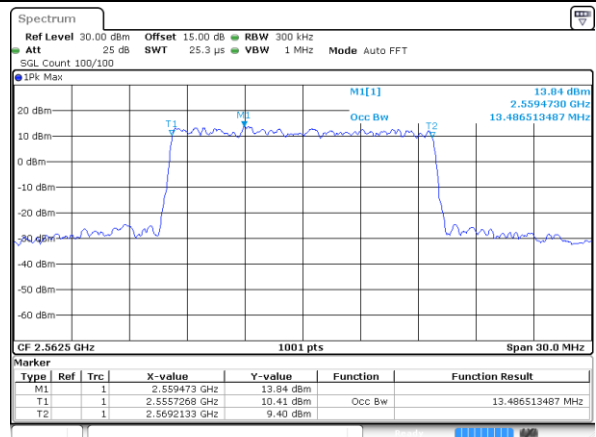


Date: 8.OCT.2021 19:09:53




LTE Band 7

Lowest Channel / 20MHz / QPSK

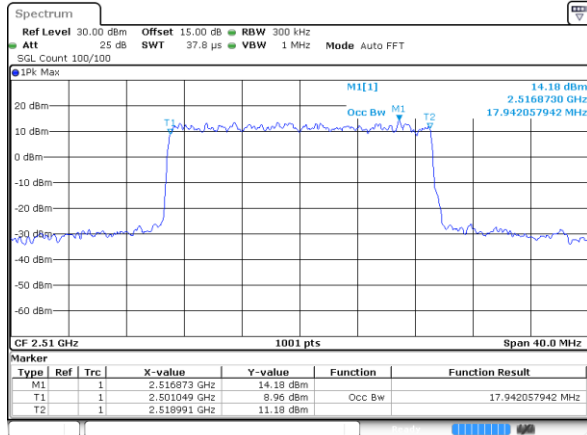


Date: 8.OCT.2021 19:21:08

Lowest Channel / 20MHz / 16QAM

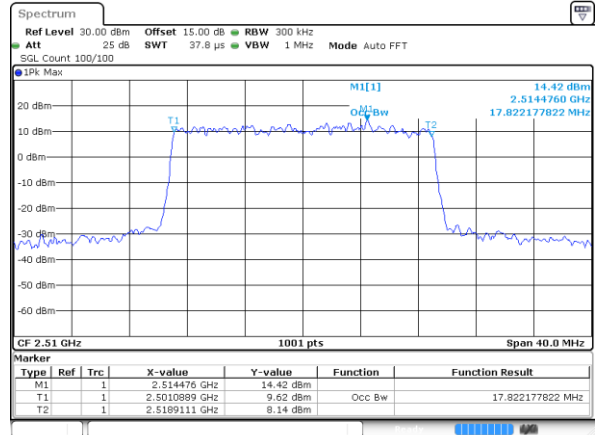


Date: 8.OCT.2021 19:21:19

Middle Channel / 20MHz / QPSK

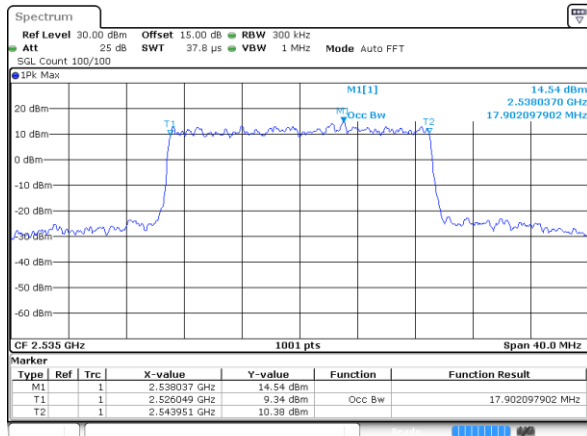


Date: 8.OCT.2021 19:26:21

Middle Channel / 20MHz / 16QAM

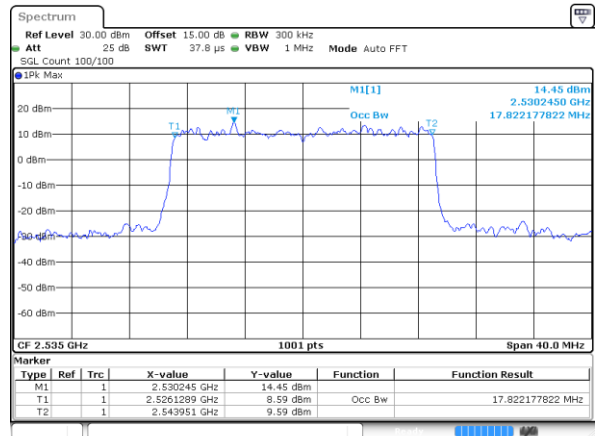


Date: 8.OCT.2021 19:26:33

Highest Channel / 20MHz / QPSK

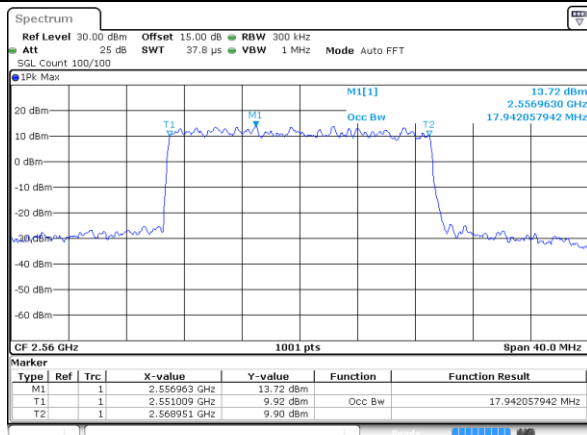

Date: 8.OCT.2021 19:28:33

Highest Channel / 20MHz / 16QAM

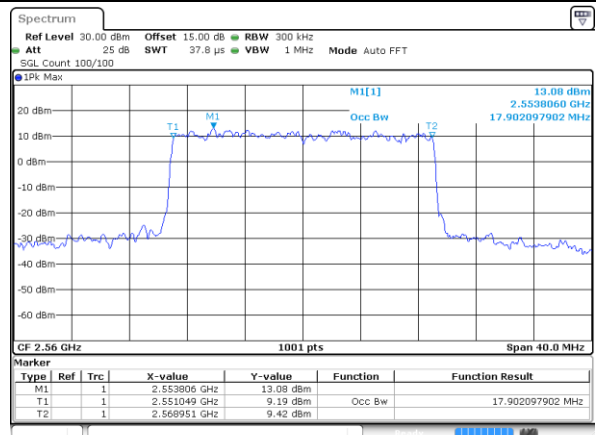


Date: 8.OCT.2021 19:28:45




LTE Band 7


Lowest Channel / 5MHz / 64QAM

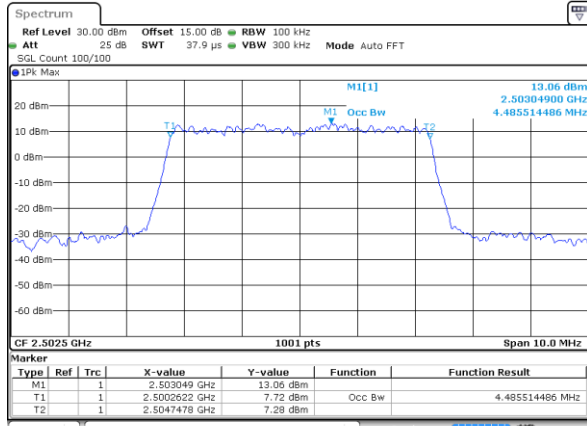


Lowest Channel / 10MHz / 64QAM

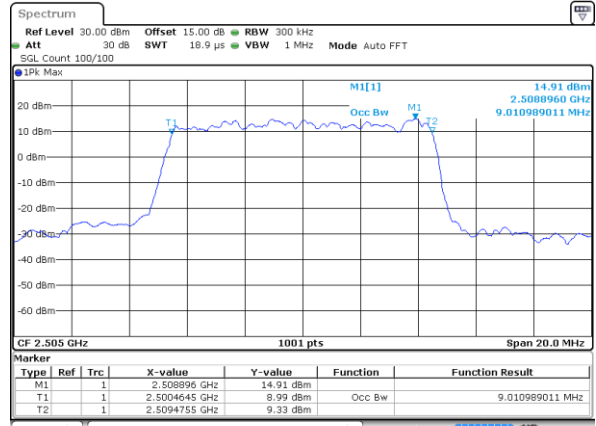


Middle Channel / 5MHz / 64QAM

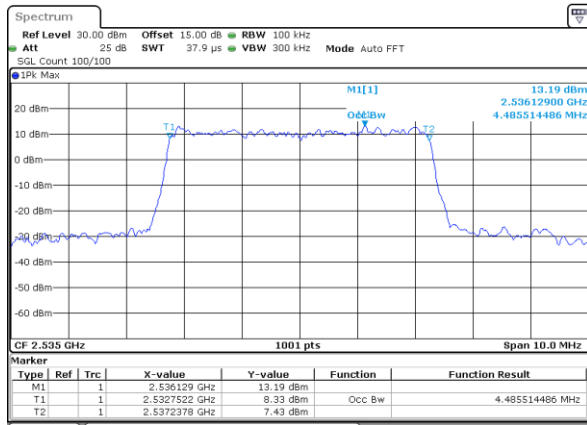


Middle Channel / 10MHz / 64QAM

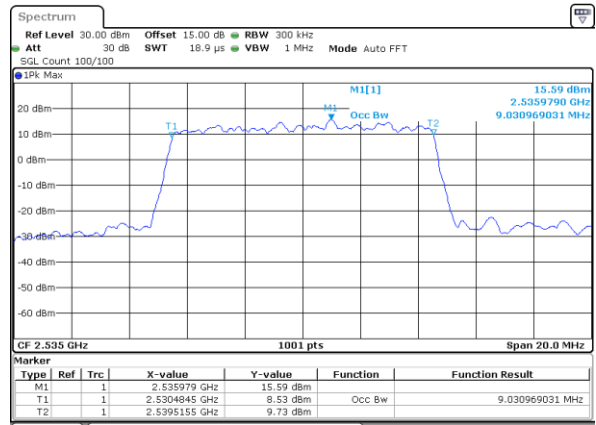

Highest Channel / 5MHz / 64QAM

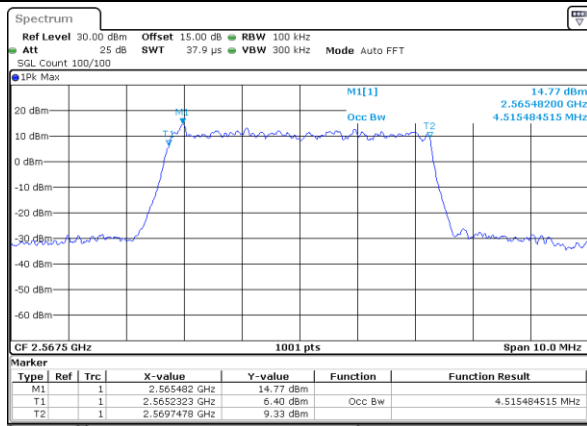


Highest Channel / 10MHz / 64QAM

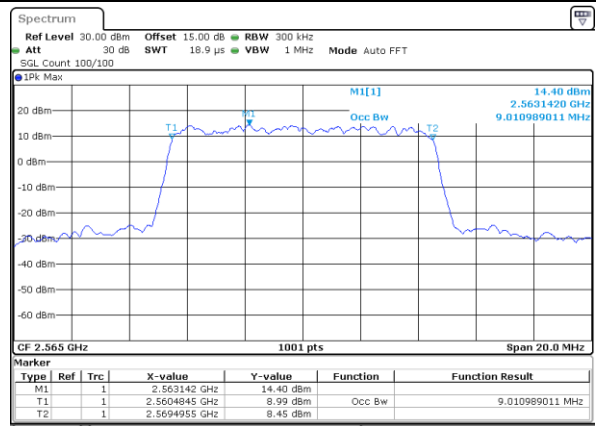




LTE Band 7

Lowest Channel / 15MHz / 64QAM

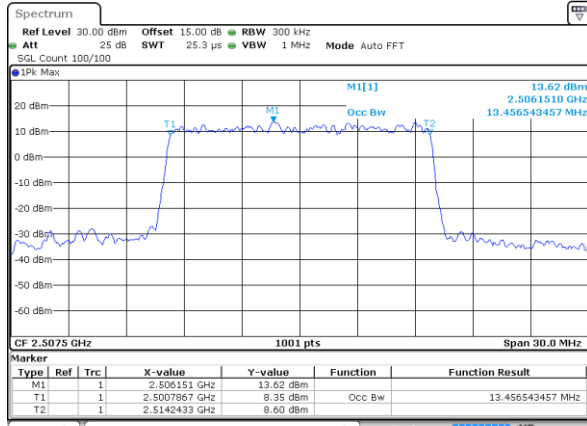


Date: 8.OCT.2021 19:14:52

Lowest Channel / 20MHz / 64QAM

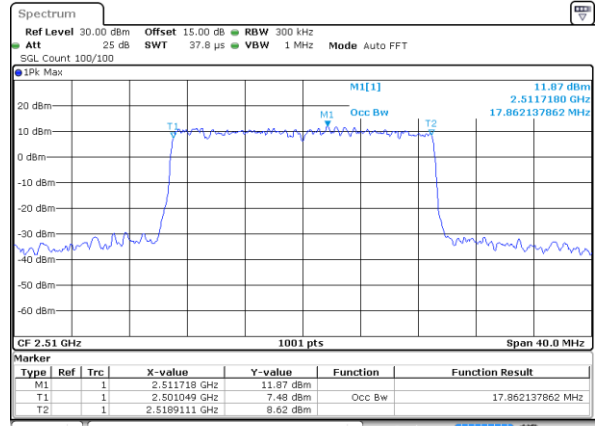


Date: 8.OCT.2021 19:33:43

Middle Channel / 15MHz / 64QAM

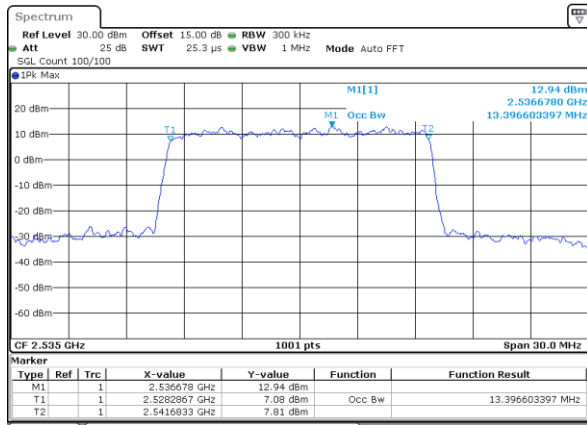


Date: 8.OCT.2021 19:17:27

Middle Channel / 20MHz / 64QAM

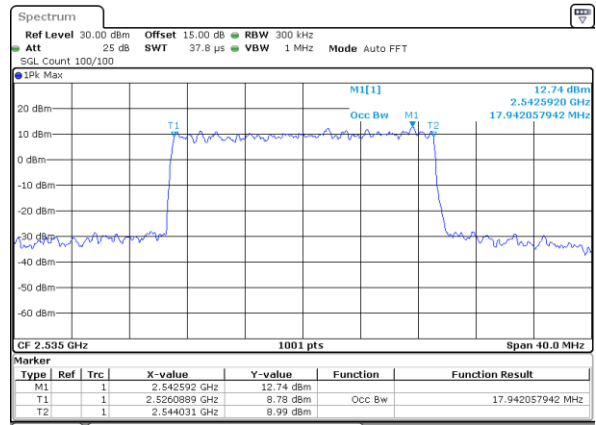


Date: 8.OCT.2021 19:36:18

Highest Channel / 15MHz / 64QAM




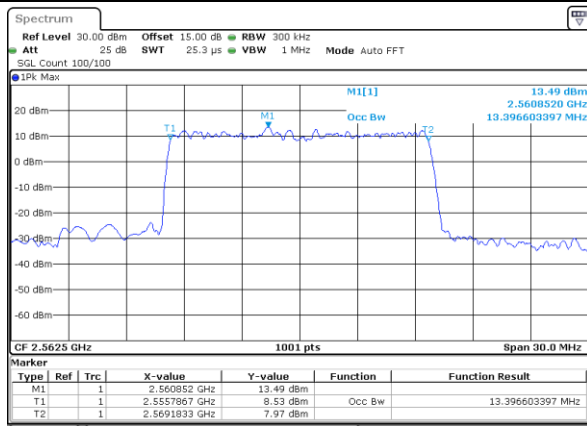


Date: 8.OCT.2021 19:18:33

Highest Channel / 20MHz / 64QAM

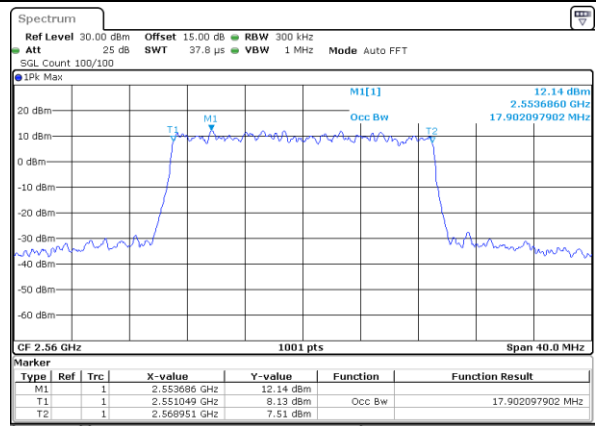


Date: 8.OCT.2021 19:37:24

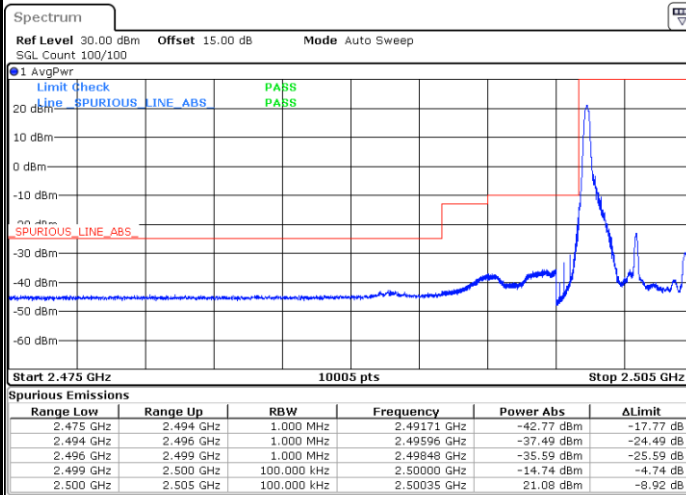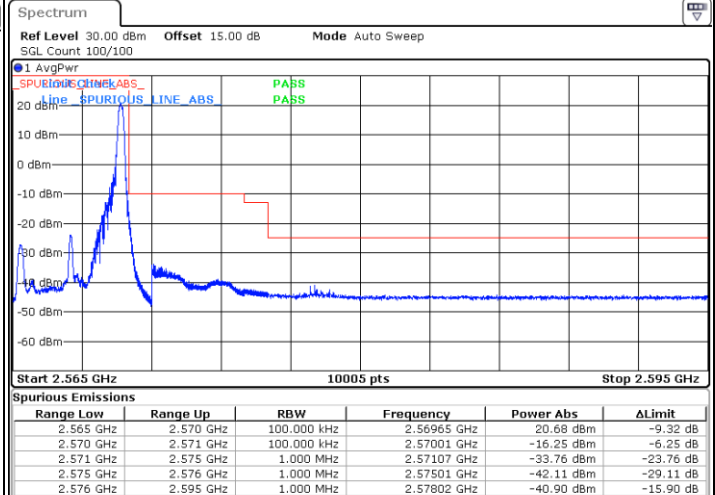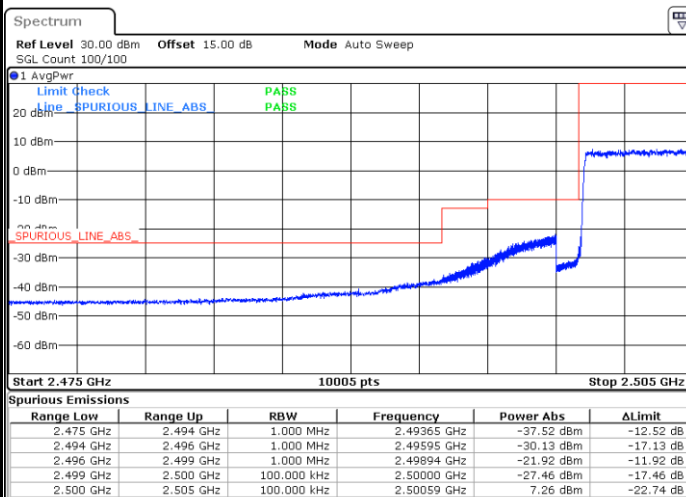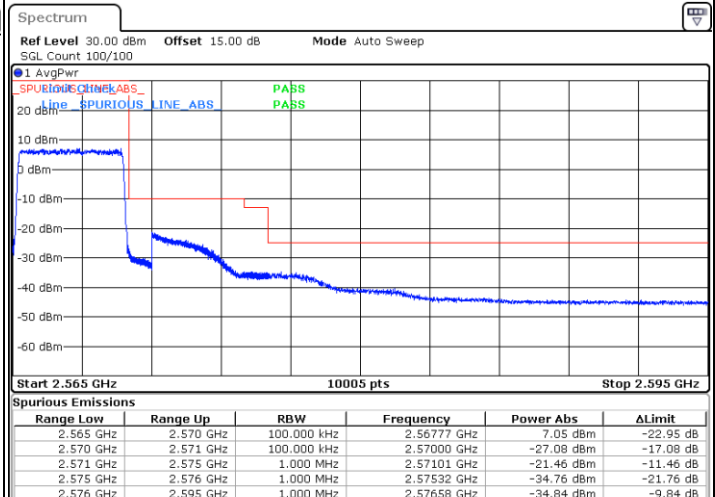**Conducted Band Edge****LTE Band 7 / 5MHz / QPSK****Lowest Band Edge / 1 RB****Highest Band Edge / 1 RB****Lowest Band Edge / Full RB****Highest Band Edge / Full RB**




LTE Band 7 / 5MHz / 16QAM


Lowest Band Edge / 1 RB

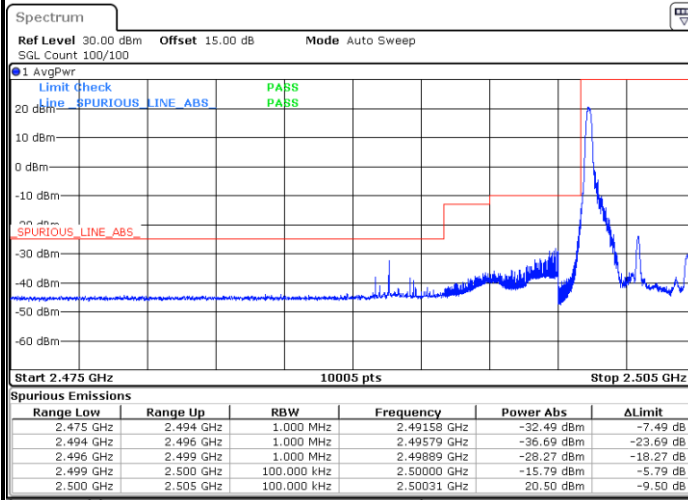


Highest Band Edge / 1 RB

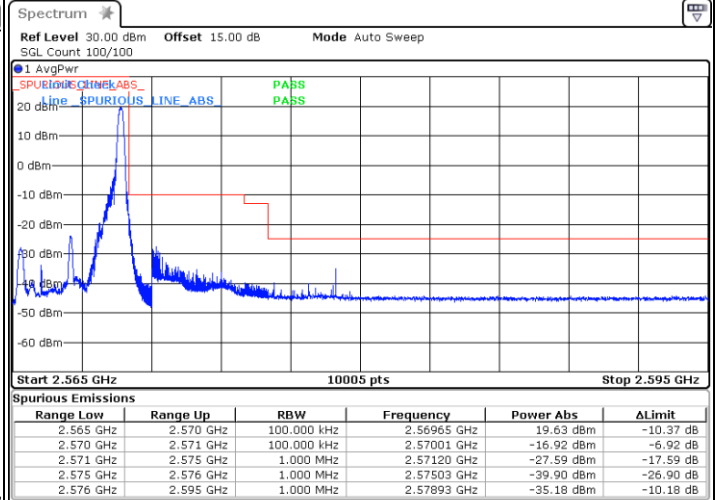

Lowest Band Edge / Full RB

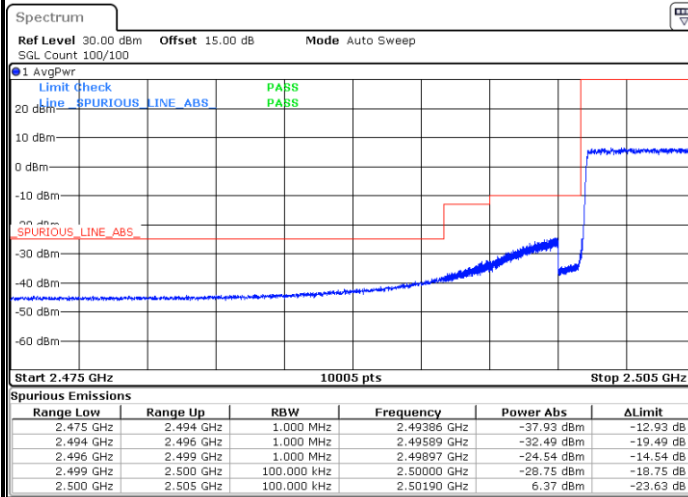


Highest Band Edge / Full RB

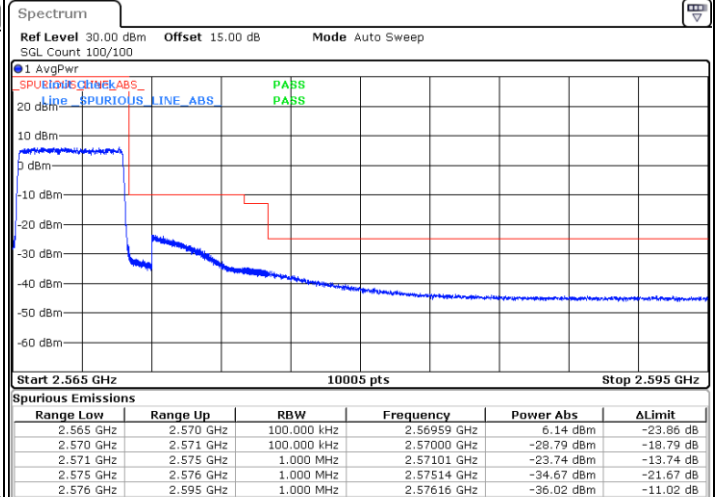




LTE Band 7 / 5MHz / 64QAM


Lowest Band Edge / 1RB

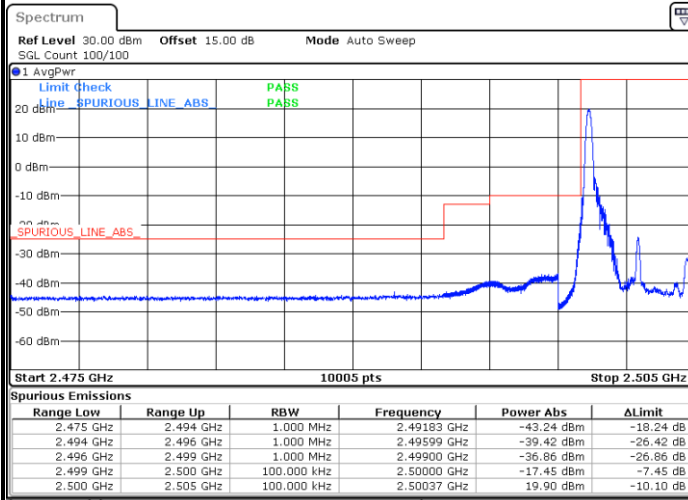


Highest Band Edge / 1 RB

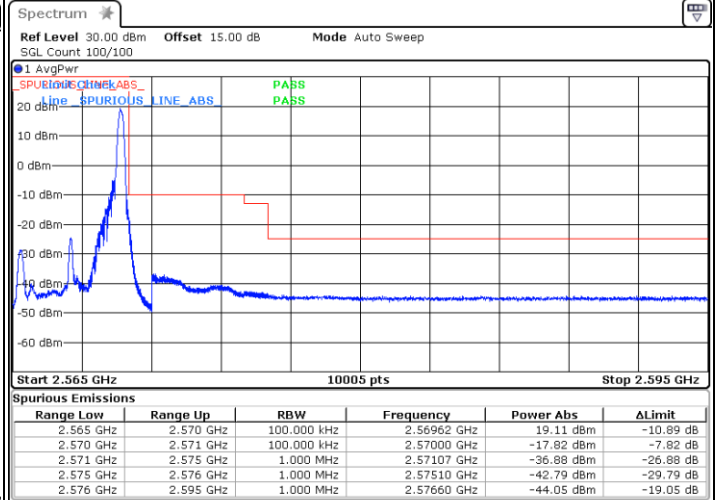

Lowest Band Edge / Full RB

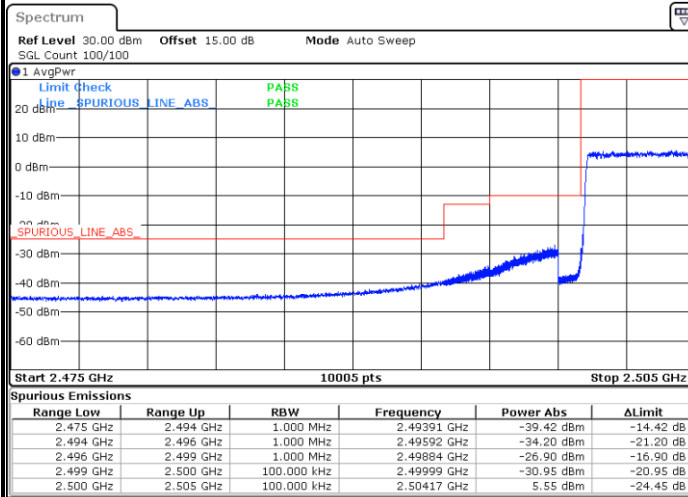


Highest Band Edge / Full RB

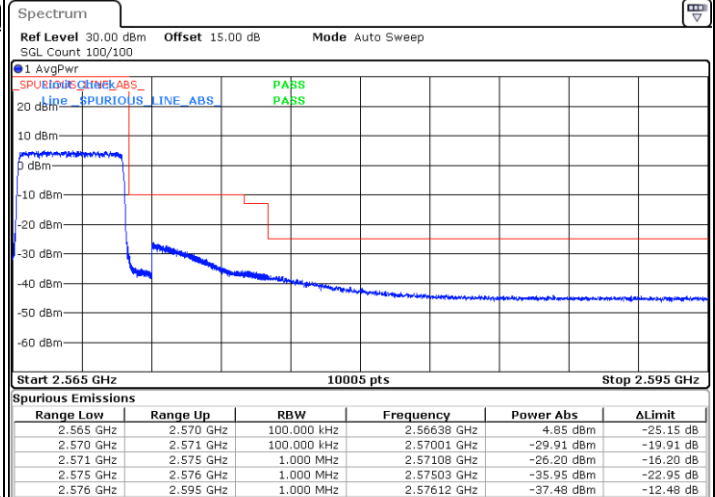




LTE Band 7 / 10MHz / QPSK


Lowest Band Edge / 1 RB

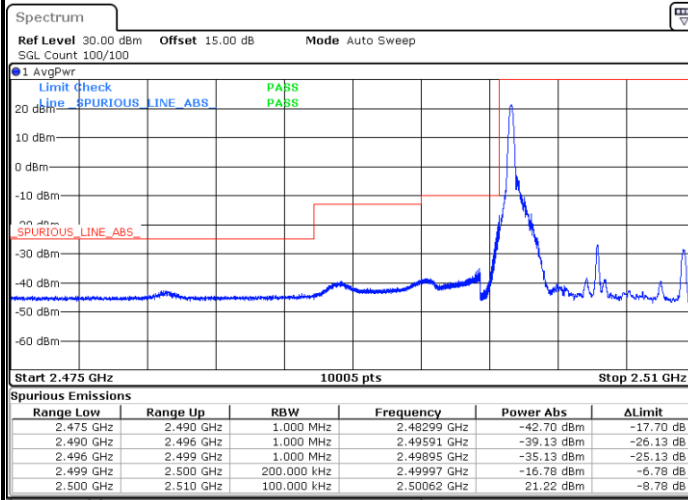

Highest Band Edge / 1 RB

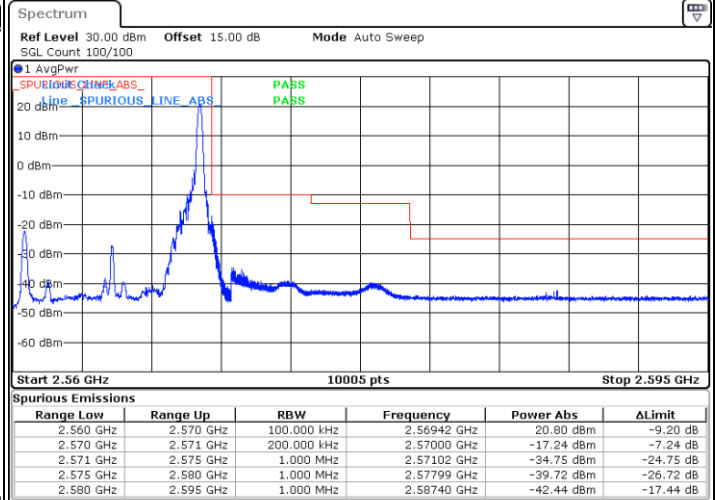

Lowest Band Edge / Full RB

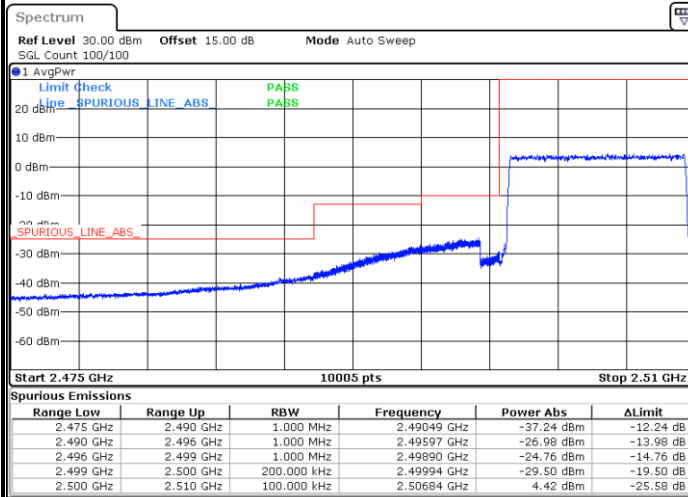

Highest Band Edge / Full RB

