





Data#: 29

File#: D:\E3 Data\2005客戶\技嘉 NEW.EMI

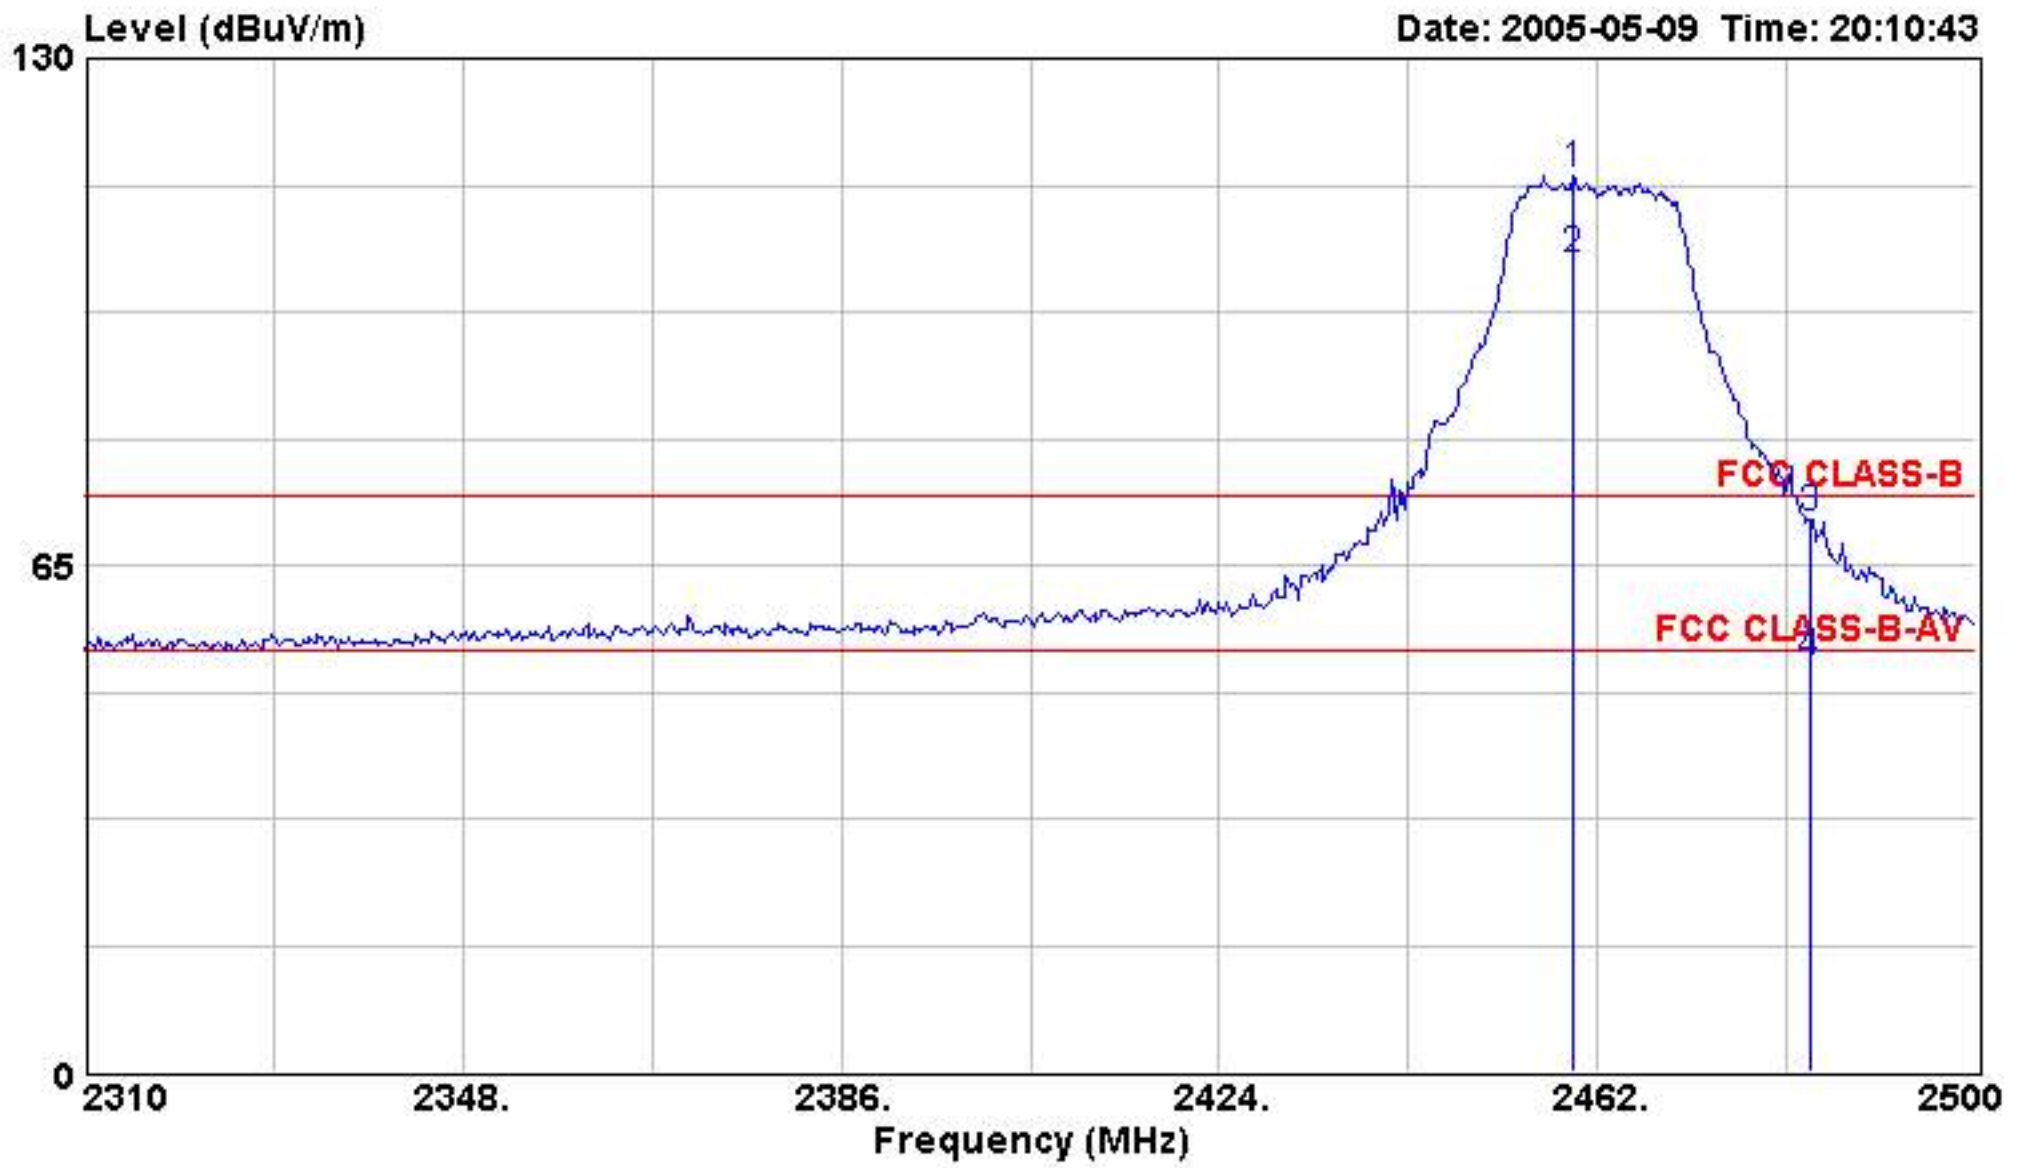


Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 18Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBuV	dBUV/m	dB	dB	dB	
1	2459.530	114.81	40.81	84.53	74.00	30.28	1.94	0.00	Peak
2	2459.530	103.92	49.92	73.64	54.00	30.28	1.94	0.00	Average
3	2483.500	70.69	-3.31	40.36	74.00	30.33	1.96	0.00	Peak
4	2483.500	52.46	-1.54	22.13	54.00	30.33	1.96	0.00	Average

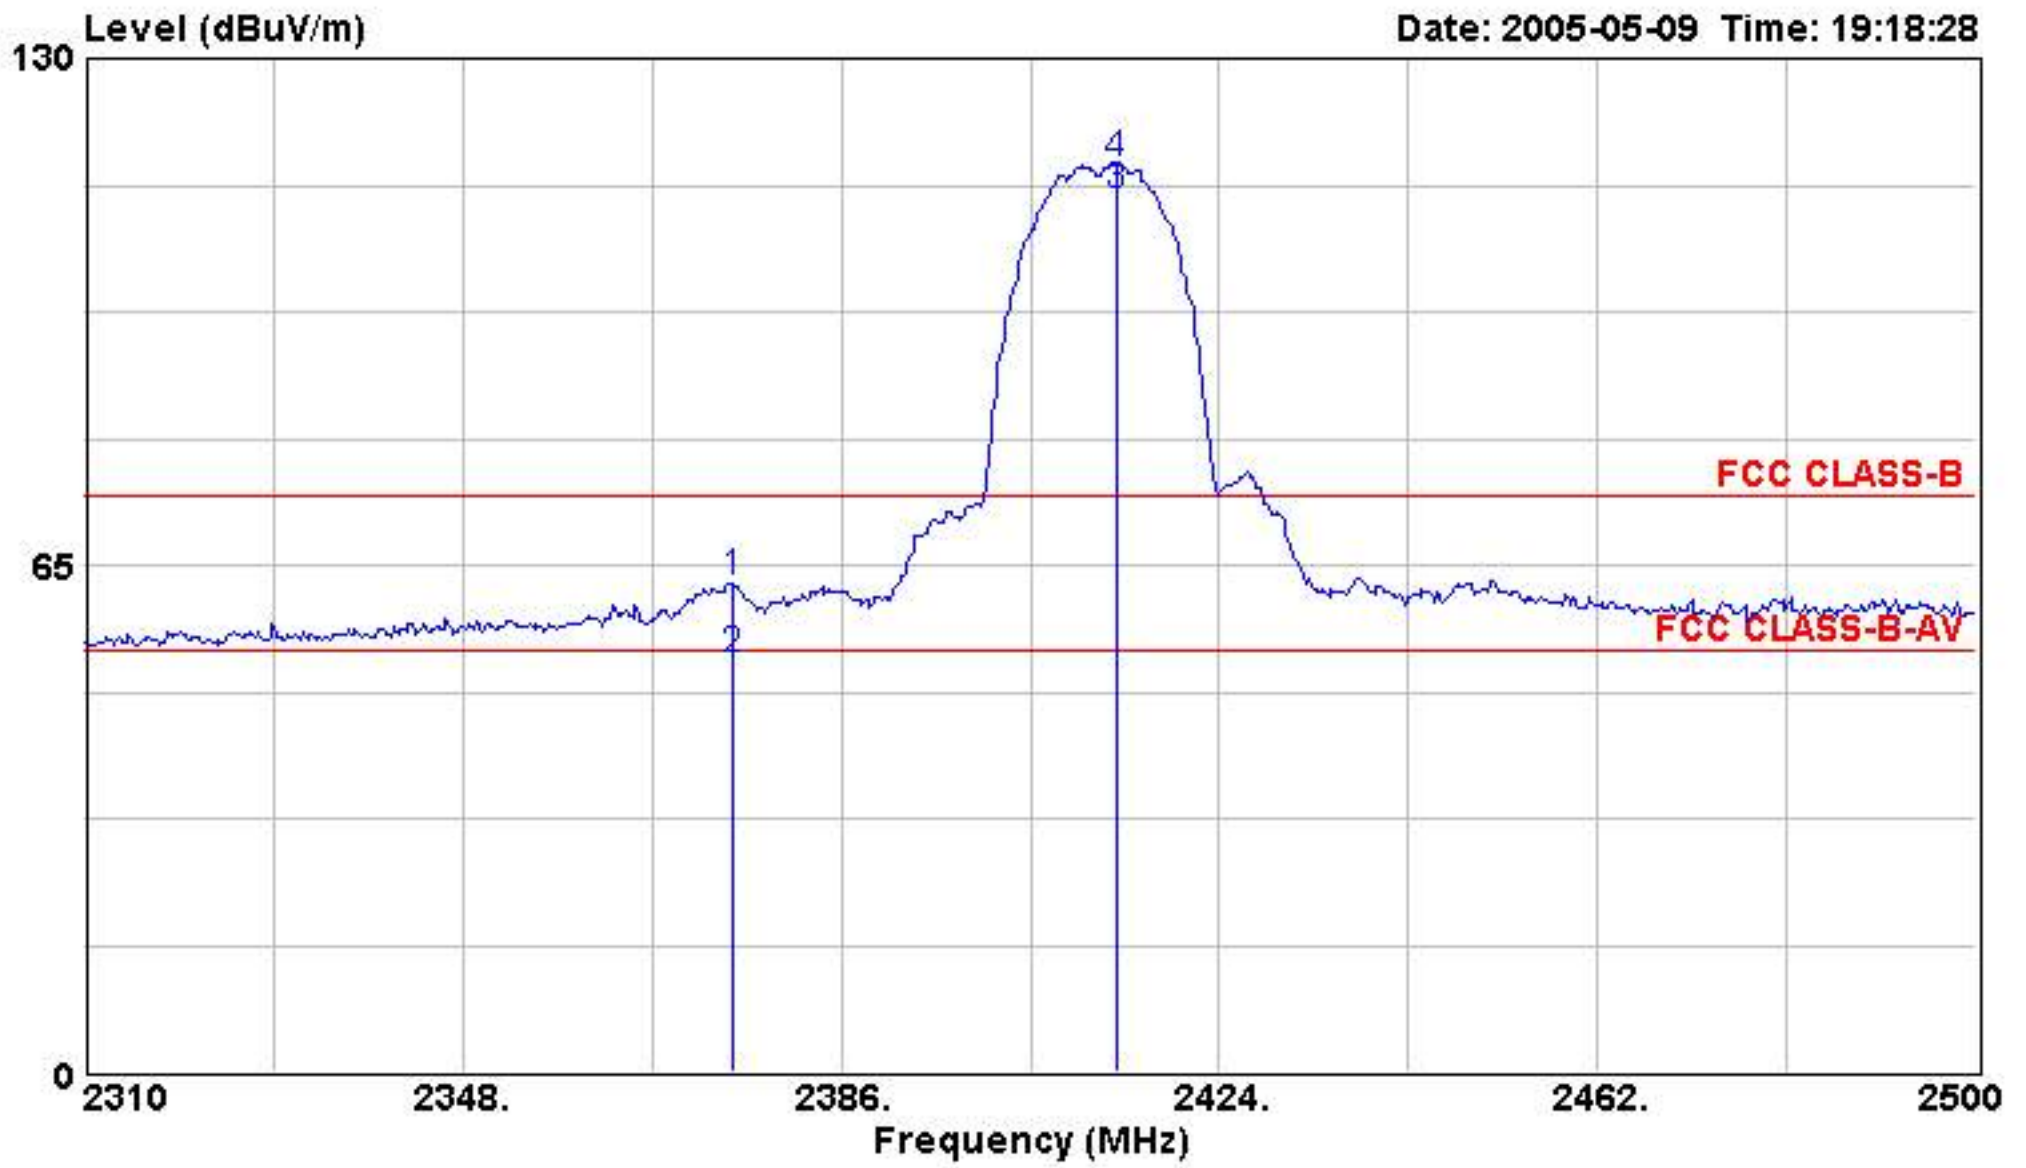


Site :03CHO3-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH01 2412MHz 11b
 :data rate 2Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	2374.980	62.69	-11.31	32.60	74.00	30.09	1.90	0.00	Peak
2	2374.980	52.67	-1.33	22.58	54.00	30.09	1.90	0.00	Average
3 @	2413.740	112.36	58.36	82.19	54.00	30.17	1.92	0.00	Average
4 over	2413.740	116.50	42.50	86.33	74.00	30.17	1.92	0.00	Peak

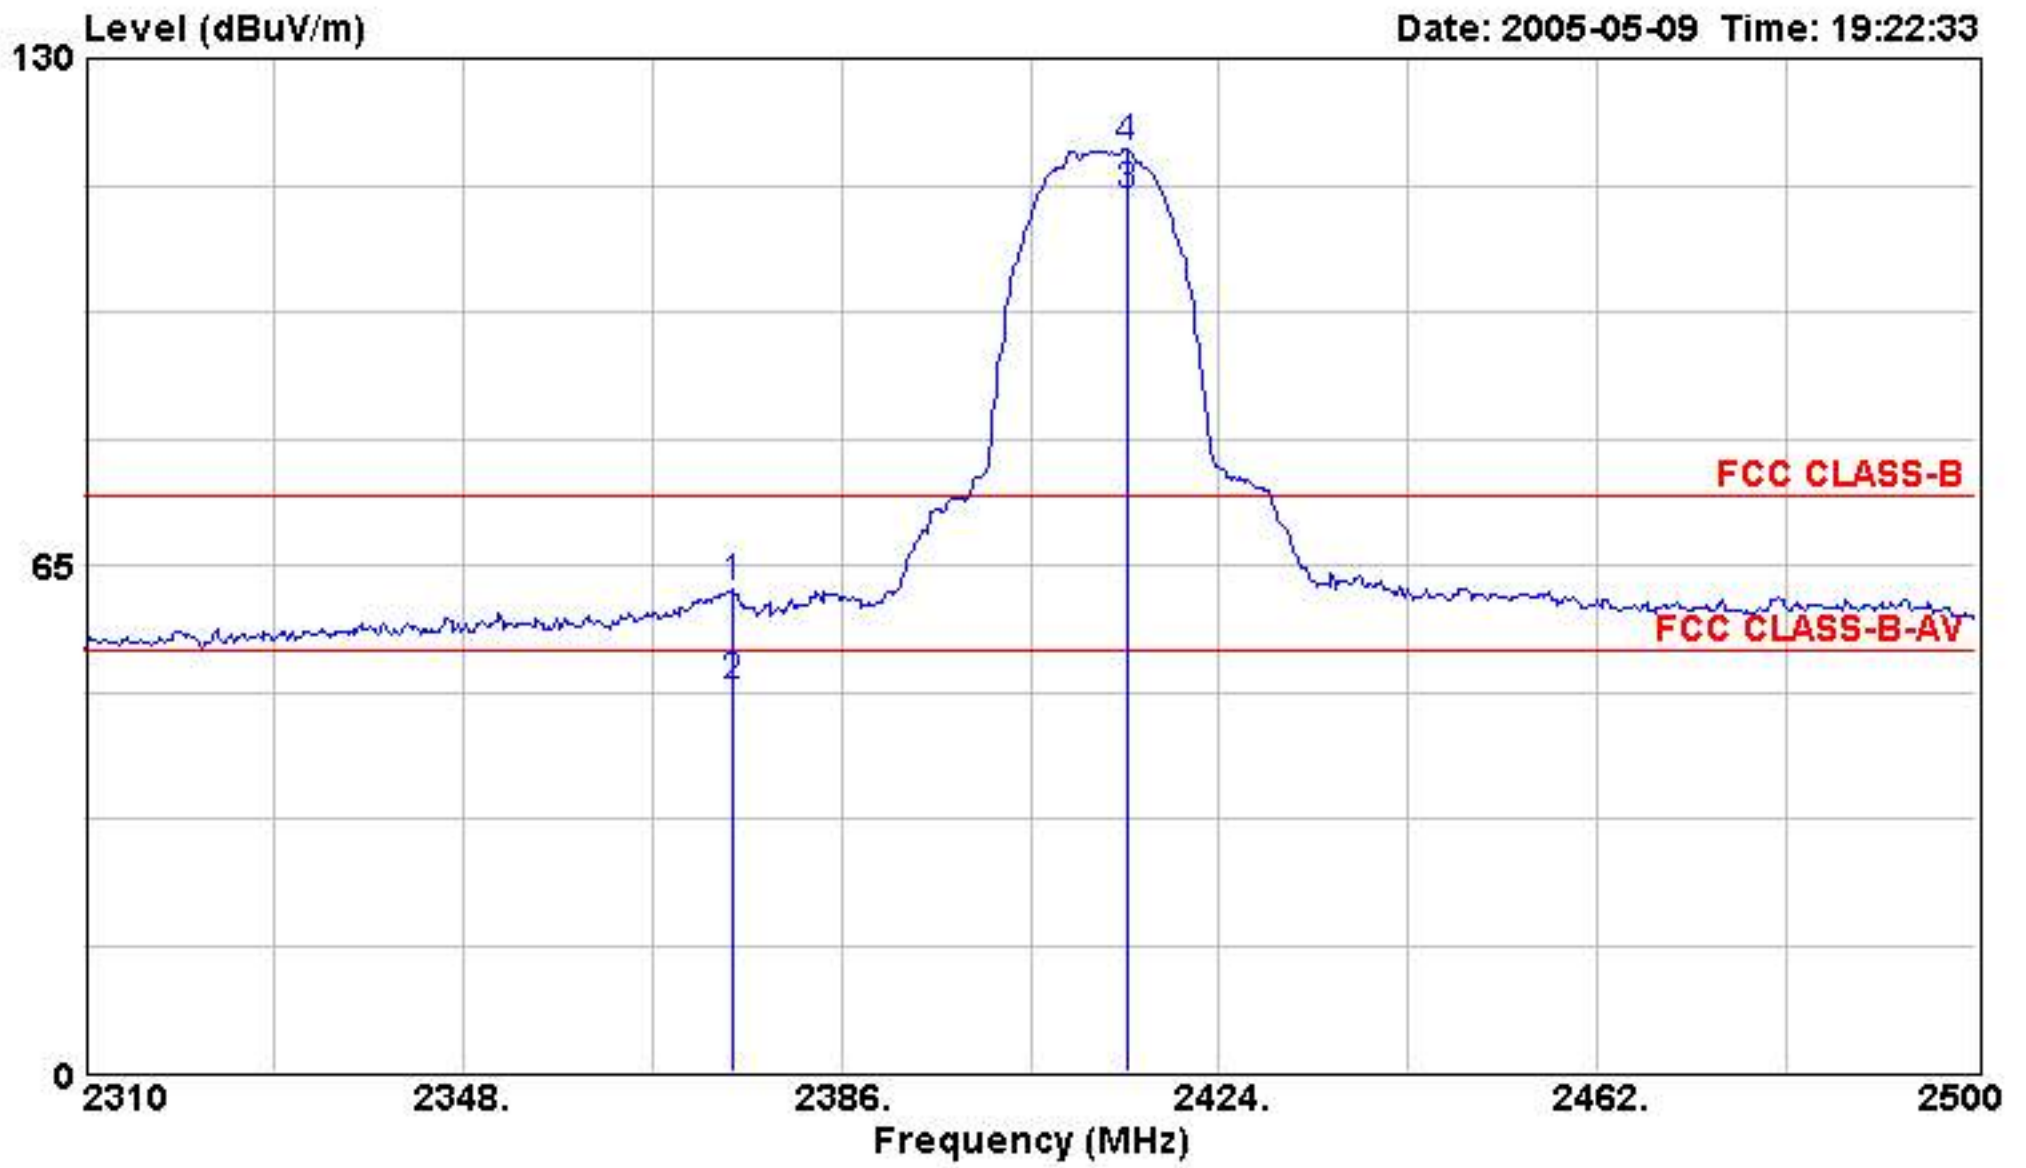

Site :03CHO3-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH01 2412MHz 11b
 :data rate 5.5Mbps

	Freq	Level	Over	Read	Limit	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	
			dB	dBuV	dBuV/m	dB	dB	
1	2374.980	61.81	-12.19	31.72	74.00	30.09	1.90	0.00 Peak
2	2374.980	49.34	-4.66	19.25	54.00	30.09	1.90	0.00 Average
3 @	2414.690	112.34	58.34	82.17	54.00	30.17	1.92	0.00 Average
4 over	2414.690	118.53	44.53	88.36	74.00	30.17	1.92	0.00 Peak

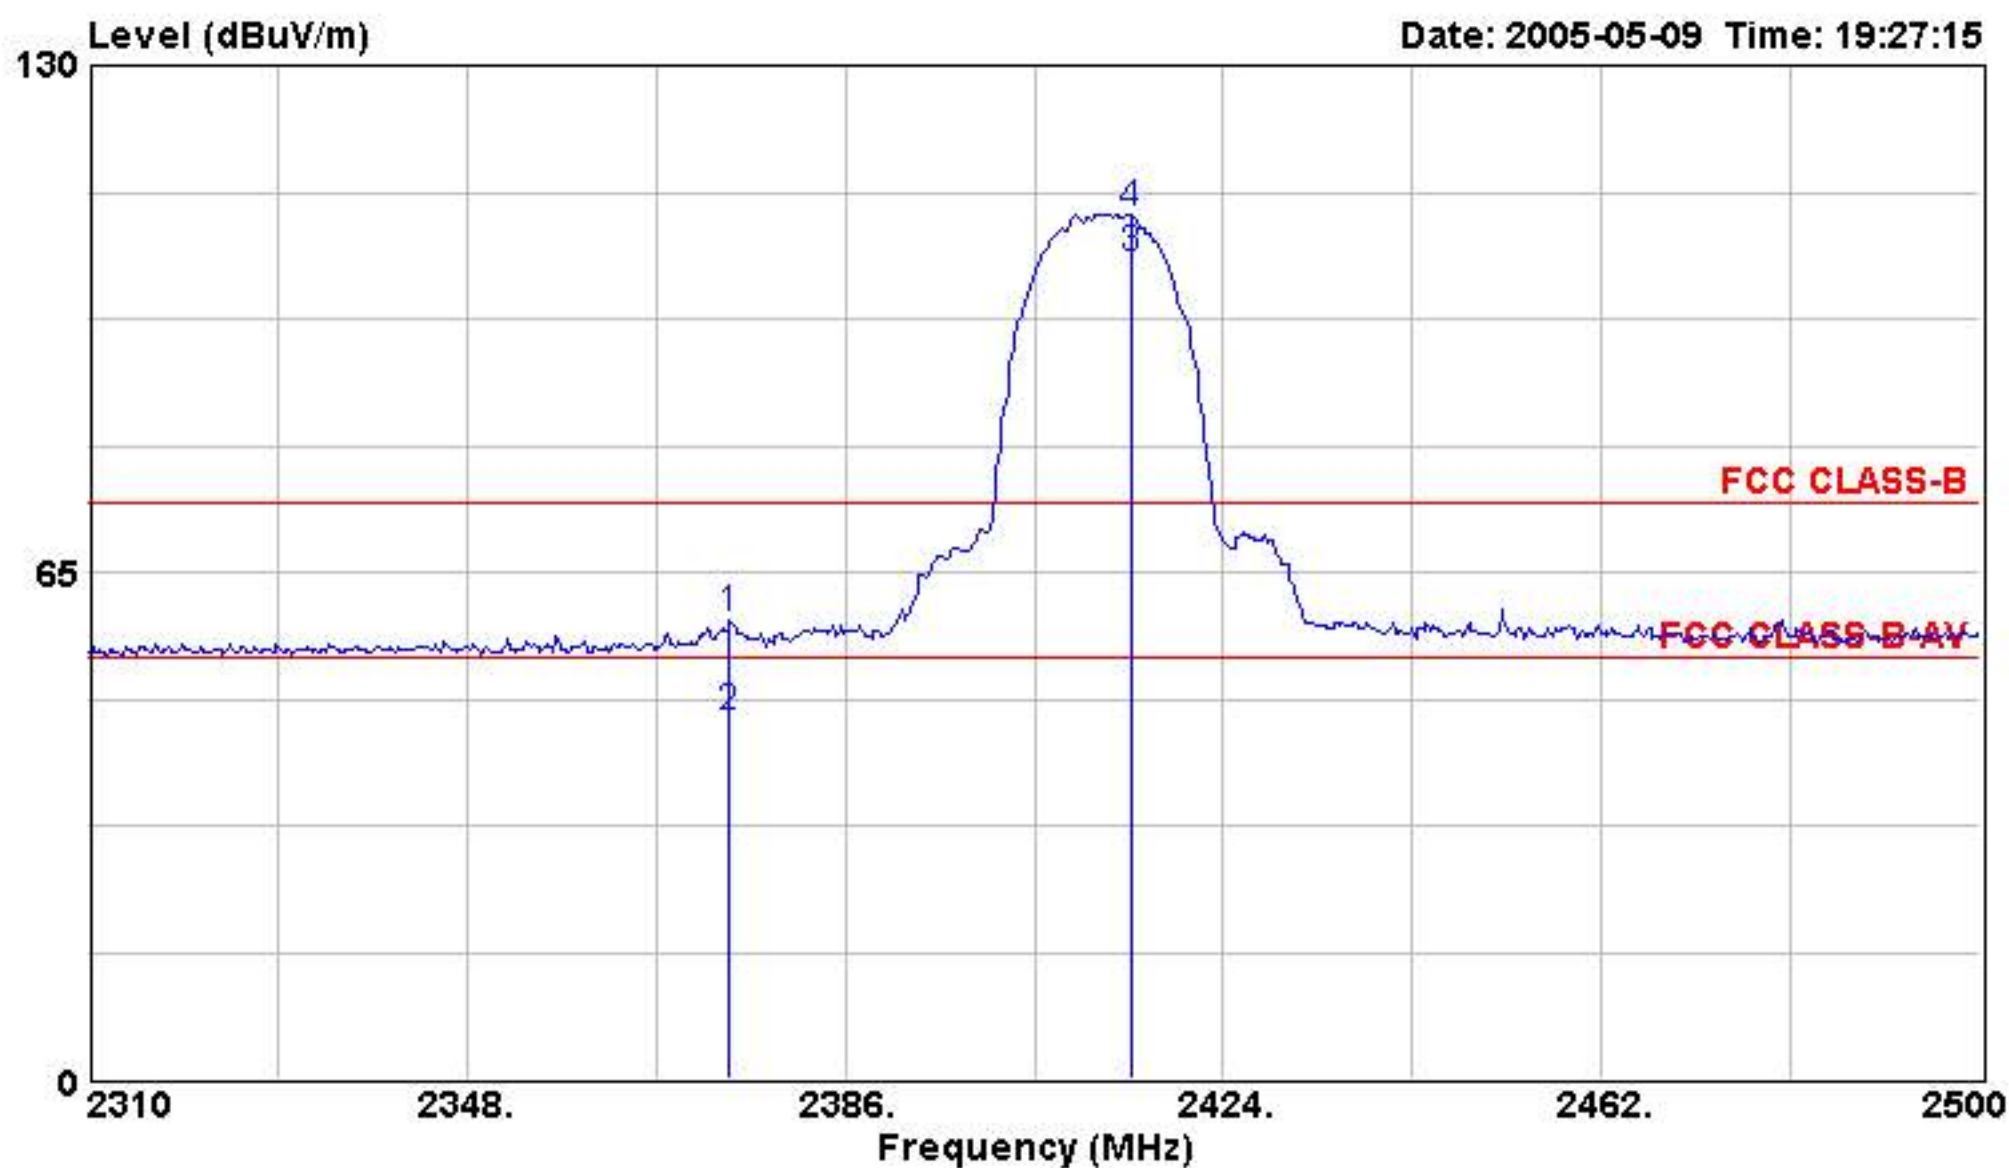

Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH01 2412MHz 11b
 :data rate 1Mbps


	Freq	Level	Over	Read	Limit	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	
			dB	dBuV	dBuV/m	dB	dB	
1	2374.410	58.85	-15.15	28.76	74.00	30.09	1.90	0.00 Peak
2	2374.410	46.10	-7.90	16.01	54.00	30.09	1.90	0.00 Average
3 over	2414.690	105.17	51.17	75.00	54.00	30.17	1.92	0.00 Average
4 over	2414.690	111.02	37.02	80.85	74.00	30.17	1.92	0.00 Peak



Data#: 14

File#: D:\E3 Data\2005客戶\技嘉 NEW.EMI

Date: 2005-05-09 Time: 19:29:34

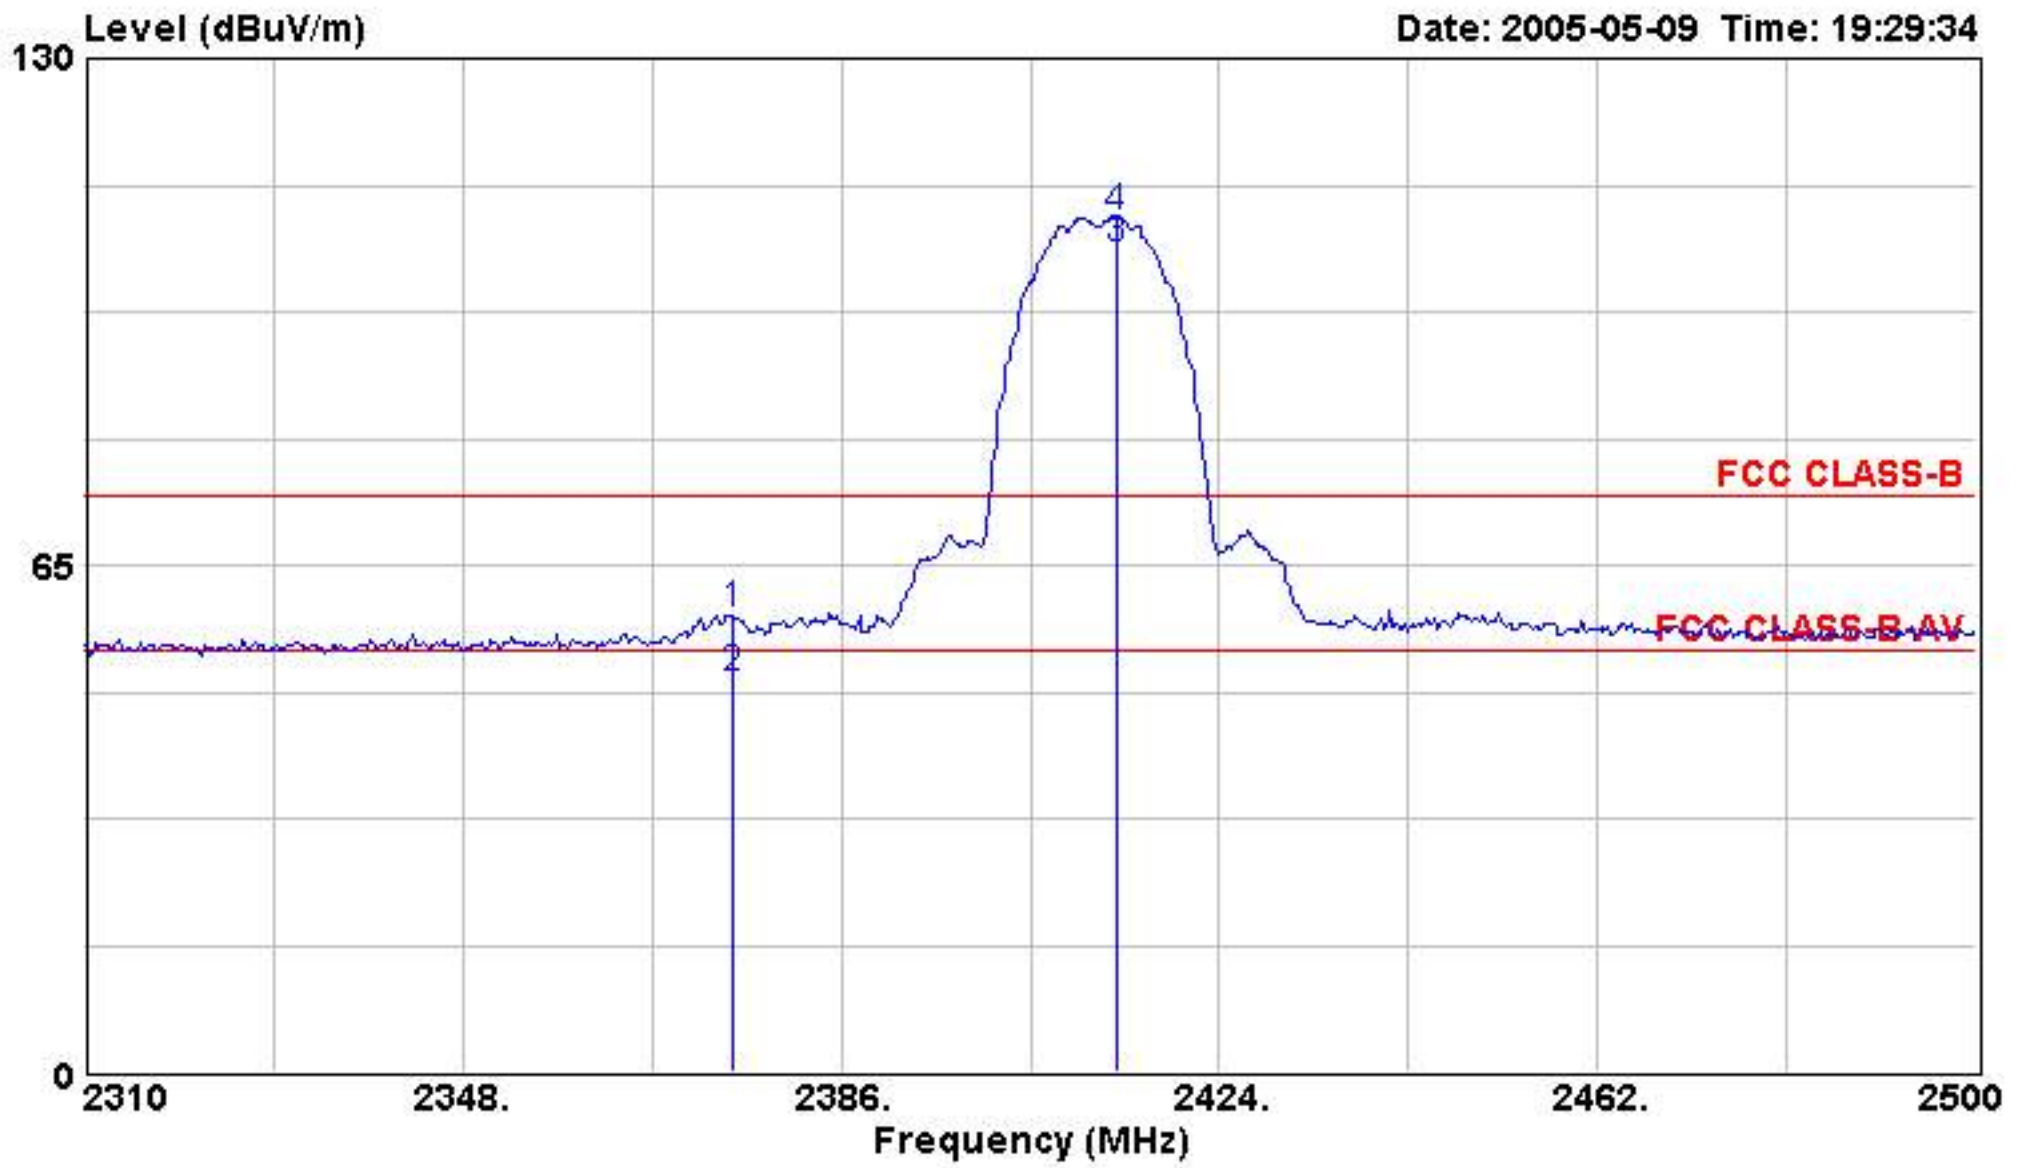


Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH01 2412MHz 11b
 :data rate 2Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	2374.980	58.63	-15.37	28.54	74.00	30.09	1.90	0.00	Peak
2	2374.980	50.38	-3.62	20.29	54.00	30.09	1.90	0.00	Average
3 over	2413.740	105.35	51.35	75.18	54.00	30.17	1.92	0.00	Average
4 over	2413.740	109.63	35.63	79.46	74.00	30.17	1.92	0.00	Peak



Data#: 15

File#: D:\E3 Data\2005客戶\技嘉 NEW.EMI

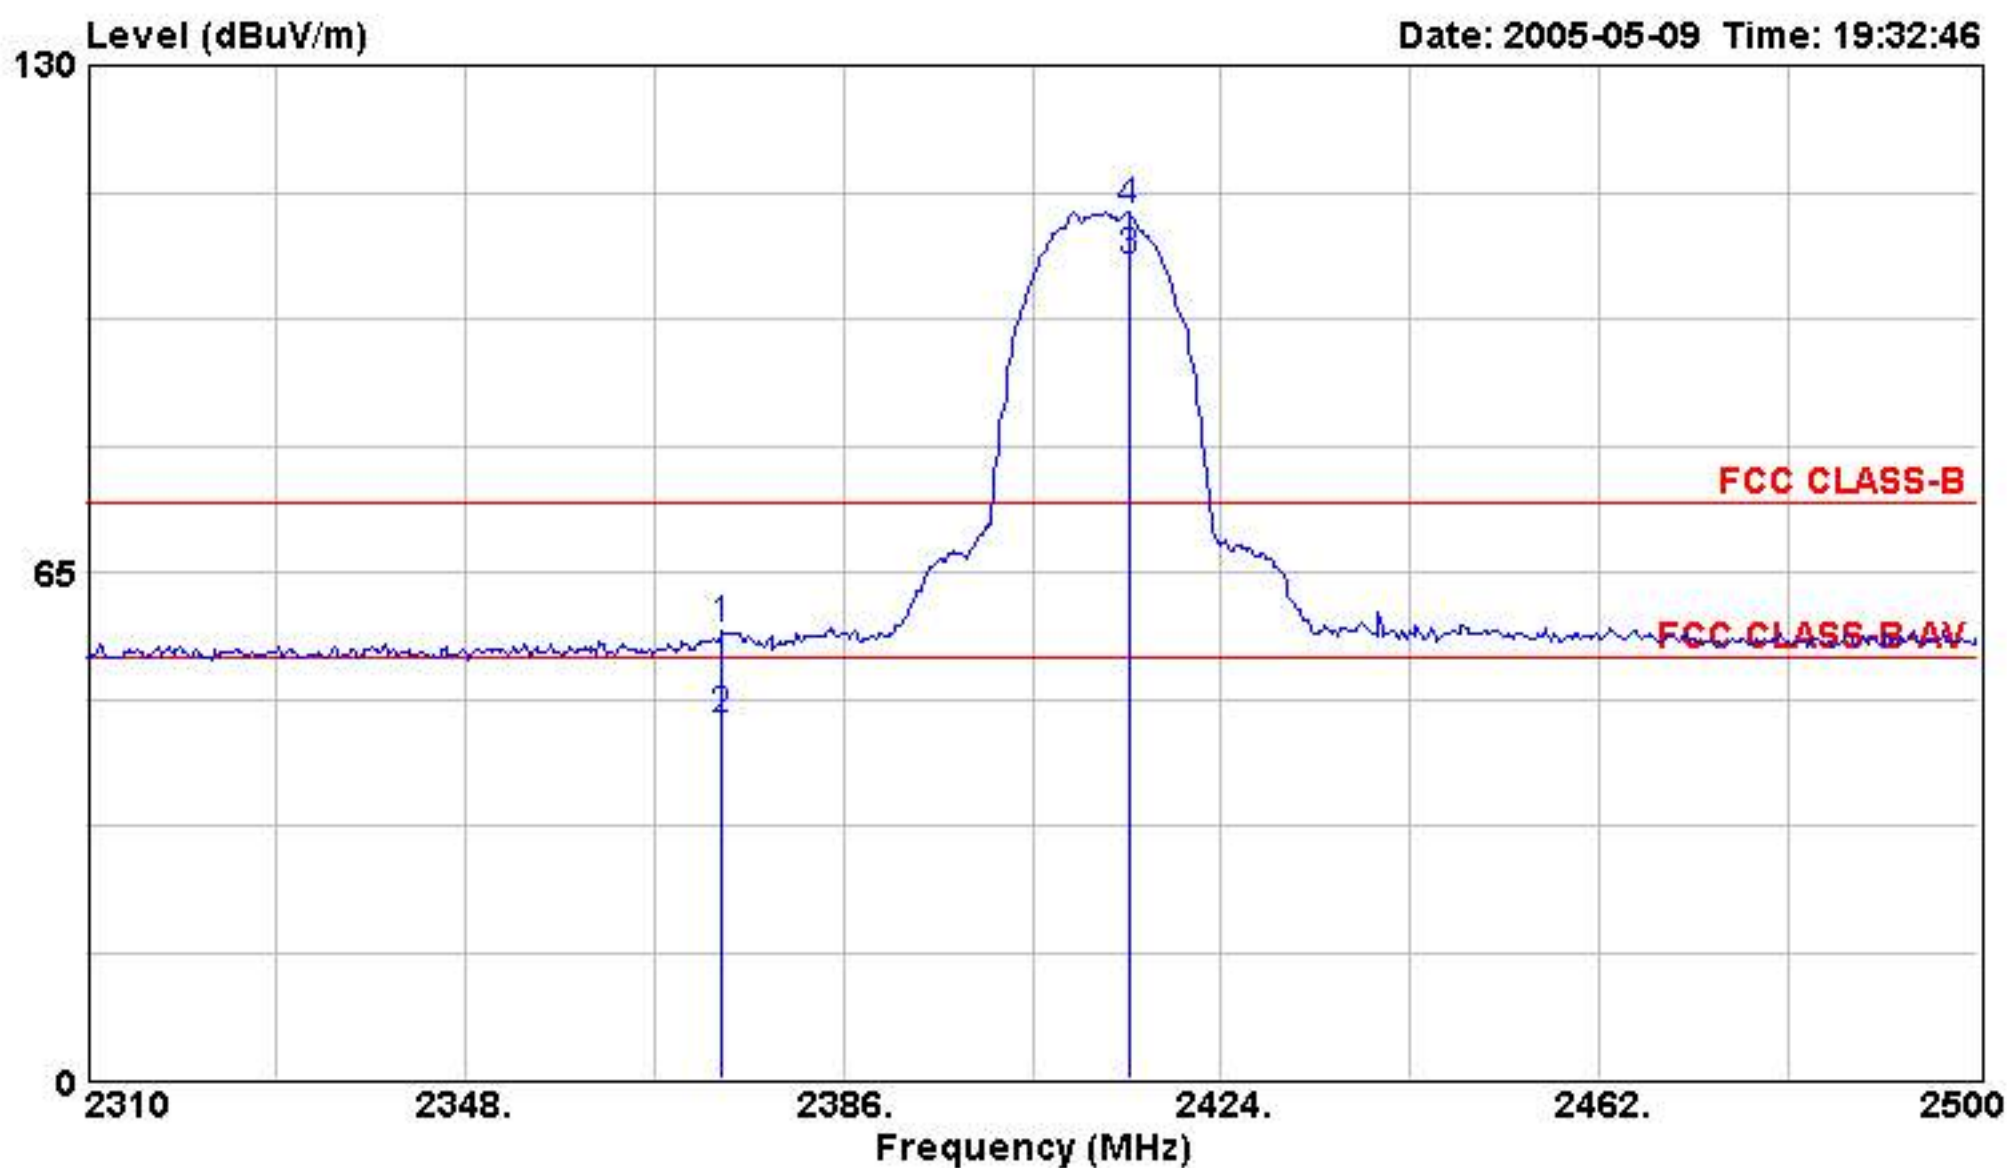

Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH01 2412MHz 11b
 :data rate 5.5Mbps


	Freq	Level	Over	Read	Limit	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	
			dB	dBuV	dBuV/m	dB	dB	
1	2373.650	57.39	-16.61	27.30	74.00	30.09	1.90	0.00 Peak
2	2373.650	45.83	-8.17	15.74	54.00	30.09	1.90	0.00 Average
3 over	2414.690	104.83	50.83	74.66	54.00	30.17	1.92	0.00 Average
4 over	2414.690	111.24	37.24	81.07	74.00	30.17	1.92	0.00 Peak



Data#: 16


File#: D:\E3 Data\2005客戶\技嘉 NEW.EMI

Date: 2005-05-09 Time: 19:35:25

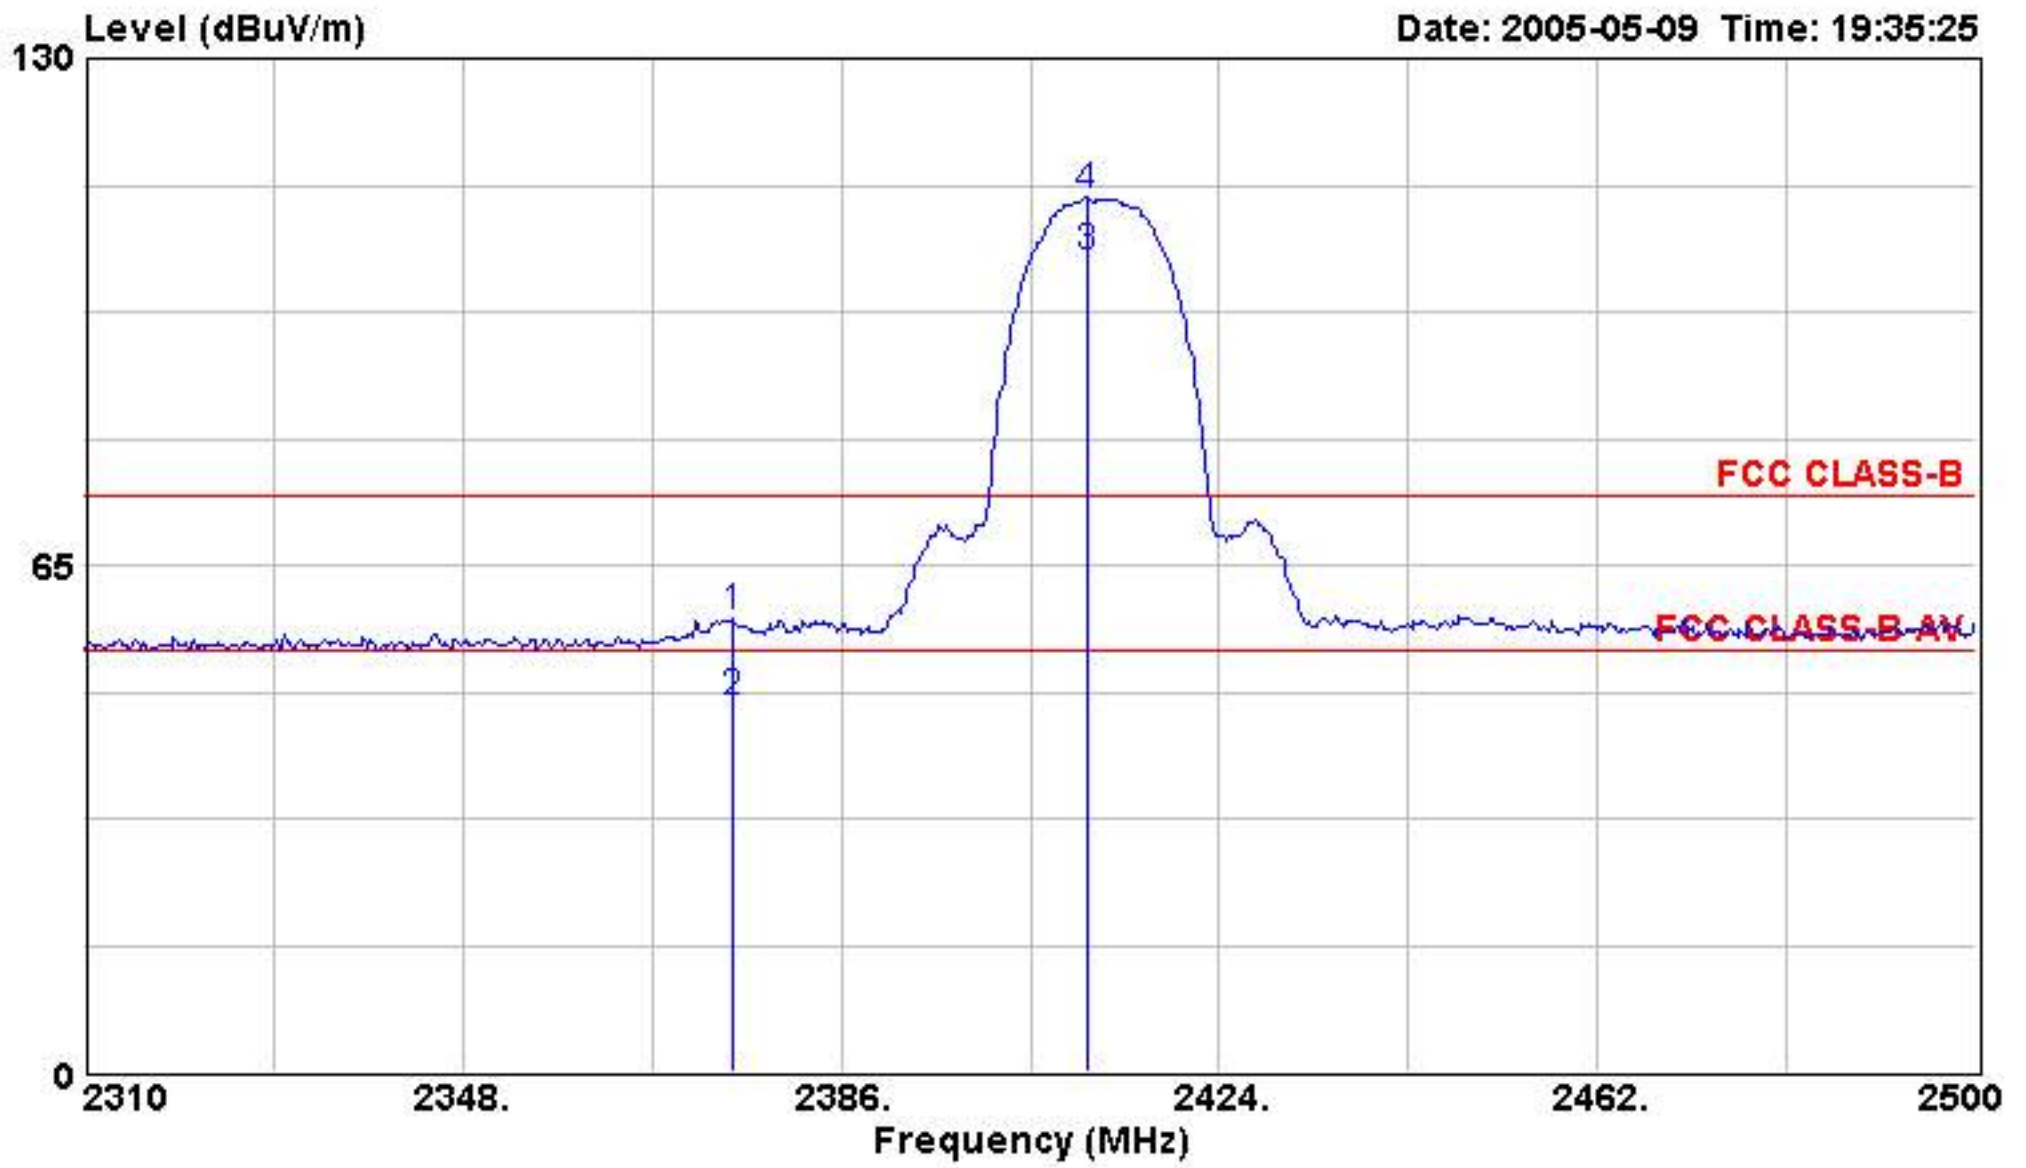


Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH01 2412MHz 11b
 :data rate 11Mbps

	Freq	Level	Over	Read	Limit	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	
			dB	dBuV	dBuV/m	dB	dB	
1	2374.980	58.05	-15.95	27.96	74.00	30.09	1.90	0.00 Peak
2	2374.980	47.20	-6.80	17.11	54.00	30.09	1.90	0.00 Average
3 over	2410.700	104.32	50.32	74.15	54.00	30.17	1.92	0.00 Average
4 over	2410.700	112.23	38.23	82.06	74.00	30.17	1.92	0.00 Peak

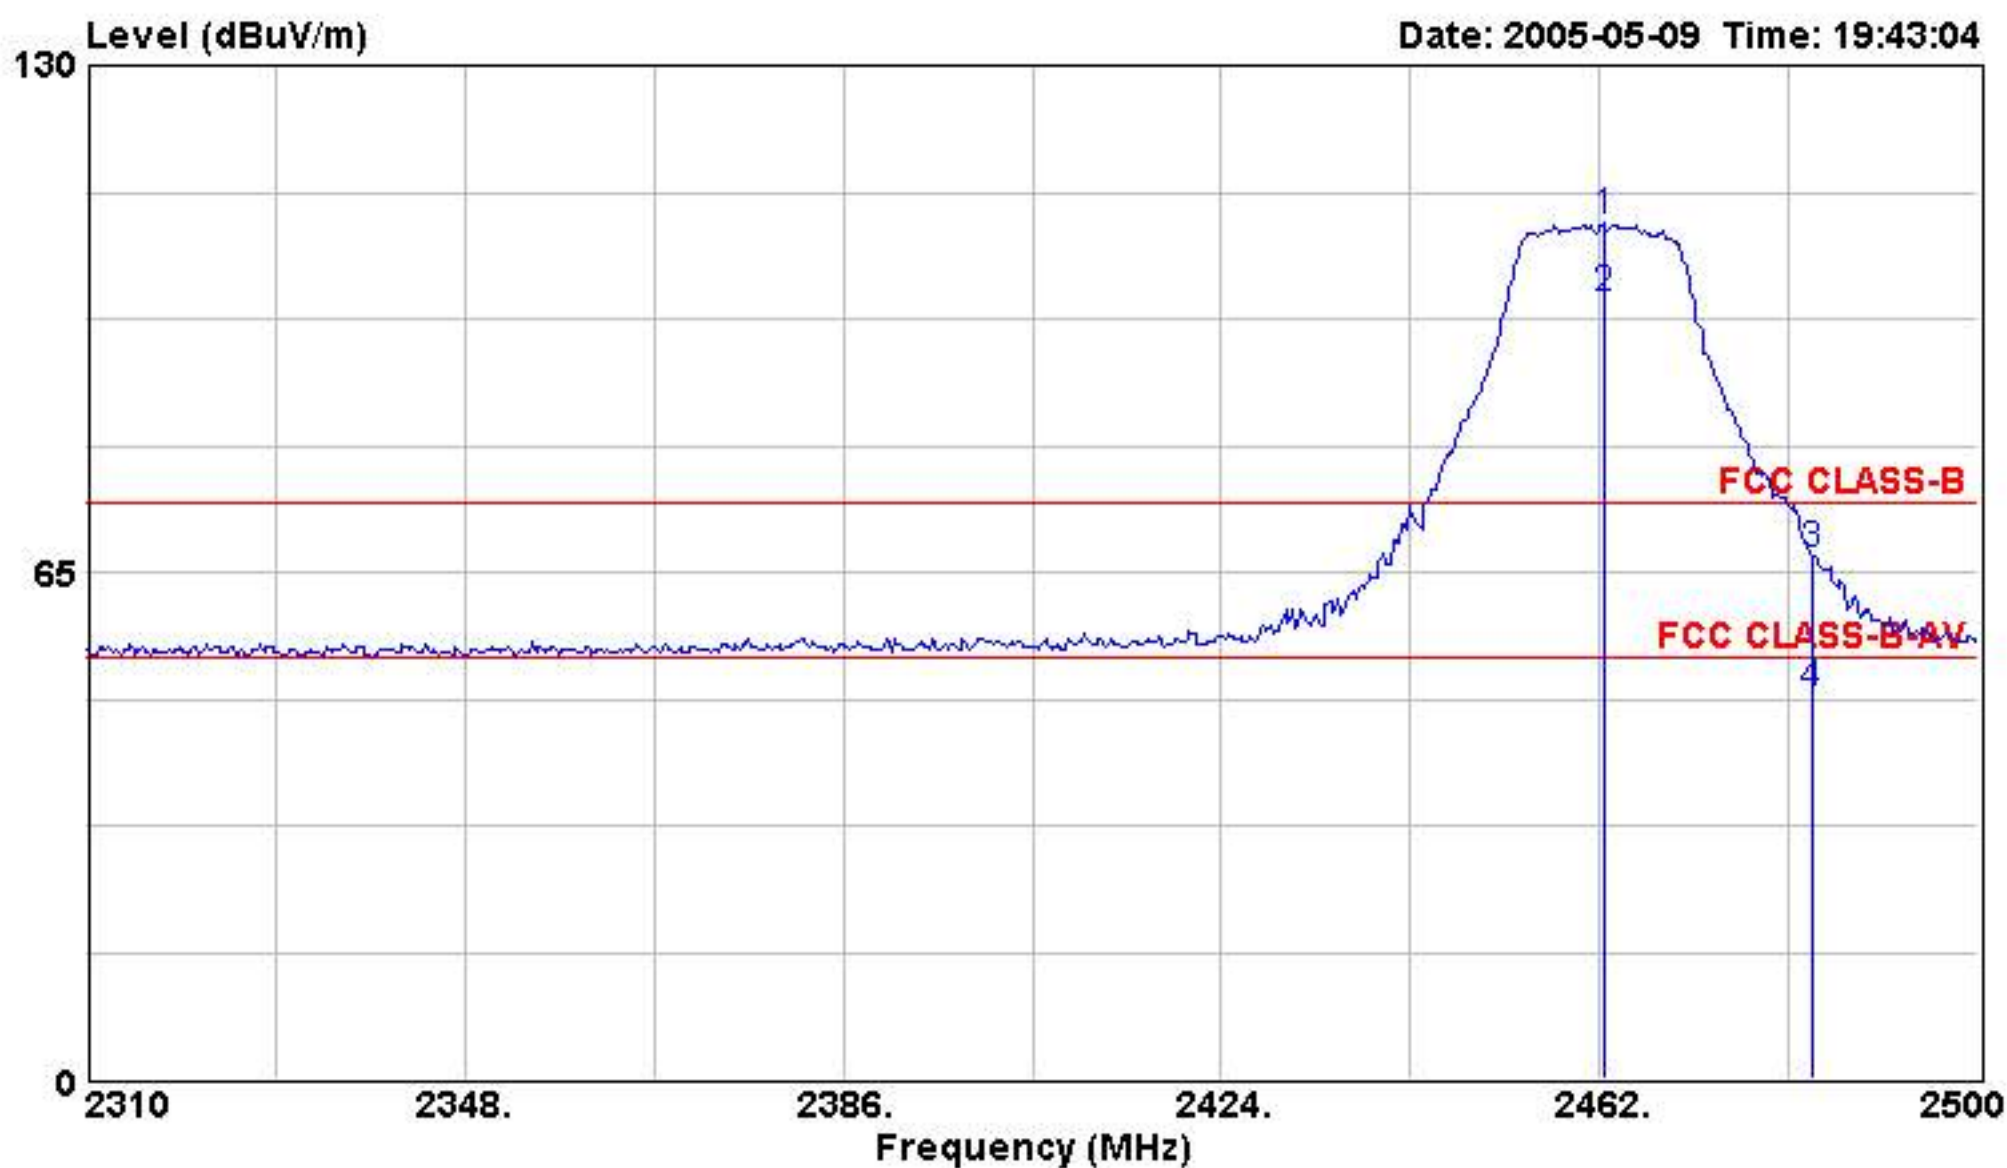


Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 6Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBuV	dBUV/m	dB	dB	dB	
1 over	2462.380	109.77	35.77	79.49	74.00	30.28	1.94	0.00	Peak
2 over	2462.380	99.90	45.90	69.62	54.00	30.28	1.94	0.00	Average
3	2483.500	67.08	-6.92	36.75	74.00	30.33	1.96	0.00	Peak
4	2483.500	49.25	-4.75	18.92	54.00	30.33	1.96	0.00	Average

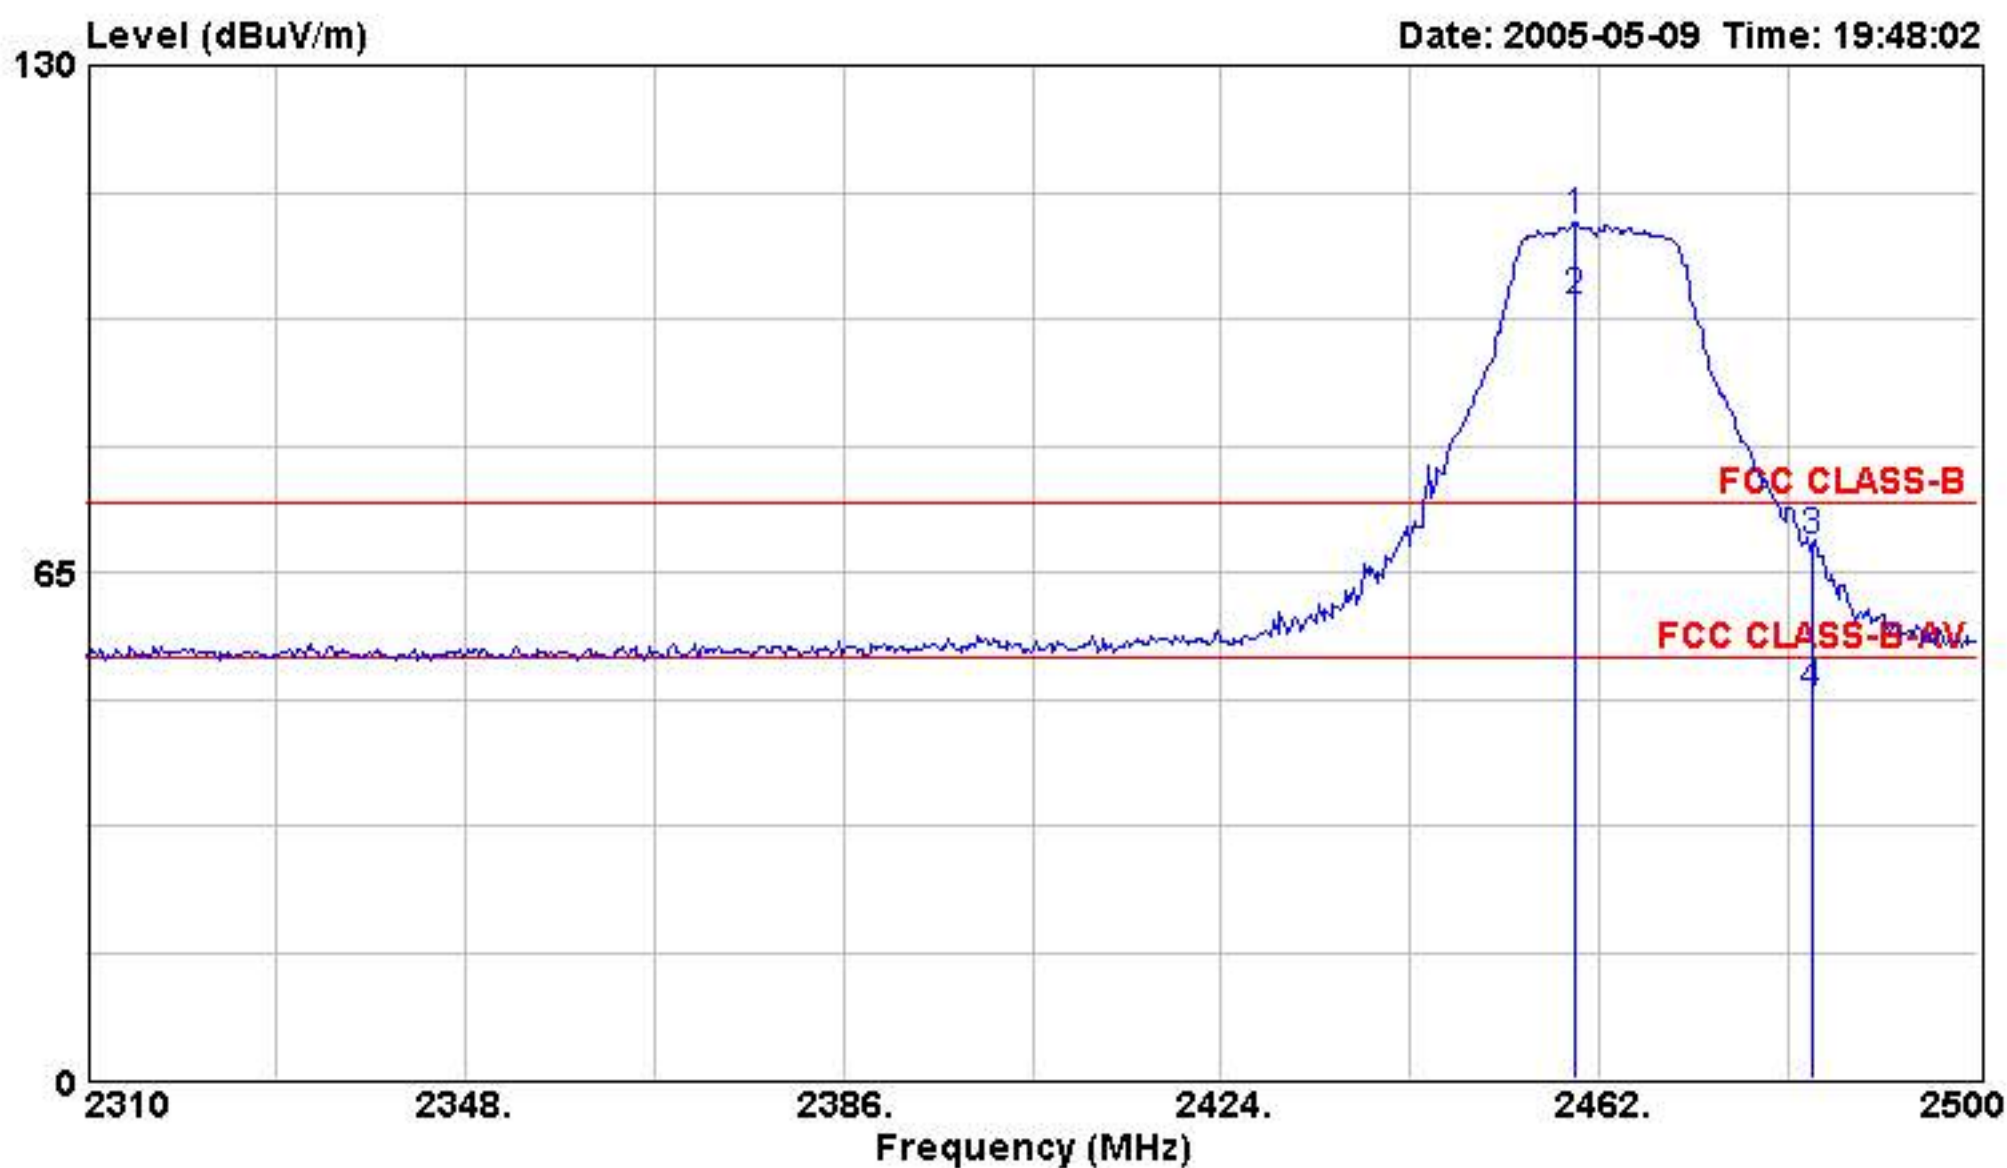


Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 9Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1 over	2459.530	109.93	35.93	79.65	74.00	30.28	1.94	0.00	Peak
2 over	2459.530	99.67	45.67	69.39	54.00	30.28	1.94	0.00	Average
3	2483.500	68.70	-5.30	38.37	74.00	30.33	1.96	0.00	Peak
4	2483.500	49.19	-4.81	18.86	54.00	30.33	1.96	0.00	Average

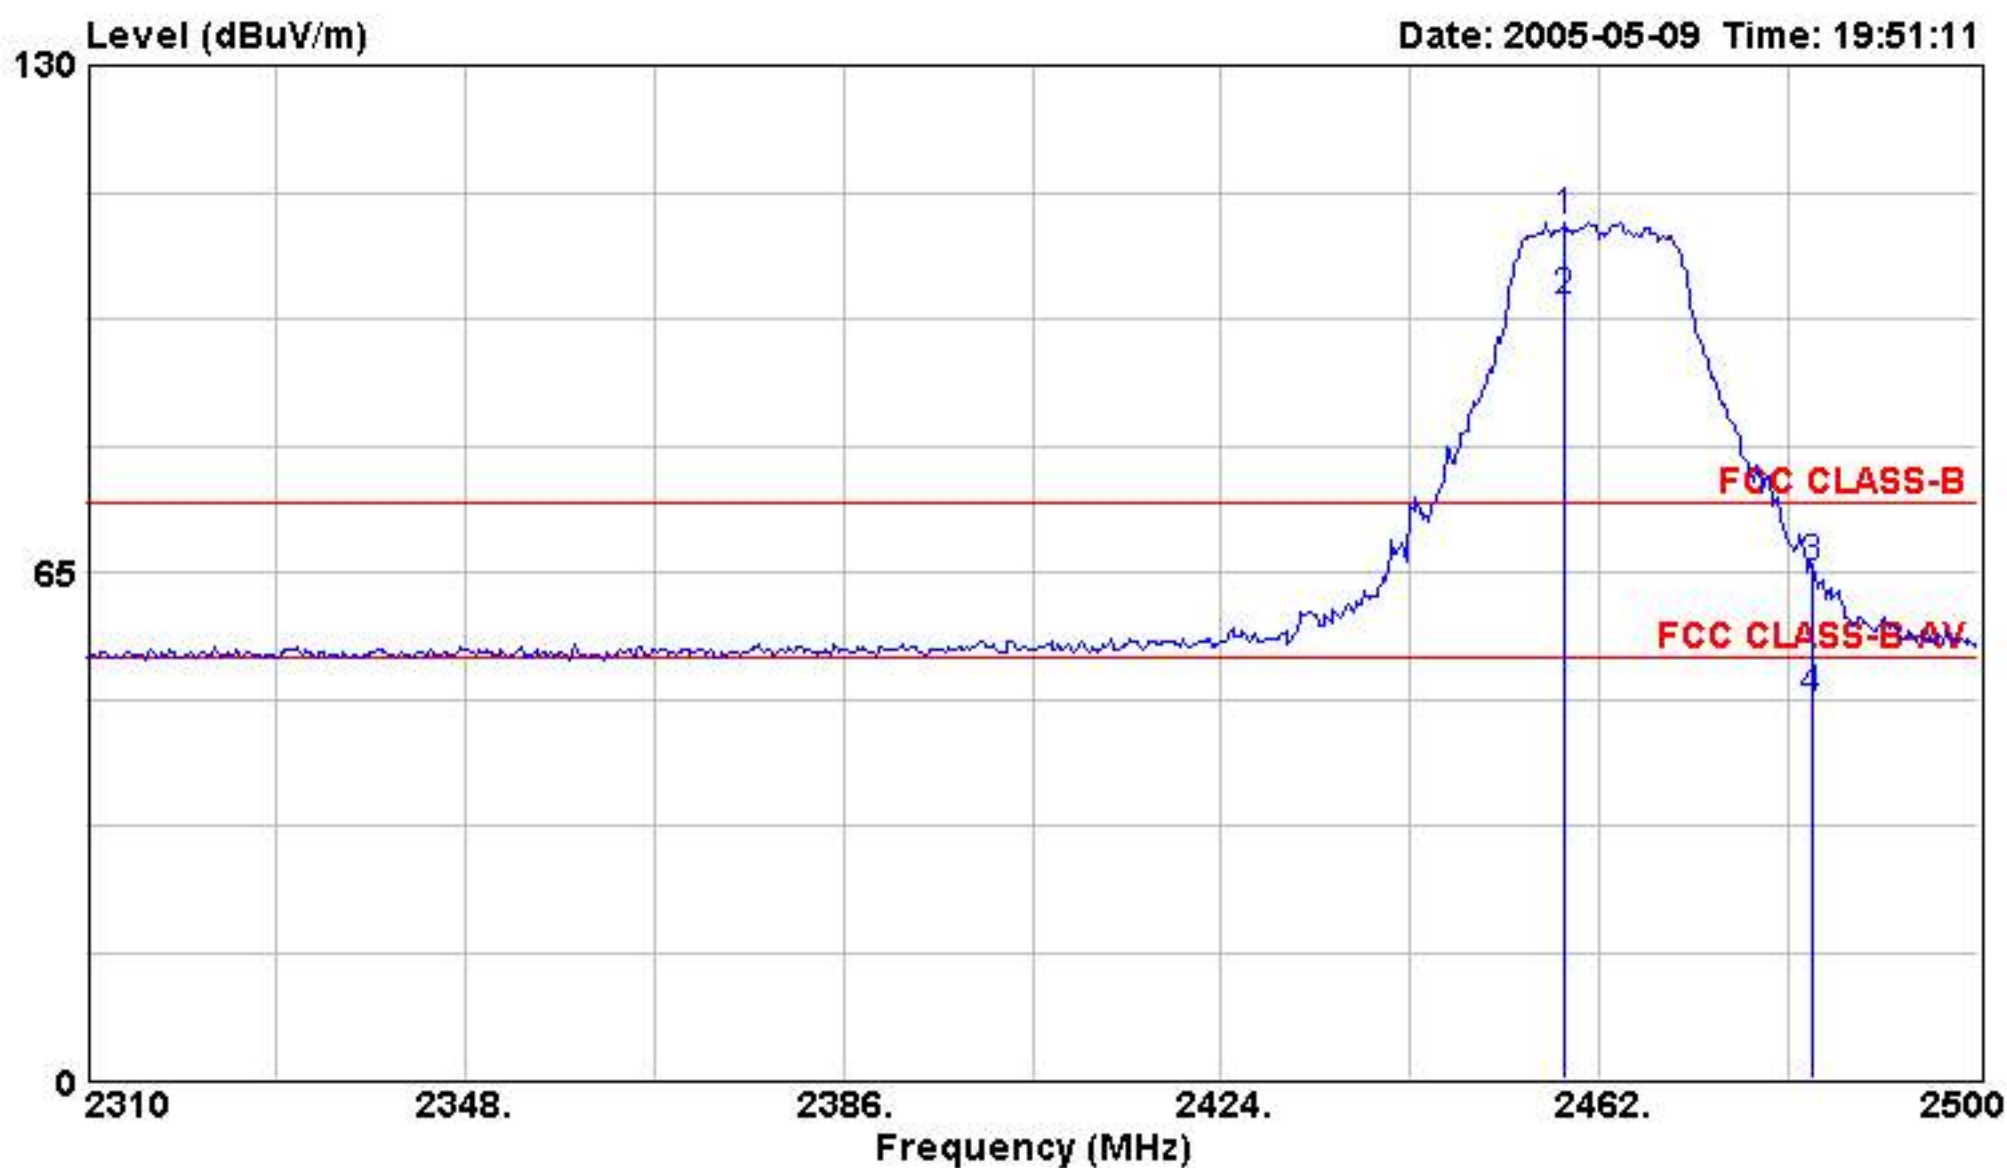

Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 12Mbps

	Freq	Level	Over	Read	Limit	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	
			dB	dBuV	dBuV/m	dB	dB	
1	2458.580	109.98	35.98	79.70	74.00	1.94	0.00	Peak
2	2458.580	99.48	45.48	69.20	54.00	1.94	0.00	Average
3	2483.500	65.30	-8.70	34.97	74.00	1.96	0.00	Peak
4	2483.500	48.47	-5.53	18.14	54.00	1.96	0.00	Average

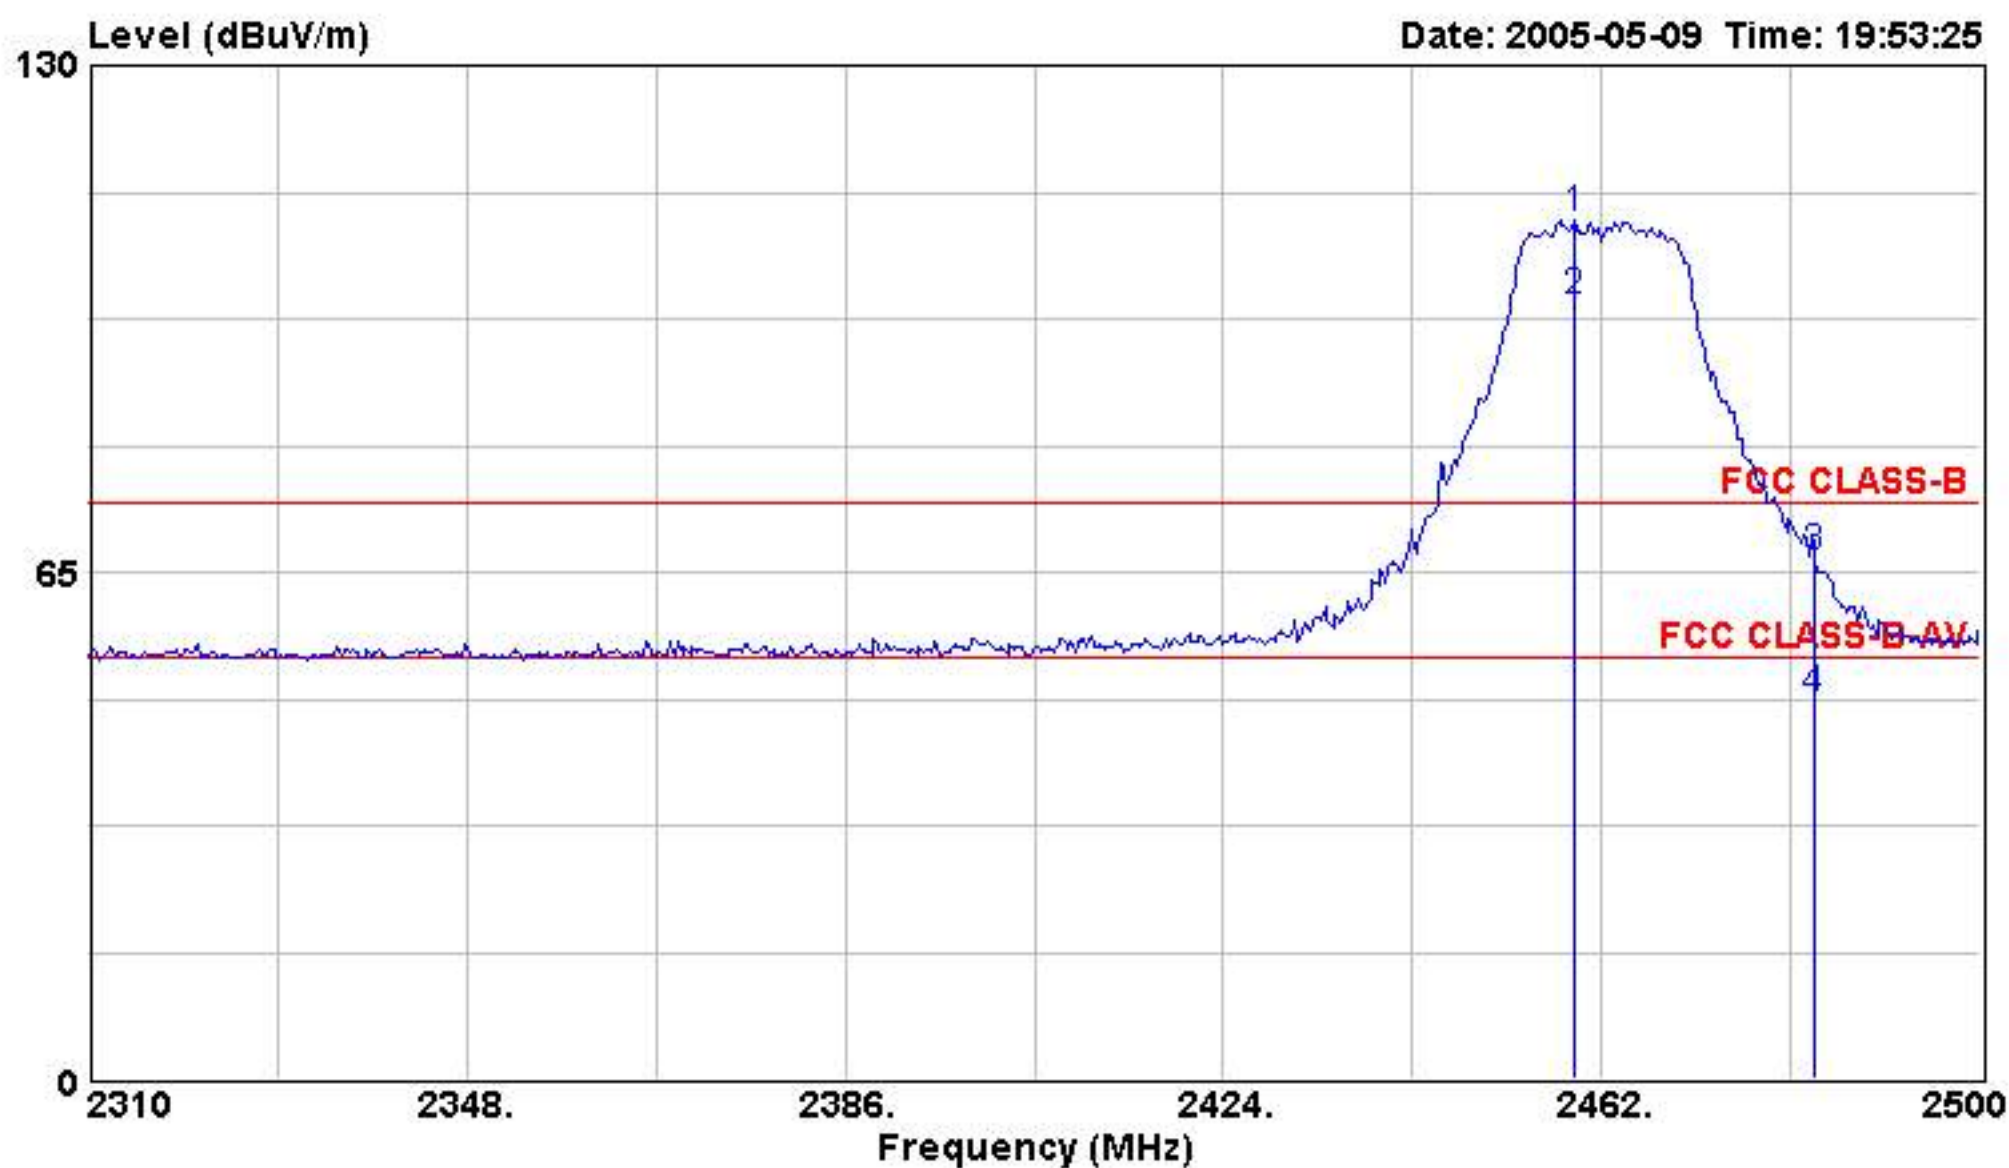


Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 18Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1 over	2459.340	110.33	36.33	80.05	74.00	30.28	1.94	0.00	Peak
2 over	2459.340	99.65	45.65	69.37	54.00	30.28	1.94	0.00	Average
3	2483.500	66.60	-7.40	36.27	74.00	30.33	1.96	0.00	Peak
4	2483.500	48.68	-5.32	18.35	54.00	30.33	1.96	0.00	Average




Data#: 21

File#: D:\E3 Data\2005客戶\技嘉 NEW.EMI

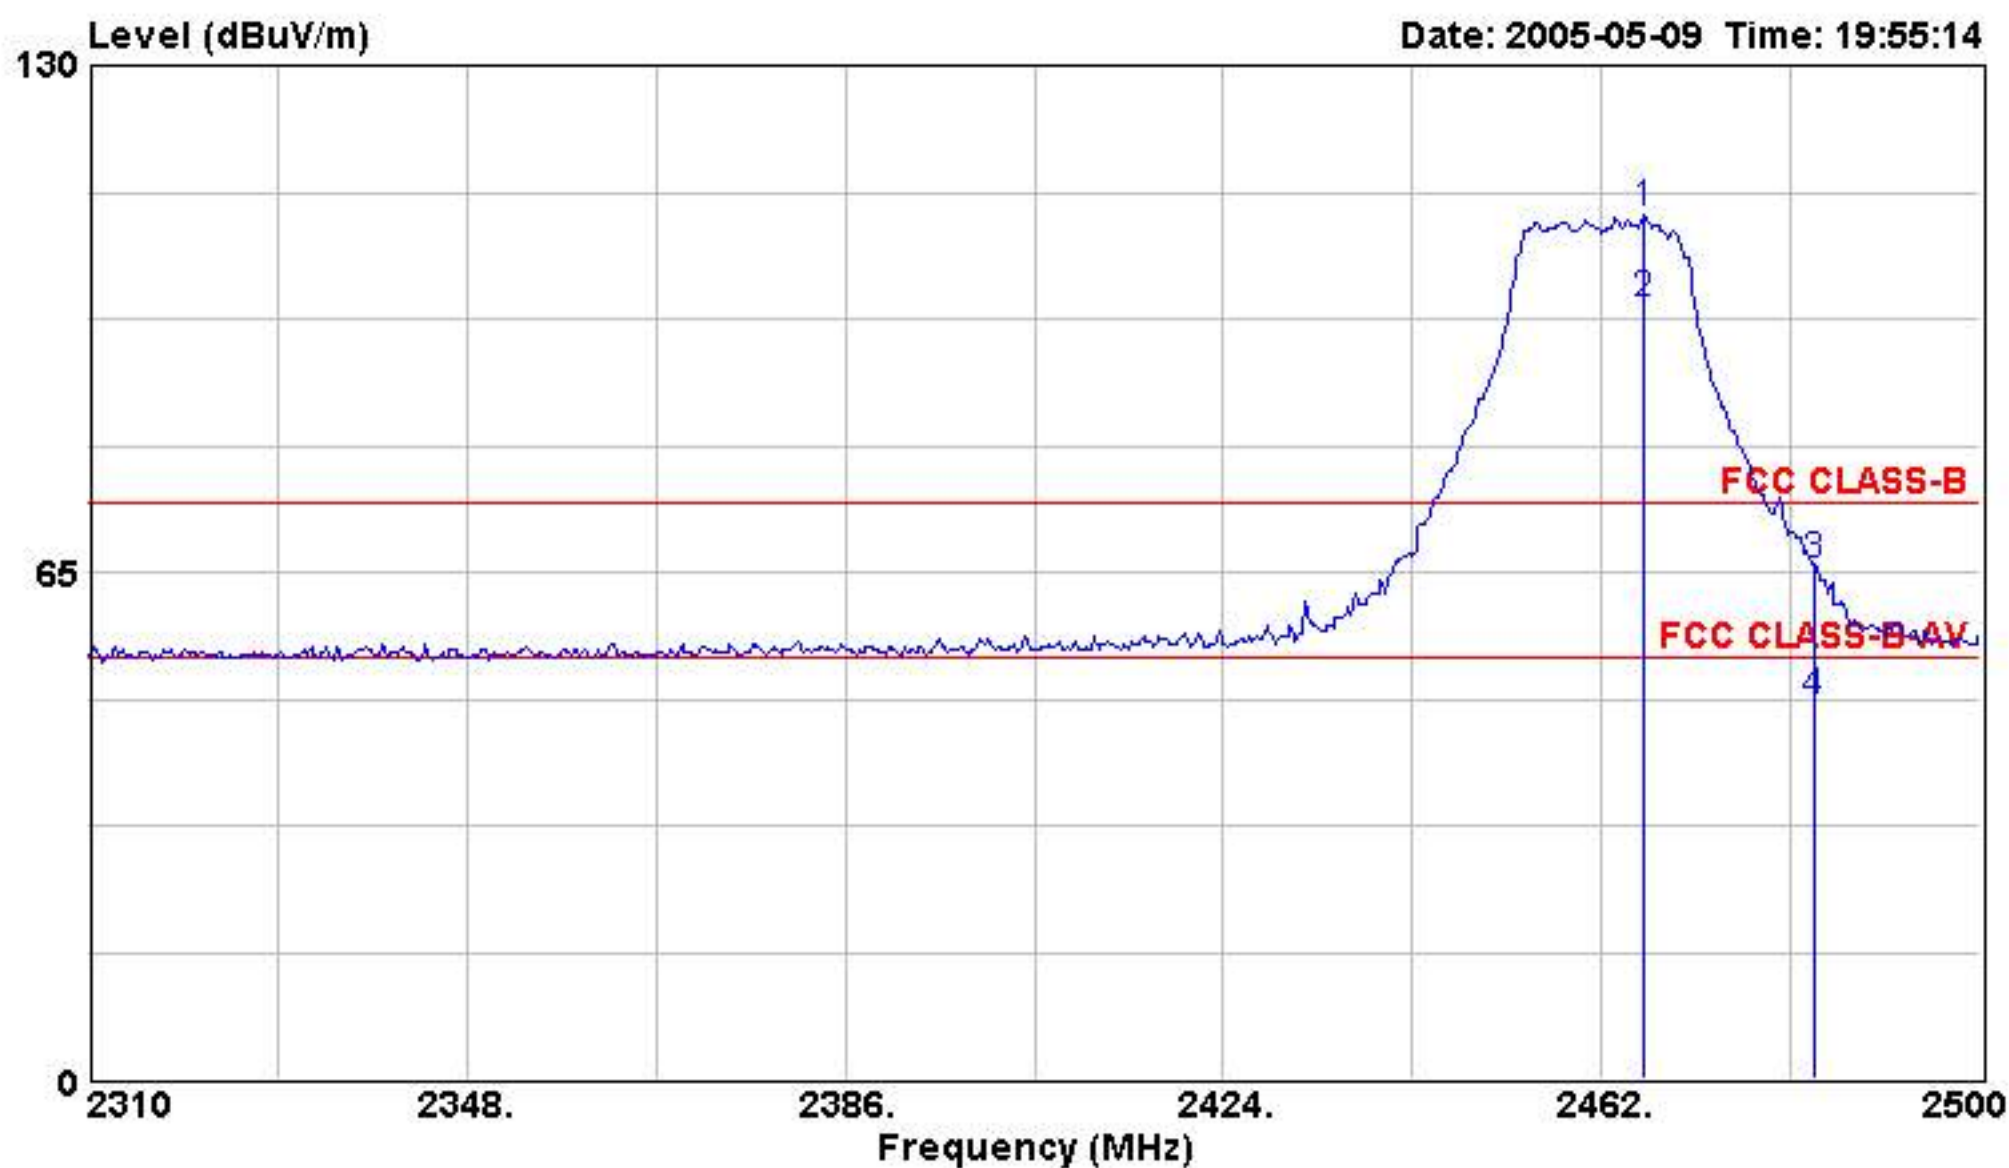

Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 24Mbps

	Freq	Level	Over	Read	Limit	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	
			dB	dBuV	dBuV/m	dB	dB	
1 over	2466.180	110.77	36.77	80.49	74.00	30.28	1.94	0.00 Peak
2 over	2466.180	99.23	45.23	68.95	54.00	30.28	1.94	0.00 Average
3	2483.500	65.79	-8.21	35.46	74.00	30.33	1.96	0.00 Peak
4	2483.500	48.28	-5.72	17.95	54.00	30.33	1.96	0.00 Average

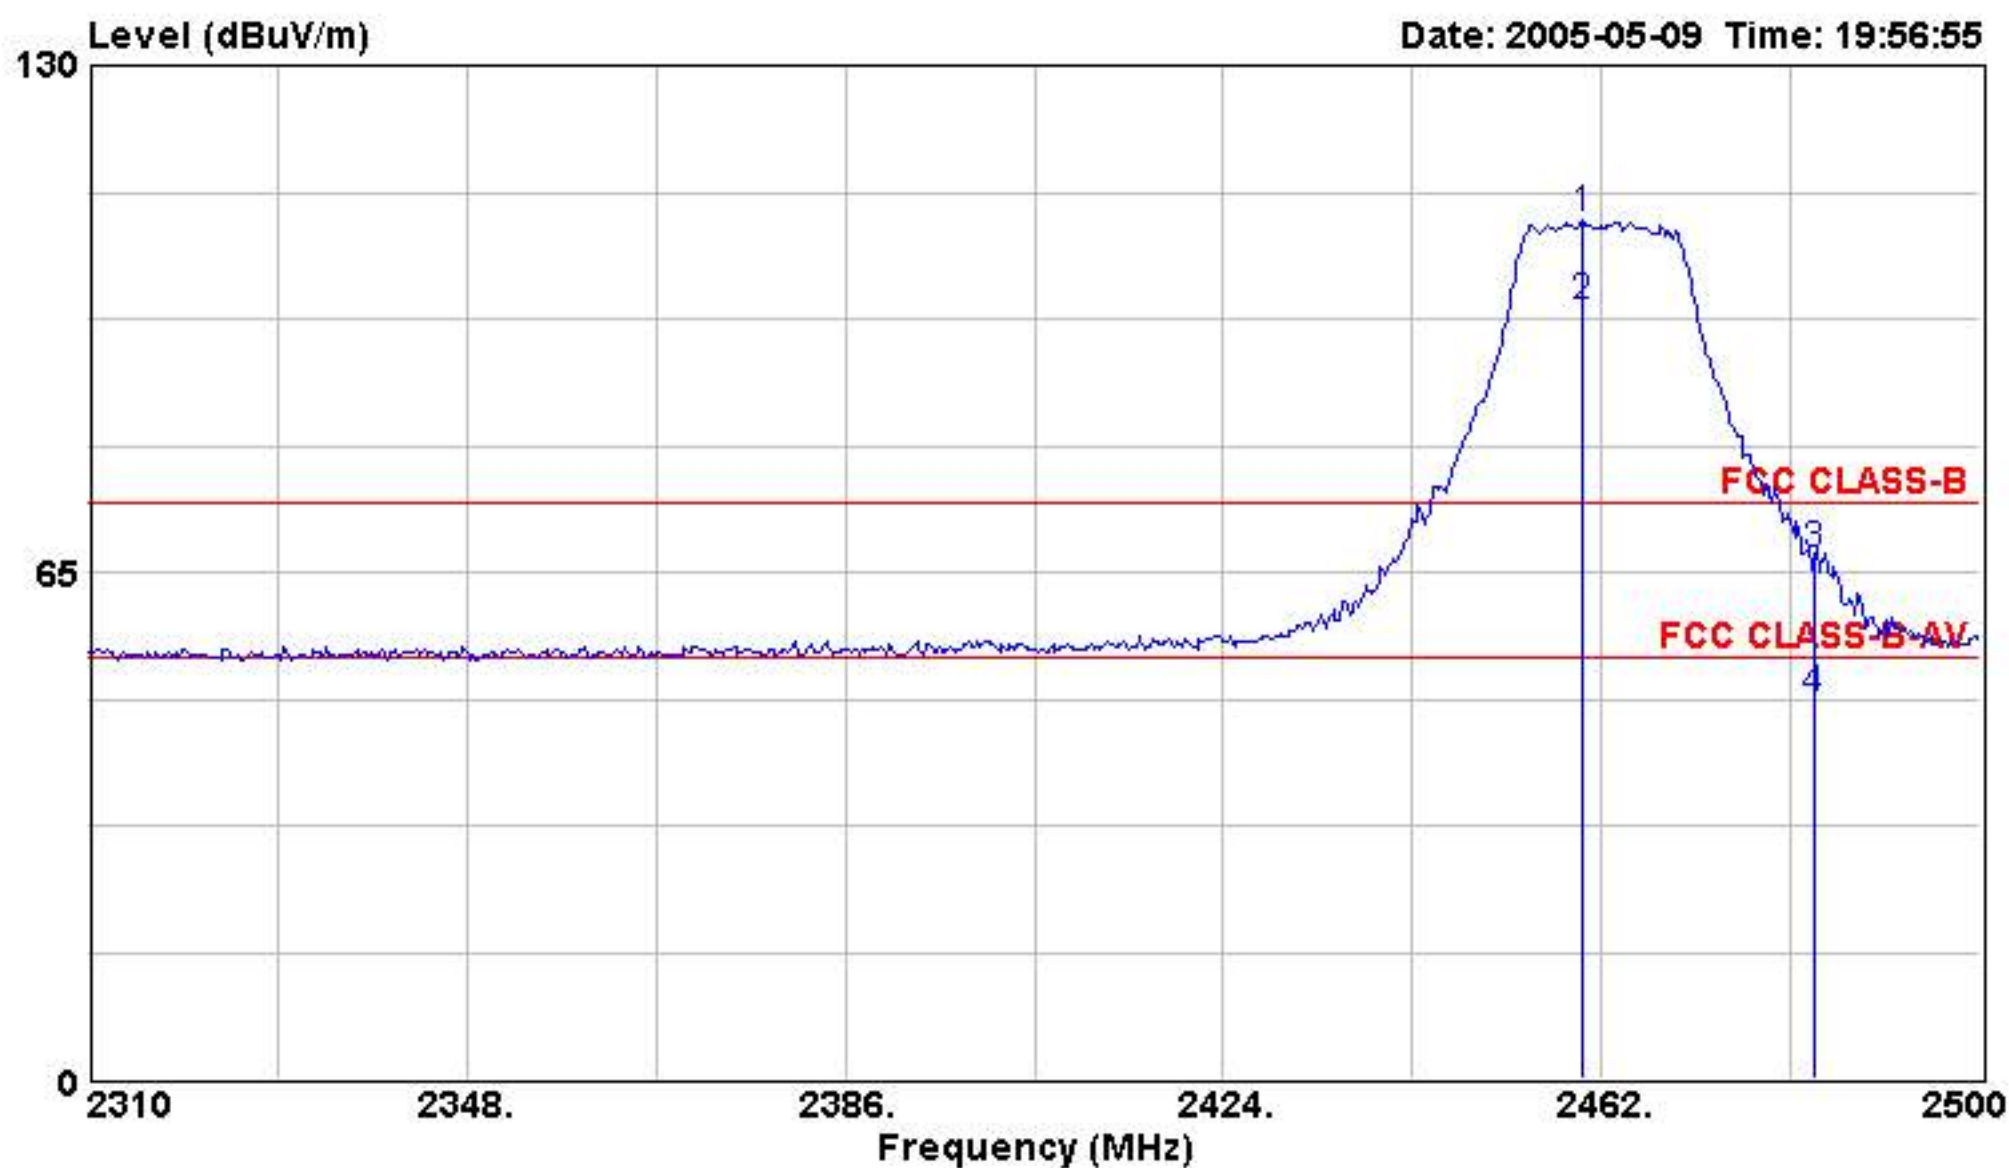

Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 36Mbps


	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	2460.100	110.34	36.34	80.06	74.00	30.28	1.94	0.00	Peak
2	2460.100	99.02	45.02	68.74	54.00	30.28	1.94	0.00	Average
3	2483.500	67.12	-6.88	36.79	74.00	30.33	1.96	0.00	Peak
4	2483.500	48.51	-5.49	18.18	54.00	30.33	1.96	0.00	Average



Data#: 23


File#: D:\E3 Data\2005客戶\技嘉 NEW.EMI

Date: 2005-05-09 Time: 19:58:31

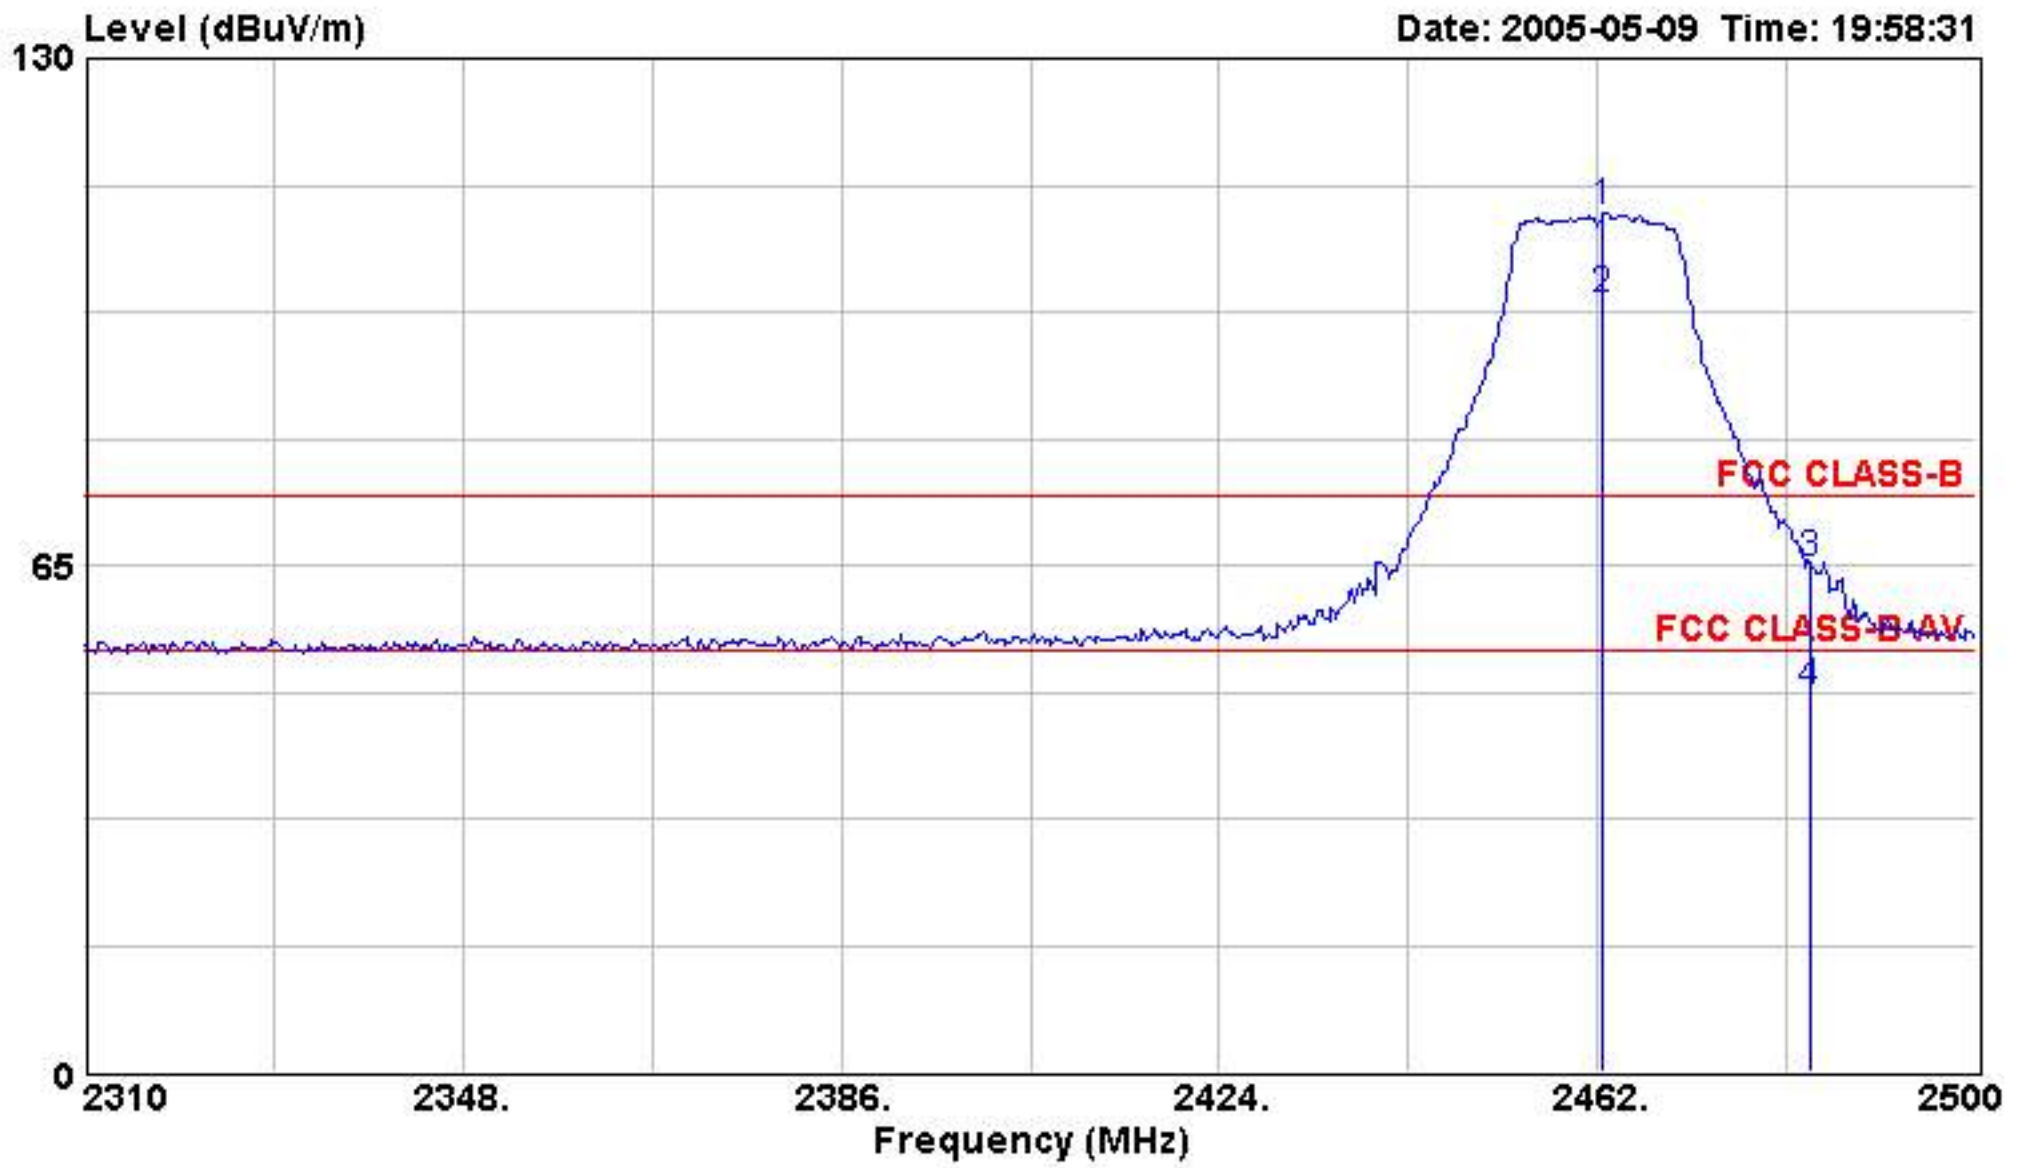


Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 48Mbps

	Freq	Level	Over	Read	Limit	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	
			dB	dBuV	dBuV/m	dB	dB	
1 over	2462.570	110.08	36.08	79.80	74.00	30.28	1.94	0.00 Peak
2 over	2462.570	98.81	44.81	68.53	54.00	30.28	1.94	0.00 Average
3	2483.500	65.01	-8.99	34.68	74.00	30.33	1.96	0.00 Peak
4	2483.500	48.44	-5.56	18.11	54.00	30.33	1.96	0.00 Average

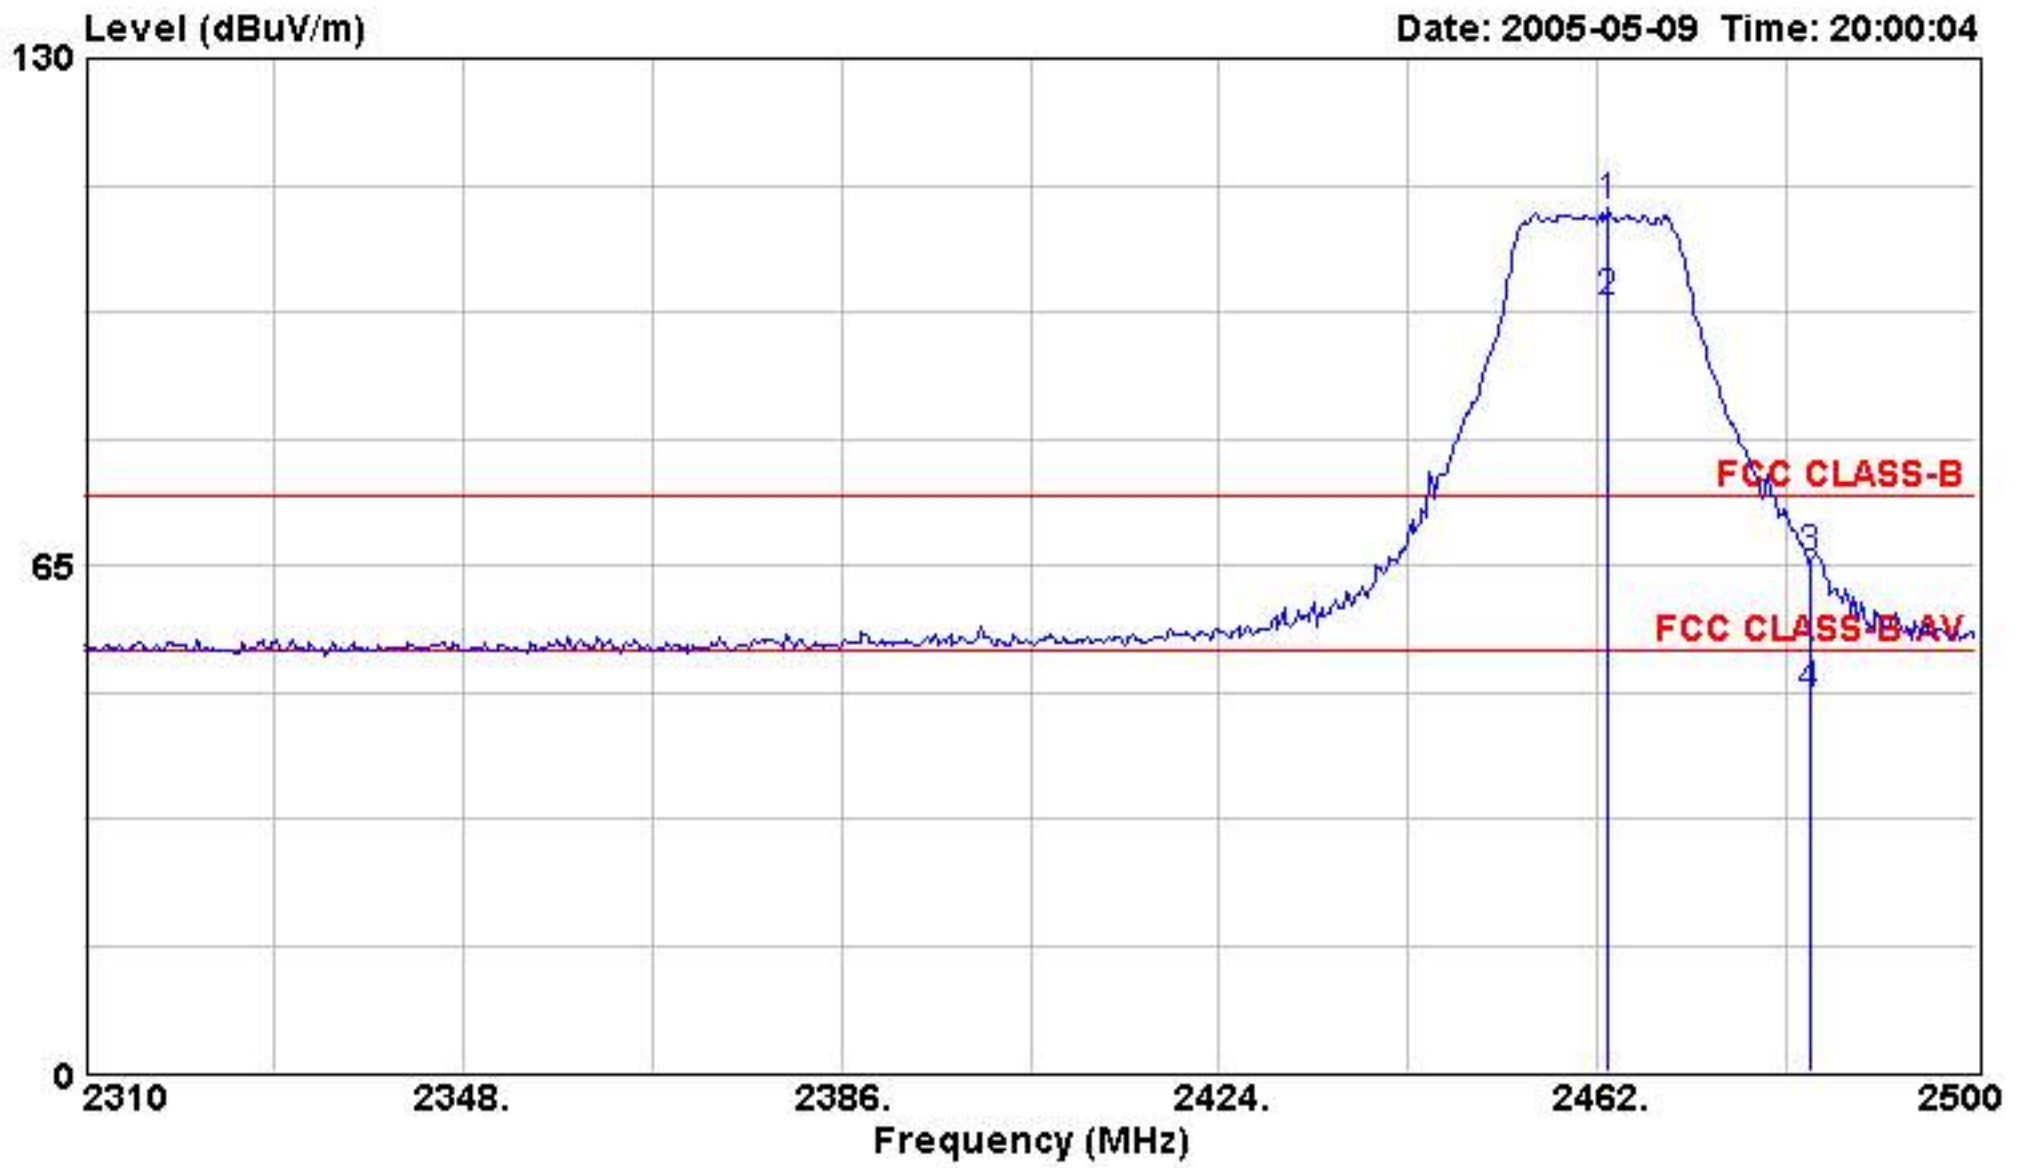

Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 HORIZONTAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 54Mbps

	Freq	Level	Over	Read	Limit	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Level	Line	Loss	Factor	
			dB	dBuV	dBuV/m	dB	dB	
1 over	2463.140	110.82	36.82	80.54	74.00	30.28	1.94	0.00 Peak
2 over	2463.140	98.58	44.58	68.30	54.00	30.28	1.94	0.00 Average
3	2483.500	65.83	-8.17	35.50	74.00	30.33	1.96	0.00 Peak
4	2483.500	48.42	-5.58	18.09	54.00	30.33	1.96	0.00 Average

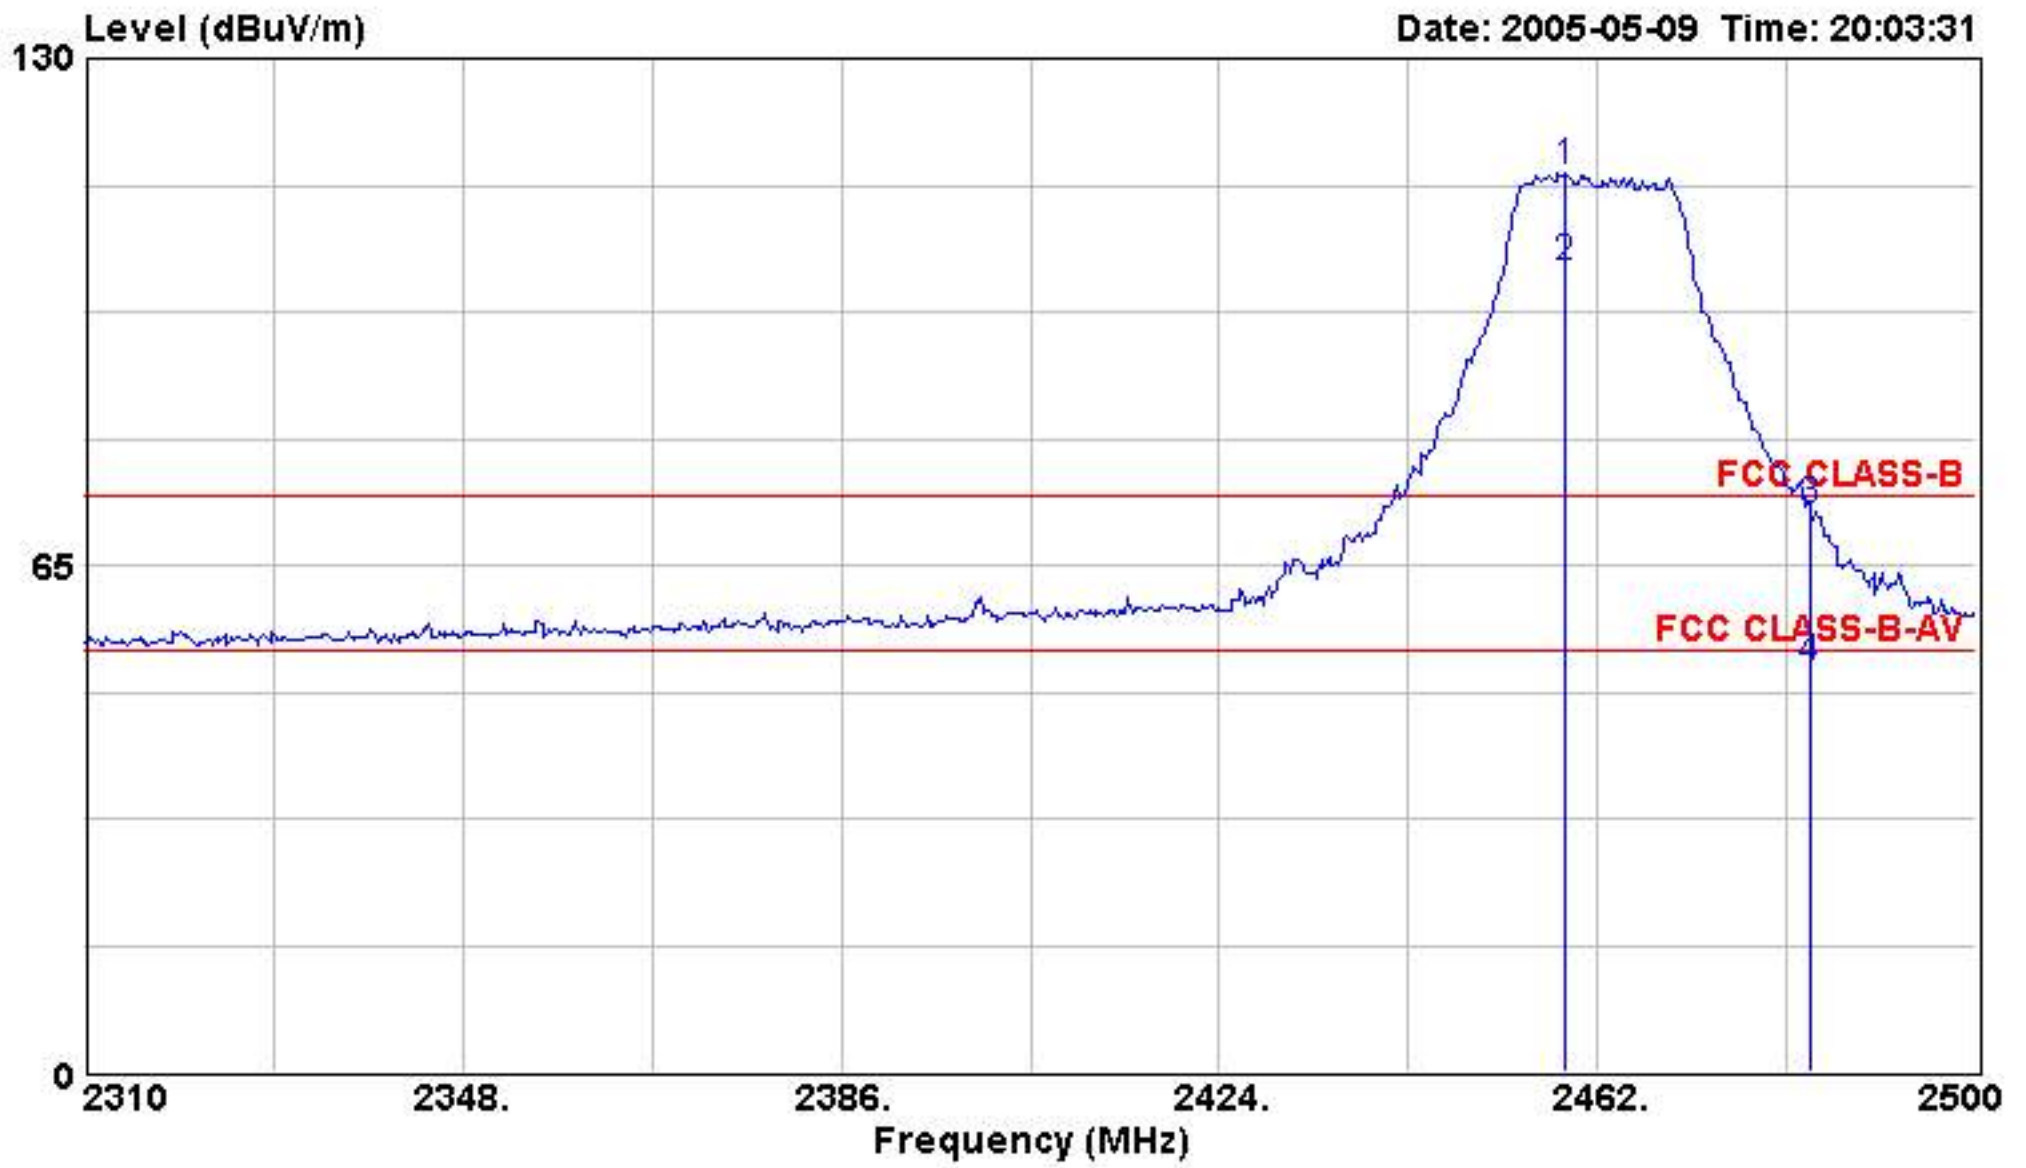


Site :03CHO3-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 54Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	2458.770	115.20	41.20	84.92	74.00	30.28	1.94	0.00	Peak
2	2458.770	102.88	48.88	72.60	54.00	30.28	1.94	0.00	Average
3	2483.500	71.70	-2.30	41.37	74.00	30.33	1.96	0.00	Peak
4	2483.500	51.83	-2.17	21.50	54.00	30.33	1.96	0.00	Average



Data#: 26

File#: D:\E3 Data\2005客戶\技嘉 NEW.EMI

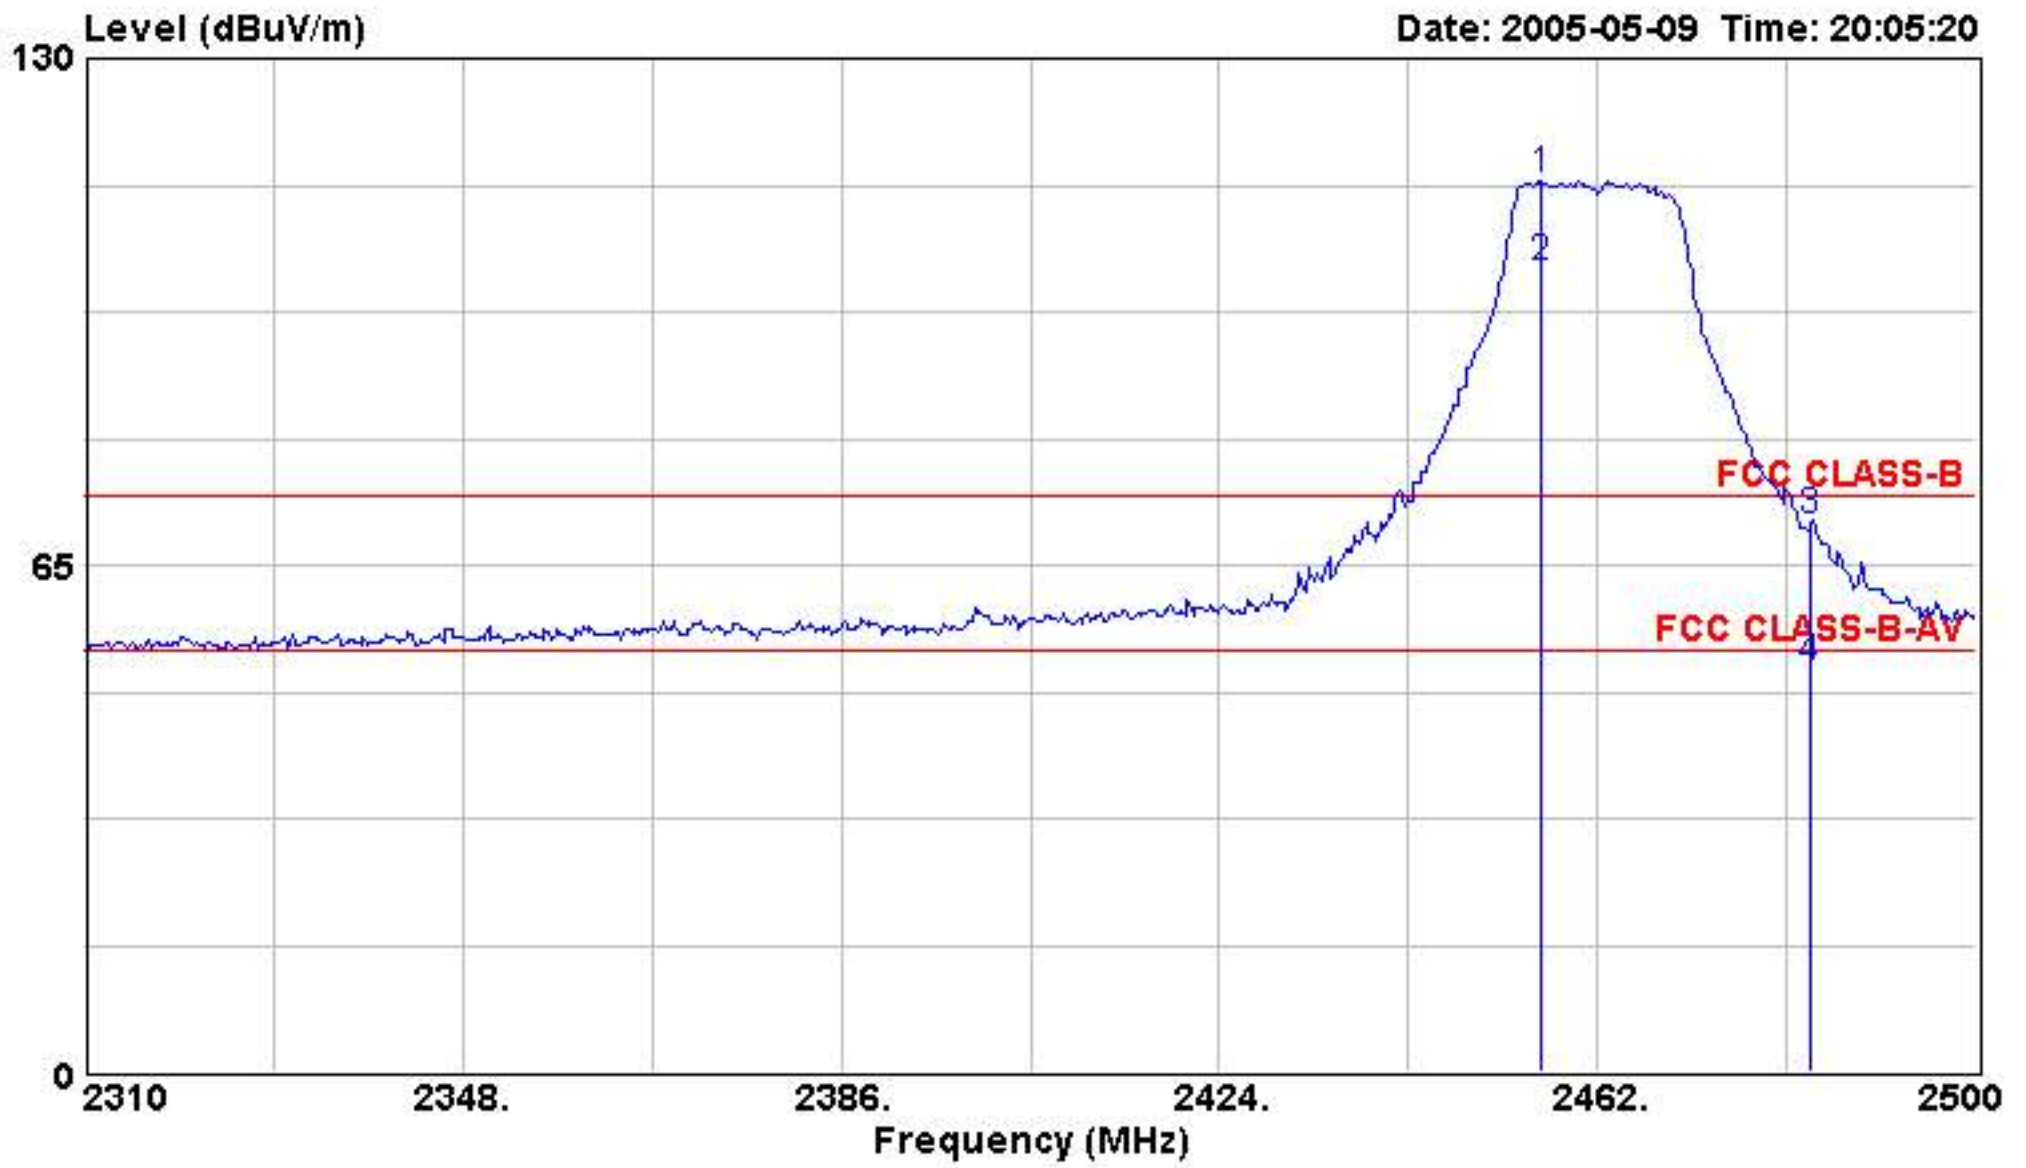


Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 48Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1 over	2456.300	114.30	40.30	84.02	74.00	30.28	1.94	0.00	Peak
2 over	2456.300	102.84	48.84	72.56	54.00	30.28	1.94	0.00	Average
3	2483.500	70.36	-3.64	40.03	74.00	30.33	1.96	0.00	Peak
4	2483.500	51.69	-2.31	21.36	54.00	30.33	1.96	0.00	Average




Data#: 27

File#: D:\E3 Data\2005客戶\技嘉 NEW.EMI

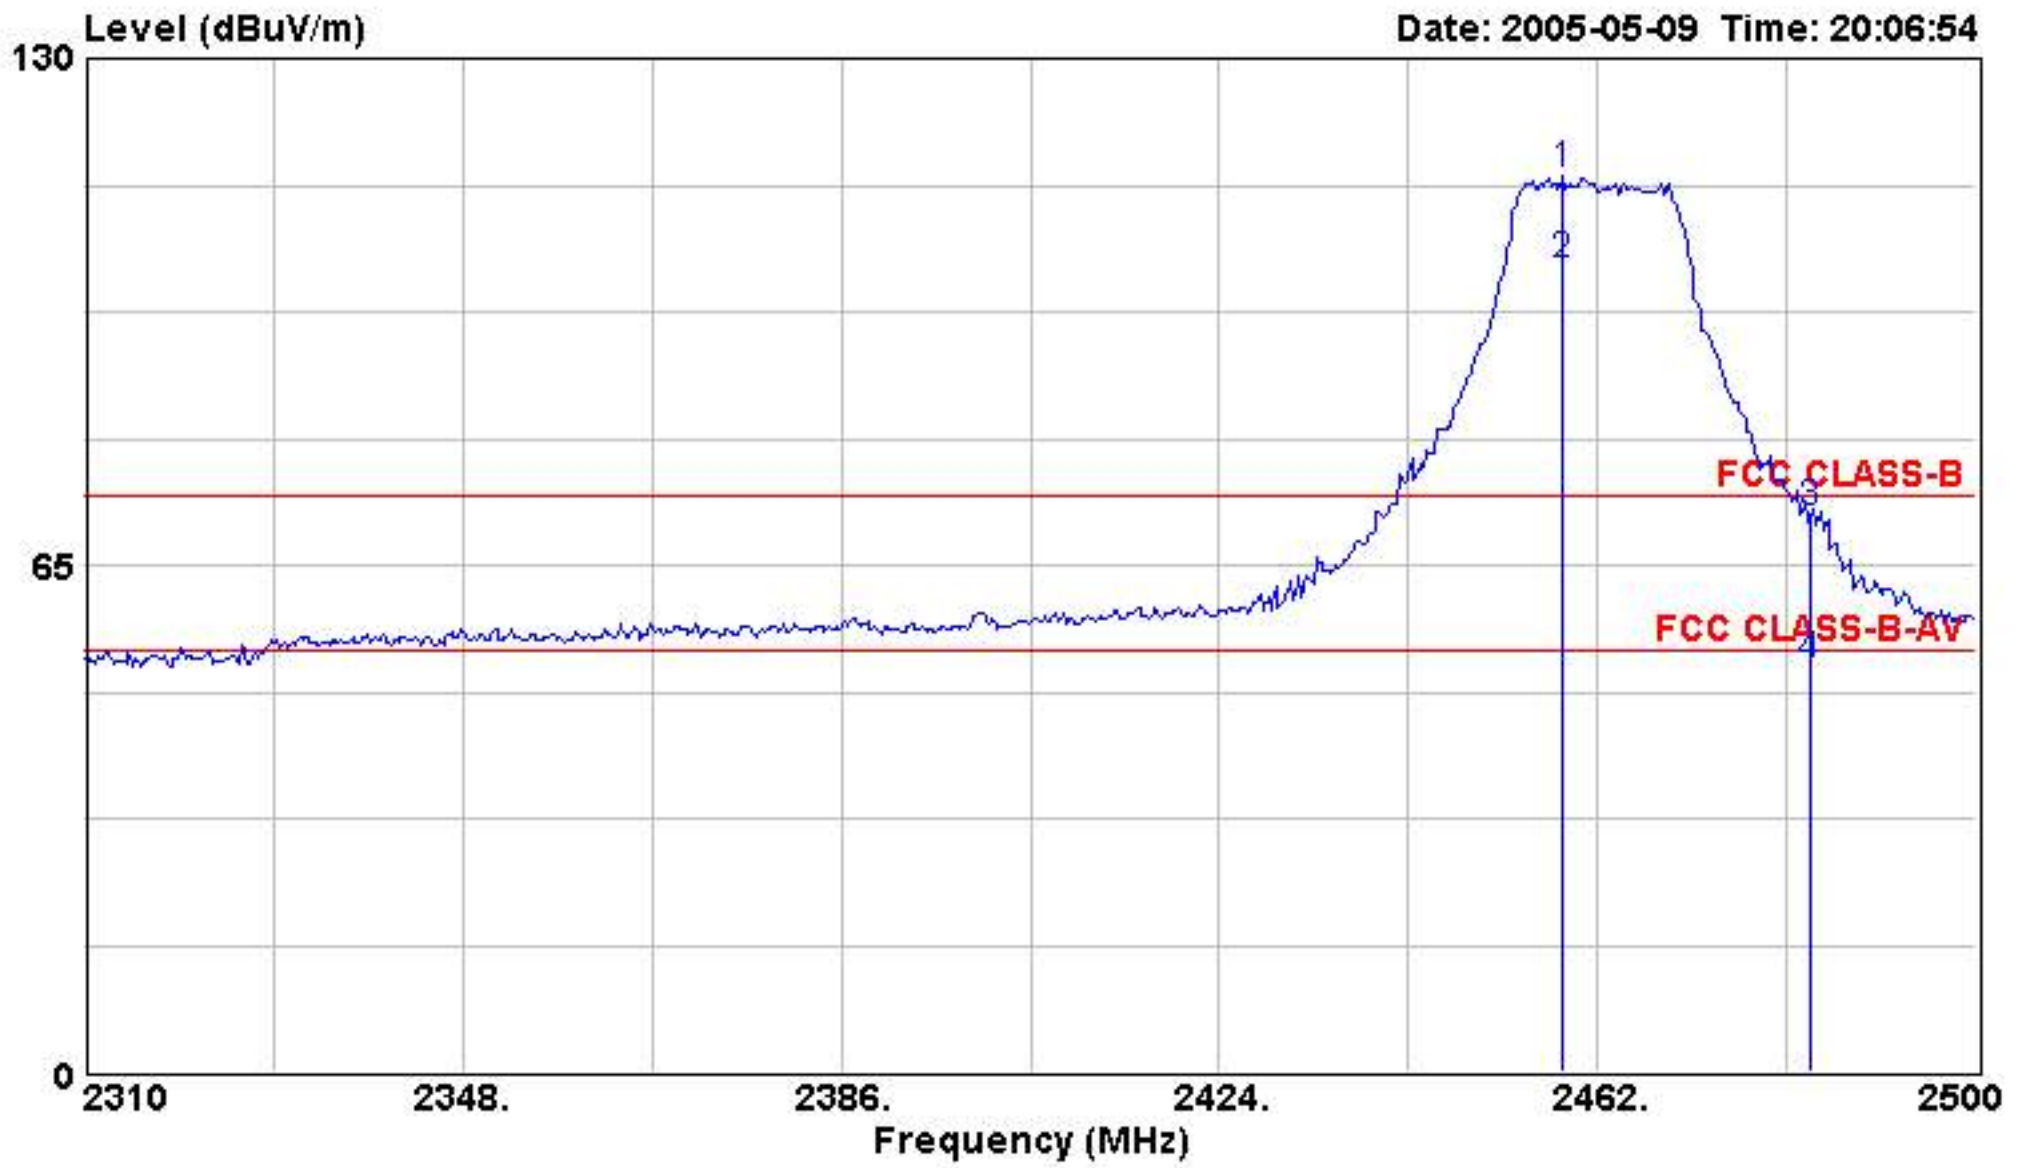


Site :03CHO3-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 36Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1 over	2458.580	114.95	40.95	84.67	74.00	30.28	1.94	0.00	Peak
2 over	2458.580	103.30	49.30	73.02	54.00	30.28	1.94	0.00	Average
3	2483.500	71.68	-2.32	41.35	74.00	30.33	1.96	0.00	Peak
4	2483.500	52.00	-2.00	21.67	54.00	30.33	1.96	0.00	Average

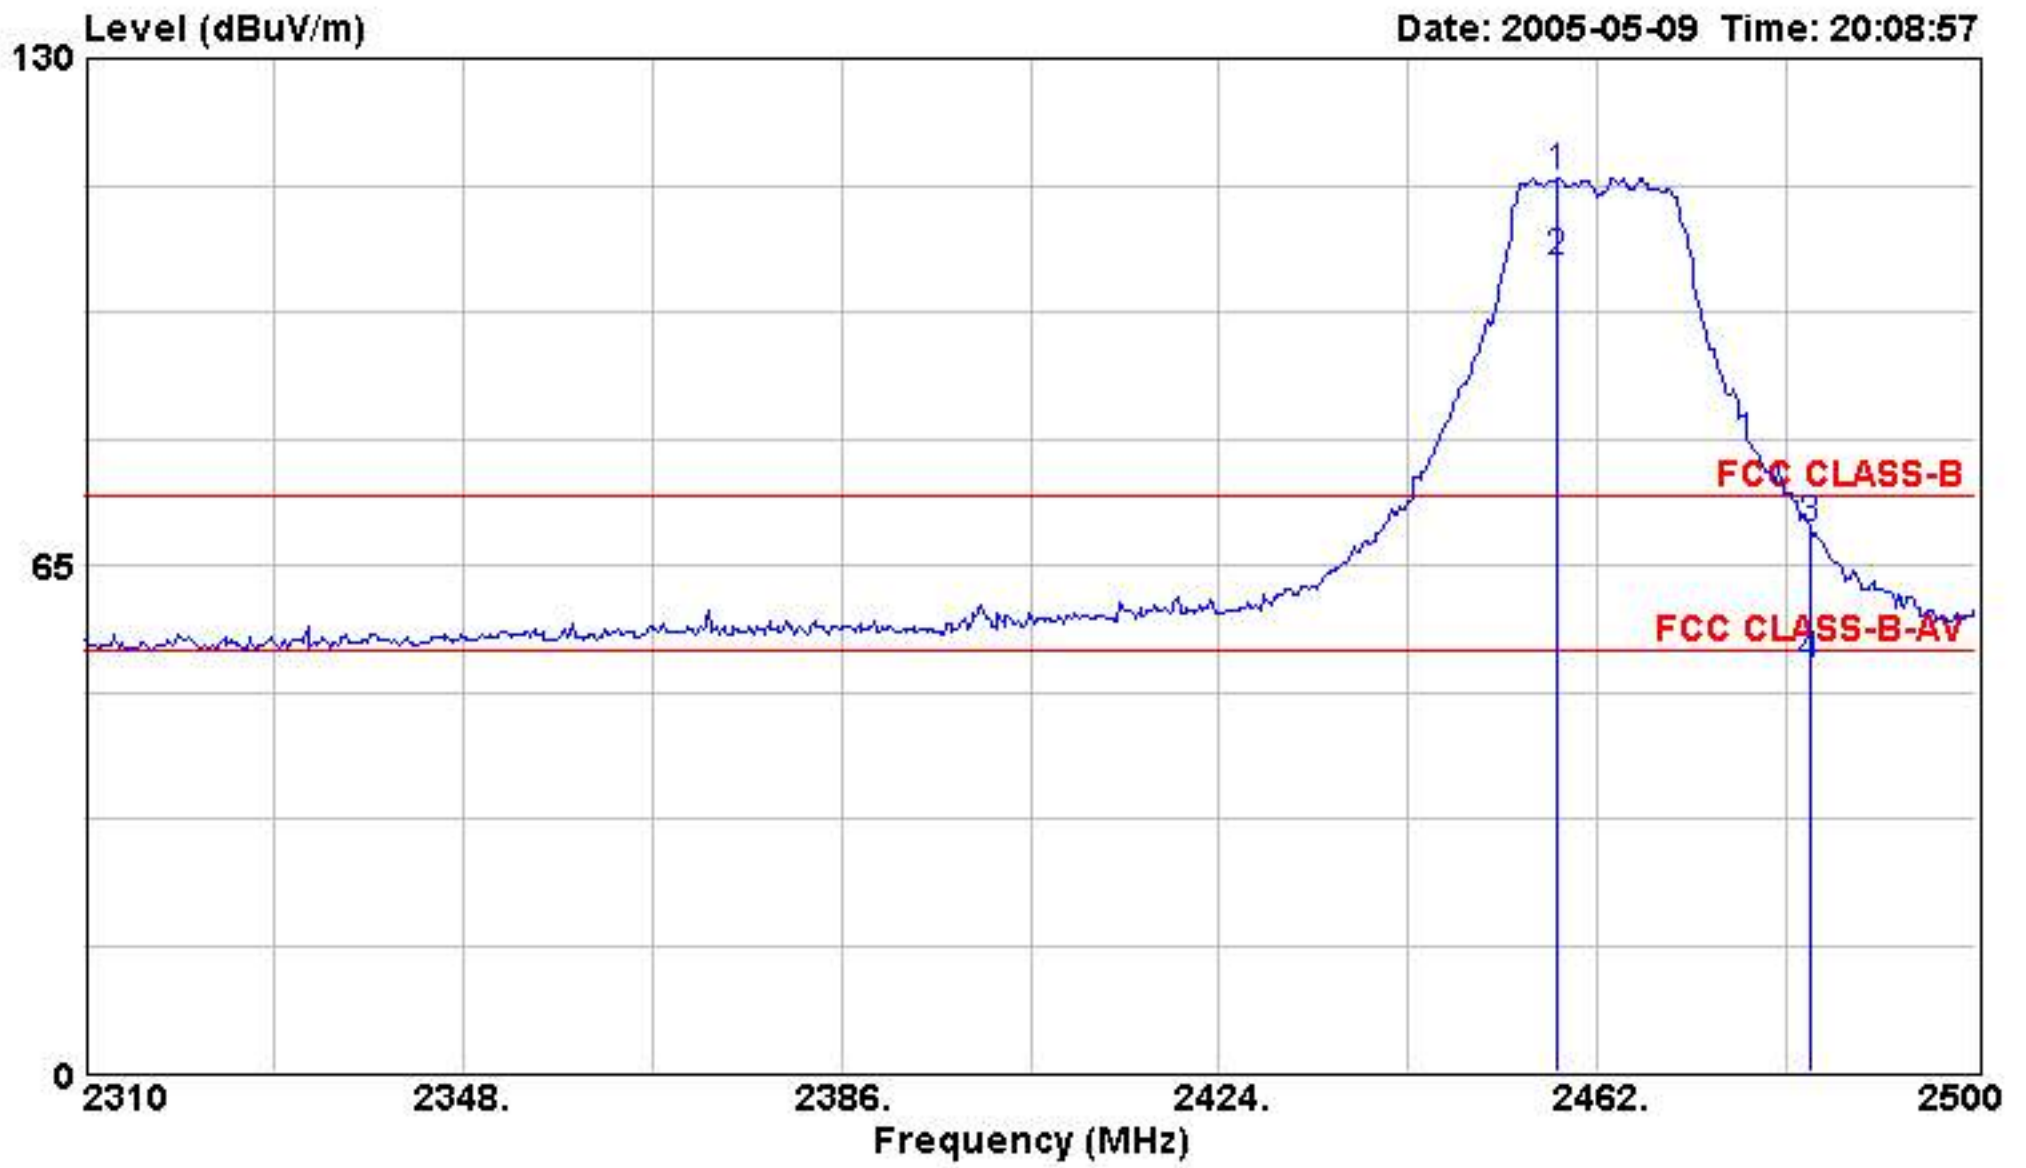


Site :03CHO3-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 24Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBuV	dBUV/m	dB	dB	dB	
1 over	2458.010	114.71	40.71	84.43	74.00	30.28	1.94	0.00	Peak
2 over	2458.010	103.55	49.55	73.27	54.00	30.28	1.94	0.00	Average
3	2483.500	69.46	-4.54	39.13	74.00	30.33	1.96	0.00	Peak
4	2483.500	51.86	-2.14	21.53	54.00	30.33	1.96	0.00	Average

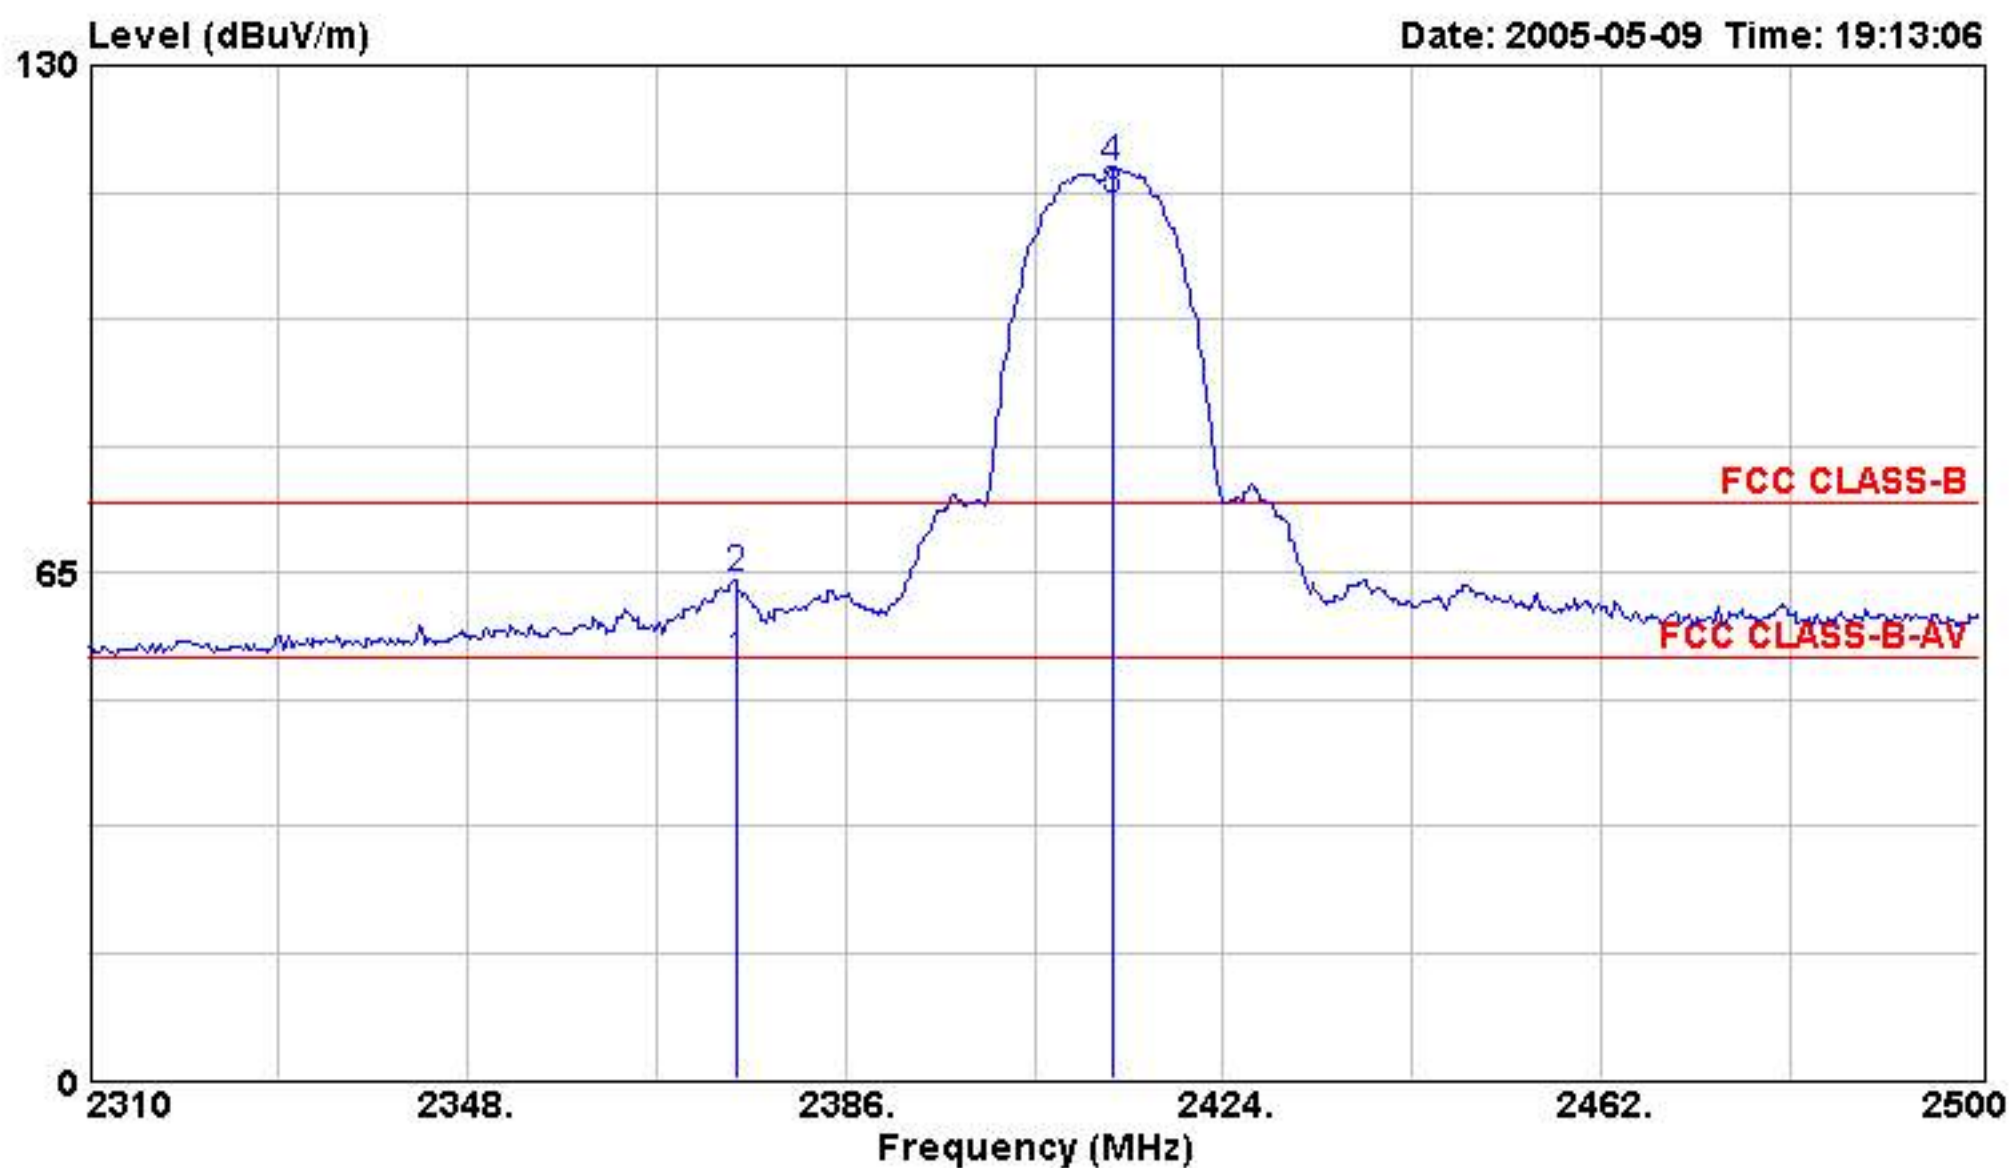

Site :03CHO3-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH01 2412MHz 11b
 :data rate 1Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV	dBUV/m	dB	dB	dB	
1	2374.980	52.94	-1.06	22.85	54.00	30.09	1.90	0.00	Average
2	2374.980	64.12	-9.88	34.03	74.00	30.09	1.90	0.00	Peak
3 @	2412.980	112.47	58.47	82.30	54.00	30.17	1.92	0.00	Average
4 over	2412.980	116.80	42.80	86.63	74.00	30.17	1.92	0.00	Peak

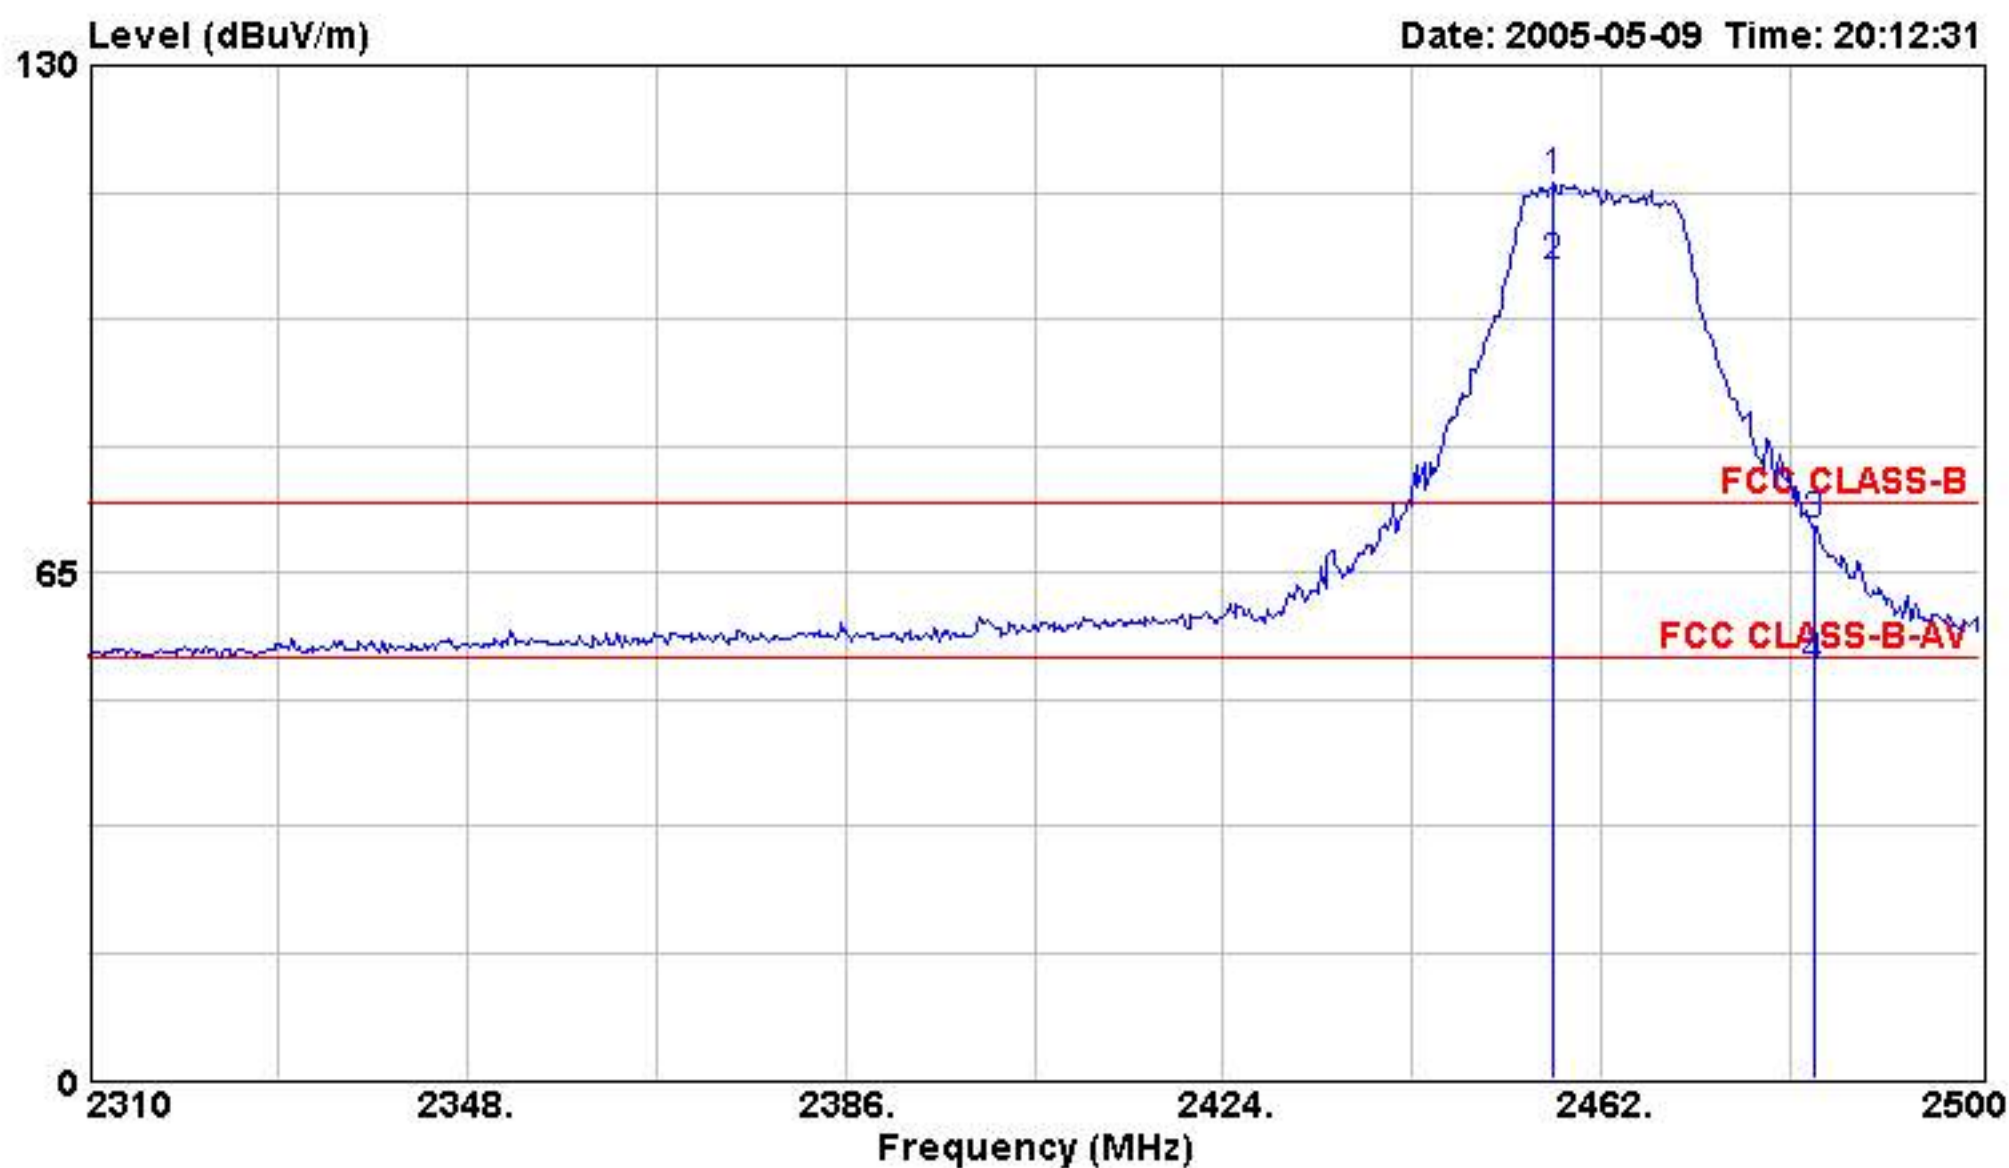


Site :03CHO3-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 12Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	2457.060	114.92	40.92	84.64	74.00	30.28	1.94	0.00	Peak
2	2457.060	104.01	50.01	73.73	54.00	30.28	1.94	0.00	Average
3	2483.500	70.88	-3.12	40.55	74.00	30.33	1.96	0.00	Peak
4	2483.500	52.62	-1.38	22.29	54.00	30.33	1.96	0.00	Average




Data#: 31

File#: D:\E3 Data\2005客戶\技嘉 NEW.EMI

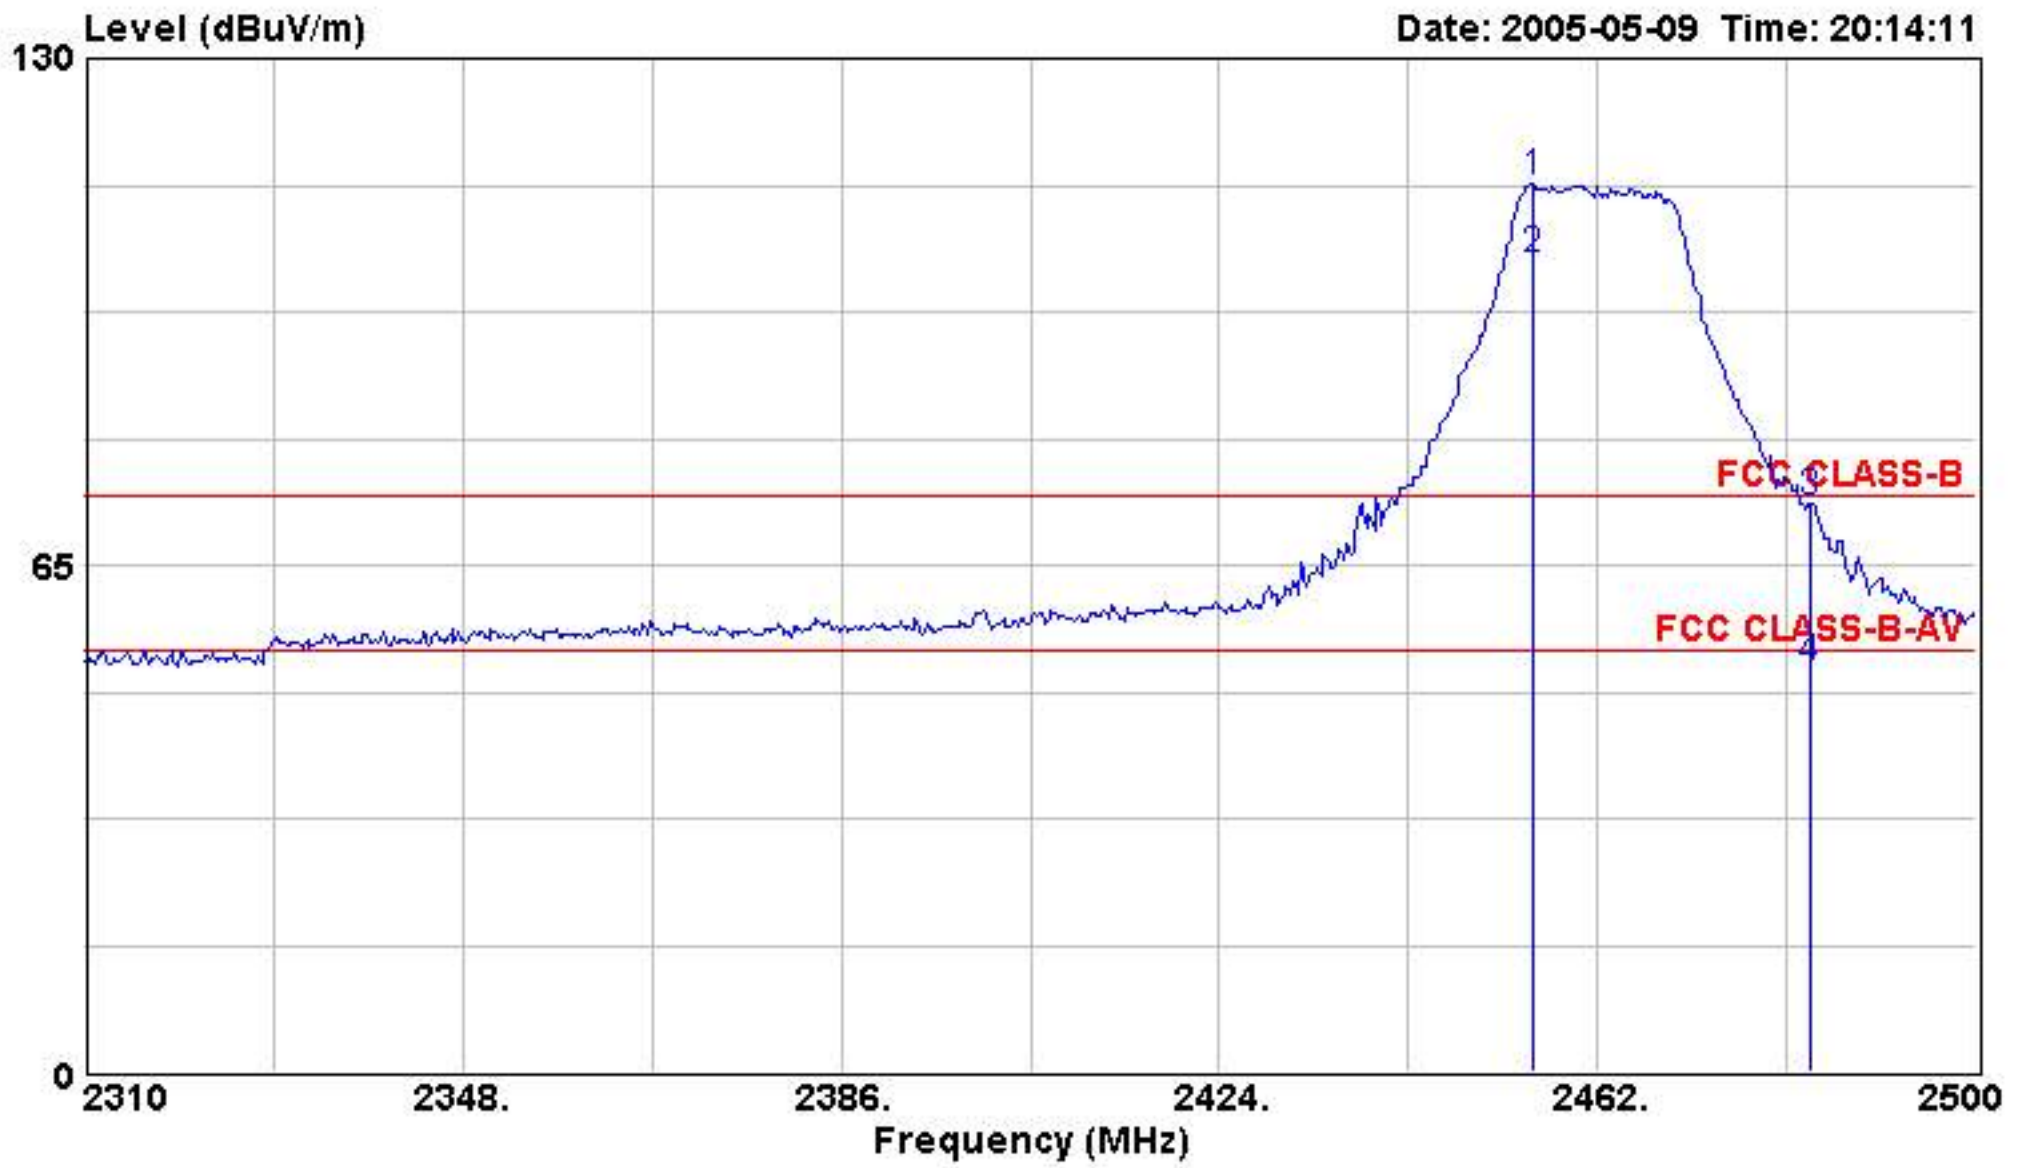

Site :03CHO3-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 9Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1 over	2455.540	113.96	39.96	83.68	74.00	30.28	1.94	0.00	Peak
2 over	2455.540	103.97	49.97	73.69	54.00	30.28	1.94	0.00	Average
3	2483.500	72.95	-1.05	42.62	74.00	30.33	1.96	0.00	Peak
4	2483.500	51.70	-2.30	21.37	54.00	30.33	1.96	0.00	Average

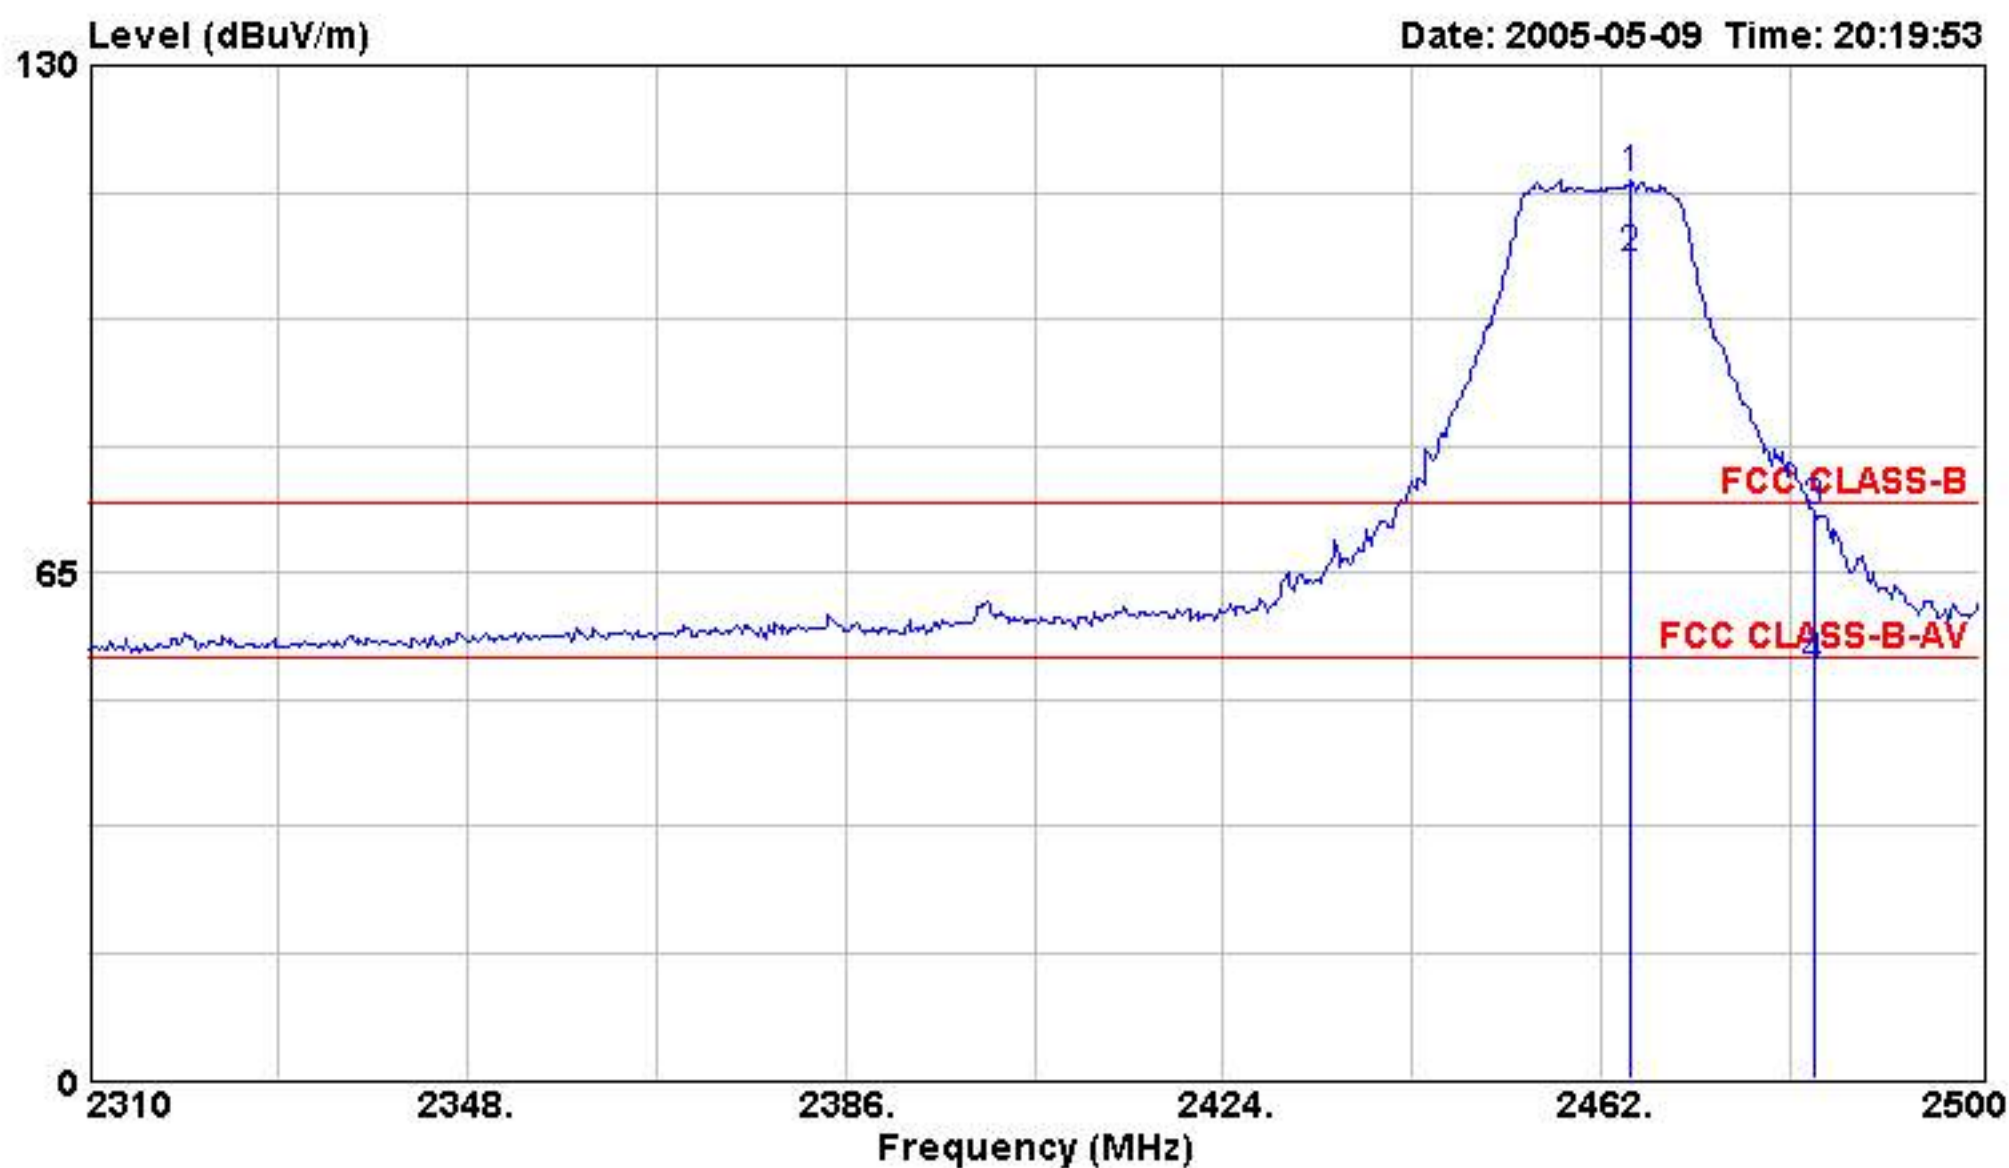


Site :03CHO3-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH11 2462MHz 11g
 :data rate 6Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	2464.850	115.27	41.27	84.99	74.00	30.28	1.94	0.00	Peak
2	2464.850	104.93	50.93	74.65	54.00	30.28	1.94	0.00	Average
3	2483.500	72.37	-1.63	42.04	74.00	30.33	1.96	0.00	Peak
4	2483.500	52.80	-1.20	22.47	54.00	30.33	1.96	0.00	Average



Data#: 9

File#: D:\E3 Data\2005客戶\技嘉 NEW.EMI

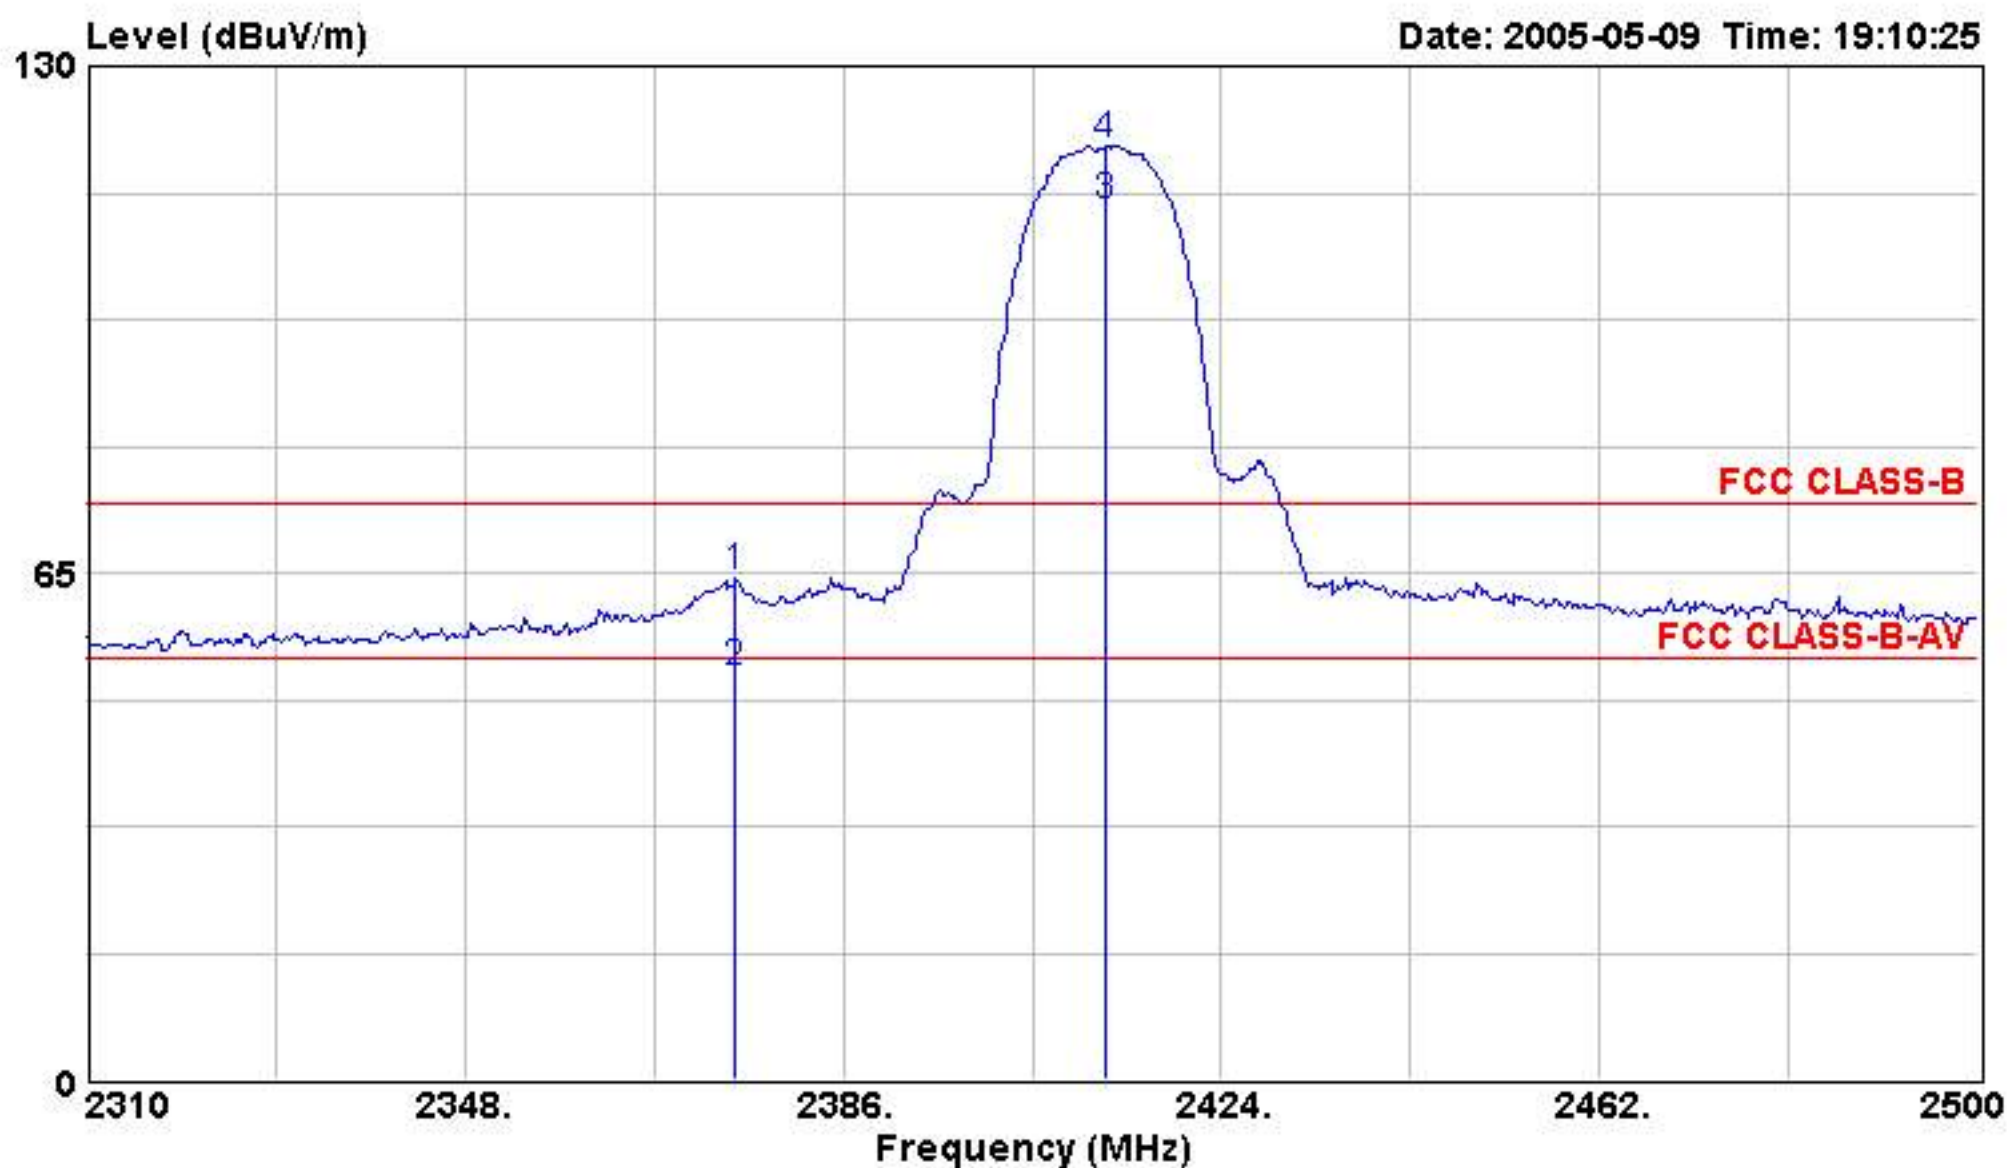

Site :03CH03-HY
 Condition:FCC CLASS-B 3m HORN-ANT-6741-200505 VERTICAL
 EUT :PCI Card
 Power :For system
 Model :
 Memo :TX CH01 2412MHz 11b
 :data rate 11Mbps

	Freq	Level	Over Limit	Read Level	Limit Line	Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB	dB	dB	
1	2375.170	64.49	-9.51	34.40	74.00	30.09	1.90	0.00	Peak
2	2375.170	52.00	-2.00	21.91	54.00	30.09	1.90	0.00	Average
3 @	2412.410	111.97	57.97	81.80	54.00	30.17	1.92	0.00	Average
4 over	2412.410	119.88	45.88	89.71	74.00	30.17	1.92	0.00	Peak