


Occupied Bandwidth

RESULTS:


	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
99% Bandwidth (MHz)	2.6789	2.6810	2.6810
Measurement Uncertainty (kHz)	<±6.18		

Verdict: PASS


- Low Channel:

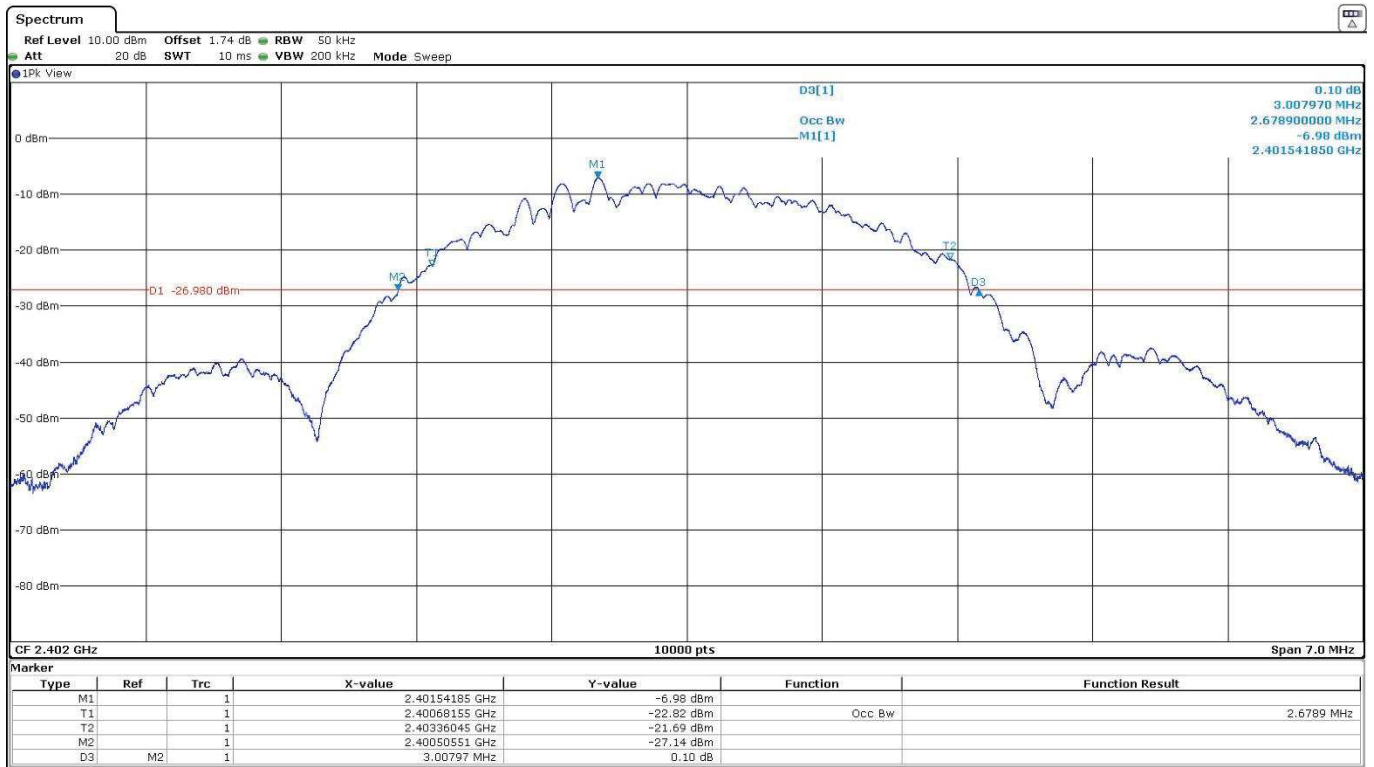

- Middle Channel:

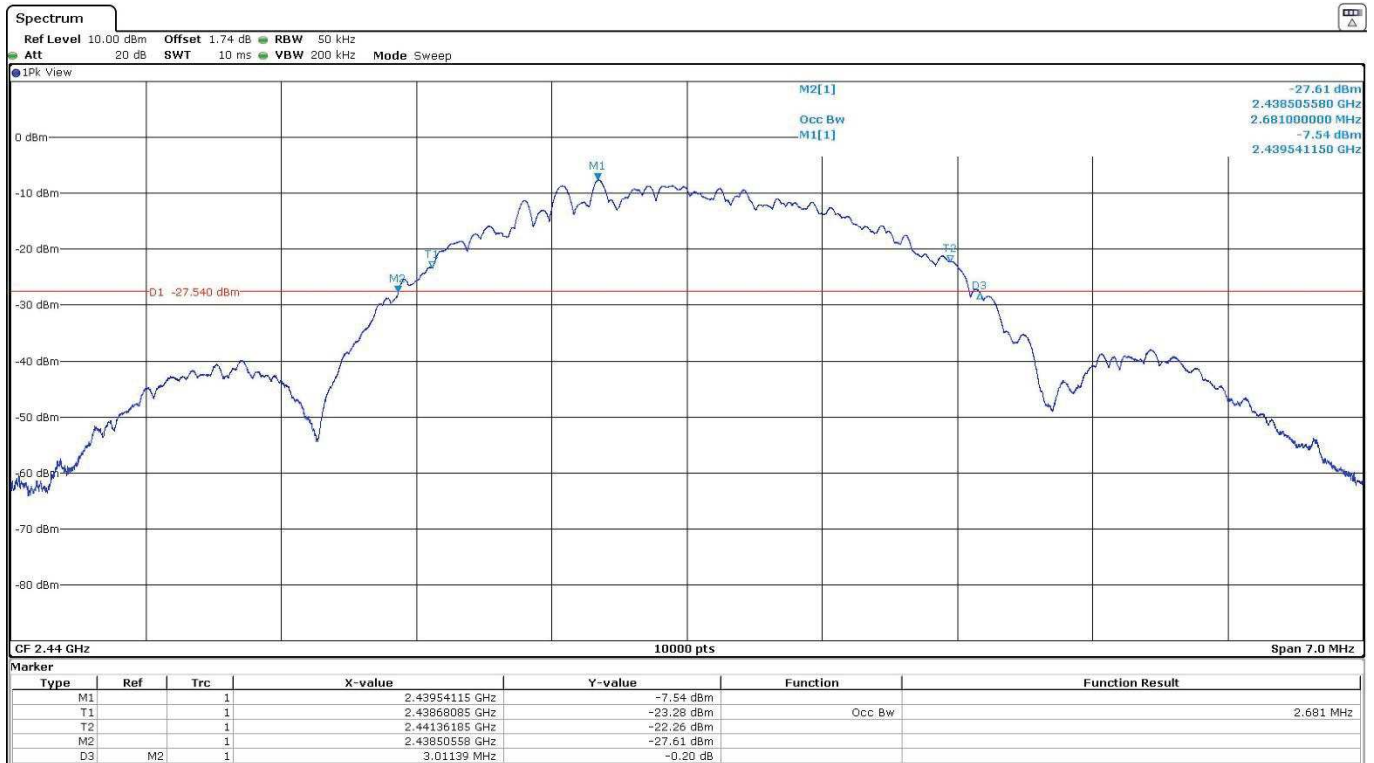

- High Channel:

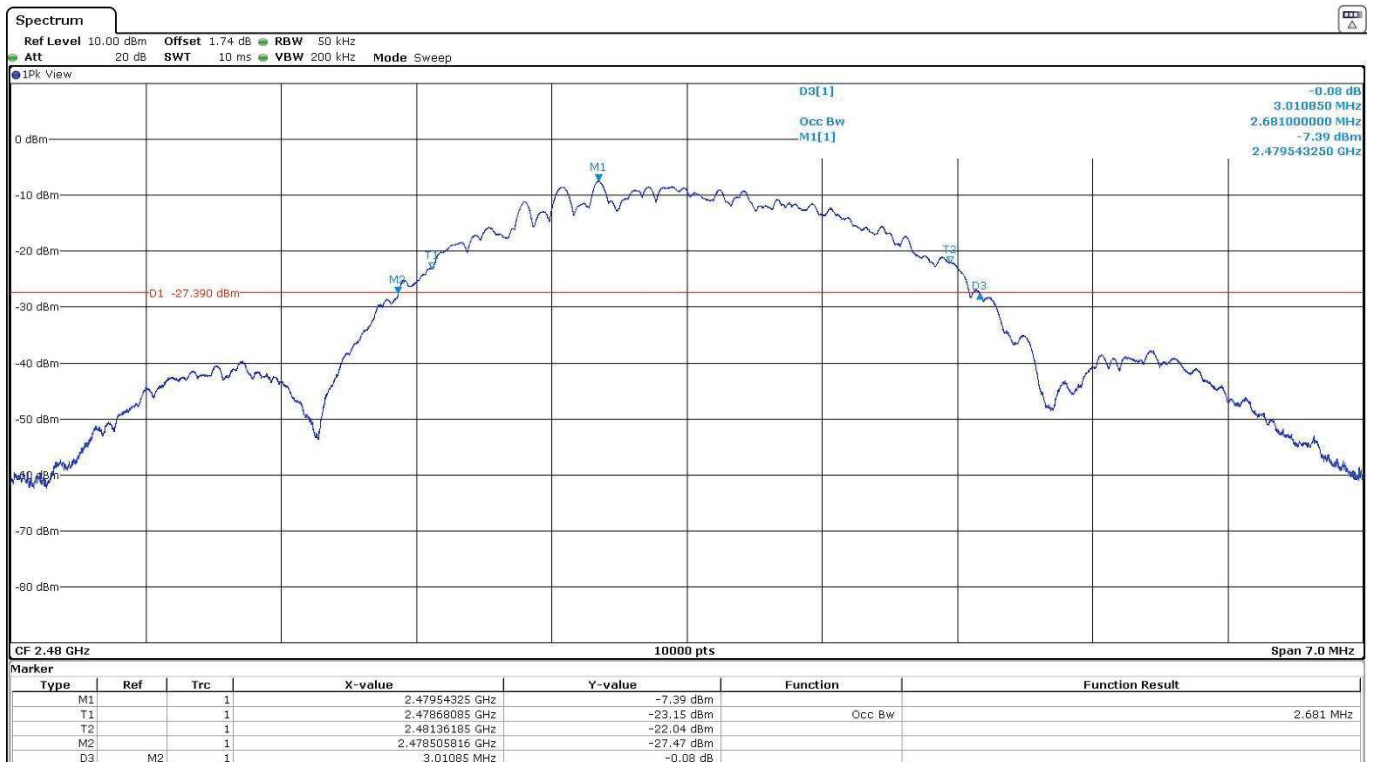

15.249 (a) / RSS-210 B.10 (a) Field strength of fundamental and harmonics emissions

SPECIFICATION:

The field strength of emissions from intentional radiators shall comply with the following

Fundamental frequency (MHz)	Field strength of fundamental (mV/m)	Field strength (dB μ V/m)	Measurement distance (m)
902 - 928	50	93.98	3
2400 – 2483.5	50	93.98	3
5725 - 5875	50	93.98	3
24000-24250	250	107.96	3


For frequencies above 1000 MHz, the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

RESULTS:


	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
Average Field Strength (dB μ V/m)	72.30	73.75	71.37
Peak Field Strength (dB μ V/m)	73.48	74.74	72.68
Measurement Uncertainty (dB)	± 4.11		

Verdict: PASS


- Low Channel:

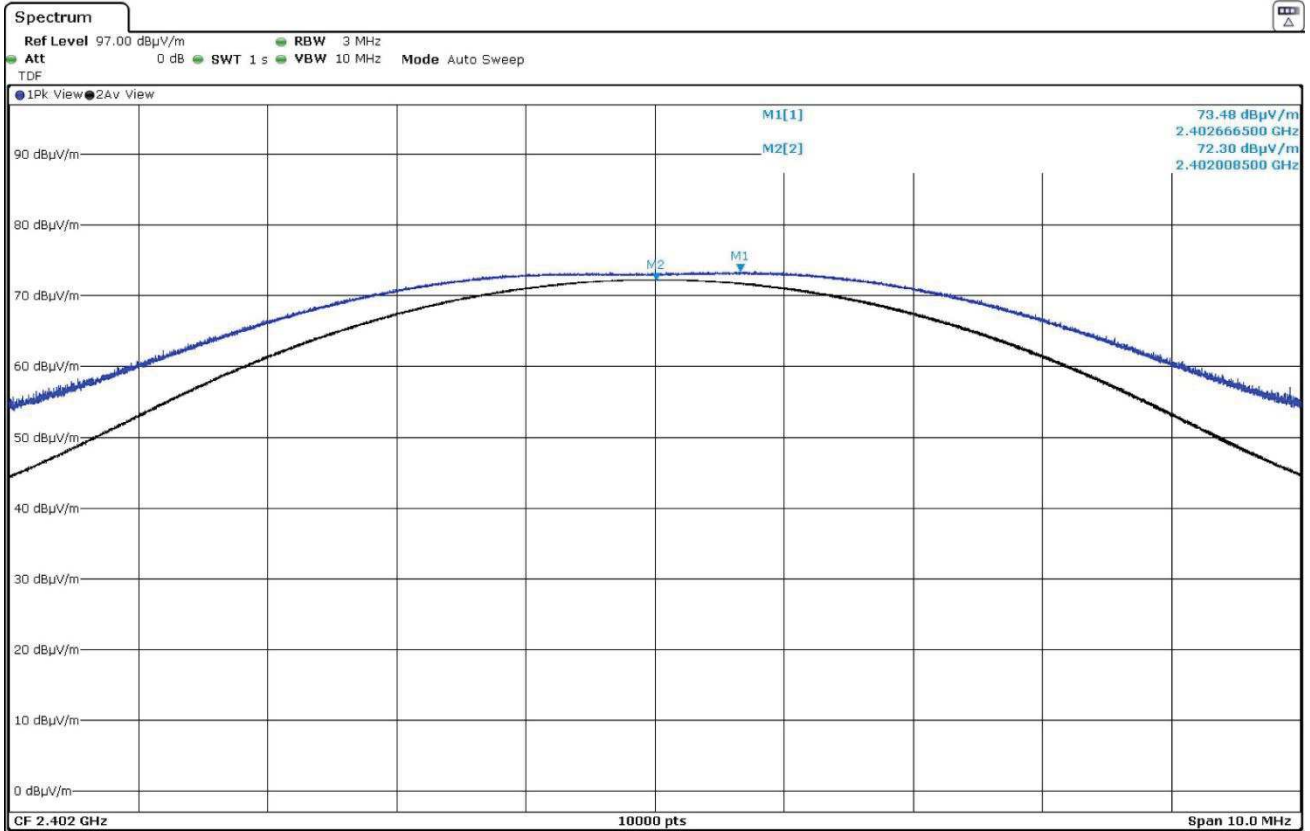

- Middle Channel:

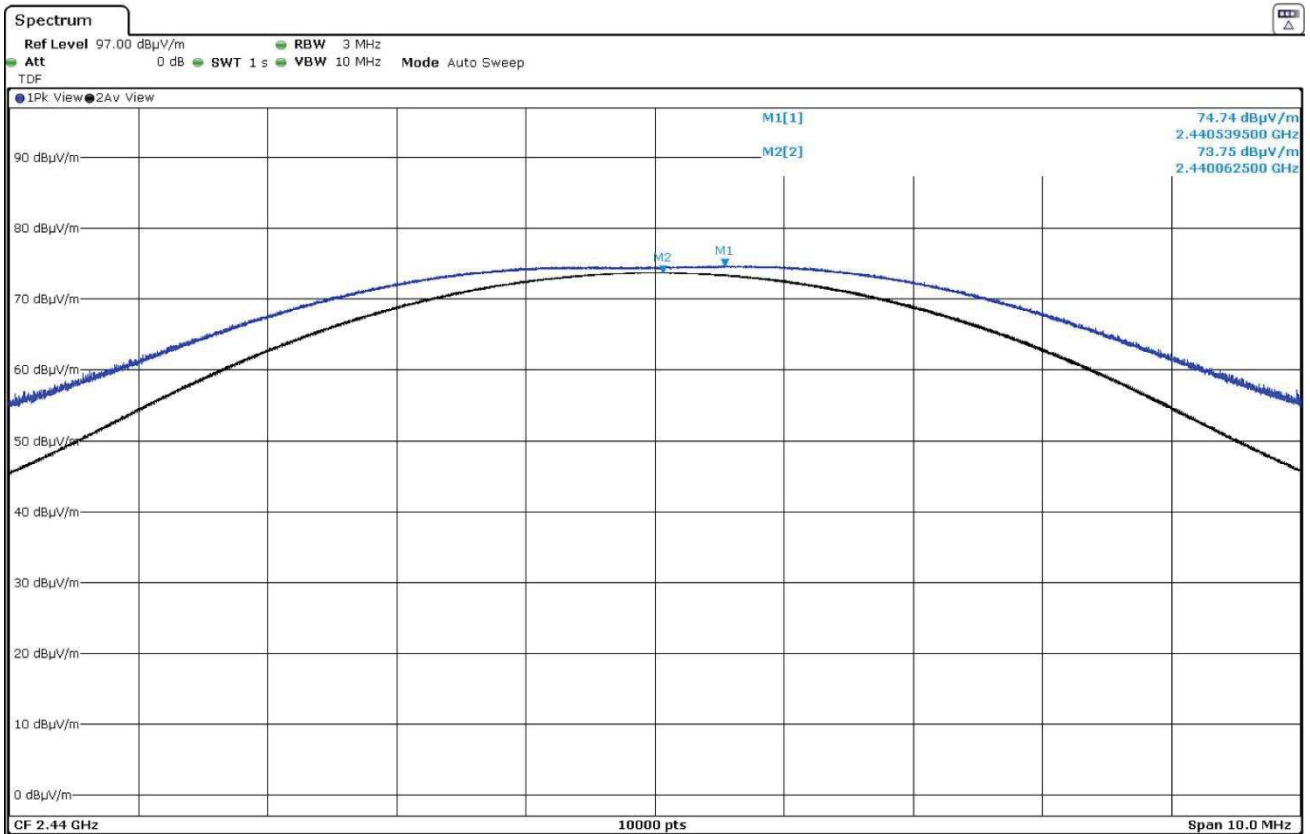

- High Channel:

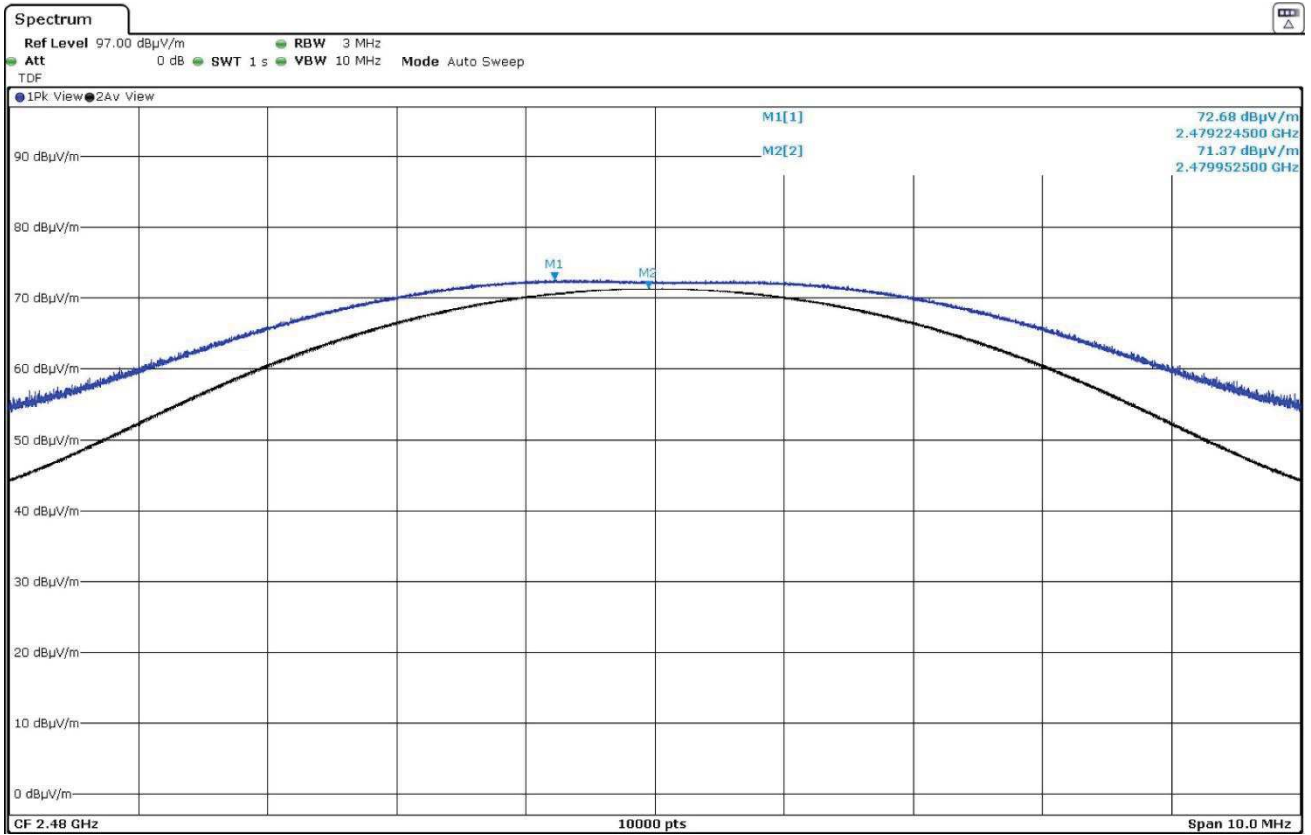

15.249 (d) / RSS-210 B.10 (b) Emissions radiated outside of the specific frequency bands

SPECIFICATION:

The field strength of harmonics from intentional radiators shall comply with the following

Fundamental frequency (MHz)	Field strength of harmonics ($\mu\text{V/m}$)	Field strength of harmonics ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
902 - 928	500	54	3
2400 – 2483.5	500	54	3
5725 - 5875	500	54	3
24000-24250	2500	67.96	3

Emissions radiated outside of the specific frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of fundamental or to the general radiated emission limits specified in section 15.209:

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

Whichever is the lesser attenuation.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-17 GHz and at distance of 1 m for the frequency range 17 GHz-26 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz - 1 GHz:

The spurious signals detected do not depend on the operating channel.

No spurious frequencies detected at less than 20 dB below the limit.

Measurement Uncertainty (dB) $<\pm 5.17$

Frequency range 1 - 26 GHz:

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots).

Spurious signals with peak levels above the average limit (54 dB μ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

Duty cycle correction +3.01 dB


No spurious frequencies detected at less than 20 dB below the limit.

Measurement Uncertainty:	1-3 GHz	$<\pm 4.11$ dB
	3-17 GHz	$<\pm 5.13$ dB
	17-26 GHz	$<\pm 4.81$ dB

Verdict: PASS

FREQUENCY RANGE 30 MHz - 1 GHz


The spurious frequencies detected do not depend on the operating channel.

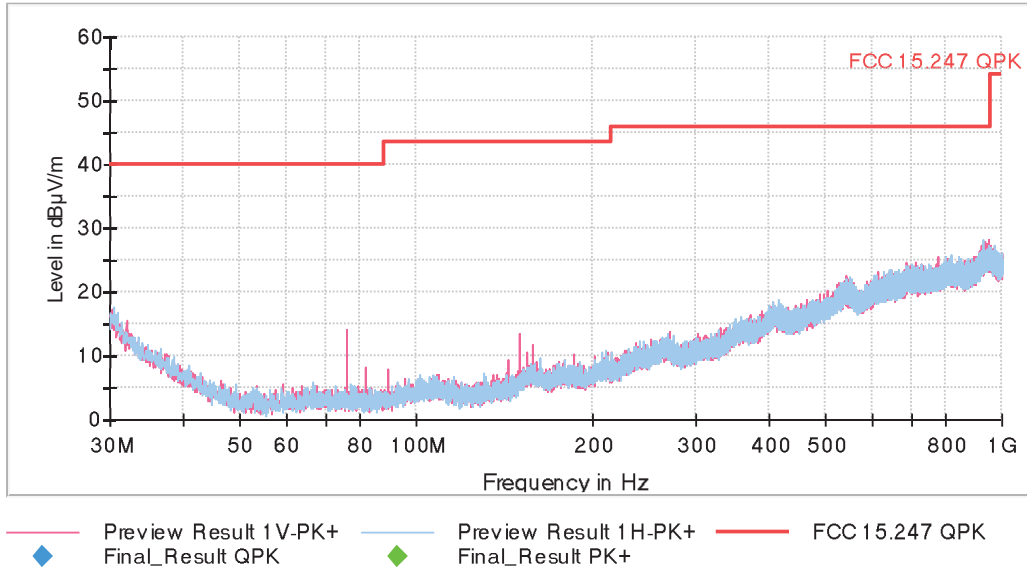

This plot is valid for the Low, Middle and High Channels.


FREQUENCY RANGE 1 - 3 GHz

- Low Channel:

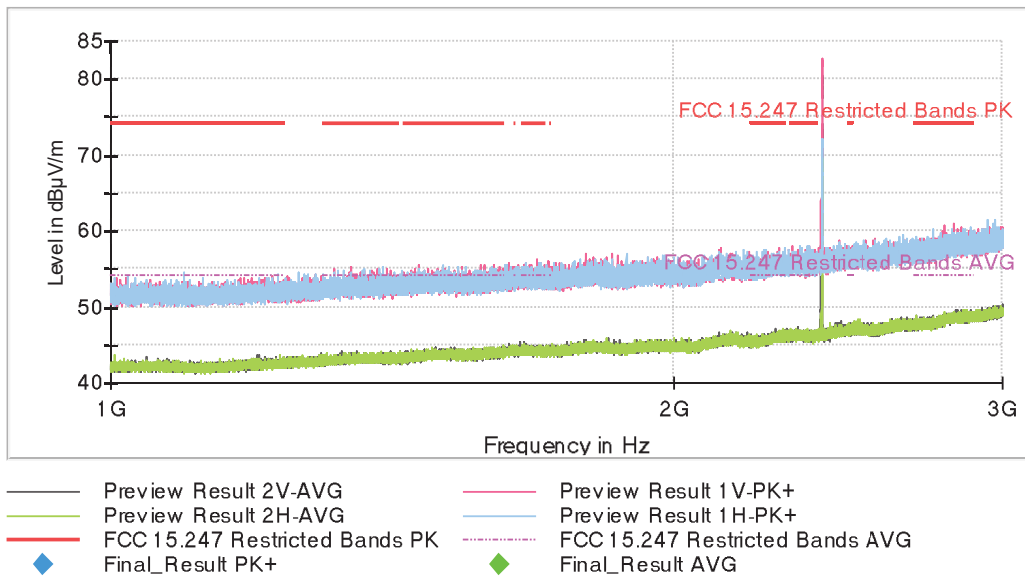


The peak above the limit is the carrier frequency.

- Middle Channel:

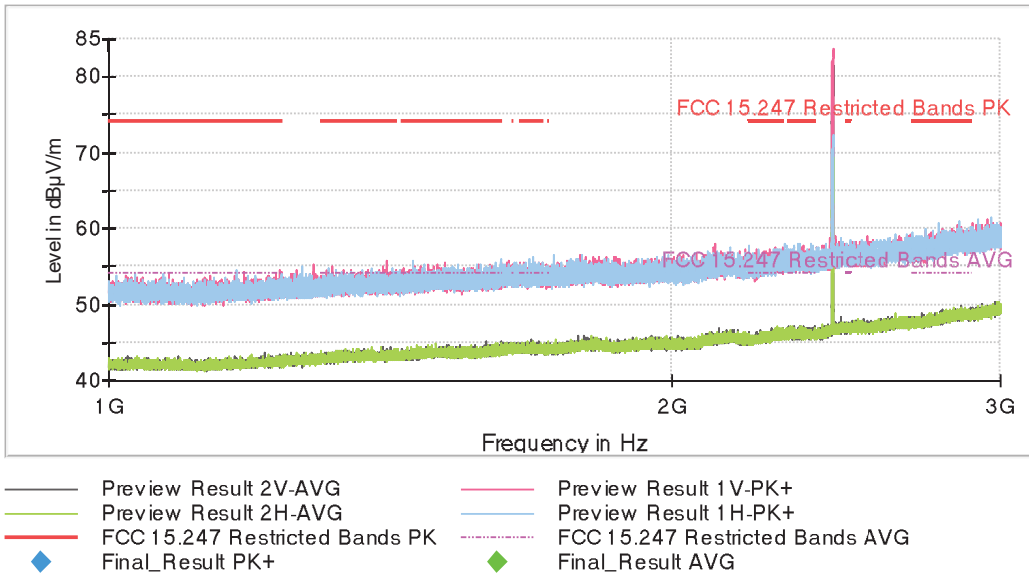

The peak above the limit is the carrier frequency.


- High Channel:

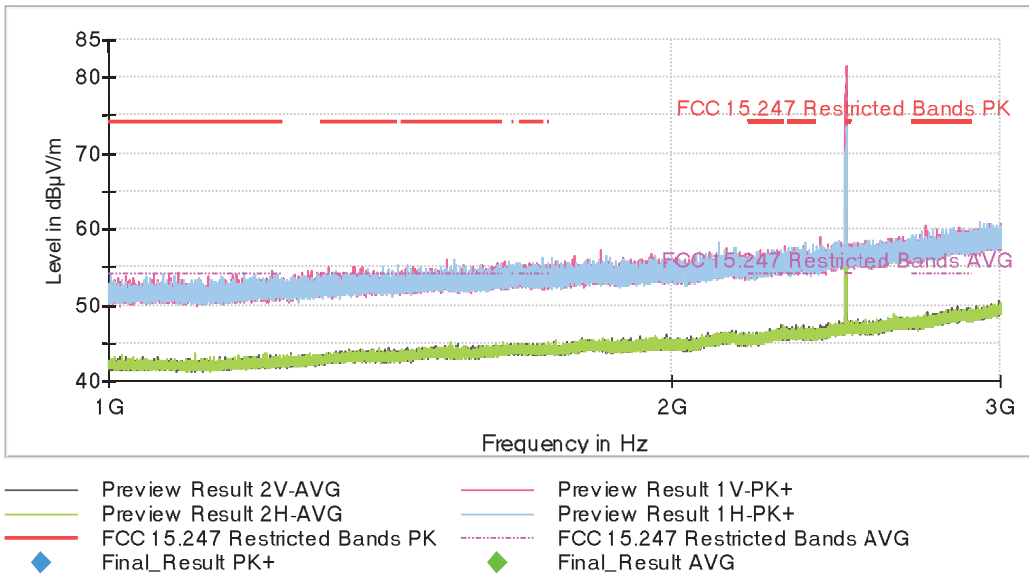


The peak above the limit is the carrier frequency.

FREQUENCY RANGE 3 - 17 GHz


- Low Channel:

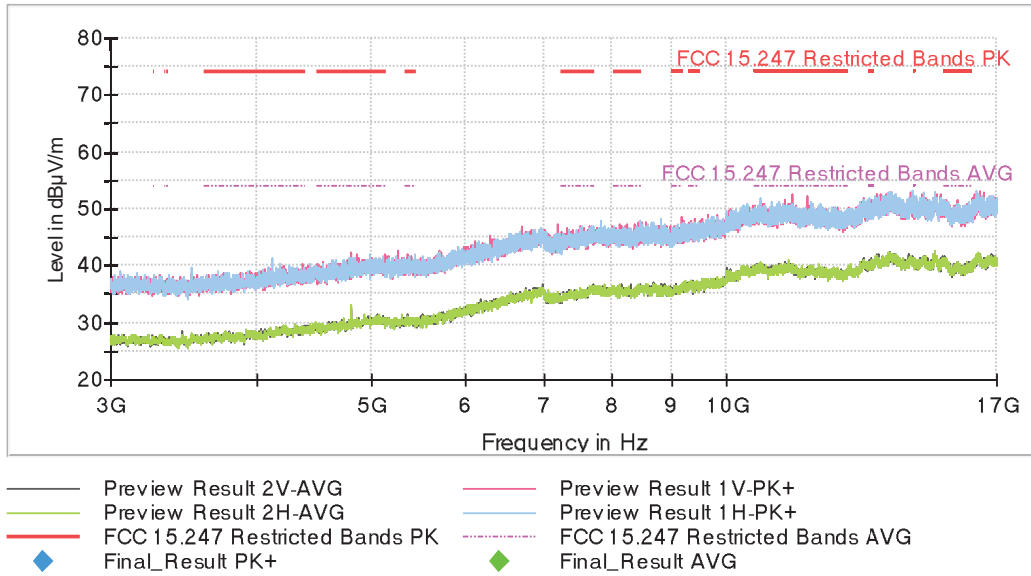

- Middle Channel:

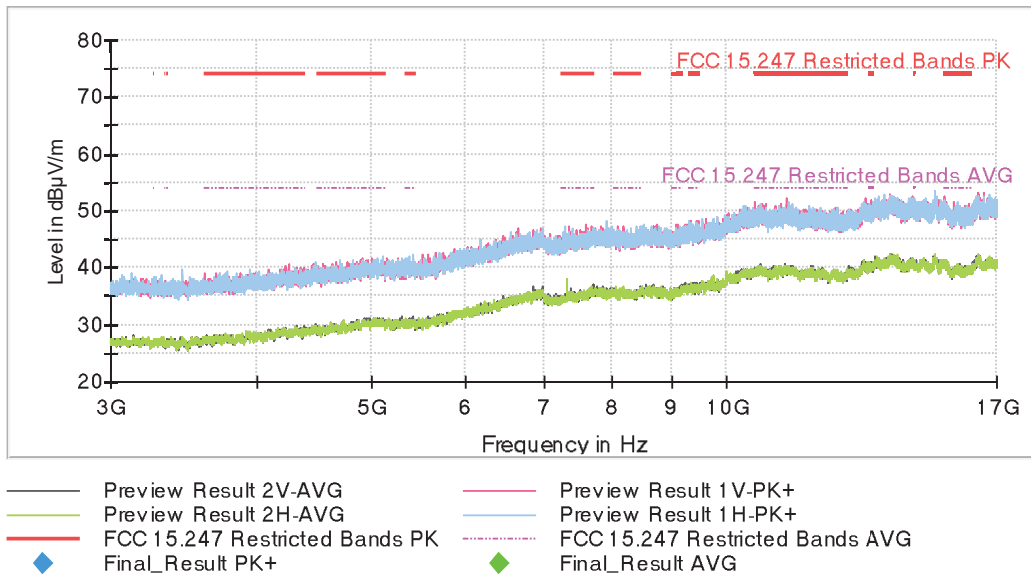


- High Channel:

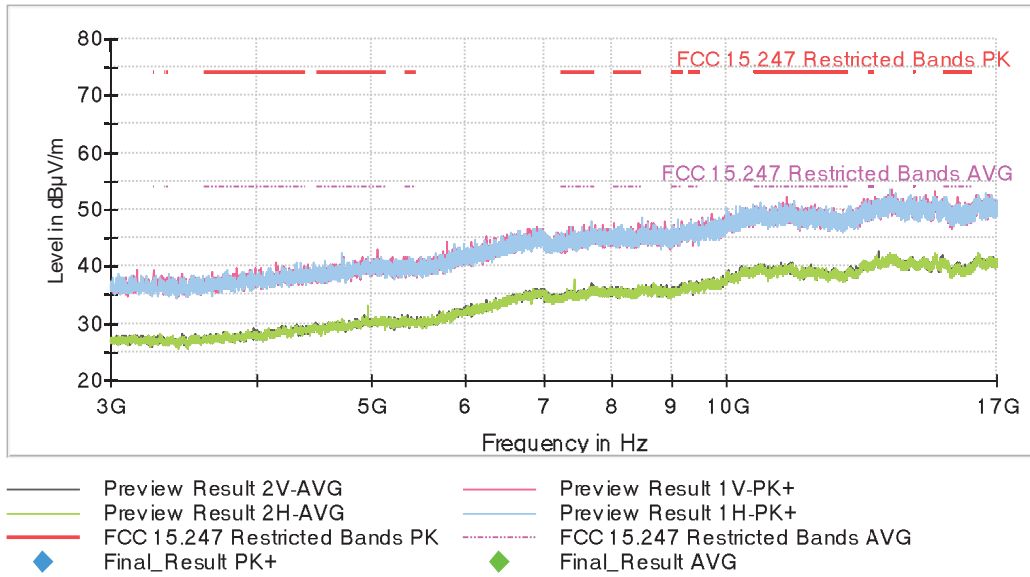

FREQUENCY RANGE 17 - 26 GHz

The spurious frequencies detected do not depend on the operating channel.

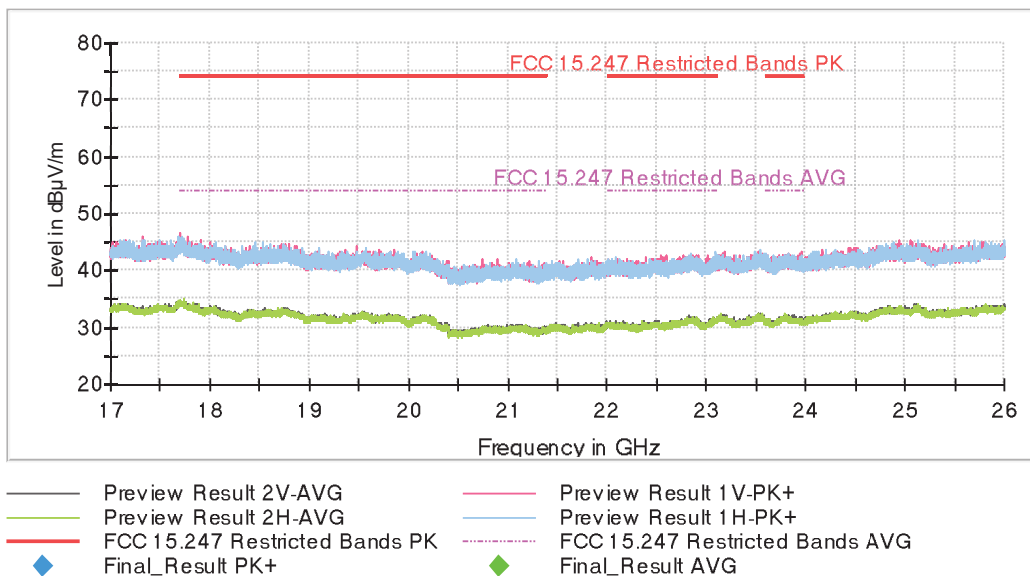


This plot is valid for the Low, Middle and High Channels.

FREQUENCY RANGE 2.31-2.39 GHZ


- Low Channel:

Full Spectrum

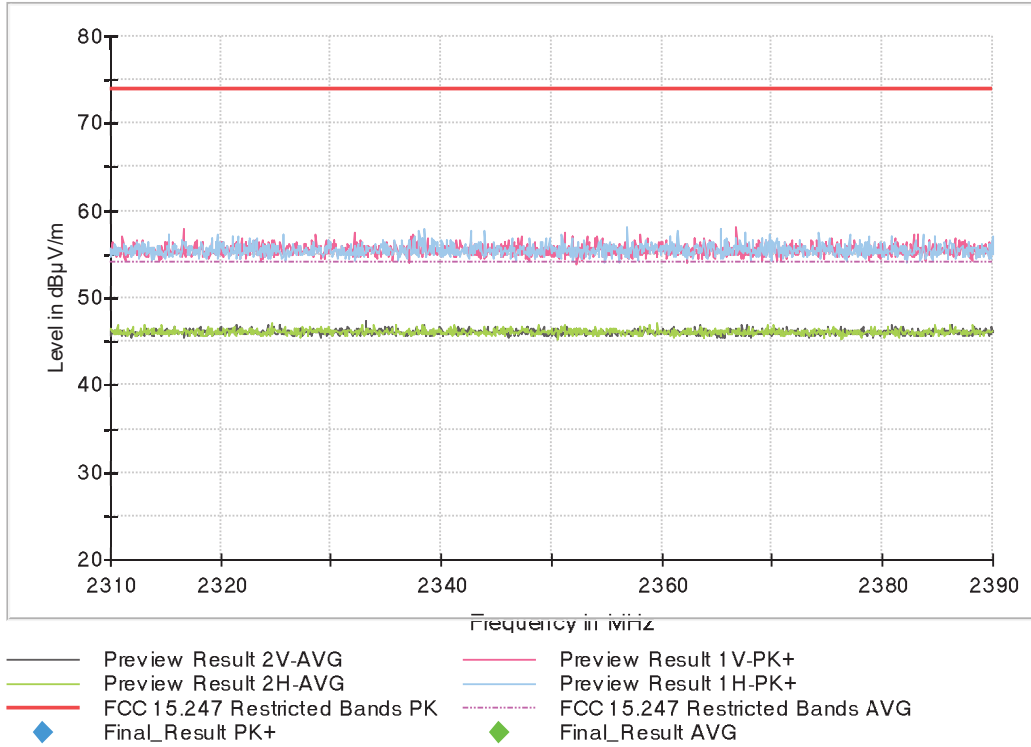


- Middle Channel:

Full Spectrum

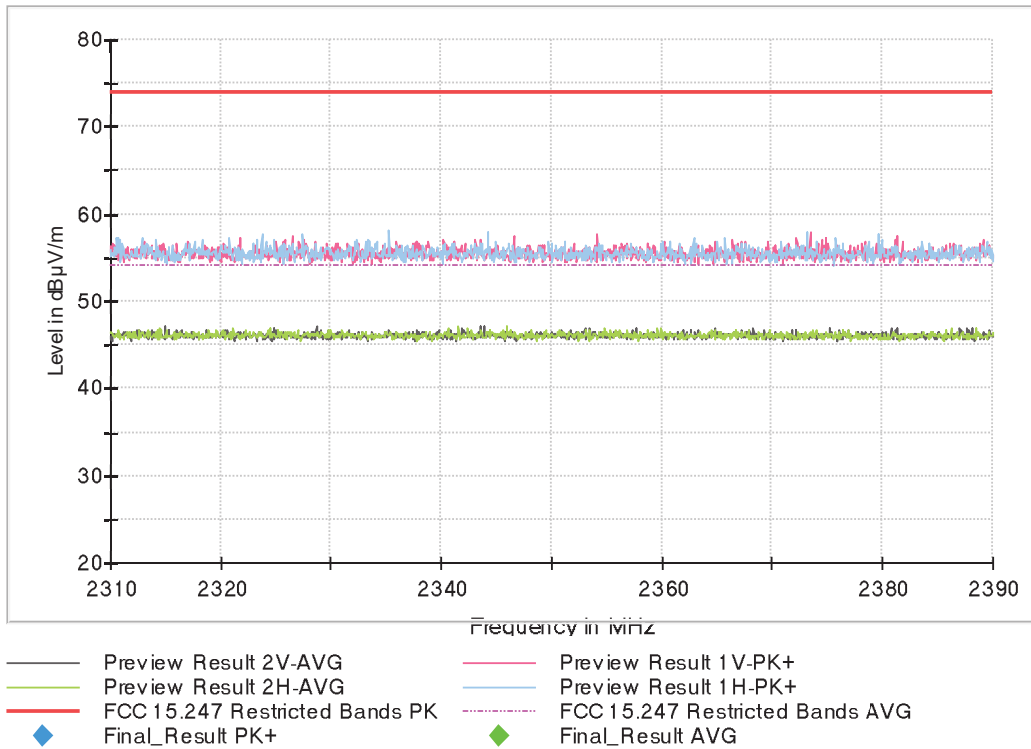

- High Channel:


Full Spectrum

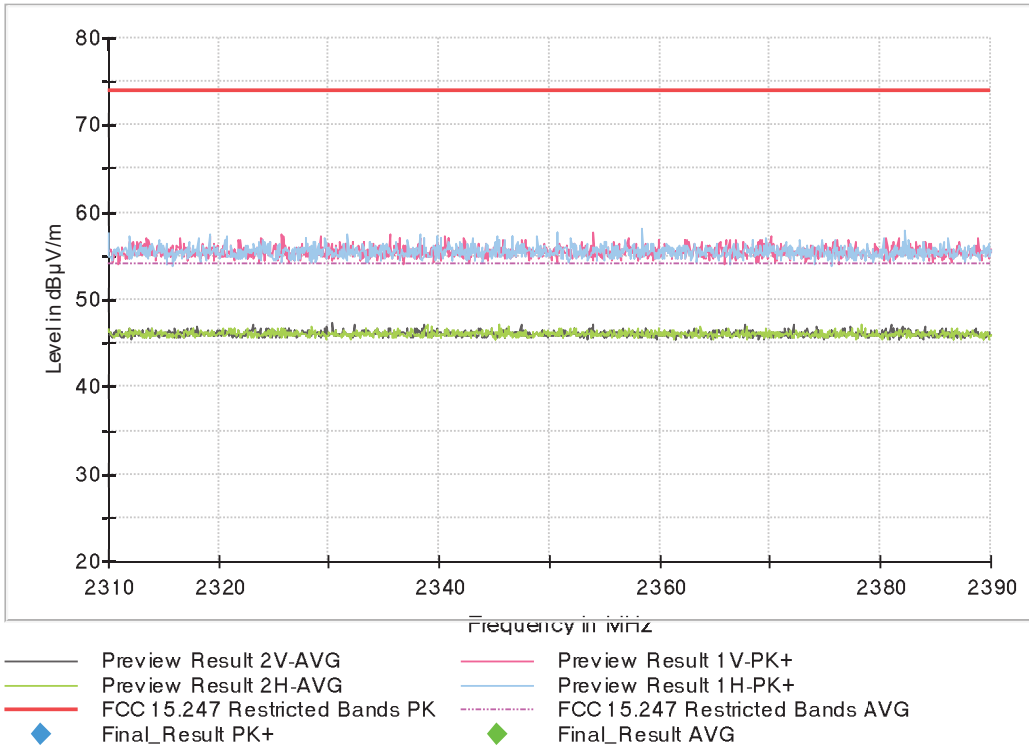

FREQUENCY RANGE 2.4835-2.5 GHz


- Low Channel:

Full Spectrum

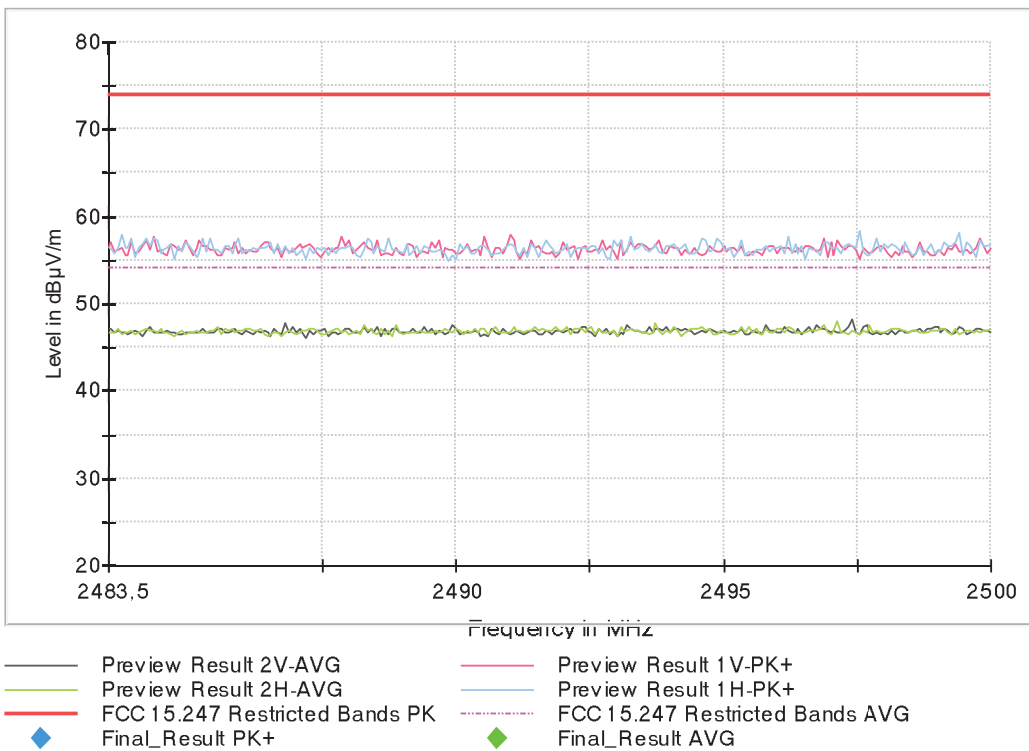

- Middle Channel:

Full Spectrum

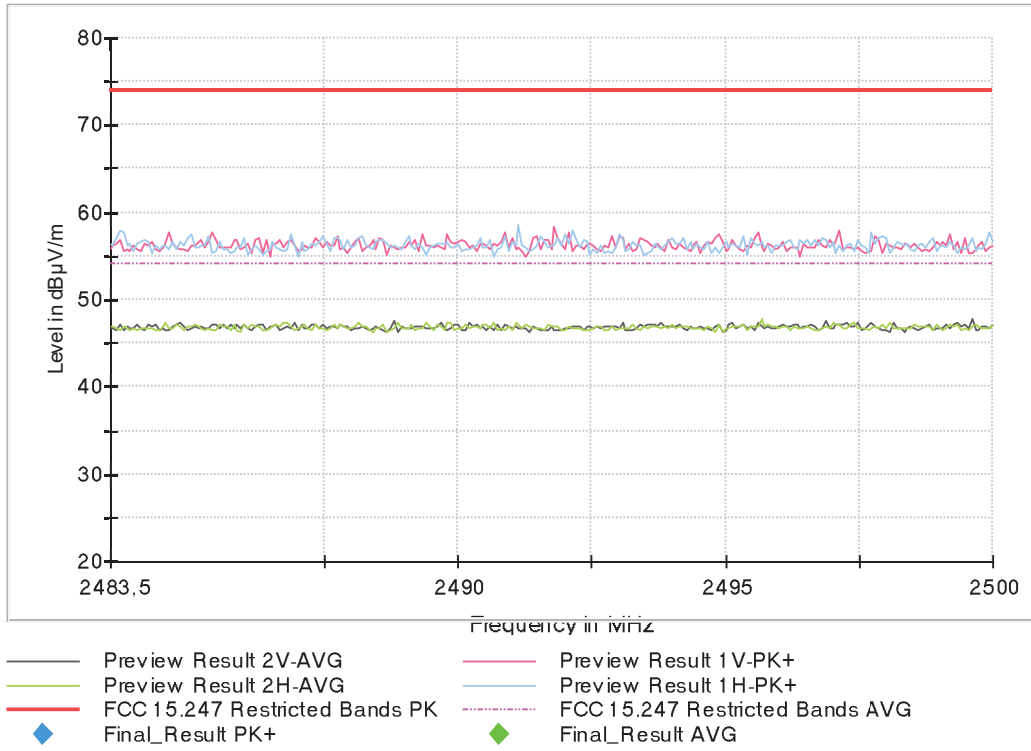

- High Channel:

Full Spectrum

