

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX_Beamforming_ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 0)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
149	5745	15.450	≤ 24.850
157	5785	15.350	≤ 24.850
165	5825	15.690	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$


Channel 149

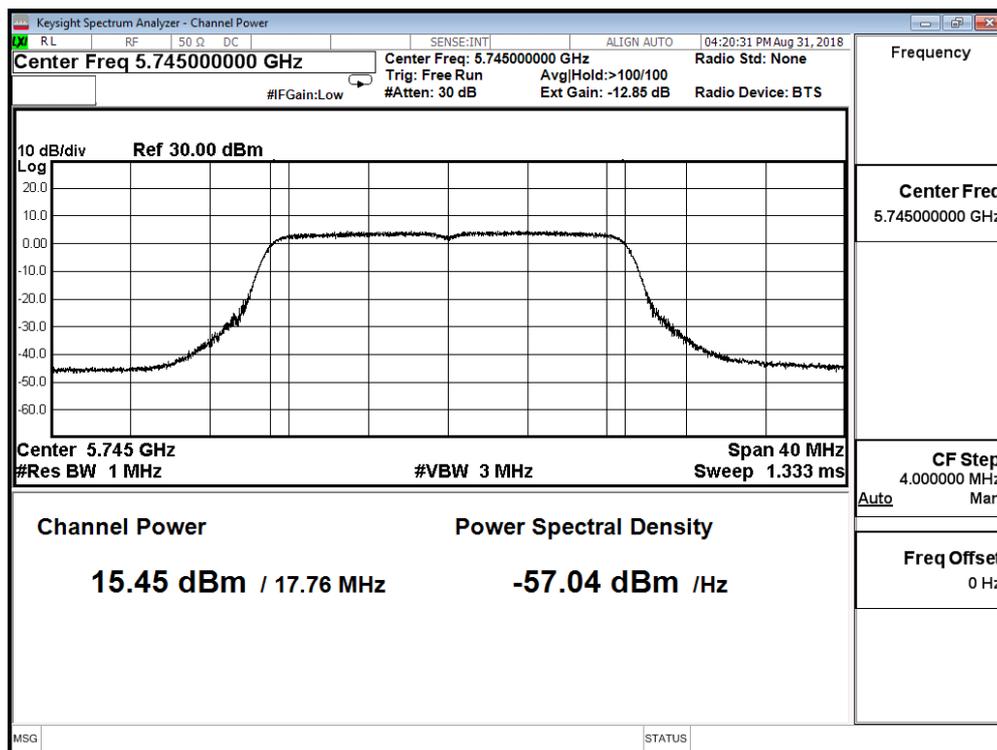

Channel 157

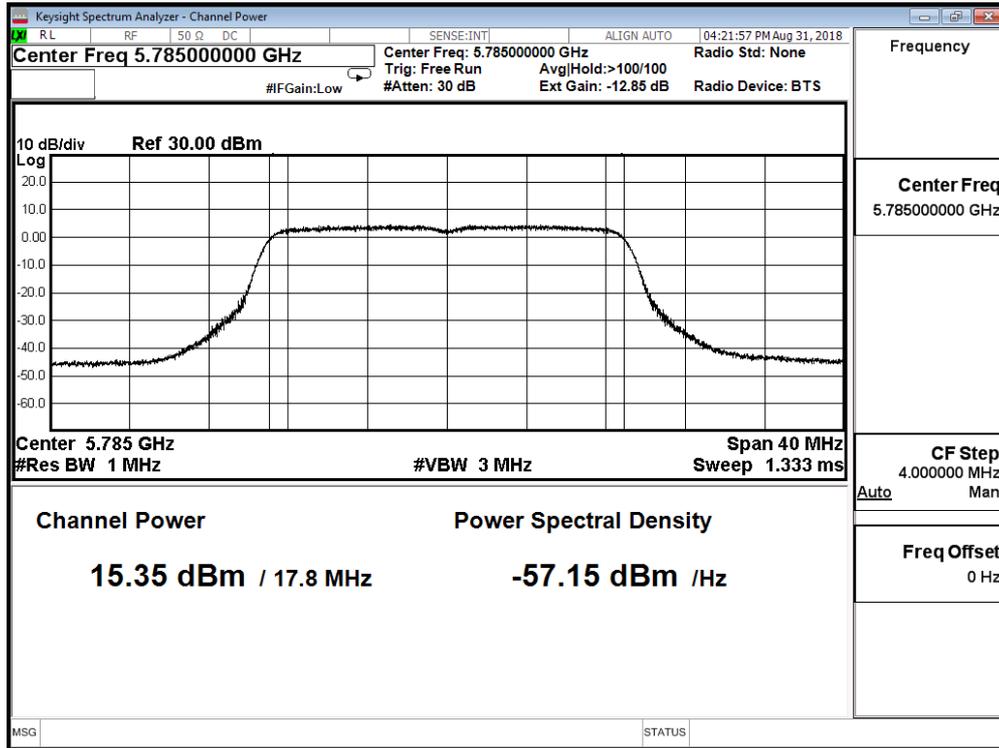

Channel 165

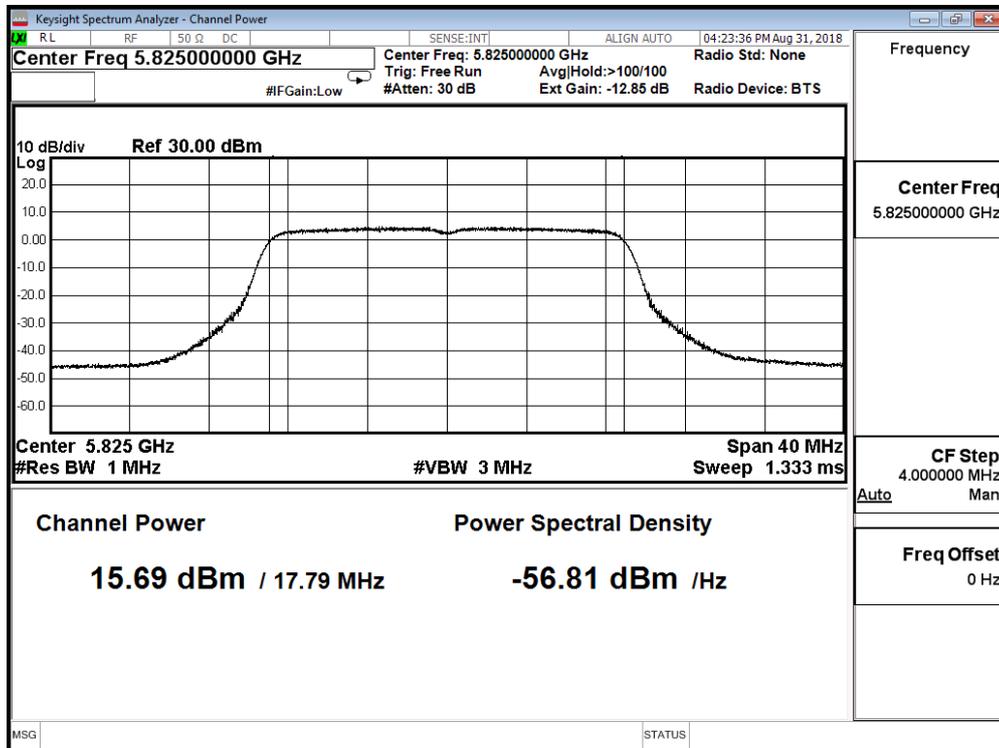

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX_Beamforming_ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
149	5745	15.770	≤ 24.850
157	5785	15.630	≤ 24.850
165	5825	15.850	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$


Channel 149

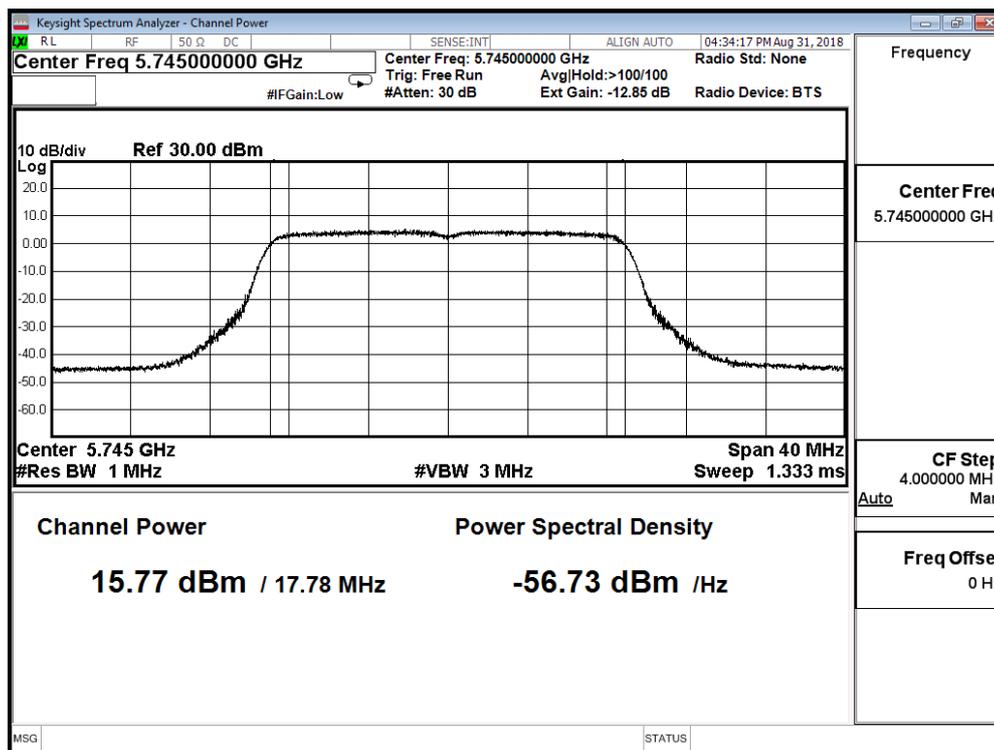

Channel 157

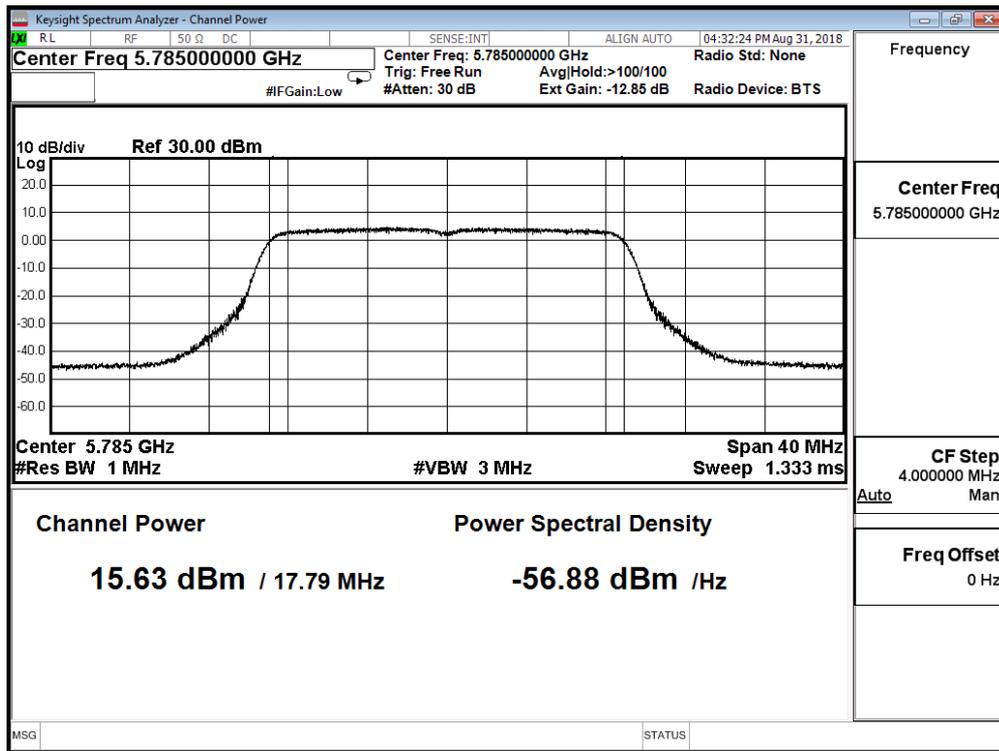

Channel 165

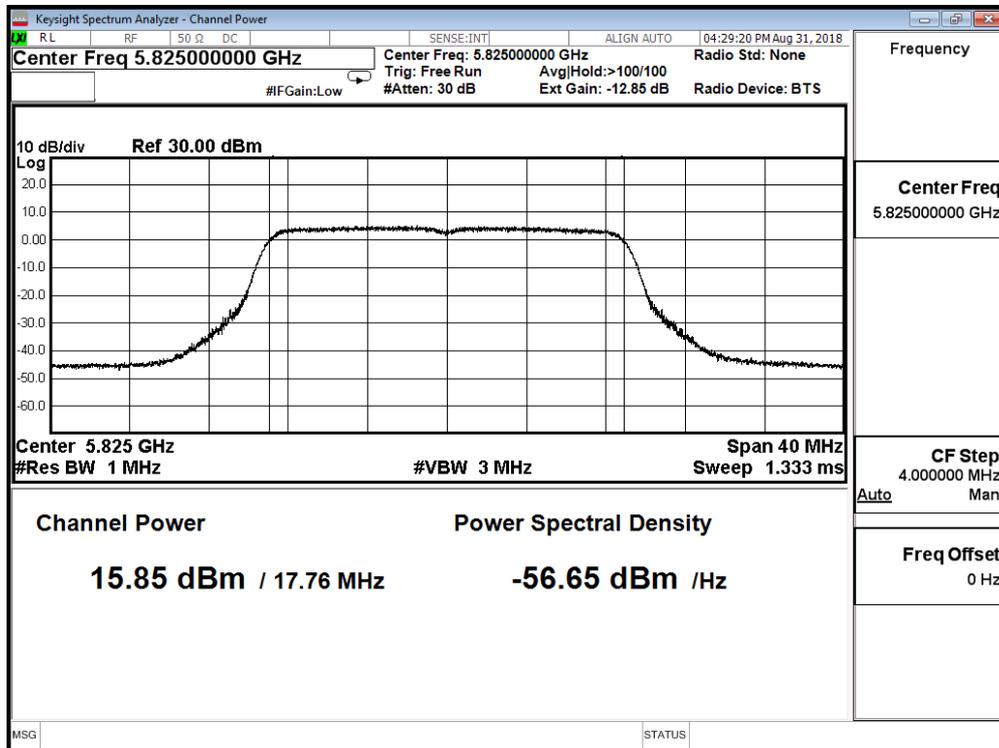

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX_Beamforming_AD P-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
149	5745	15.560	≤ 24.850
157	5785	15.280	≤ 24.850
165	5825	15.720	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$


Channel 149

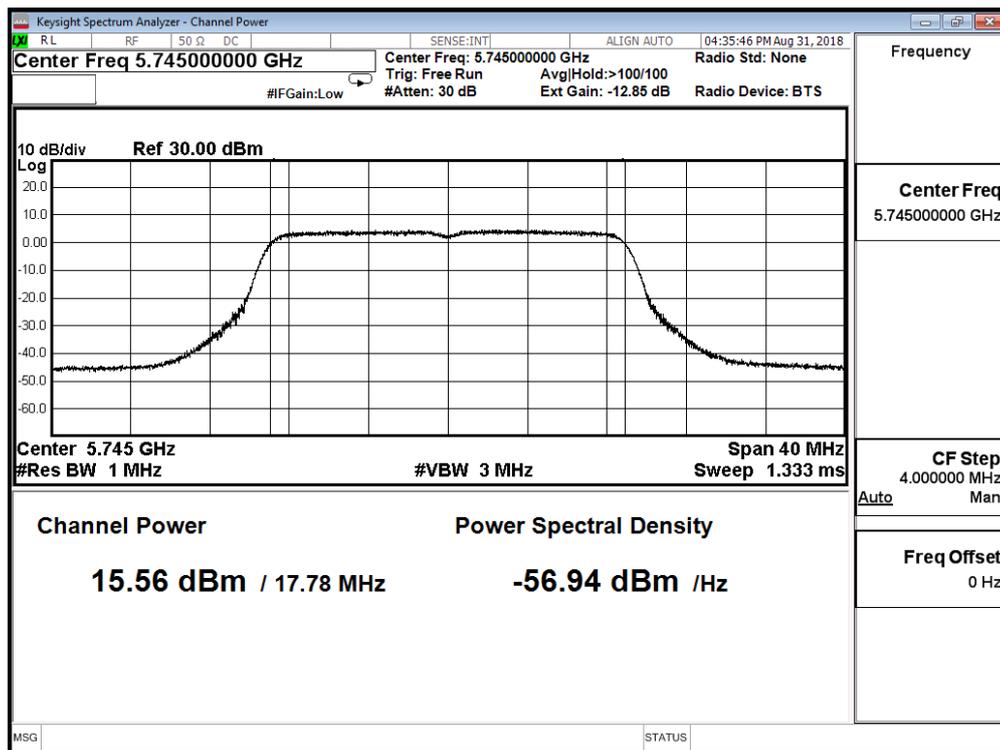

Channel 157

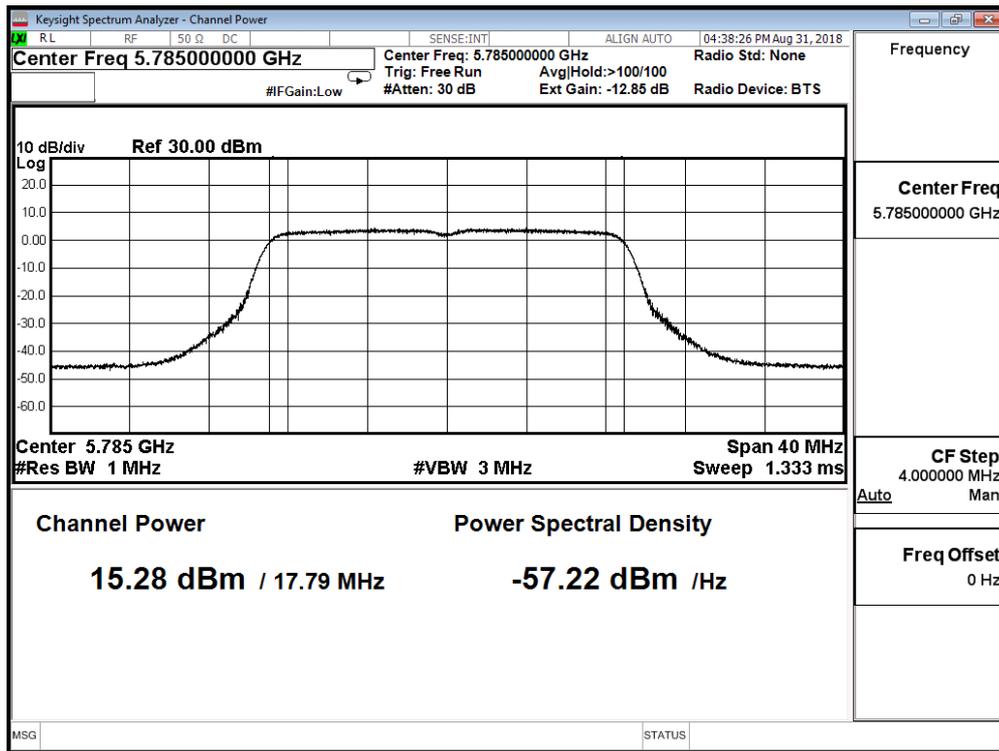

Channel 165

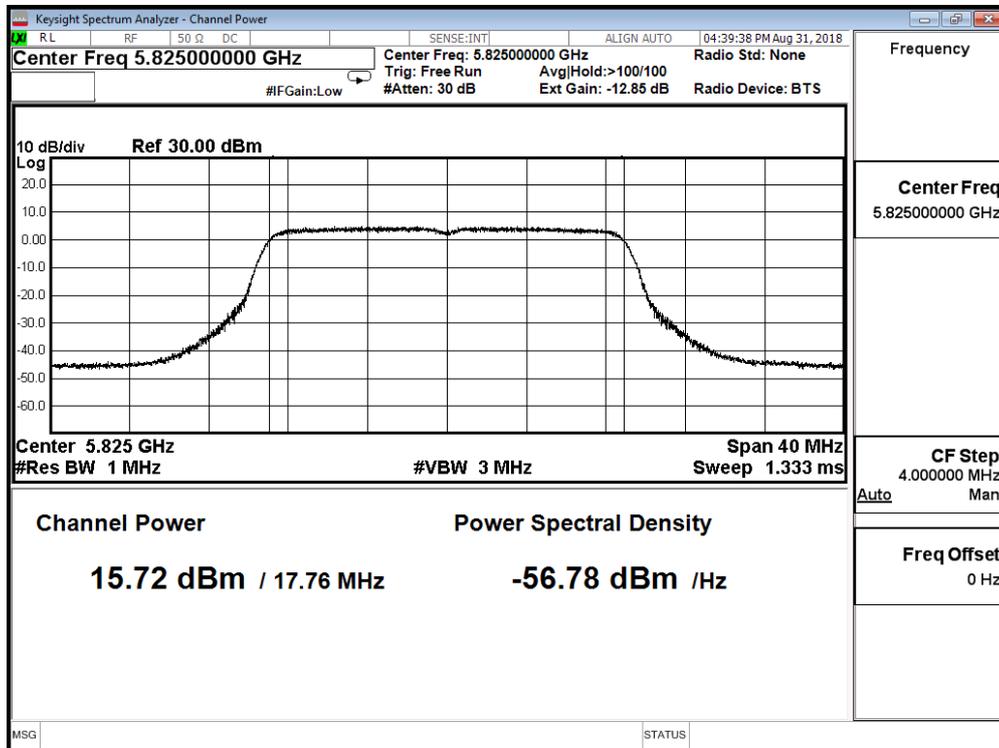

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX_Beamforming_ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
149	5745	15.870	≤ 24.850
157	5785	15.600	≤ 24.850
165	5825	15.900	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$


Channel 149

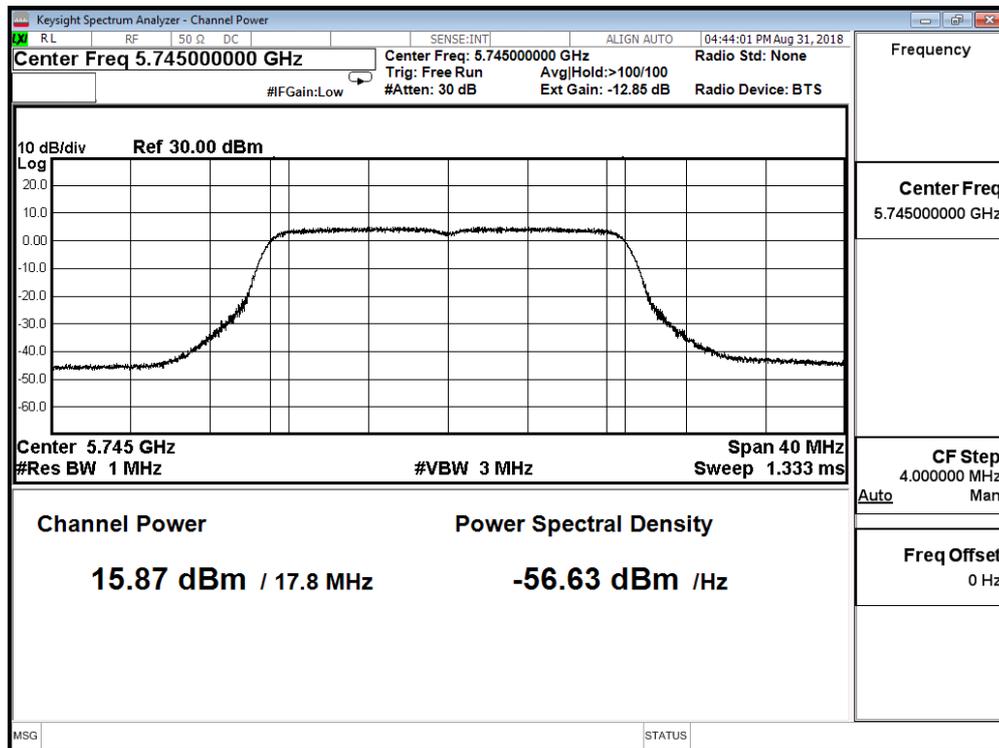

Channel 157

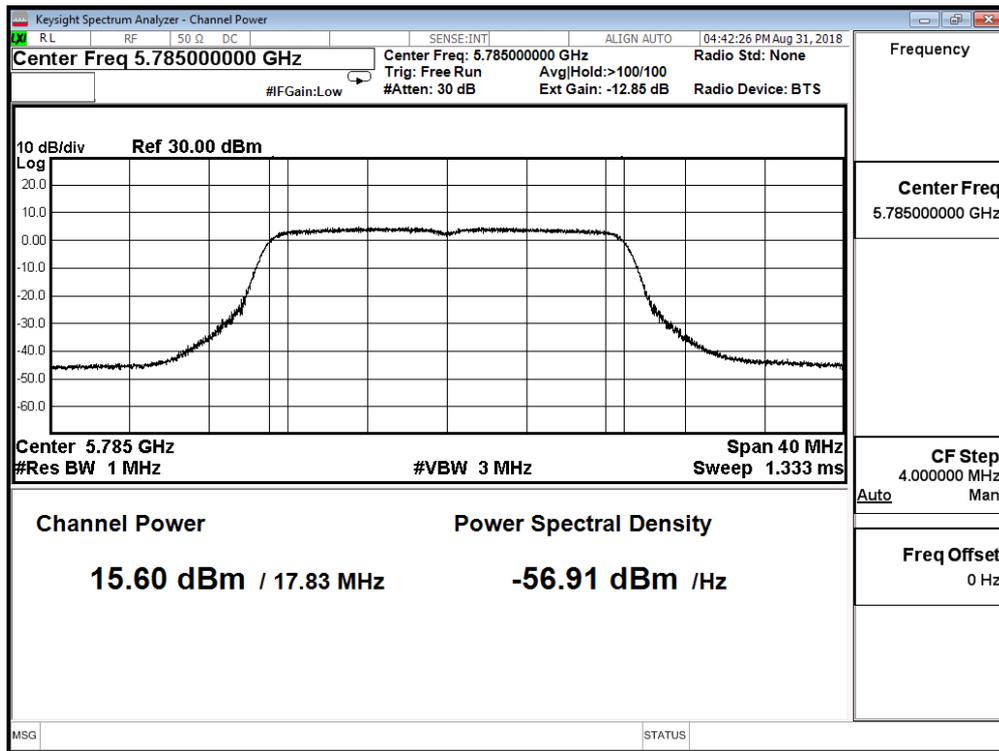

Channel 165

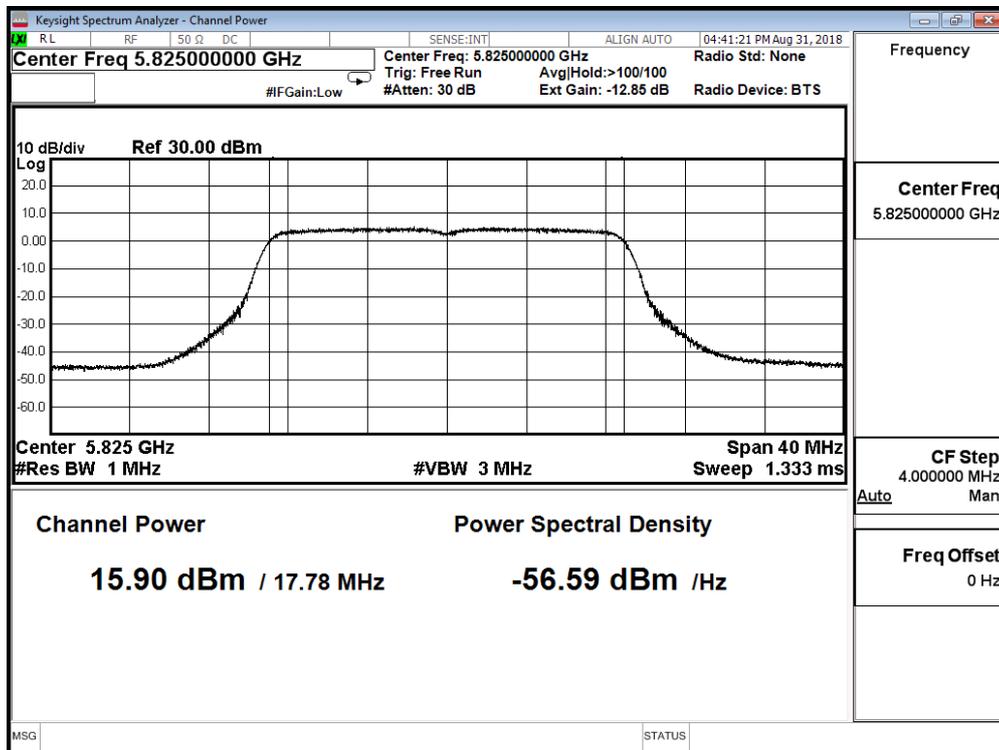

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX_Beamforming_ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 4)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
149	5745	16.070	≤ 24.850
157	5785	15.270	≤ 24.850
165	5825	16.100	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$


Channel 149

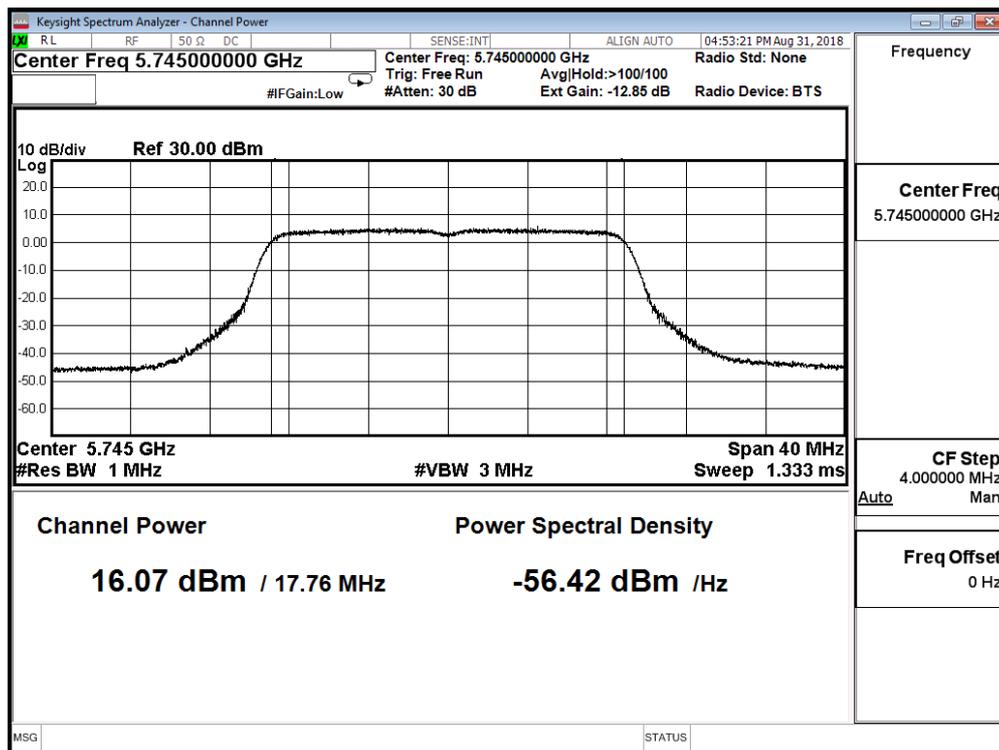

Channel 157

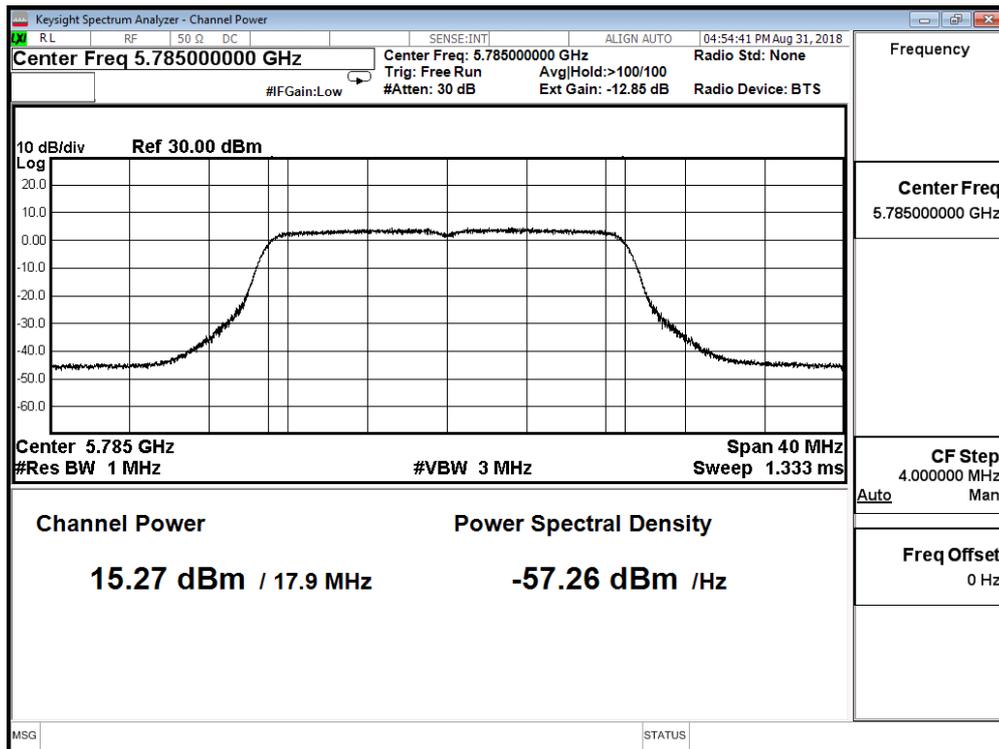

Channel 165

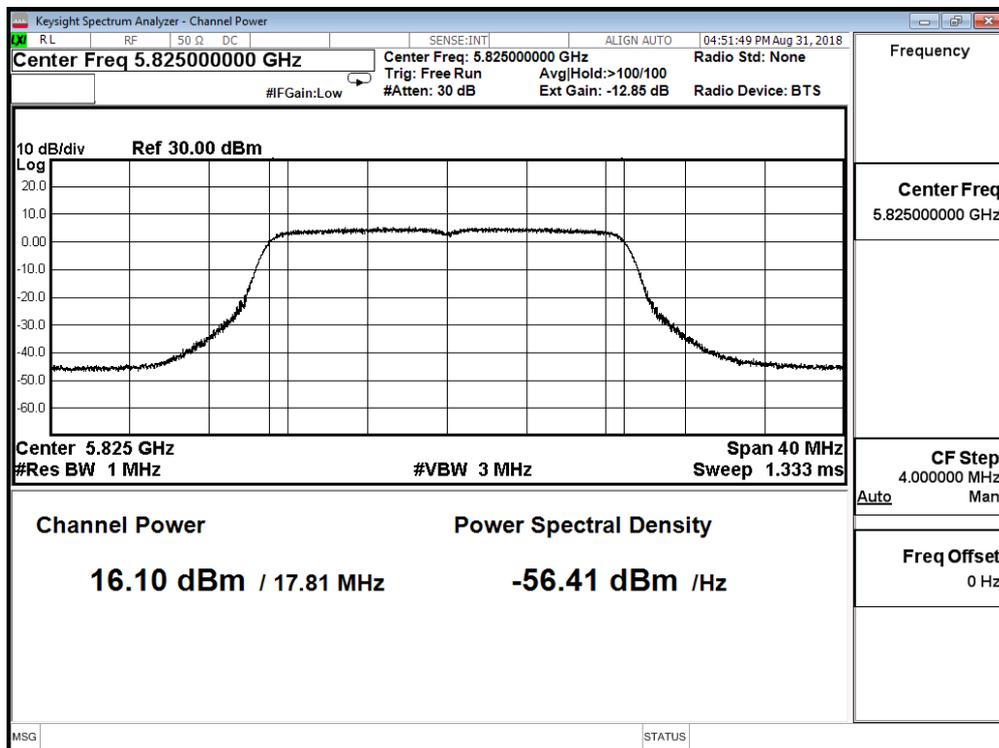

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX_Beamforming_ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 5)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
149	5745	15.230	≤ 24.850
157	5785	14.900	≤ 24.850
165	5825	15.480	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$


Channel 149

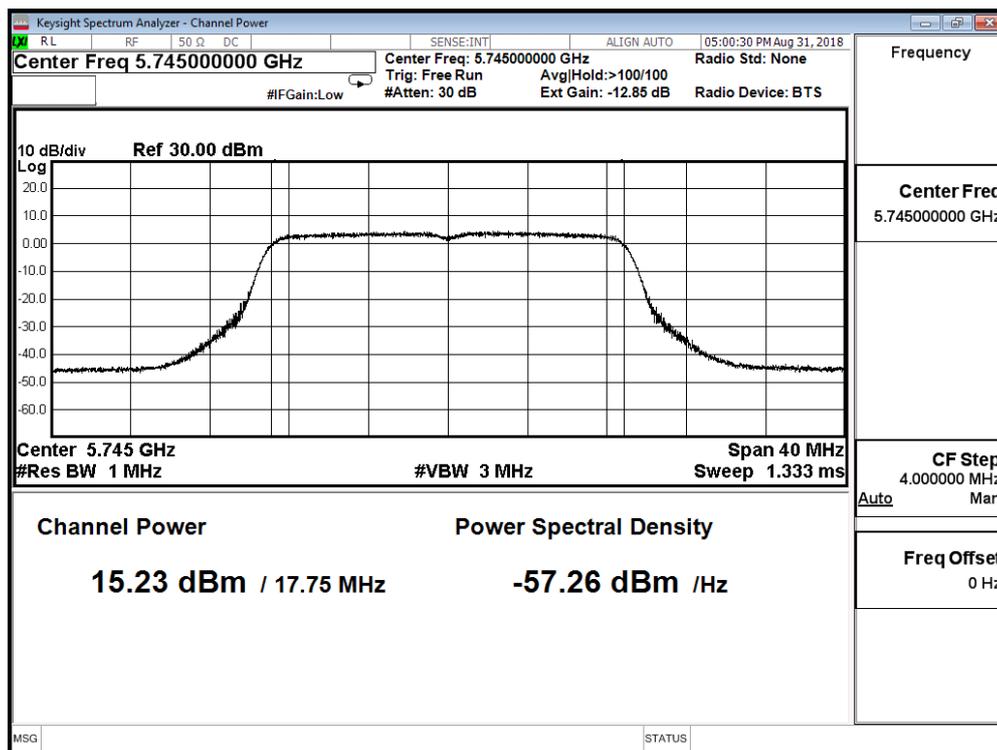

Channel 157

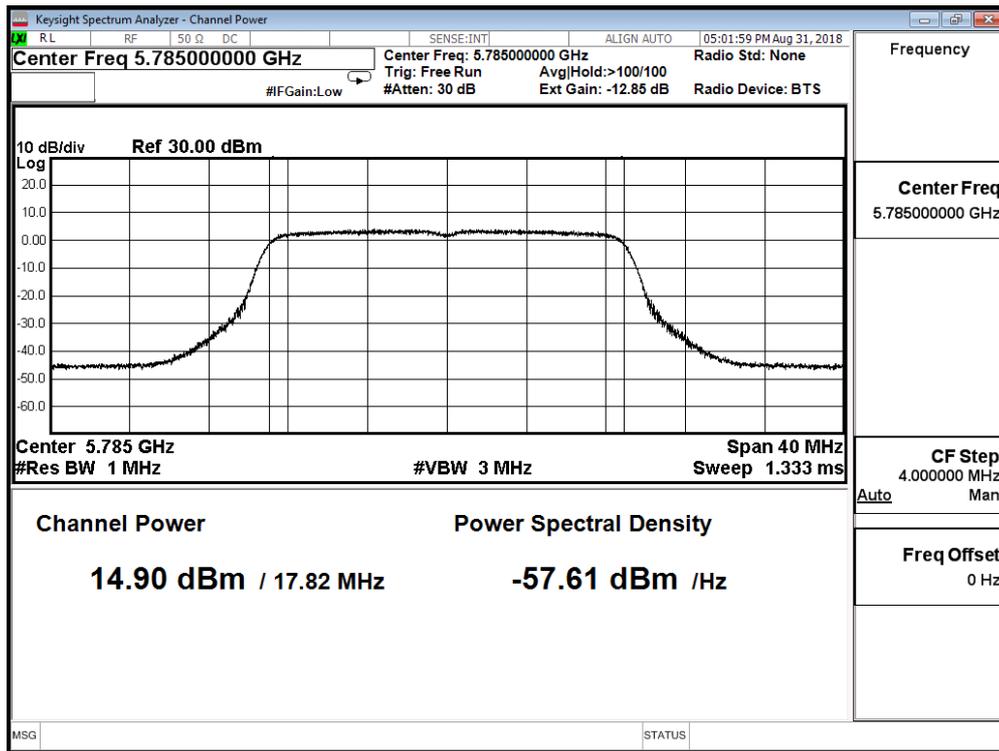

Channel 165

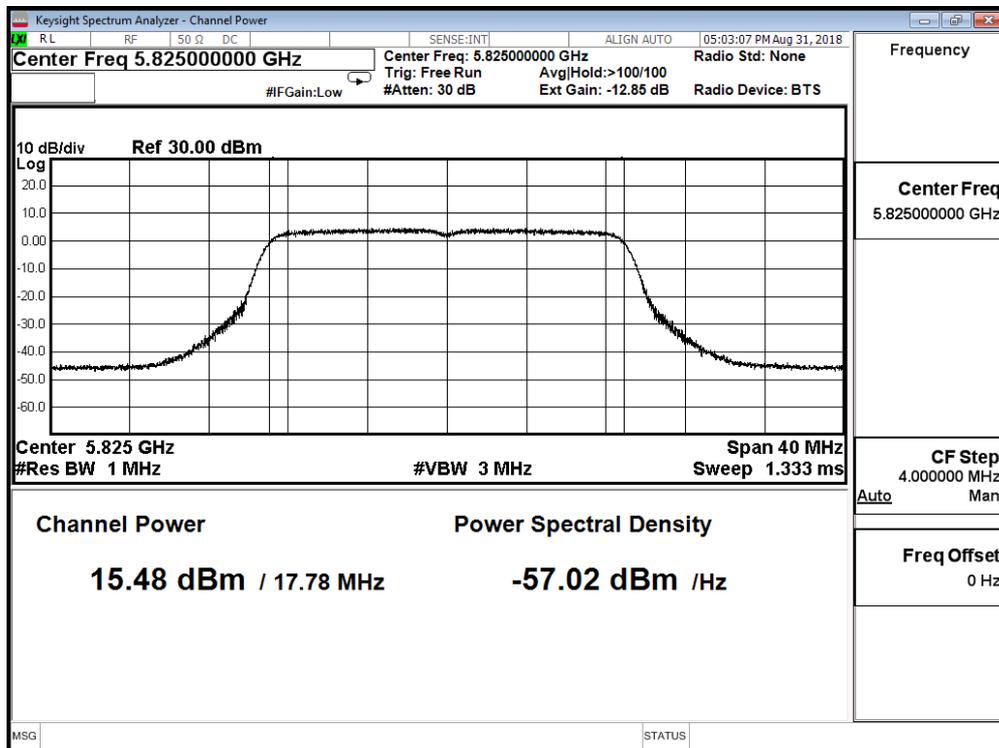

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX_Beamforming_ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 6)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
149	5745	15.760	≤ 24.850
157	5785	15.030	≤ 24.850
165	5825	15.410	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$


Channel 149

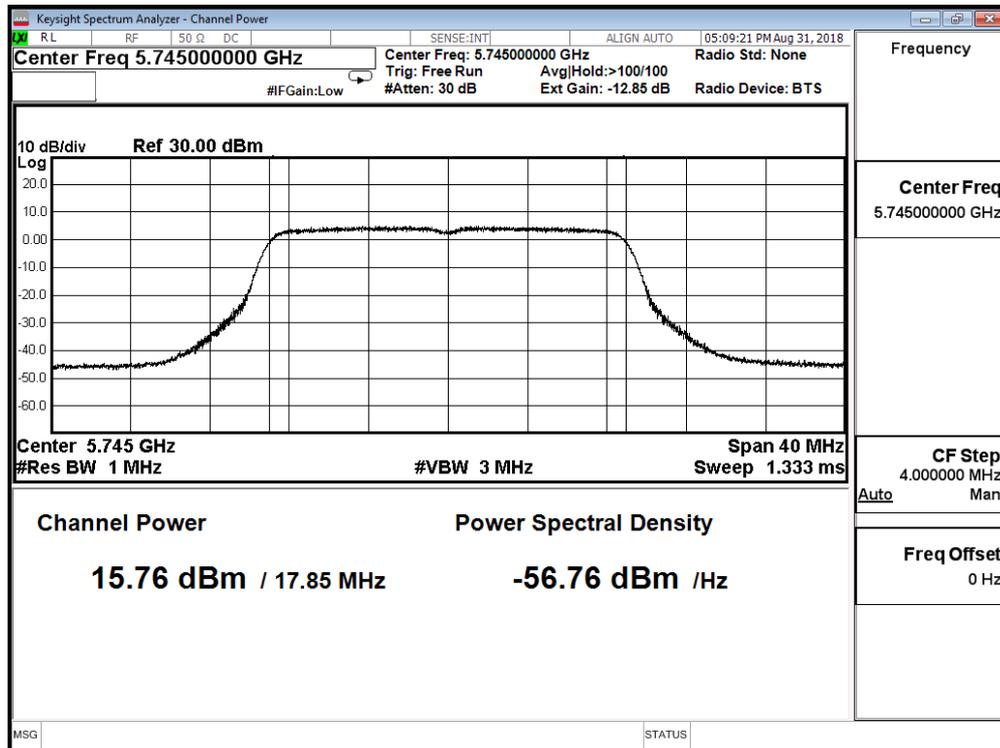

Channel 157

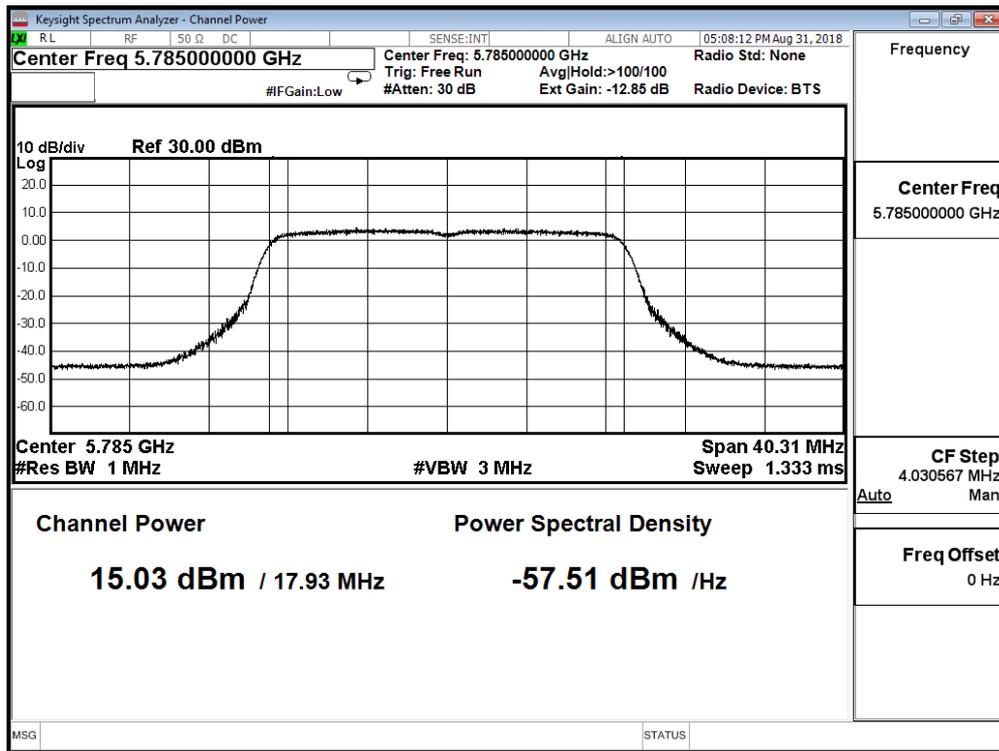

Channel 165

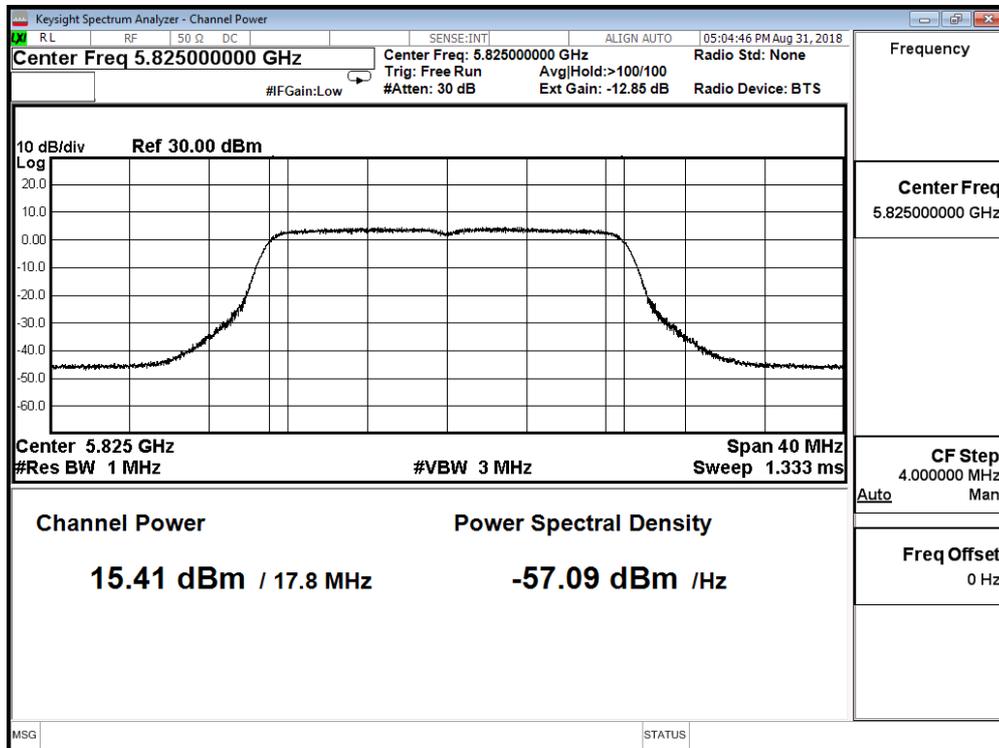

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX_Beamforming_ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 8)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
149	5745	15.820	≤ 24.850
157	5785	15.700	≤ 24.850
165	5825	15.990	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$


Channel 149

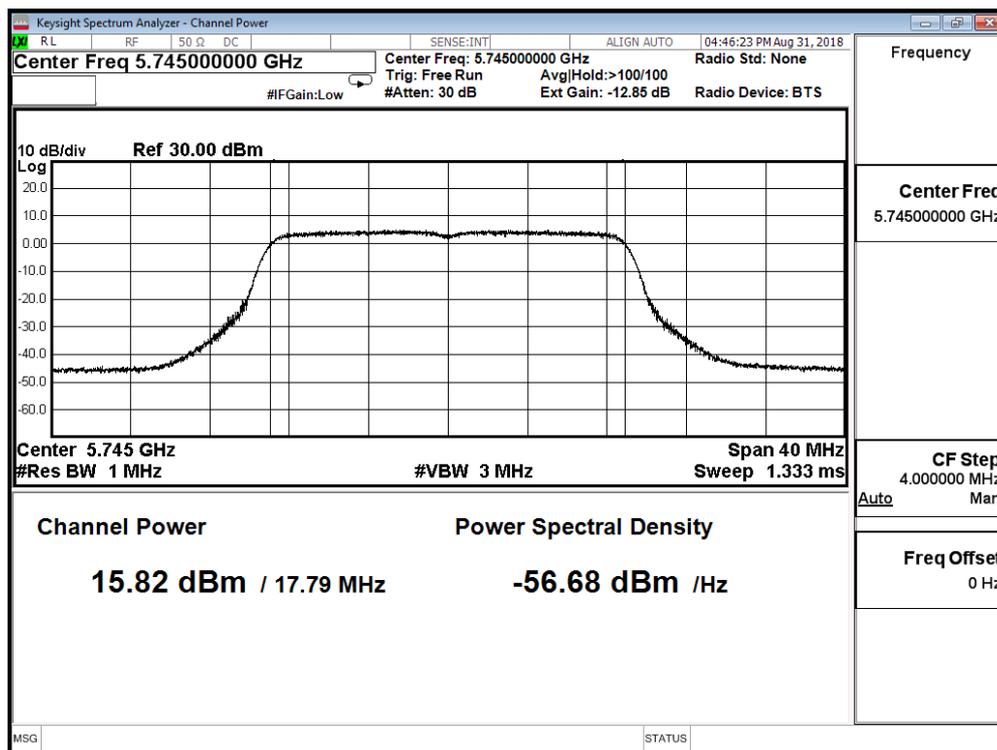

Channel 157

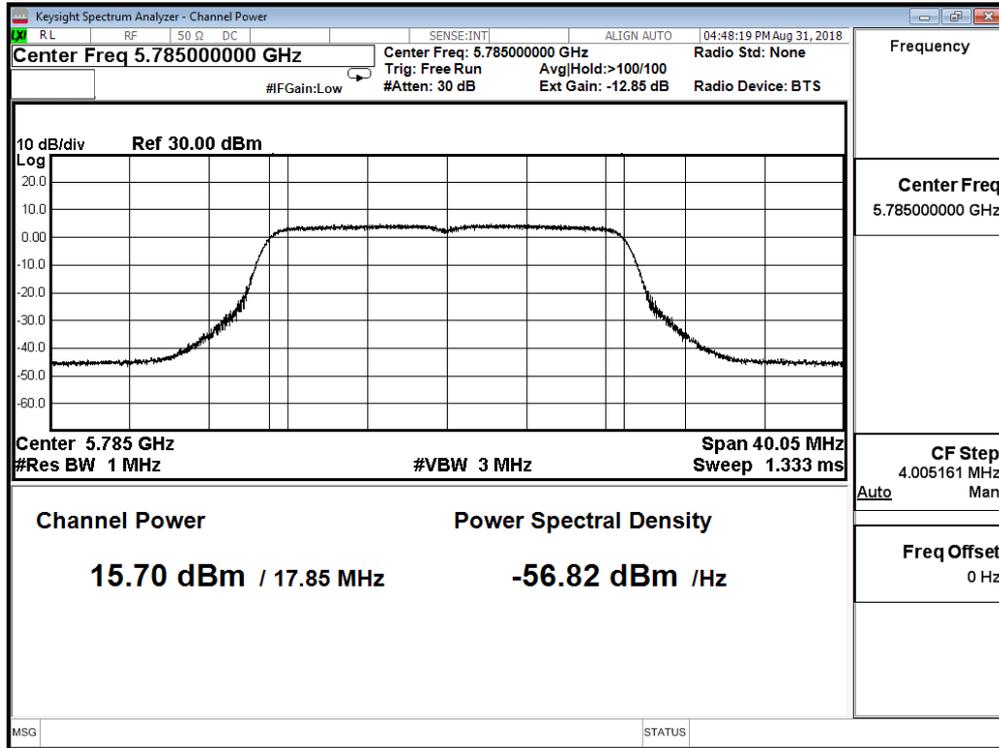

Channel 165

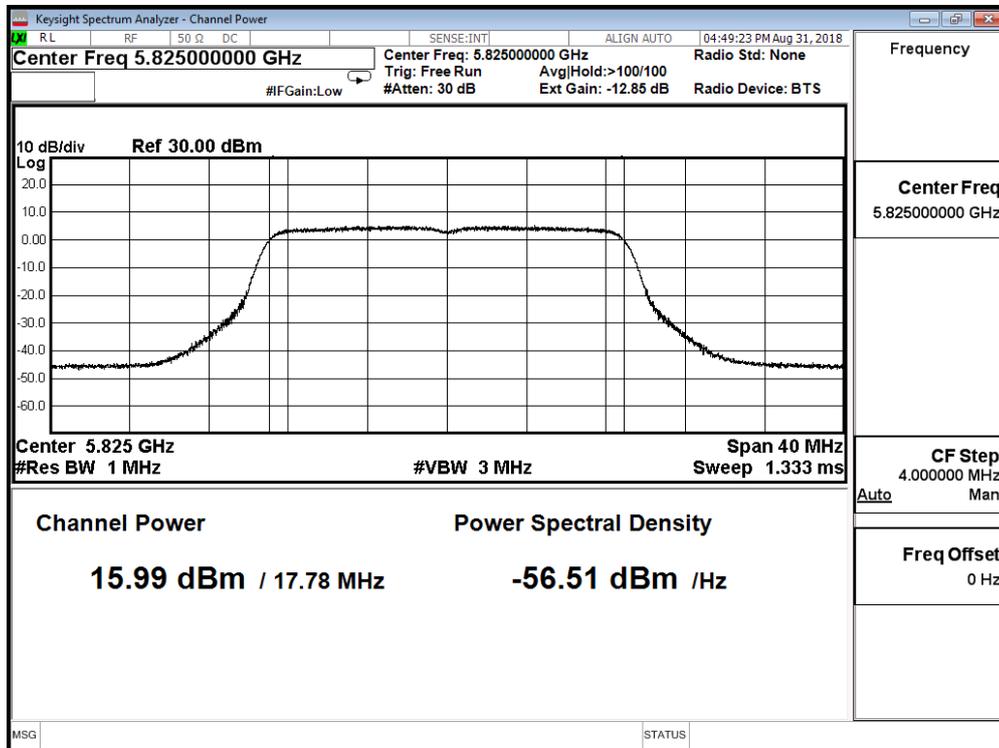

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX_Beamforming_AD P-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H

IEEE 802.11ac(20MHz)(ANT 0+1+2+3+4+5+6+8)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
149	5745	24.729	≤ 24.850
157	5785	24.384	≤ 24.850
165	5825	24.804	≤ 24.850

Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{dBm} - (11.15 - 6) = 24.85$

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(40MHz)ANT 0)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
151	5755	14.910	≤ 24.850
159	5795	15.380	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 151

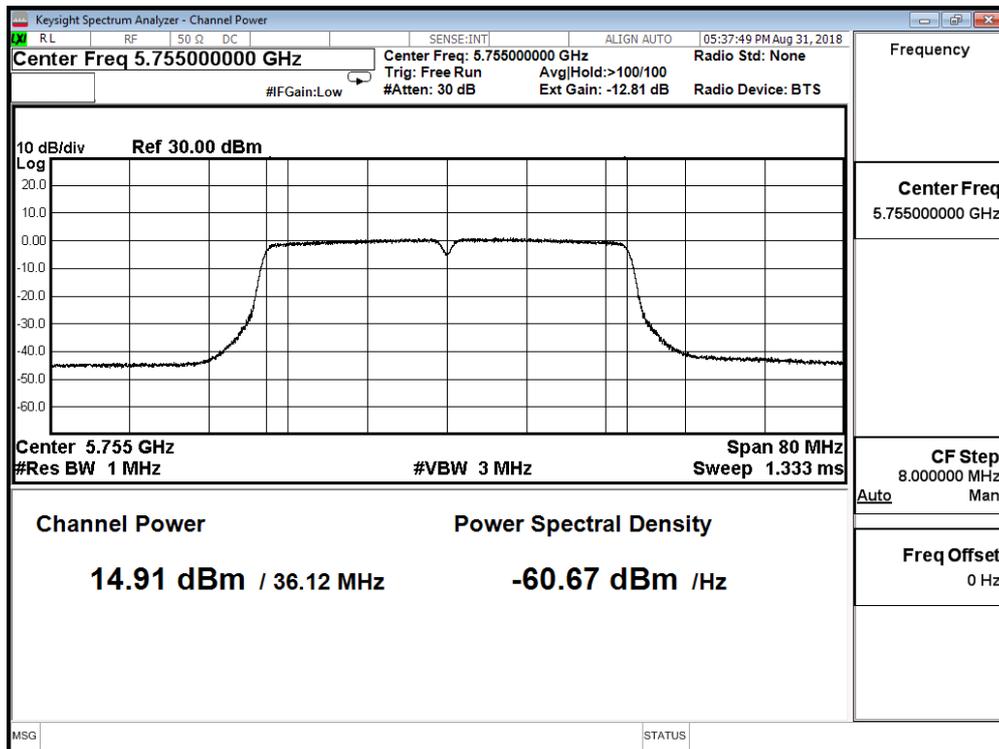

Channel 159

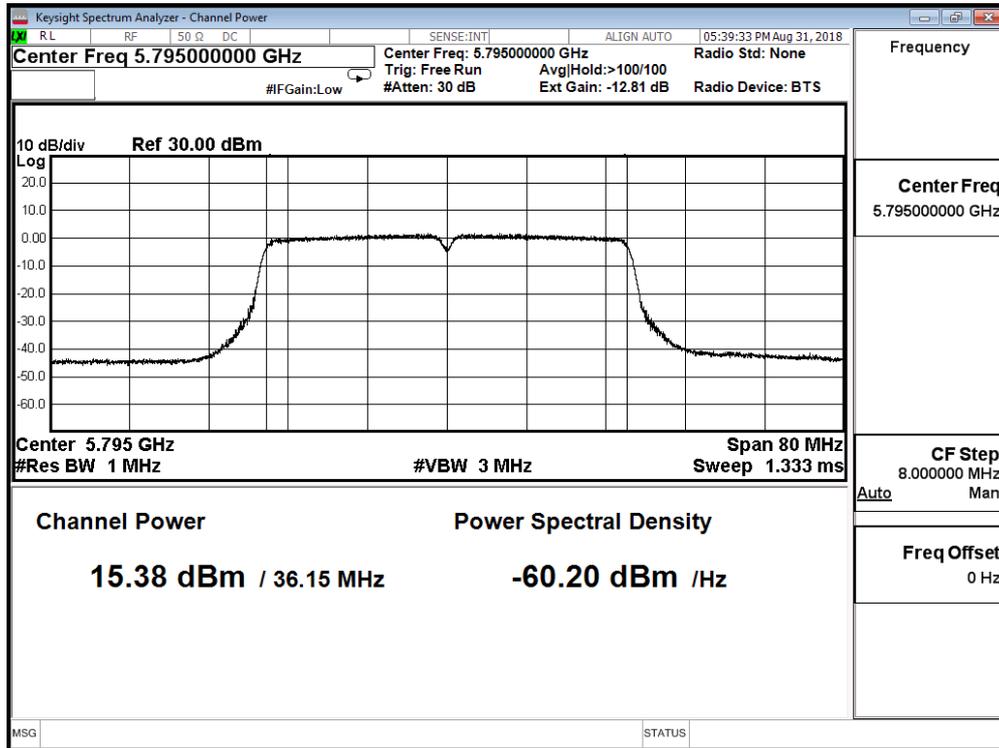

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
151	5190	15.660	≤ 24.850
159	5230	15.610	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 151

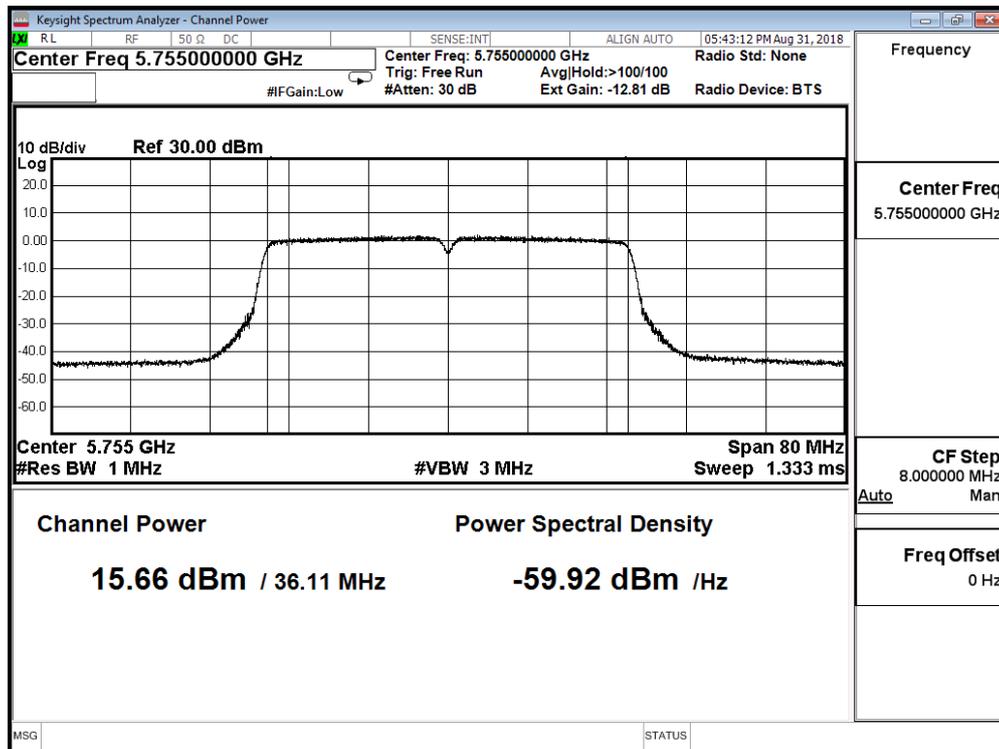

Channel 159

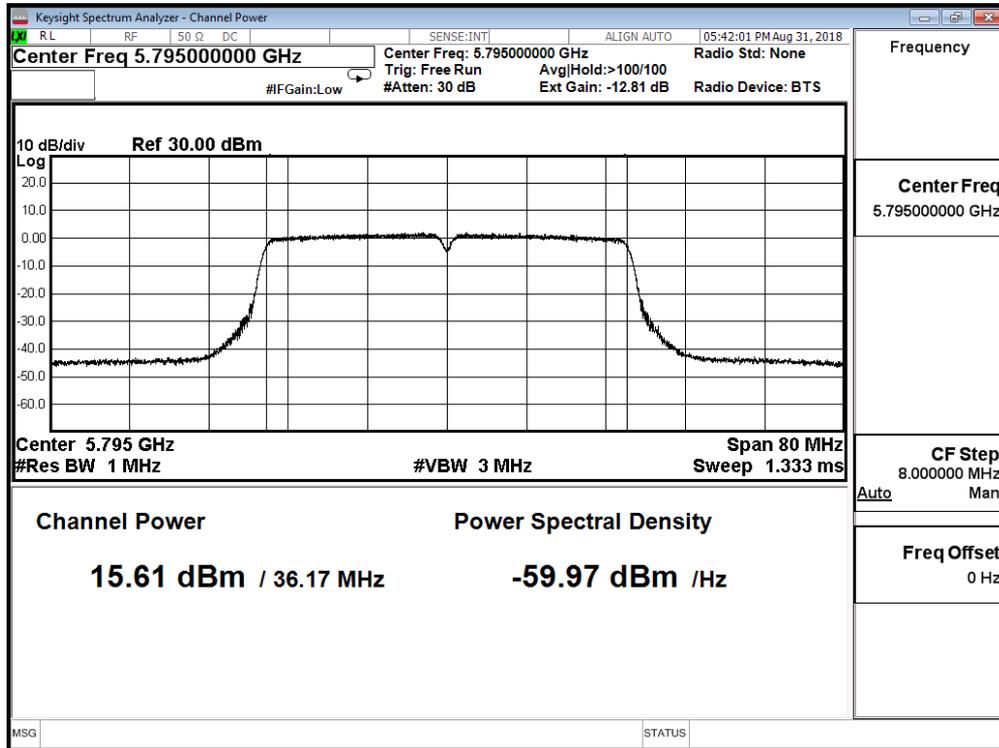

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
151	5755	15.230	≤ 24.850
159	5795	15.490	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 151

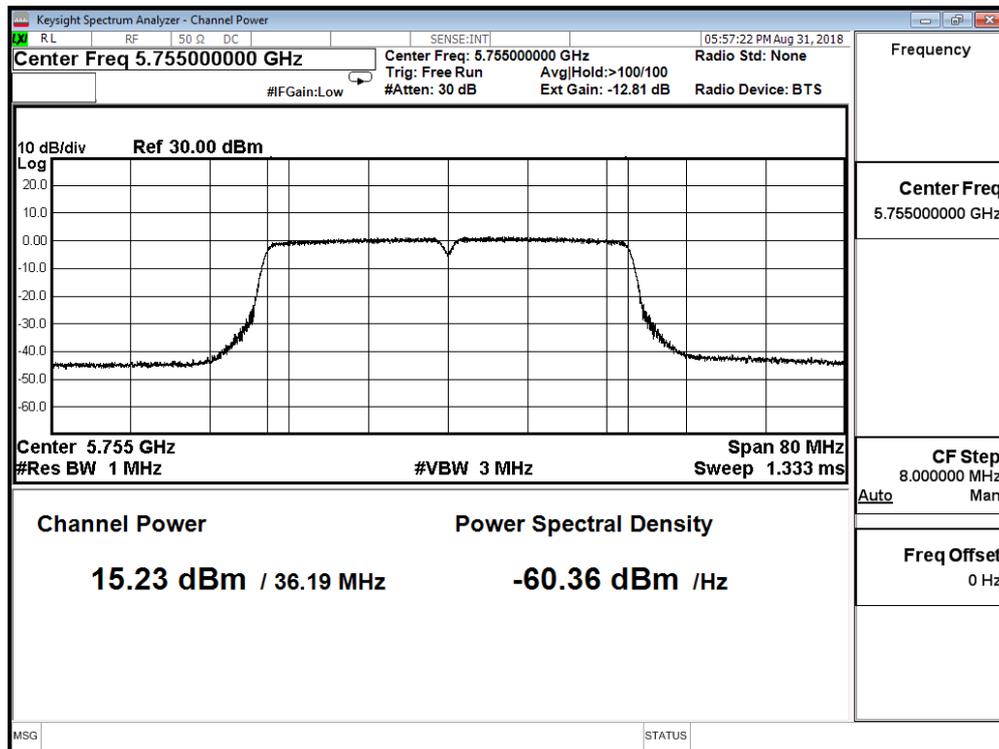

Channel 159

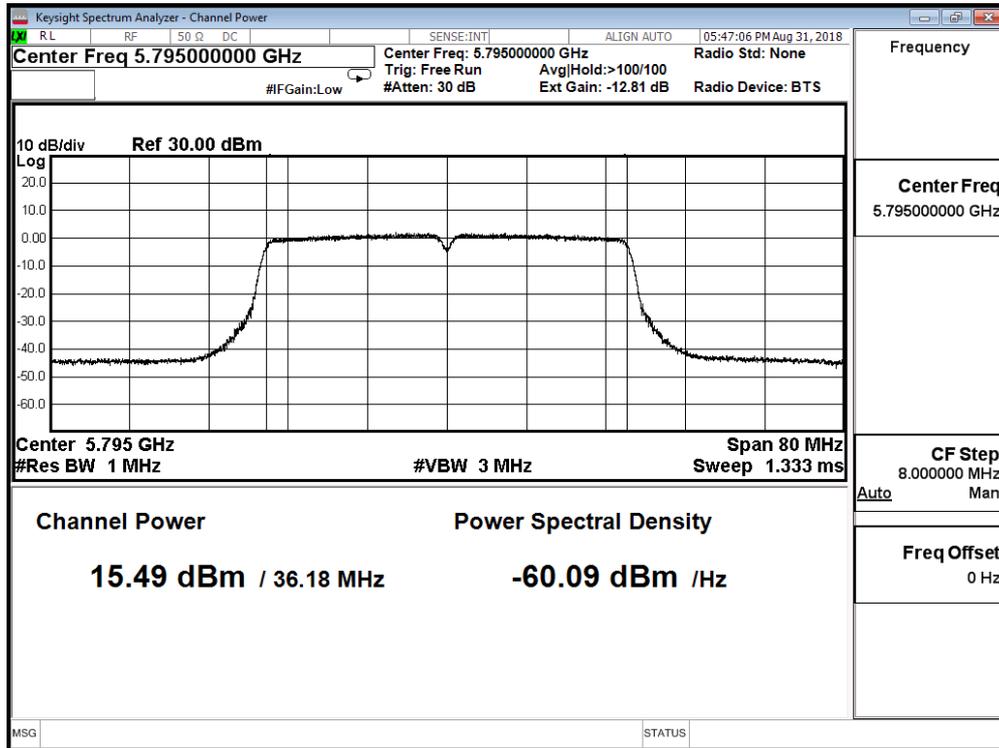

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
151	5755	15.260	≤ 24.850
159	5795	15.480	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 151

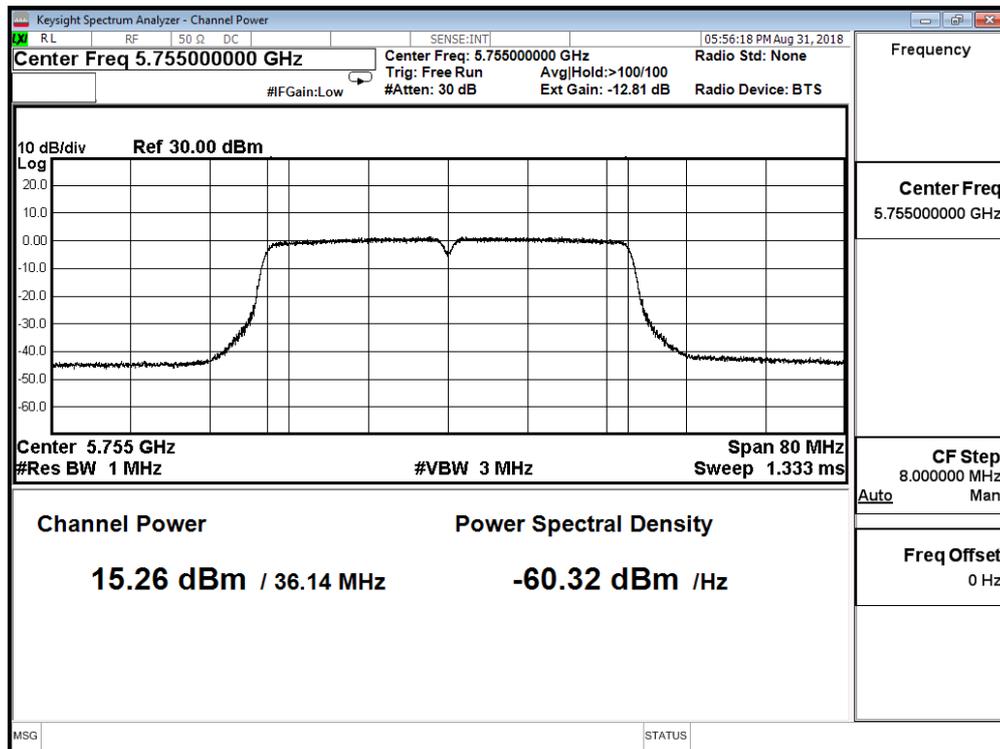

Channel 159

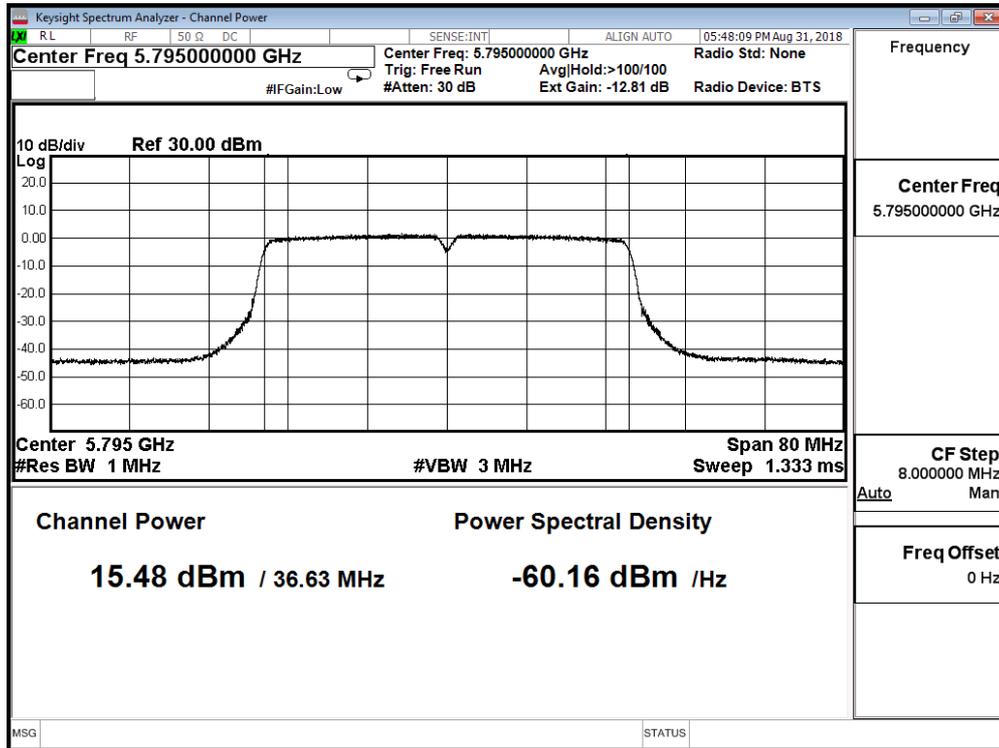

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 4)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
151	5755	15.480	≤ 24.850
159	5795	15.550	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 151

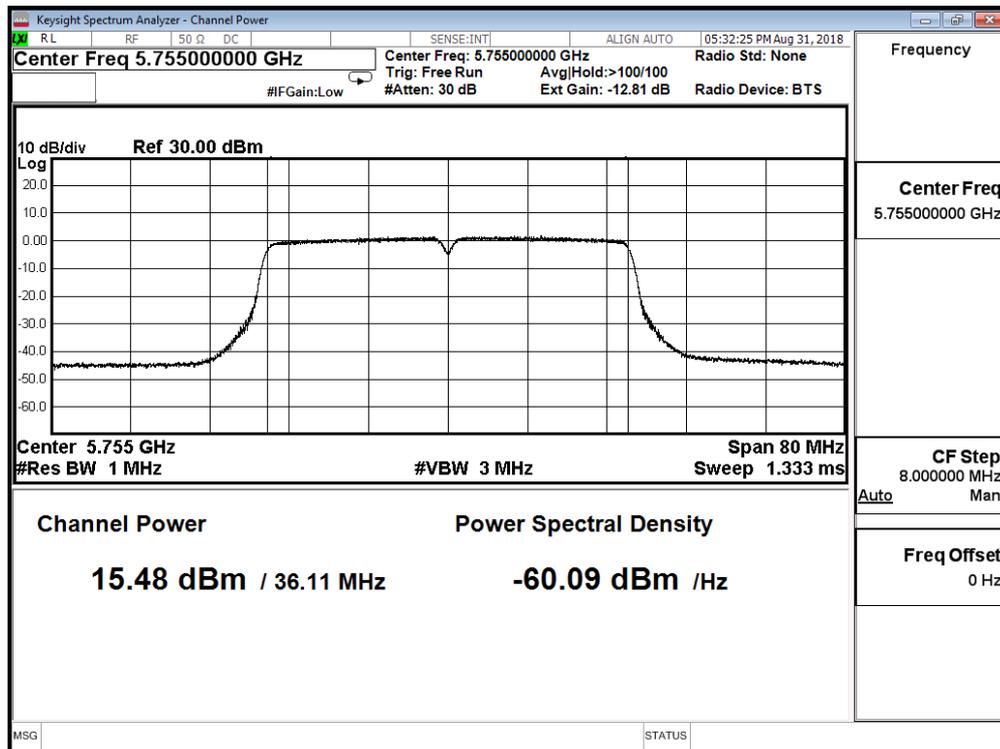

Channel 159

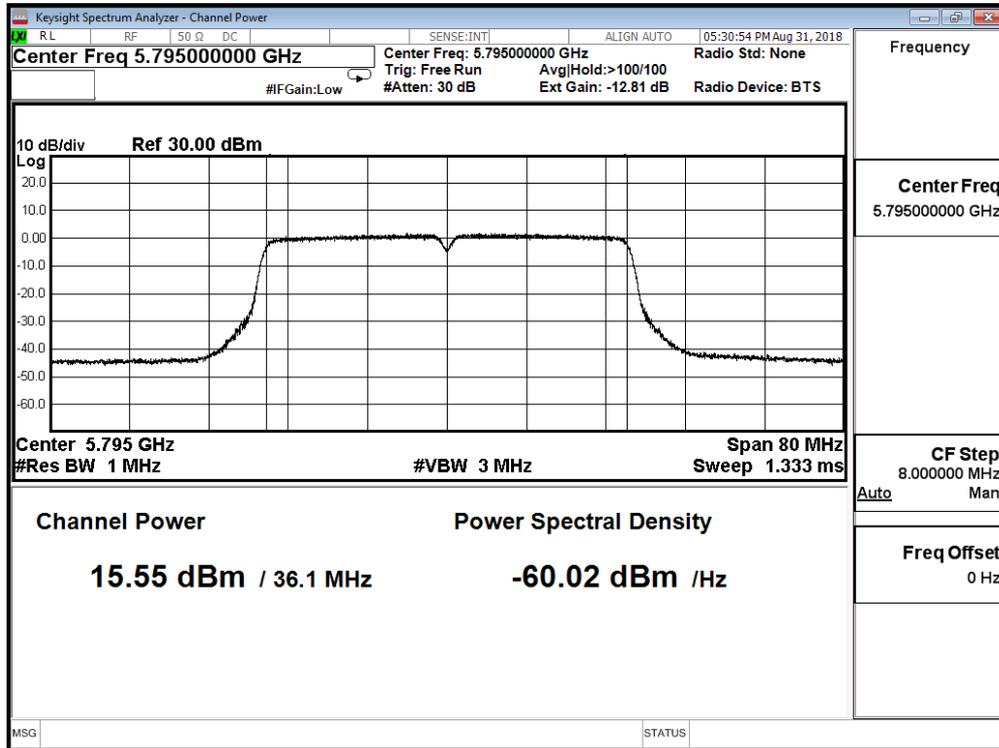

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 5)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
151	5755	15.380	≤ 24.850
159	5795	15.720	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 151

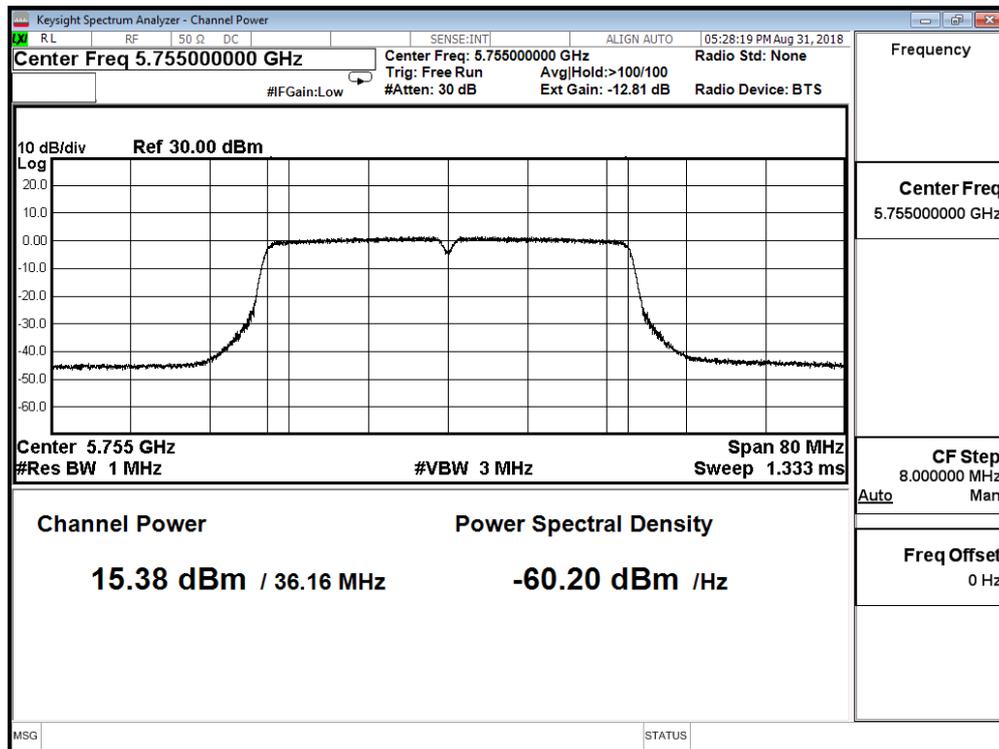

Channel 159

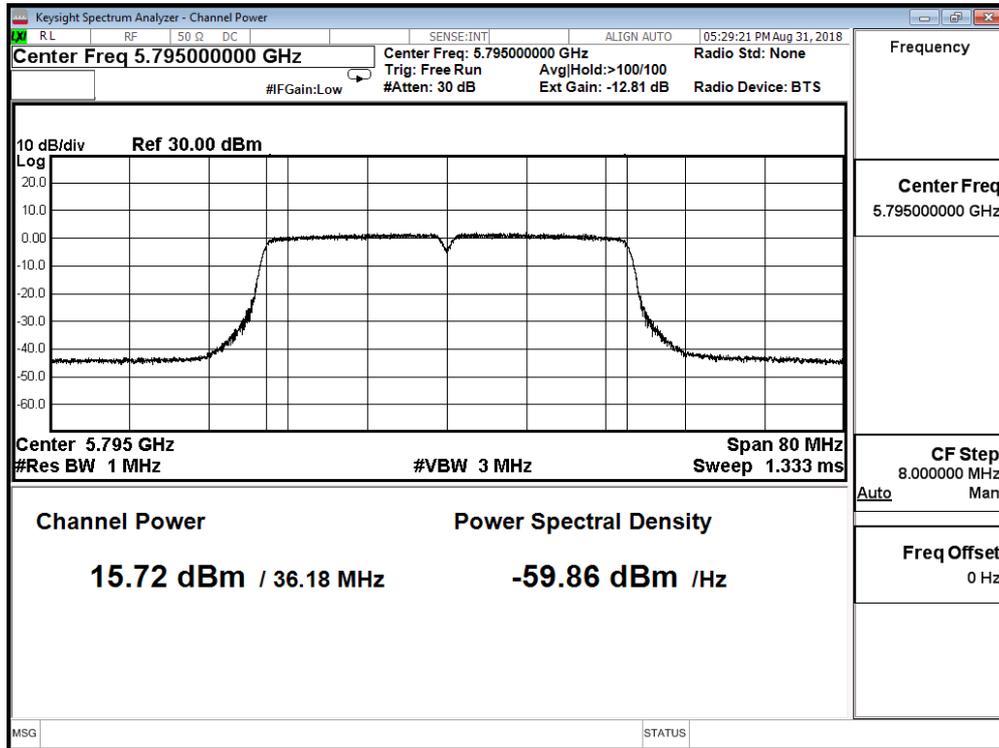

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 6)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
151	5755	15.030	≤ 24.850
159	5795	15.290	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 151

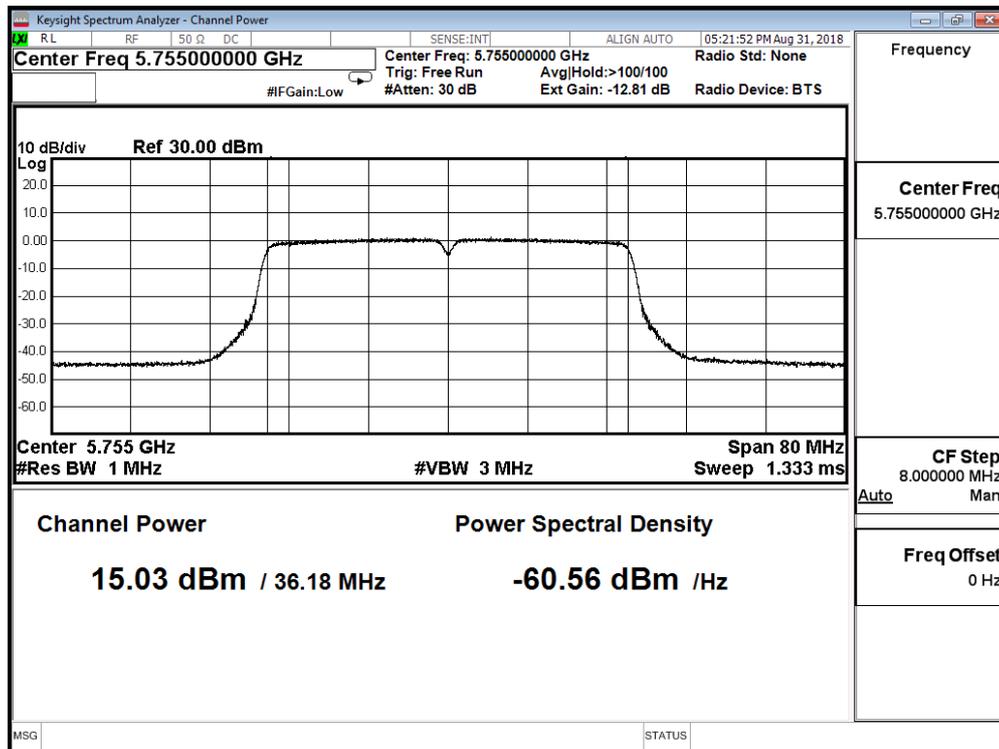

Channel 159

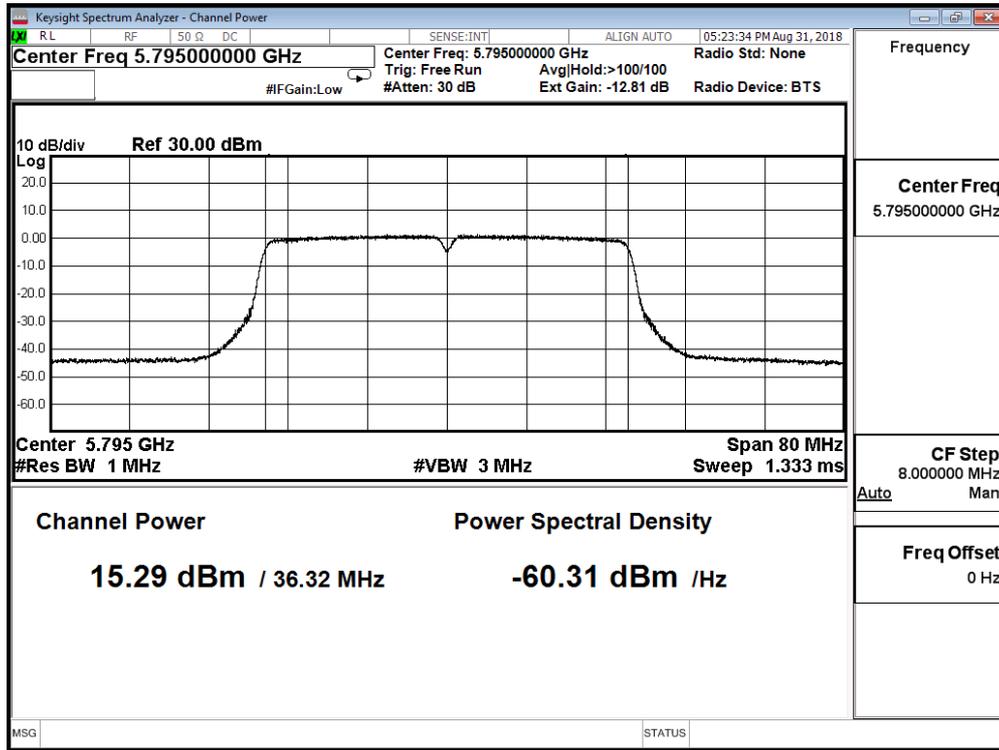

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 8)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
151	5755	15.250	≤ 24.850
159	5795	15.690	≤ 24.850


Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 151

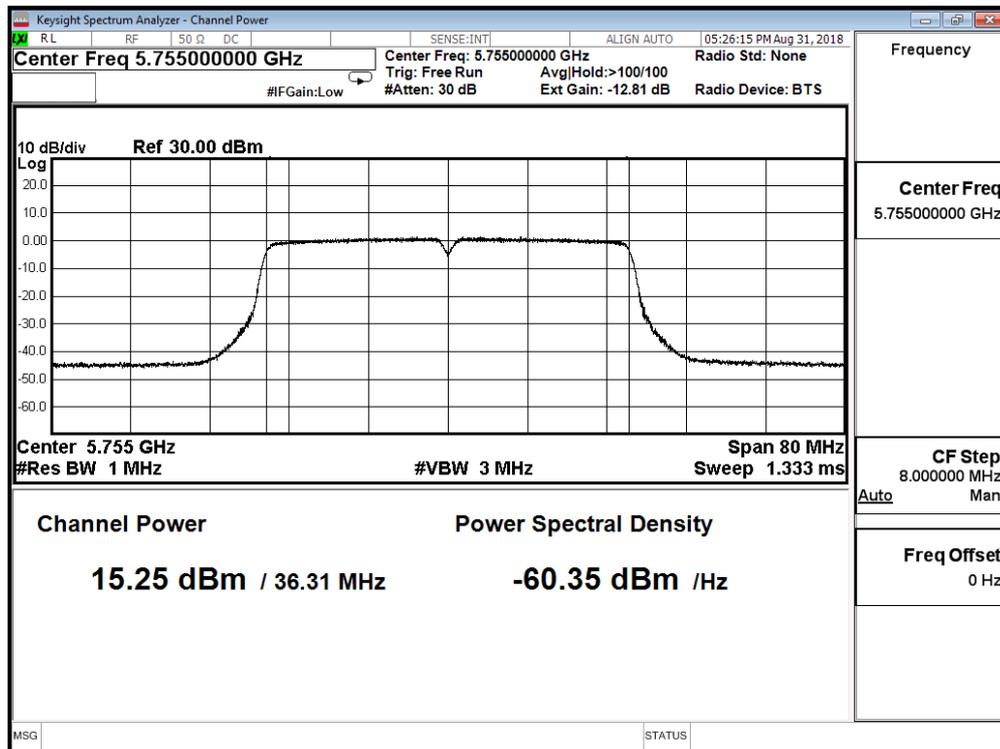

Channel 159

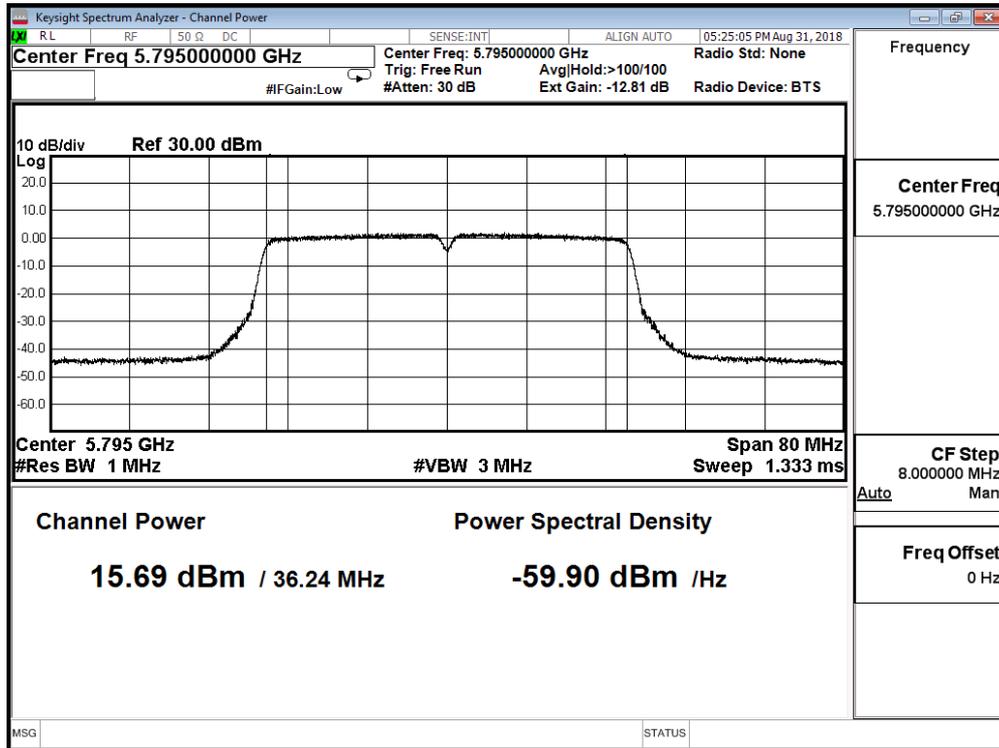

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H

IEEE 802.11ac(40MHz)(ANT 0+1+2+3+4+5+6+8)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
151	5755	24.312	≤ 24.850
159	5795	24.559	≤ 24.850

Directional gain = $2.7+10\log(7) = 11.15$

Limit = $30\text{dBm}-(11.15-6) = 24.85$

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(80MHz)(ANT 0)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
155	5775	15.250	≤ 24.850

Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 155

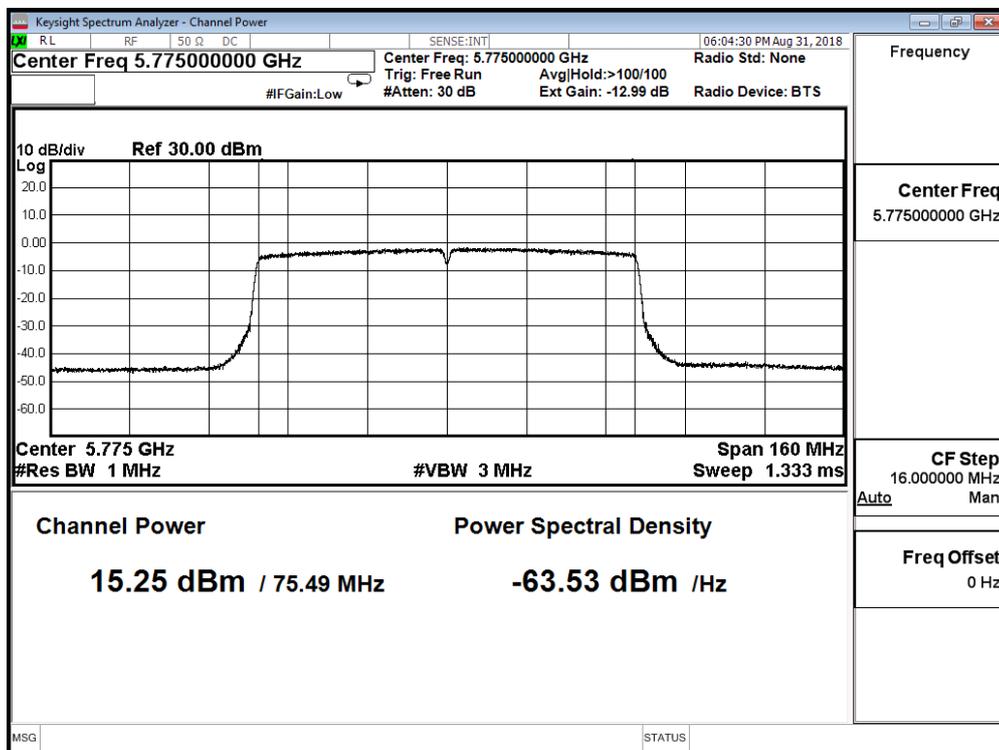

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(80MHz)(ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
155	5775	15.460	≤ 24.850

Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 155

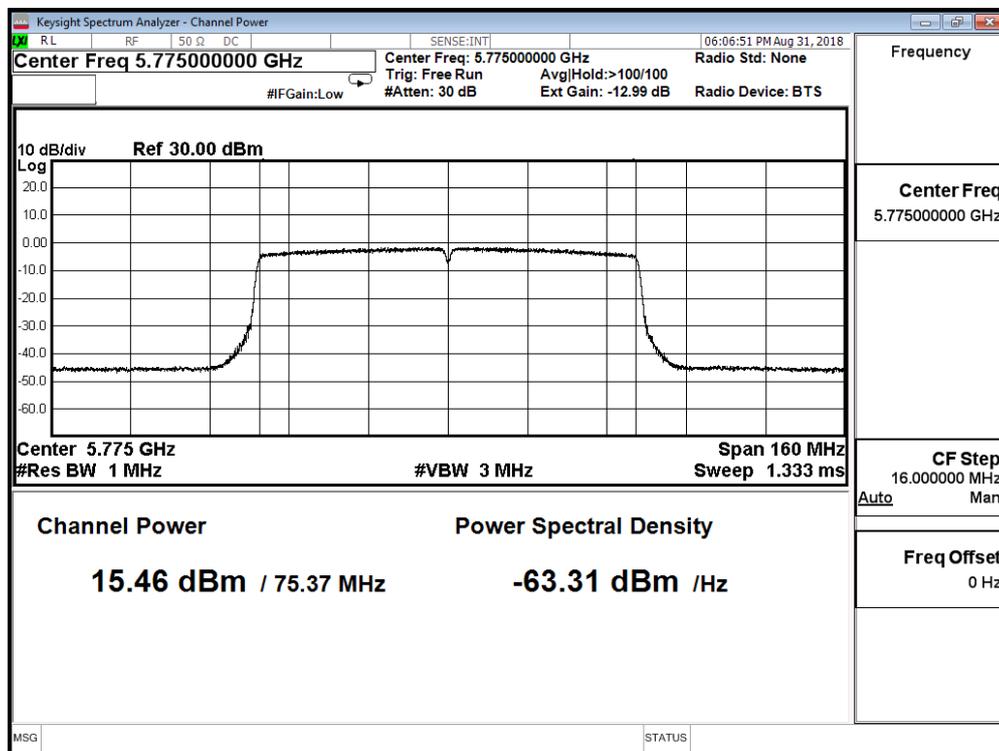

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(80MHz)(ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
155	5775	15.250	≤ 24.850

Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 155

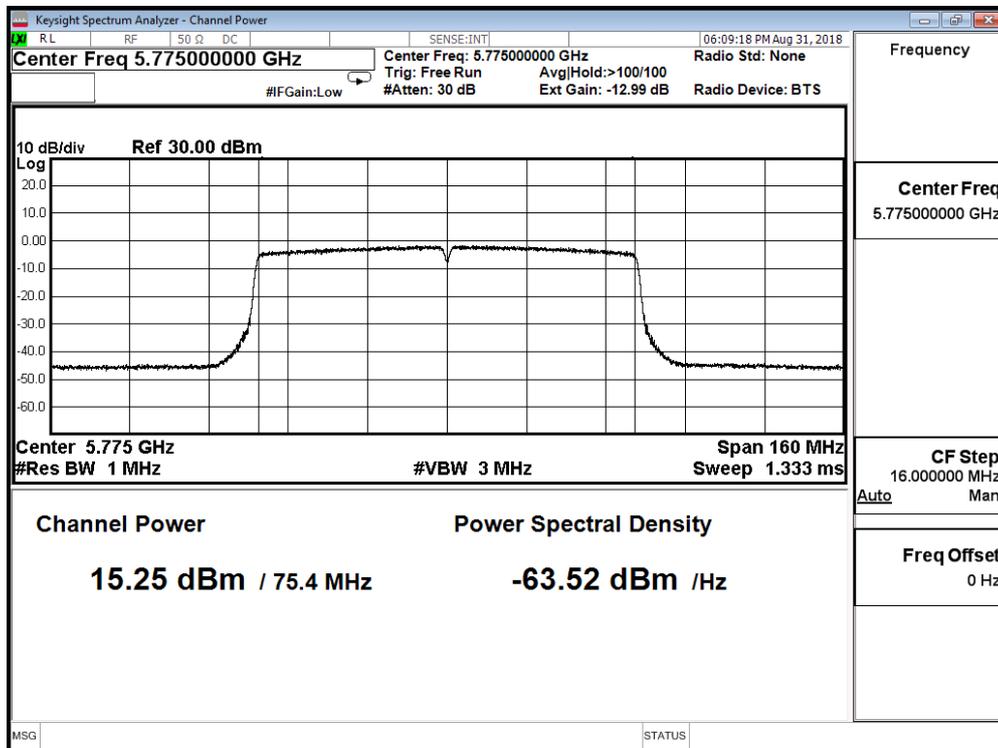

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(80MHz)(ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
155	5775	15.530	≤ 24.850

Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 155

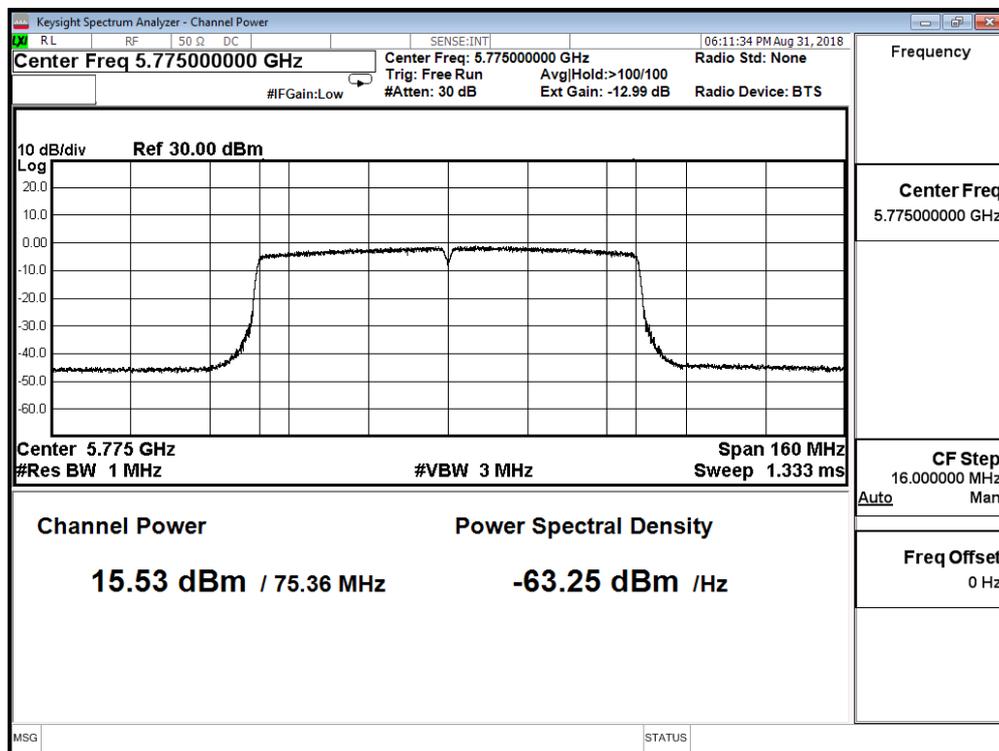

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(80MHz)(ANT 4)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
155	5775	15.950	≤ 24.850

Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 155

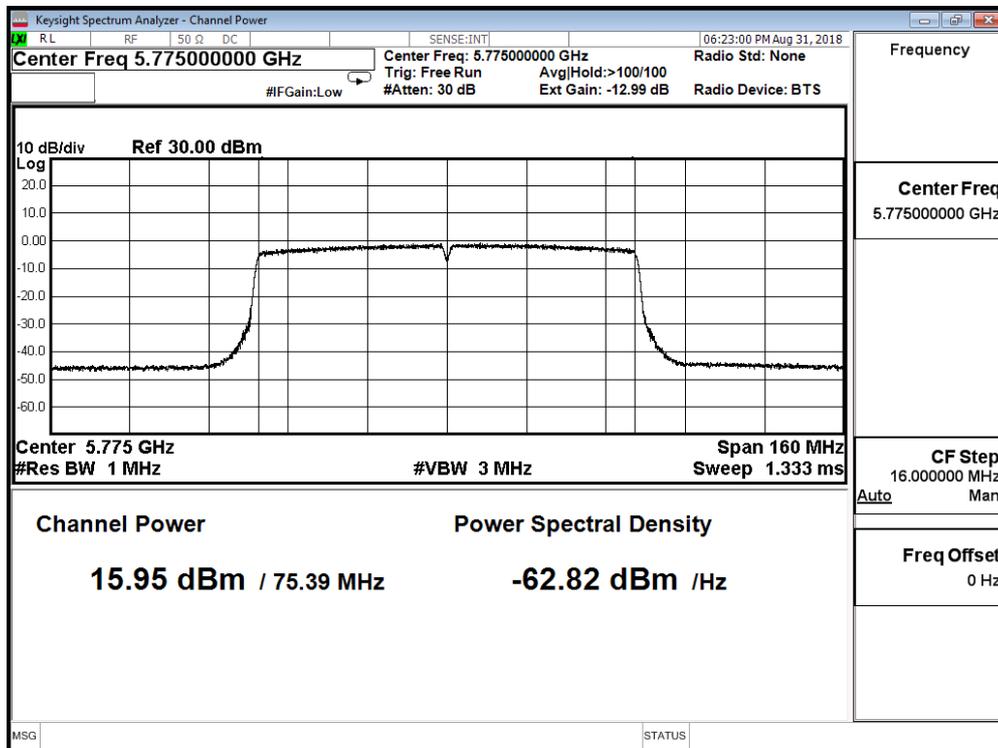

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(80MHz)(ANT 5)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
155	5775	15.570	≤ 24.850

Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 155

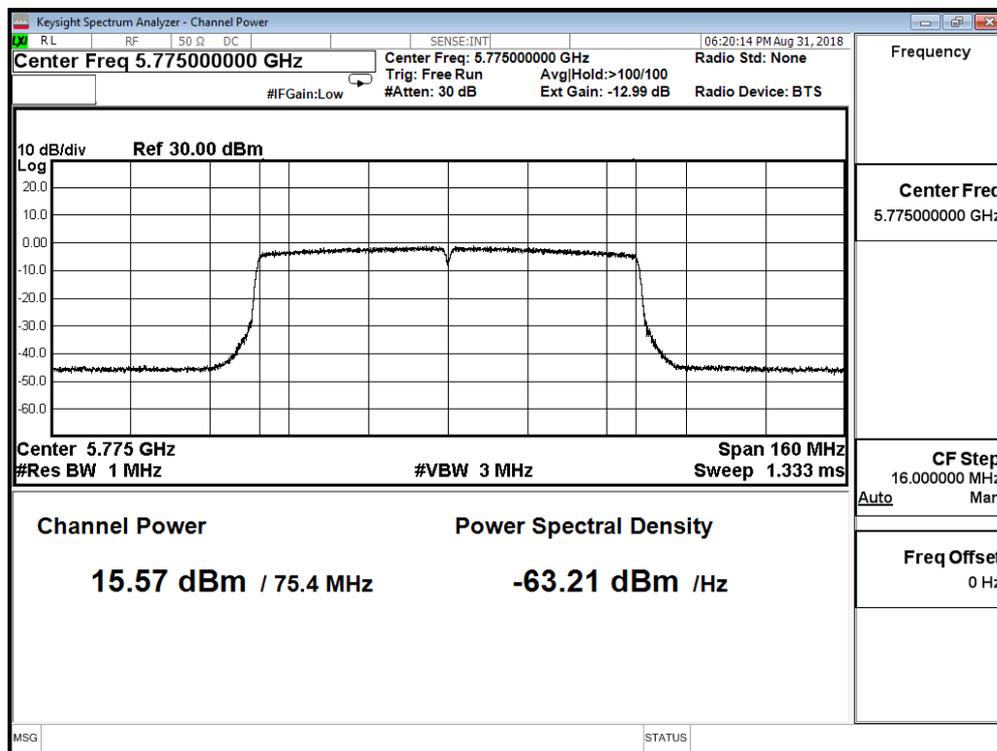

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(80MHz)(ANT 6)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
155	5775	15.310	≤ 24.850

Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 155

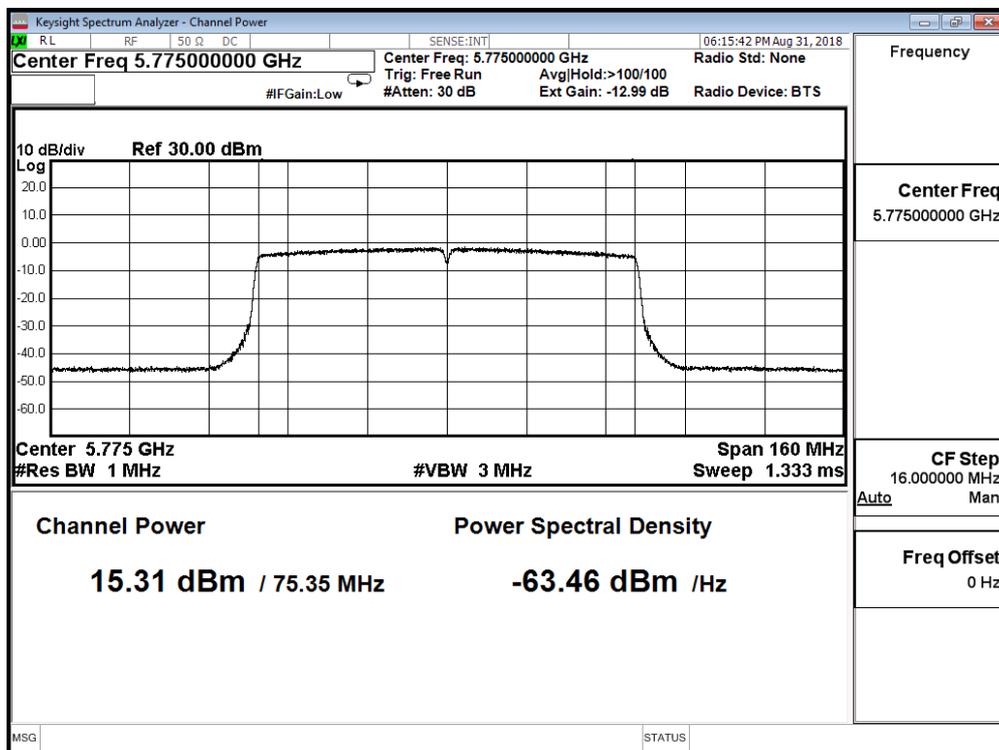

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(80MHz)(ANT 8)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
155	5775	15.900	≤ 24.850

Directional gain = $2.7 + 10 \log(7) = 11.15$

Limit = $30 \text{ dBm} - (11.15 - 6) = 24.85$

Channel 155

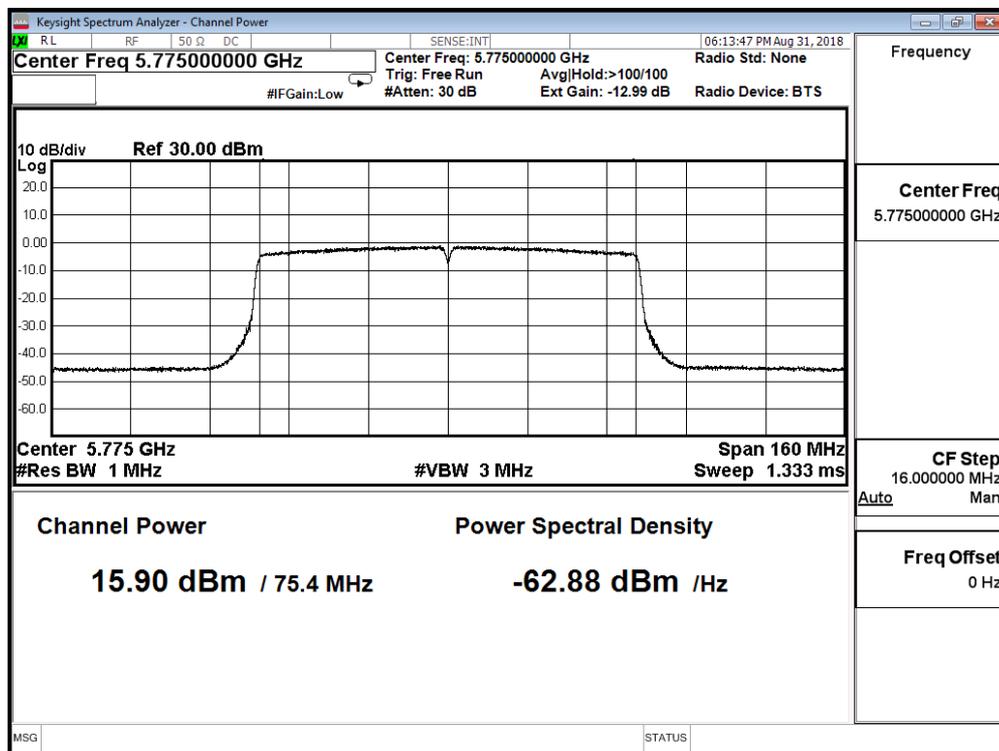

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 3:TX Beamforming ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 0+1+2+3+4+5+6+8)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
155	5775	24.566	≤ 24.850

Directional gain = $2.7+10\log(7) = 11.15$


Limit = $30\text{dBm}-(11.15-6) = 24.85$

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD P-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 0)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	16.440	≤ 30.000
44	5220	16.710	≤ 30.000
48	5240	16.750	≤ 30.000


Channel 36

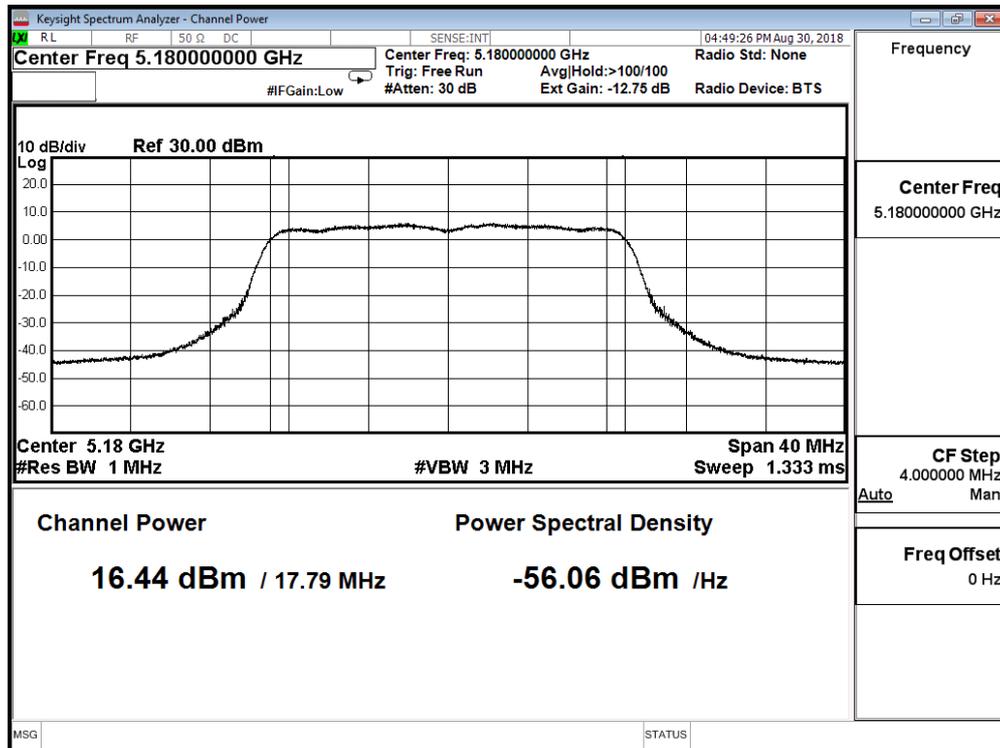

Channel 44

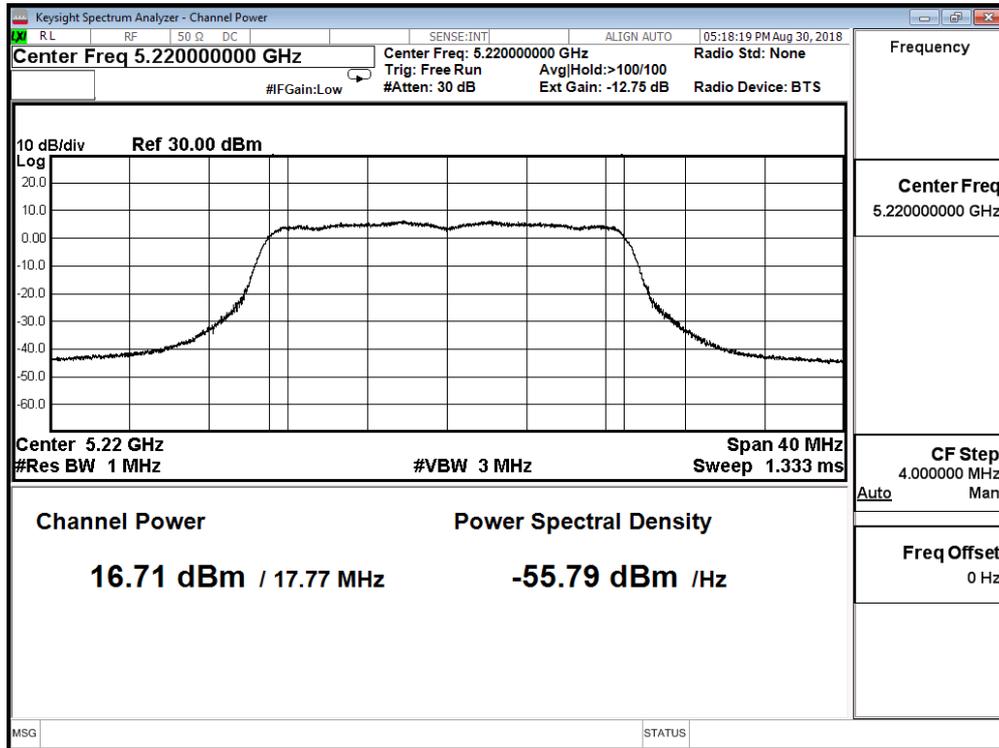

Channel 48

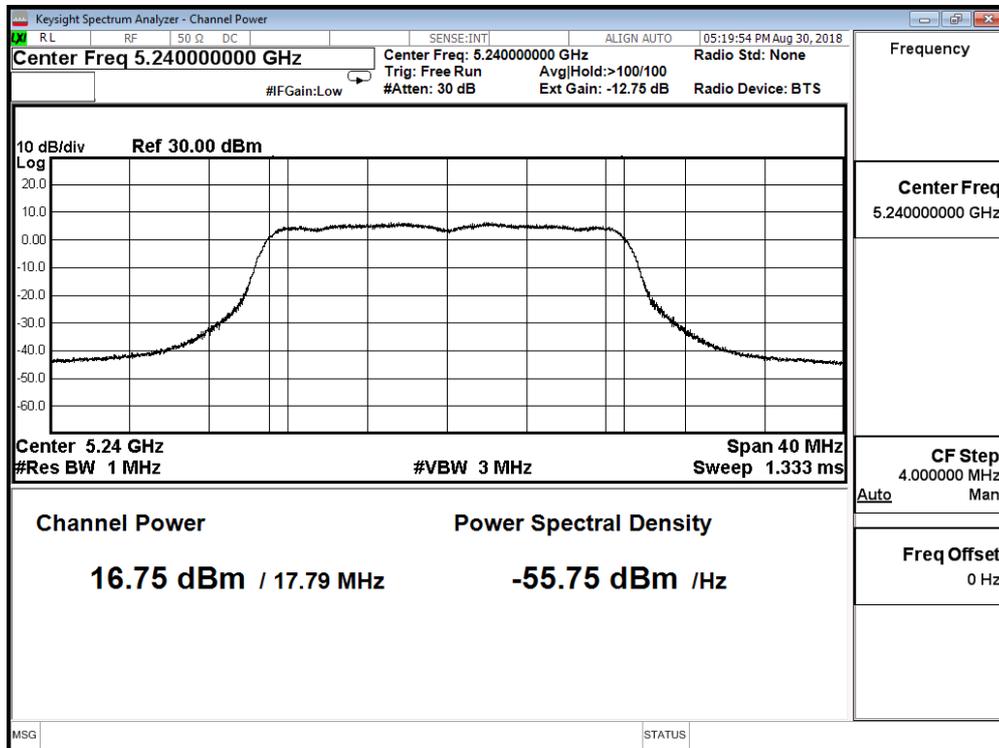


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 1)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	16.420	≤ 30.000
44	5220	16.180	≤ 30.000
48	5240	16.330	≤ 30.000


Channel 36

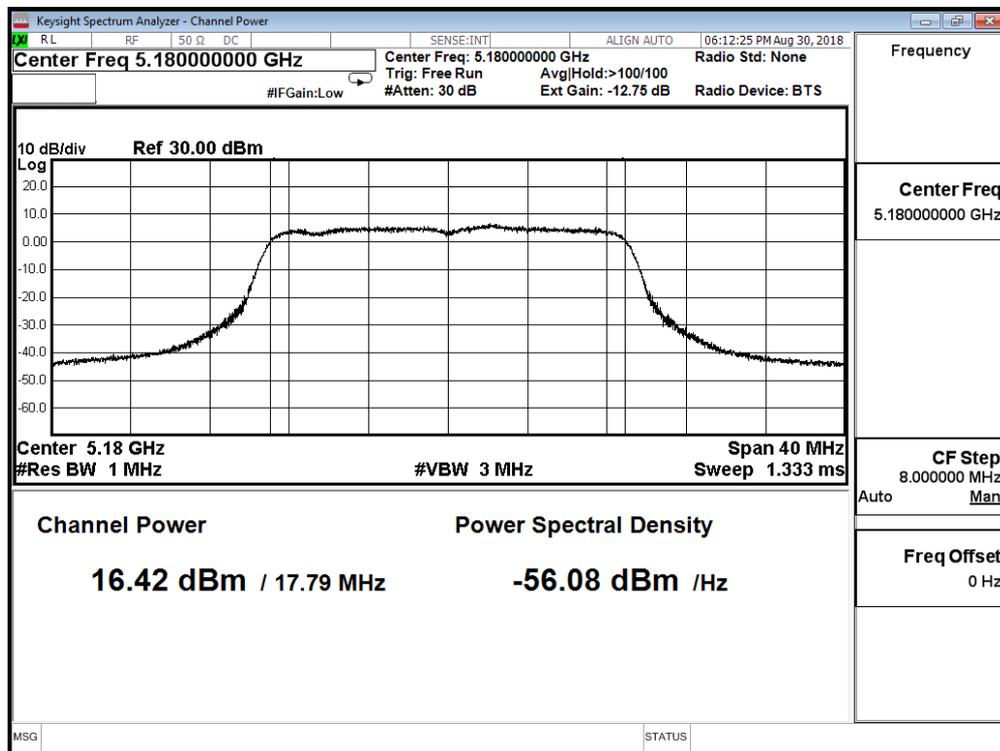

Channel 44

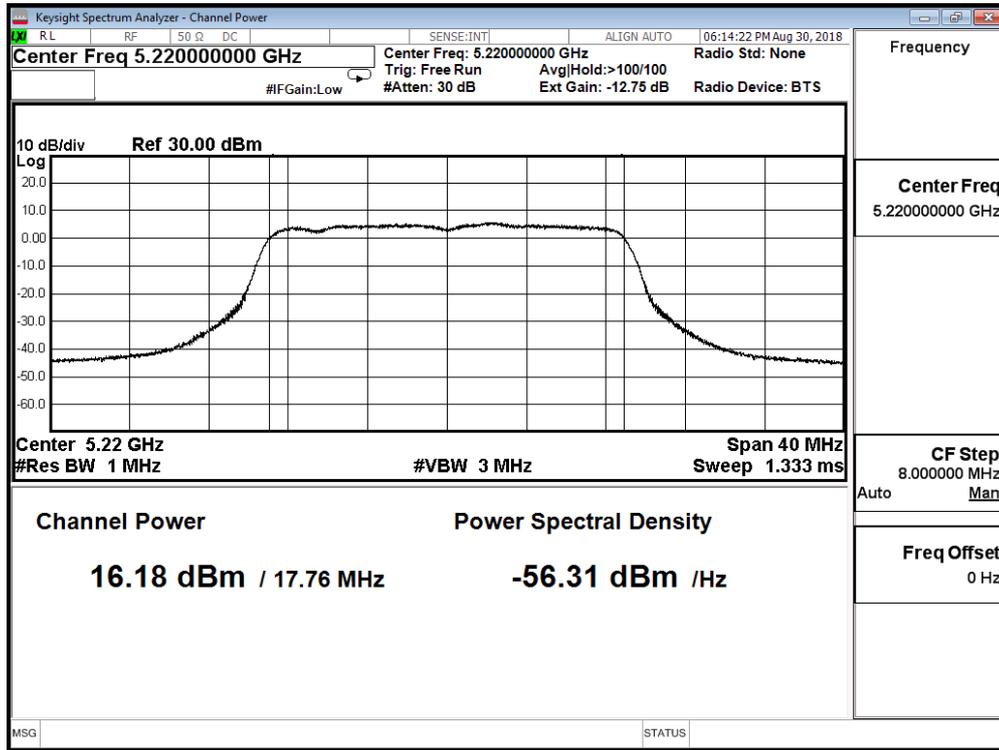

Channel 48

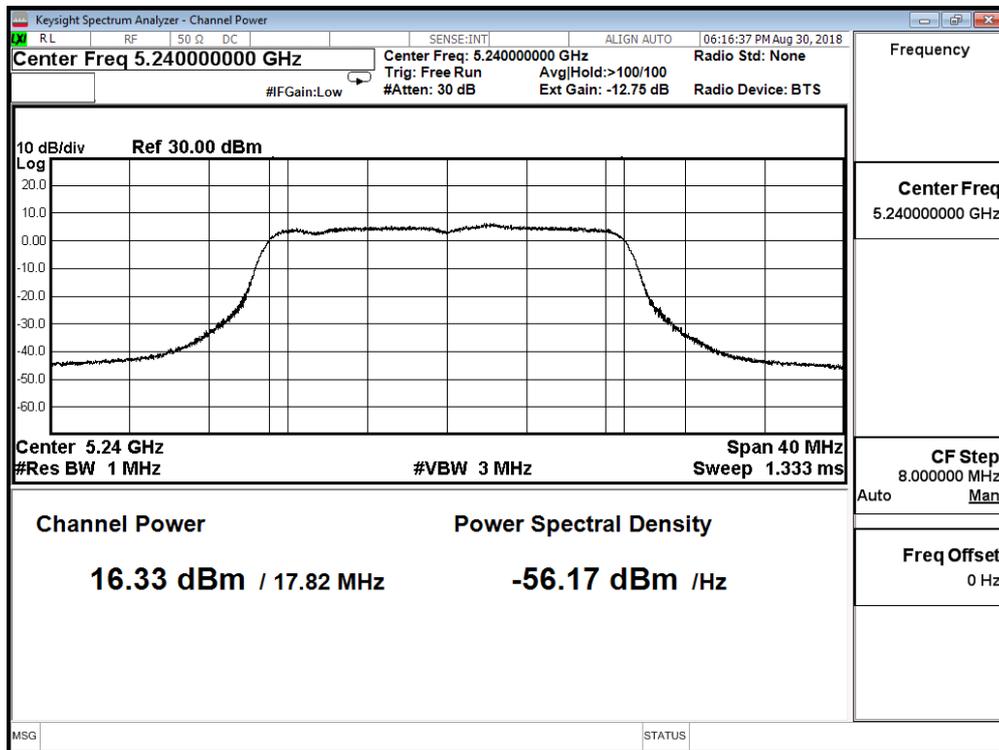


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	17.200	≤ 30.000
44	5220	17.480	≤ 30.000
48	5240	17.500	≤ 30.000


Channel 36

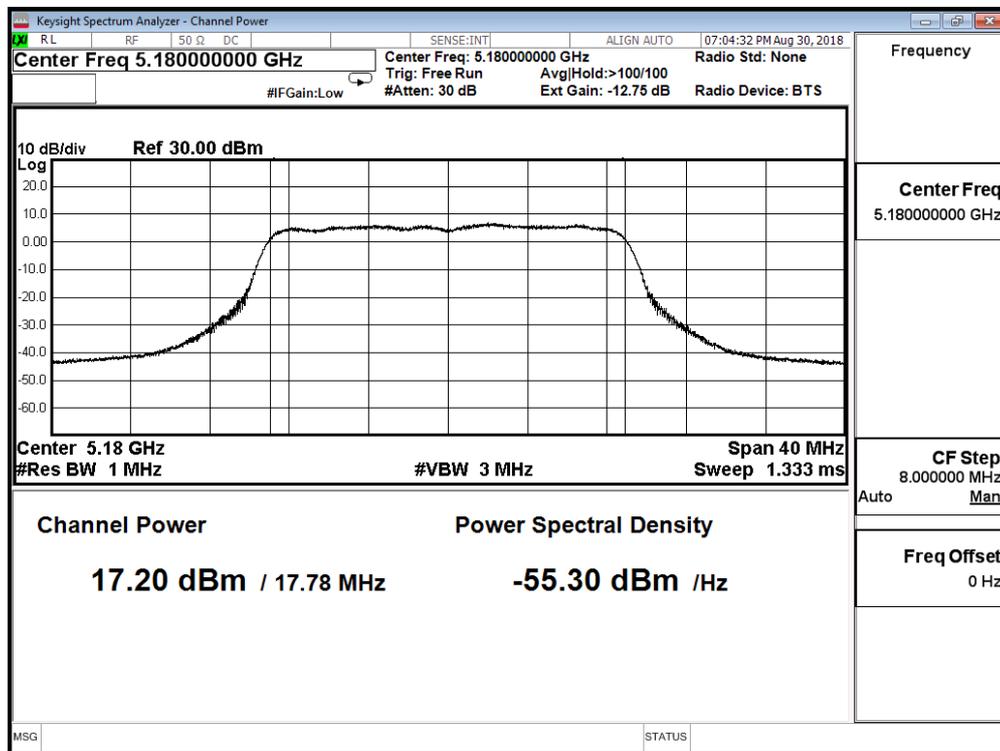

Channel 44

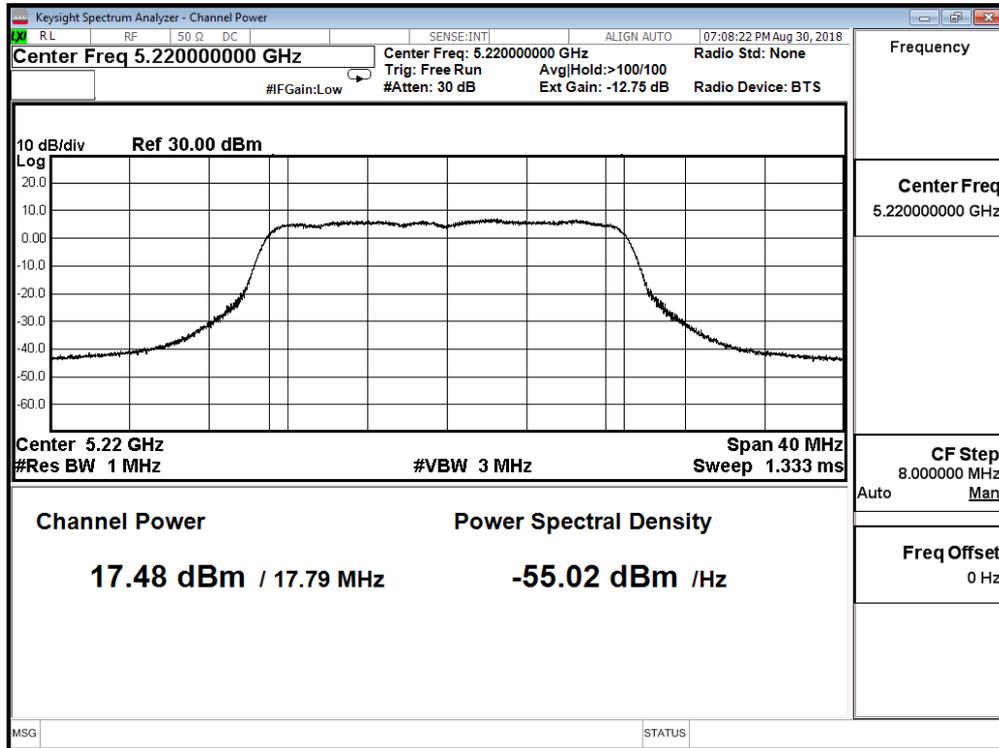

Channel 48

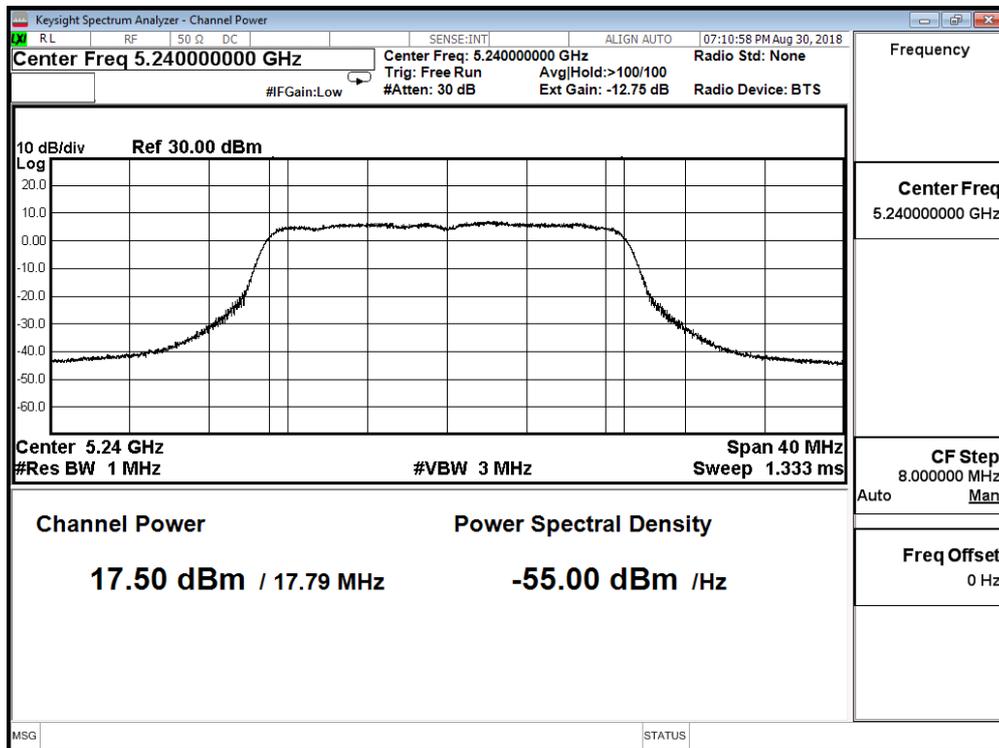


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 3)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	17.100	≤ 30.000
44	5220	16.890	≤ 30.000
48	5240	16.610	≤ 30.000


Channel 36

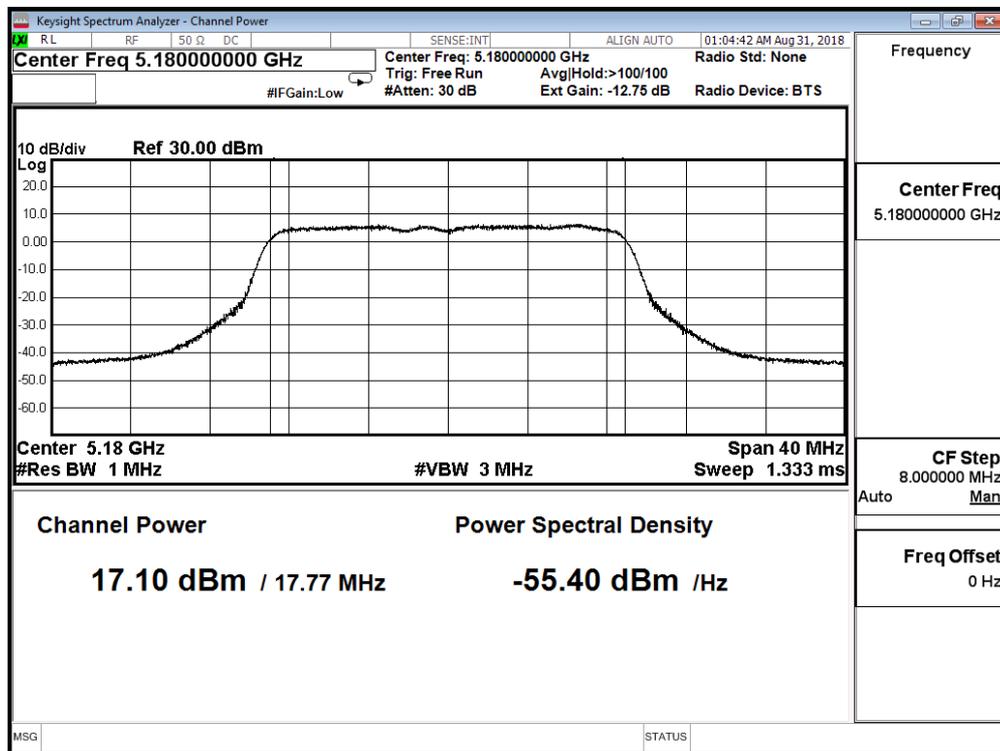

Channel 44

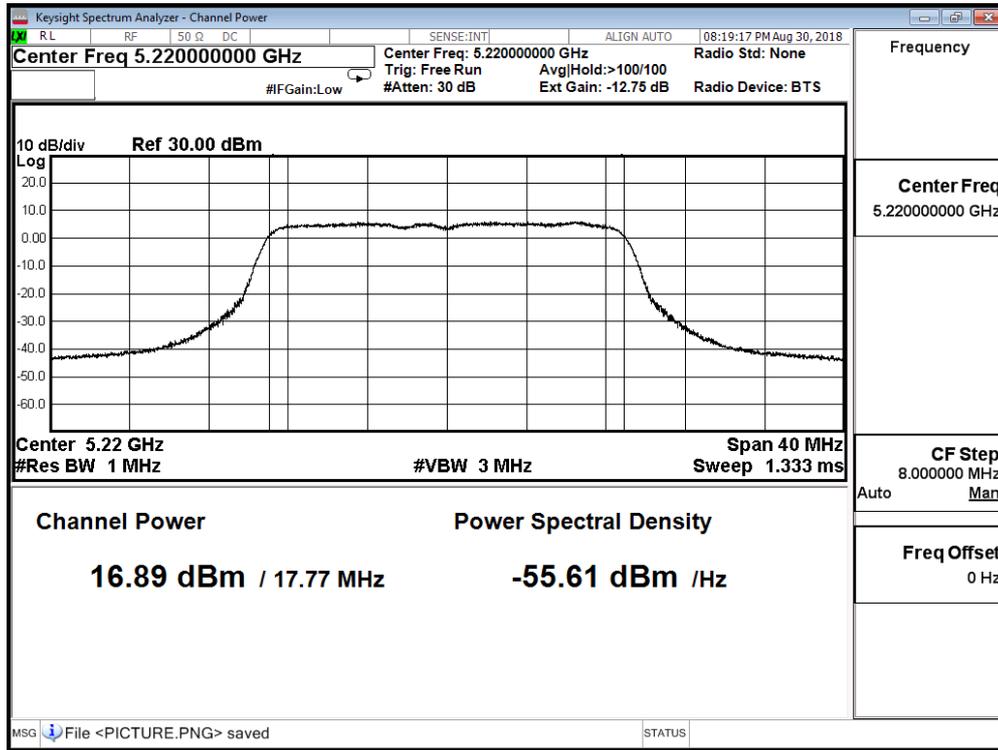

Channel 48

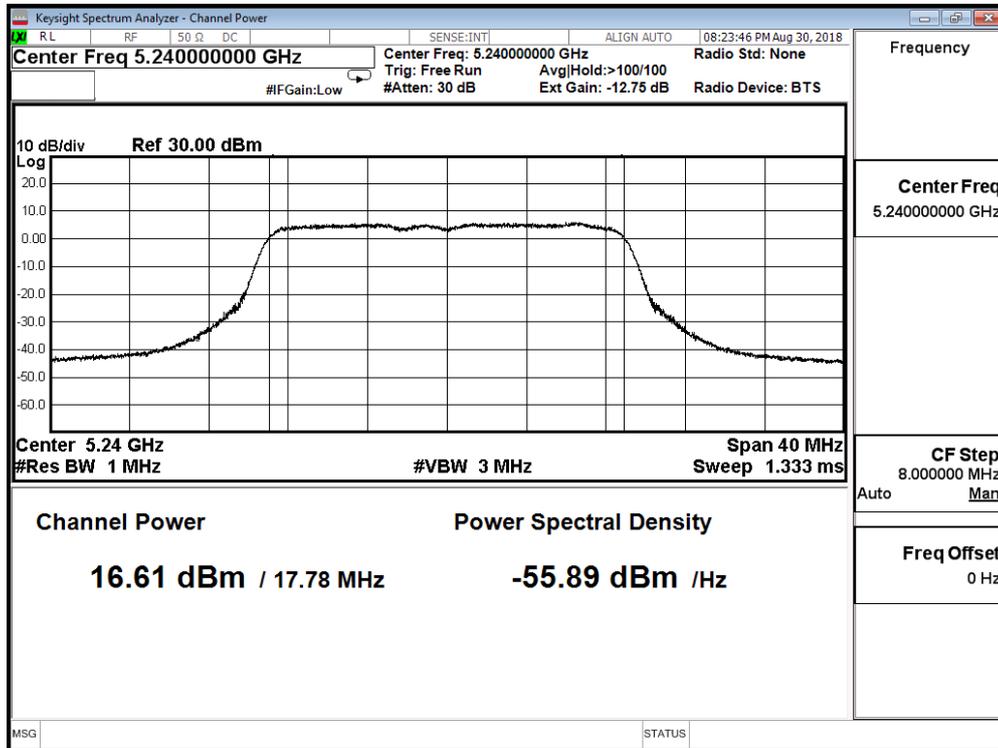


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 4)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	17.040	≤ 30.000
44	5220	17.130	≤ 30.000
48	5240	16.890	≤ 30.000


Channel 36

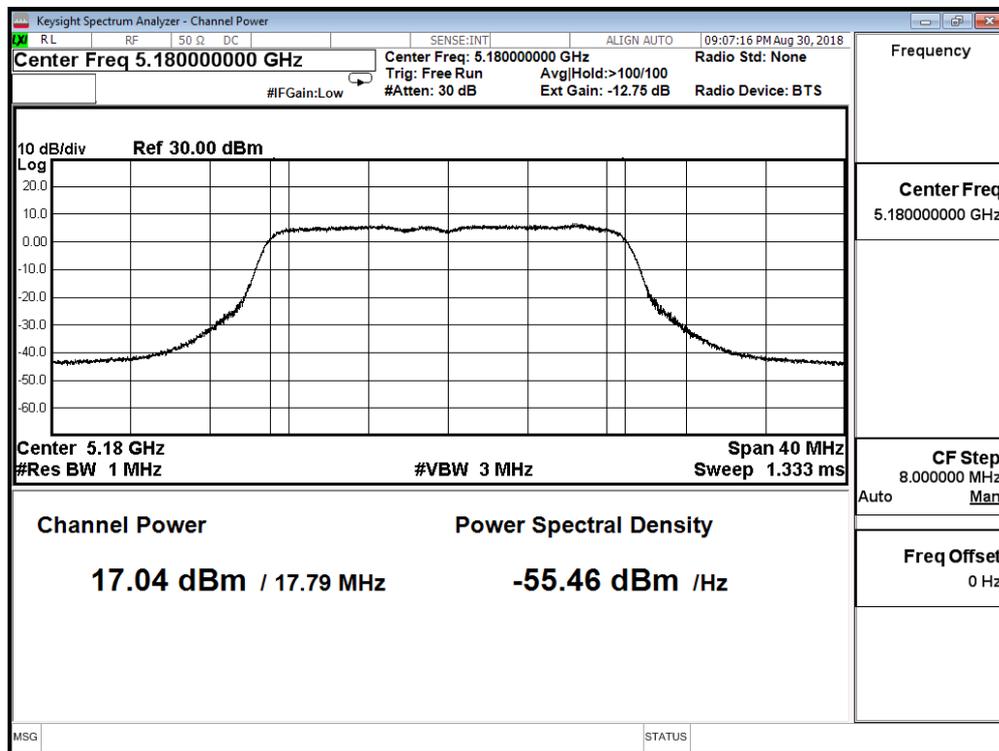

Channel 44

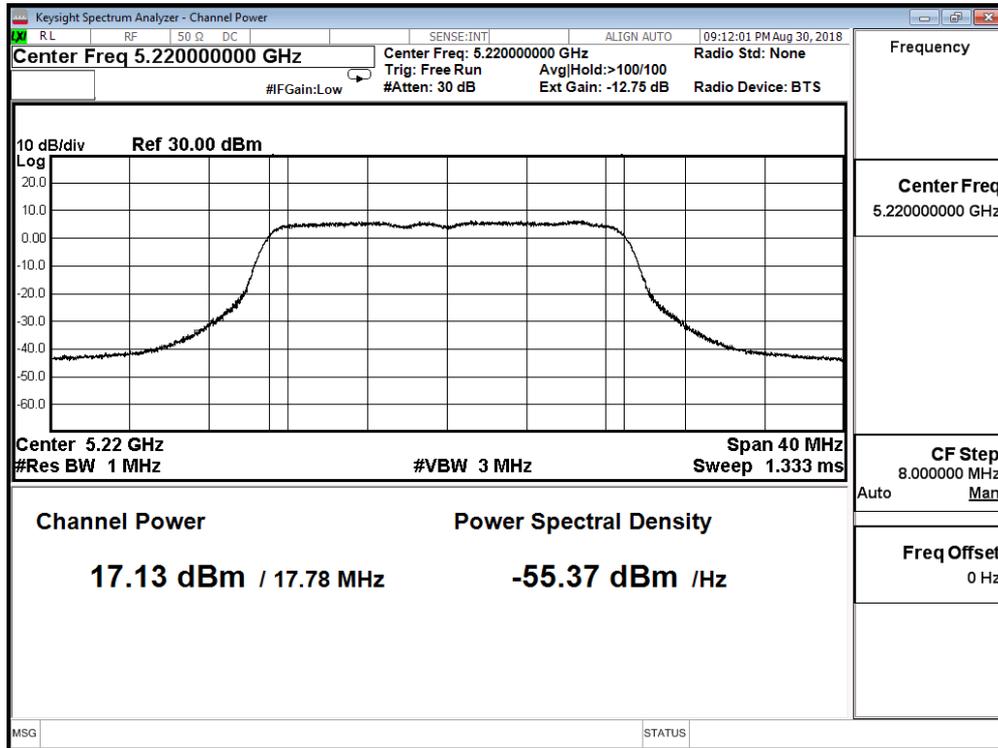

Channel 48

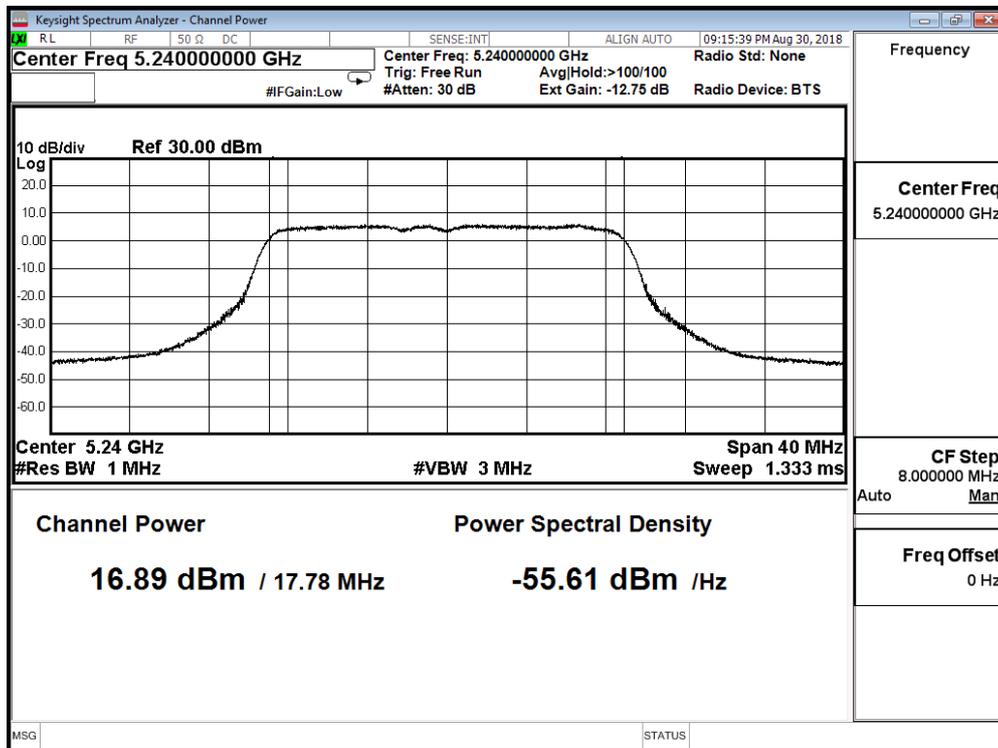


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD6-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 5)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	16.620	≤ 30.000
44	5220	17.110	≤ 30.000
48	5240	17.620	≤ 30.000


Channel 36

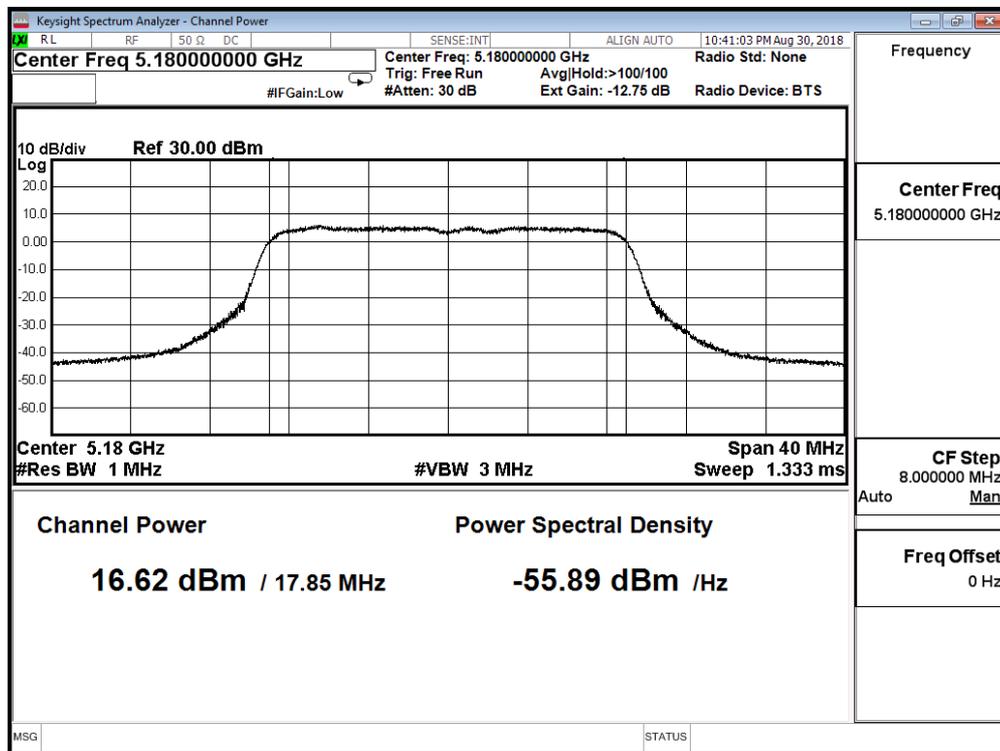

Channel 44

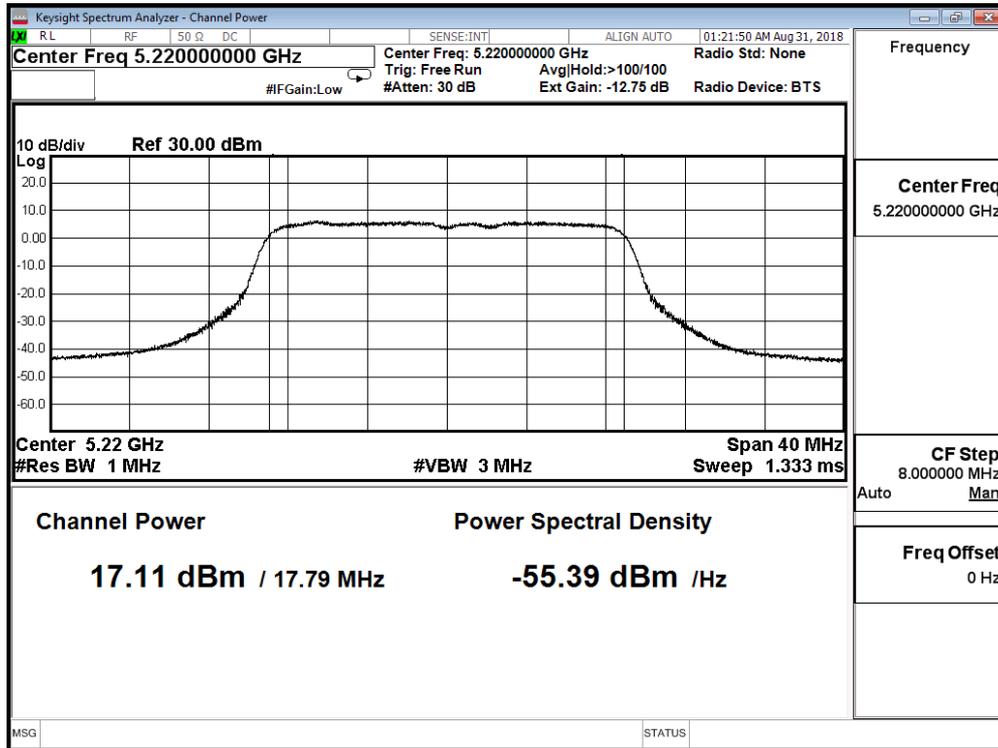

Channel 48

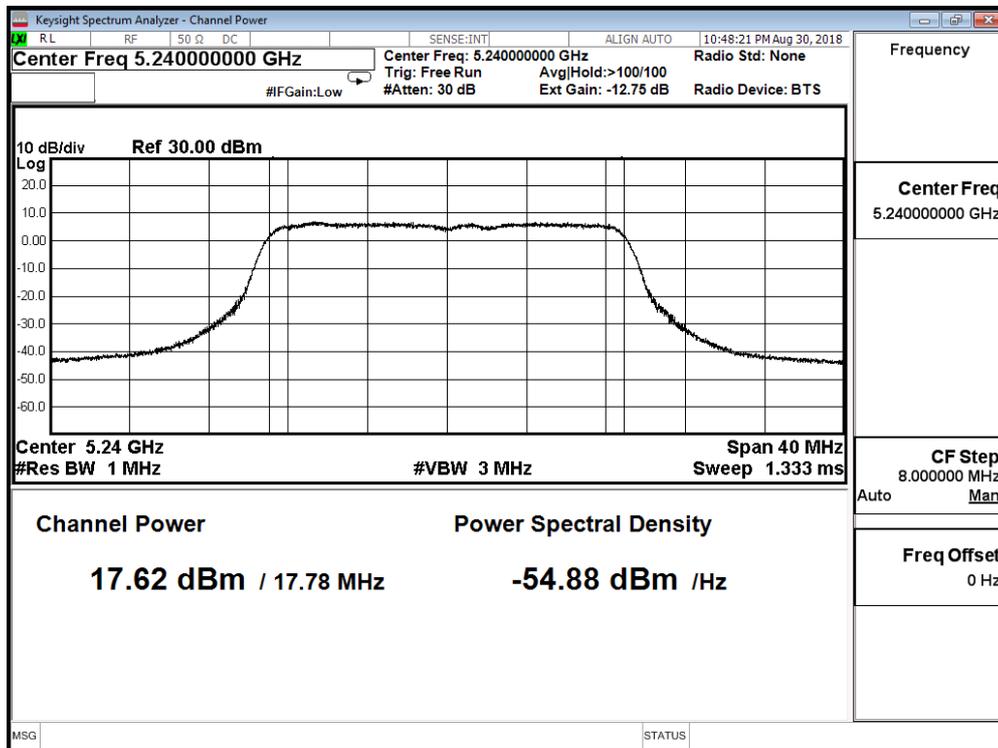


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 6)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	16.700	≤ 30.000
44	5220	16.950	≤ 30.000
48	5240	17.240	≤ 30.000


Channel 36

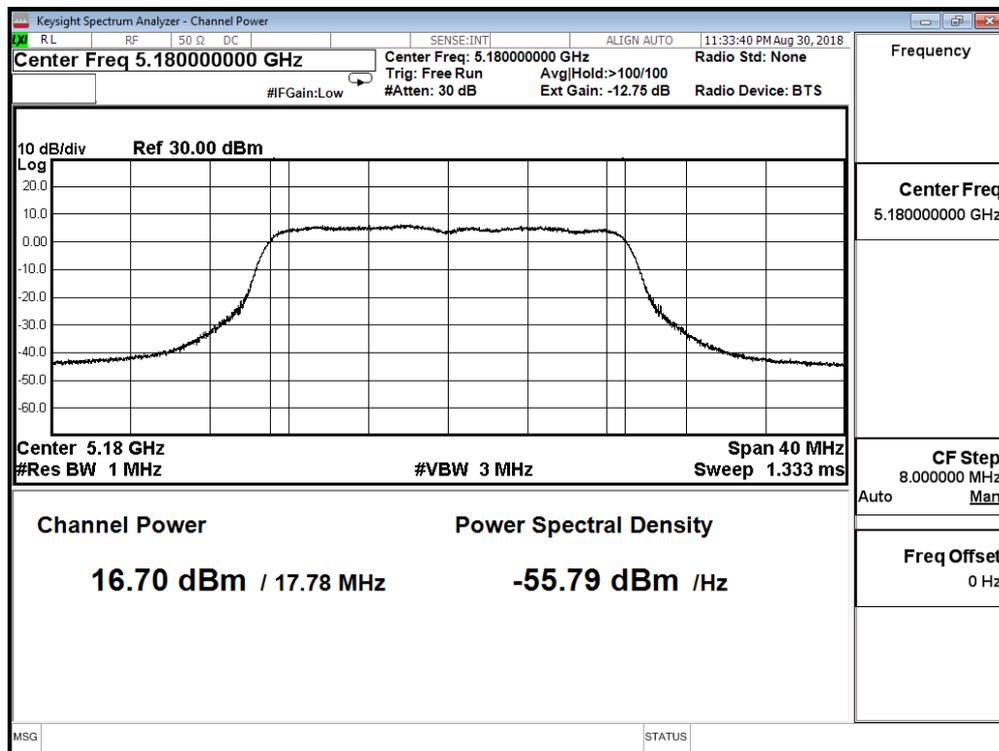

Channel 44

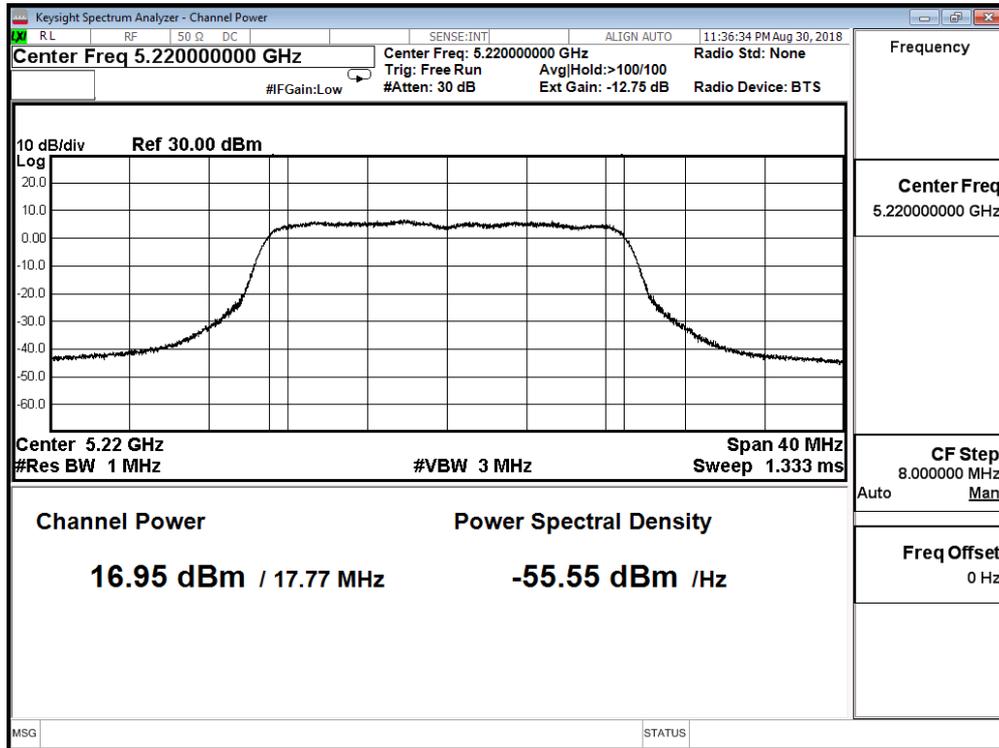

Channel 48

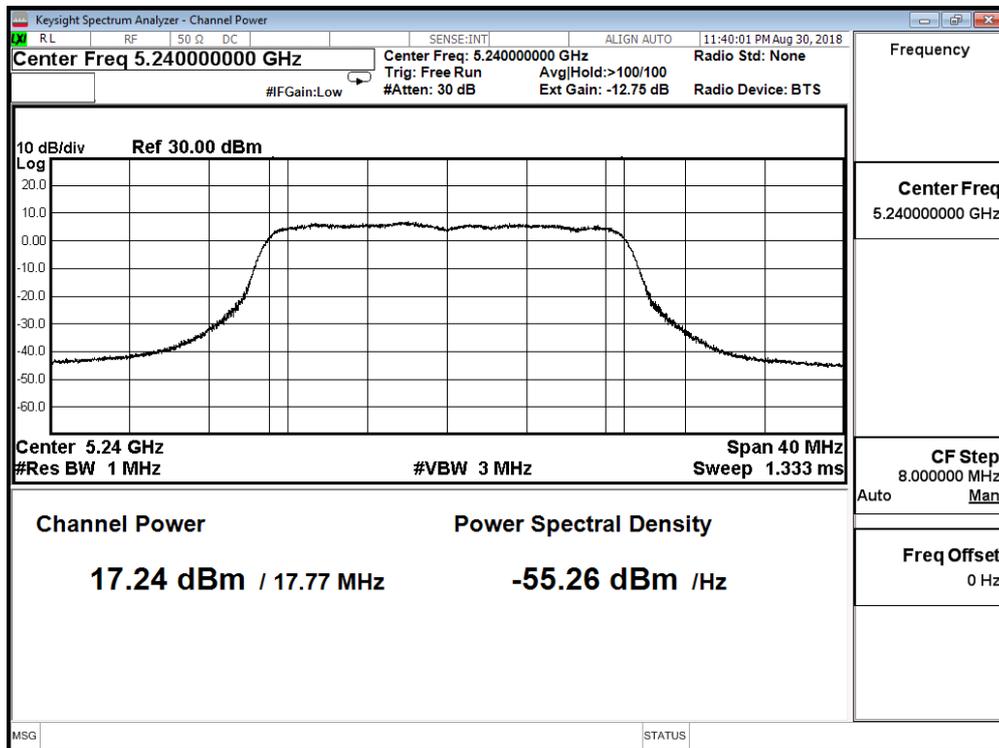


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD P-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H


IEEE 802.11ac(20MHz)(ANT 8)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	17.070	≤ 30.000
44	5220	16.880	≤ 30.000
48	5240	17.120	≤ 30.000


Channel 36

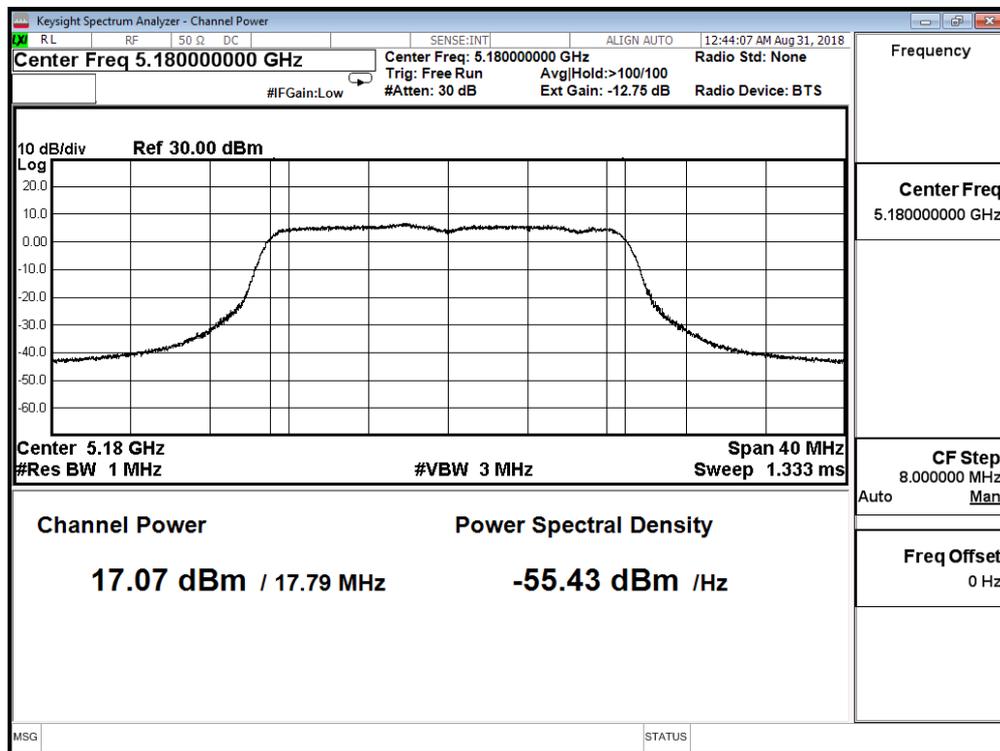

Channel 44

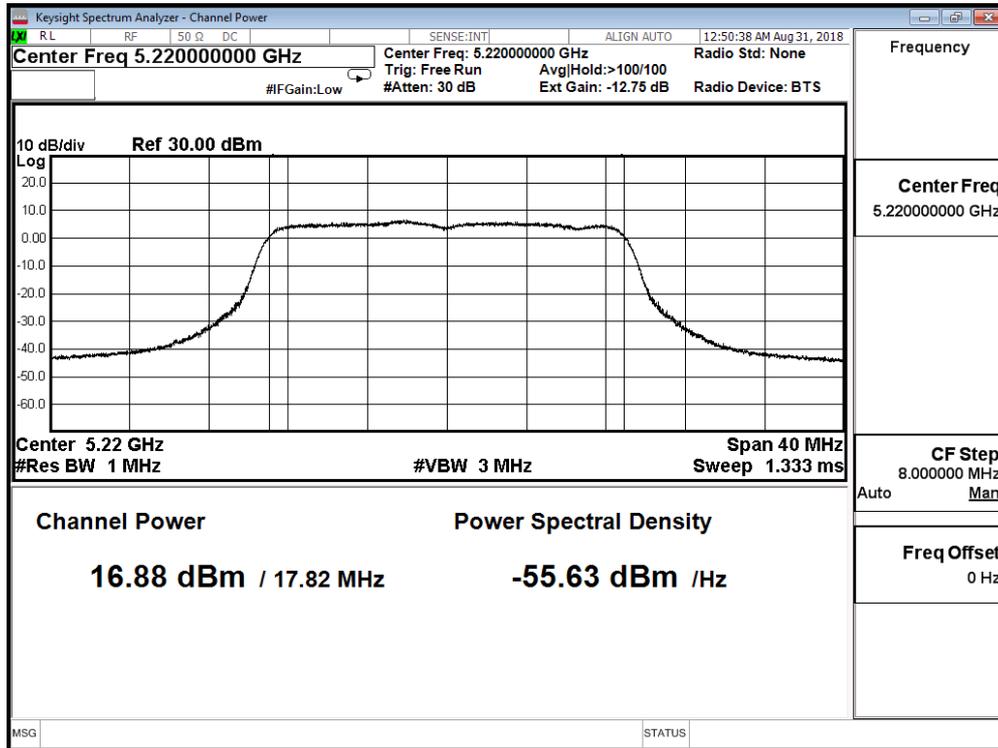

Channel 48

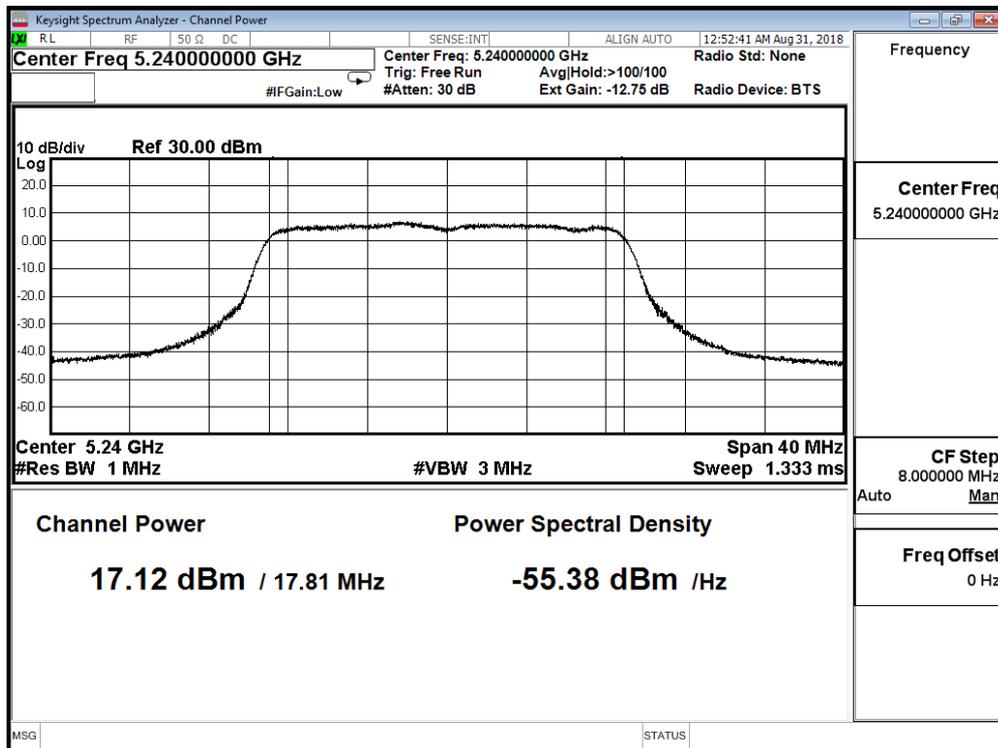

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD P-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H

IEEE 802.11ac(20MHz)(ANT 0+1+2+3+4+5+6+8)


Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	25.865	≤ 30.000
44	5220	25.961	≤ 30.000
48	5240	26.058	≤ 30.000

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 0)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
38	5190	15.970	≤ 30.000
46	5230	20.420	≤ 30.000

Channel 38

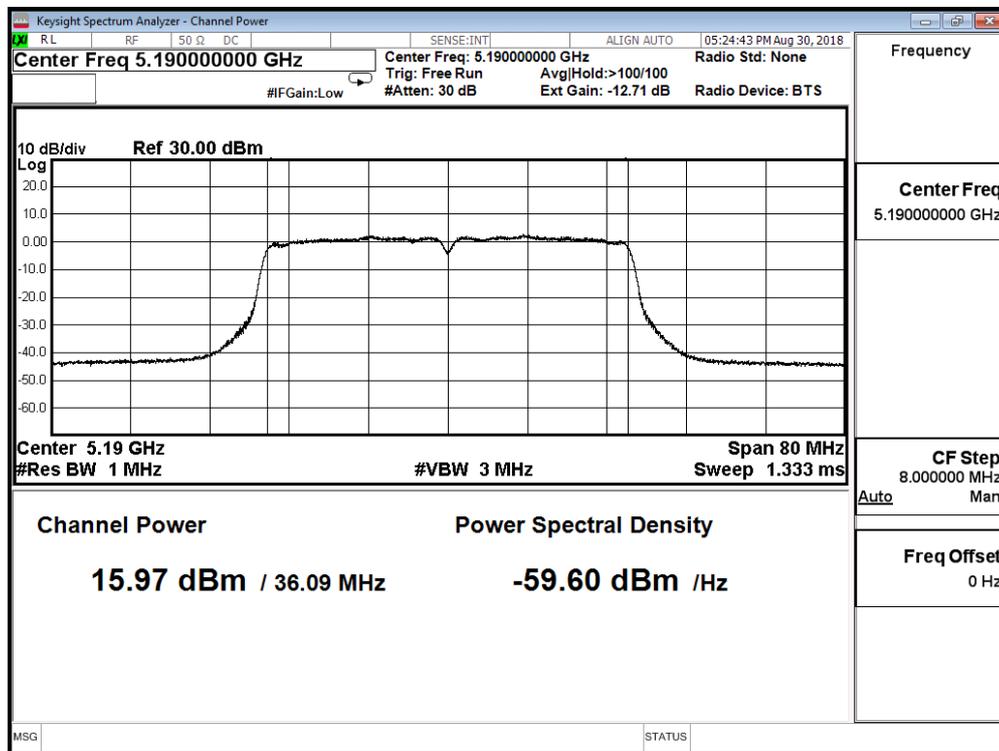

Channel 46

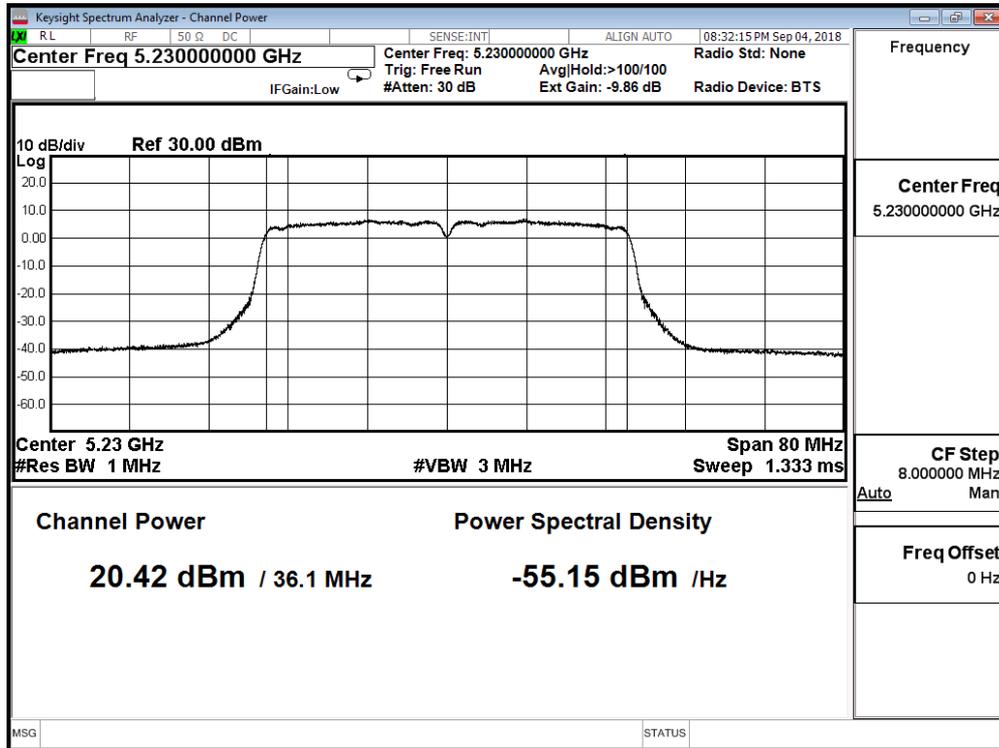


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.090	≤ 30.000
46	5230	19.780	≤ 30.000

Channel 38

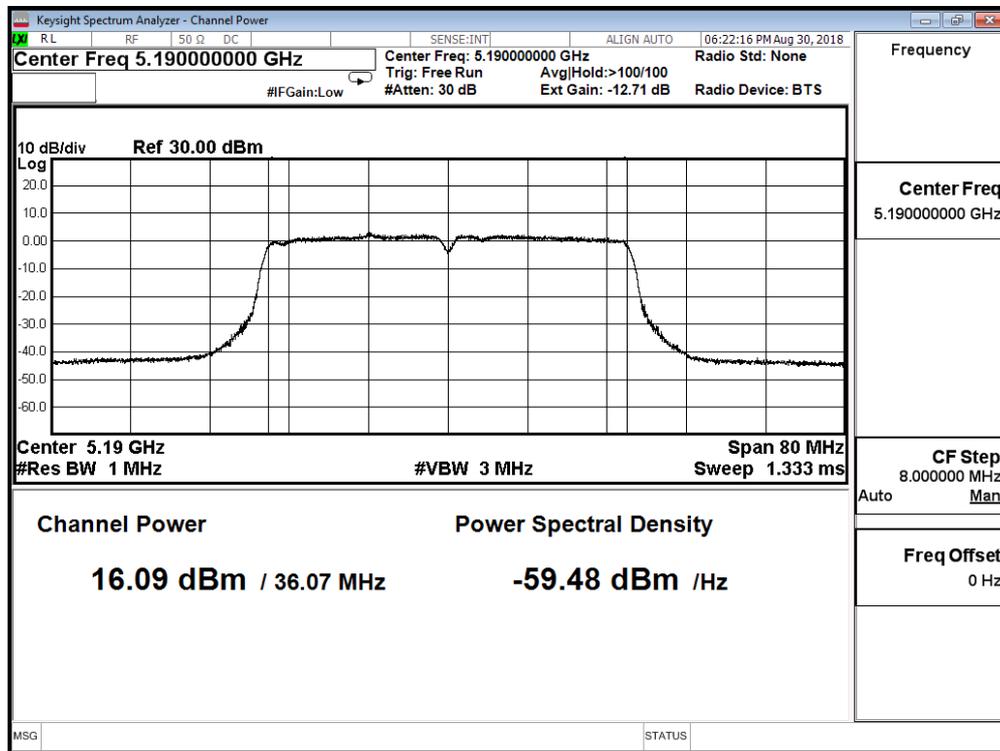

Channel 46

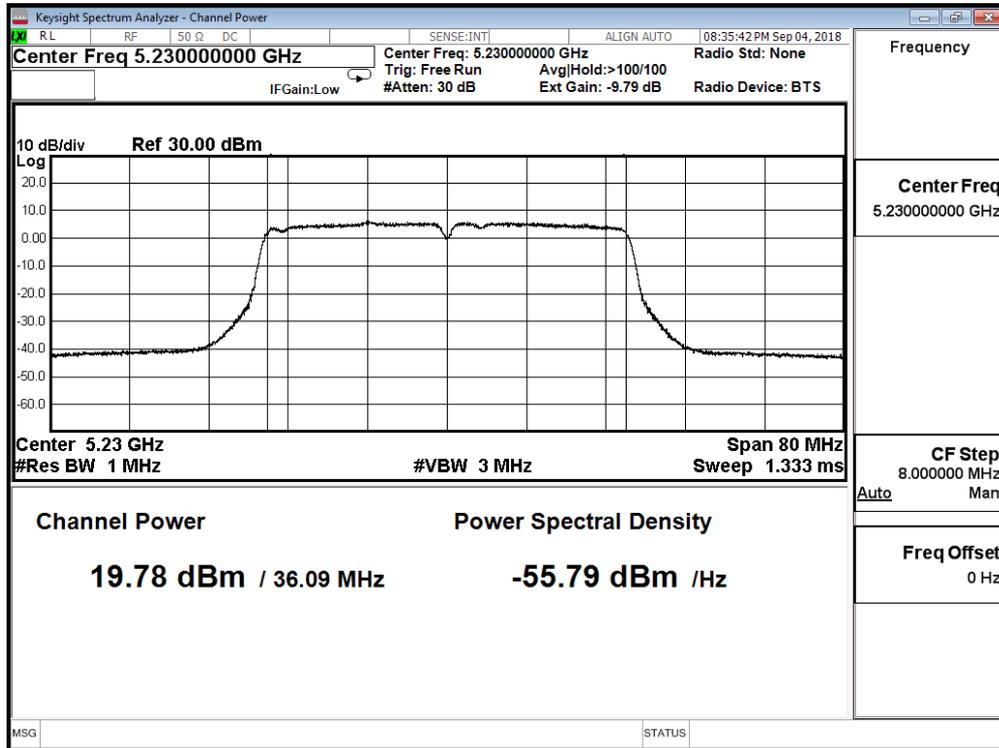


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.720	≤ 30.000
46	5230	21.280	≤ 30.000

Channel 38

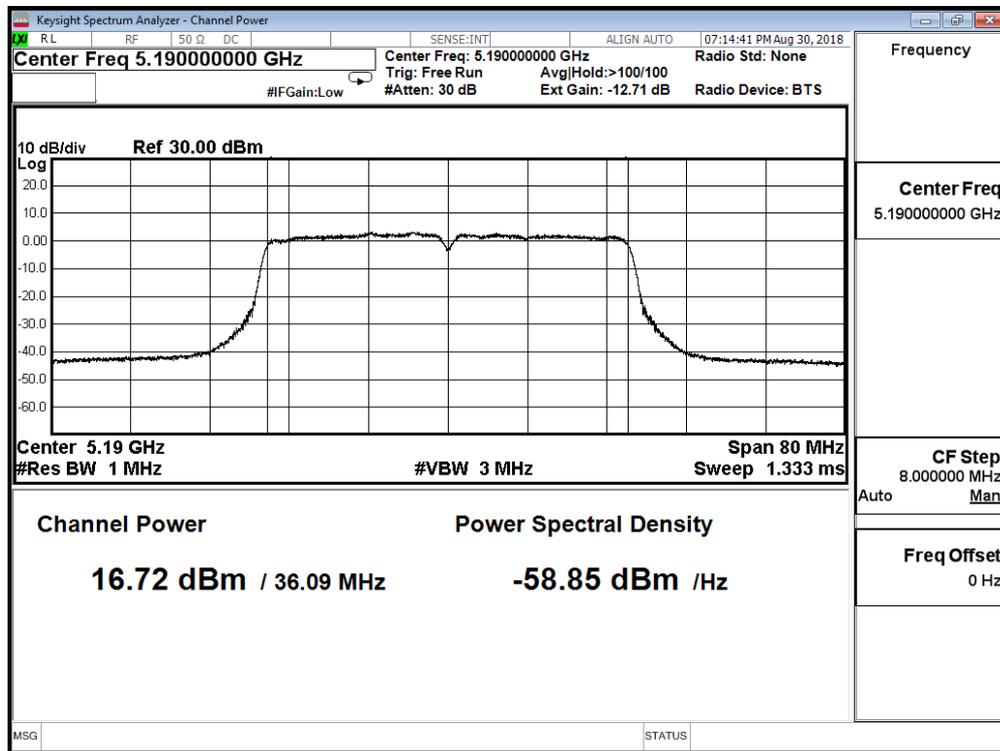

Channel 46

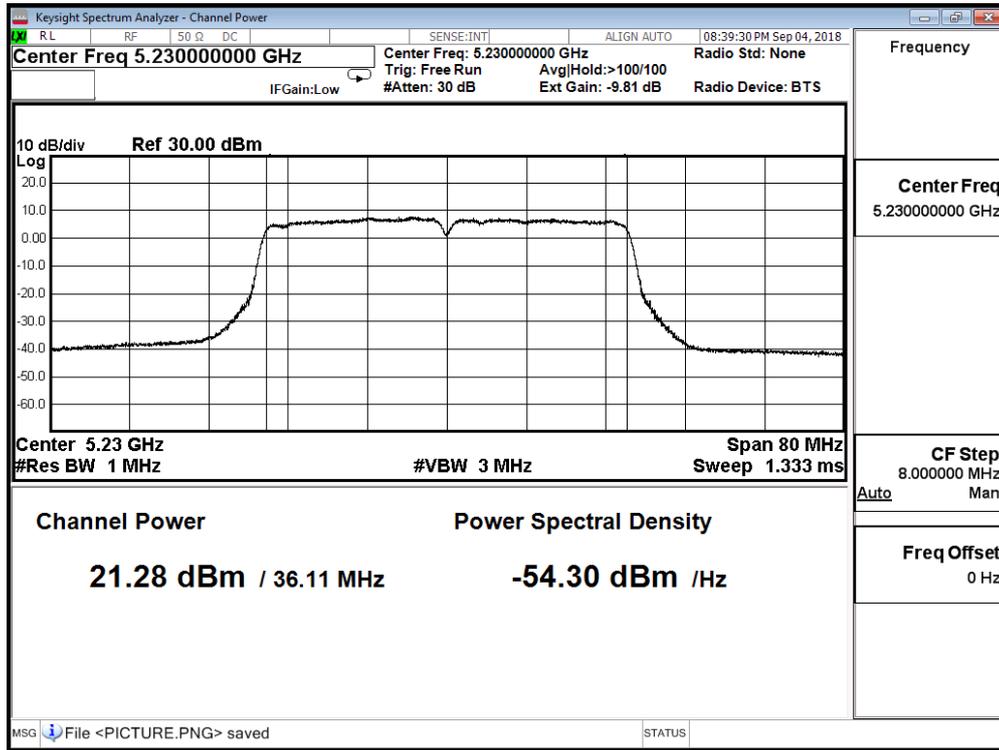


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.420	≤ 30.000
46	5230	20.850	≤ 30.000

Channel 38

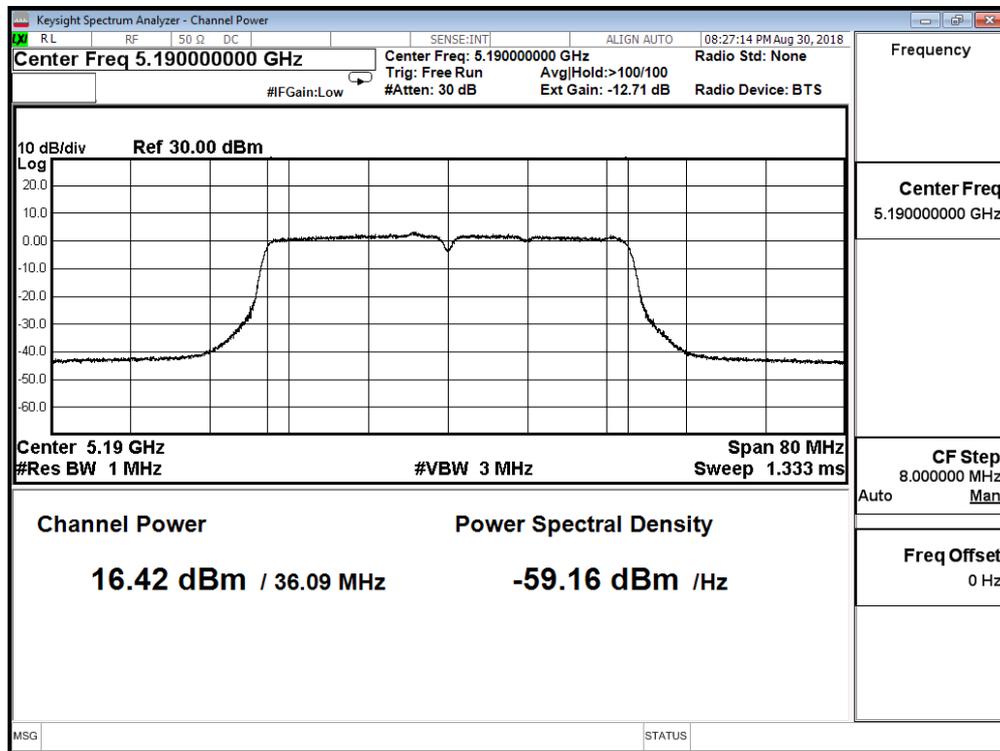

Channel 46

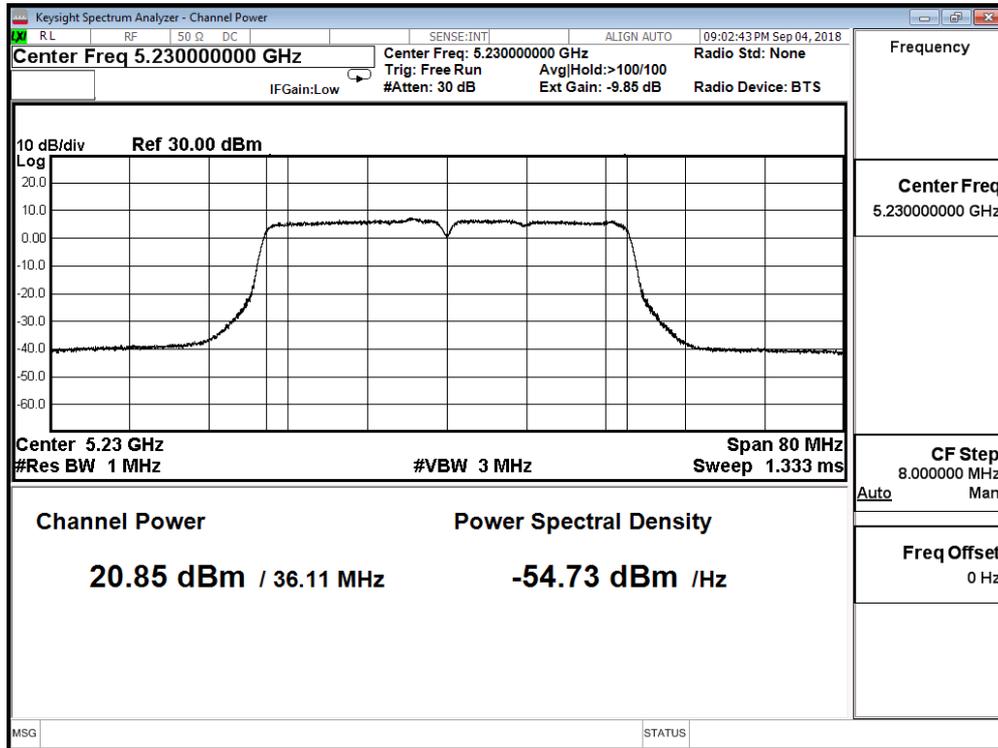


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 4)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.870	≤ 30.000
46	5230	20.480	≤ 30.000

Channel 38

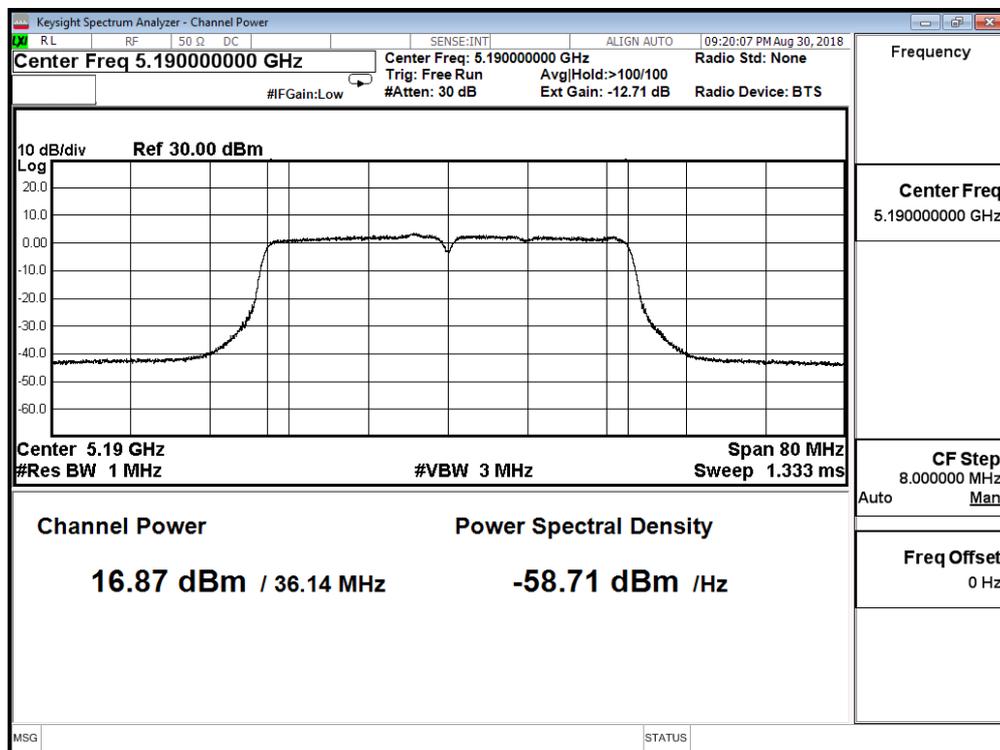

Channel 46

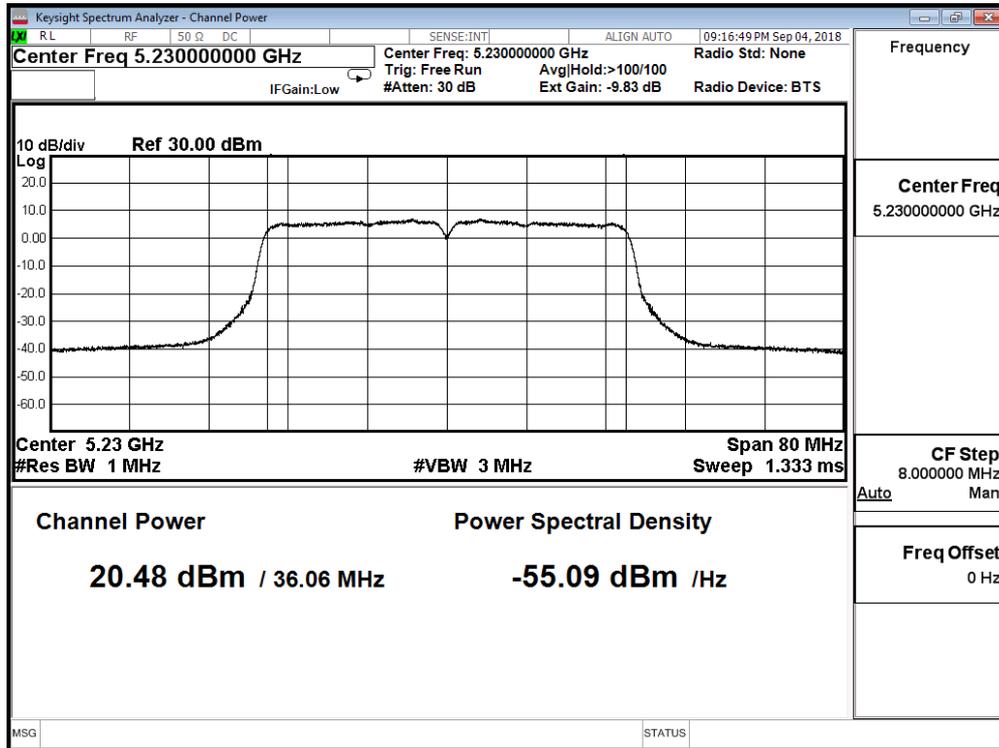


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/28	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 5)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	15.890	≤ 30.000
46	5230	20.400	≤ 30.000

Channel 38

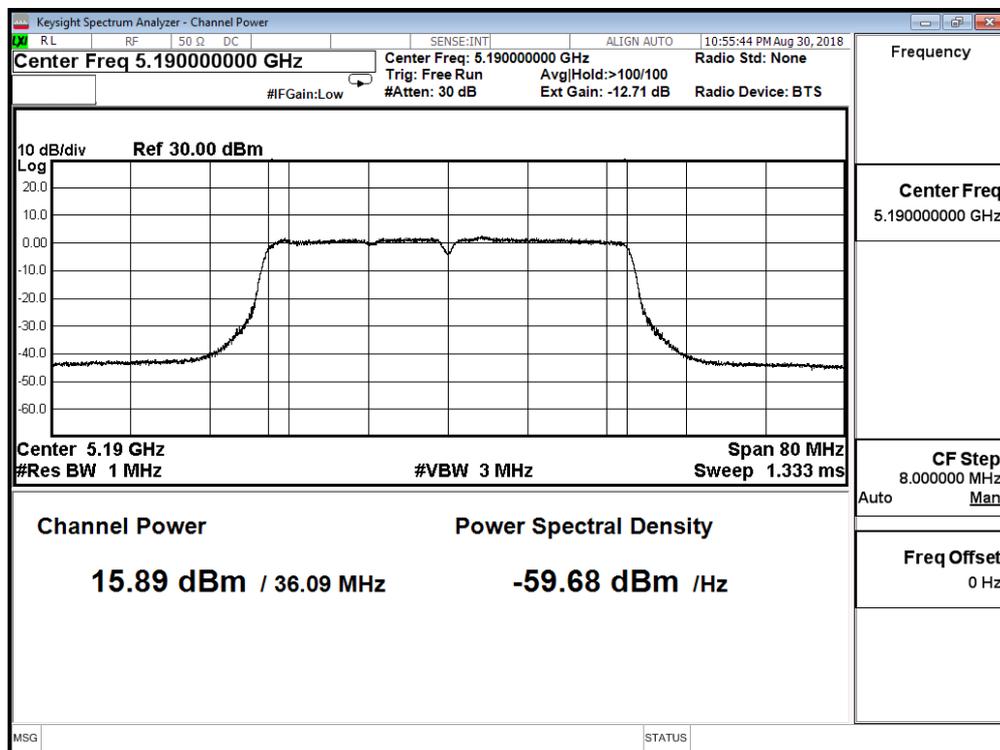

Channel 46

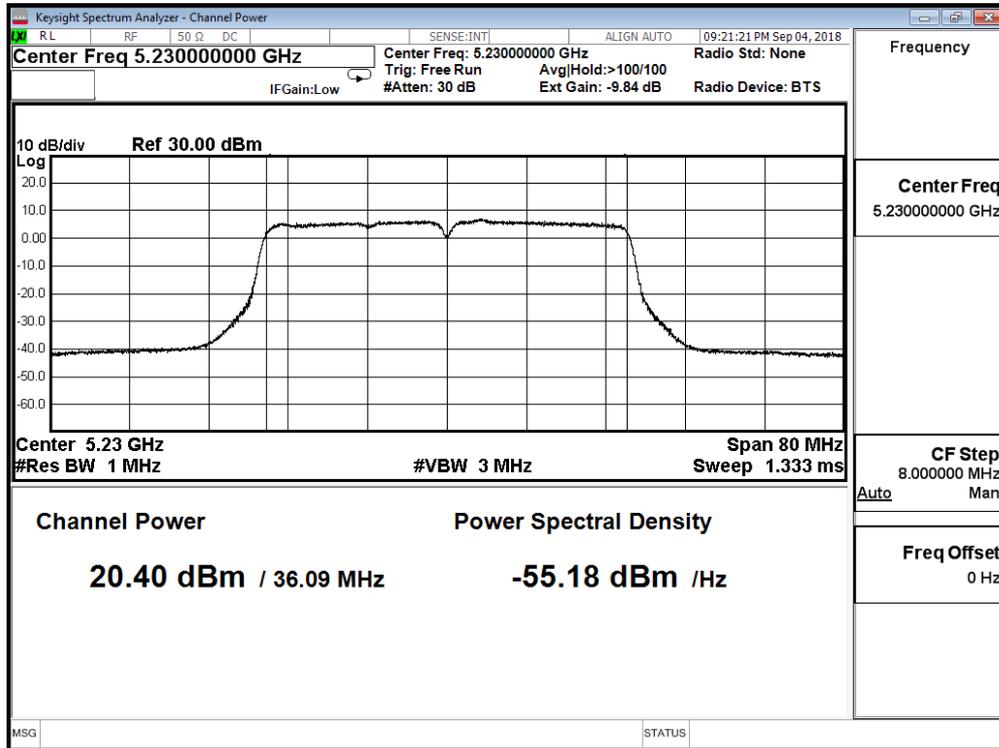


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/28	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 6)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.700	≤ 30.000
46	5230	19.830	≤ 30.000

Channel 38

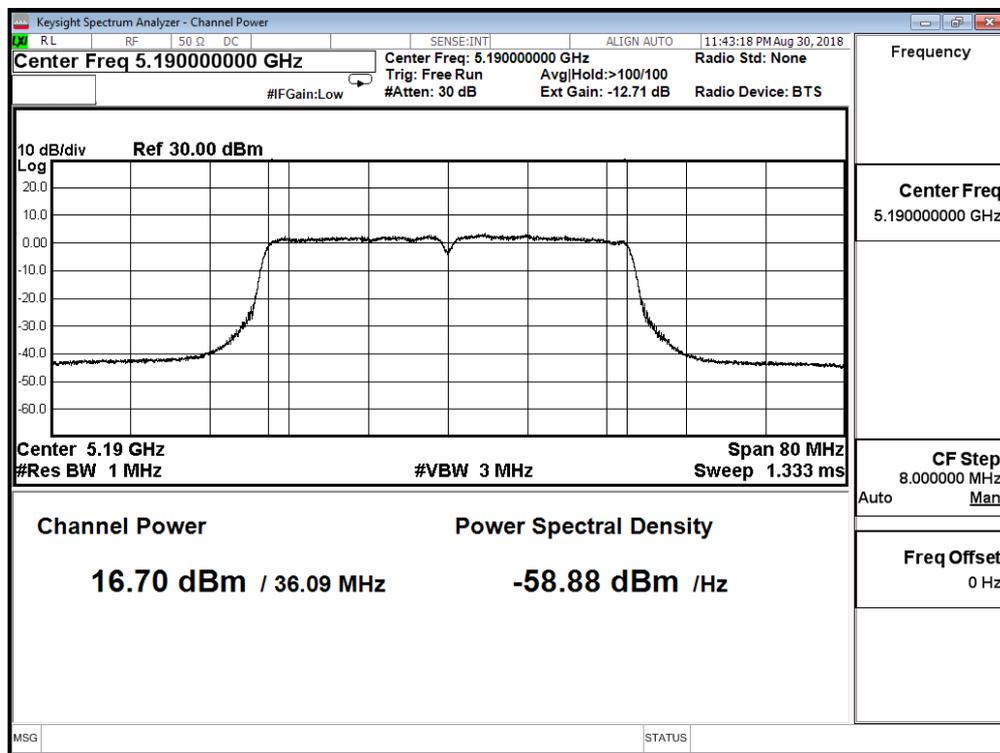

Channel 46

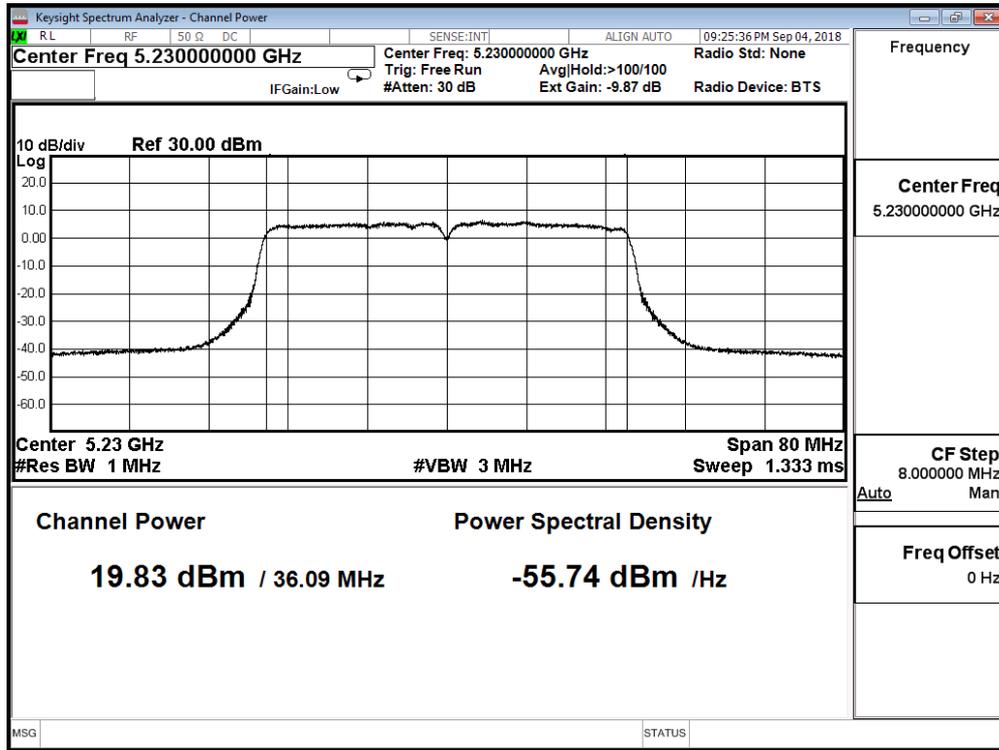


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ac(40MHz)(ANT 8)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	17.170	≤ 30.000
46	5230	21.460	≤ 30.000

Channel 38

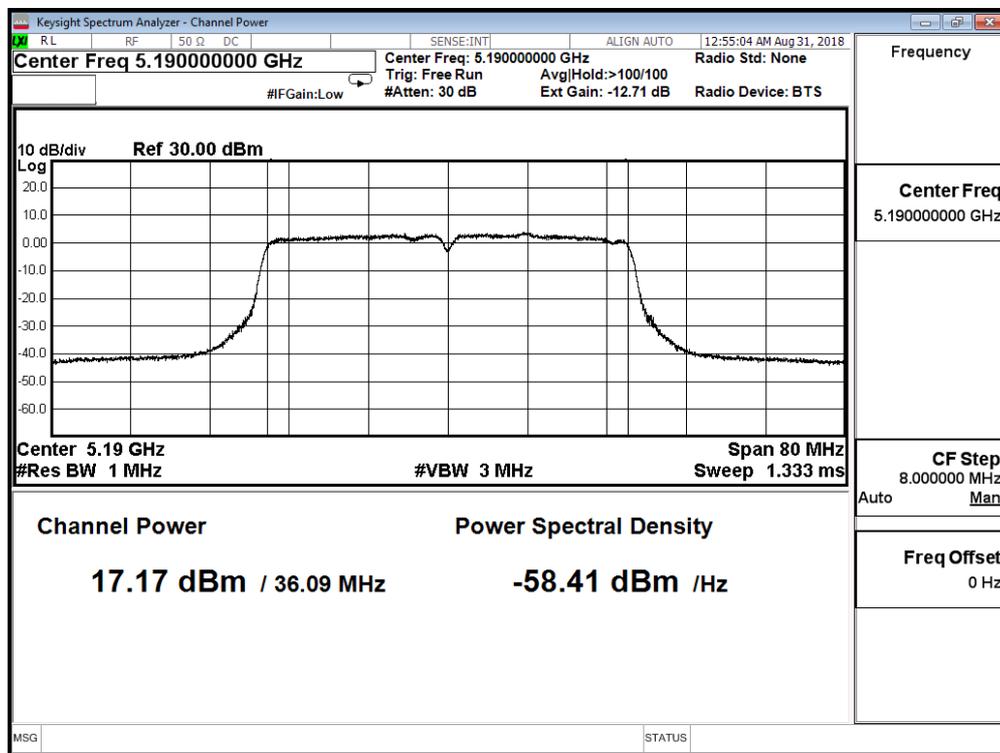

Channel 46

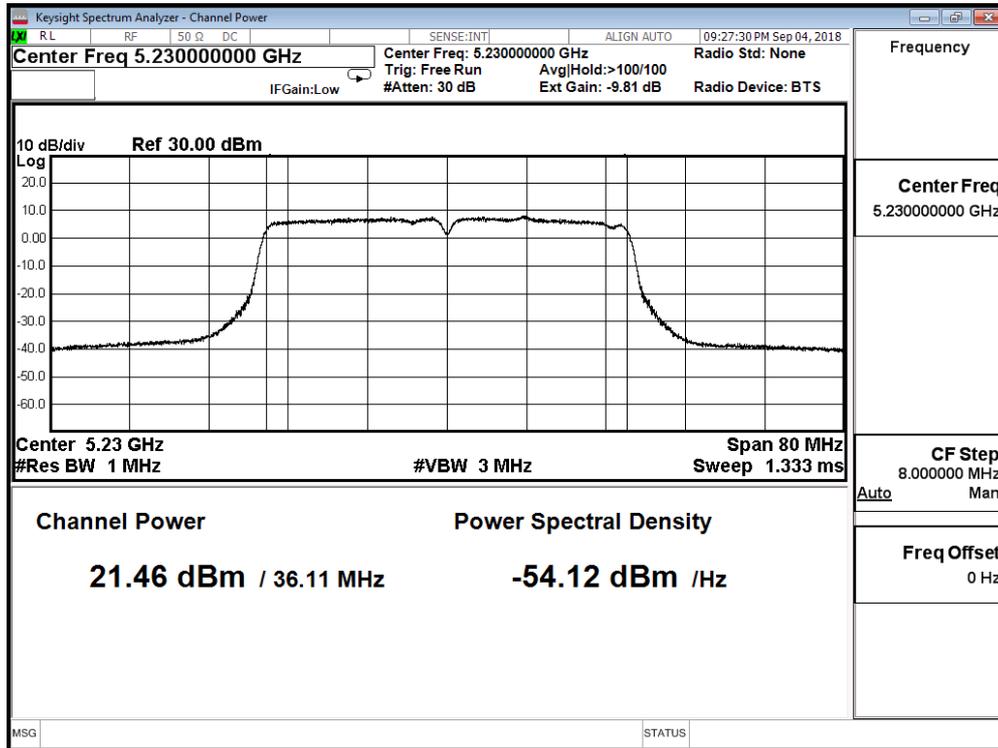

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD P-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ac(40MHz)(ANT 0+1+2+3+4+5+6+8)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	25.531	≤ 30.000
46	5230	29.631	≤ 30.000

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 0)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	16.550	≤ 30.000

Channel 42

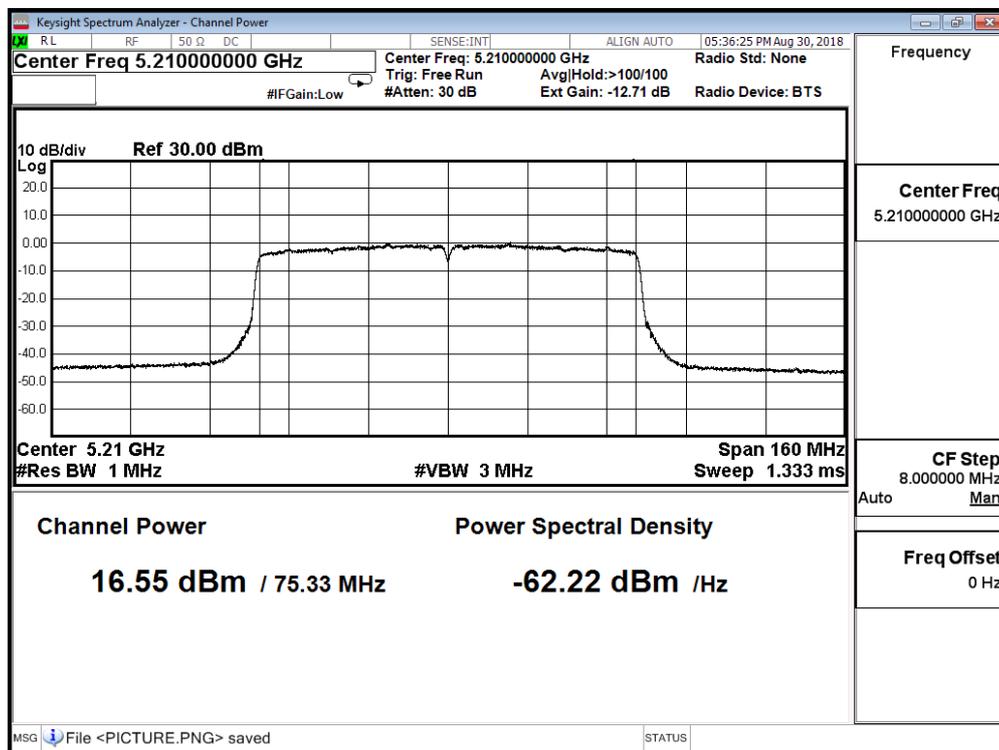


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	16.490	≤ 30.000

Channel 42

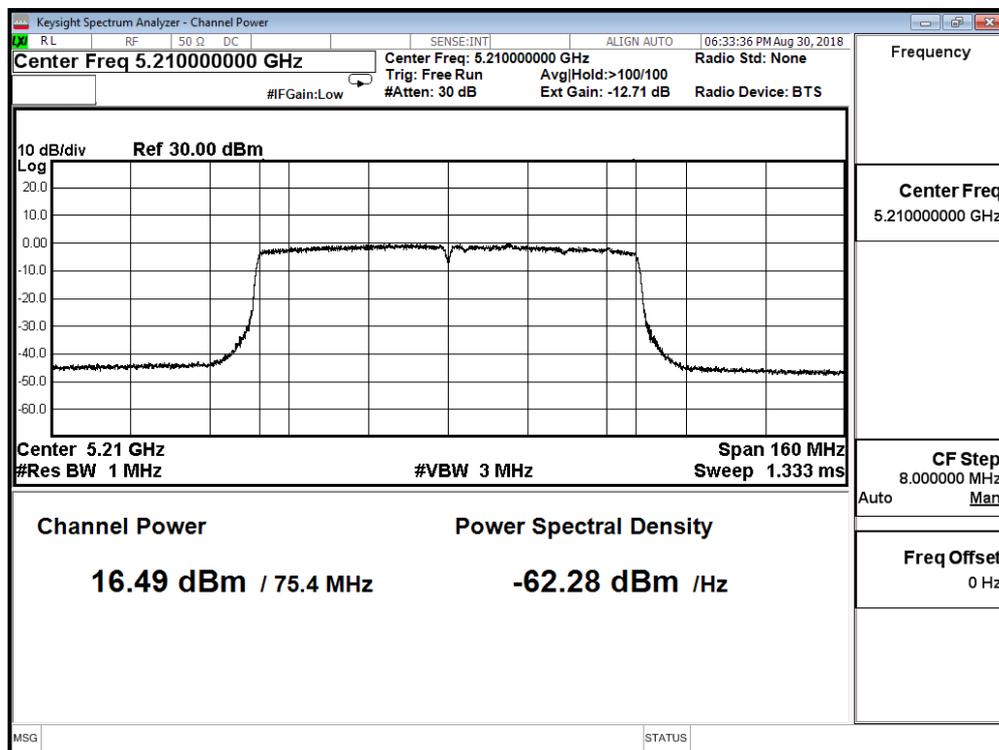


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	17.710	≤ 30.000

Channel 42

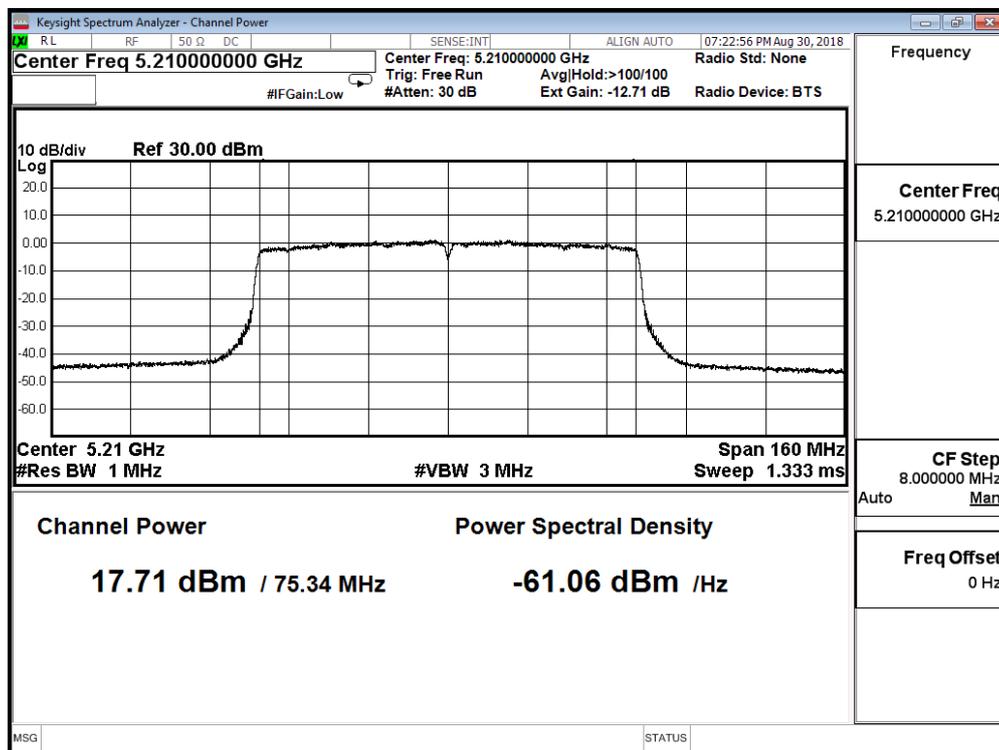


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	17.060	≤ 30.000

Channel 42

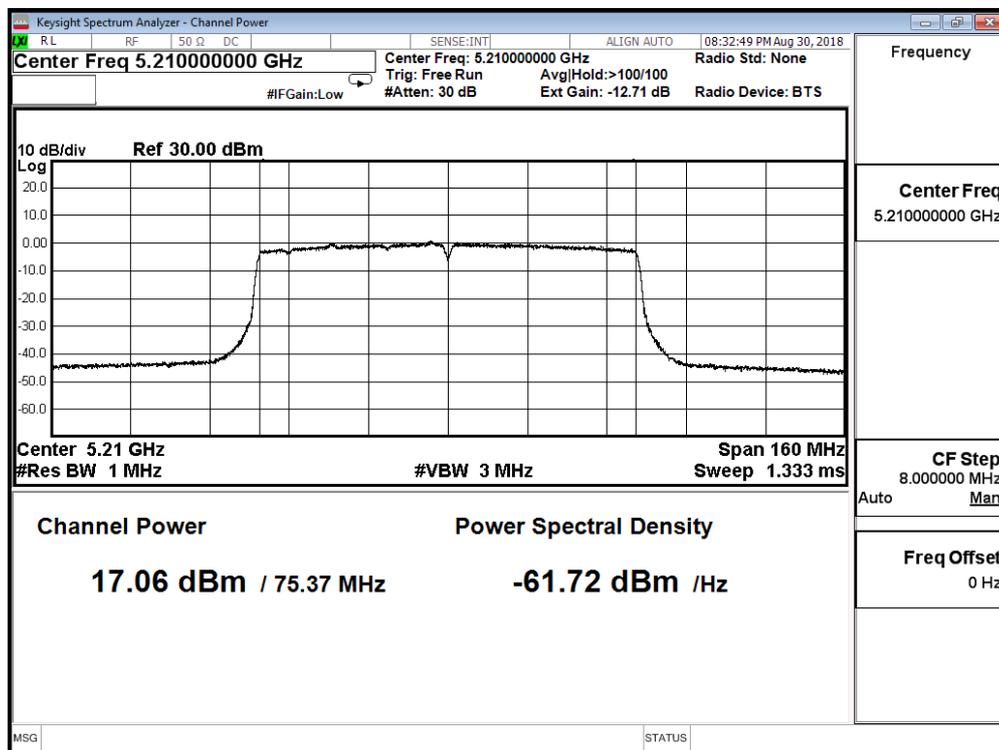


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD P-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 4)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	17.490	≤ 30.000

Channel 42

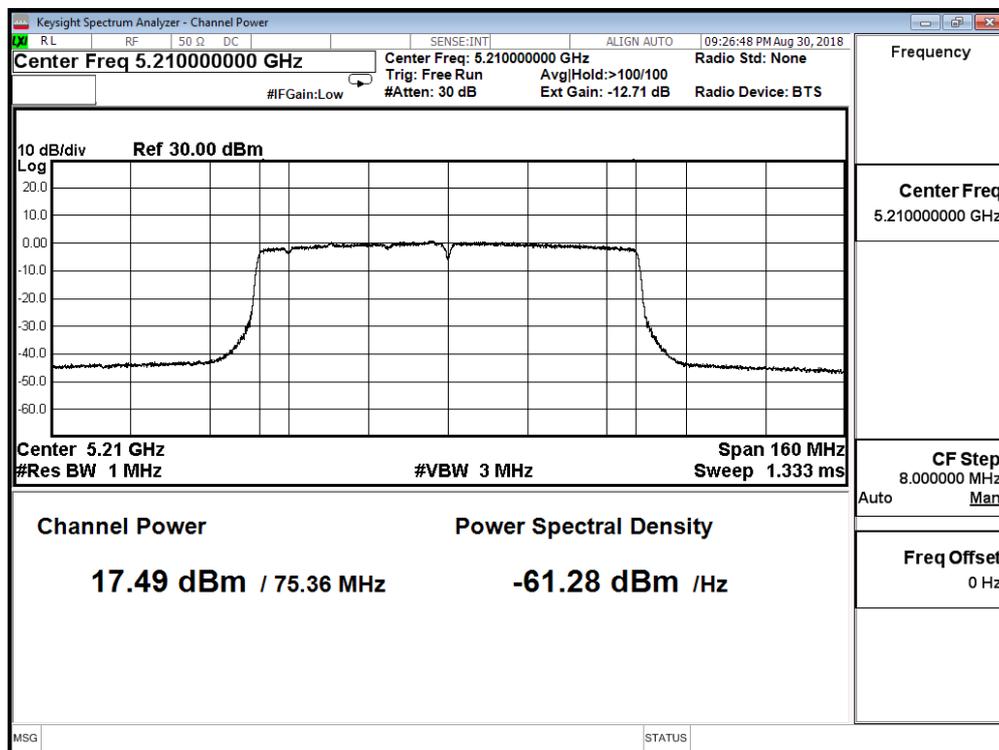


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 5)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	17.220	≤ 30.000

Channel 42

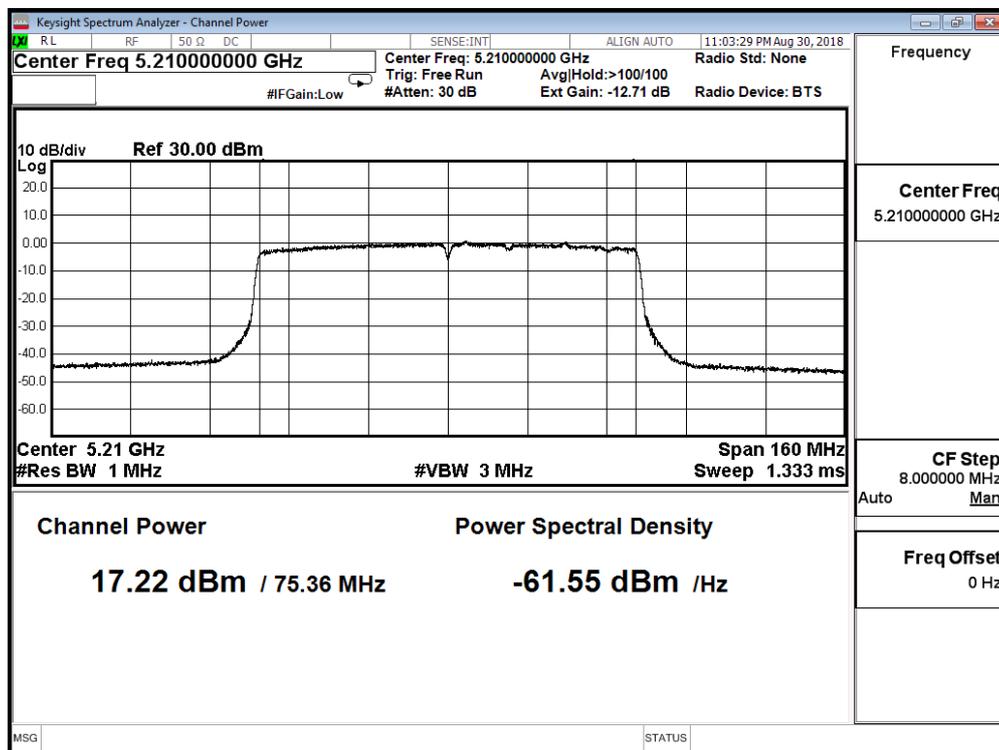


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 6)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	17.370	≤ 30.000

Channel 42

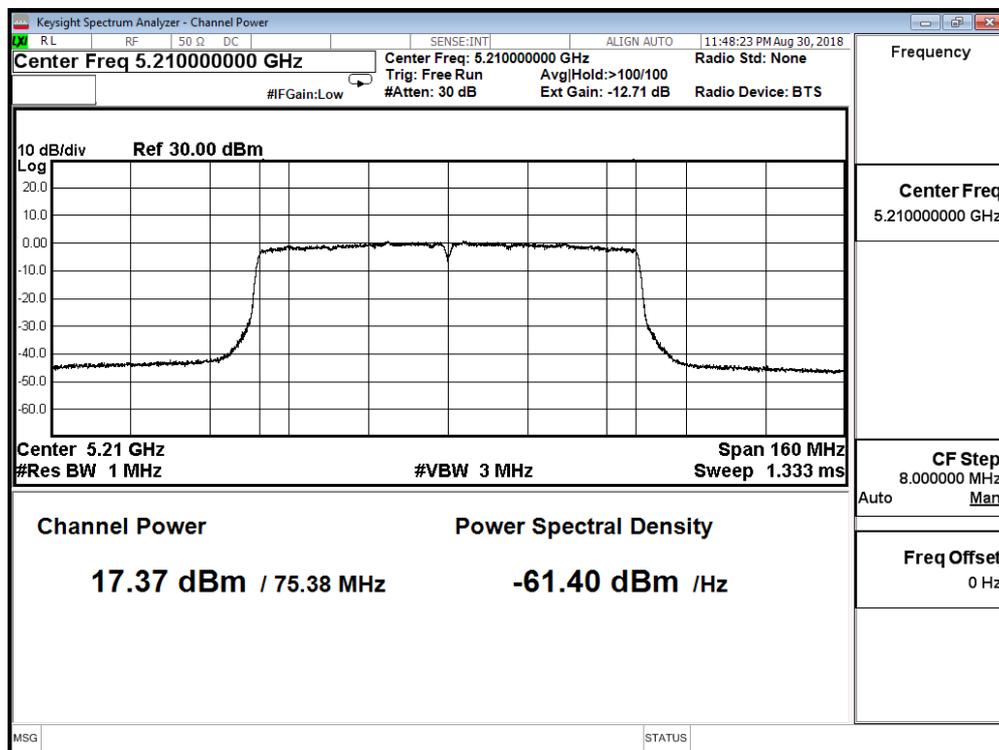


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/31	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 8)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	16.960	≤ 30.000

Channel 42

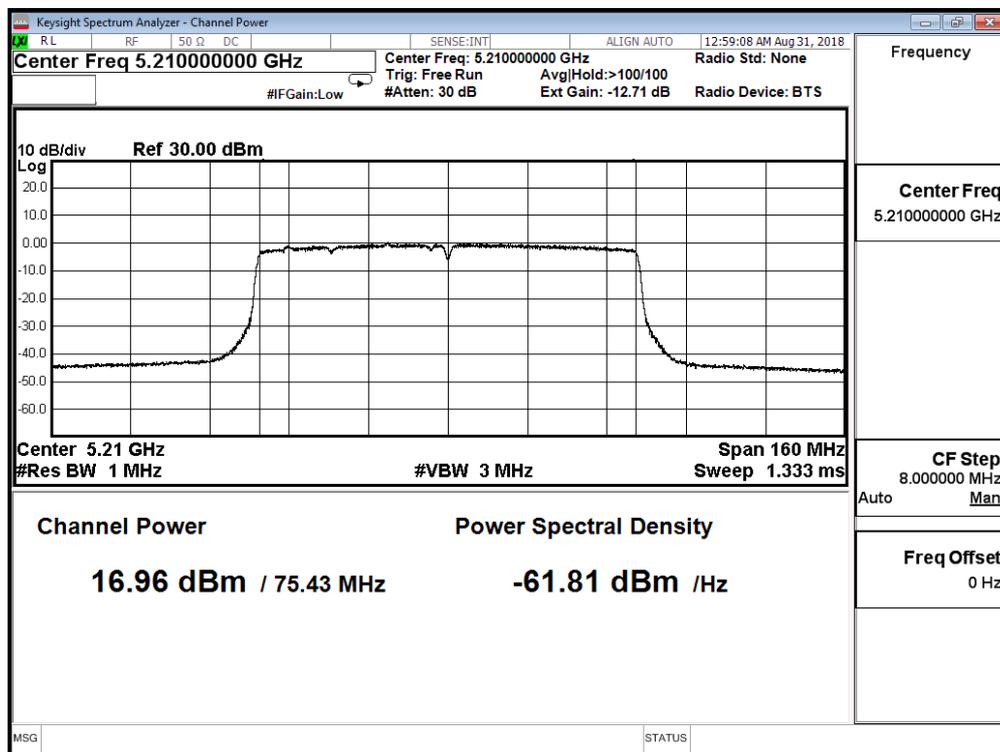

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD P-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 0+1+2+3+4+5+6+8)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	26.156	≤ 30.000

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(20MHz)(ANT 0)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	16.630	≤ 30.000
44	5220	16.520	≤ 30.000
48	5240	16.750	≤ 30.000


Channel 36

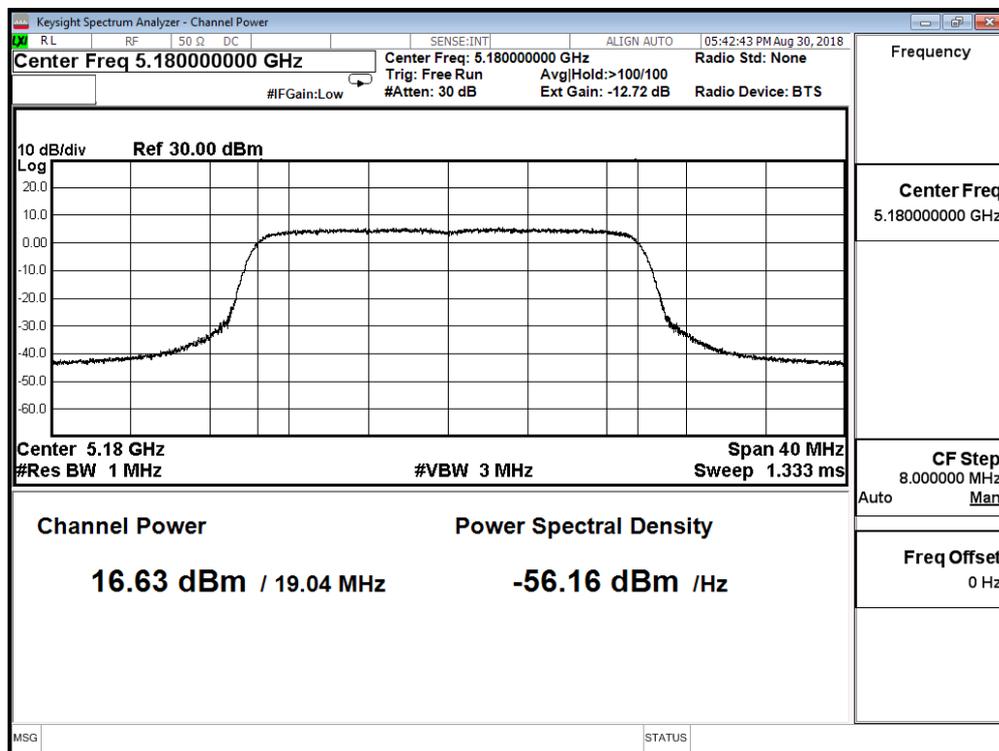

Channel 44

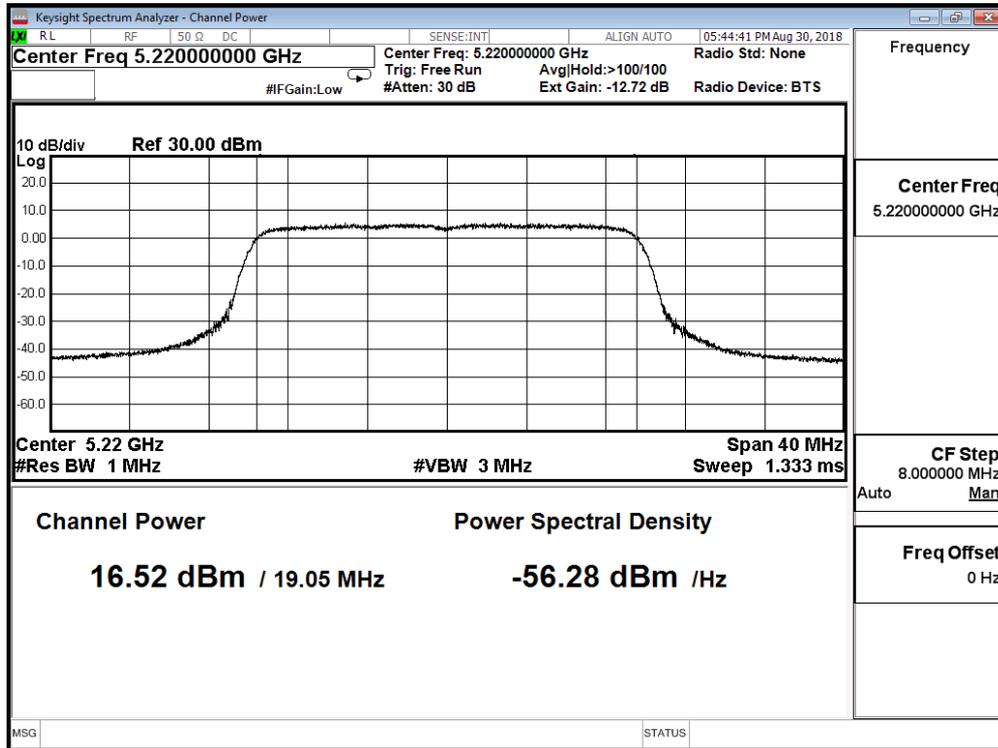

Channel 48

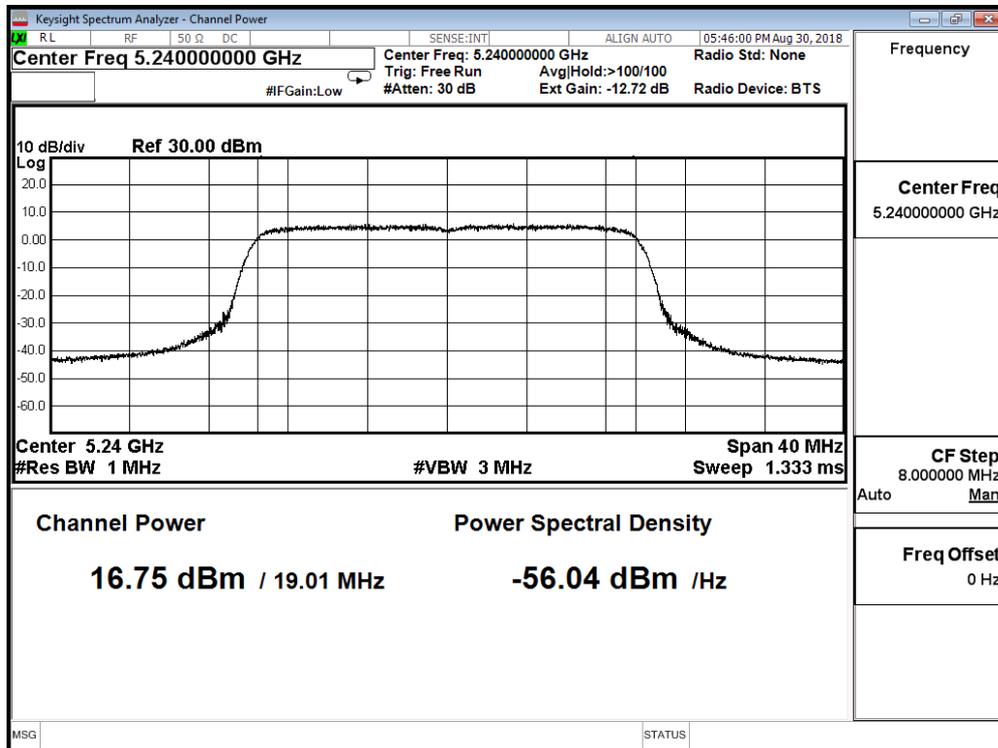


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(20MHz)(ANT 1)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	17.060	≤ 30.000
44	5220	16.420	≤ 30.000
48	5240	16.600	≤ 30.000


Channel 36

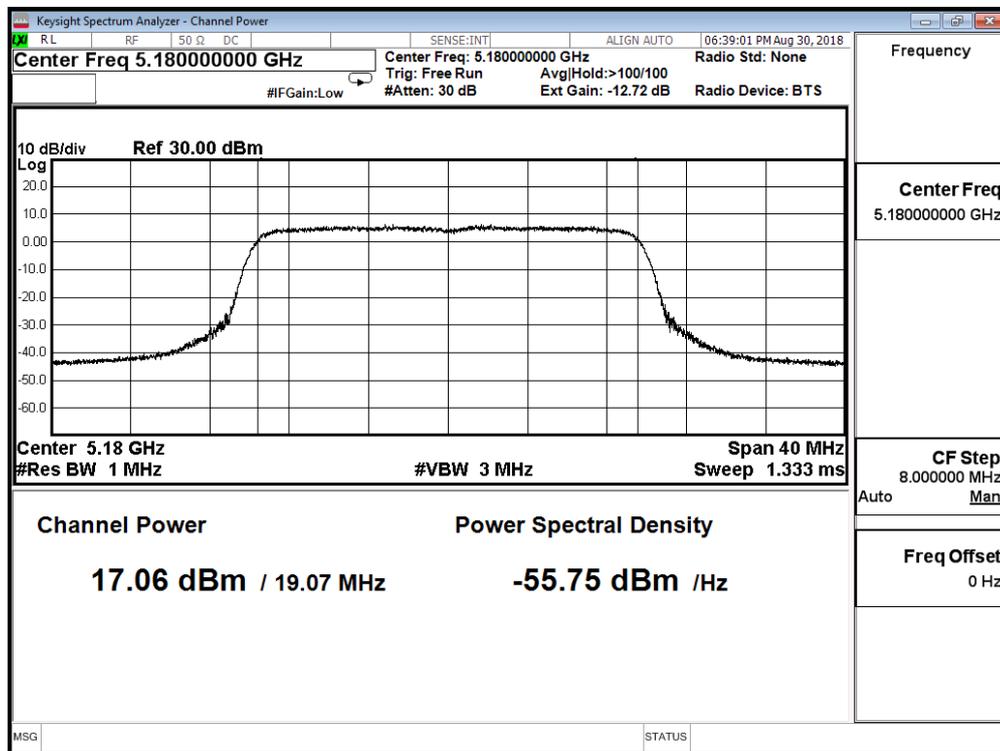

Channel 44

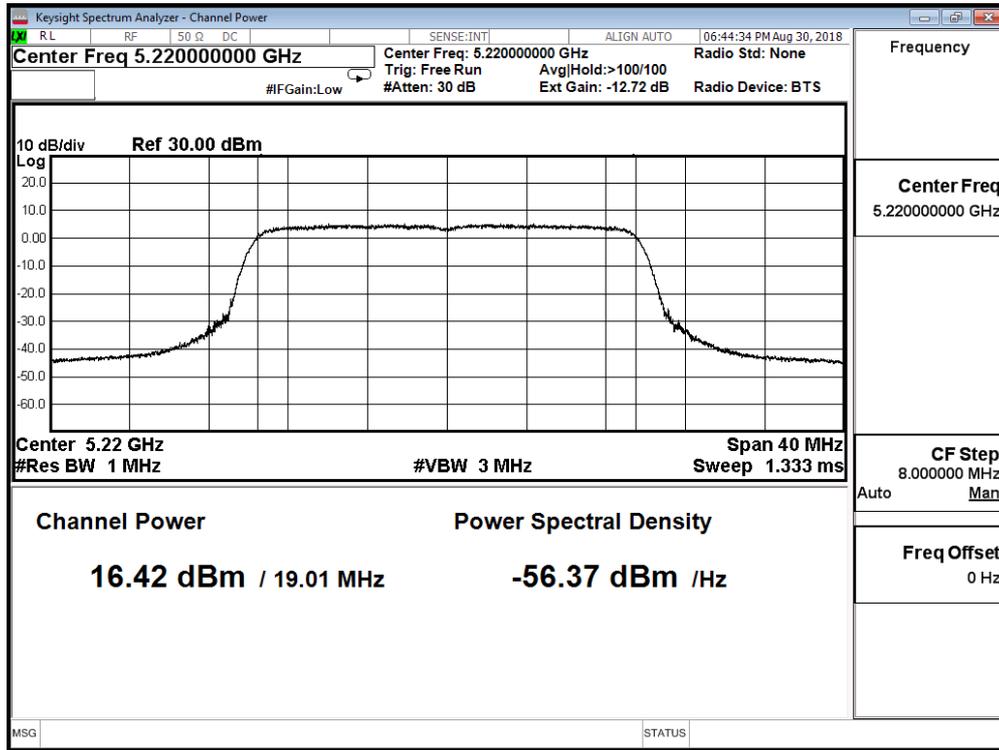

Channel 48

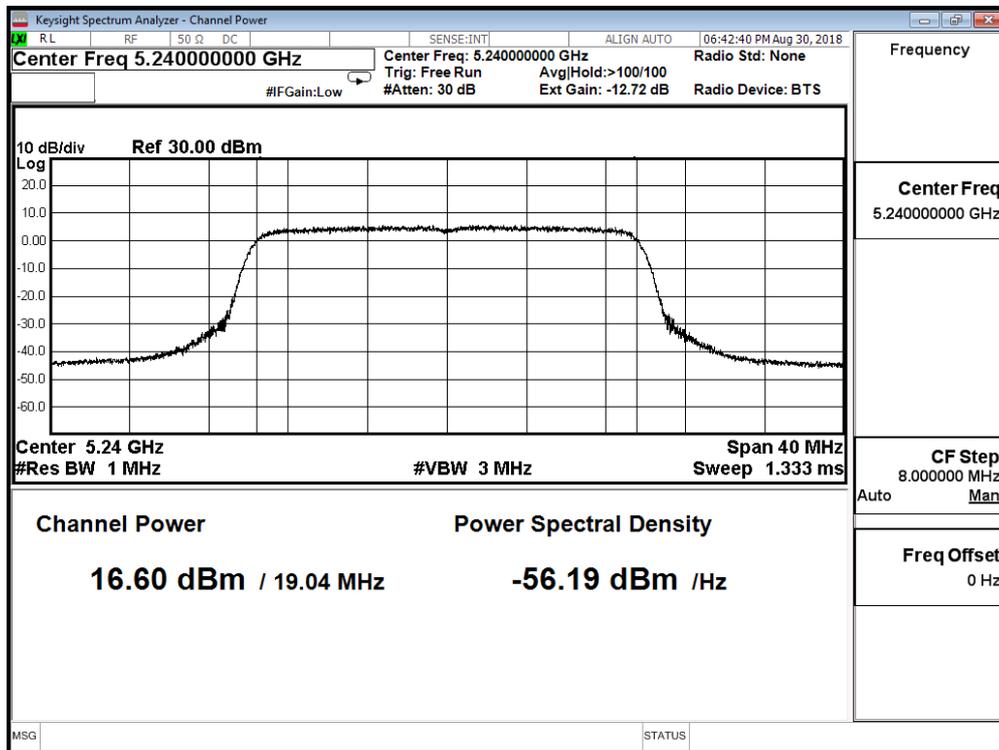


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(20MHz)(ANT 2)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	17.760	≤ 30.000
44	5220	17.670	≤ 30.000
48	5240	17.850	≤ 30.000


Channel 36

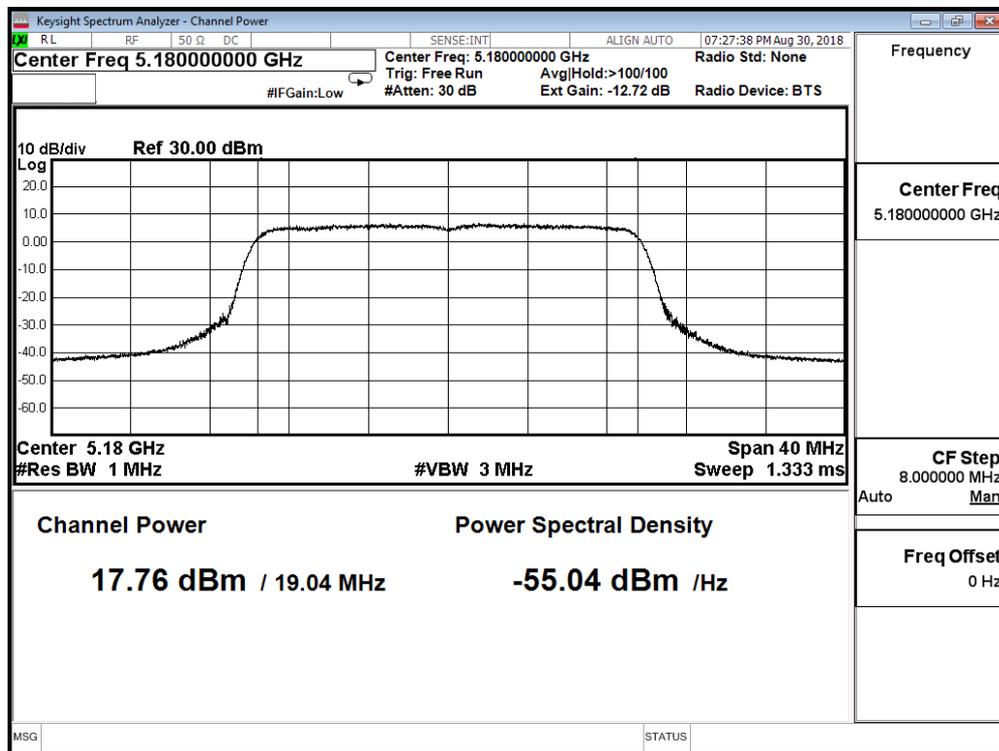

Channel 44

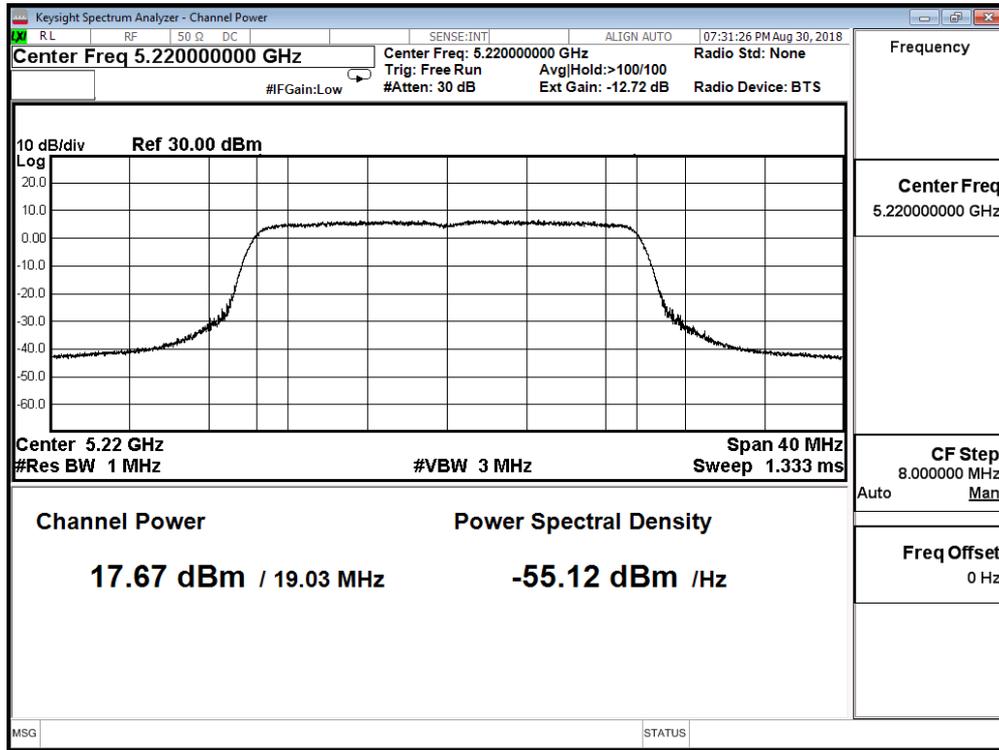

Channel 48

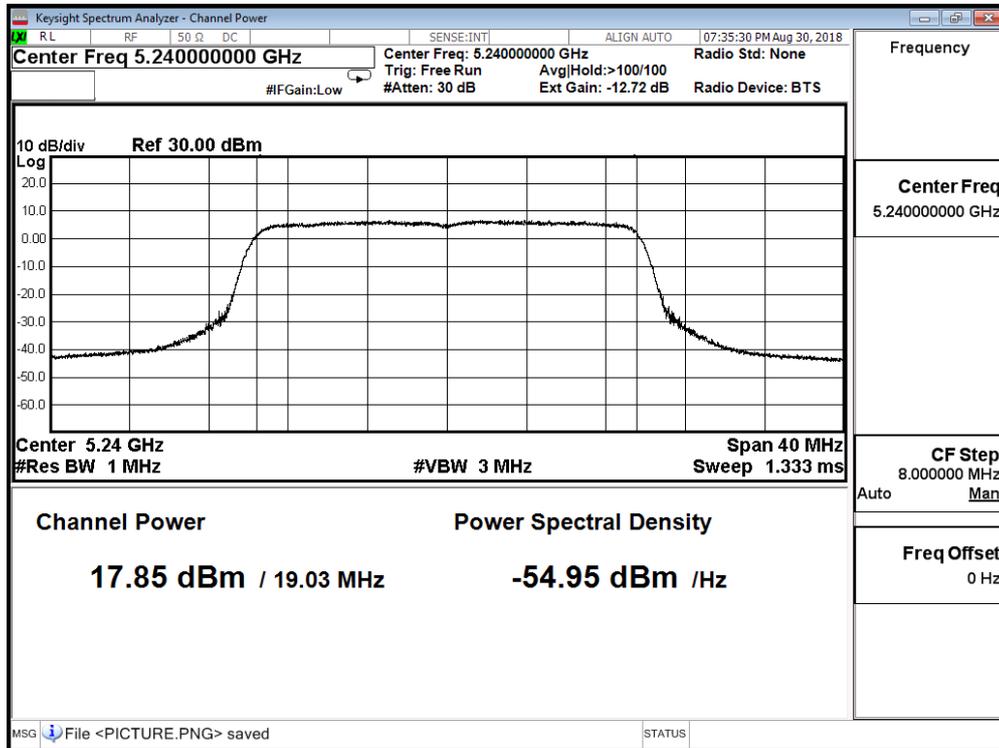


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(20MHz)(ANT 3)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	17.420	≤ 30.000
44	5220	16.950	≤ 30.000
48	5240	16.970	≤ 30.000


Channel 36

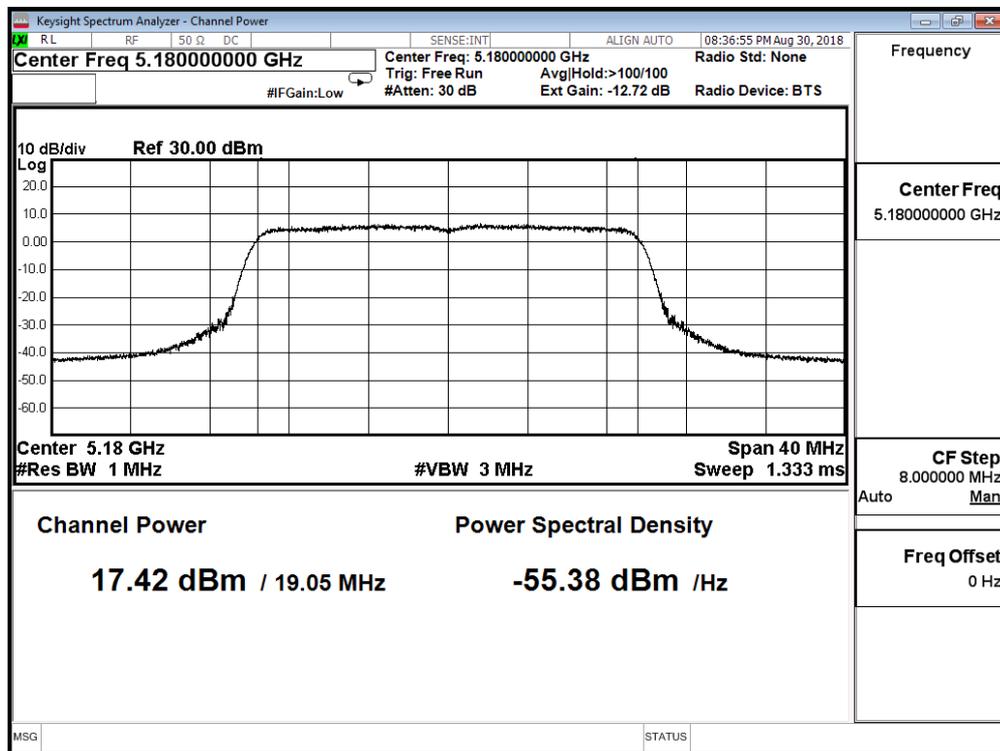

Channel 44

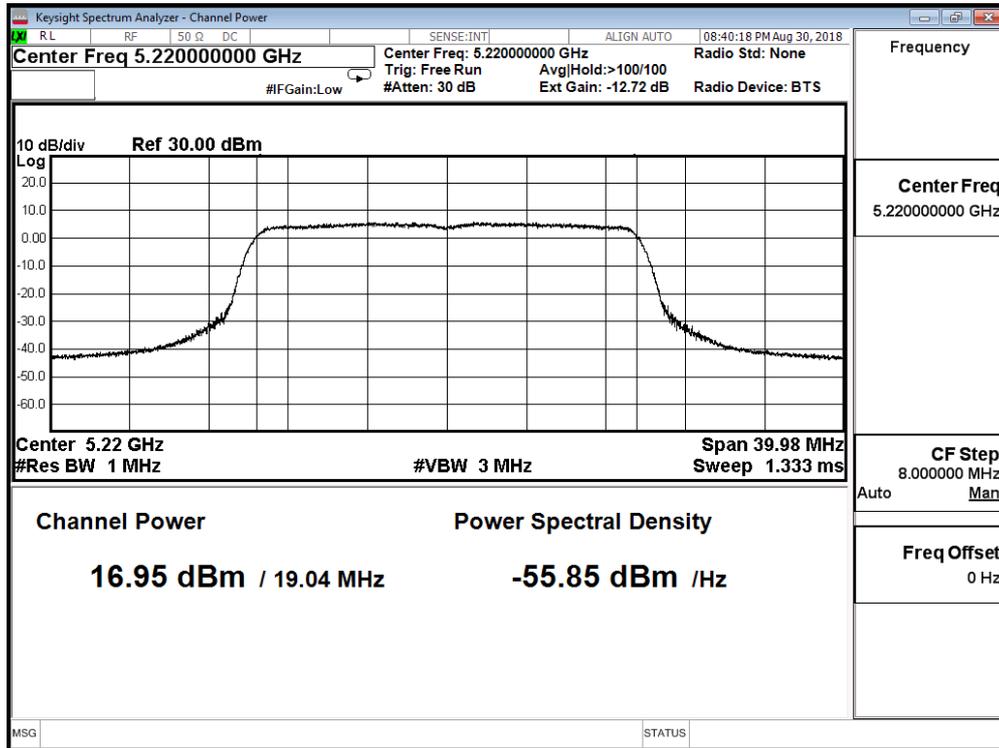

Channel 48

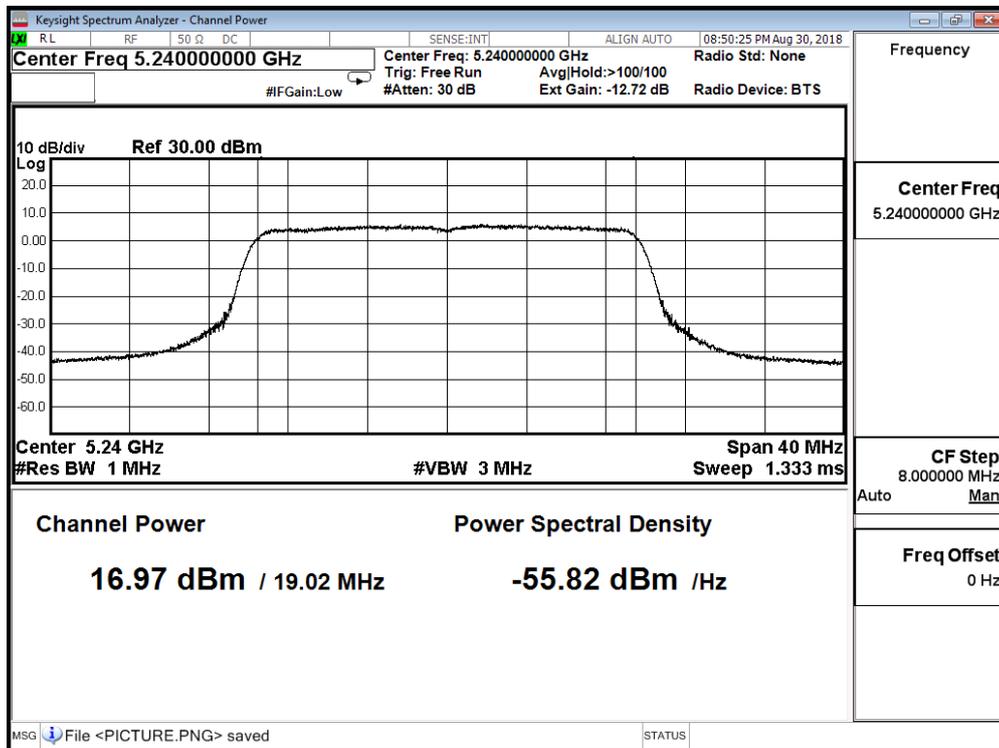


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(20MHz)(ANT 4)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	17.690	≤ 30.000
44	5220	17.180	≤ 30.000
48	5240	16.880	≤ 30.000


Channel 36

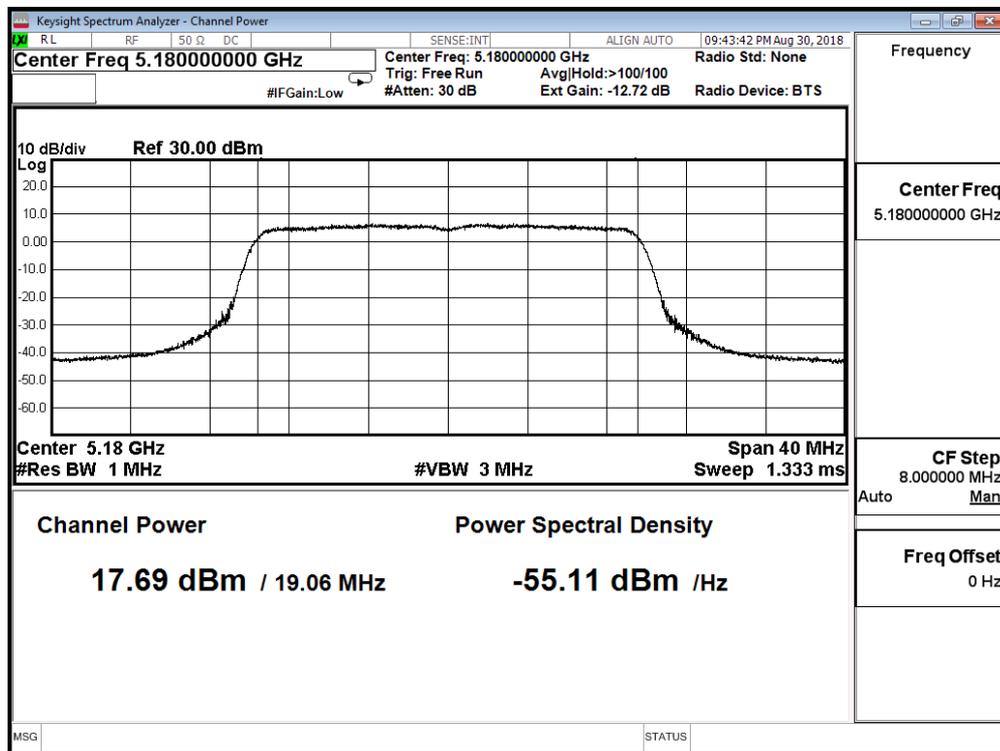

Channel 44

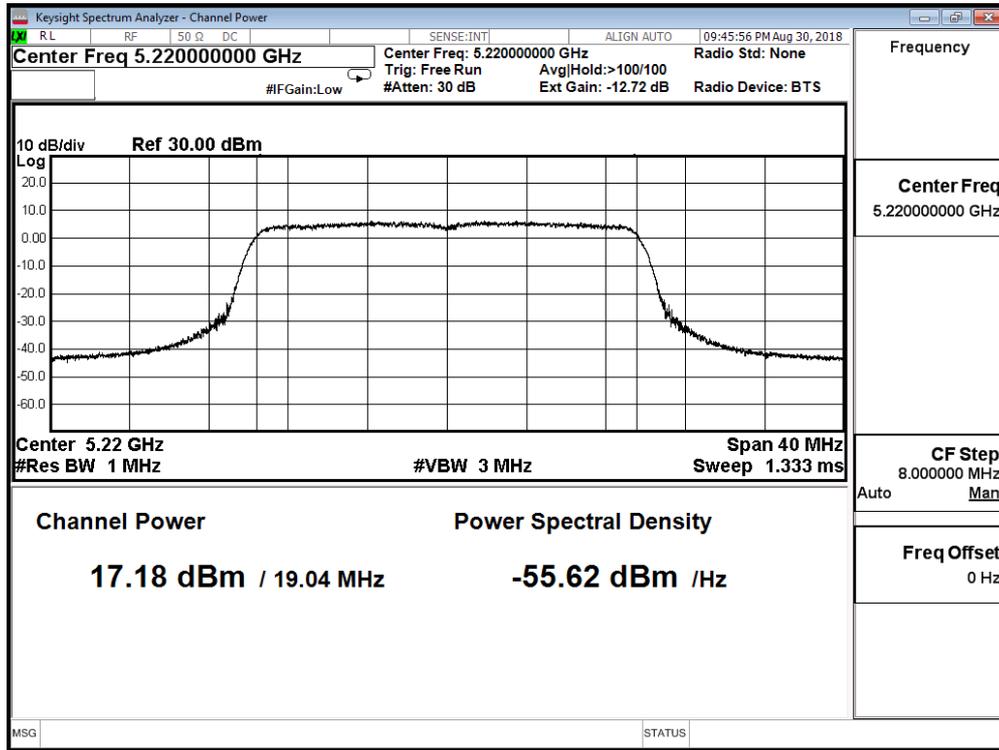

Channel 48

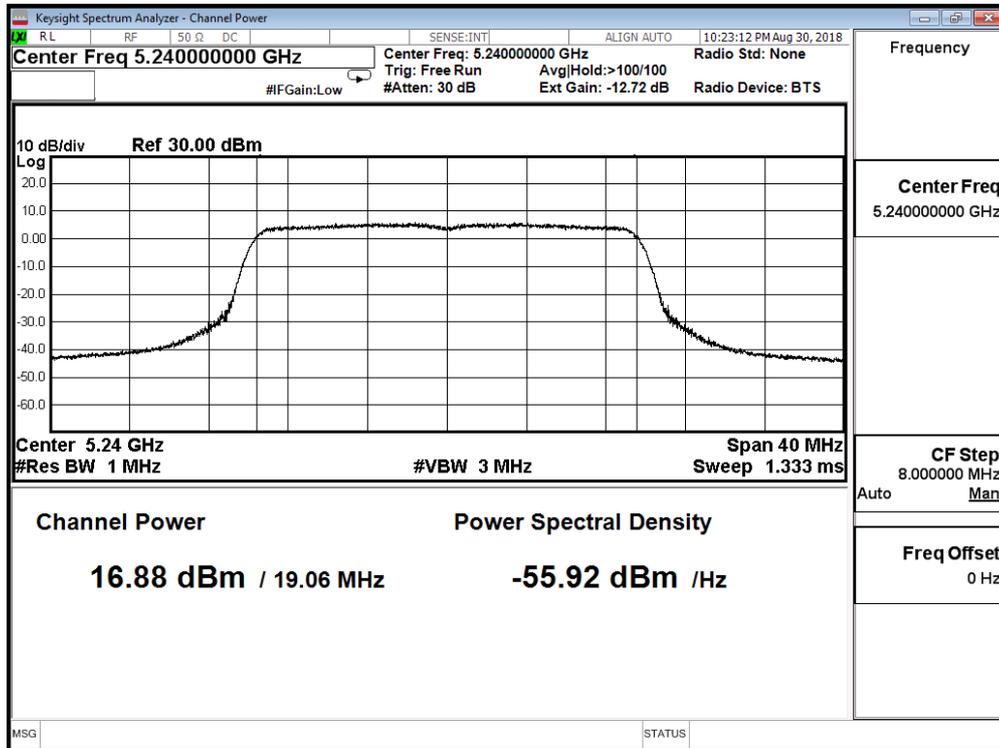


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(20MHz)(ANT 5)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	16.580	≤ 30.000
44	5220	17.160	≤ 30.000
48	5240	17.290	≤ 30.000


Channel 36

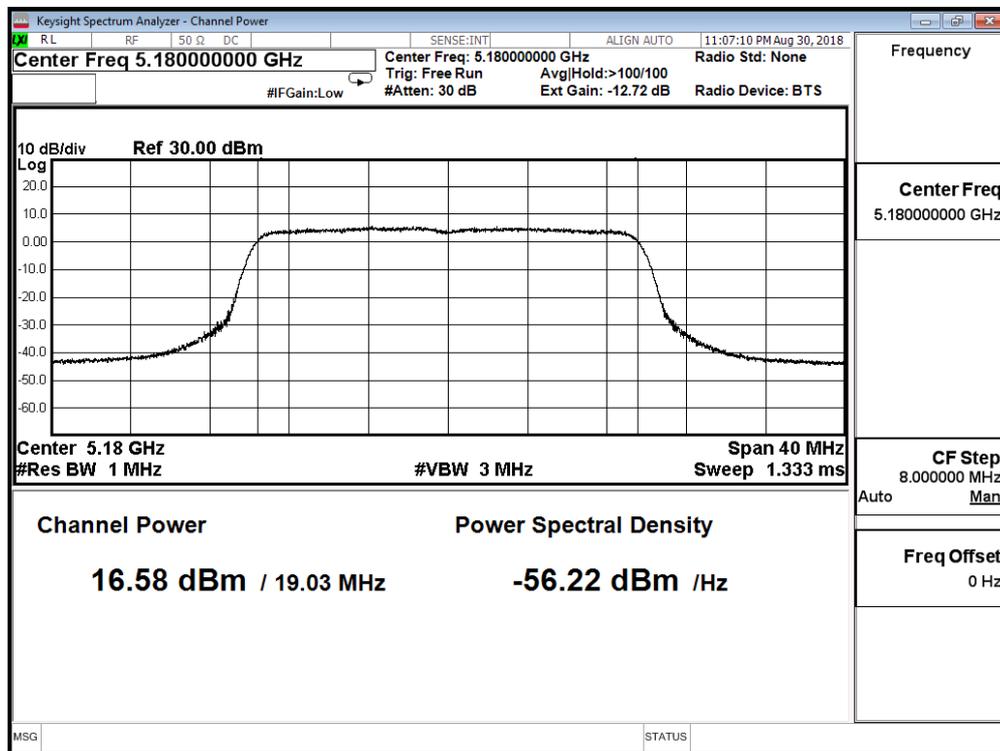

Channel 44

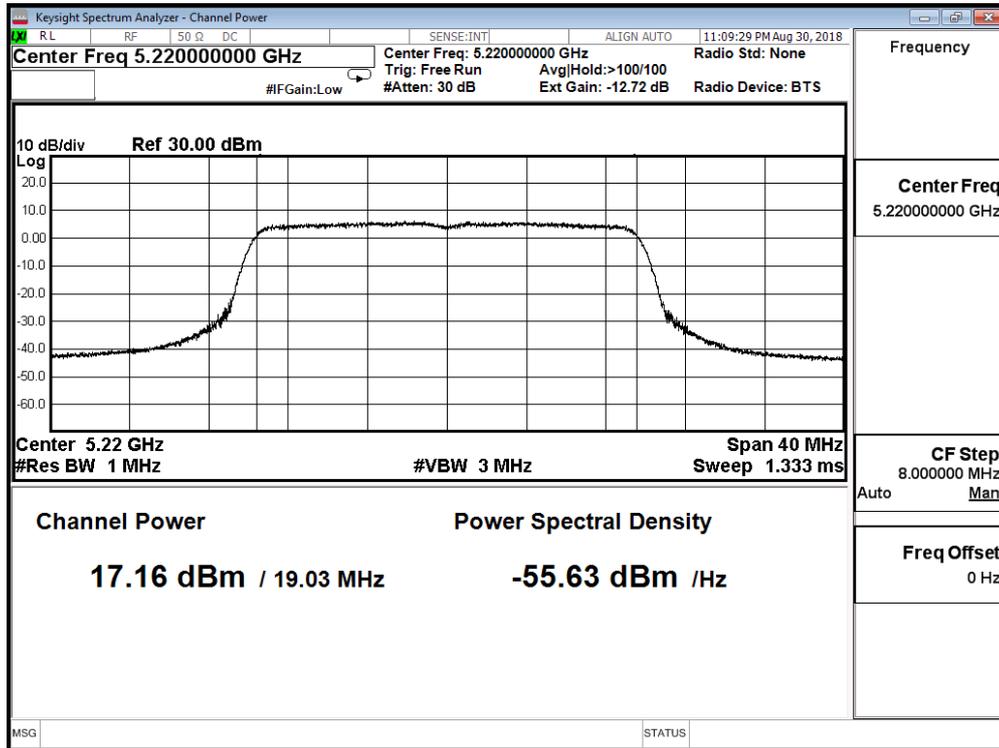

Channel 48

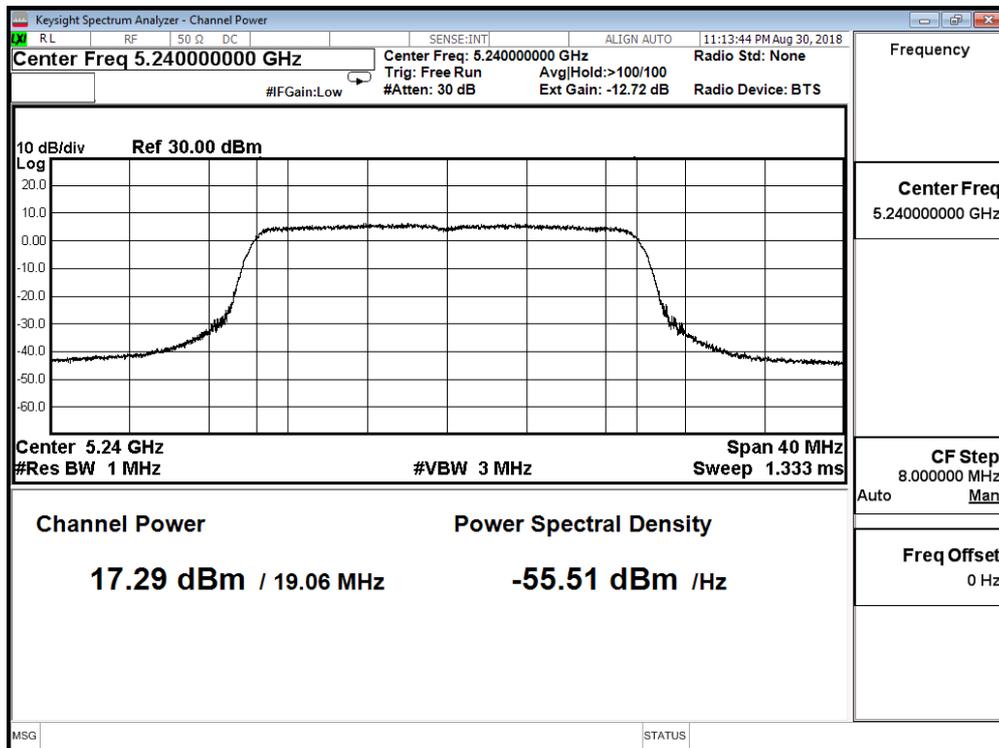


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(20MHz)(ANT 6)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	17.450	≤ 30.000
44	5220	17.170	≤ 30.000
48	5240	17.340	≤ 30.000


Channel 36

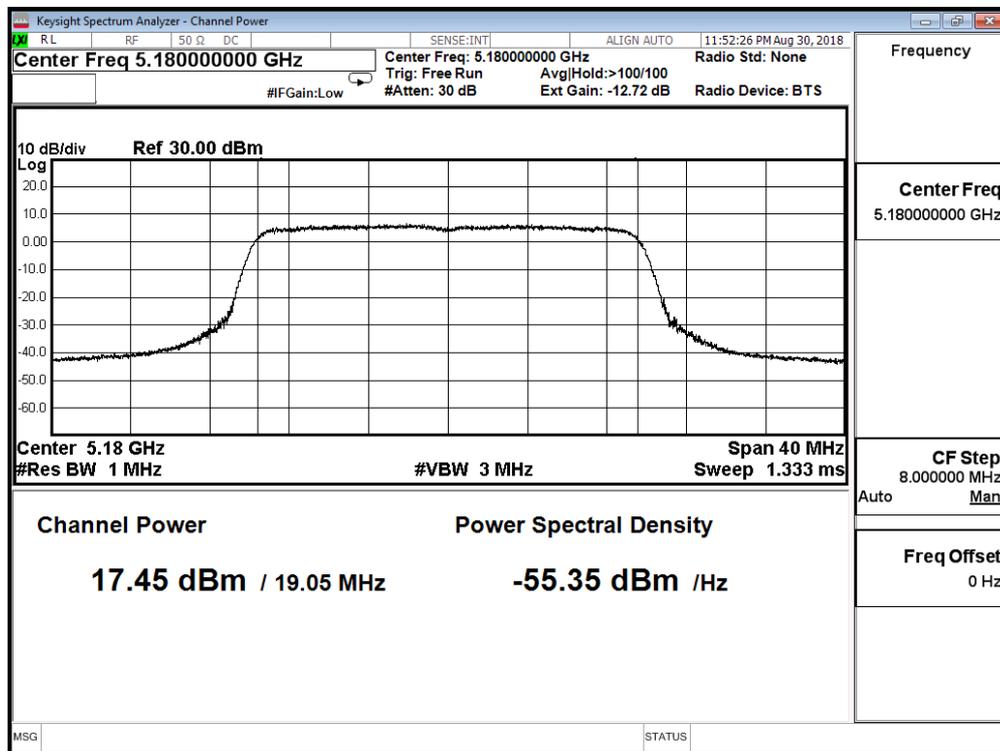

Channel 44

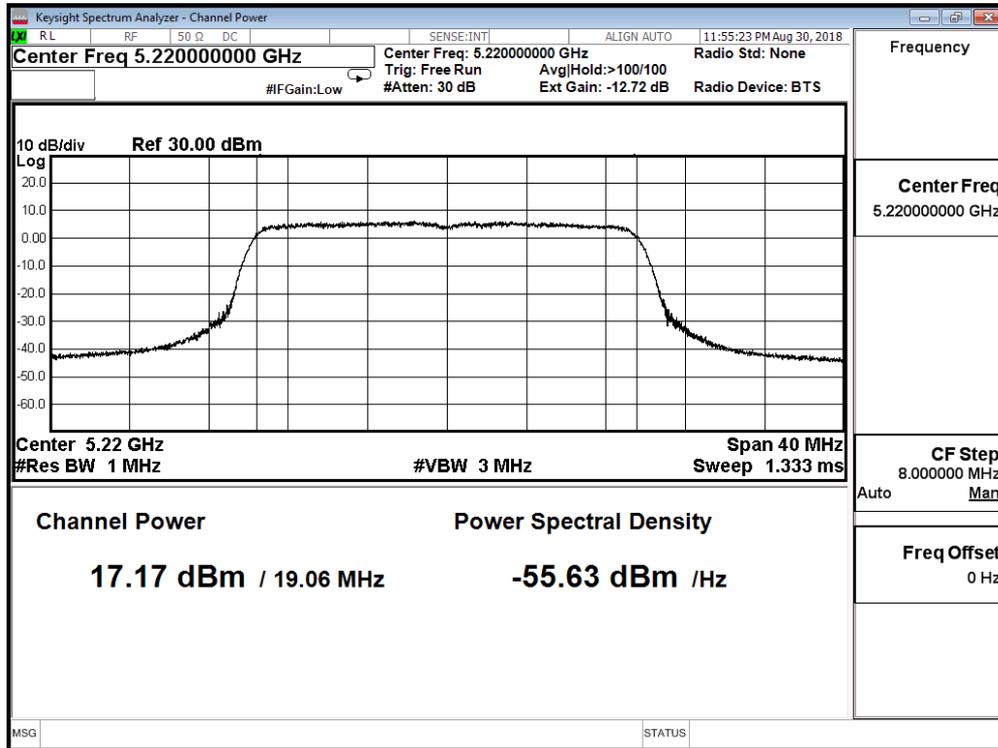

Channel 48

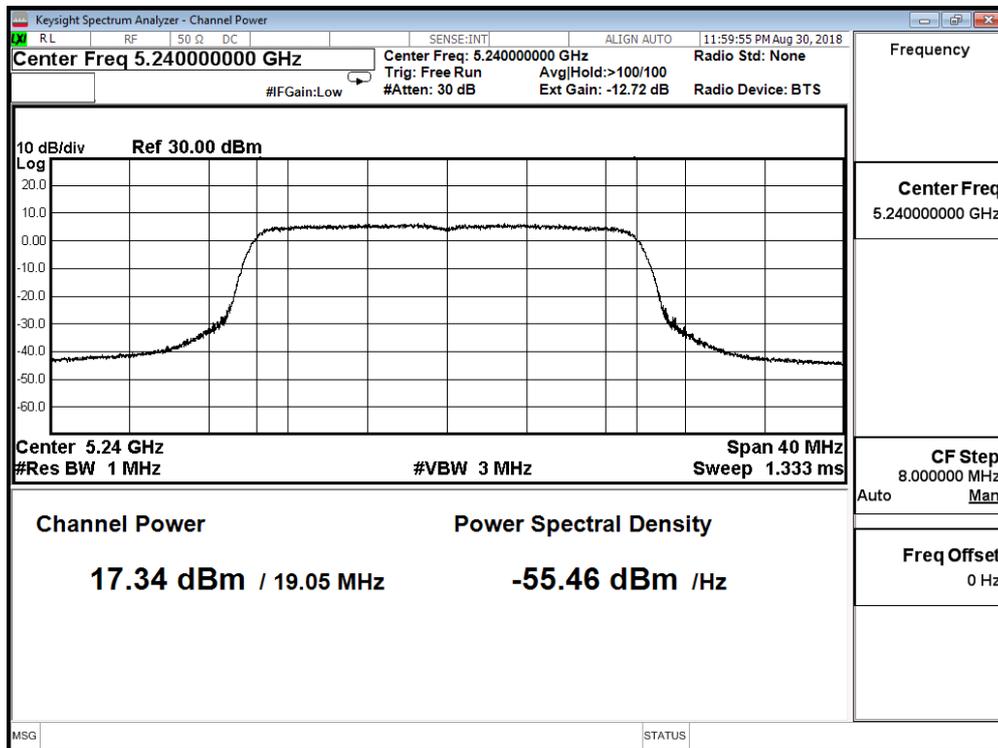


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(20MHz)(ANT 8)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	17.380	≤ 30.000
44	5220	17.270	≤ 30.000
48	5240	17.690	≤ 30.000


Channel 36

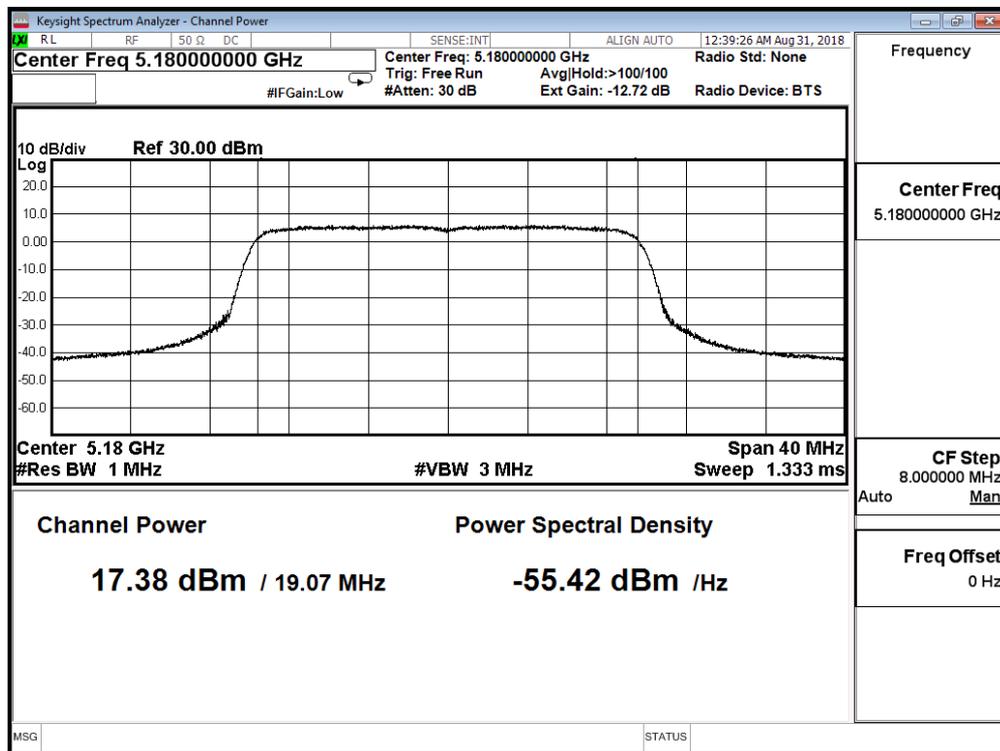

Channel 44

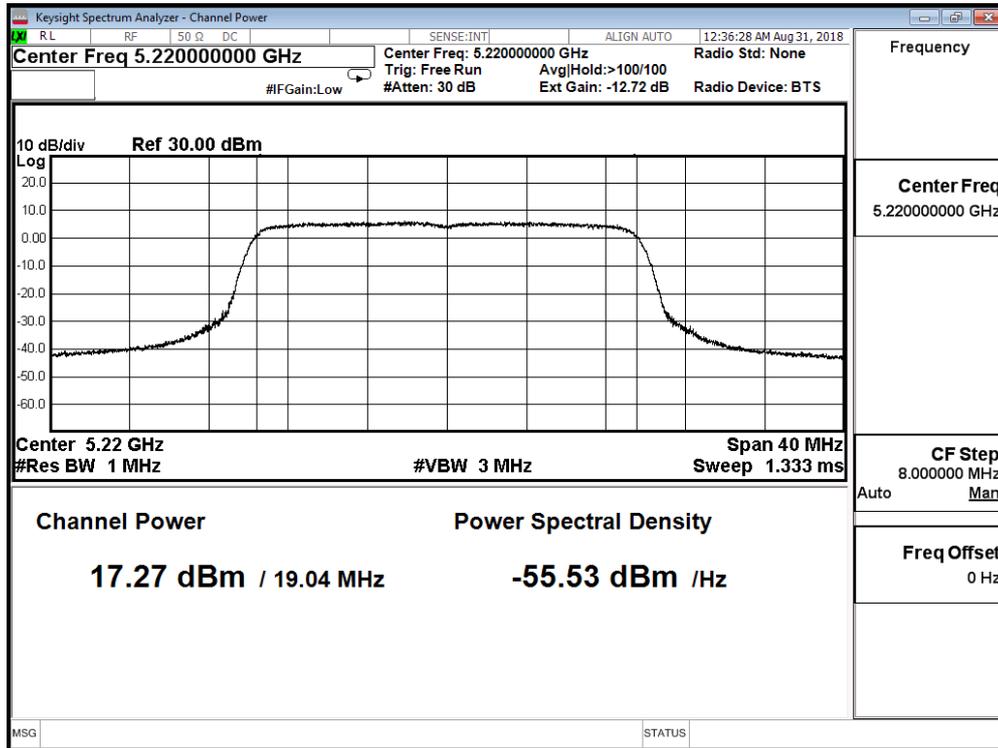

Channel 48

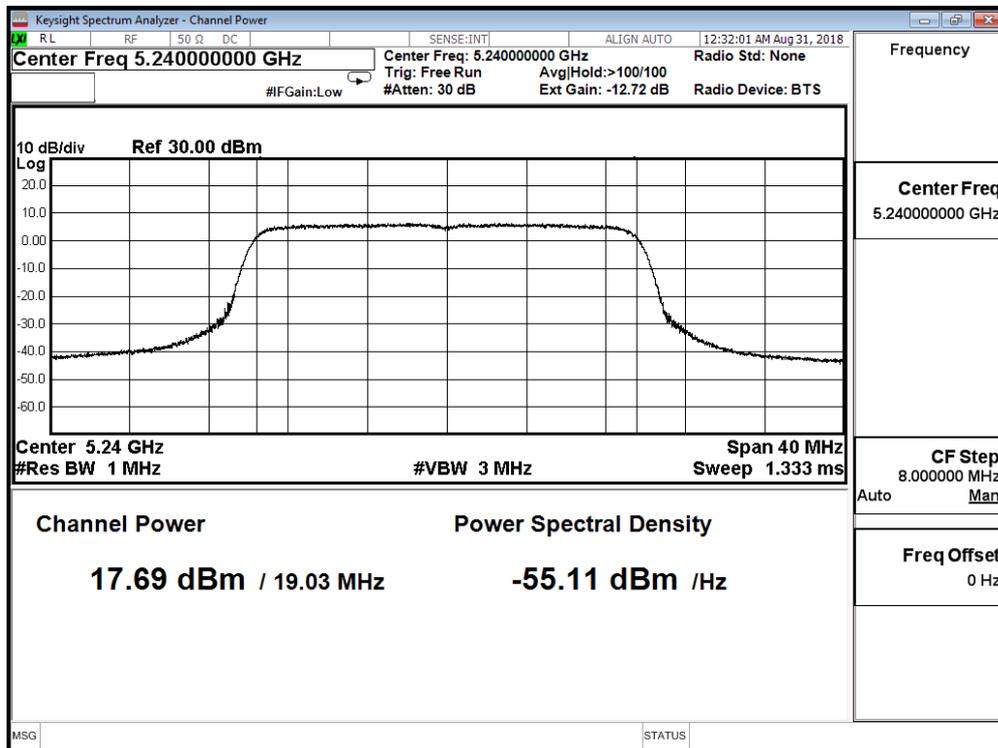

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD P-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ax(20MHz)(ANT 0+1+2+3+4+5+6+8)


Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
36	5180	26.297	≤ 30.000
44	5220	26.090	≤ 30.000
48	5240	26.222	≤ 30.000

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(40MHz)(ANT 0)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Required Limit (dBm)
38	5190	15.810	≤ 30.000
46	5230	20.500	≤ 30.000

Channel 38

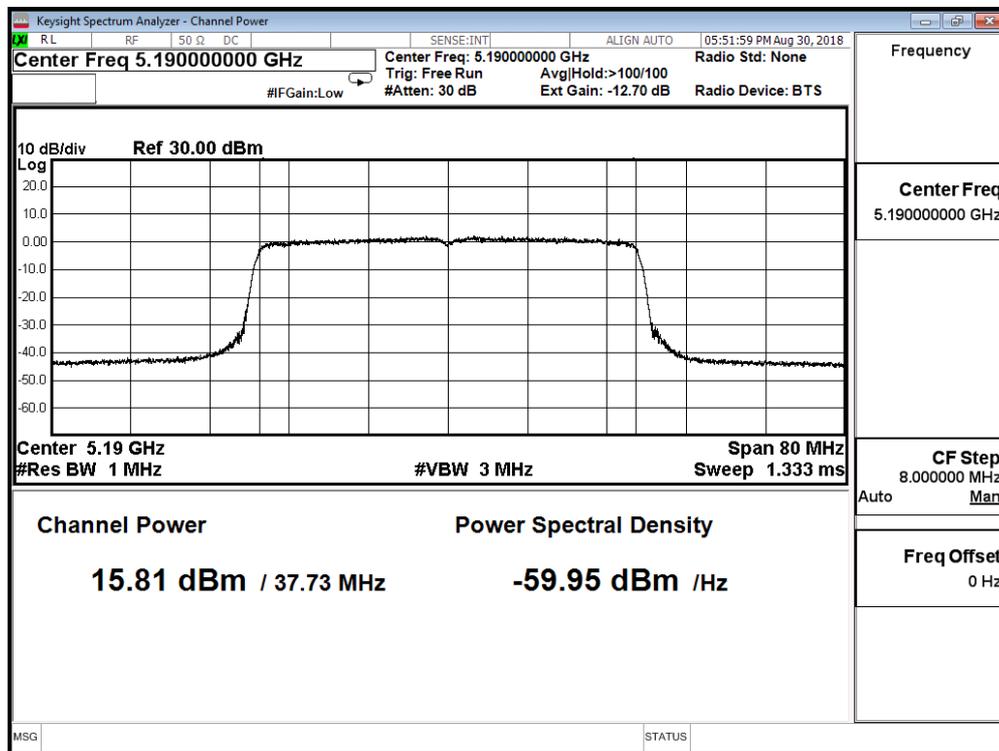

Channel 46

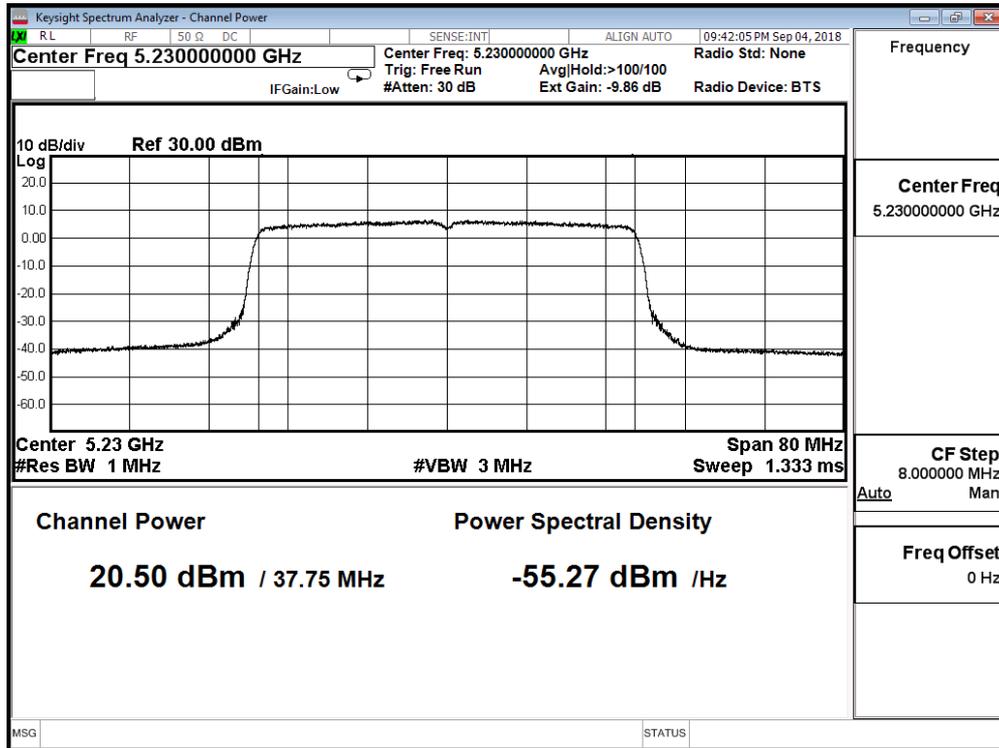


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(40MHz)(ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.410	≤ 30.000
46	5230	19.790	≤ 30.000

Channel 38

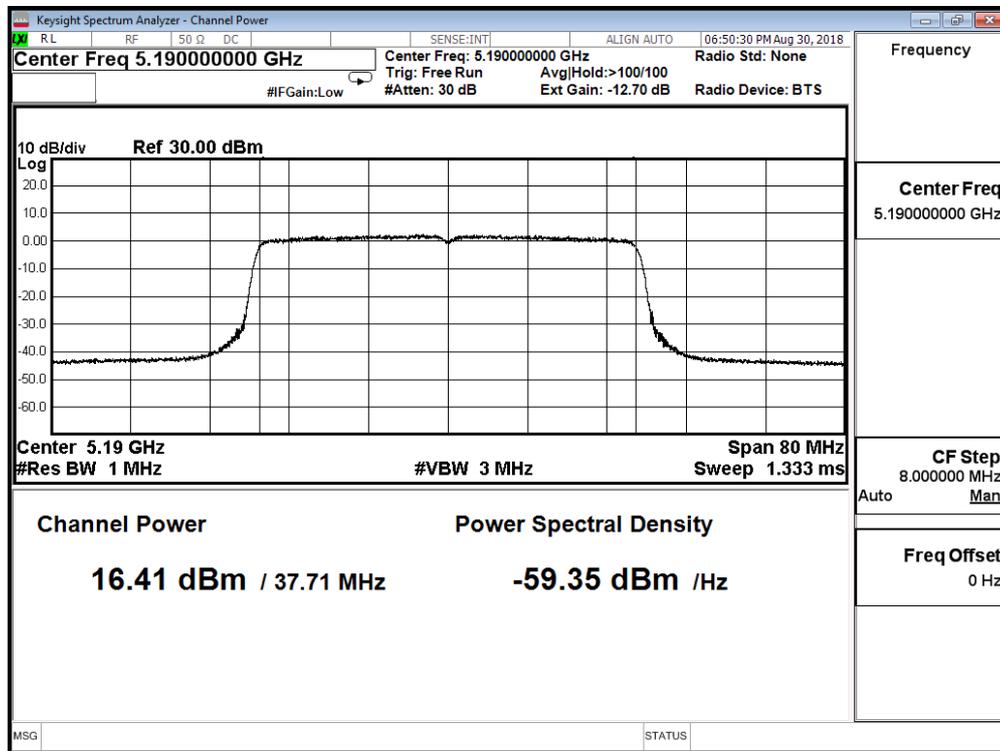

Channel 46

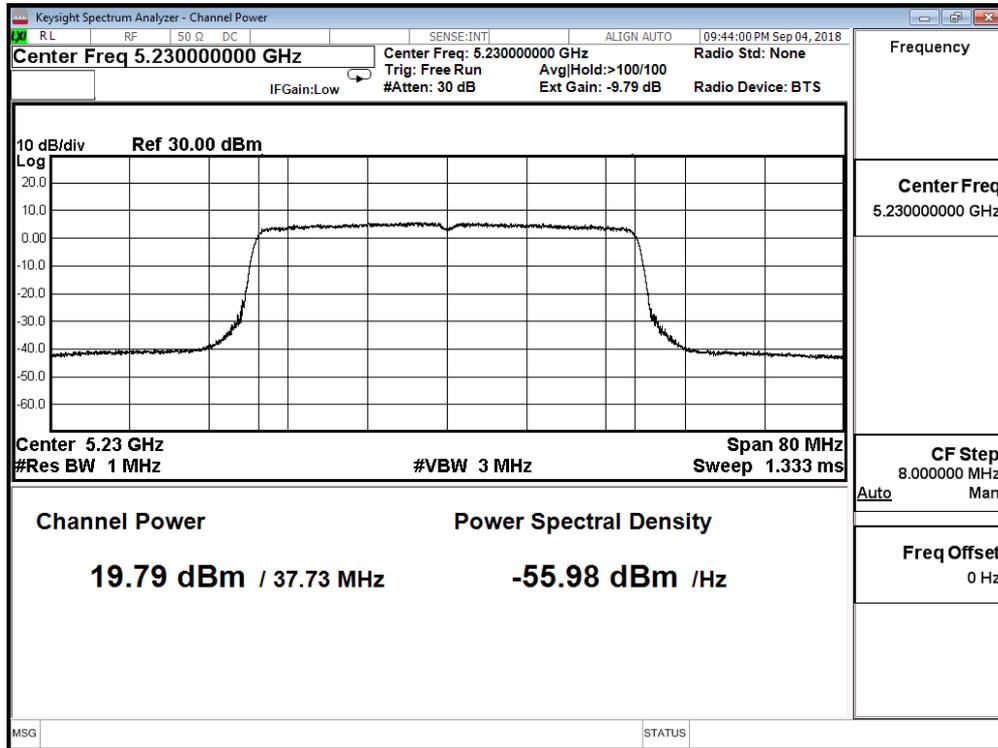


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(40MHz)(ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.860	≤ 30.000
46	5230	21.260	≤ 30.000

Channel 38

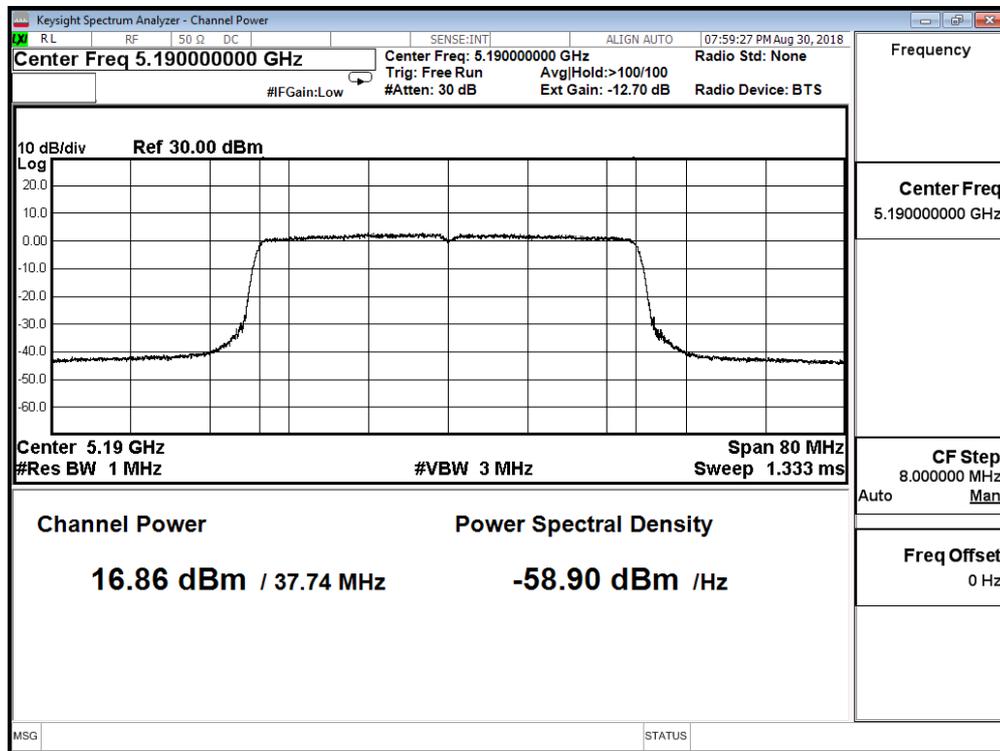

Channel 46

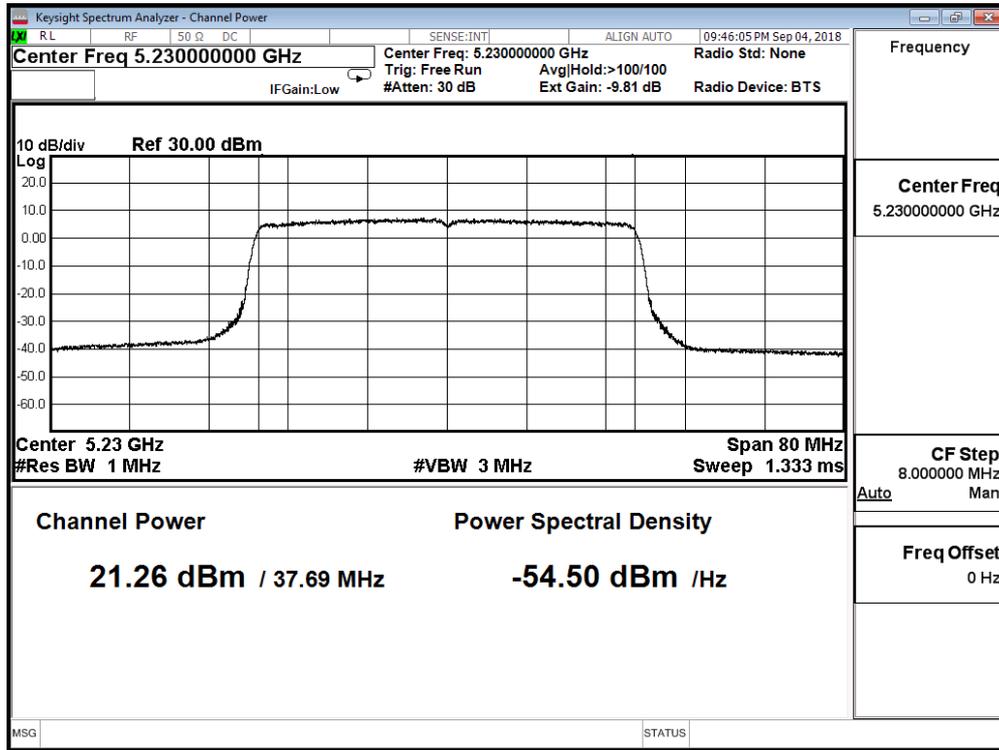


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(40MHz)(ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.670	≤ 30.000
46	5230	20.980	≤ 30.000

Channel 38

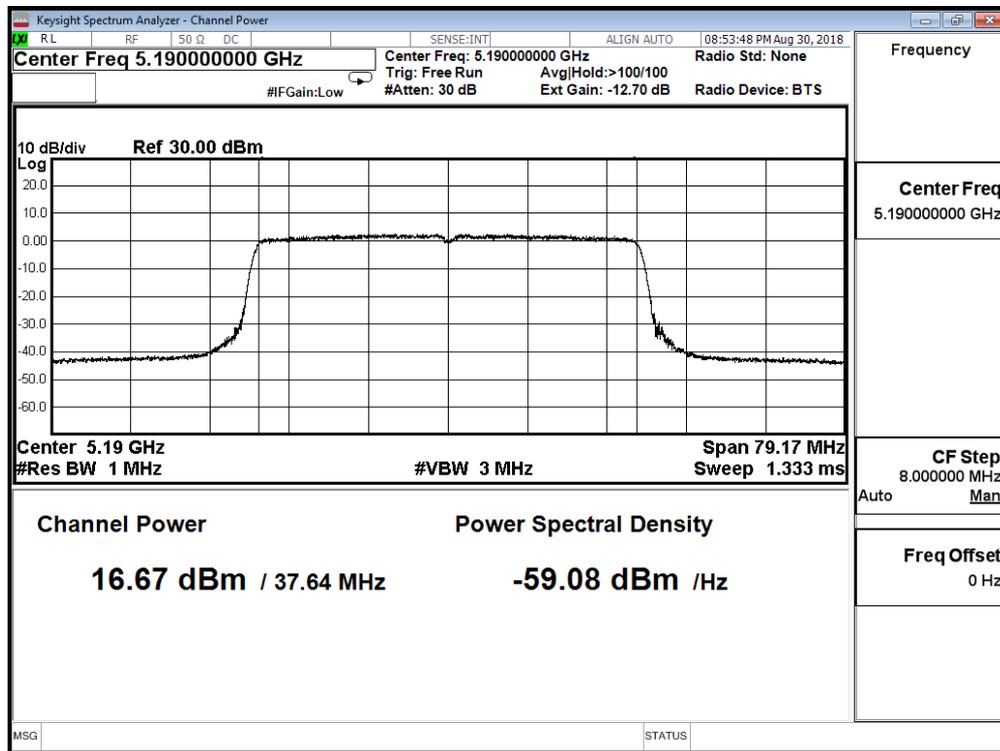

Channel 46

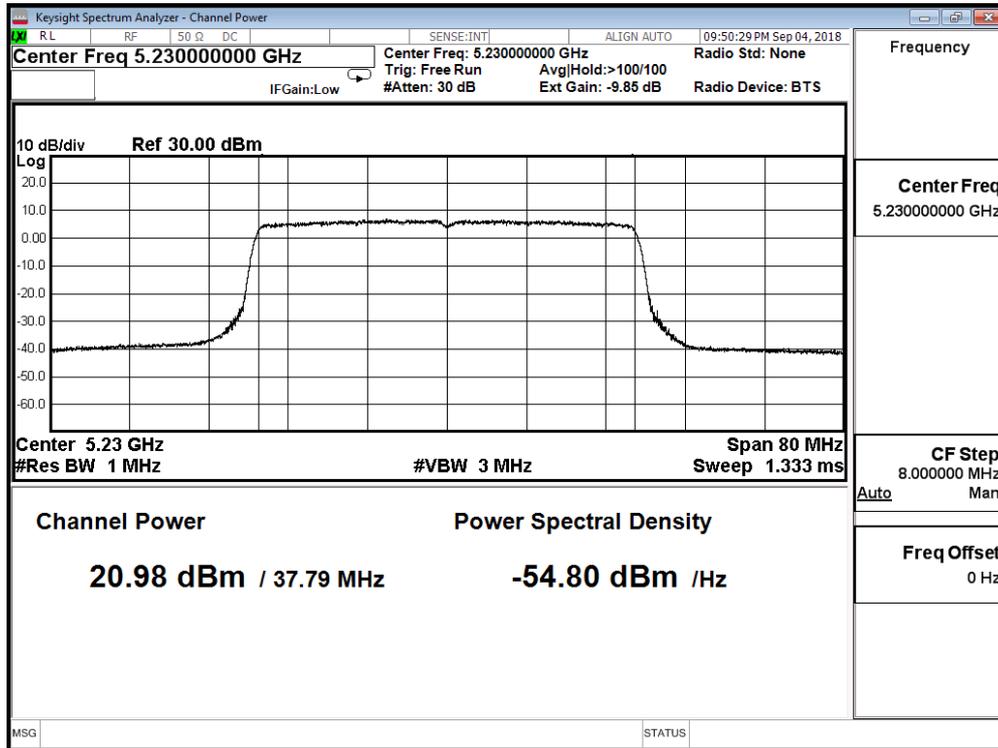


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(40MHz)(ANT 4)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.070	≤ 30.000
46	5230	20.390	≤ 30.000

Channel 38

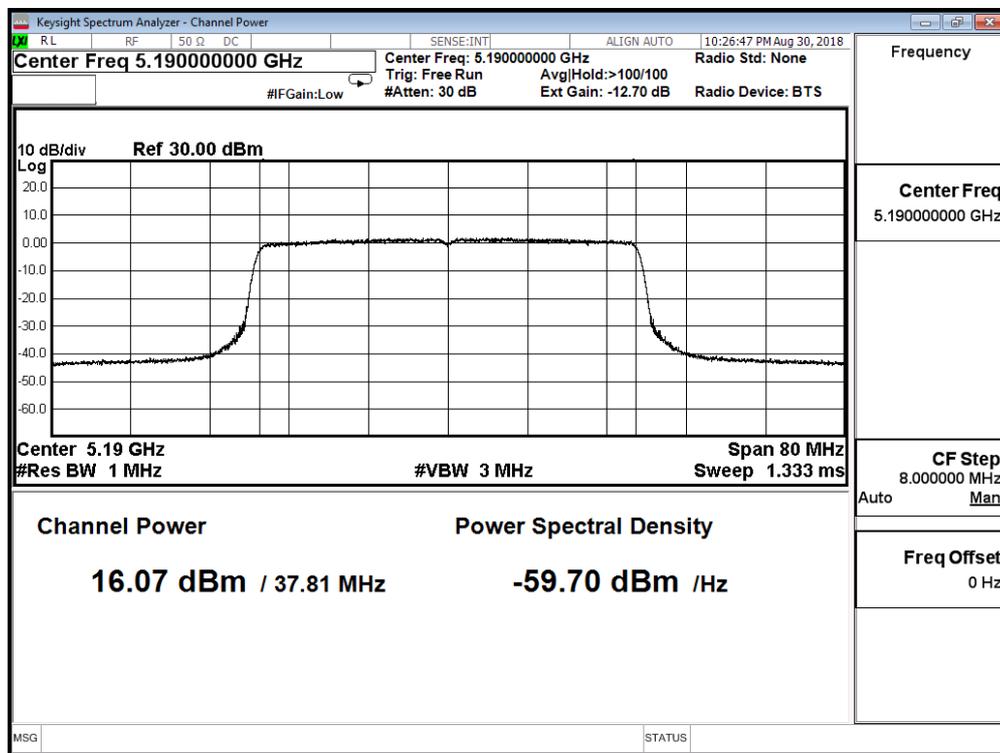

Channel 46

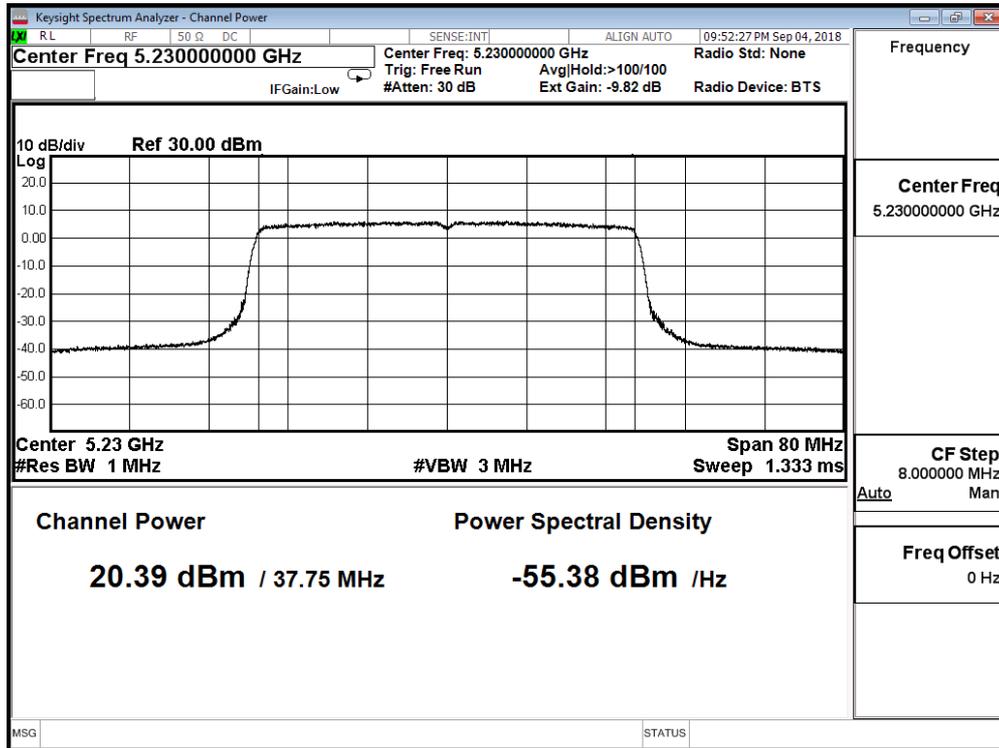


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(40MHz)(ANT 5)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	15.850	≤ 30.000
46	5230	20.180	≤ 30.000

Channel 38

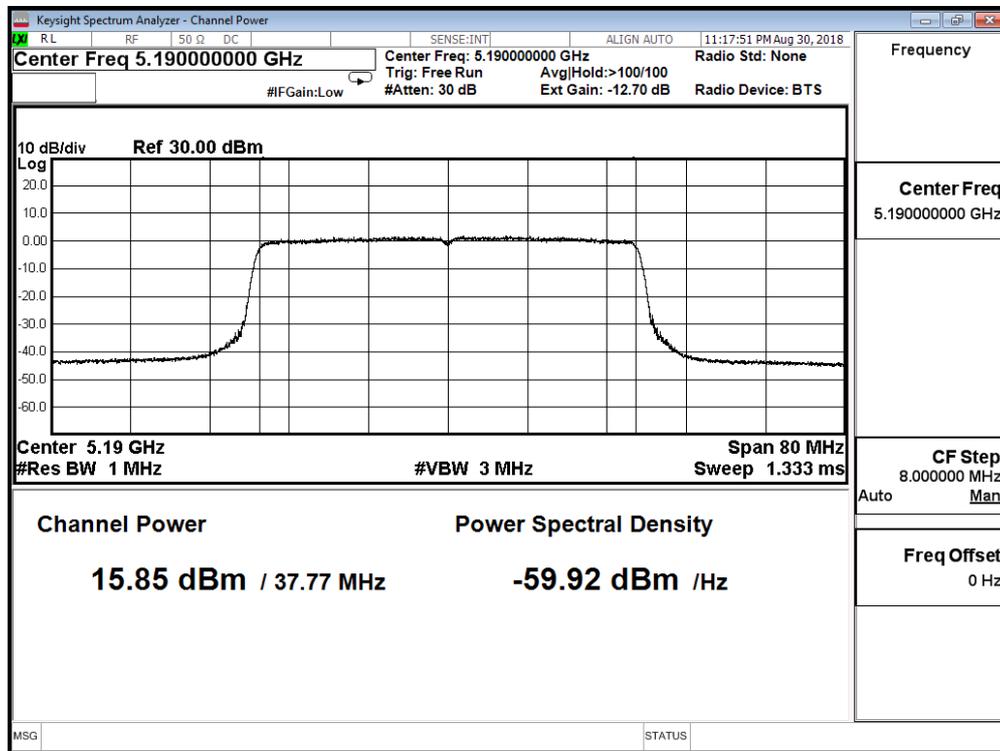

Channel 46

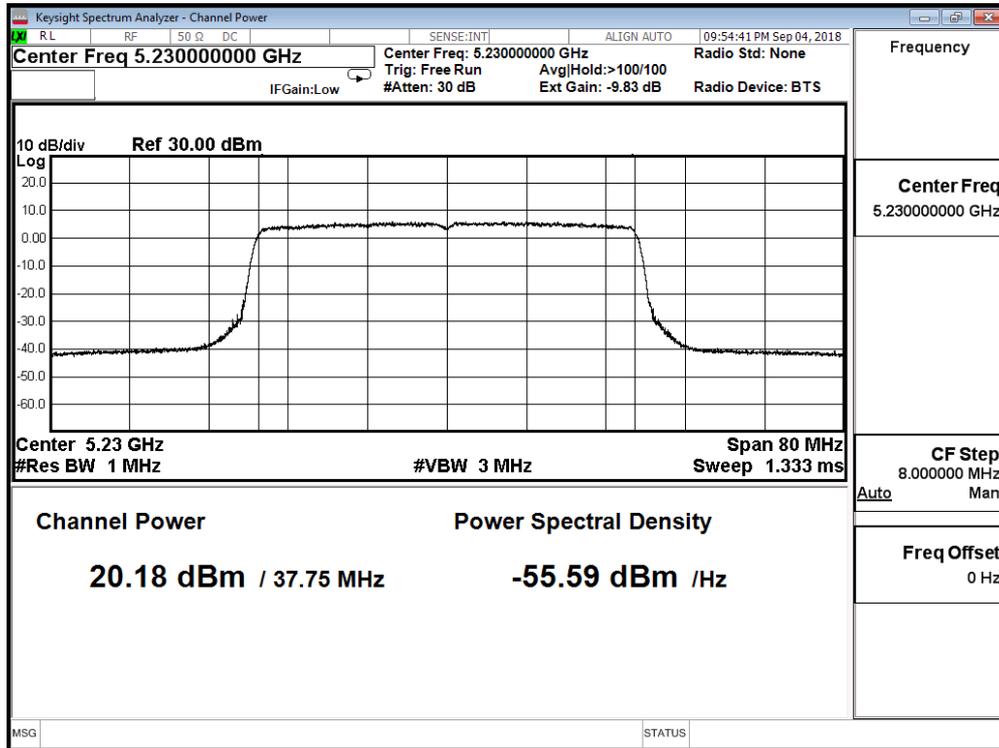


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(40MHz)(ANT 6)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.230	≤ 30.000
46	5230	19.580	≤ 30.000

Channel 38

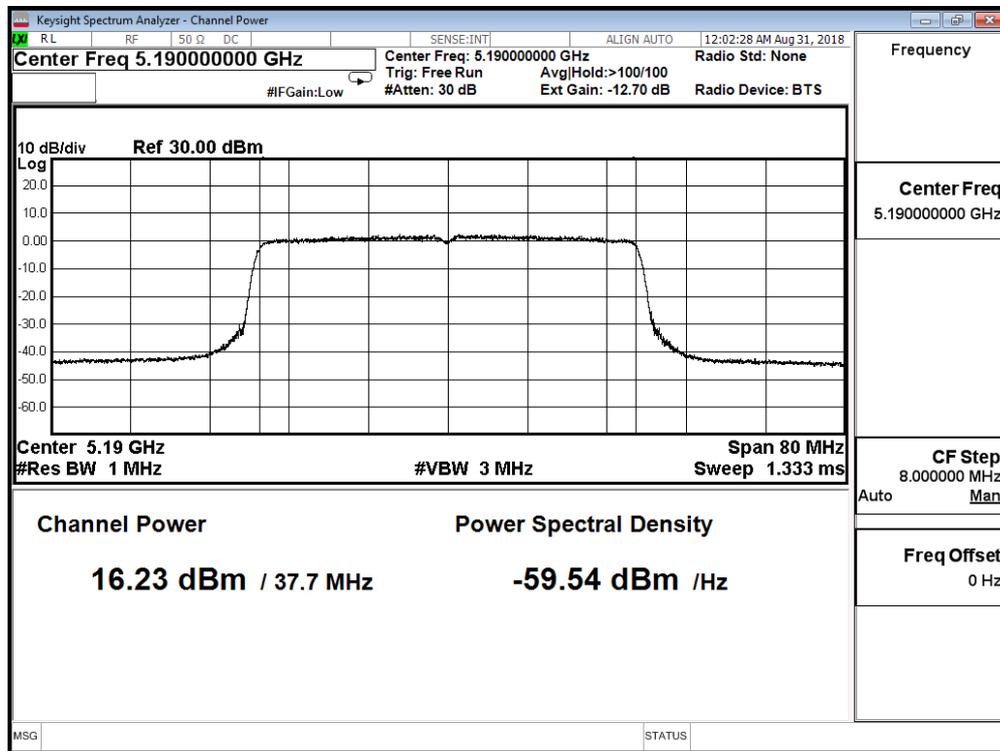

Channel 46

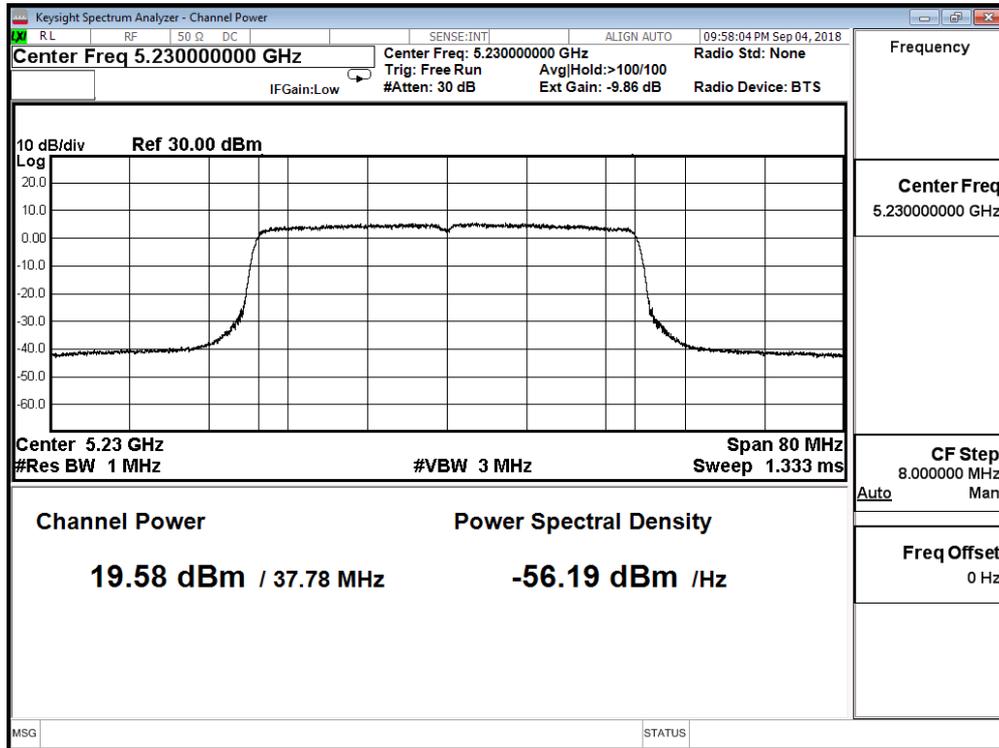


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H


IEEE 802.11ax(40MHz)(ANT 8)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.950	≤ 30.000
46	5230	21.440	≤ 30.000

Channel 38

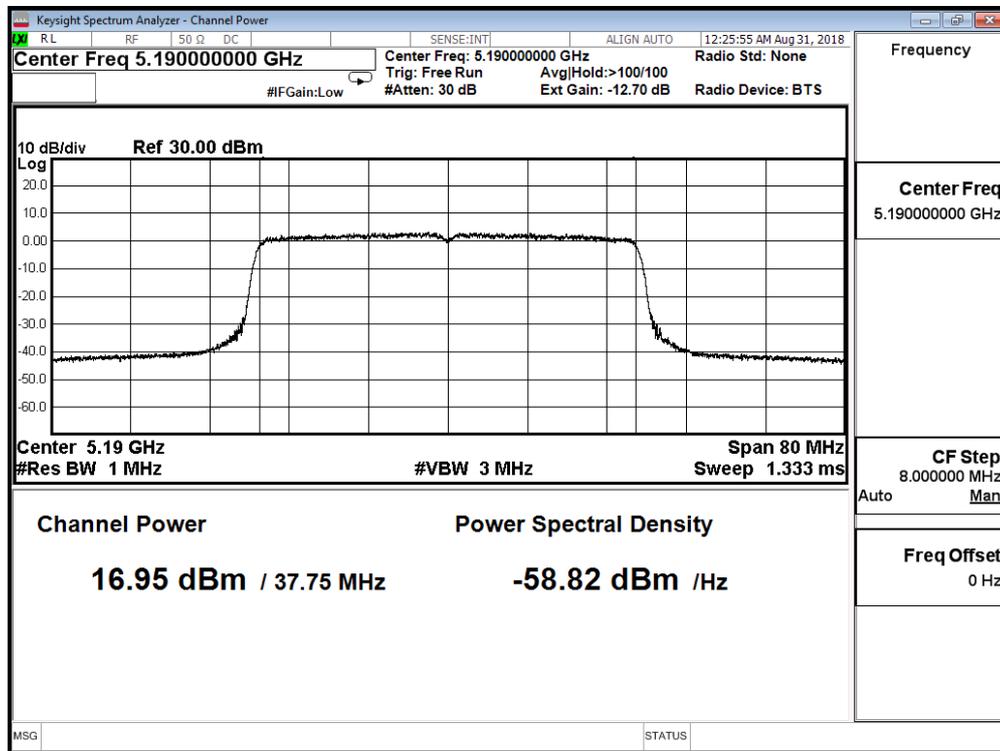

Channel 46

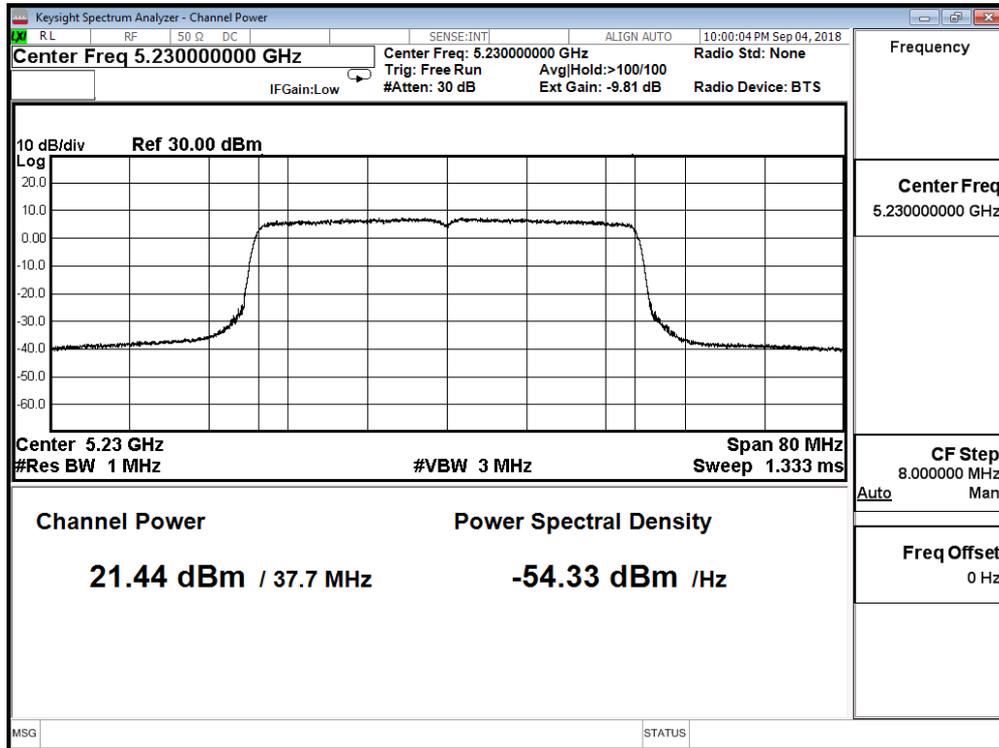

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD P-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ax(40MHz)(ANT 0+1+2+3+4+5+6+8)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	25.407	≤ 30.000
46	5230	29.591	≤ 30.000

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ax(80MHz)(ANT 0)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	16.040	≤ 30.000

Channel 42

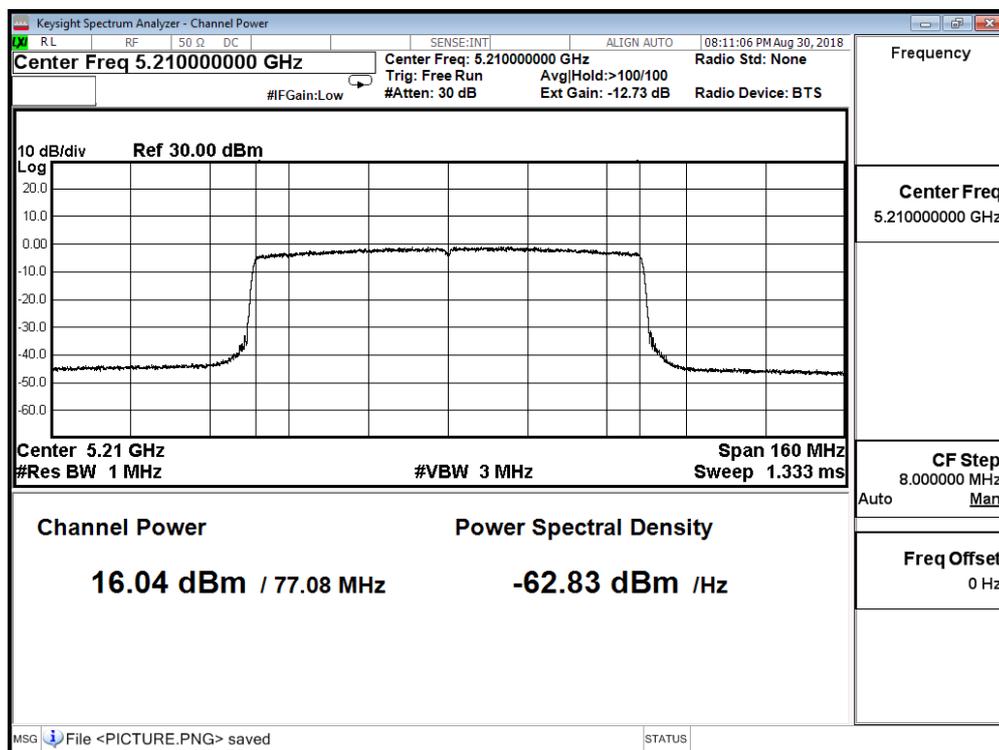


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ax(80MHz)(ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	15.760	≤ 30.000

Channel 42

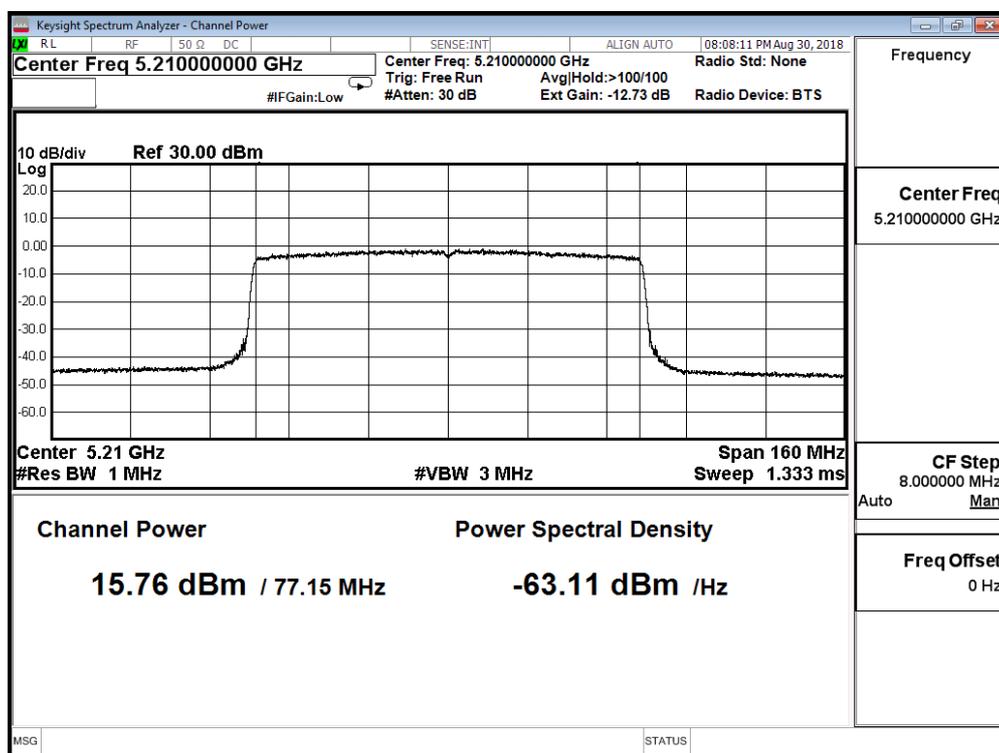


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ax(80MHz)(ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	16.920	≤ 30.000

Channel 42

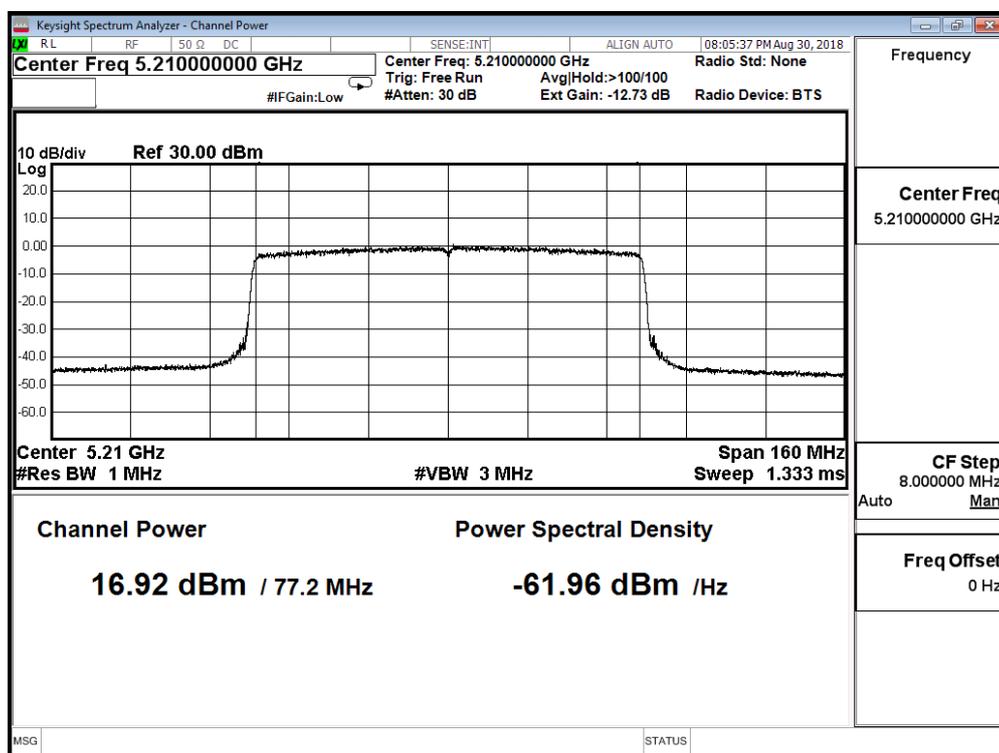


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ax(80MHz)(ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	16.430	≤ 30.000

Channel 42

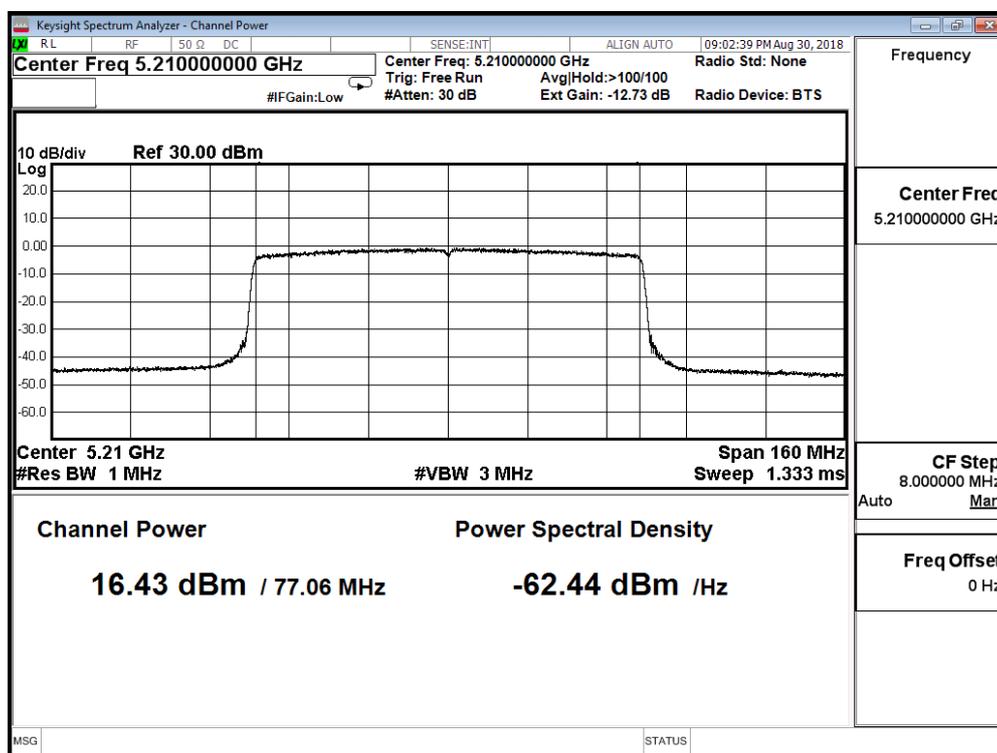


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ax(80MHz)(ANT 4)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	16.070	≤ 30.000

Channel 42

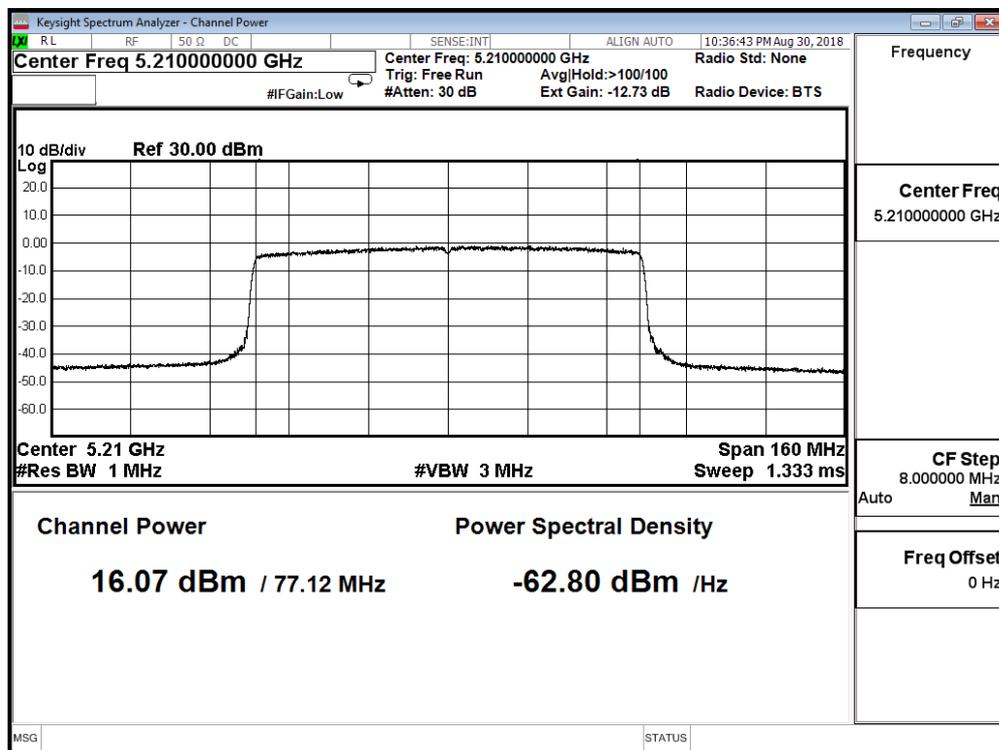


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ax(80MHz)(ANT 5)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	16.640	≤ 30.000

Channel 42

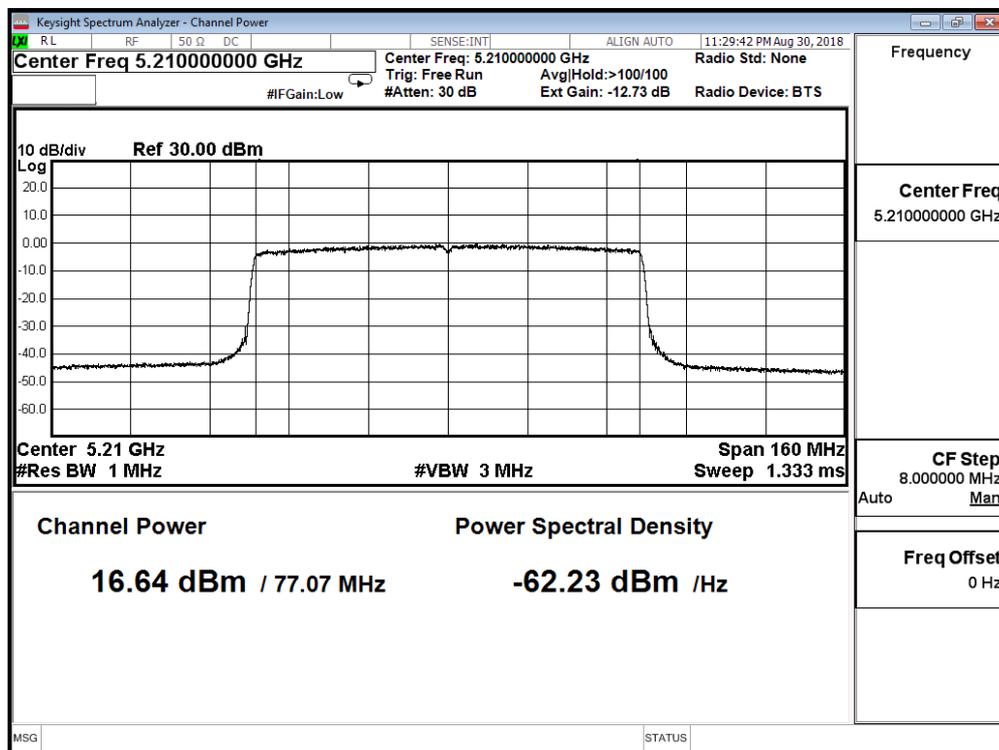


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ax(80MHz)(ANT 6)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	15.970	≤ 30.000

Channel 42

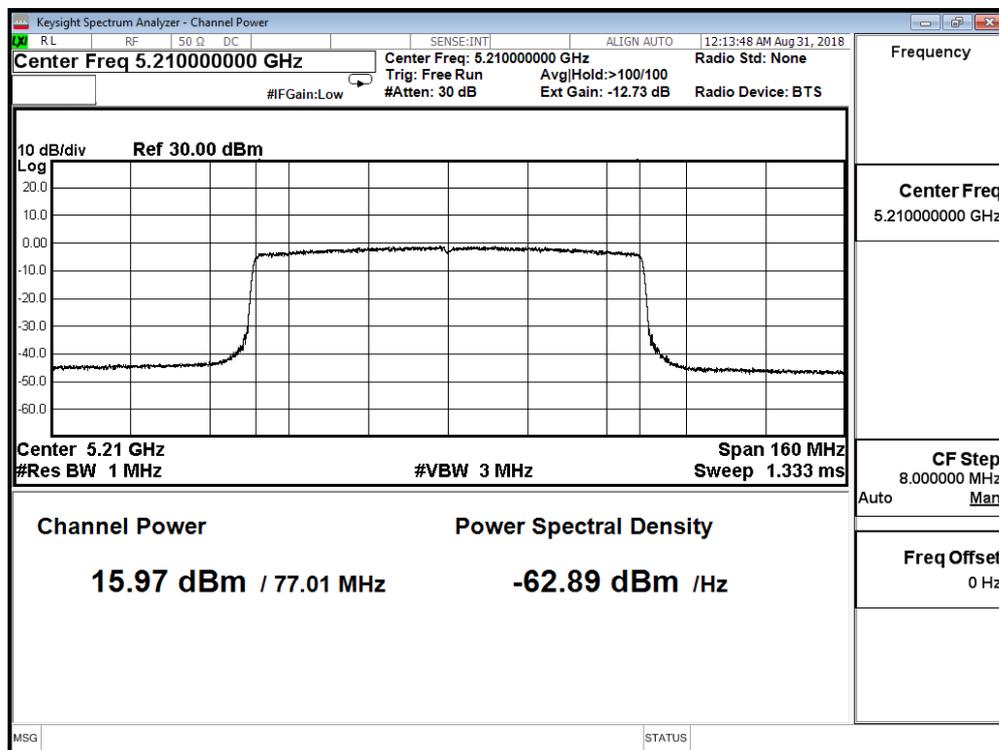


Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_ADP-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ax(80MHz)(ANT 8)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	15.890	≤ 30.000

Channel 42

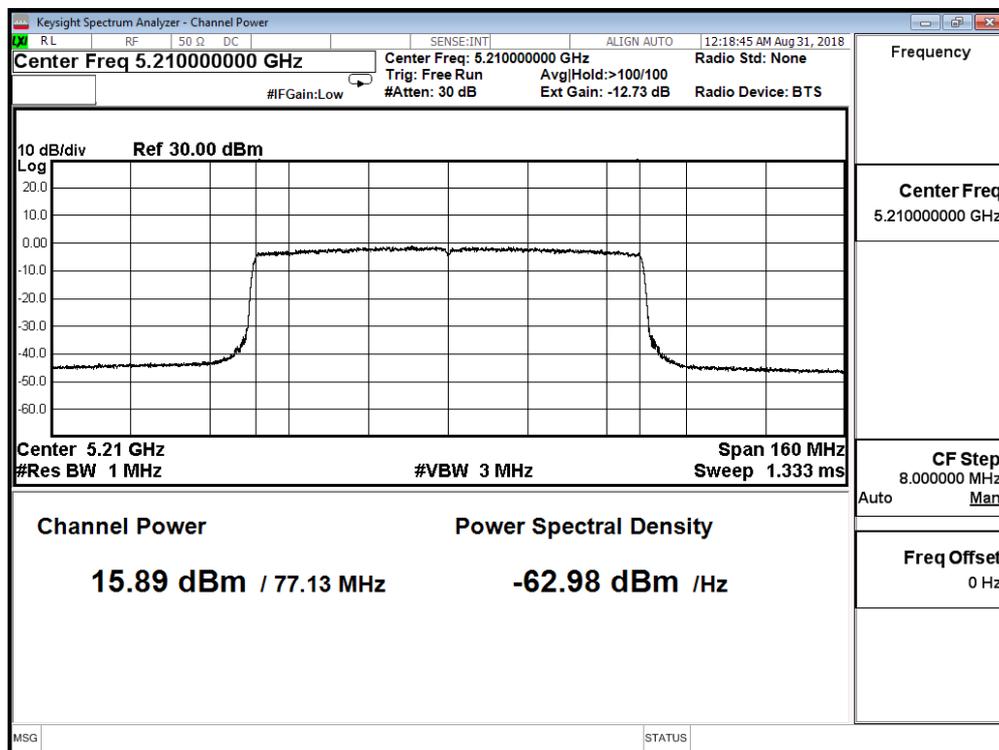

Product	ROG Rapture GT-AX6000 Dual-band Gaming Router		
Test Item	Maximum conducted output power		
Test Mode	Mode 4:TX_Non Beamforming_NSS2_AD P-65DW Y		
Date of Test	2018/08/30	Test Site	SR10-H

IEEE 802.11ax(80MHz)(ANT 0+1+2+3+4+5+6+8)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	25.263	≤ 30.000