



國際電器認證中心有限公司 International Electrical Certification Centre Ltd.


提供電器產品測試國際認證及諮詢服務 Technical Service in Electrical Product Testing, International Certification & Information



Network Partner



Nemko
Qualified Independent Laboratory



Accredited Laboratory

F C C - TEST REPORT

REPORT NO.: 21941/0/400F

Head Office:

Unit 602-605, 6/F., 31 Lok Yip Rd., On Lok Tsuen, Fanling, N.T., Hong Kong. Tel: (852) 2305 2570 Fax: (852) 2756-4480 Home page: <http://www.iecc.com.hk> E-mail: info@iecc.com.hk
香港新界粉嶺安樂村樂業路31號6樓602-605室 電話: (852) 2305 2570 傳真: (852) 2756 4480 網頁: <http://www.iecc.com.hk> 電子郵件: info@iecc.com.hk

Guangzhou Office:

Unit 1916, 19/F., South Tower, Guangzhou World Trade Centre Complex, 371-375 Huan Shi Dong Rd., Guangzhou, P.R. China. Tel: +86-20-8776 4838 Fax: +86-20-8776 3918
廣州市環市東路371-375號世界貿易中心南塔19樓1916室 電話: (020) 8776 4838 傳真: (020) 8776 3918



Network Partner



Qualified Independent Laboratory



Accredited Laboratory

FCC – Test Report

Date: 2000-04-01

No. 21941/0/400F

Page 2 of 11

**FCC listed testlab
acc. to Section 2.948 of the FCC - Rules****in compliance with the requirements of
ANSI C63.4 - 1992**

Product : Radio-Controlled Sand Hopper with
Item no. 32946 – 27 MHz Transmitter

Model : 32946

Applicant : HONG KONG TOY CENTRE
LIMITED

Manufacturer : PLAYWELL INDUSTRY FACTORY


Head Office:Unit 602-605, 6/F., 31 Lok Yip Rd., On Lok Tsuen, Fanling, N.T., Hong Kong. Tel: (852) 2305 2570 Fax: (852) 2756-4480 Home page: <http://www.iecc.com.hk> E-mail: info@iecc.com.hk
香港新界粉嶺安樂村樂業路31號6樓602-605室 電話: (852) 2305 2570 傳真: (852) 2756 4480 網頁: <http://www.iecc.com.hk> 電子郵件: info@iecc.com.hk**Guangzhou Office:**Unit 1916, 19/F., South Tower, Guangzhou World Trade Centre Complex, 371-375 Huan Shi Dong Rd., Guangzhou, P.R. China. Tel: +86-20-8776 4838 Fax: +86-20-8776 3918
廣州市環市東路371-375號世界貿易中心南塔19樓1916室 電話: (020) 8776 4838 傳真: (020) 8776 3918



Network Partner



Qualified Independent Laboratory



Accredited Laboratory

FCC – Test ReportDate: 2000-04-01

No. 21941/0/400F

Page 3 of 11

TABLE OF CONTENTS

1. Cover sheet
2. Introduction
3. Table of Contents
4. Laboratory Report
5. Summary of Test results
6. Test Equipment List
7. Radiated Emission Test procedure
8. Interference Radiation (Datasheet)
9. Notes for Radiation Measurement (acc. to ANSI C63.4 - 1992)
10. Measurement of Emissions within Band Edges (Datasheet)
11. Notes for Measurement of Emissions within Band Edges

Head Office:Unit 602-605, 6/F., 31 Lok Yip Rd., On Lok Tsuen, Fanling, N.T., Hong Kong. Tel: (852) 2305 2570 Fax: (852) 2756-4480 Home page: <http://www.iecc.com.hk> E-mail: info@iecc.com.hk
香港新界粉嶺安樂村樂業路31號6樓602-605室 電話: (852) 2305 2570 傳真: (852) 2756 4480 網頁: <http://www.iecc.com.hk> 電子郵件: info@iecc.com.hk**Guangzhou Office:**Unit 1916, 19/F., South Tower, Guangzhou World Trade Centre Complex, 371-375 Huan Shi Dong Rd., Guangzhou, P.R. China. Tel: +86-20-8776 4838 Fax: +86-20-8776 3918
廣州市環市東路371-375號世界貿易中心南塔19樓1916室 電話: (020) 8776 4838 傳真: (020) 8776 3918



Network Partner

Nemko
Qualified Independent Laboratory

Accredited Laboratory

FCC – Test Report

No. 21941/0/400F

Date: 2000-04-01

Page 4 of 11

LABORATORY - REPORT

APPLICANT: HONG KONG TOY CENTRE LIMITED
ADDRESS: 1604-06, 16/F., Miramar Tower
132 Nathan Road
Tsimshatsui, Kowloon
HONG KONG

DATE OF SAMPLE RECEIVED: 2000-03-03
DATE OF TESTING: 2000-04-01

DESCRIPTION OF SAMPLE:
Product: Radio-Controlled Sand Hopper with Item no. 32946 -- 27 MHz Transmitter
Manufacturer: PLAYWELL INDUSTRY FACTORY
Model number: 32946
Rating: DC 9V ('6F22' Size Battery x 1)
Country of Origin: P.R. CHINA

INVESTIGATIONS REQUESTED: Measurements to the relevant clauses of F.C.C. Rules and Regulations Part 15 Subpart C - Intentional Radiators

RESULTS: See the attached test sheets

CONCLUSIONS From the measurement data obtained, the tested sample was considered to have **COMPLIED** with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.



Authorized Signature

Remark: Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests



Network Partner

**Nemko**

Qualified Independent Laboratory

Agent of



Accredited Laboratory

FCC – Test Report

Date: 2000-04-01

No. 21941/0/400F

Page 5 of 11

Summary of Test Results**Interference Radiation:**

Test result: O.K.
Test data: See attached data sheet

Interference Voltage:

Test result: N.A.
Test data: N.A.

Measurement of Emissions within Band Edges

Test result: O.K.
Test data: See attached data sheet

Head Office:


Unit 602-605, 6/F., 31 Lok Yip Rd., On Lok Tsuen, Fanling, N.T., Hong Kong. Tel: (852) 2305 2570 Fax: (852) 2756-4480 Home page: <http://www.iecc.com.hk> E-mail: info@iecc.com.hk
香港新界粉嶺安樂村樂業路31號6樓602-605室 電話: (852) 2305 2570 傳真: (852) 2756 4480 網頁: <http://www.iecc.com.hk> 電子郵件: info@iecc.com.hk

Guangzhou Office:

Unit 1916, 19/F., South Tower, Guangzhou World Trade Centre Complex, 371-375 Huan Shi Dong Rd., Guangzhou, P.R. China. Tel: +86-20-8776 4838 Fax: +86-20-8776 3918
廣州市環市東路371-375號世界貿易中心南塔19樓1916室 電話: (020) 8776 4838 傳真: (020) 8776 3918



Network Partner

Nemko
Qualified Independent Laboratory

Accredited Laboratory

FCC – Test Report

Date: 2000-04-01

No. 21941/0/400F

Page 6 of 11

TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Remark
Test Receiver	Rohde & Schwarz	ESH 3	863497/015	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	860688/022	25MHz – 1,300 MHz
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	--	2 x 10A, 50Ω, 50μH 10KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Antenna Mast System	Schwarzbeck	AM9104	--	Max. 4 meters height
Spectrum Analyzer with Q. Peak	Tektronix	2712	B023006	9KHz – 1.8GHz
Interface for Spectrum 2712	Tektronix	TD3F14A	--	
Test Receiver	Rohde & Schwarz	ESH 3	892580/006	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	863512/012	25MHz – 1,300 MHz
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2	--	
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	--	2 x 10A, 50Ω, 50μH 10KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Signal Generator	Rohde & Schwarz	SWS 2	879113/42	100KHz – 1040 MHz
Digital Multimeter	Tektronix	DM2510G	DM- 2510GTW10555	10KHz – 30MHz
Turntable with Controller	Drehtisch	DT312	--	φ120 cm

Head Office:Unit 602-605, 6/F., 31 Lok Yip Rd., On Lok Tsuen, Fanling, N.T., Hong Kong. Tel: (852) 2305 2570 Fax: (852) 2756-4480 Home page: <http://www.iecc.com.hk> E-mail: info@iecc.com.hk
香港新界粉嶺安樂村樂業路31號6樓602-605室 電話: (852) 2305 2570 傳真: (852) 2756 4480 網頁: <http://www.iecc.com.hk> 電子郵件: info@iecc.com.hk**Guangzhou Office:**Unit 1916, 19/F., South Tower, Guangzhou World Trade Centre Complex, 371-375 Huan Shi Dong Rd., Guangzhou, P.R. China. Tel: +86-20-8776 4838 Fax: +86-20-8776 3918
廣州市環市東路371-375號世界貿易中心南塔19樓1916室 電話: (020) 8776 4838 傳真: (020) 8776 3918



Network Partner

**Nemko**
Qualified Independent Laboratory


Agent of



Accredited Laboratory

FCC – Test Report**No. 21941/0/400F**Date: 2000-04-01

Page 7 of 11

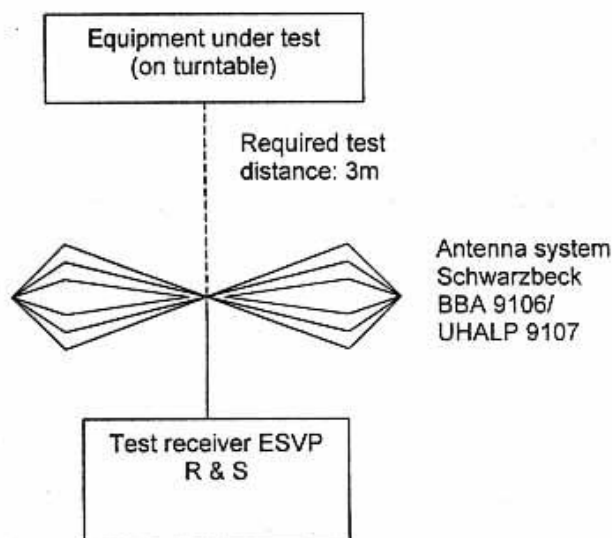Radiated Emission Test Procedure**Head Office:**Unit 602-605, 6/F., 31 Lok Yip Rd., On Lok Tsuen, Fanling, N.T., Hong Kong. Tel: (852) 2305 2570 Fax: (852) 2756-4480 Home page: <http://www.iecc.com.hk> E-mail: info@iecc.com.hk
香港新界粉嶺安樂村樂業路31號6樓602-605室 電話: (852) 2305 2570 傳真: (852) 2756 4480 網頁: <http://www.iecc.com.hk> 電子郵件: info@iecc.com.hk**Guangzhou Office:**Unit 1916, 19/F., South Tower, Guangzhou World Trade Centre Complex, 371-375 Huan Shi Dong Rd., Guangzhou, P.R. China. Tel: +86-20-8776 4838 Fax: +86-20-8776 3918
廣州市環市東路371-375號世界貿易中心南塔19樓1916室 電話: (020) 8776 4838 傳真: (020) 8776 3918



Network Partner



Nemko Interference Radiation

Qualified Independent Laboratory

Measurement of Radiated Emissions (27MHz-1000MHz)

Acc: FCC Part 15 Subpart C

Agent of
Accredited Laboratory

IECC Ref: 21941/D/400F
 Model: 32946
 Applicant: HONG KONG TOY CENTRE LIMITED
 Ser.Nr.: 1


Test Equipment
 Receiver: ESVP Rohde & Schwarz
 Antenna: Schwarzbeck BBA 9106
 and UHALP 9107

Set under test: Radio-Controlled Sand Hopper with item no. 32946
 Connected sets: -
 Operating mode: Power "On"

	Frequency (MHz)	Horz. Reading dB(μV)	Vert. Reading dB(μV)	Antenna Factor (dB)	Horiz. Test Result (μV/m)	Vert. Test Result (μV/m)	Limit (μV/m)
Harm. 2	54.24	< 16	17	6.3	< 13	15	100
Harm. 3	81.36	< 16	< 16	5.2	< 12	< 12	100
Harm. 4	108.48	< 16	< 16	9.5	< 19	< 19	150
Harm. 5	135.60	< 16	< 16	12.2	< 26	< 26	150
Harm. 6	162.72	< 16	< 16	13.6	< 30	< 30	150
Harm. 7	189.84	< 16	< 16	14.8	< 35	< 35	150
Harm. 8	216.96	< 16	< 16	15.7	< 38	< 38	200
Harm. 9	244.08	< 16	< 16	16.5	< 42	< 42	200
Harm. 10	271.20	< 16	< 16	17.3	< 46	< 46	200
Harm. 11	298.32	< 16	< 16	18.0	< 50	< 50	200
Harm. 12	325.44	< 16	< 16	16.8	< 44	< 44	200
Harm. 13	352.56	< 16	< 16	17.4	< 47	< 47	200
Harm. 14	379.68	< 16	< 16	17.9	< 50	< 50	200
Harm. 15	406.80	< 16	< 16	18.4	< 52	< 52	200
Harm. 16	433.92	< 16	< 16	18.8	< 55	< 55	200
Harm. 17	461.04	< 16	< 16	19.2	< 57	< 57	200
Harm. 18	488.16	< 16	< 16	19.5	< 60	< 60	200
Harm. 19	515.28	< 16	< 16	19.9	< 62	< 62	200
Harm. 20	542.40	< 16	< 16	20.1	< 64	< 64	200
Harm. 21	569.52	< 16	< 16	20.5	< 67	< 67	200
Harm. 22	596.64	< 16	< 16	20.9	< 70	< 70	200
Harm. 23	623.76	< 16	< 16	21.2	< 73	< 73	200
Harm. 24	650.88	< 16	< 16	21.6	< 76	< 76	200
Harm. 25	678.00	< 16	< 16	22.1	< 80	< 80	200
Harm. 26	705.12	< 16	< 16	22.5	< 84	< 84	200
Harm. 27	732.24	< 16	< 16	22.8	< 87	< 87	200
Harm. 28	759.36	< 16	< 16	23.2	< 91	< 91	200
Harm. 29	786.48	< 16	< 16	23.5	< 95	< 95	200
Harm. 30	813.60	< 16	< 16	23.9	< 99	< 99	200
Harm. 31	840.72	< 16	< 16	24.2	< 103	< 103	200
Harm. 32	867.84	< 16	< 16	24.6	< 107	< 107	200
Harm. 33	894.96	< 16	< 16	24.9	< 111	< 111	200
Harm. 34	922.08	< 16	< 16	25.3	< 117	< 117	200
Harm. 35	949.20	< 16	< 16	25.8	< 122	< 122	200
Harm. 36	976.32	< 16	< 16	26.2	< 128	< 128	500

Note: Refer to the attached test report no. FCC-21941 issued by PKM electronics GmbH for measurement at frequencies below 30MHz.

* Data (Horz.) * Data (Vert.) — Limit

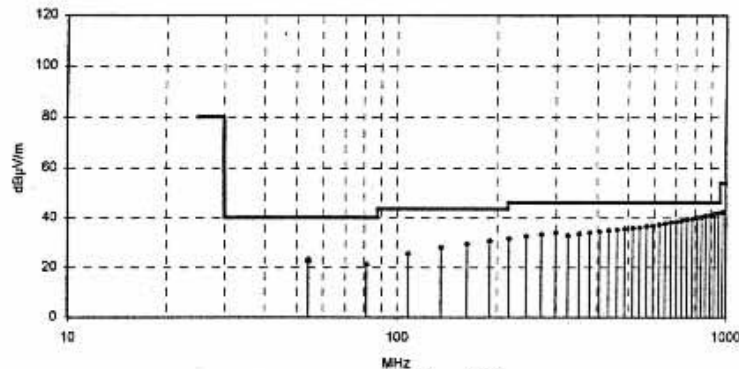

Test result:


☒ O.K.
☐ Not O.K.

Date: 01 APR 2000

Operator: [Signature]



Network Partner

Nemko
Qualified Independent LaboratoryAgent of
Accredited Laboratory**FCC – Test Report**

Date: 2000-04-01

No. 21941/0/400F

Page 9 of 11

Notes for Radiation Measurement**1. Measurement facility:**

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

2. Distance between the EUT and measuring antenna:

3 meters.

3. Measuring instrumentations:

Rohde & Schwarz ESVP Test Receiver (20 - 1300 MHz) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

In the frequency range above 1000 MHz Spectrum Analyzer FMSM26 and Analyzer Display Unit FSA-D are used, bandwidth set at 100 kHz.

4. Measuring antenna:

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

In the frequency range above 1 GHz horn-antenna RGA 50/60 is used.

5. Frequency range scanned:

The frequency range 30 - 5000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

6. Arrangement of EUT:

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.

7. Measuring Procedure:

In accordance with the relevant sections of the American National Standards Institute (ANSI) C63.4-1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.



Network Partner



Nemko
Qualified Independent Laboratory


Measurement of Emissions within band edges



Accredited Laboratory

Acc: FCC Part 15 Subpart C

IECC Ref:	21941/0/400F	Test Equipment
Model:	32946	Spectrum Analyzer:
Applicant:	HONG KONG TOY CENTRE LIMITED	Tektronix 2712
Ser.Nr.:	1	
Set under test:	Radio-Controlled Sand Hopper with Item no. 32946	
Connected sets:	-	
Operating mode:	Power "On"	

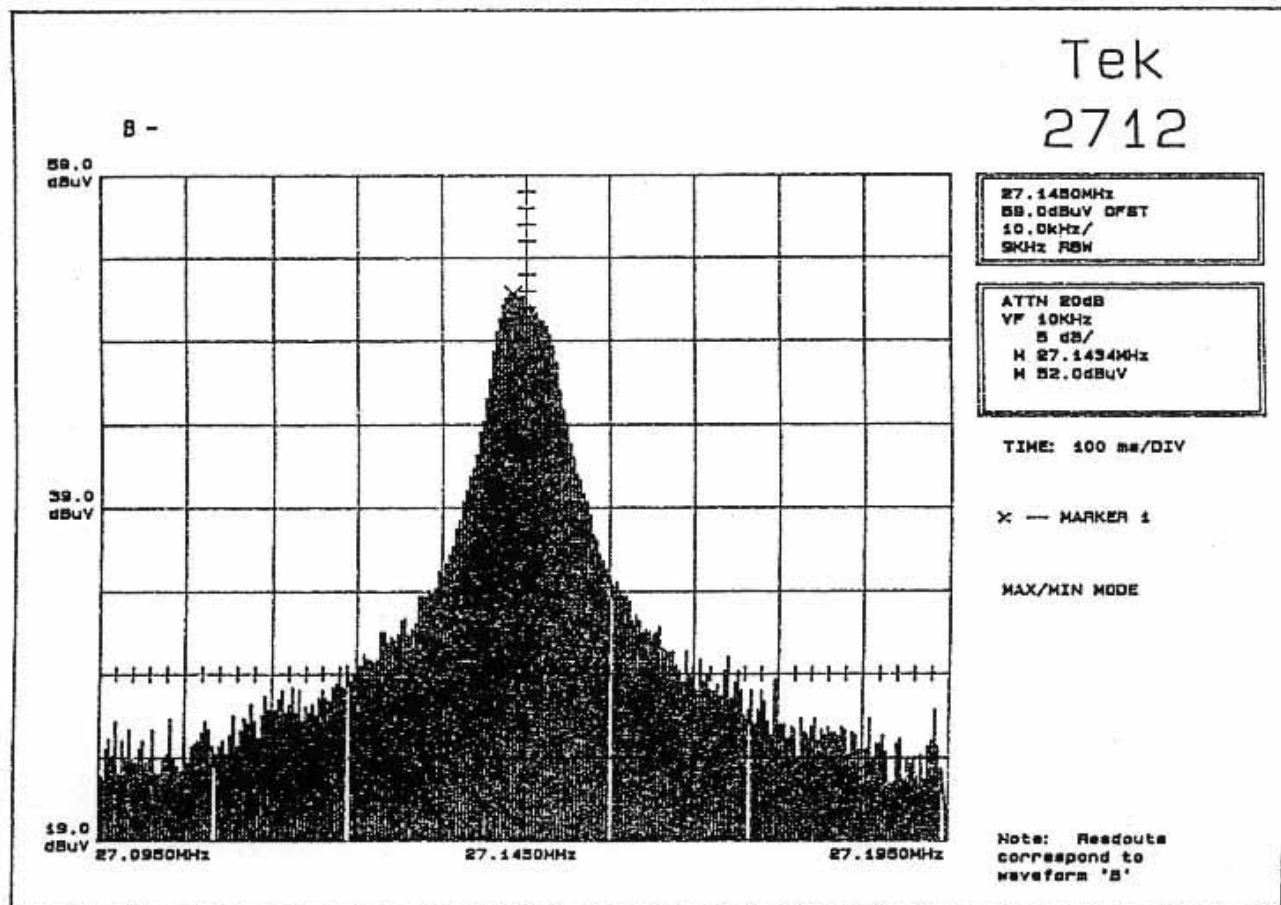

Test result:

☒ O.K.
☐ Not O.K.

Date: 01 APR 2000

Operator: 6



Network Partner



Qualified Independent Laboratory



Accredited Laboratory

FCC – Test ReportDate: 2000-04-01

No. 21941/0/400F

Page 11 of 11

Notes for Measurement of Emissions within Band Edges

1. **Measurement facility:**
Measurement facility located at Fanling (Hong Kong) placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.
2. **Measuring instrumentations:**
Spectrum Analyzer: Tektronix 2712
3. **Frequency range scanned:**
The frequency range acc. to FCC rules and regulations part 15 subpart C - Intentional Radiators.
4. **Arrangement of EUT:**
During the test, the sample was operated.
5. **Measuring Procedure:**
In accordance with the relevant sections of American National Standards Institute (ANSI) C63.4 - 1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz'.