

TEST REPORT FROM RADIO FREQUENCY INVESTIGATION LTD.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)

To: FCC Part 15 Subpart E: 1998
(Unlicensed National Information
Infrastructure Devices)

Test Report Serial No:
RFI/EMCB1/RP38797A

This Test Report Is Issued Under The Authority Of Brian Watson Technical Director: 	Checked By: 
Tested By: 	Release Version No: PDF01
Issue Date: 04 May 1999	Test Date: 25 September 1997

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields. Furthermore, the date of creation must match the issue date stated above.
This report may be copied in full.

Radio Frequency Investigation Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, ENGLAND. Tel: +44 (0) 1256 851193 Fax: +44 (0) 1256 851192	Registered in England, No. 211 7901. Registered Office: Ewhurst Park, Ramsdell, Basingstoke, Hampshire RG26 5RQ	
--	--	---

RADIO FREQUENCY INVESTIGATION LTD.

EMC Department

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

TEST REPORT

S.No: RFI/EMCB1/RP38797A

Page 2 of 56

Issue Date:

This page has been left intentionally blank.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

Table of Contents

1. Client Information	4
2. Equipment Under Test (EUT).....	5
3. Test Specification, Methods And Procedures.....	9
4. Deviations From The Test Specification.....	10
5. Operation Of The EUT During Testing	11
6. Summary Of Test Results.....	12
7. Measurements, Examinations And Derived Results.....	13
8. Measurement Uncertainty.....	30
Appendix 1. Test Equipment Used.....	31
Appendix 2. Measurement Methods	33
Appendix 3. Test Configuration Drawings	40
Appendix 4. Graphical Test Results	45
Appendix 5. Photographs of EUT.....	55

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

1. Client Information

Company Name:	Adaptive Broadband Ltd
Address:	First Floor, Block C1 The Westbrook Centre Milton Road Cambridge CB4 1YQ Tel: +44-1223-713713 Fax: +44-1223-713714
Contact Name:	Mr P. Simpson Tel: +44-1223-713412 E-Mail: ps@adaptivebroadband.com

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

2. Equipment Under Test (EUT)

The following information (with the exception of the Date of Receipt) has been supplied by the client:

2.1. Identification Of Equipment Under Test (EUT)

Brand Name:	AB-ACCESS
Model Name or Number:	Access Point (AB)
Unique Type Identification:	UNII Pilot
Serial Number:	Pre-Production 001
Country of Manufacture:	UK
FCC ID Number:	Awaiting Certification from the FCC
Date of Receipt:	20 April 1999

Brand Name:	AB-ACCESS
Model Name or Number:	SU and AP 'Wall-Box'
Unique Type Identification:	RJ45
Serial Number:	Pre-Production 001
Country of Manufacture:	UK
FCC ID Number:	Awaiting Certification from the FCC
Date of Receipt:	20 April 1999

Brand Name:	Sinpro Electronic co. Ltd
Description	DC Power Supply Unit
Model Name or Number:	SPU50-9
Unique Type Identification:	None stated by client
Serial Number:	120663
Country of Manufacture:	Taiwan
FCC ID Number:	Awaiting Certification from the FCC
Date of Receipt:	20 April 1999

2.2. Description Of EUT

AB-ACCESS is targeted at providing high-speed wireless internet access in the recently assigned FCC U-NII bands between 5GHz and 6GHz. AB-ACCESS adopts a cellular structure consisting of base stations (Access Point [AP]) servicing many users. It is a fixed access, point to multipoint infrastructure. The product is targeted at the US market only.

The AP is routed via a 'wall box' to the network service provider's trunked infrastructure. The AP has an integral antenna with a 60 degree 3dB beam width to illuminate the desired coverage area. AP units can be installed around the periphery of a tall building or on a tower for optimum coverage. Power and data (bi-directional) are routed via braid and foil screened, quad twisted pair, CAT 5 data cable from an internally mounted wall box (similar in construction to a standard BT telephone outlet) up to the AP antenna unit. Power and data status is also routed via this cable. Power is provided to the wall box via a standard FCC approved 48V DC supply. The wall box provides ATM connectivity via the RJ45 socket to the service providers network.

2.3. Modifications Incorporated In EUT

The EUT has been modified so that it can be driven from a PC test script enabling worst case conditions for FCC requirements to be evaluated and tested for compliance. This modification is purely a software driver. AB-ACCESS employs a rapid TDD (Time Divisions Duplex) air interface based on ATM (Asynchronous Transfer Mode) networking protocols - data is transmitted asynchronously on demand and as such there is no discernible duty from which 'averaged' measurements can be taken. The following test modes have been implemented:

Continuous Transmit – this enables worst case EIRP and PSD to be measured, the unit is set for maximum transmit power.

Continuous Receive – There may be some fundamental frequency components that exceed the switch receive test-mode, again the unit is set to maximum receive gain.

Burst Receive - to measure worst radiated and conducted EMC in receive mode. A predetermined duty cycle will be used, the unit is set for maximum receive gain.

Maximum Transmit Power – this is worst case for switching transients creating spurious emissions – EMC radiated and conducted. As above, a predetermined duty cycle will be used, as before the unit is set for maximum transmits power.

Within each of these modes we can change the operating channel as desired by means of the PC controller.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

2.4. Additional Information Related To Testing

Power Supply Requirement:	115 V, 60 Hz AC Mains to PSU 48 VDC from PSU to EUT
Current Rating	830mA
Intended Operating Environment:	AP antenna units are mounted outside, operational range is -20 to +50 degrees Celsius. "Wall-box" units and PSUs are mounted internally to users buildings/office/home.
Weight:	AP antenna unit 5 Kg max
Dimensions:	AP = 500mm (h) x 250mm (w) x 80mm (d)
Interface Ports:	'Wall-box' RJ45 socket – Ethernet / ATM available
Type of Device	Fixed Access Wireless Internet System
Antenna Details	Permanently Attached
Occupied Bandwidth	17 MHz
Type of Modulation	QPSK at 25Mbps/sec, raised cosine filter ($\alpha = 0.35$)
Number of Tx Channels	15 Channels of 15 MHz, 5 channels in each U-NII Band
Method of Frequency Generation	Synthesiser
Category of Receiver	Superheterodyne

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

2.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	PC
Brand Name:	Dell
Model Name or Number:	Latitude
Serial Number:	DP/N0009321C – 12800 – 8BM2910 – ZL6D8
FCC ID Number:	None stated by client
Cable Length And Type:	6m Ethernet UTP
Connected to Port:	Wall-Box (Configuration Only)

Description:	PSU for PC
Brand Name:	Dell
Model Name or Number:	PA-2
Serial Number:	DP/N 0085391 REV A01
FCC ID Number:	None stated by client
Cable Length And Type:	1m DC
Connected to Port:	PC Input

Description	ATM Switch
Brand Name:	ATML
Model Name or Number:	VIRATA Switch 1000
Serial Number:	VM1000-01-1001664
FCC ID Number:	None Stated by Client
Cable Length And Type:	6m Ethernet UTP
Connected to Port:	Wall-Box

3. Test Specification, Methods And Procedures

3.1. Test Specification

Reference:	FCC Part 15 Subpart E: 1998
Title:	Code of Federal Regulations, Part 15 (47CFR15) Radio Frequency Devices: Digital Devices. Subpart E: Unlicensed National Information Infrastructure Devices
Comments:	A description of the test facility used for this test is on file with, and has been accepted by, the Federal Communications Commission as required by Section 2.948 of Federal Rules.
Purpose of Test:	To determine whether the equipment complied with the requirements of the specification for the purposes of certification.

3.2. Methods And Procedures

The methods and procedures used were as detailed in:

ANSI C63.2 (1987)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (1992)

Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16 (1987)

Title: Specification for Radio Interference measuring apparatus and measurement methods.

3.3. Definition Of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the Methods & Procedures section above. Appendix 1 contains a list of the test equipment used.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

4. Deviations From The Test Specification

None

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

5. Operation Of The EUT During Testing

5.1. Operating Conditions

The EUT was tested in a normal laboratory environment.

During testing, the EUT was powered by a 48 V DC Supply from the PSU. The PSU was powered from a 115 V, 60 Hz AC Mains supply.

5.2. Operating Modes

The EUT was tested in the following operating mode:

Continuous and Maximum Transmit Power for transmitter tests to FCC Part 15 Subpart E (15.407).

Continuous and bursted receive for receiver tests to FCC Part 15 Subpart B.

For both transmit and receive modes, tests were performed with the EUT set to the following channels for each of the 3 operating bands.

Bottom Band: 5.15 to 5.25 GHz:	Bottom Channel (Channel 0)	5.17 GHz
	Top Channel (Channel 4)	5.23 GHz
Middle Band: 5.25 to 5.35 GHz:	Bottom Channel (Channel 5)	5.27 GHz
	Top Channel (Channel 9)	5.33 GHz
Top Band: 5.725 to 5.825 GHz:	Bottom Channel (Channel 10)	5.745 GHz
	Top Channel (Channel 14)	5.805 GHz

The reason for choosing this mode was that it was defined by the client as being likely to be the worst case with regards EMC.

5.3. Configuration And Peripherals

The EUT was tested in the following configuration: The AP antenna unit is connected via S-FTP-Cat5 cable to the wall-box. The power was supplied from the PSU to the wall-box. Data was controlled from the support PC to the wall-box via UTP-Cat5 Ethernet cables.

The reason for choosing this configuration was that it was defined by the client as being likely to be the worst case with regards EMC and typical of an installation at a users home / office.

NB Section 2 of this report contains a full list of support equipment used and Appendix 3 contains a schematic diagram of the test configuration.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

6. Summary Of Test Results

6.1. Transmitter Tests

Range Of Measurements	Specification Reference	Compliance Status
AC Powerline Conducted Emissions, 450 kHz to 30 MHz	Section 15.407 (b5) of C.F.R. 47: 1998. (Section 15.207)	Complied
Effective Isotropic Radiated Power Levels, 5 GHz to 6 GHz	Section 15.407 (a) of C.F.R. 47: 1998.	Complied
Electric Field Strength Spurious Emissions, 30 MHz to 1000 MHz	Section 15.407 (b5) of C.F.R. 47: 1998 (Section 15.209)	Complied
Effective Isotropic Radiated Power Spurious Emissions, 1 GHz to 40 GHz	Section 15.407 (b1/2/3) of C.F.R. 47: 1998.	Complied
Frequency Stability -20°C to +50°C 85% to 115% VAC @ 20°C	Section 15.407 (g) of C.F.R. 47: 1997	Complied

6.2. Receiver Tests

Range Of Measurements	Specification Reference	Compliance Status
AC Powerline Conducted Emissions, 450 kHz to 30 MHz	Section 15.107 Class B of C.F.R. 47: 1998.	Complied
Electric Field Strength Spurious Emissions, 30 MHz to 26000 MHz	Section 15.109 Class B of C.F.R. 47: 1998	Complied

6.3. Location Of Tests

All the measurements described in this report were performed at the premises of Radio Frequency Investigation Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, England.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

7. Measurements, Examinations And Derived Results

7.1. General Comments

7.1.1. This section contains test results only. Details of the test methods and procedures can be found in Appendix 2 of this report.

7.1.2. The measurement uncertainties stated were calculated in accordance with the requirements of NAMAS Document NIS 81 with a confidence level of 95%. Please refer to Section 8 for details of measurement uncertainties.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

7.2. Test Results For AC Mains Conducted Emissions: Tx and Rx Mode

7.2.1. Quasi-Peak Detector Measurements On Live And Neutral Lines

7.2.1.1. Measurements were performed to FCC Part 15.107 Class B (Unintentional Radiators) and FCC Part 15.207 (Intentional Radiators).

7.2.1.2. The EUT was operated simultaneously in both maximum transmit power and burst receive mode on the specified channel.

7.2.1.3. Plots of the initial scans can be found in Appendix 4.

7.2.1.4. Preliminary conducted spurious emission scans were performed with the EUT set to all 6 channels stated in section 5.2. These preliminary scans showed similar emission levels for each of the channels. Therefore final conducted emission measurements were performed with the EUT set to Bottom Band Bottom Channel (Channel 0).

7.2.1.5. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector:

Bottom Band Bottom Channel (Channel 0)

Frequency (MHz)	Line	Q-P Level (dB _{mV})	Q-P Limit (dB _{mV})	Margin (dB)	Result
0.563	Live	35.5	48.0	12.5	Complied
0.563	Neutral	37.3	48.0	10.3	Complied
3.101	Live	43.9	48.0	4.1	Complied
3.101	Neutral	44.8	48.0	3.2	Complied
3.288	Live	45.4	48.0	2.6	Complied
3.288	Neutral	46.2	48.0	1.8	Complied
10.306	Live	33.7	48.0	14.3	Complied
10.306	Neutral	33.5	48.0	14.5	Complied
13.671	Live	38.5	48.0	9.5	Complied
13.671	Neutral	36.8	48.0	11.2	Complied
18.000	Live	36.5	48.0	11.5	Complied
18.000	Neutral	37.2	48.0	10.8	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

7.2.2. Test Results For AC Mains Conducted Emissions: Tx and Rx Mode (continued)

7.2.2.1. Further to section 7.2.1, additional measurements were performed on frequencies within 6dB of the limit with the EUT set to each of the other 5 operating channels.

Bottom Band Top Channel (Channel 4)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
3.101	Live	44.5	48.0	3.5	Complied
3.101	Neutral	45.0	48.0	3.0	Complied
3.288	Live	45.3	48.0	2.7	Complied
3.288	Neutral	46.3	48.0	1.7	Complied

Middle Band Bottom Channel (Channel 5)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
3.101	Live	44.5	48.0	3.5	Complied
3.101	Neutral	44.9	48.0	3.1	Complied
3.288	Live	45.3	48.0	2.7	Complied
3.288	Neutral	46.3	48.0	1.7	Complied

Middle Band Top Channel (Channel 9)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
3.101	Live	44.8	48.0	3.2	Complied
3.101	Neutral	45.1	48.0	2.9	Complied
3.288	Live	45.4	48.0	2.6	Complied
3.288	Neutral	46.3	48.0	1.7	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

7.2.3. Test Results For AC Mains Conducted Emissions: Receive Mode (continued)**Top Band Bottom Channel (Channel 10)**

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
3.101	Live	44.9	48.0	3.1	Complied
3.101	Neutral	45.2	48.0	2.8	Complied
3.288	Live	45.4	48.0	2.6	Complied
3.288	Neutral	46.3	48.0	1.7	Complied

Top Band Top Channel (Channel 14)

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
3.101	Live	45.0	48.0	3.0	Complied
3.101	Neutral	45.3	48.0	2.7	Complied
3.288	Live	45.7	48.0	2.3	Complied
3.288	Neutral	46.5	48.0	1.5	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

7.3. Test Results For Radiated Emissions: Tx and Rx Mode

7.3.1. Electric Field Strength Measurements: 30 MHz to 1000 MHz

7.3.1.1. Measurements were performed to FCC Part 15.109 Class B (Unintentional Radiators) and FCC Part 15.209 (Intentional Radiators).

7.3.1.2. The EUT was operated simultaneously in both maximum transmit power and burst receive mode on the specified channel.

7.3.1.3. The client has stated that the highest clock frequency for the EUT was 4.9025 GHz. Therefore tests were performed up to 26.0 GHz.

7.3.1.4. Preliminary radiated spurious emission scans were performed with the EUT set to all 6 channels stated in section 5.2. These preliminary scans showed similar emission levels for each of the channels. Therefore final radiated emission measurements were performed with the EUT set to Bottom Band Bottom Channel (Channel 0).

7.3.1.5. Plots of the initial scans can be found in Appendix 4.

7.3.1.6. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector at a test distance of 3m (results incorporate antenna factors and cable losses):

Middle Band Top Channel (Channel 9)

Frequency (MHz)	Ant. Pol.	Q-P Level (dB _m V/m)	Q-P Limit (dB _m V/m)	Margin (dB)	Result
46.510	Vert.	20.2	40.0	19.8	Complied
50.000	Vert.	32.4	40.0	7.6	Complied
100.000	Vert.	28.6	43.5	14.9	Complied
120.005	Vert.	20.8	43.5	22.7	Complied
150.000	Horiz.	27.4	43.5	16.1	Complied
256.000	Vert.	14.9	46.0	31.1	Complied
336.000	Vert.	23.2	46.0	22.8	Complied
352.000	Vert.	23.0	46.0	23.0	Complied
368.000	Vert.	16.4	46.0	29.6	Complied
432.000	Horiz.	22.4	46.0	23.6	Complied
512.000	Horiz.	26.2	46.0	19.8	Complied
528.000	Horiz.	30.6	46.0	15.4	Complied
550.000	Horiz.	35.9	46.0	10.1	Complied
559.000	Horiz.	27.3	46.0	18.7	Complied
576.000	Horiz.	30.1	46.0	15.9	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

7.3.2. Test Results For Radiated Emissions: Tx and Rx Mode (continued)

7.3.2.1. Further to section 7.3.1, additional measurements were performed on various frequencies of interest with the EUT set to each of the 2 other operating channels.

Bottom Band Top Channel (Channel 4)

Frequency (MHz)	Ant. Pol.	Q-P Level (dB _m V/m)	Q-P Limit (dB _m V/m)	Margin (dB)	Result
512.000	Horiz.	27.4	46.0	18.6	Complied

Top Band Bottom Channel (Channel 10)

Frequency (MHz)	Ant. Pol.	Q-P Level (dB _m V/m)	Q-P Limit (dB _m V/m)	Margin (dB)	Result
550.000	Horiz.	36.7	46.0	9.3	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

7.4. Test Results For Radiated Emissions: Receive Mode

7.4.1. Electric Field Strength Measurements: 1 GHz to 26 GHz

7.4.1.1. Measurements were performed to FCC Part 15.109 Class B (Unintentional Radiators).

7.4.1.2. The client has stated that the highest clock frequency for the EUT was 4.9025 GHz. Therefore tests were performed up to 26.0 GHz.

7.4.1.3. Preliminary radiated spurious emission scans were performed with the EUT set to all 6 channels stated in section 5.2. Final radiated emission measurements were performed only if the preliminary scan showed any spurious emissions to be within 10dB of the reference limit line.

7.4.1.4. At higher frequencies, due to the limitations of the dynamic range of the measuring receiver it was not possible to perform radiated emission preliminary scans and final measurements at the specified 3m test distance. Therefore the measuring antenna was moved to a test distance of 1m. The limit was extrapolated using the factor $20 \log (d1/d2)$.

7.4.1.5. Plots of the initial scans can be found in Appendix 4.

7.4.1.6. The following tables list frequencies at which emissions were measured using Average and Peak detector functions at a test distance of 1m:

Bottom Band Bottom Channel (Channel 0)

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dBmV/m)	Average Limit (dBmV/m)	Average Margin (dB)	Result
1.29999	Vert.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
1.29999	Horiz.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
8.53494	Vert.	21.2	30.5	2.1	53.8	63.5	9.7	Complied
8.53494	Horiz.	25.9	30.5	2.1	58.5	63.5	5.0	Complied

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
1.29999	Vert.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
1.29999	Horiz.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
8.53494	Vert.	27.7	30.5	2.1	60.3	83.5	23.2	Complied
8.53494	Horiz.	29.5	30.5	2.1	62.1	83.5	21.4	Complied

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Test Results For Radiated Emissions: Receive Mode (continued)

Bottom Band Top Channel (Channel 4)

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dBmV/m)	Average Limit (dBmV/m)	Average Margin (dB)	Result
1.29999	Vert.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
1.29999	Horiz.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
8.65498	Vert.	25.2	30.5	2.1	57.8	63.5	5.7	Complied
8.65498	Horiz.	26.9	30.5	2.1	61.5	63.5	4.0	Complied

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
1.29999	Vert.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
1.29999	Horiz.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
8.65498	Vert.	31.5	30.5	2.1	64.1	83.5	19.4	Complied
8.65498	Horiz.	35.2	30.5	2.1	67.8	83.5	15.7	Complied

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Test Results For Radiated Emissions: Receive Mode (continued)

Middle Band Bottom Channel (Channel 5)

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dBmV/m)	Average Limit (dBmV/m)	Average Margin (dB)	Result
1.29999	Vert.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
1.29999	Horiz.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
8.73500	Vert.	22.4	30.5	2.1	55.0	63.5	8.5	Complied
8.73500	Horiz.	23.1	30.5	2.1	55.7	63.5	7.8	Complied

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
1.29999	Vert.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
1.29999	Horiz.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
8.73500	Vert.	28.6	30.5	2.1	61.2	83.5	22.3	Complied
8.73500	Horiz.	29.5	30.5	2.1	62.1	83.5	21.4	Complied

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Test Results For Radiated Emissions: Receive Mode (continued)

Middle Band Top Channel (Channel 9)

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dBmV/m)	Average Limit (dBmV/m)	Average Margin (dB)	Result
1.29999	Vert.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
1.29999	Horiz.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
8.85499	Vert.	23.5	30.5	2.1	56.1	63.5	7.4	Complied
8.85499	Horiz.	22.8	30.5	2.1	55.4	63.5	8.1	Complied

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
1.29999	Vert.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
1.29999	Horiz.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
8.85499	Vert.	26.9	30.5	2.1	59.5	83.5	24.0	Complied
8.85499	Horiz.	28.7	30.5	2.1	61.3	83.5	22.2	Complied

Top Band Bottom Channel (Channel 10)

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dBmV/m)	Average Limit (dBmV/m)	Average Margin (dB)	Result
1.29999	Vert.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
1.29999	Horiz.	14.7	21.7	1.0	36.4	63.5	27.1	Complied

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
1.29999	Vert.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
1.29999	Horiz.	27.8	21.7	1.0	50.5	83.5	33.0	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

Test Results For Radiated Emissions: Receive Mode (continued)**Top Band Top Channel (Channel 14)**

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dBmV/m)	Average Limit (dBmV/m)	Average Margin (dB)	Result
1.29999	Vert.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
1.29999	Horiz.	14.7	21.7	1.0	36.4	63.5	27.1	Complied
9.80496	Vert.	22.6	30.5	2.1	55.2	63.5	8.3	Complied
9.80496	Horiz.	22.8	30.5	2.1	55.4	63.5	8.1	Complied

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
1.29999	Vert.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
1.29999	Horiz.	27.8	21.7	1.0	50.5	83.5	33.0	Complied
9.80496	Vert.	27.4	30.5	2.1	60.0	83.5	23.5	Complied
9.80496	Horiz.	27.8	30.5	2.1	60.4	83.5	23.1	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

7.5. Test Results For Radiated Emissions: Transmit Mode

7.5.1. Effective Isotropic Radiated Power Measurements: 5.0 GHz to 6.0 GHz.

7.5.1.1. Measurements were performed to FCC Part 15.407(a) (Unlicensed National Information Infrastructure Devices).

7.5.1.2. The client has stated that the EUT operated in the frequency ranges of 5.15 to 5.25 GHz, 5.25 to 5.35 GHz, and 5.725 to 5.825 GHz. Measurements were performed at both bottom and top channels within each band.

7.5.1.3. The EUT was configured with a permanently connected antenna. The client has stated that the directional gain of the antenna is 18dBi. EIRP measurements were performed to determine the output power levels of the EUT, and the limit was increased by 6dB to compensate for the antenna being connected. The specified limit includes the 6dB antenna gain.

7.5.1.4. It was possible to polarise the antenna incorporated within the EUT for both vertical and horizontal polarisation's. Therefore EIRP measurements were performed with the antenna polarised in both planes.

7.5.1.5. Results are shown for the EUT operating on each of the 6 channels stated in section 5.2. Measurements are shown for both transmit power levels and peak power spectral density. Plots showing the characteristics of the transmitter output can be seen in Appendix 4.

7.5.1.6. In addition to the measurements stated in section 7.10.1.5, additional results were calculated for the ratio of the peak excursion of the modulation envelope as stated in FCC Part 15.407(a[6]).

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

Results: Peak Transmit Power Levels

Tx Band (GHz)	Channel	Tx Antenna	Measured Peak EIRP (dBm)	Limit (dBm) (Includes 6dBi Antenna Gain for EIRP)	Bandwidth (MHz)	Plot No.	Result
5.15 – 5.25	Bottom (0)	Vert.	13.10	22.02	15.9555	075	Complied
5.15 – 5.25	Bottom (0)	Horiz.	13.76	22.06	16.0666	076	Complied
5.15 – 5.25	Top (4)	Vert.	14.93	22.00	15.8666	077	Complied
5.15 – 5.25	Top (4)	Horiz.	14.82	22.04	15.9777	078	Complied
5.25 – 5.35	Bottom (5)	Horiz.	22.67	29.07	16.1111	079	Complied
5.25 – 5.35	Bottom (5)	Vert.	21.85	29.05	16.0666	080	Complied
5.25 – 5.35	Top (9)	Vert.	22.92	29.05	16.0444	081	Complied
5.25 – 5.35	(Top (9)	Horiz.	23.50	29.06	16.0888	082	Complied
5.725 – 5.825	Bottom (10)	Horiz.	28.38	35.05	16.0222	083	Complied
5.725 – 5.825	Bottom (10)	Vert.	26.65	35.06	16.0666	084	Complied
5.725 – 5.825	Top (14)	Vert.	27.01	35.05	16.0222	085	Complied
5.725 – 5.825	Top (14)	Horiz.	29.80	35.13	16.3333	086	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

Results: Peak Power Spectral Density (PPSD)

Tx Band (GHz)	Channel	Tx Antenna	Measured PPSP (EIRP) (dBm/MHz)	Limit (dBm/MHz) (Includes 6dBi Antenna Gain for EIRP)	Plot No.	Result
5.15 – 5.25	Bottom (0)	Vert.	8.5	10.0	075	Complied
5.15 – 5.25	Bottom (0)	Horiz.	6.3	10.0	076	Complied
5.15 – 5.25	Top (4)	Vert.	7.1	10.0	077	Complied
5.15 – 5.25	Top (4)	Horiz.	7.8	10.0	078	Complied
5.25 – 5.35	Bottom (5)	Horiz.	15.2	17.0	079	Complied
5.25 – 5.35	Bottom (5)	Vert.	14.0	17.0	080	Complied
5.25 – 5.35	Top (9)	Vert.	15.2	17.0	081	Complied
5.25 – 5.35	Top (9)	Horiz.	16.4	17.0	082	Complied
5.725 – 5.825	Bottom (10)	Horiz.	19.9	23.0	083	Complied
5.725 – 5.825	Bottom (10)	Vert.	18.6	23.0	084	Complied
5.725 – 5.825	Top (14)	Vert.	19.2	23.0	085	Complied
5.725 – 5.825	Top (14)	Horiz.	21.6	23.0	086	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

Results: Ratio of Peak Excursion of the Modulation Envelope

Tx Band (GHz)	Channel	Tx Ant	Measured Peak EIRP (dBm)	Measured PPSP (EIRP) (dBm/MHz)	Ratio: Peak Excursion	Limit (dB)	Result
5.15 – 5.25	Bottom (0)	Horiz	13.10	8.5	4.60	13.0	Complied
5.15 – 5.25	Bottom (0)	Vert.	13.76	6.3	7.46	13.0	Complied
5.15 – 5.25	Top (4)	Vert.	14.93	7.1	7.83	13.0	Complied
5.15 – 5.25	Top (4)	Horiz.	14.82	7.8	7.02	13.0	Complied
5.25 – 5.35	Bottom (5)	Horiz.	22.67	15.2	7.47	13.0	Complied
5.25 – 5.35	Bottom (5)	Vert.	21.85	14.0	7.85	13.0	Complied
5.25 – 5.35	Top (9)	Vert.	22.92	15.2	7.72	13.0	Complied
5.25 – 5.35	Top (9)	Horiz.	23.50	16.4	7.10	13.0	Complied
5.725 – 5.825	Bottom (10)	Horiz.	28.38	19.9	8.48	13.0	Complied
5.725 – 5.825	Bottom (10)	Vert.	26.65	18.6	8.05	13.0	Complied
5.725 – 5.825	Top (14)	Vert.	27.01	19.2	7.81	13.0	Complied
5.725 – 5.825	Top (14)	Horiz.	29.80	21.6	8.2	13.0	Complied

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

7.6. Test Results For Radiated Emissions: Transmit Mode

7.6.1. Effective Isotropic Radiated Power Spurious Measurements: 1.0 GHz to 40.0 GHz.

7.6.1.1. Measurements were performed to FCC Part 15.407(b) (Unlicensed National Information Infrastructure Devices).

7.6.1.2. The client has stated that the highest clock frequency for the EUT was 5.825 GHz. Therefore tests were performed up to 40.0 GHz.

7.6.1.3. Preliminary EIRP scans were performed with the EUT operating on each of the 6 channels stated in section 5.2. Plots showing the spurious (undesirable) emission levels can be seen in Appendix 4.

7.6.1.4. The EUT was configured with a permanently connected antenna. It was possible to polarise the antenna for both vertical and horizontal polarisation's. Therefore EIRP measurements were performed with the antenna polarised in both planes.

Results:

7.6.1.5. Preliminary scans were performed with the EUT operated on each of the 6 channels stated in section 5.2. It can be shown from the plots (Plots 087 to 134) that all emissions outside of the transmitter band edges are of at least 6dB from the reference limit line. Therefore no final measurements were performed.

7.6.1.6. All preliminary scans (Plots 087 to 134) can be seen in Appendix 4.

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

7.7. Test Results For Frequency Stability: Transmit Mode

7.7.1. Measurements for frequency stability were performed in accordance with FCC Part 15.407 (g) of C.F.R. 47:1997.

7.7.2. Measurements were performed over the temperature range of -20°C to +50°C at the nominal operating voltage, and over an operating voltage of 85% to 115% at +20°C.

7.7.3. The client has specified that due to the transmission of broadband data centred around the nominal carrier frequency of the EUT, measurements of any 'drift' are virtually impossible. However valid measurements would be possible by observing the drift on the main local oscillator, which is 902.5 MHz below the nominal centre frequency. All oscillators within the EUT are referenced to a single source and so any drift can be easily quantified. Also due to the integrated nature of the antenna, and its associated gain/frequency response, any 'drift' can be observed whilst operating at the top frequency of the U-NII band (Channel 14).

7.7.4. Measurements for frequency drift were performed with the EUT operating on Channel 14. A plot (Plot 169) of the frequency stability was performed, with the EUT supply voltage, varied from 85% to 110%, and then up to 115%. At all times the ambient temperature was maintained at +20°C. A further plot (Plot 170) was performed to show the frequency stability of the EUT, with the ambient temperature varied from -20°C to +20°C, and then to +50°C. The supply voltage to the EUT remained at a constant 115V. The plots of both measurements can be seen in Appendix 4.

Results: Supply Variation

Nominal Operating Frequency	Frequency Deviation @ +20 °C			Limit (±10ppm)	Result
	85% Supply Voltage	100% Supply Voltage	115% Supply Voltage		
4.90249 GHz	< 1 kHz	< 1 kHz	< 1 kHz	49 kHz	Complied

Results: Temperature Variation

Nominal Operating Frequency	Frequency Deviation @ 115 V			Limit (±10ppm)	Result
	-20 °C	+20 °C	+50 °C		
4.90249 GHz	< 10 kHz	< 1 kHz	< 10 kHz	49 kHz	Complied

8. Measurement Uncertainty

8.1. Company Policy, as based on the NAMAS Accreditation Standard, M10, paragraph 12.11 (o), states that Test Reports shall include estimated uncertainty of the calibration or test result (this information need only appear in test reports and test certificates where it is relevant to the validity or application of the test result, where a client's instructions so require or where uncertainty affects compliance to a specification or limit).

8.2. The global uncertainties have been calculated in accordance with NAMAS NIS 81 (Edition 1, May 1994) as follows:

Measurement Type	Range	Confidence Level	Calculated Uncertainty
Conducted Emissions	0.15 MHz to 30 MHz	95%	+/- 2.2 dB
Radiated Field Strength Emissions	30 MHz to 1000 MHz	95%	+/- 4.9 dB
Radiated Field Strength Emissions	1.0 GHz to 26.0 GHz	95%	+/- 4.0 dB
Effective Isotropic Radiated Power	1.0 GHz to 40.0 GHz	95%	+/- 4.0 dB
Frequency Stability	N/A	95%	+/- 4.2 dB

8.3. Measurement uncertainties have been applied in accordance with NAMAS document NIS 81 (edition 1, May 1994), and in the absence of any specification criteria, guidance, or code of practice, compliance has been judged on the basis of shared risk.

8.4. In the case of emissions tests, the measured value of the disturbance from the product sample shall be compared directly with the limits. If the measured value is equal to or less than the limit the product is deemed to pass the test.

8.5. In the case of immunity tests, the equipment is deemed to pass the test if it fulfils the stated performance criteria at the required or a higher severity level. The measurement uncertainty has been taken into account in the calibration procedures stated in the relevant basic standard.

8.6. The methods used to calculate the above uncertainties are in line with those used for calibration laboratories contained in NAMAS document NIS 3003 Edition 8 "The Expression of Uncertainty and Confidence in Measurement" May 1995, which align with international recommendations "Guide to the Expression of Uncertainty in Measurement" ISO/IEC/OIML/BIPM (Prepared by ISO/TAG 4: January 1993).

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Appendix 1. Test Equipment Used

Instrument	Manufacturer	Model	RFI No.
Conducted Emissions:			
L.I.S.N. (1 ph.)	R & S	ESH3-Z5	A004
Pulse Limiter	R & S	ESH3-Z32	A287
Test Receiver	R & S	ESMI	M069
Plotter	H.P.	7440A	P001
Radiated Electric Field Emissions			
Bilog Antenna	Chase	CBL6111	A259
3dB Attenuator	Narda	771003	A262
Bilog Antenna	Chase	CBL6111	A490
Cable	Rosenberger	UFA210A-1-1182-704704	C460
Cable	Rosenberger	UFA210A-1-1182-704704	C461
Test Receiver	R & S	ESVP	M002
Spectrum Monitor	R & S	EZM	M003
Test Receiver	R & S	ESMI	M069
Test Receiver	R & S	ESBI	M088
1.0 to 2.0 GHz Horn	Eaton	9188-2	A028
2.0 to 4.0 GHz Horn	Eaton	91889-2	A031
4.0 to 6.0 GHz Horn	Flann	12240-20	A428
6.0 to 8.2 GHz Horn	Narda	642	A439
8.2 to 12.5 GHz Horn	Narda	640	A437
12.5 to 18.0 GHz Horn	Flann	18240-20	A430
18.0 to 26.0 GHz Horn	Flann	20240-20	A436

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Test Equipment Used (continued)

Effective Isotropic Radiated Power			
Test Receiver	R & S	ESMI	M069
Cable	Rosenberger	UFA210A-1-1182-704704	C460
Cable	Rosenberger	UFA210A-1-1182-704704	C461
1.0 to 2.0 GHz Horn	Eaton	9188-2	A028
2.0 to 4.0 GHz Horn	Eaton	91889-2	A031
4.0 to 6.0 GHz Horn	Flann	12240-20	A428
6.0 to 8.2 GHz Horn	Narda	642	A439
8.2 to 12.5 GHz Horn	Narda	640	A437
12.5 to 18.0 GHz Horn	Flann	18240-20	A430
18.0 to 26.0 GHz Horn	Flann	20240-20	A436
26.0 to 40.0 GHz Horn	Flann	22240-20	A435
Harmonic Mixer	-	-	W152
Frequency Stability			
Test Receiver	R & S	ESMI	M069
Cable	Rosenberger	UFA210A-1-1182-704704	C460
4.0 to 6.0 GHz Horn	Flann	12240-20	A428
Environmental Test Chamber	Prolan	PV427H75F 30HV	E007

NB In accordance with NAMAS requirements, all the measurement equipment is on a calibration schedule.

Appendix 2. Measurement Methods

A2.1. AC Mains Conducted Emissions: FCC Part 15

A2.1.1. AC mains conducted emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

A2.1.2. The test was performed in a shielded enclosure with the equipment arranged as detailed in the standard on a wooden bench using the floor of the screened enclosure as the ground reference plane and with the EUT powered via a 115 V 60 Hz AC mains supply.

A2.1.3. Initial measurements in the form of swept scans covering the entire measurement band were performed in order to identify frequencies on which the EUT was generating interference. In order to minimise the time taken for these swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidths (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

A2.1.4. Following the initial scans, a graph was produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested (at individual frequencies) using the appropriate detector function.

A2.1.5. The test equipment settings for conducted emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements
Detector Type:	Peak	Quasi-Peak (CISPR)*
Mode:	Max Hold	Not applicable
Bandwidth:	10 kHz	9 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

* In some instances an Average detector function may also have been used.

A2.2. Radiated Field Strength Emissions

A2.2.1. Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

A2.2.2. Initial measurements covering the entire measurement band in the form of swept scans in a shielded enclosure (for frequencies below 4 GHz) or on an open area test site (for frequencies above 4 GHz) were performed in order to identify frequencies on which the EUT was generating interference. This determined the frequencies on which the EUT should be re-measured in full on the open area test site. In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

A2.2.3. The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. Where (at higher frequencies) the noise floor was found to be of a higher level, a test distance of 1m was used. Following the initial scans, graphs were produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested on the open area test site, at the appropriate distance, using a measuring receivers with a Quasi-Peak detector (below 1000 MHz), where applicable, for measurements above 1000 MHz average and peak detectors were used.

A2.2.4. For the main (final) measurements the EUT was arranged on a non-conducting table on an open area test site, as detailed in the specification.

A2.2.5. All measurements on the open area test site were performed using broadband antennas.

A2.2.6. On the open area test site, at each frequency where a signal was found, the levels were maximised by initially rotating the turntable through 360°. In addition, for frequencies below 1000 MHz, the antenna height was varied between 1 and 4 m. For frequencies above 1000 MHz, the antenna was fixed at a height of 1.5m. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

A2.2.7. The test equipment settings for radiated emissions measurements were as follows:

Receiver Function	Initial Scan Below 1GHz	Final Measurements Below 1GHz
Detector Type:	Peak	Quasi-Peak (CISPR)
Mode:	Max Hold	Not applicable
Bandwidth:	120 kHz	120 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

Receiver Function	Initial Scan Above 1GHz	Final Measurements Above 1 GHz
Detector Type:	Peak	Peak/Average
Mode:	Max Hold	Not applicable
Bandwidth:	1 MHz	1 MHz
Amplitude Range:	60 dB	20 dB (typical)
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

A.2.3.Effective Isotropic Radiated Power Measurements: 5.0 GHz to 6.0 GHz.

A.2.3.1. Effective Isotropic Radiated Power measurements were performed in accordance with the standard, against the appropriate limits on an open area test site.

A.2.3.2. The EUT was set to transmit on the required channel at maximum transmit power. The channels stated in section 5.2 were tested. The EUT was configured with a permanently attached antenna. Therefore radiated power measurements were performed.

A.2.3.3. The EUT was mounted on a non-metallic table at a 1 m test height. The receive (test) antenna was placed at a test distance of 2m. The EUT was set to operate at the required channel and the exact frequency recorded. A substitution measurement was then performed to determine the loss of the test set-up. (Details of the substitution method can be seen in Appendix A.2.6.).

A.2.3.4. The level recorded for the substitution method was entered as a level offset in the measuring receiver. Initial measurements covering the entire measurement band were performed in the form of a swept scan. In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (1MHz). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The EUT was rotated through 360° to maximise all emissions. The test was performed with the EUT integral antenna set for both horizontal and vertical polarisations. The test antenna was also set for both polarities.

A.2.3.5. The measured Peak Transmit Power and the Power Spectral Density could then be determined.

A.2.3.6. The EUT was set to the next channel and sections A.2.3.2. to A.2.3.5. were repeated.

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

A.2.4. Effective Isotropic Radiated Power Spurious Measurements: 1.0 GHz to 40.0 GHz.

A.2.4.1. Effective Isotropic Radiated Power Spurious measurements were performed in accordance with the standard, against the appropriate limits on an open area test site.

A.2.4.2. The EUT was set to transmit on the required transmit channel at maximum transmit power. The channels stated in section 5.2 were tested. The EUT was configured with a permanently attached antenna. Therefore radiated power measurements were performed.

A.2.4.3. The EUT was mounted on a non-metallic table at a 1.5m test height. The receive (test) antenna was placed at a test distance of 2m. For each of the frequency ranges performed, a substitution method was performed to determine the worst case loss of the test set-up. (Details of the substitution method can be seen in Appendix A.2.6.)

A.2.4.4. The level recorded for the substitution method was entered as a level offset in the measuring receiver. Initial measurements covering the entire measurement band were performed in the form of a swept scan (For frequencies below 4 GHz, initial scans were performed in a shielded enclosure). In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (1MHz). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The EUT was rotated through 360° to maximise all emissions. The test was performed with the EUT integral antenna set for both horizontal and vertical polarisation. The test antenna was also set for both polarities.

A.2.4.5. The maximum emission level obtained in dBm/MHz could then be determined. Any levels which were found to be within 6dB of the reference limit line were re-measured with a substitution measurement being performed.

A.2.4.6. The EUT was set to the next channel and sections A.2.4.2. to A.2.4.5. were repeated.

**Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998**

A2.5. Frequency Stability

A.2.5.1. Measurements were performed to determine the frequency stability against the specified limits.

A.2.5.2. An environmental test chamber was used to perform the testing required.

A.2.5.3. The EUT was situated inside the environmental test chamber and the required temperature (starting from the lowest level) was allowed to settle prior to switching on the EUT.

A.2.5.4. The EUT was switched on and the relevant frequency was recorded. The EUT was left switched on and measurements were performed after 2, 5 and 10 minutes.

A2.5.5. Frequency and RF output power measurements were then made at intervals of one minute for a duration of 10 minutes whilst maintaining the required temperature.

A2.5.6. The EUT was then switched off for a minimum of 30 minutes and the environmental chamber was allowed to stabilise at the next temperature. Points A2.5.3. to A2.5.5. were then repeated.

A.2.5.7. The test chamber was then allowed to stabilise at +20°C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency recorded.

A.2.6. Substitution Methods

A.2.6.1. The equipment is configured as illustrated in Appendix 4.

A.2.6.2. The EUT is replaced by an in-band antenna connected to a signal generator tuned to the frequency of interest. A 10dB attenuator was connected to improve matching.

A.2.6.3. The transmit and receive antennas were vertically polarised at a fixed height of 1.5 metres.

A.2.6.4. The signal generator level is then adjusted to give a level equal to that obtained from the EUT.

A.2.6.5. The radiated power is given by the formula below.

$$\text{True Signal level} = \text{Signal Generator Level} - \sum L + Ag$$

where:

$\sum L$ is the sum of the losses, i.e. cable loss.

Ag is the isotropic gain of the antenna.

A.2.6.6. The measurement shall be repeated for horizontal polarisation.

Appendix 3. Test Configuration Drawings


This appendix contains the following drawings:

Drawing Reference Number	Title
DRG\38797ETF01\EMICON	Test configuration for measurement of conducted emissions
DRG\38797ETF01\EMIRAD	Test configuration for measurement of radiated emissions
DRG\38797ETF01\001	Schematic diagram of the EUT, support equipment and interconnecting cables used for the test
DRG\38797ETF01\002	Substitution measurement test set-up

EMC Department


Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

DRG\38797ETF01\EMICON

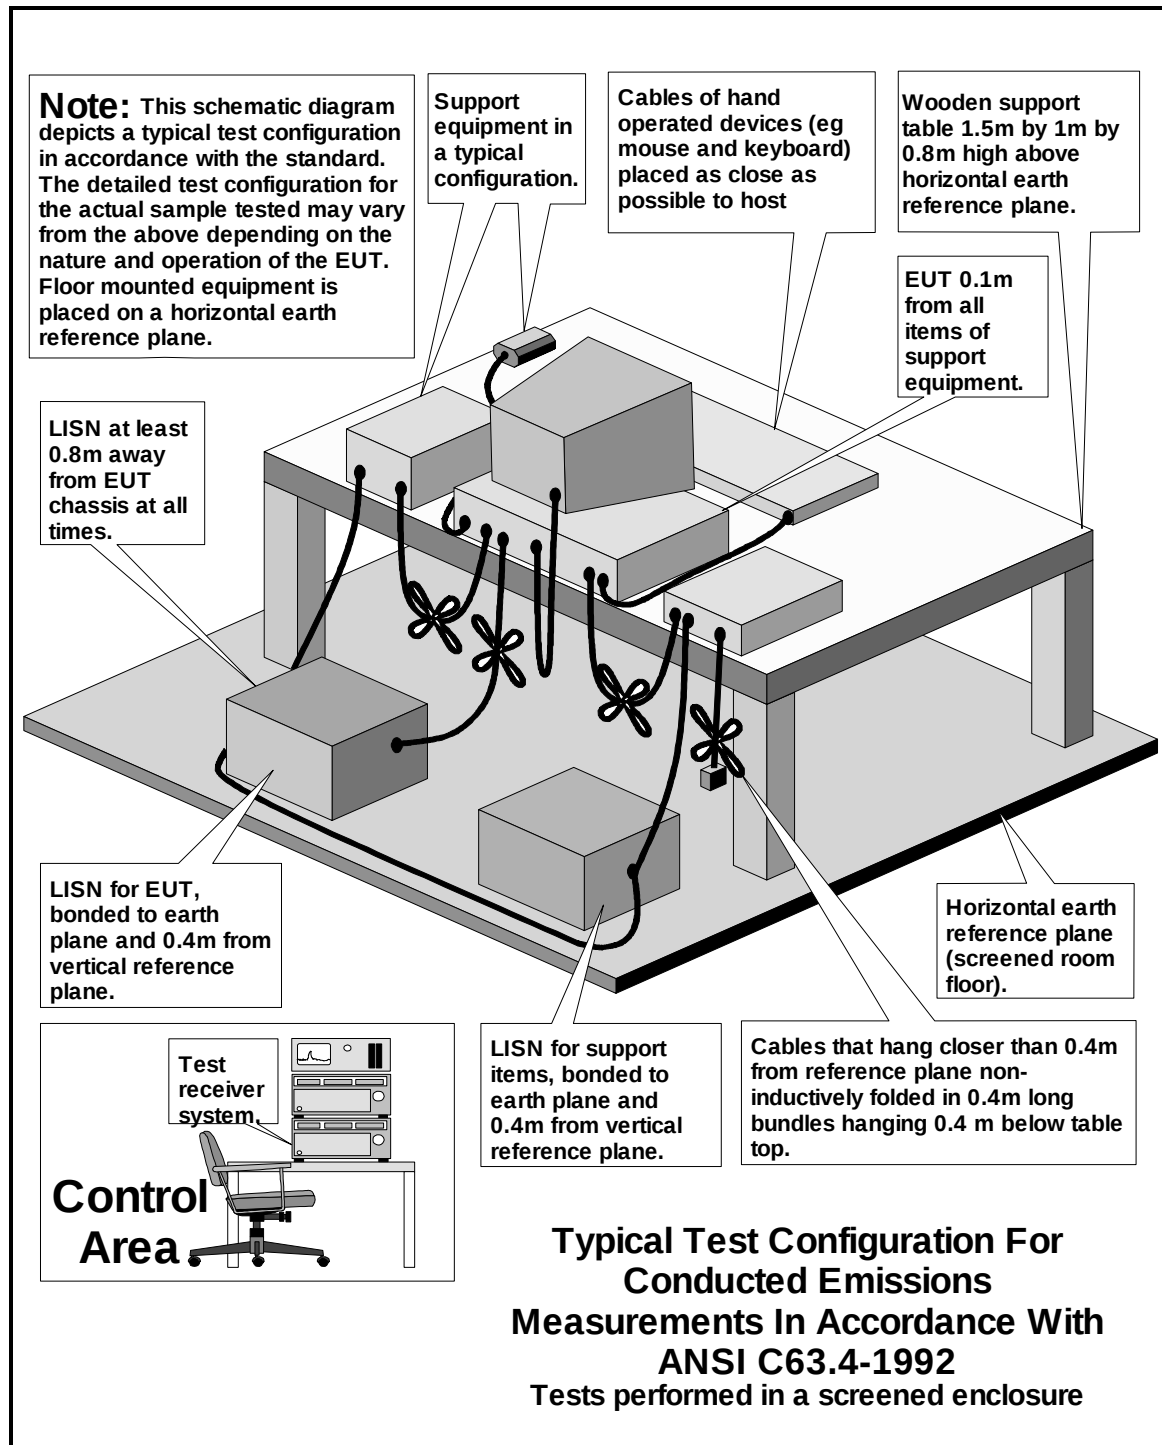

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998


DRG\38797ETF01\EMIRAD

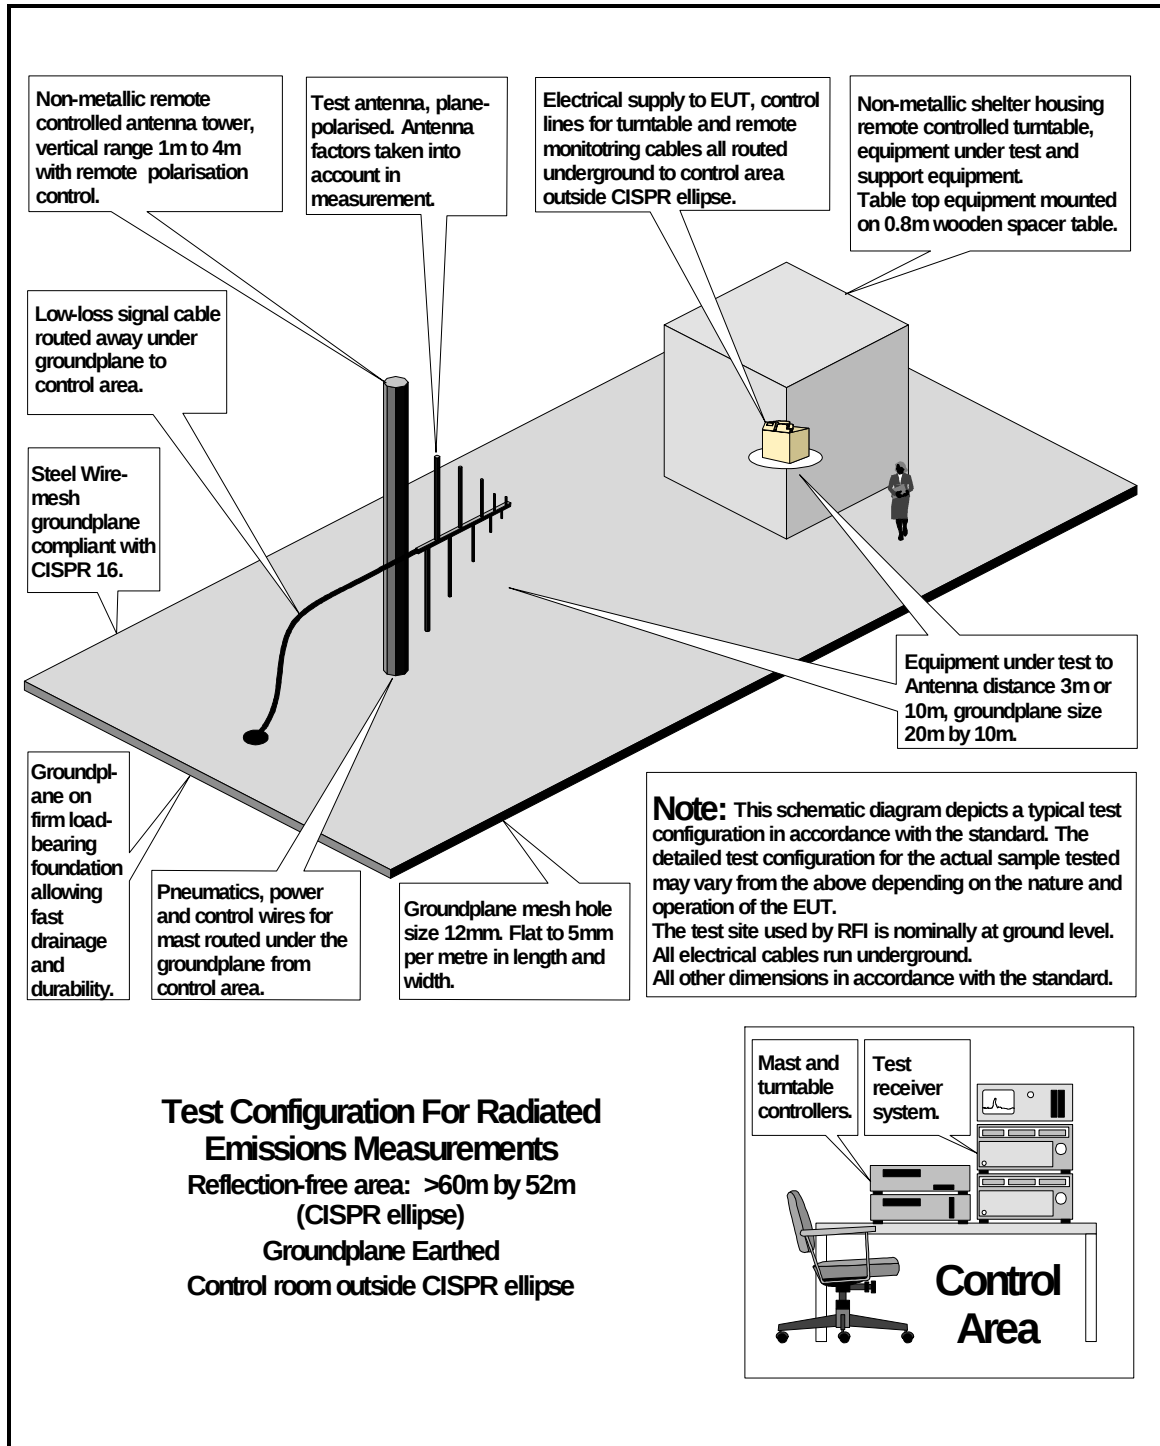

EMC Department


Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

DRG\38797ETF01\001

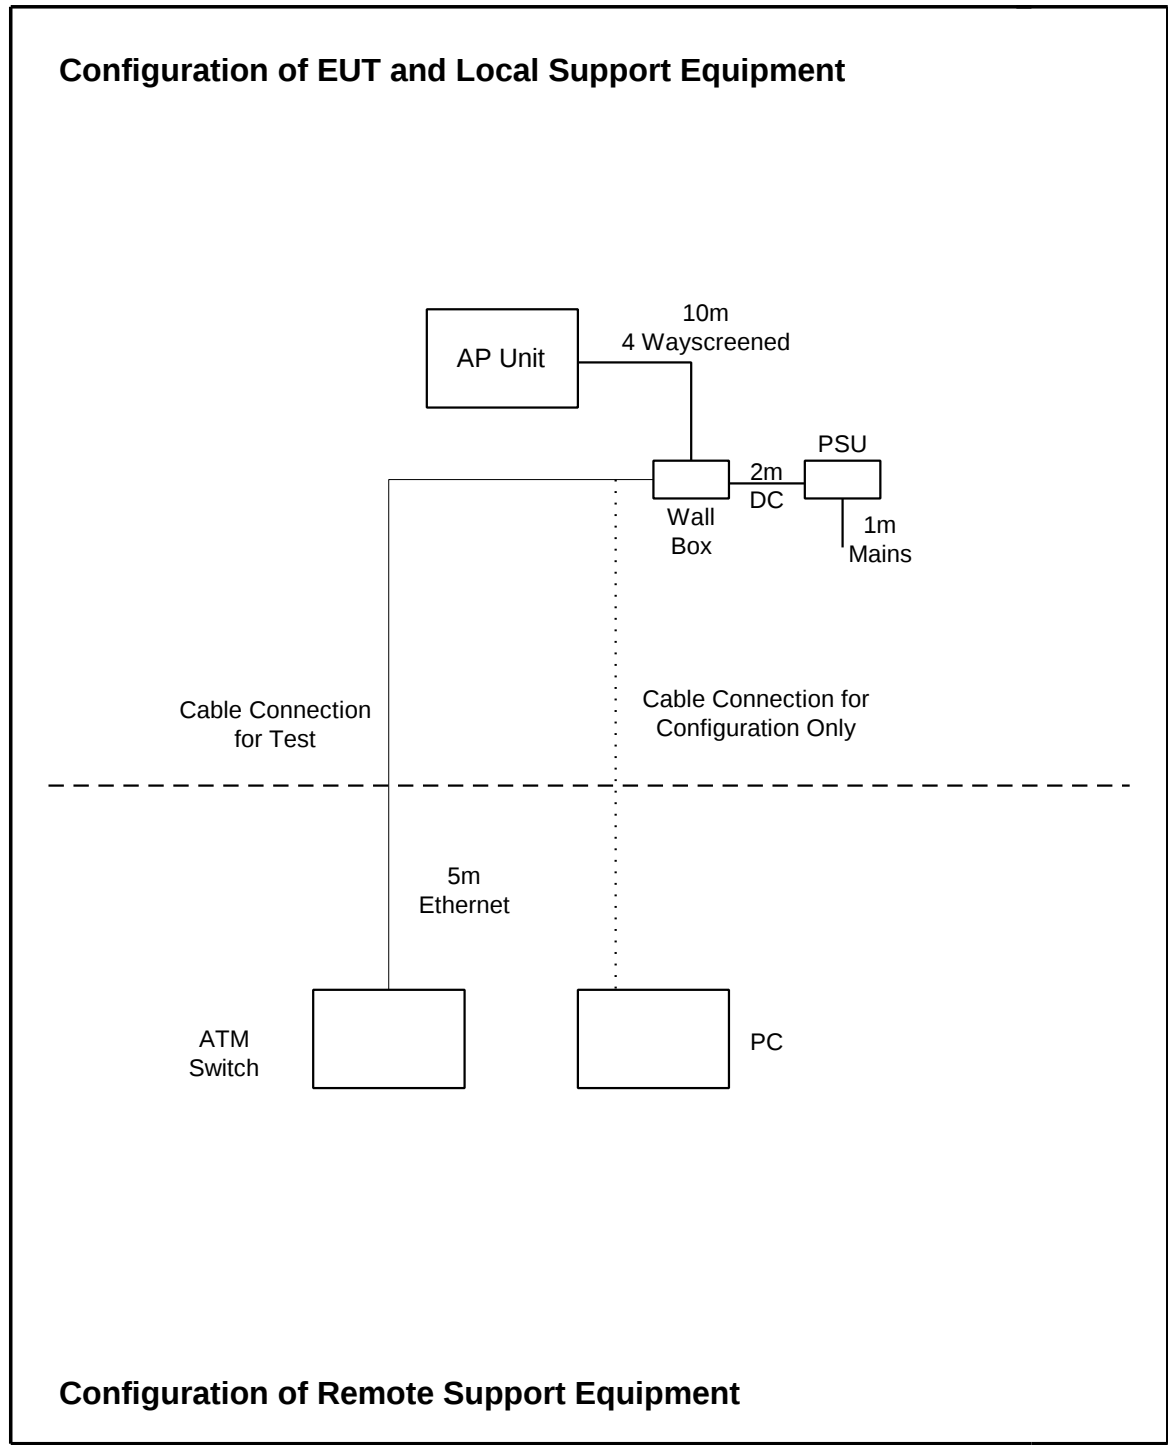

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

DRG\38797ETF01\002

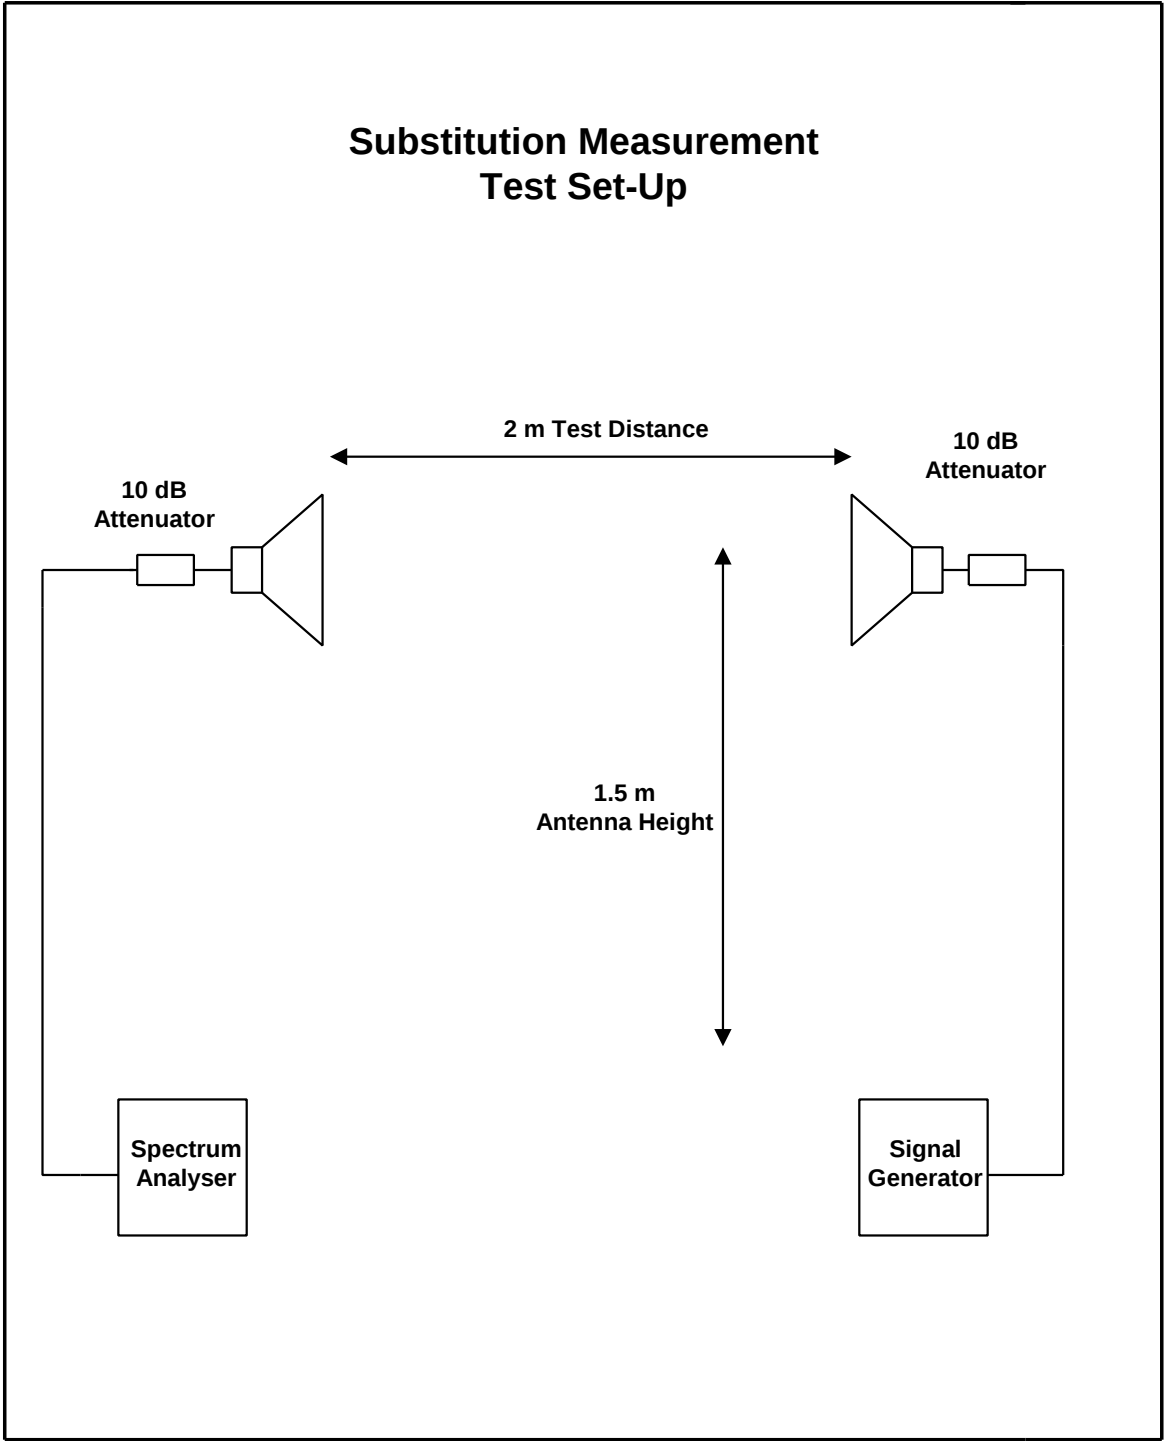

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Appendix 4. Graphical Test Results

This appendix contains the following graphs:

Graph Reference Number	Title
GPH\38797ETF01\001	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\002	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\003	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\004	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\005	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\006	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\007	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\008	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\009	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\010	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\011	Scan of Radiated Electric Field: Receive Mode: 2000 to 4000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\012	Scan of Radiated Electric Field: Receive Mode: 1000 to 2000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\013	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 1.0 to 2.0 GHz.
GPH\38797ETF01\014	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 2.0 to 4.0 GHz.
GPH\38797ETF01\015	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 2.0 to 4.0 GHz.
GPH\38797ETF01\016	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 1.0 to 2.0 GHz.

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38797ETF01\017	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 1.0 to 2.0 GHz.
GPH\38797ETF01\018	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 2.0 to 4.0 GHz.
GPH\38797ETF01\019	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 2.0 to 4.0 GHz.
GPH\38797ETF01\020	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 1.0 to 2.0 GHz.
GPH\38797ETF01\021	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 1.0 to 2.0 GHz.
GPH\38797ETF01\022	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 2.0 to 4.0 GHz.
GPH\38797ETF01\023	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 2.0 to 4.0 GHz.
GPH\38797ETF01\024	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 1.0 to 2.0 GHz.
GPH\38797ETF01\025	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Live Line.
GPH\38797ETF01\026	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Neutral Line.
GPH\38797ETF01\027	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Neutral Line.
GPH\38797ETF01\028	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Live Line.
GPH\38797ETF01\029	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Live Line.
GPH\38797ETF01\030	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Neutral Line.
GPH\38797ETF01\031	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Neutral Line.

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38797ETF01\032	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Live Line.
GPH\38797ETF01\033	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Live Line.
GPH\38797ETF01\034	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Neutral Line.
GPH\38797ETF01\035	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). Neutral Line.
GPH\38797ETF01\036	Scan of Conducted Emissions: Tx and Rx Mode: 450 kHz to 30 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). Live Line.
GPH\38797ETF01\037	Scan of Radiated Electric Field: Tx and Rx Mode: 30 to 1000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\038	Scan of Radiated Electric Field: Tx and Rx Mode: 30 to 1000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\039	Scan of Radiated Electric Field: Tx and Rx Mode: 30 to 1000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\040	Scan of Radiated Electric Field: Tx and Rx Mode: 30 to 1000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\041	Scan of Radiated Electric Field: Tx and Rx Mode: 30 to 1000 MHz 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\042	Scan of Radiated Electric Field: Tx and Rx Mode: 30 to 1000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\039A	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\040A	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\041A	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\042A	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\043	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\044	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\045	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38797ETF01\046	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\047	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\048	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\049	Scan of Radiated Electric Field: Receive Mode: 5000 to 6000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\050	Scan of Radiated Electric Field: Receive Mode: 4000 to 5000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\051	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\052	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\053	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\054	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\055	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\056	Scan of Radiated Electric Field: Receive Mode: 6000 to 8200 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\057	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\058	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\059	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\060	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\061	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\062	Scan of Radiated Electric Field: Receive Mode: 8200 to 12500 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\063	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38797ETF01\064	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\065	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\066	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\067	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\068	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\069	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\070	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\071	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\072	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\073	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.725 to 5.85 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\074	Scan of Radiated Electric Field: Receive Mode: 12500 to 18000 MHz 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\075	Transmitter Power Level: EIRP. Tx Vertical. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\076	Transmitter Power Level: EIRP. Tx Horizontal. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0)
GPH\38797ETF01\077	Transmitter Power Level: EIRP. Tx Vertical. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\078	Transmitter Power Level: EIRP. Tx Horizontal. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4)
GPH\38797ETF01\079	Transmitter Power Level: EIRP. Tx Horizontal. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\080	Transmitter Power Level: EIRP. Tx Vertical. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5)
GPH\38797ETF01\081	Transmitter Power Level: EIRP. Tx Vertical. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)
GPH\38797ETF01\082	Transmitter Power Level: EIRP. Tx Horizontal. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9)

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38797ETF01\083	Transmitter Power Level: EIRP. Tx Horizontal. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\084	Transmitter Power Level: EIRP. Tx Vertical. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10)
GPH\38797ETF01\085	Transmitter Power Level: EIRP. Tx Vertical. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\086	Transmitter Power Level: Tx Horizontal. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14)
GPH\38797ETF01\087	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Tx Lower Band Edge. 5.0 to 5.16 GHz.
GPH\38797ETF01\088	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). Tx Upper Band Edge. 5.18 to 6.0 GHz.
GPH\38797ETF01\089	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 4.0 to 5.0 GHz.
GPH\38797ETF01\090	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 4.0 to 5.0 GHz.
GPH\38797ETF01\091	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Tx Lower Band Edge. 5.0 to 5.22 GHz.
GPH\38797ETF01\092	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). Tx Upper Band Edge. 5.24 to 6.0 GHz.
GPH\38797ETF01\093	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Tx Lower Band Edge. 5.0 to 5.26 GHz.
GPH\38797ETF01\094	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). Tx Upper Band Edge. 5.28 to 6.0 GHz.
GPH\38797ETF01\095	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 4.0 to 5.0 GHz.
GPH\38797ETF01\096	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 4.0 to 5.0 GHz.
GPH\38797ETF01\097	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Tx Lower Band Edge. 5.0 to 5.32 GHz.

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38797ETF01\098	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). Tx Upper Band Edge. 5.34 to 6.0 GHz.
GPH\38797ETF01\099	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Tx Lower Band Edge. 5.0 to 5.735 GHz.
GPH\38797ETF01\100	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). Tx Upper Band Edge. 5.815 to 6.0 GHz.
GPH\38797ETF01\101	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 4.0 to 5.0 GHz.
GPH\38797ETF01\102	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 4.0 to 5.0 GHz.
GPH\38797ETF01\103	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 14). Tx Lower Band Edge. 5.0 to 5.795 GHz.
GPH\38797ETF01\104	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 14). Tx Upper Band Edge. 5.815 to 6.0 GHz.
GPH\38797ETF01\105	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 6.0 to 8.2 GHz.
GPH\38797ETF01\106	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 6.0 to 8.2 GHz.
GPH\38797ETF01\107	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 6.0 to 8.2 GHz.
GPH\38797ETF01\108	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 6.0 to 8.2 GHz.
GPH\38797ETF01\109	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 6.0 to 8.2 GHz.
GPH\38797ETF01\110	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 6.0 to 8.2 GHz.

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)

Graph Reference Number	Title
GPH\38797ETF01\111	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 8.2 to 12.5 GHz.
GPH\38797ETF01\112	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 8.2 to 12.5 GHz.
GPH\38797ETF01\113	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 8.2 to 12.5 GHz.
GPH\38797ETF01\114	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 8.2 to 12.5 GHz.
GPH\38797ETF01\115	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 8.2 to 12.5 GHz.
GPH\38797ETF01\116	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 8.2 to 12.5 GHz.
GPH\38797ETF01\117	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 12.5 to 18.0 GHz.
GPH\38797ETF01\118	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 12.5 to 18.0 GHz.
GPH\38797ETF01\119	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 12.5 to 18.0 GHz.
GPH\38797ETF01\120	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 12.5 to 18.0 GHz.
GPH\38797ETF01\121	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 12.5 to 18.0 GHz.
GPH\38797ETF01\122	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 12.5 to 18.0 GHz.
GPH\38797ETF01\123	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 18.0 to 26.0 GHz.

Test Of: Adaptive Broadband Ltd
 AB-ACCESS Access Point (AP)
 To: F.C.C. Part 15 Subpart E: 1998

Graphical Test Results (continued)


Graph Reference Number	Title
GPH\38797ETF01\124	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 18.0 to 26.0 GHz.
GPH\38797ETF01\125	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 18.0 to 26.0 GHz.
GPH\38797ETF01\126	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 18.0 to 26.0 GHz.
GPH\38797ETF01\127	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 18.0 to 26.0 GHz.
GPH\38797ETF01\128	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 18.0 to 26.0 GHz.
GPH\38797ETF01\129	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Bottom Channel. (Channel 0). 26.0 to 40.0 GHz.
GPH\38797ETF01\130	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.15 to 5.25 GHz Band. Top Channel. (Channel 4). 26.0 to 40.0 GHz.
GPH\38797ETF01\131	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Bottom Channel. (Channel 5). 26.0 to 40.0 GHz.
GPH\38797ETF01\132	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.25 to 5.35 GHz Band. Top Channel. (Channel 9). 26.0 to 40.0 GHz.
GPH\38797ETF01\133	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Bottom Channel. (Channel 10). 26.0 to 40.0 GHz.
GPH\38797ETF01\134	Spurious Radiated Emissions: EIRP. Tx Both Polarities. 5.725 to 5.825 GHz Band. Top Channel. (Channel 14). 26.0 to 40.0 GHz.
GPH\38797ETF01\135	Frequency Stability. Supply Variation.
GPH\38797ETF01\136	Frequency Stability. Temperature Variation.

These pages are not included in the total number of pages for this report.



Date 21.Apr.'99 Time 09:29:08
Ref.Lvl 70.00 dBx
Marker 47.35 dBx
1.2966 GHz

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBμV/m]

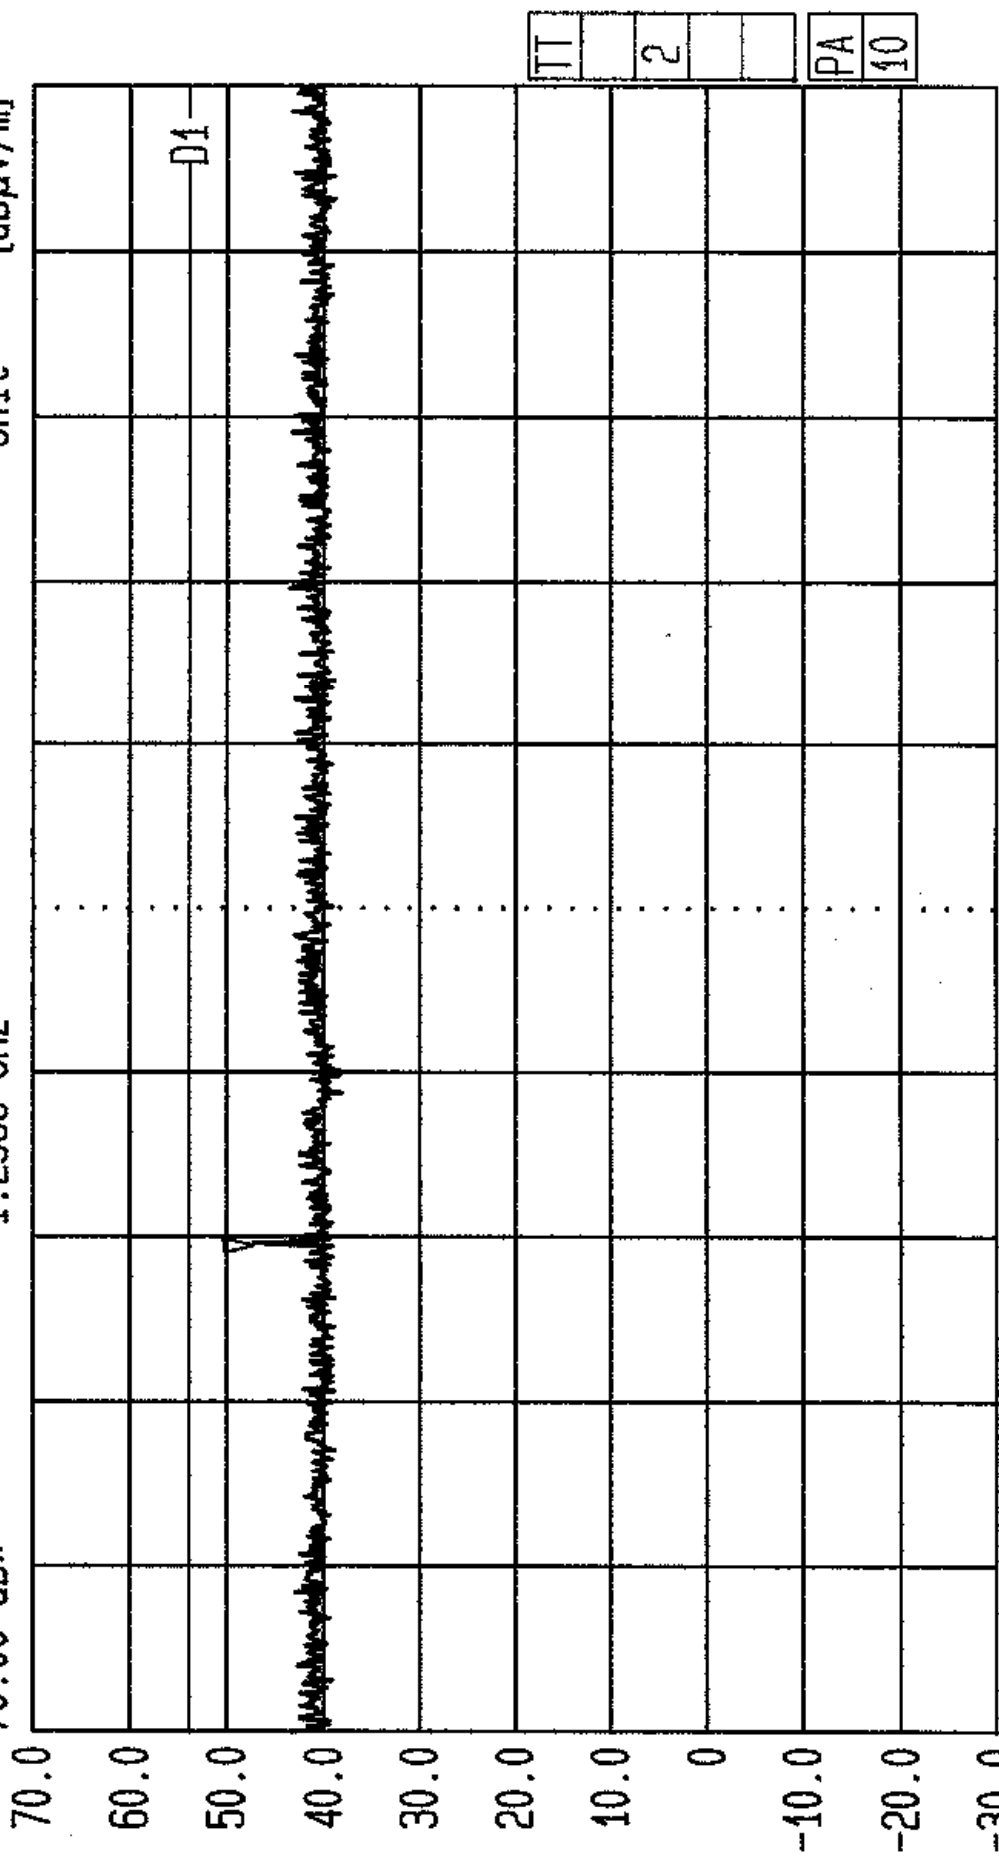


Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.4057b). Rx. 5.15-5.25GHz Band. Bott Chan. EUT: AB Access Access Point
GPH/38797/JD01/001



Date 21.Apr.'99 Time 09:37:07

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 200.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBμV/m]

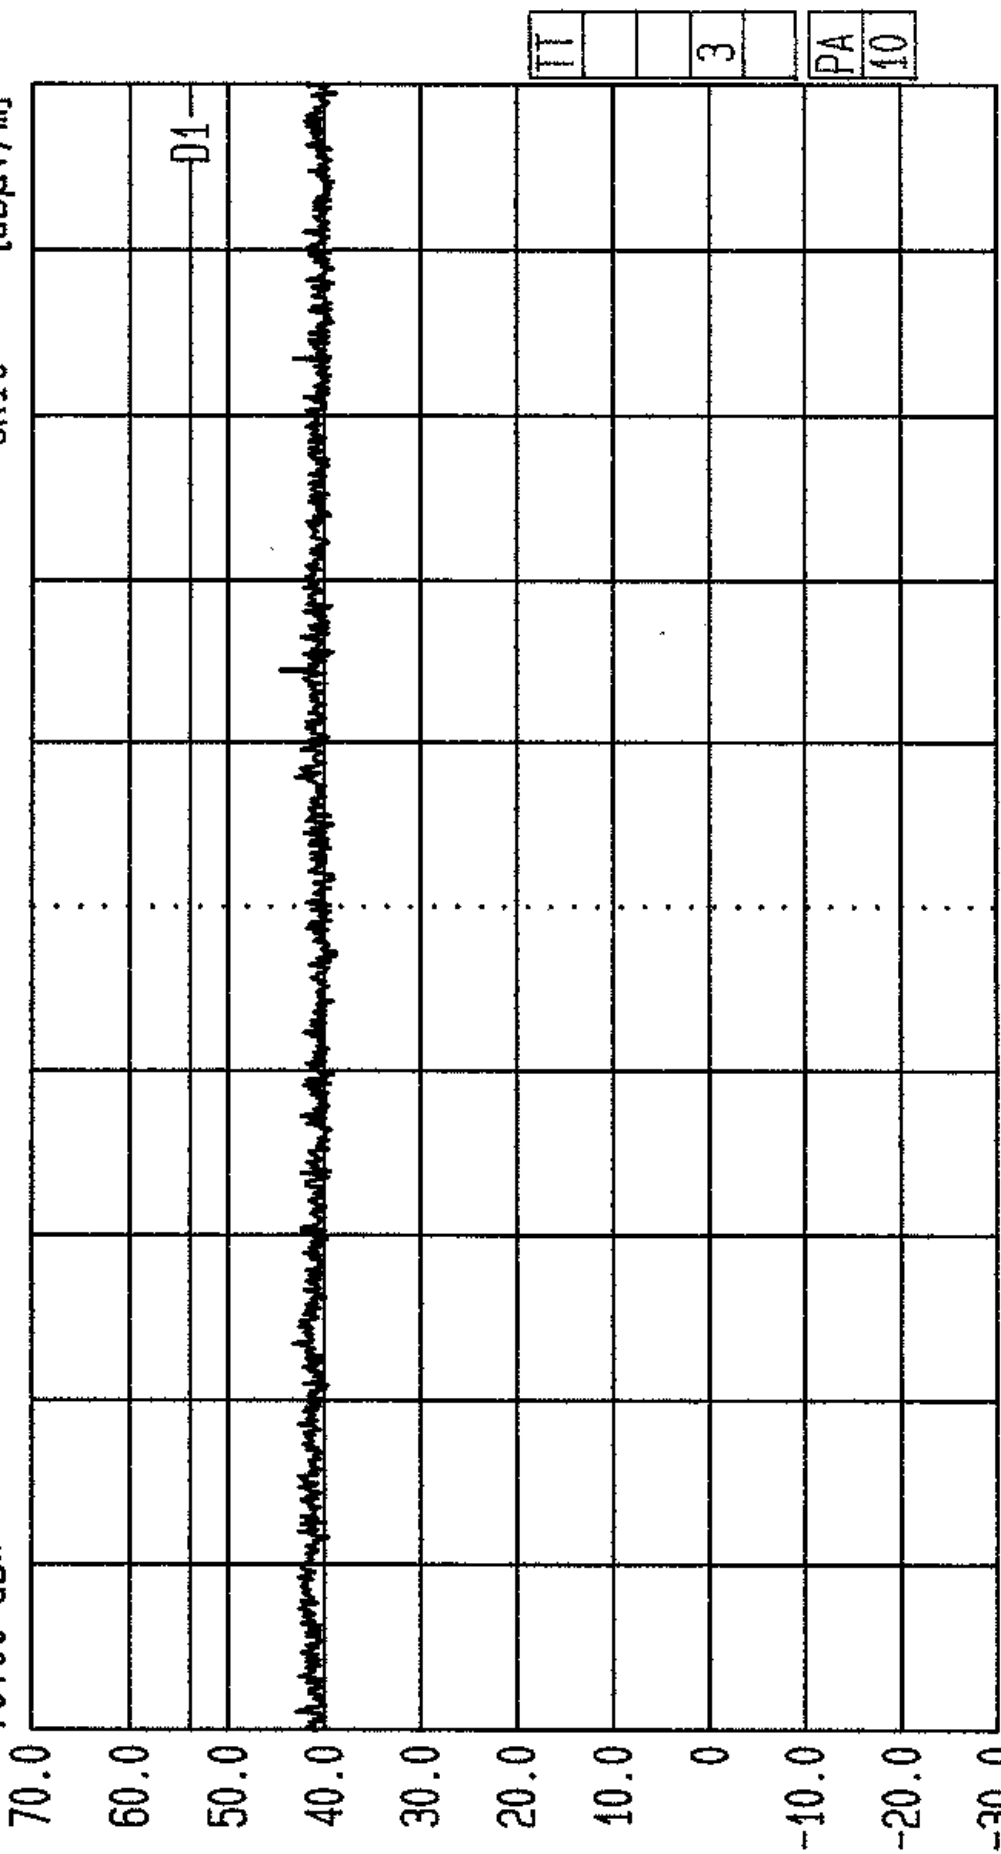

TT
3
PA
10

Radiated, Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.15-5.25GHz Band. Bott Chan. EUT: AB Access Access Point
GPH/38797/JD01/002



Date 21.Apr.'99 Time 09:43:56

Ref.Lvl
70.00 dBx

Res.Bw
TG.Lvl
CF.Stp


1 MHz [imp]
Off
200.000 MHz

Vid.Bw
RF.Att
Unit

1 MHz

0 dB
[dBμV/m]

70.0
60.0
50.0
40.0
30.0
20.0
10.0
0
-10.0
-20.0
-30.0

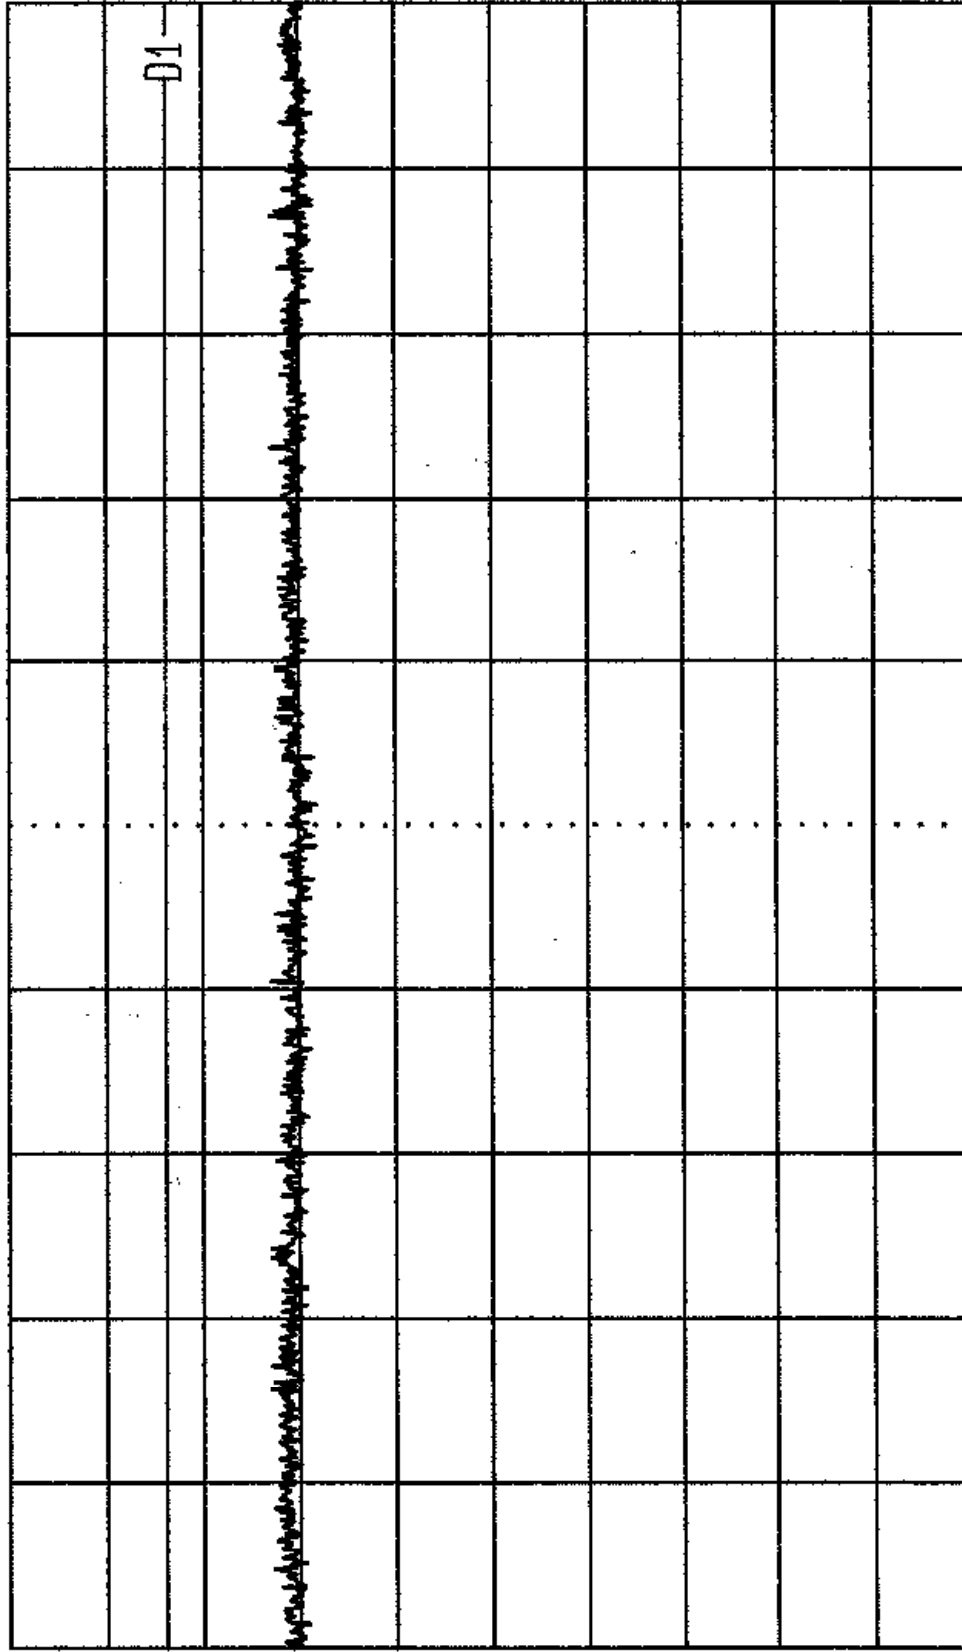

TT
3
PA
10

Start
2 GHz

Span
2 GHz

Center
3 GHz

Sweep
20 ms

Stop
4 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.4057b). Rx. 5.15-5.25GHz Band. Top Chan. EUT: AB Access Access Point
GPH/38797/JD01/003



Date 21.Apr.'99 Time 09:49:23

Ref.Lvl
70.00 dBx


Res.Bw
TG.Lvl
CF.Stp

1 MHz [imp]
off
100.000 MHz

Vid.Bw
RF.Att
Unit

1 MHz

0 dB
[dBuV/m]

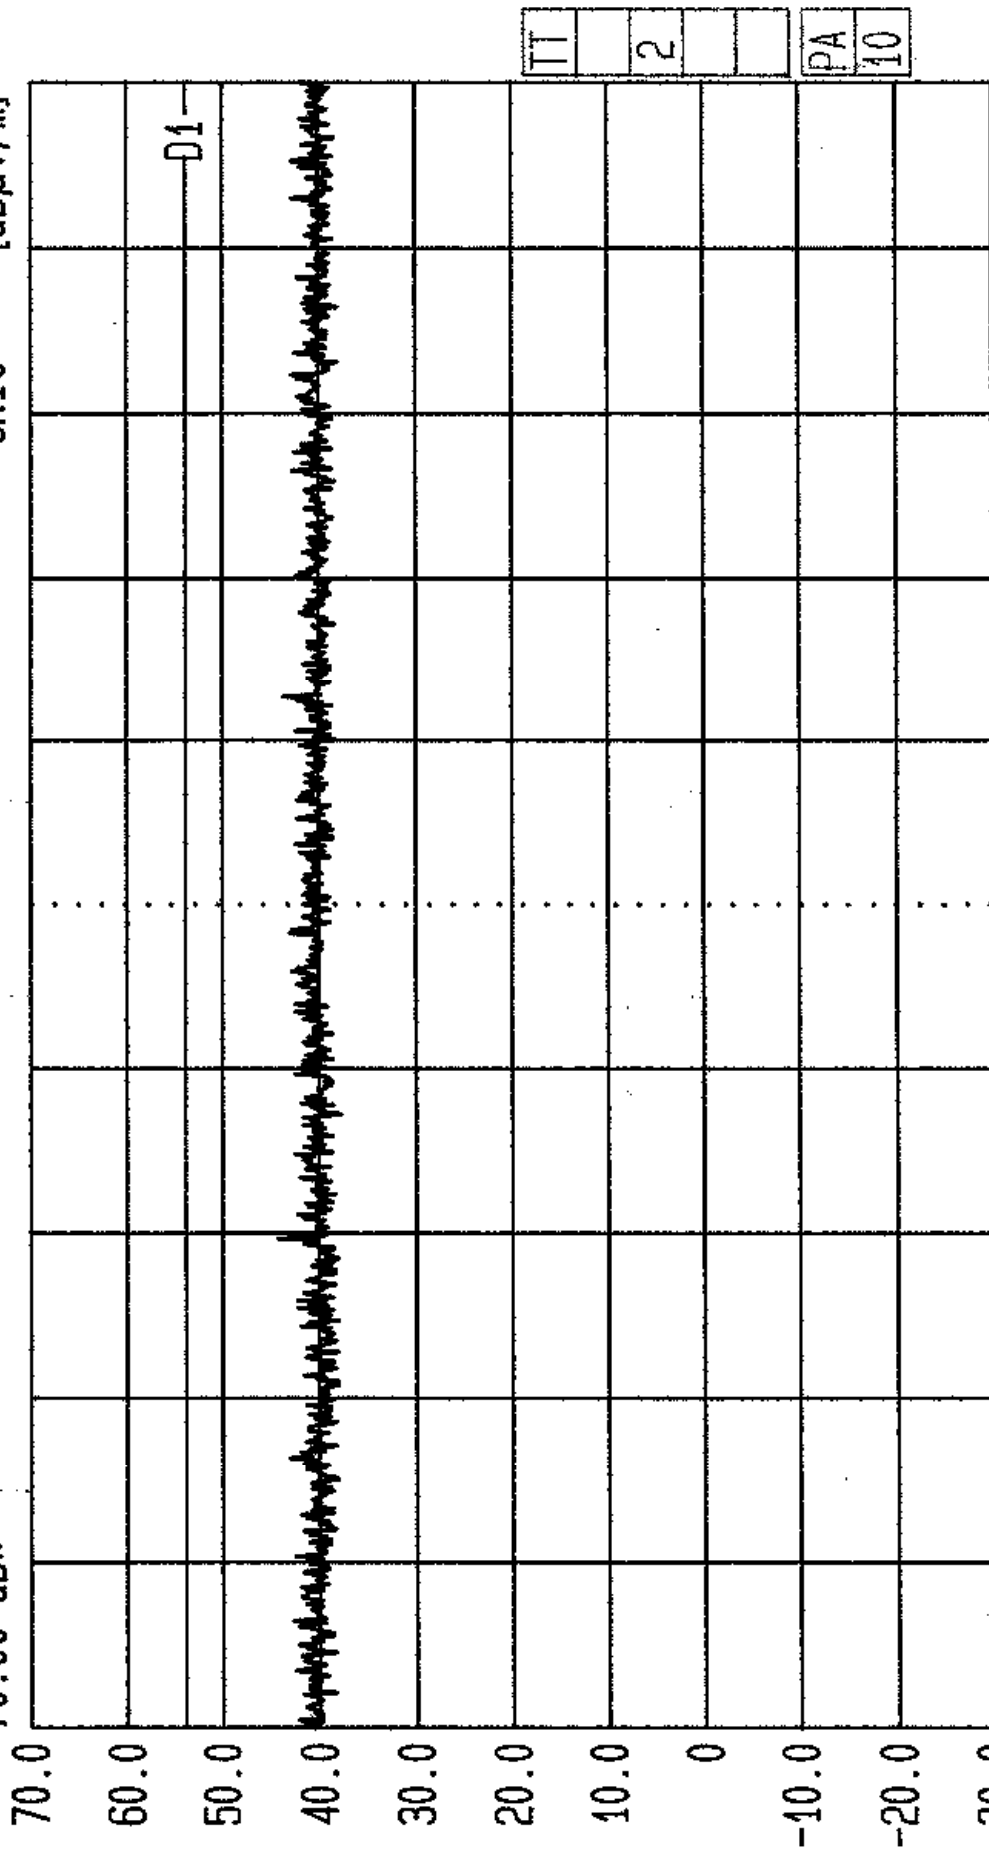


Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.4057b). Rx. 5.15-5.25GHz Band. Top Chan. EUT: AB Access Access Point GPH/38797/JD01/004



Date 21.Apr.'99 Time 10:04:07
Ref.Lvl 70.00 dBx
Marker 46.90 dBx
1.2966 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBμV/m]

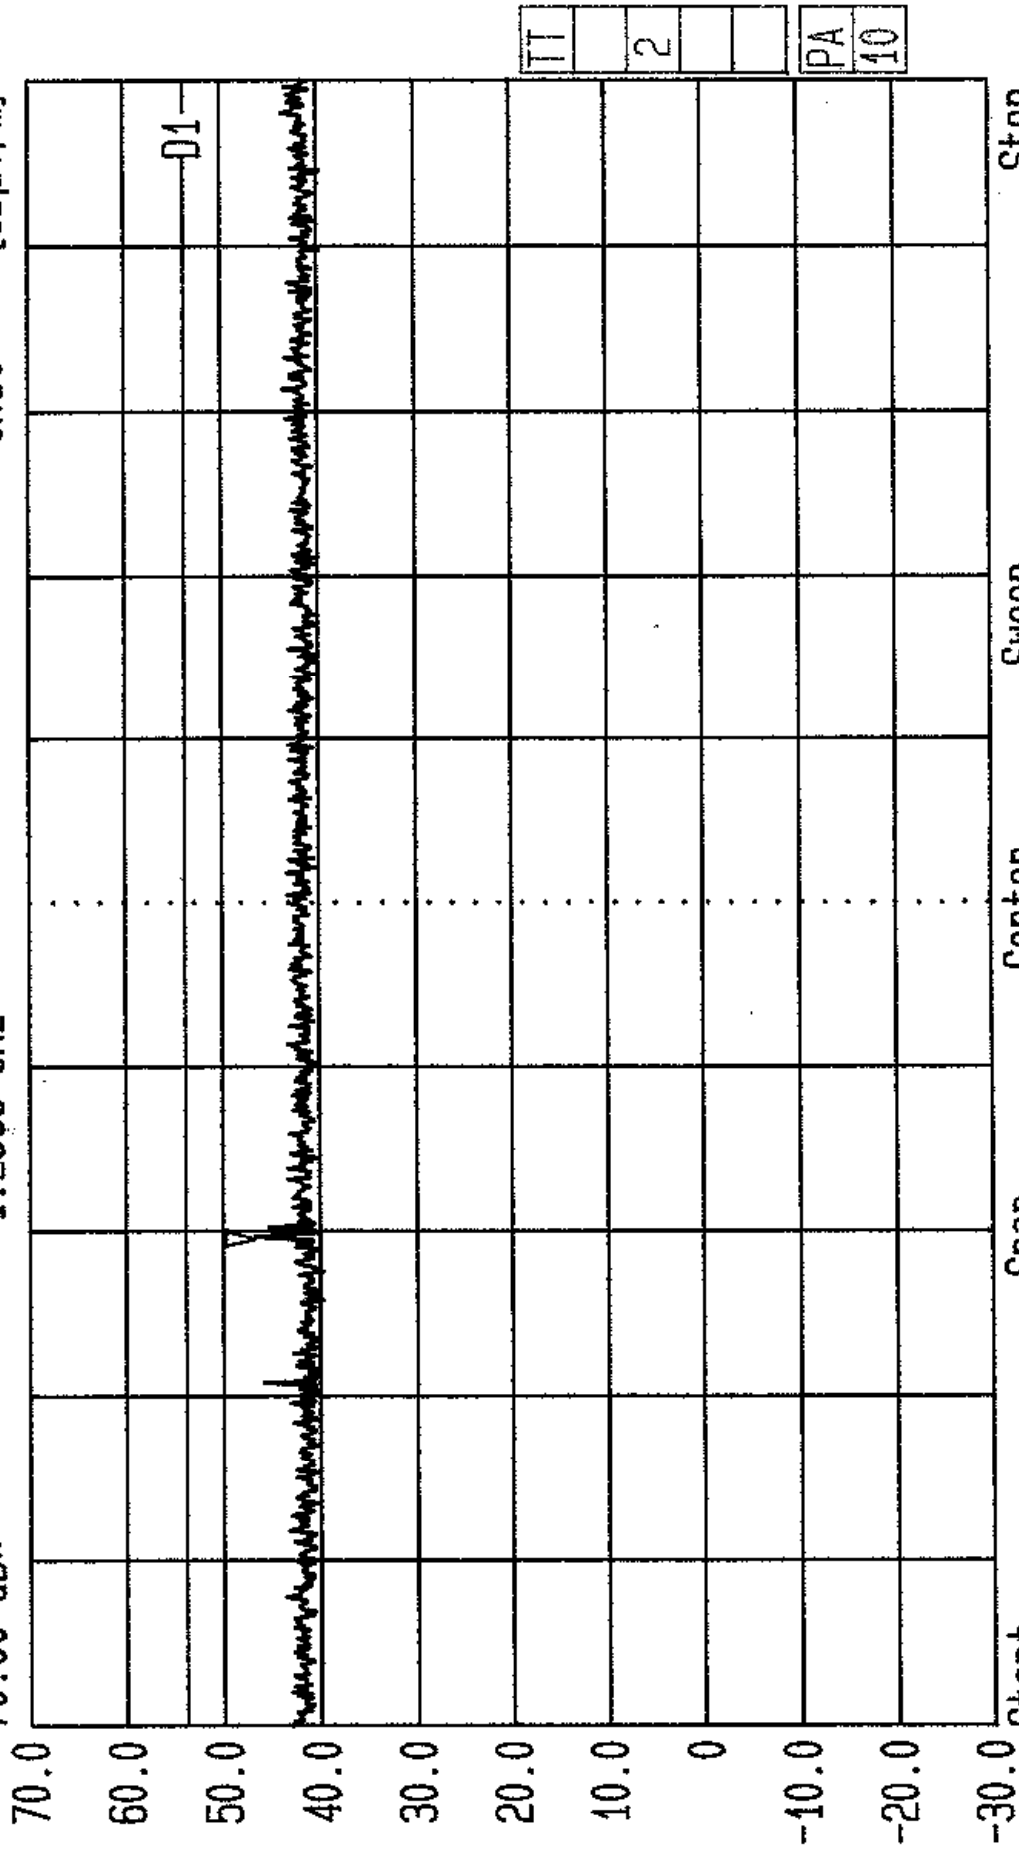

TT
2
PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.4057b). Rx. 5.25-5.35GHz Band. Bott Chan. EUT: AB Access Access Point
GPH/38797/JD01/005




Date 21.Apr.'99 Time 10:11:37

Ref.Lvl
70.00 dBx

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 200.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBuV/m]

70.0
60.0
50.0
40.0
30.0
20.0
10.0
0
-10.0
-20.0
-30.0

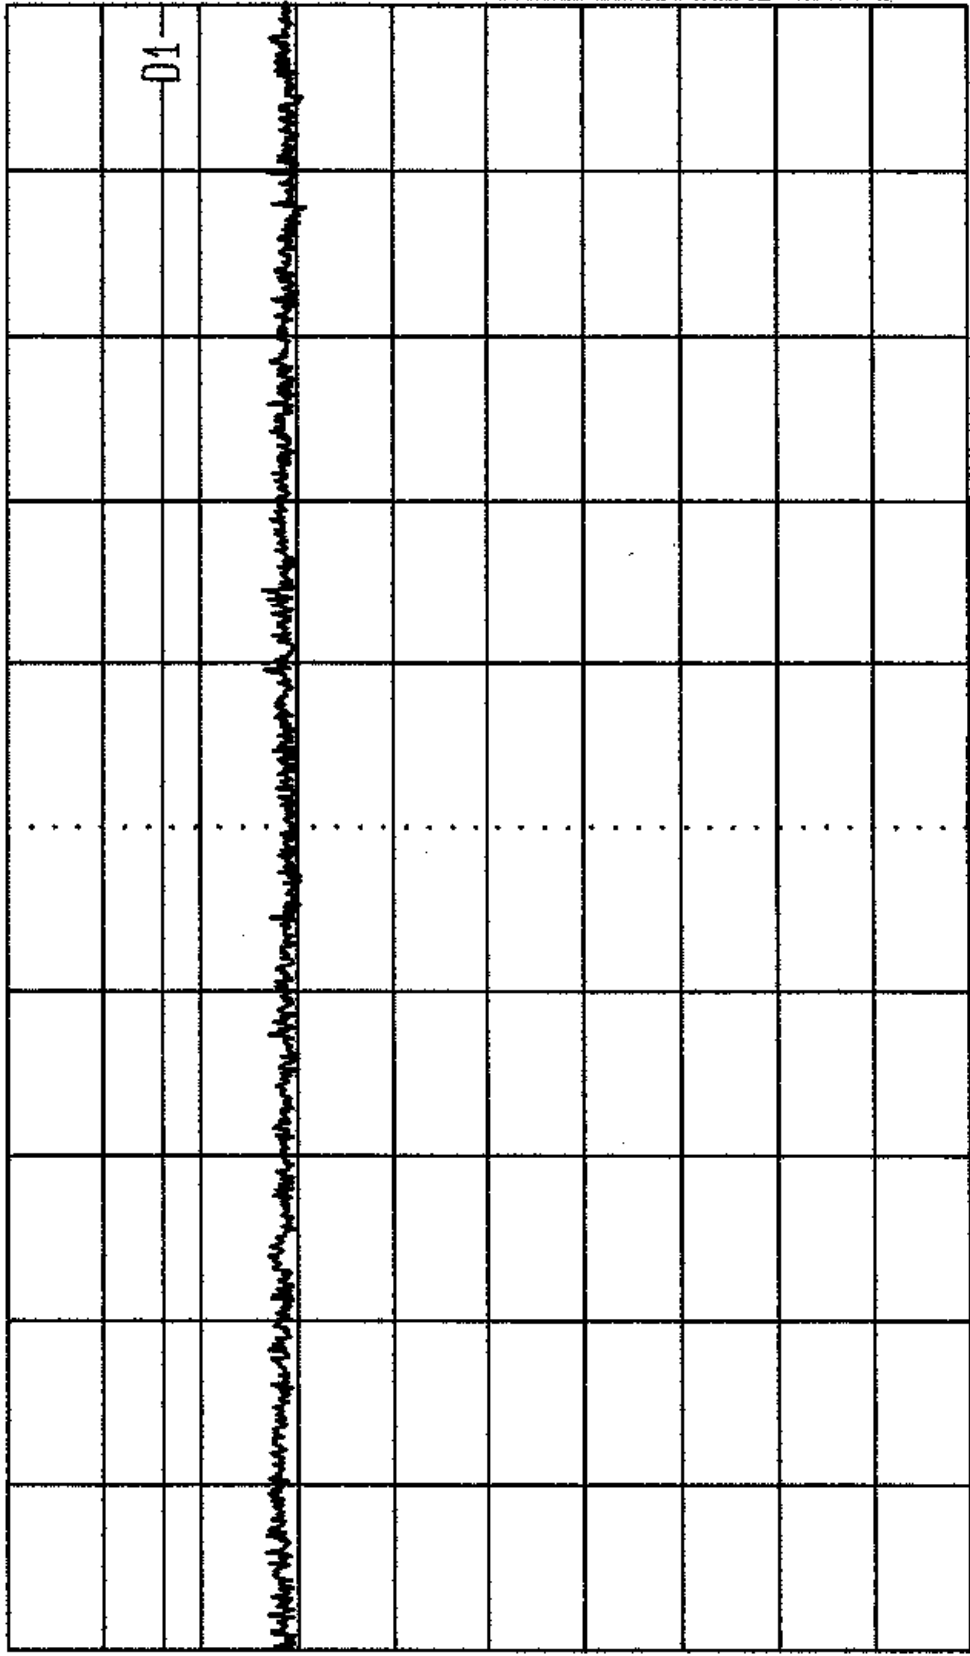

Start
2 GHz

Span
2 GHz

Center
3 GHz

Sweep
20 ms

Stop
4 GHz

TT
3
PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band. Bott Chan. EUT: AB Access Access Point
GPH/38797/JD01/006



Date 21.Apr.'99 Time 10:17:01

Ref.Lvl
70.00 dBx

1 MHz

Vid.Bw

1 MHz [imp]

Off

200.000 MHz

RF.Att

0 dB

[dBμV/m]

Res.Bw

TG.Lvl

CF.Stp

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0

-10.0

-20.0

-30.0

01

TT
3
PA
10

Start
2 GHz

Span
2 GHz

Center
3 GHz

Sweep
20 ms

Stop
4 GHz


Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.4057b). Rx. 5.25-5.35GHz Band. Top Chan.

EUT: AB Access Access Point
GPH/38797/JD01/007



Date 21.Apr.'99 Time 10:21:35
Ref.Lvl 70.00 dB*
Marker 46.95 dB*
1.2966 GHz

Res.Bw 1 MHz [imp]
T6.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBuV/m]

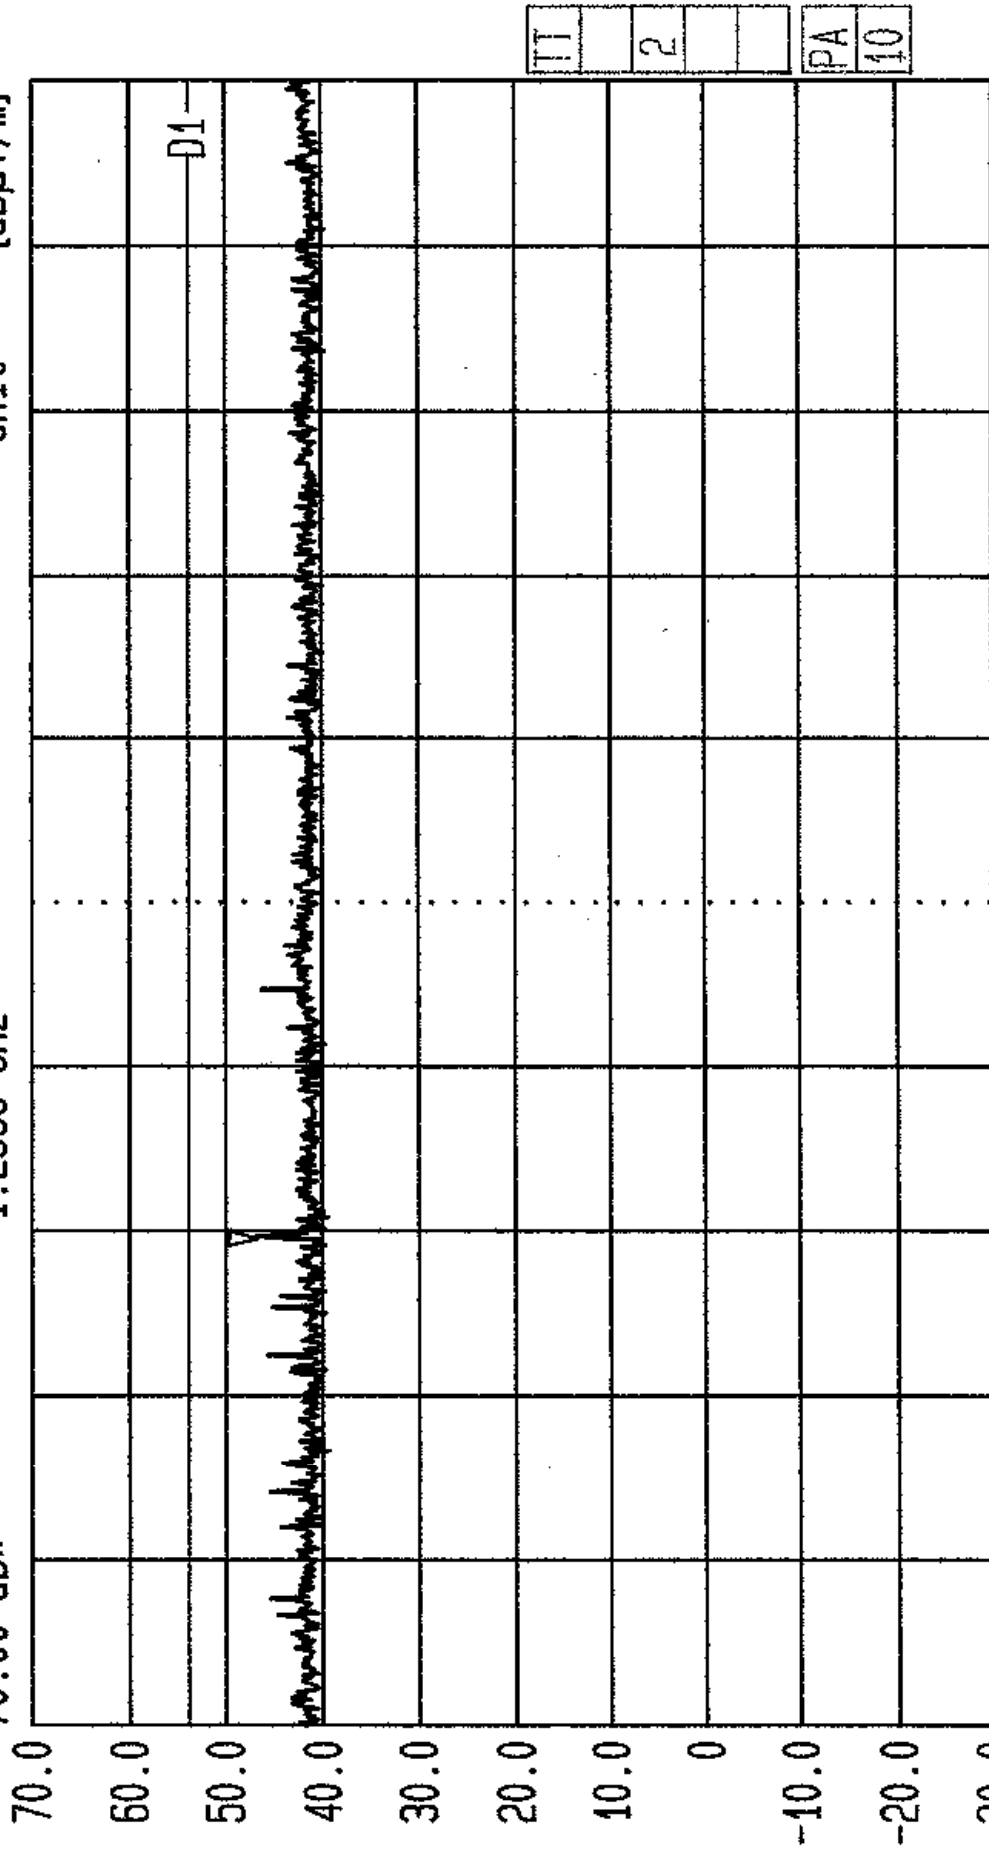


Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band. Top Chan. EUT: AB Access Access Point
GPH/38797/JD01/008



Date 21.Apr.'99 Time 10:30:49

Ref.Lvl
70.00 dBx

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBuV/m]

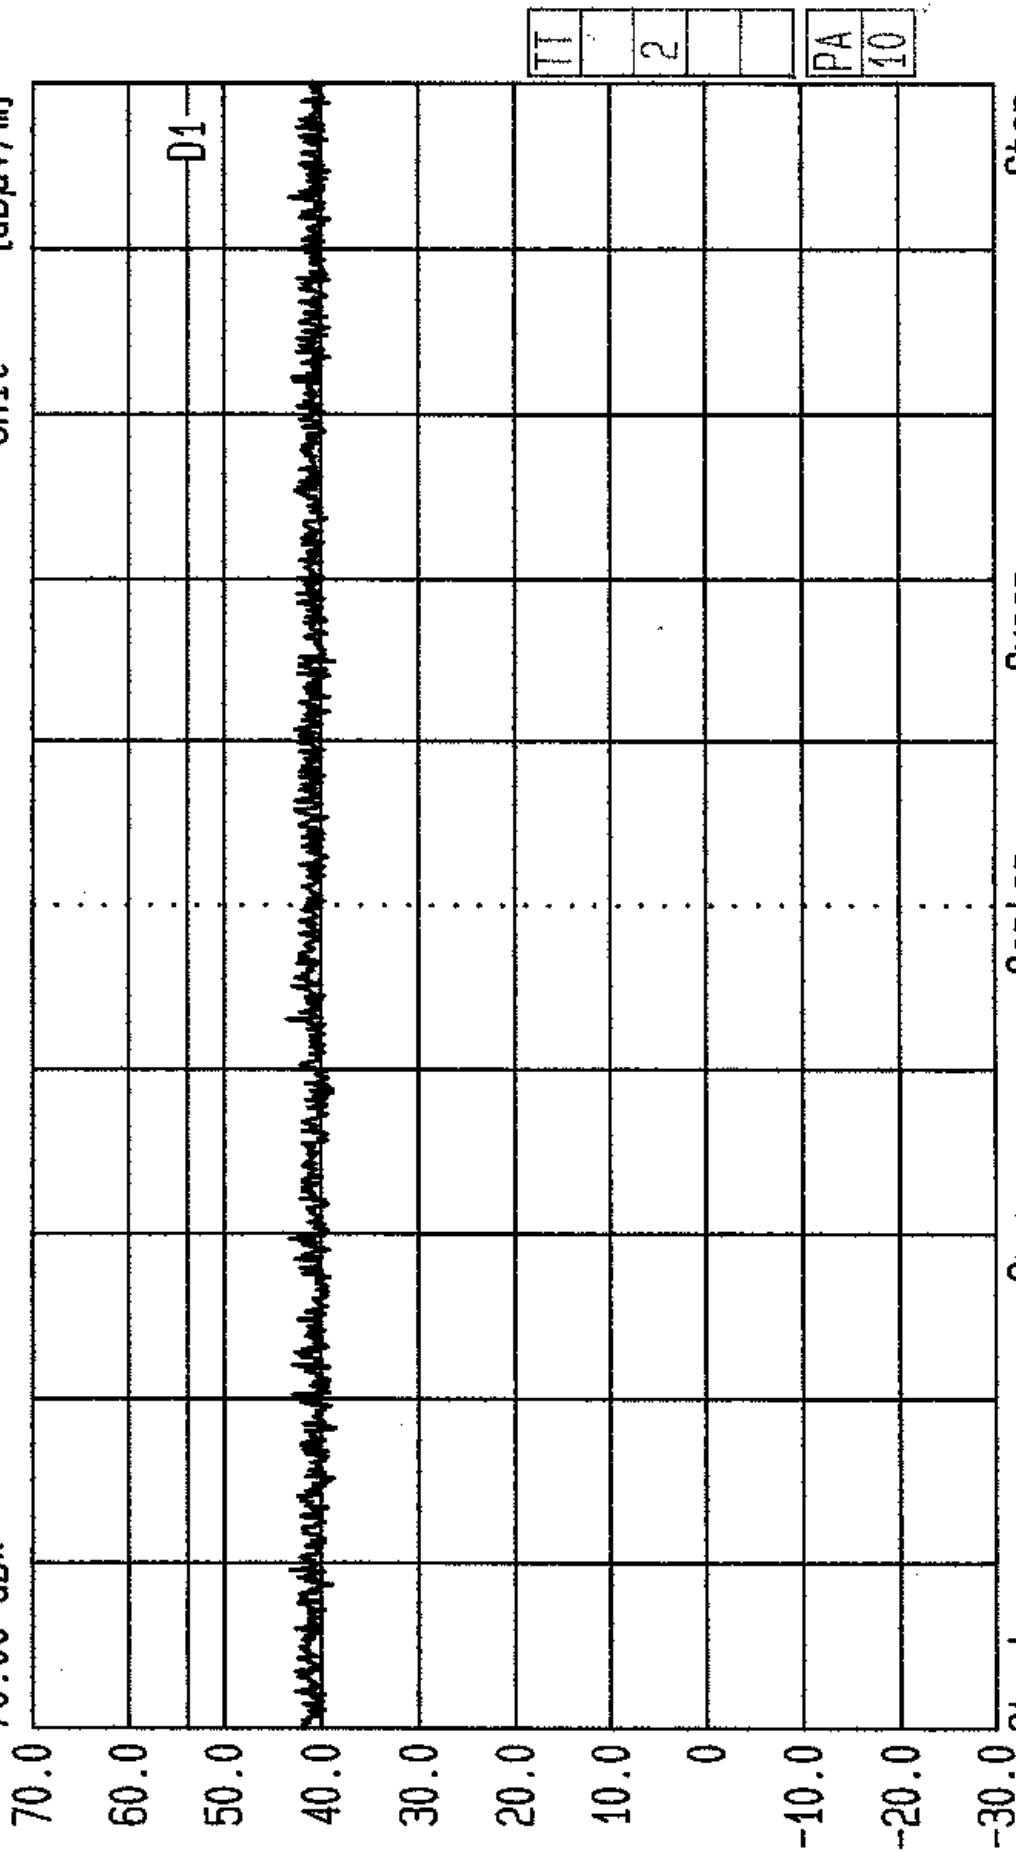

TT
2
PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.4057b). Rx. 5.755-5.825GHz Band. Bott Chan. GPH/38797/JD01/009



Date 21.Apr.'99 Time 10:34:20

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 200.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBμV/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

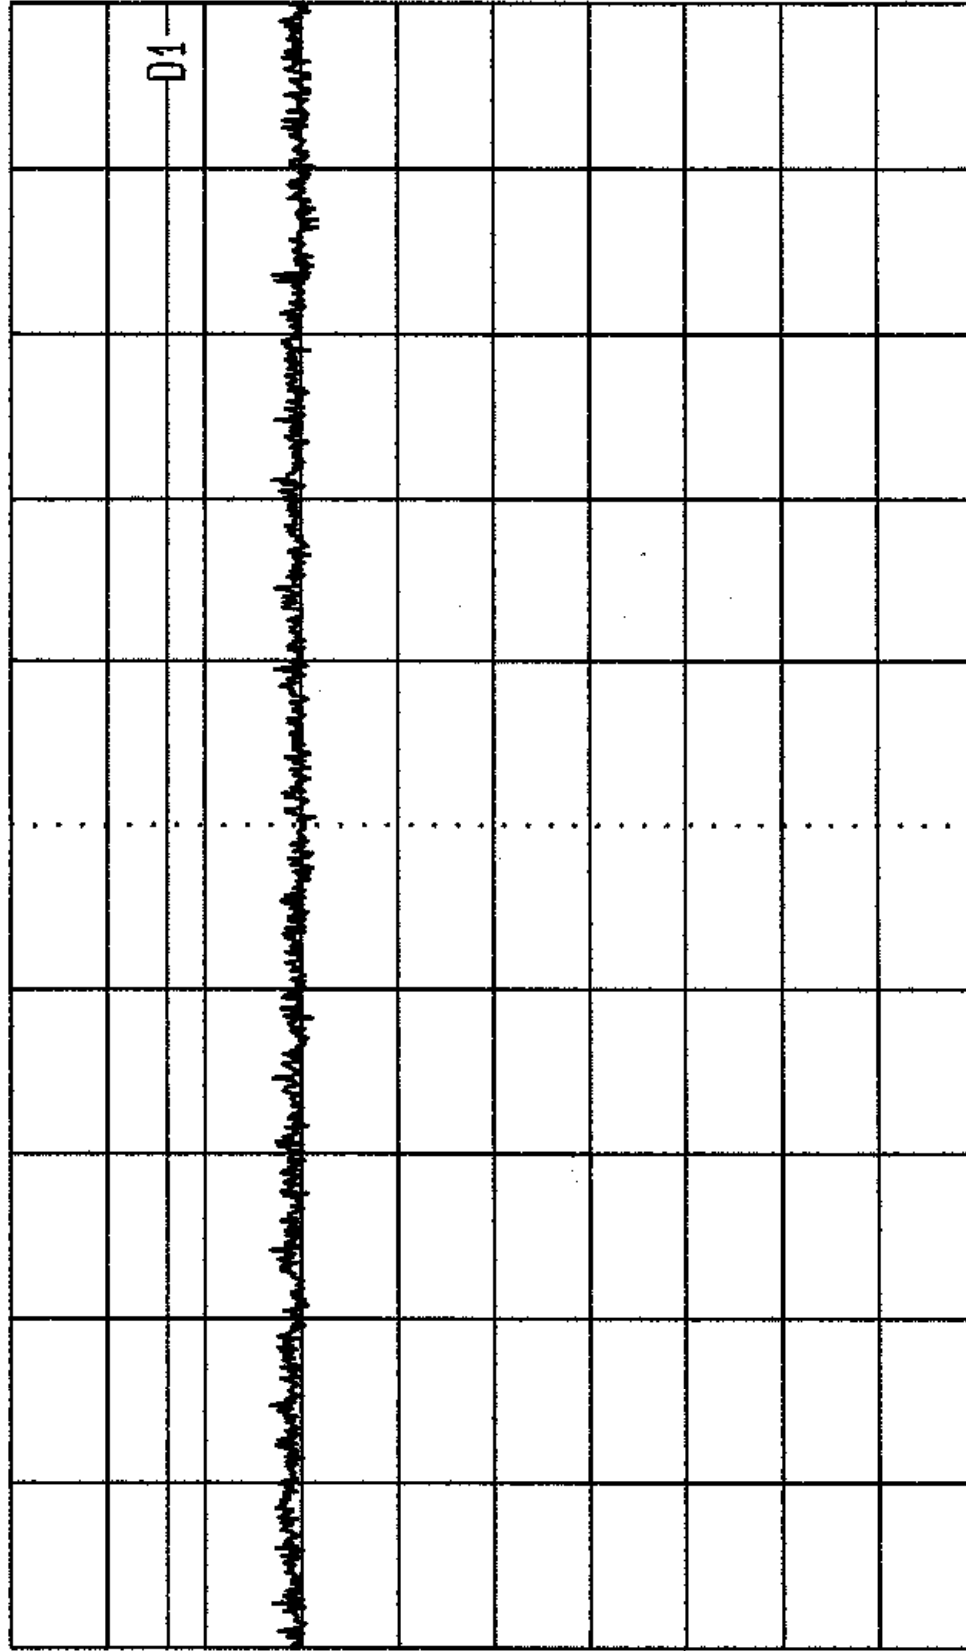

Start
2 GHz

Span
2 GHz

Center
3 GHz

Sweep
20 ms

Stop
4 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.405(b). Rx. 5.755-5.825GHz Band. Bott Chan: GPH/38797/JD01/010


TT
3
PA
10



Date 21.Apr.'99 Time 10:47:09

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 200.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBμV/m]

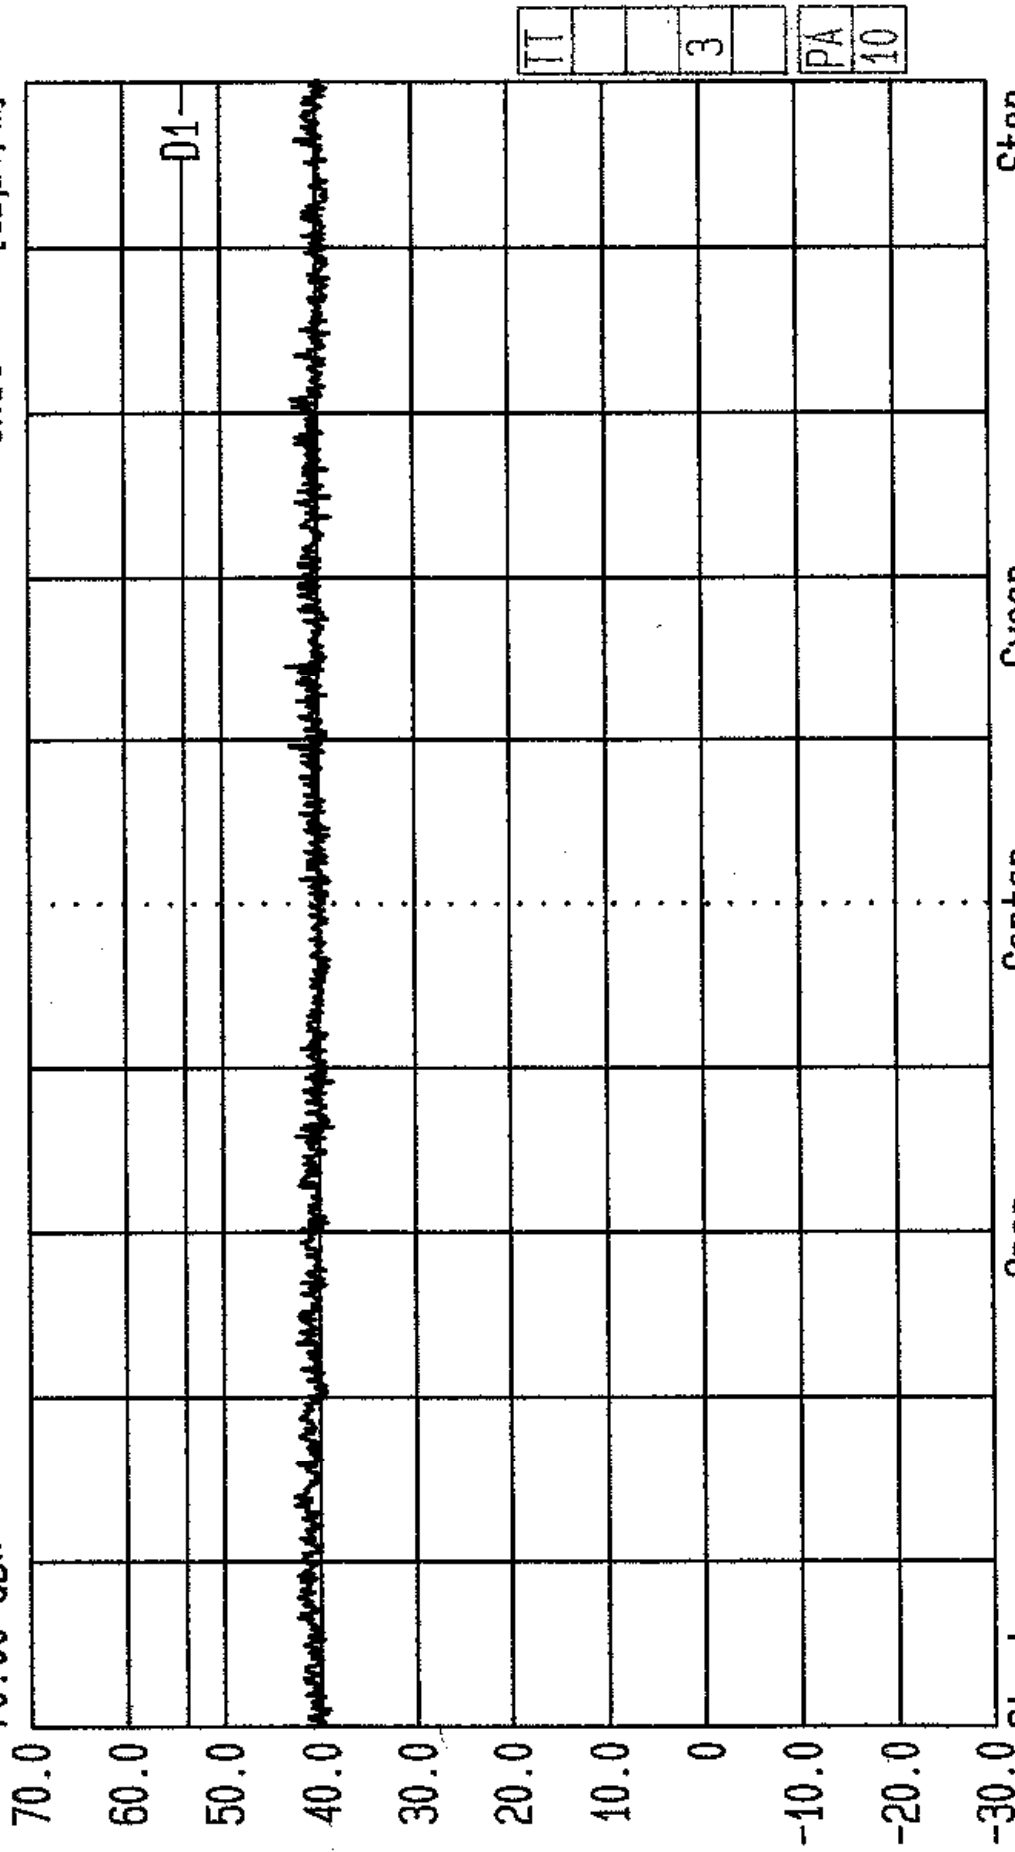


PA 10
3

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.4057b). Rx. 5.755-5.825GHz Band. Top Chan. GPH/38797/JD01/011



Date 21.Apr.'99 Time 11:05:51
Ref.Lvl 70.00 dB* Marker
1.2966 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBuV/m]

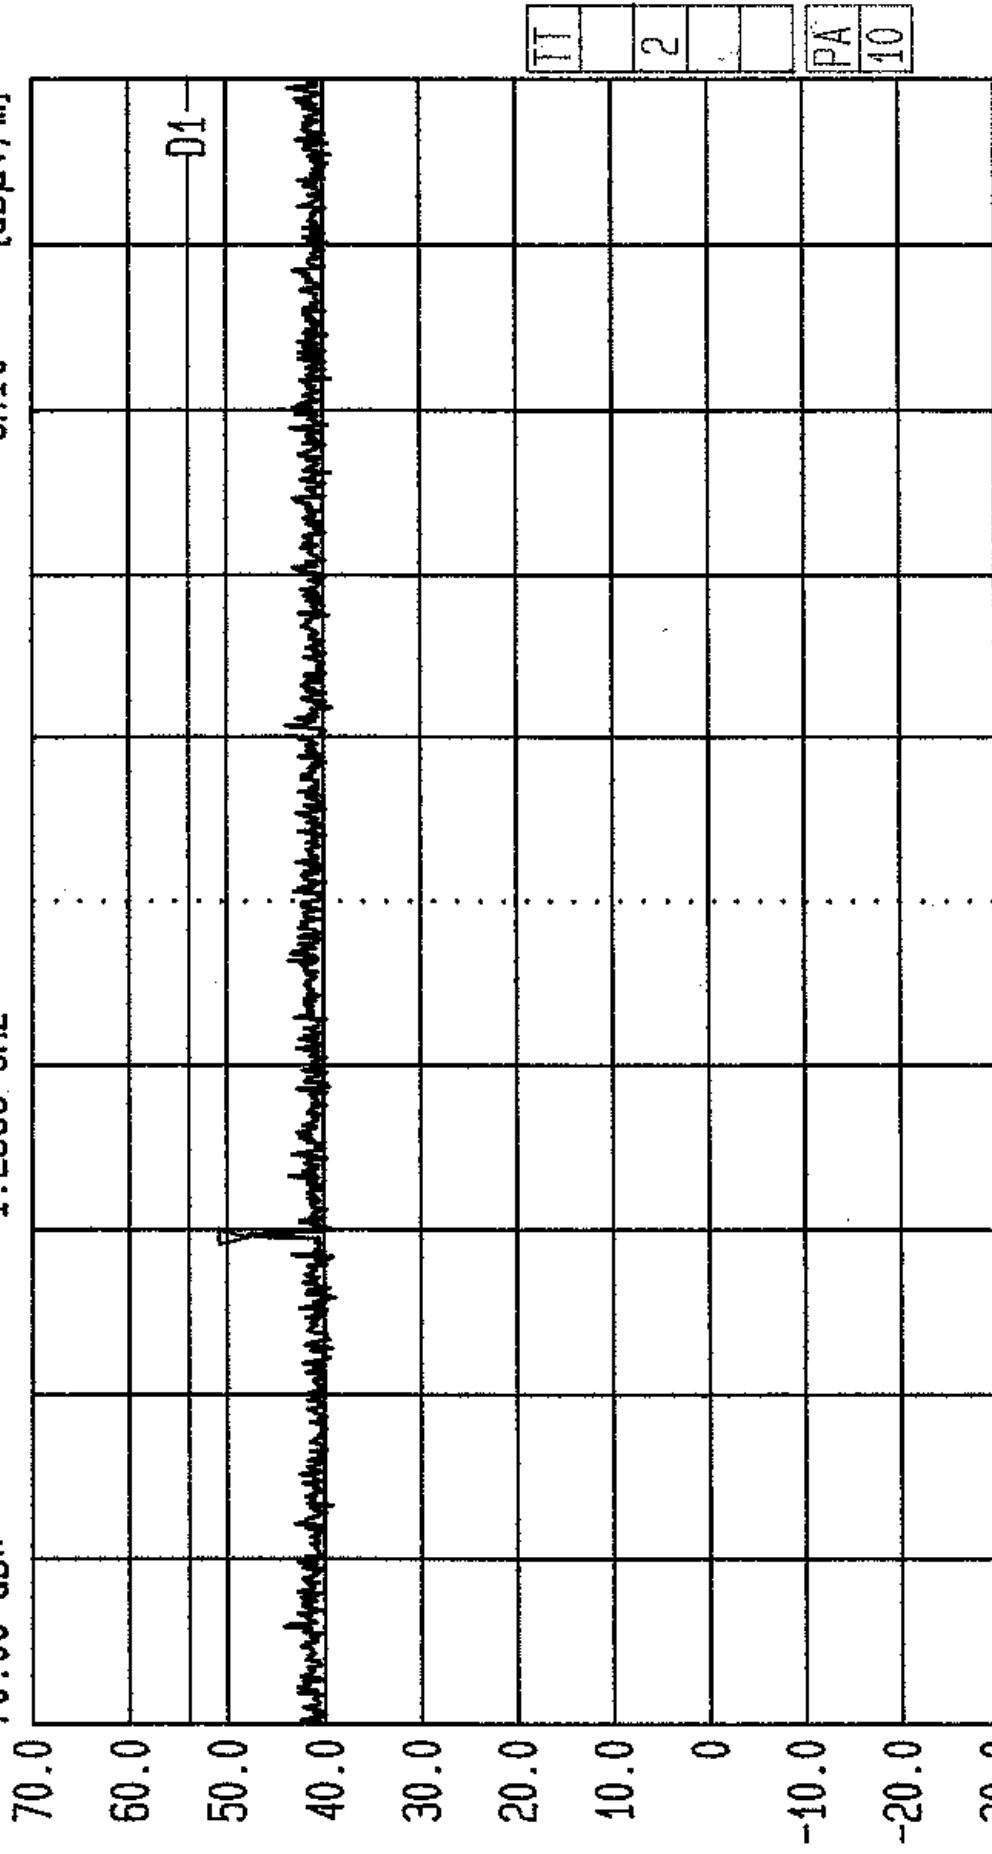


Start 1 GHz Stop 2 GHz
Sweep 20 ms
Center 1.5 GHz
Span 1 GHz
EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/012
Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.755-5.825GHz Band.



LVLOFF
Date 21.Apr.'99 Time 11:33:40
Ref.Lvl -10.00 dBm
Marker -113.2 dBm/Hz
1.6055 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

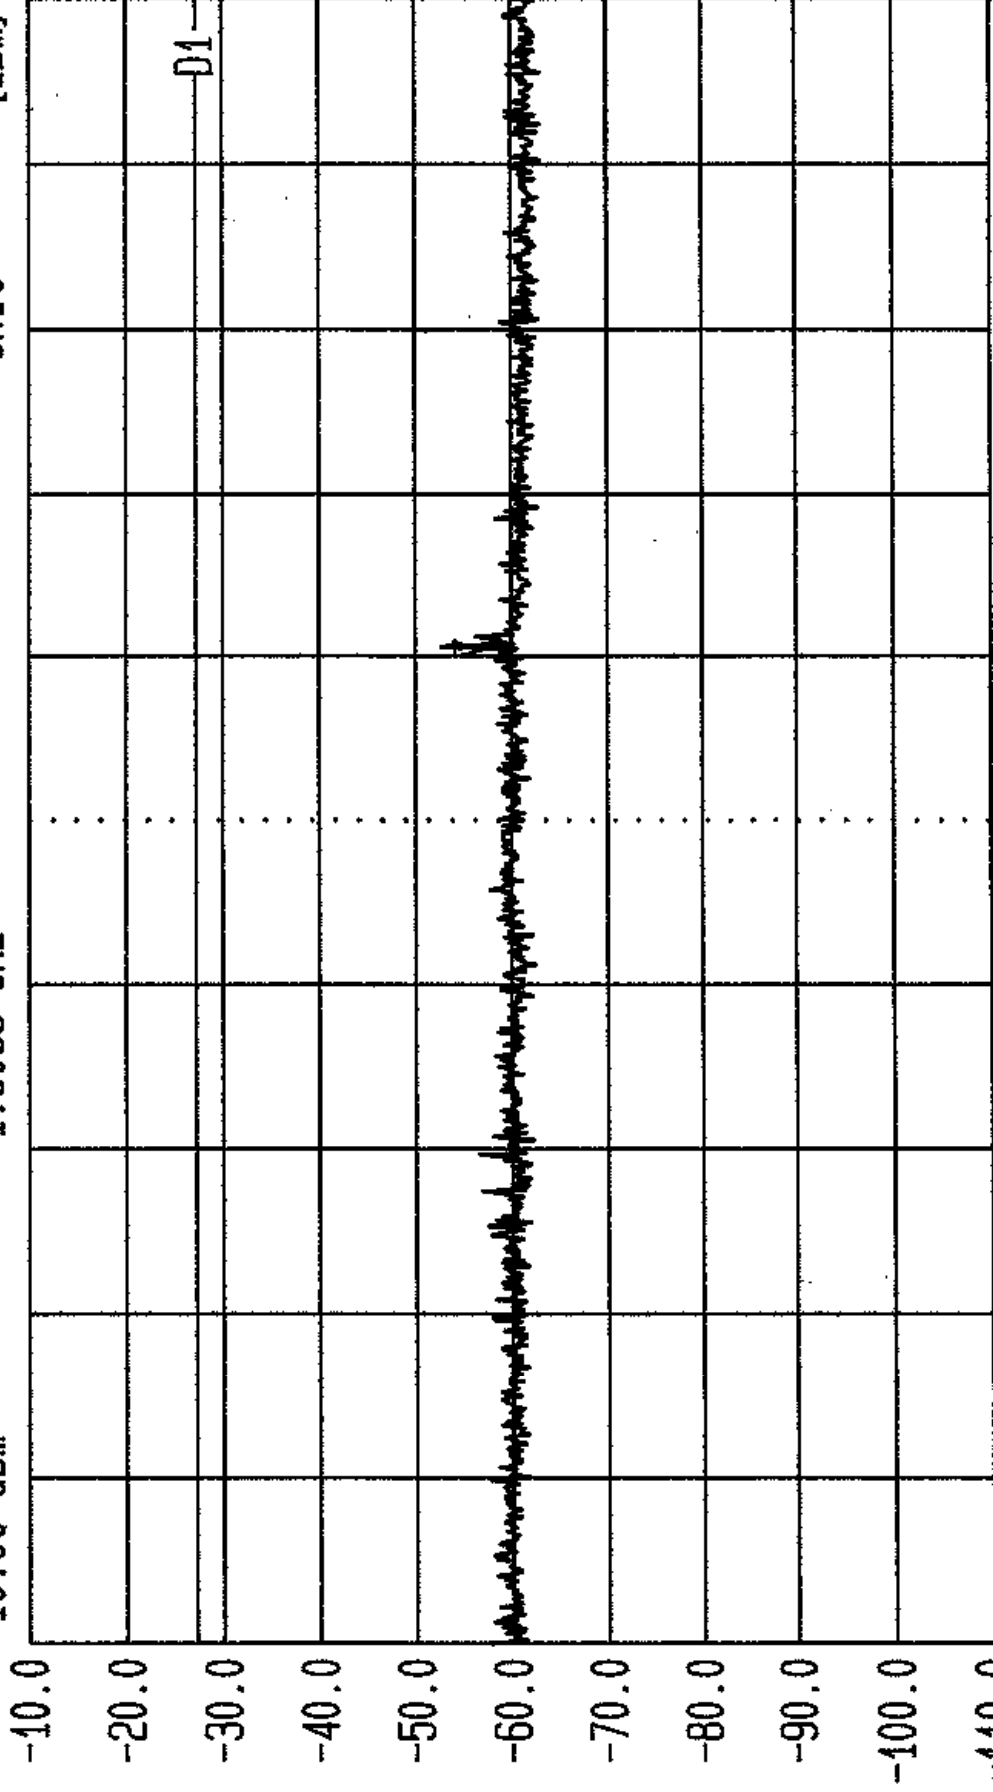

Start 1 GHz
Span 1 GHz
Center 1.5 GHz
Sweep 20 ms
Stop 2 GHz
EUT: AB Access Access Point
Bott Chan. GPH/38797/JD01/013
5.15-5.25 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.407(b). Tx. 5.25-5.35 GHz Band.


PA
10



OFFICE

Date 21.Apr.'99 Time 11:39:40
Ref_Lvl -9.50 dBm
Marker -114.6 dBm/HZ
3.2911 GHz

Res.Bw	1 MHz [imp]	Vid.Bw	1 MHz
TG.Lvl	Off	RF.Att	0 dB
CF.Stp	200.000 MHz	Unit	[dBm]

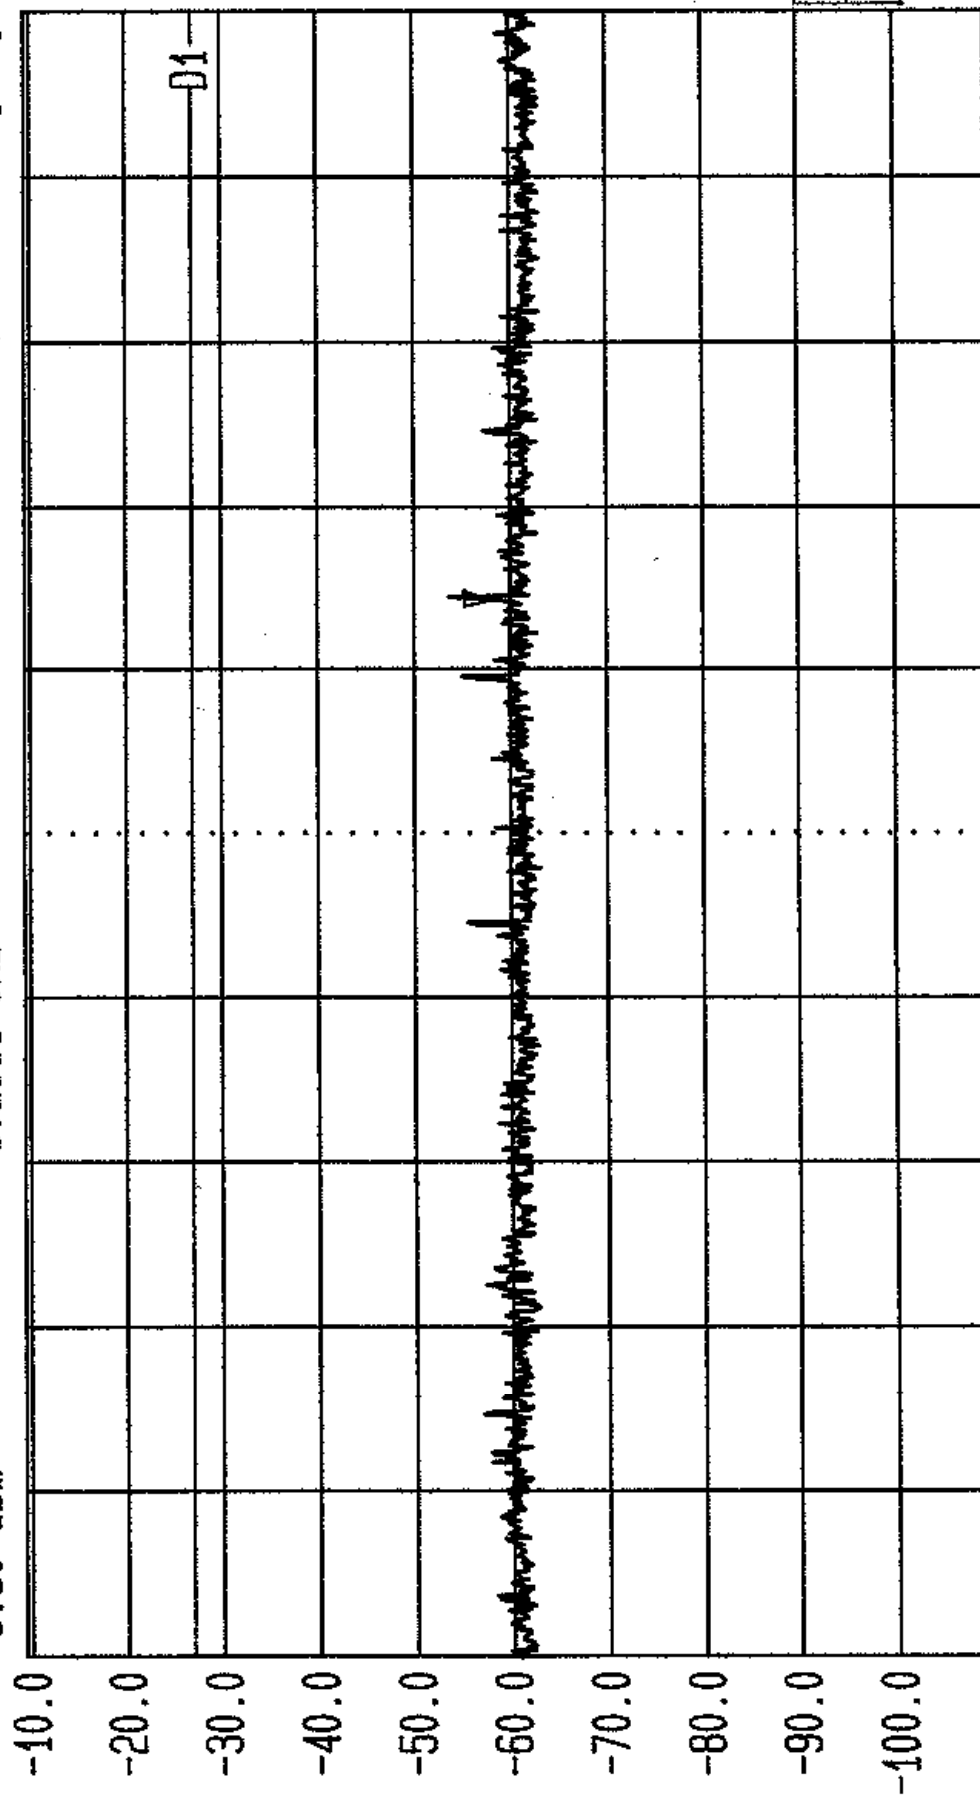

Start	Span	Center	Sweep	Stop
2 GHz	2 GHz	3 GHz	20 ms	4 GHz


Radiated. Tested by RFI for Adaptive Broadband Ltd.
 Limit. FCC Part 15.407(b). Tx. ~~5.25-5.35~~GHz Band. Bott Chan. EUT: AB Access Access Point
 6PH/38797/JD01/014
 515-5:25



LVLOFF
Date 21.Apr. '99 Time 11:44:27
Ref.Lvl -9.50 dBm
Marker -115.4 dBm/Hz
3.2911 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 200.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

-10.0
-20.0
-30.0
-40.0
-50.0
-60.0
-70.0
-80.0
-90.0
-100.0

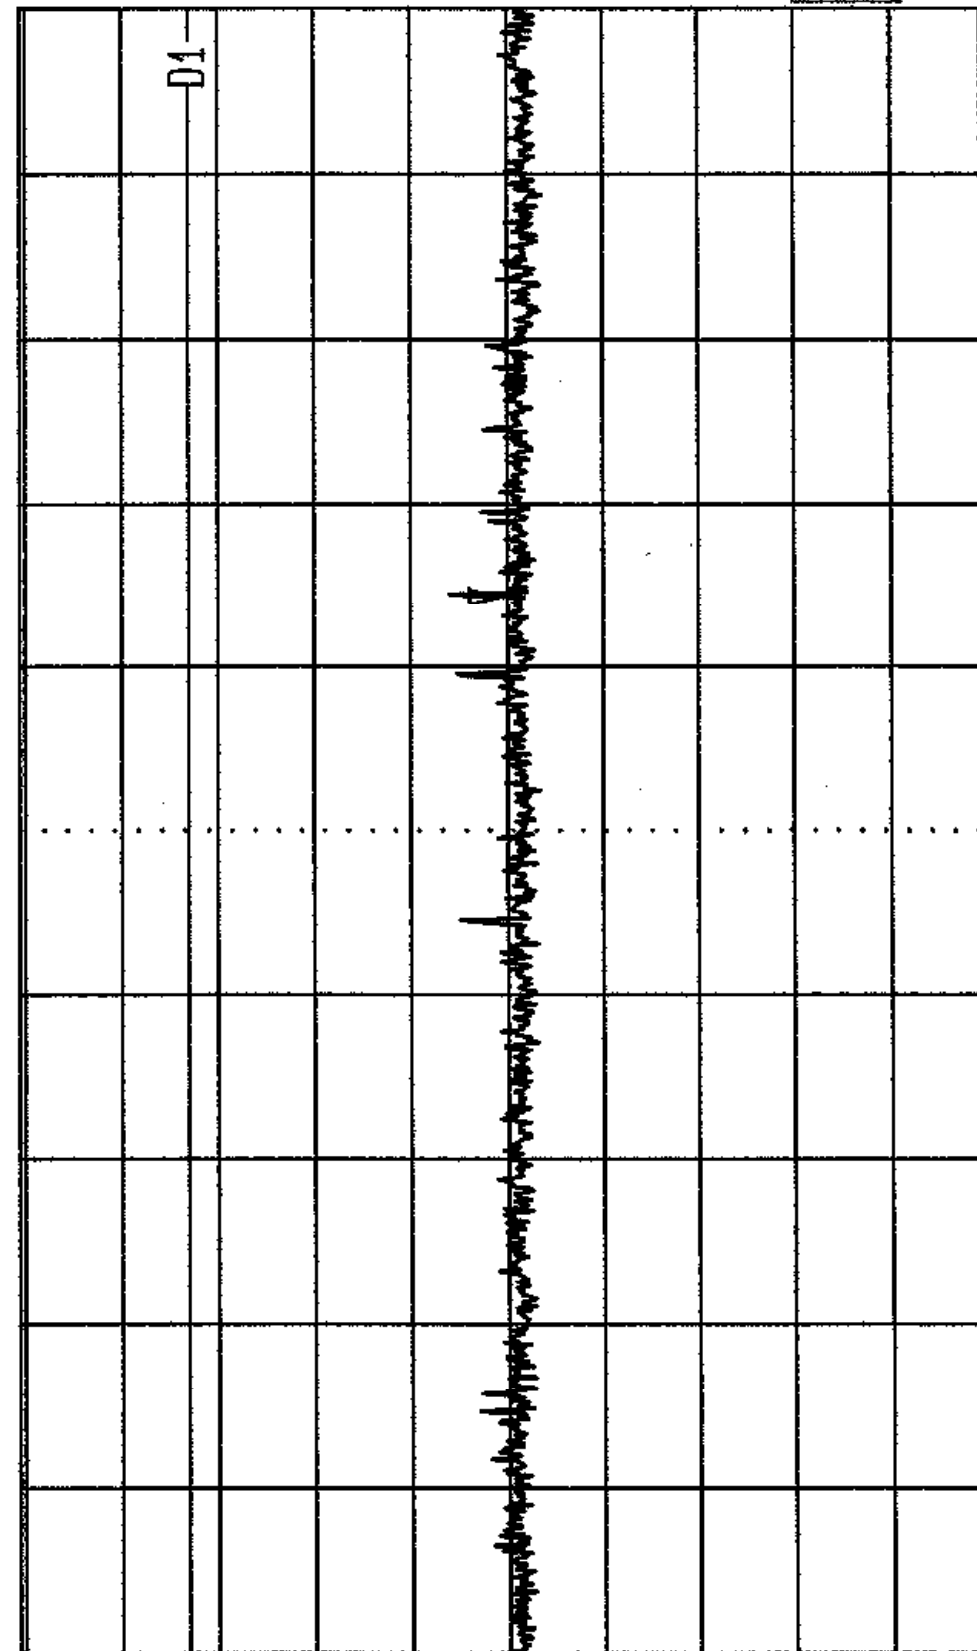

PA
10

Start
2 GHz

Span
2 GHz

Center
3 GHz

Sweep
20 ms

Stop
4 GHz


Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.407(b). TX. ~~5.25-5.35 GHz~~ Band. 5.15-5.25 GHz

EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/015



LVLOFF
Date 21.Apr.'99 Time 11:51:26
Ref.Lvl Marker -113.9 dBm/Hz
-10.00 dBm 1.2966 GHz

Res.Bw 1 MHz [imp] 1 MHz
TG.Lvl off
CF.Stp 100.000 MHz
Vid.Bw RF.Att 0 dB
Unit [dBm]

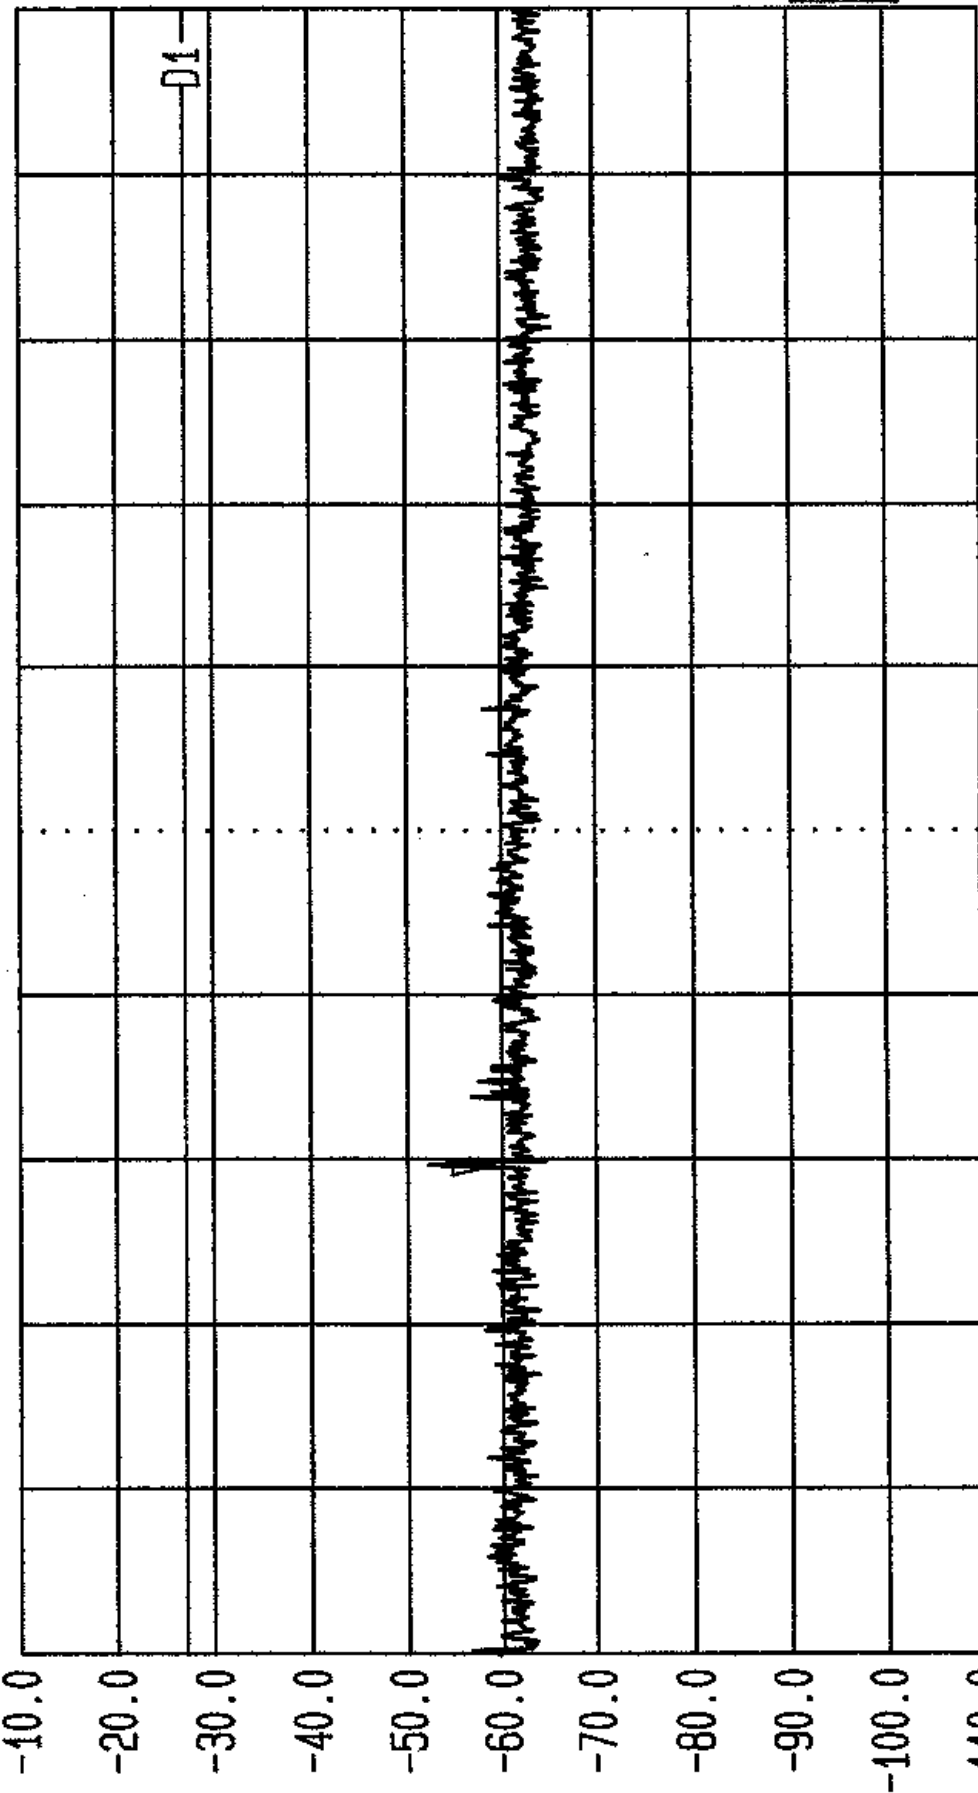


PA
10

Start 1 GHz Span 1 GHz Center 1.5 GHz Sweep 20 ms Stop 2 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b). Tx. 5.25-5.35GHz Band. Top Chan. GPH/38797/JD01/016
S.15-5.25



LVLOFF
Date 21.Apr.'99 Time 11:54:53
Ref.Lvl -10.00 dBm
Marker -113.2 dBm/Hz
1.2966 GHz

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

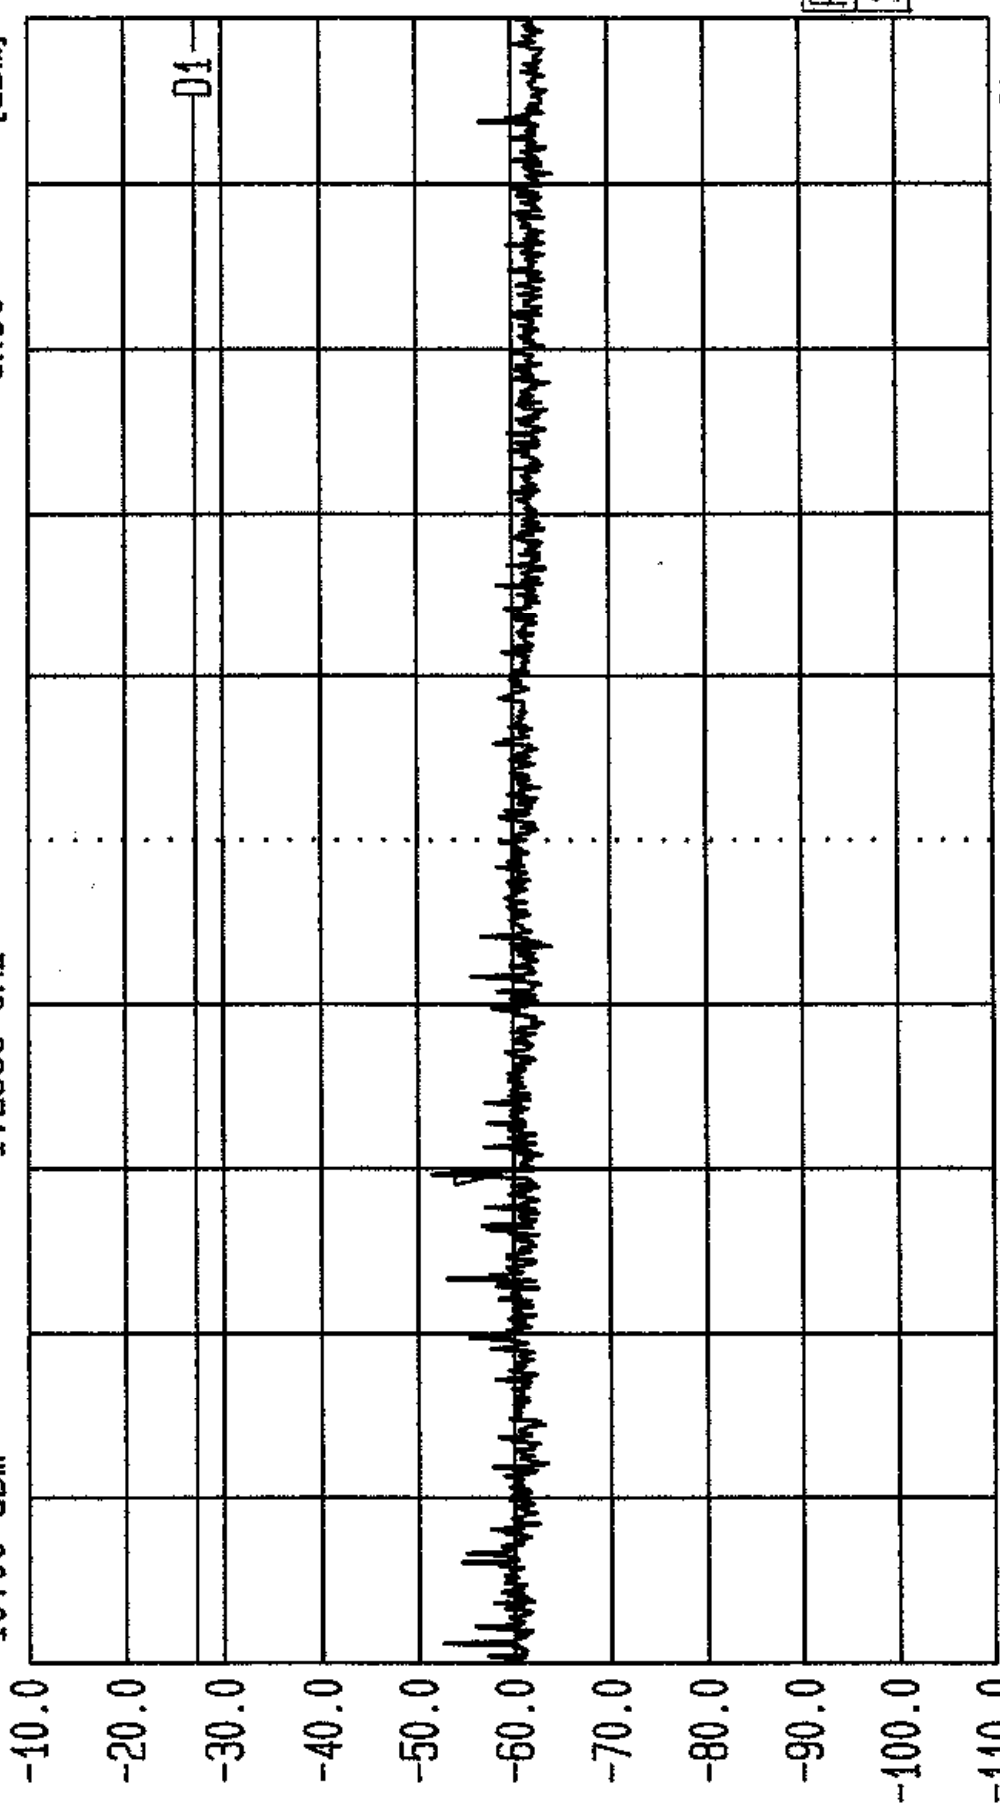


PA
10

Start 1 GHz Stop 2 GHz
Span 1 GHz Sweep 20 ms
Center 1.5 GHz
EUT: AB Access Access Point
Bott Chan. GPH/38797/JD01/017
Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.407(b). Tx. 5.25-5.35GHz Band.



LVLOFF
Date 21.Apr.'99 Time 11:58:08
Ref.Lvl Marker -115.4 dBm/Hz
-9.50 dBm 3.1911 GHz

Res.Bw 1 MHz [imp] 1 MHz
TG.Lvl off
CF.Stp 200.000 MHz
Vid.Bw RF.Att 0 dB
Unit [dBm]

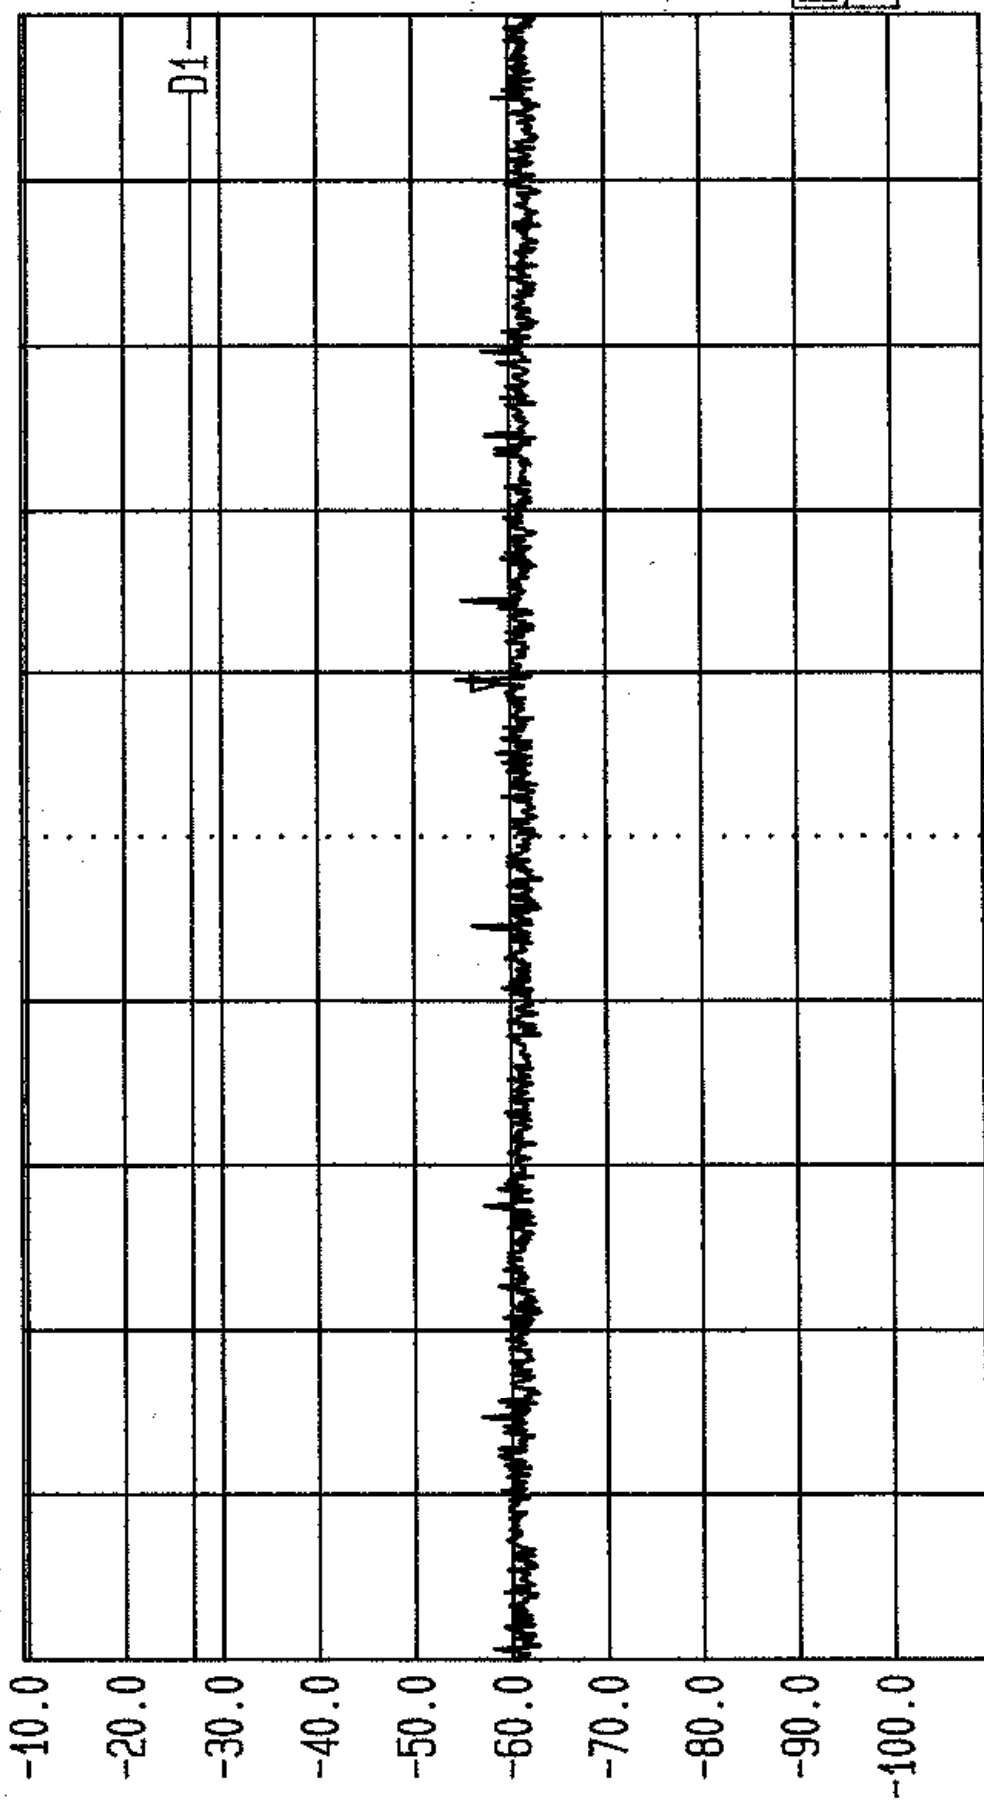

PA
10


Start 2 GHz Span 2 GHz Center 3 GHz Sweep 20 ms Stop 4 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b). Tx. 5.25-5.35GHz Band. Chan. GPH/38797/JD01/018
Boff



LVLOFF
Date 21.Apr.'99 Time 12:04:29
Ref.Lvl -9.50 dBm
Marker -114.9 dBm/Hz
3.1911 GHz

Res.Bw 1 MHz [imp]
1 MHz [imp]
Off
200.000 MHz
RF.Att 0 dB
Unit [dBm]

-10.0
-20.0
-30.0
-40.0
-50.0
-60.0
-70.0
-80.0
-90.0
-100.0

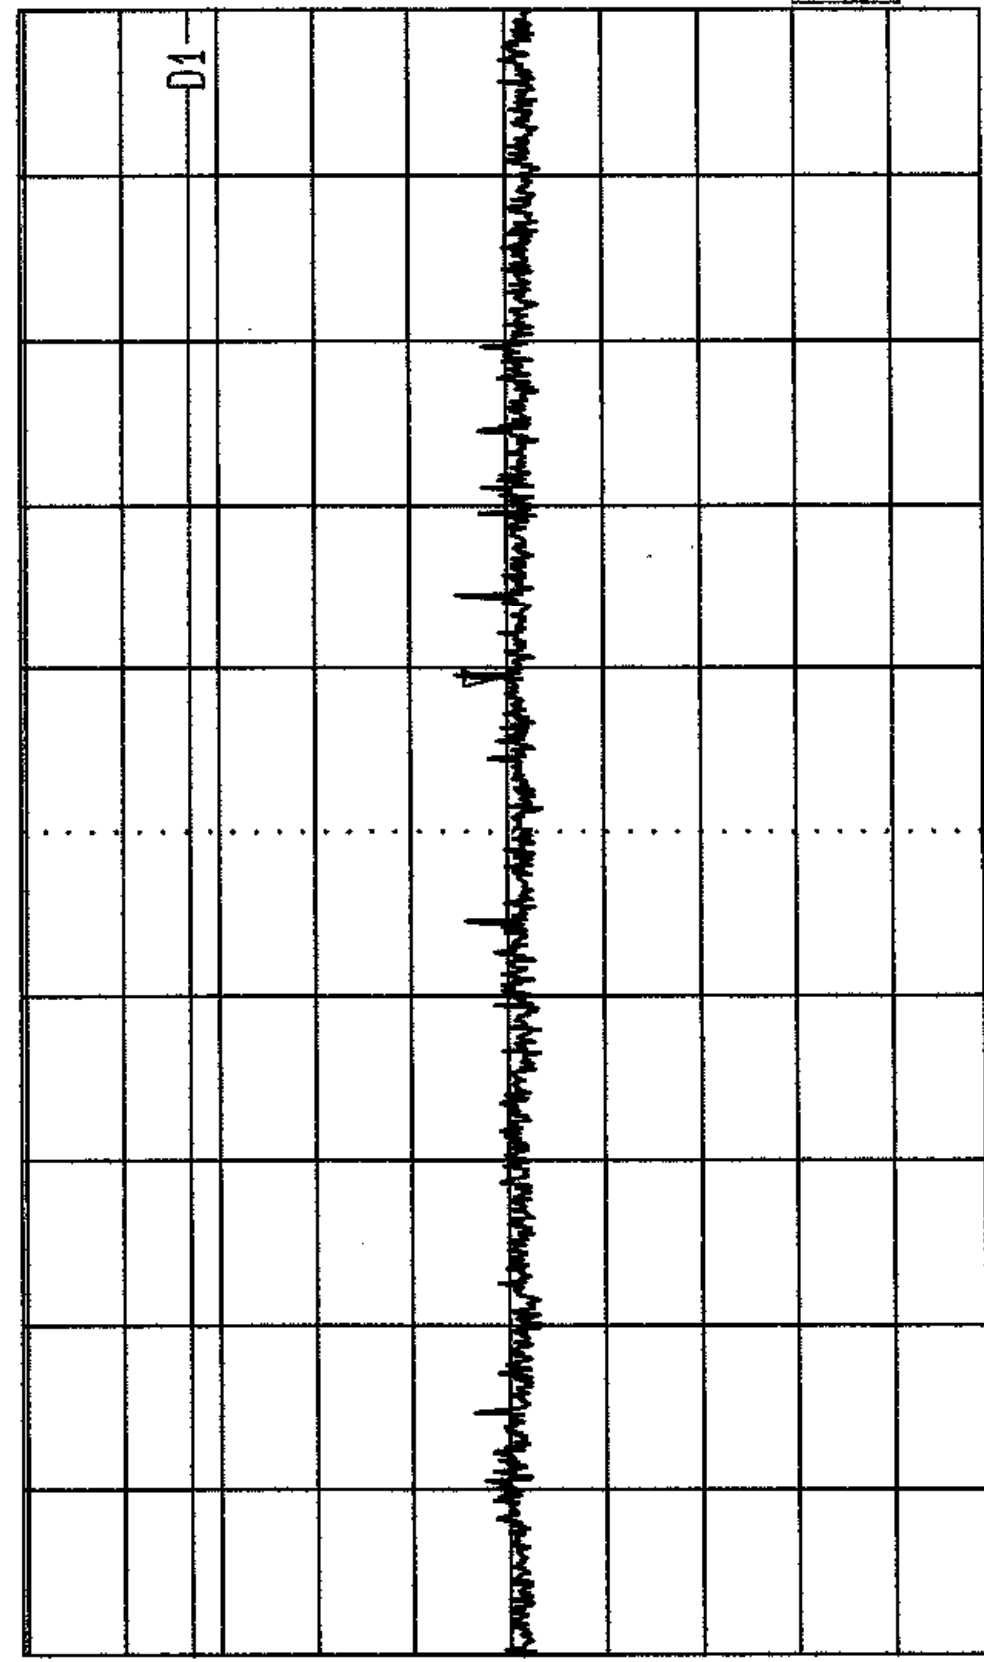


PA
10

Start 2 GHz Span 2 GHz Center 3 GHz Sweep 20 ms Stop 4 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.407(b). Tx. 5.25-5.35GHz Band. Top Chan. EUT: AB Access Access Point
GPH/38797/JD01/019



LVLOFF
Date 21.Apr.'99 Time 12:04:56
Ref.Lvl -10.00 dBm
Marker -113.8 dBm/Hz
1.3377 GHz

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

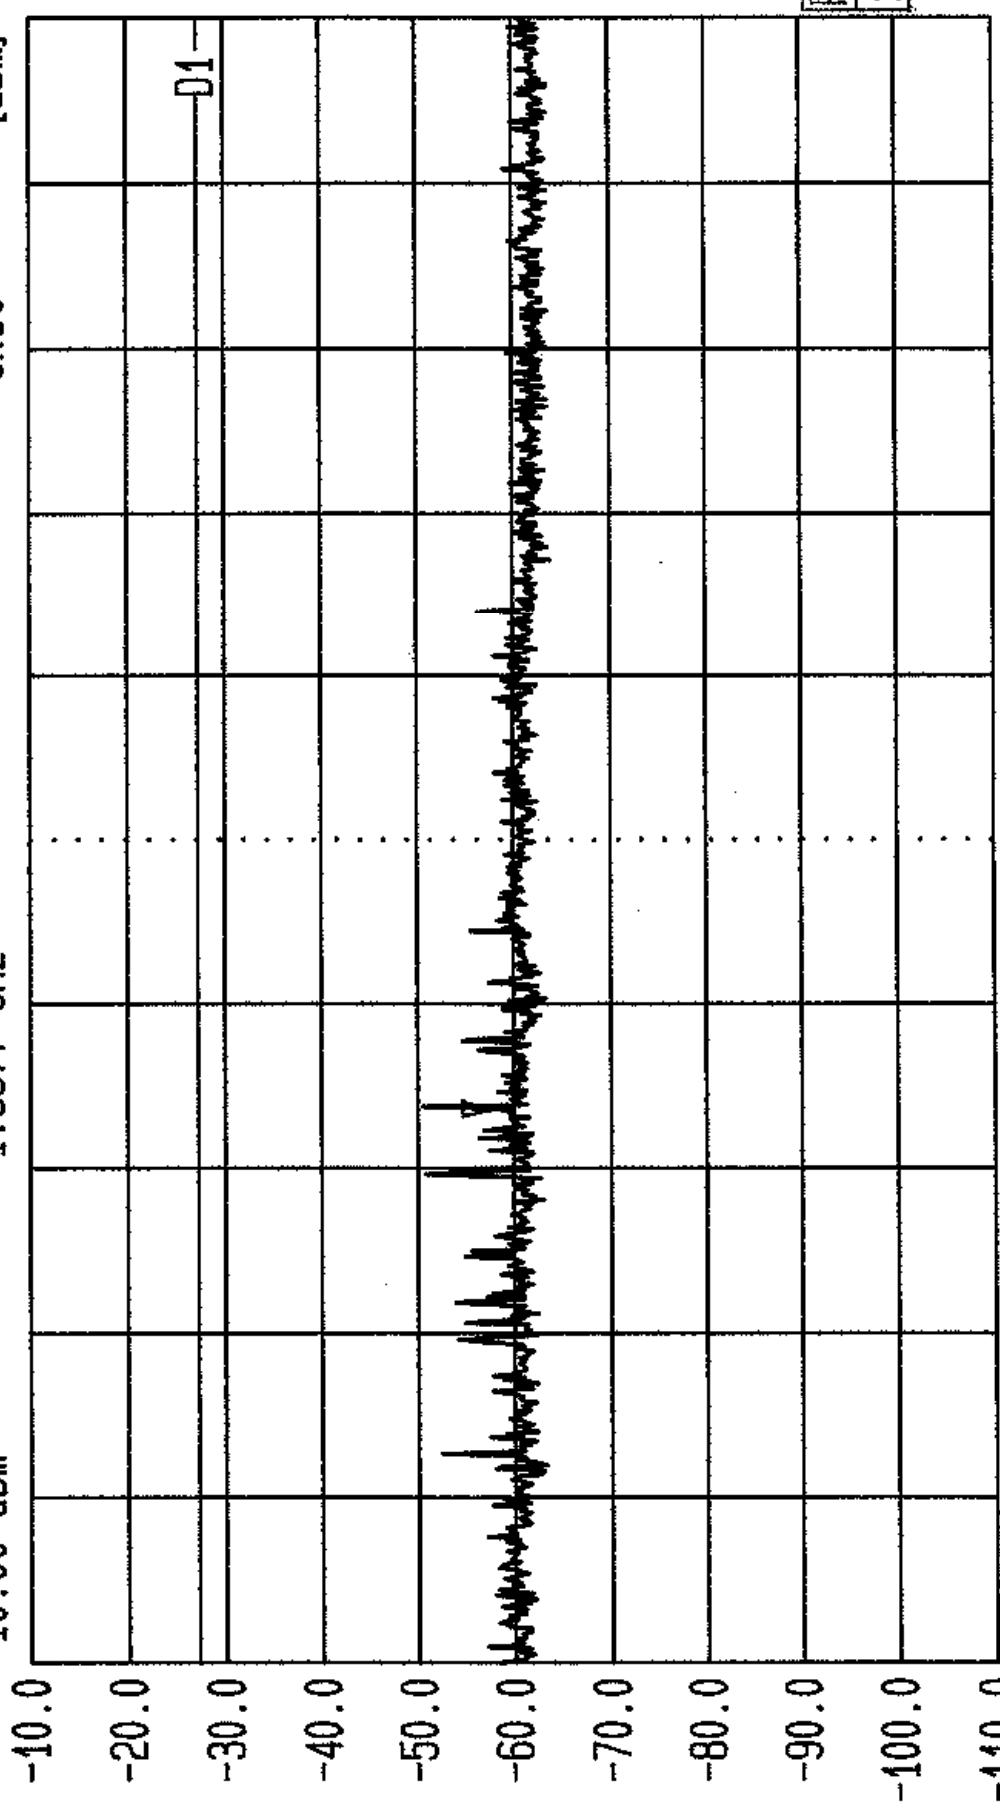


PA
10

Start 1 GHz Span 1 GHz Center 1.5 GHz Sweep 20 ms Stop 2 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.407(b). Tx. 5.25-5.35GHz Band. Top Chan. EUT: AB Access Access Point
GPH/38797/JD01/020



LVLOFF
Date 21.Apr.'99 Time 12:08:12
Ref.Lvl -10.00 dBm
Marker -112.4 dBm/Hz
1.2966 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

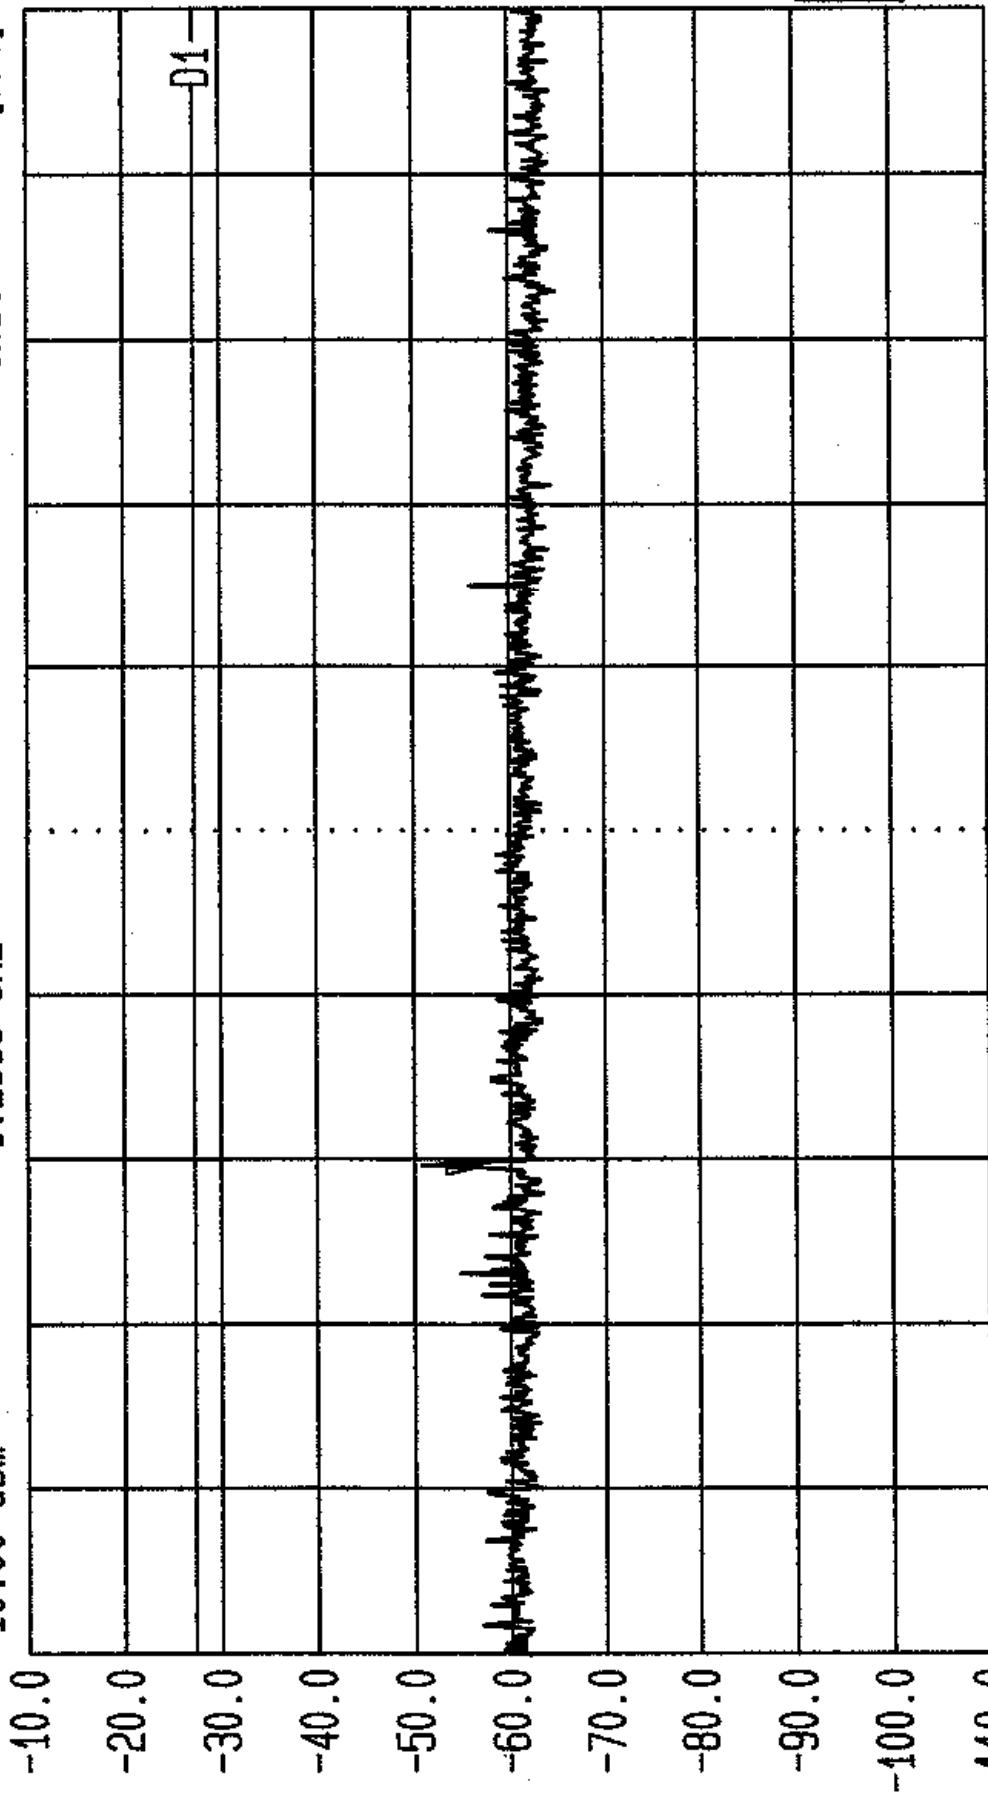


Start 1 GHz Stop 2 GHz
Span 1 GHz Sweep 20 ms
Center 1.5 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b). Tx. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/021

PA
10



LVLOFF
Date 21 Apr. '99 Time 12:11:36
Ref.Lvl -9.50 dBm
Marker -115.8 dBm/Hz
3.2911 GHz
Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 200.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

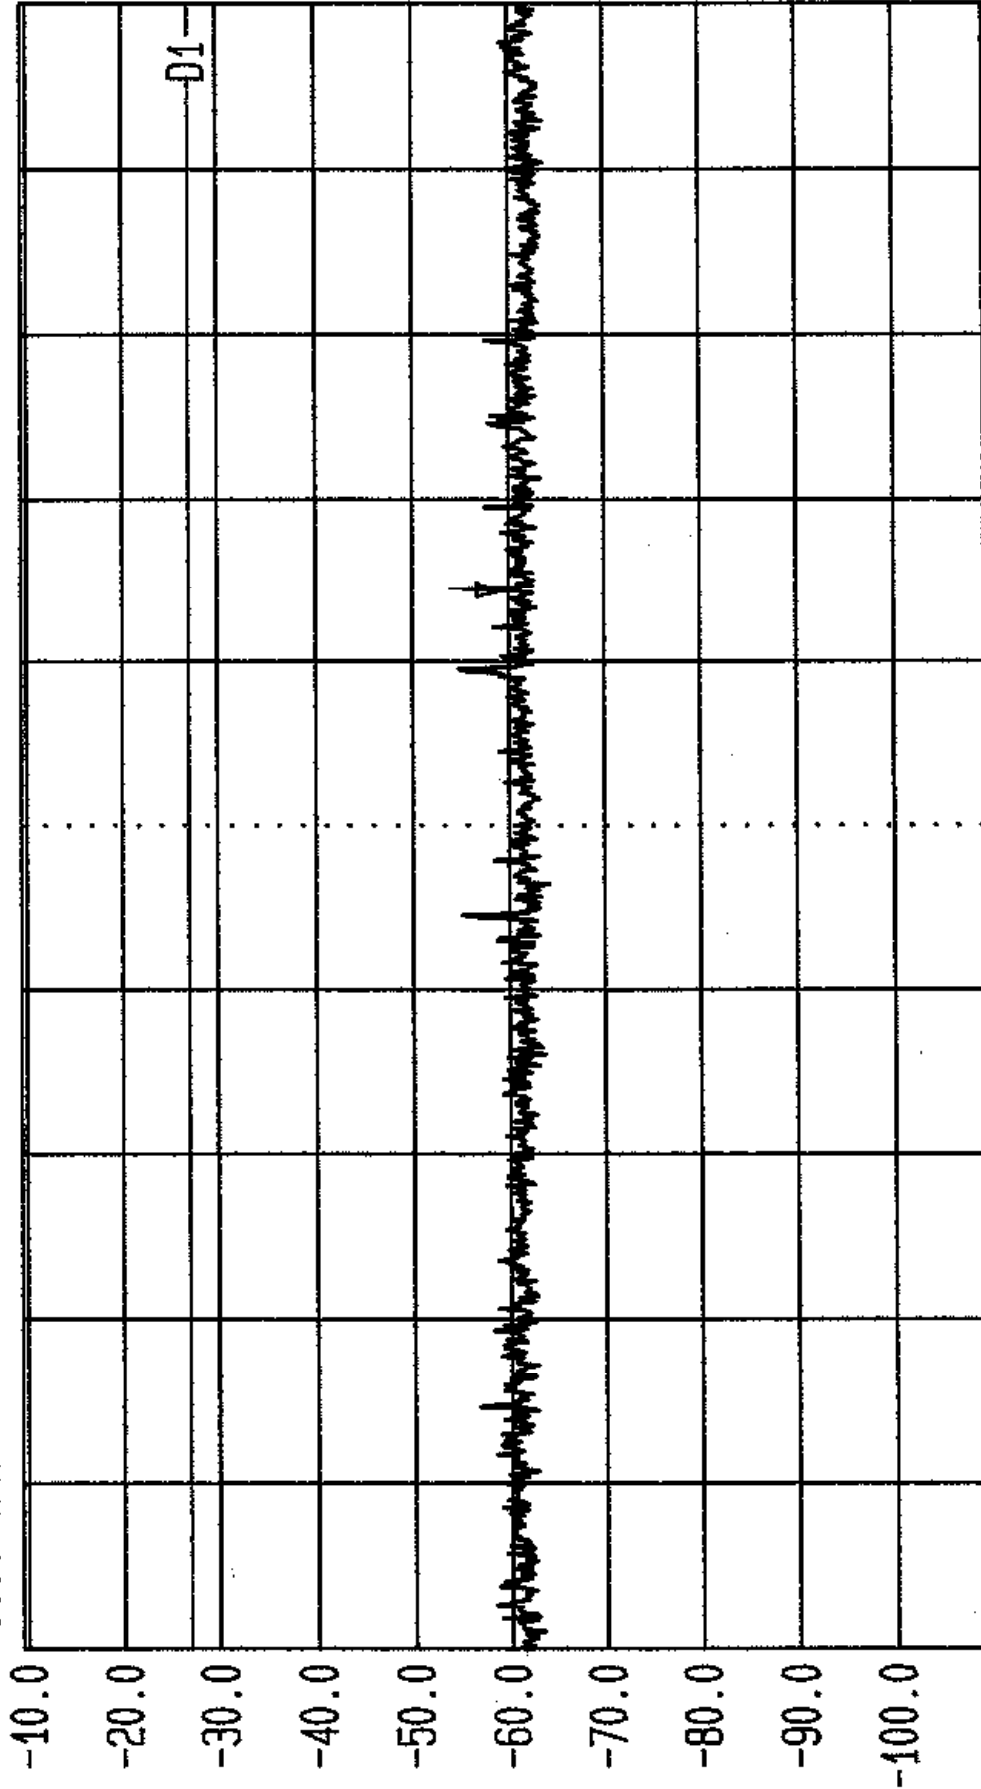


Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.407(b). Tx. 5.725-5.825GHz Band. Bott Chan. EUT: AB Access Access Point
GPH/38797/JD01/022

PA
10



LVLOFF
Date 21.Apr.'99 Time 12:14:56
Ref.Lvl -9.50 dBm
Marker -115.2 dBm/Hz
3.1911 GHz

Res.BW 1 MHz [imp]
T6.Lvl Off
CF.Stp 200.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

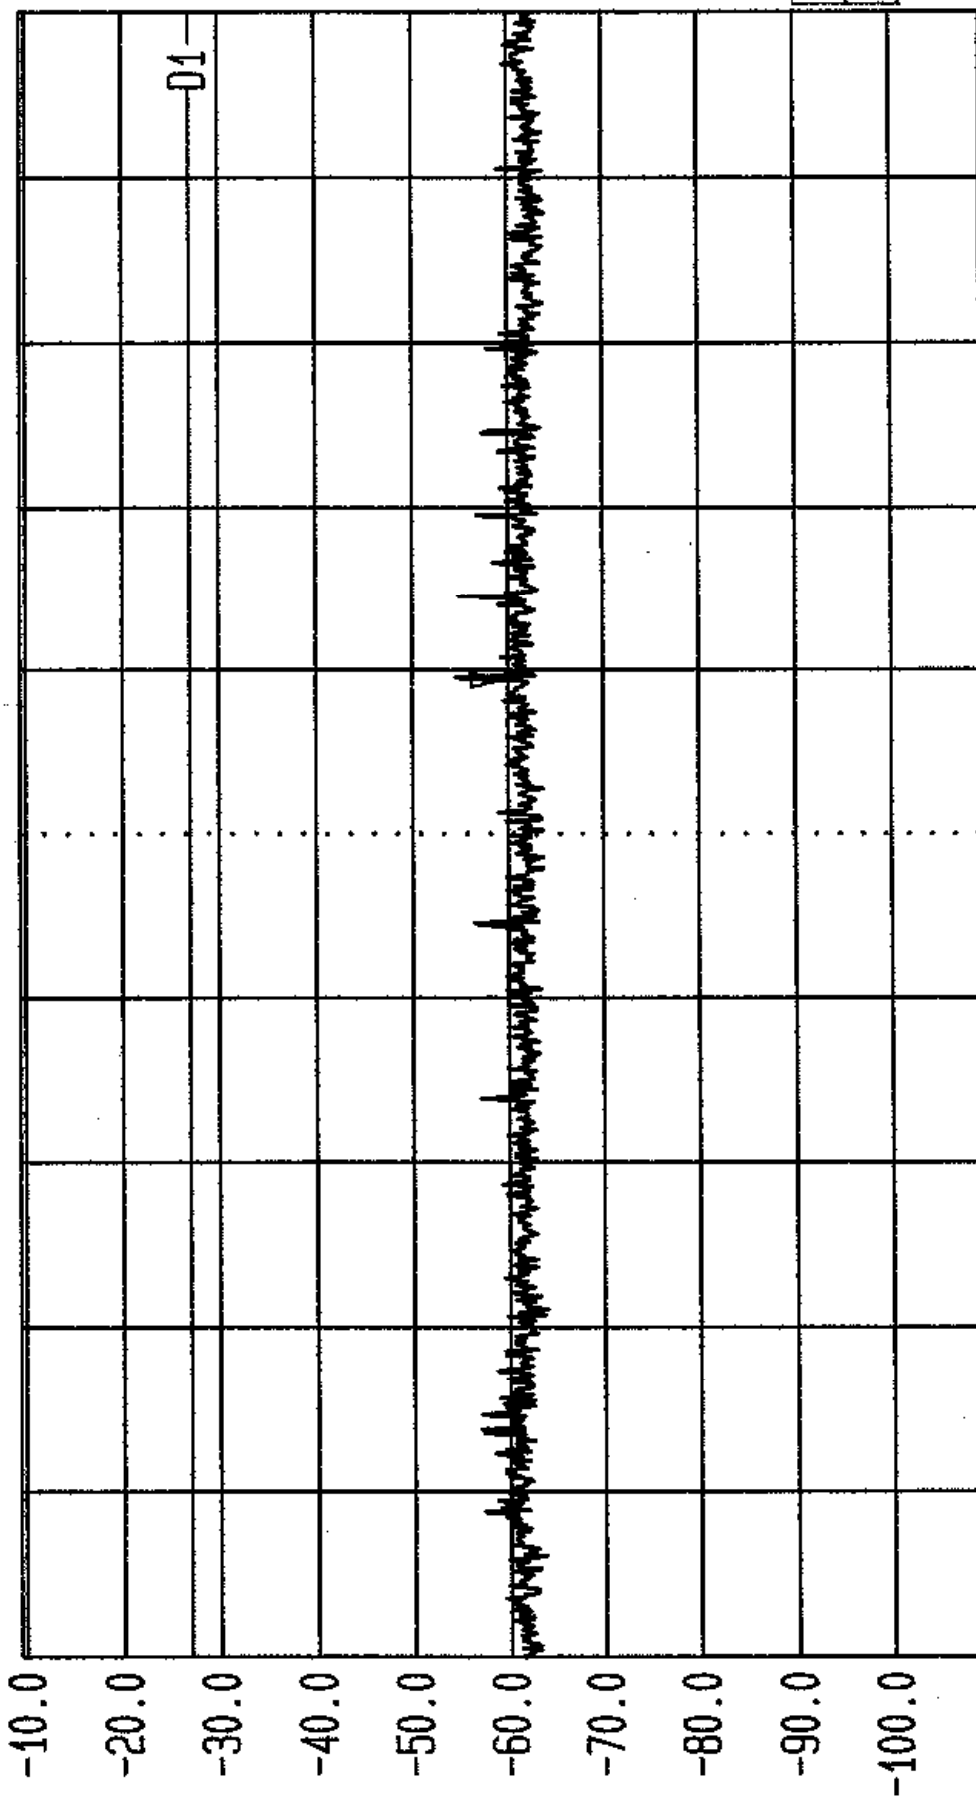

Start 2 GHz
Span 2 GHz
Center 3 GHz
Sweep 20 ms
Stop 4 GHz
EUT: AB Access Access Point
GPH/38797/JD01/023
Top Chan.


Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.407(b). Tx. 5.725-5.825GHz Band.

PA
10



LVLOFF
Date 21.Apr.'99 Time 12:18:15
Ref.Lvl -10.00 dBm
Marker -112.6 dBm/Hz
1.2966 GHz

Res.Bw
TG.Lvl
CF.Stp
1 MHz [imp]
Off
100.000 MHz
Vid.Bw
1 MHz
RF.Att
0 dB
Unit
[dBm]

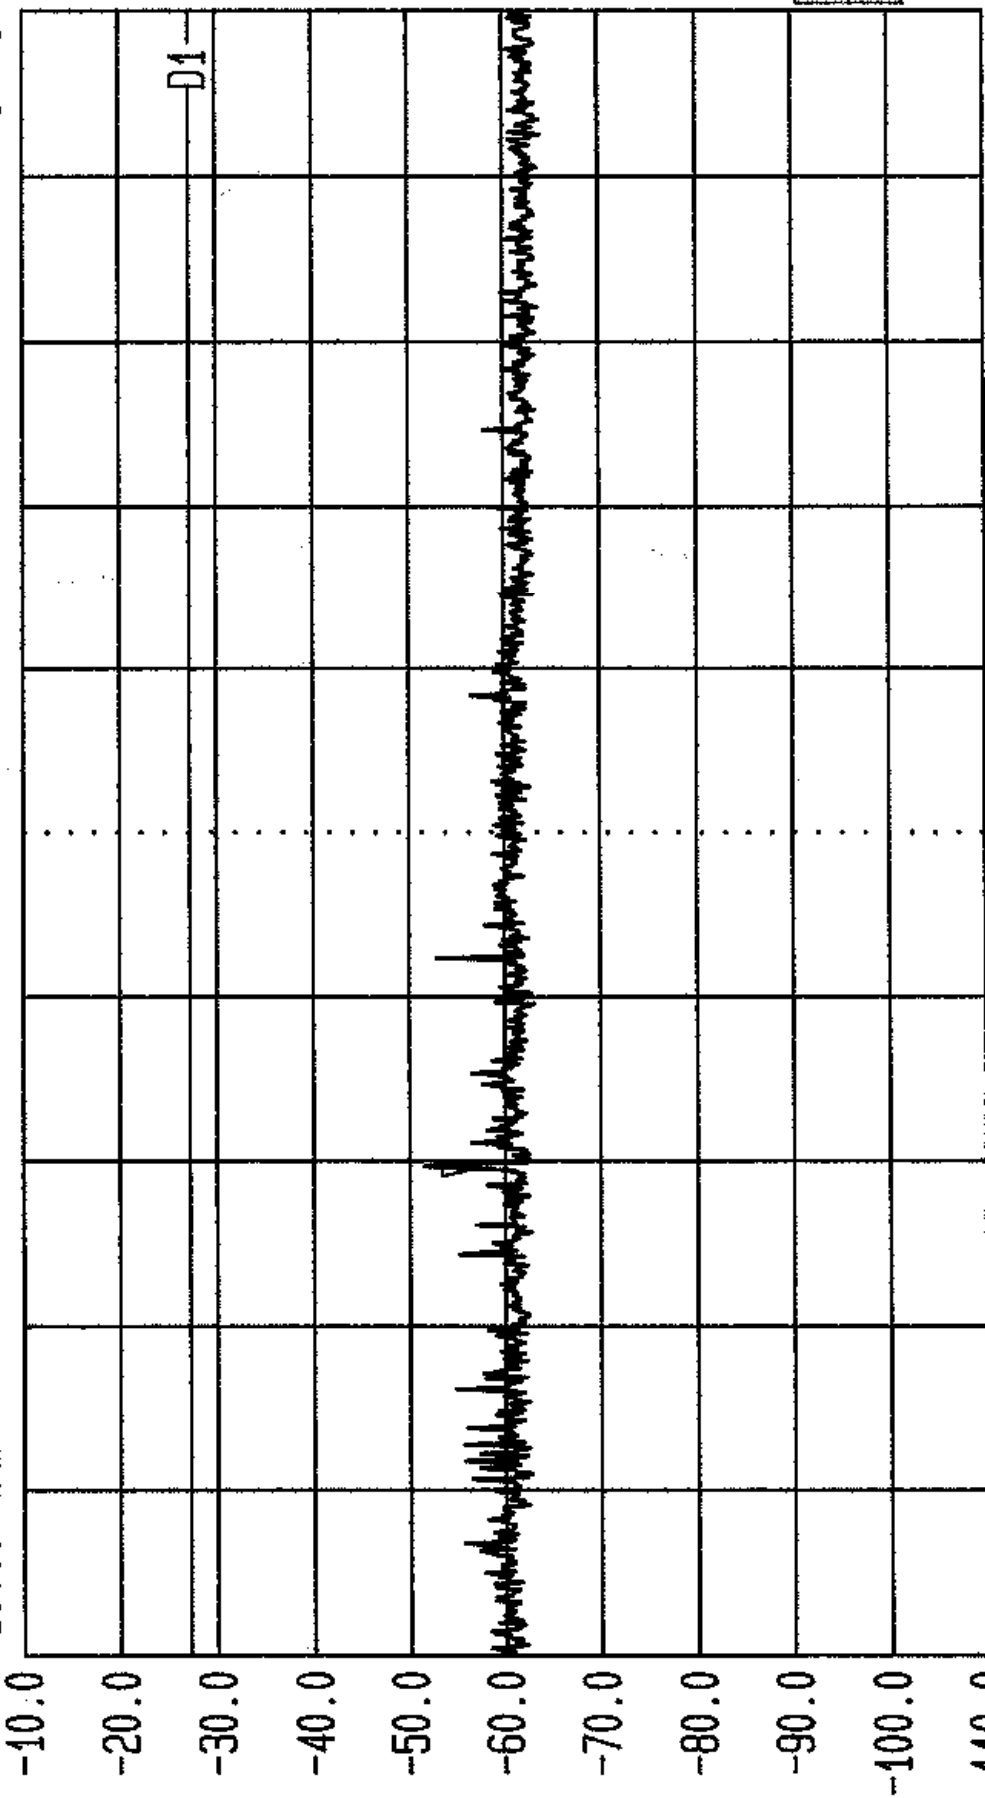

Start 1 GHz
Span 1 GHz
Center 1.5 GHz
Sweep 20 ms
Stop 2 GHz
EUT: AB Access Access Point
GPH/38797/JD01/024
Top Chan.

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.407(b). Tx. 5.725-5.825GHz Band.

PA
10




Date 21.Apr.'99 Time 14:30:09
Ref.Lvl 70.00 dBμV
Marker 45.14 dBμV
3.300 MHz

Res.Bw
TG.Lvl
CF.Stp

9 kHz [imp]
Off
2.955 MHz

Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBμV]

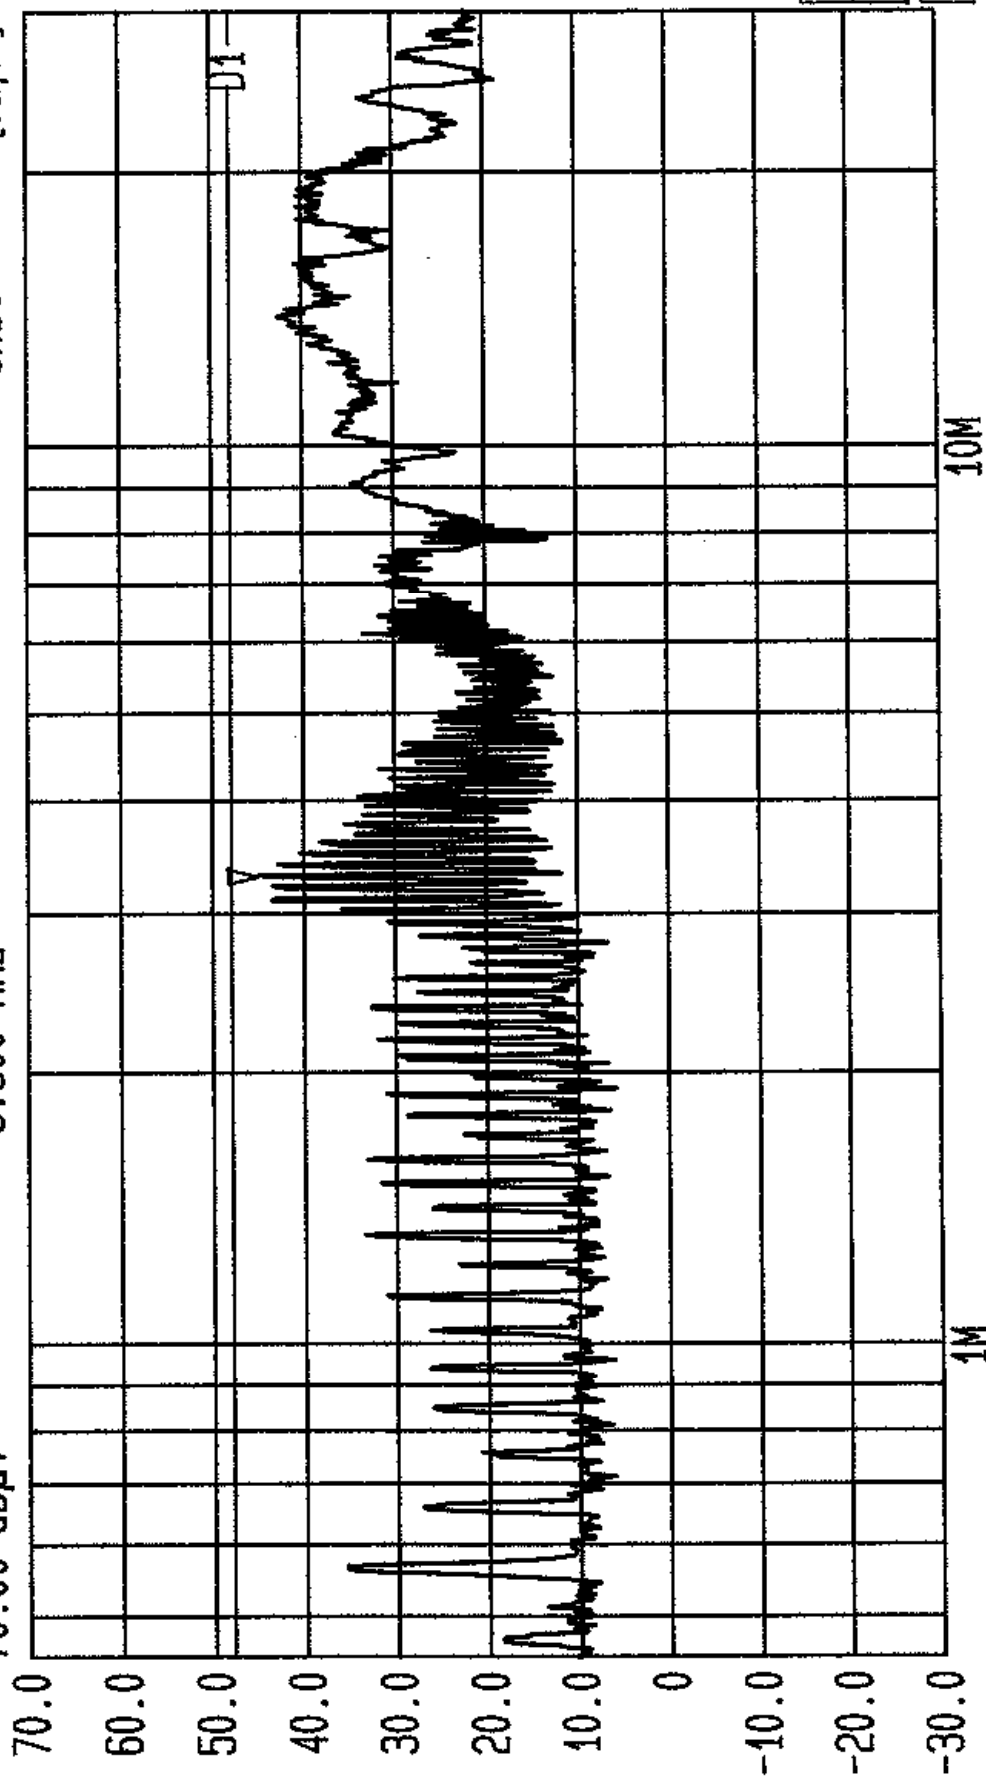

PA
10
FI


Start 450 kHz
Span 29.55 MHz
Center 3.67423 MHz
Sweep 260 ms
Stop 30 MHz

Conducted Live. Tested by RFI for Adaptive Broadband Ltd. EUT AB Access Access Point
Limit. FCC Part 15.407 (b5). Tx/Rx 5.15-5.25GHz Band. Bott Chan. GPH/38797/JD01/025



Date 21.Apr.'99 Time 14:35:23
Ref.Lvl 70.00 dBµV
Marker 46.44 dBµV
3.284 MHz

Res.Bw 9 kHz [imp] Vid.Bw 10 kHz
TG.Lvl Off
CF.Stp 2.955 MHz
RF.Att 10 dB
Unit [dBµV]

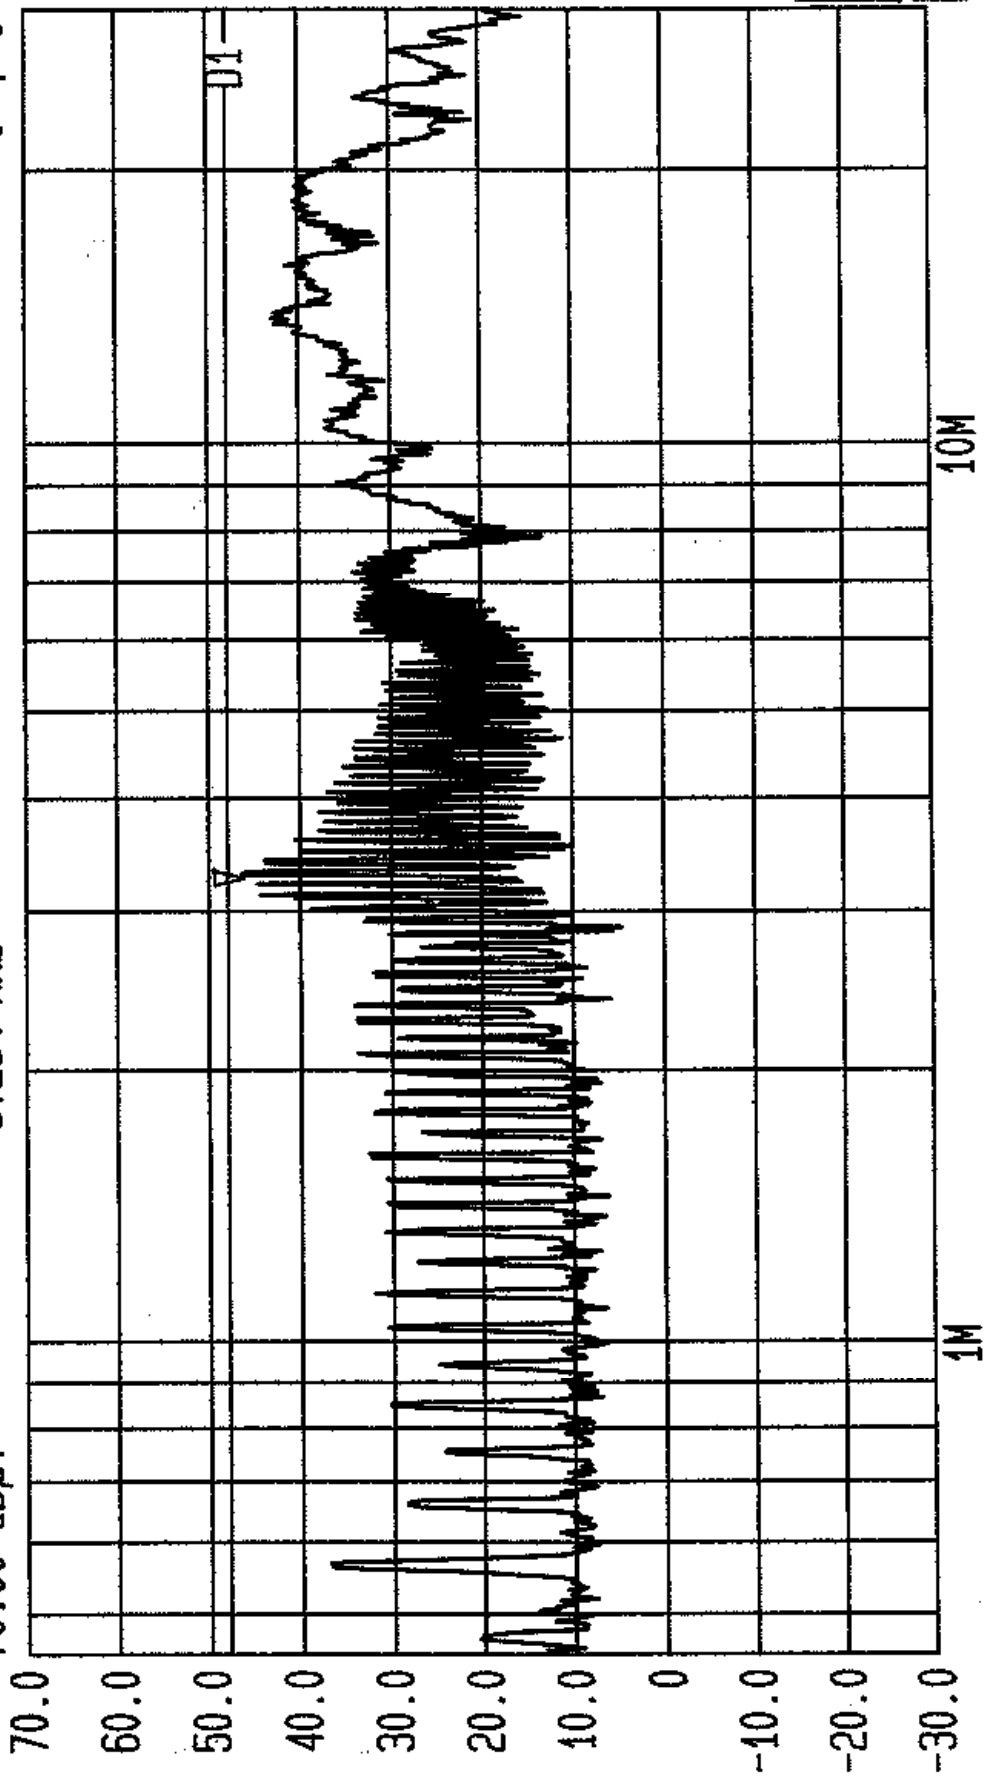


PA
10
FI

Start 450 kHz Stop 30 MHz
Span 29.55 MHz Sweep 260 ms
Center 3.67423 MHz
Conducted Neut. Tested by RFI for Adaptive Broadband Ltd. EUT AB Access Access Point
Limit. FCC Part 15.407 (b5). Tx/Rx 5.15-5.25GHz Band. Batt Chan. GPH/38797/JD01/026



Date 21.Apr.'99 Time 14:43:21
Ref.Lvl 70.00 dBuV
Marker 45.32 dBuV
3.315 MHz

Res.Bw 9 kHz [imp] 10 kHz
TG.Lvl Off
CF.Stp 2.955 MHz
RF.Att 10 dB
Unit [dBuV]

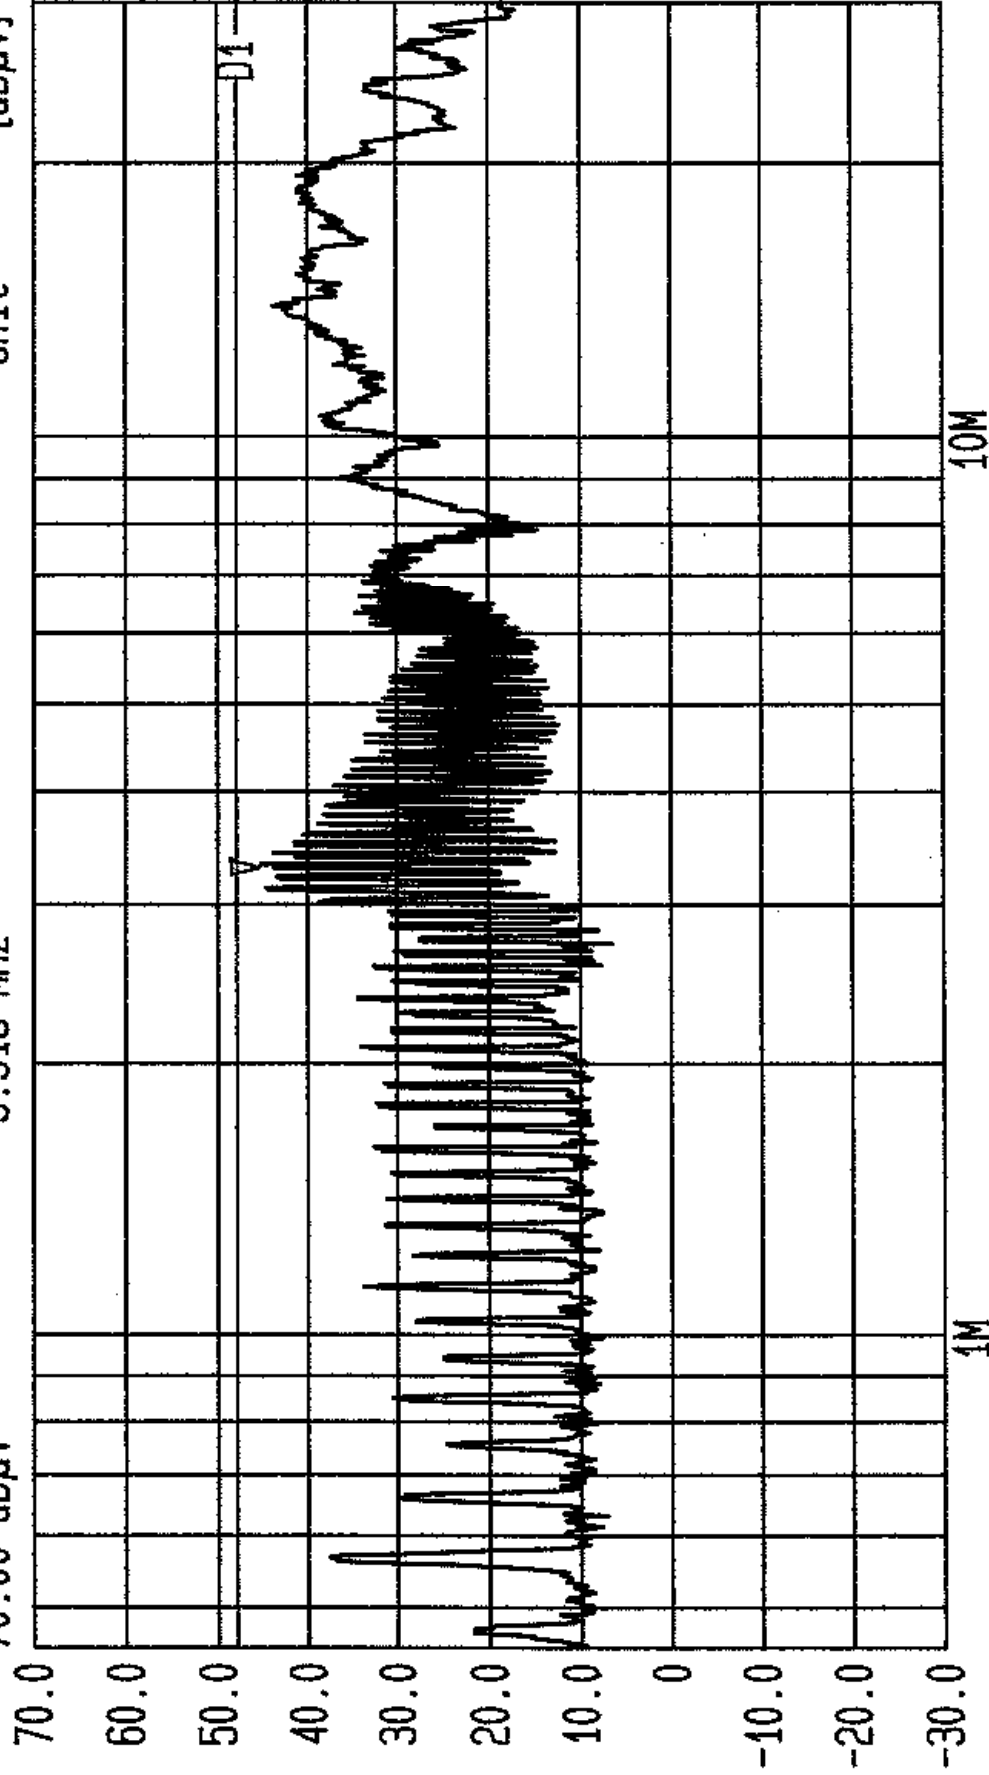


PA
10
FT

Start 450 kHz Stop 30 MHz
Sweep 2.2 s
Center 3.67423 MHz
Span 29.55 MHz
Conducted Neut. Tested by RFI for Adaptive Broadband Ltd. EUT AB Access Access Point
Limit. FCC Part 15.407 (b5) . Tx/Rx 5.15-5.25GHz Band. Top Chan. GPH/38797/JD01/027



Date 21.Apr.'99 Time 14:49:19
Ref.Lvl 70.00 dBuV
Marker 45.04 dBuV
3.315 MHz

Res.Bw 9 kHz [imp]
TG.Lvl off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBuV]

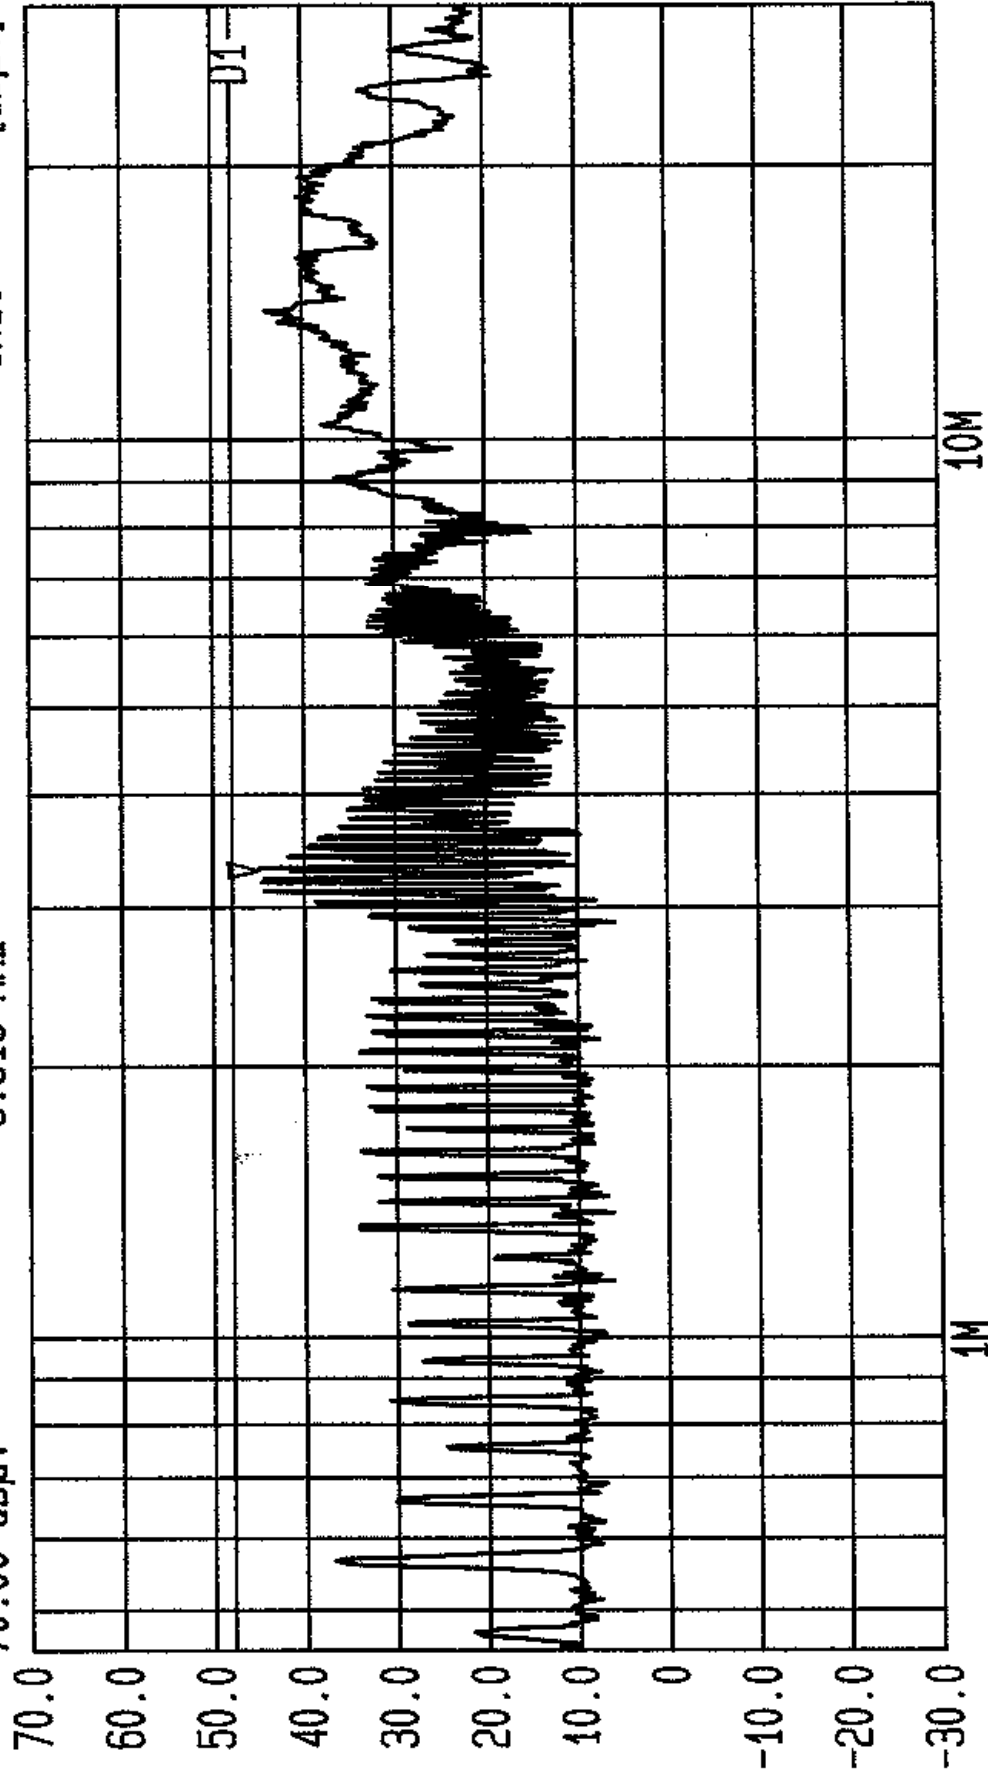

PA
10
FI


Start 450 kHz
Span 29.55 MHz
Center 3.67423 MHz
Sweep 260 ms
Stop 30 MHz

Conducted Live. Tested by RFI for Adaptive Broadband Ltd. EUT AB Access Access Point
Limit. FCC Part 15.407 (b5) . Tx/Rx 5.15-5.25GHz Band. Top Chan. GPH/38797/JD01/028



Date 21.Apr.'99 Time 14:54:50
Ref.Lvl 70.00 dBμV
Marker 45.20 dBμV
3.315 MHz

Res.Bw 9 kHz [imp] 10 kHz
TG.Lvl off
CF.Stp 2.955 MHz
RF.Att 10 dB
Unit [dBμV]

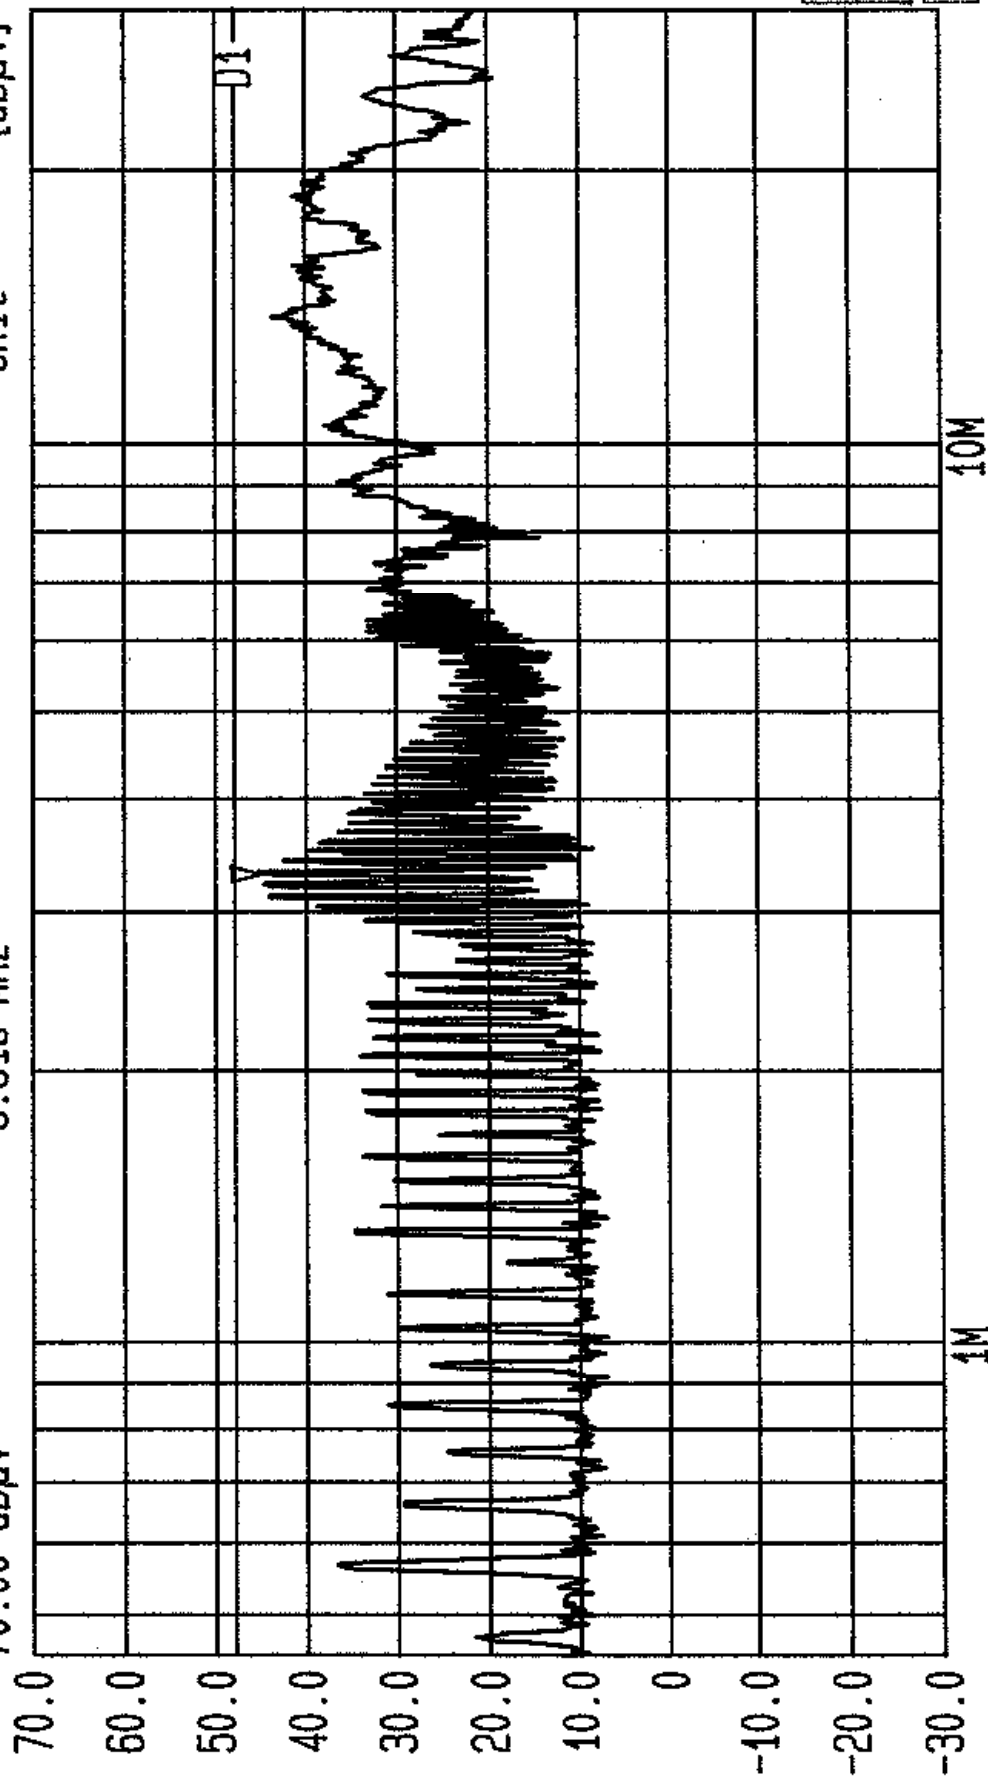


PA
10
FI

Start 450 kHz Stop 30 MHz
Span 29.55 MHz Center 3.67423 MHz Sweep 2.2 s
Conducted Live. Tested by RFI for Adaptive Broadband Ltd. EUT AB Access Access Point
Limit. FCC Part 15.407 (b5). Tx/Rx 5.25-5.35GHz Band. Bott Chan. 6PH/38797/JD01/029



Date 21.Apr.'99 Time 14:59:47
Ref.Lvl 70.00 dBuV
Marker 46.34 dBuV
3.315 MHz

Res.Bw 9 kHz [imp]
TG.Lvl Off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBuV]

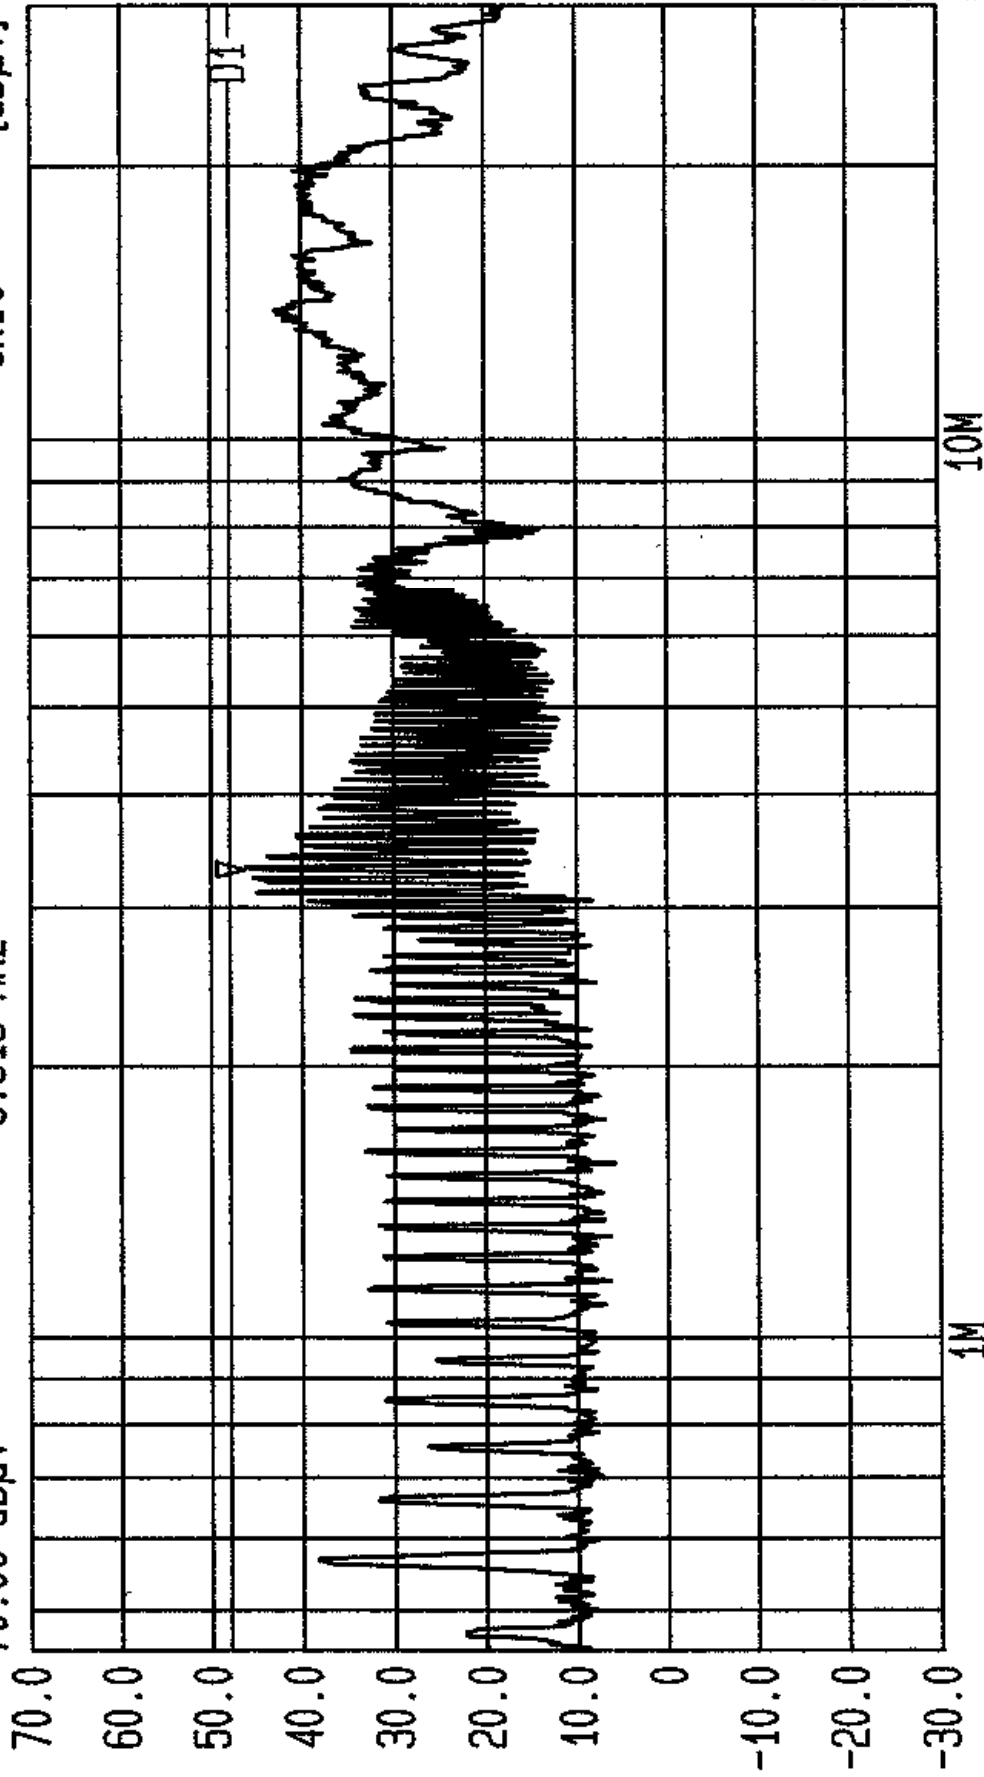


PA
10
FI

Start 450 kHz Stop 30 MHz
Sweep 2.2 s
Center 3.67423 MHz
Span 29.55 MHz
Conducted Neut. Tested by RFI for Adaptive Broadband Ltd. EUT AB Access Access Point
Limit. FCC Part 15.407 (b5). Tx/Rx 5.25-5.35GHz Band. Bott Chan. GPH/38797/JD01/030



Date 21.Apr.'99 Time 15:08:54
Ref.Lvl 70.00 dBμV
Marker 46.41 dBμV
3.315 MHz

Res.Bw 9 kHz [imp]
TG.Lvl Off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBμV]

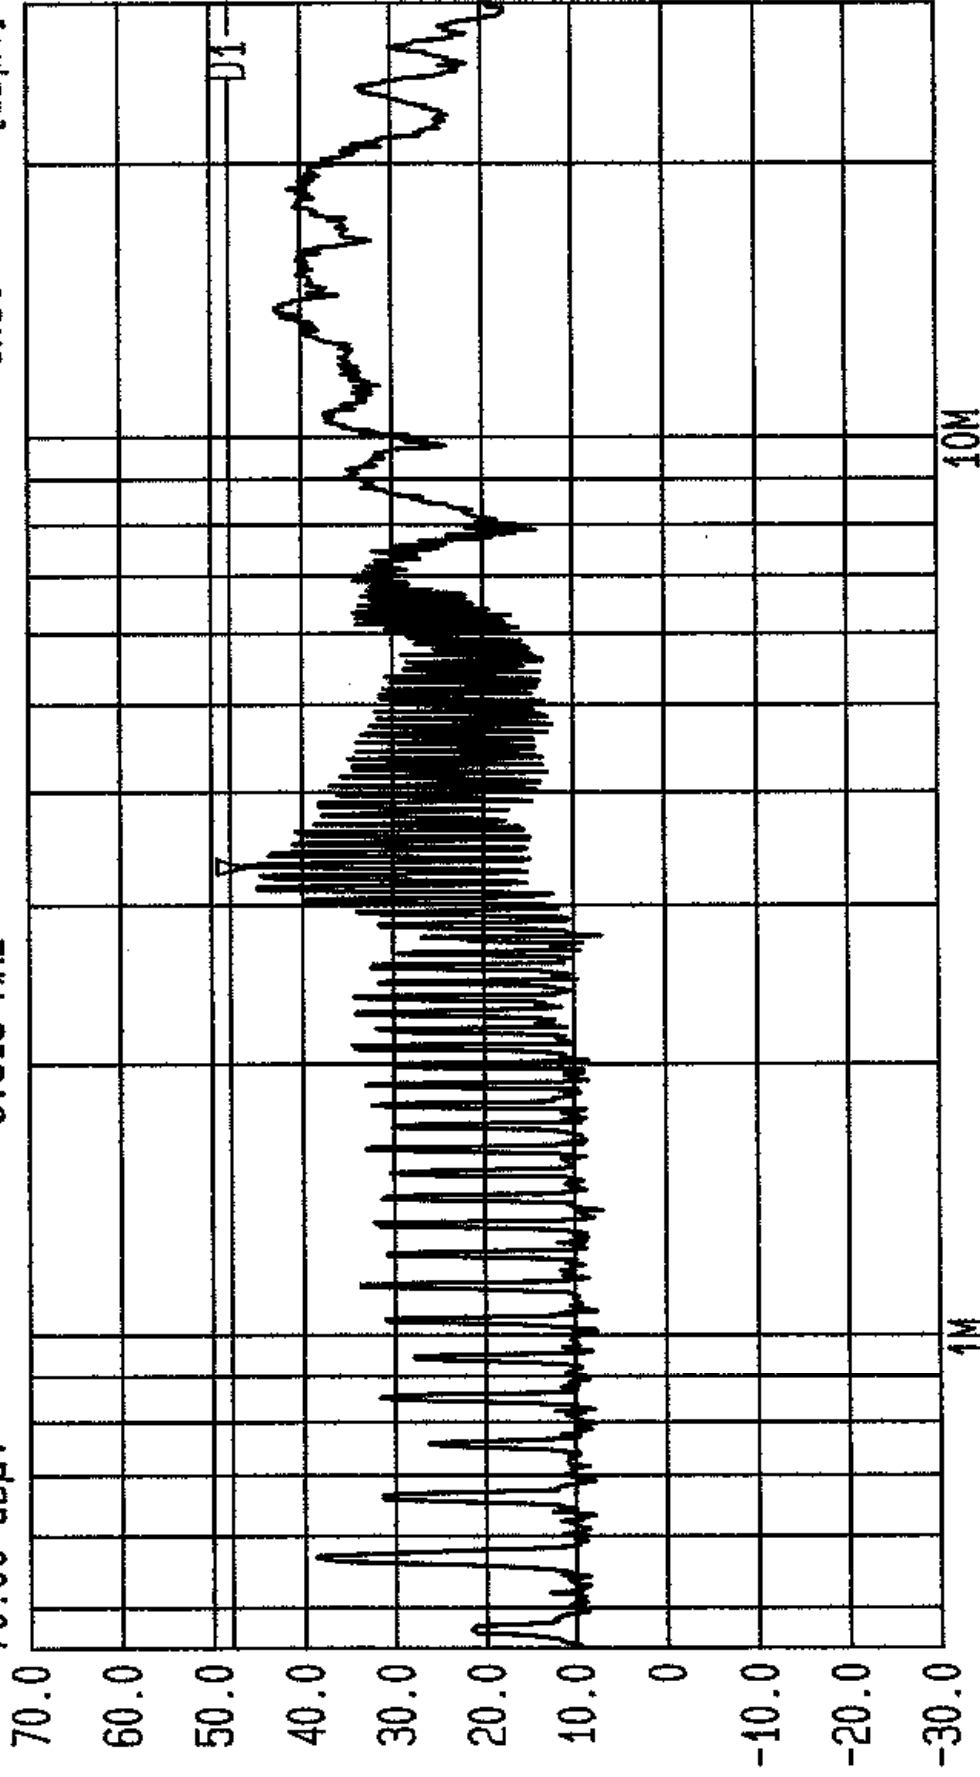


PA
10
FI

Start 450 kHz Stop 30 MHz
Span 29.55 MHz Sweep 2.2 s
Center 3.67423 MHz
Conducted Neut. Tested by RFI for Adaptive Broadband Ltd. EUT AB Access Access Point
Limit. FCC Part 15.407 (b5). Tx/Rx 5.25-5.35GHz Band. Top Chan. GPH/38797/JD01/031



Date 21.Apr.'99 Time 15:13:26
Ref.Lvl 70.00 dBuV
Marker 45.32 dBuV
3.315 MHz

Res.BW 9 kHz [imp]
TG.Lvl Off
CF.Stp 2.955 MHz
Vid.BW 10 kHz
RF.Att 10 dB
Unit [dBuV]

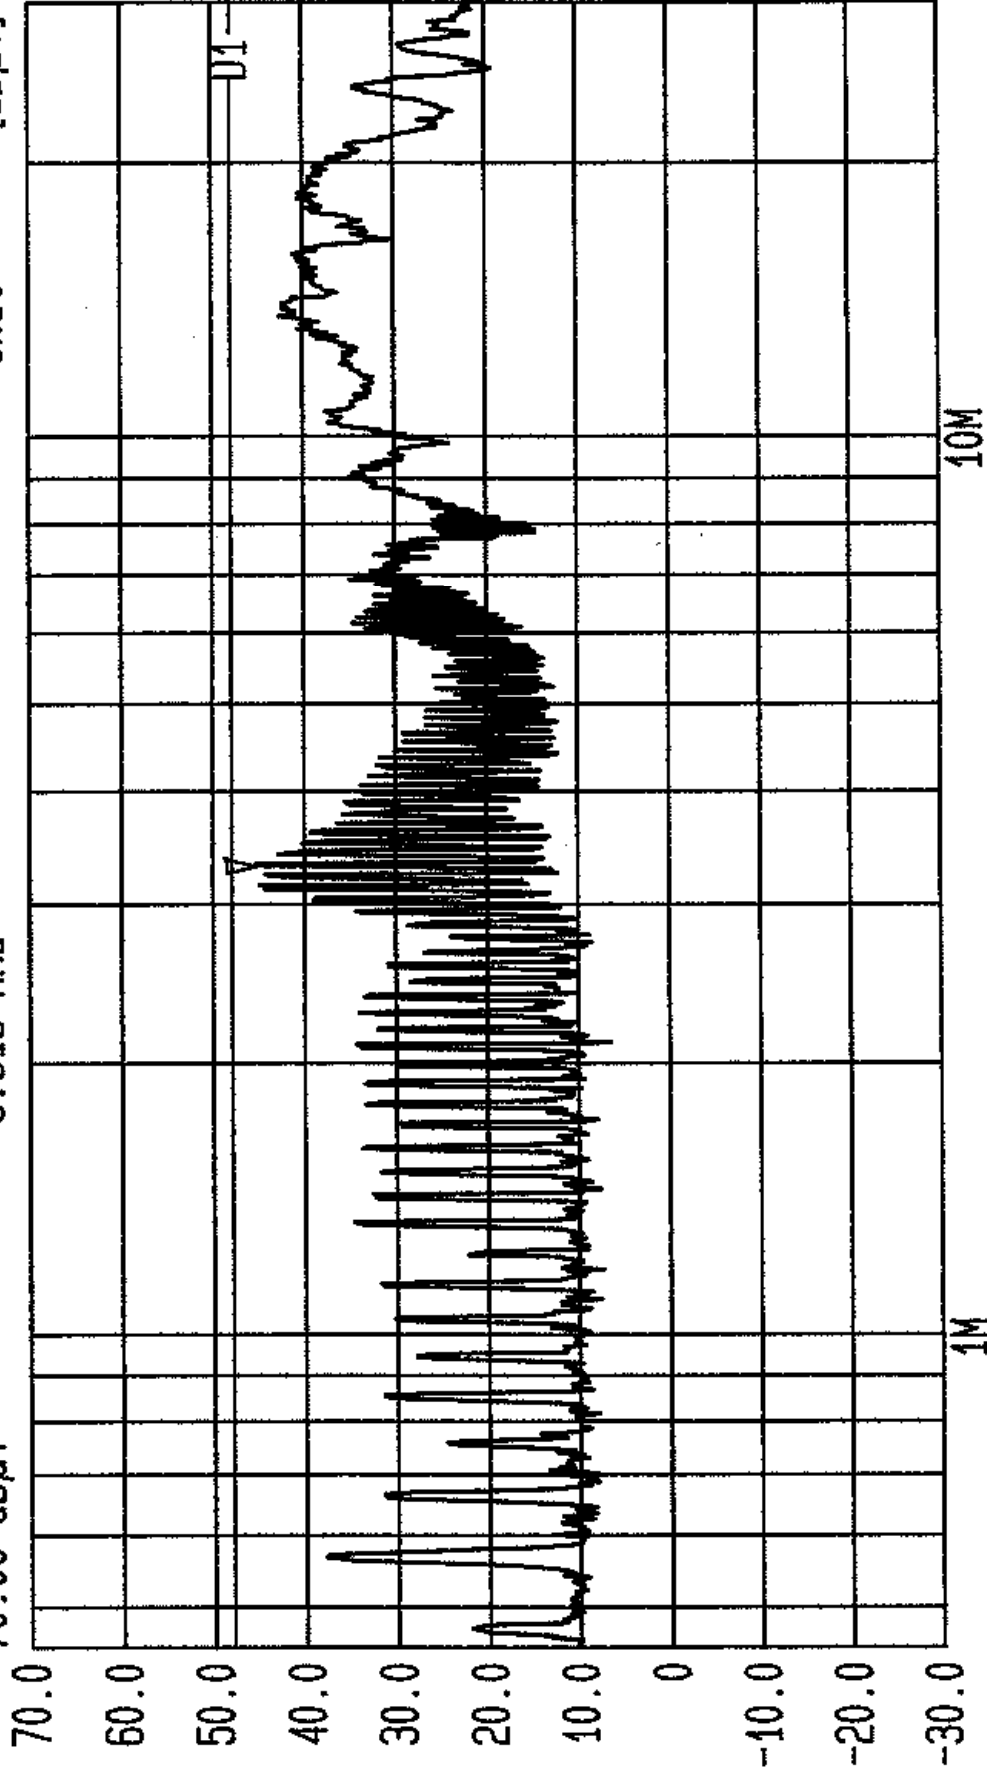


PA
10
FI

Start 450 kHz Stop 30 MHz
Span 29.55 MHz Sweep 2.2 s
Center 3.67423 MHz
Conducted Live. Tested by RFI for Adaptive Broadband Ltd. EUT AB Access Access Point
Limit. FCC Part 15.407 (b5). Tx/Rx 5.25-5.35GHz Band. Top Chan. GPH/38797/JD01/032



Date 21.Apr.'99 Time 15:17:55
Ref.Lvl 70.00 dBuV
Marker 45.22 dBuV
3.315 MHz

Res.Bw 9 kHz [imp]
TG.Lvl Off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBuV]

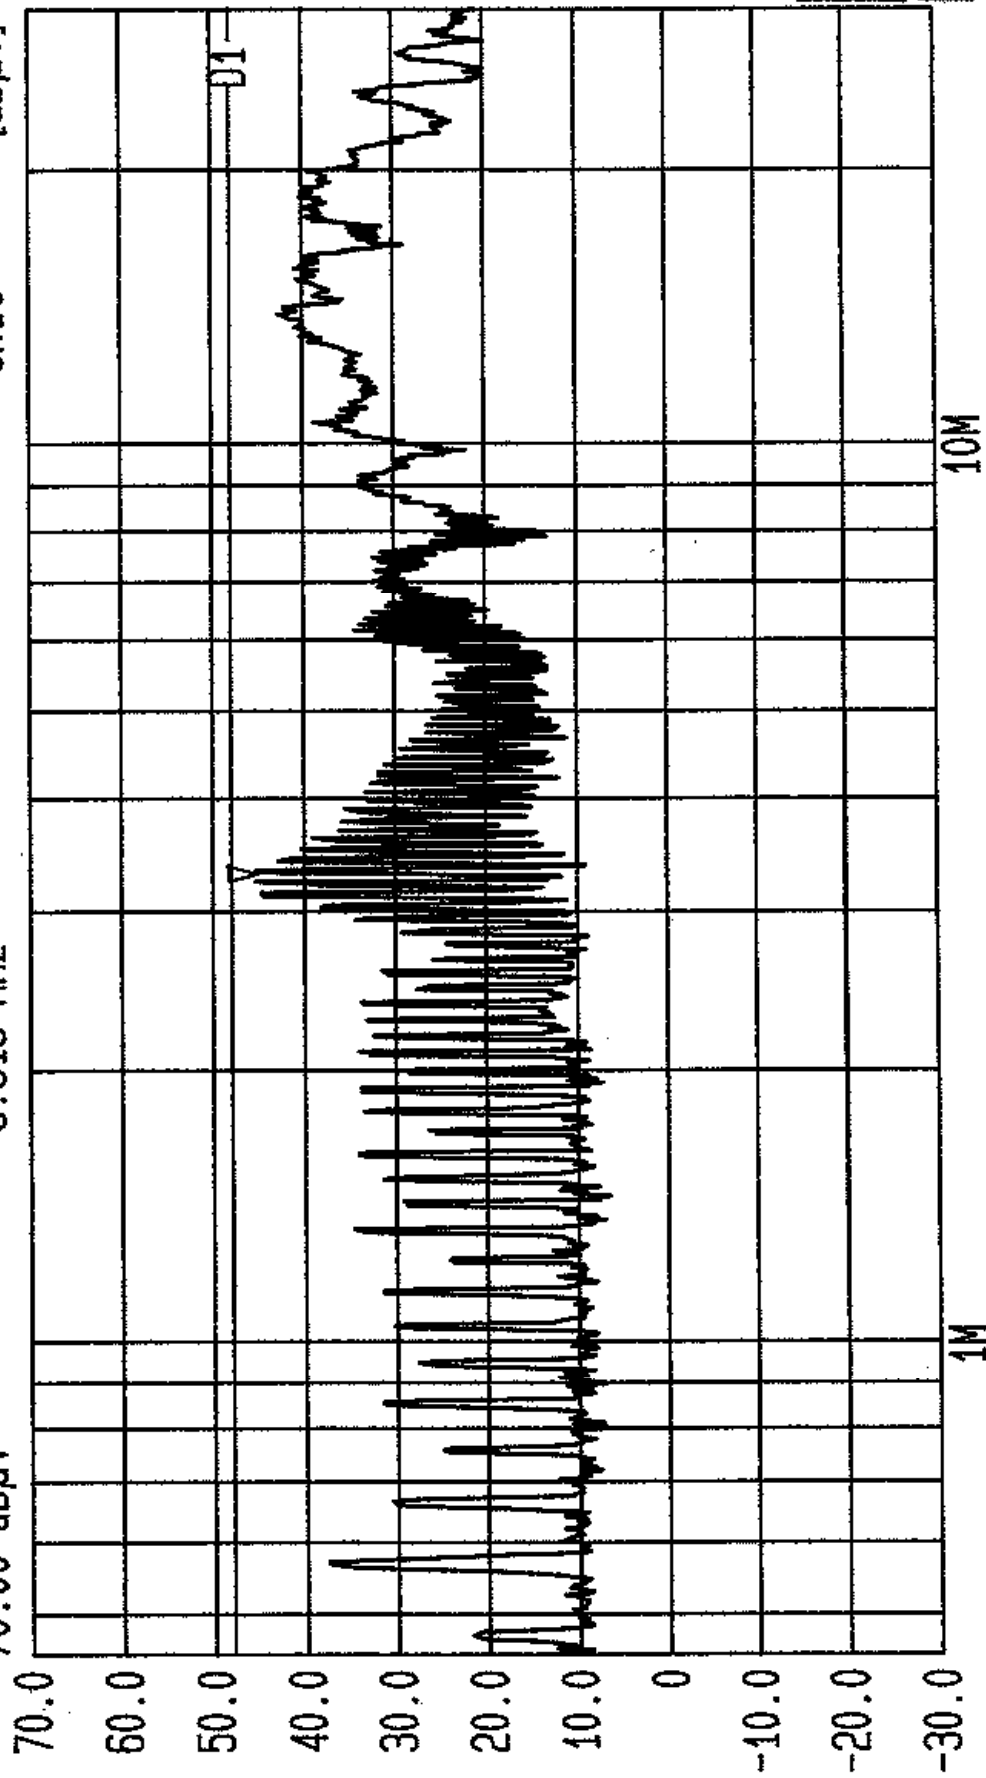


PA
10
FI

Start 450 kHz Stop 30 MHz
Sweep 2.2 s
Center 3.67423 MHz
Span 29.55 MHz
Conducted Live: Tested by RFI for Adaptive Broadband Ltd. EUT AB Access Access Point
Limit. FCC Part 15.407 (b5) . Tx/Rx 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/033



Date 21.Apr.'99 Time 15:26:58
Ref.Lvl 70.00 dBuV
Marker 46.57 dBuV
3.300 MHz

Res.Bw 9 kHz [imp]
TG.Lvl off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBuV]

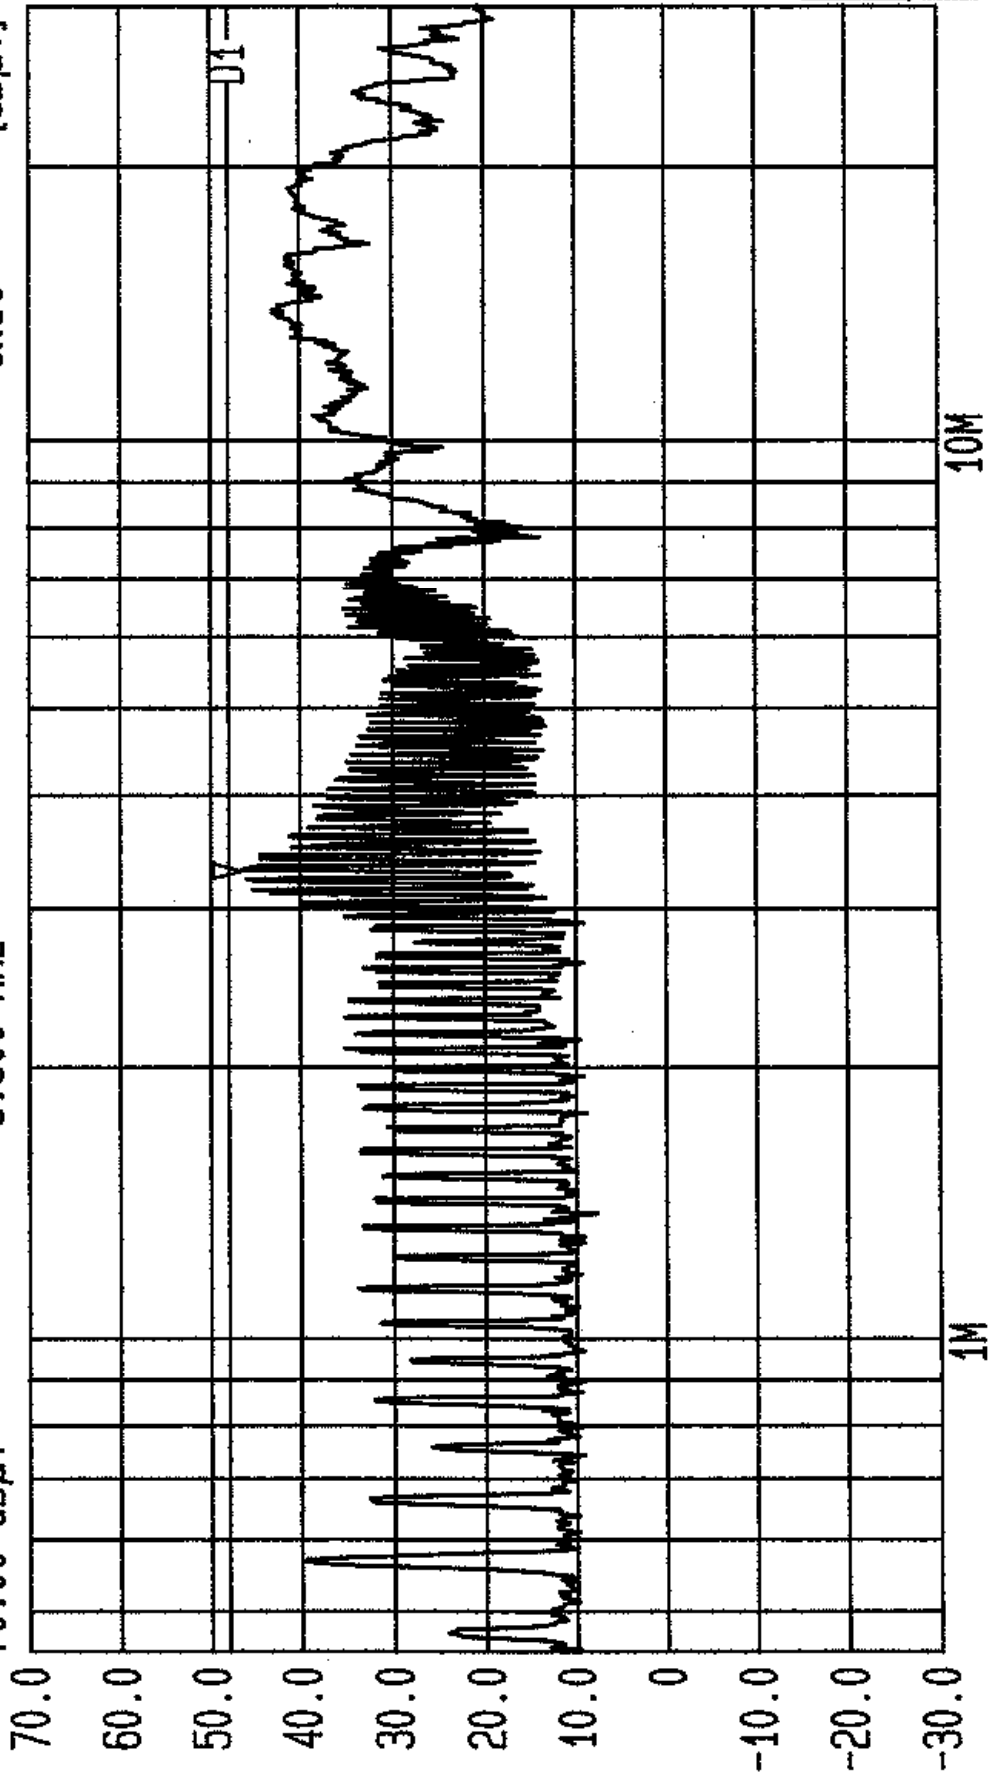


PA
10
FI

Start 450 kHz Stop 30 MHz
Span 29.55 MHz Sweep 2.2 s
Center 3.67423 MHz
Conducted Neut. Tested by RFI for Adaptive Broadband Ltd. EUT AB Access Access Point
Limit. FCC Part 15.407 (b5) . Tx/Rx 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/034



Date 21.Apr.'99 Time 15:42:19
Ref.Lvl 70.00 dBuV
Marker 46.57 dBuV
3.331 MHz

Res.BW 9 kHz [imp]
TG.Lvl Off
CF.Stp 2.955 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBuV]

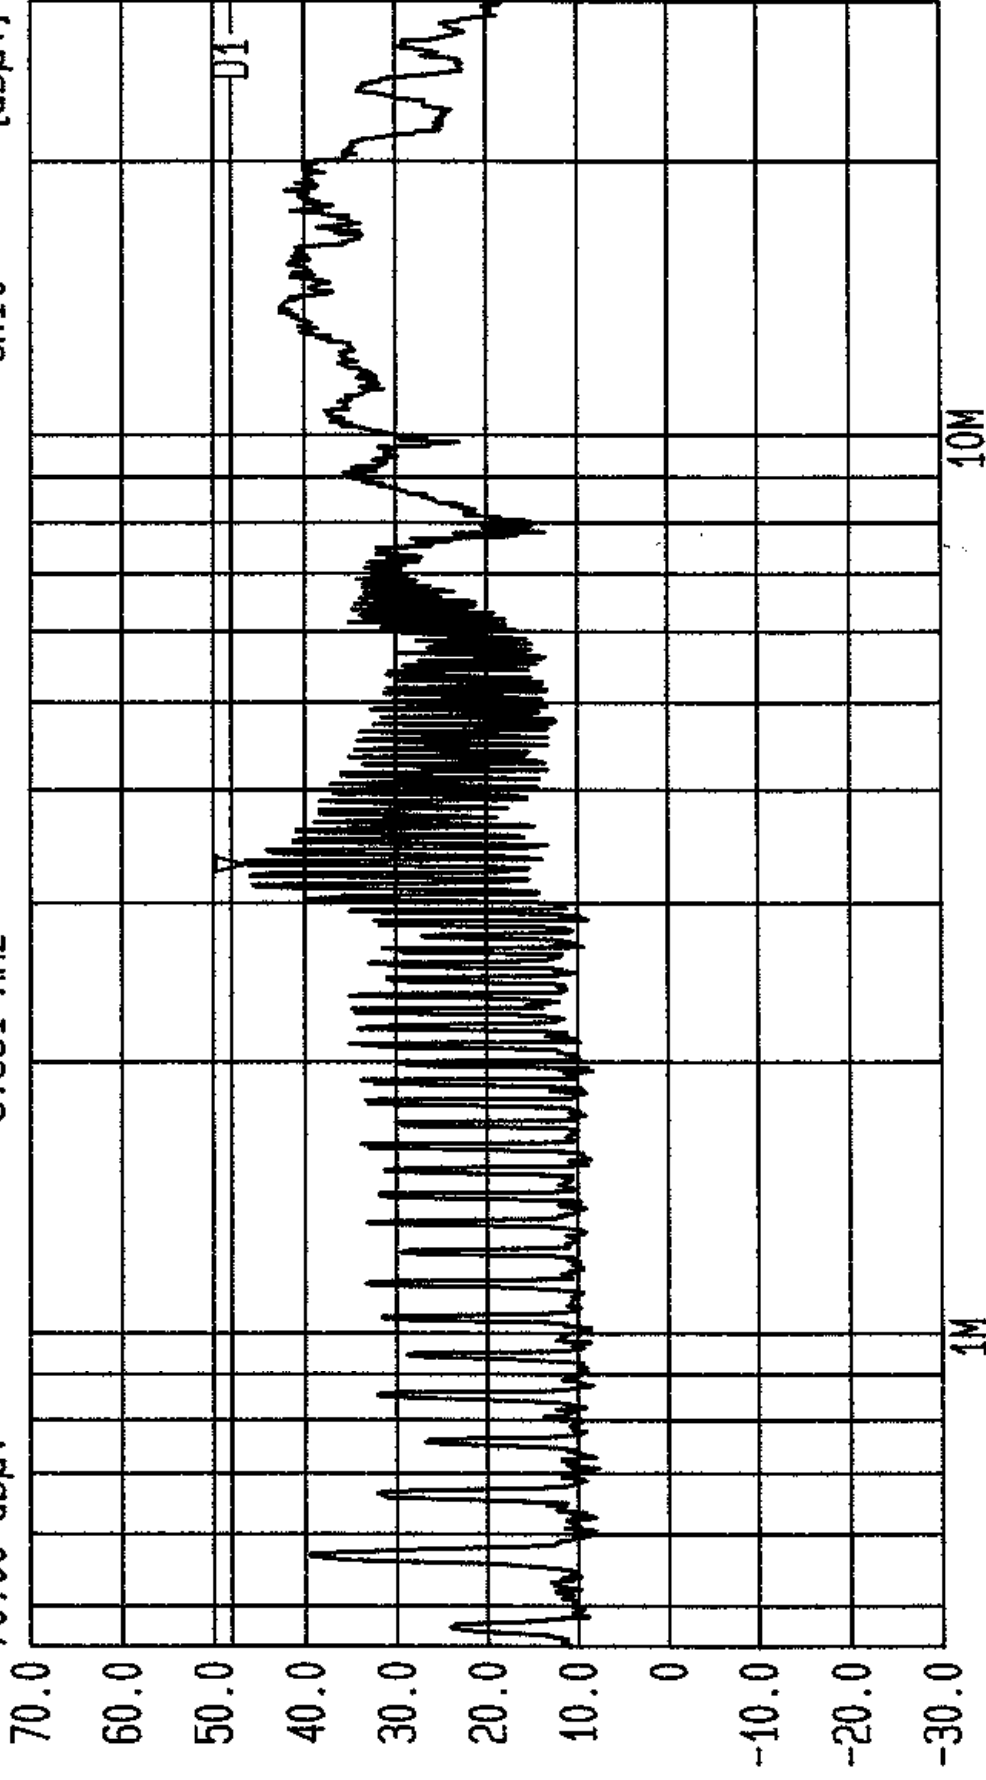


PA
10
FI

Start 450 kHz Stop 30 MHz
Span 29.55 MHz Sweep 2.2 s
Center 3.67423 MHz
Conducted Neut. Tested by RFI for Adaptive Broadband Ltd. EUT AB Access Access Point
Limit. FCC Part 15.407 (b5). Tx/Rx 5.725-5.825GHz Band. Top Chan. GPH/38797/JD01/035



Date 21.Apr.'99 Time 15:46:13
Ref.Lvl 70.00 dBuV
Marker 45.45 dBuV
3.328 MHz

Res.Bw 9 kHz [imp]
T6.Lvl off
CF.Stp 2.961 MHz
Vid.Bw 10 kHz
RF.Att 10 dB
Unit [dBuV]

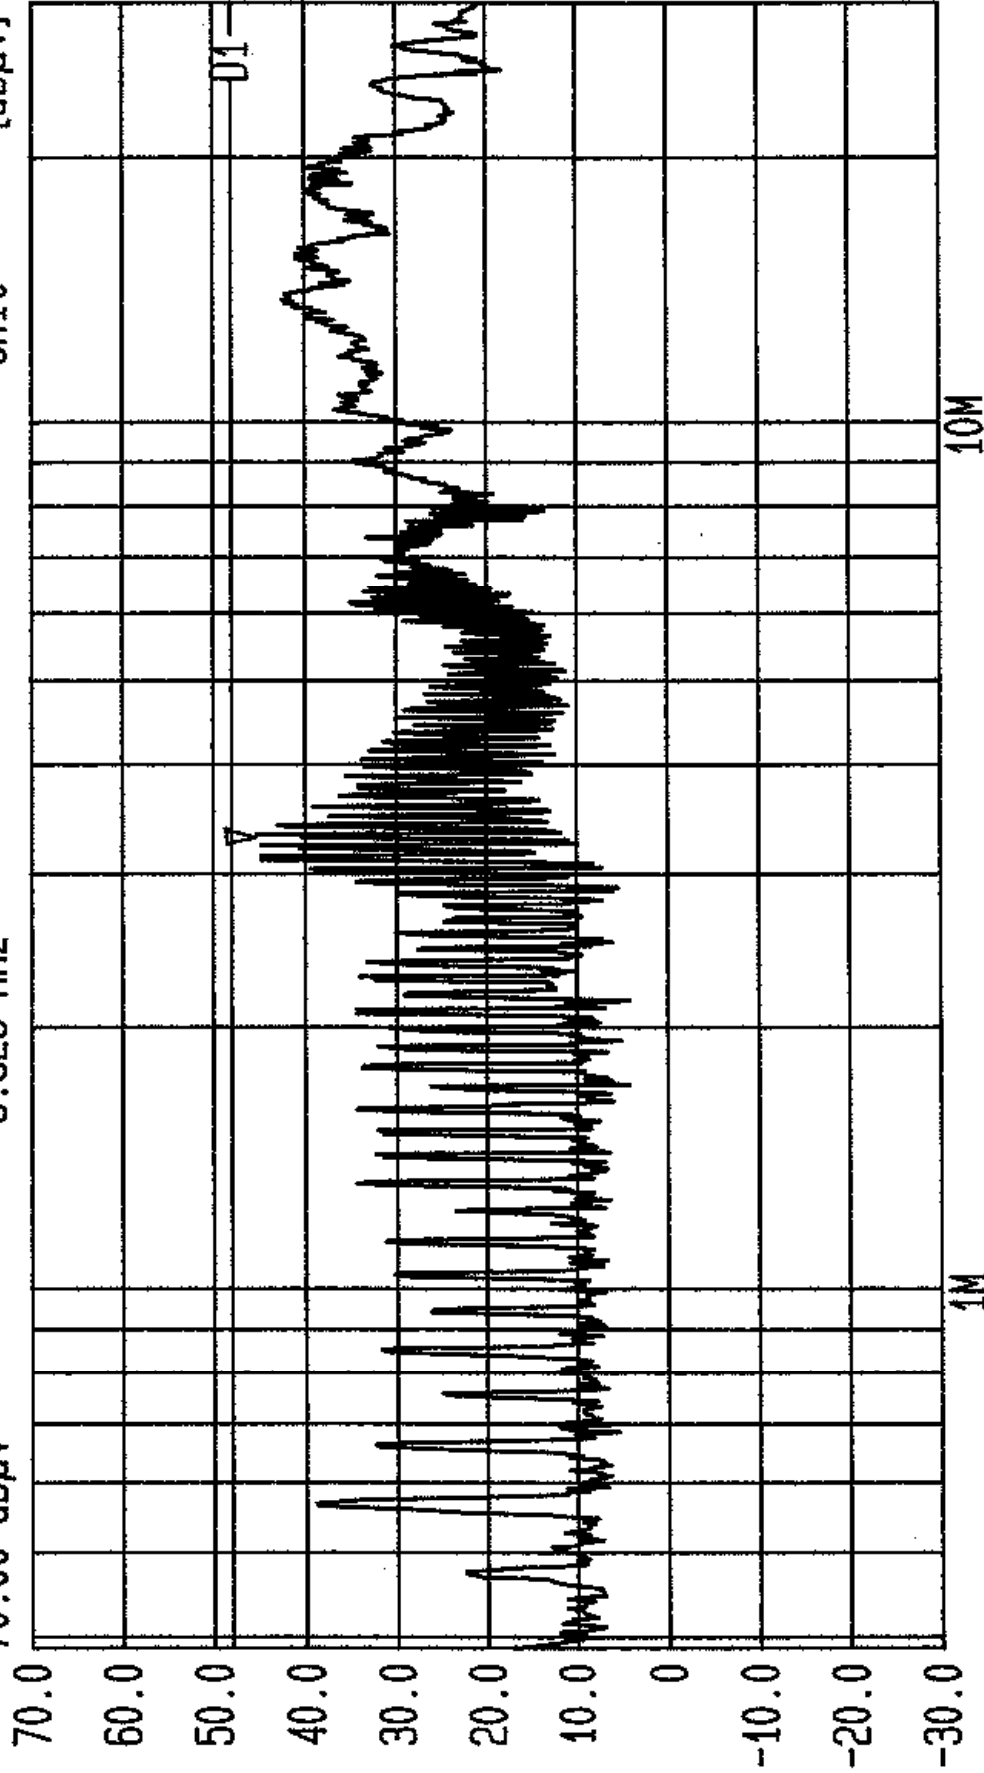

Start 387.5 kHz Stop 30 MHz
Span 29.61 MHz Sweep 240 ms
Center 3.40954 MHz
Conducted Live. Tested by RFI for Adaptive Broadband Ltd. EUT AB Access Access Point
Limit. FCC Part 15.407 (b5). Tx/Rx 5.725-5.825GHz Band. Top Chan. GPH/38797/JD01/036


PA
10
FI

20.0.0.0.0.0



Date 21.Apr.'99 Time 16:14:46
Ref.Lvl 70.00 dBx
Marker 52.41 dBx
579.5 MHz

Res.Bw 120 kHz [imp]
TG.Lvl Off
CF.Stp 97.000 MHz
Vid.Bw 100 kHz
RF.Att 0 dB
Unit [dBuV/m]

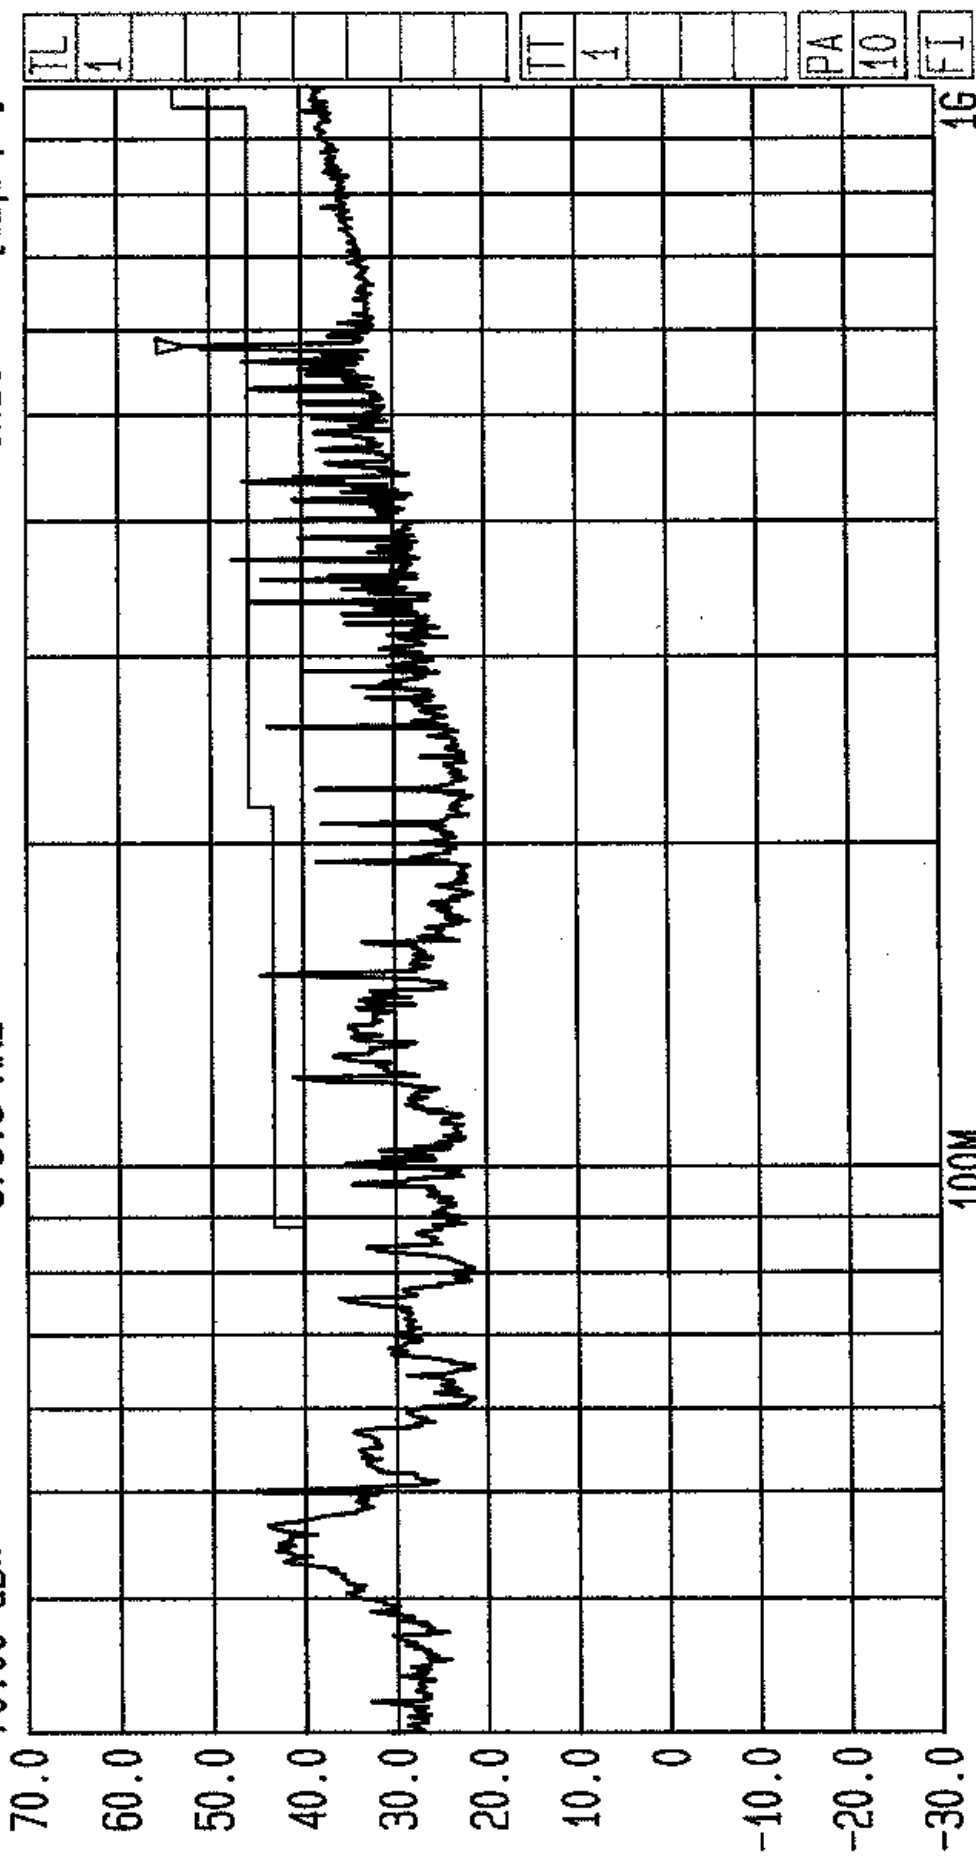


Start 30 MHz
Span 970 MHz
Center 173.2 MHz
Sweep 80 ms
Stop 1 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.407 (b5). Tx/Rx 5.15-5.25GHz Band.
EUT AB Access Access Point
Bott Chan. GPH/38797/JD01/037



Date 21.Apr.'99 Time 16:38:48
Ref.Lvl 70.00 dB*
Marker 45.45 dB*
575.0 MHz

Res.BW 120 kHz [imp] Vid.BW 100 kHz
TG.Lvl Off
CF.Stp 97.000 MHz RF.Att 0 dB
Unit [dBμV/m]

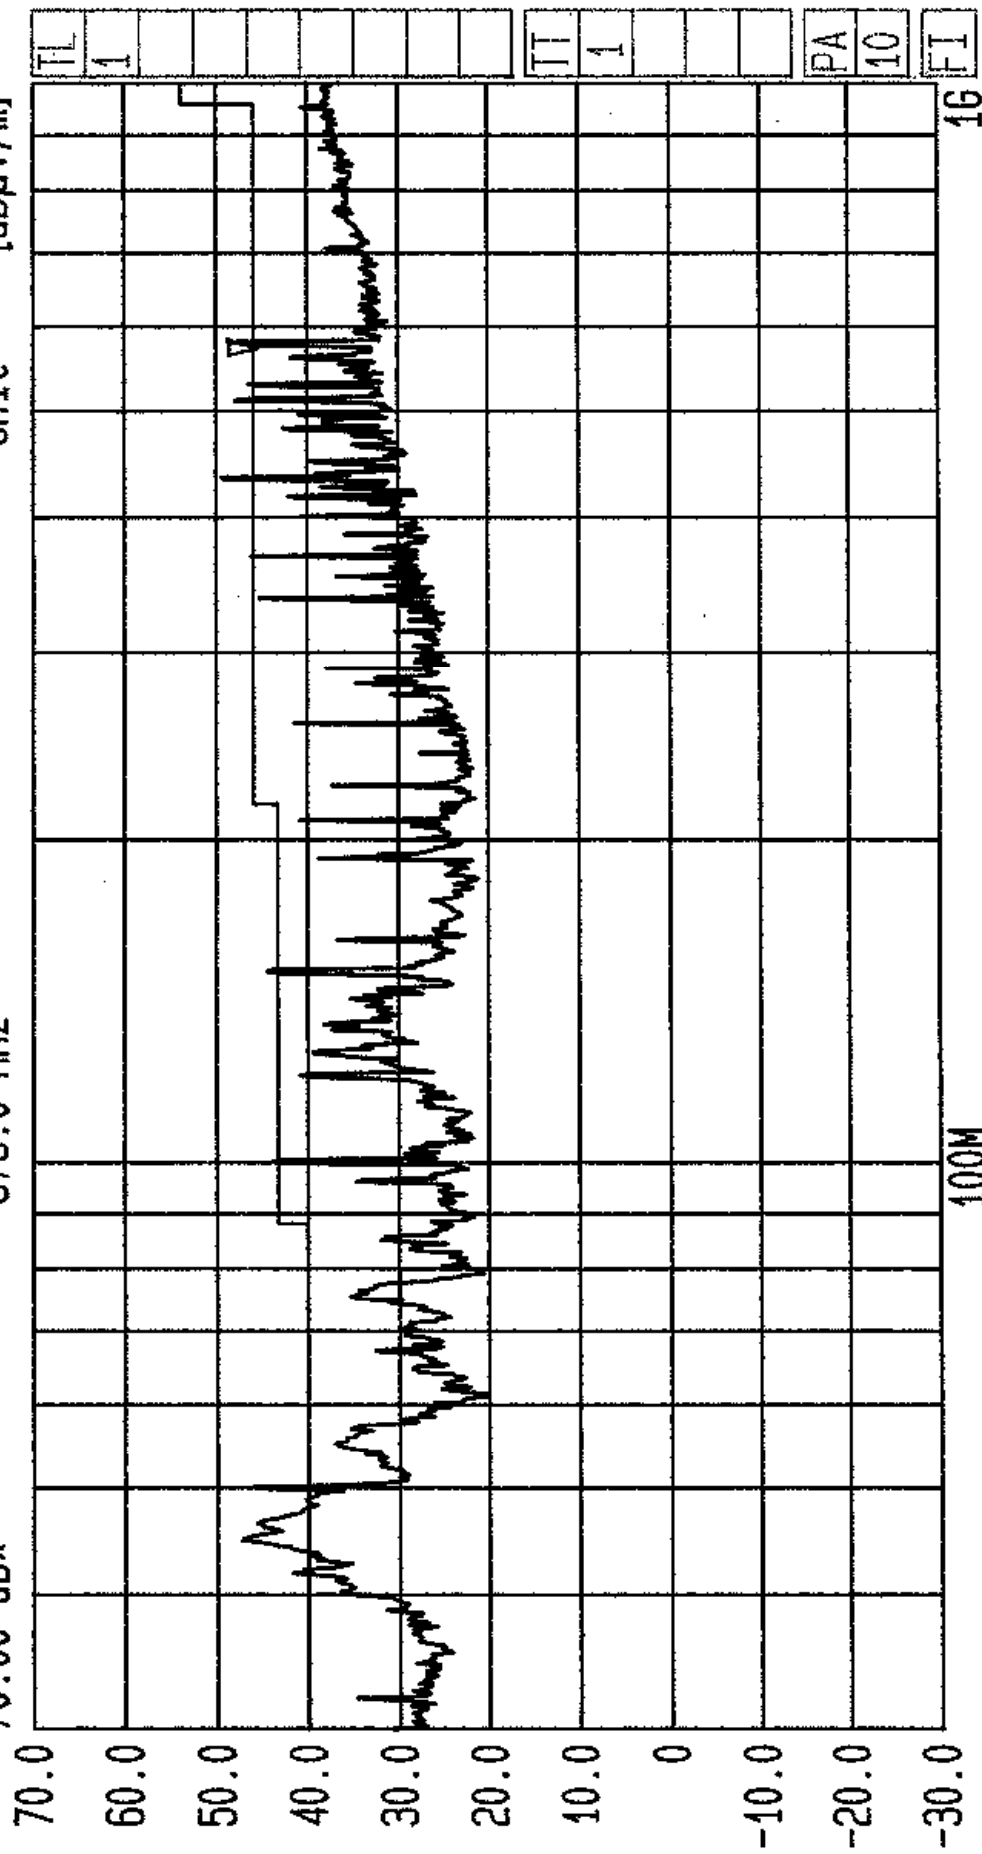


Start 30 MHz Span 970 MHz Center 173.2 MHz Sweep 380 ms Stop 1 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.407 (b5). Tx/Rx 5.15-5.25GHz Band. Top Chan. GPH/38797/JD01/038



Date 21.Apr.'99 Time 16:53:48
Ref.Lvl 70.00 dB*
Marker 24.22 dB*
247.8 MHz

Res.Bw 120 kHz [imp]
TG.Lvl Off
CF.Stp 97.000 MHz
Vid.Bw 100 kHz
RF.Att 0 dB
Unit [dBμV/m]

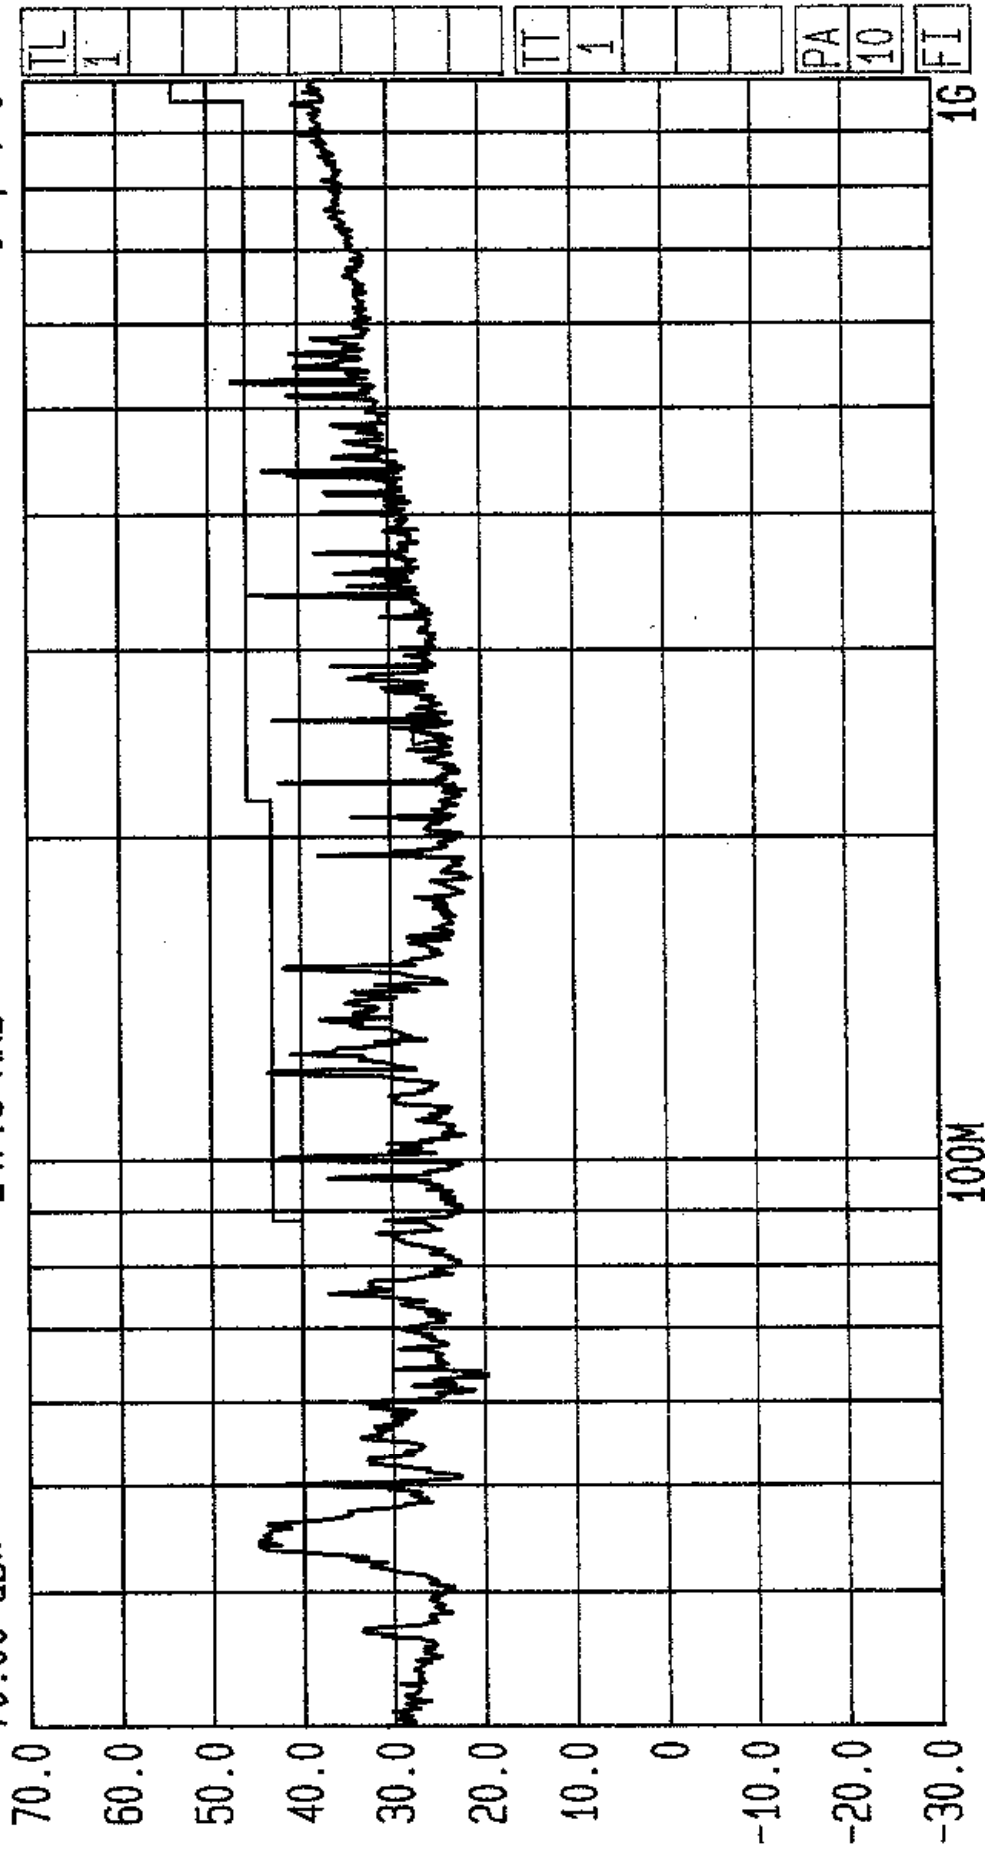


Start 30 MHz
Span 970 MHz
Center 173.2 MHz
Sweep 80 ms
Stop 1 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.407 (b5). Tx/Rx 5.25-5.35GHz Band. EUT AB Access Access Point
Bott Chan. GPH/38797/JD01/039



Date 21.Apr.'99 Time 17:28:05
Ref.Lvl 70.00 dB*
Marker 50.58 dB*
527.8 MHz

Res.Bw 120 kHz [imp]
TG.Lvl Off
CF.Stp 97.000 MHz
Vid.Bw 100 kHz
RF.Att 0 dB
Unit [dBuV/m]

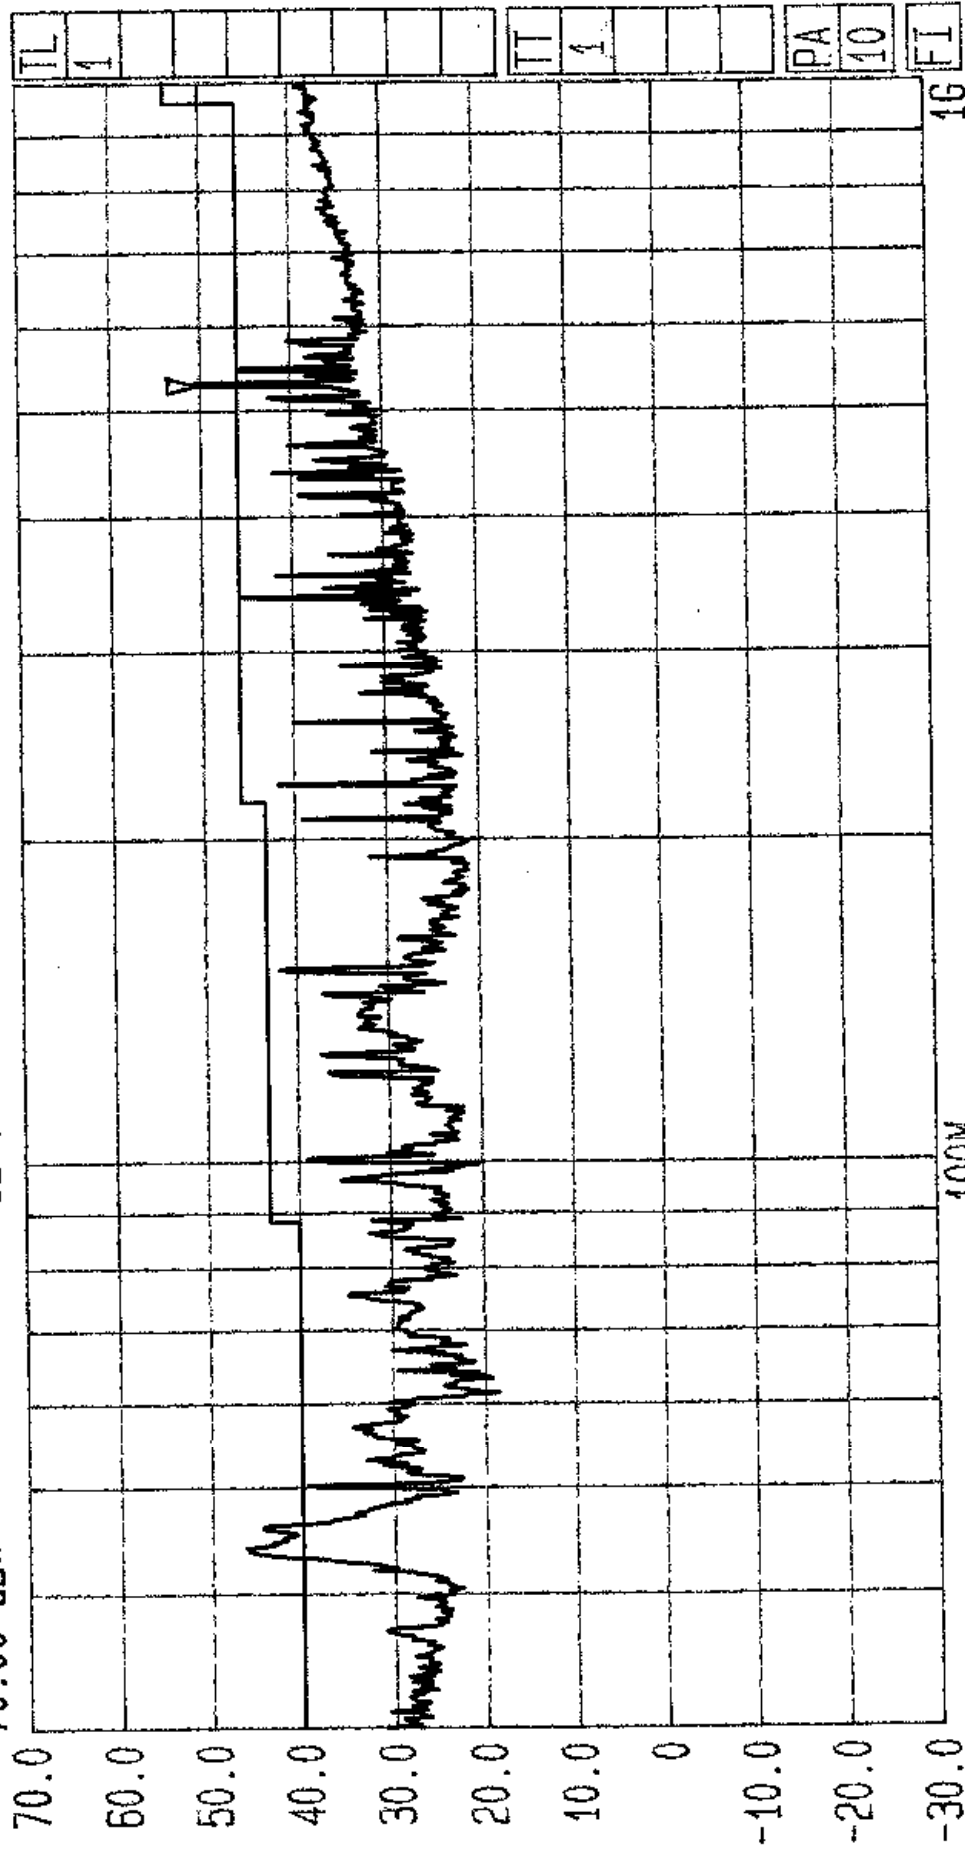

Start 30 MHz
Span 970 MHz
Center 173.2 MHz
Sweep 380 ms
Stop 1 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.407 (b5). Tx/Rx 5.25-5.35GHz Band.
EUT AB Access Access Point
Top Chan. GPH/38797/JD01/040



Date 21.Apr.'99 Time 17:45:28

Ref.Lvl 70.00 dBx

Marker 50.71 dBx

527.8 MHz

Res.Bw 120 kHz [imp]


TG.Lvl Off

CF.Stp 97.000 MHz

RF.Att 0 dB

Unit [dBμV/m]

Vid.Bw 100 kHz

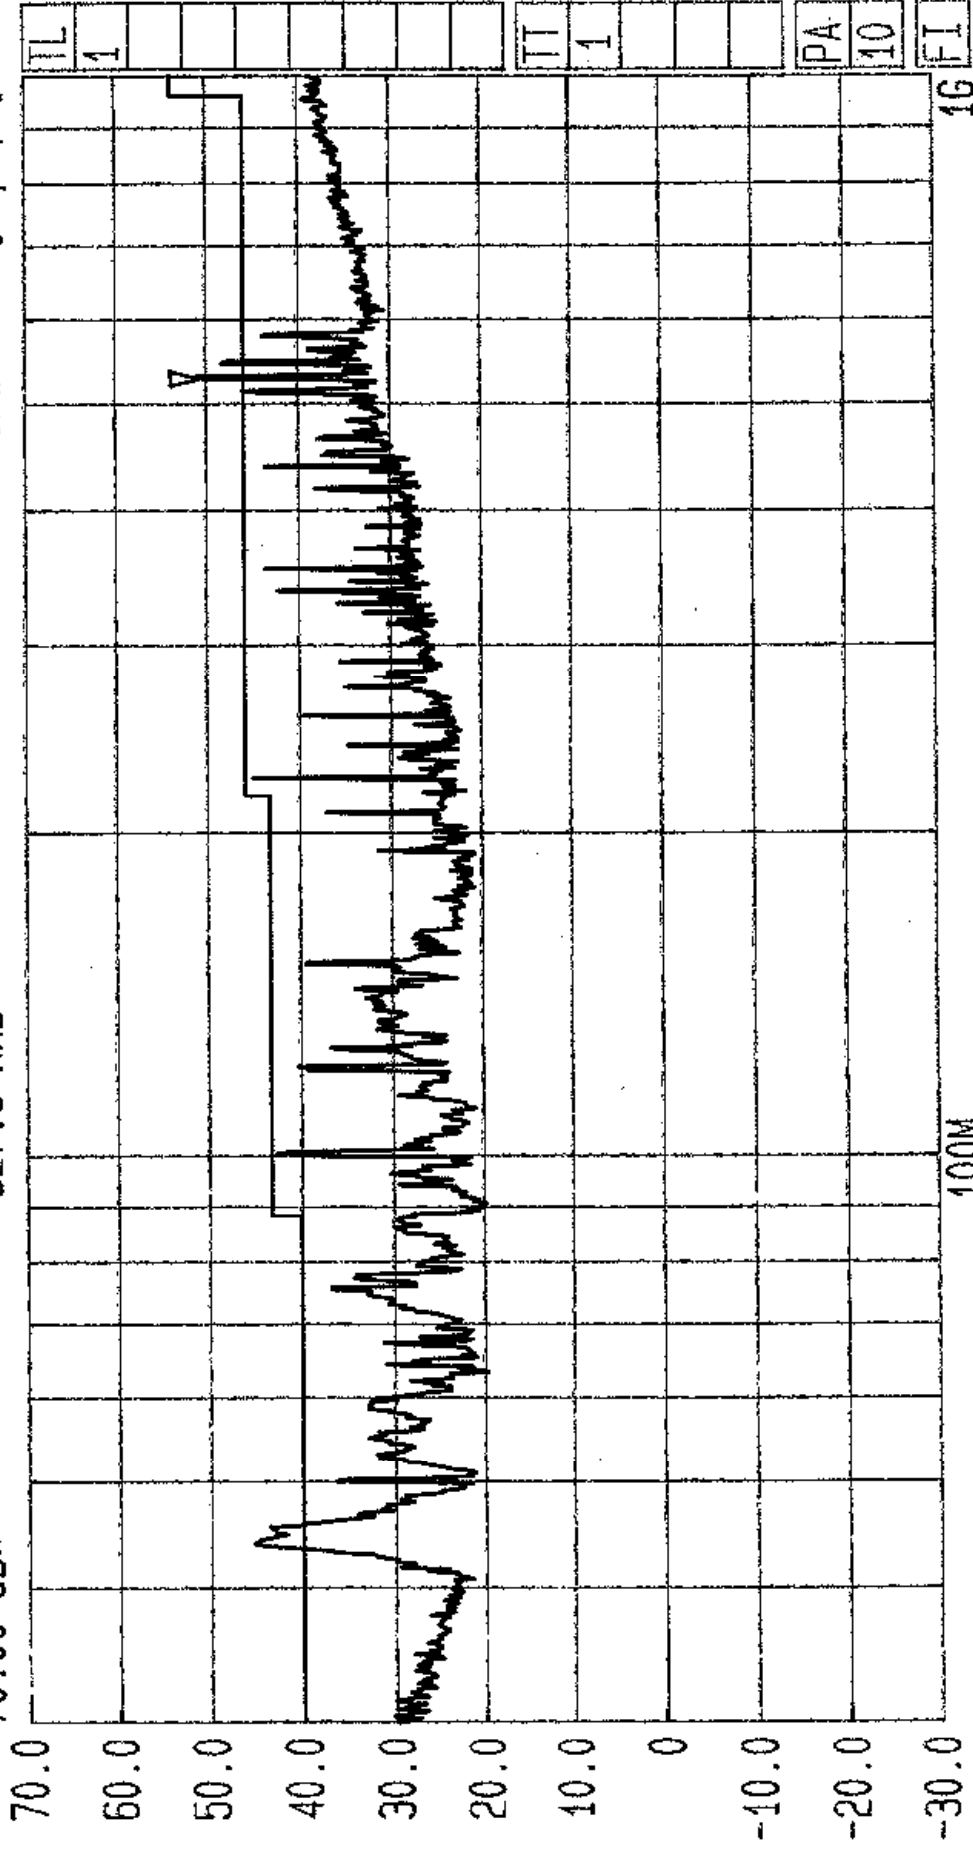

Start 30 MHz

Sweep 80 ms

Center 173.2 MHz

Span 970 MHz


Stop 1 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT AB Access Access Point
Limit. FCC Part 15.407 (b5). Tx/Rx 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/041



Date 21.Apr.'99 Time 17:58:21
Ref.Lvl 70.00 dBx
Marker 49.28 dBx
529.8 MHz

Res.Bw 120 kHz [imp]
TG.Lvl off
CF.Stp 97.000 MHz
Vid.Bw 100 kHz
RF.Att 0 dB
Unit [dBμV/m]

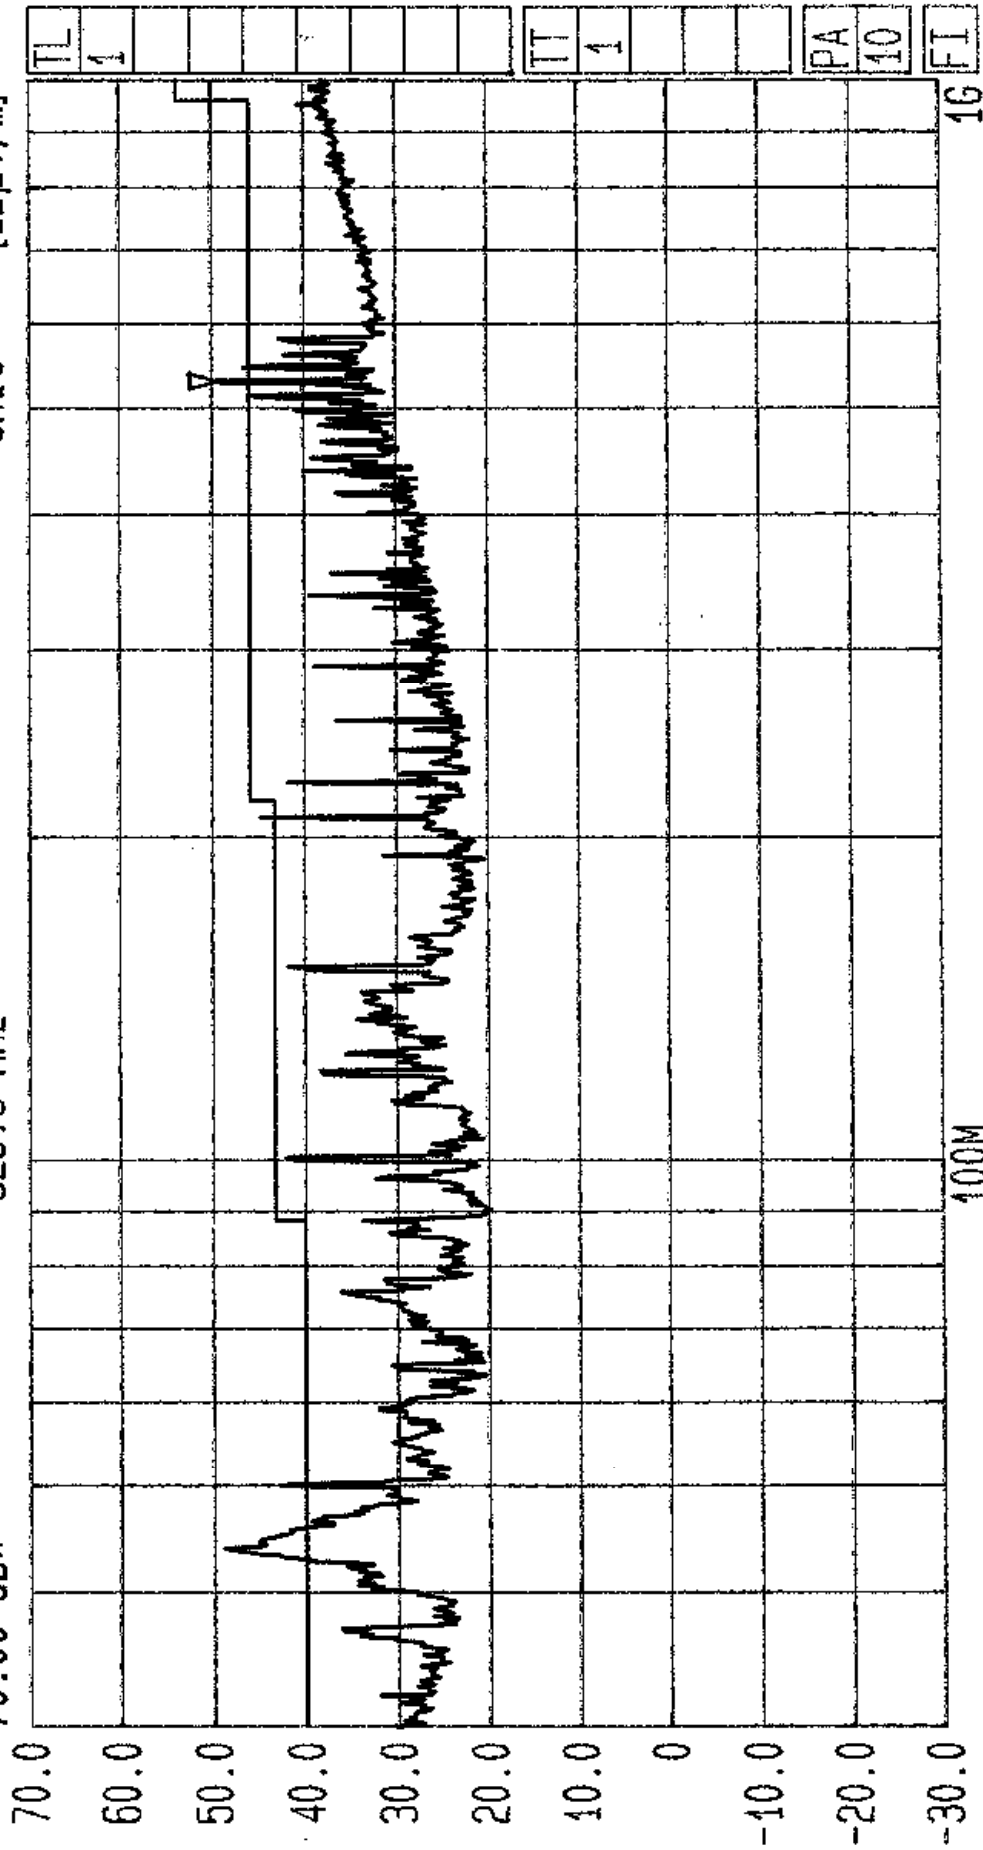

Start 30 MHz
Span 970 MHz
Center 173.2 MHz
Sweep 380 ms
Stop 1 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.407 (b5). Tx/Rx 5.725-5.825GHz Band. Top Chan. GPH/38797/JD01/042



Date 21.Apr.'99 Time 22:30:24


Ref.Lvl
70.00 dBx

Res.Bw
1G.Lvl
CF.Stp

1 MHz [imp]
off
100.000 MHz

Vid.Bw
RF.Att
Unit
1 MHz
0 dB
[dB μ V/m]

70.0
60.0
50.0
40.0
30.0
20.0
10.0
0
-10.0
-20.0
-30.0

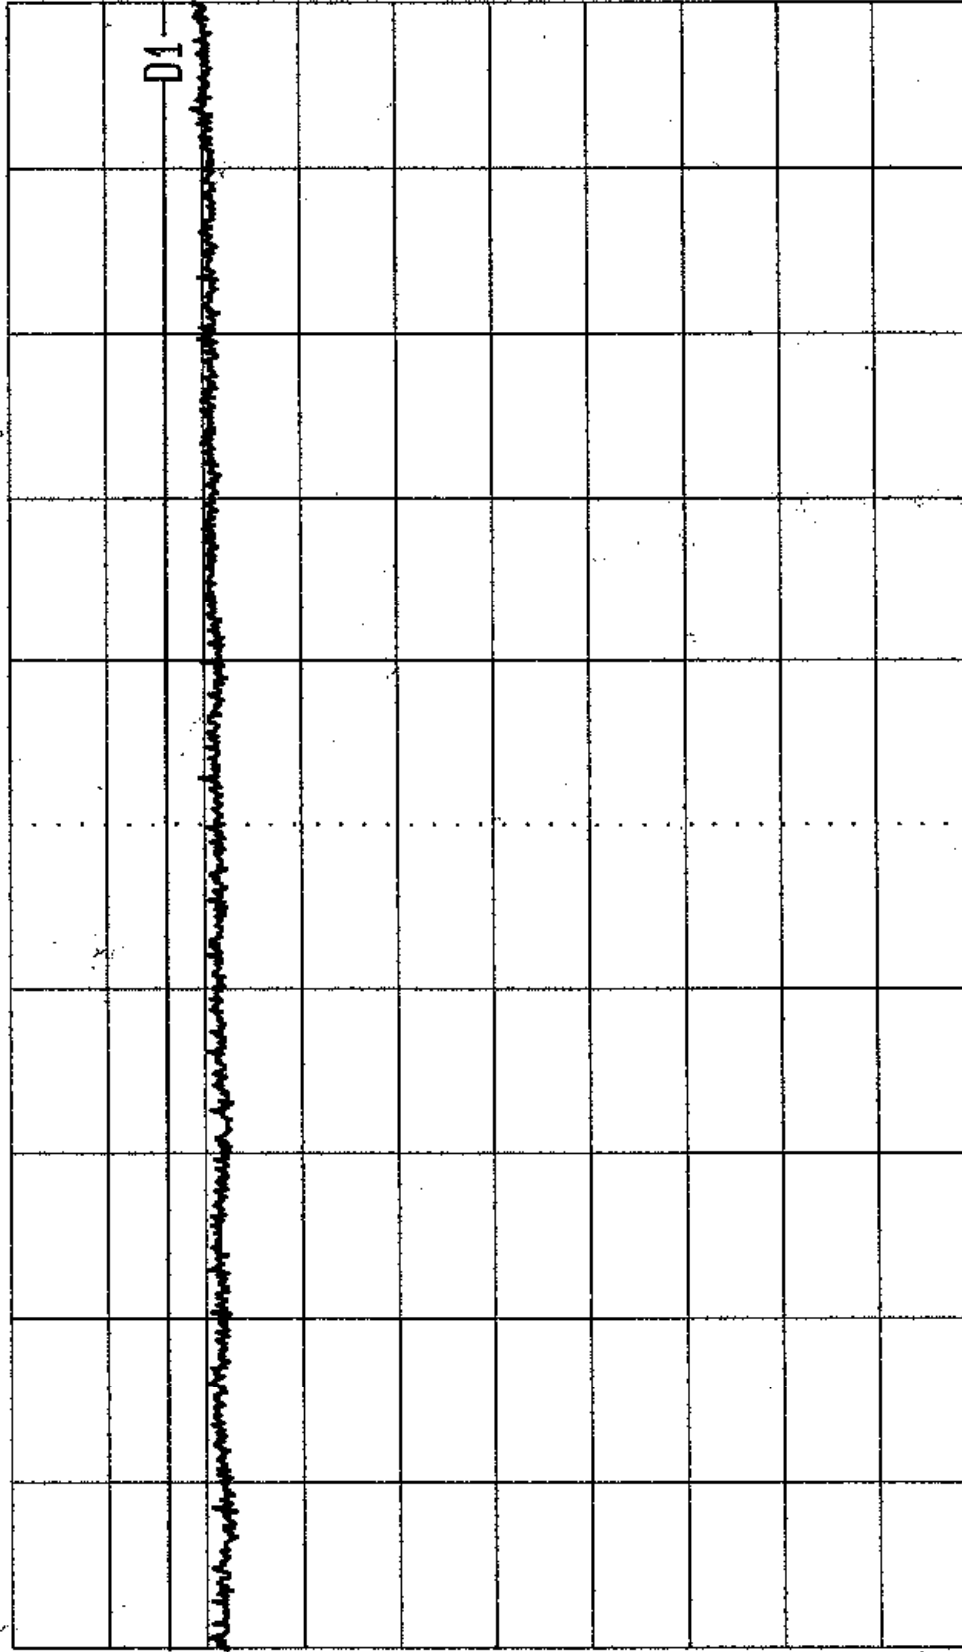

Start
4 GHz

Span
1 GHz

Center
4.5 GHz

Sweep
20 ms

Stop
5 GHz

TT
3
PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.15-5.25GHz Band.


EUT: AB Access Access Point
Bott Chan. GPH/38797/JD01/039 A



Date 21.Apr.'99 Time 22:33:31

Ref.Lvl
70.00 dB*

Res.Bw 1 MHz [imp]
1G.Lvl off
CF:Stp 100.000 MHz
Vid.Bw 1 MHz
RF:Att 0 dB
Unit [dBuV/m]

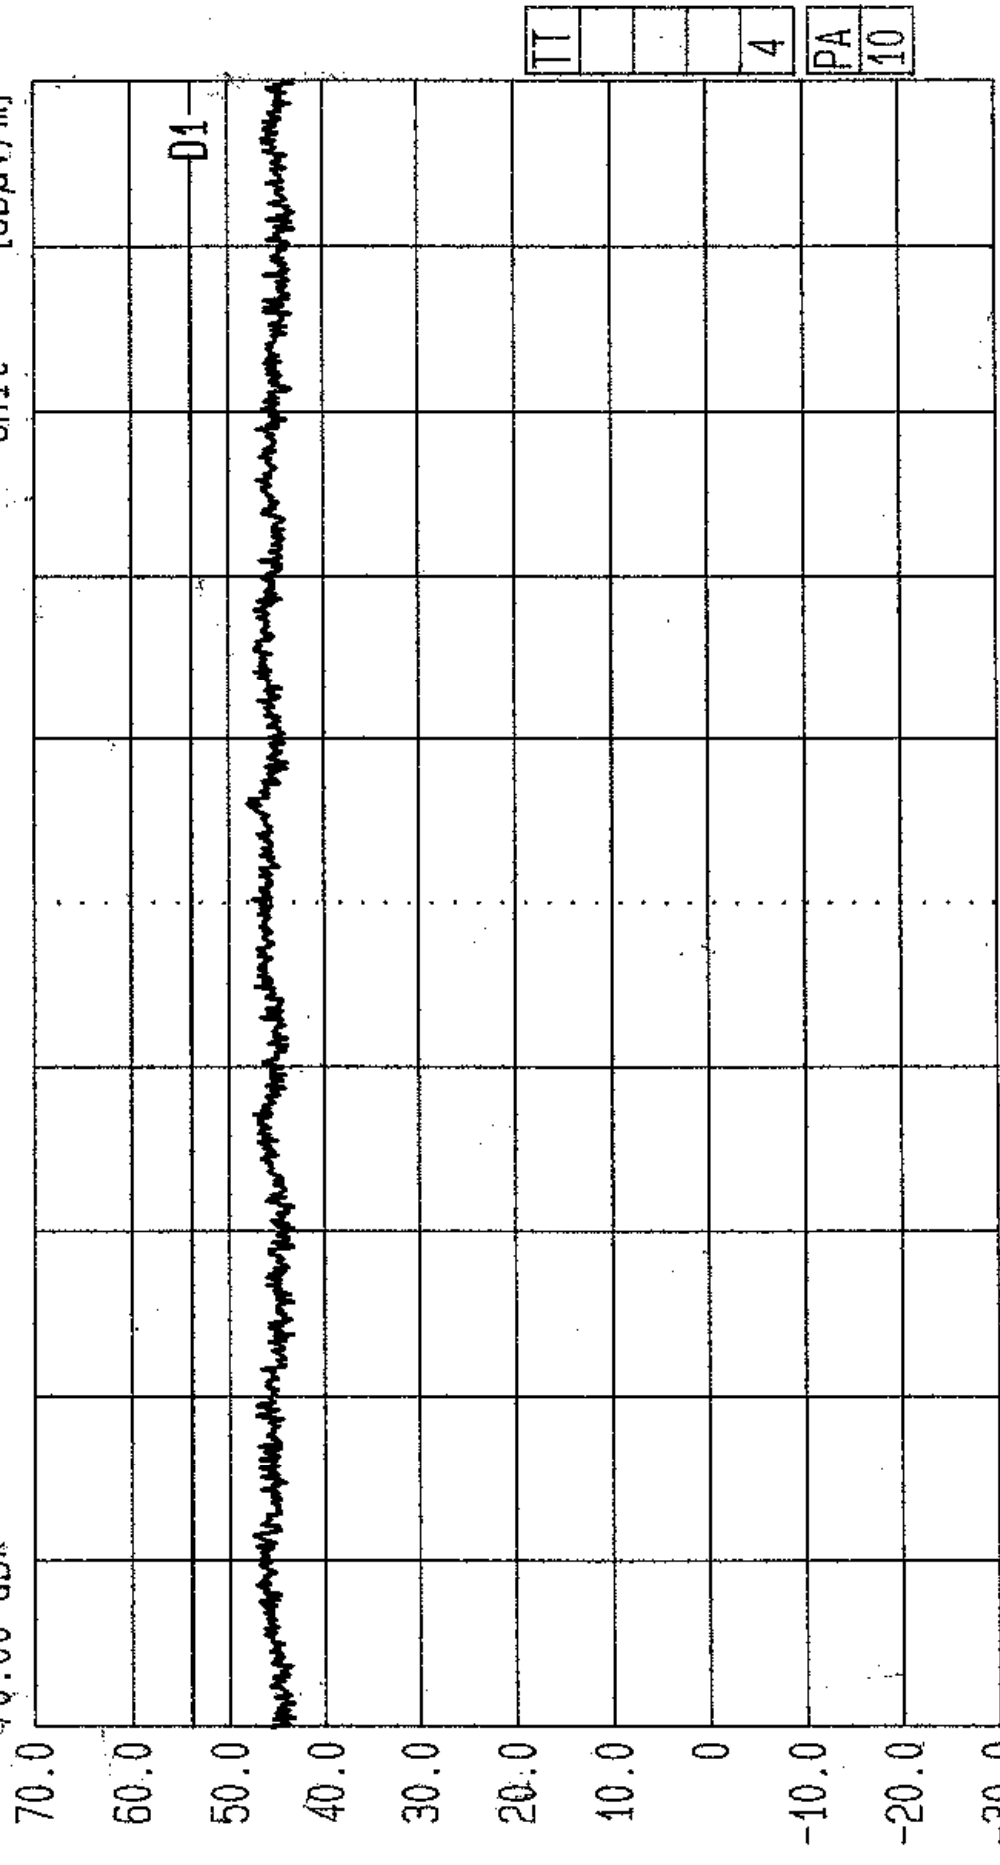

Start 5 GHz Stop 6 GHz
Span 1 GHz Sweep 20 ms

Center 5.5 GHz
EUT: AB Access Access Point
Bott Chan. GPH/38797/JD01/040 A



Date 21.Apr.'99 Time 22:37:24

Ref.Lvl
70.00 dB*


Res.Bw
1G.Lvl
CF.Stp

1 MHz [imp]
off
100.000 MHz

Vid.Bw
RF.Att
Unit

1 MHz
0 dB
[dBμV/m]

70.0
60.0
50.0
40.0
30.0
20.0
10.0
0
-10.0
-20.0
-30.0

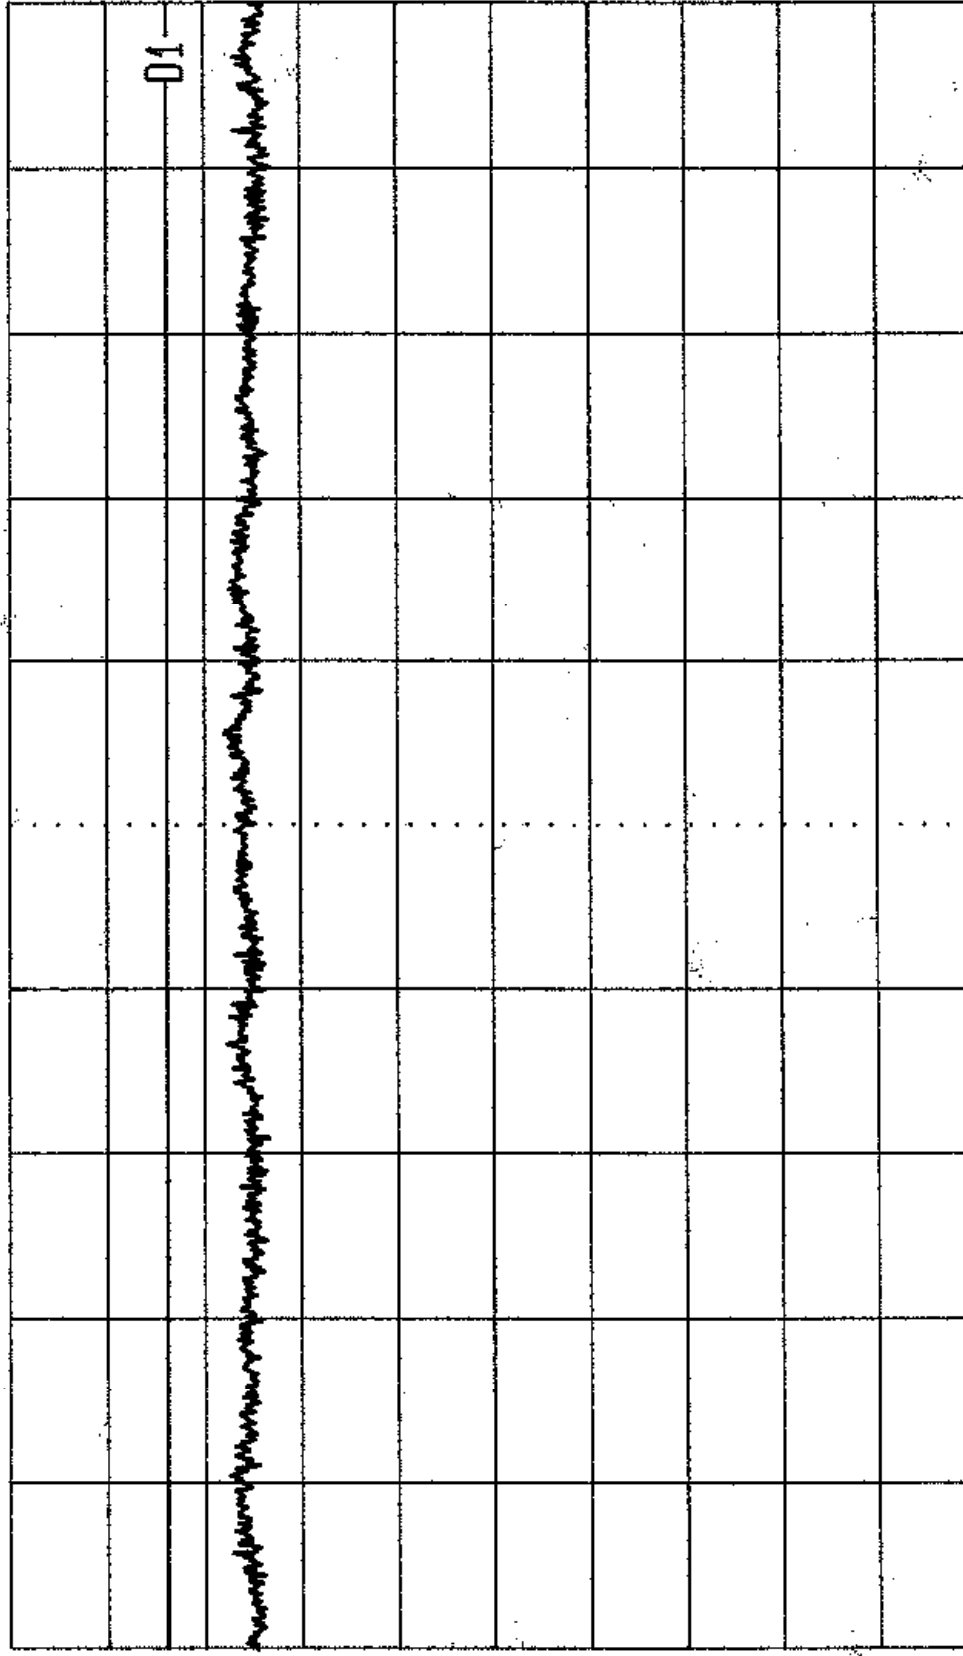

TT
4
PA
10

Start.
5 GHz

Span
1 GHz

Center
5.5 GHz

Sweep
20 ms

Stop
6 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.15-5.25GHz Band.

EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/041a



Date 21.Apr.'99 Time 22:40:40

Ref.Lvl
70.00 dBx


Res.Bw
1G.Lvl
CF.Stp

1 MHz [imp]
Off
100.000 MHz

Vid.Bw
RF.Att
Unit

1 MHz
0 dB
[dBμV/m]

70.0
60.0
50.0
40.0
30.0
20.0
10.0
0
-10.0
-20.0
-30.0

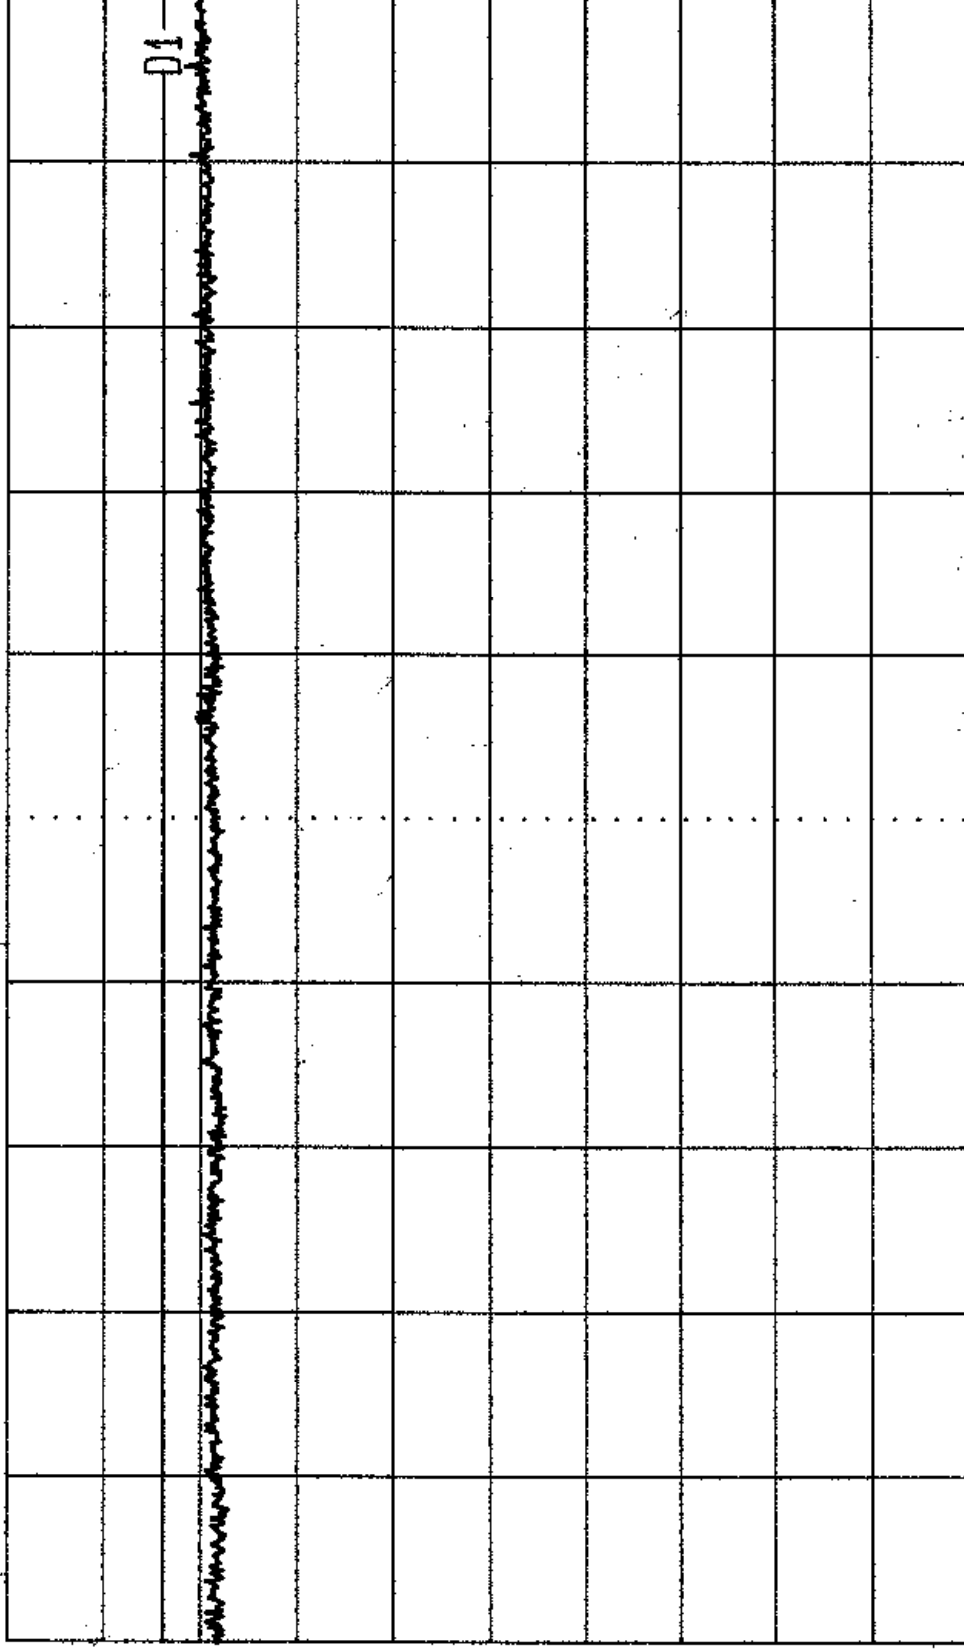

Start
4 GHz

Span
1 GHz

Center
4.5 GHz

Sweep
20 ms

Stop
5 GHz

TT
3
PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.15-5.25GHz Band.

EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/042A



Date 21.Apr.'99 Time 22:44:10


Ref.Lvl
70.00 dBx

Res.Bw
1 MHz [imp]
off
100.000 MHz
CF.Stp

Vid.Bw
1 MHz

RF.Att
0 dB
Unit
[dBuV/m]

70.0
60.0
50.0
40.0
30.0
20.0
10.0
0
-10.0
-20.0
-30.0

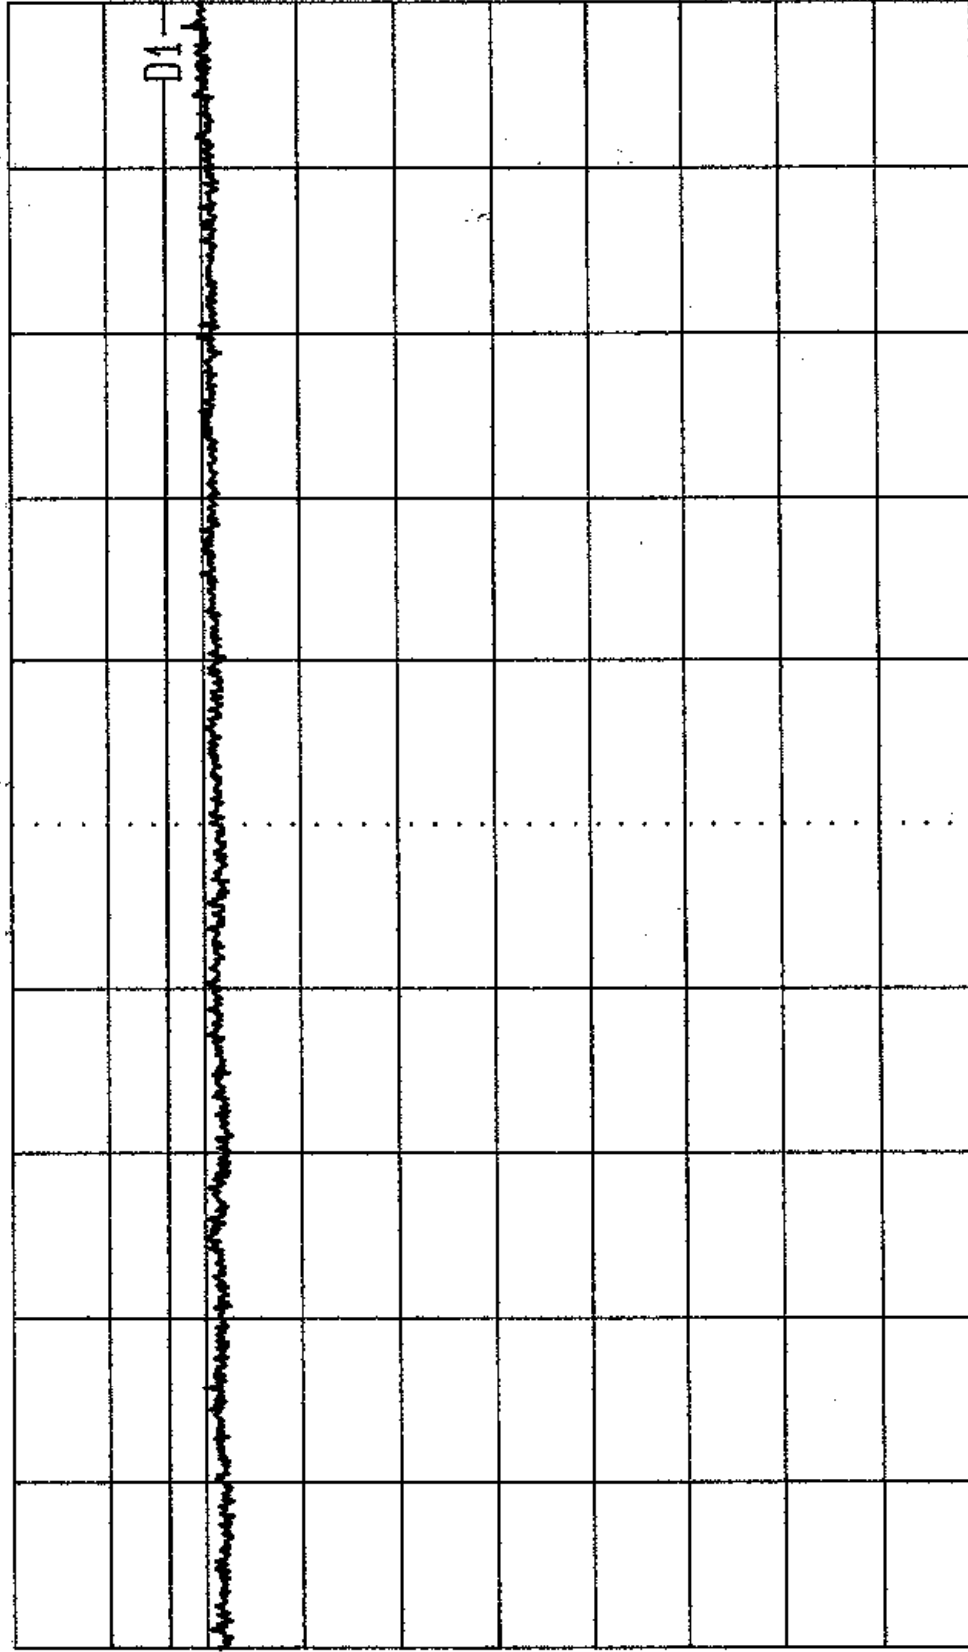

TT
3
PA
10


Start 4 GHz
Span 1 GHz
Center 4.5 GHz
Sweep 20 ms
Stop 5 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band.
EUT: AB Access Access Point
Bott Chan. GPH/38797/JD01/043



Date 21.Apr.'99 Time 22:47:21

Ref.Lvl
70.00 dBx

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
TG.Lvl Off
CF.Stp 100.000 MHz RF.Att 0 dB
Unit [dBuV/m]

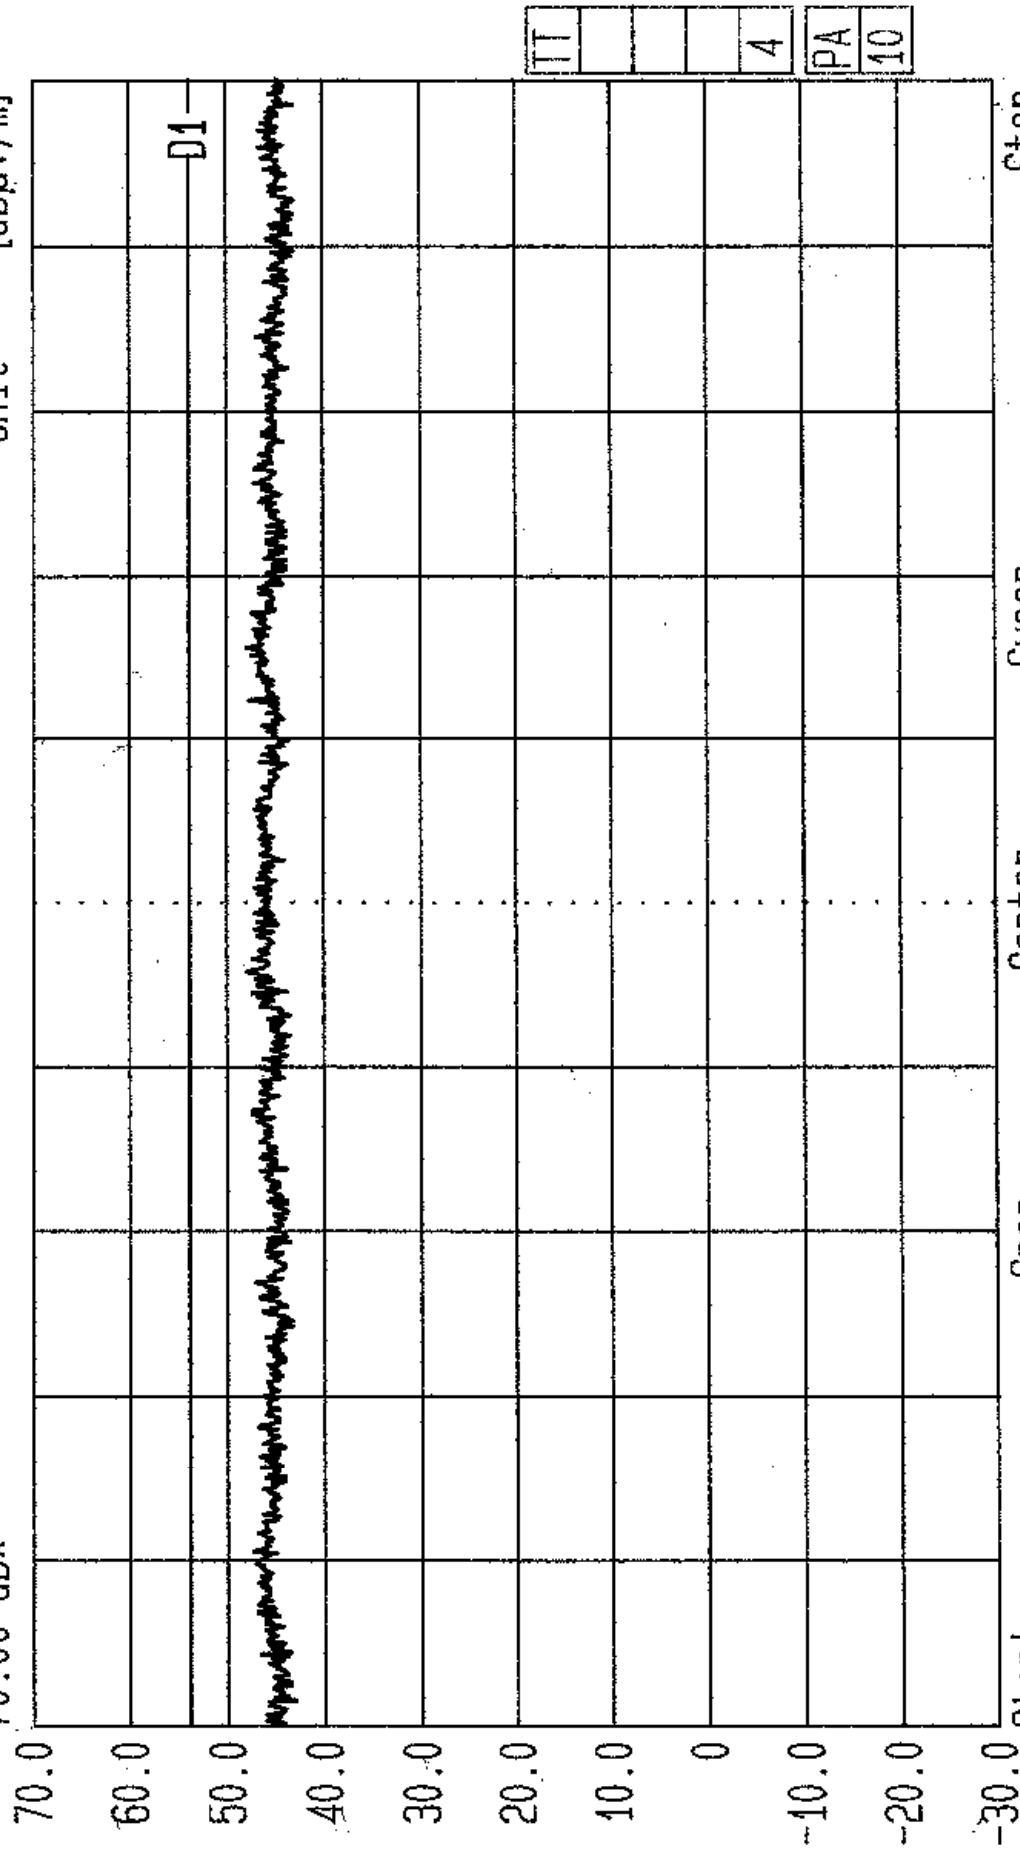

TT
4
PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band. Bott Chan. GPH/38797/JD01/044



Date 21.Apr.'99 Time 22:50:42

Ref.Lvl

70.00 dBx

Res.Bw

1 MHz [imp]

TG.Lvl

Off

1 MHz [imp]

Off

100.000 MHz

RF.Att

Unit

[dBμV/m]

Vid.Bw

1 MHz

1 MHz

0 dB

[dBμV/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

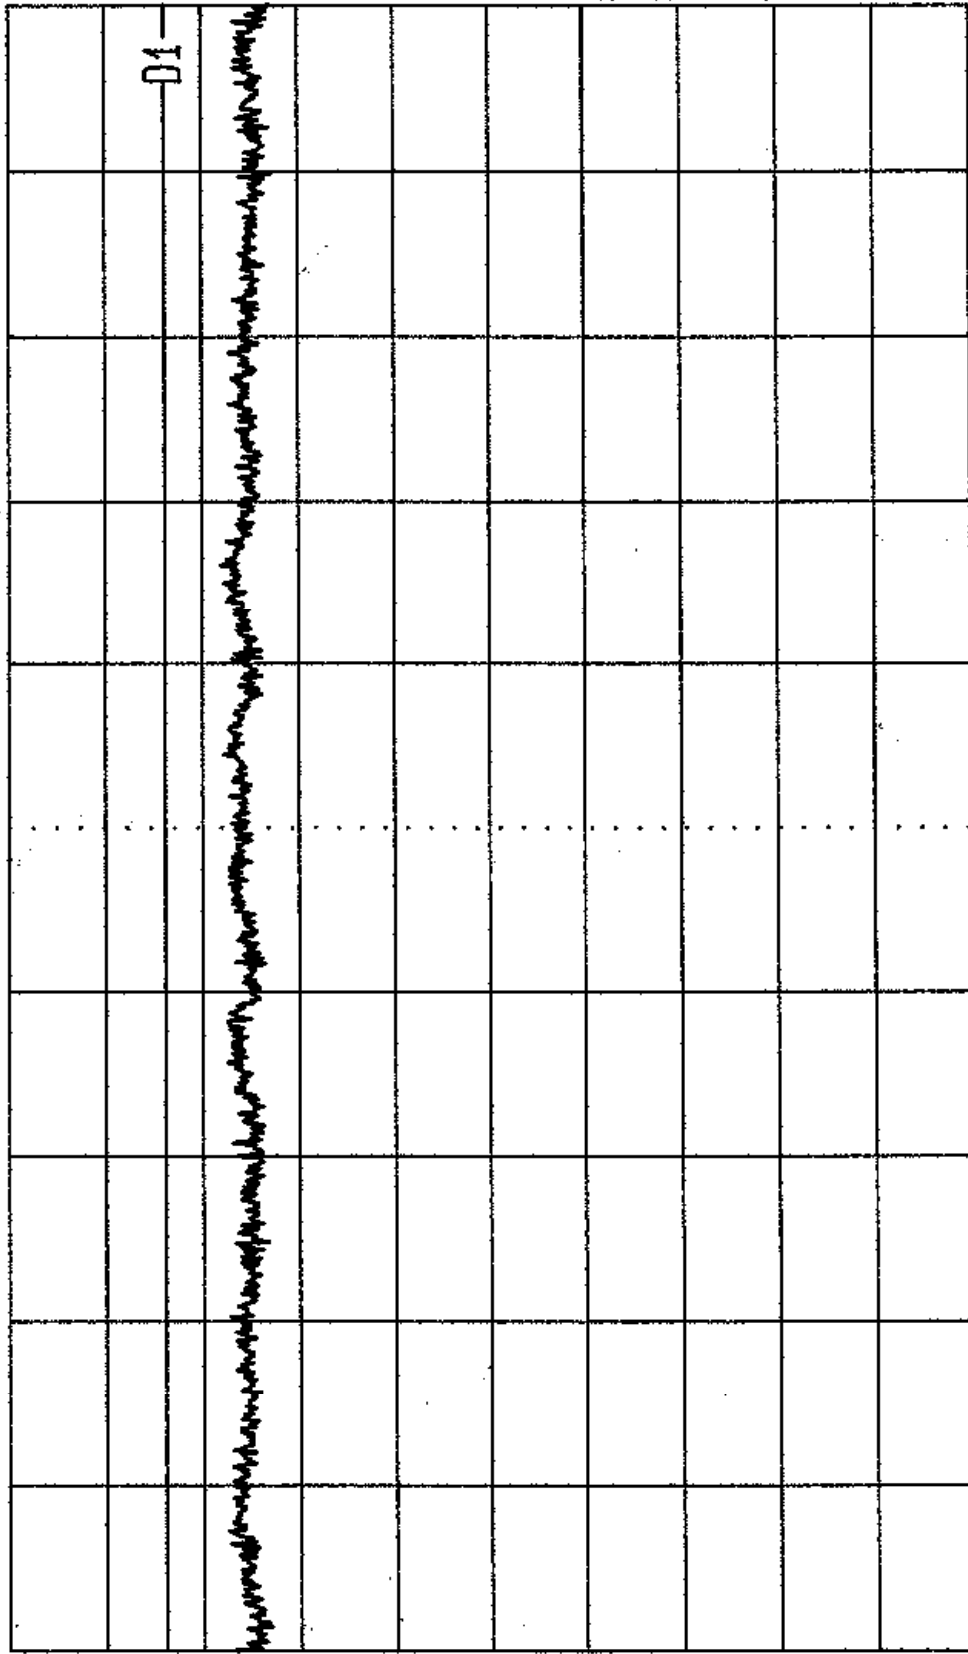

Start
5 GHz

Span
1 GHz

Center
5.5 GHz

Sweep
20 ms

Stop
6 GHz

TT
4
PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band.

EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/045




Date 21. Apr. '99 Time 22:54:07

Ref. Lvl
70.00 dBx

Res. Bw 1 MHz [imp]
1 MHz [imp]
Off
100.000 MHz
RF. Att 0 dB
Unit [dBμV/m]

70.0
60.0
50.0
40.0
30.0
20.0
10.0
0
-10.0
-20.0
-30.0

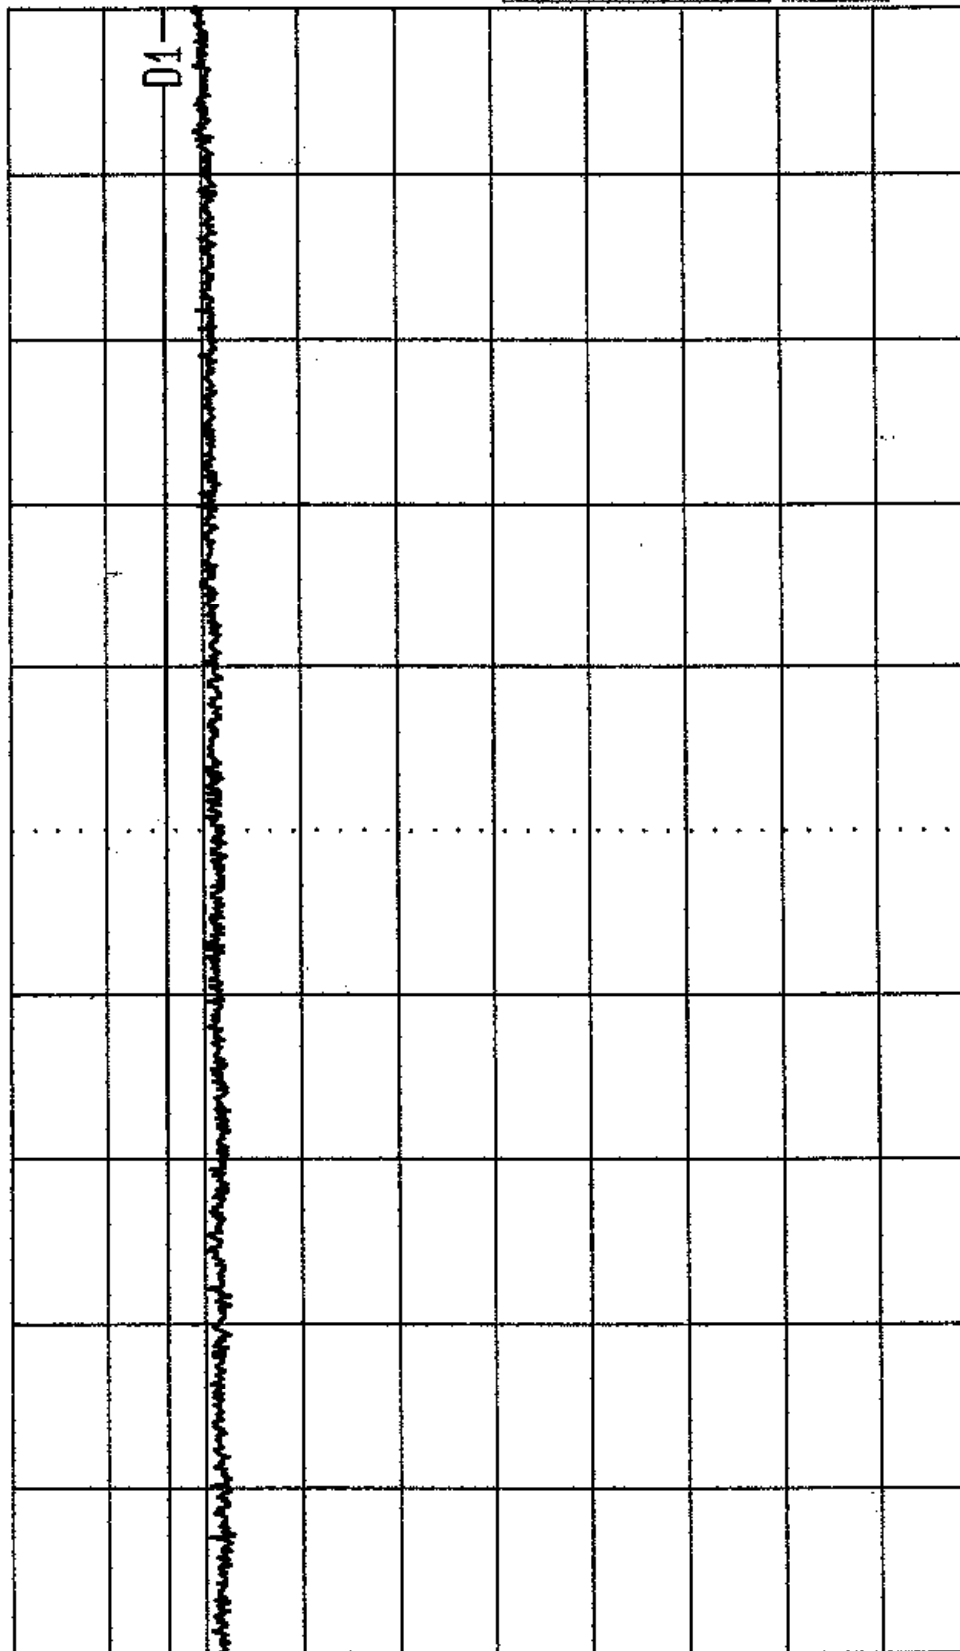

Start
4 GHz

Span
1 GHz

Center
4.5 GHz

Sweep
20 ms

Stop
5 GHz

TT
3
PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band.

EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/046



Date 21.Apr.'99 Time 22:58:14

Ref.Lvl

70.00 dBx

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

Off

100.000 MHz

Vid.Bw

RF.Att

Unit

1 MHz

0 dB

[dB μ V/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

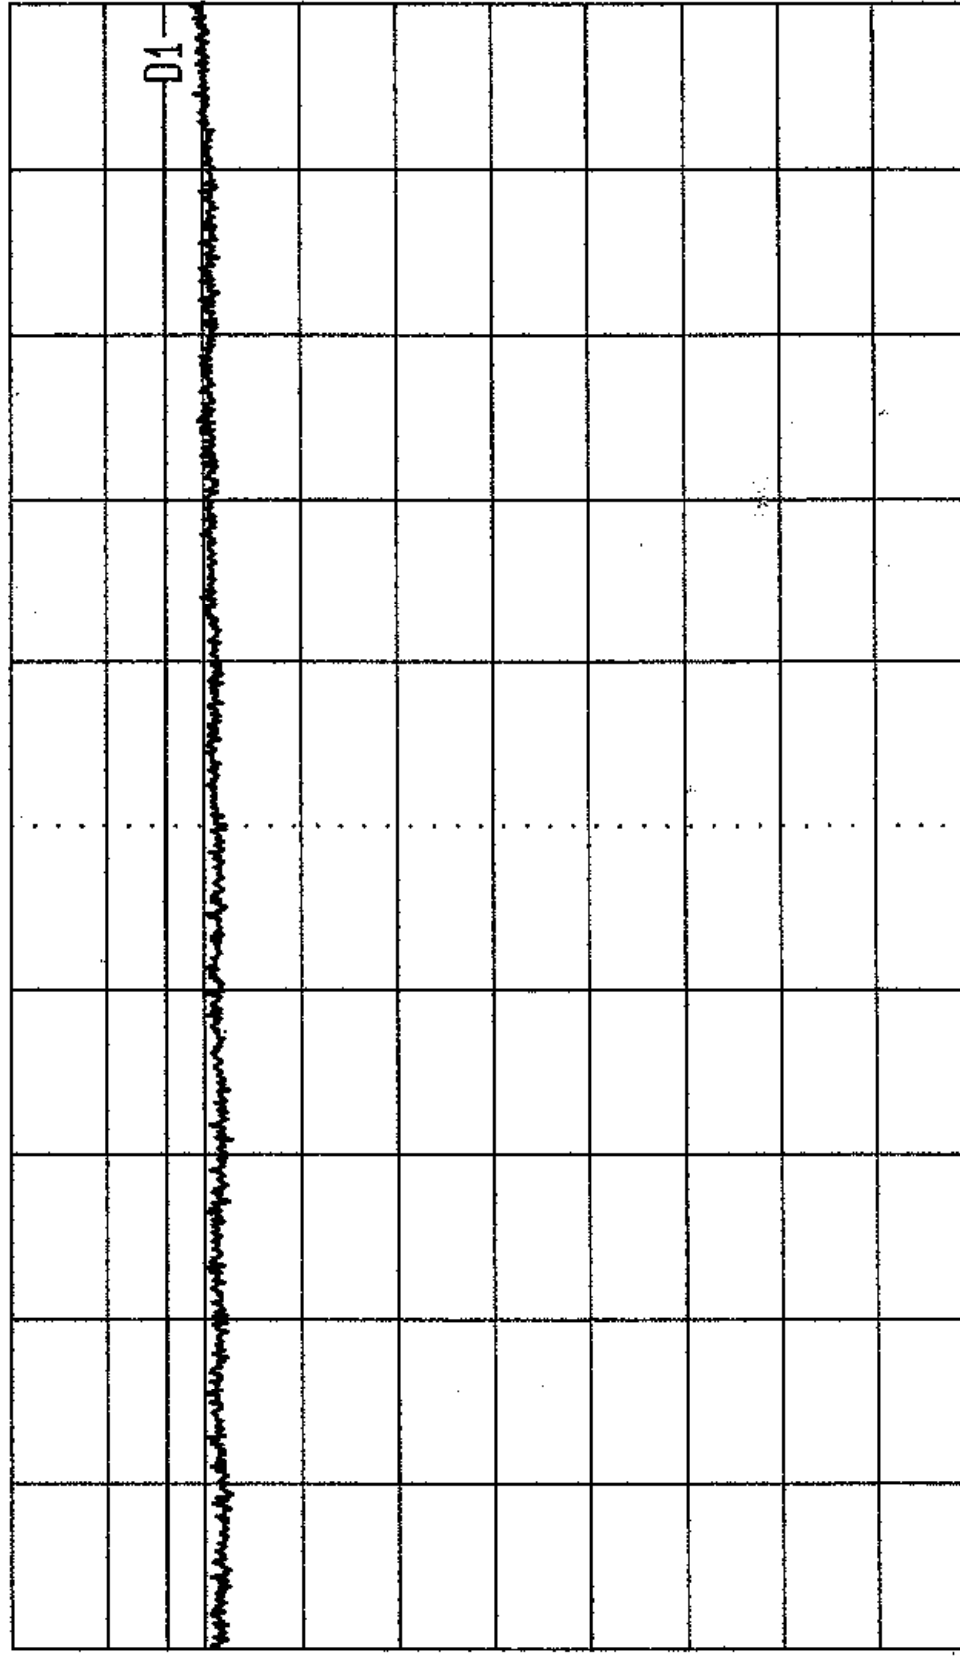

IT

3

PA

10

Start

4 GHz

Span

1 GHz

Center

4.5 GHz

Sweep

20 ms

Stop

5.6 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.405(b). Rx. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/047



Date 21.Apr.'99 Time 23:01:26

Ref.Lvl

70.00 dBx

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

off

100.000 MHz

Vid.Bw

RF.Att

Unit

1 MHz

0 dB

[dBμV/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

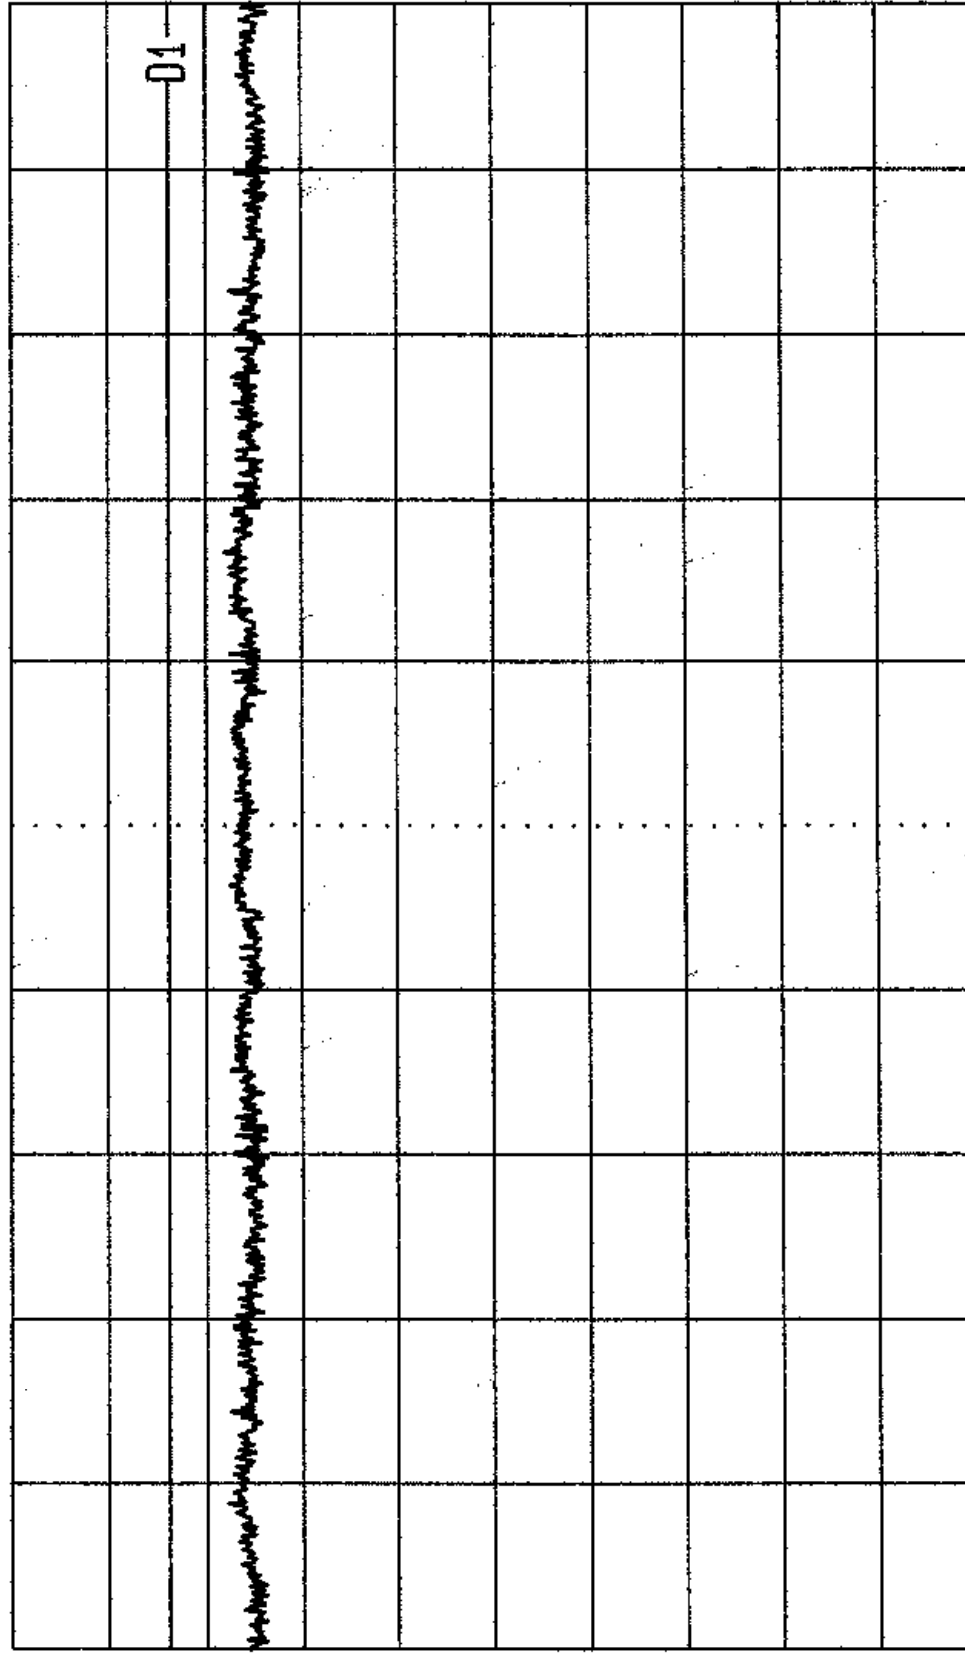

Start
5 GHz

Span
1 GHz

Center
5.5 GHz

Sweep
20 ms

Stop
6 GHz

TT
4
PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.725-5.825GHz Band.

EUT: AB Access Access Point
Bott Chan. GPH/38797/JD01/048



Date 21.Apr.'99 Time 23:13:05

Ref.Lvl

70.00 dB*

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

off

100.000 MHz

Vid.Bw

RF.Att

Unit

1 MHz

0 dB

[dBuV/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

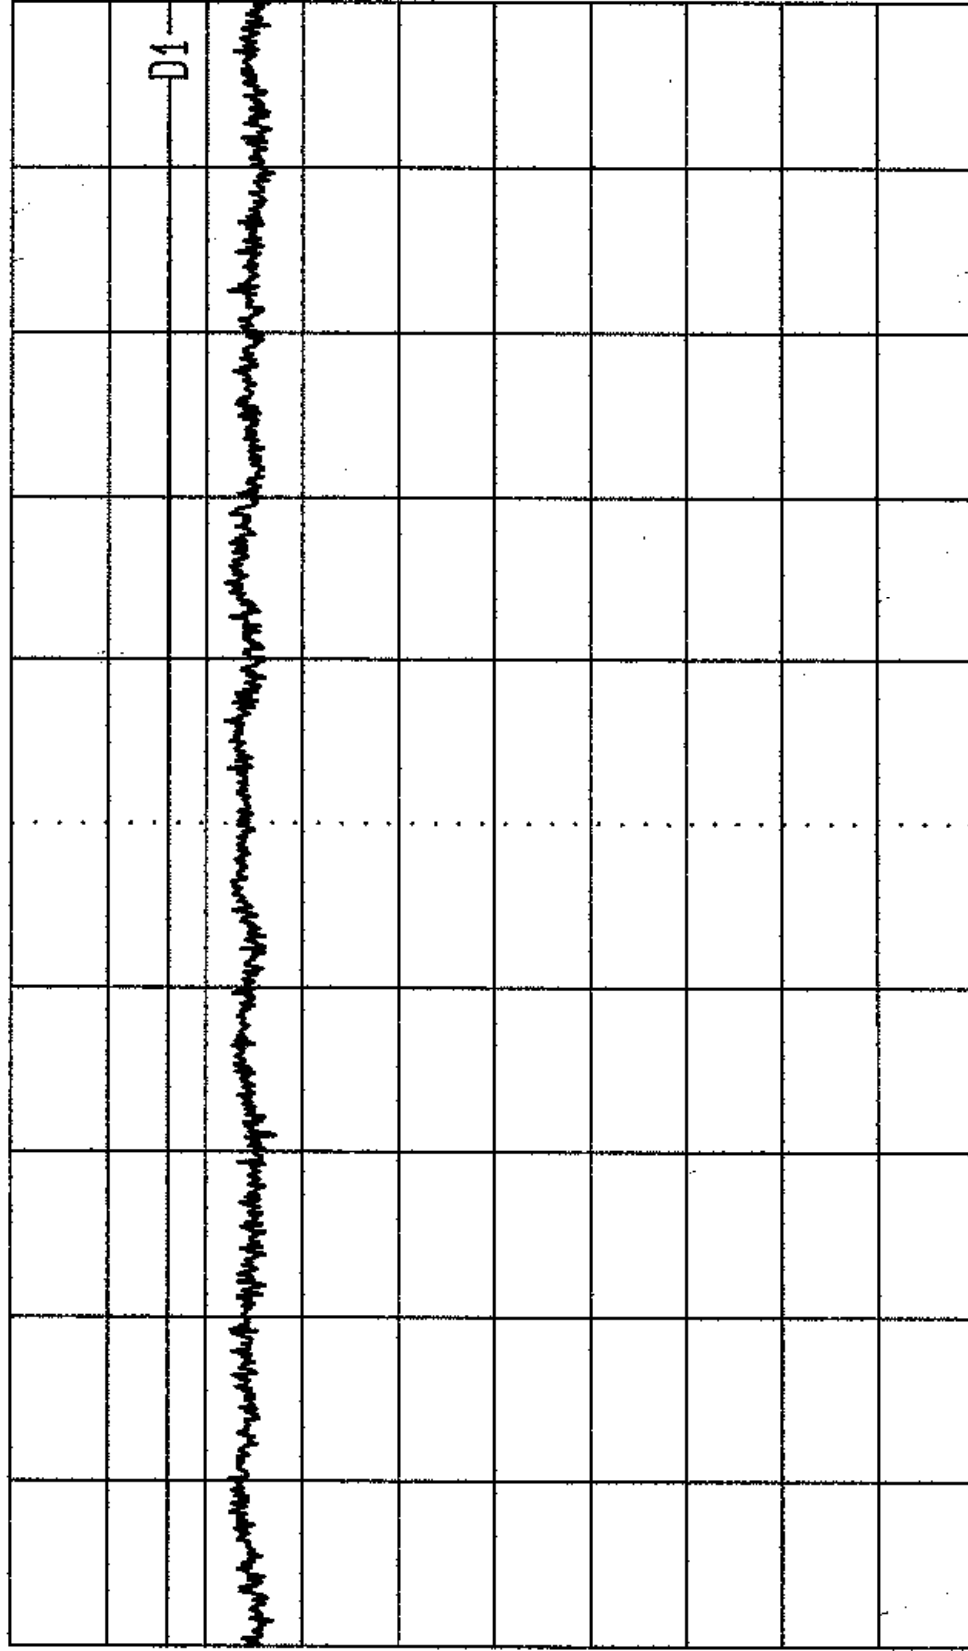

Start

5 GHz

Span

1 GHz

Center

5.5 GHz

Sweep

20 ms

Stop

6 GHz

Radiated, Tested by RFI for Adaptive Broadband Ltd.

Limit. FCC Part 15.405(b). RX. 5.725-5.825GHz Band.

EUT: AB Access Access Point

Top Chan. GPH/38797/JD01/049


TT
4
PA
10



Date 21. Apr. '99 Time 23:16:26

Ref.Lvl
70.00 dBx

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBµV/m]

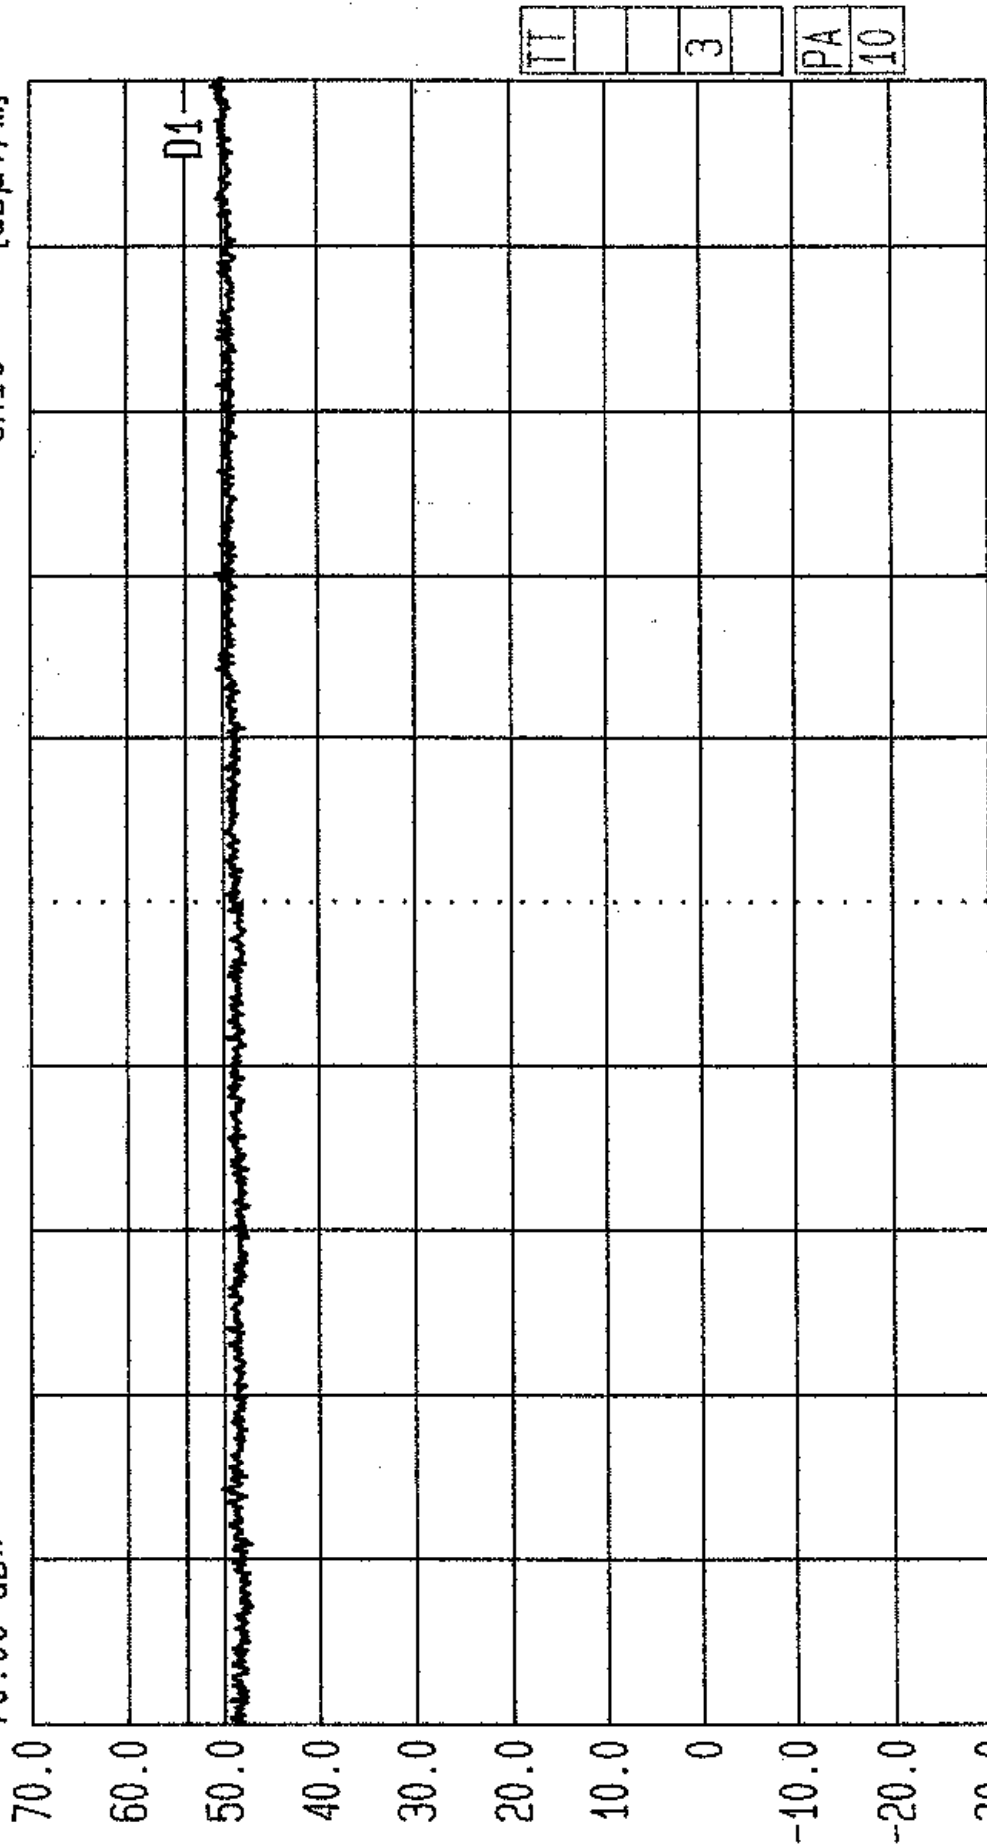

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.725-5.825GHz Band.

EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/050



Date 21.Apr.'99 Time 23:20:21

Ref.Lvl

70.00 dBx

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

Off

220.000 MHz

Vid.Bw

1 MHz

RF.Att

0 dB

[dB μ V/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

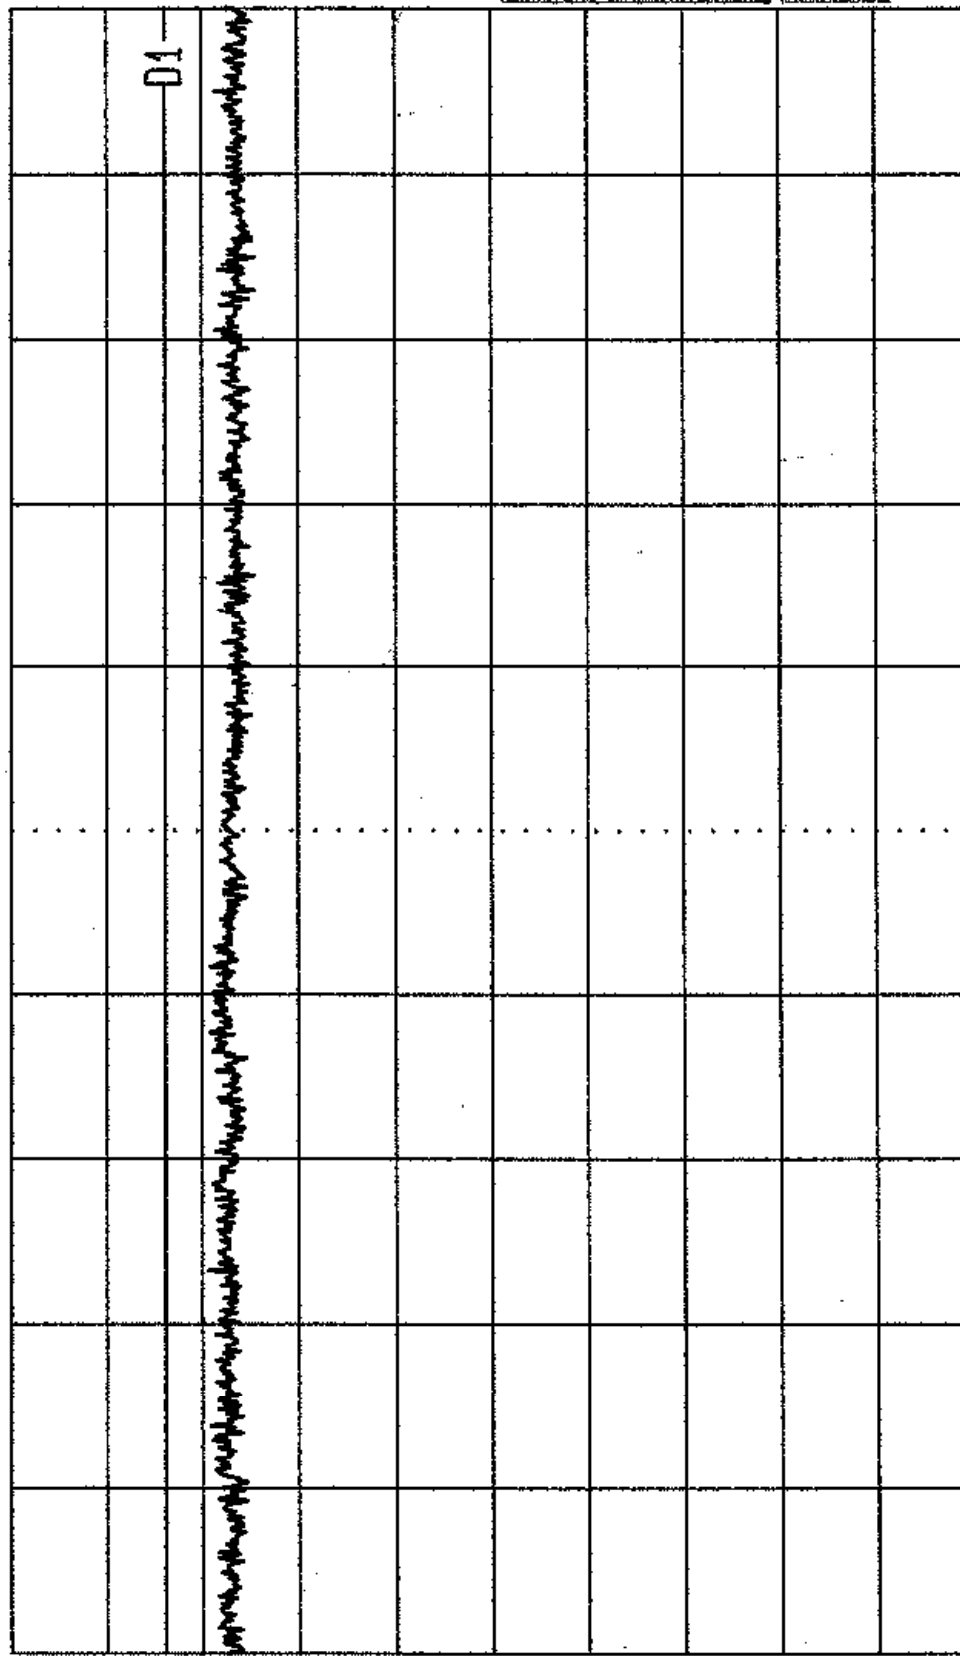

TT
3
PA
10

Start
6 GHz

Span
2.2 GHz

Center
7.1 GHz

Sweep
20 ms

Stop
8.2 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.725-5.825GHz Band.

EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/051




Date 21.Apr.'99 Time 23:26:00

Ref.Lvl
70.00 dBx

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
IG.Lvl off
CF.Stp 220.000 MHz RF.Att 0 dB
Unit [dBuV/m]

70.0
60.0
50.0
40.0
30.0
20.0
10.0
0
-10.0
-20.0
-30.0

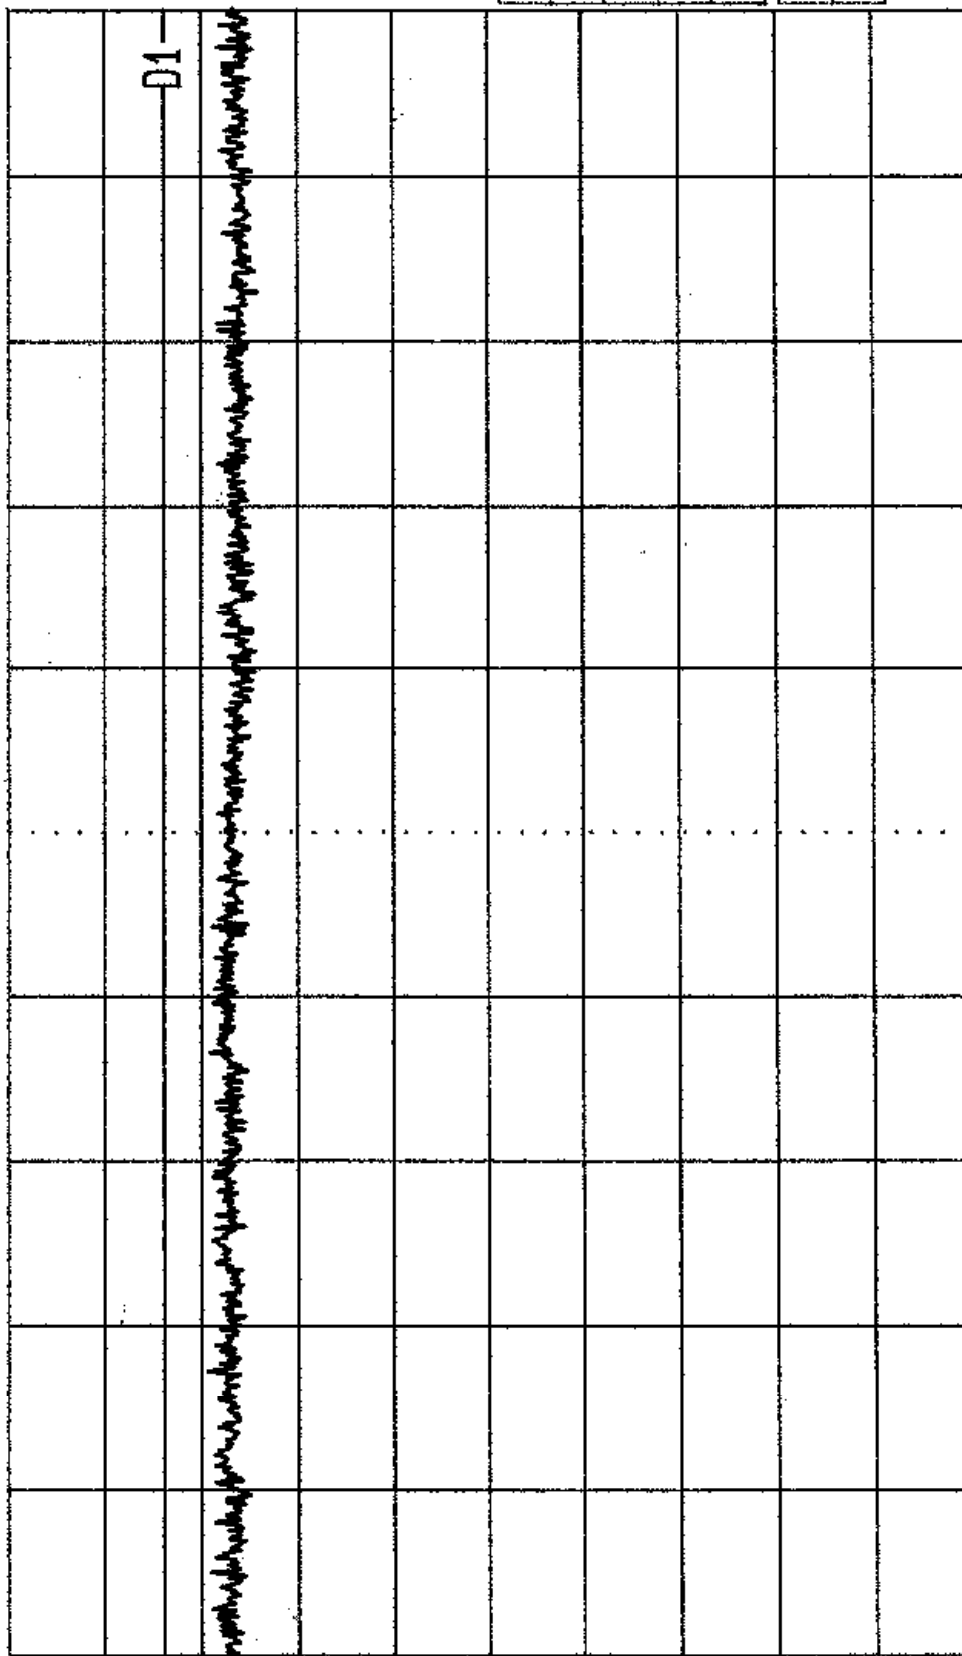

Start 6 GHz Span 2.2 GHz Center 7.1 GHz Sweep 20 ms Stop 8.2 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.405(b). Rx. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/052

TT
3
PA
10




Date 21.Apr.'99 Time 23:30:48

Ref.Lvl
70.00 dB*

Res.Bw
1 MHz [imp]
off
220.000 MHz
CF.Stp

Vid.Bw
1 MHz
RF.Att
0 dB
Unit
[dBuV/m]

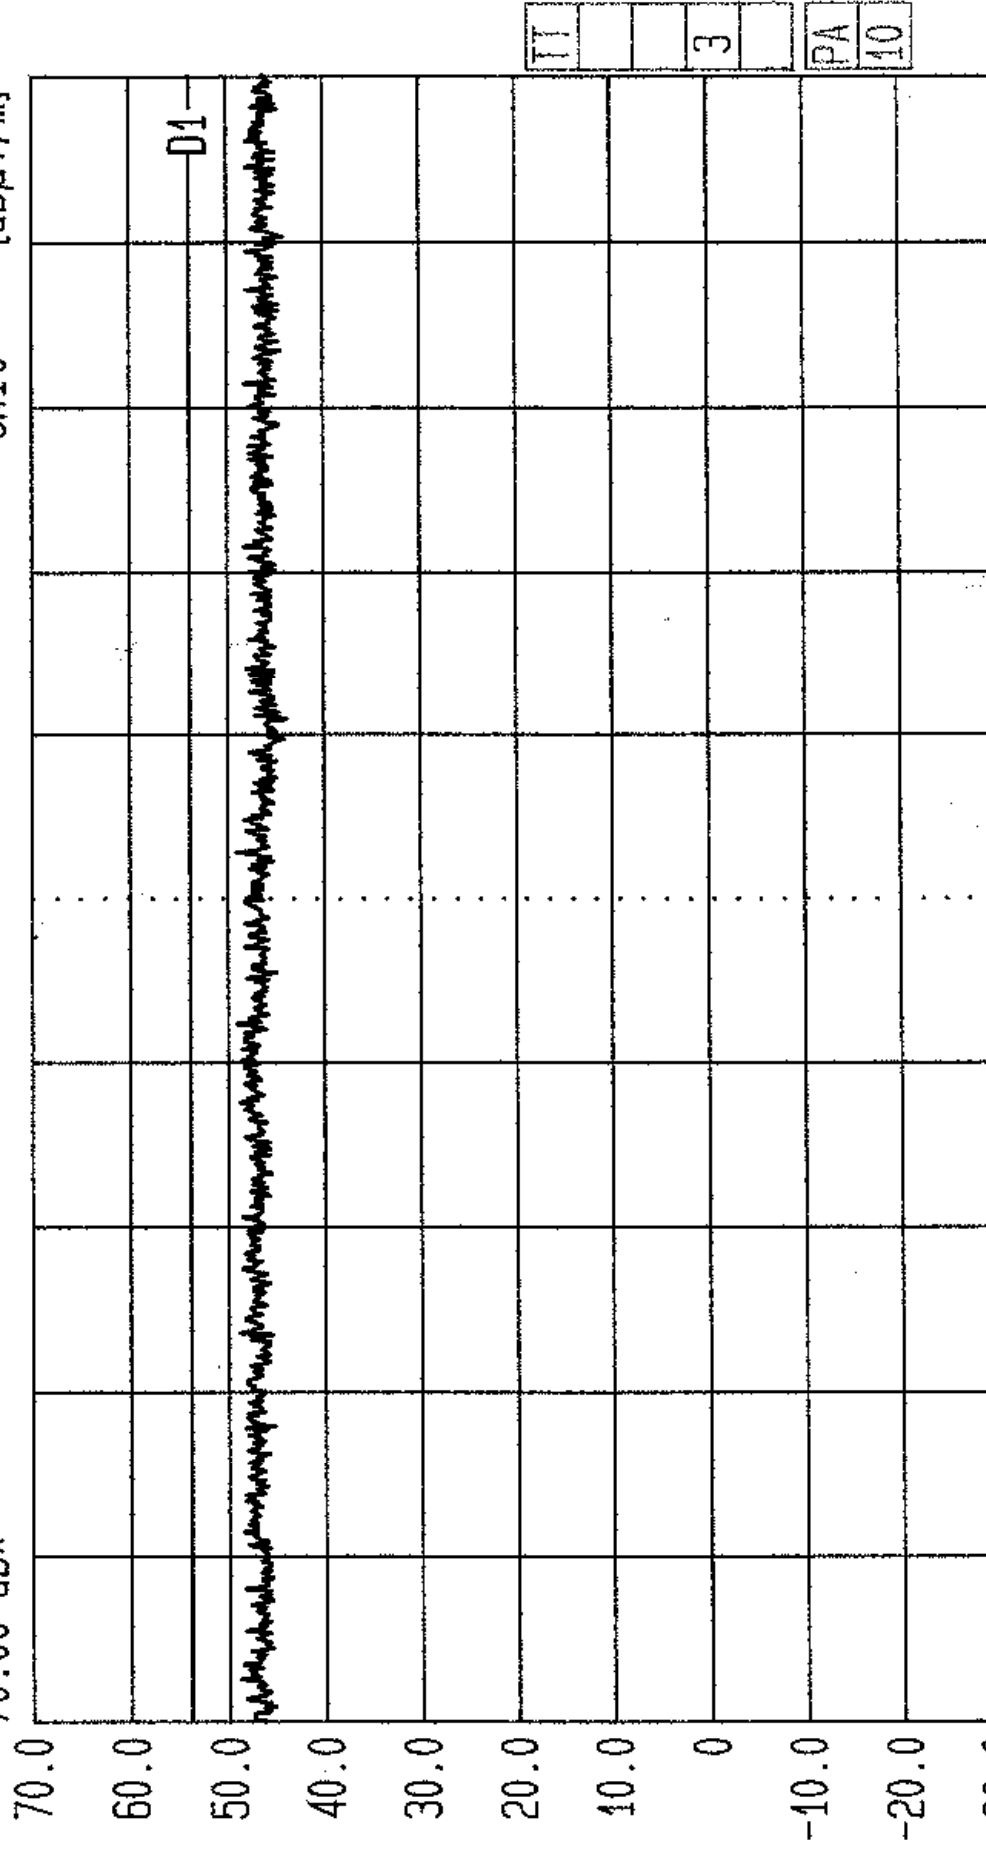

TT
3
PA
10

Radiated, Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band.

EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/053



Date 21.Apr.'99 Time 23:34:46

Ref.Lvl

70.00 dBx

Res.Bw

1 MHz

off

CF.Stp

1 MHz [imp]

off

220.000 MHz

RF.Att

0 dB

Unit

Vid.Bw

1 MHz

[dB μ V/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

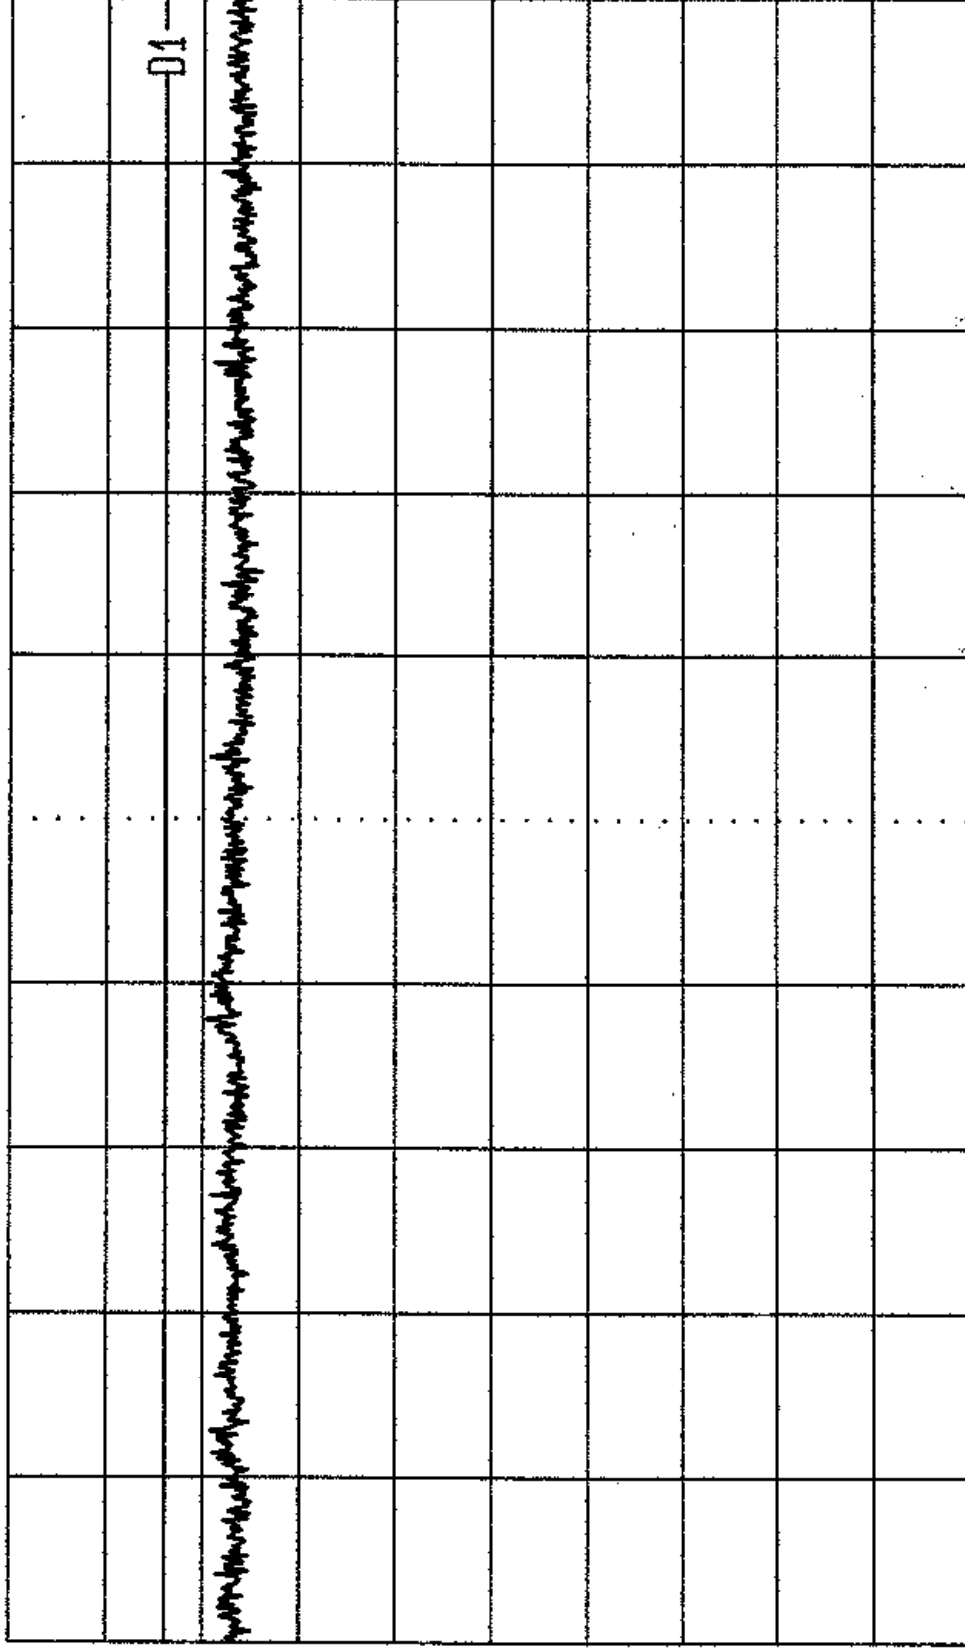

Start

6 GHz

Span

2.2 GHz

Center

7.1 GHz

Sweep

20 ms

Stop

8.2 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.

Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band.

EUT: AB Access Access Point

Bott Chan. GPH/38797/JD01/054

TT
3
PA
10



Date 21.Apr.'99 Time 23:39:41


Ref.Lvl
70.00 dB*

Res.Bw
TG.Lvl
CF.Stp

1 MHz [imp]
off
220.000 MHz

Vid.Bw
RF.Att
Unit
1 MHz
0 dB
[dBμV/m]

70.0
60.0
50.0
40.0
30.0
20.0
10.0
0
-10.0
-20.0
-30.0

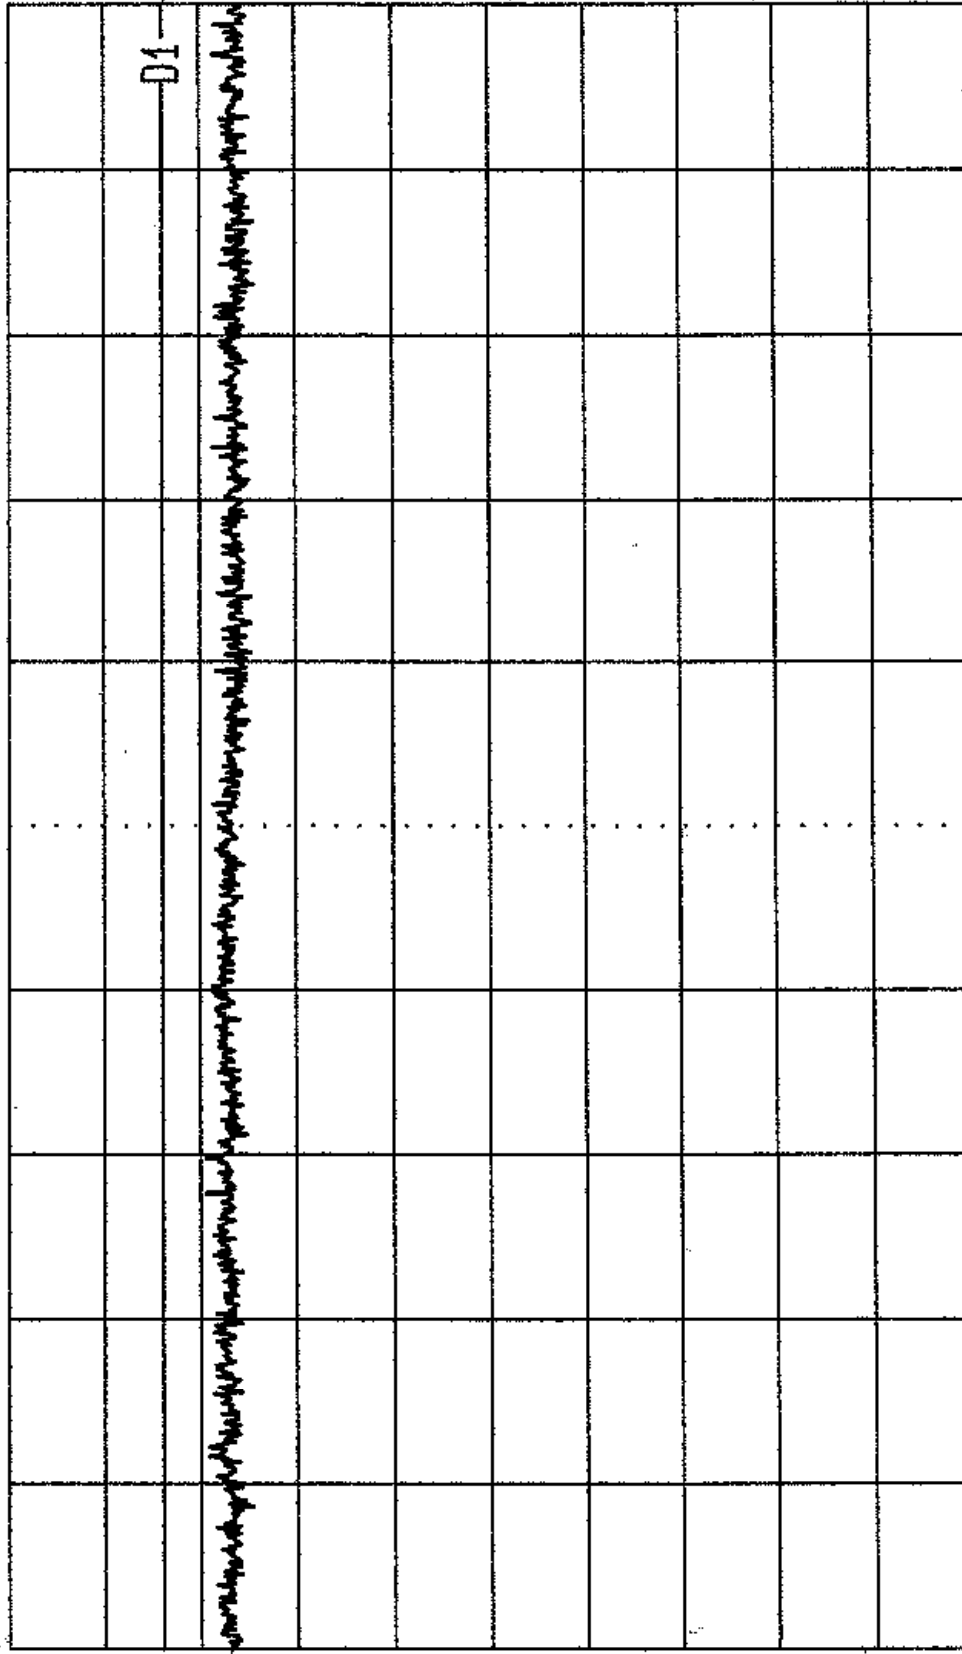

Start
6 GHz

Span
2.2 GHz

Center
7.1 GHz

Sweep
20 ms

Stop
8.2 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.15-5.25GHz Band.

EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/055

TT
3
PA
10



Date 21.Apr.'99 Time 23:44:30

Ref.Lvl
70.00 dBx


Res.Bw
TG.Lvl
CF.Stp

1 MHz [imp]
off
220.000 MHz

Vid.Bw

1 MHz

RF.Att
Unit
0 dB
[dB μ V/m]

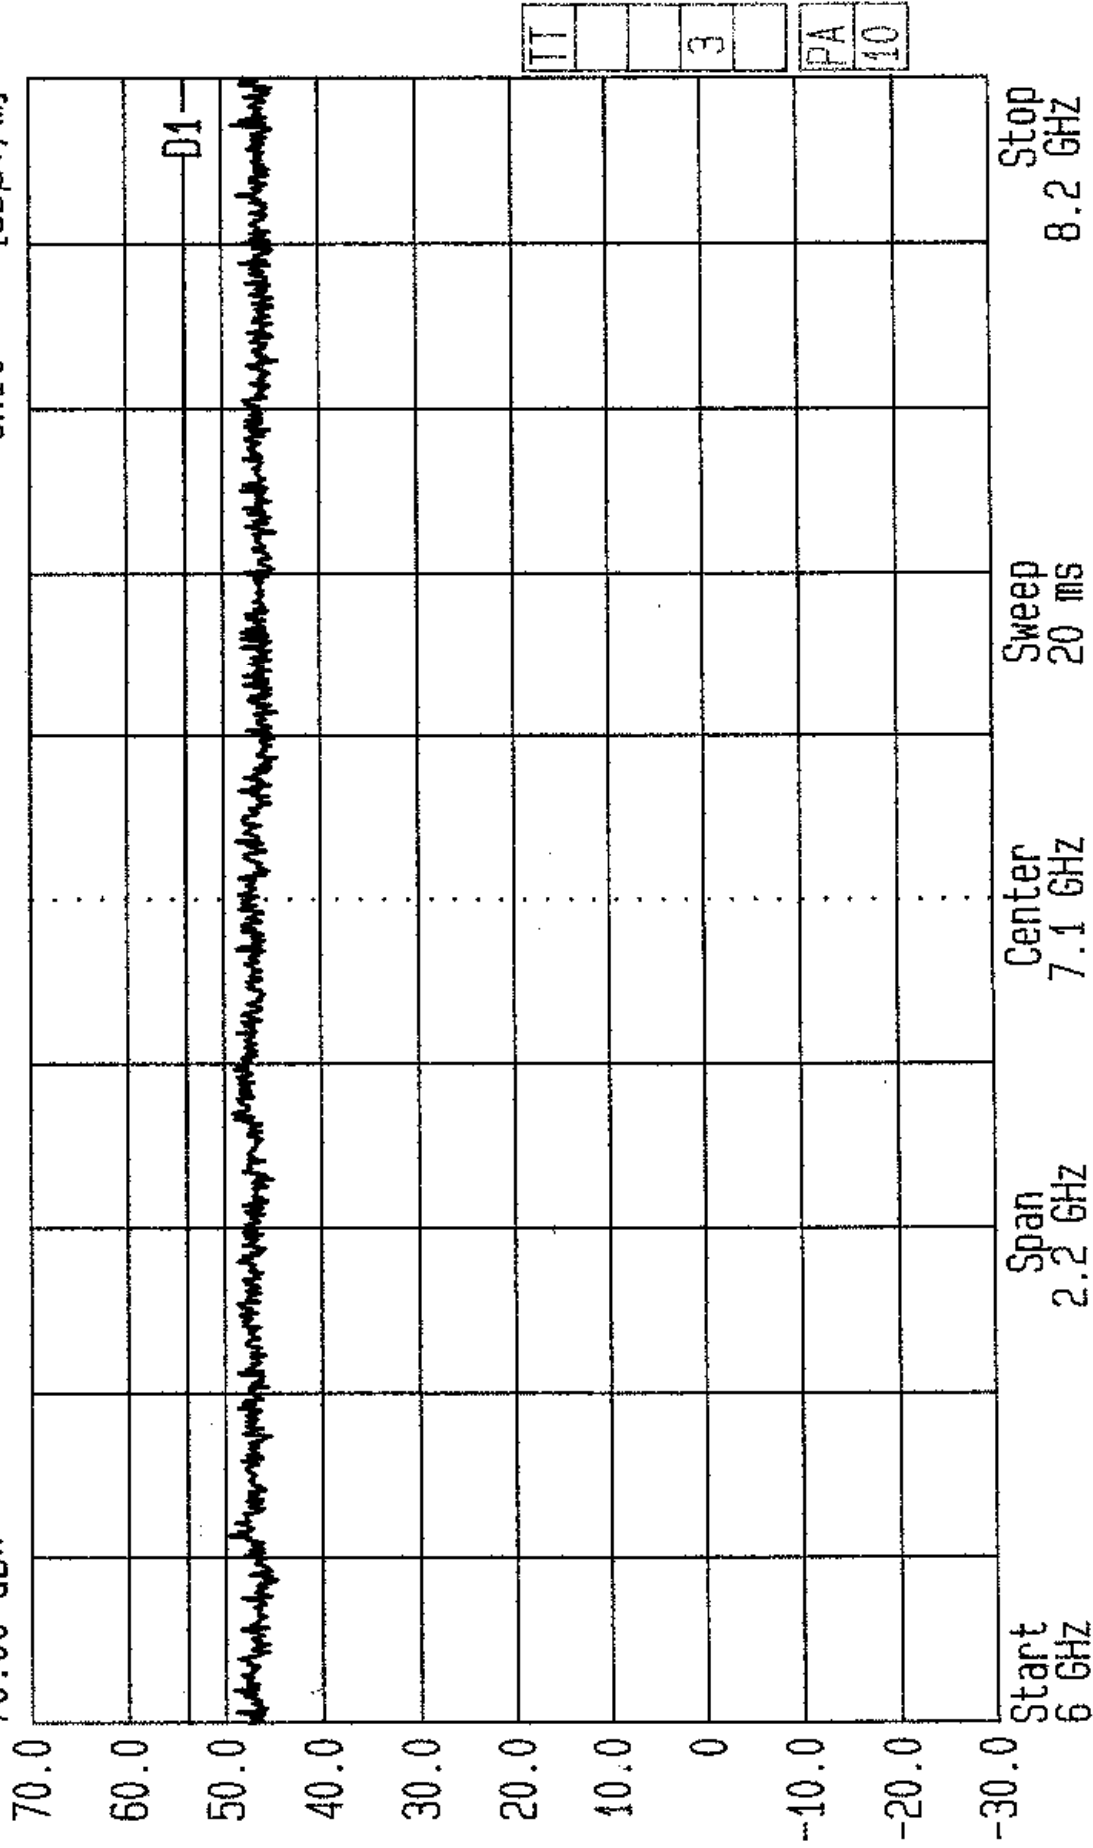

TT
3
PA
10

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.15-5.25GHz Band.

EUT: AB Access Access Point
Bott Chan. GPH/38797/JD01/056



Date 22.Apr.'99 Time 01:47:04

Ref.Lvl 70.00 dBx

Marker 55.07 dBx

8.5344 GHz

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

off

430.000 MHz

Vid.Bw

RF.Att

Unit

1 MHz

0 dB

[dB μ V/m]

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0

-10.0

-20.0

-30.0

D1

TT

3

PA

10

FI

Start

8.2 GHz

Span

4.3 GHz

Center

10.35 GHz

Sweep

40 ms

Stop

12.5 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.

Limit. FCC Part 15.405(b). Rx. 5.15-5.25GHz Band.

EUT: AB Access Access Point

Bott Chan. GPH/38797/JD01/057




Date 22.Apr.'99 Time 01:55:51
Ref.Lvl 70.00 dB* Marker 55.91 dB*
8.6538 GHz

Res.Bw
TG.Lvl
CF.Stp

1 MHz [imp]
off
430.000 MHz

Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBuV/m]

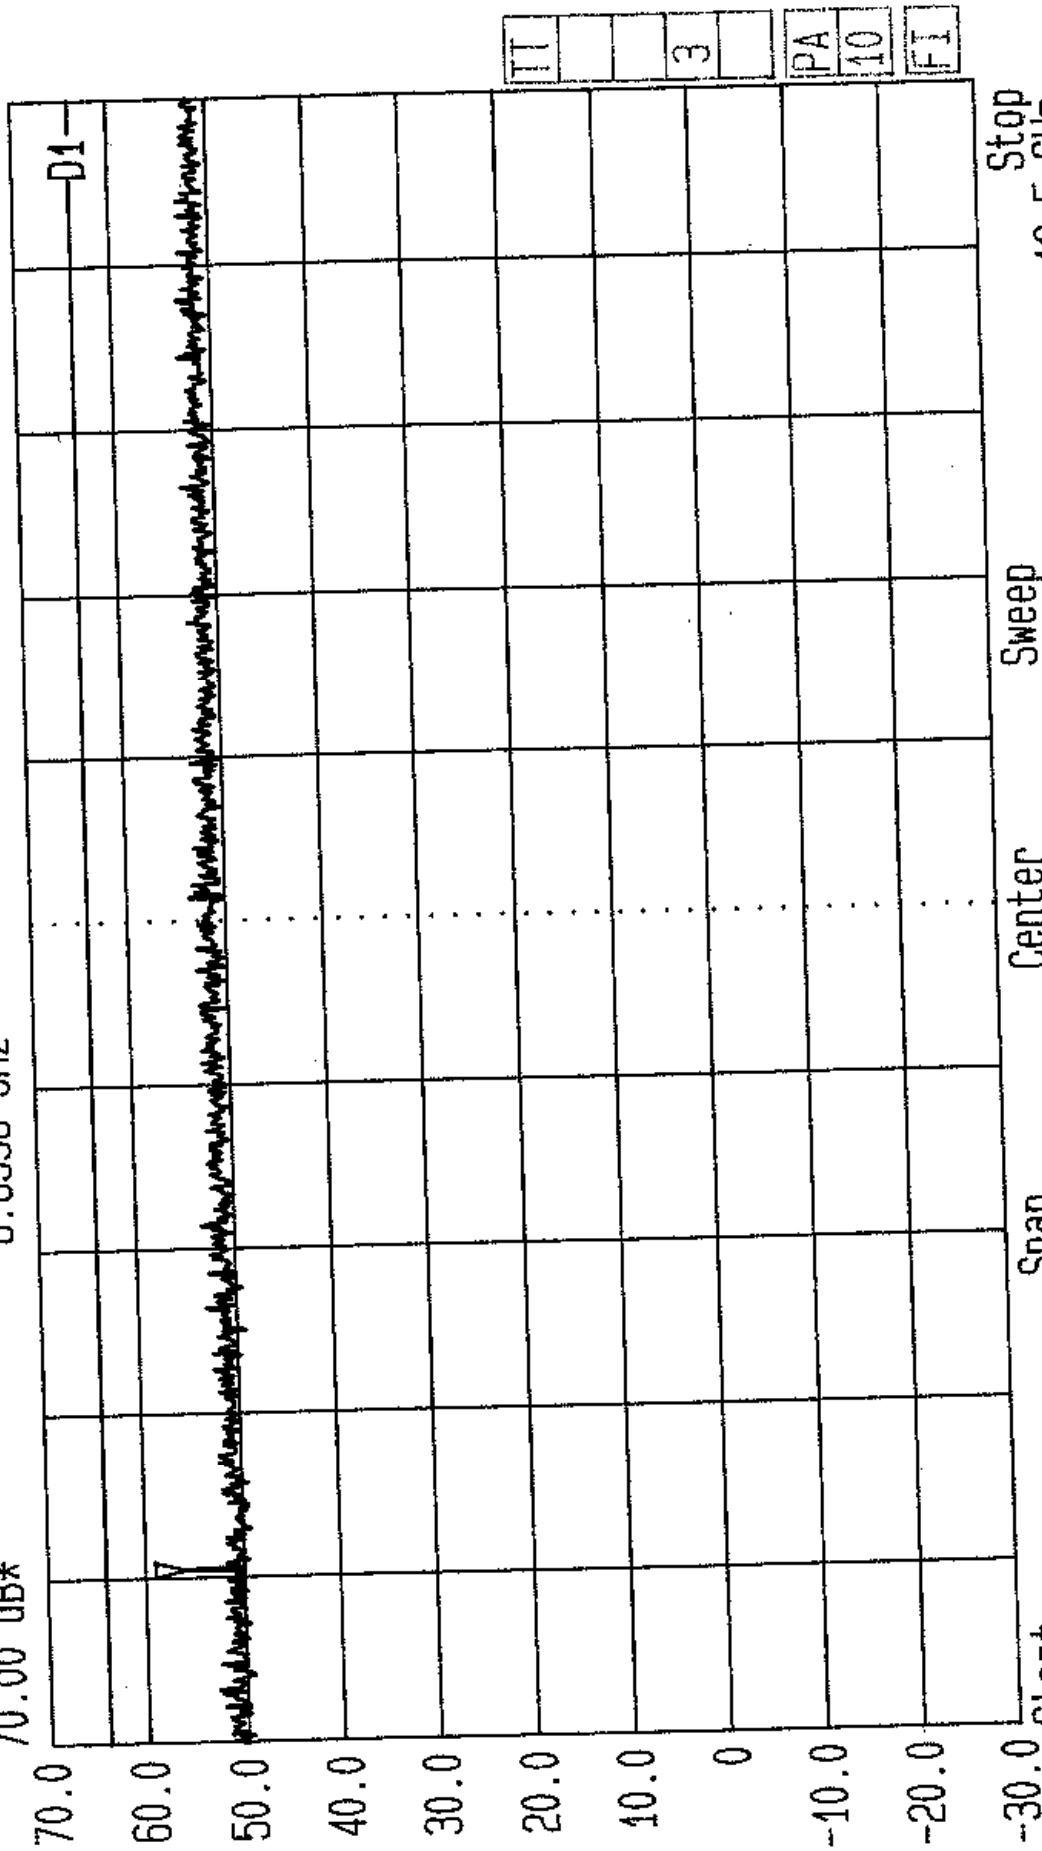


IT
3
PA
10
FI

Start 8.2 GHz
Span 4.3 GHz
Center 10.35 GHz
Sweep 40 ms
Stop 12.5 GHz
EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/058
Radiated, Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.15-5.25GHz Band.



Date 22.Apr.'99 Time 02:01:23
Ref.Lvl 70.00 dB*
Marker 54.41 dB*
8.7351 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 430.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBμV/m]

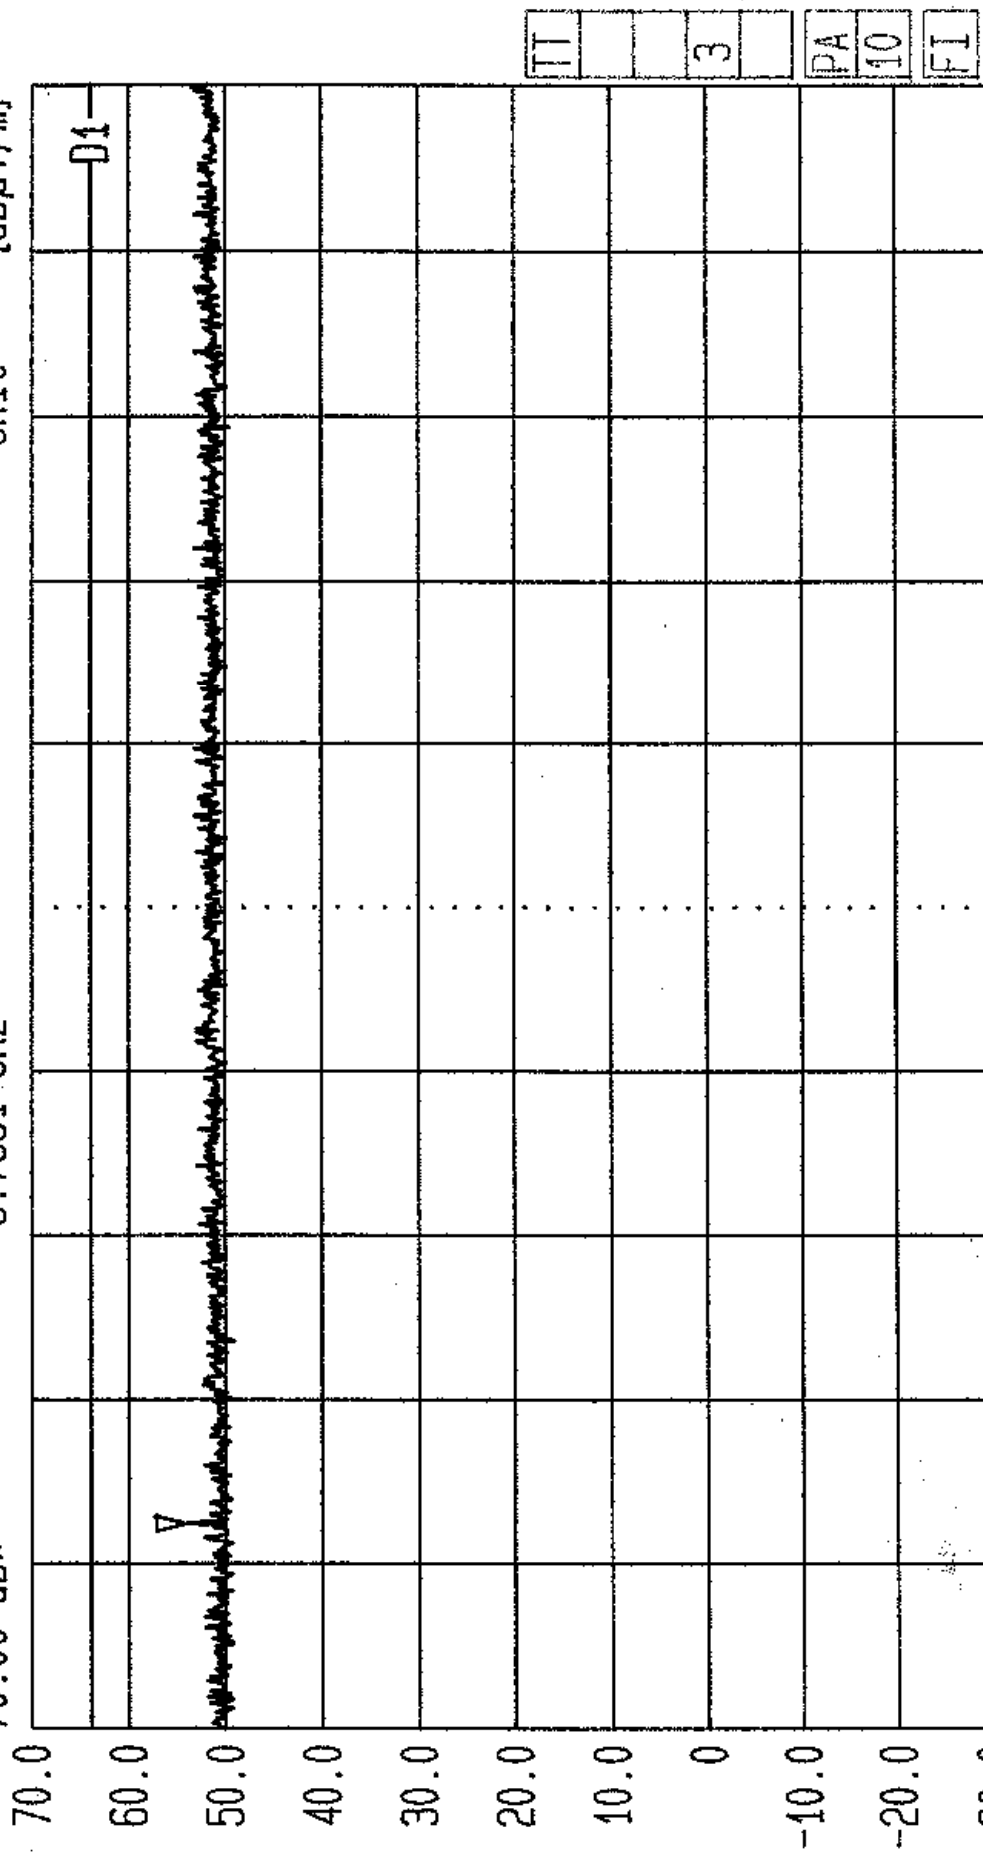


Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band.
EUT: AB Access Access Point
Bott Chan. GPH/38797/JD01/059



Date 22.Apr.'99 Time 02:18:22
Ref.Lvl 70.00 dB* Marker 56.80 dB*
8.8545 GHz

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
TG.Lvl off
CF.Stp 430.000 MHz RF.Att 0 dB
Unit [dBμV/m]

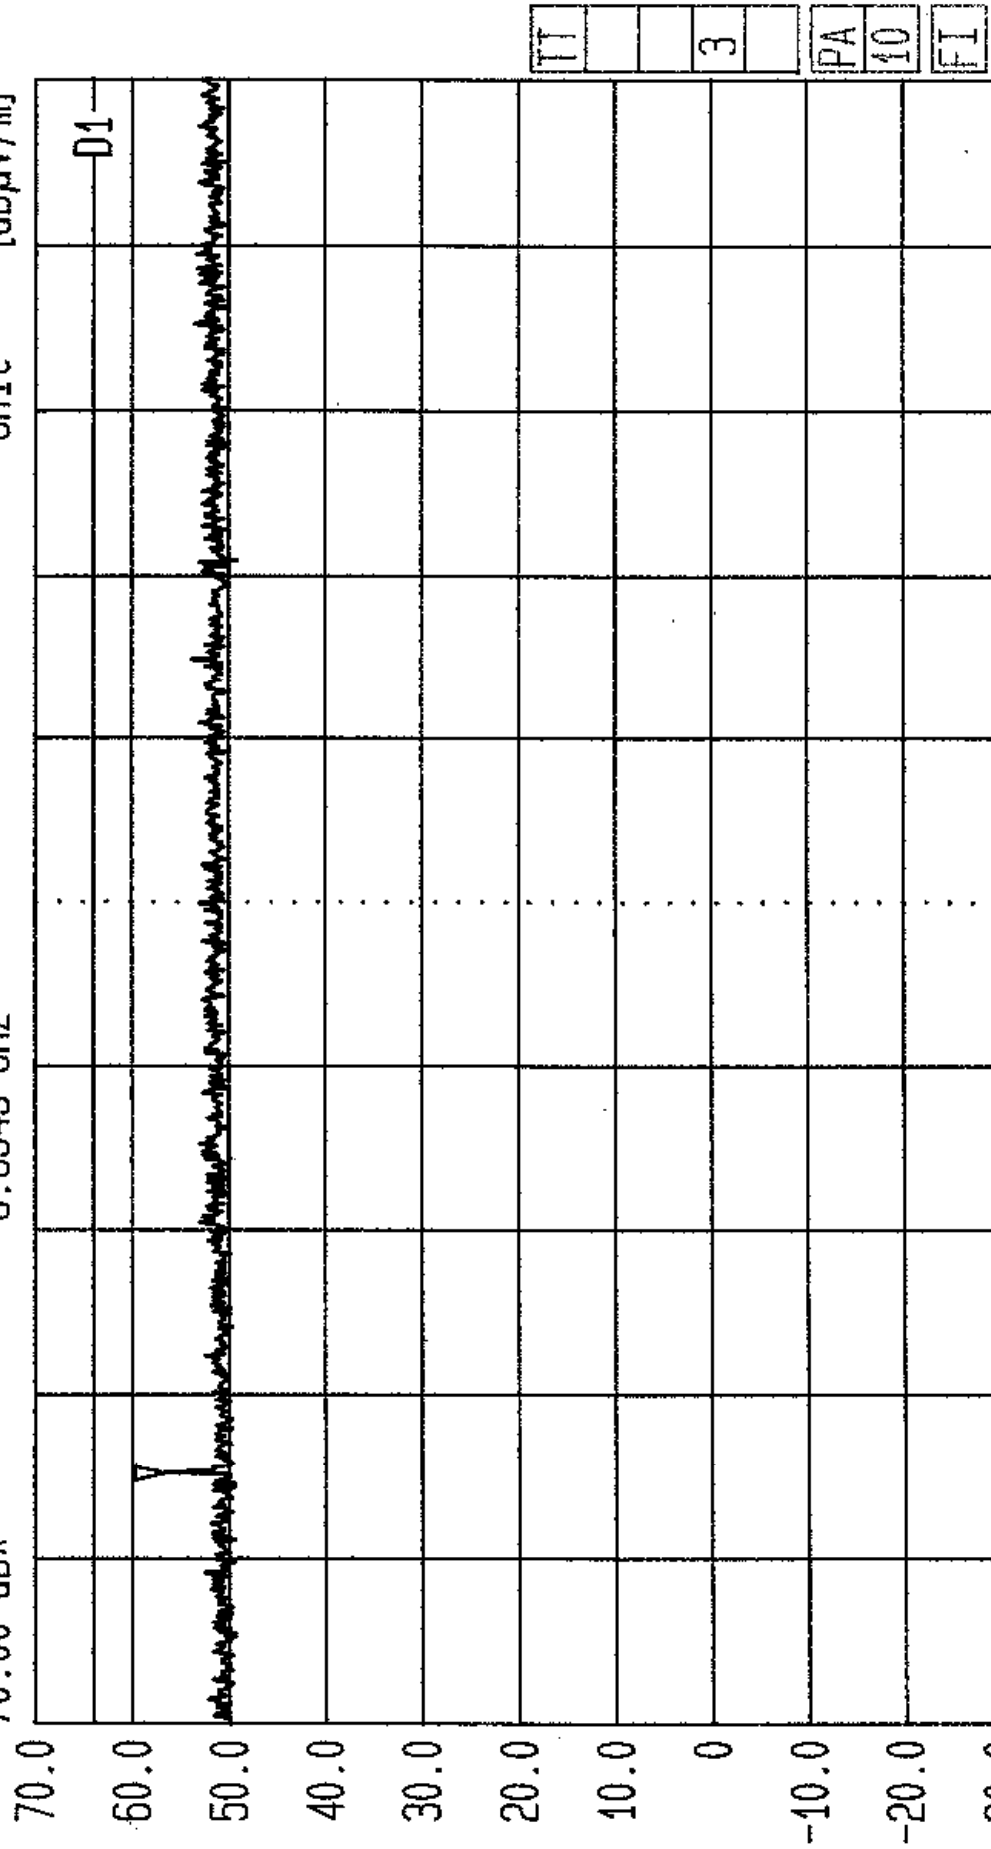


Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band. EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/060



Date 22.Apr.'99 Time 02:26:02

Ref.Lvl
70.00 dBx

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
TG.Lvl Off
CF.Stp 430.000 MHz RF.Att 0 dB
Unit [dBμV/m]

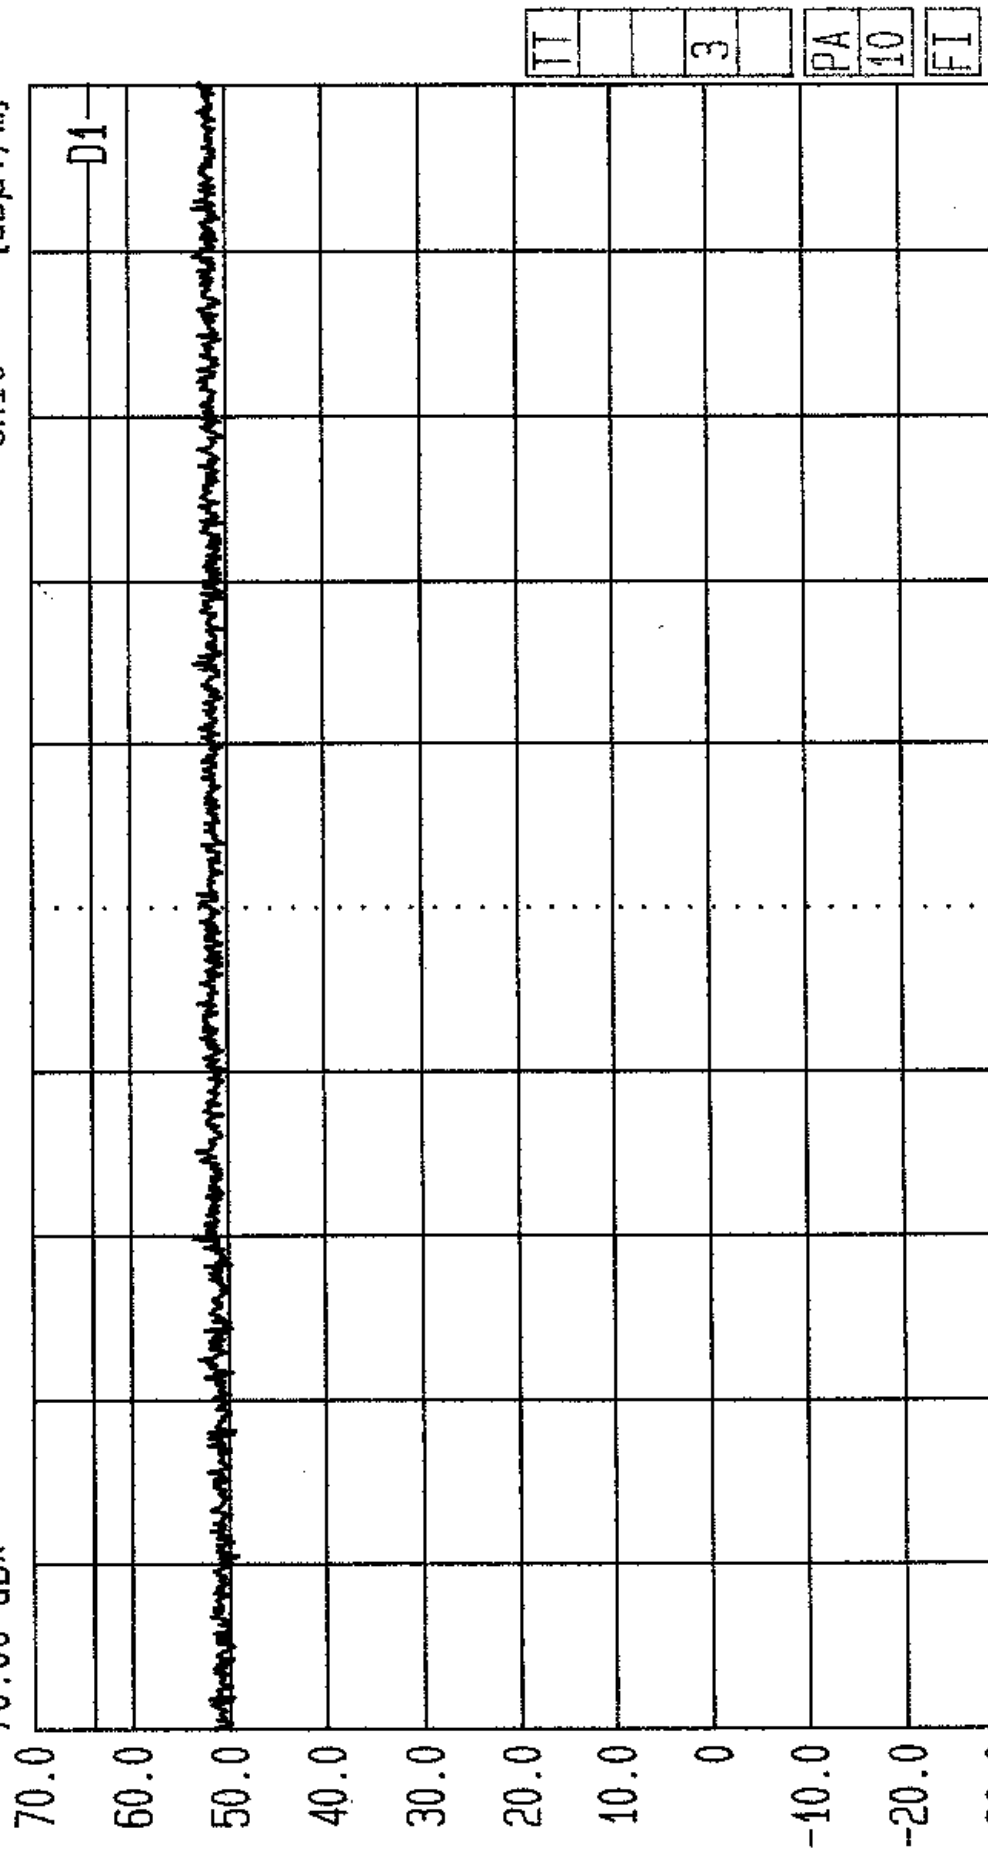


Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.405(b). Rx. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/061



Date 22.Apr.'99 Time 02:31:17
Ref.Lvl 70.00 dB* Marker 54.97 dB*
9.8053 GHz

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
TG.Lvl Off
CF.Stp 430.000 MHz RF.Att 0 dB
Unit [dB μ V/m]

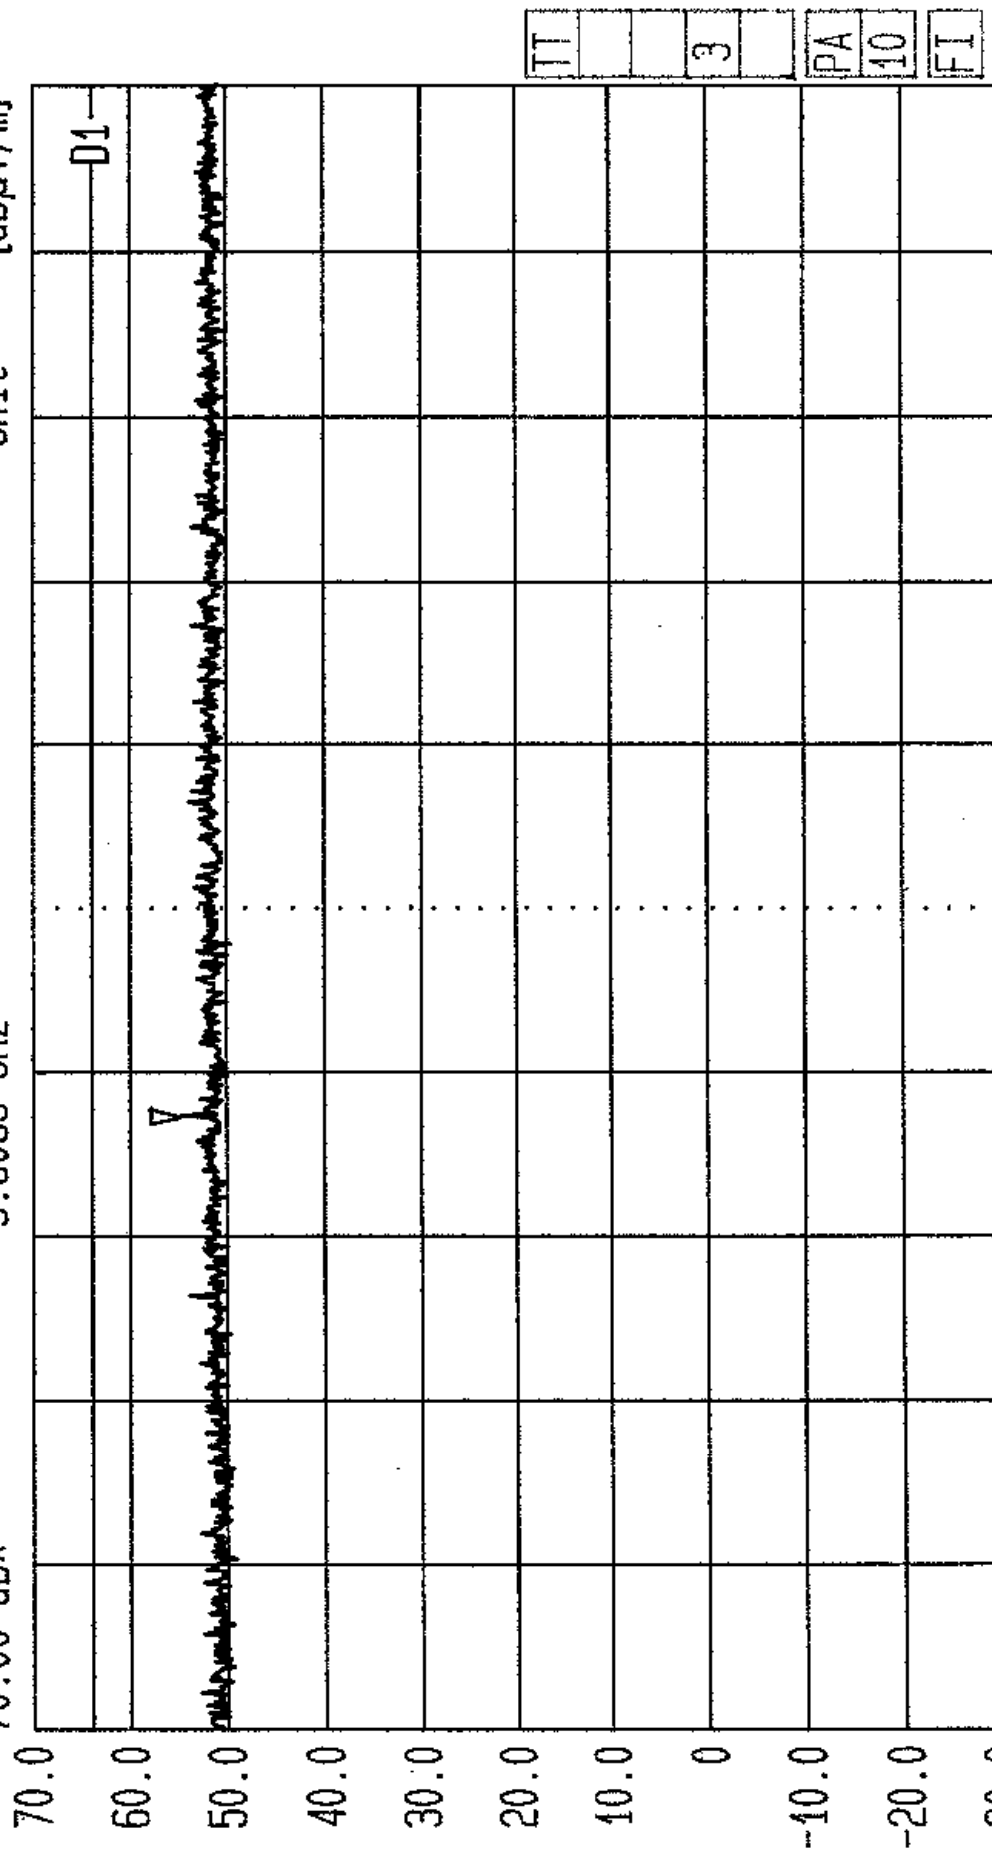

Start 8.2 GHz Span 4.3 GHz Center 10.35 GHz Sweep 40 ms Stop 12.5 GHz
Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.405(b). Rx. 5.725-5.825GHz Band. Top Chan. GPH/38797/JD01/062


TT
3
PA
10
FI



Date 22.Apr.'99 Time 02:36:48

Ref.Lvl
70.00 dBx

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 550.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBμV/m]

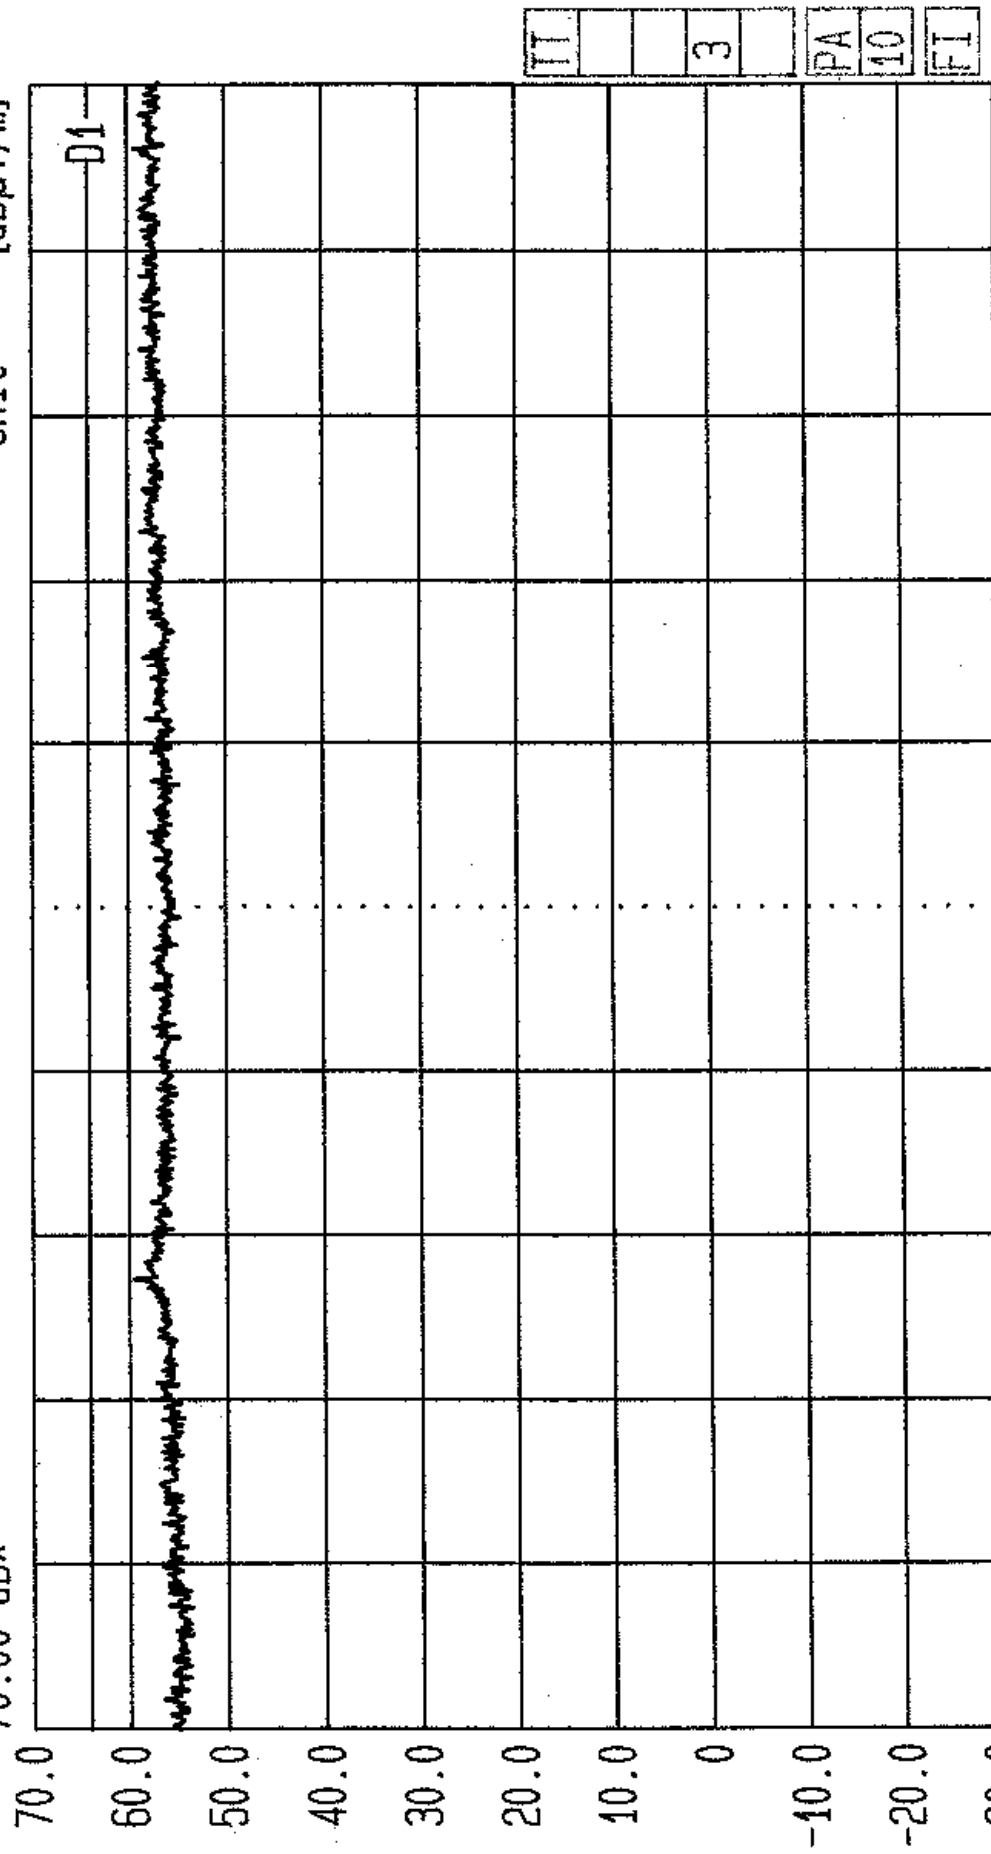

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.725-5.825GHz Band. Top Chan. EUT: AB Access Access Point
GPH/38797/JD01/063



Date 22.Apr.'99 Time 02:41:16

Ref.Lvl

70.00 dBx

Res.BW

TG.Lvl

CF.Stp

1 MHz [imp]

off

550.000 MHz

Vid.BW

0 dB

Unit

1 MHz

[dB μ V/m]

70.0

60.0

50.0

40.0

30.0

20.0


10.0

0

-10.0

-20.0

-30.0

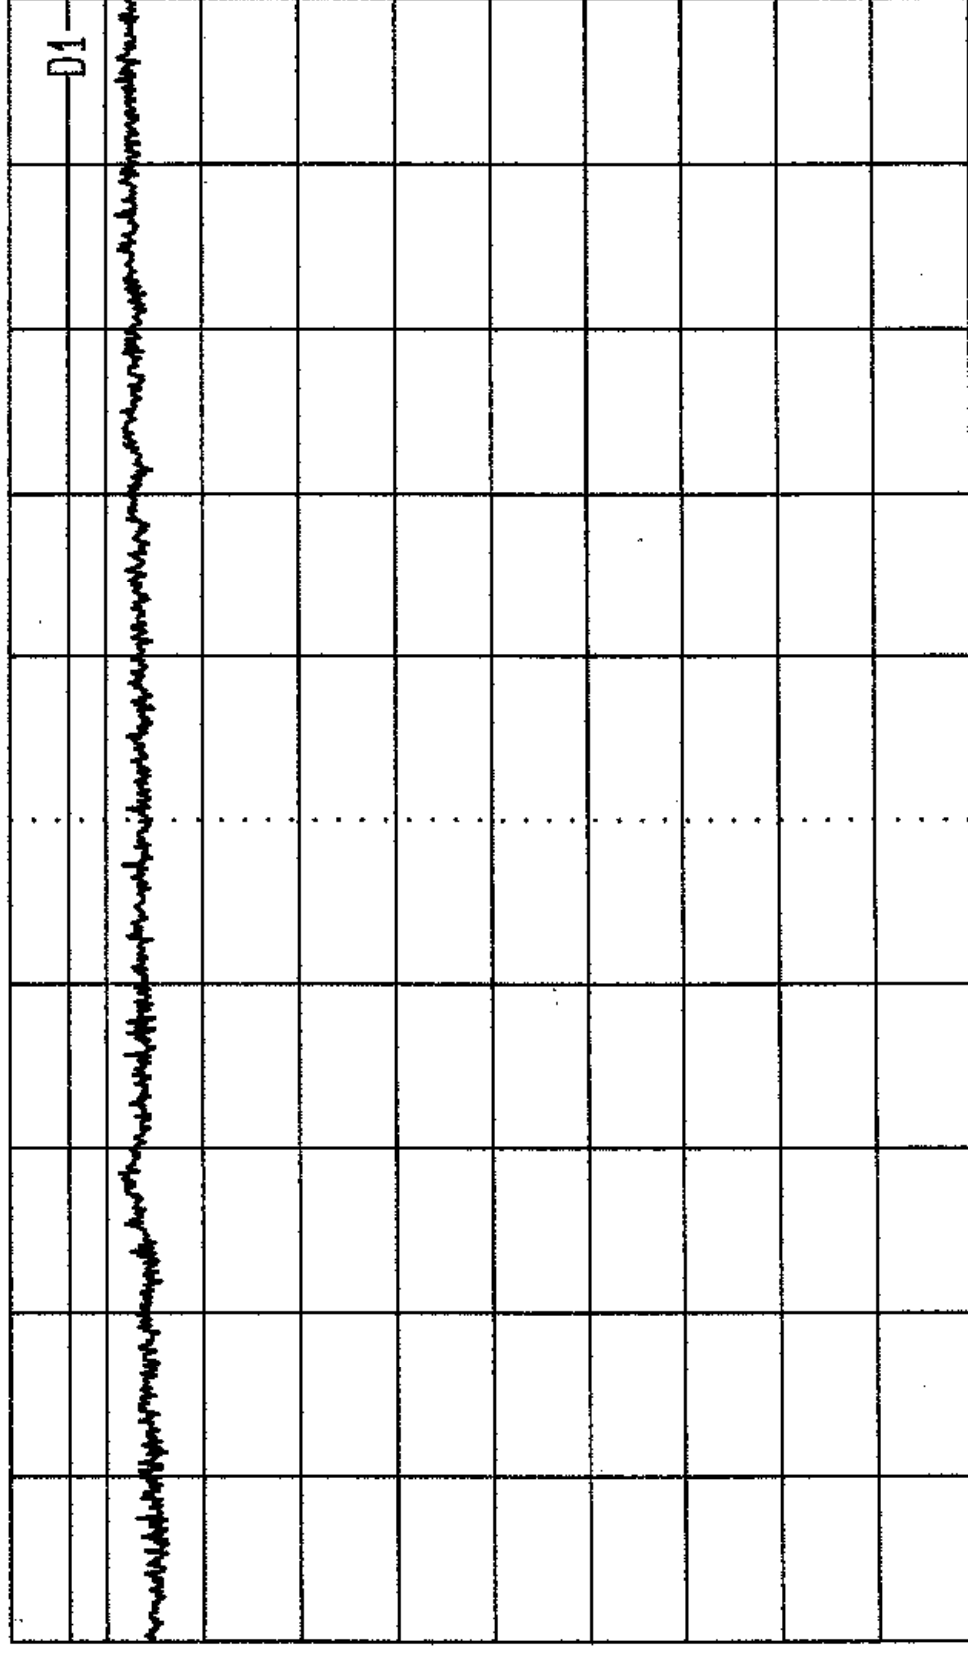

Start

12.5 GHz

Span

5.5 GHz

Center

15.25 GHz

Sweep

40 ms

Stop

18 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.405(b). Rx. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/064

TT
3
PA
10
FI



Date 22.Apr.'99 Time 02:45:34


Ref.Lvl
70.00 dBx

Res.Bw
TG.Lvl
CF.Stp

1 MHz [imp]
off
550.000 MHz

Vid.Bw
RF.Att
Unit

1 MHz
0 dB
[dBμV/m]

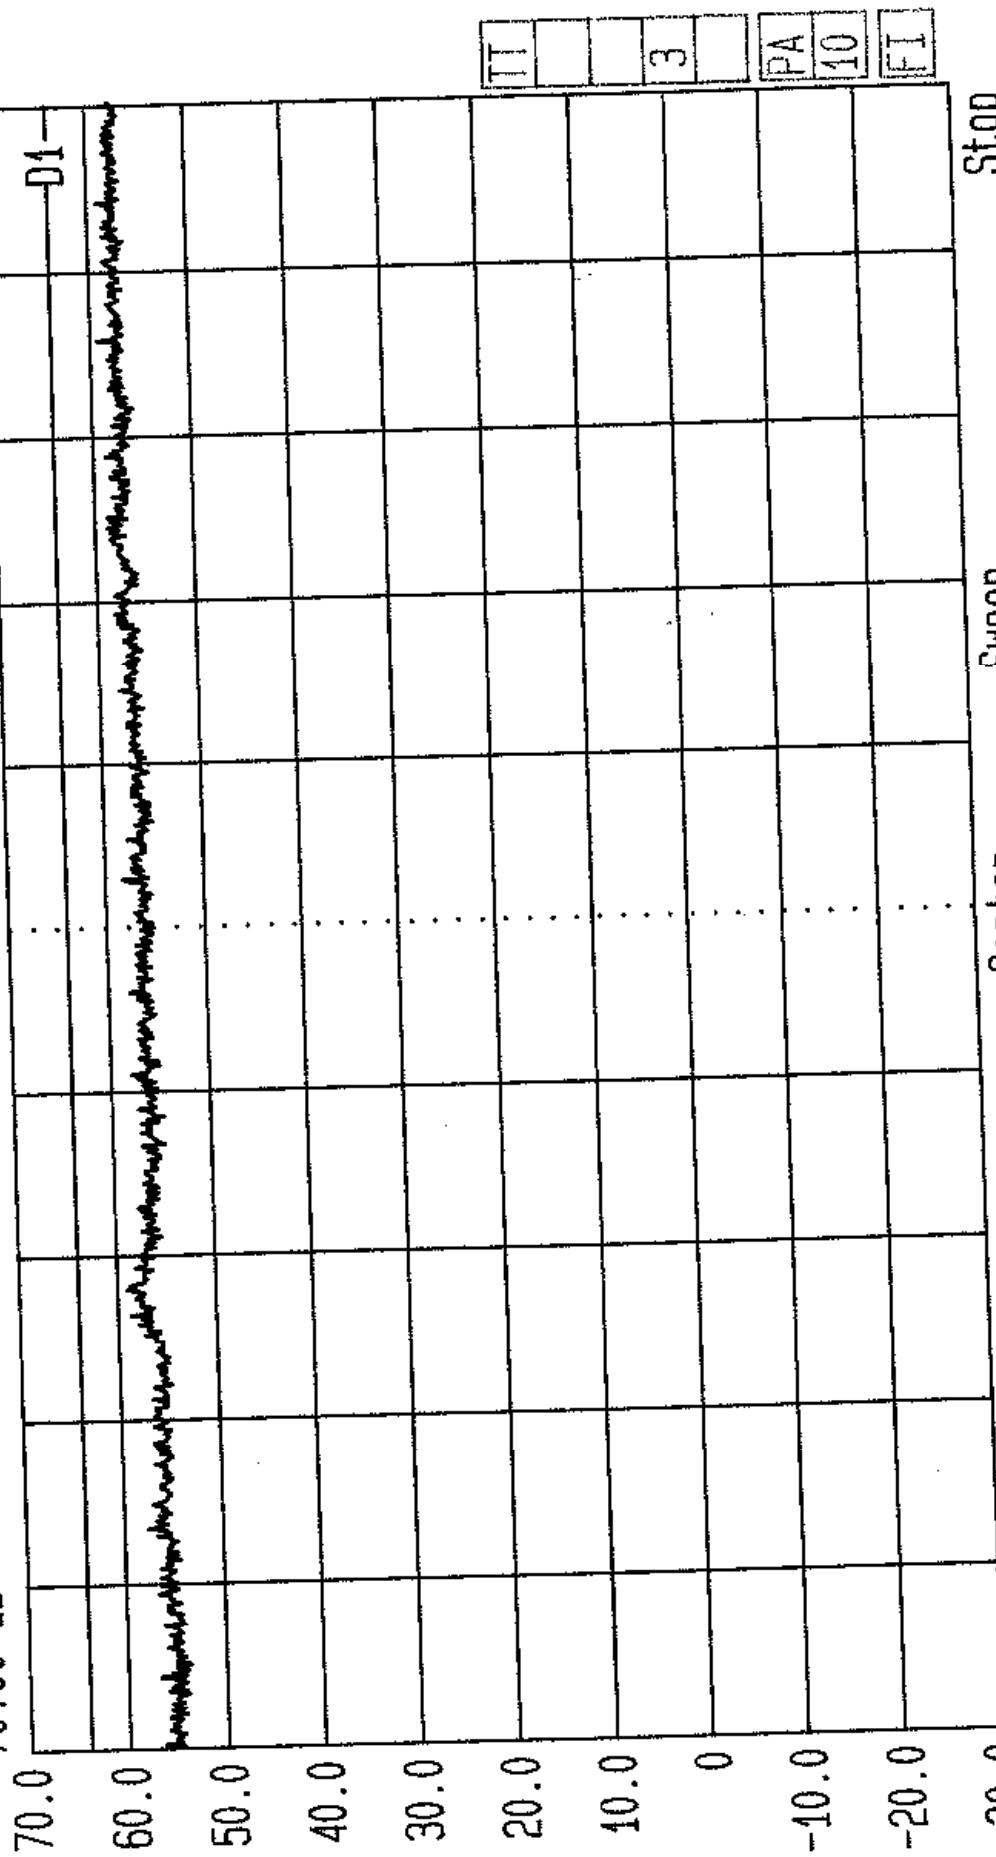

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band.

EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/065



Date 22.Apr.'99 Time 02:49:10

Ref.Lvl
70.00 dBx

Res.Bw
TG.Lvl
CF.Stp


1 MHz [imp]
off
550.000 MHz

Vid.Bw
RF.Att
Unit

1 MHz

0 dB

[dBμV/m]

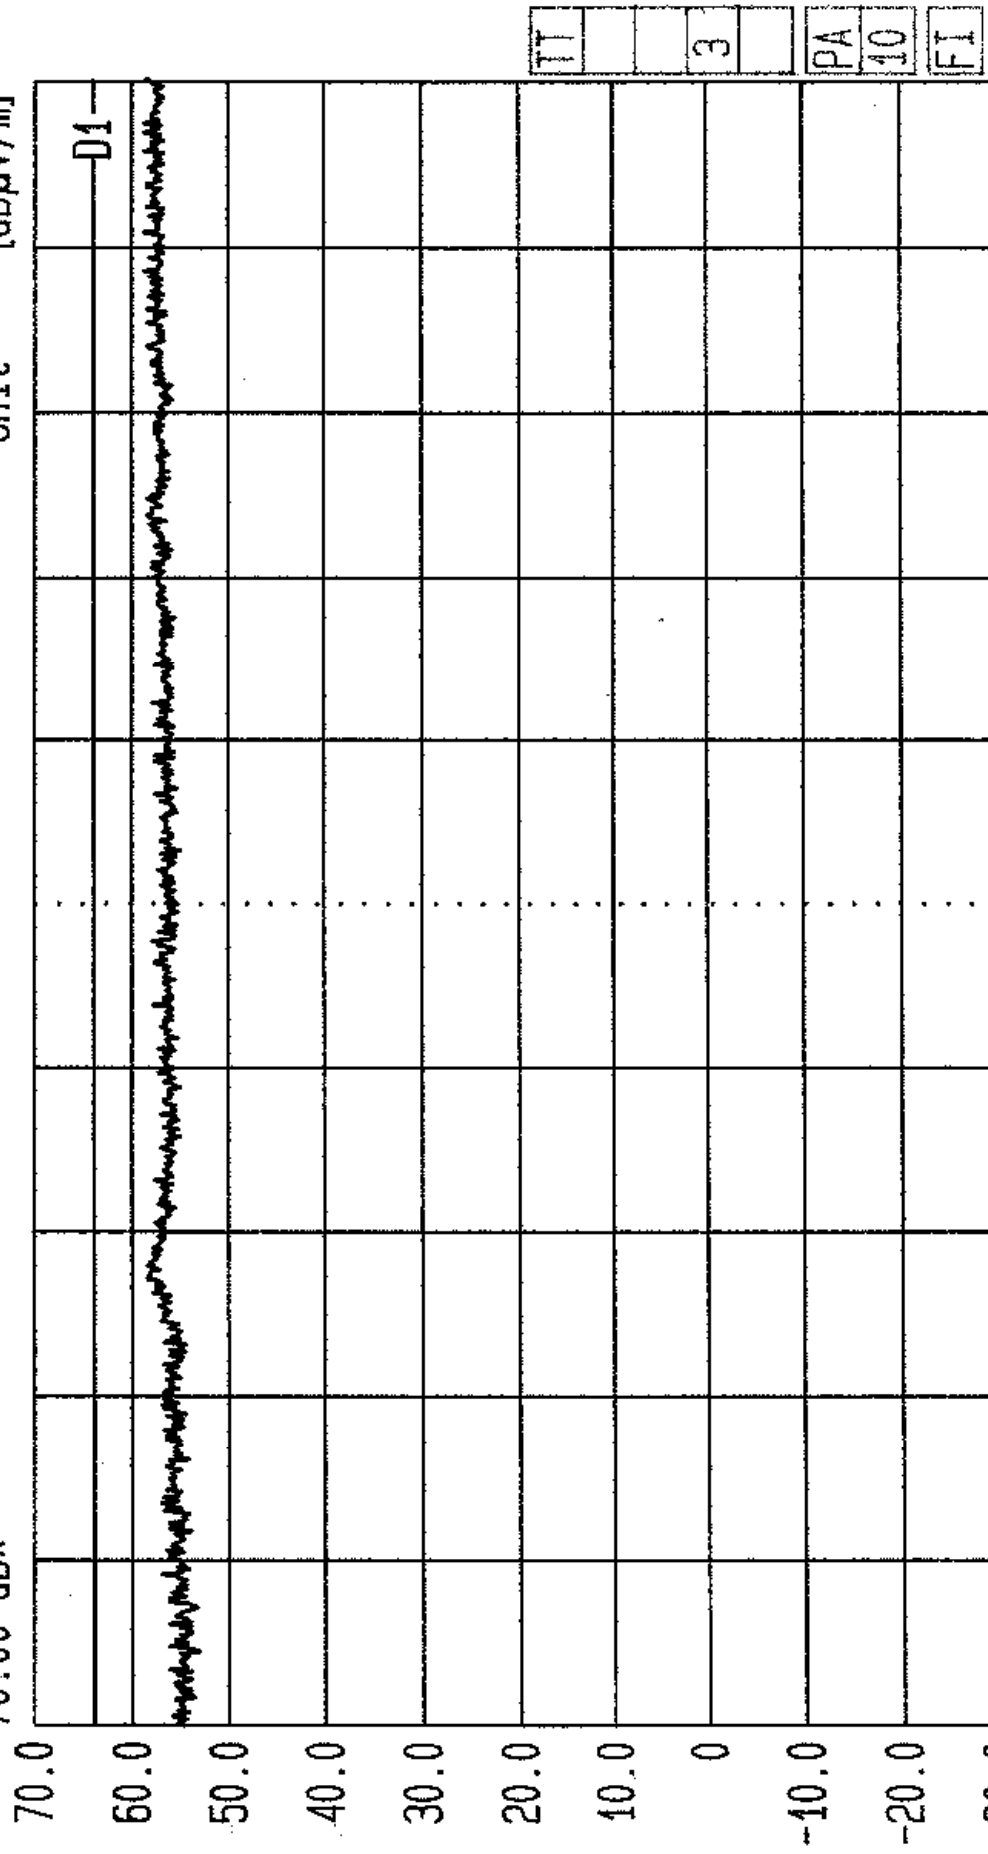

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band. EUT: AB Access Access Point
Bott Chan. GPH/38797/JD01/066



Date 22.Apr.'99 Time 02:52:57

Ref.Lvl
70.00 dBx

Res.Bw
TG.Lvl
CF.Stp


1 MHz [imp]
Off
550.000 MHz

Vid.Bw
RF.Att
Unit

1 MHz

0 dB

[dBμV/m]

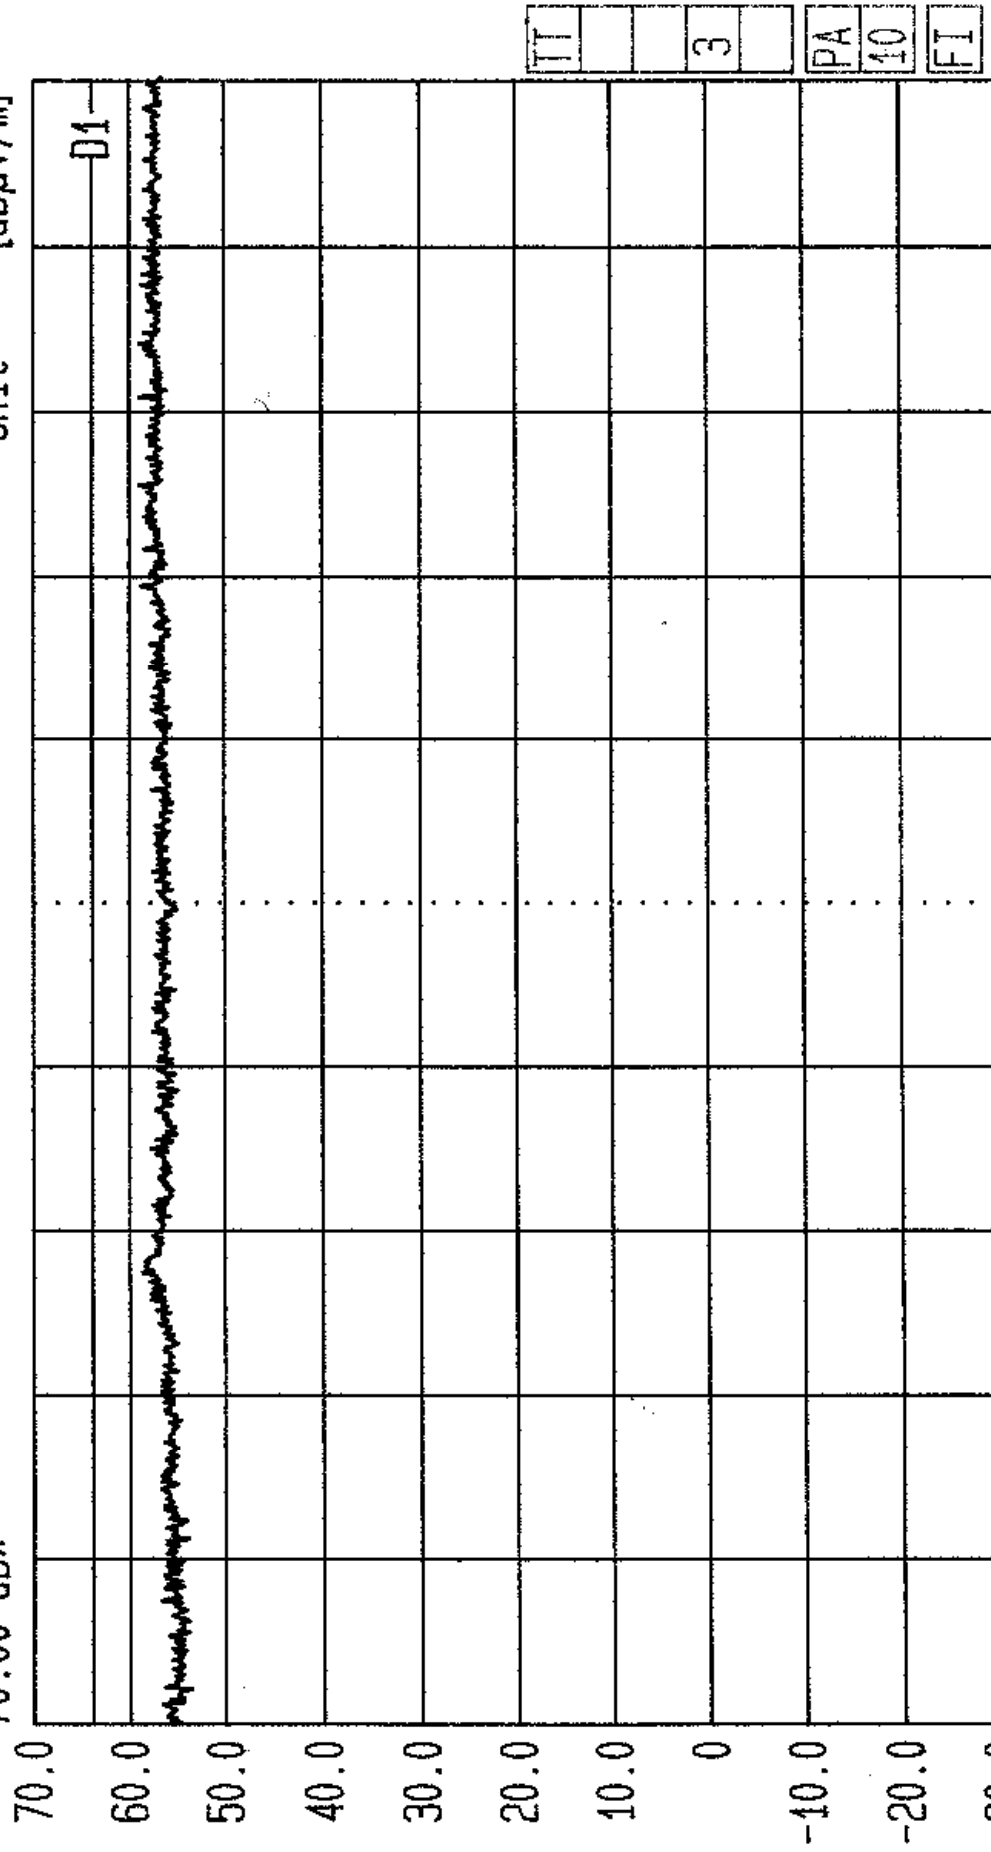

Radiated, Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.15-5.25GHz Band.

EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/067



Date 22.Apr.'99 Time 02:56:27

Ref.Lvl

70.00 dBx

Res.Bw

1G.Lvl

CF.Stp

1 MHz [imp]

Off

550.000 MHz

Vid.Bw


RF.Att

Unit

1 MHz

0 dB

[dBuV/m]

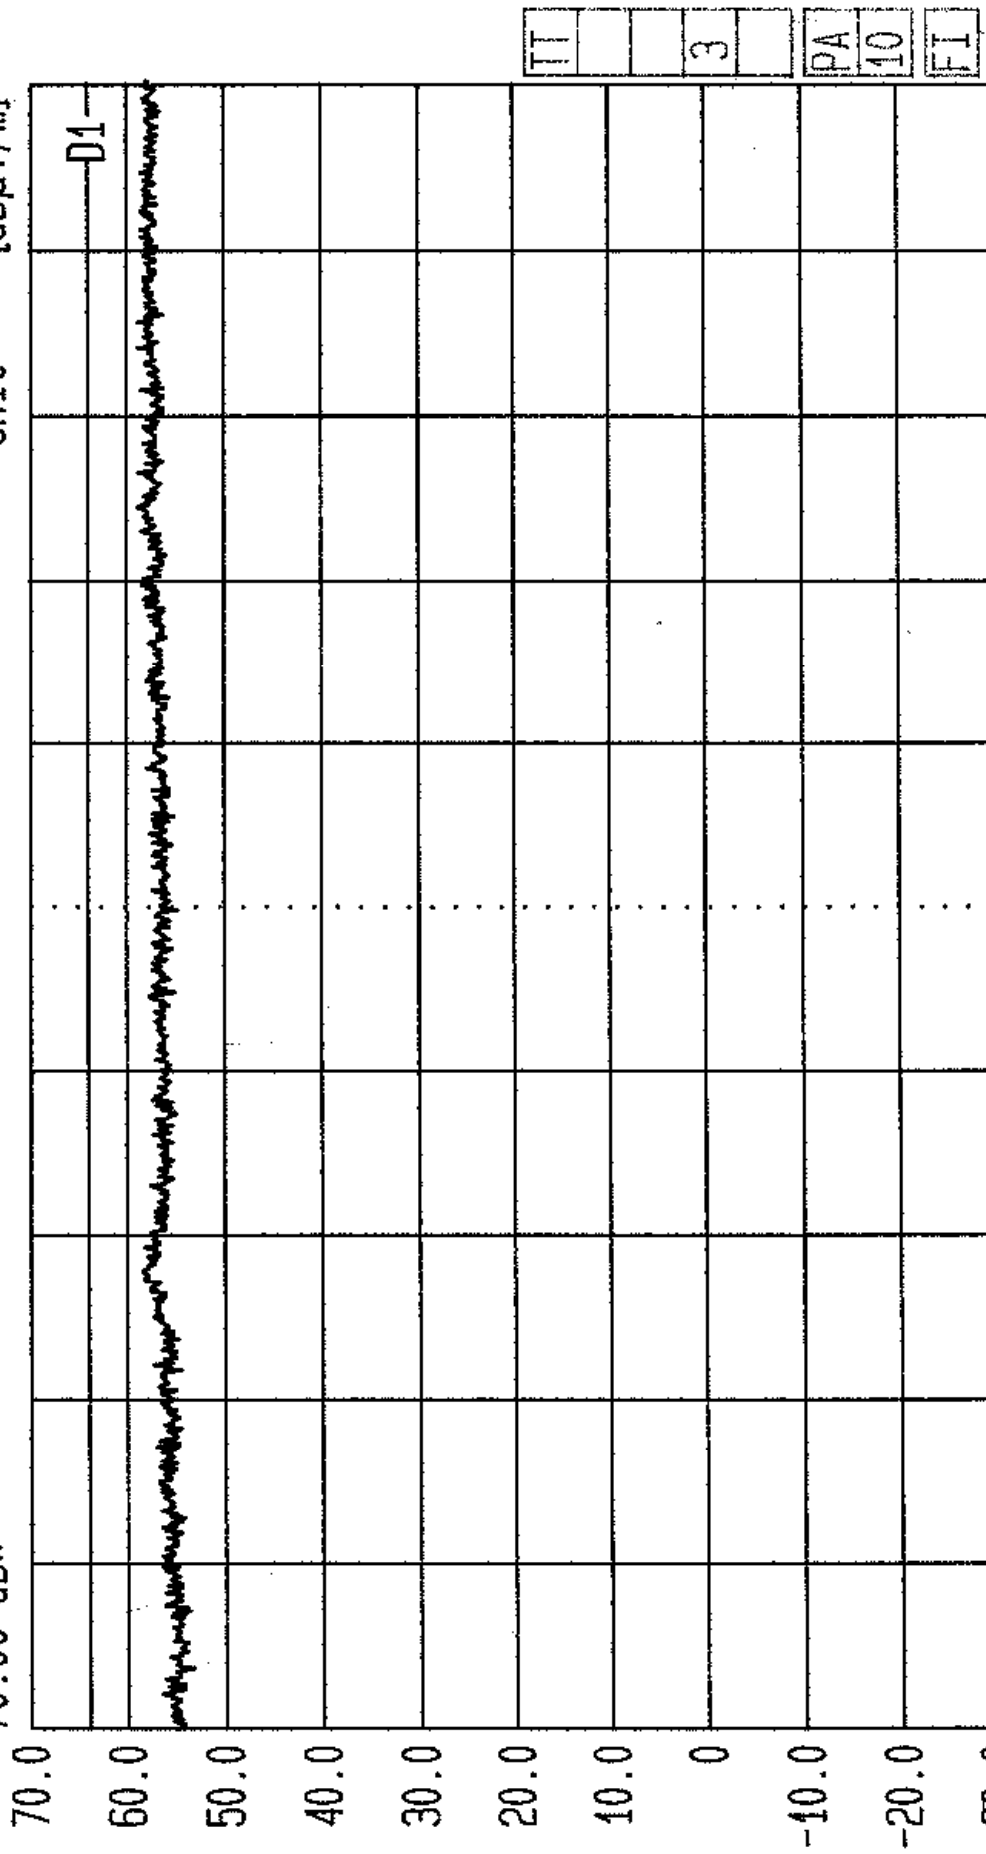


Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). RX. 5.15-5.25GHz Band. Bott Chan. EUT: AB Access Access Point
GPH/38797/JD01/068



Date 22.Apr.'99 Time 03:00:26
Ref.Lvl 70.00 dBx

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
TG.Lvl Off
CF.Stp 800.000 MHz RF.Att 0 dB
Unit [dBμV/m]

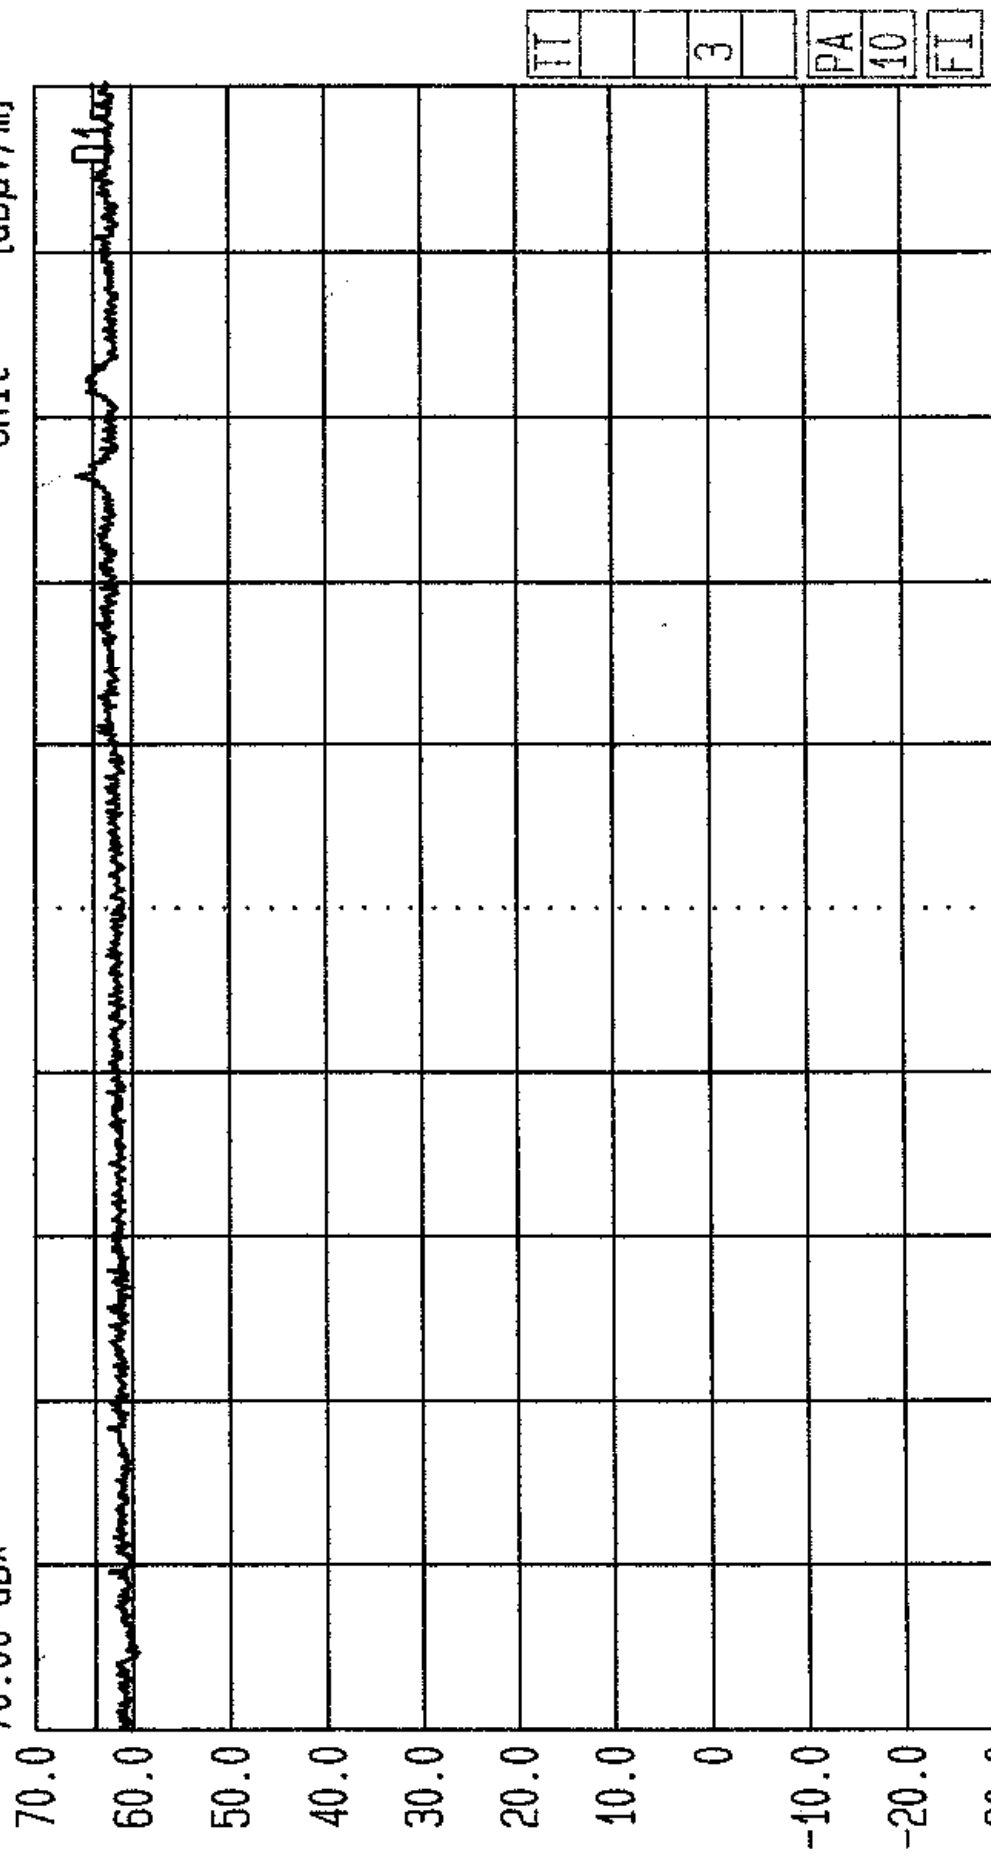

TT
3
PA
10
FI



Date 22.Apr.'99 Time 03:12:33

Ref.Lvl

70.00 dBx

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

off

800.000 MHz

Vid.Bw

RF.Att

Unit

1 MHz

0 dB

[dBuV/m]

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0

-10.0

-20.0

-30.0

Start

18 GHz

Span

8 GHz

Center

22 GHz

Sweep

60 ms

Stop

26 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.

Limit. FCC Part 15.405(b). Rx. 5.15-5.25GHz Band.

EUT: AB Access Access Point

Top Chan. GPH/38797/JD01/070


TT
3
PA
10
FI



Date 22.Apr.'99 Time 03:21:30

Ref.Lvl
70.00 dBx

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 800.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBuV/m]

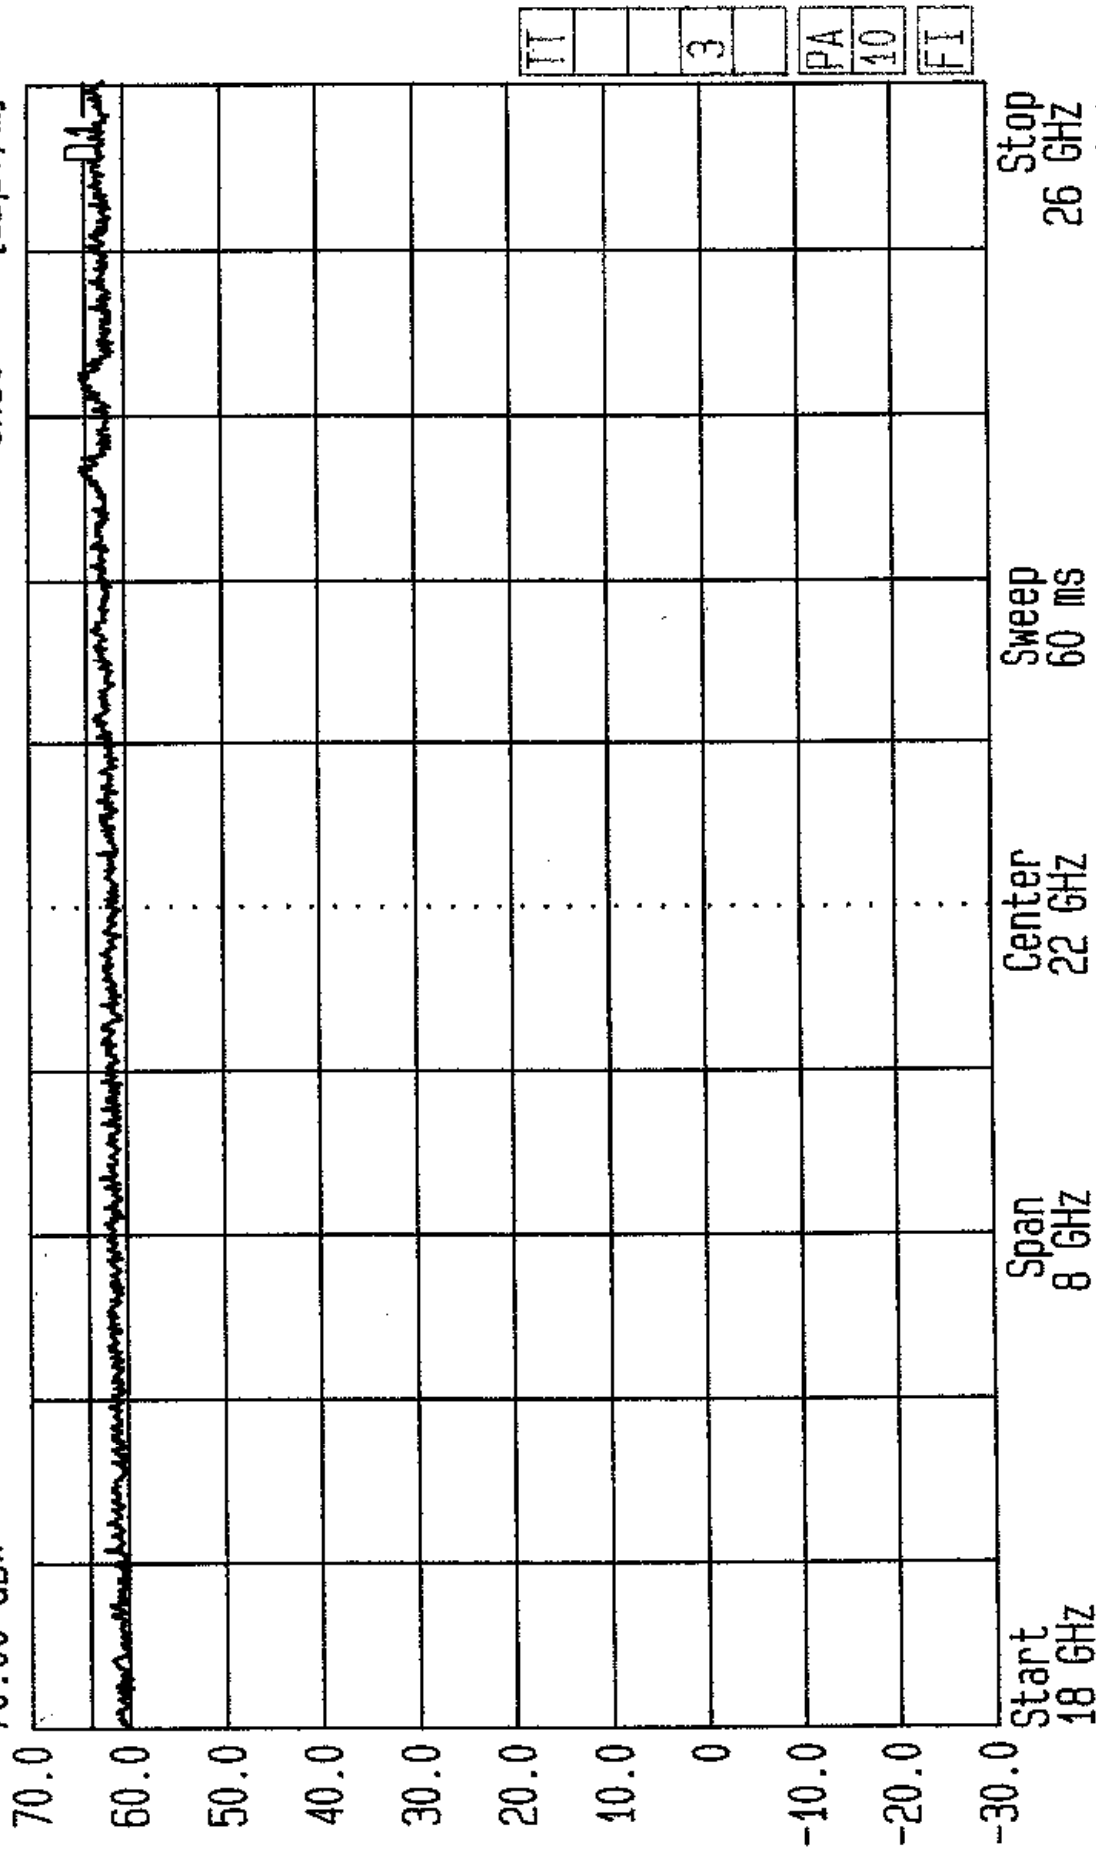

TT
3
PA
10
FI

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band.
EUT: AB Access Access Point
Bott Chan. GPH/38797/JD01/071



Date 22.Apr.'99 Time 03:25:51

Ref.Lvl
70.00 dB*

Res.Bw
TG.Lvl
CF.Stp

1 MHz [imp]
off
800.000 MHz

Vid.Bw
RF.Att
Unit

1 MHz
0 dB
[dB μ V/m]

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0

-10.0

-20.0

-30.0

Start
18 GHz

Span
8 GHz

Center
22 GHz

Sweep
60 ms

Stop
26 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd.
Limit. FCC Part 15.405(b). Rx. 5.25-5.35GHz Band.

EUT: AB Access Access Point
Top Chan. GPH/38797/JD01/072

TT
3
PA
10
FI



Date 22.Apr.'99 Time 03:30:46

Ref.Lvl

70.00 dB*

Res.BW

TG.Lvl

CF.Stp

1 MHz [imp]

Off

800.000 MHz

Vid.BW


RF.Att

Unit

1 MHz

0 dB

[dBuV/m]

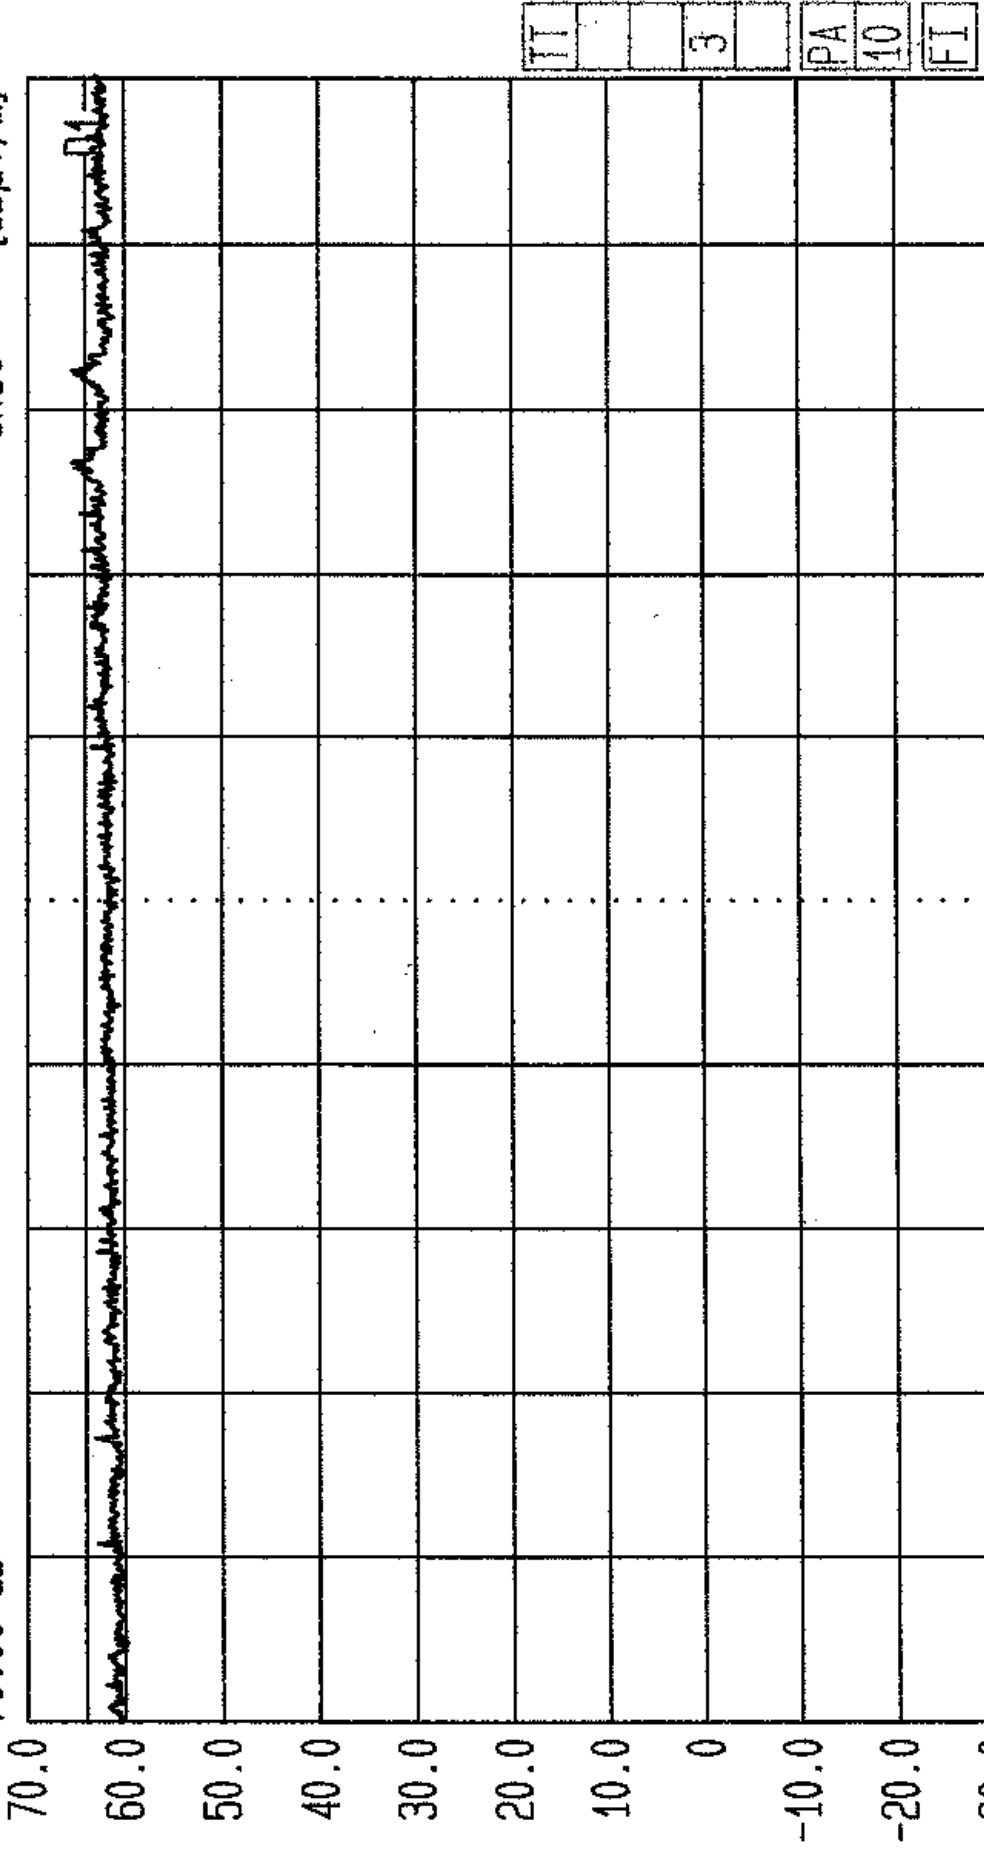

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.405(b). Rx. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/073



Date 22.Apr.'99 Time 03:34:54

Ref.Lvl

70.00 dB*

Res.Bw

TG.Lvl

CF.Stp

1 MHz [imp]

Off

800.000 MHz

Vid.Bw


RF.Att

Unit

1 MHz

0 dB

[dBμV/m]

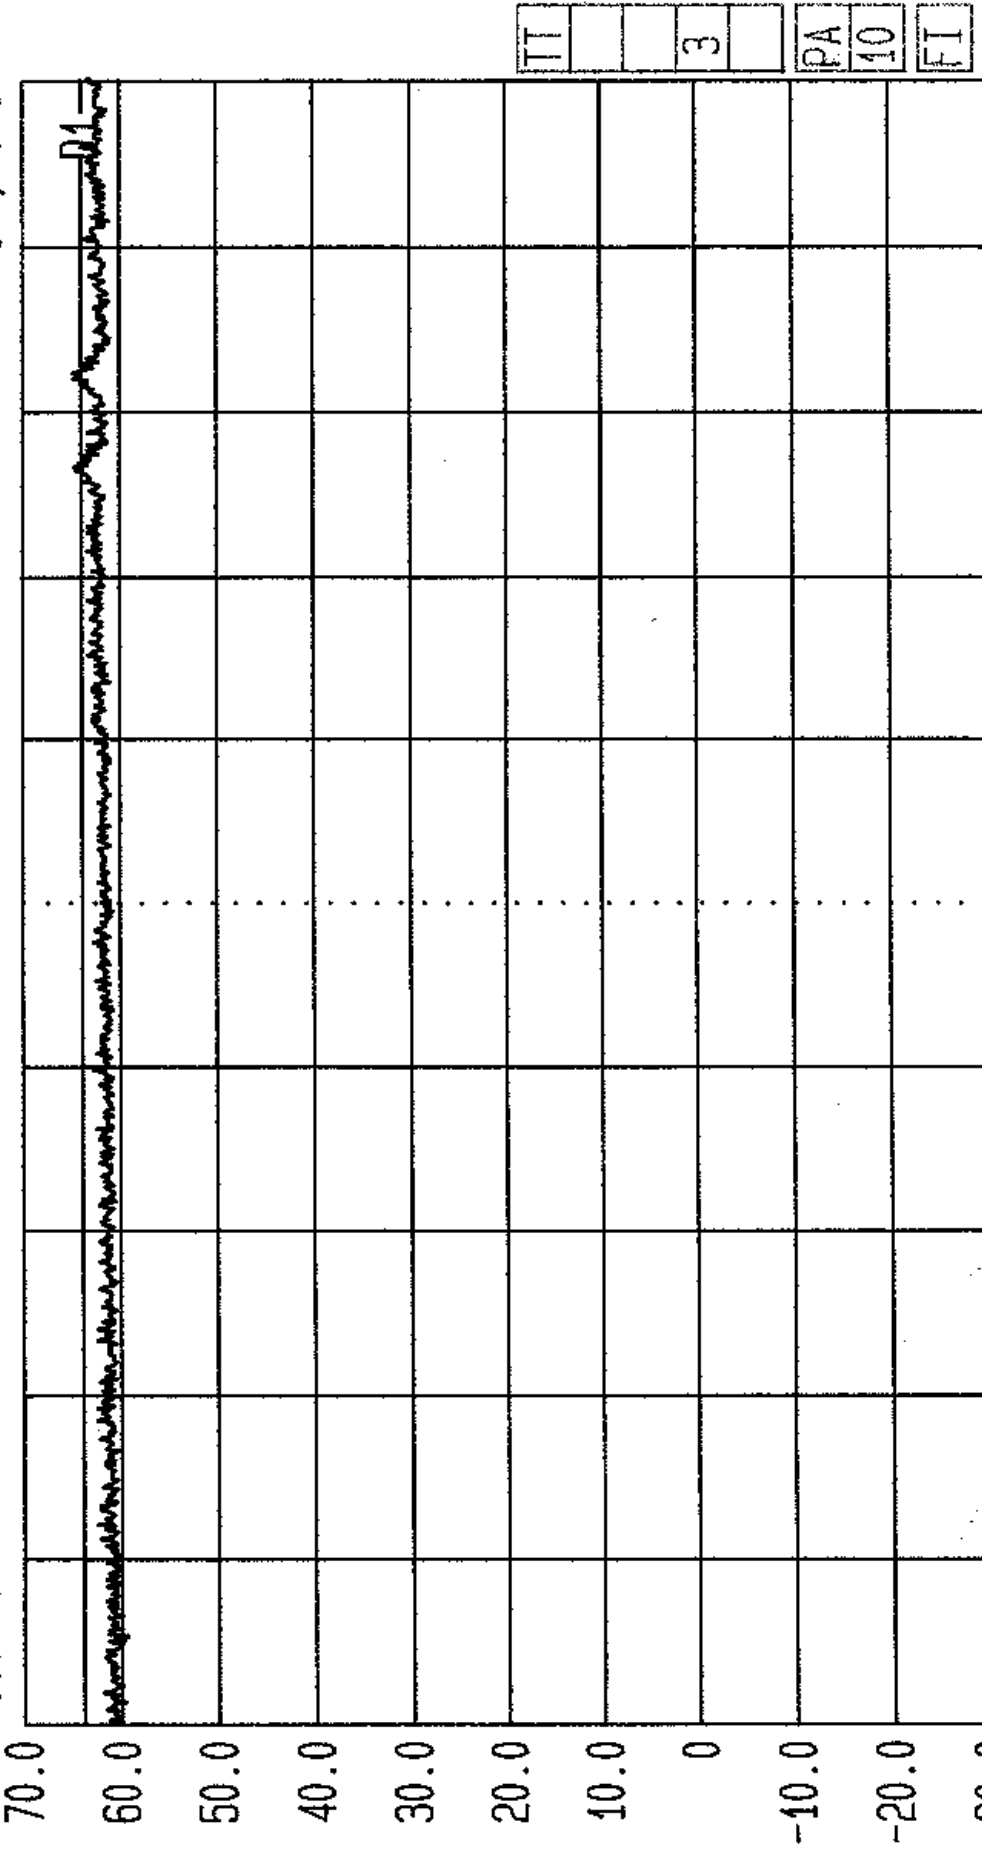

TT
3
PA
10
FI

Start 18 GHz

Span 8 GHz

Center 22 GHz

Sweep 60 ms

Stop 26 GHz

Radiated. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.405(b). Rx. 5.725-5.825GHz Band. Top Chan. GPH/38797/JD01/074




LVLOFF
Date 22.Apr.'99 Time 03:52:28
Ref.Lvl 20.00 dBm Marker 13.10 dBm
5.17011 GHz

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 2.000 MHz

Vid.Bw 1 MHz
RF.Att 10 dB
Unit [dBm]

F1 5.16199999993 GHz D1
F2 5.17795555562 GHz D2
F2-F1 -15.955555569 MHz D1-D2
13.10 dBm
-12.90 dBm
-26.00 dB

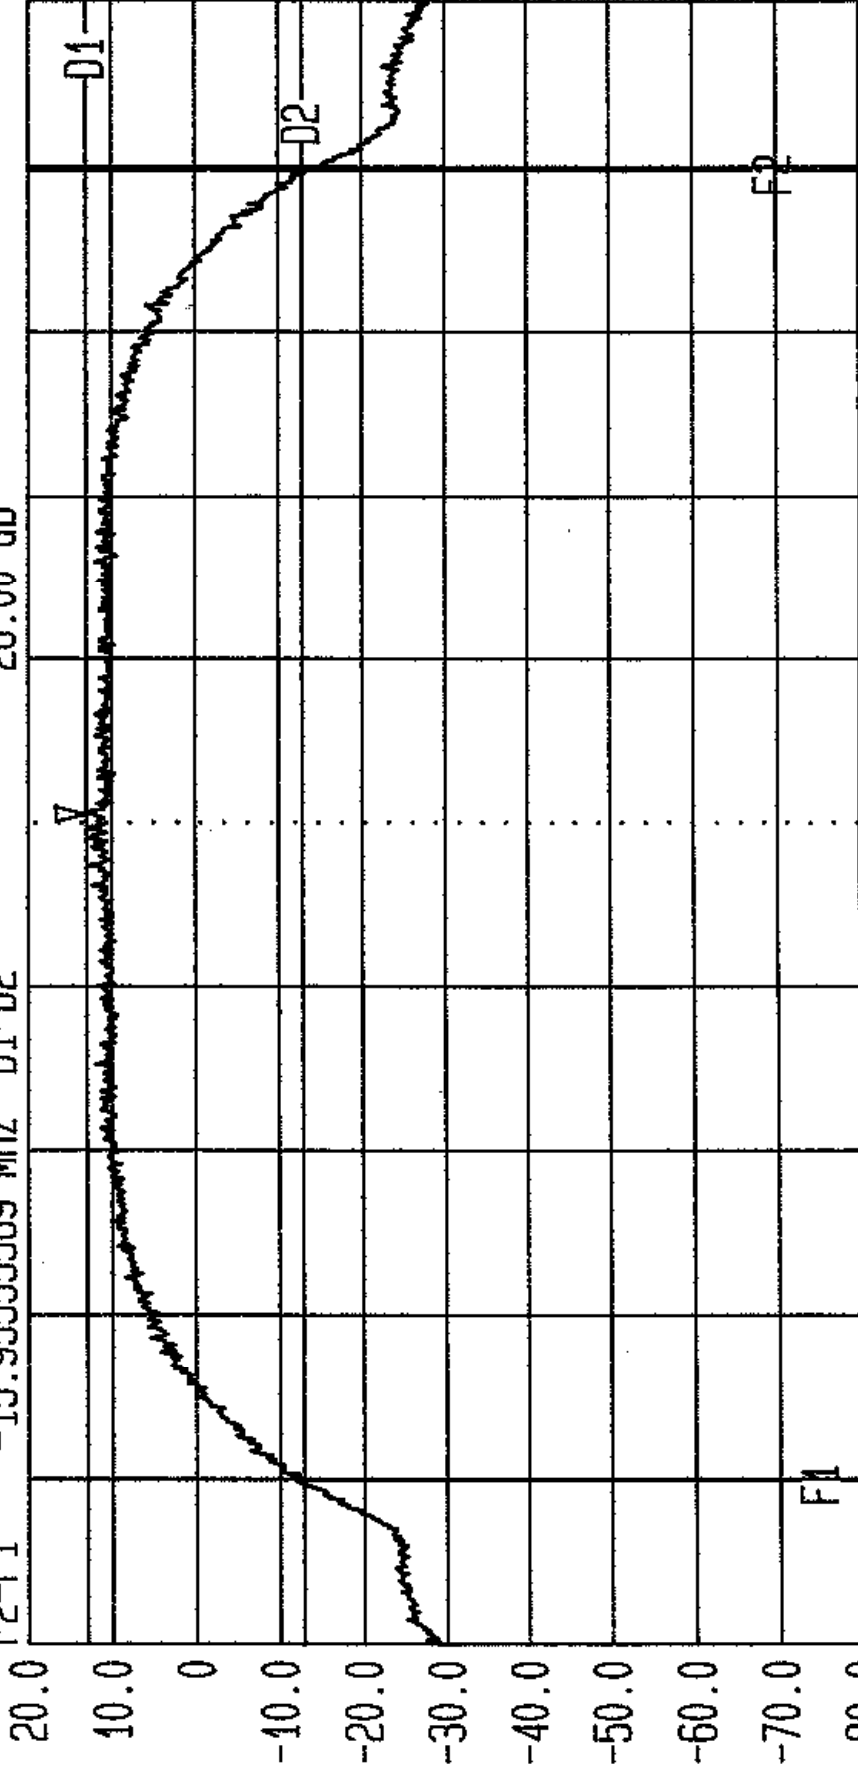

Start 5.16 GHz Center 5.17 GHz Stop 5.18 GHz
Span 20 MHz Sweep 20 ms

Tx Power EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(a) 16.0. 5.15-5.25GHz Band. Bott Chan. GPH/38797/JD01/075

PA
10
FI




LVLOFF
Date 22.Apr.'99 Time 03:58:45
Ref.Lvl 20.00 dBm
Marker 13.76 dBm
5.16960 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 2.000 MHz

Vid.Bw 1 MHz
RF.Att 10 dB
Unit [dBm]

F1 5.1618888883 GHz D1
F2 5.17795555562 GHz D2
F2-F1 -16.06666679 MHz D1-D2

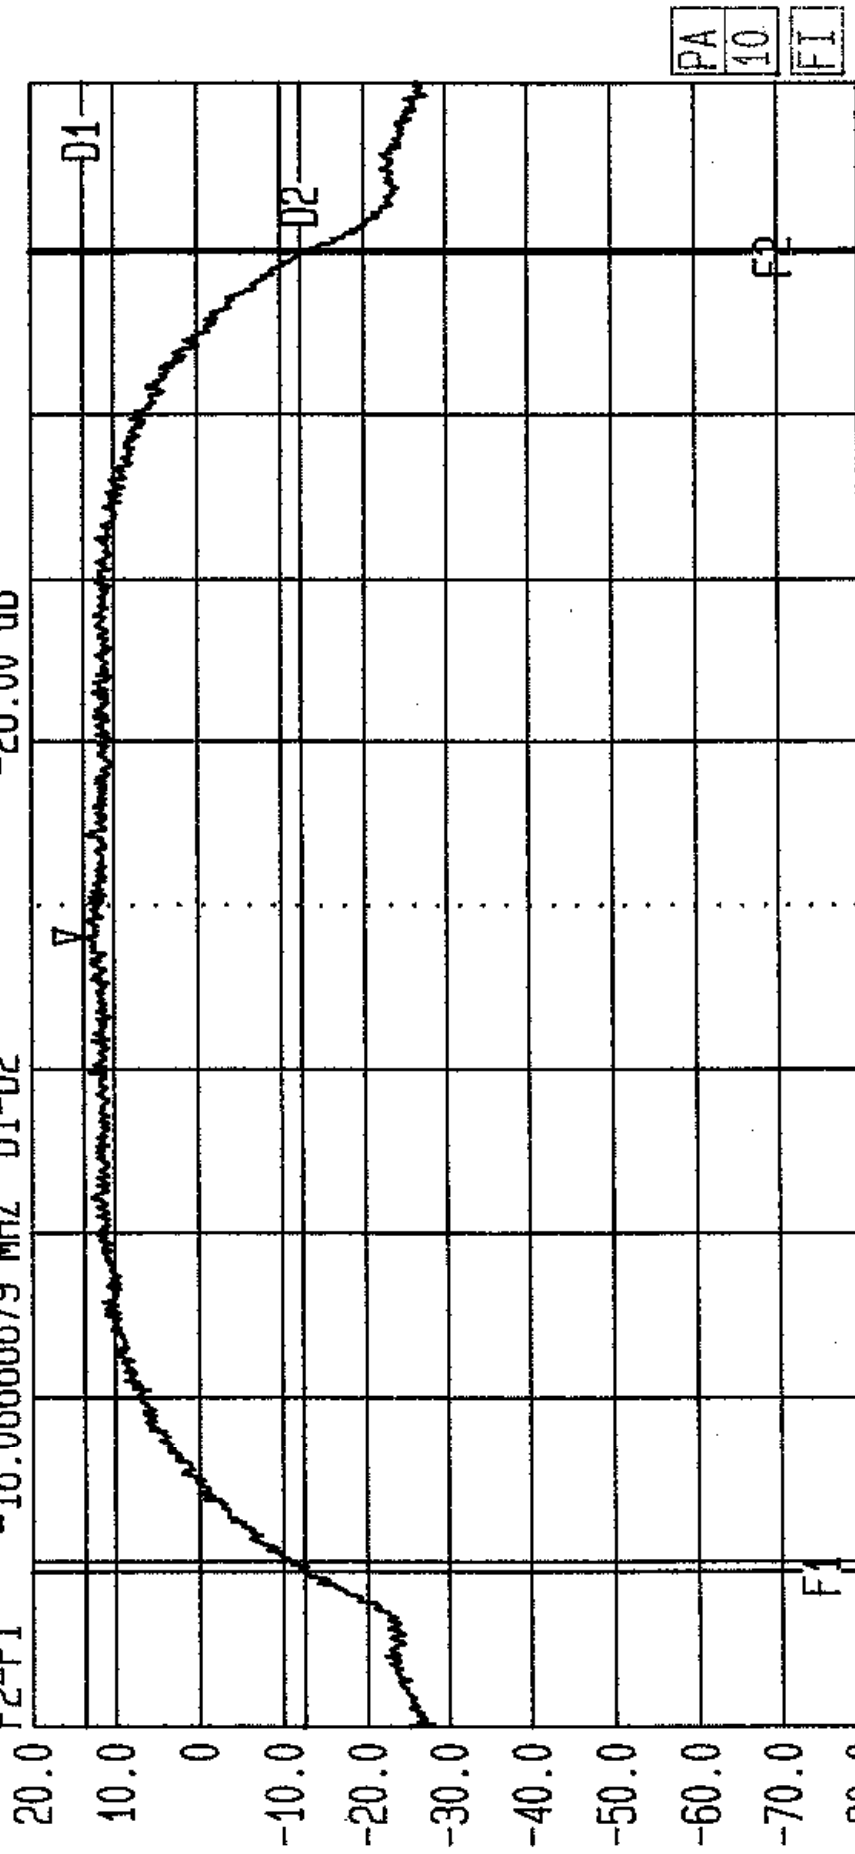


Start 5.16 GHz Stop 5.18 GHz
Span 20 MHz Sweep 20 ms
Center 5.17 GHz
Tx Power EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(a) 16.0. 5.15-5.25GHz Band. Bott Chan. GPH/38797/JD01/076



LVLOFF
Date 22.Apr.'99 Time 04:07:02
Ref.Lvl Marker 14.93 dBm
20.00 dBm 5.23006 GHz

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 2.000 MHz
Vid.Bw 1 MHz
RF.Att 10 dB
Unit [dBm]

F1 5.2220222221 GHz D1
F2 5.2378888889 GHz D2
F2-F1 -15.86666668 MHz D1-D2

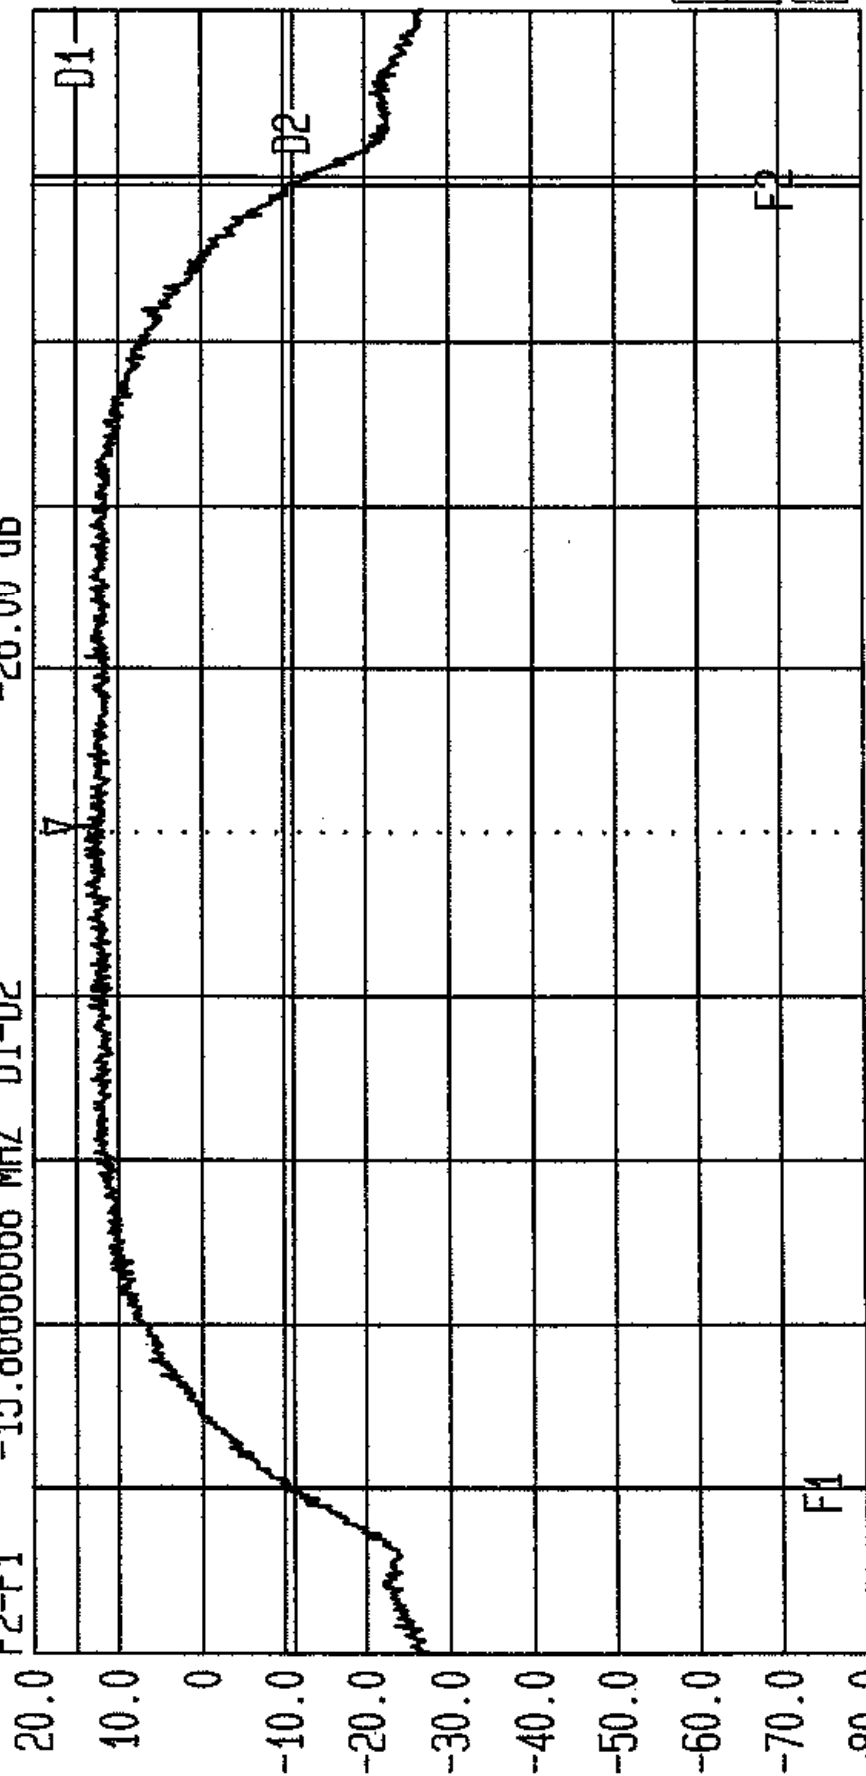


Start 5.22 GHz Stop 5.24 GHz
Span 20 MHz Sweep 20 ms
Center 5.23 GHz
Tx Power EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(a) 16.0. 5.15-5.25GHz Band. Top Chan. GPH/38797/JD01/077



LVLOFF
Date 22.Apr.'99 Time 04:11:05
Ref.Lvl Marker 14.82 dBm
20.00 dBm 5.22986 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 2.000 MHz
Vid.Bw 1 MHz
RF.Att 10 dB
Unit [dBm]

F1 5.22195555555 GHz D1
F2 5.23793333333 GHz D2
F2-F1 -15.9777778 MHz D1-D2

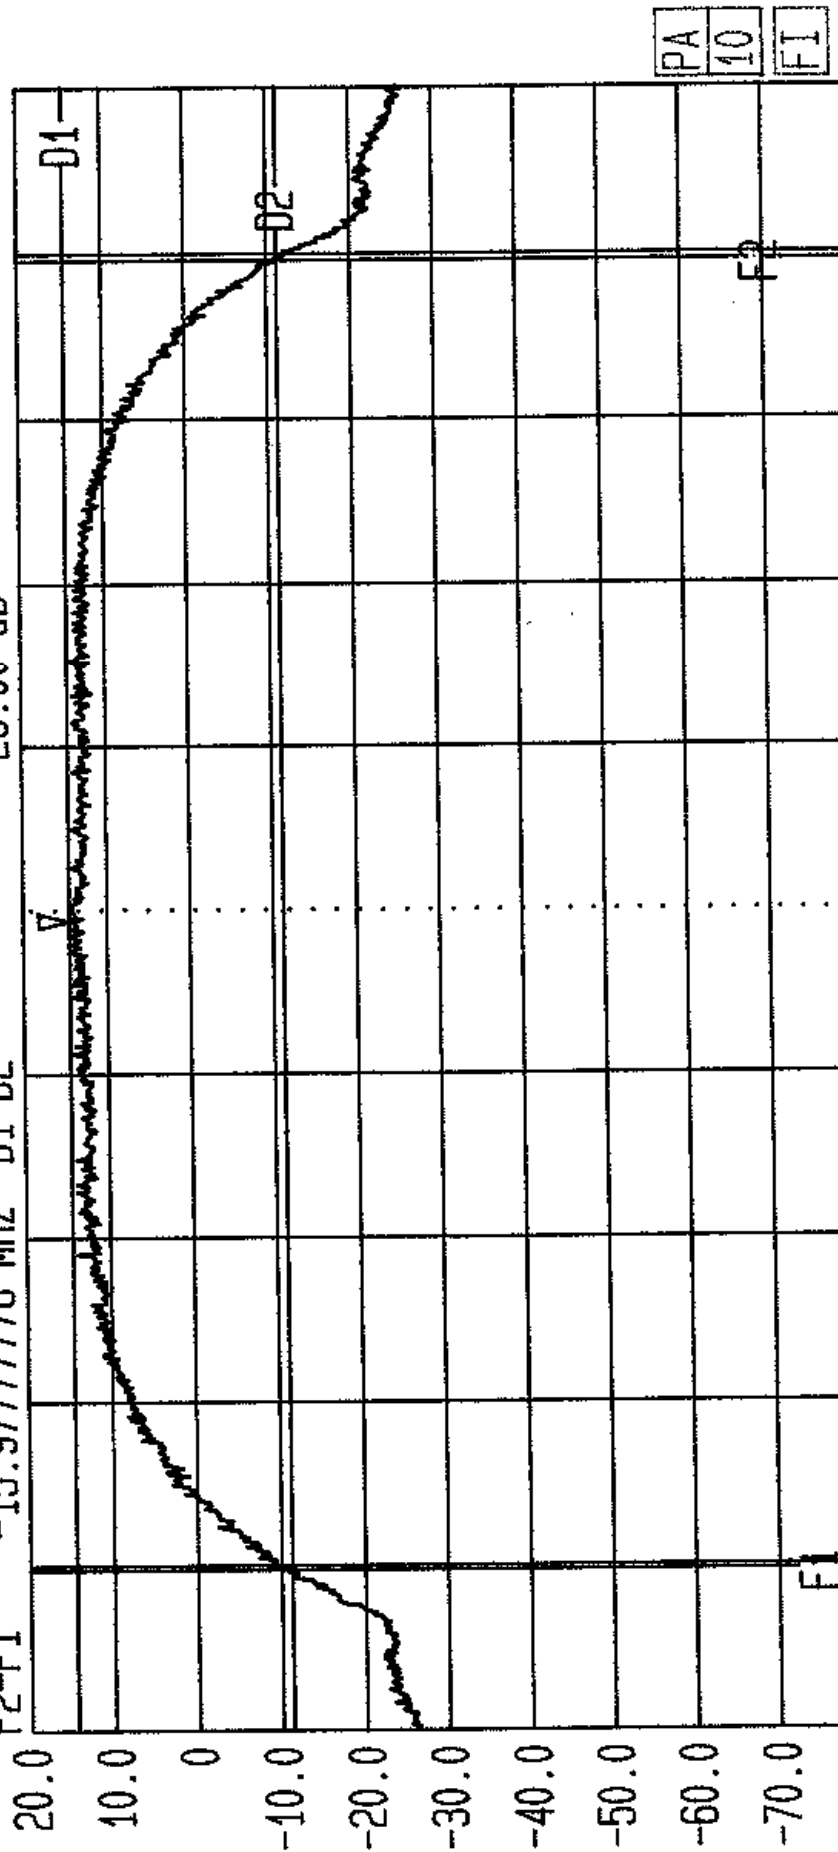

Start 5.22 GHz Stop 5.24 GHz
Span 20 MHz Sweep 20 ms
Center 5.23 GHz
Tx Power EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(a) 16.0. Top Chan. GPH/38797/JD01/078




LVLOFF
Date 22.Apr.'99 Time 04:15:42
Ref.Lvl Marker 22.67 dBm
30.00 dBm 5.26713 GHz

Res.Bw 1 MHz [imp]
16.Lvl off
CF.Stp 2.000 MHz

Vid.Bw 1 MHz
RF.Att 20 dB
Unit [dBm]

F1 5.26193333332 GHz D1
F2 5.27804444442 GHz D2
F2-F1 -16.11111110 MHz D1-D2

22.67 dBm
-3.33 dBm
-26.00 dB

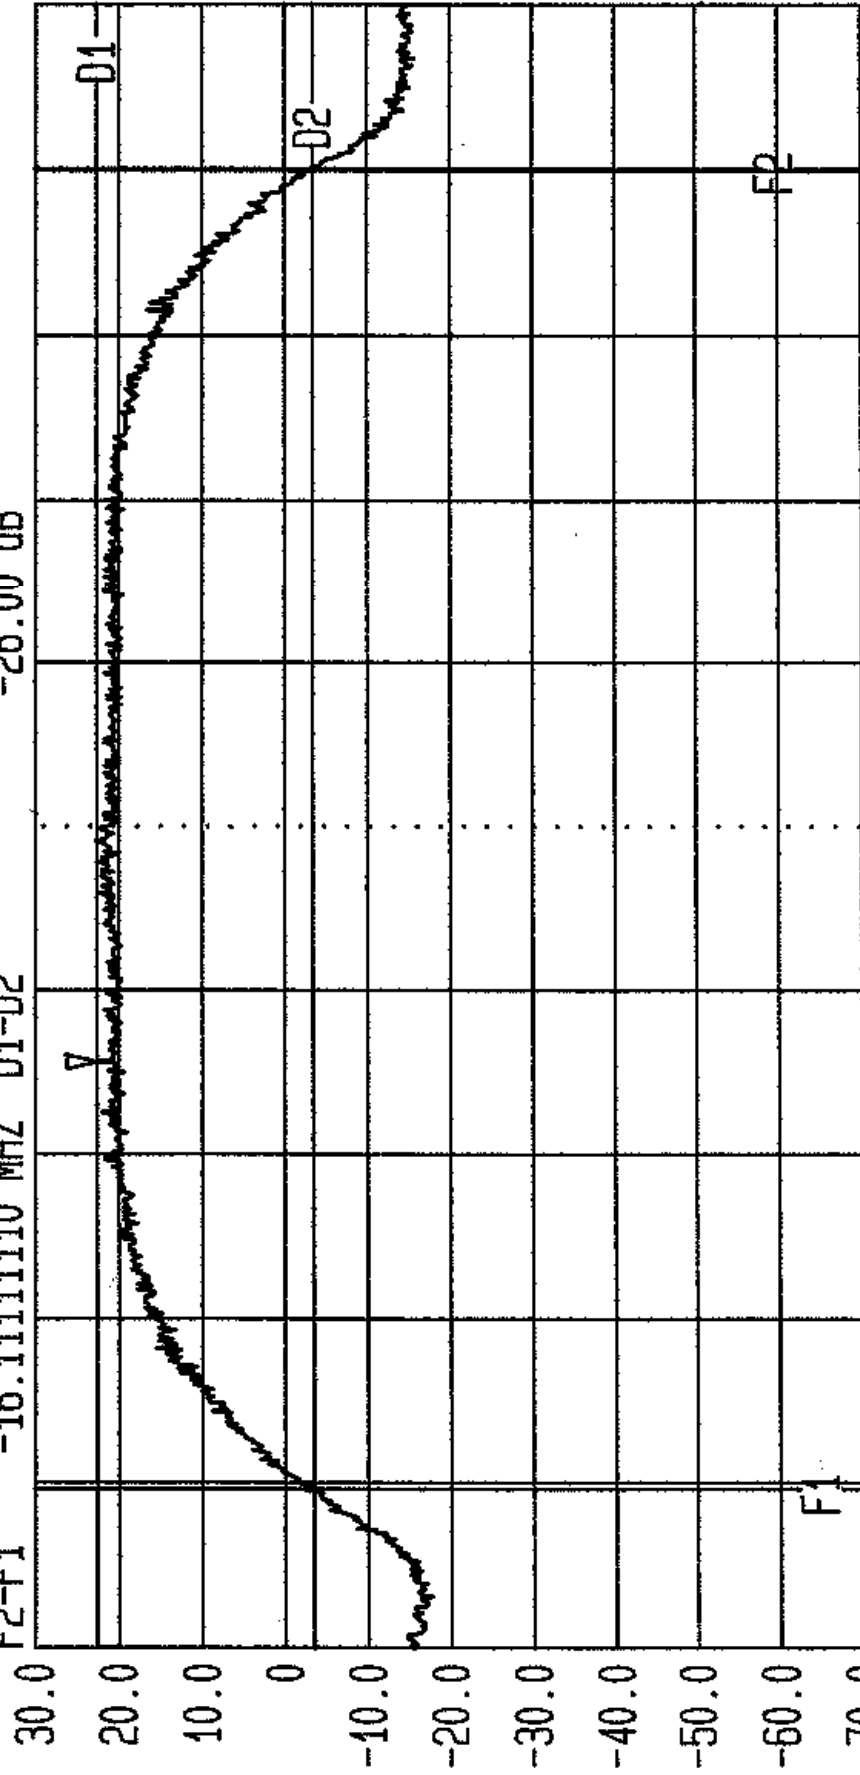

Start 5.26 GHz Span 20 MHz Center 5.27 GHz Sweep 20 ms Stop 5.28 GHz

Tx Power EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(a) 23.0. 5.25-5.35GHz Band. Bott Chan. GPH/38797/JD01/079


PA
10
FI



LVLOFF
Date 22.Apr.'99 Time 04:24:03
Ref.Lvl Marker 21.85 dBm
30.00 dBm 5.26988 GHz

Res.Bw 1 MHz [imp] Vid.Bw 1 MHz
TG.Lvl off
CF.Stp 2.000 MHz RF.Att 20 dB
Unit [dBm]

F1 5.2619333332 GHz D1
F2 5.2779999998 GHz D2
F2-F1 -16.06666666 MHz D1-D2

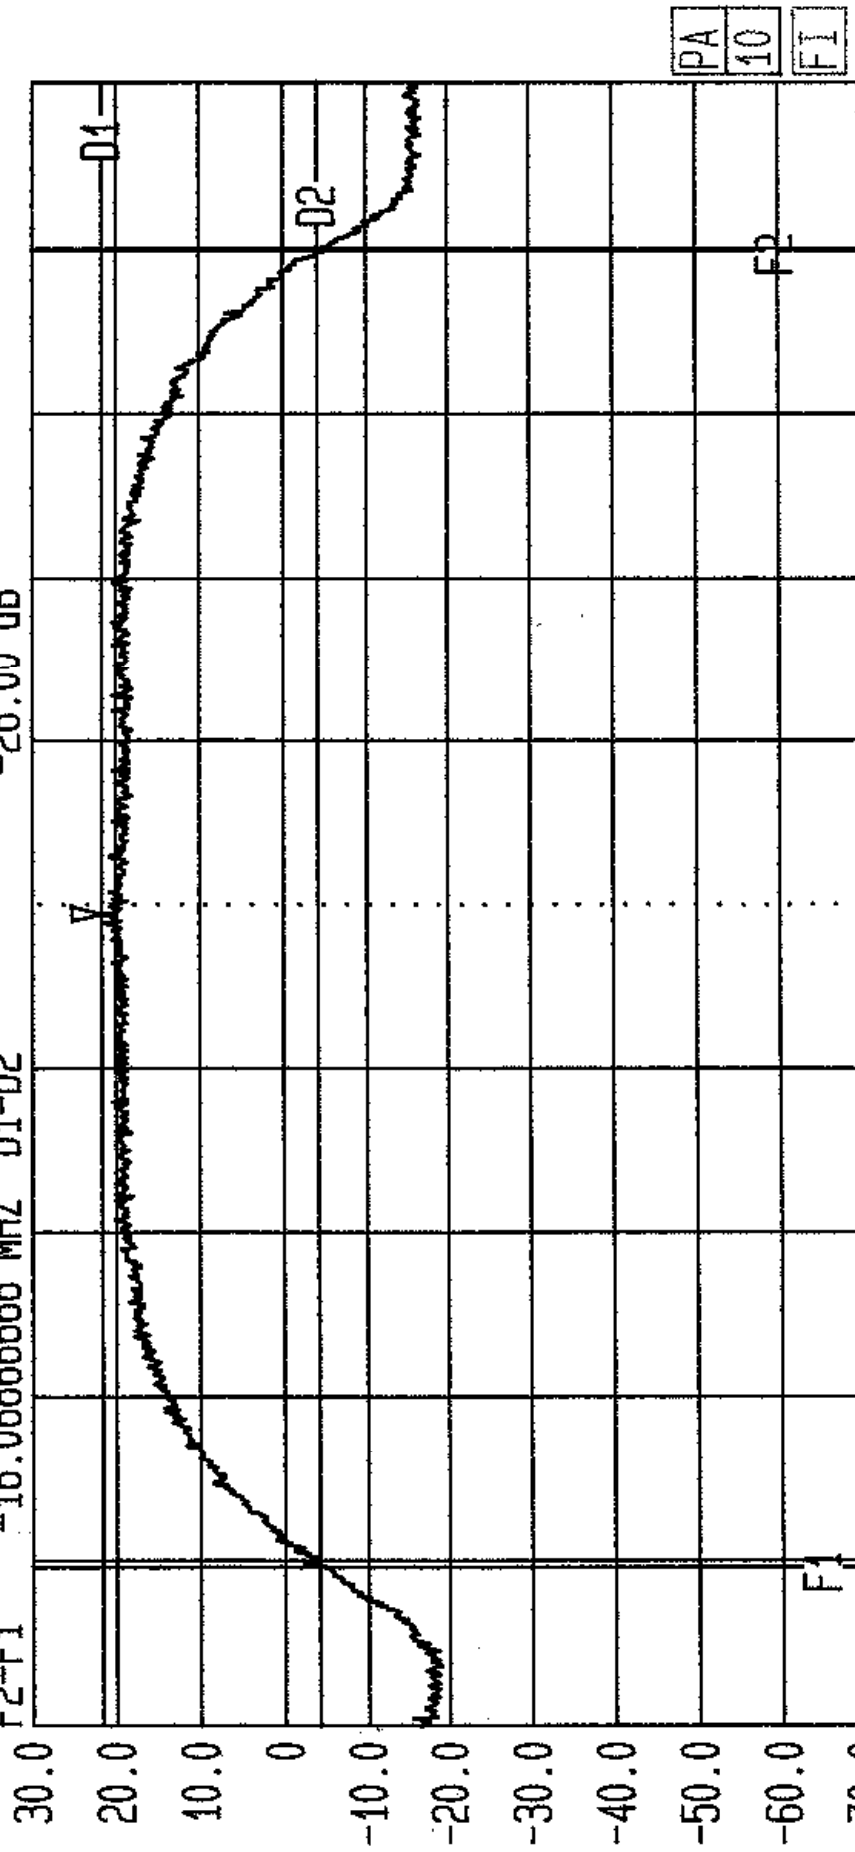


Start 5.26 GHz Stop 5.28 GHz
Span 20 MHz Sweep 20 ms
Center 5.27 GHz
Tx Power EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(a) 23.0. 5.25-5.35GHz Band. Bott Chan. GPH/38797/JD01/080



LVLOFF
Date 22.Apr.'99 Time 04:27:58
Ref.Lvl Marker 22.92 dBm
30.00 dBm 5.32984 GHz
F1 5.3218666666 GHz D1
F2 5.3379111111 GHz D2
F2-F1 -16.04444445 MHz D1-D2

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 2.000 MHz
Vid.Bw 1 MHz
RF.Att 20 dB
Unit [dBm]

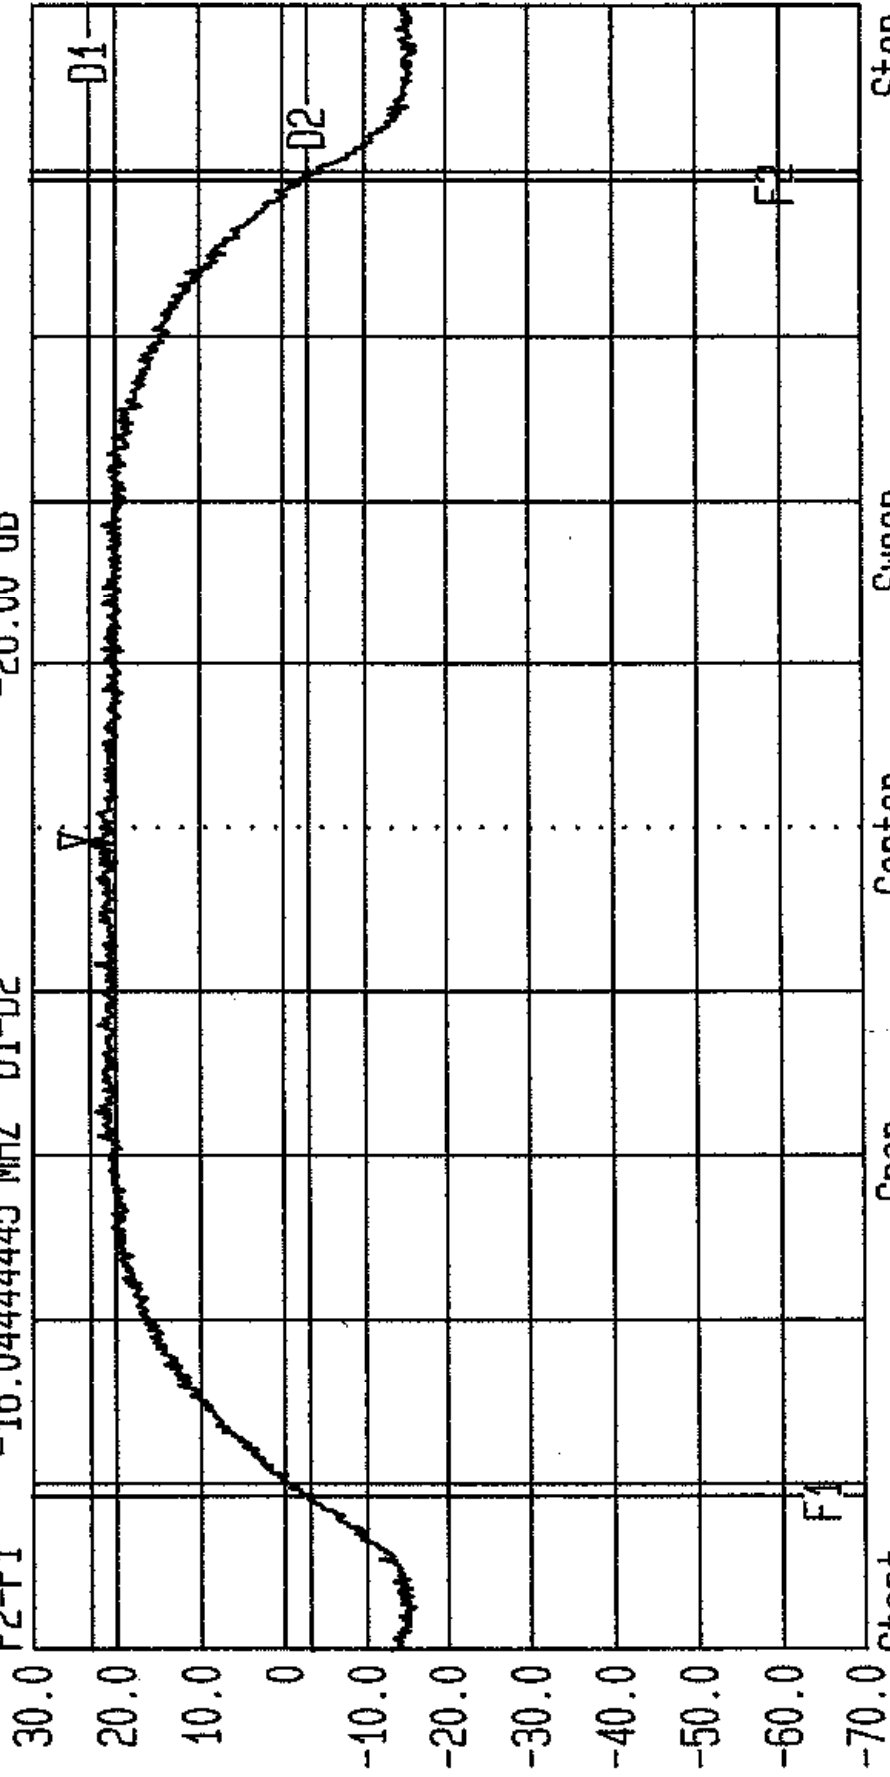


Tx Power EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(a) 23.0. 5.25-5.35GHz Band. Top Chan. GPH/38797/JD01/081



LVLOFF
Date 22.Apr.'99 Time 04:31:56
Ref.Lvl Marker 23.50 dBm
30.00 dBm 5.32762 GHz

Res.Bw 1 MHz [imp] 1 MHz
T6.Lvl Off
CF.Stp 2.000 MHz
RF.Att 20 dB
Unit [dBm]

F1 5.321866666666 GHz D1 23.50 dBm
F2 5.337955555555 GHz D2 -2.50 dBm
F2-F1 -16.08888889 MHz D1-D2 -26.00 dB

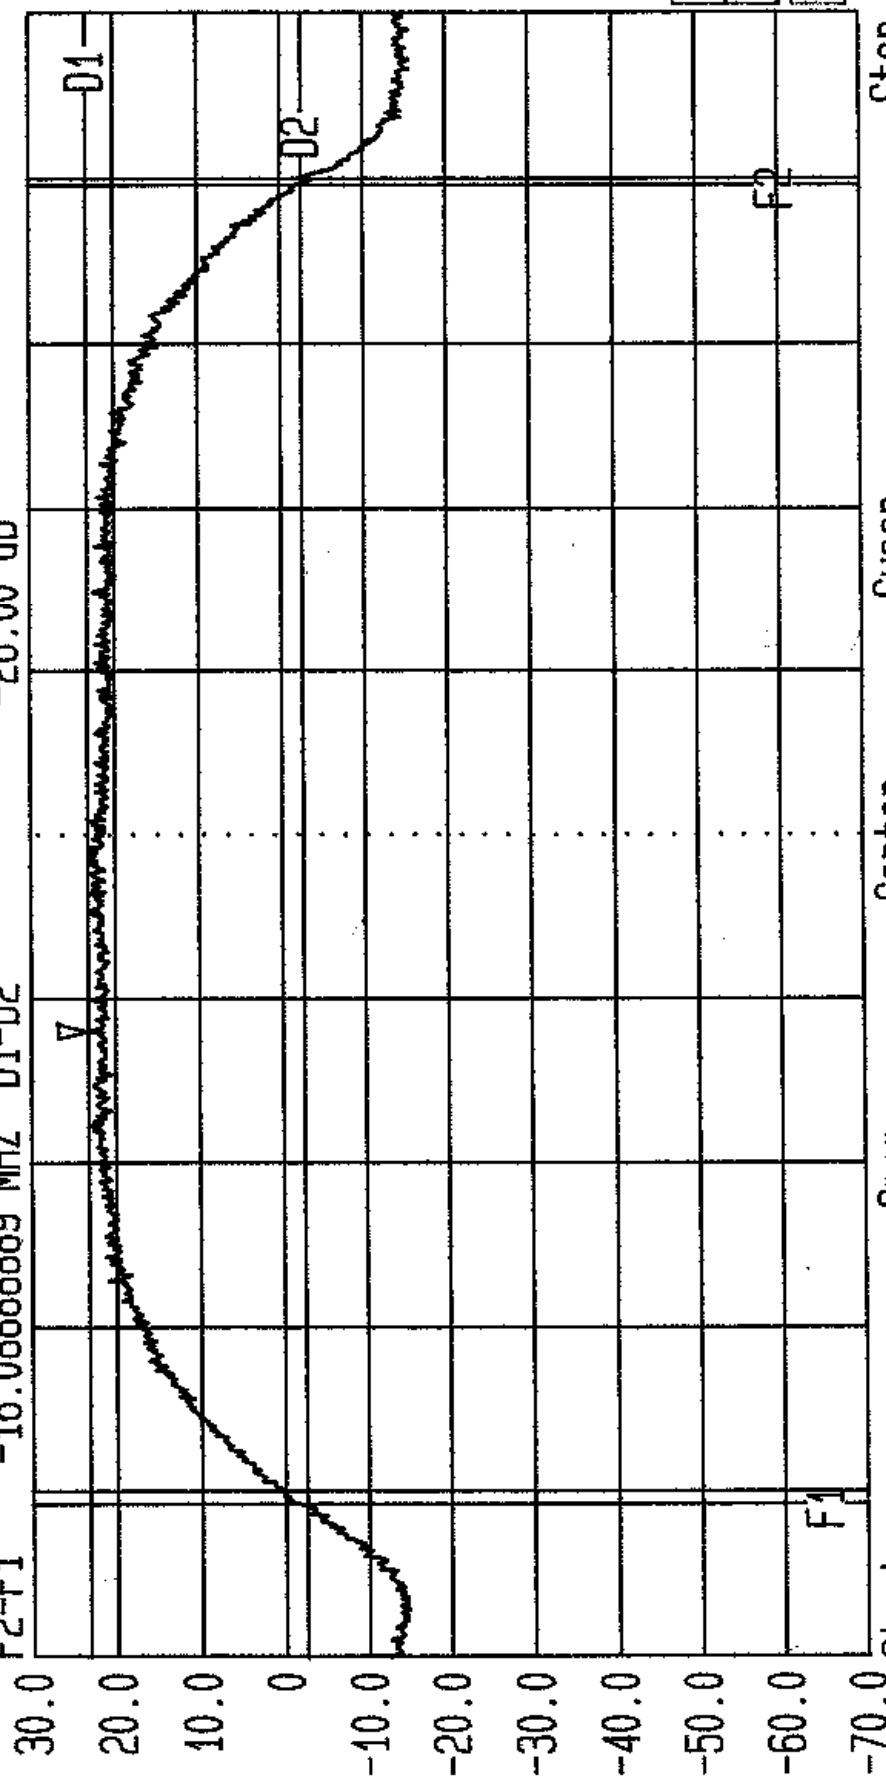

Start 5.32 GHz Span 20 MHz Center 5.33 GHz Sweep 20 ms Stop 5.34 GHz
Tx Power EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(a) 23.0. 5.25-5.35GHz Band. Top Chan. GPH/38797/JD01/082




LVLOFF
Date 22.Apr.'99 Time 04:37:10
Ref.Lvl1 Marker 28.38 dBm
30.00 dBm 5.7497 GHz

Res.Bw 1 MHz [imp]
1 MHz
TG.Lvl Off
CF.Stp 2.000 MHz
RF.Att 20 dB
Unit [dBm]

F1 5.7369555552 GHz D1
F2 5.7529777776 GHz D2
F2-F1 -16.0222224 MHz D1-D2

28.38 dBm
2.38 dBm
-26.00 dB

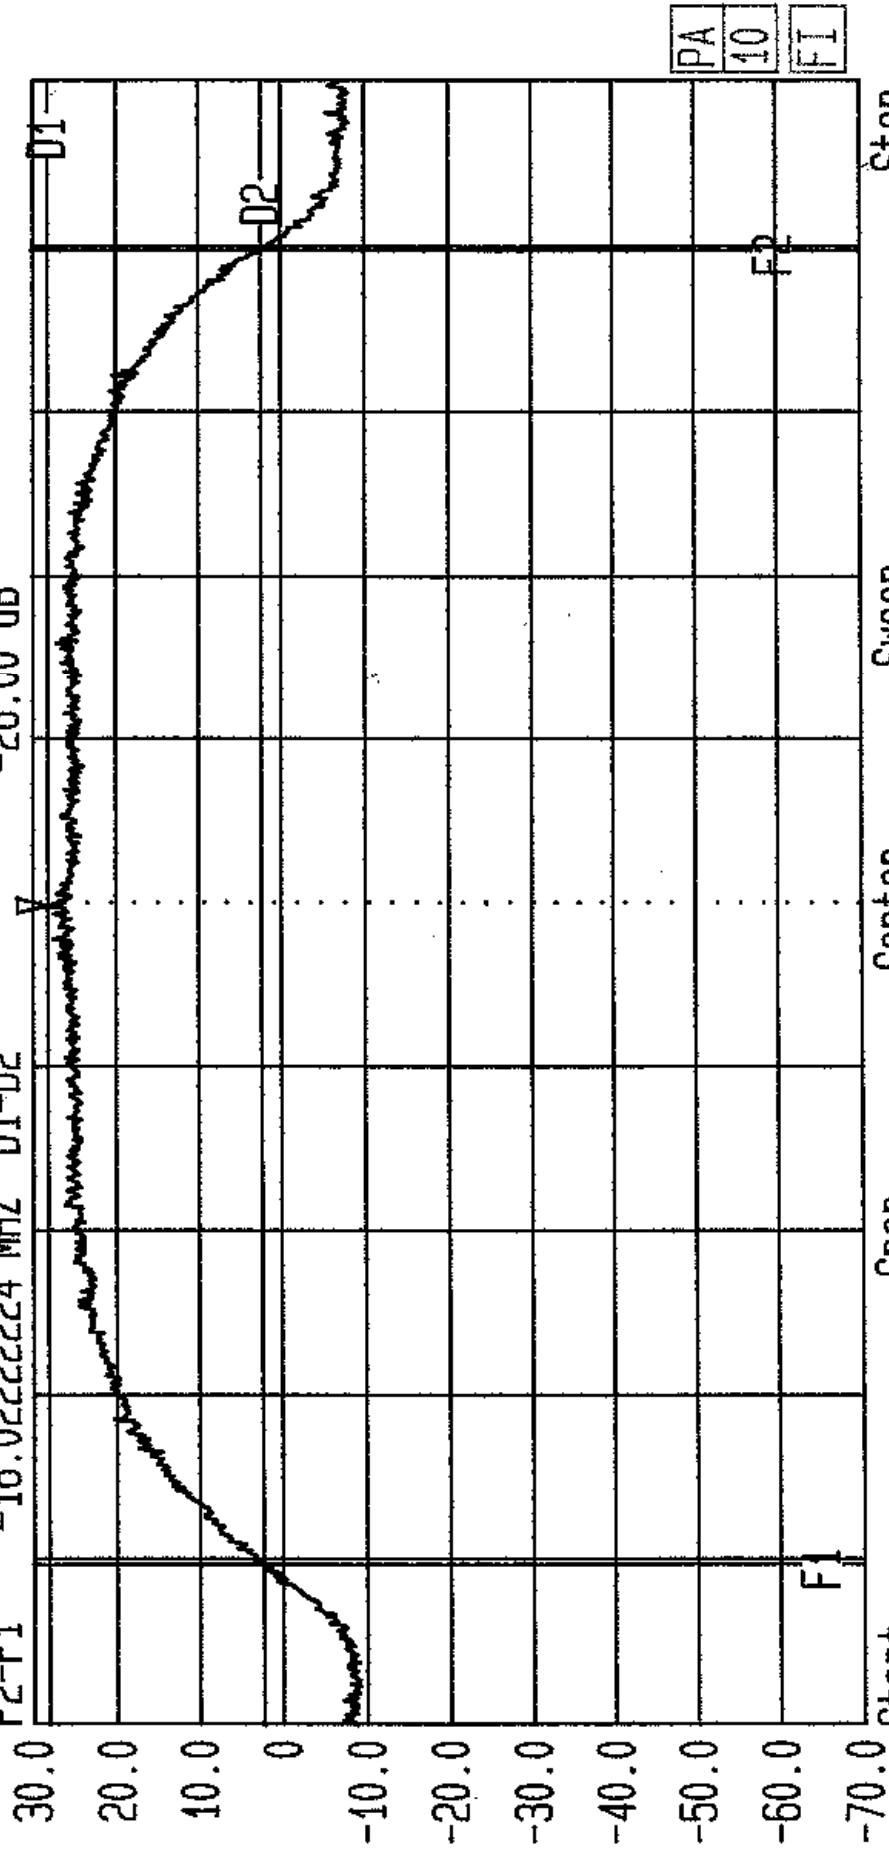


Start 5.735 GHz Span 20 MHz Center 5.745 GHz Sweep 20 ms Stop 5.755 GHz
Tx Power EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(a) 29.0. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/083



LVLOFF
Date 22.Apr.'99 Time 04:41:09
Ref.Lvl Marker 26.65 dBm
30.00 dBm 5.7495 GHz

Res.Bw 1 MHz [imp] 1 MHz
TG.Lvl Off
CF.Stp 2.000 MHz
Unit 20 dB [dBm]

F1 5.7369555552 GHz D1
F2 5.7530222220 GHz D2
F2-F1 -16.06666668 MHz D1-D2

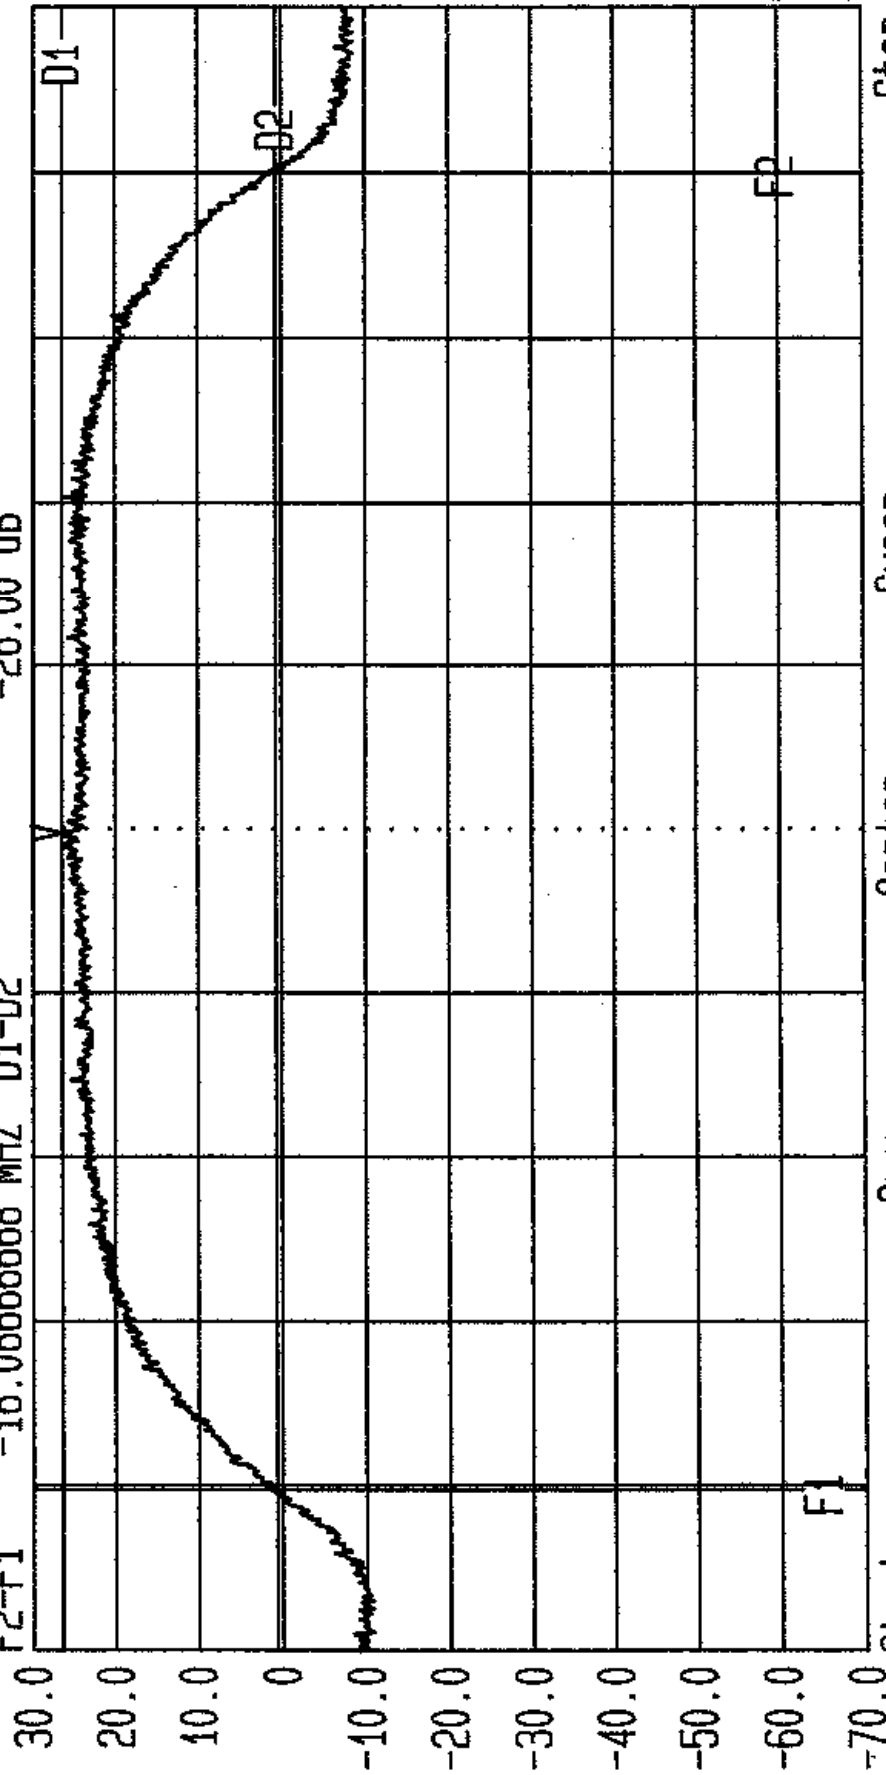

Start 5.735 GHz Span 20 MHz Center 5.745 GHz Sweep 20 ms Stop 5.755 GHz

Tx Power EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(a) 29.0. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/084


PA
10
FI



LVLOFF
Date 22.Apr.'99 Time 04:45:44
Ref.Lvl Marker 27.01 dBm
30.00 dBm 5.80506 GHz

F1 5.7969111112 GHz D1
F2 5.8129333333 GHz D2
F2-F1 -16.0222221 MHz D1-D2

Res.Bw 1 MHz [imp] 1 MHz
TG.Lvl Off
CF.Stp 2.000 MHz
Unit 20 dB [dBm]

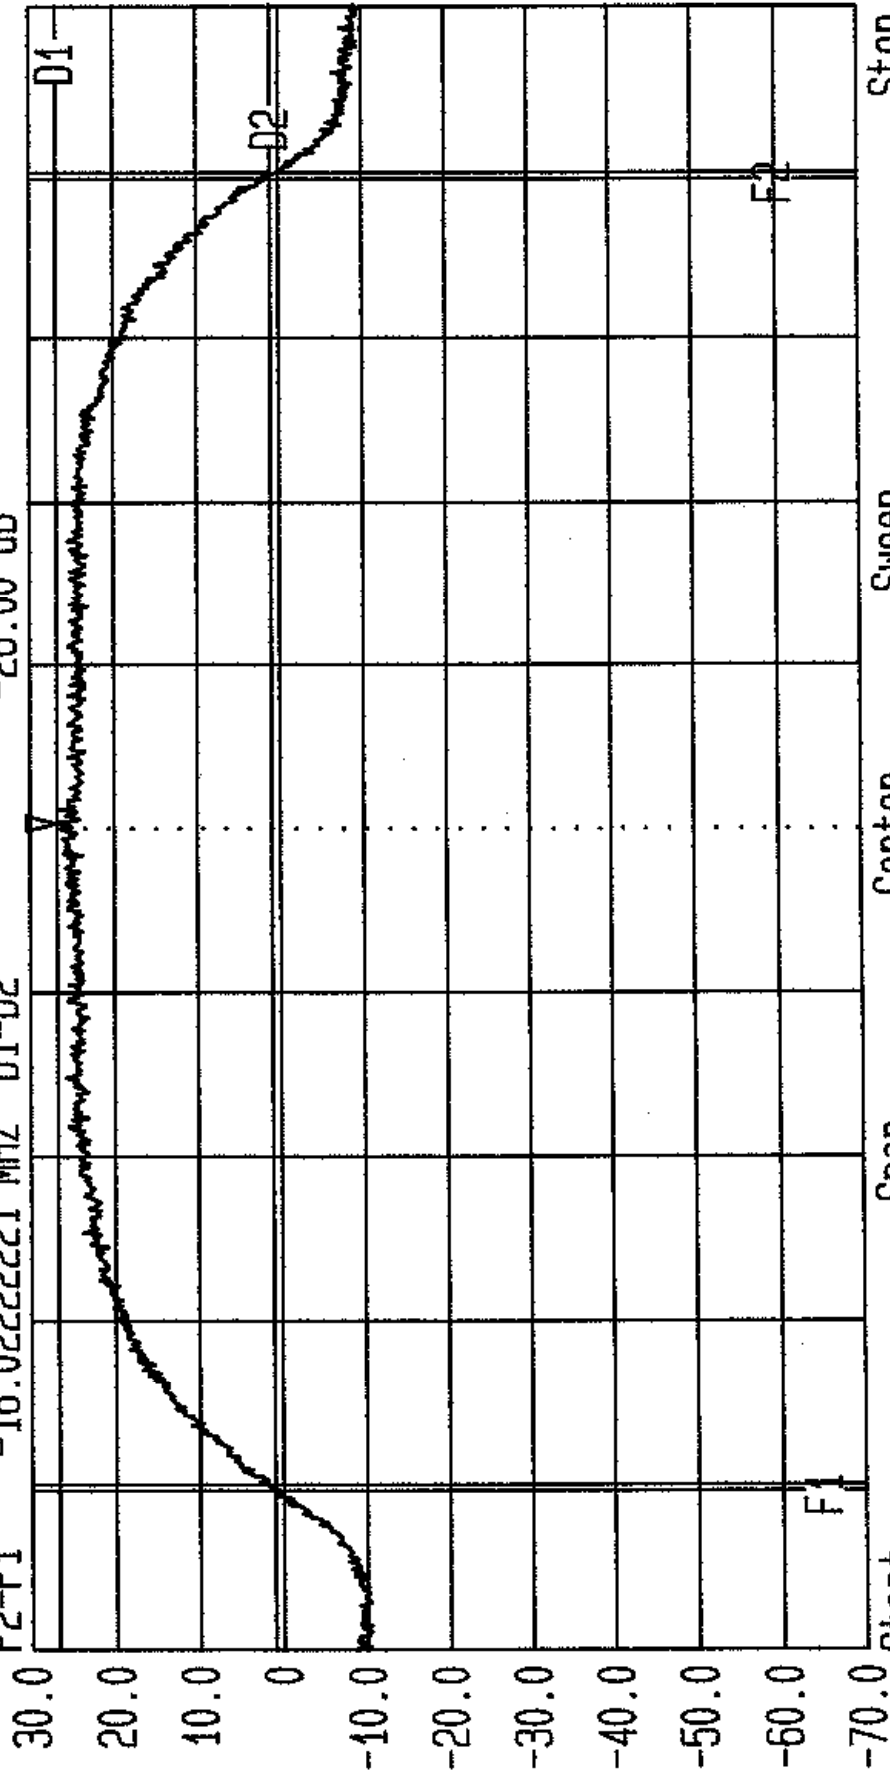

Start 5.795 GHz Span 20 MHz Center 5.805 GHz Sweep 20 ms Stop 5.815 GHz
Tx Power EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(a) 29.0. 5.725-5.825GHz Band. Top Chan. GPH/38797/JD01/085




LVLOFF
Date 22.Apr.'99 Time 04:50:02
Ref.Lvl Marker 29.80 dBm
30.00 dBm 5.80497 GHz

Res.Bw 1 MHz [imp] 1 MHz
TG.Lvl off
CF.Stp 2.000 MHz
RF.Att 20 dB
Unit [dBm]

F1 5.7967777780 GHz D1
F2 5.8131111110 GHz D2
F2-F1 -16.33333330 MHz D1-D2

27.01 dBm
1.01 dBm
-26.00 dB

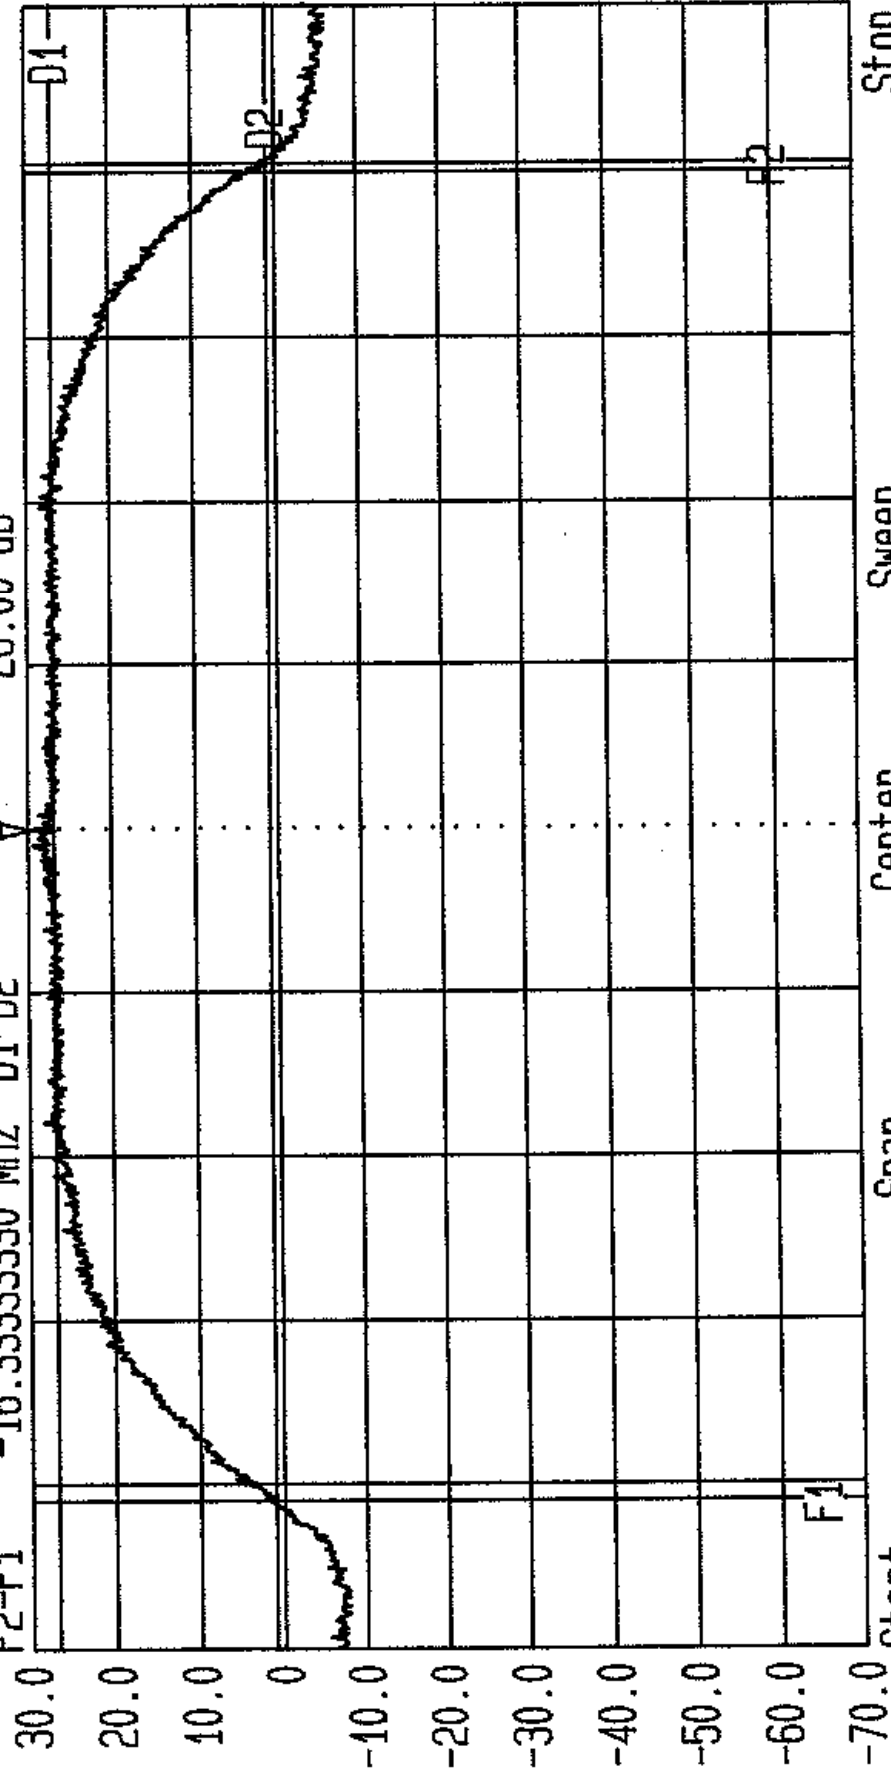

Start 5.795 GHz Span 20 MHz Center 5.805 GHz Sweep 20 ms Stop 5.815 GHz
Tx Power EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(a) 29.0. 5.725-5.825GHz Band. Top Chan. GPH/38797/JD01/086

PA
10
FI




LVLOFF
Date 22.Apr.'99 Time 04:57:12
Ref.Lvl1 Marker -96.4 dBm/Hz
0 dBm 5.1495 GHz

Res.Bw 1 MHz [imp] 1 MHz
TG.Lvl1 Off
CF.Stp 16.000 MHz
Unit 10 dB [dBm]

F1 5.1500000000 GHz D1
F2 OFF D2
F2-F1 OFF D1-D2

-27.00 dBm
OFF
OFF

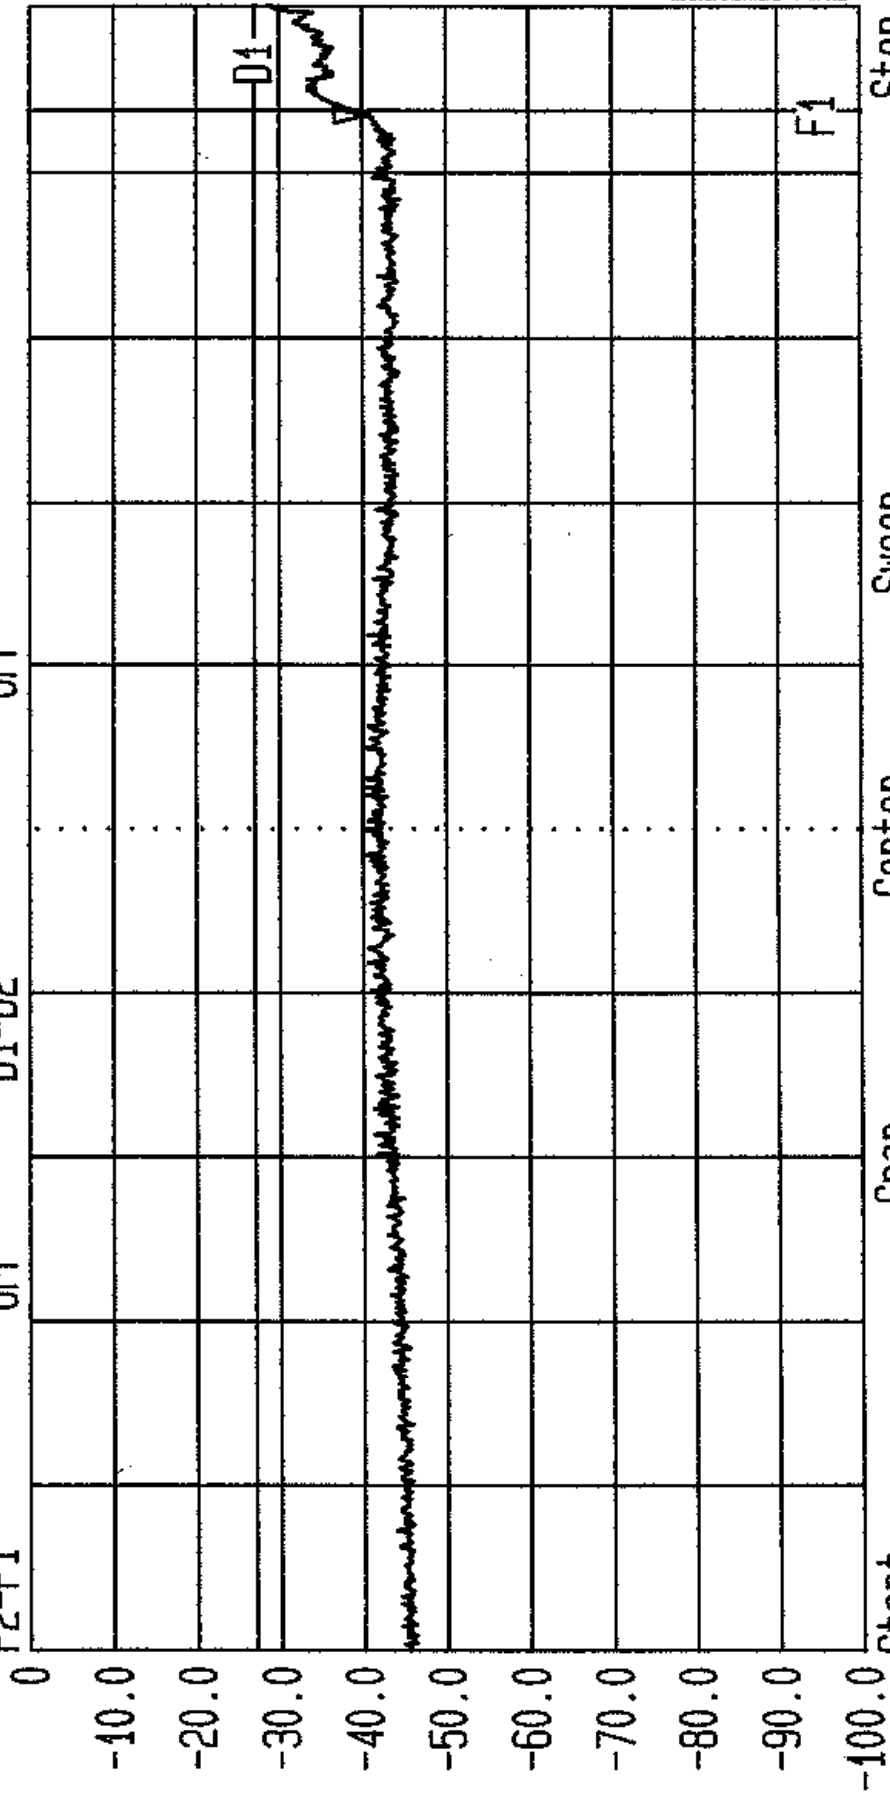


Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.15-5.25GHz Band. Bott Chan. GPH/38797/JD01/087



LVLOFF
Date 22.Apr.'99 Time 05:01:08
Ref.Lvl Marker -94.0 dBm/Hz
0 dBm 5.8150 GHz

Res.BW 1 MHz [imp] 1 MHz
TG.Lvl Off
CF.Stp 82.000 MHz 10 dB
Unit [dBm]

F1 5.2500000000 GHz D1
F2 OFF D2
F2-F1 OFF D1-D2
-27.00 dBm
OFF
OFF

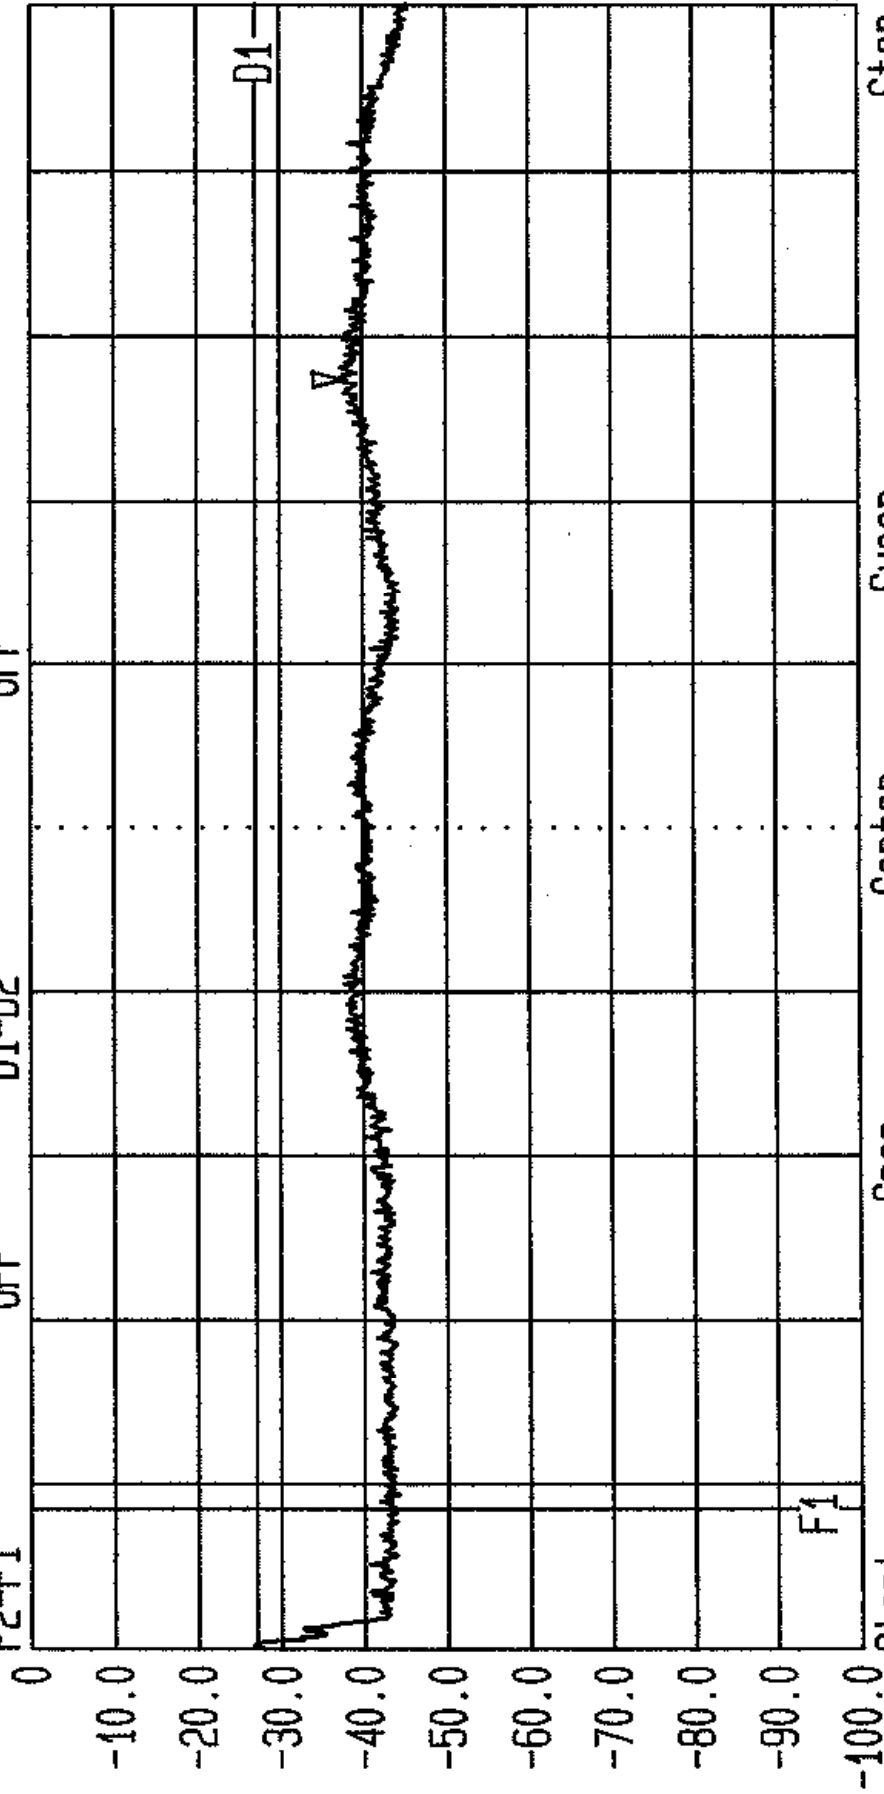


Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.15-5.25GHz Band. Bott Chan. GPH/38797/JD01/088



Res.BW	1 MHz [imp]	Vid.BW	1 MHz
TG.Lvl	Off	RF.Att	10 dB
CF.Stp	100.000 MHz	Unit	[dBm]

F1	OFF	D1
F2	OFF	D2
F2-F1	OFF	D1-D2

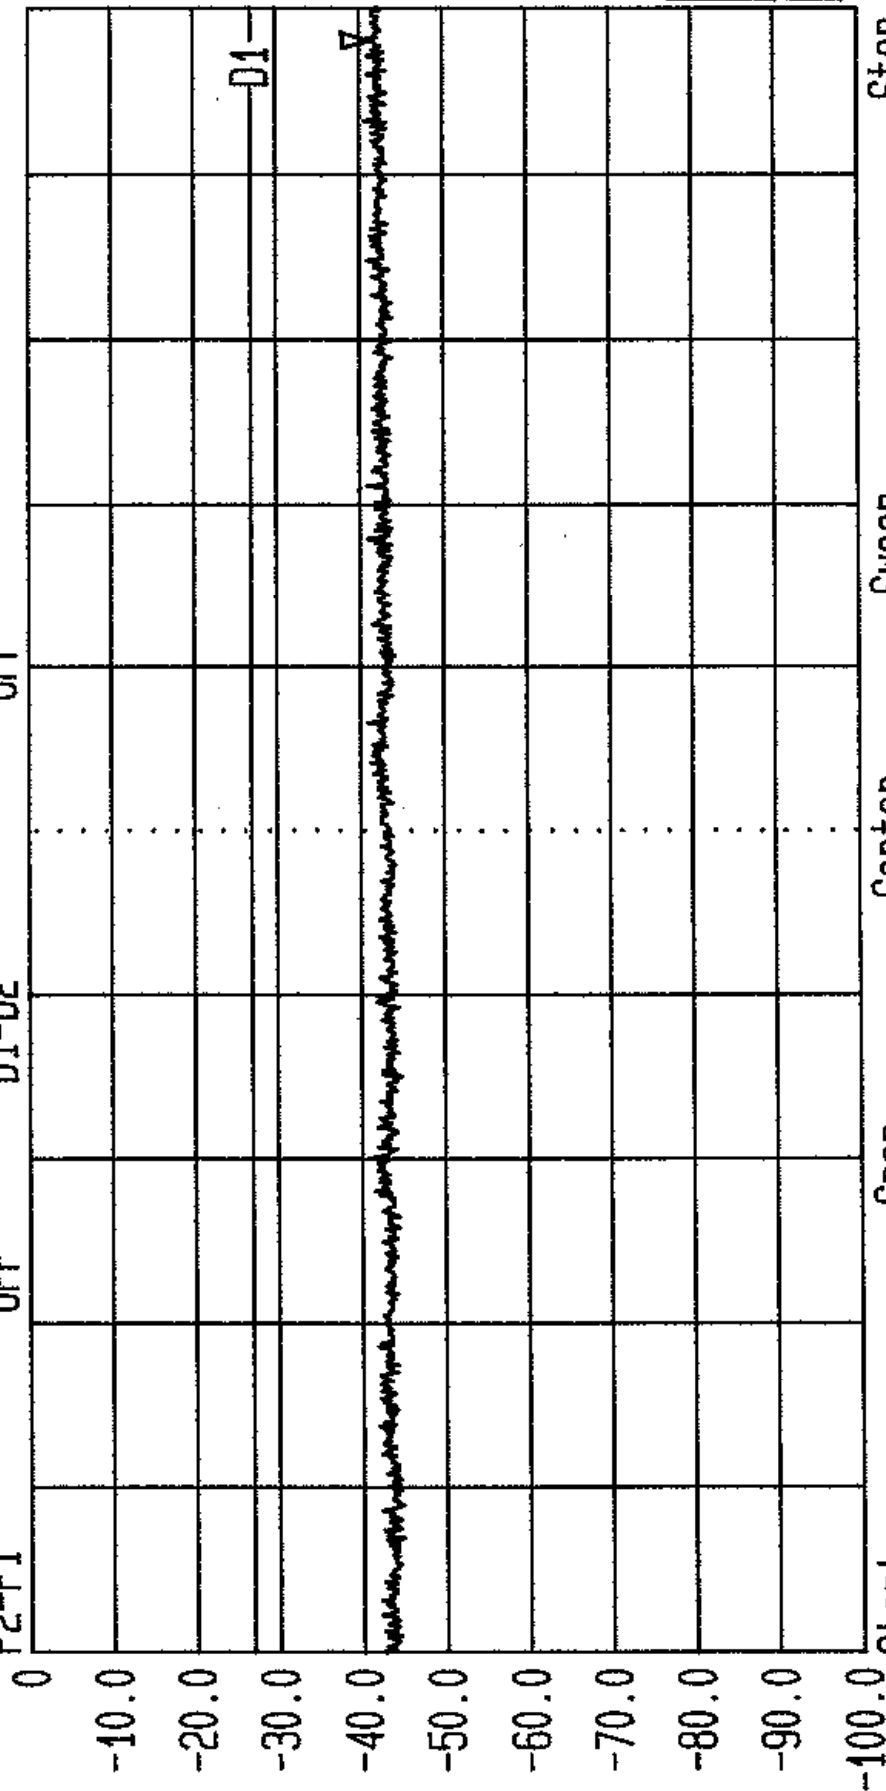

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.15-5.25GHz Band. Bott Chan. GPH/38797/JD01/089




LVLOFF
Date 22.Apr.'99 Time 05:11:12
Ref.Lvl 0 dBm
Marker -98.0 dBm/Hz
4.9811 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 10 dB
Unit [dBm]

F1 OFF D1
F2 OFF D2
F2-F1 OFF D1-D2

-27.00 dBm
OFF
OFF

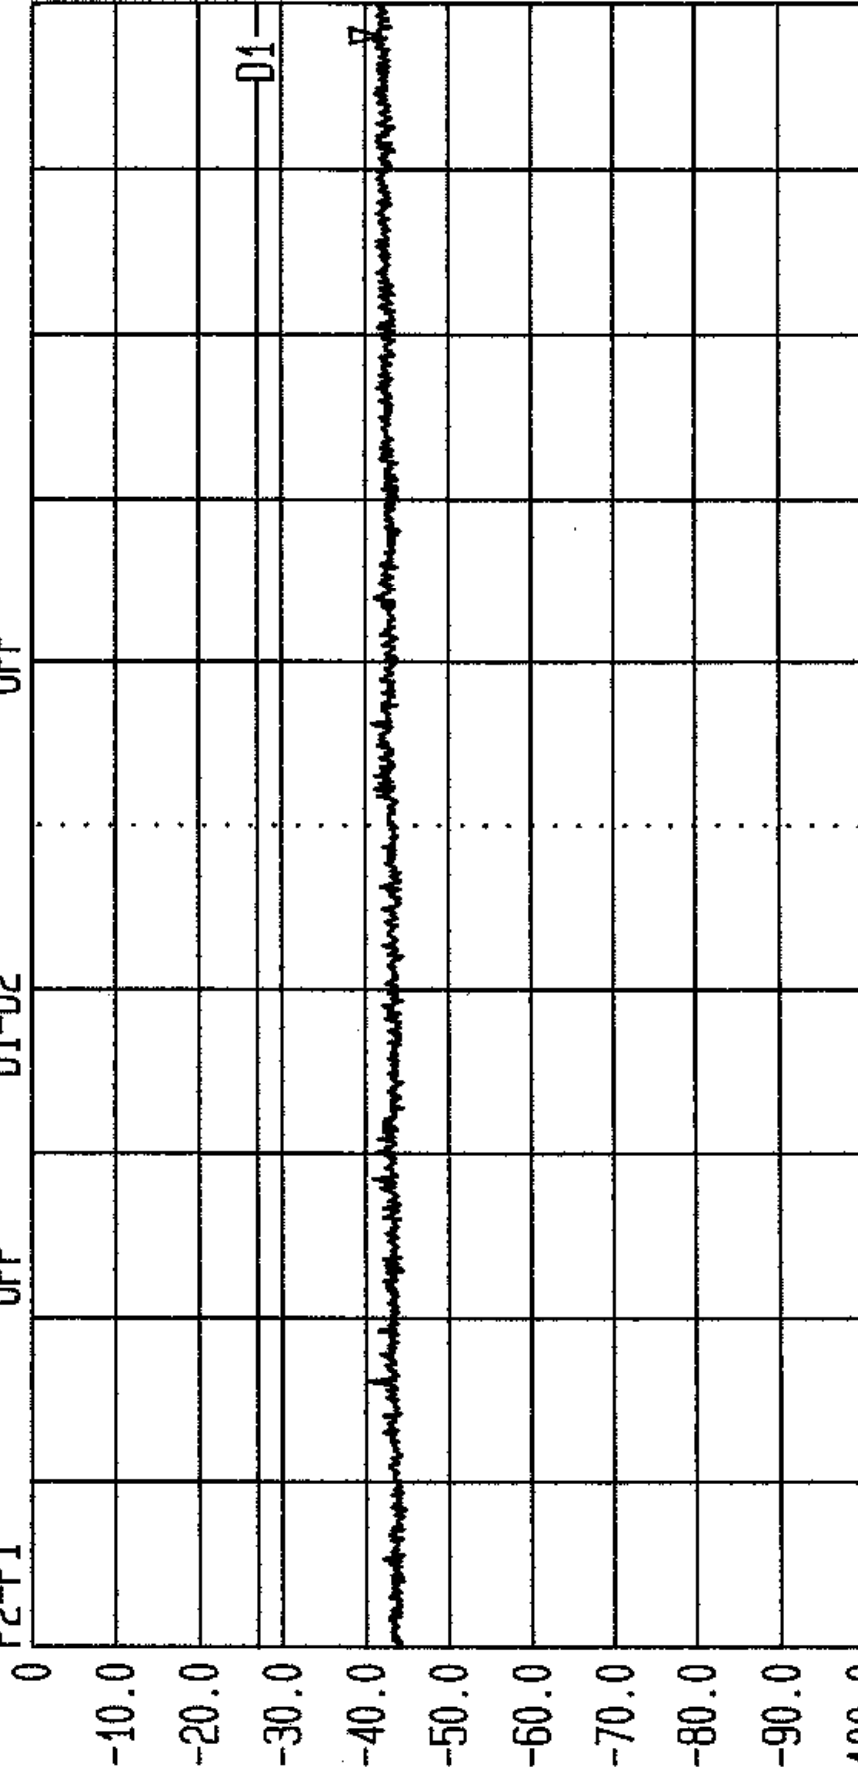

PA
10
FI

Start 4 GHz
Span 1 GHz
Center 4.5 GHz
Sweep 20 ms
Stop 5 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.15-5.25GHz Band. Top Chan. GPH/38797/JD01/090




LVLOFF
Date 22.Apr.'99 Time 05:15:15
Ref.Lvl1 Marker -98.0 dBm/Hz
0 dBm 5.0946 GHz

Res.Bw 1 MHz [imp] 1 MHz
T6.Lvl1 off
CF.Stp 22.000 MHz
Unit RF.Att 10 dB [dBm]

F1 5.1500000000 GHz D1
F2 OFF D2
F2-F1 OFF D1-D2

-27.00 dBm
OFF
OFF

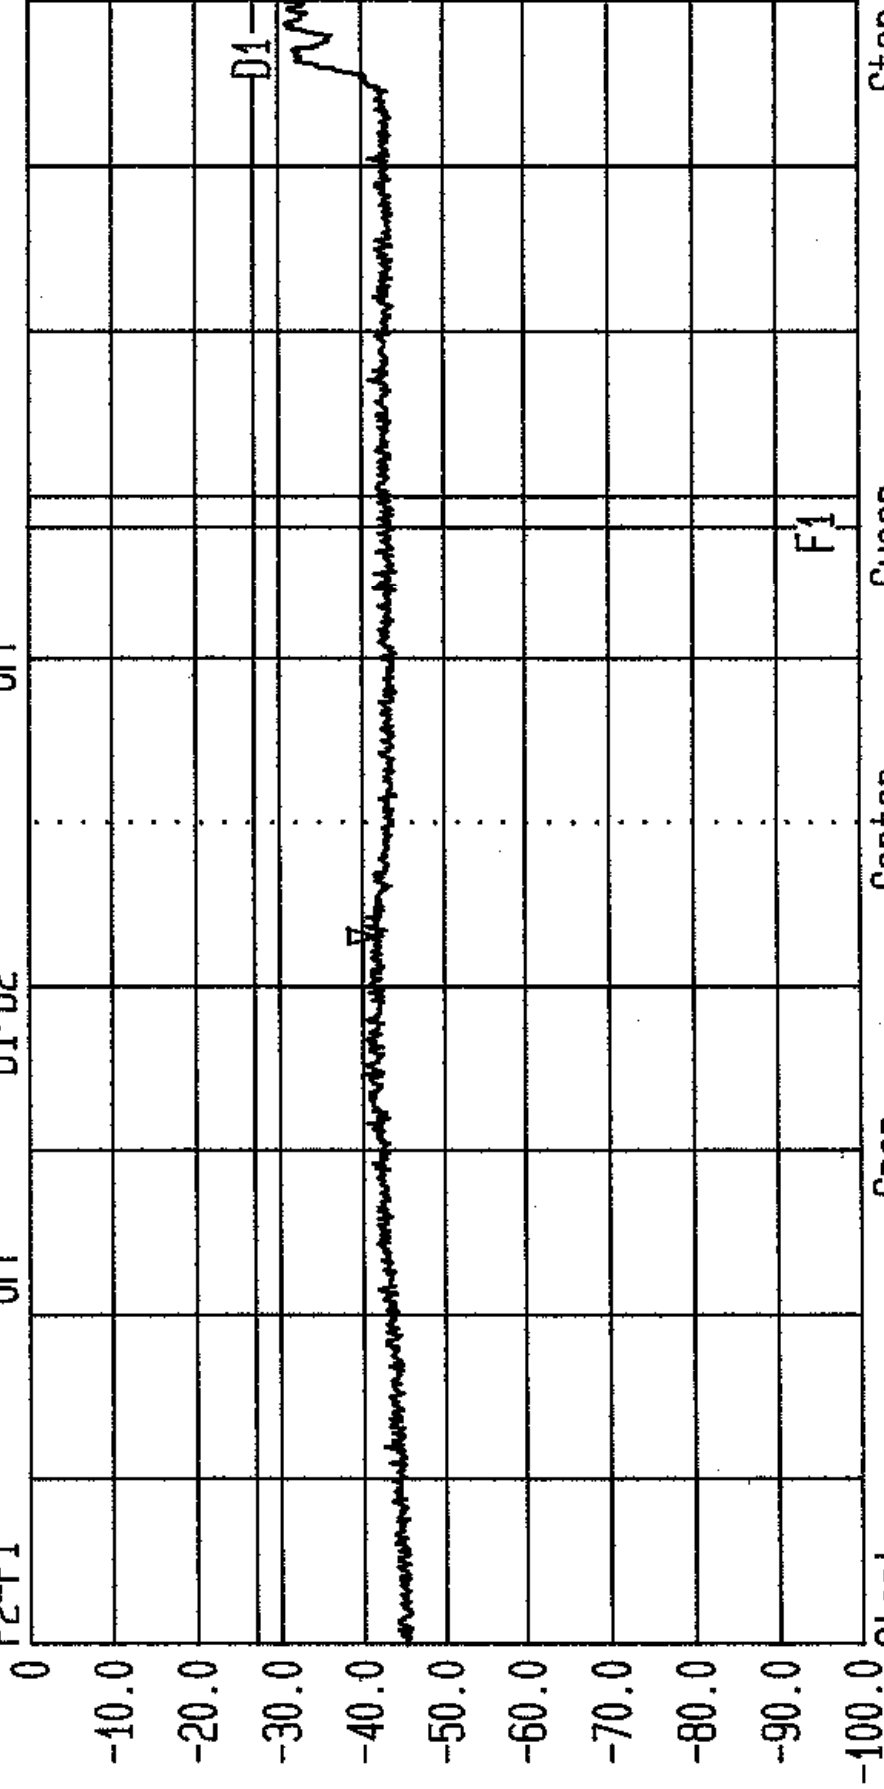

Start 5 GHz Span 220 MHz Center 5.11 GHz Sweep 20 ms Stop 5.22 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.15-5.25GHz Band. Top Chan. GPH/38797/JD01/091


PA
10
FI



LVLOFF
Date 22.Apr.'99 Time 05:18:56
Ref.Lvl Marker -91.8 dBm/Hz
0 dBm 5.2509 GHz
F1 5.2500000000 GHz D1
F2 OFF D2
F2-F1 OFF D1-D2

Res.Bw 1 MHz [imp] 1 MHz
TG.Lvl Off
CF.Stp 76.000 MHz
-27.00 dBm
OFF
OFF

Vid.Bw 1 MHz
RF.Att 10 dB
Unit [dBm]

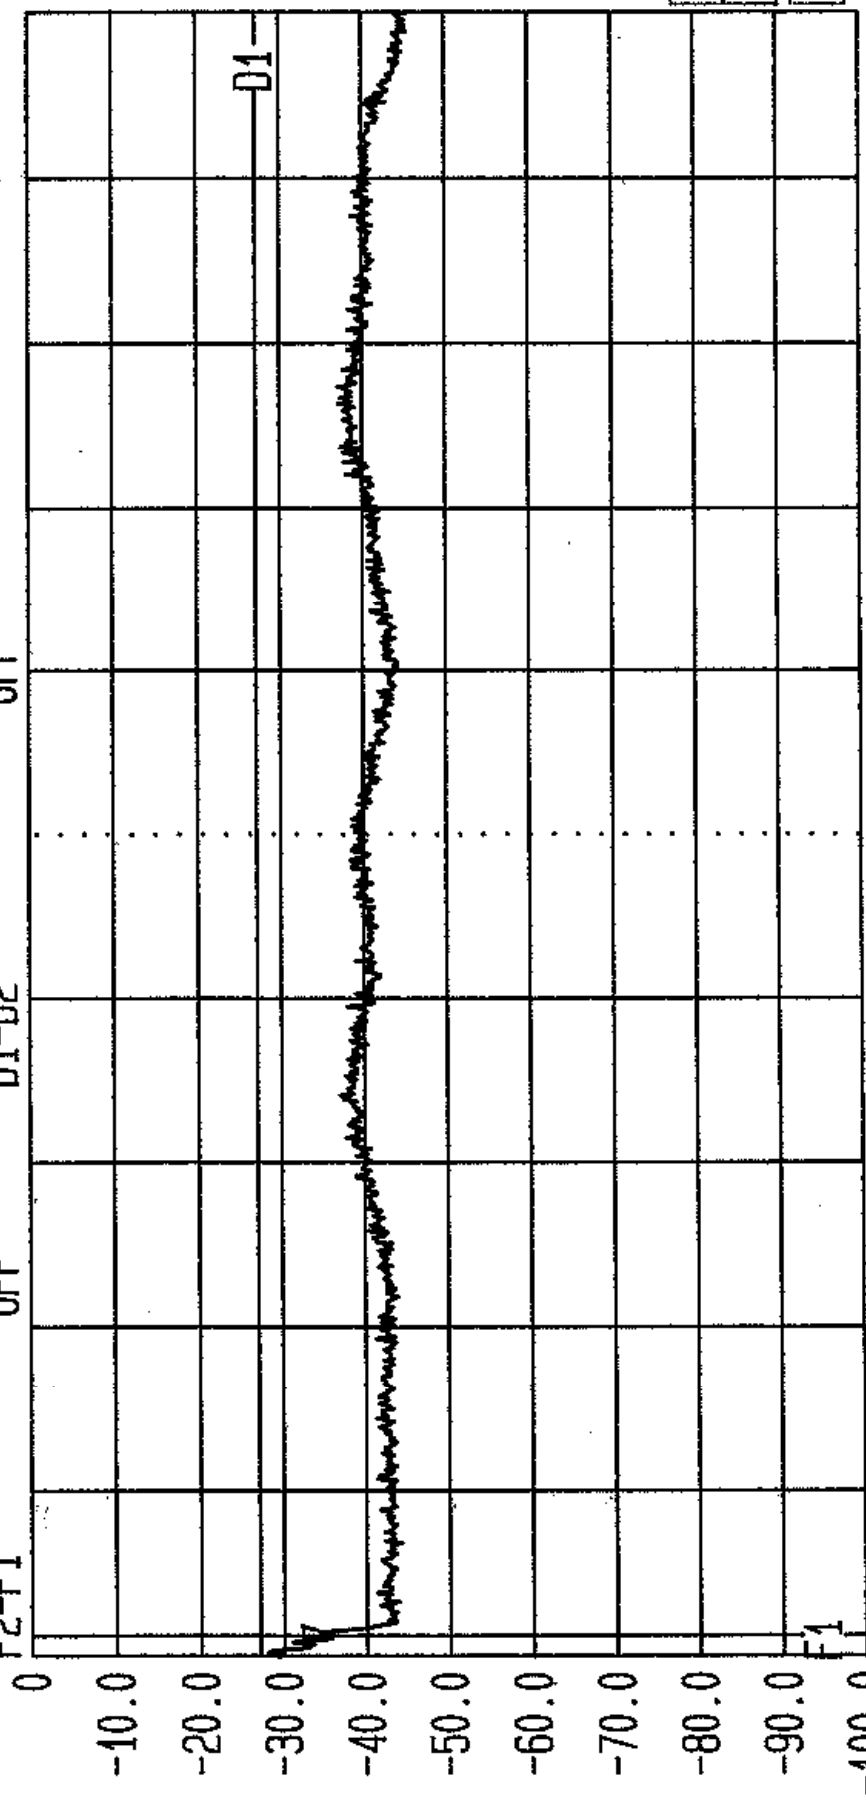

Start 5.24 GHz Span 760 MHz Center 5.62 GHz Sweep 20 ms Stop 6 GHz
Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407 (b) Tx. 5.15-5.25GHz Band. Top Chan. GPH/38797/JD01/092

PA
10
FI




LVLOFF
Date 22.Apr.'99 Time 05:23:17
Ref.Lvl1 Marker -93.6 dBm/Hz
0 dBm 5.2498 GHz

Res.Bw 1 MHz [imp] 1 MHz
TG.Lvl1 Off
CF.Stp 26.000 MHz
Unit RF.Att 10 dB [dBm]

F1 5.2500000000 GHz D1
F2 OFF D2
F2-F1 OFF D1-D2

-27.00 dBm
OFF
OFF

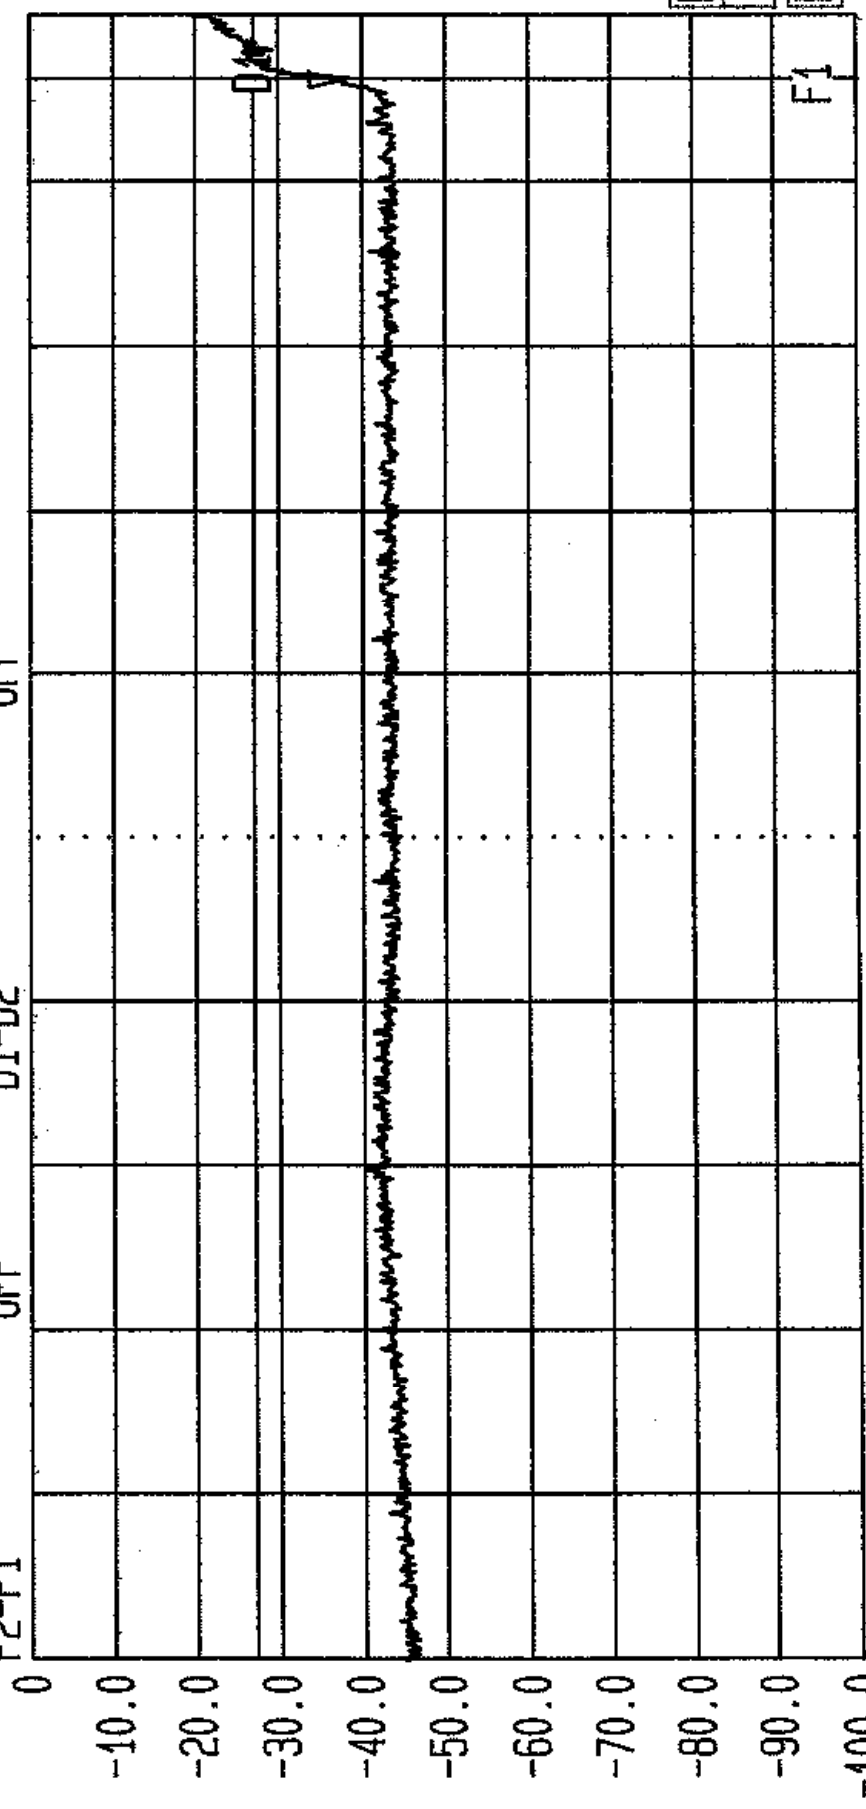

PA
10
FI

Start 5 GHz Span 260 MHz Center 5.13 GHz Sweep 20 ms Stop 5.26 GHz
Spurious EIRP: Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.25-5.35GHz Band. Bott Chan. GPH/38797/JD01/093




LVLOFF
Date 22.Apr.'99 Time 05:27:03
Ref.Lvl Marker -94.4 dBm/Hz
0 dBm 5.8168 GHz

Res.Bw 1 MHz [imp] 1 MHz
T6.Lvl off
CF.Stp 72.000 MHz
Unit 10 dB [dBm]

F1 5.3500000000 GHz D1
F2 OFF D2
F2-F1 OFF D1-D2

-27.00 dBm

OFF
OFF

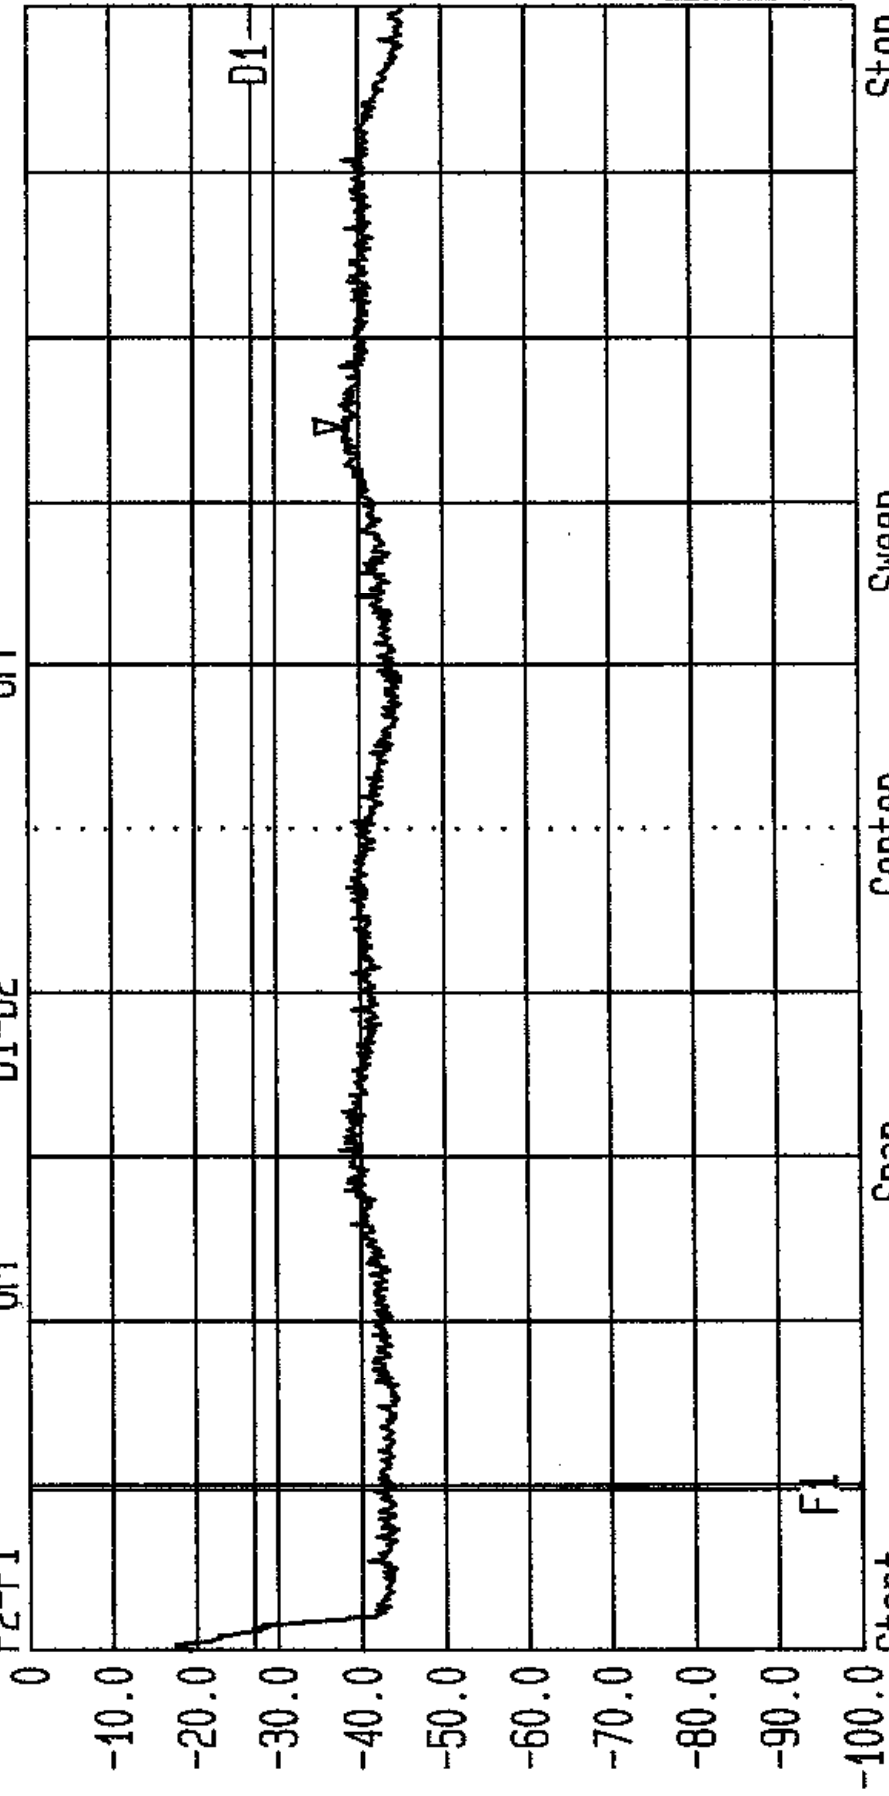

PA
10
FI

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.25-5.35GHz Band. Bott Chan. GPH/38797/JD01/094



LVLOFF
Date 22.Apr.'99 Time 05:30:46
Ref.Lvl 0 dBm
Marker -97.4 dBm/Hz
4.9977 GHz
Res.Bw 1 MHz [imp]
10 dB [dBm]
1 MHz
10 dB [dBm]
RF.Att Unit

-27.00 dBm

OFF

OFF

D1

D2

D1-D2

OFF


OFF

OFF

F1

F2

F2-F1

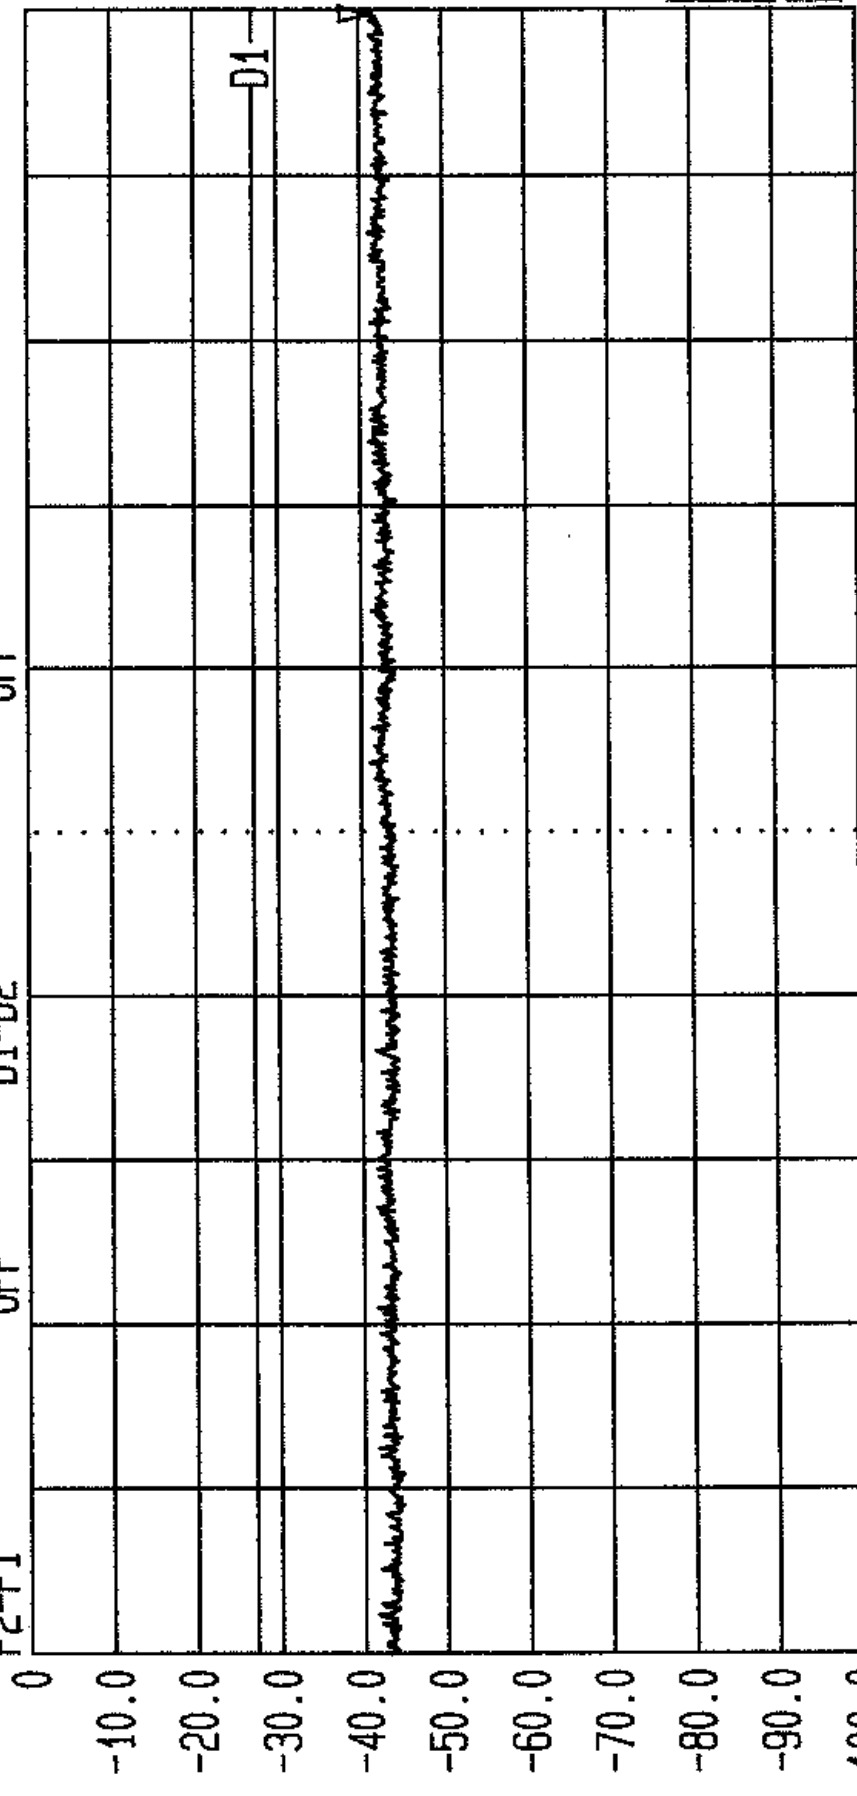


Start 4 GHz
Span 1 GHz
Center 4.5 GHz
Sweep 20 ms
Stop 5 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.25-5.35GHz Band. Bott Chan. GPH/38797/JD01/095

PA
10
FI



LVLOFF
Date 22.Apr.'99 Time 05:34:18
Ref.Lvl 0 dBm
Marker -98.0 dBm/Hz
4.9166 GHz
Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 10 dB
Unit [dBm]

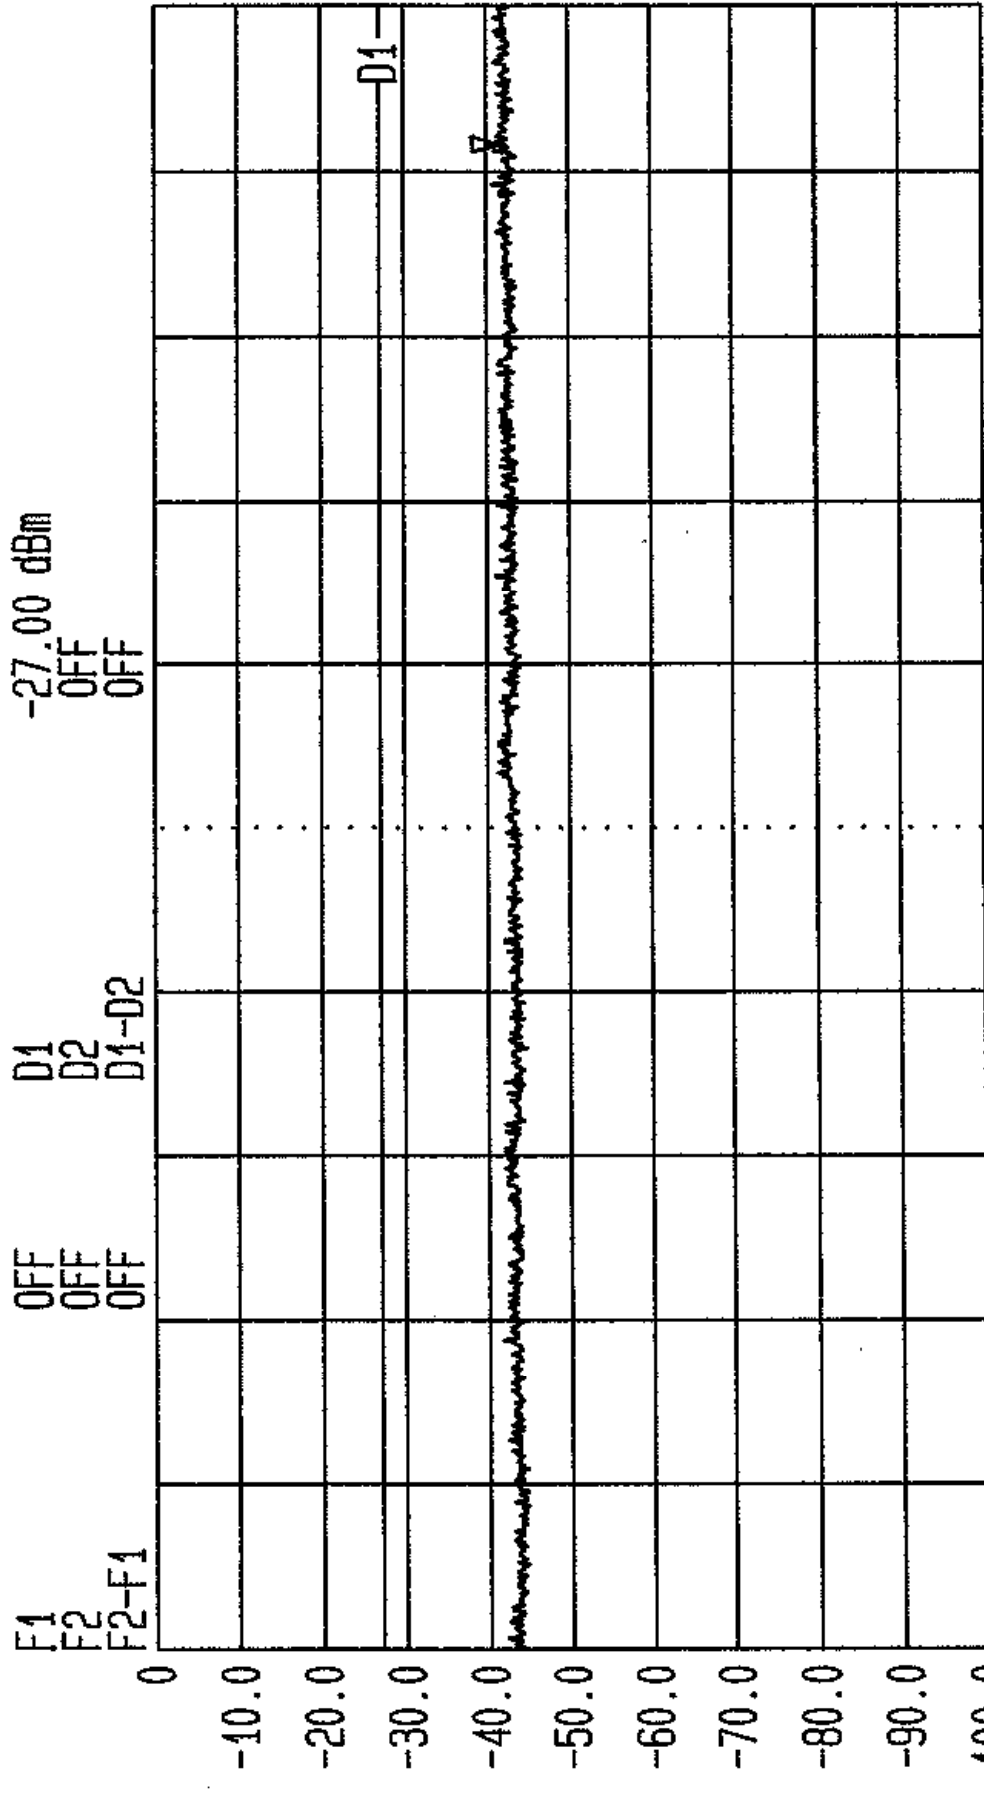

Start 4 GHz
Span 1 GHz
Center 4.5 GHz
Sweep 20 ms
Stop 5 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.25-5.35GHz Band. Top Chan. GPH/38797/JD01/096

PA
10
FI




LVLOFF
Date 22.Apr.'99 Time 05:38:02
Ref.Lvl Marker -97.3 dBm/Hz
0 dBm 5.0796 GHz

Res.Bw 1 MHz [imp] off
TG.Lvl 32.000 MHz
CF.Stp Unit
F1 5.2500000000 GHz D1
F2 OFF D2
F2-F1 OFF D1-D2

-27.00 dBm

OFF

OFF

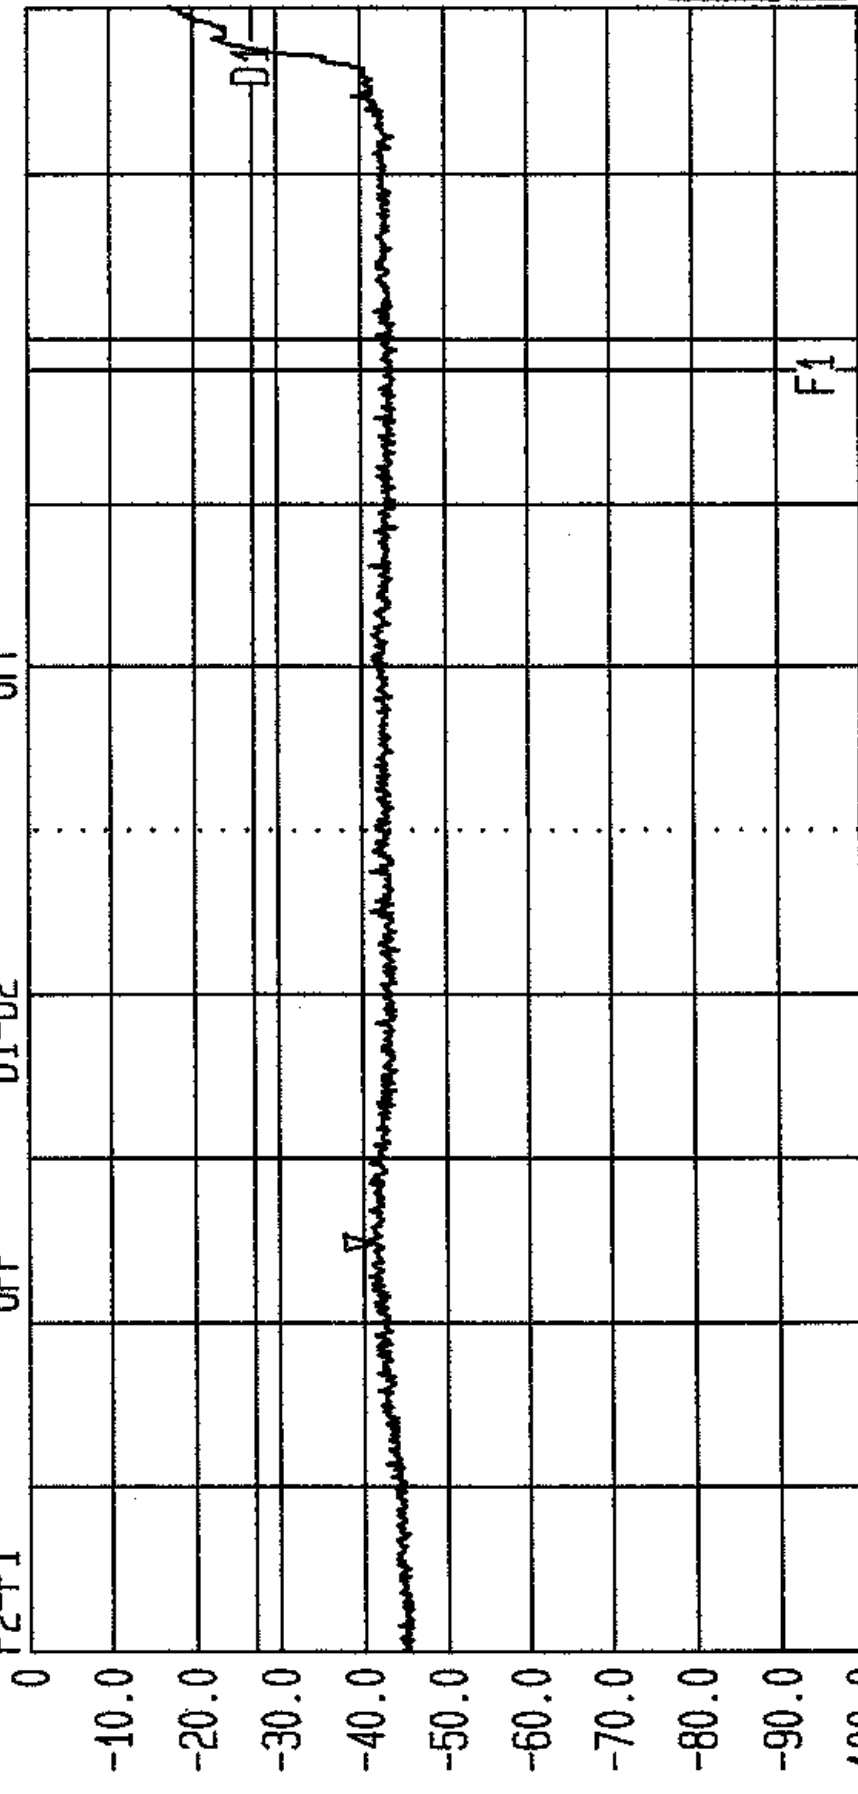

Start 5 GHz
Span 320 MHz
Center 5.16 GHz
Sweep 20 ms
Stop 5.32 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.25-5.35GHz Band. Top Chan. GPH/38797/JD01/097


PA
10
FI



LVLOFF
Date 22.Apr.'99 Time 05:42:07
Ref.Lvl Marker -96.7 dBm/Hz
0 dBm 5.3502 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 66.000 MHz
Vid.Bw 1 MHz
RF.Att 10 dB
Unit [dBm]

F1 5.3500000000 GHz D1
F2 OFF D2
F2-F1 OFF D1-D2
-27.00 dBm
OFF
OFF

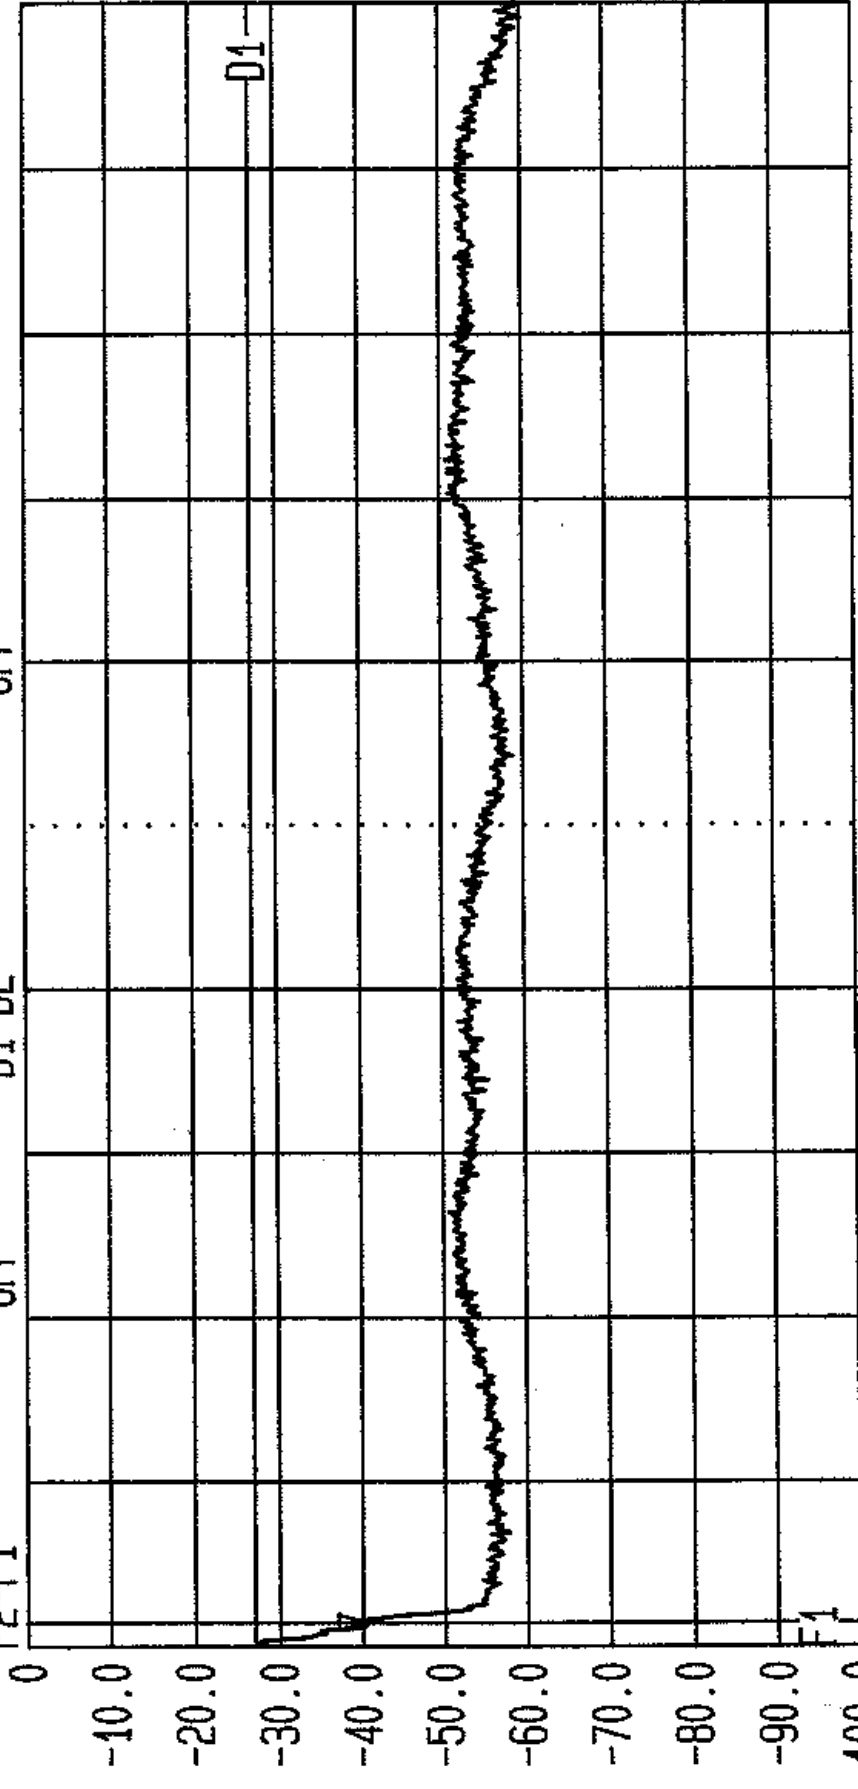


Start 5.34 GHz Span 660 MHz Center 5.67 GHz Sweep 20 ms Stop 6 GHz
F1
Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.25-5.35GHz Band. Top Chan. GPH/38797/JD01/098

PA
10
FI



LVLOFF
Date 22.Apr.'99 Time 05:48:22
Ref.Lvl 0 dBm Marker -91.8 dBm/Hz
5.7250 GHz

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 73.500 MHz
Vid.Bw 1 MHz
RF.Att 10 dB
Unit [dBm]

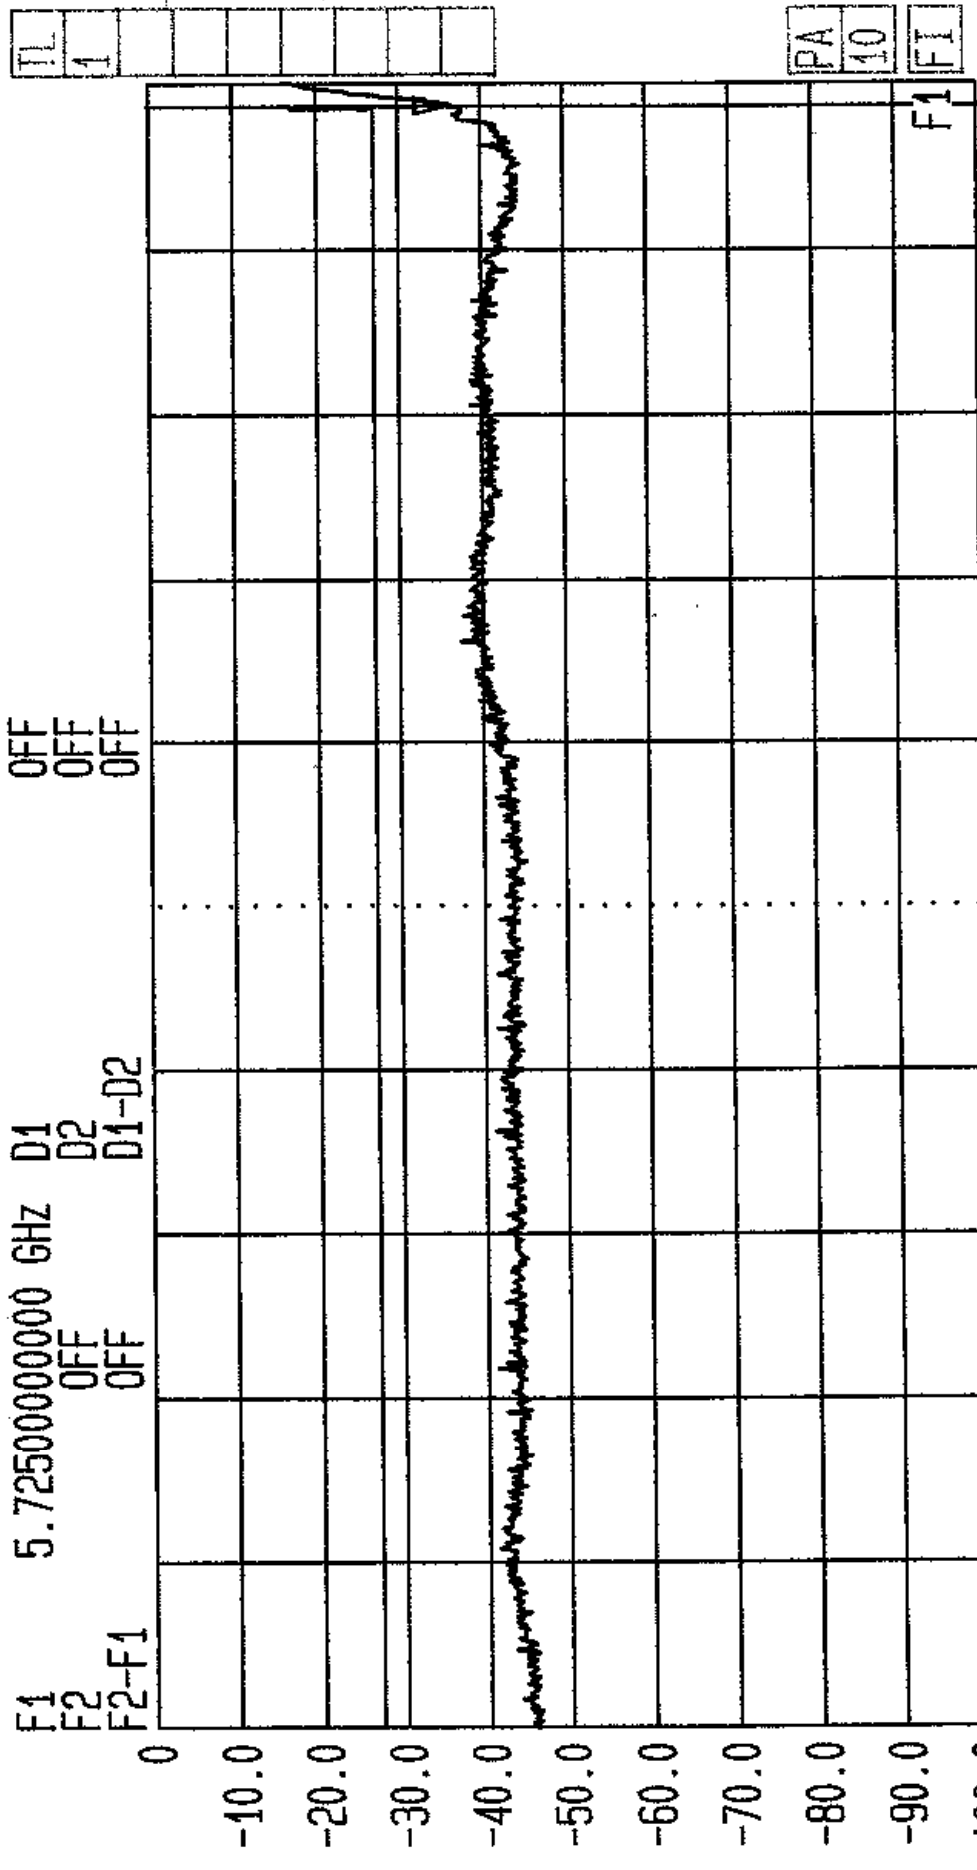

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/099




LVLOFF
Date 22.Apr.'99 Time 05:52:10
Ref.Lvl1 Marker -94.5 dBm/Hz
0 dBm 5.8312 GHz

Res.Bw 1 MHz [imp]
TG.Lvl1 Off
CF.Stp 18.500 MHz
Vid.Bw 1 MHz
AF.Att 10 dB
Unit [dBm]

TL
2

OFF
OFF
OFF

F1 5.825000000000 GHz D1
F2 OFF D2
F2-F1 OFF D1-D2

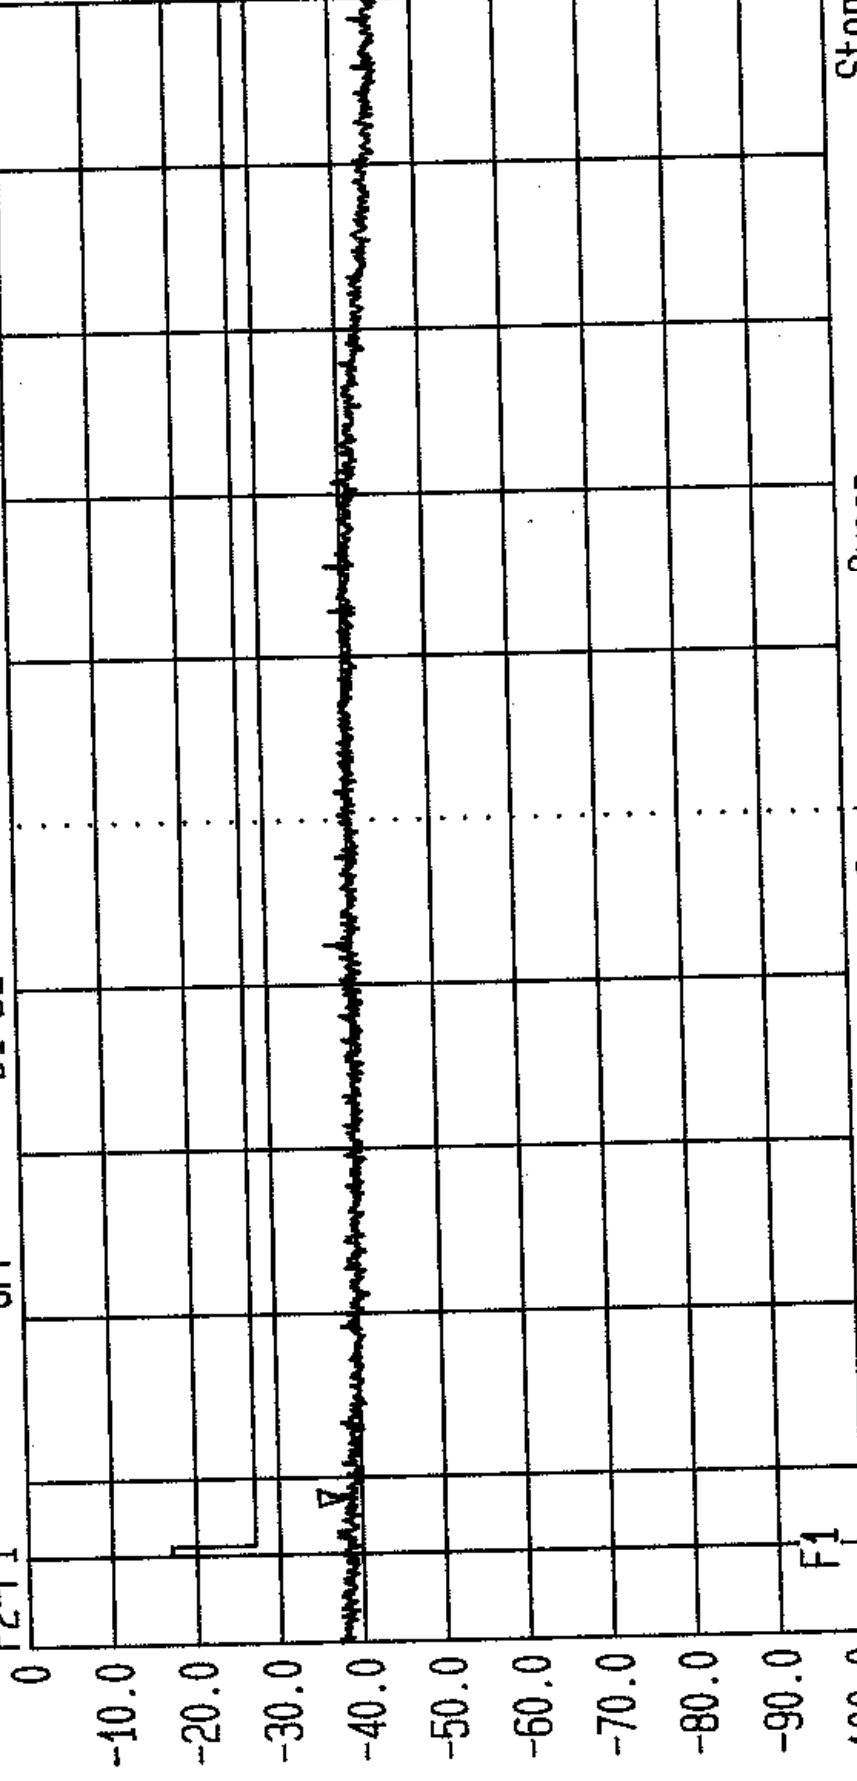

PA
10
FI


Start 5.815 GHz
Span 185 MHz
Center 5.9075 GHz
Sweep 20 ms
Stop 6 GHz
Spurious EIRP: Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/100



LVLOFF
Date 22.Apr.'99 Time 05:56:07
Ref.Lvl Marker -99.6 dBm/Hz
0 dBm 4.0877 GHz

Res.Bw 1 MHz [imp] 1 MHz
TG.Lvl off
CF.Stp 100.000 MHz RF.Att 10 dB
Unit [dBm]

F1 5.8250000000 GHz D1 -27.00 dBm
F2 OFF
F2-F1 OFF D1-D2

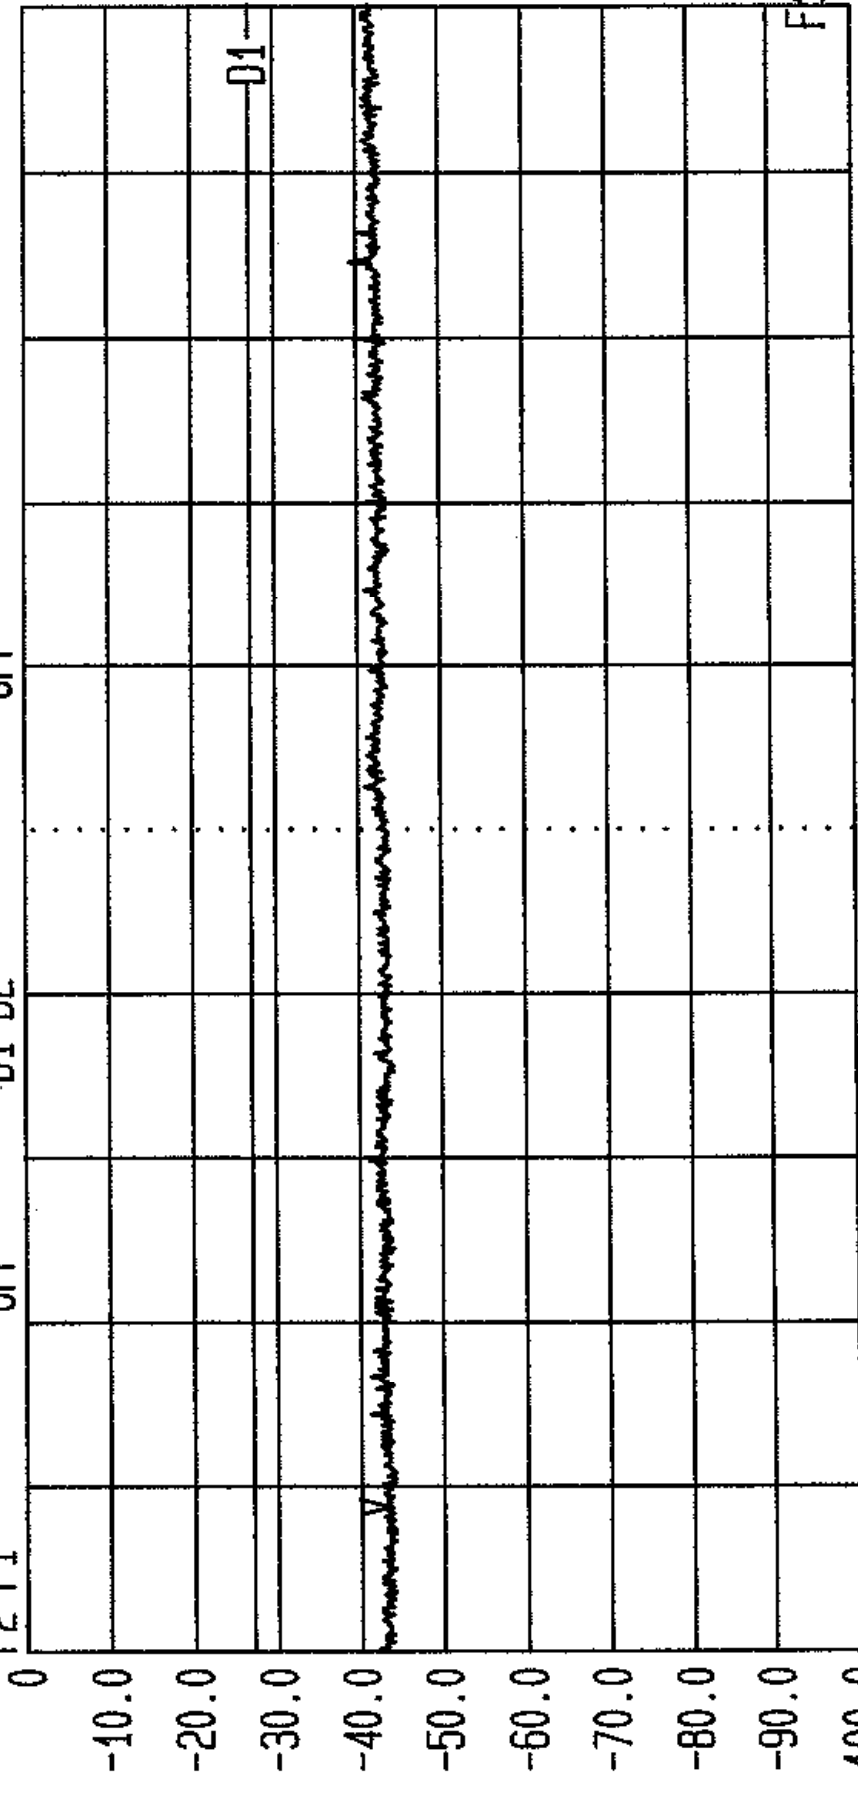

Start 4 GHz Span 1 GHz Center 4.5 GHz Sweep 20 ms Stop 5 GHz
Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407 (b) Tx. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/101


PA 10 FFI



LVLOFF
Date 22.Apr.'99 Time 06:02:08
Ref.Lvl 0 dBm
Marker -95.2 dBm/Hz
4.9066 GHz

Res.Bw 1 MHz [imp]
1G.Lvl off
CF.Stp 100.000 MHz
Vid.Bw 1 MHz
RF.Att 10 dB
Unit [dBm]

F1 OFF
F2 OFF
F2-F1 OFF
D1
D2
D1-D2
-27.00 dBm
OFF
OFF

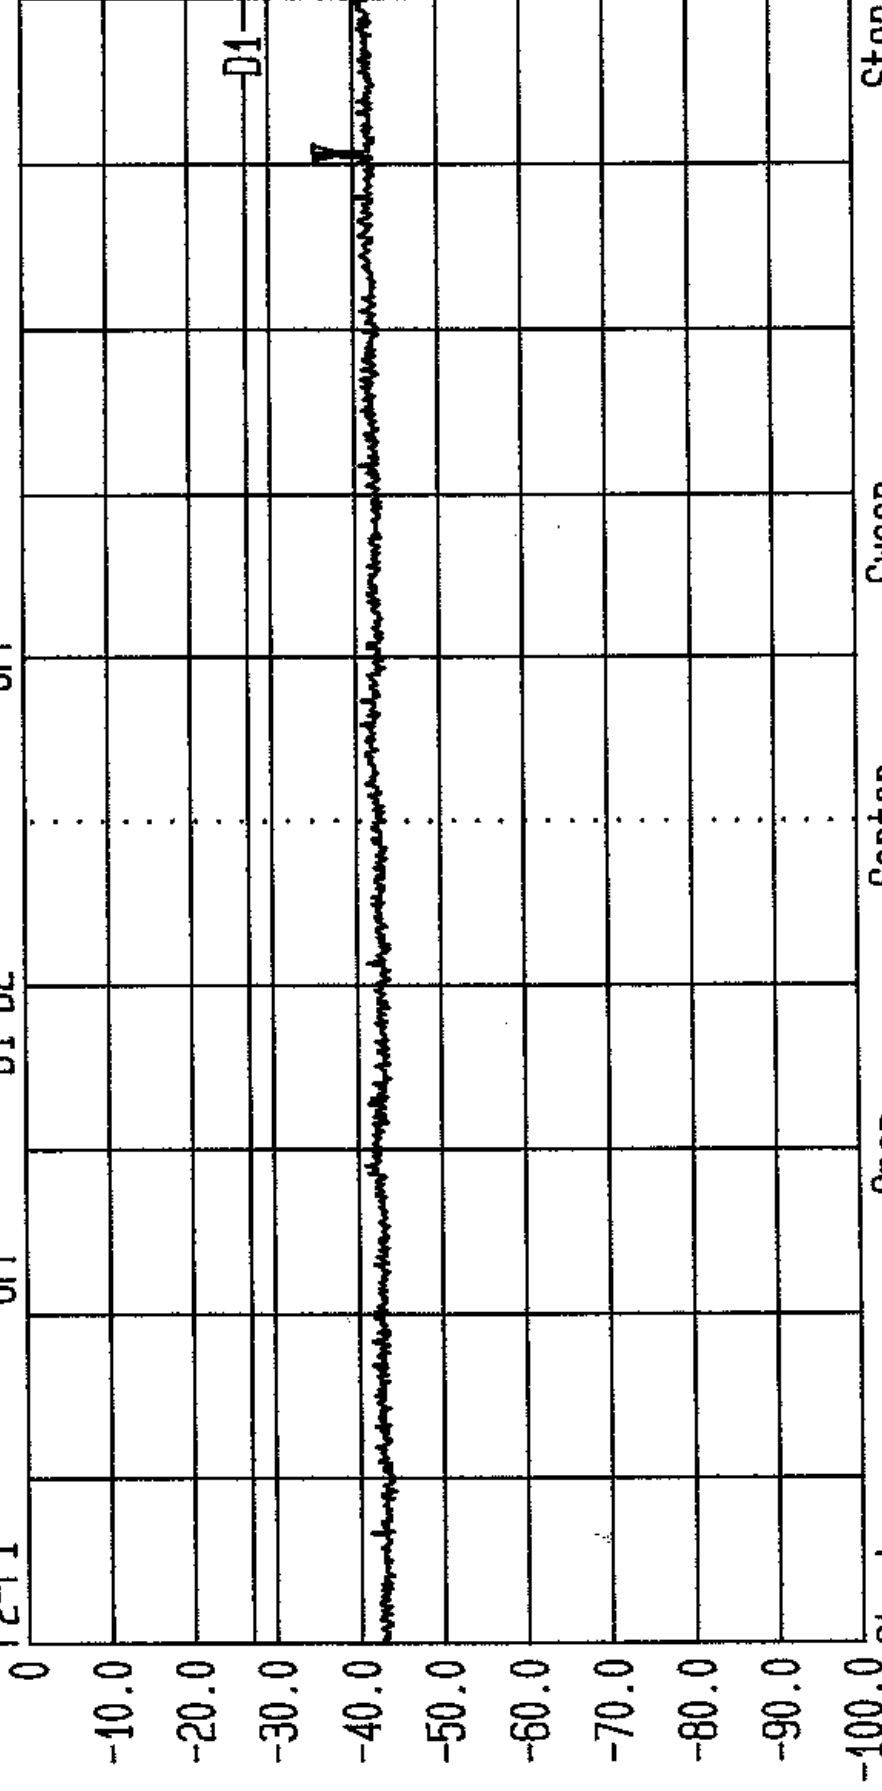

Start 4 GHz
Span 1 GHz
Center 4.5 GHz
Sweep 20 ms
Stop 5 GHz
Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.725-5.825GHz Band. Top Chan. GPH/38797/JD01/102

PA
10
FI




LVLOFF
Date 22.Apr.'99 Time 06:05:39
Ref.Lvl 0 dBm Marker -94.8 dBm/Hz
5.5123 GHz

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 79.500 MHz
Vid.Bw 1 MHz
RF.Att 10 dB
Unit [dBm]

F1 5.7250000000 GHz D1
F2 OFF D2
F2-F1 OFF D1-D2

TL
1

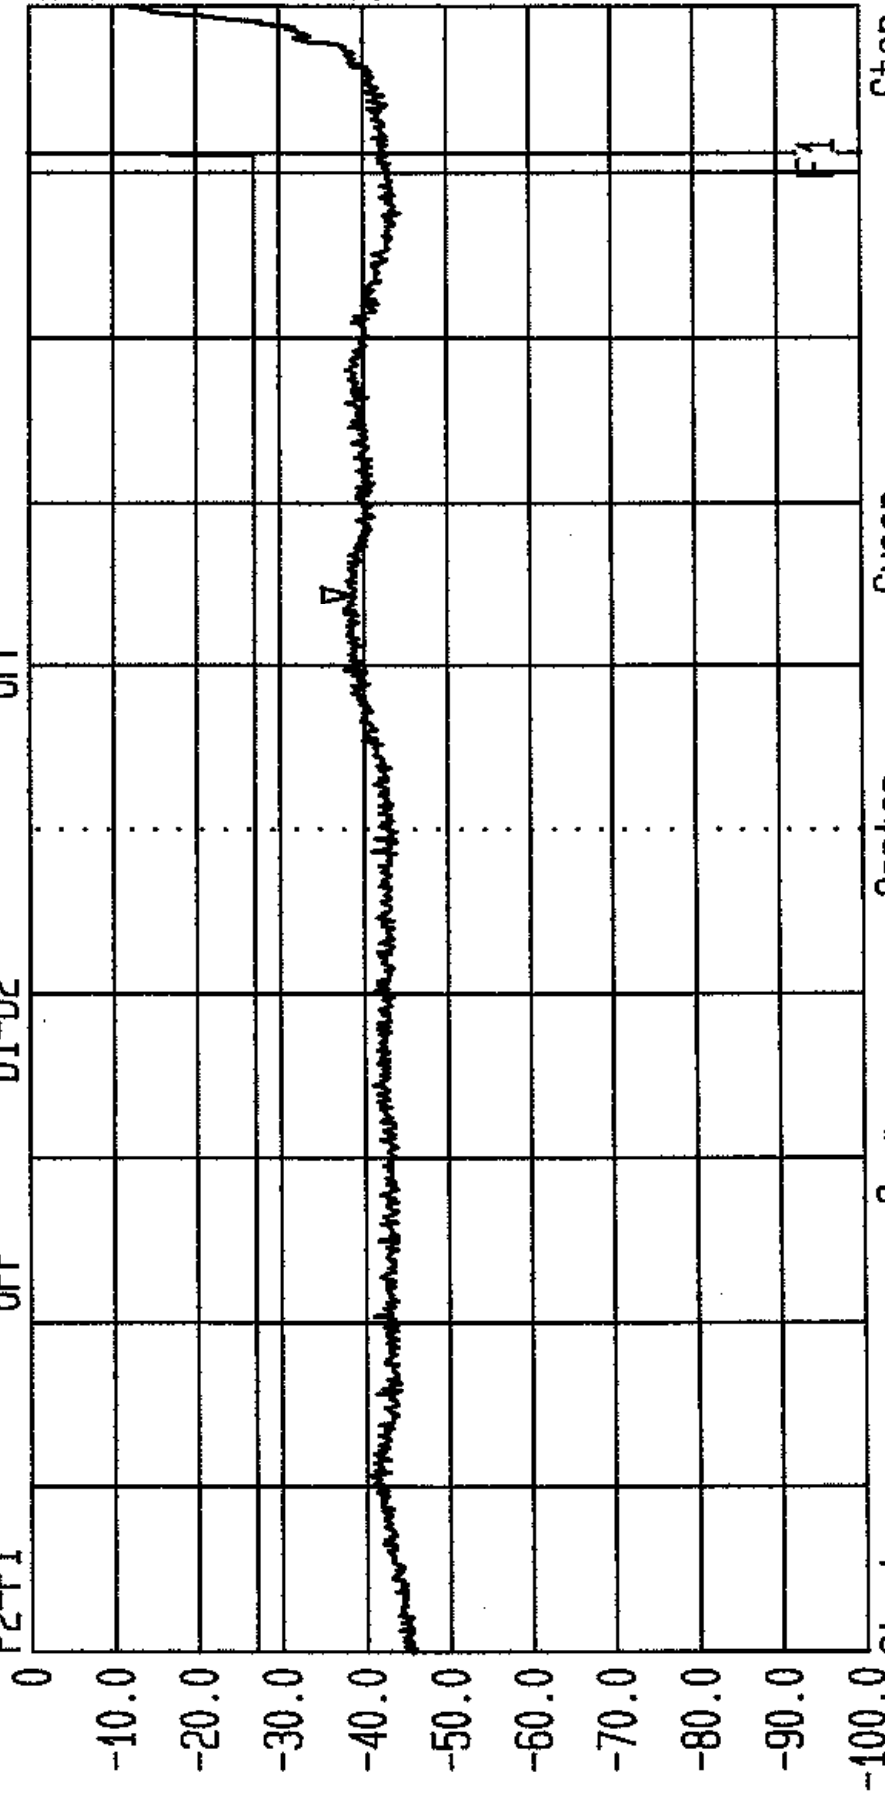

PA
10
FI

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.725-5.825GHz Band. Top Chan. GPH/38797/JD01/103




Res.Bw	1 MHz [imp]	Vid.Bw	1 MHz
TG.Lvl	off		
CF.Stp	220.000 MHz	RF.Att	10 dB
		Unit	[dBm]

F1	OFF	D1
F2	OFF	D2
F3-F4	OFF	D1-D2

-27.00 dBm
OFF
OFF

TL		2					
----	--	---	--	--	--	--	--

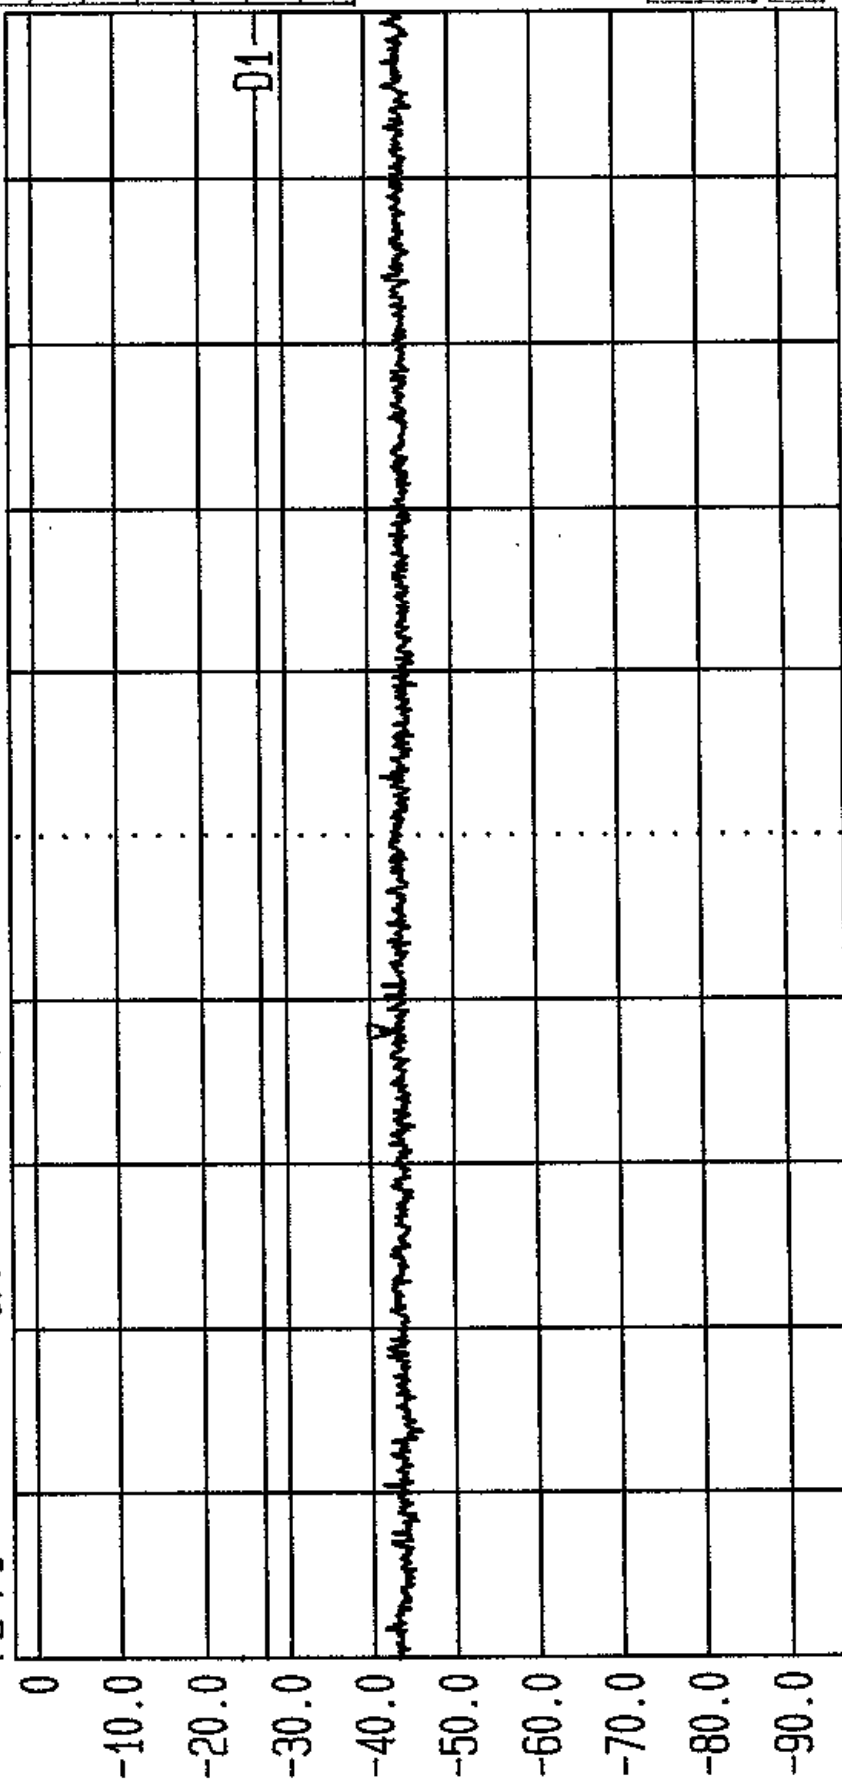

Start	Span	Center	Sweep	Stop
6 GHz	2.2 GHz	7.1 GHz	20 ms	8.2 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
 Limit. FCC Part 15.407(b) Tx. 5.15-5.25GHz Band. Bott Chan. GPH/38797/JD01/105



LVLOFF
Date 22.Apr.'99 Time 06:22:18
Ref.Lvl 2.70 dBm
Marker -95.7 dBm/Hz
6.4937 GHz

Res.Bw
TG.Lvl
CF.Stp

1 MHz [imp]
off
220.000 MHz

Vid.Bw

1 MHz

RF.Att
Unit
10 dB
[dBm]

F1 OFF D1
F2 OFF D2
F2-F1 OFF D1-D2

-27.00 dBm

OFF
OFF

0
-10.0
-20.0
-30.0
-40.0
-50.0
-60.0
-70.0
-80.0
-90.0

D1



TL
2

PA
10
FI

Start
6 GHz

Span
2.2 GHz

Center
7.1 GHz

Sweep
20 ms


Stop
8.2 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.15-5.25GHz Band. Top Chan. GPH/38797/JD01/106



LVLOFF
Date 22.Apr.'99 Time 06:25:56
Ref.Lvl1 Marker -98.7 dBm/Hz
2.70 dBm 6.5377 GHz

Res.Bw 1 MHz [imp]
TG.Lvl1 Off
CF.Stp 220.000 MHz
Unit RF.Att
10 dB [dBm]

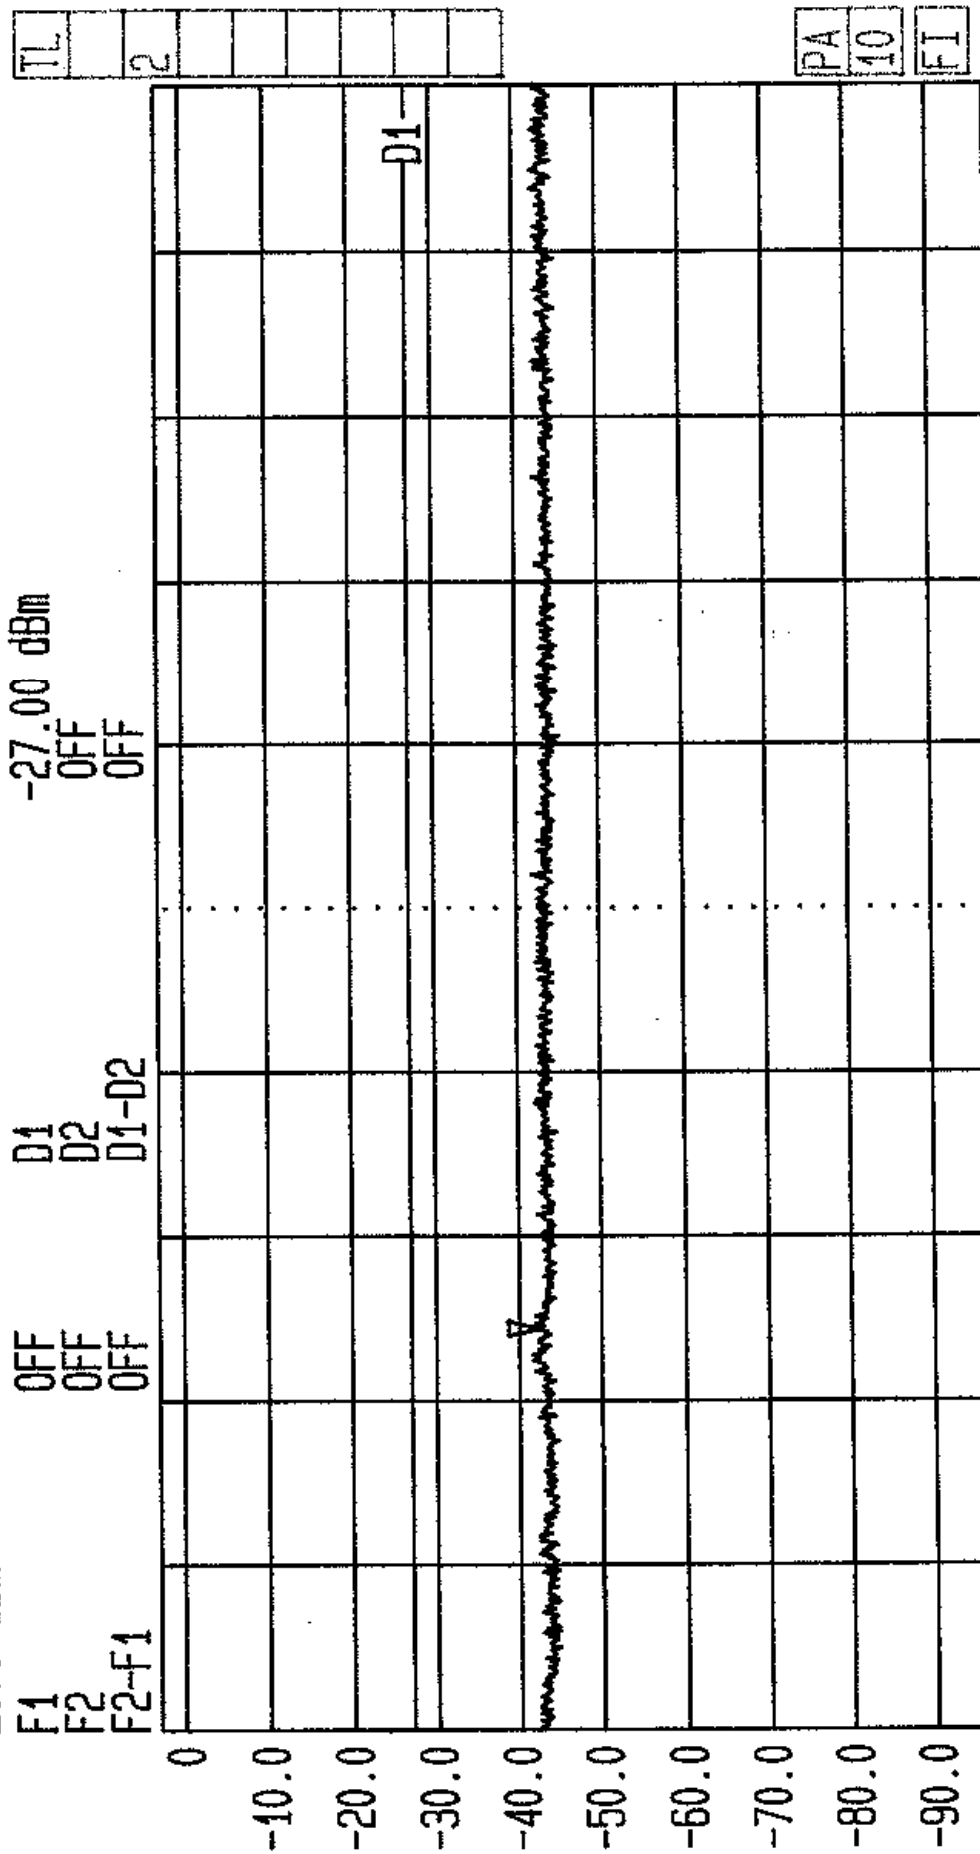




LVLOFF
Date 22.Apr.'99 Time 06:29:58
Ref.Lvl1 Marker -98.9 dBm/Hz
2.70 dBm

Res.Bw 1 MHz [imp]
TG.Lvl1 off
CF.Stp 220.000 MHz
Vid.Bw 1 MHz
RF.Att 10 dB
Unit [dBm]

F1 OFF D1
F2 OFF D2
F2-F1 OFF D1-D2

-27.00 dBm
OFF
OFF

TL
2

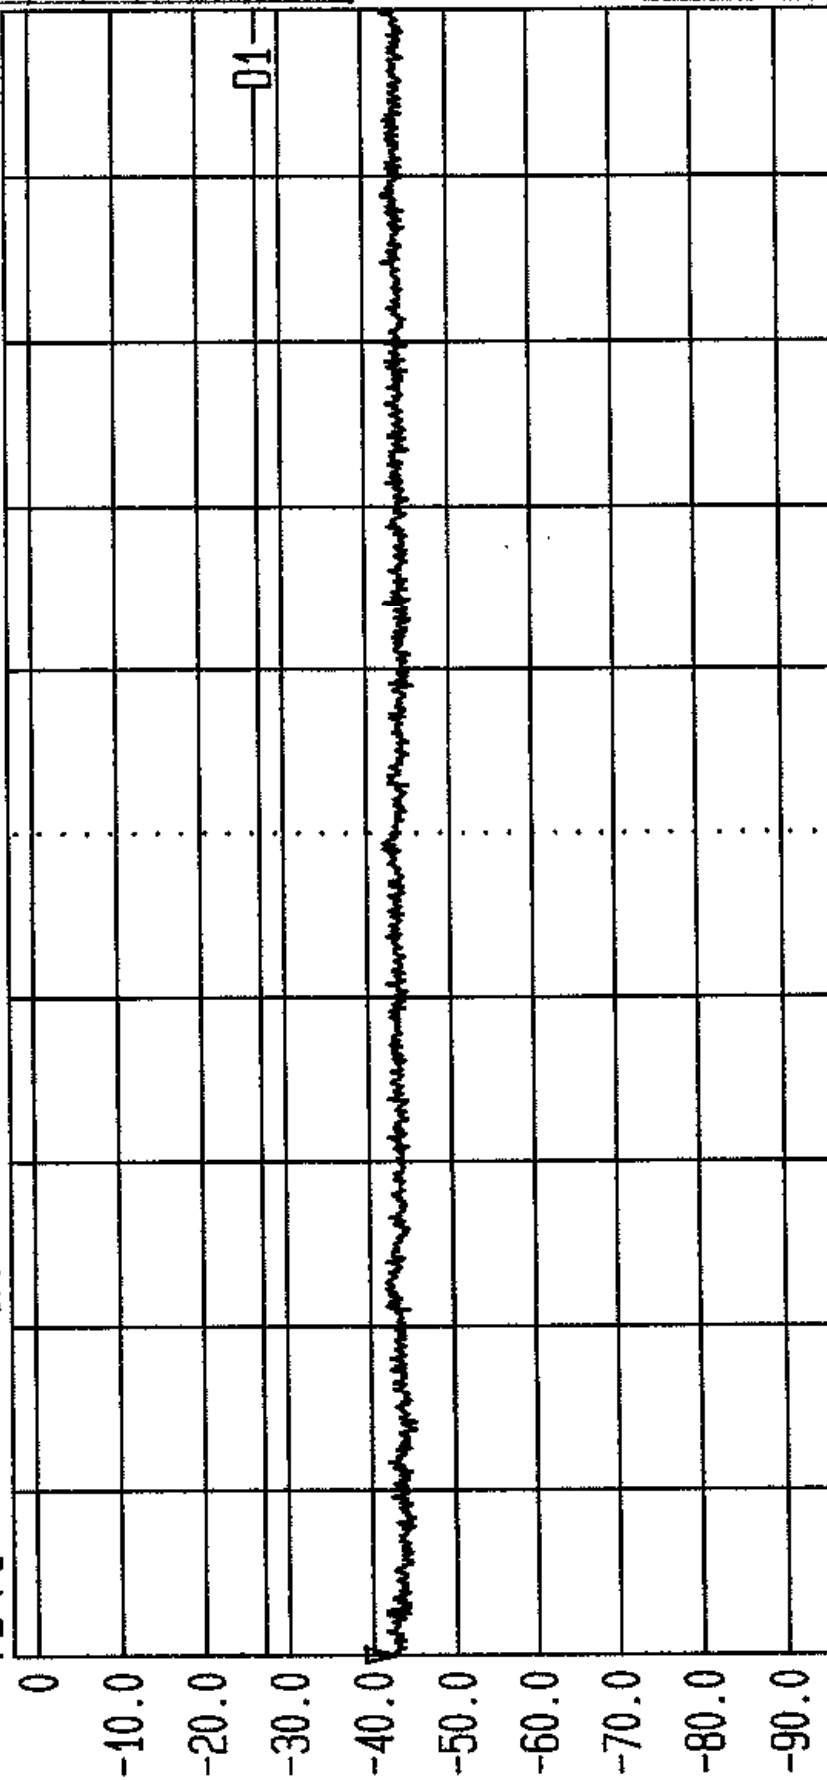

PA
10
FI

Start 6 GHz
Span 2.2 GHz
Center 7.1 GHz
Sweep 20 ms
Stop 8.2 GHz
Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407 (b) Tx. 5.25-5.35GHz Band. Top Chan. GPH/38797/JD01/108



LVLOFF '99 Time 06:33:39
 Date 22.Apr. -98.0 dBm/Hz
 Ref.Lvl Marker
 2.70 dBm 6.5060 GHz

Res.Bw	1 MHz [imp]	Vid.Bw	1 MHz
TG.Lvl	Off		
CF.Stp	220.000 MHz	RF.Att	10 dB
		Unit	[dBm]

-27.00 dBm

F1	OFF	D1
F2	OFF	D2
F3-F1	OFF	D1-D2

TL		2					
----	--	---	--	--	--	--	--


0
-10.0
-20.0
-30.0
-40.0
-50.0
-60.0
-70.0
-80.0
-90.0

01-

PA	10	FI
----	----	----

Start	Span	Center	Sweep	Stop
6 GHz	2.2 GHz	7.1 GHz	20 ms	8.2 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB
Limit. FCC Part 15.407(b) Tx. 5.725-5.825GHz Band. Bott.Chan.
GPH/38797/JD01/109

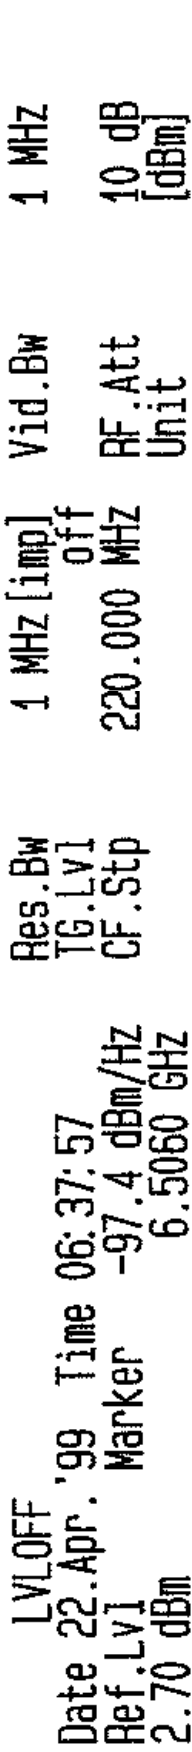

```

LVLOFF
Date 22.Apr.'99   Time 06:37:57
Ref.Lvl            Marker
2.70 dBm          -97.4 dBm/Hz
                   6.5060 GHz

Res.Bw            1 MHz [imp]
TG.Lvl            off
CF.Stp            220.000 MHz
Vid.Bw            1 MHz
RF.Att            10 dB
Unit              [dBm]

```

F1	OFF	D1	-27.00 dBm	TL
F2	OFF	D2	OFF	
F3-F1	OFF	D1-D2	OFF	

[illegible]

Start	Span	Center	Sweep	Stop
6 GHz	2.2 GHz	7.1 GHz	20 ms	8.2 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
 Limit. FCC Part 15.407(b) Tx. 5.725-5.825GHz Band. Top.Chan. GPH/38797/JD01/110




LVLOFF
Date 22.Apr.'99 Time 06:49:32
Ref.Lvl 7.10 dBm
Marker -96.9 dBm/Hz
9.4278 GHz

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 430.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

F1 OFF D1
F2 OFF D2
F2-F1 OFF D1-D2

-27.00 dBm
OFF
OFF

TL
2

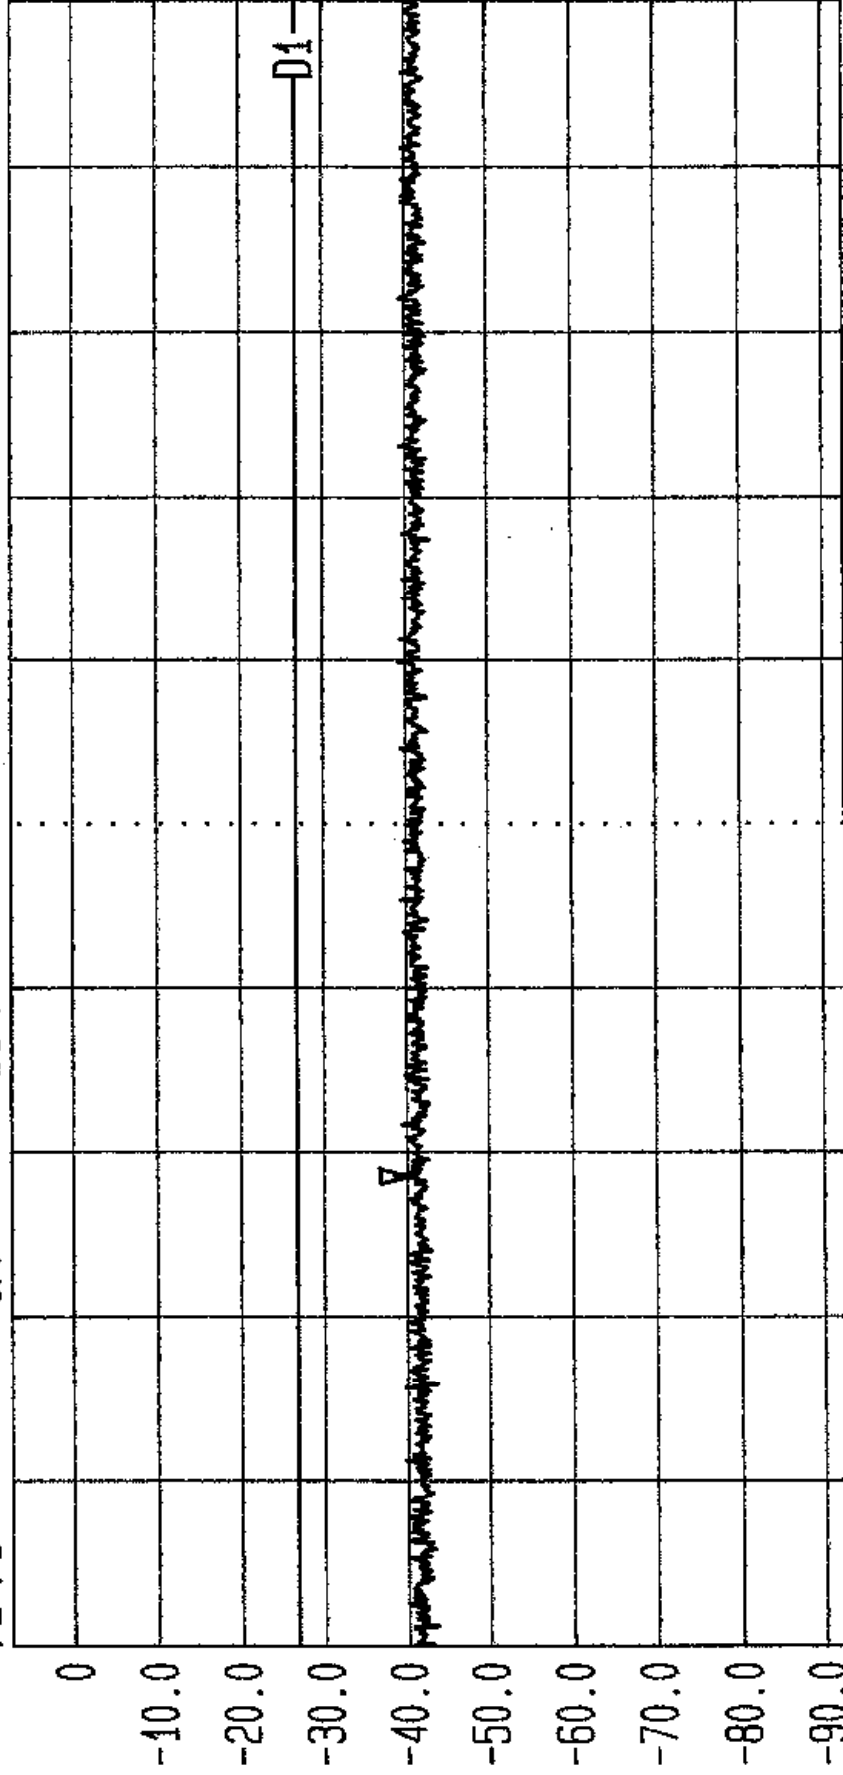

Start 8.2 GHz
Span 4.3 GHz
Center 10.35 GHz
Sweep 40 ms
Stop 12.5 GHz


Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.15-5.25GHz Band. Bott.Chan. GPH/38797/JD01/111



Res. Bw
TG. Lvl
CF. Stp

1 MHz [imp]	Vid.Bw	1 MHz
Off		
430.000 MHz	RF.Att	0 dB
	Unit	[dBm]

-27.00 dBm
OFF
OFF

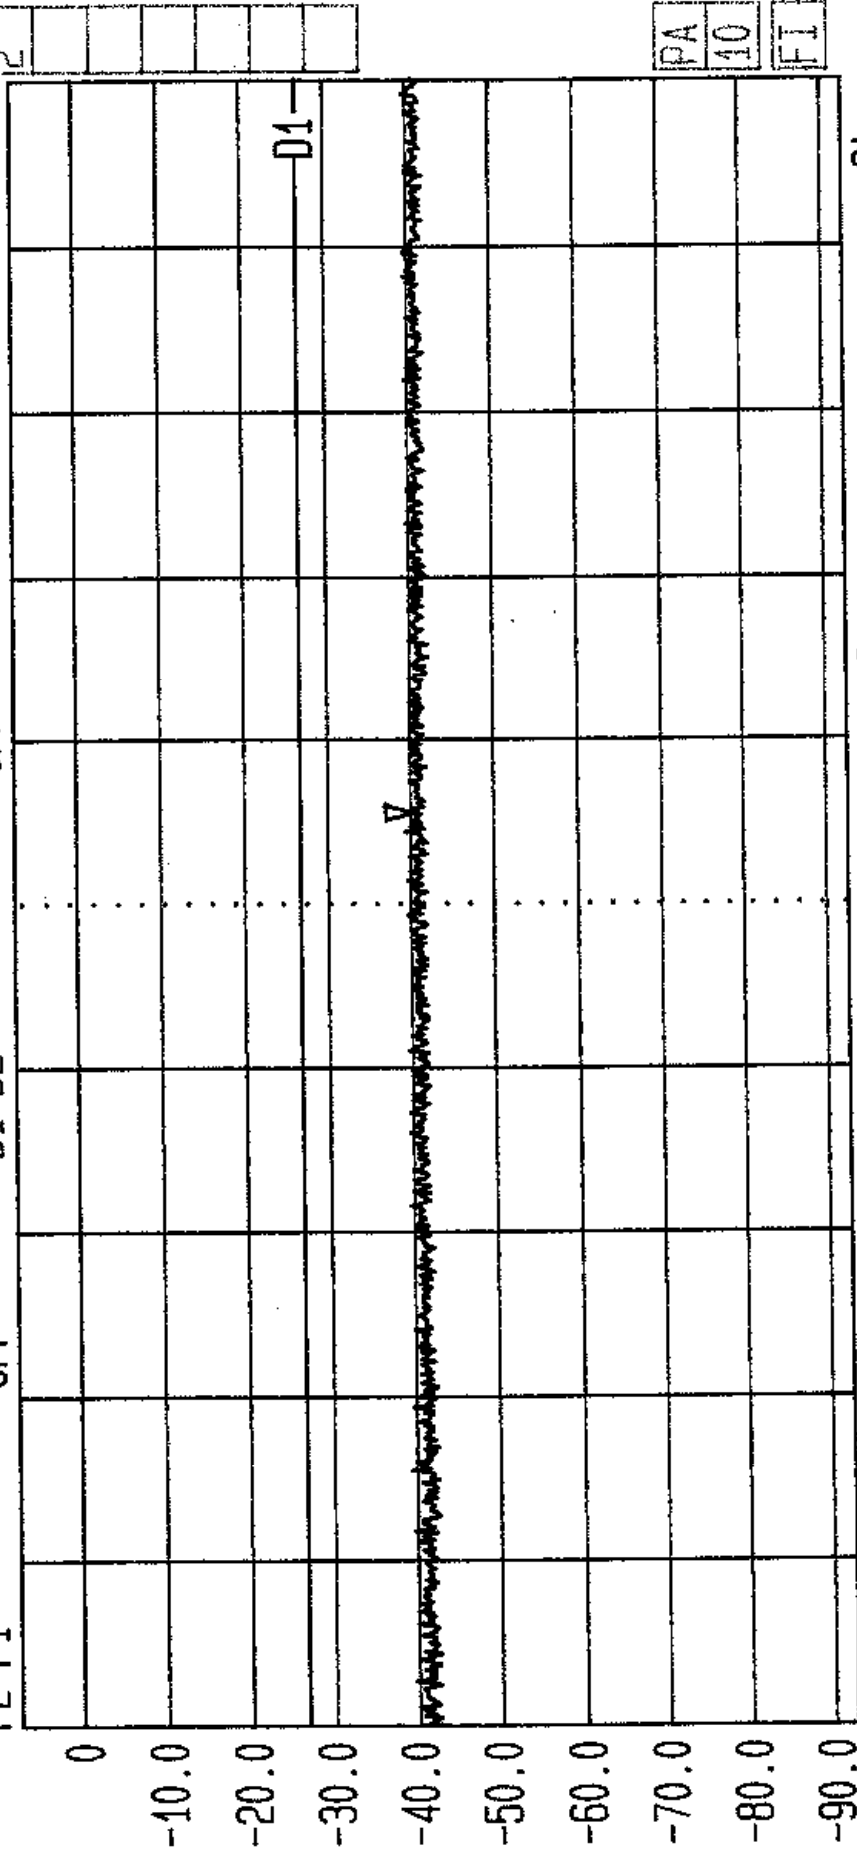


Start	Span	Center	Sweep	Stop
8.2 GHz	4.3 GHz	10.35 GHz	40 ms	12.5 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.15-5.25GHz Band. Top.Chan. GPH/38797/JD01/112



LVLOFF
Date 22.Apr.'99 Time 06:53:06
Ref.Lvl 7.10 dBm
Marker -97.4 dBm/Hz
9.0504 GHz


Res.Bw 1 MHz [imp]
1 MHz
TG.Lvl off
CF.Stp 430.000 MHz
RF.Att 0 dB
Unit [dBm]

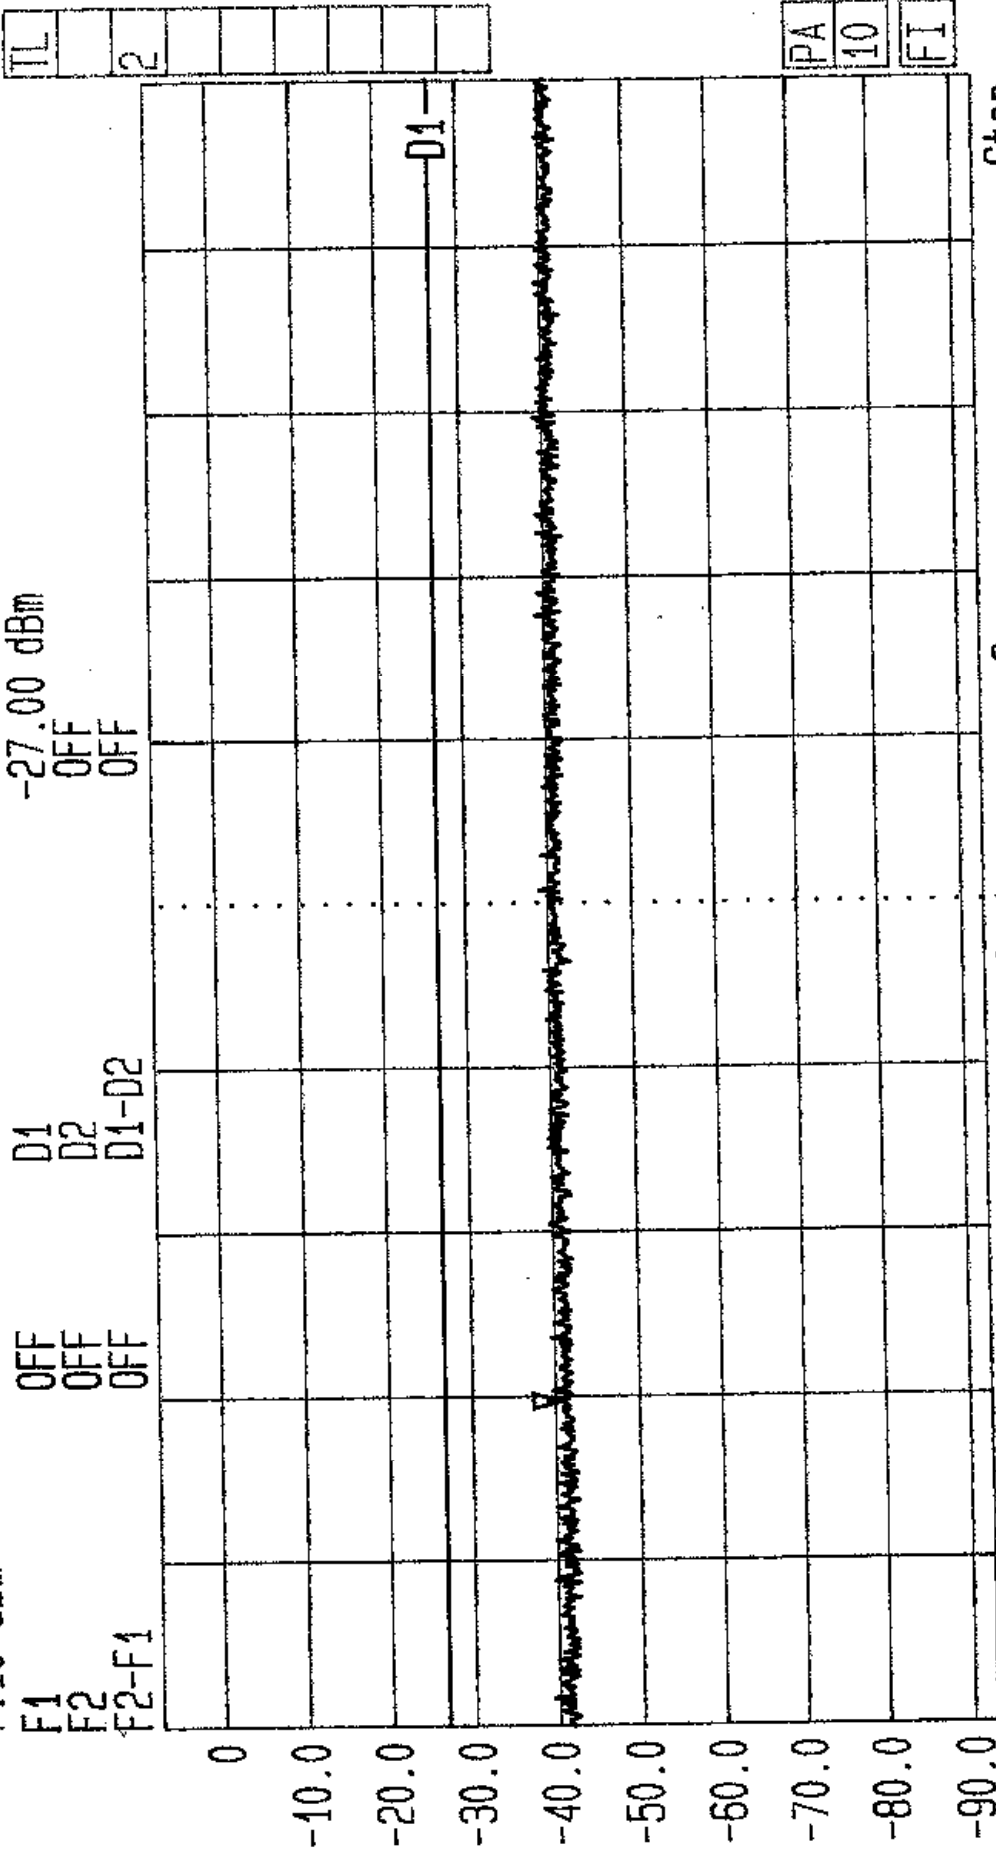


Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.25-5.35GHz Band. Bott Chan.



LVLOFF
Date 22.Apr.'99 Time 06:57:10
Ref.Lvl 7.10 dBm
Marker -96.9 dBm/Hz
10.0012 GHz
Res.Bw 1 MHz [imp]
1 MHz
Vid.Bw 1 MHz
TG.Lvl off
CF.Stp 430.000 MHz
RF.Att 0 dB
Unit [dBm]

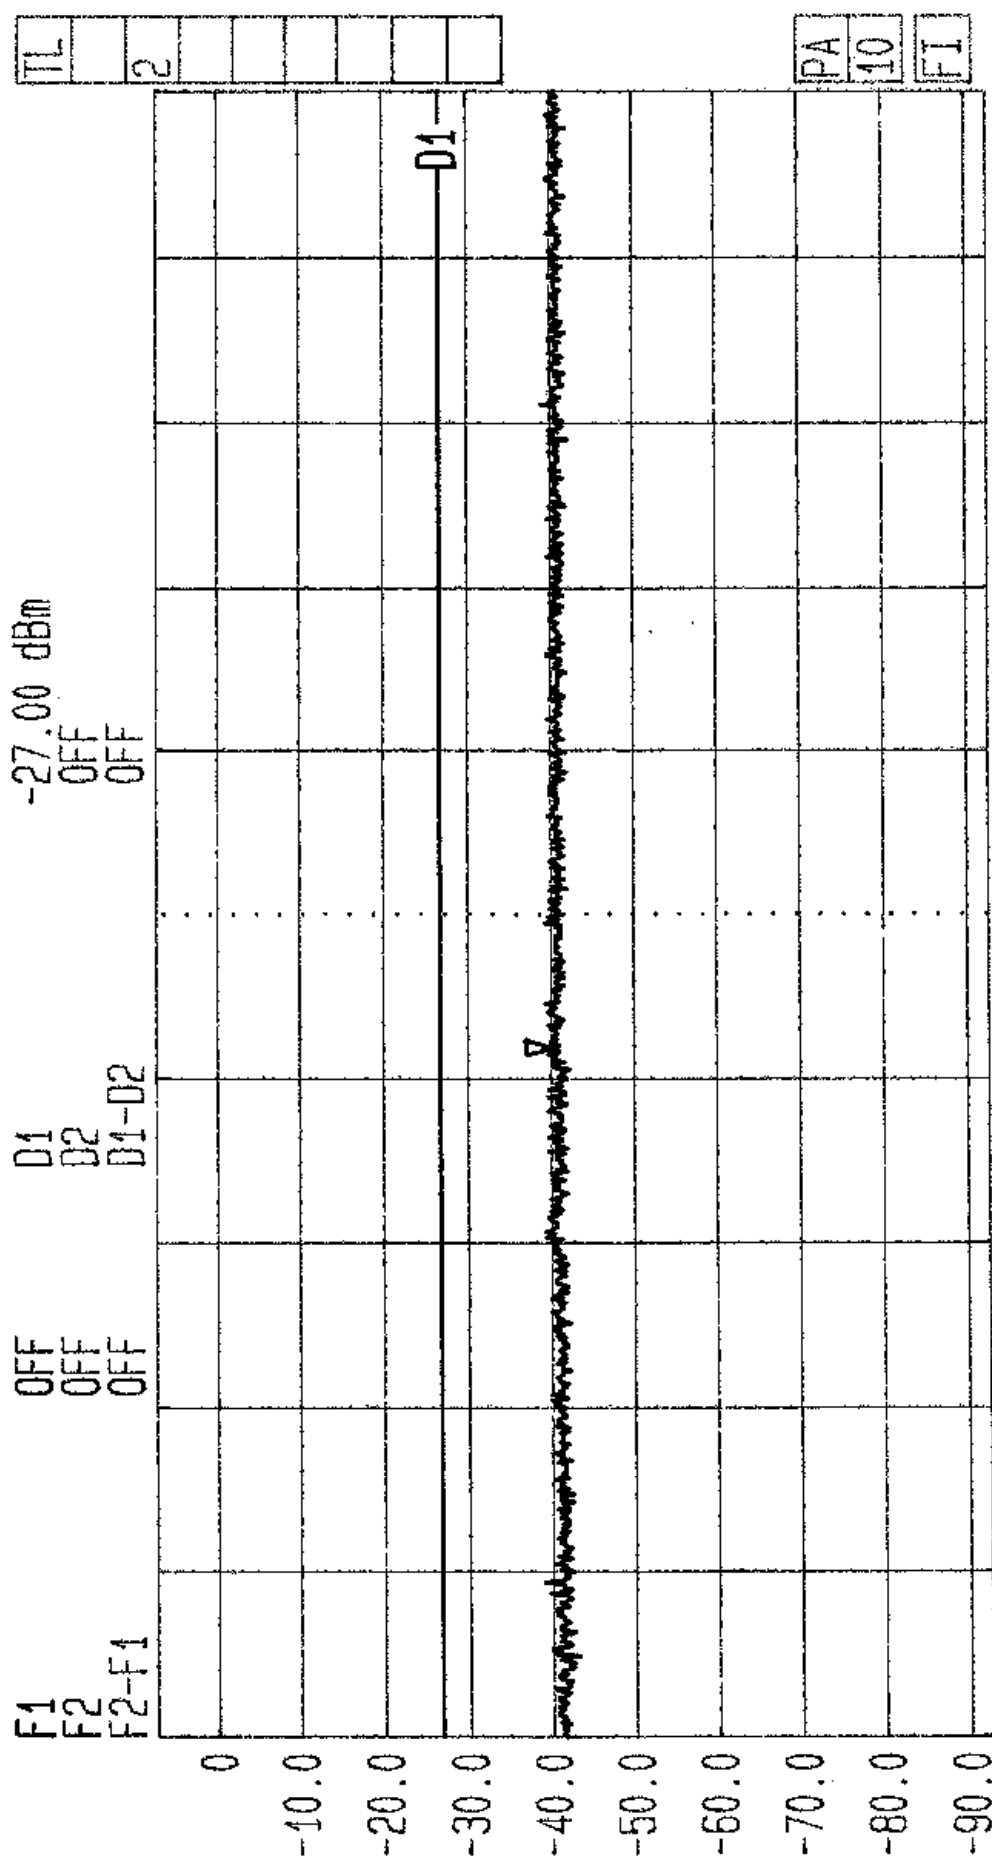

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.25-5.35GHz Band. Top Chan. GPH/38797/JD01/114

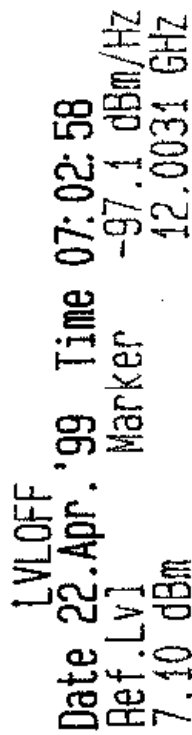


Res.Bw	1 MHz[imp]	Vid.Bw	1 MHz
TG.Lvl	off		
CF.Stp	430.000 MHz	RF.Att	0 dB
		Unit	[dBm]

F1	OFF	D1
F2	OFF	D2
F3-F1	OFF	D1-D2

-27.00 dBm
OFF
OFF

1		2					
---	--	---	--	--	--	--	--

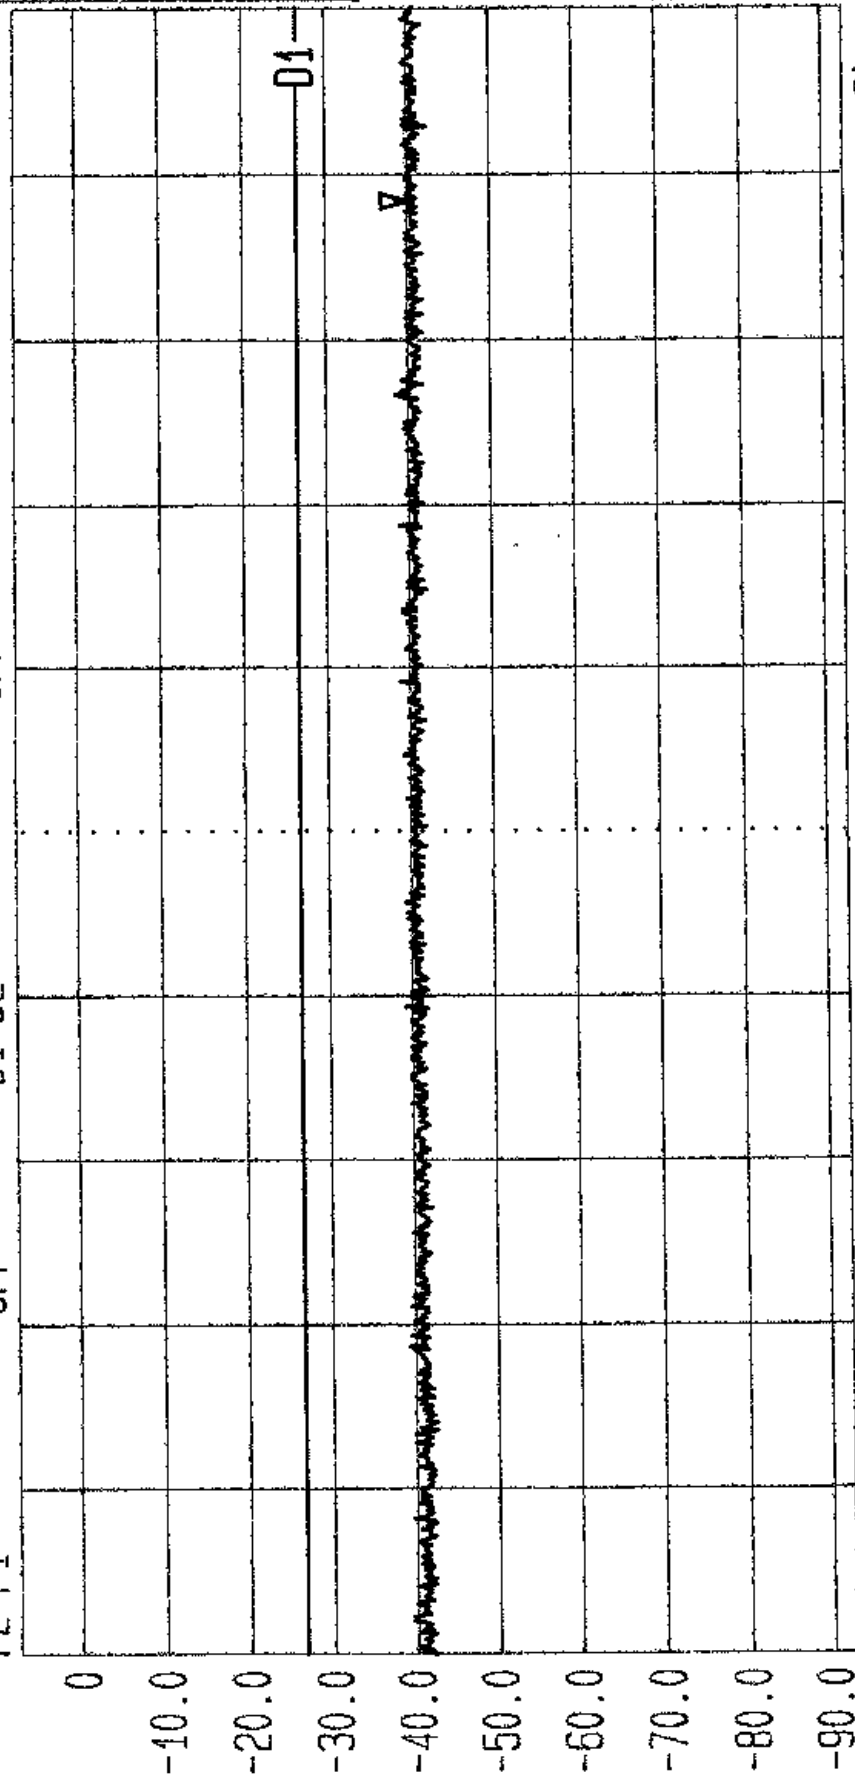


Start	Span	Center	Sweep	Stop
8.2 GHz	4.3 GHz	10.35 GHz	40 ms	12.5 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/115



LVLOFF
Date 22.Apr.'99 Time 07:06:34
Ref.Lvl 7.10 dBm
Marker -95.9 dBm/Hz
11.6208 GHz

Res.Bw 1 MHz [imp]
Vid.Bw 1 MHz
TG.Lvl off
CF.Stp 430.000 MHz
RF.Att 0 dB
Unit [dBm]

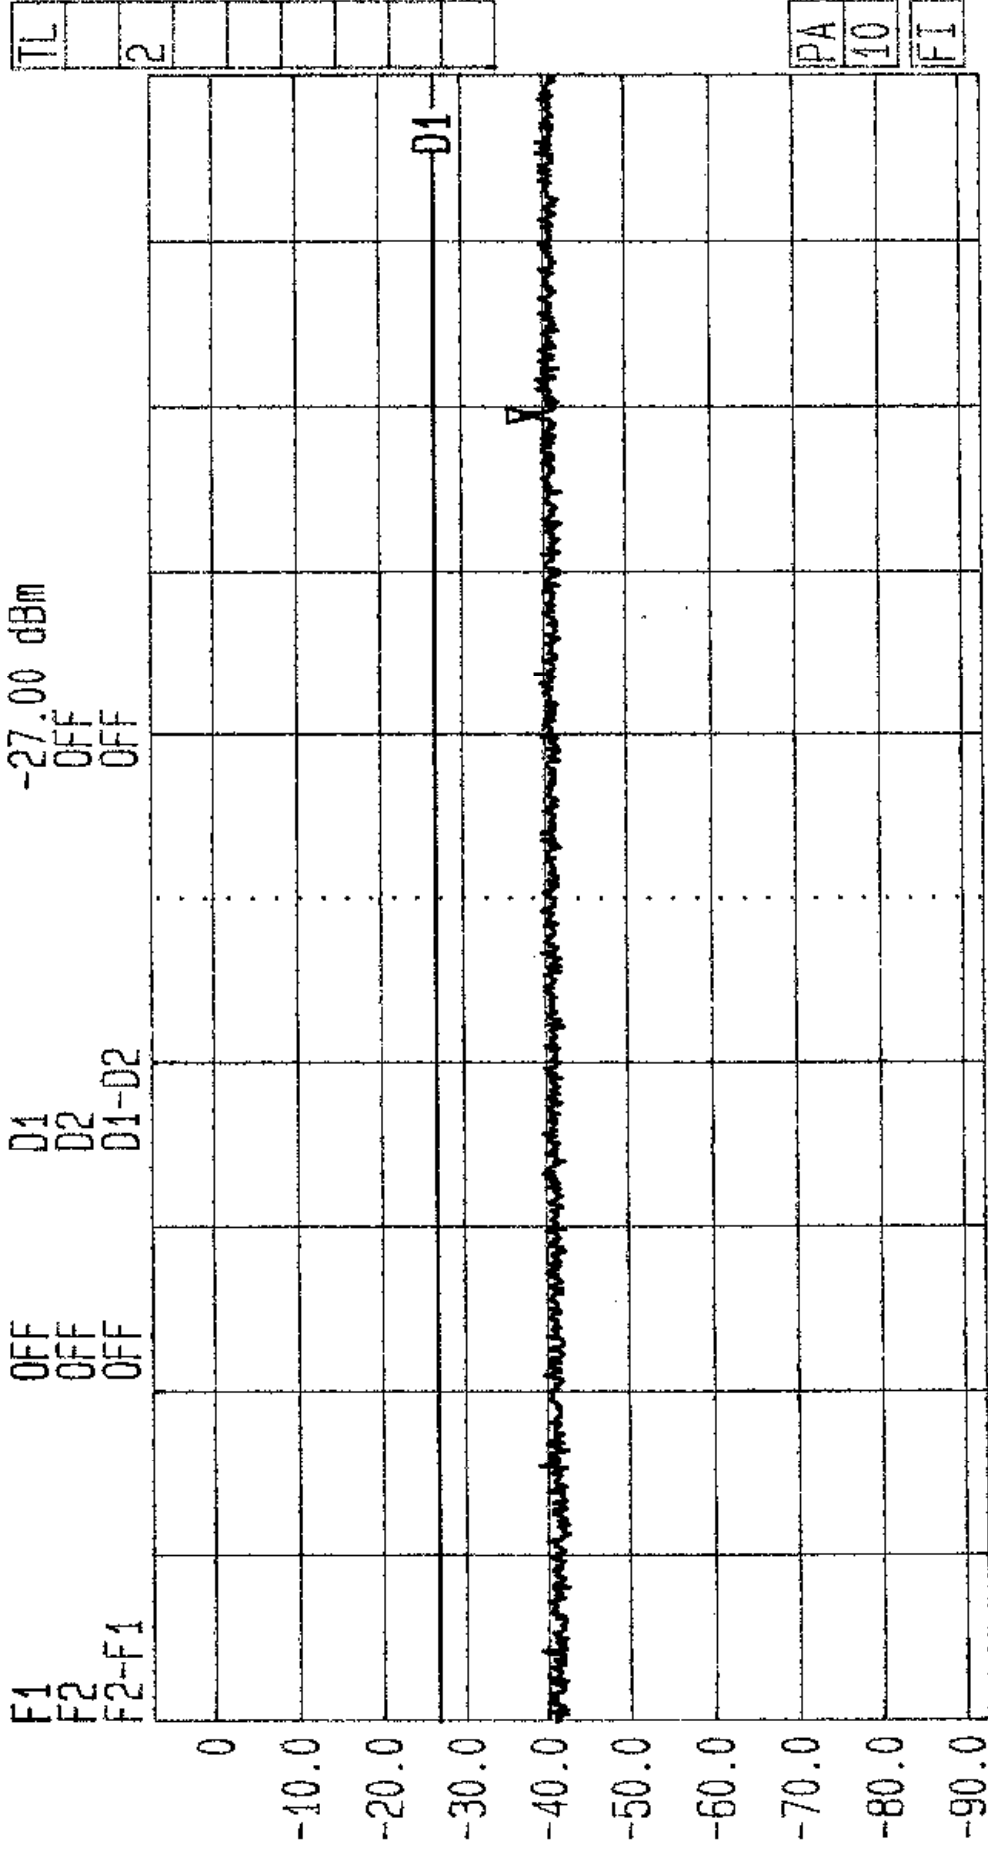


Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.725-5.825GHz Band. Top Chan. GPH/38797/JD01/116



LVLOFF
Date 22.Apr.'99 Time 07:12:03
Ref.Lvl 11.20 dBm
Marker -91.0 dBm/Hz
16.3133 GHz


Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 550.000 MHz
F1 OFF
F2 OFF
F2-F1 OFF
D1
D2
D1-D2
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

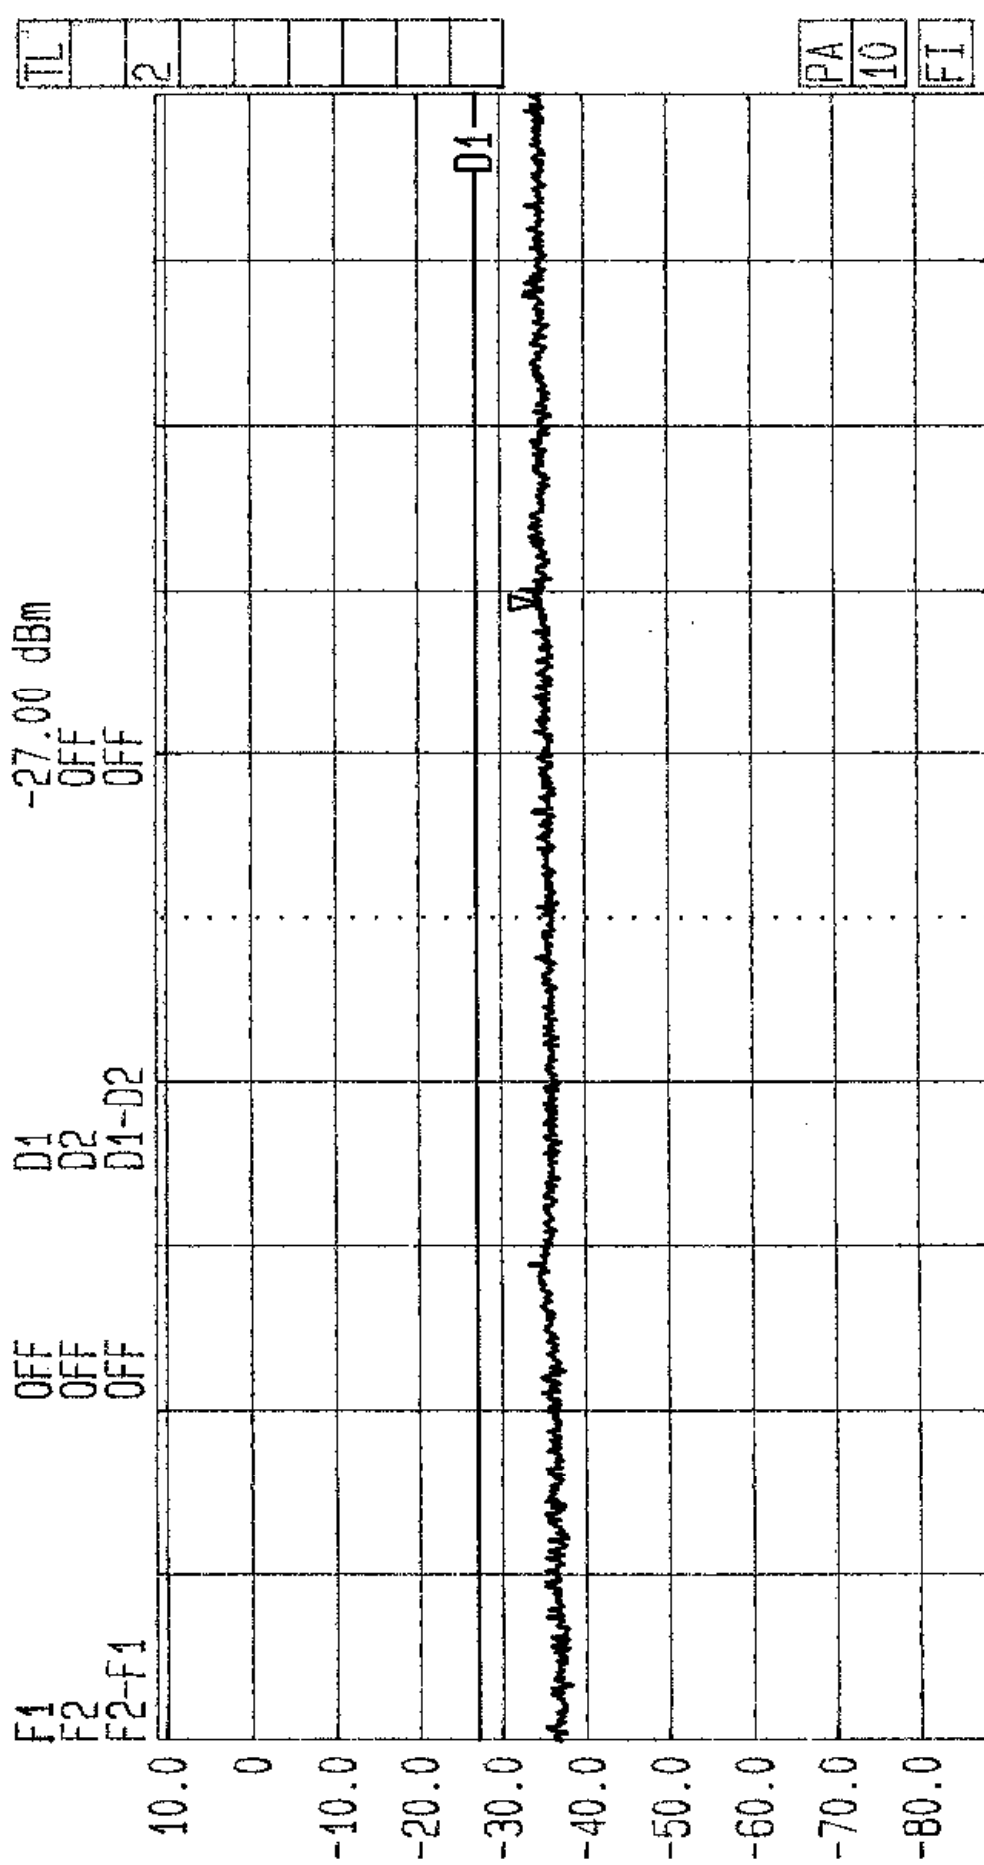



LVLOFF
Date 22.Apr.'99 Time 07:16:41
Ref.Lvl 11.20 dBm
Marker -90.5 dBm/Hz
17.8227 GHz

Res.Bw 1 MHz [imp]
TG.Lvl off
CF.Stp 550.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

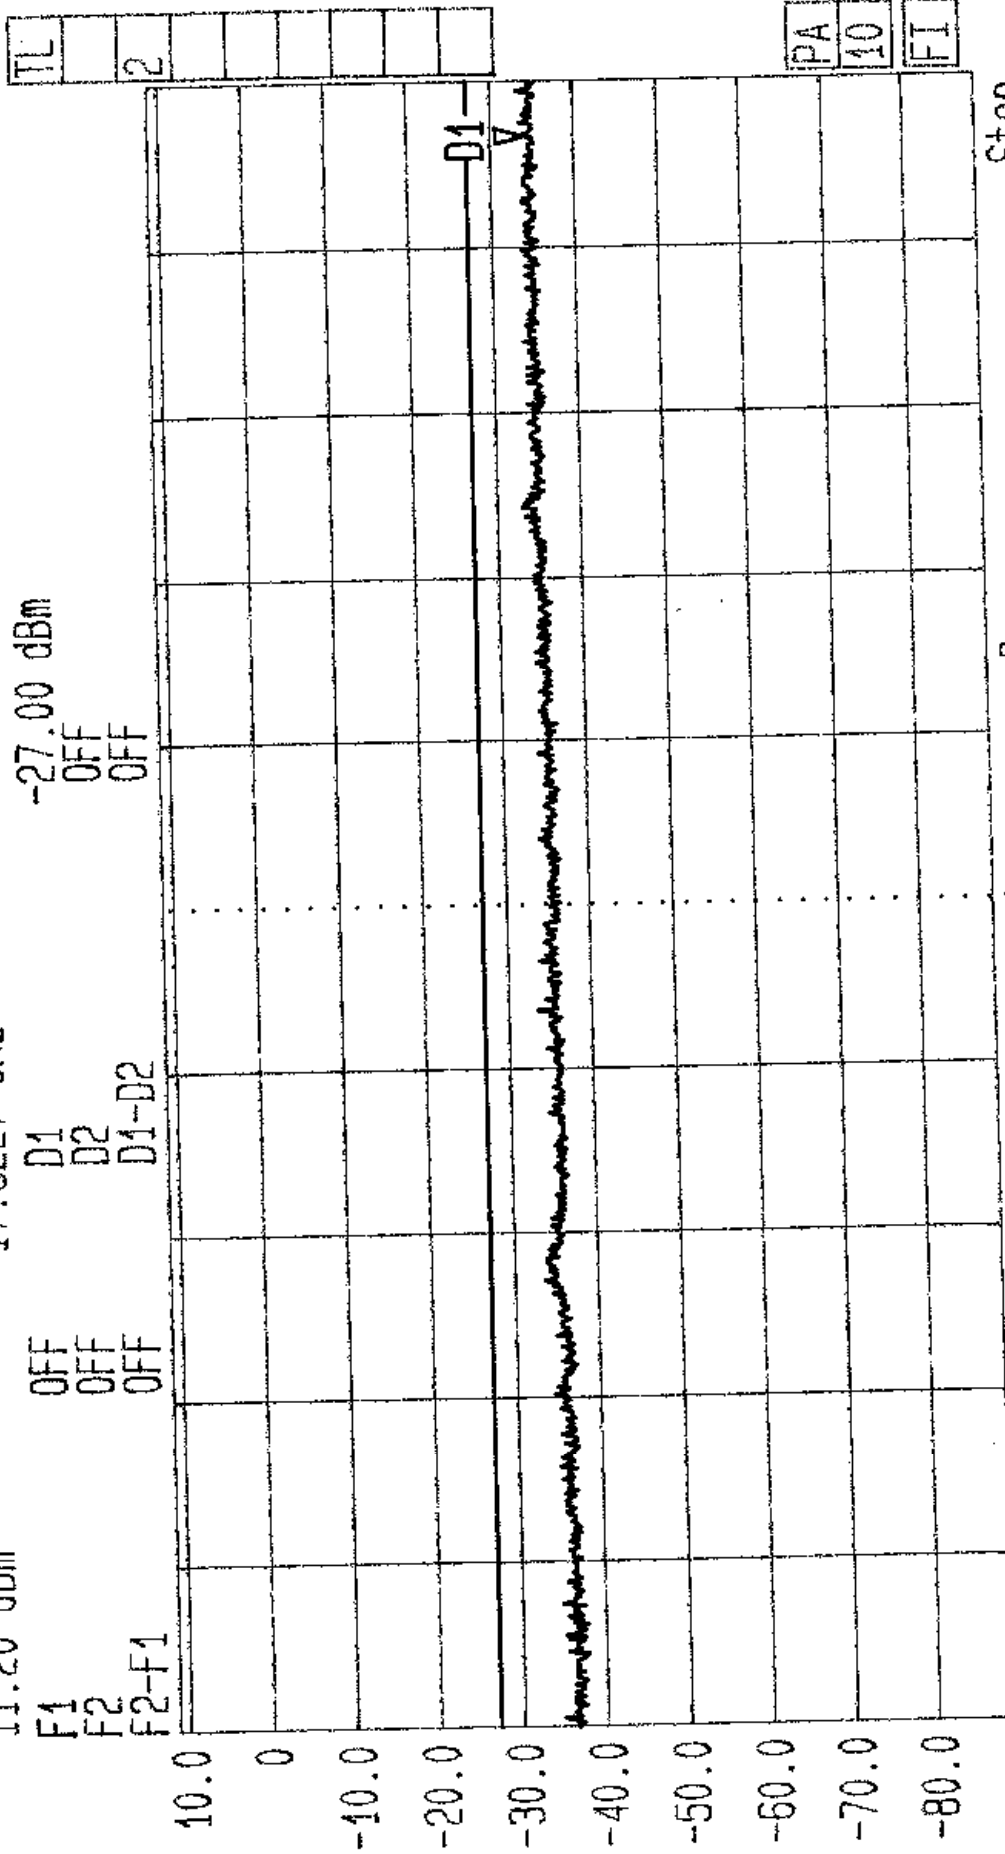


Spurious EIRP: Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.15-5.25GHz Band. Top Chan. GPH/38797/JD01/118



LVLOFF
Date 22.Apr.'99 Time 07:22:44
Ref.Lvl 11.20 dBm
Marker -90.2 dBm/Hz
17.1811 GHz

Res.Bw 1 MHz [imp]
1G.Lvl off
CF.Stp 550.000 MHz
Unit RF.Att 0 dB
[dBm]

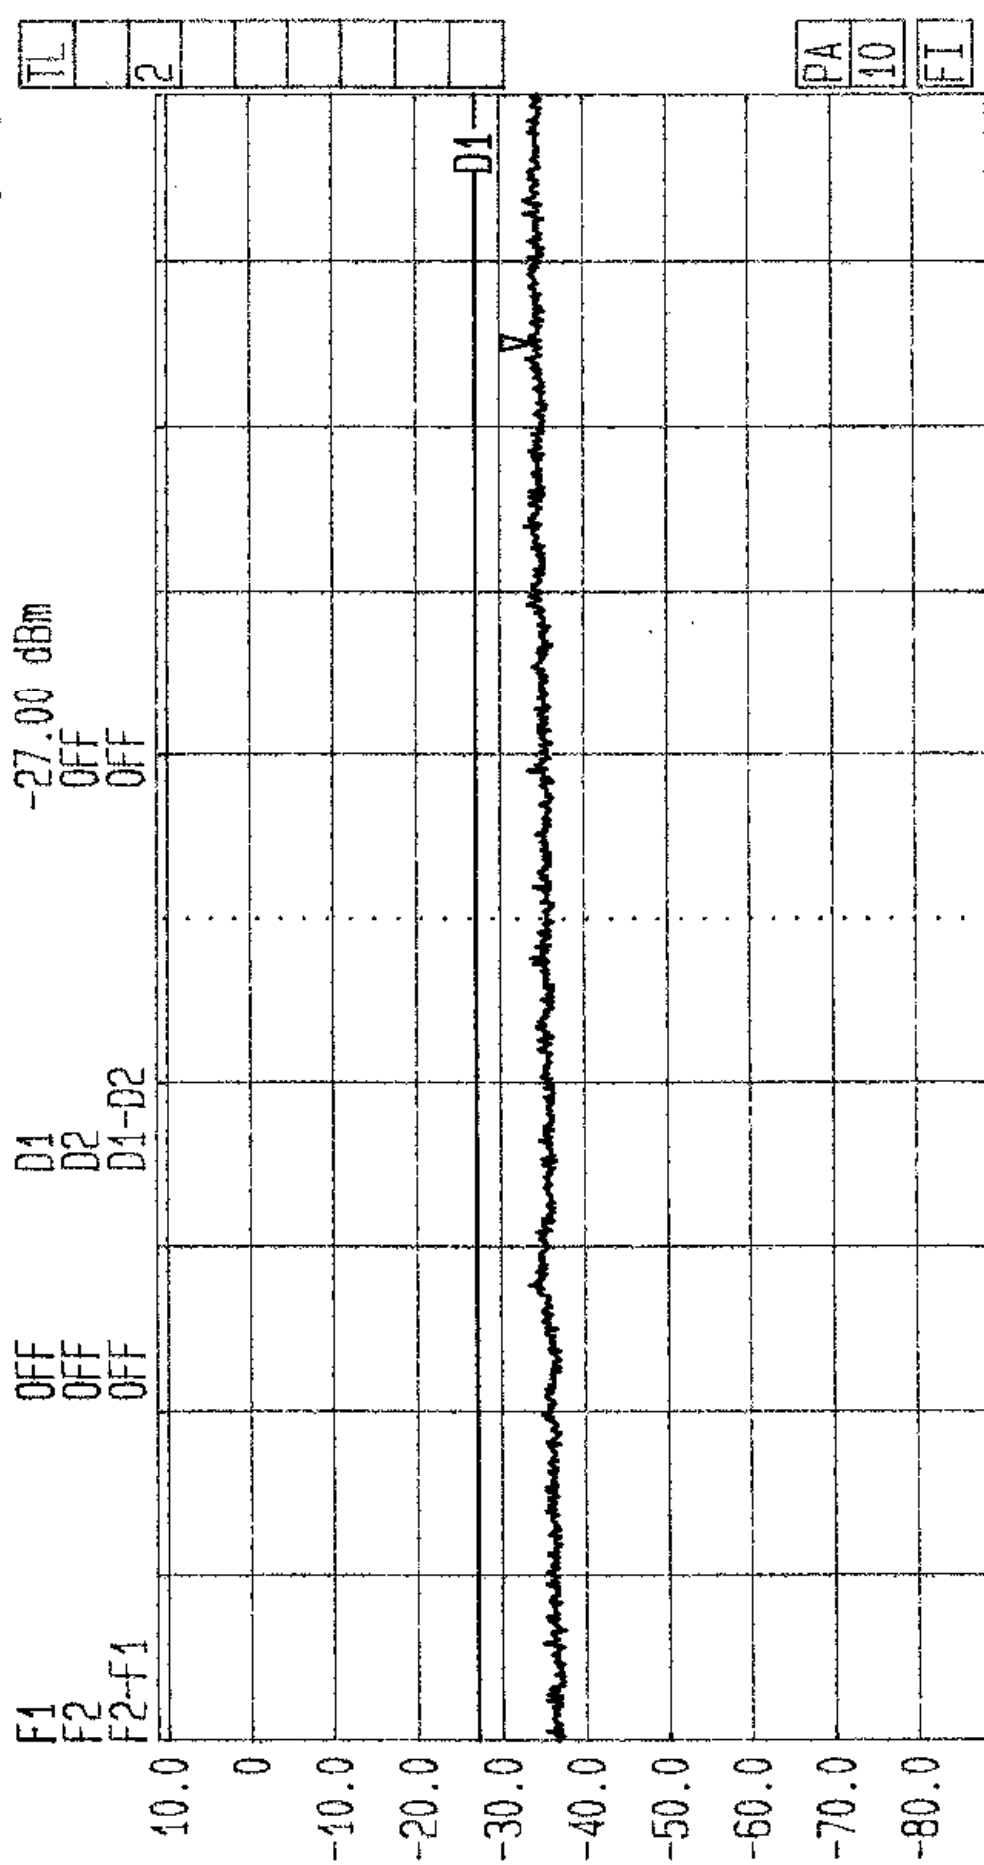

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407 (b) Tx. 5.25-5.35GHz Band. Bott Chan. GPH/38797/JD01/119



LVLOFF
Date 22.Apr.'99 Time 07:33:59
Ref.Lvl 11.20 dBm
Marker -91.0 dBm/Hz
17.1811 GHz

Res.Bw 1 MHz [imp]
Vid.Bw 1 MHz
TG.Lvl Off
CF.Stp 550.000 MHz
RF.Att 0 dB
Unit [dBm]

F1 OFF D1
F2 OFF D2
F2-F1 OFF D1-D2

-27.00 dBm
OFF
OFF

TL
2

10.0
0
-10.0
-20.0
-30.0
-40.0
-50.0
-60.0
-70.0
-80.0

D1

PA
10
FI

Start
12.5 GHz


Span
5.5 GHz

Center
15.25 GHz

Sweep
40 ms

Stop
18 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.25-5.35GHz Band. Top Chan. GPH/38797/JD01/120



Date 22-Apr-'99 Time 07:37:39

Ref. Lvl	Marker	-90.3 dBm/Hz	16.8327 GHz
44.20 dBm			

Marker

—

40

22
23

00

222

Res. Bw	1 MHz [imp]	Vid. Bw	1 MHz
TG. Lvl	Off	RF. Att	0 dB
CF. Stp	550.000 MHz	Unit	[dBm]

-27.00 dBm

LEO

10

10



10

☐ Yes ☐ No	☐ Yes ☐ No
--	--

Stop
48 GHz

Sweep 40 ms

Center
15.25 GHz

Span
5.5 GHz


Start
12.5 GHz

12.5 GHz
5.725-5.825GHz Band. Bott Chan.
Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) TX. GPH/38797/JD01/121



LVLOFF
Date 22.Apr.'99 Time 07:42:27
Ref.Lvl Marker -90.0 dBm/Hz
11.20 dBm 17.0955 GHz


Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 550.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

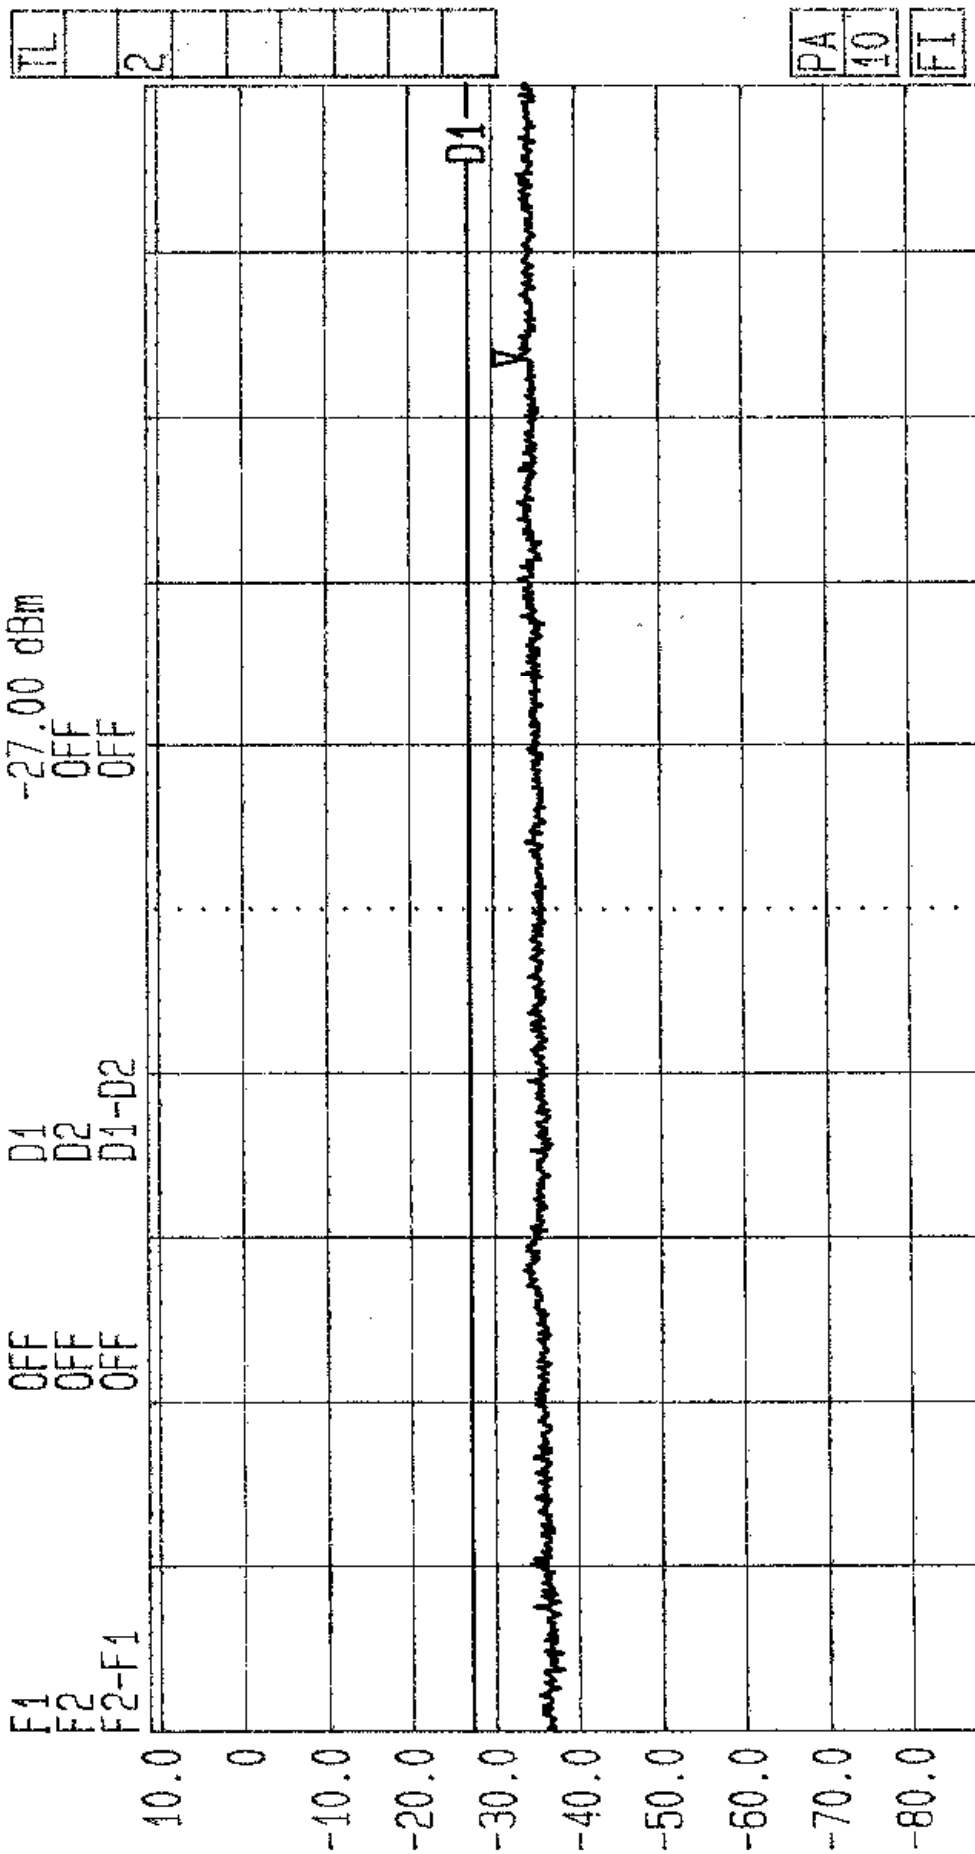

Start 12.5 GHz
Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.725-5.825GHz Band. Top Chan. GPH/38797/JD04/122



LVLOFF
Date 22.Apr.'99 Time 07:49:01
Ref.Lvl 10.70 dBm
Marker -87.4 dBm/Hz
24.5638 GHz
Res.Bw 1 MHz [impl]
TG.Lvl off
CF.Stp 850.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

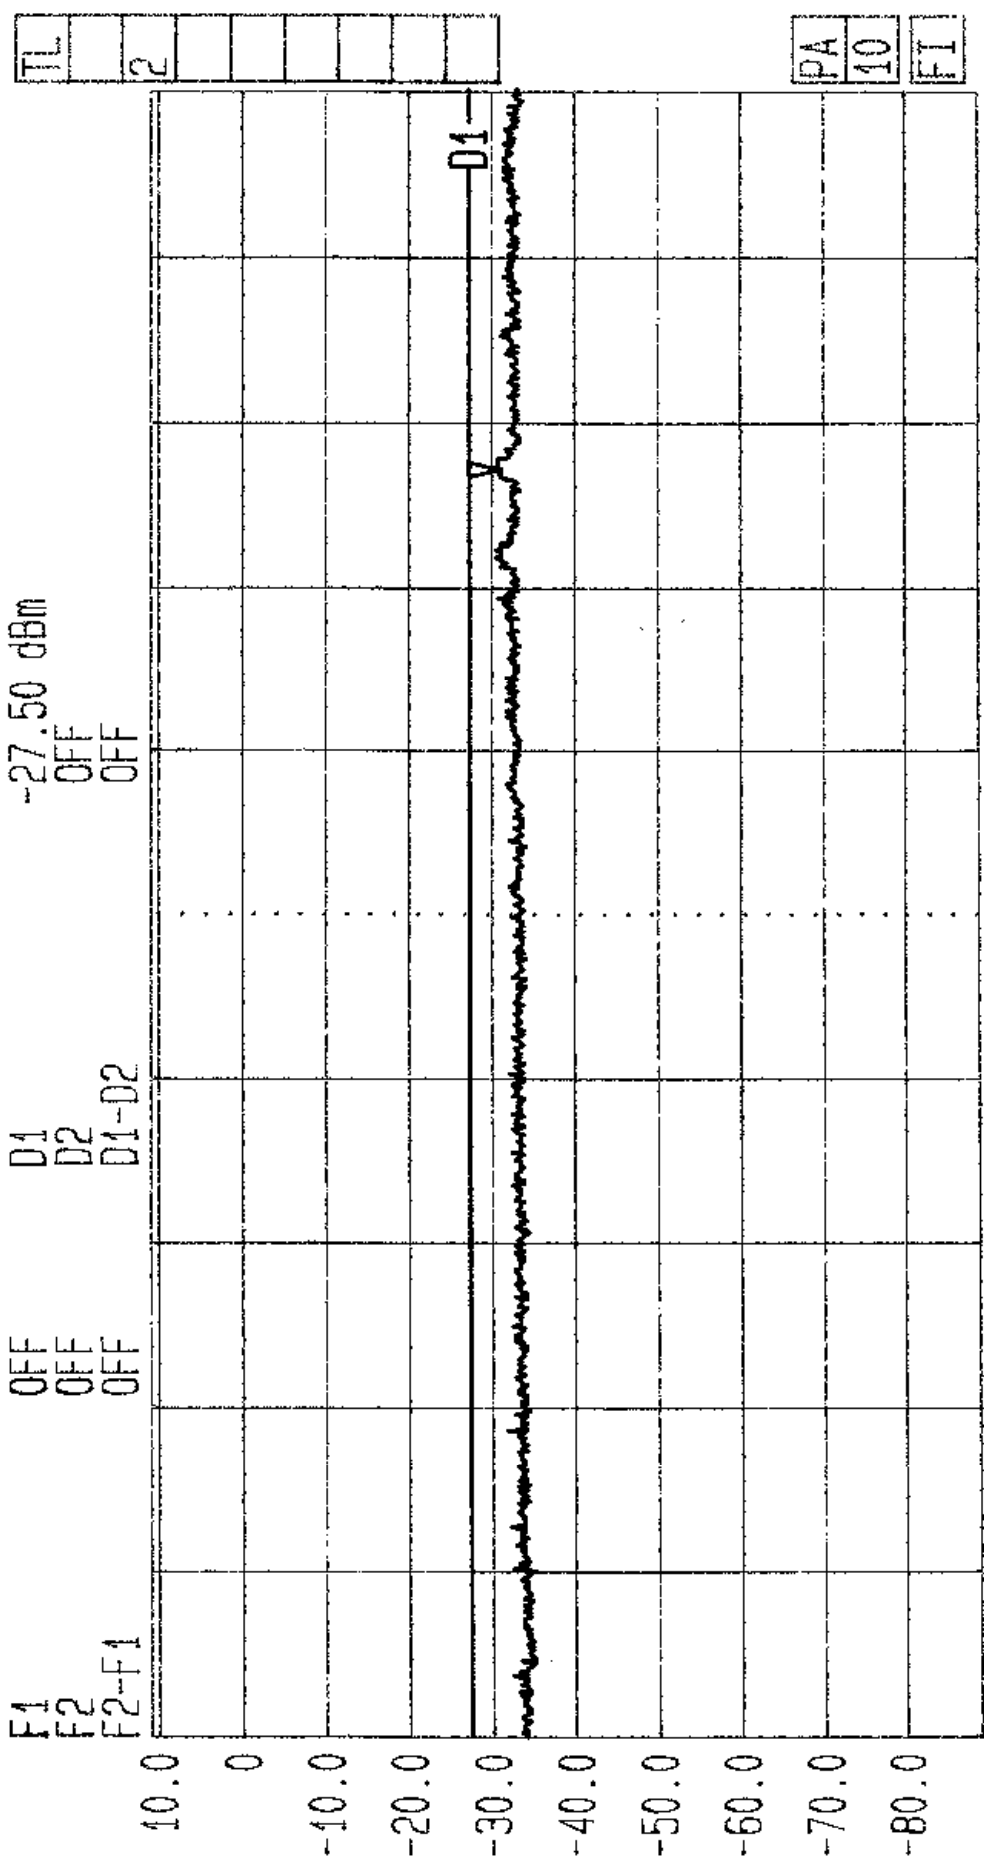

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.15-5.25GHz Band. Bott Chan.




Res.Bw	1 MHz	Vid.Bw	1 MHz
TG.LVI		RF.Att	0 dB
CF.Stp	850.000 MHz	Unit	[dBm]

01	OFF	01-02
02	OFF	
03	OFF	

-27.50 dBm
OFF
OFF

TL		2					
----	--	---	--	--	--	--	--

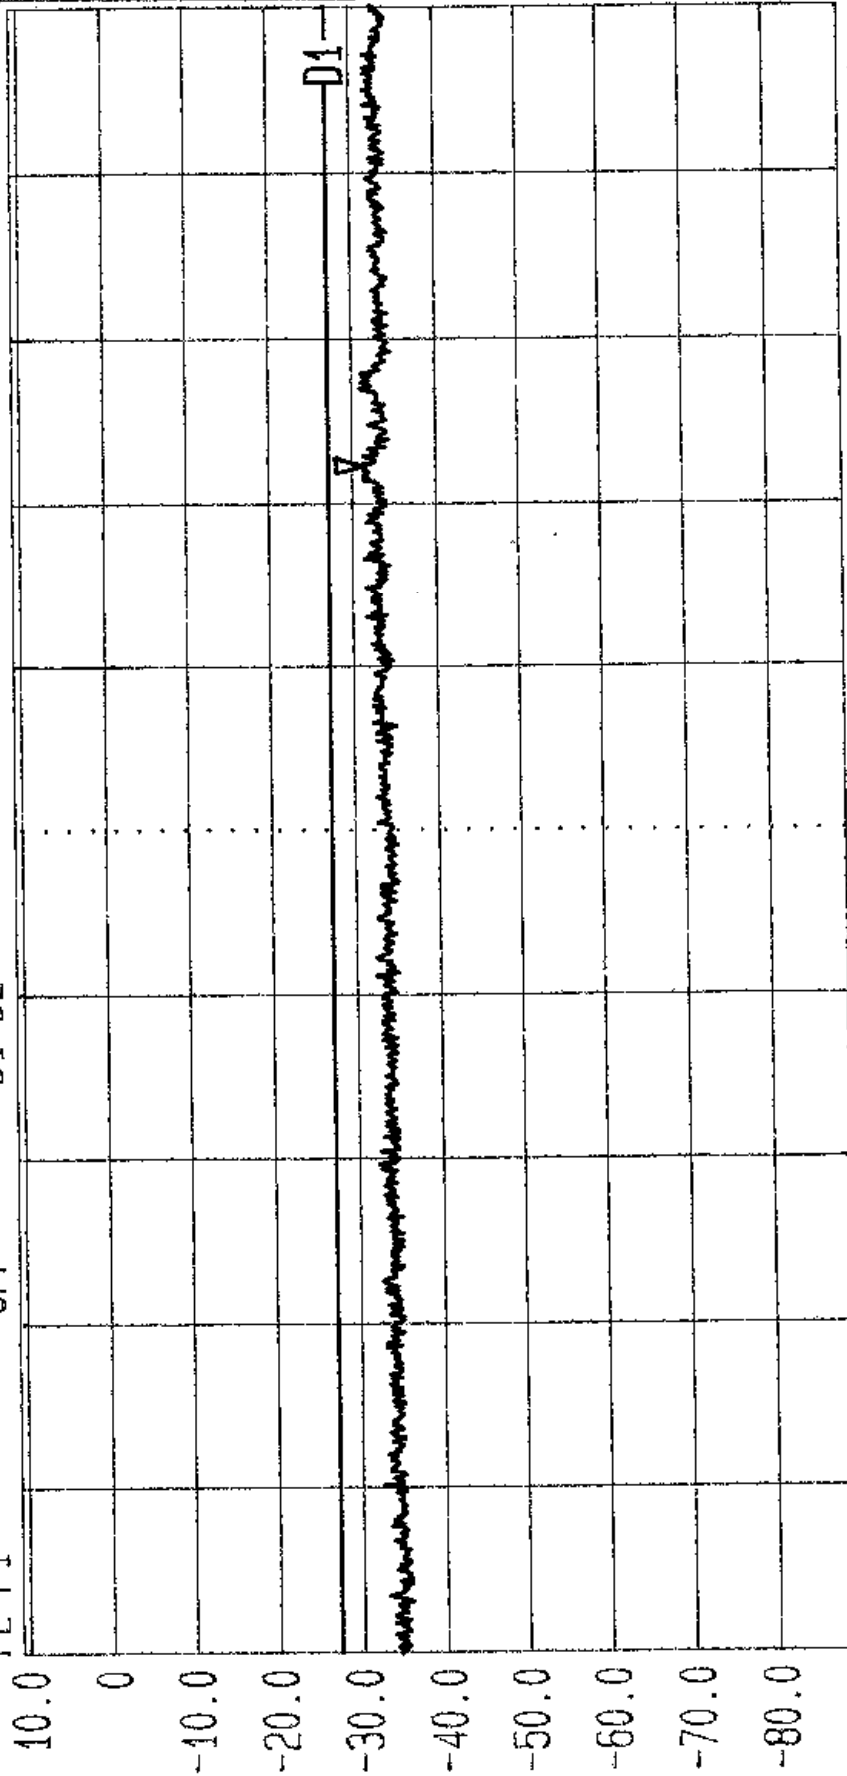

Start	Span	Center	Sweep	Stop
18 GHz	8.5 GHz	22.25 GHz	60 ms	26.5 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.25-5.35GHz Band. Bott Chan. GPH/38797/JD01/125

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.25-5.35GHz Band. Bott Chan. GPH/38797/JD01/125



LVLOFF
Date 22.Apr.'99 Time 08:01:47
Ref.Lvl 10.70 dBm
Marker -87.3 dBm/Hz
24.1011 GHz

Res.Bw 1 MHz [imp]
TG.Lvl Off
CF.Stp 850.000 MHz
Vid.Bw 1 MHz
RF.Att 0 dB
Unit [dBm]

F1 OFF D1
F2 OFF D2
F2-F1 OFF D1-D2

-27.50 dBm
OFF
OFF

10.0
0
-10.0
-20.0
-30.0
-40.0
-50.0
-60.0
-70.0
-80.0

D1

TL
2

PA
10
FI

Start 18 GHz
Span 8.5 GHz
Center 22.25 GHz
Sweep 60 ms
Stop 26.5 GHz
Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.25-5.35GHz Band. top Chan. GPH/38797/JD01/126



LVLOFF
Date 22.Apr.'99 Time 08:05:47

Ref. Lvl
Marker

10.70 dBm

OFF
FBI

44-38861-102

44-38861-1000

104

22
06

05-01-12

DE S. B. W.

Fig. 1

100

1 MHz [10]

440

50.000 MHz

Vid. B.W.


En Att

5

1.

03


2

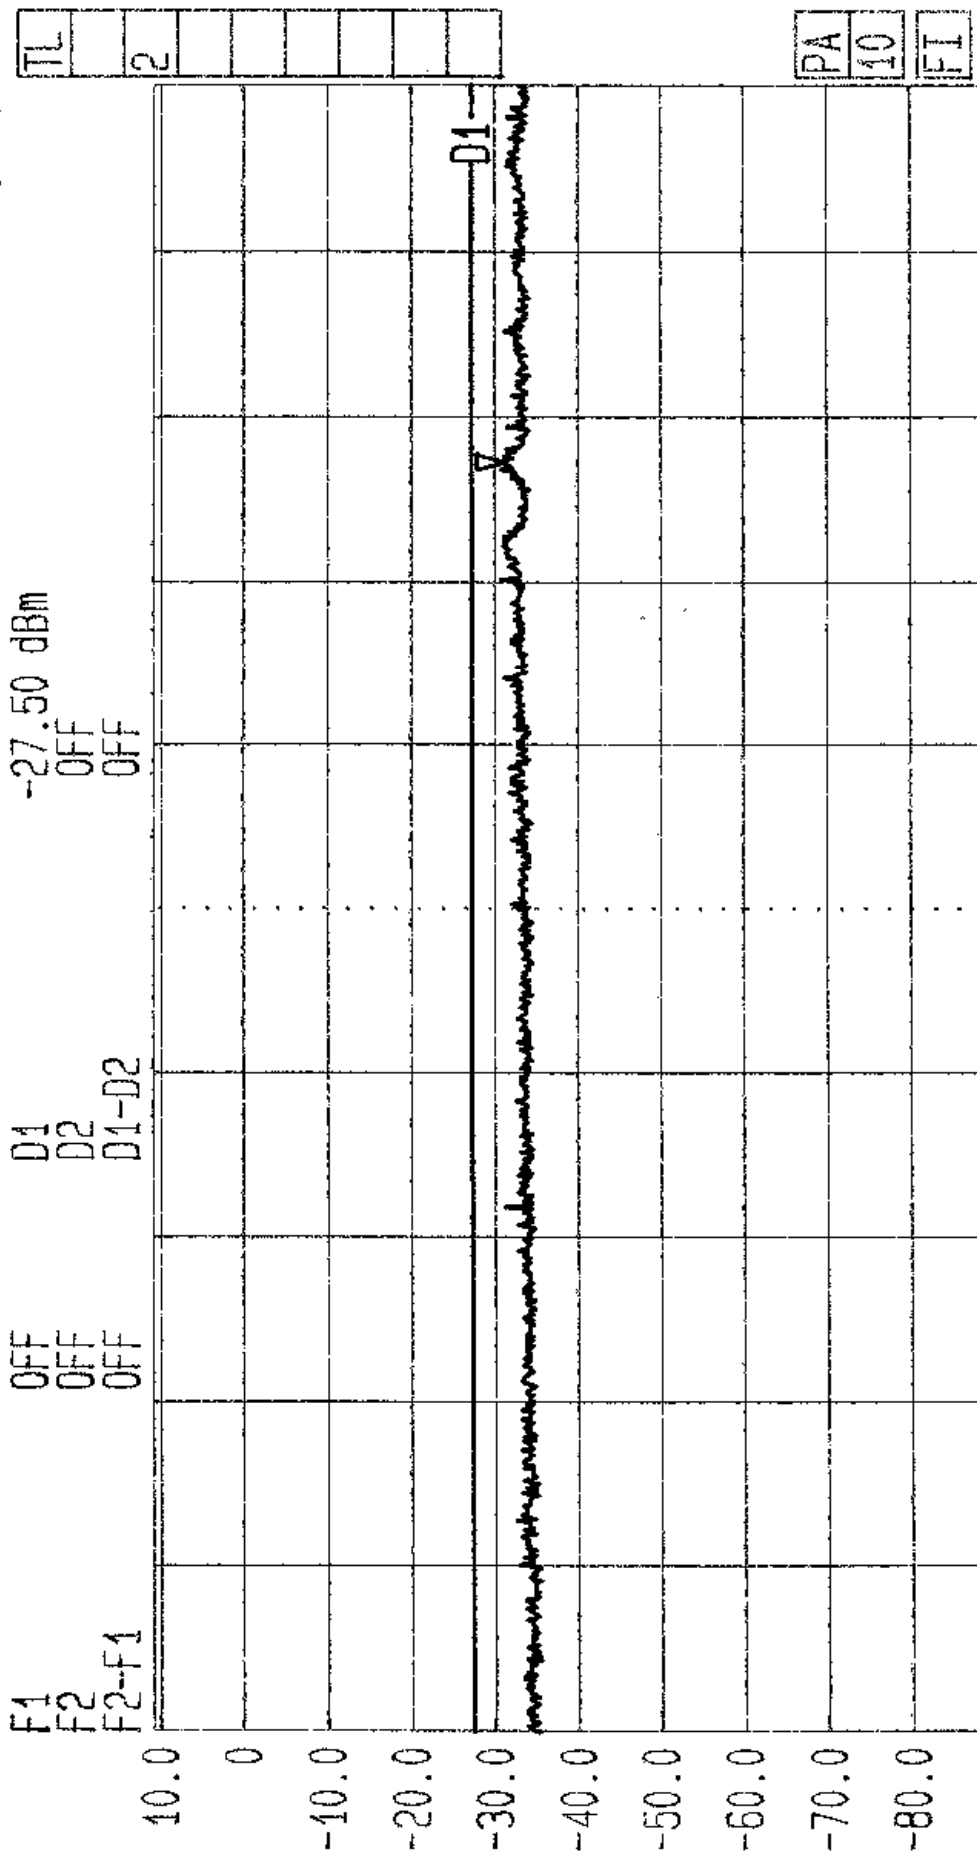

Start	Span	Center	Sweep	Stop
18 GHz	8.5 GHz	22.25 GHz	50 ms	26.5 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
 Limit. FCC Part 15.407(b) Tx. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/127

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) TX. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/127



Ref. Lvl Marker

Ref.Lvl	Marker	-88.1 dBm/Hz
10.70 dBm		24.5015 GHz


F1	OFF
F2	OFF
F2-F1	OFF

01	02	01
04	04	04

Res. BW
TG. Lvl
CF. Stp

1 MHz [imp]
off
850.000 MHz

Vid.BW	1 MHz
RF.Att	0 dB
Unit	[dBm]

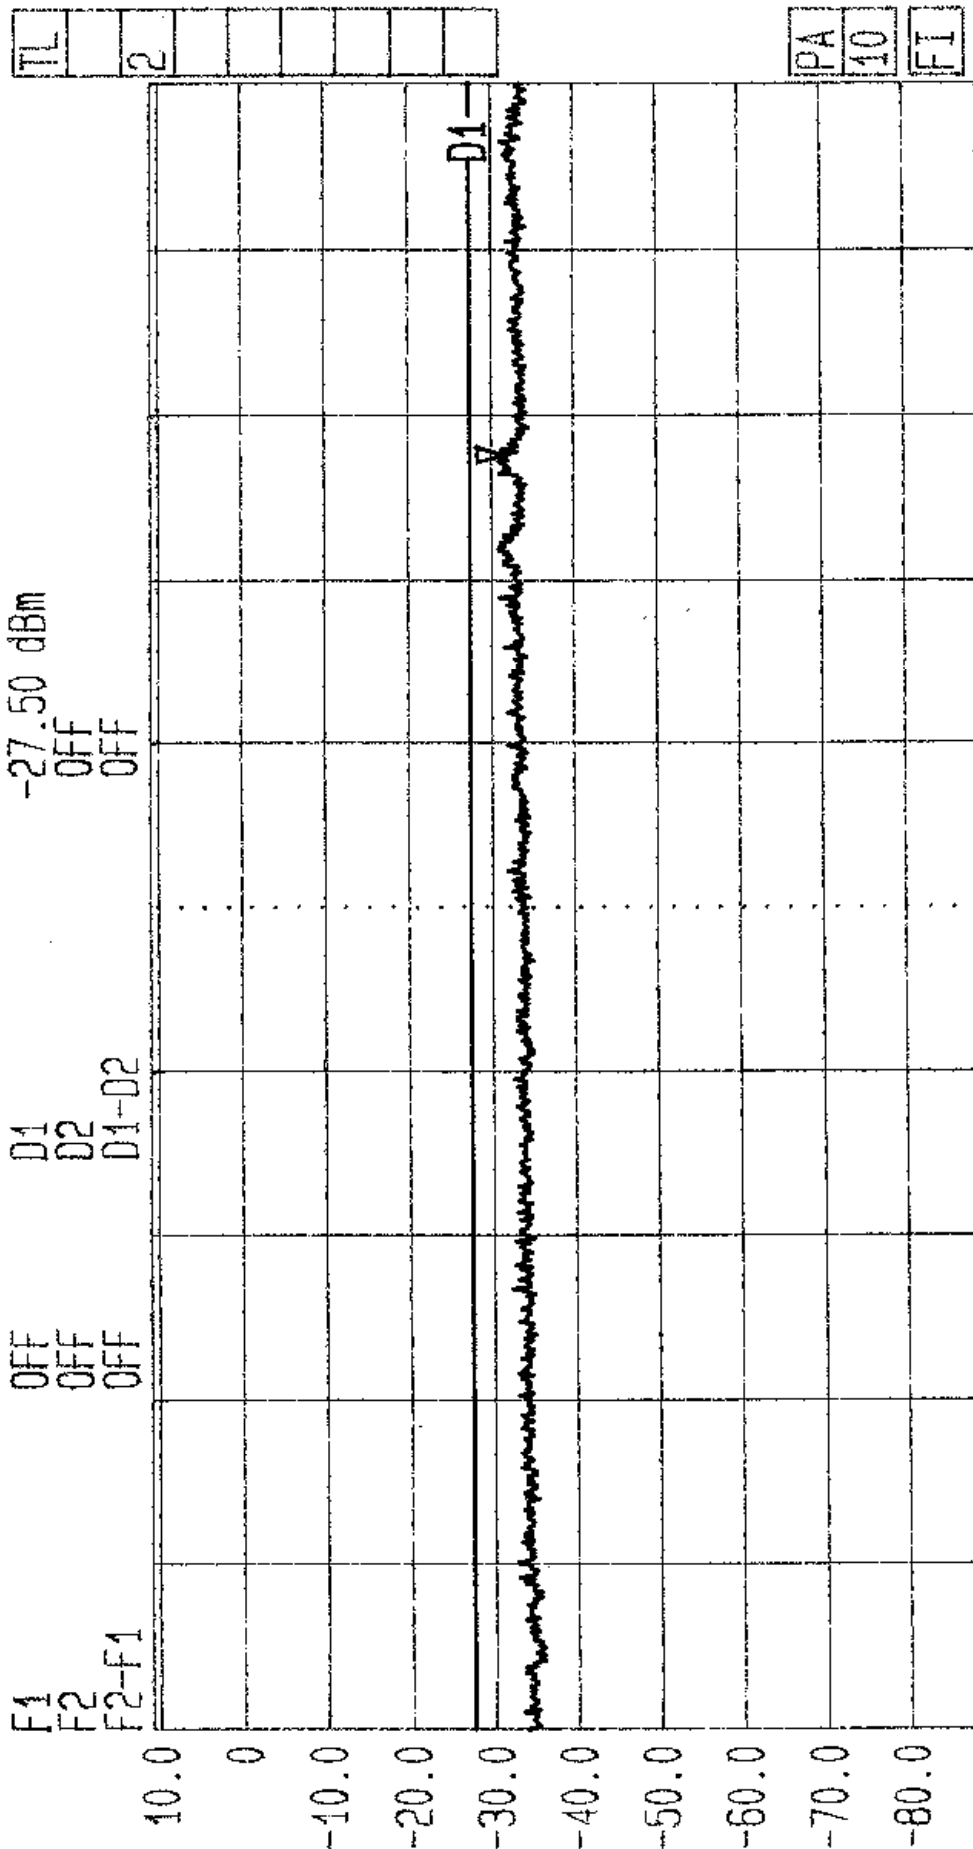

Start
18 GHz

Span
8.5 GHz

Center
22.25 GHz

Sweep 60 ms

Stop
26.5 GHz

Spurious EIRP. Tested by RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407(b) Tx. 5.725-5.825GHz Band. Top Chan. GPH/38797/JD01/128

LVLOFF
Date 22.Apr.'99 Time 09:53:07
Ref.Lvl
-14.90 dBm

Res.BW 1.0 MHz (3dB) Vid.BW 1 MHz
CF.Stp 1.350 GHz RF.Att 0 dB
Unit [dBm]

-20.0 -
-30.0 -
-40.0 -
-50.0 -
-60.0 -
-70.0 -
-80.0 -
-90.0 -
-100.0 -
-110.0 -

D1

Start 26.5 GHz
Span 13.5 GHz

Center 33.25 GHz

Sweep 50 ms

Stop 40 GHz

Spurious EIRP. Tested By RFI For Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407 (b) Tx. 5.15-5.25GHz Band. Bott. Chan. GPH/38797/JD01/129

LVL OFF
 Date 22.Apr.'99 Time 09:55:21
 Ref.Lvl Marker -38.99 dBm
 -14.90 dBm 39.2800 GHz
 Res.BW 4.0 MHz [3dB] Vid.BW 1 MHz
 CF.Stp 1.350 GHz RF.Att 0 dB
 Unit [dBm]


-20.0 -
 -30.0 -
 -40.0 -
 -50.0 -
 -60.0 -
 -70.0 -
 -80.0 -
 -90.0 -
 -100.0 -
 -110.0 -

01-

Y
 39.2800 GHz

Start 26.5 GHz Span 13.5 GHz Center 33.25 GHz Sweep 50 ms Stop 40 GHz
 Spurious EIRP. Tested By RFI For Adaptive Broadband Ltd. EUT: AB Access Access Point
 Limit. FCC Part 15.407 (b) Tx. 5.15-5.25GHz Band. Top Chan. GPH/38797/JD01/130

LVLOFF
 Date 22.Apr.'99 Time 09:57:38
 Ref.Lvl -38.71 dBm
 Marker 33.7450 GHz
 Res.BW 1.0 MHz [3dB] Vid.BW 1 MHz
 CF.Stp 1.350 GHz RF.Att 0 dB
 Unit (dBm)

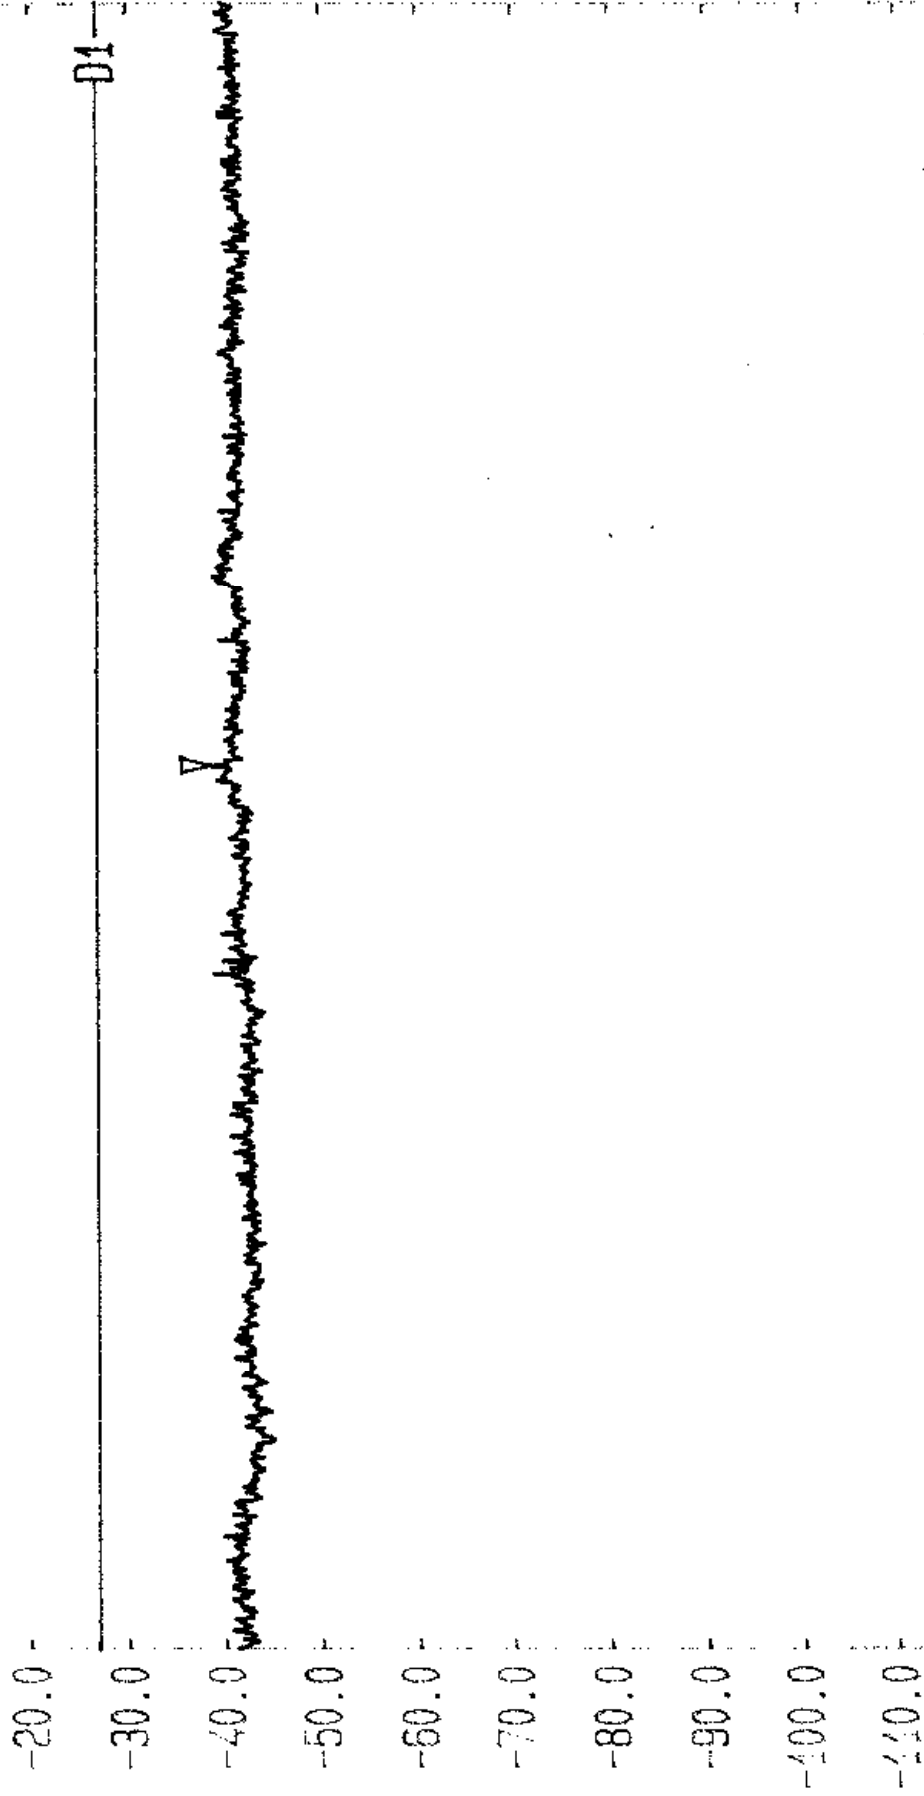

Start 26.5 GHz Span 13.5 GHz Center 33.25 GHz Sweep 50 ms Stop 40 GHz
 Spurious EIRP. Tested By RFI For Adaptive Broadband Ltd. EUT: AB Access Access Point
 Limit. FCC Part 15.407 (b) Tx. 5.25-5.35GHz Band. Bott Chan. GPH/38797/JD01/131

LVLOFF
Date 22.Apr.'99 Time 09:59:52
Ref.Lvl Marker -38.49 dBm
-14.90 dBm
Res.BW 1.0 MHz [3dB] Vid.BW 1 MHz
CF.Stp 1.350 GHz RF.Att 0 dB
Unit [dBm]

-20.0 -
-30.0 -
-40.0 -
-50.0 -
-60.0 -
-70.0 -
-80.0 -
-90.0 -
-100.0 -
-110.0 -


D1

*Spurious EIRP. Tested By RFI For Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407 (b) Tx. 5.25-5.35GHz Band. Top Chan.*

Start 26.5 GHz Span 13.5 GHz Center 33.25 GHz Sweep 60 ms Stop 40 GHz


Spurious EIRP. Tested By RFI For Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407 (b) Tx. 5.25-5.35GHz Band. Top Chan. GPH/38797/JD01/132

LVL OFF
Date 22.Apr.'99 Time 10:02:10
Ref.Lvl Marker -38.87 dBm
-14.90 dBm
Res.BW 1.0 MHz [3dB] Vid.BW 1 MHz
CF.Stp 1.350 GHz RF.Att 0 dB
Unit [dBm]

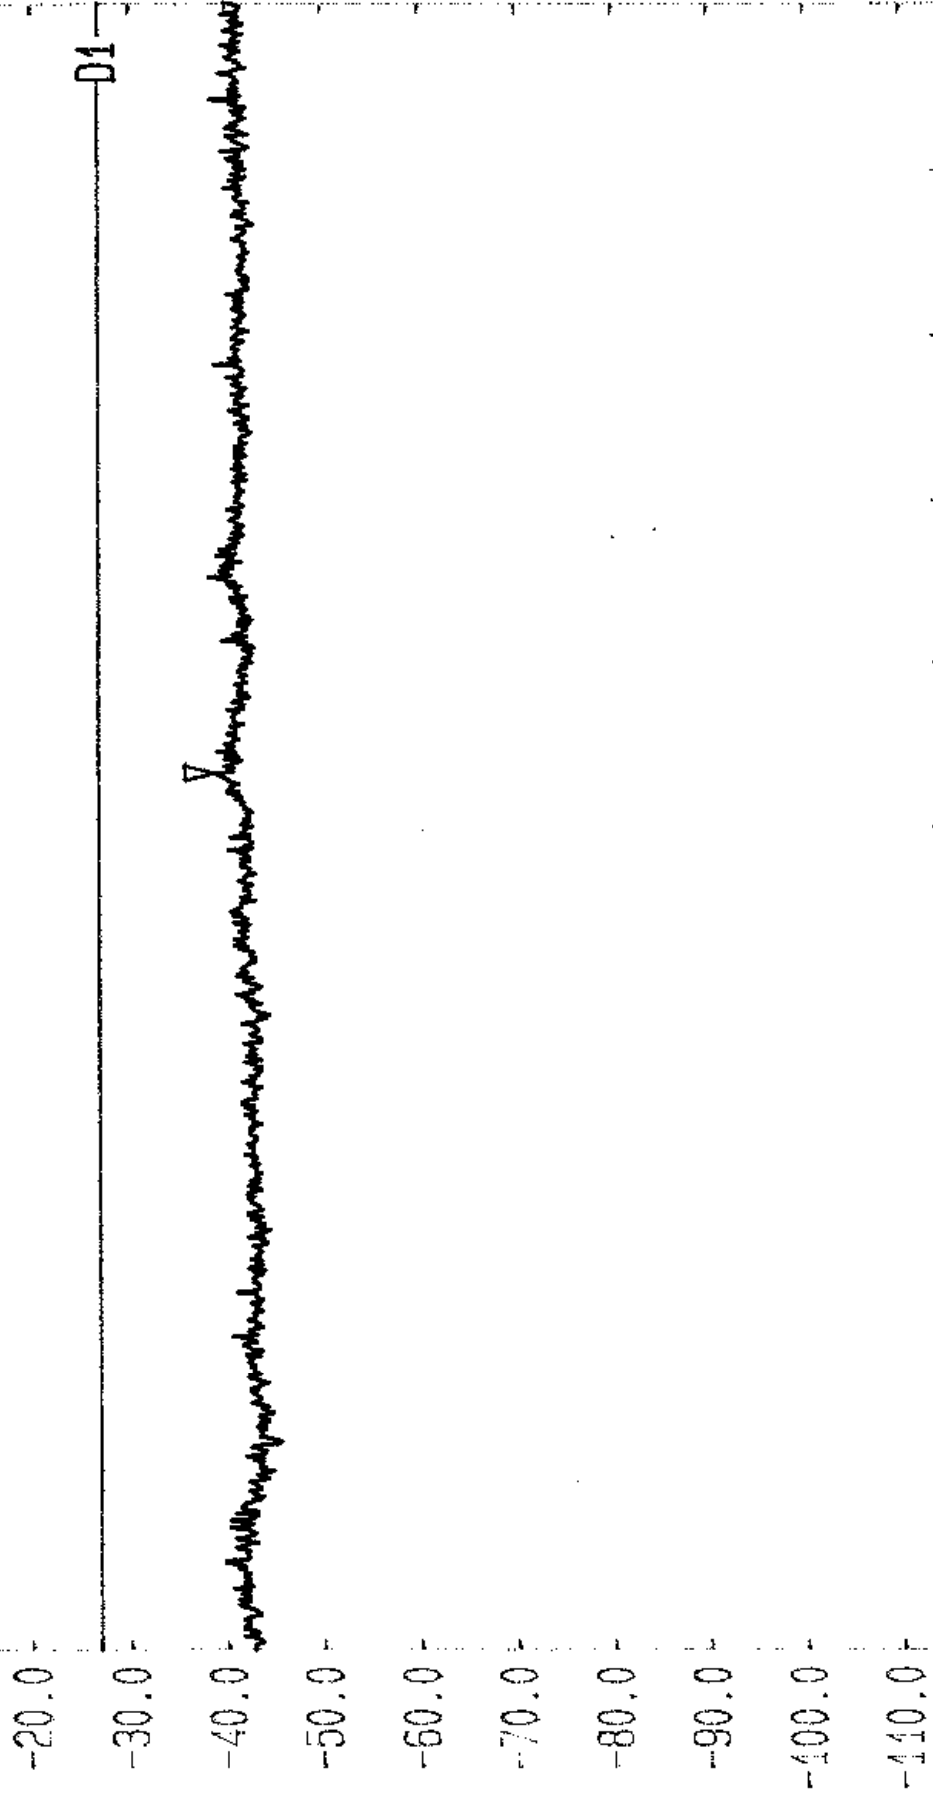

Start 26.5 GHz Span 13.5 GHz Center 33.25 GHz Sweep 50 ms Stop 40 GHz
Spurious EIRP. Tested By RFI For Adaptive Broadband Ltd. EUT: AB Access Access Point
Limit. FCC Part 15.407 (b) Tx. 5.725-5.825GHz Band. Bott Chan. GPH/38797/JD01/133

LVLOFF
 Date 22.Apr.'99 Time 10:04:51
 Ref.Lvl Marker -38.13 dBm
 -14.90 dBm
 Res.BW 1.0 MHz [3dB] Vid.BW 1 MHz
 CF.Stp 1.350 GHz RF.Att 0 dB
 Unit [dBm]

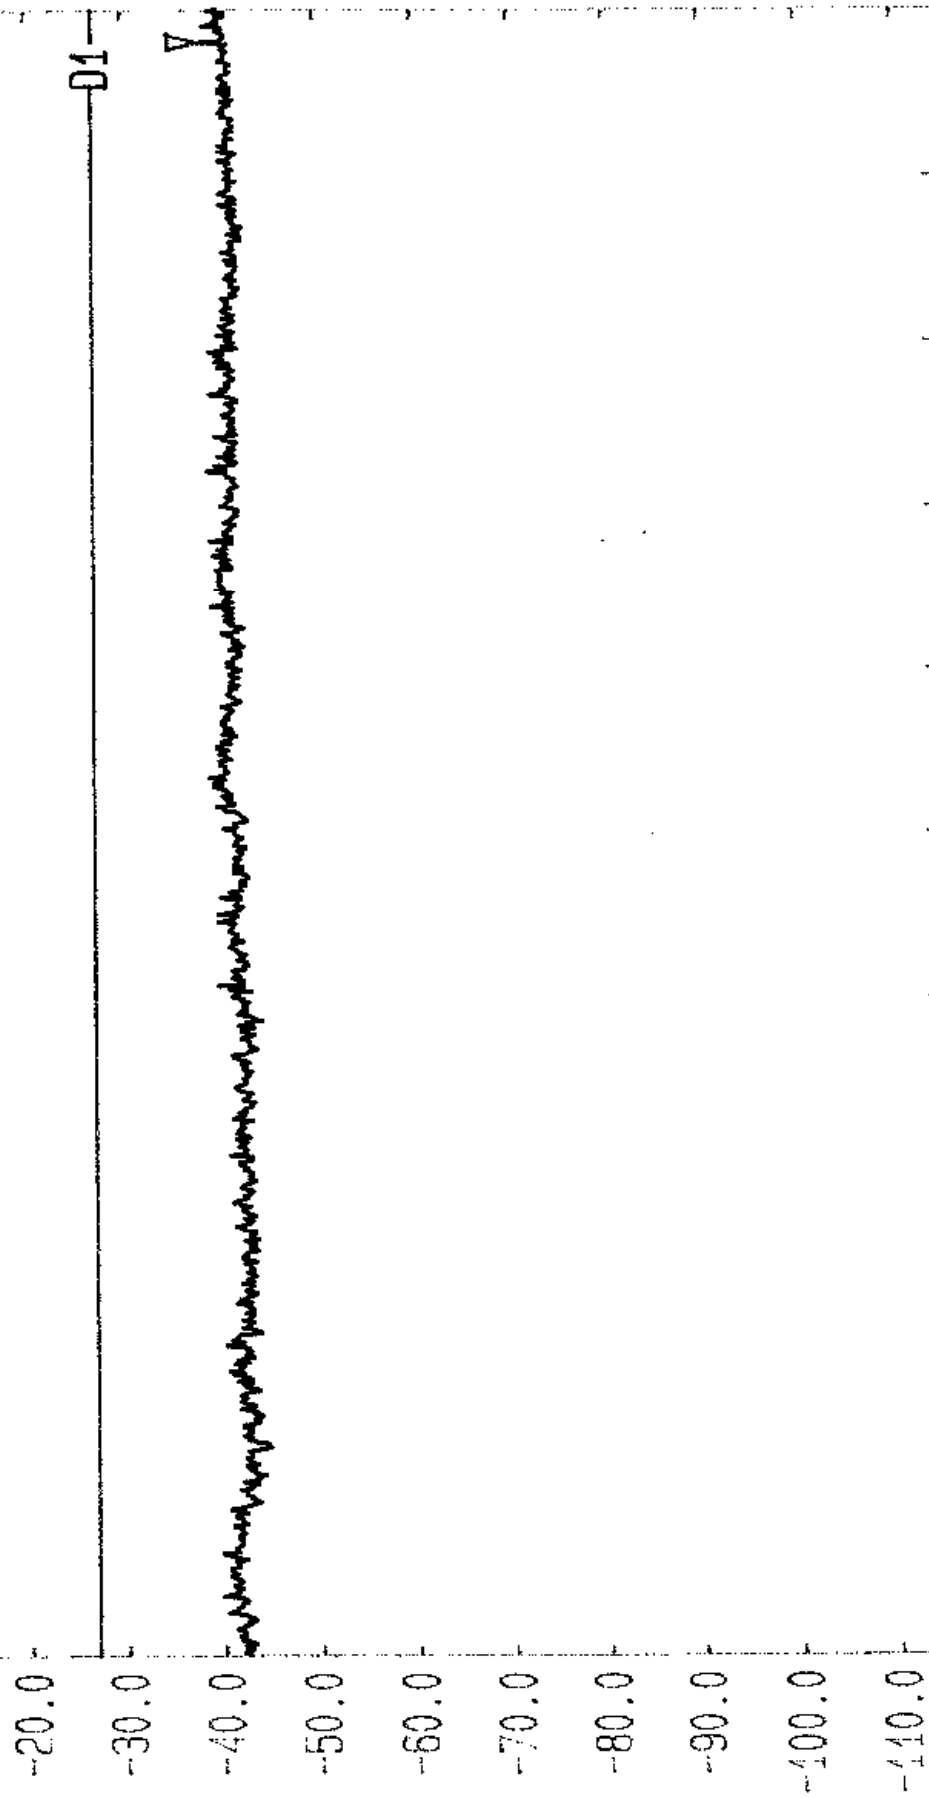


Start 26.5 GHz Span 13.5 GHz Center 33.25 GHz Sweep 50 ms Stop 40 GHz
 Spurious EIRP. Tested By RFI For Adaptive Broadband Ltd. EUT: AB Access Access Point
 Limit. FCC Part 15.407 (b) Tx. 5.725-5.825GHz Band. Top Chan. GPH/38797/JD01/134



Date 22.Apr.'99 Time 11:04:45
Ref.Lvl -50.00 dBm
Marker -86.41 dBm
4.9024934 GHz

Res.Bw 1.0 kHz [3dB]
T6.Lvl off
CF.Stp 10.000 kHz
Vid.Bw 1 kHz
RF.Att 10 dB
Unit [dBm]

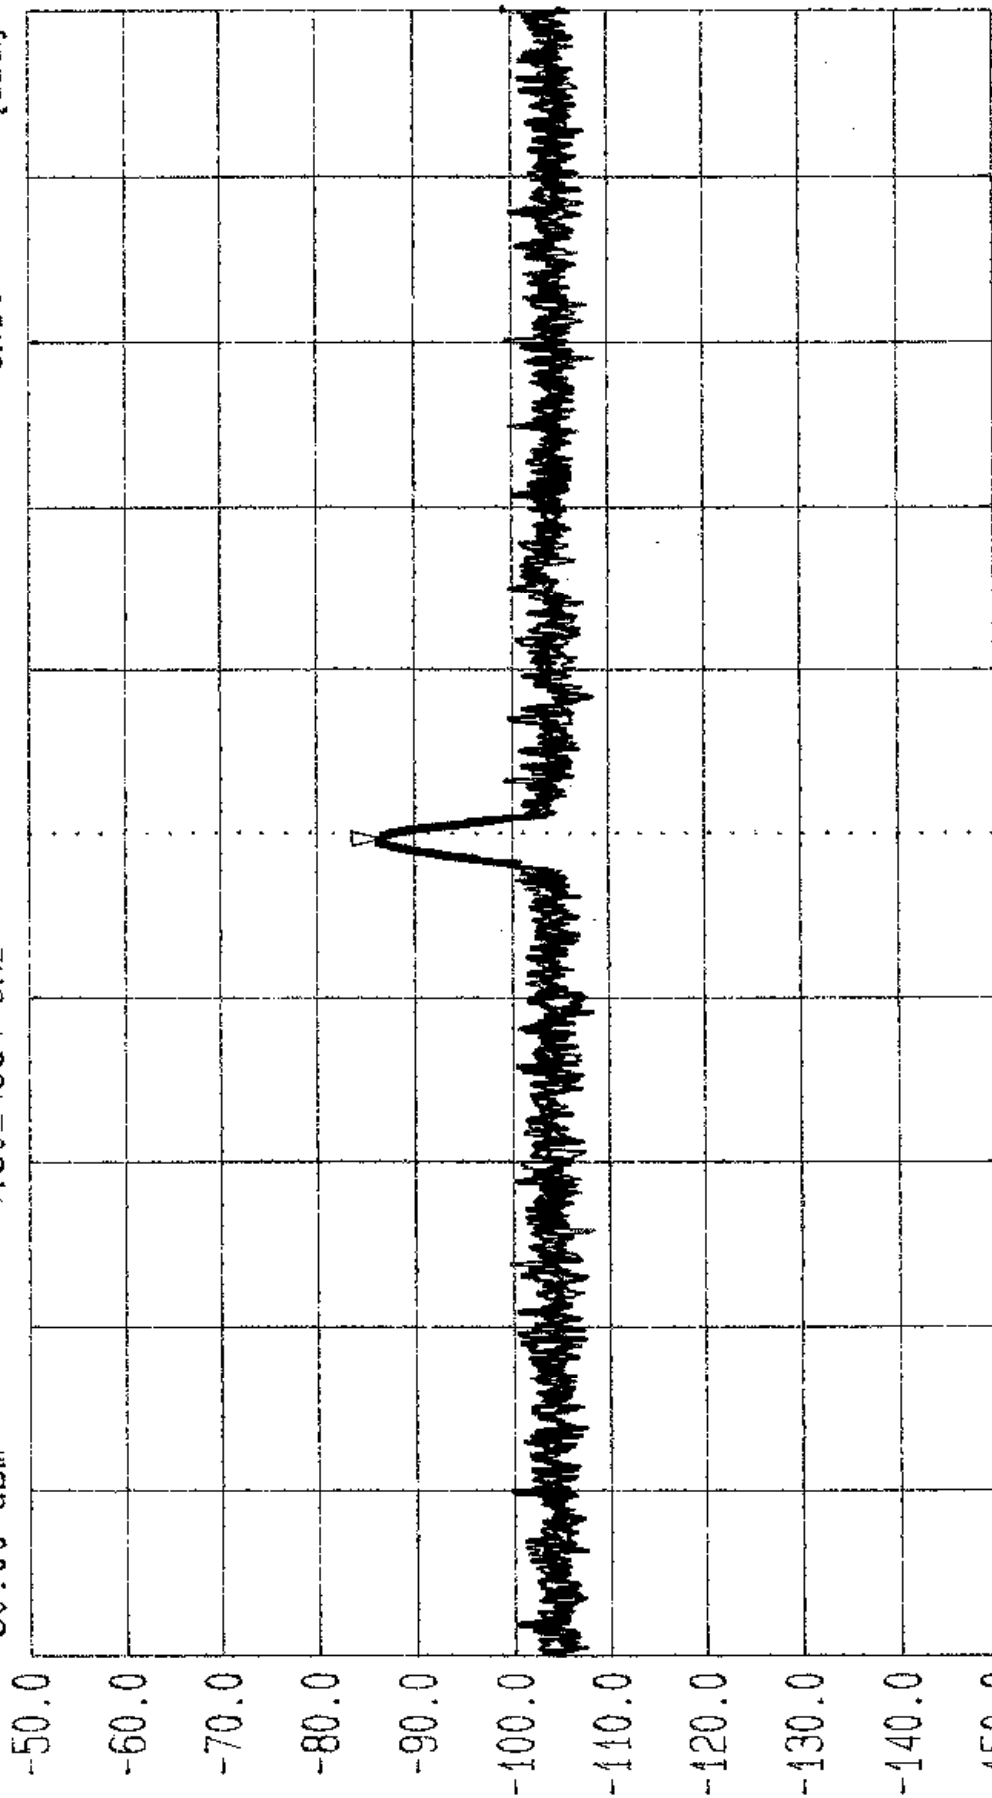

Start 4.902443775 GHz Span 100 kHz Center 4.902493775 GHz Sweep 300 ms Stop 4.902543775 GHz
Temperature. Tested By RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Supply Varaton @ 20C 0: Black.. +15: Green. -15: Red GPH/38797/JD01/135




Date 22.Apr.'99 Time 12:32:00
Ref.Lvl -50.00 dBm
Marker 4.9024645 GHz

Res.BW 1.0 kHz [3dB]
TG.Lvl off
CF.Stp 10.000 kHz
Unit [dBm]

Vid.BW 1 kHz

10 dB

RF.Att

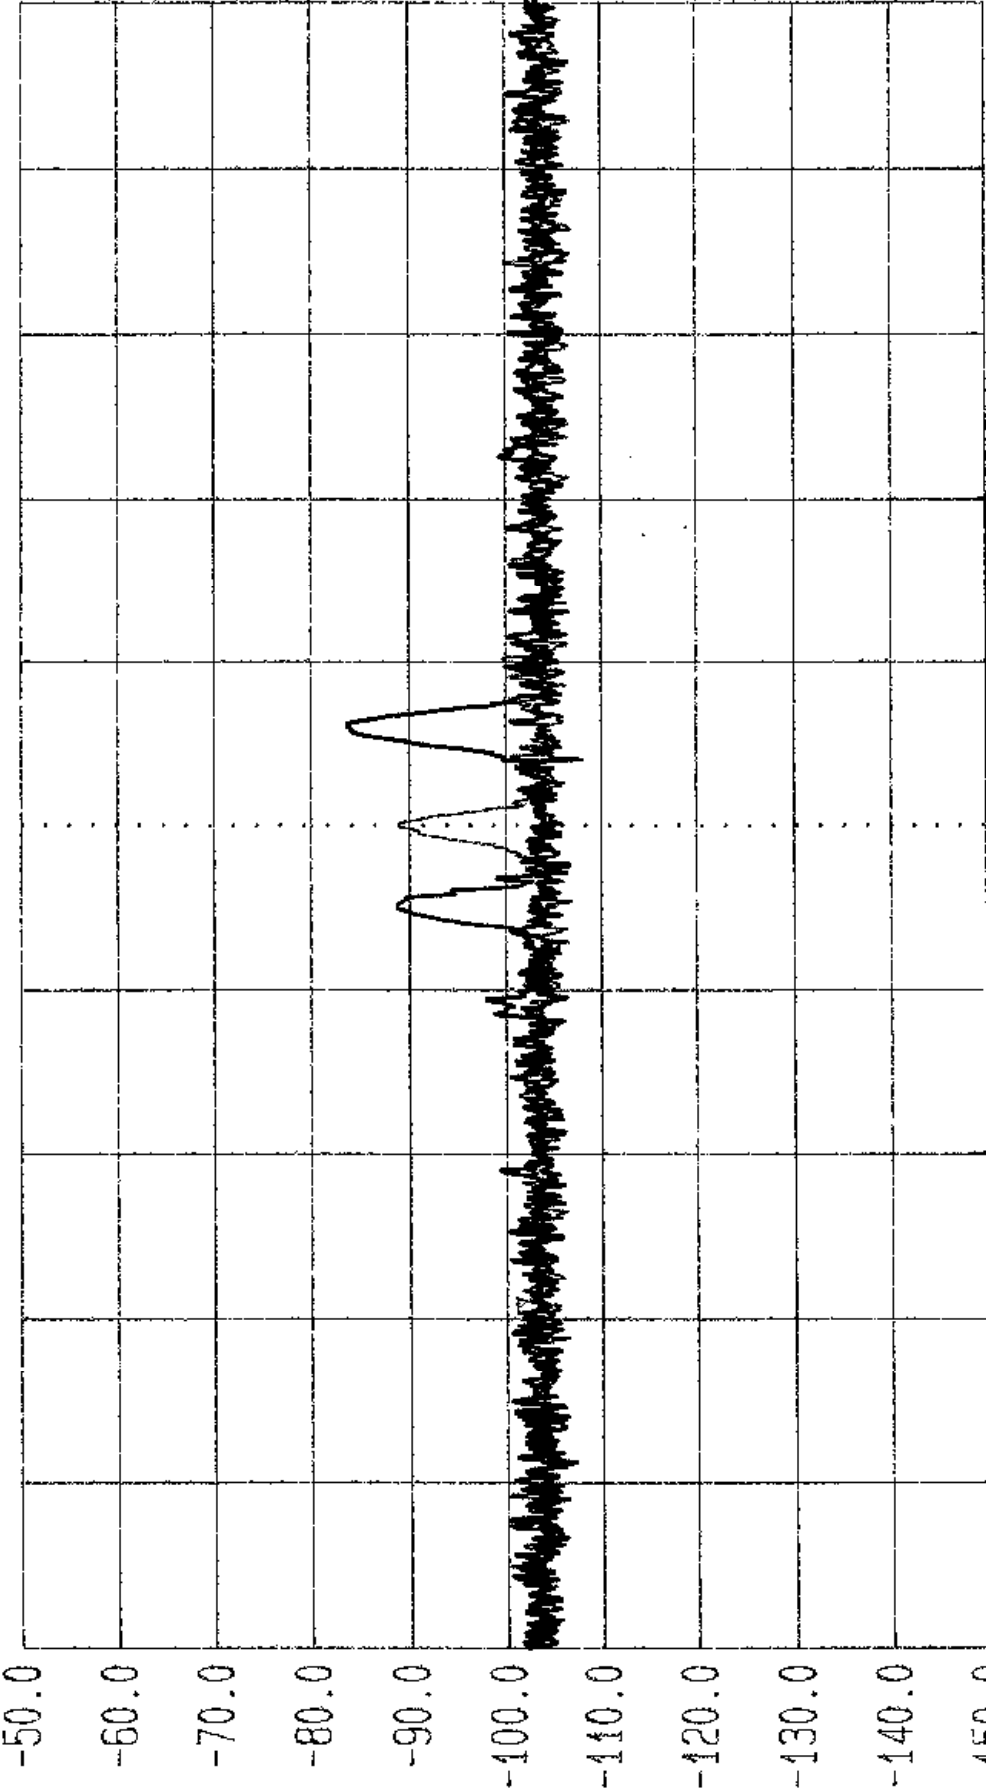

Start 4.90243775 GHz Span 100 kHz Center 4.902493775 GHz Sweep 300 ms Stop 4.902543775 GHz
Temperature. Tested By RFI for Adaptive Broadband Ltd. EUT: AB Access Access Point
Temperature Variation -20: Black. +20: Green. +50: Red

RADIO FREQUENCY INVESTIGATION LTD.

EMC Department

Test Of: Adaptive Broadband Ltd
To: AB-ACCESS Access Point (AP)
F.C.C. Part 15 Subpart E: 1998

TEST REPORT

S.No: RFI/EMCB1/RP38797A

Page 54 of 56

Issue Date:

This page has been left intentionally blank.

Appendix 5. Photographs of EUT

This appendix contains the following photographs

Photo Reference Number	Title
PHT\38797ETF01\001	Side view of conducted emissions
PHT\38797ETF01\002	Front view of conducted emissions
PHT\38797ETF01\003	Rear view of radiated emissions
PHT\38797ETF01\004	Front view of radiated emissions

These pages are not included in the total number of pages for this report.

RADIO FREQUENCY INVESTIGATION LTD.

EMC Department

Test Of: Adaptive Broadband Ltd
To: AB-ACCESS Access Point (AP)
F.C.C. Part 15 Subpart E: 1998

TEST REPORT

S.No: RFI/EMCB1/RP38797A

Page 56 of 56

Issue Date:

This page has been left intentionally blank.

EMC Department

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

PHT\38797\001 Side view of conducted emissions



EMC Department

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

PHT\38797\002 Front view of conducted emissions



EMC Department

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

PHT\38797\003 Rear view of radiated emissions



EMC Department

Test Of: Adaptive Broadband Ltd
AB-ACCESS Access Point (AP)
To: F.C.C. Part 15 Subpart E: 1998

PHT\38797\004 Front view of radiated emissions

