


Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 90° / Mode 2		


Horizontal

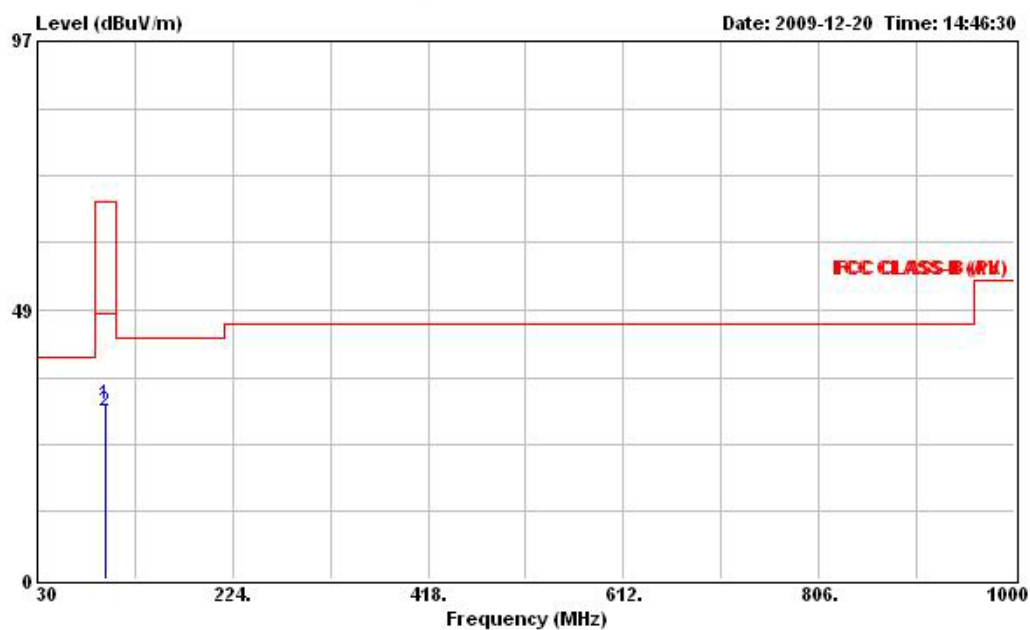

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : Mitsubishi (LANCER GLXi)
 Memo : Small CAR
 Memo : 90度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.880	31.53	-36.47	68.00	46.24	2.27	11.13	28.11	Peak	291	---
2	97.880	30.28	-17.72	48.00	44.99	2.27	11.13	28.11	Average	291	---

Vertical

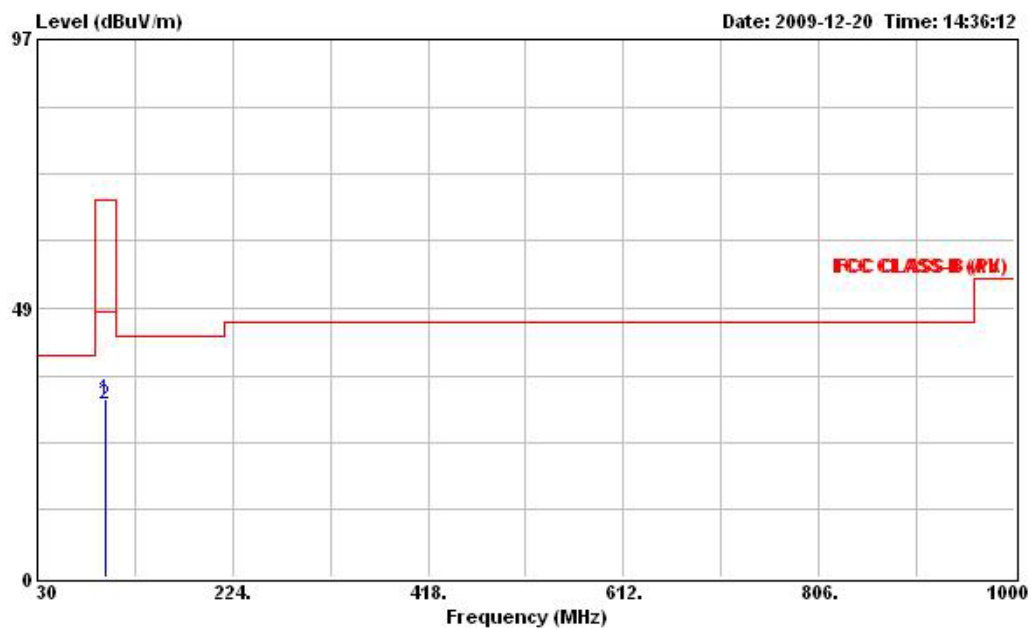


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : Mitsubishi (LANCER GLXi)
 Memo : Small CAR
 Memo : 90度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.880	32.06	-35.94	68.00	46.77	2.27	11.13	28.11	Peak	100	---
2	97.880	31.31	-16.69	48.00	46.02	2.27	11.13	28.11	Average	100	---

Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 135° / Mode 2		


Horizontal

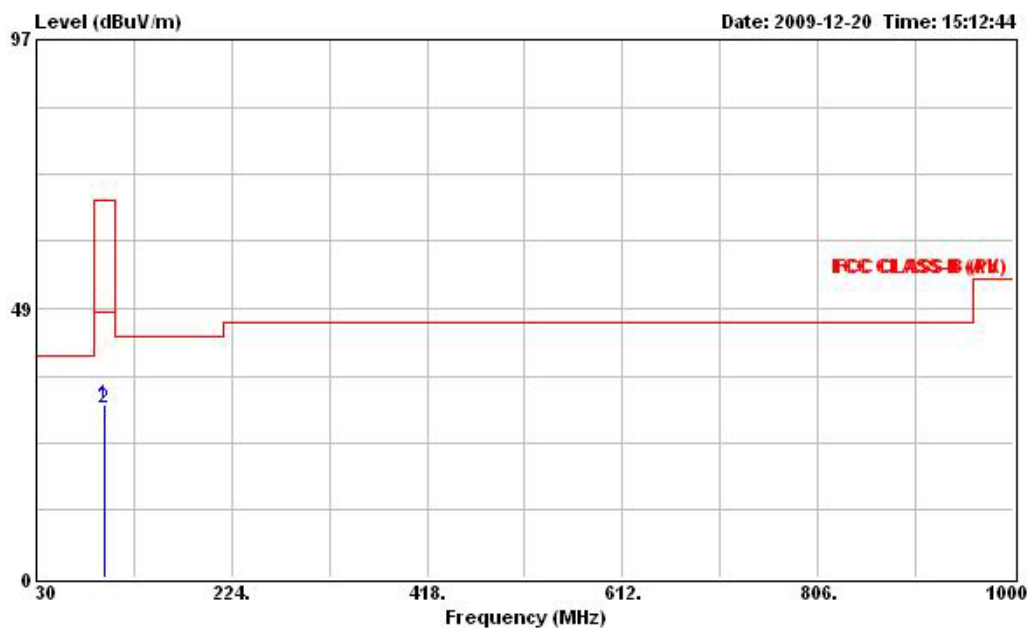

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : Mitsubishi (LANCER GLXi)
 Memo : Small CAR
 Memo : 135度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.880	31.31	-36.69	68.00	46.02	2.27	11.13	28.11	Peak	268	135
2	97.880	30.60	-17.40	48.00	45.31	2.27	11.13	28.11	Average	268	135

Vertical

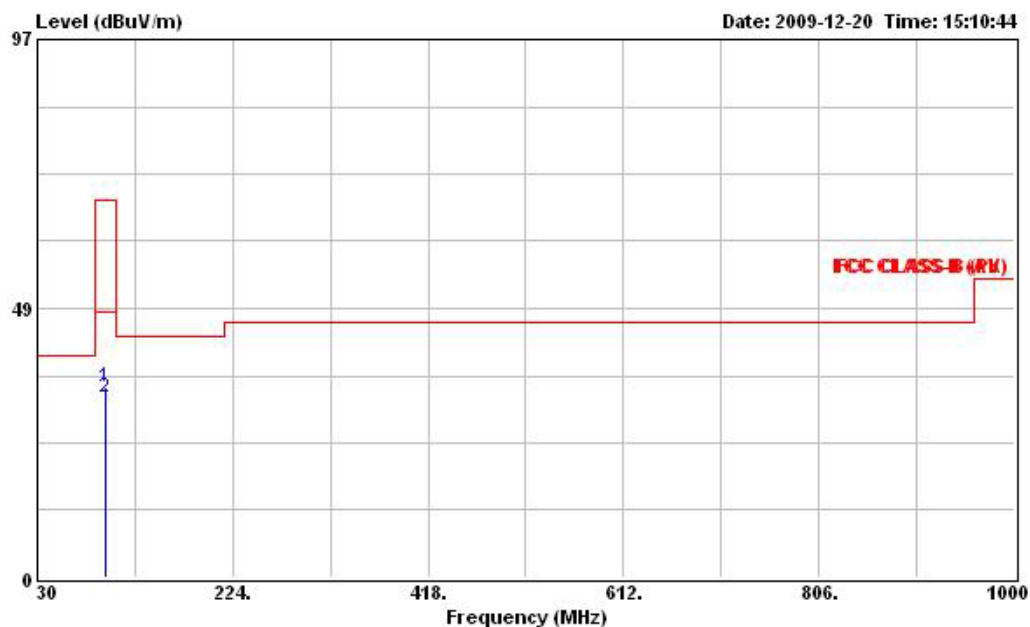


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : Mitsubishi (LANCER GLXi)
 Memo : Small CAR
 Memo : 135度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.880	34.35	-33.65	68.00	49.06	2.27	11.13	28.11	Peak	100	135
2	97.880	32.50	-15.50	48.00	47.21	2.27	11.13	28.11	Average	100	135

Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 180° / Mode 2		


Horizontal

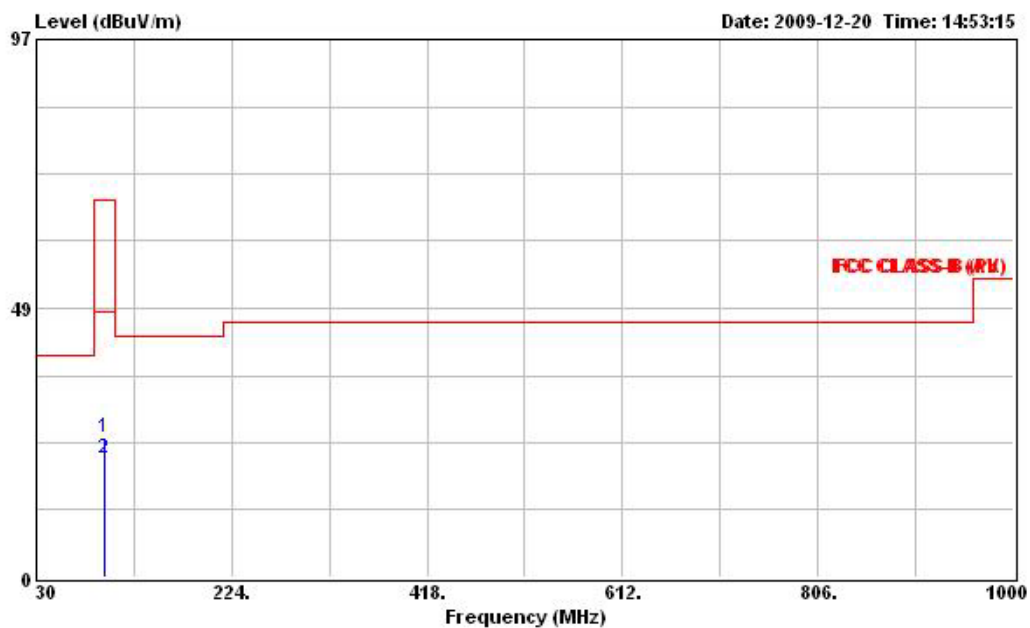

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : Mitsubishi (LANCER GLXi)
 Memo : Small CAR
 Memo : 180度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.880	25.10	-42.90	68.00	39.81	2.27	11.13	28.11	Peak	400	90
2	97.880	21.38	-26.62	48.00	36.09	2.27	11.13	28.11	Average	400	90

Vertical

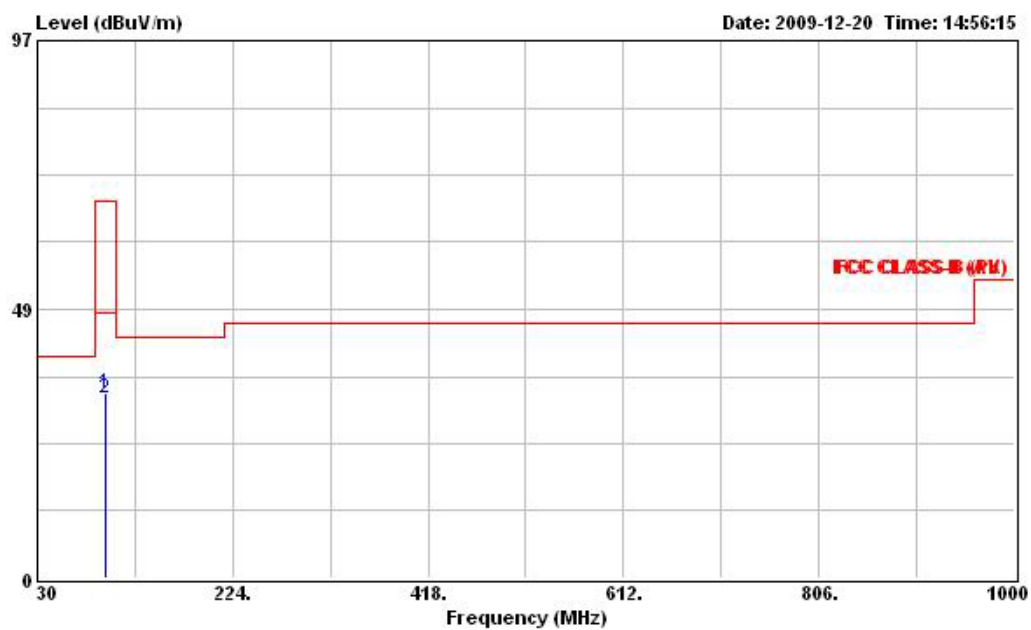


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : Mitsubishi (LANCER GLXi)
 Memo : Small CAR
 Memo : 180度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB		dB		cm	deg
1	97.880	33.39	-34.61	68.00	48.10	2.27	11.13	28.11	Peak	104	90
2	97.880	32.46	-15.54	48.00	47.17	2.27	11.13	28.11	Average	104	90

Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 225° / Mode 2		


Horizontal

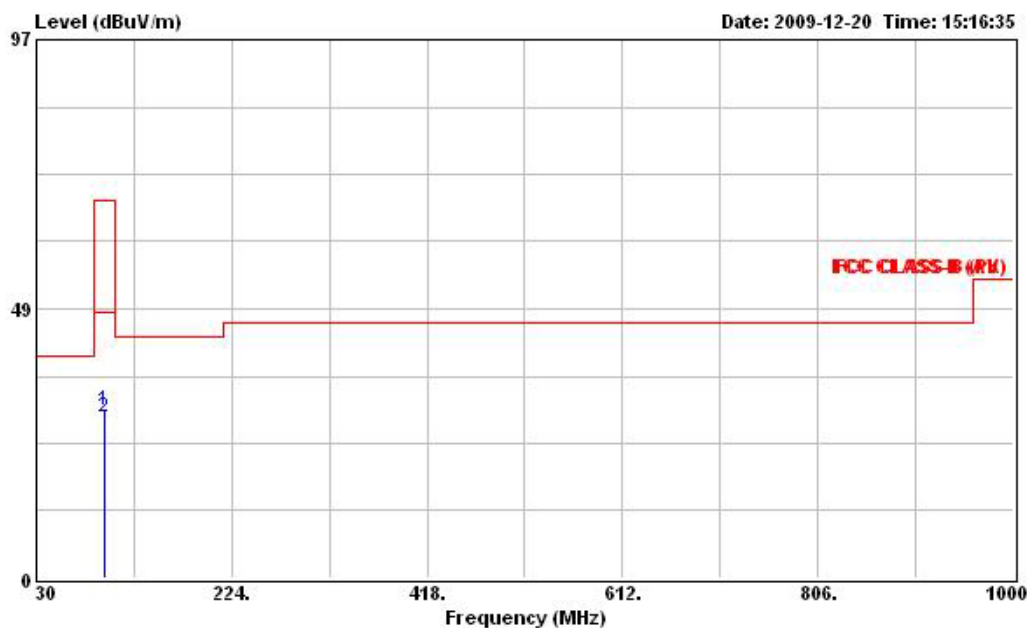

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : Mitsubishi (LANCER GLXi)
 Memo : Small CAR
 Memo : 225度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.880	30.19	-37.81	68.00	44.90	2.27	11.13	28.11	Peak	258	45
2	97.880	28.94	-19.06	48.00	43.65	2.27	11.13	28.11	Average	258	45

Vertical

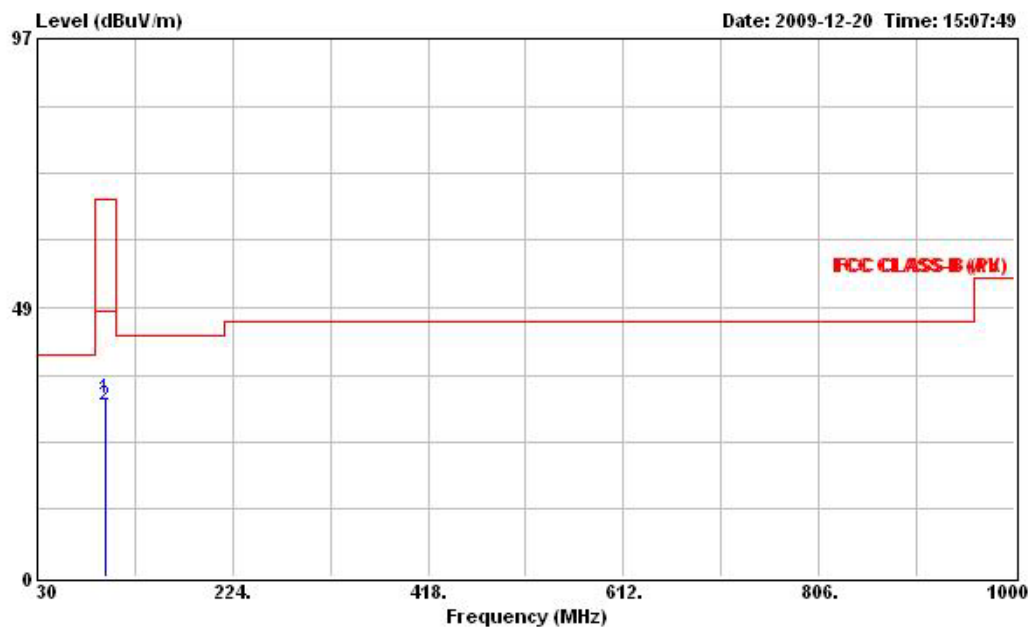


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : Mitsubishi (LANCER GLXi)
 Memo : Small CAR
 Memo : 225度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.880	32.14	-35.86	68.00	46.85	2.27	11.13	28.11	Peak	100	45
2	97.880	30.97	-17.03	48.00	45.68	2.27	11.13	28.11	Average	100	45

Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 270° / Mode 2		


Horizontal

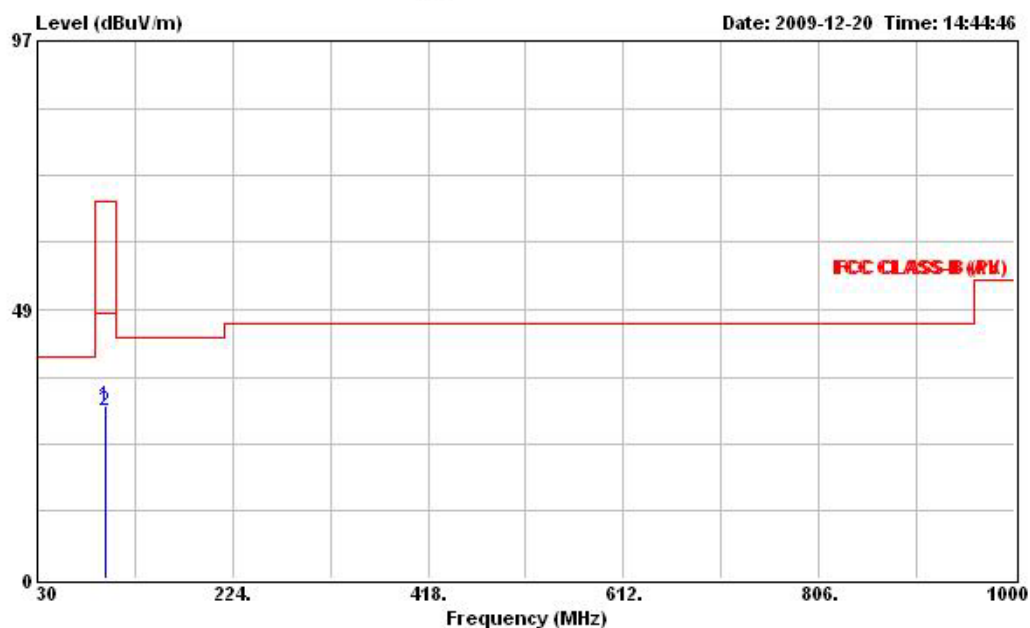

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : Mitsubishi (LANCER GLXi)
 Memo : Small CAR
 Memo : 270度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.880	31.31	-36.69	68.00	46.02	2.27	11.13	28.11	Peak	400	0
2	97.880	30.32	-17.68	48.00	45.03	2.27	11.13	28.11	Average	400	0

Vertical

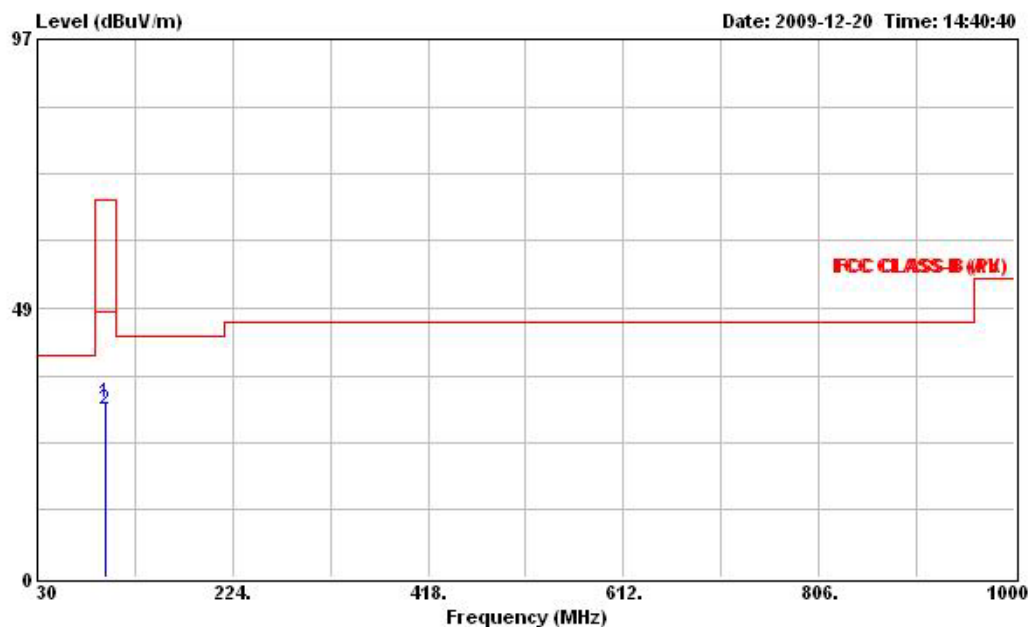


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : Mitsubishi (LANCER GLXi)
 Memo : Small CAR
 Memo : 270度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.880	31.42	-36.58	68.00	46.13	2.27	11.13	28.11	Peak	100	0
2	97.880	30.33	-37.67	68.00	45.04	2.27	11.13	28.11	QP	100	0

Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 315° / Mode 2		


Horizontal

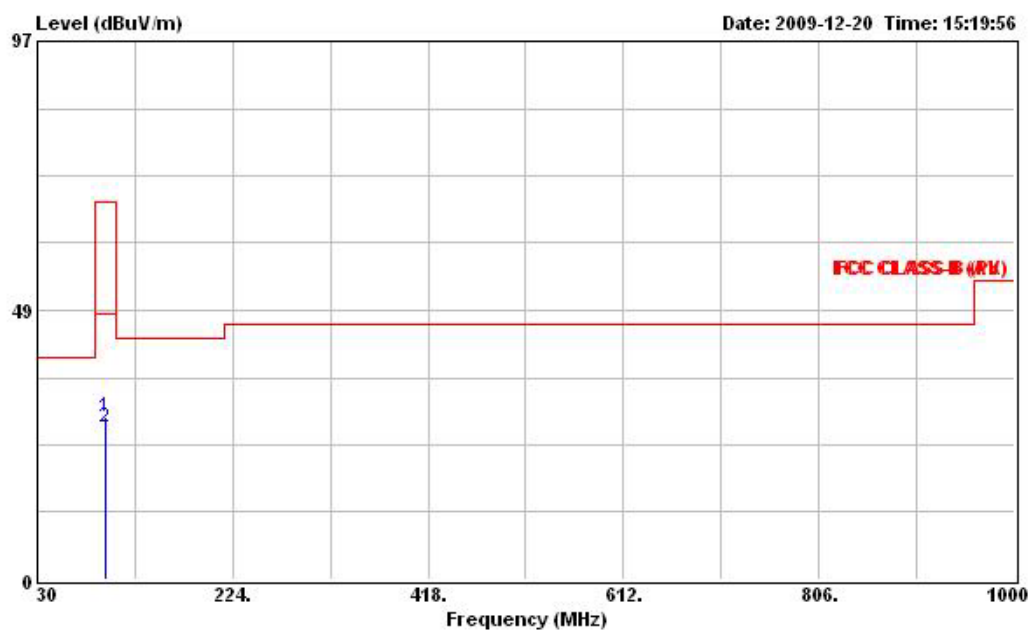

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : Mitsubishi (LANCER GLXi)
 Memo : Small CAR
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.880	29.17	-38.83	68.00	43.88	2.27	11.13	28.11	Peak	400	---
2	97.880	27.27	-20.73	48.00	41.98	2.27	11.13	28.11	Average	400	---

Vertical

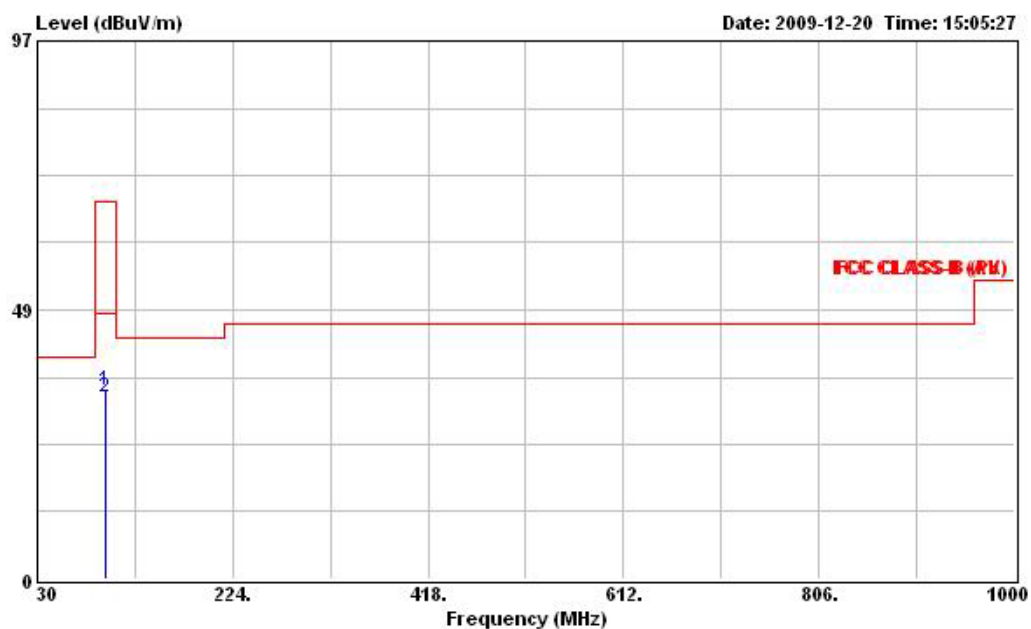


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : Mitsubishi (LANCER GLXi)
 Memo : Small CAR
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.880	34.04	-33.96	68.00	48.75	2.27	11.13	28.11	Peak	100	---
2	97.880	32.64	-15.36	48.00	47.35	2.27	11.13	28.11	Average	100	---

Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 0° / Mode 3		


Horizontal

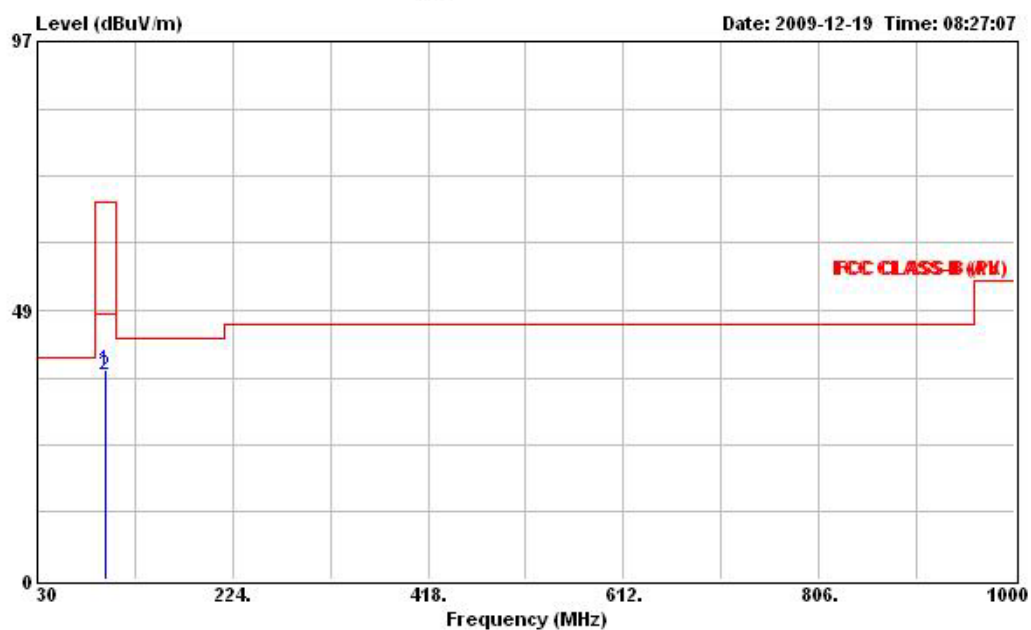

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD IXION
 Memo : Large CAR
 Memo : 0度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	37.90	-30.10	68.00	52.61	2.27	11.13	28.11	Peak	341	---
2	97.890	36.76	-11.24	48.00	51.47	2.27	11.13	28.11	Average	341	---

Vertical

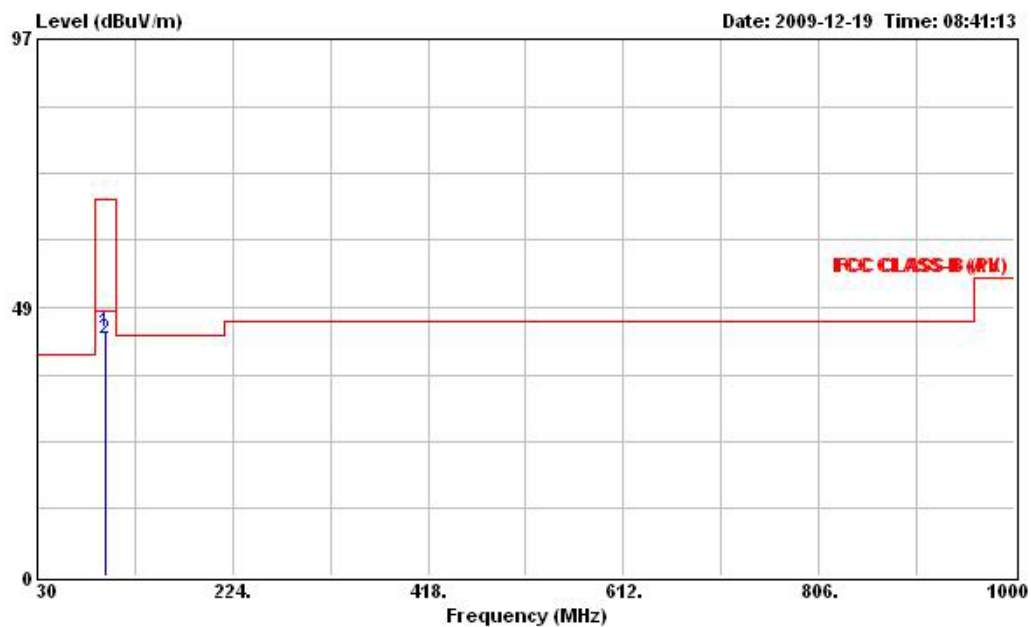


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD ION
 Memo : Large CAR
 Memo : 0度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	44.09	-23.91	68.00	58.80	2.27	11.13	28.11	Peak	121	---
2	97.890	42.76	-5.24	48.00	57.47	2.27	11.13	28.11	Average	121	---

Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 45° / Mode 3		


Horizontal

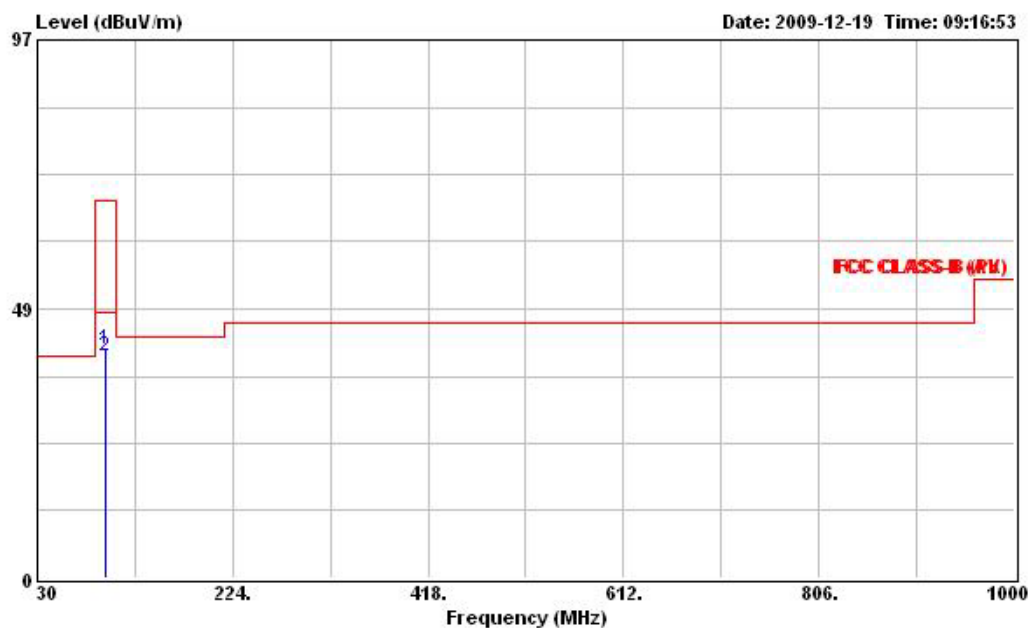

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD IXION
 Memo : Large CAR
 Memo : 45度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	41.26	-26.74	68.00	55.97	2.27	11.13	28.11	Peak	307	---
2	97.890	39.98	-8.02	48.00	54.69	2.27	11.13	28.11	Average	307	---

Vertical

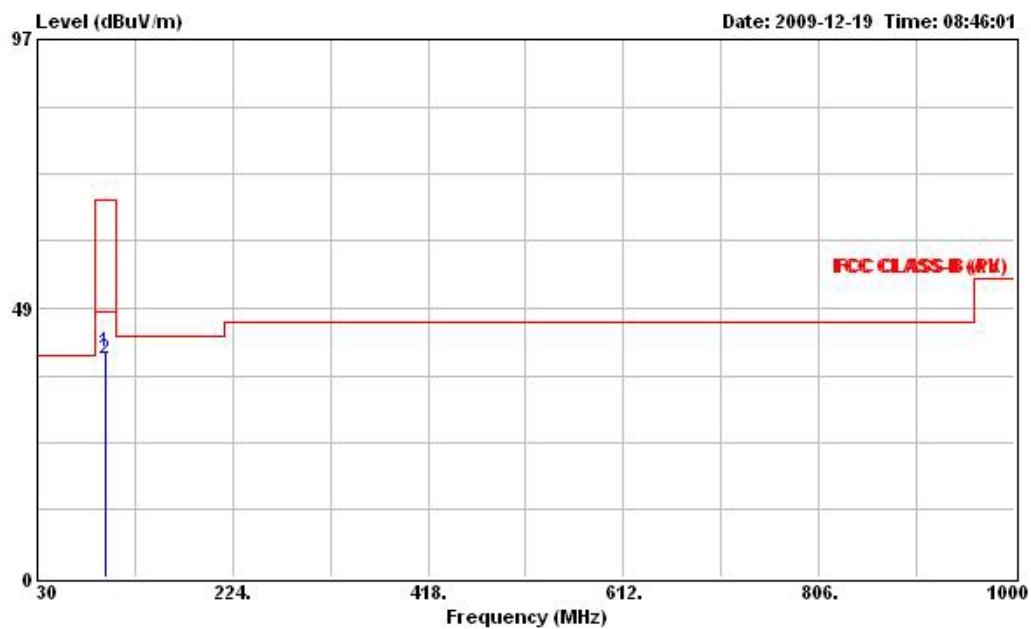


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD IXION
 Memo : Large CAR
 Memo : 45度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	40.59	-27.41	68.00	55.30	2.27	11.13	28.11	Peak	105	---
2	97.890	39.33	-8.67	48.00	54.04	2.27	11.13	28.11	Average	105	---

Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 90° / Mode 3		


Horizontal

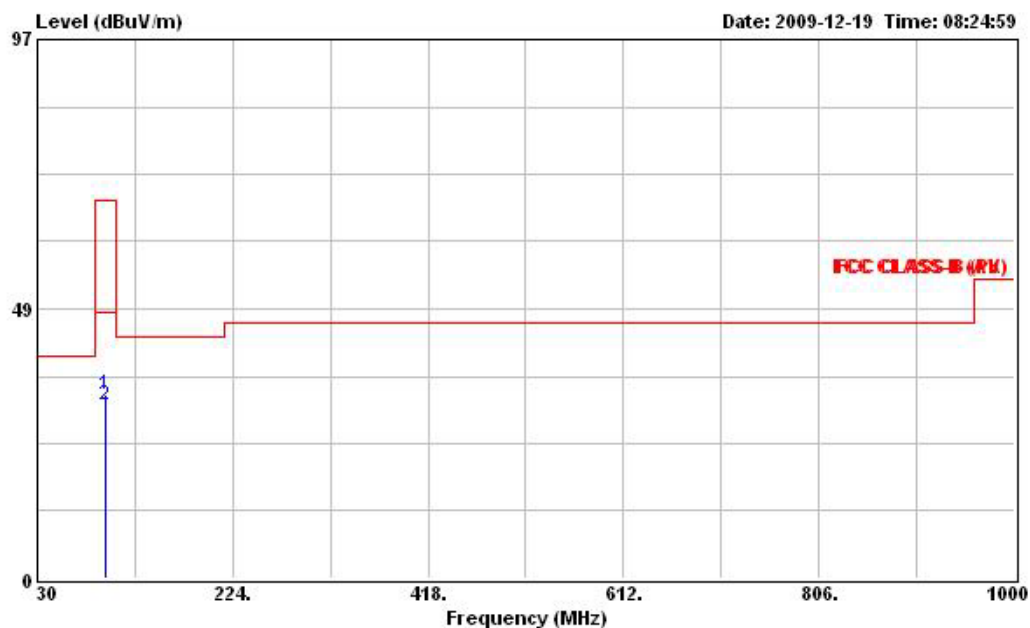

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD IXION
 Memo : Large CAR
 Memo : 90度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	32.98	-35.02	68.00	47.69	2.27	11.13	28.11	Peak	206	---
2	97.890	31.32	-16.68	48.00	46.03	2.27	11.13	28.11	Average	206	---

Vertical

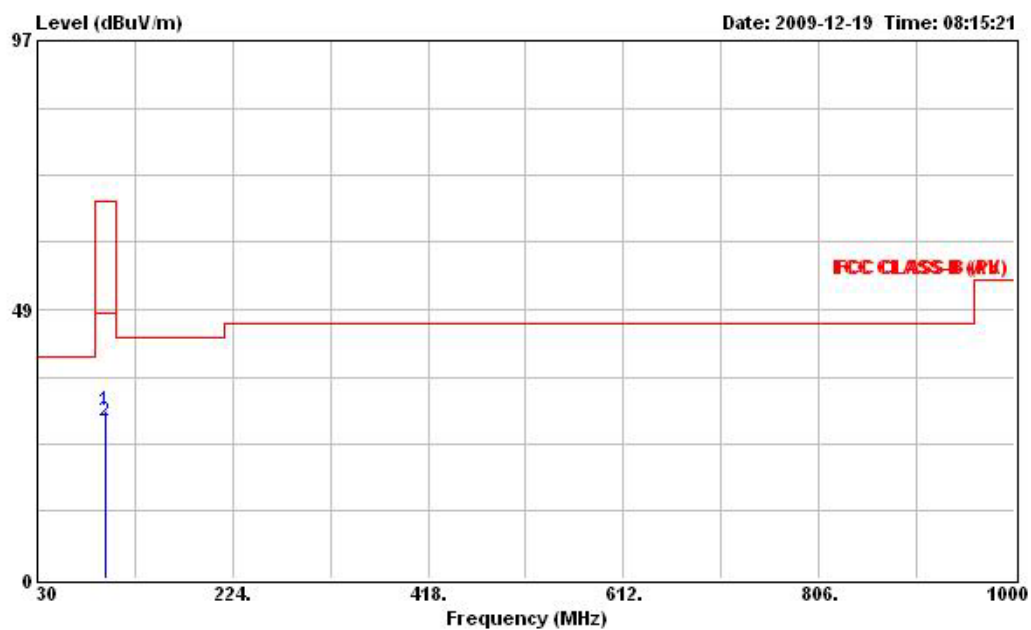


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD IXION
 Memo : Large CAR
 Memo : 90度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	30.28	-37.72	68.00	44.99	2.27	11.13	28.11	Peak	100	---
2	97.890	28.40	-19.60	48.00	43.11	2.27	11.13	28.11	Average	100	---

Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 135° / Mode 3		


Horizontal

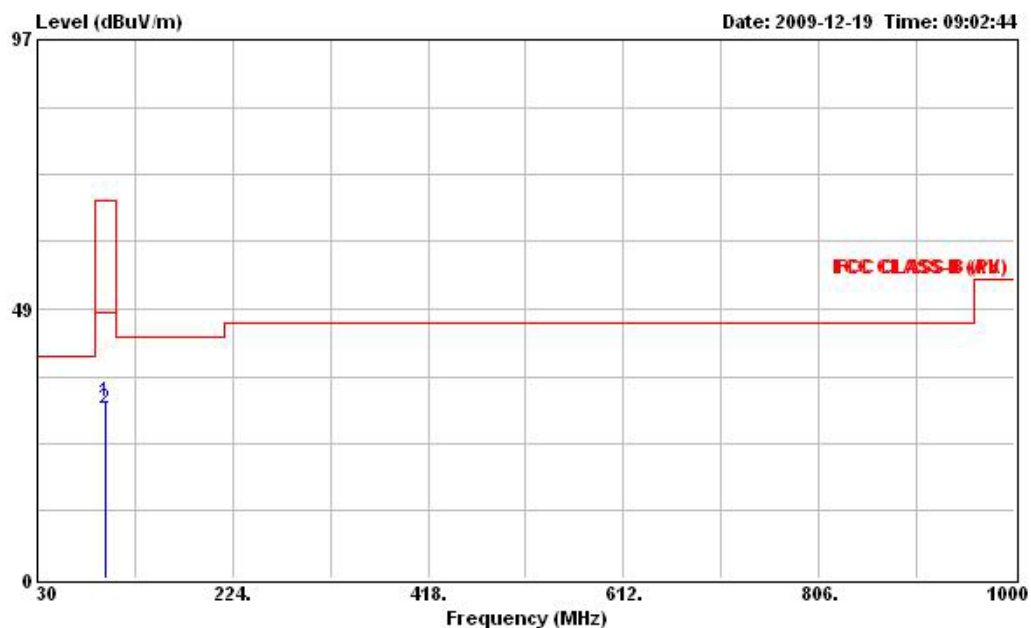

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD IXION
 Memo : Large CAR
 Memo : 135度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	31.94	-36.06	68.00	46.65	2.27	11.13	28.11	Peak	207	135
2	97.890	30.42	-17.58	48.00	45.13	2.27	11.13	28.11	Average	207	135

Vertical

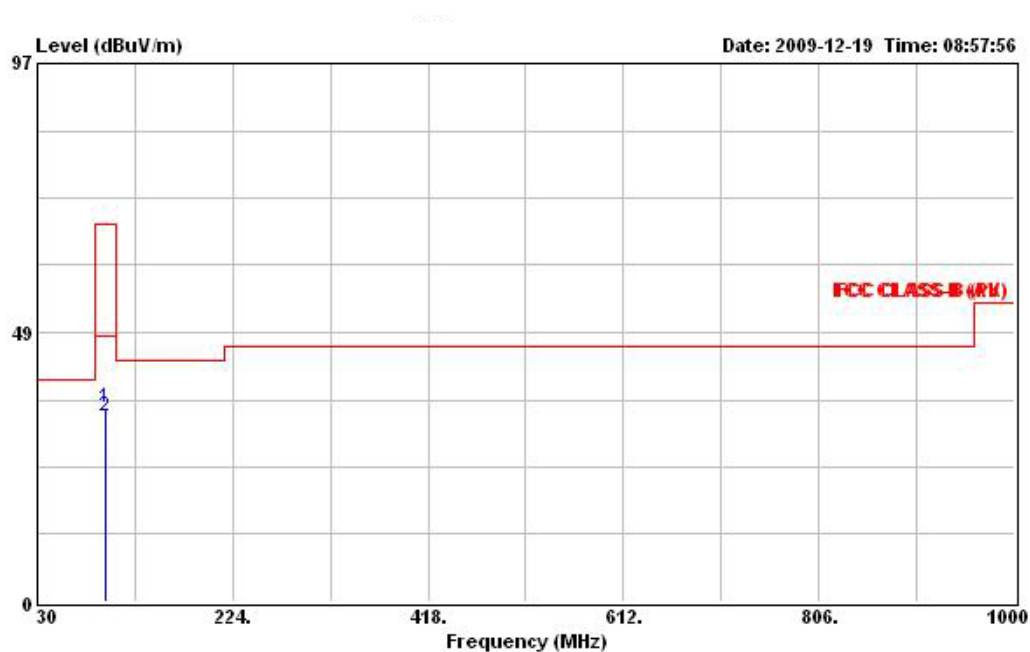


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD IXION
 Memo : Large CAR
 Memo : 135度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	34.94	-33.06	68.00	49.65	2.27	11.13	28.11	Peak	133	135
2	97.890	33.34	-14.66	48.00	48.05	2.27	11.13	28.11	Average	133	135

Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 180° / Mode 3		


Horizontal

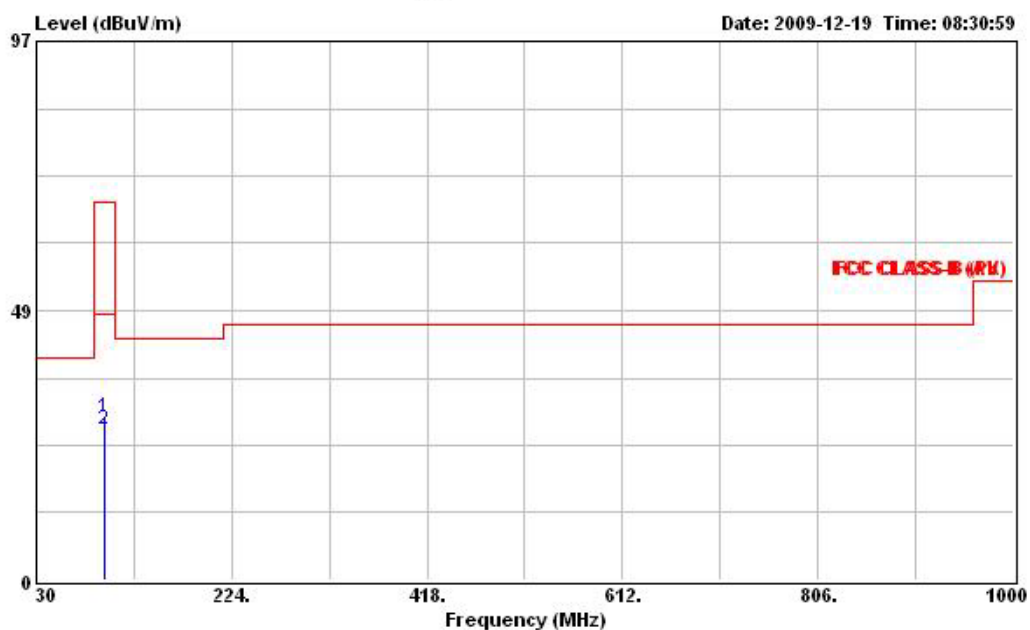

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD EXION
 Memo : Large CAR
 Memo : 180度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	29.18	-38.82	68.00	43.89	2.27	11.13	28.11	Peak	166	90
2	97.890	27.08	-20.92	48.00	41.79	2.27	11.13	28.11	Average	166	90

Vertical

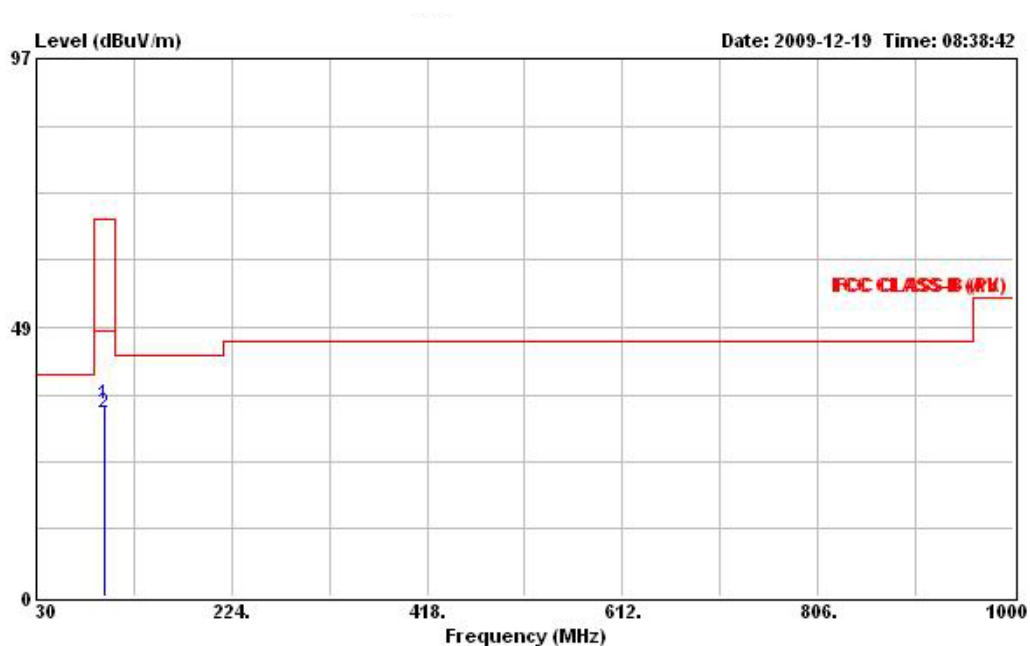


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD IXION
 Memo : Large CAR
 Memo : 180度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	34.78	-33.22	68.00	49.49	2.27	11.13	28.11	Peak	100	90
2	97.890	33.07	-14.93	48.00	47.78	2.27	11.13	28.11	Average	100	90

Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 225° / Mode 3		


Horizontal

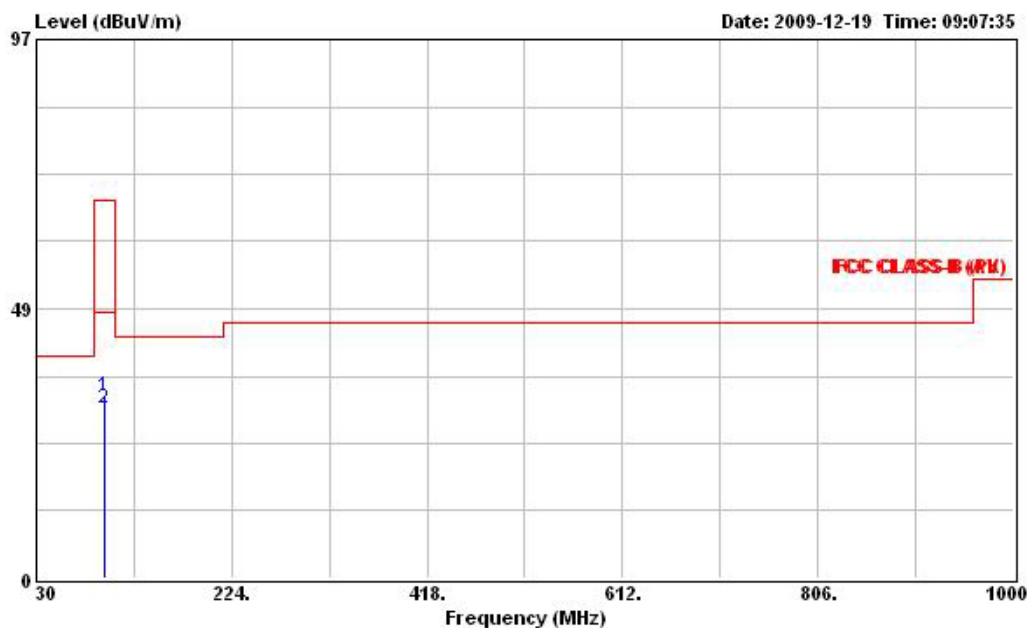

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD ION
 Memo : Large CAR
 Memo : 225度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	32.60	-35.40	68.00	47.31	2.27	11.13	28.11	Peak	320	45
2	97.890	30.68	-17.32	48.00	45.39	2.27	11.13	28.11	Average	320	45

Vertical

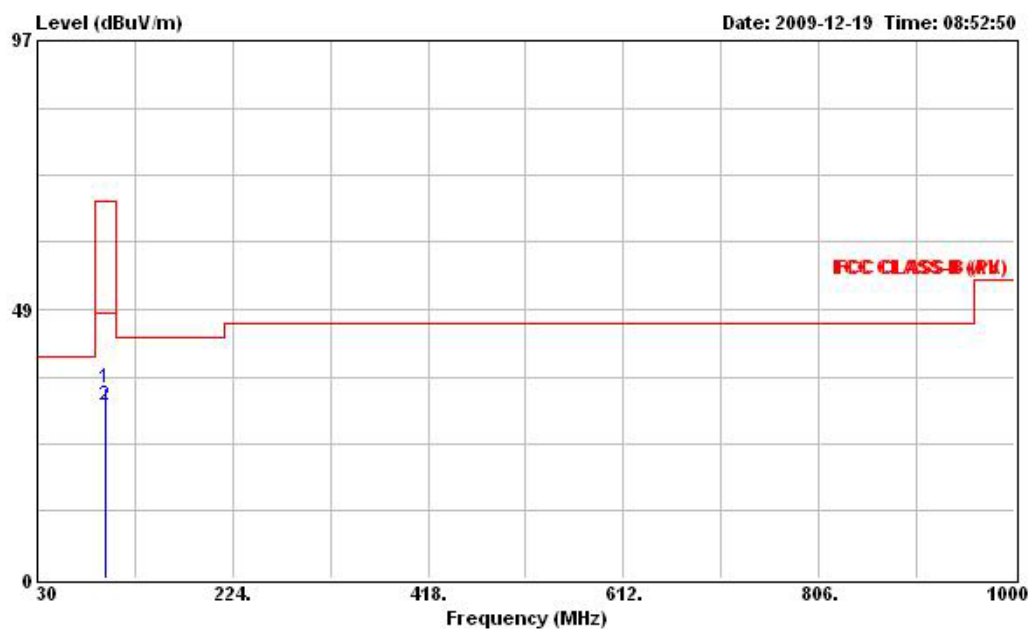


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD IXION
 Memo : Large CAR
 Memo : 225度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	34.27	-33.73	68.00	48.98	2.27	11.13	28.11	Peak	119	45
2	97.890	31.18	-16.82	48.00	45.89	2.27	11.13	28.11	Average	119	45

Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 270° / Mode 3		


Horizontal

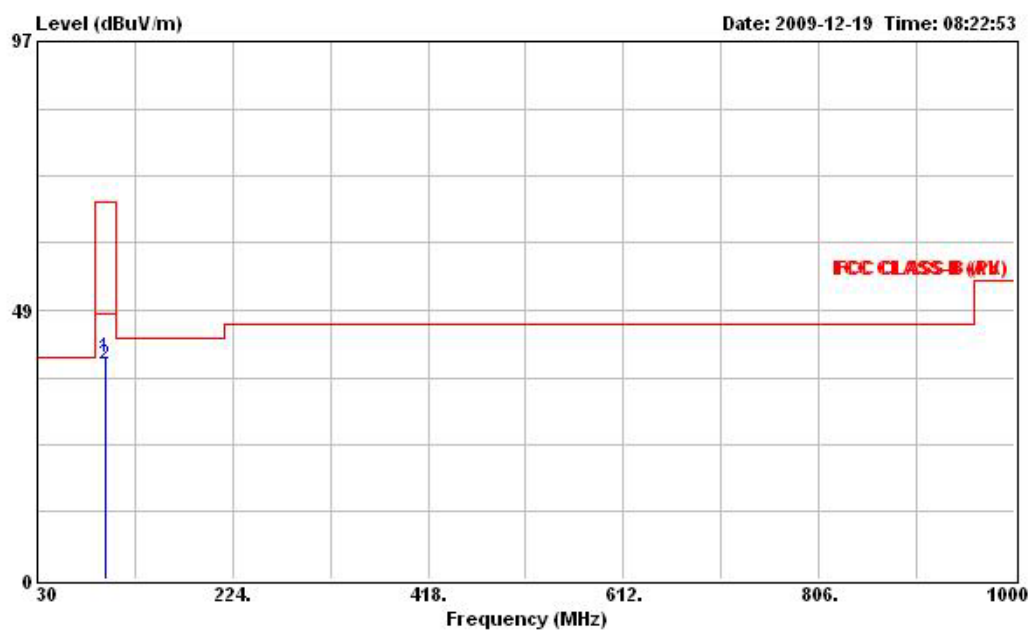

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD IXION
 Memo : Large CAR
 Memo : 270度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	39.88	-28.12	68.00	54.59	2.27	11.13	28.11	Peak	318	0
2	97.890	38.76	-9.24	48.00	53.47	2.27	11.13	28.11	Average	318	0

Vertical

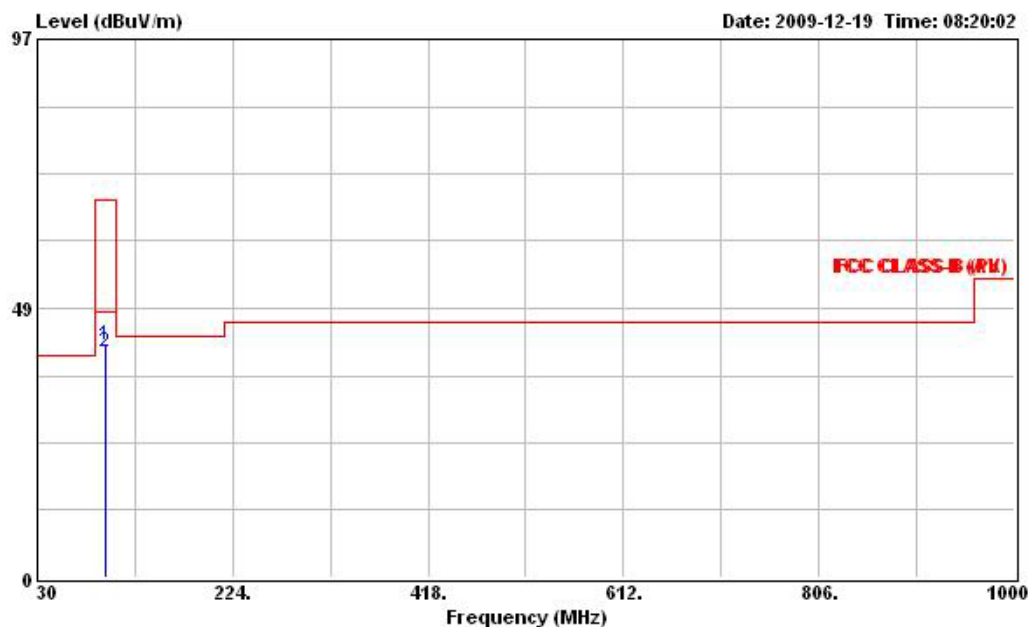


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD IXION
 Memo : Large CAR
 Memo : 270度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	41.76	-26.24	68.00	56.47	2.27	11.13	28.11	Peak	102	0
2	97.890	40.64	-7.36	48.00	55.35	2.27	11.13	28.11	Average	102	0

Temperature	20.3℃	Humidity	57.8%
Configurations	97.9 MHz/ 315° / Mode 3		


Horizontal

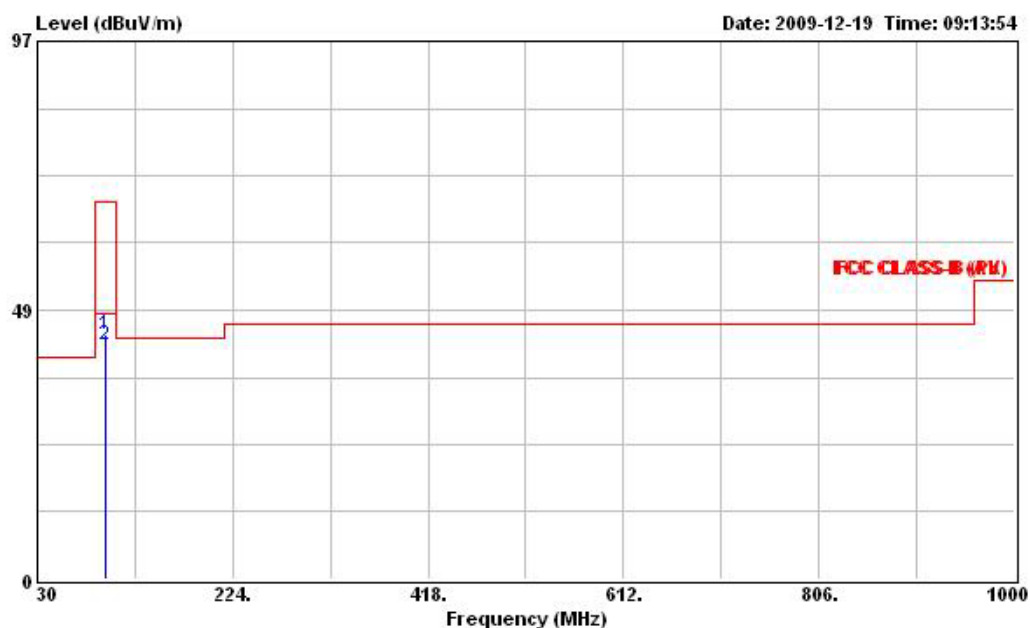

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD IXION
 Memo : Large CAR
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	44.08	-23.92	68.00	58.79	2.27	11.13	28.11	Peak	358	---
2	97.890	42.18	-5.82	48.00	56.89	2.27	11.13	28.11	Average	358	---

Vertical

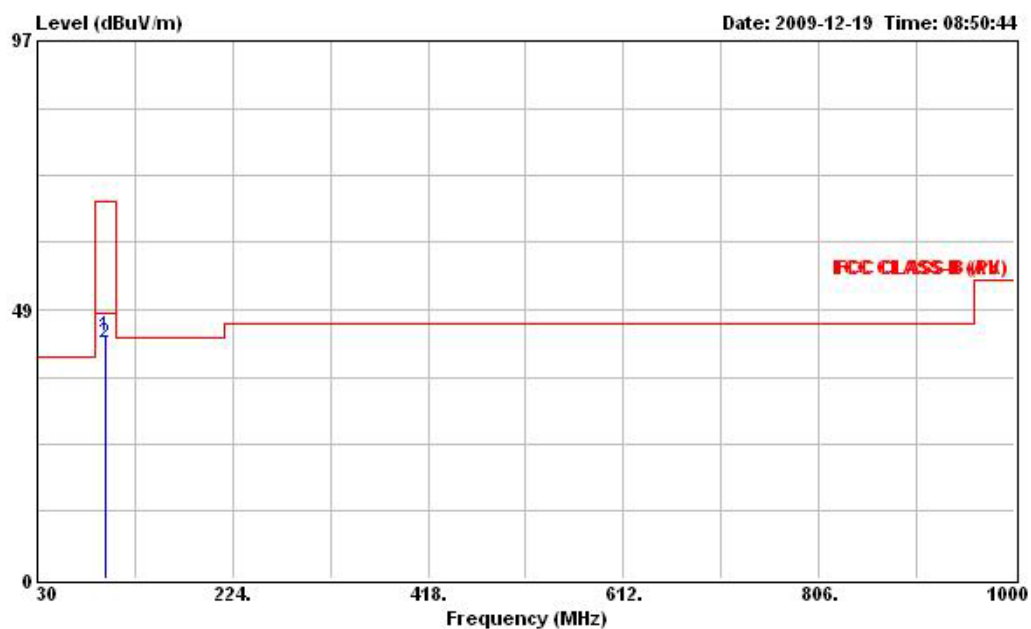

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 Model : SP5TK1
 Memo : FCC ID:P3HSP5
 Memo : FM 97.9M
 Memo : FORD IXION
 Memo : Large CAR
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	97.890	43.66	-24.34	68.00	58.37	2.27	11.13	28.11	Peak	114	---
2	97.890	42.54	-5.46	48.00	57.25	2.27	11.13	28.11	Average	114	---

4. List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
10m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-10M	10CH01-HY	30MHz~1GHz 10m, 3m	Apr. 13, 2009	Radiation (10CH01-HY)
Receiver	R&S	ESI7	838496/009	9kHz-7GHz	Apr. 01 2009	Radiation (10CH01-HY)
Amplifier	Agilent	8447D	2944A10825	100kHz – 1.3GHz	May 26, 2009	Radiation (10CH01-HY)
Turn Table	HD	DT 60 RPS	1513/004/00	0 ~ 360 degree	N/A	Radiation (10CH01-HY)
Antenna Mast	HD	MA240	240/556/00	1 m - 4 m	N/A	Radiation (10CH01-HY)
RF Cable-R10m	Suhner Switzerland + Rosenberger	RG223/U + UAA220A-0	CB022-DOOR	30MHz~1GHz	Nov. 24, 2009	Radiation (10CH01-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2681	30MHz –1GHz	Dec. 21 2008	Radiation (10CH01-HY)