

# **FCC Test Report**

Report No.: AGC00113180701FE03

FCC ID : PLE-GB-6420B

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Bluetooth headset

**BRAND NAME** : Gigastone

**MODEL NAME** : GB-6420B, GB-6420W

**CLIENT**: Gigastone Corp.

**DATE OF ISSUE** : July 12, 2018

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Subpart C Section 15.249

**REPORT VERSION**: V1.0

# Attestation of Global Compliance (Shenzhen) Co., Ltd

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spower this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KSC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 60

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0		July 12, 2018	Valid	Initial release

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



# TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM5.2. EQUIPMENT USED IN EUT SYSTEM5.3. SUMMARY OF TEST RESULTS	8
6. TEST FACILITY	10
7. TEST METHOD	11
8. TEST EQUIPMENT LIST	
9. RADIATED EMISSION	12
9.1. TEST LIMIT 9.2. MEASUREMENT PROCEDURE 9.3. TEST SETUP 9.4. TEST RESULT	12 13 15
10. BAND EDGE EMISSION	38
10.1. MEASUREMENT PROCEDURE 10.2 TEST SETUP 10.3 RADIATED TEST RESULT	38 39
11. 20DB BANDWIDTH	43
11.1. MEASUREMENT PROCEDURE	43
12. FCC LINE CONDUCTED EMISSION TEST	50
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	50 51 51
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	52
ADDENIDIY D. DUOTOCDADUS OF FUT	5.4



age 4 of 60

## 1. VERIFICATION OF CONFORMITY

Applicant	Gigastone Corp.
Address	12F, No. 480, Rueiguang Rd., Neihu Dist., Taipei 114, Taiwan
Manufacturer	Gblue Technology CO., LTD.
Address	2nd floor, Fukang Commercial Plaza, Yousong Road, Longhua Avenue, Longhua New District, Shenzhen
Product Designation	Bluetooth headset
Brand Name	Gigastone
Test Model	GB-6420B
Series Model	GB-6420W
Difference Description	All the same except for the model name
Date of test	July 04, 2018 to July 12, 2018
Deviation	None Sand Comment of the Comment of
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249. The test results of this report relate only to the tested sample identified in this report.

Tested By		Henry Zh	ang
Figure Completion 8	Henry Zhar	ng(Zhang Zhuorui)	July 12, 2018
Reviewed By	C	and change	The state of the s
S Station of Cichal Compliant	Cool Cheng	(Cheng Mengguo)	July 12, 2018
Approved By		Foresto ce	
Marco © Marco		ei(Lei Yonggang) orized Officer	July 12, 2018

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



## 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
Bluetooth Version	V4.2
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK
Number of channels	79
Hardware Version	V3
Software Version	V4
Antenna Designation	PCB Antenna
Antenna Gain	0dBi
Power Supply	DC 3.7V by battery
Note:	

- The USB port only used for charging and can't be used to transfer data with PC. The BT function of EUT isn't work when charging.

## 2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR Channel List

Frequency Band	Cha	annel Number		Frequency		
, GO		0	TK Tomplence	2402MHz	® 5 3 10 10 10 10 10 10 10 10 10 10 10 10 10	
	The Till of the Control of the Contr	® # Control Global Control	(S) The state of Global	2403MHz	C Alles	
	alion of Global				-700	
		38		2440 MHz	The Kingliance	
2400~2483.5MHz	N. TO	39	The Compliance	2441 MHz	no.	
	(a) William of Global Co	40		2442 MHz		
	-C			- 700h	The Third	
	- Till	77	The Complaints	2479 MHz	R Attestation of Co.	
	TK Compliance	78	® Milestation (Ga	2480 MHz		



Page 6 of 60

#### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.


- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

## 4. DESCRIPTION OF TEST MODES


	411 1123
NO.	TEST MODE DESCRIPTION
1 The Mariantee	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π /4-DQPSK
<b>5</b>	Middle channel π /4-DQPSK
6	High channel π /4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9 ® Manufacture 9	High channel 8DPSK
10	BT Link(Hopping mode)

#### Note:

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.





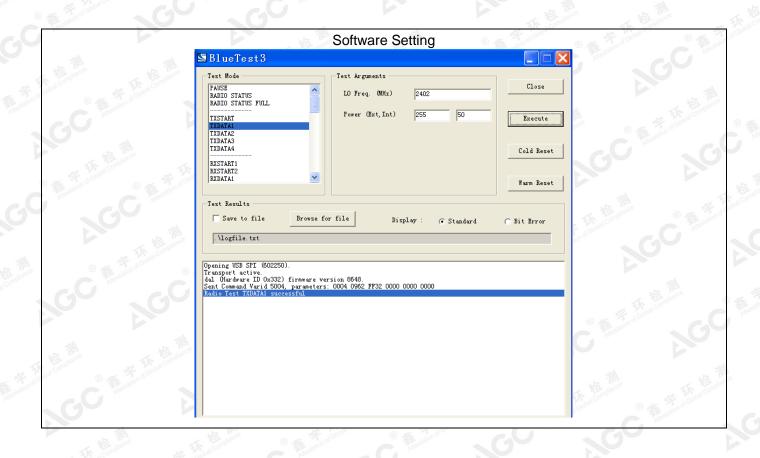

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cent.com.



Page 8 of 60

# 5. SYSTEM TEST CONFIGURATION

#### 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

EUT

Configure 2: (Control continuous TX)

			KEL.	
EUT	station o	Control box	Os.	PC

#### **5.2. EQUIPMENT USED IN EUT SYSTEM**

<u> </u>					
Item	Equipment	Mfr/Brand	Model/Type No.	Remark	
1	Bluetooth headset	Gigastone	GB-6420B	EUT	
2	Battery	N/A	J581328	Accessory	
3	PC.	APPLE	A1465	A.E	
4	Control box	CSR	USB_SPI_TOOLS	A.E	
5	USB Cable	N/A	1m unshielded	A.E	
6	IPOD	APPLE	A1367	A.E	



Page 9 of 60

#### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	N/A
§15.215	Bandwidth	Compliant

Note: N/A means it's not applicable to this item.



Page 10 of 60

## 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP Lab Code	600153-0
Designation Number	CN5028
Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0



age 11 of 60

## 7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

## 8. TEST EQUIPMENT LIST

#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2018	Jun.19, 2019
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 18, 2017	May 17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2018	Jun.19, 2019
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
Radiation Cable 1	MXT	RS1	R005	N/A	N/A
Radiation Cable 2	MXT	RS1	R006	N/A	N/A
Loop Antenna	A.H.Systems,Inc	SAS-562B	station of Con-	Mar. 01, 2018	Feb. 28, 2019
Filter (2.4-2.483GHz)	Micro-tronics	087		Jun.20, 2018	Jun.19, 2019



Page 12 of 60

## 9. RADIATED EMISSION

#### 9.1. TEST LIMIT

## Standard FCC15.249

Fundamental	Field Strength of Fundamental	Field Strength of Harmonics
Frequency	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency	Distance	Field Strengths Limit					
(MHz)	Meters	μ V/m	dB(μV)/m				
0.009 ~ 0.490	300	2400/F(kHz)	2				
0.490 ~ 1.705	30	24000/F(kHz)	电测 乐意				
1.705 ~ 30		30	See The second of the second o				
30 ~ 88	3	100	40.0				
88 ~ 216	3	150	43.5				
216 ~ 960	3	200	46.0				
960 ~ 1000	3	500	54.0				
Above 1000	3 Maria Commission	Other:74.0 dB(µV)/m (Average)	(Peak) 54.0 dB(μV)/m				

Remark:

- (1) Emission level dB $\mu$  V = 20 log Emission level  $\mu$  V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 13 of 60

#### 9.2. MEASUREMENT PROCEDURE

- 1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 14 of 60


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	Fundamental: 2.4~2.483GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 2MHz/ VBW 10Hz for Average Harmonics: 1GHz~25GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP





#### 9.3. TEST SETUP

#### RADIATED EMISSION TEST-SETUP FREQUENCY BELOW 30MHz

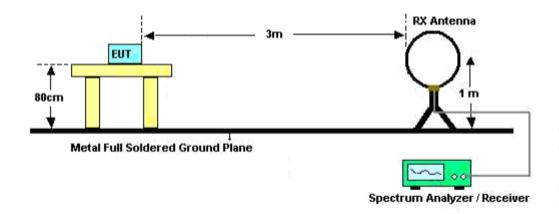


#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

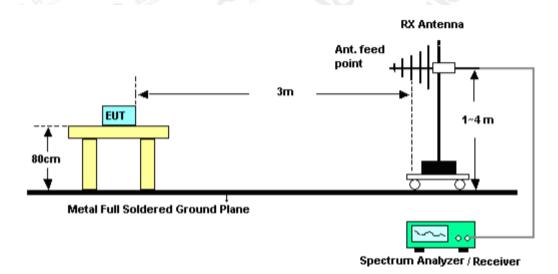





## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

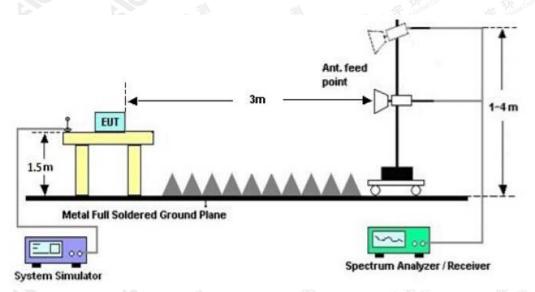

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at although the confirmed at although the confirmed at all the confirme



Page 17 of 60

#### 9.4. TEST RESULT


(Worst modulation: GFSK)

#### **RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

#### **RADIATED EMISSION BELOW 1GHz**

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

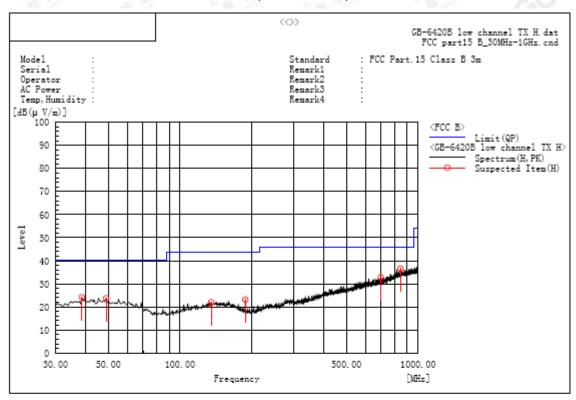

#### A. Suspected List:


1 G	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(u√/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
	38.730	Н	6.8	17.3	24.1	40.0	15.9	Pass	150.0	241.5
	48.915	Н	6.6	17.1	23.7	40.0	16.3	Pass	200.0	139.6
	135.245	Н	5.5	16.5	22.0	43.5	21.5	Pass	100.0	41.0
	188.110	Н	9.3	13.9	23.2	43.5	20.3	Pass	150.0	160.6
	697.360	Н	6.5	26.3	32.8	46.0	13.2	Pass	100.0	69.1
	843.345	Н	7.1	29.5	36.6	46.0	9.4	Pass	100.0	125.2

**RESULT: PASS** 



Page 18 of 60

#### RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

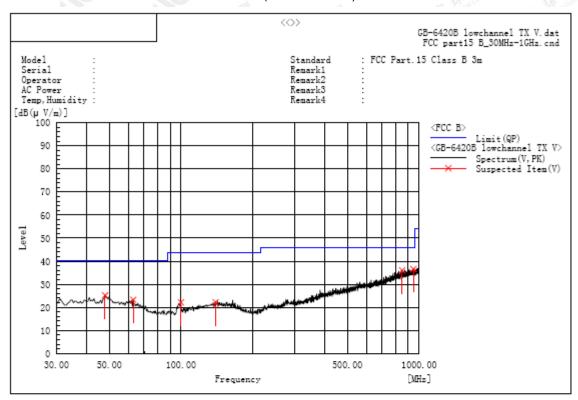

#### A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
47.945	V	8.0	17.2	25.2	40.0	14.8	Pass	100.0	335.8
62.980	V	7.4	15.9	23.3	40.0	16.7	Pass	100.0	159.2
99.840	V	8.8	13.4	22.2	43.5	21.3	Pass	150.0	250.6
139.610	V	5.6	16.6	22.2	43.5	21.3	Pass	100.0	98.0
848.680	v	6.4	29.6	36.0	46.0	10.0	Pass	200.0	74.4
946.165	V	6.0	30.6	36.6	46.0	9.4	Pass	100.0	139.8


#### **RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



#### RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

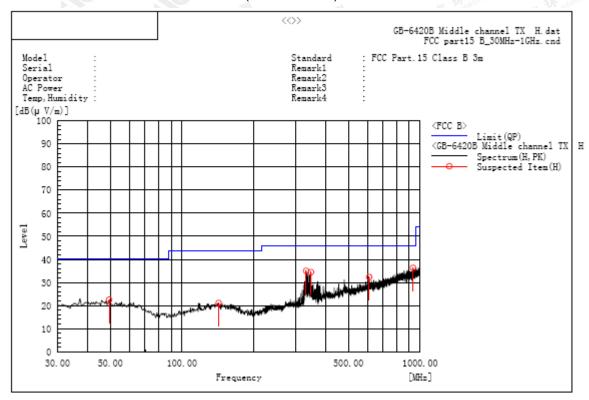


#### A. Suspected List:

Frequency MHz	Polarization Reading dB(uV)		Factor dB (1/m)	Level dB(u√/m) PK	Limit dB(u∀/m) QP	Margin dB Pass/Fail		Height cm	Angle deg
49.400	H	5.4	17.1	22.5	40.0	17.5	Pass	100.0	50.8
142.520	Н	4.5	16.6	21.1	43.5	22.4	Pass	100.0	55.7
332.155	Н	16.8	18.2	35.0	46.0	11.0	Pass	150.0	35.5
348.160	Н	15.7	18.8	34.5	46.0	11.5	Pass	100.0	74.0
611.030	Н	7.2	25.1	32.3	46.0	13.7	Pass	200.0	35.5
934.040	Н	5.8	30.5	36.3	46.0	9.7	Pass	100.0	54.7

**RESULT: PASS** 



## RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL -VERTICAL

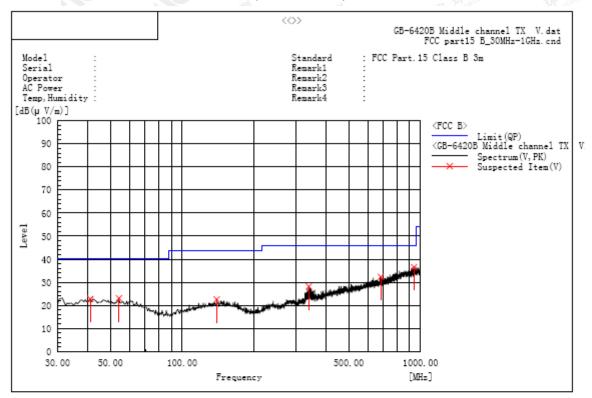

#### A. Suspected List:

Frequency MHz			Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
41.155	V	5.4	17.4	22.8	40.0	17.2	Pass	150.0	71.9
54.250	V	6.3	16.8	23.1	40.0	16.9	Pass	200.0	71.6
139.610	v	6.0	16.6	22.6	43.5	20.9	Pass	200.0	108.5
339.915	V	9.7	18.5	28.2	46.0	17.8	Pass	200.0	252.0
680.870	V	6.3	26.0	32.3	46.0	13.7	Pass	100.0	311.4
938.890	v	6.0	30.6	36.6	46.0	9.4	Pass	150.0	108.5


#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



#### RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

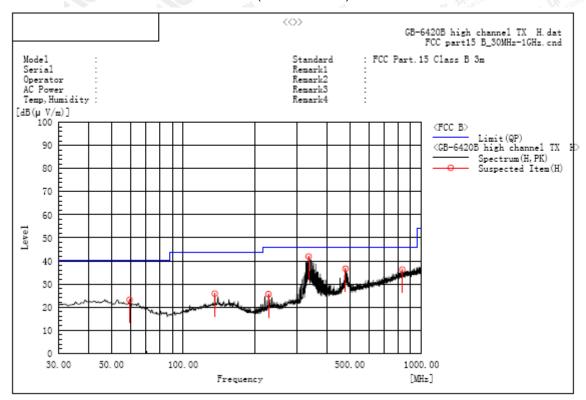

#### A. Suspected List:


	Frequency MHz	Polarization Reading dB(uV)		Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
	59.585	H	7.0	16.2	23.2	40.0	16.8	Pass	150.0	295.4
Г	135.730	Н	9.2	16.6	25.8	43.5	17.7	Pass	150.0	144.8
	227.880	Н	10.1	15.5	25.6	46.0	20.4	Pass	100.0	103.8
í	336.035	Н	23.6	18.3	41.9	46.0	4.1	Pass	200.0	248.2
311	480.080	Н	14.0	22.6	36.6	46.0	9.4	Pass	100.0	240.0
	830.250	Н	6.9	29.3	36.2	46.0	9.8	Pass	100.0	262.8

**RESULT: PASS** 



Page 22 of 60

## RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

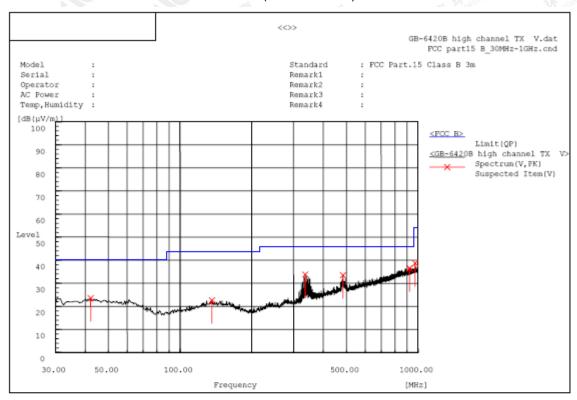

#### A. Suspected List:

	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
	42.125	v	6.1	17.4	23.5	40.0	16.5	Pass	100.0	357.4
ſ	136.215	V	6.0	16.6	22.6	43.5	20.9	Pass	100.0	173.0
ſ	336.035	v	15.5	18.3	33.8	46.0	12.2	Pass	150.0	65.3
	483.960	V	10.9	22.6	33.5	46.0	12.5	Pass	100.0	91.4
	921.430	V	6.1	30.4	36.5	46.0	9.5	Pass	100.0	332.6
	971.870	v	7.8	30.9	38.7	54.0	15.3	Pass	200.0	49.8

#### **RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.




Page 23 of 60

## **RADIATED EMISSION ABOVE 1GHz**

(Worst modulation: GFSK)

## For Fundamental

## RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

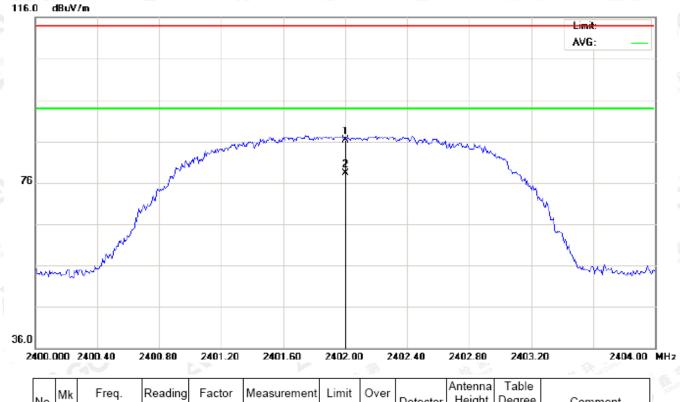


). N	Иk	Freq.	Reading	Factor	Measurement	Limit	Over		Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
		2402.000	75.99	10.32	86.31	114.00	-27.69	peak			
	*	2402.000	68.06	10.32	78.38	94.00	-15.62	AVG	100	142	
	). 	-	MHz 2402.000	MHz dBuV 2402.000 75.99	MHz dBuV dB/m 2402.000 75.99 10.32	MHz dBuV dB/m dBuV/m 2402.000 75.99 10.32 86.31	MHz dBuV dB/m dBuV/m dBuV/m 2402.000 75.99 10.32 86.31 114.00	MHz dBuV dB/m dBuV/m dB dBuV/m dB dBuV/m dB dBuV/m dB	Mk   Freq.   Reading   Factor   Measurement   Limit   Over   Detector	Mk   Freq.   Reading   Factor   Measurement   Limit   Over   Detector   Height	Mk   Freq.   Reading   Factor   Measurement   Limit   Over   Detector   Height   Degree

RESULT: PASS



Page 24 of 60

## RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

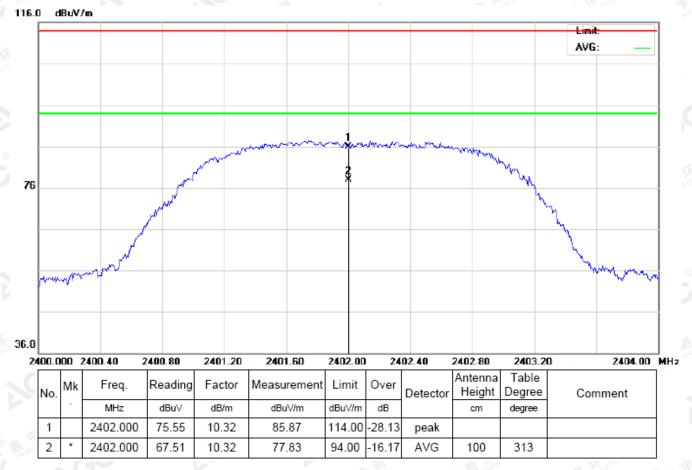


**RESULT: PASS** 



Page 25 of 60

## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

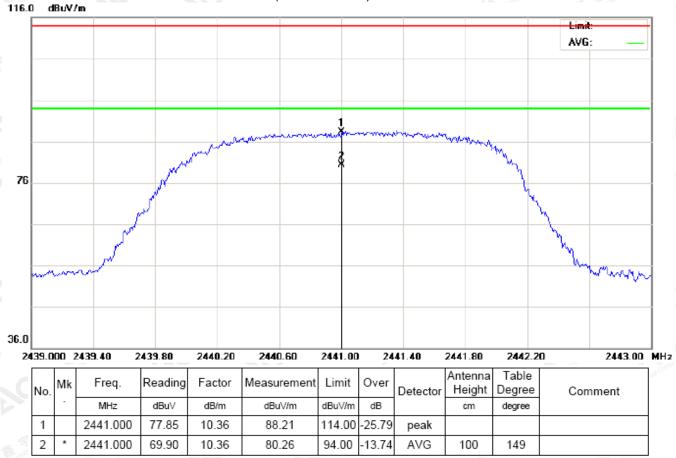


**RESULT: PASS** 

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gett.com.



Page 26 of 60

## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

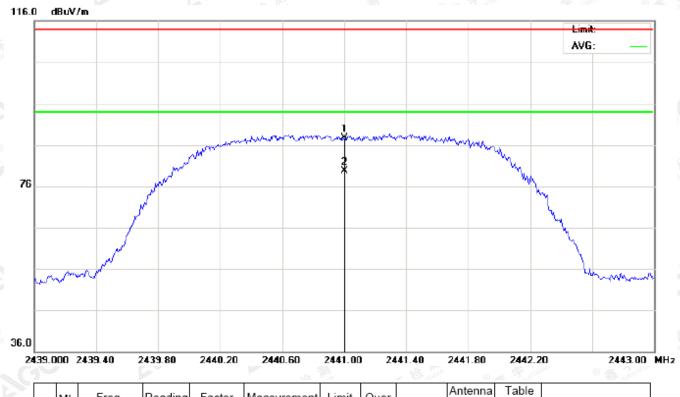

											2000	
	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
102		,	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
9	1		2441.000	77.41	10.36	87.77	114.00	-26.23	peak			
	2	*	2441.000	69.40	10.36	79.76	94.00	-14.24	AVG	100	310	


**RESULT: PASS** 

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 27 of 60

## RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

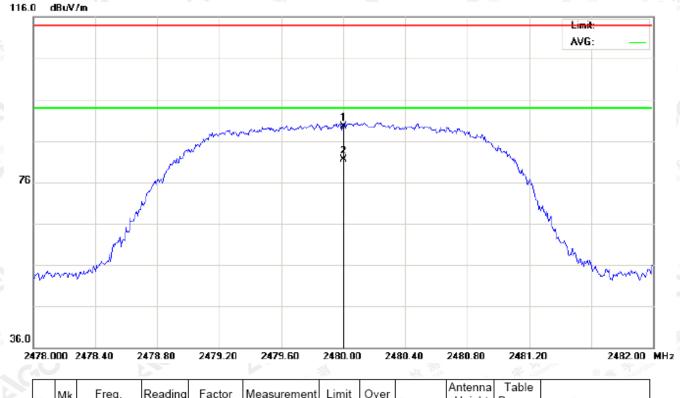

No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
a	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	79.04	10.41	89.45	114.00	-24.55	peak			
2	*	2480.000	71.12	10.41	81.53	94.00	-12.47	AVG	100	141	


**RESULT: PASS** 

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 28 of 60

## RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

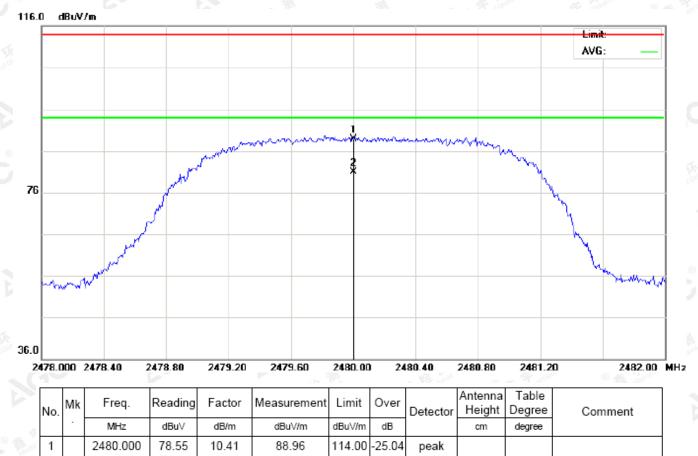

## **RESULT: PASS**

2

2480.000

70.58

10.41

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

80.99

The "Factor" value can be calculated automatically by software of measurement system.

94.00

-13.01

AVG

100

318

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 29 of 60

## Field strength of the fundamental signal

## 1Mbps Result:

#### Peak value

Frequency	Reading Level	Factor	Measurement	Limit Over		Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	75.99	10.32	86.31	114	-27.69	Horizontal	
2402	75.55	10.32	2 85.87	114	-28.13	Vertical	
2441	77.85	10.36	88.21	114	-25.79	Horizontal	
2441	77.41	10.36	87.77	114	-26.23	Vertical	
2480	79.04	10.41 89.45 114 -		-24.55	Horizontal		
2480	78.55	10.41	88.96	114	-25.04	Vertical	

#### Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	68.06	10.32	78.38	94	-15.62	Horizontal
2402	67.51	10.32	77.83 94		-16.17	Vertical
2441	69.90	10.36	80.26	94	-13.74	Horizontal
2441	69.40	10.36	79.76	94	-14.24	Vertical
2480	71.12	10.41	81.53	94	-12.47	Horizontal
2480	70.58	10.41	80.99	94	-13.01	Vertical



Page 30 of 60

## 2Mbps Result:

#### Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	75.50	10.32	85.82	114	-28.18	Horizontal
2402			VIII.	114	-28.57 -26.27	Vertical Horizontal
2441						
2441	76.94	10.36	87.30	114	-26.70	Vertical
2480	78.54	10.41	88.95	114	-25.05	Horizontal
2480	78.09	10.41	88.50	114	-25.50	Vertical

## Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	67.61	10.32	77.93	94	-16.07	Horizontal
2402	67.03	10.32	77.35	94	-16.65	Vertical
2441	69.42	10.36	79.78	94	-14.22	Horizontal
2441	69.00	10.36	79.36	94	-14.64	Vertical
2480	70.65	10.41	41 81.06 94 -		-12.94	Horizontal
2480	70.17	10.41	80.58	94	-13.42	Vertical



Page 31 of 60

## 3Mbps Result:

#### Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	75.08	10.32	85.40	114	-28.60	Horizontal
2402	402 74.65 10.32		10.32 84.97	114	-29.03	Vertical
2441	76.88	10.36	87.24	114	-26.76	Horizontal
2441	76.52	10.36	86.88	114	-27.12	Vertical
2480	78.06	10.41	88.47	114	-25.53	Horizontal
2480	77.67	10.41	88.08	114	-25.92	Vertical

## Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	67.17	10.32	77.49	94	-16.51	Horizontal
2402	66.63	10.32	76.95		-17.05	Vertical
2441	68.96	10.36	79.32	94	-14.68	Horizontal
2441	68.52	10.36	78.88	94	-15.12	Vertical
2480	70.16	10.41	80.57	80.57 94 -13.43		Horizontal
2480	69.72	10.41	80.13	94	-13.87	Vertical




Page 32 of 60

## (Worst modulation: GFSK)

#### **For Harmonics**

#### RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

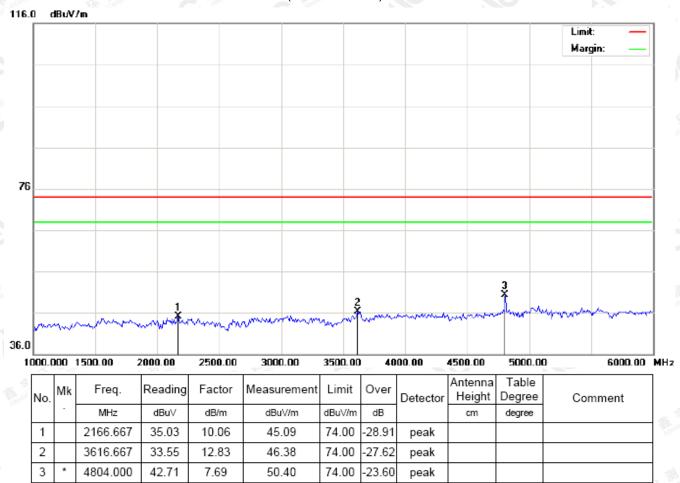


**RESULT: PASS** 

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



Page 33 of 60

# RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

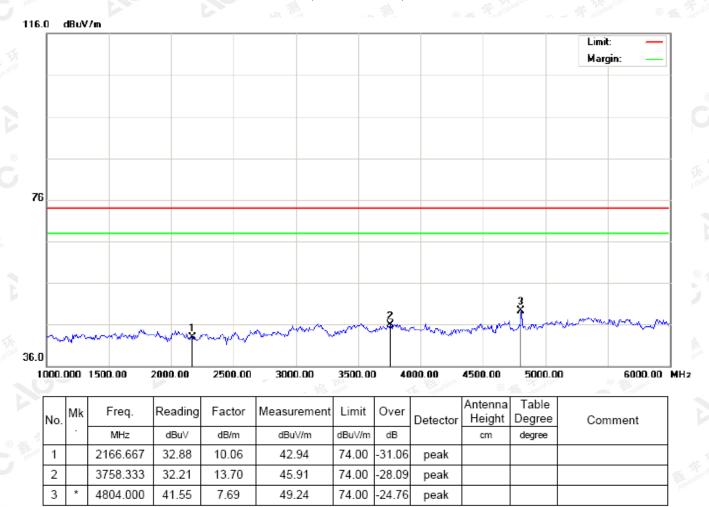


**RESULT: PASS** 

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 34 of 60

## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

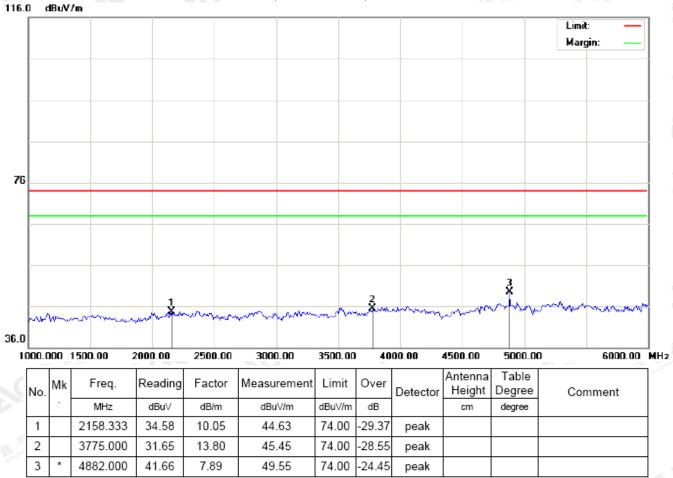


**RESULT: PASS** 

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 35 of 60

## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

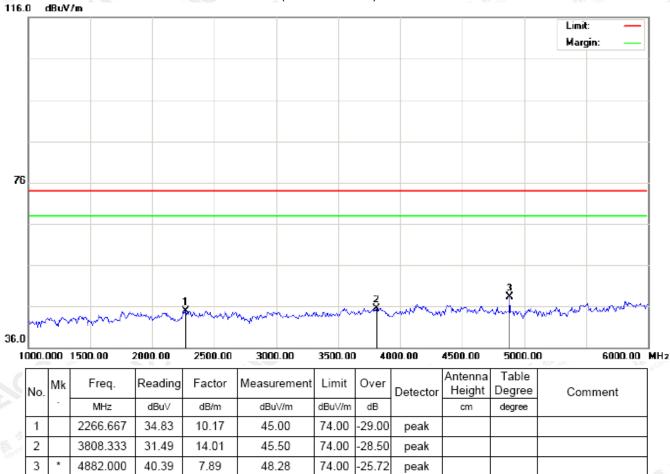


**RESULT: PASS** 

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 36 of 60

## RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

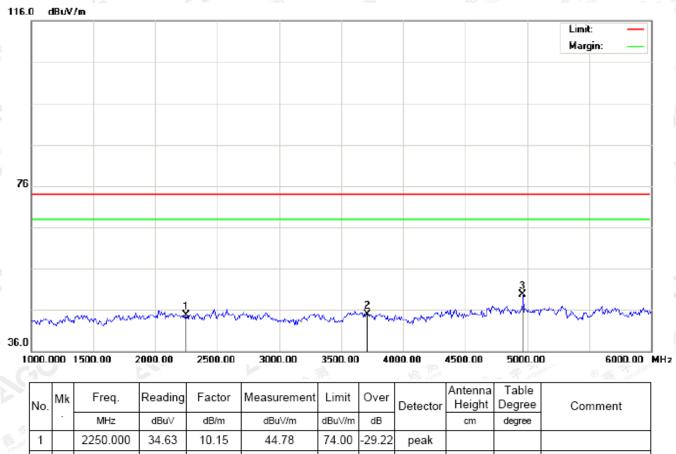


	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
8		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
3	1		2250.000	34.63	10.15	44.78	74.00	-29.22	peak			
	2		3708.333	31.59	13.39	44.98	74.00	-29.02	peak			
	3	*	4960.000	41.60	8.09	49.69	74.00	-24.31	peak			

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (C), this document teannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gert.com.



Page 37 of 60

# RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

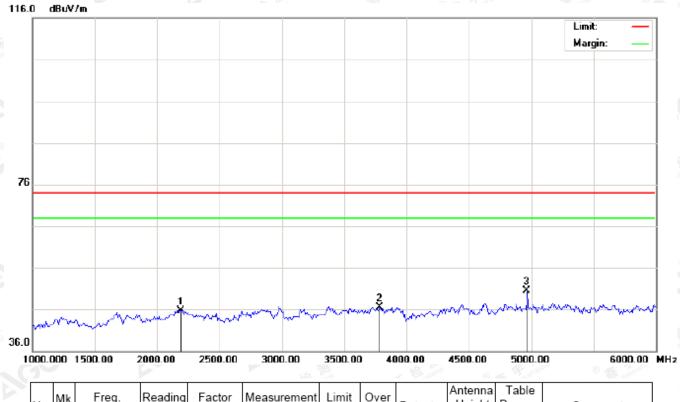

lo.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over				Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2191.667	35.67	10.09	45.76	74.00	-28.24	peak			
2		3783.333	32.63	13.86	46.49	74.00	-27.51	peak			
3	*	4960.000	42.41	8.09	50.50	74.00	-23.50	peak			
	1 2	1 2	MHz 1 2191.667 2 3783.333	MHz dBuV 1 2191.667 35.67 2 3783.333 32.63	10. MHz dBu√ dB/m 1 2191.667 35.67 10.09 2 3783.333 32.63 13.86	MHz dBuV dB/m dBuV/m 1 2191.667 35.67 10.09 45.76 2 3783.333 32.63 13.86 46.49	1 2191.667 35.67 10.09 45.76 74.00 2 3783.333 32.63 13.86 46.49 74.00	MHz dBuV dB/m dBuV/m dBuV/m dB 1 2191.667 35.67 10.09 45.76 74.00 -28.24 2 3783.333 32.63 13.86 46.49 74.00 -27.51	Mk         Freq.         Reading         Factor         Measurement         Limit         Over         Detector           MHz         dBuV         dBm         dBuV/m         dBuV/m         dB         Detector           1         2191.667         35.67         10.09         45.76         74.00         -28.24         peak           2         3783.333         32.63         13.86         46.49         74.00         -27.51         peak	No.   Mk   Freq.   Reading   Factor   Measurement   Limit   Over   Detector   Height	No.   Mk   Freq.   Reading   Factor   Measurement   Limit   Over   Detector   Height   Degree

## **RESULT: PASS**

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 38 of 60

## 10. BAND EDGE EMISSION


## 10.1. MEASUREMENT PROCEDURE

- The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

	Start frequenc	y(MHz)		Stop frequency(MHz)				
	2200	Kimplence	The Committee	® A station of G	2405	100		
(S) ### (1)	2478	3lobal C	Allestation of Glob	-,0 "	2500			

#### **10.2 TEST SETUP**

## RADIATED EMISSION TEST SETUP

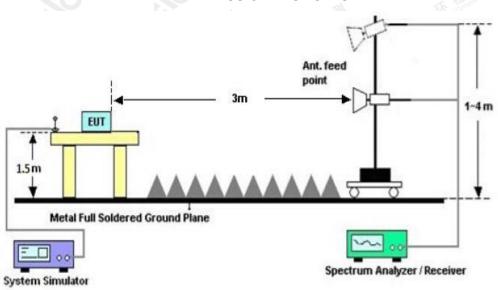

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 39 of 60

# **10.3 RADIATED TEST RESULT**

(Worst modulation: GFSK)

## TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		2349.308	32.55	10.26	42.81	74.00	-31.19	peak			
2		2390.000	33.00	10.31	43.31	74.00	-30.69	peak			
3		2400.000	41.97	10.32	52.29	74.00	-21.71	peak			
4	*	2402.000	76.05	10.32	86.37	74.00	12.37	peak			
5	Х	2402.000	68.02	10.32	78.34	74.00	4.34	AVG	100	144	

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 40 of 60

## TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical




No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
<u> </u>	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	]
1		2354.775	33.51	10.27	43.78	74.00	-30.22	peak			
2		2390.000	33.71	10.31	44.02	74.00	-29.98	peak			
3		2400.000	42.56	10.32	52.88	74.00	-21.12	peak			
4	*	2402.000	75.59	10.32	85.91	74.00	11.91	peak			
5	Х	2402.000	67.46	10.32	77.78	74.00	3.78	AVG	100	315	

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 41 of 60

## TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

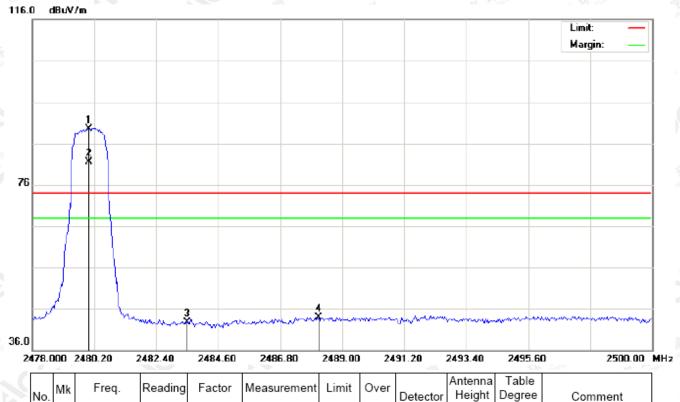


No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	79.08	10.41	89.49	74.00	15.49	peak			
2	Х	2480.000	71.09	10.41	81.50	74.00	7.50	AVG	100	145	
3		2483.500	32.19	10.41	42.60	74.00	-31.40	peak			
4		2488.157	33.49	10.42	43.91	74.00	-30.09	peak			

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 42 of 60

## TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

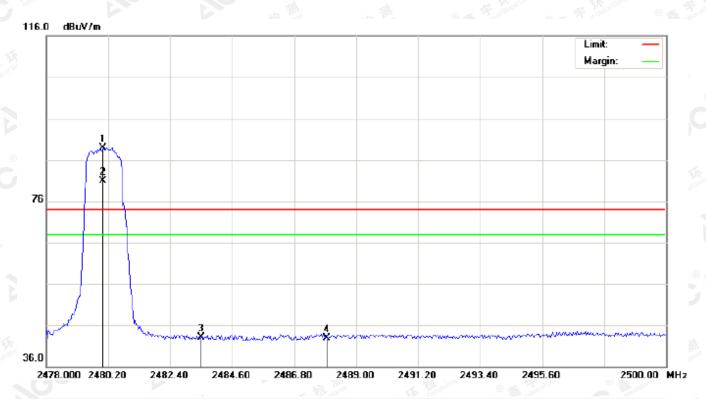

No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
ă	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	78.58	10.41	88.99	74.00	14.99	peak			
2	Х	2480.000	70.53	10.41	80.94	74.00	6.94	AVG	100	317	
3		2483.500	32.76	10.41	43.17	74.00	-30.83	peak			
4		2487.973	32.56	10.42	42.98	74.00	-31.02	peak			

### **RESULT: PASS**

**Note**: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Page 43 of 60

## 11. 20DB BANDWIDTH

## 11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ 3RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

## 11.2. TEST SET-UP

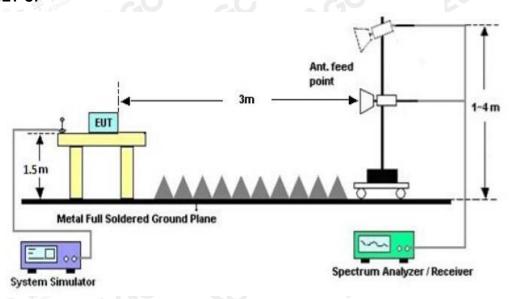

## 11.3. LIMITS AND MEASUREMENT RESULTS

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT										
		Measurement Result								
Applicable Limits										
		99%OBW (MHz)	-20dB BW(MHz)	Result						
The state of the s	Low Channel	0.937	1.102	PASS						
N/A	Middle Channel	0.944	1.112	PASS						
100	High Channel	0.921	1.070	PASS						


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.




### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

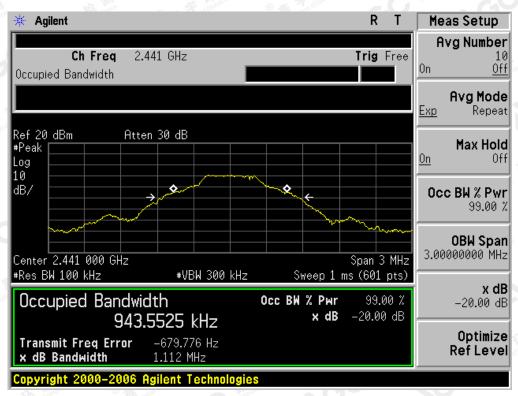


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.






#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

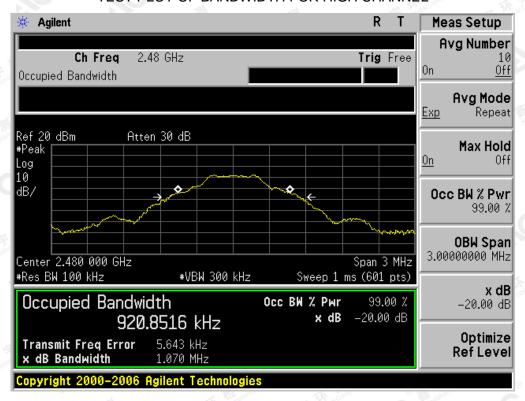


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.





Alle			~ N	" "Co""				
BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT								
	Measurement Result							
Applicable Limits								
		99%OBW (MHz)	-20dB BW(MHz)	Result				
The plants of the plants	Low Channel	1.216	1.370	PASS				
N/A	Middle Channel	1.206	1.360	PASS				
	High Channel	1.213	1.369	PASS				


## TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

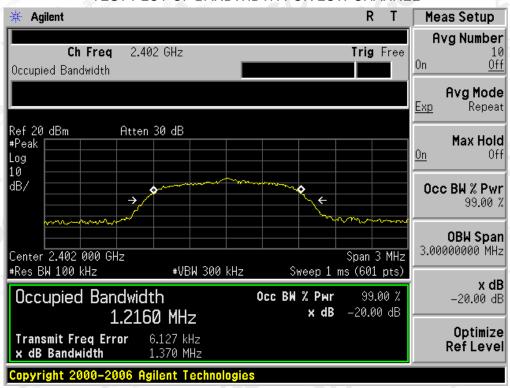


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.




#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

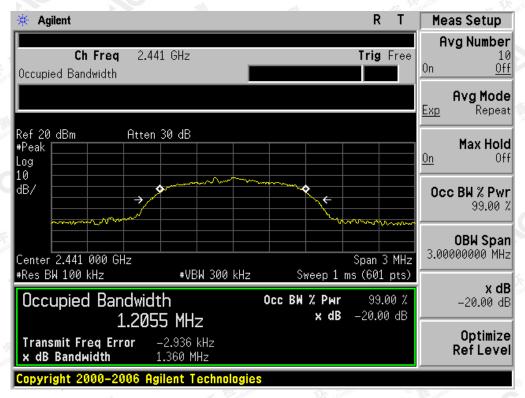

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

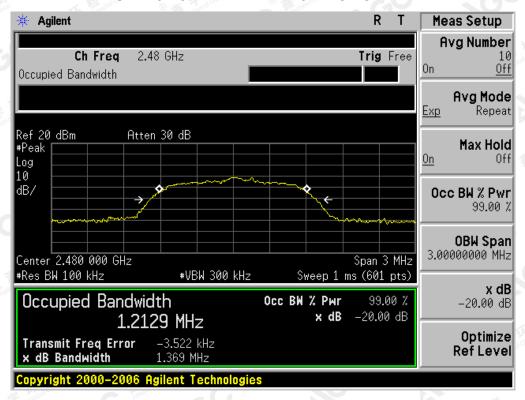


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.





BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT								
	Measurement Result							
Applicable Limits		Daguit						
		99%OBW (MHz)	-20dB BW(MHz)	Result				
The plants of the plants	Low Channel	1.217	1.373	PASS				
N/A	Middle Channel	1.199	1.361	PASS				
AGC "	High Channel	1.204	1.371	PASS				


## TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

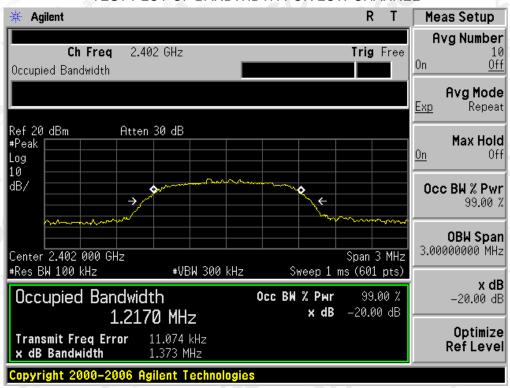


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

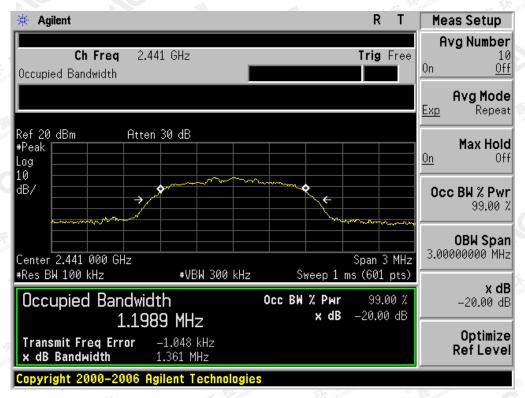

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

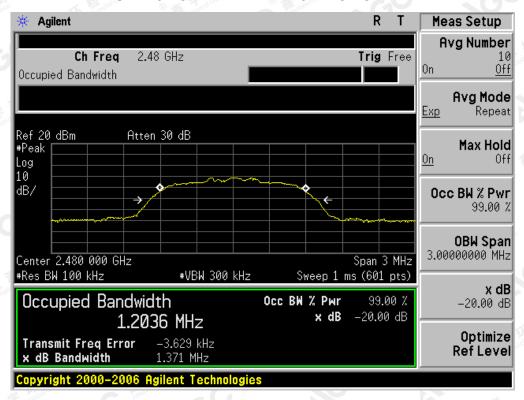

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



age 50 of 60

## 12. FCC LINE CONDUCTED EMISSION TEST


## 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage							
Frequency	Q.P.( dBuV)	Average( dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

## Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

## 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

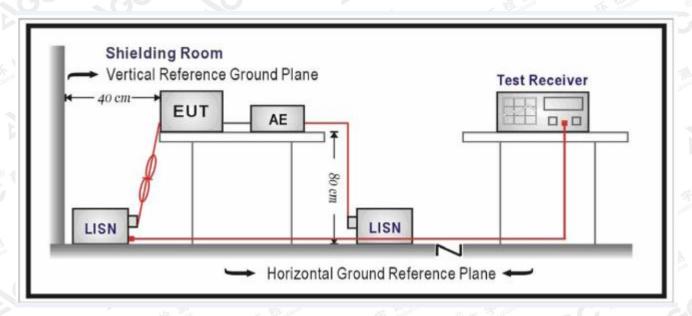

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 51 of 60

### 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- The test data of the worst case condition(s) was reported on the Summary Data page.

### 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Note: The BT function of EUT isn't work when charging.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a trp://www.ago.go.tt.com.






# APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP





The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.









The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



# **APPENDIX B: PHOTOGRAPHS OF EUT**

TOTAL VIEW OF EUT



TOP VIEW OF EUT



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gott.com.

Attestation of Global Compliance



## **BOTTOM VIEW OF EUT**



FRONT VIEW OF EUT



The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc.goalt.com.

Attestation of Global Compliance



## **BACK VIEW OF EUT**



LEFT VIEW OF EUT



The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.

Attestation of Global Compliance



# RIGHT VIEW OF EUT



VIEW OF EUT (PORT)



The results shows if this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.cett.com.



## **OPEN VIEW OF EUT**



VIEW OF BATTERY




The results spowd this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gent.com.


Attestation of Global Compliance



# **INTERNAL VIEW OF EUT-1**

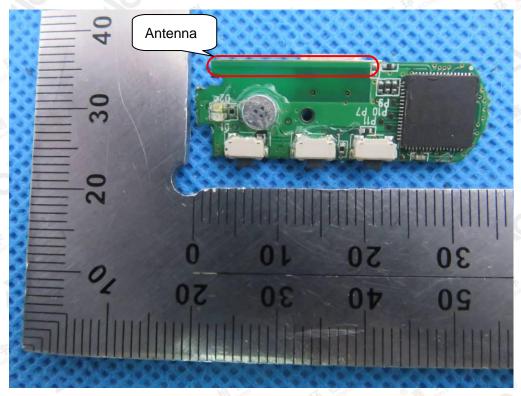

**INTERNAL VIEW OF EUT-2** 

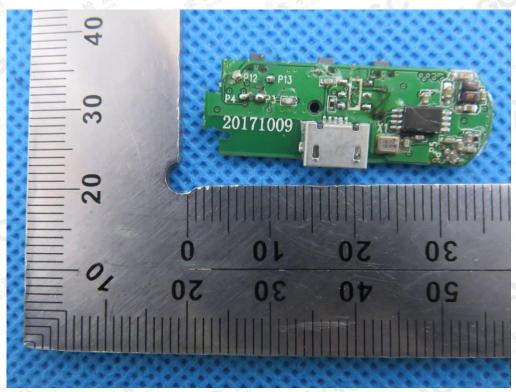

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a state of the sample (s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a state of the sample (s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a state of the sample (s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission.

Attestation of Global Compliance





# **INTERNAL VIEW OF EUT-3**



----END OF REPORT----

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance