


Test Report No.10039979 001

Appendix 1: IUT Photos

(File: 10039979Appendix1)


Product: Combo module

Type Designation: WBCN603MH

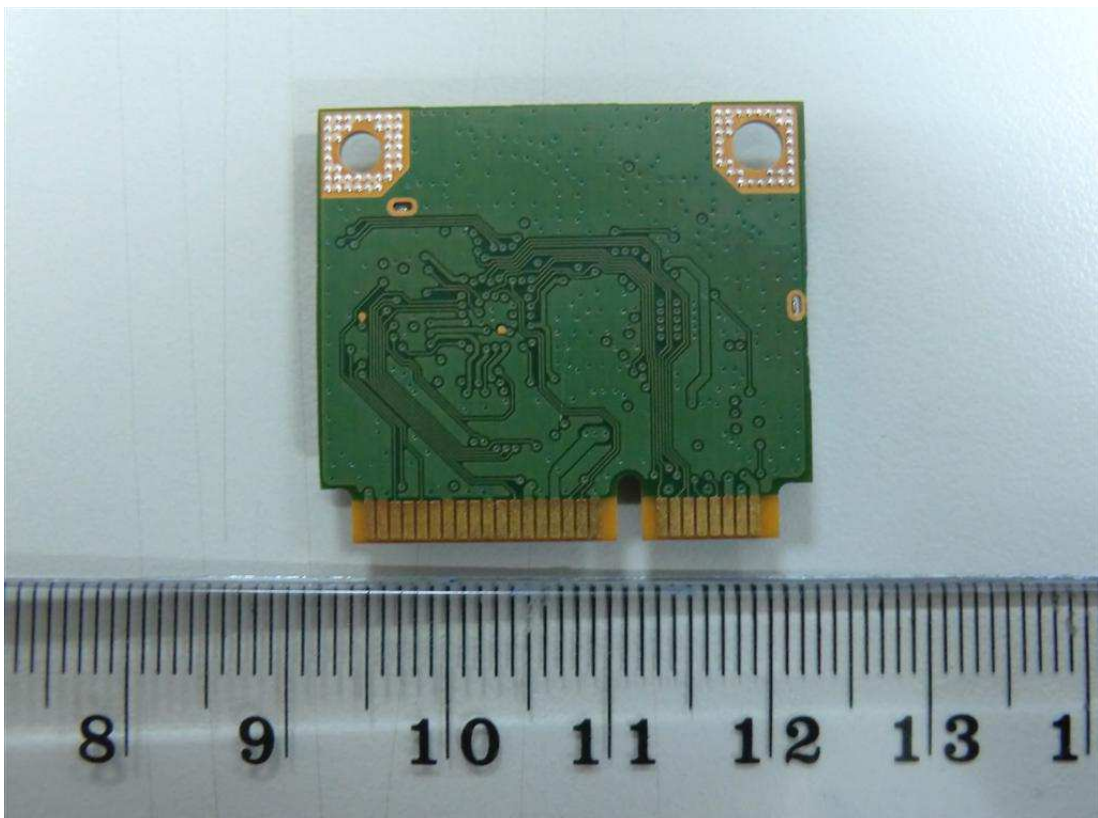


Product: Combo module

Type Designation: WBCN603MH

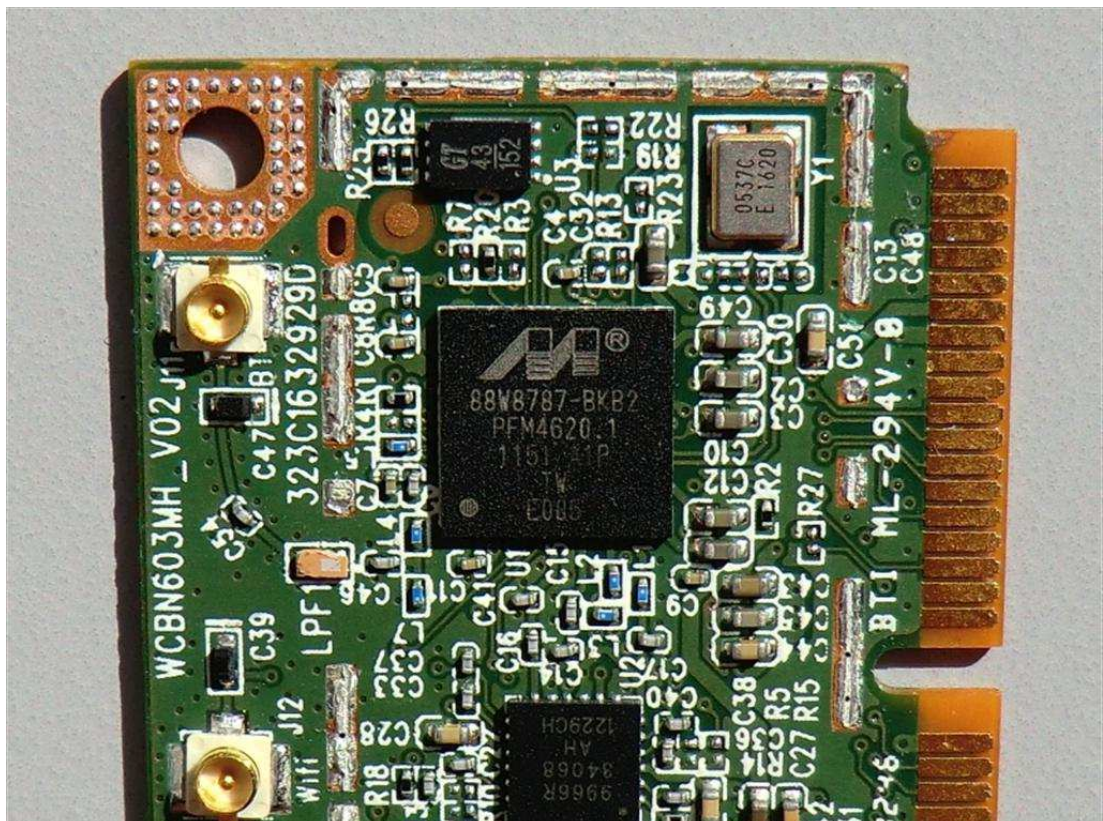

Product: Combo module


Type Designation: WBCN603MH

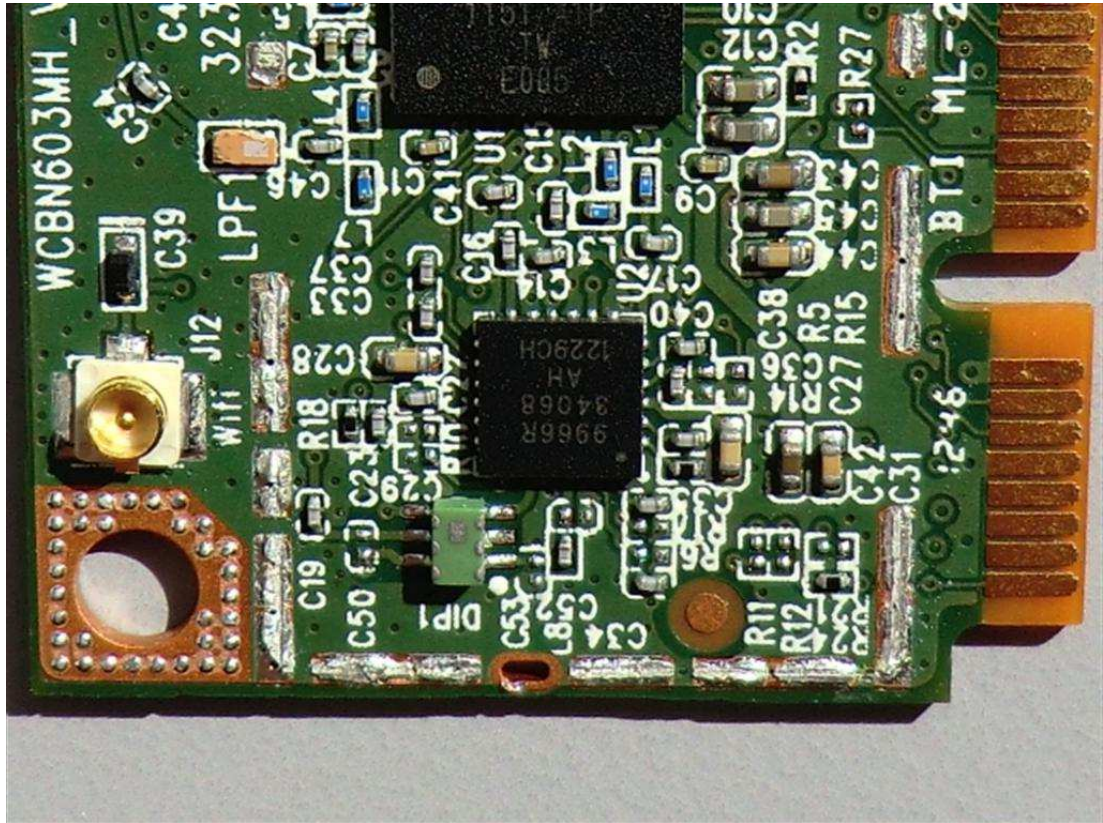

Test Report No.10039979 001


Appendix 2: Test Result of Radiated Emissions and
Radiated Band Edge

(File: 10039979Appendix2)

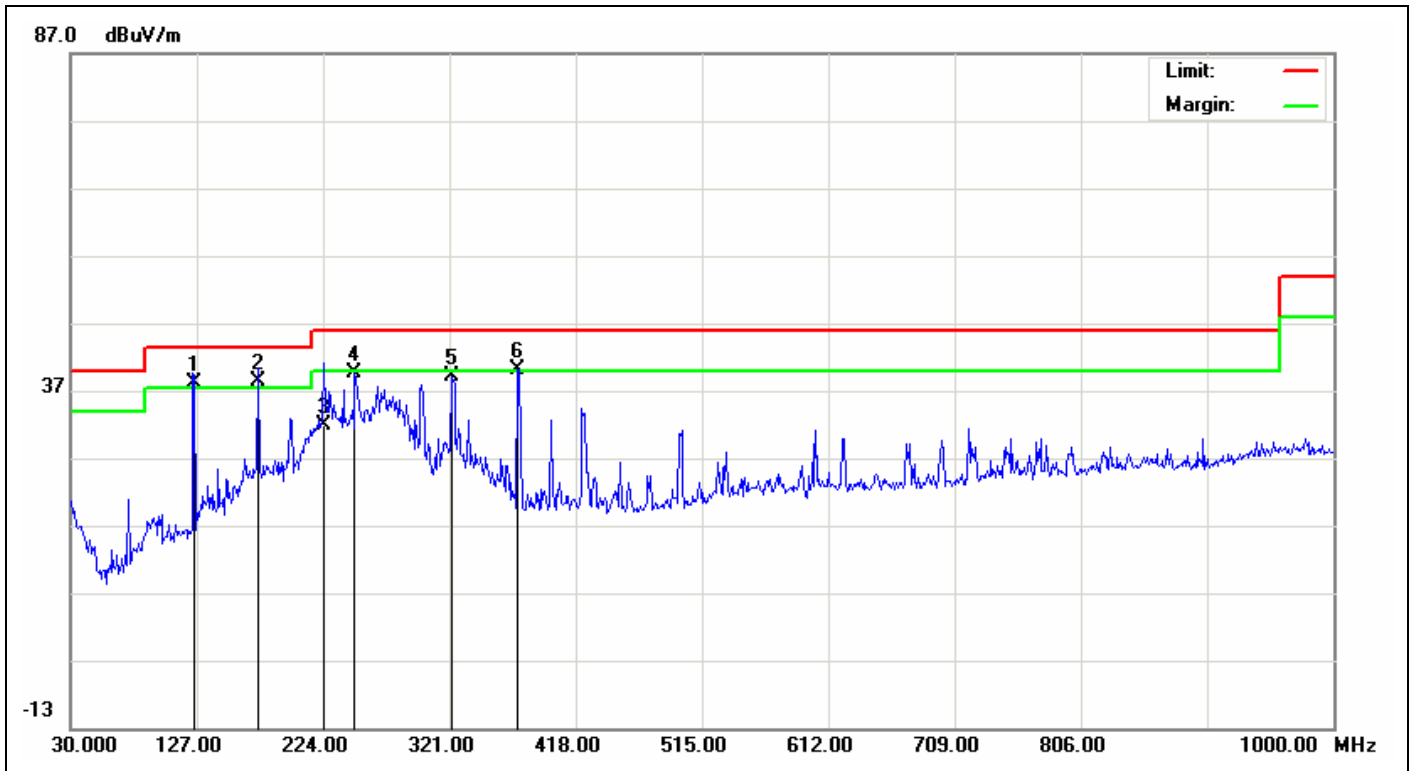


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2012/12/31 AM 09:41:52
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:			
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	124.9100	-13.88	52.12	38.24	43.50	-5.26	QP	200	149	
2	174.2400	-15.83	54.22	38.39	43.50	-5.11	QP	200	335	
3	224.8600	-15.18	47.06	31.88	46.00	-14.12	QP	100	0	
4	248.2500	-13.06	52.69	39.63	46.00	-6.37	QP	100	161	
5	322.9399	-10.78	49.85	39.07	46.00	-6.93	QP	100	191	
6	373.3798	-9.59	49.70	40.11	46.00	-5.89	QP	100	311	

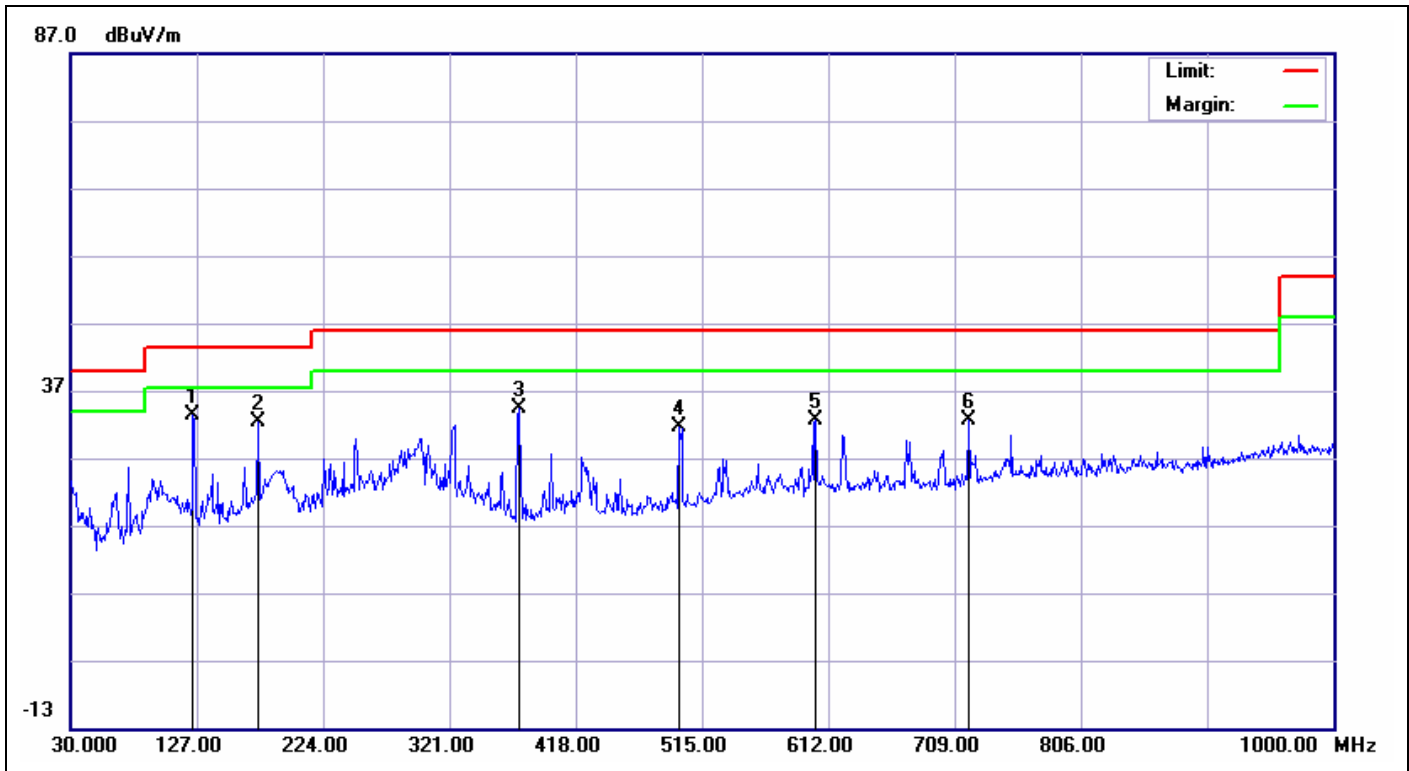

Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2012/12/31 AM 09:46:51
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:			
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	124.0900	-13.91	47.25	33.34	43.50	-10.16	QP	200	84	
2	174.5300	-15.83	48.10	32.27	43.50	-11.23	QP	200	241	
3	374.3500	-9.57	43.86	34.29	46.00	-11.71	QP	100	219	
4	497.5400	-7.66	39.32	31.66	46.00	-14.34	QP	100	242	
5	602.3000	-5.84	38.54	32.70	46.00	-13.30	QP	100	106	
6	719.6700	-4.30	36.93	32.63	46.00	-13.37	QP	100	186	

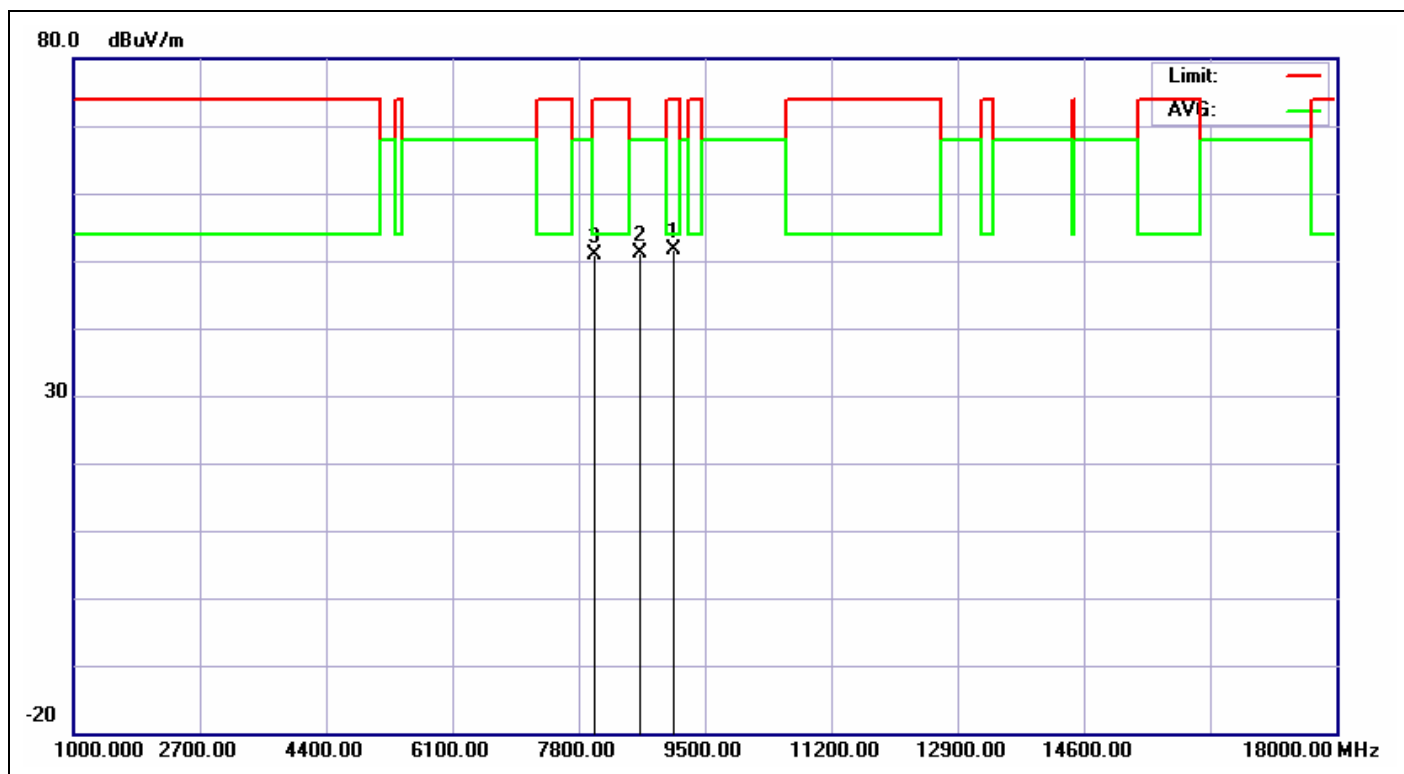

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2013/1/3 AM 11:42:47

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A20 CH5180


Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9083.000	7.44	44.15	51.59	74.00	-22.41	peak	100	0	
2	8620.000	6.80	44.27	51.07	68.00	-16.93	peak	100	0	
3	8022.000	6.45	44.52	50.97	68.00	-17.03	peak	100	0	

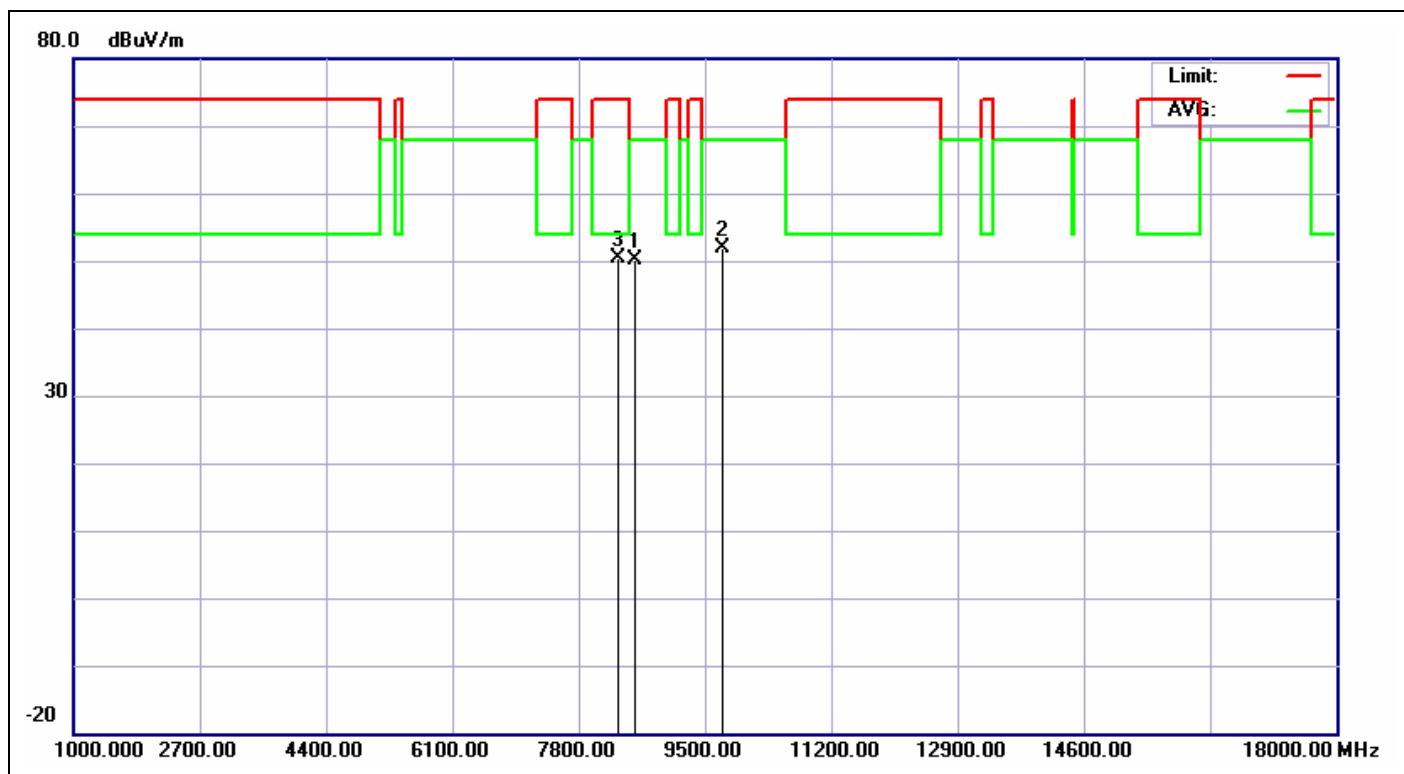


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 AM 11:44:39
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8566.000	6.73	43.41	50.14	68.00	-17.86	peak	100	360	
2	9735.000	7.28	44.62	51.90	68.00	-16.10	peak	100	360	
3	8330.000	6.56	43.75	50.31	74.00	-23.69	peak	100	360	

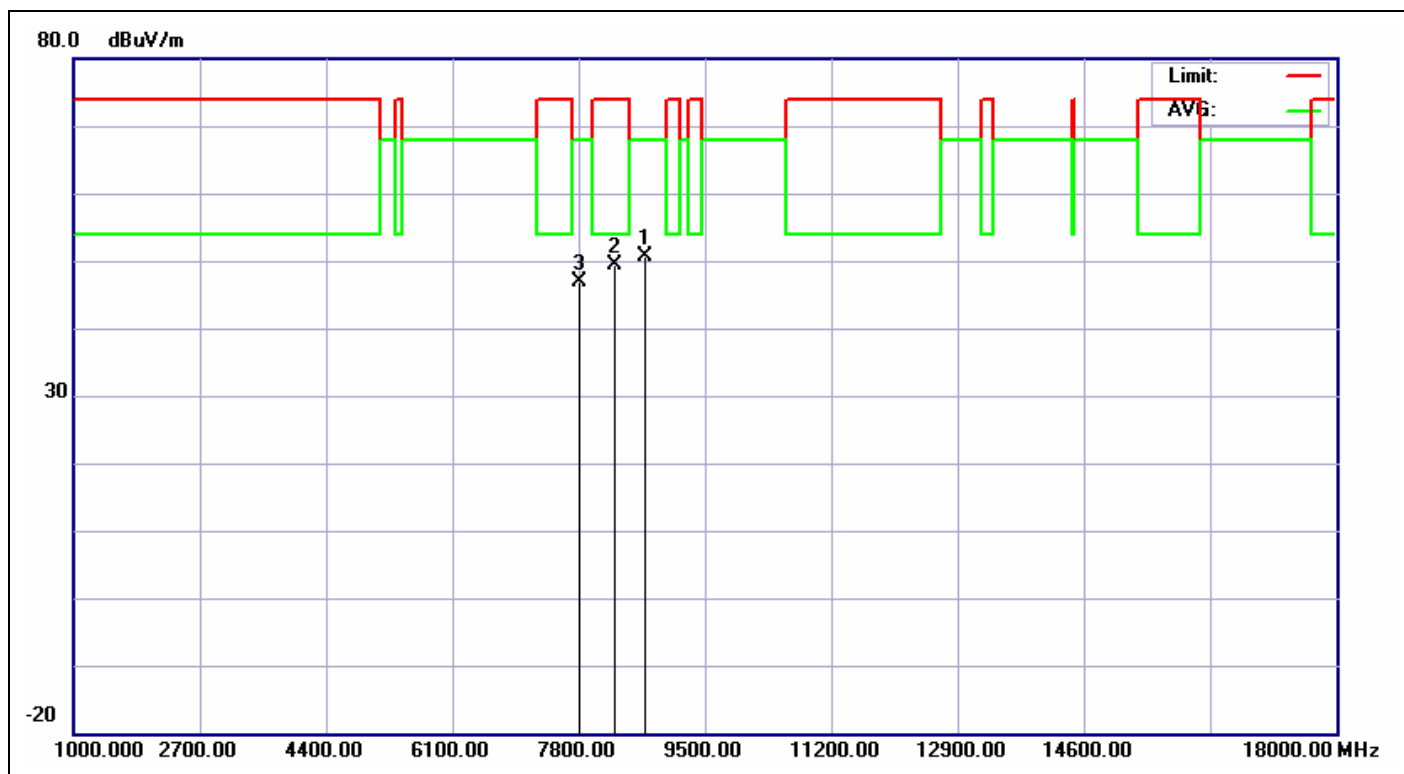


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 AM 11:47:00
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8684.000	6.88	43.64	50.52	68.00	-17.48	peak	100	0	
2	8276.000	6.54	42.87	49.41	74.00	-24.59	peak	100	0	
3	7814.000	6.47	40.47	46.94	68.00	-21.06	peak	100	0	

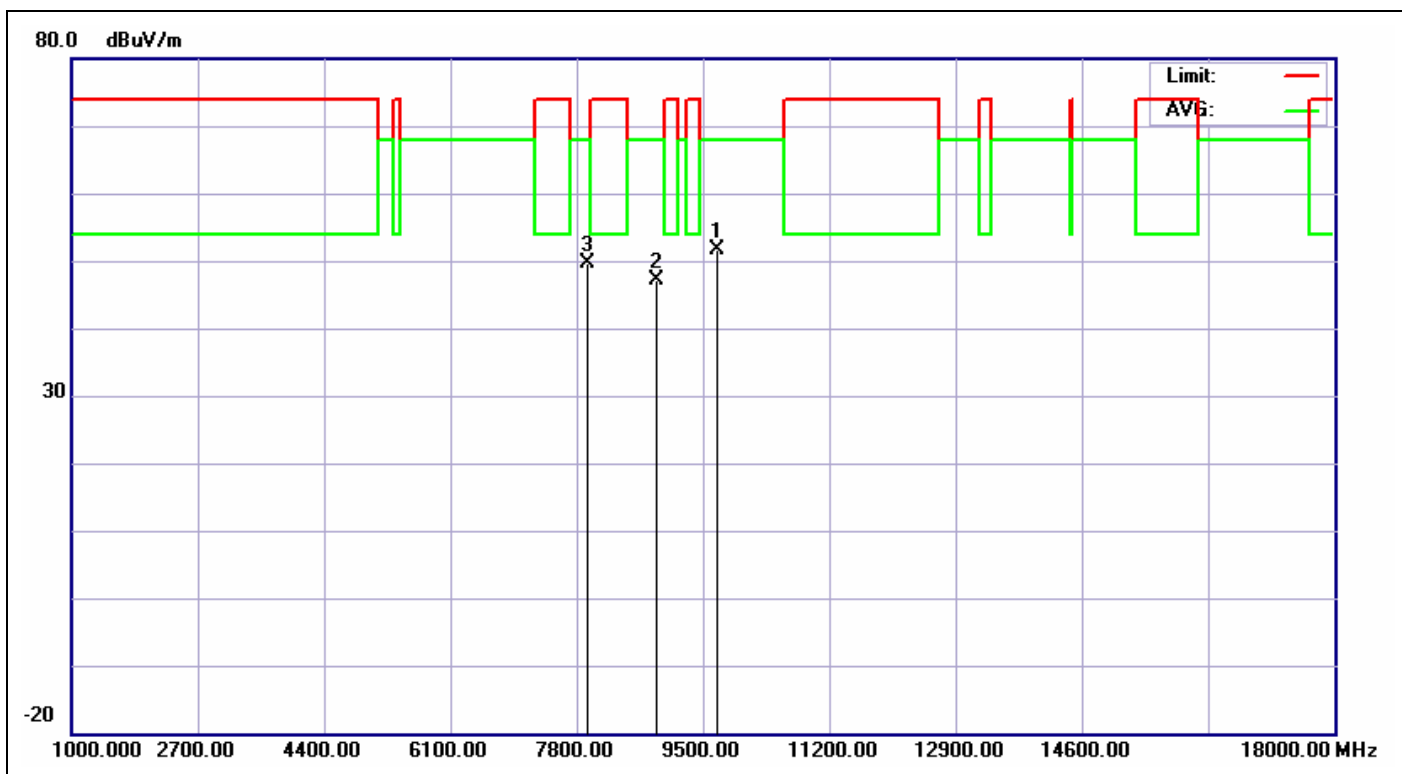


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 AM 11:49:31
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9690.000	7.40	44.17	51.57	68.00	-16.43	peak	100	360	
2	8874.000	7.17	40.05	47.22	68.00	-20.78	peak	100	360	
3	7950.000	6.45	43.16	49.61	68.00	-18.39	peak	100	360	

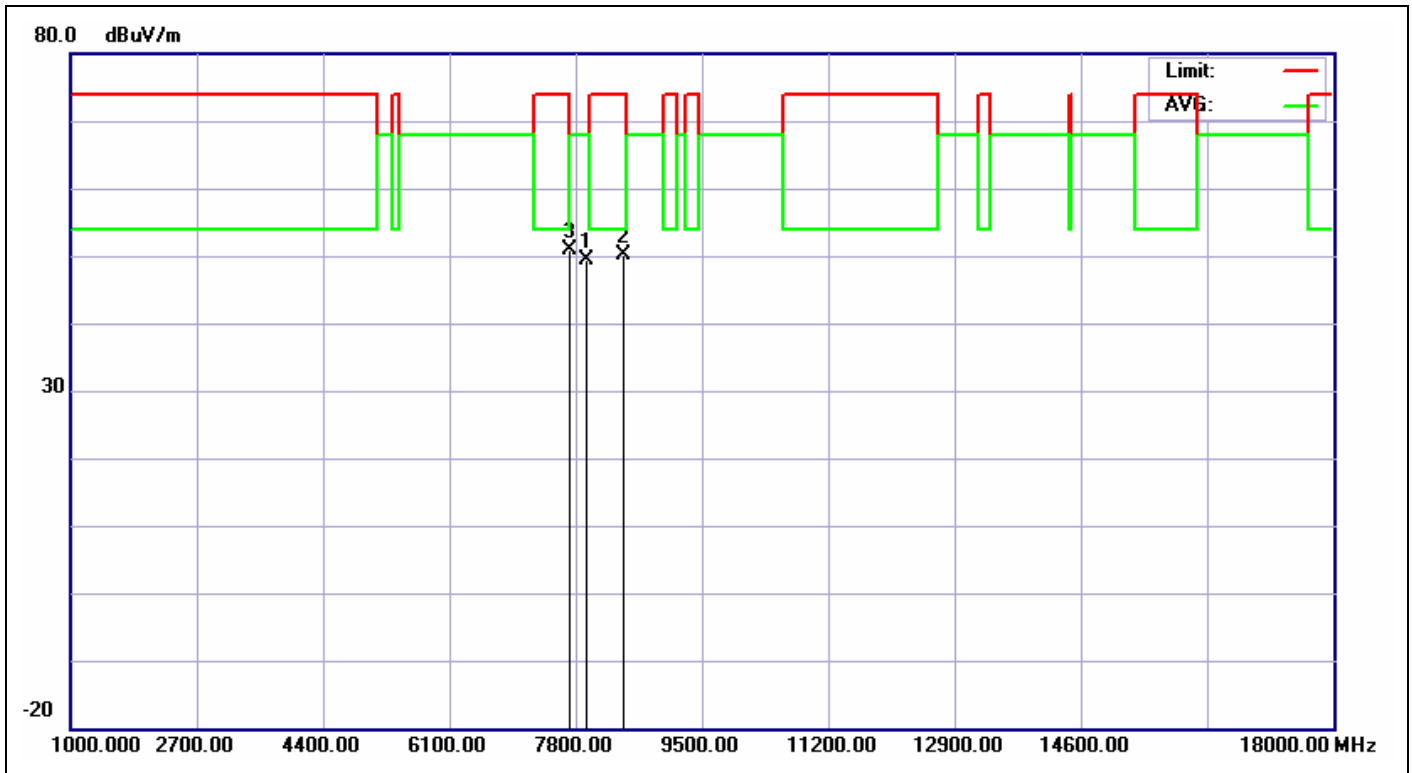


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 12:03:38
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5240		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7950.000	6.45	42.86	49.31	68.00	-18.69	peak	100	0	
2	8439.000	6.60	43.44	50.04	74.00	-23.96	peak	100	0	
3	7732.000	6.47	44.42	50.89	74.00	-23.11	peak	100	0	

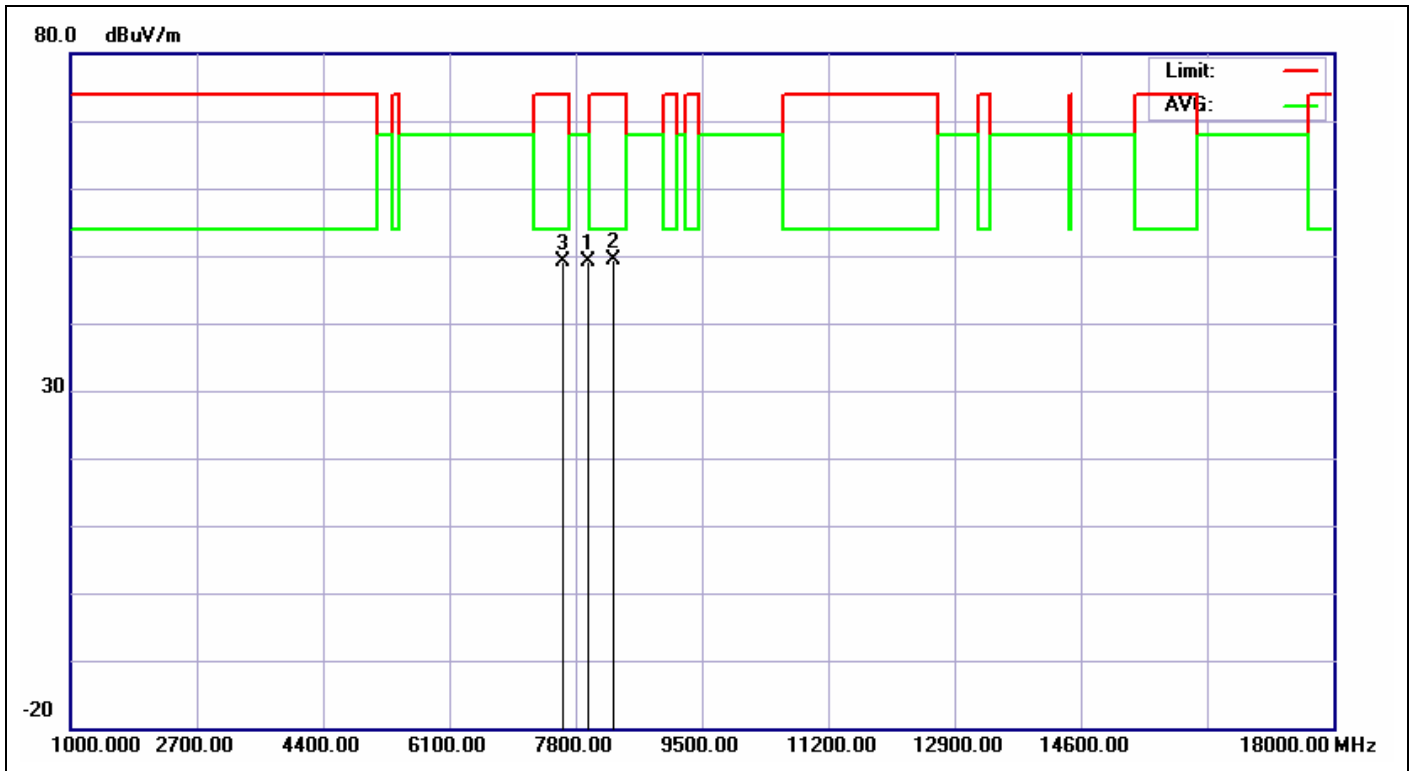

Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 12:05:52
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5240		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7977.000	6.44	42.70	49.14	68.00	-18.86	peak	100	360	
2	8303.000	6.55	42.76	49.31	74.00	-24.69	peak	100	360	
3	7623.000	6.49	42.65	49.14	74.00	-24.86	peak	100	360	

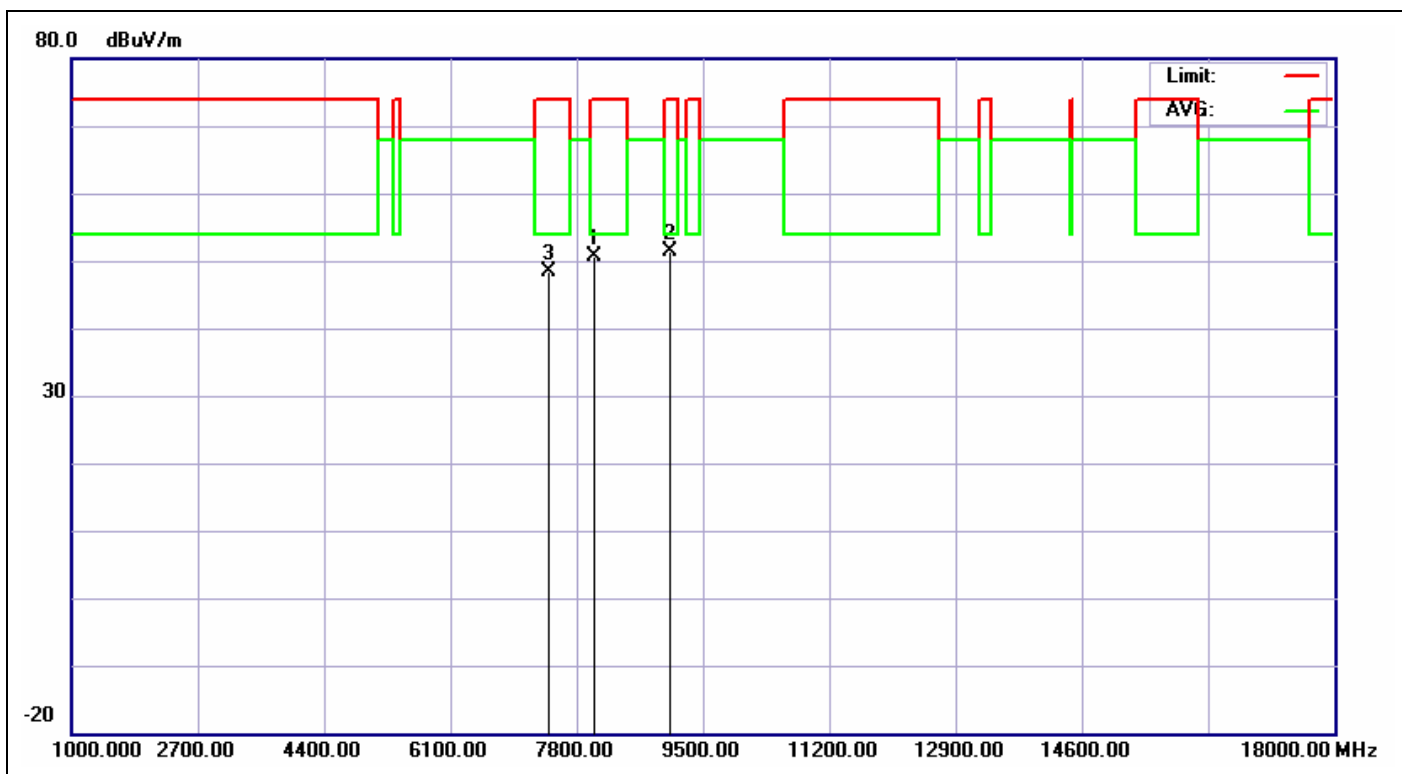

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2013/1/3 PM 12:08:04

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A40 CH5190


Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8031.000	6.45	44.15	50.60	74.00	-23.40	peak	100	0	
2	9065.000	7.43	43.84	51.27	74.00	-22.73	peak	100	0	
3	7433.000	6.25	42.19	48.44	74.00	-25.56	peak	100	0	

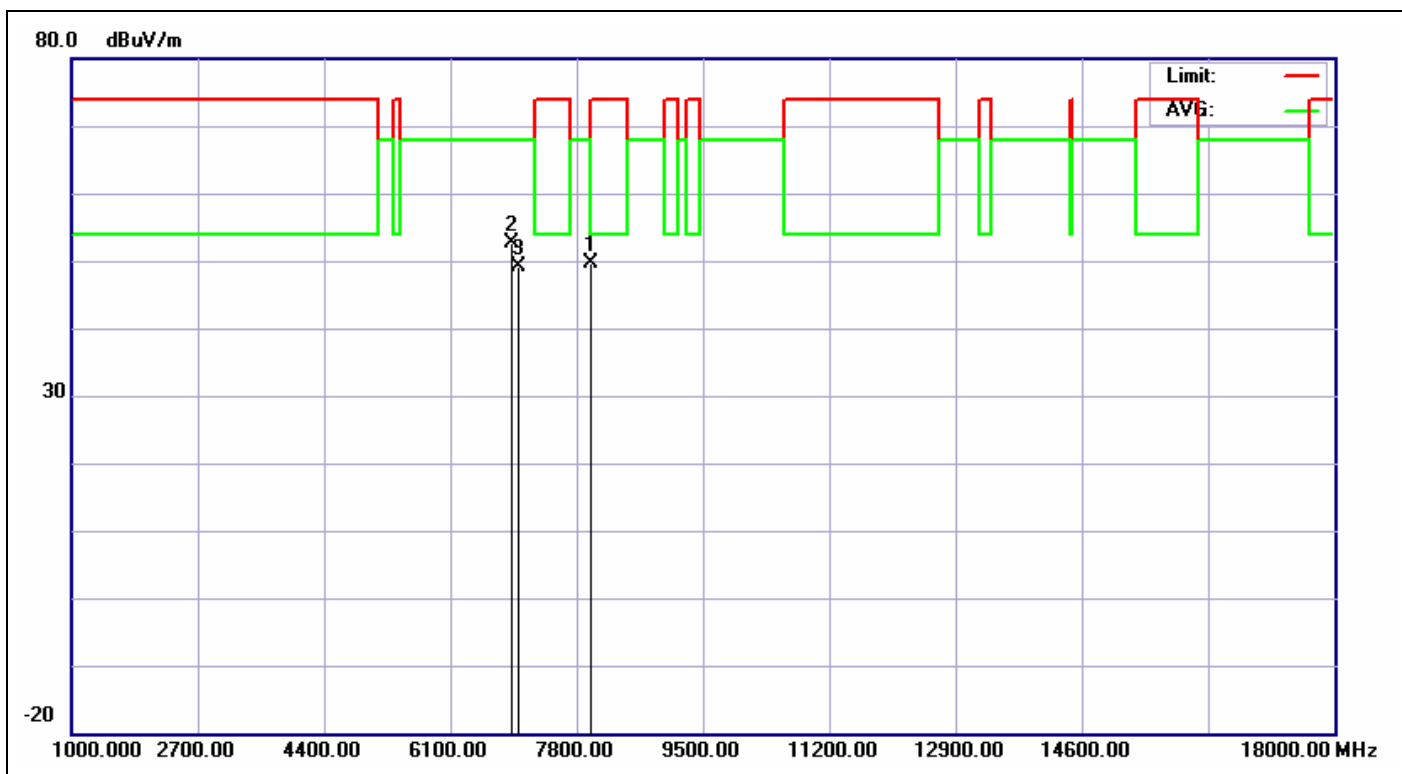


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 12:09:56
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5190		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8004.000	6.45	43.28	49.73	68.00	-18.27	peak	100	360	
2	6916.000	4.40	48.31	52.71	68.00	-15.29	peak	100	360	
3	7025.000	4.60	44.54	49.14	68.00	-18.86	peak	100	360	

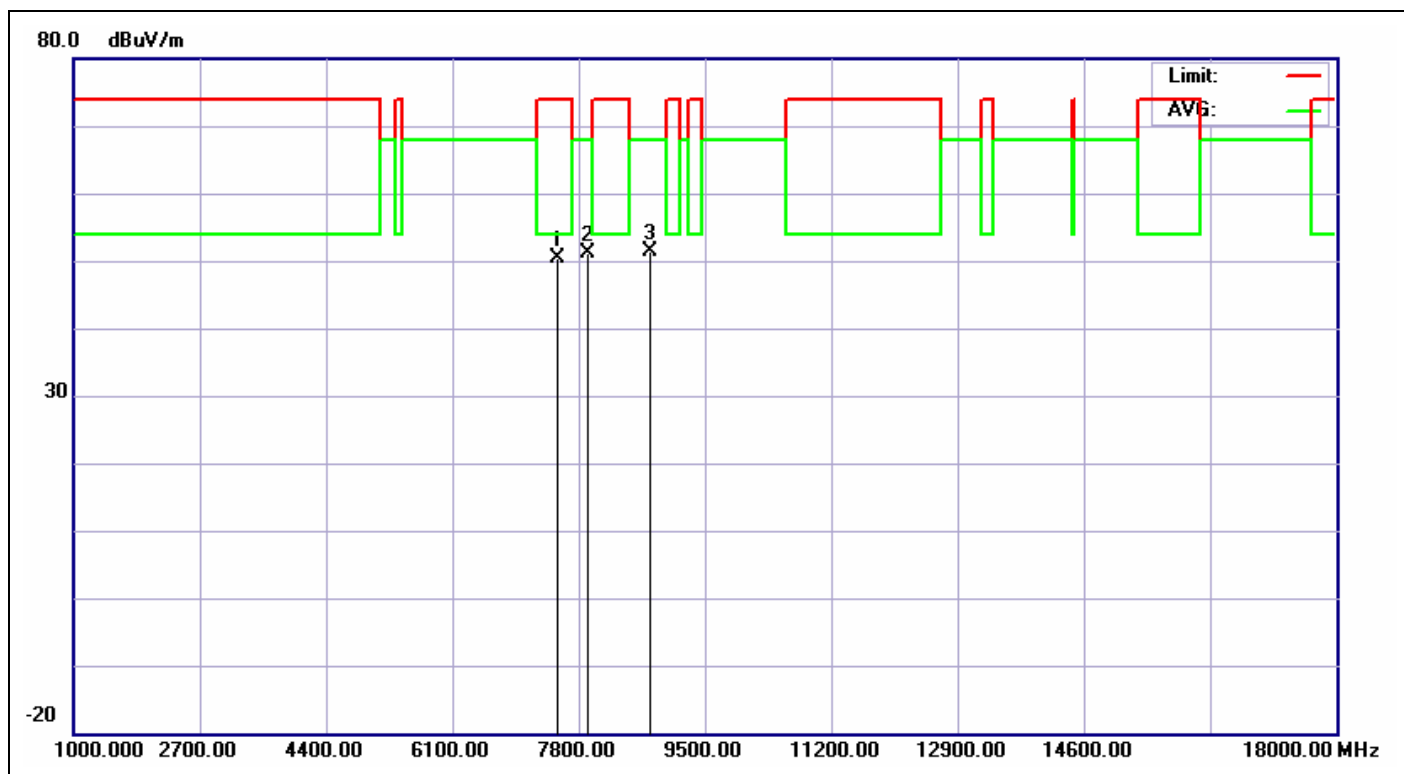


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 12:12:15
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5230		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7514.000	6.51	43.75	50.26	74.00	-23.74	peak	100	0	
2	7922.000	6.46	44.61	51.07	68.00	-16.93	peak	100	0	
3	8766.000	7.02	44.28	51.30	68.00	-16.70	peak	100	0	

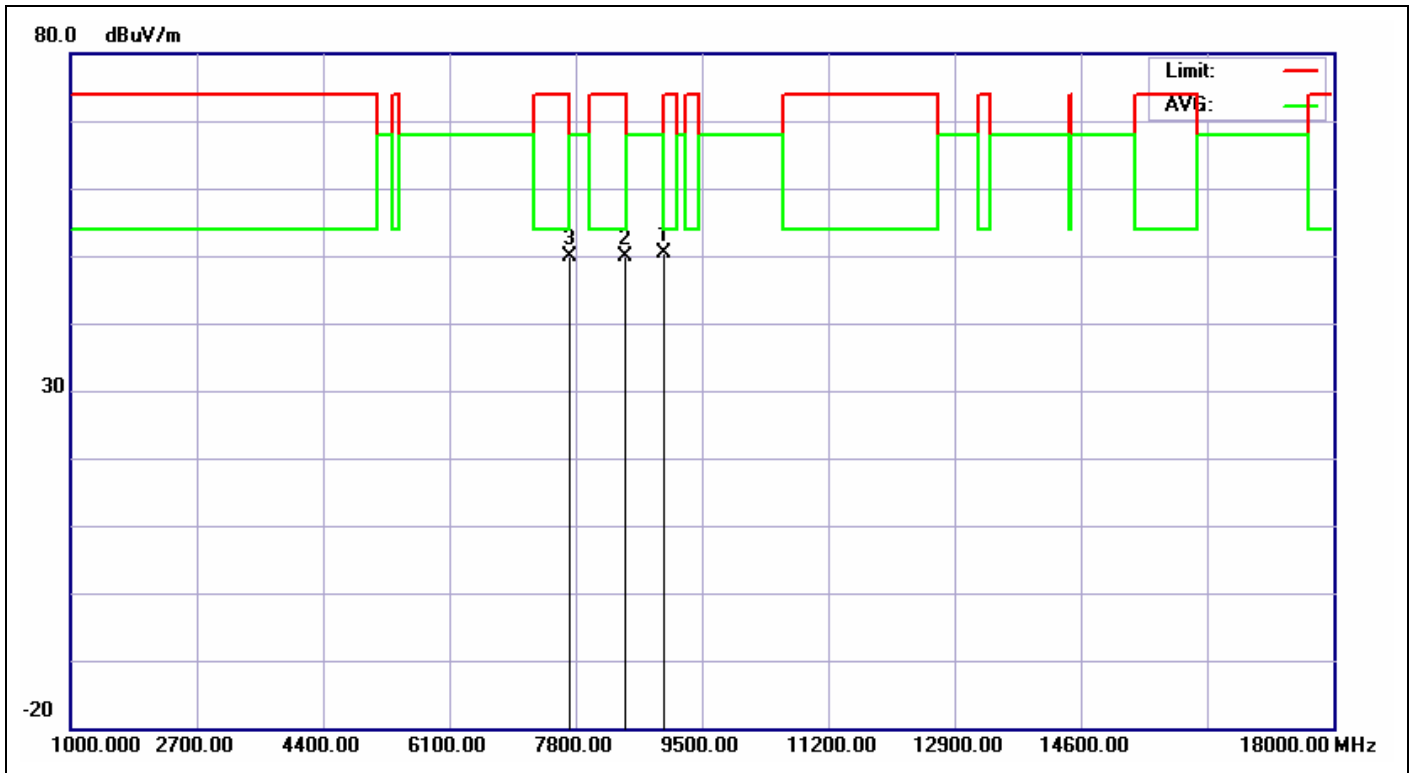


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 01:05:12
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5230		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8983.000	7.33	42.95	50.28	68.00	-17.72	peak	100	360	
2	8466.000	6.60	43.18	49.78	74.00	-24.22	peak	100	360	
3	7732.000	6.47	43.52	49.99	74.00	-24.01	peak	100	360	

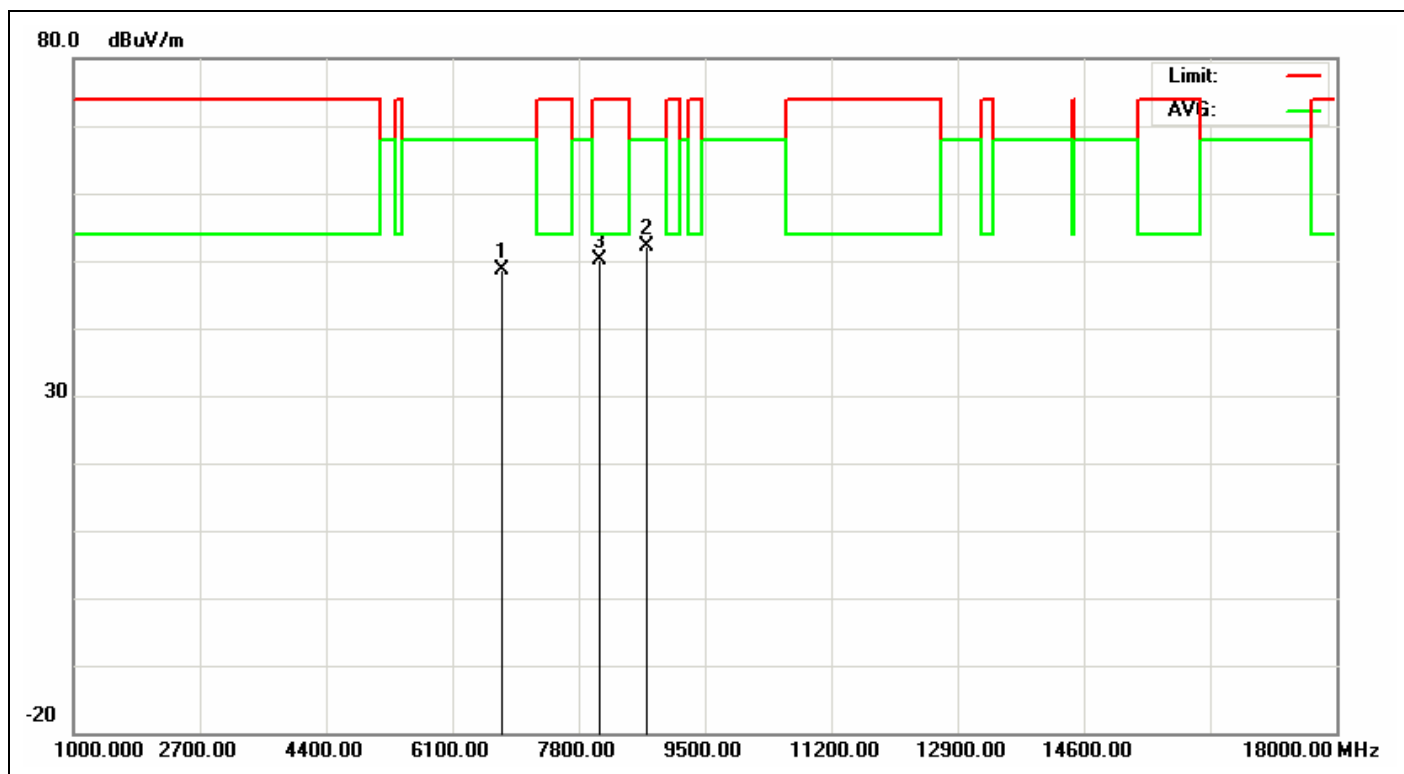


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 AM 11:31:15
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	6771.000	4.22	44.42	48.64	68.00	-19.36	peak	100	0	
2	8729.000	6.97	45.08	52.05	68.00	-15.95	peak	100	0	
3	8076.000	6.47	43.75	50.22	74.00	-23.78	peak	100	0	

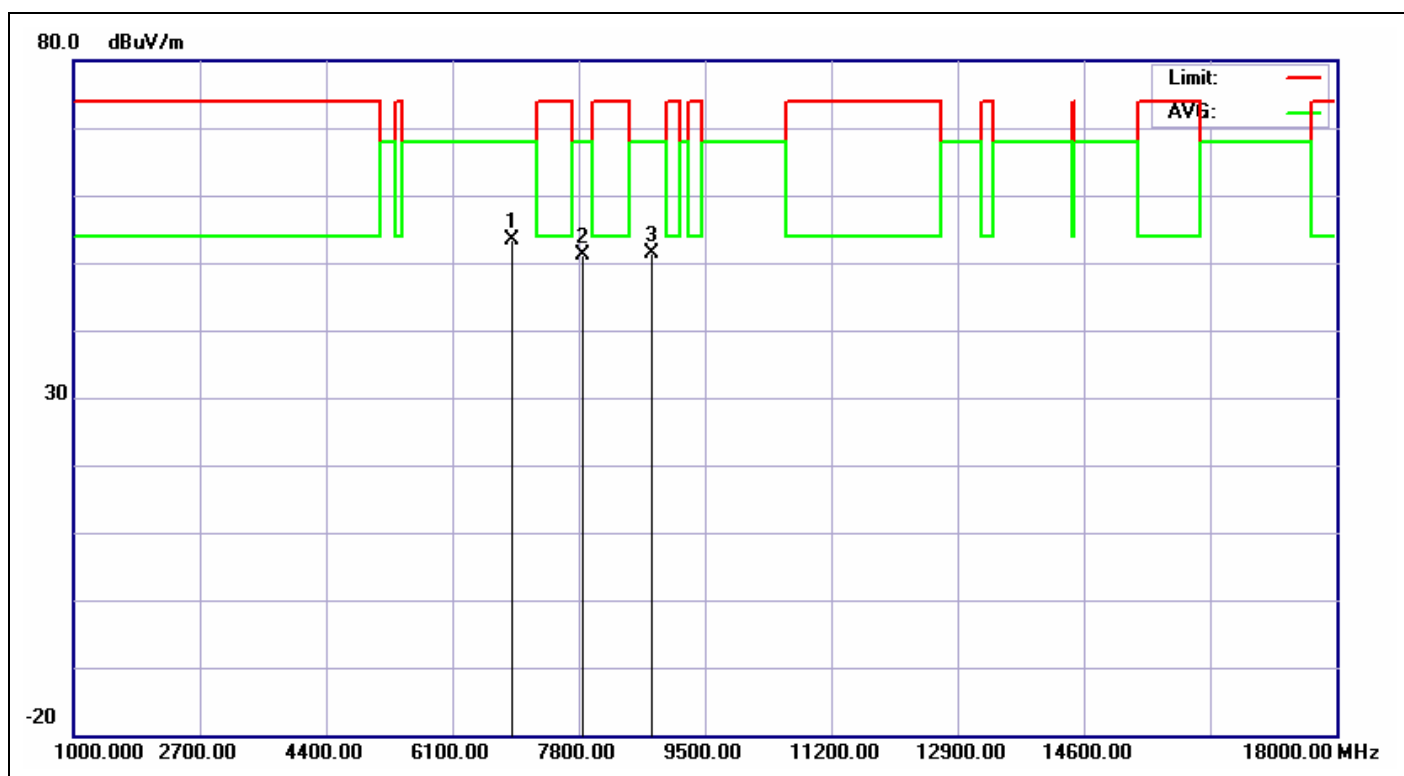


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 AM 11:33:56
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	6907.000	4.39	48.87	53.26	68.00	-14.74	peak	100	360	
2	7859.000	6.45	44.76	51.21	68.00	-16.79	peak	100	360	
3	8783.000	7.04	44.35	51.39	68.00	-16.61	peak	100	360	

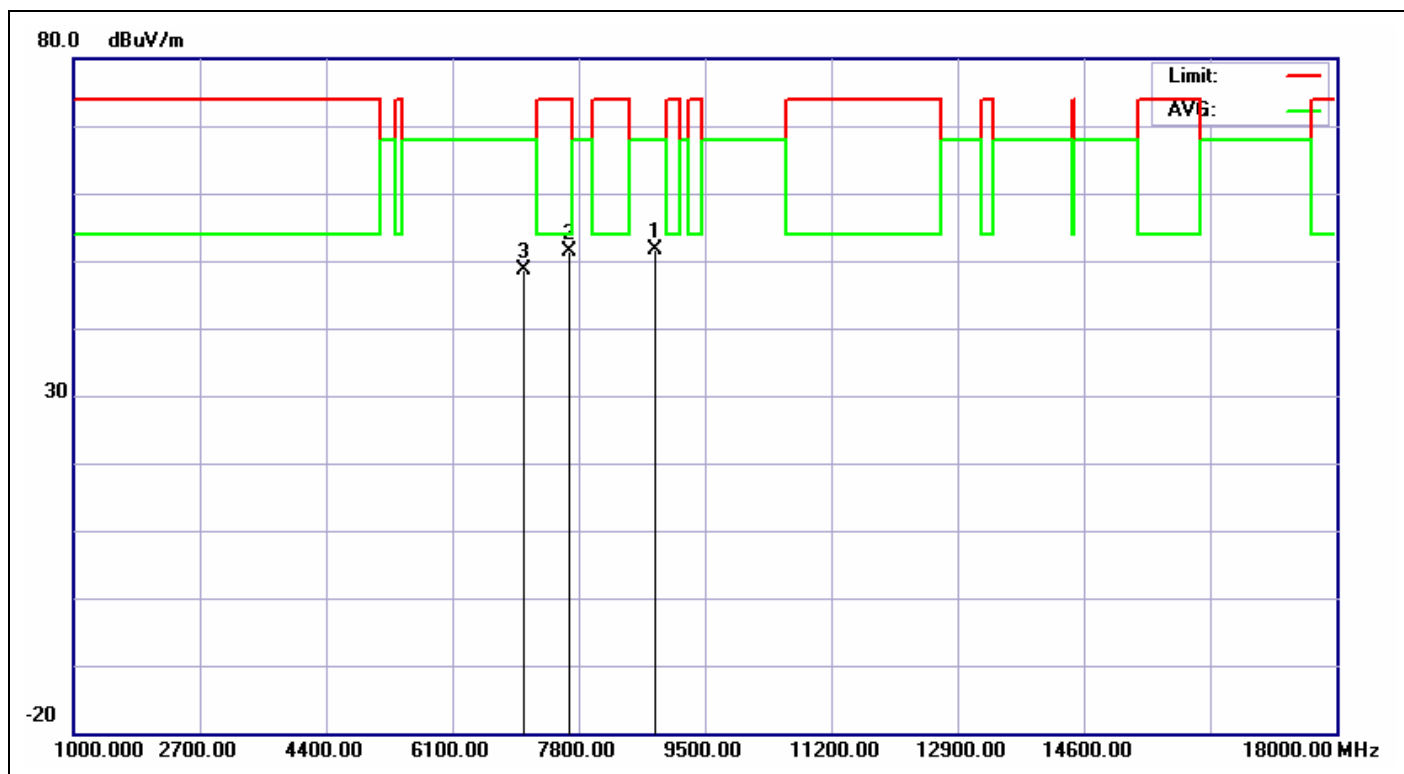


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 AM 11:35:46
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8838.000	7.12	44.48	51.60	68.00	-16.40	peak	100	0	
2	7668.000	6.49	44.77	51.26	74.00	-22.74	peak	100	0	
3	7070.000	4.79	43.94	48.73	68.00	-19.27	peak	100	0	

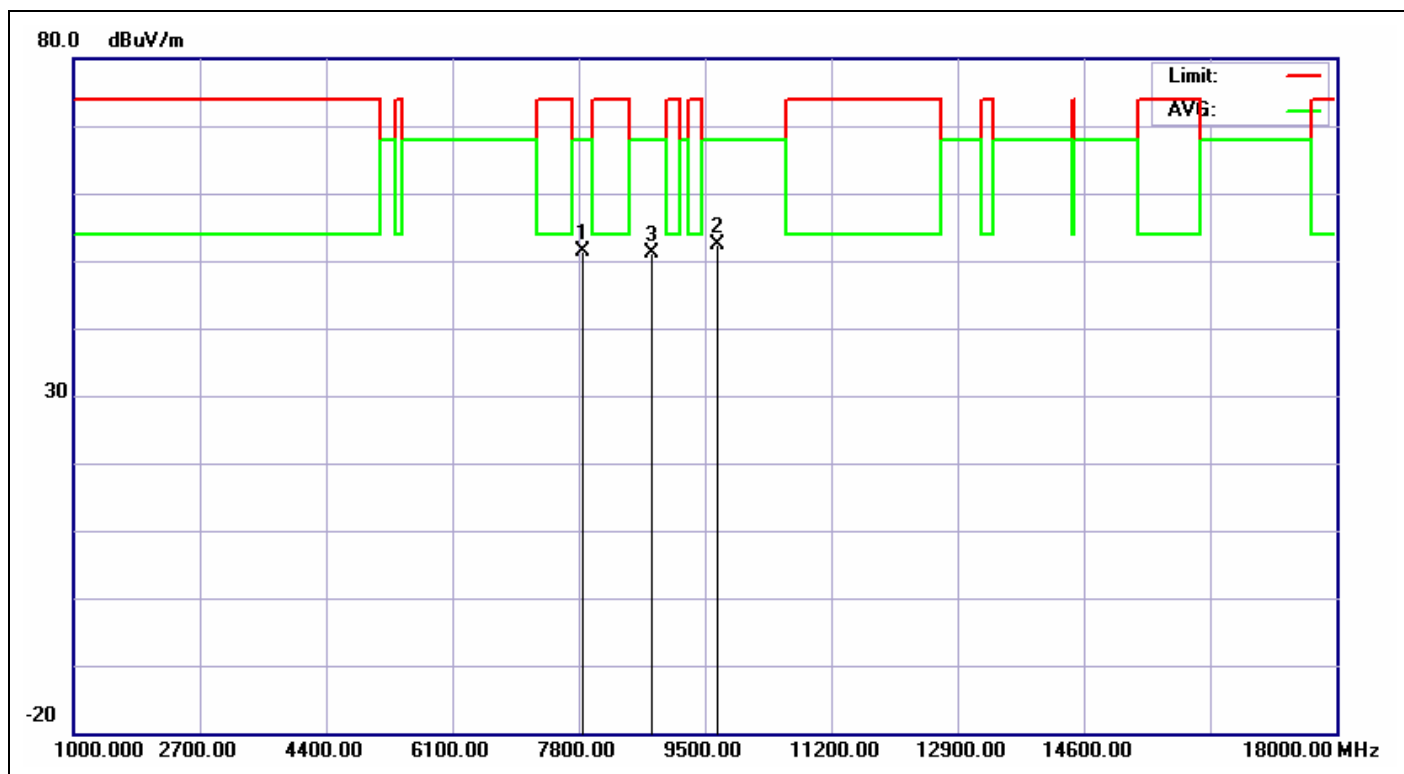

Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 AM 11:37:22
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7859.000	6.45	44.97	51.42	68.00	-16.58	peak	100	360	
2	9681.000	7.41	44.85	52.26	68.00	-15.74	peak	100	360	
3	8783.000	7.04	43.98	51.02	68.00	-16.98	peak	100	360	

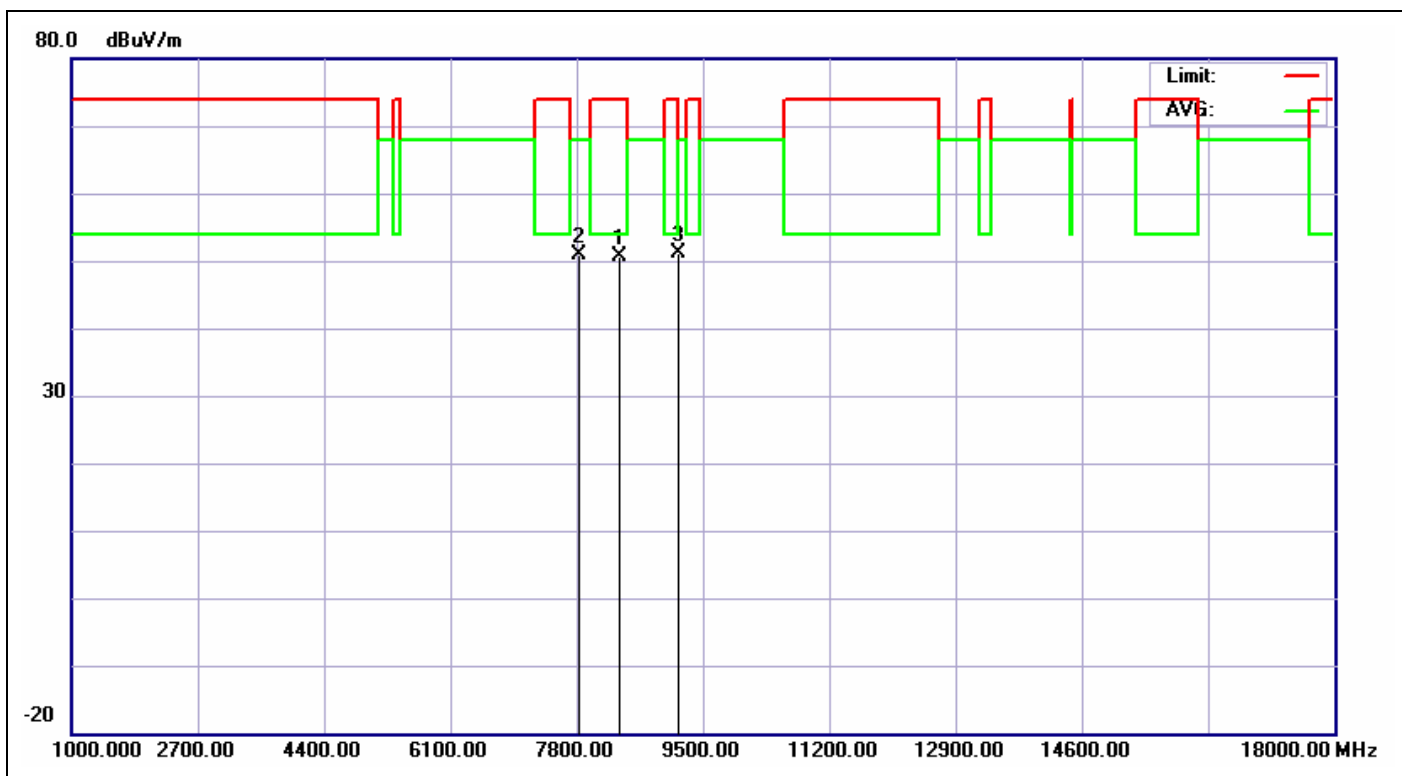

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2013/1/3 AM 11:39:12

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A CH5240


Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8375.000	6.57	44.10	50.67	74.00	-23.33	peak	100	0	
2	7831.000	6.46	44.46	50.92	68.00	-17.08	peak	100	0	
3	9164.000	7.52	43.52	51.04	74.00	-22.96	peak	100	0	

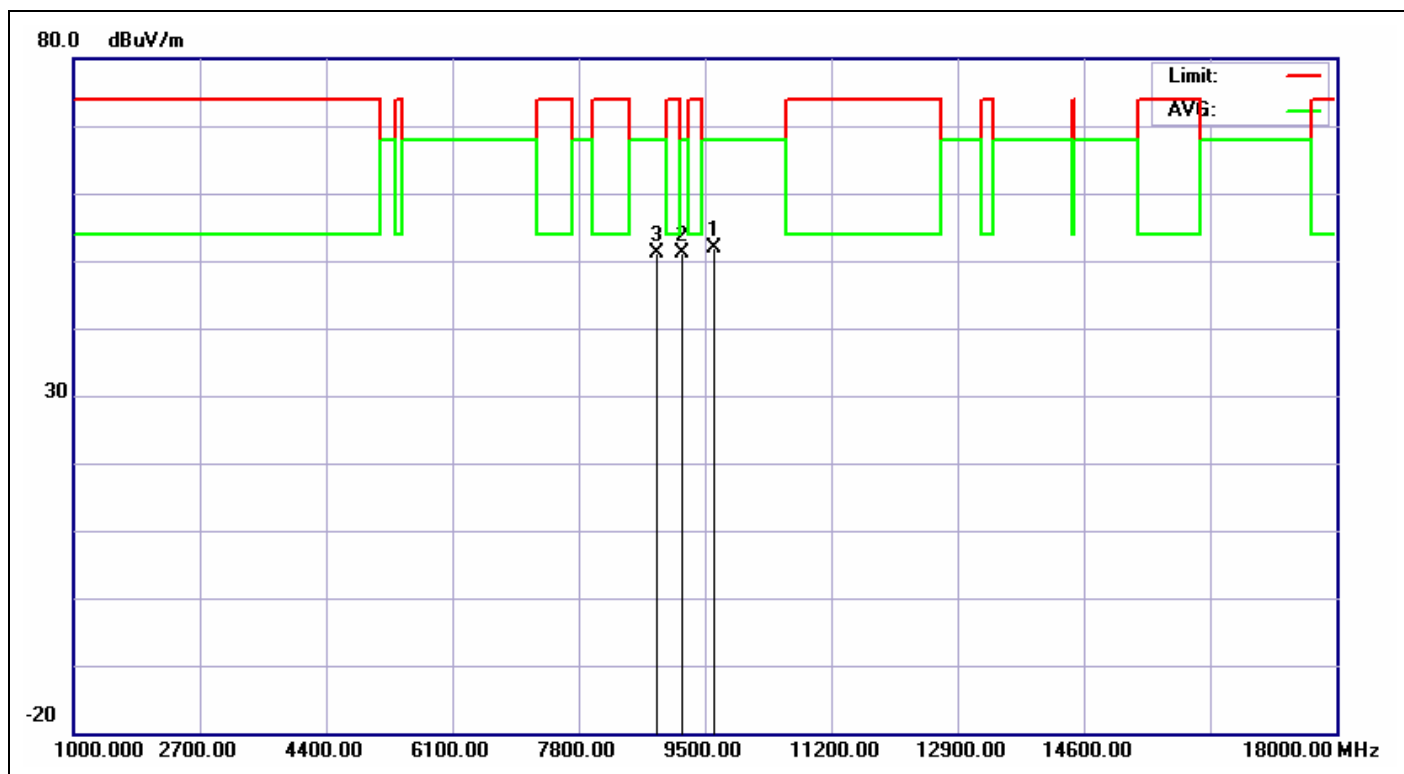


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 AM 11:40:46
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5240		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9627.000	7.56	44.29	51.85	68.00	-16.15	peak	100	360	
2	9191.000	7.56	43.68	51.24	74.00	-22.76	peak	100	360	
3	8865.000	7.15	43.92	51.07	68.00	-16.93	peak	100	360	

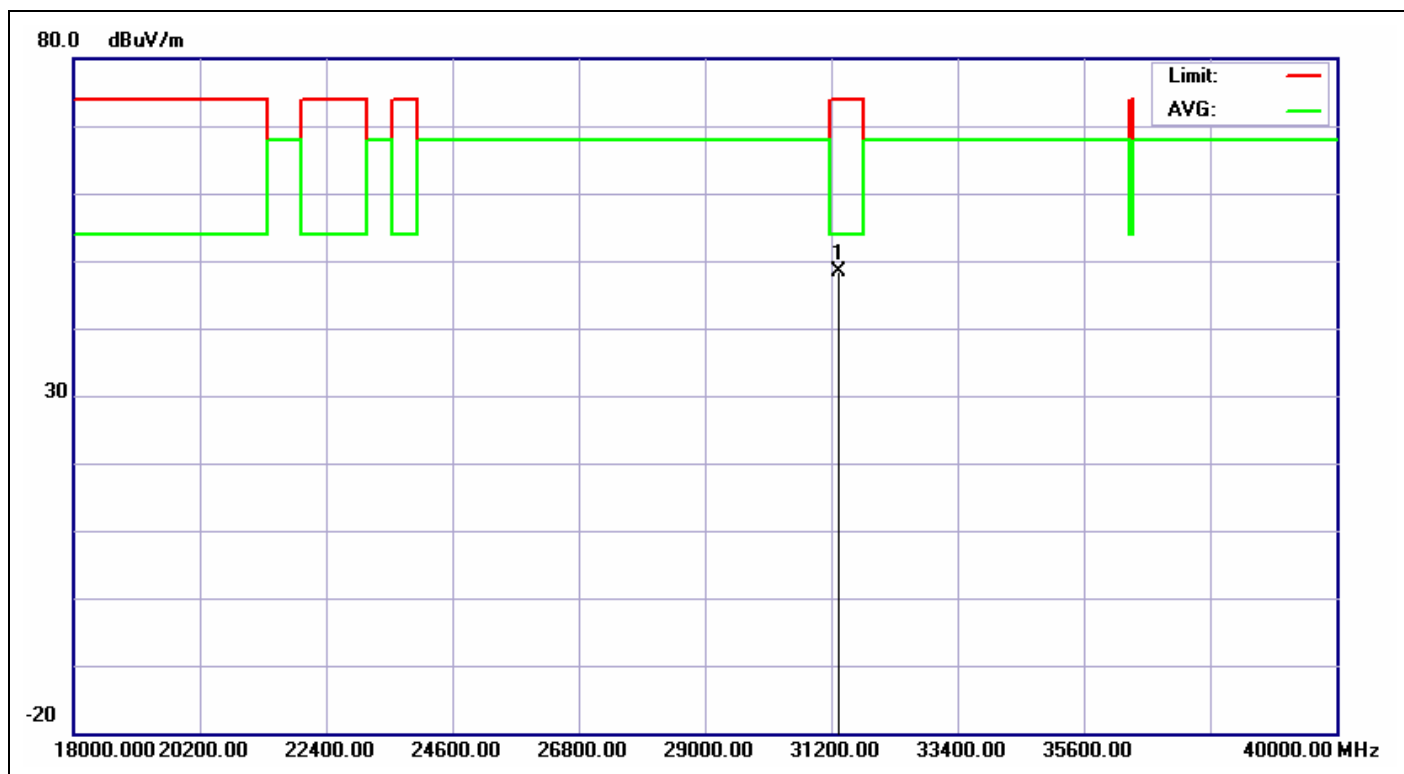


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:22:56
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31318.000	32.19	16.20	48.39	74.00	-25.61	peak	100	360	

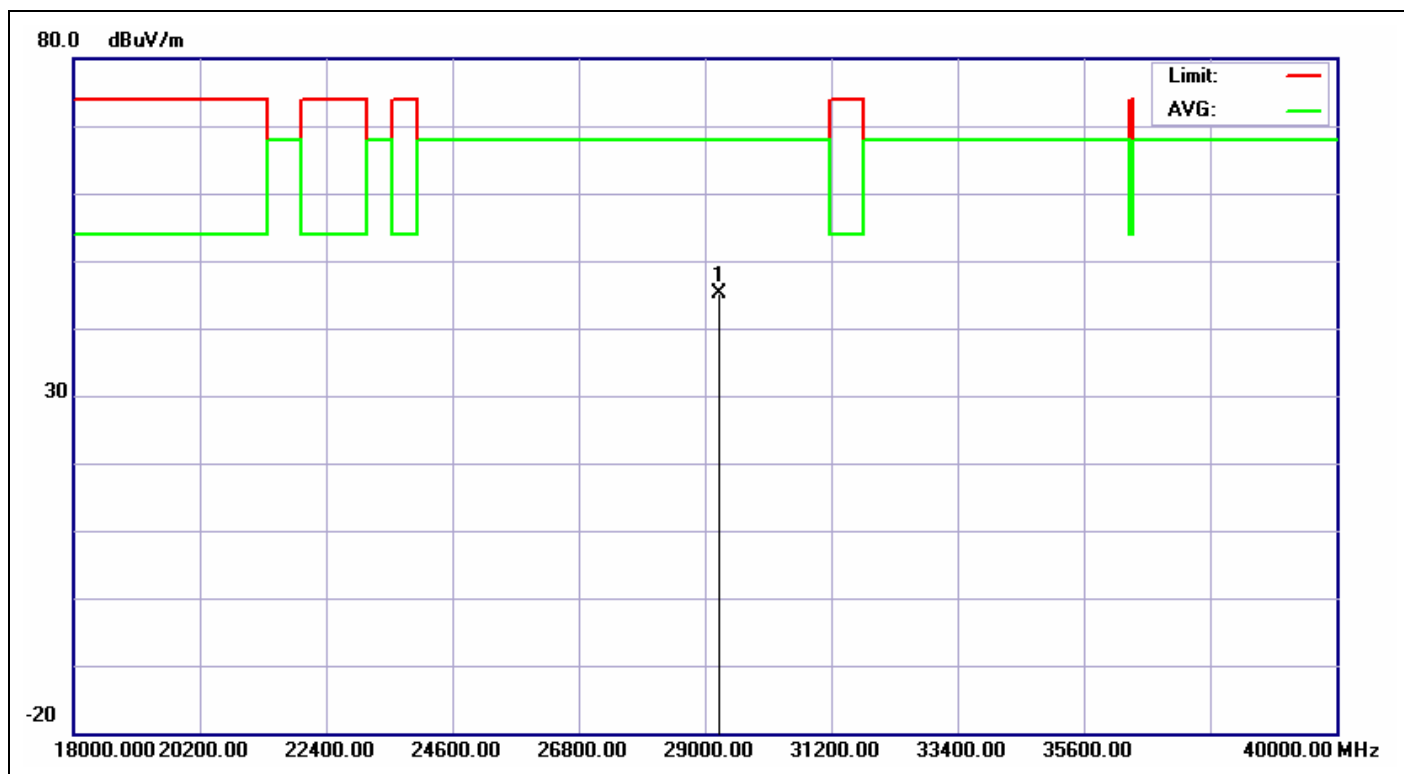


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:23:22
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	29241.000	30.77	14.25	45.02	68.00	-22.98	peak	100	360	

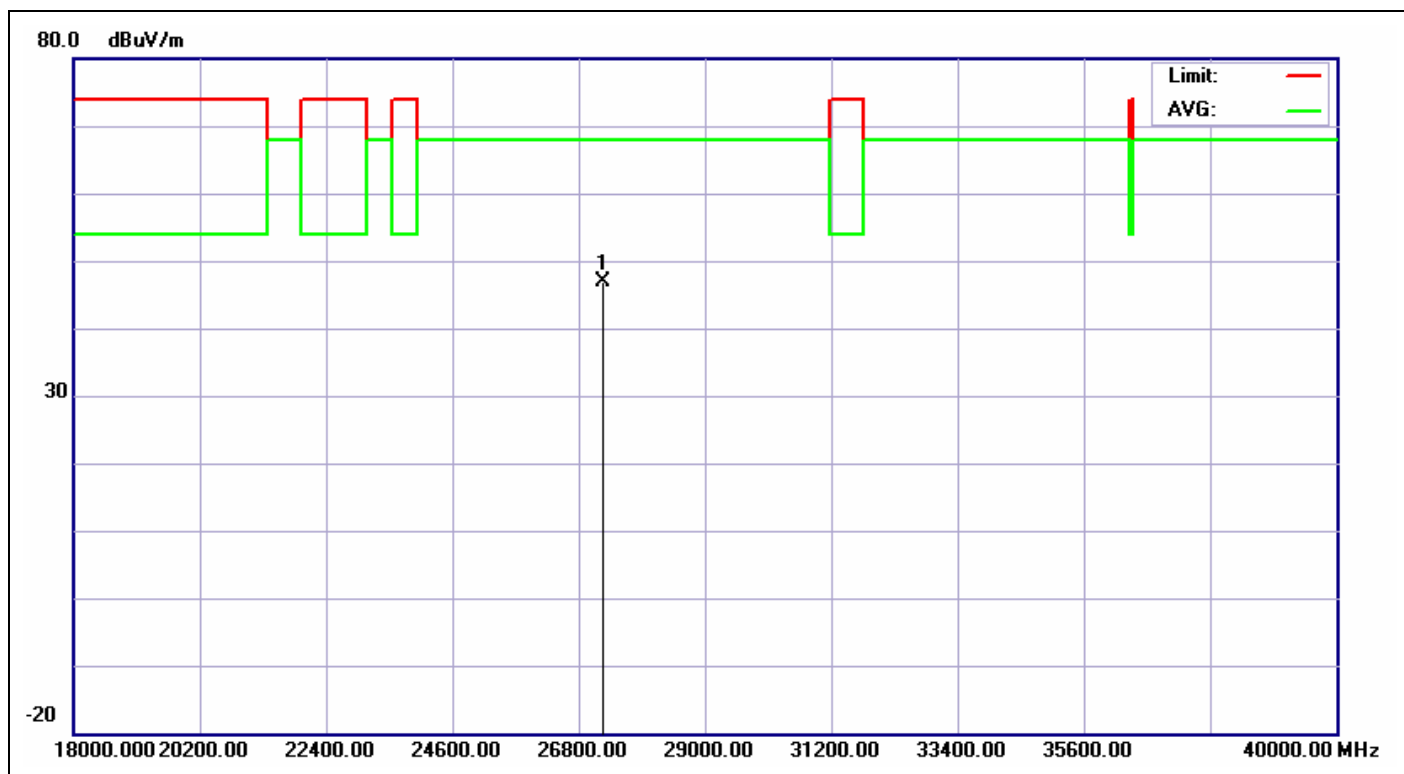


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:23:45
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	27235.000	30.81	16.12	46.93	68.00	-21.07	peak	100	360	

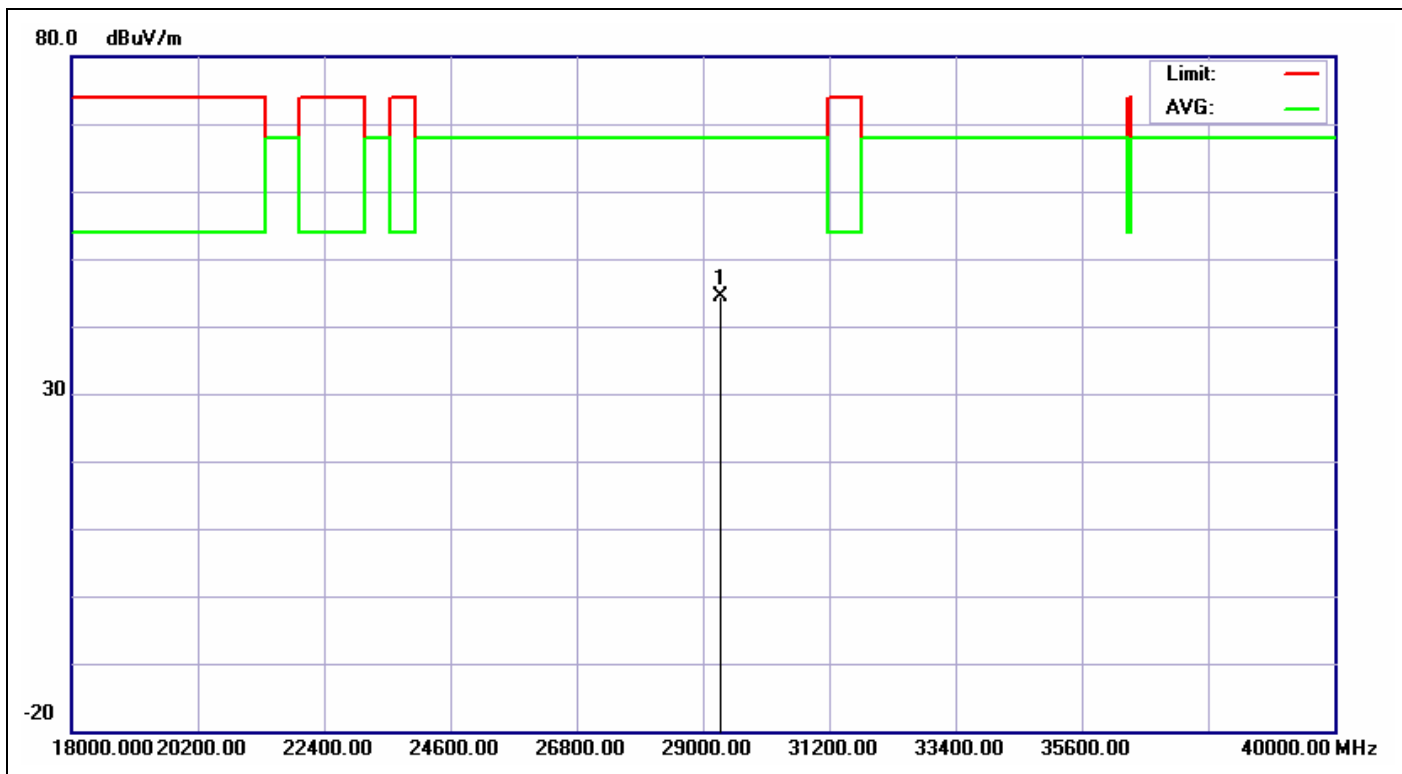


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:24:12
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	29312.000	30.65	13.62	44.27	68.00	-23.73	peak	100	360	

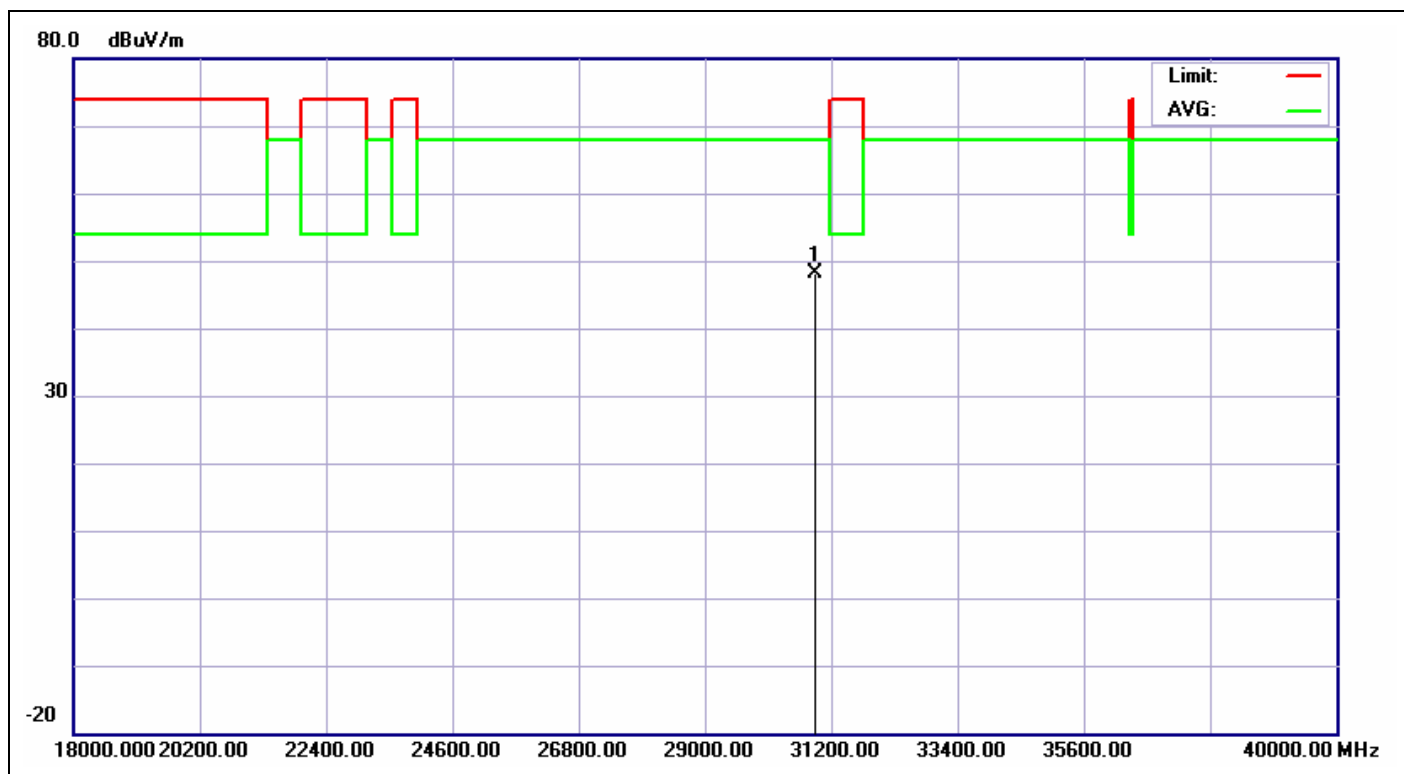


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:24:36
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5240		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30931.000	32.54	15.57	48.11	68.00	-19.89	peak	100	360	

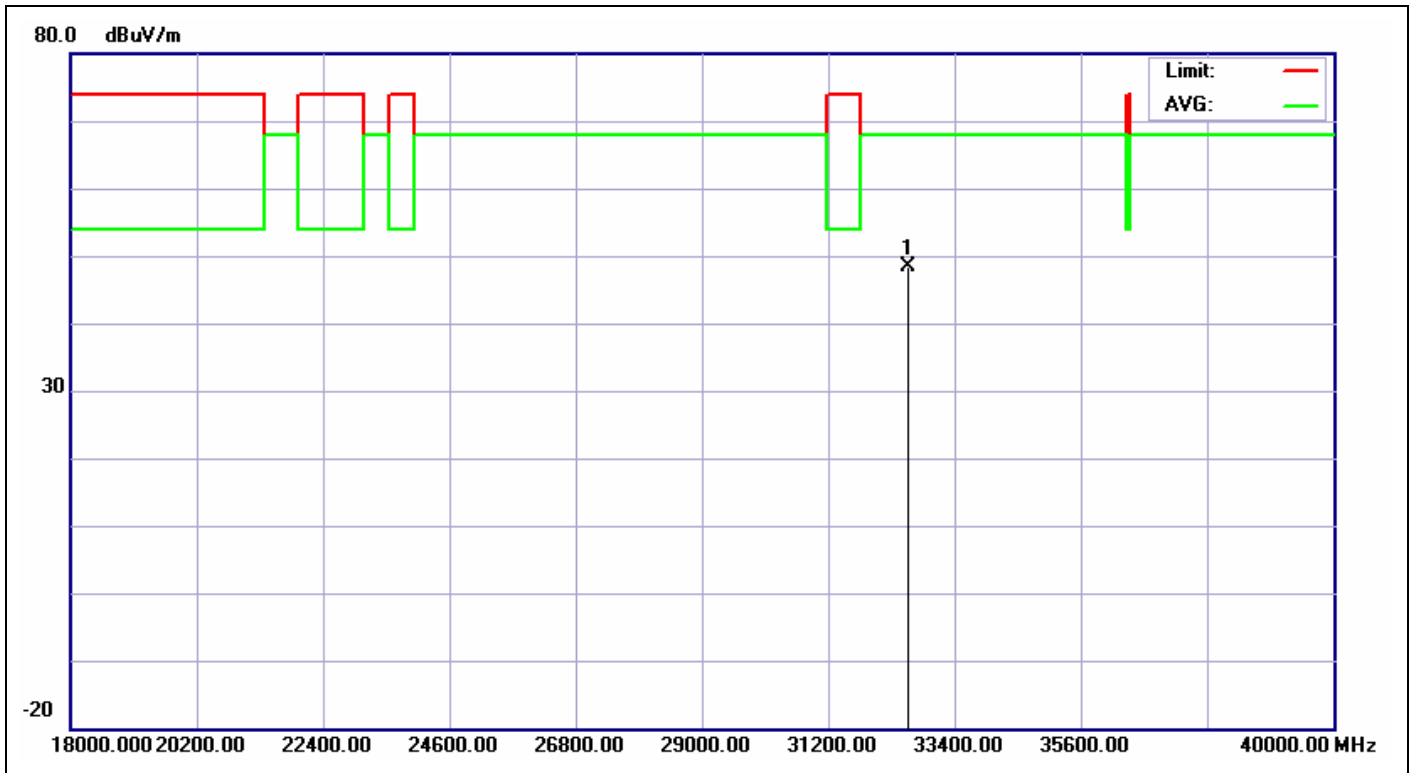


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:25:00
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5240		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32585.000	34.22	14.19	48.41	68.00	-19.59	peak	100	360	

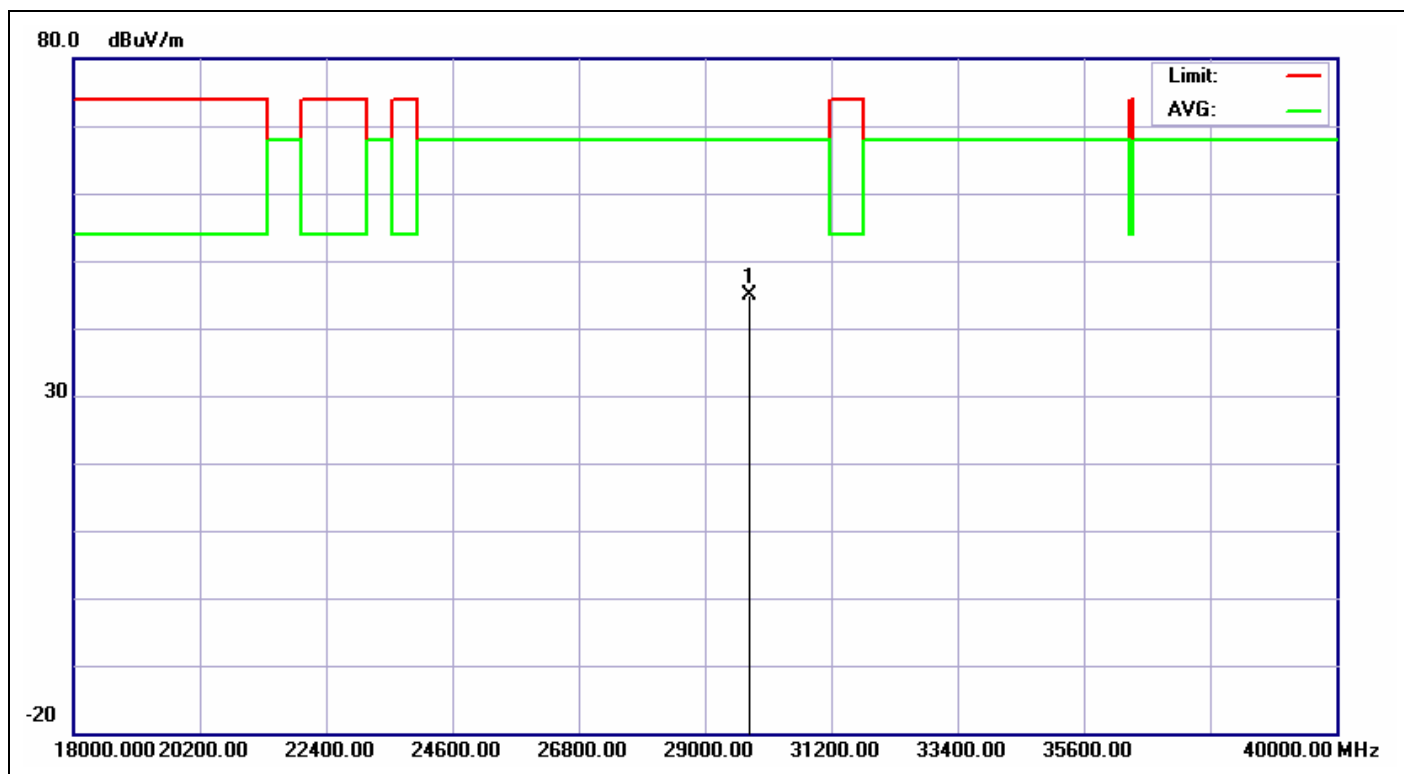


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:26:01
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5190		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	29769.000	30.34	14.64	44.98	68.00	-23.02	peak	100	360	

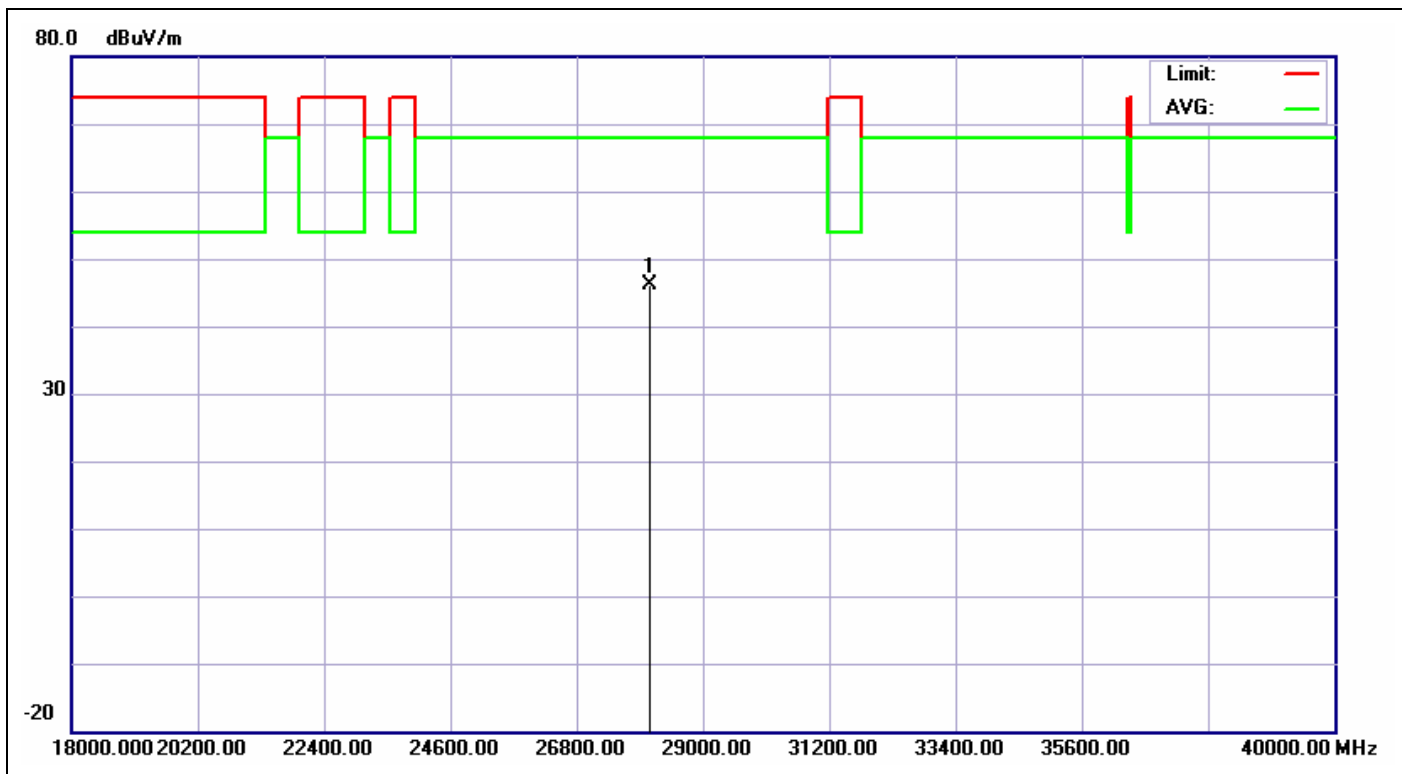


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:26:27
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5190		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28080.000	30.67	15.43	46.10	68.00	-21.90	peak	100	360	

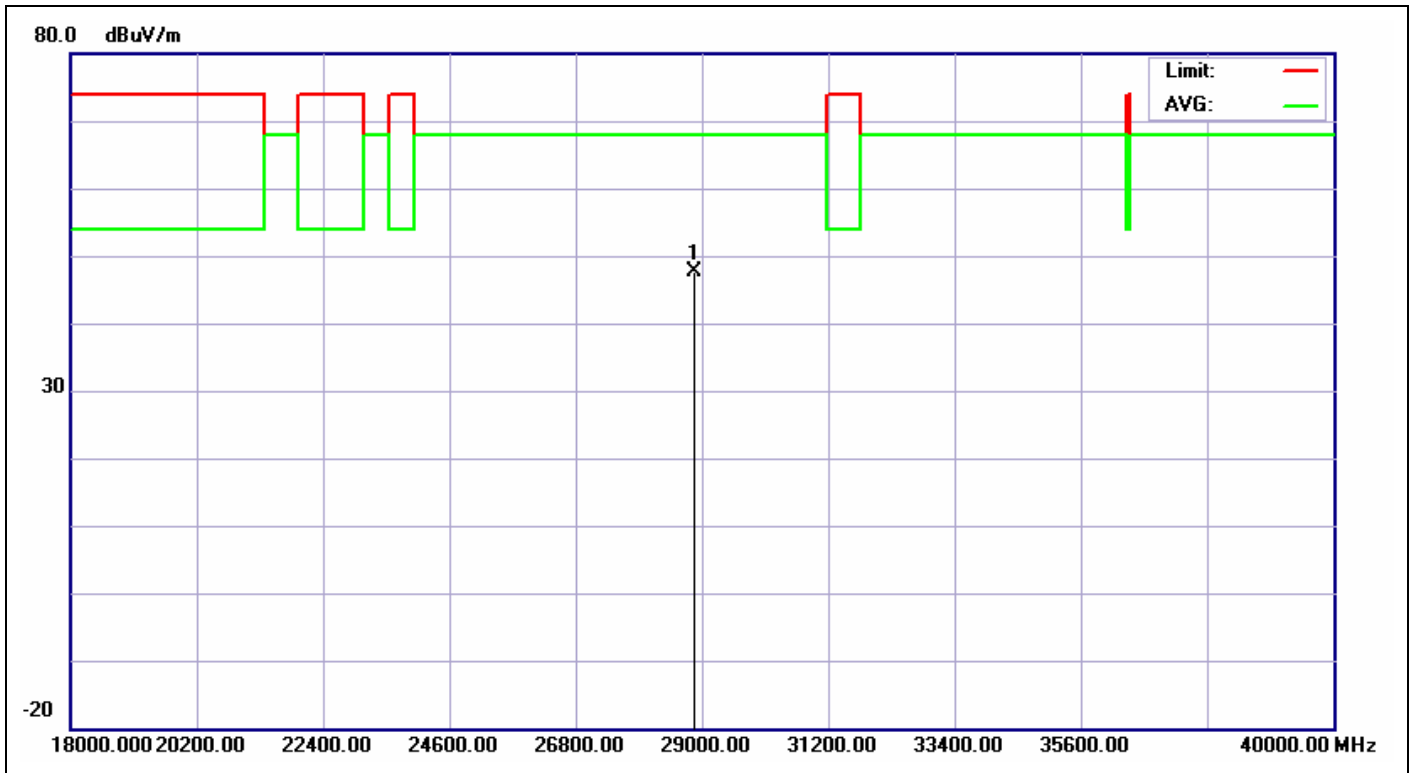


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:26:53
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5230		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28854.000	31.28	16.31	47.59	68.00	-20.41	peak	100	360	

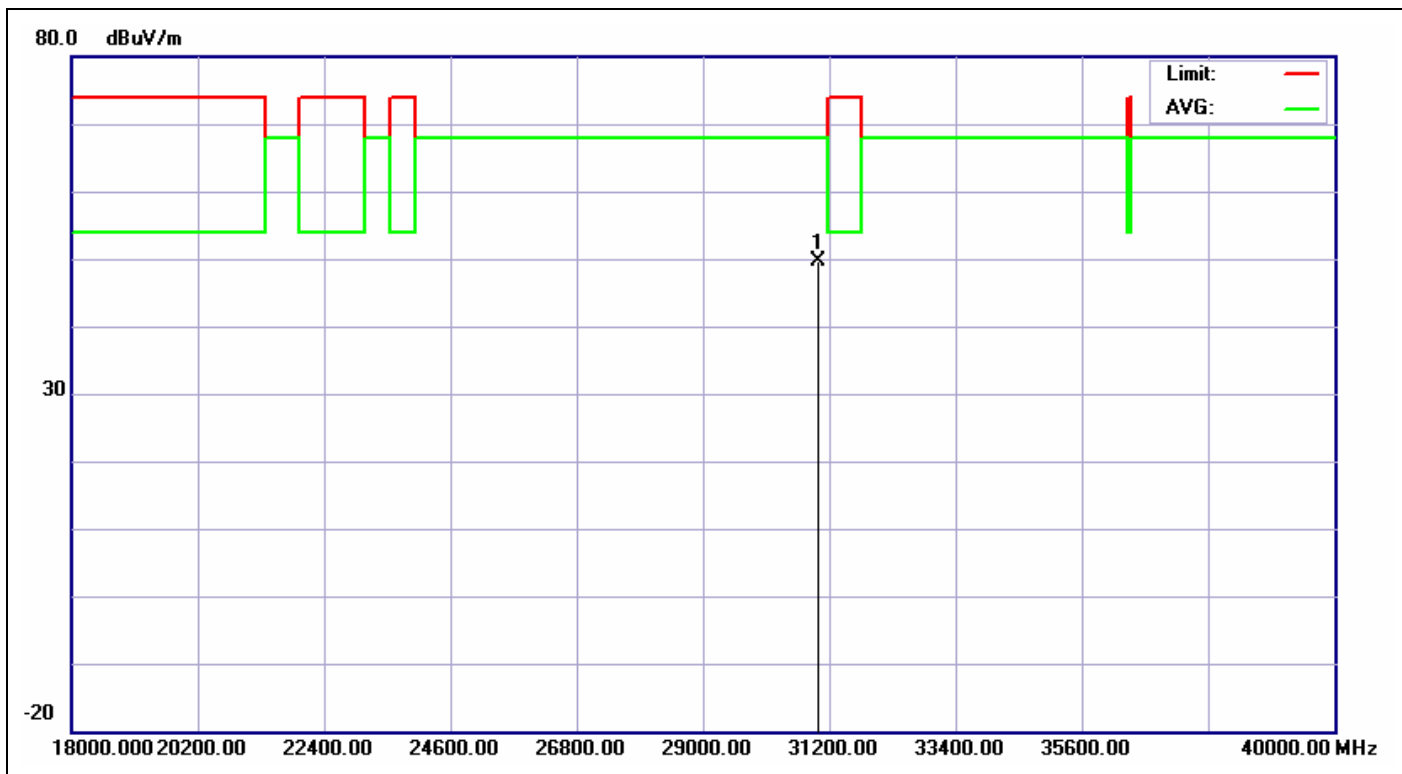


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:27:20
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5230		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31001.000	32.76	16.89	49.65	68.00	-18.35	peak	100	360	

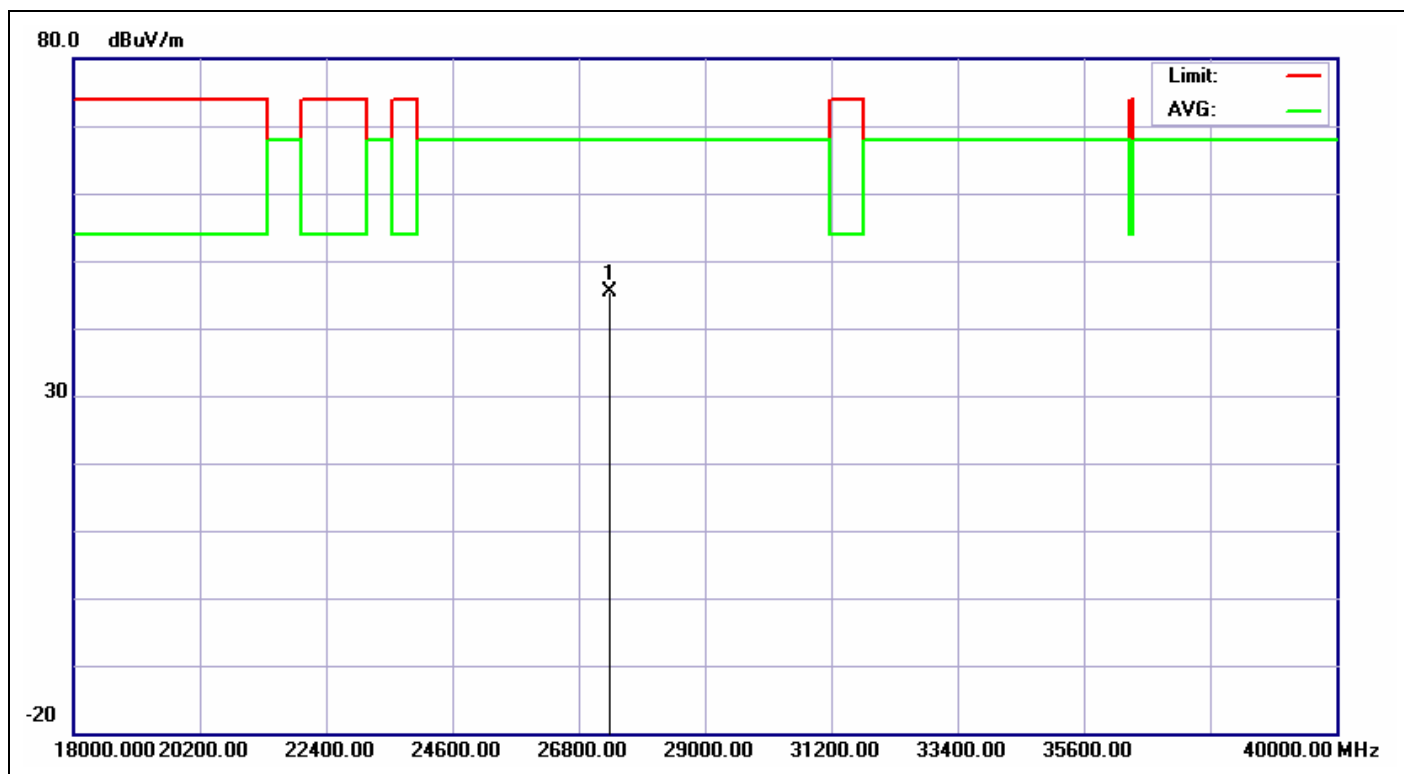


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:20:12
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	27340.000	30.65	14.68	45.33	68.00	-22.67	peak	100	360	

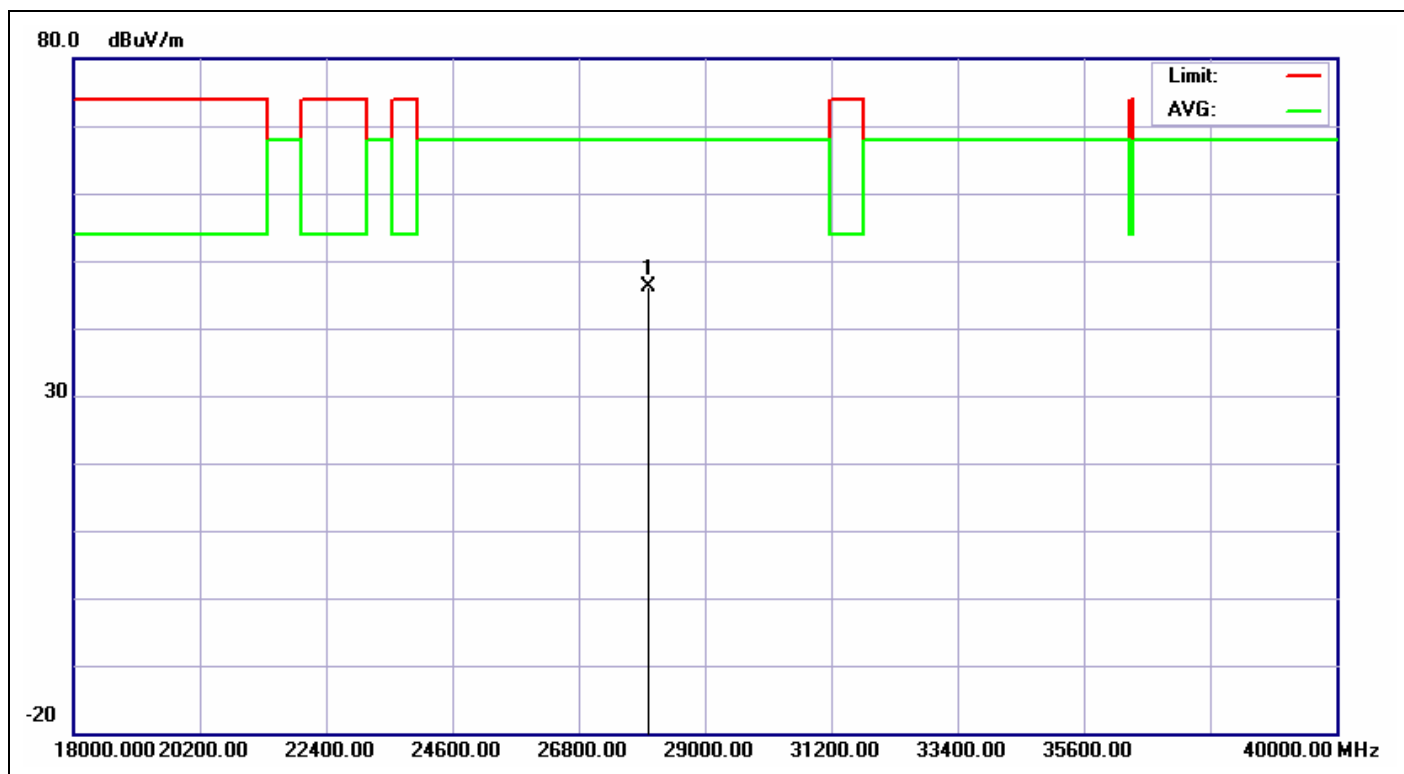

Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:20:49
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5180		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28009.000	30.54	15.70	46.24	68.00	-21.76	peak	100	360	

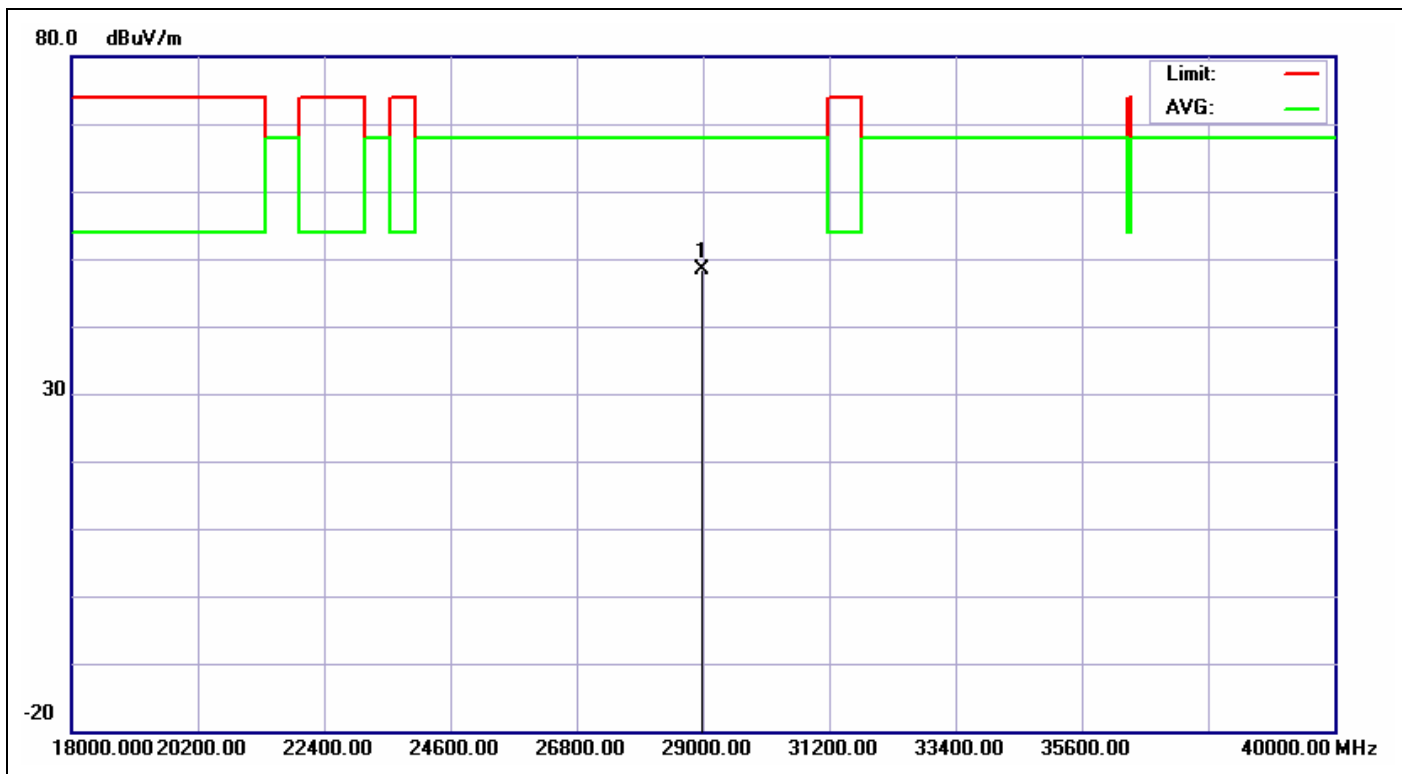

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2013/1/3 PM 09:21:10

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A CH5220


Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28995.000	31.22	17.15	48.37	68.00	-19.63	peak	100	360	

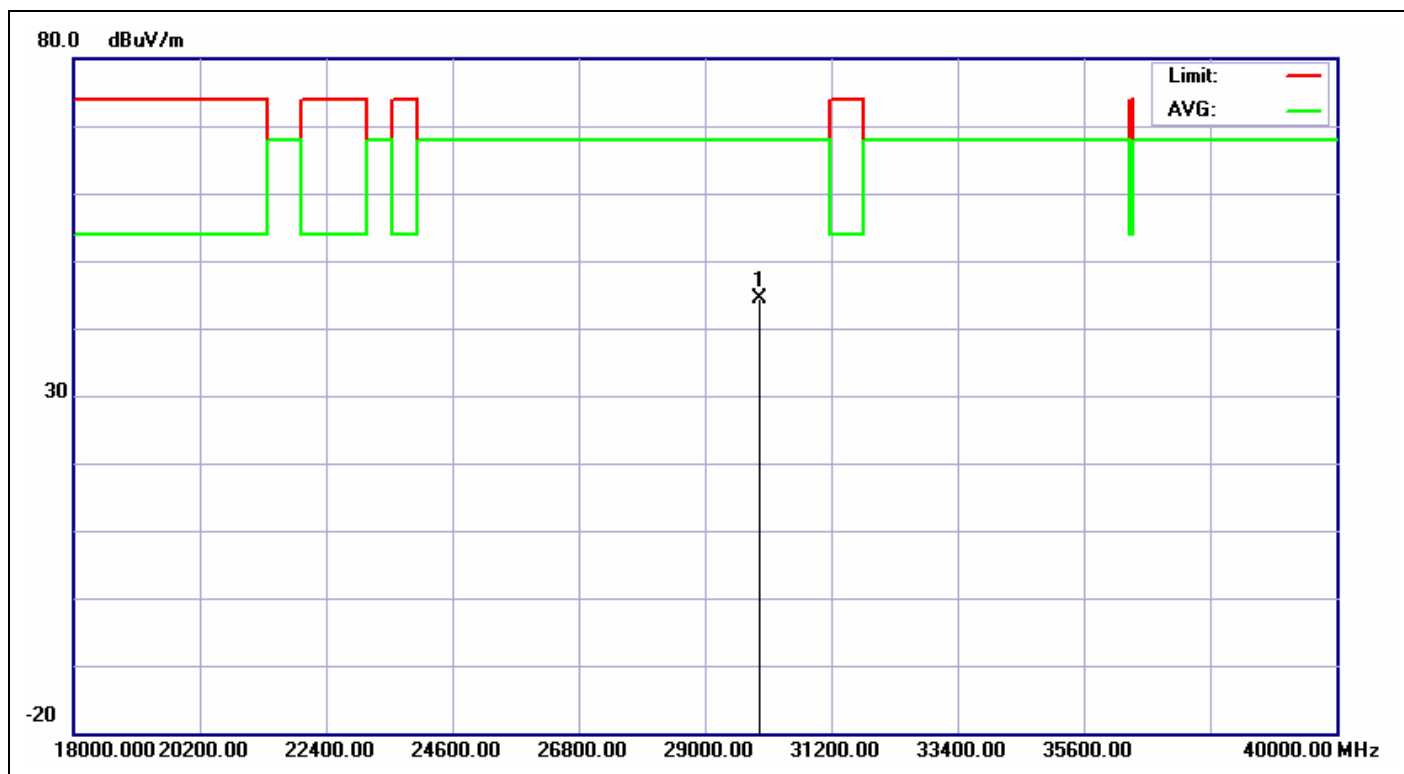


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:21:38
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5220		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	29945.000	30.36	14.10	44.46	68.00	-23.54	peak	100	360	

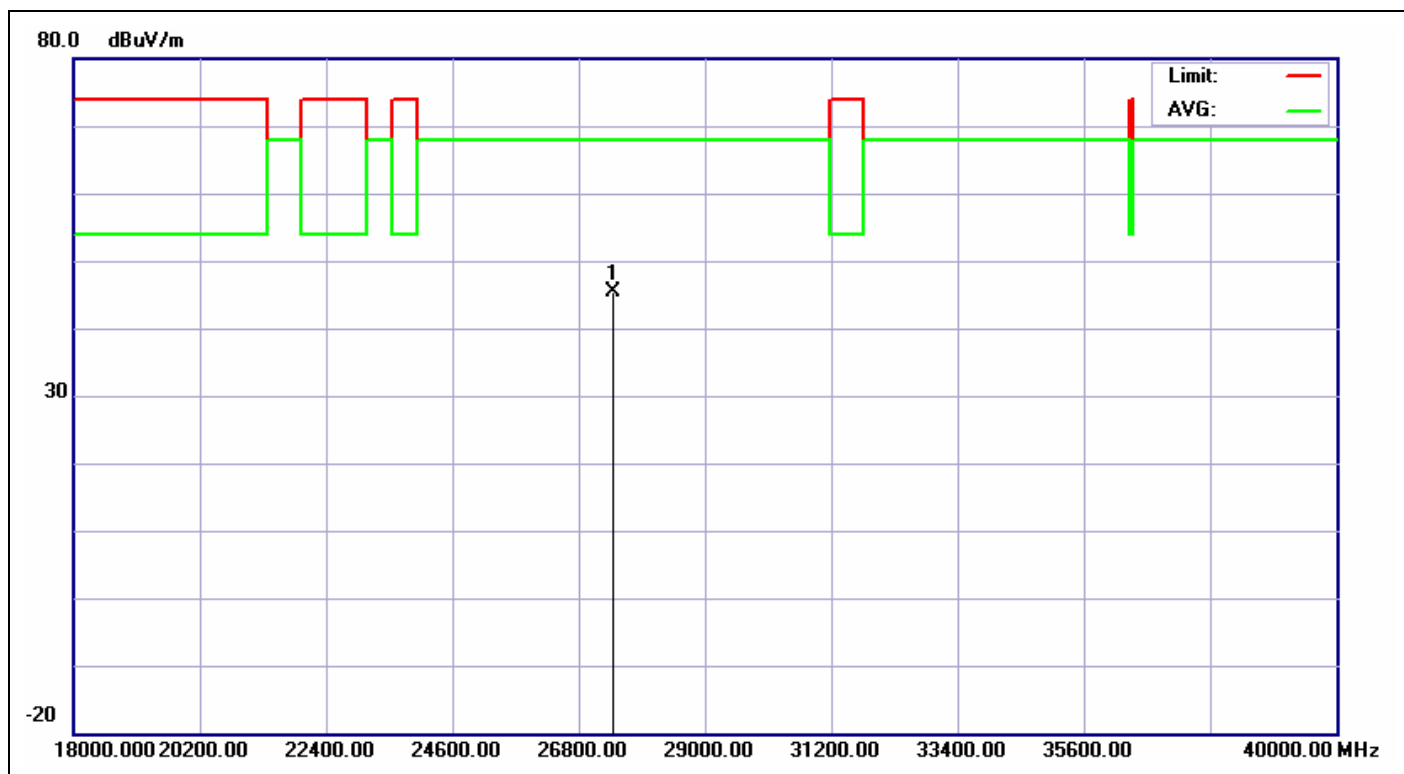


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:22:00
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5240		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	27411.000	30.55	14.89	45.44	68.00	-22.56	peak	100	360	

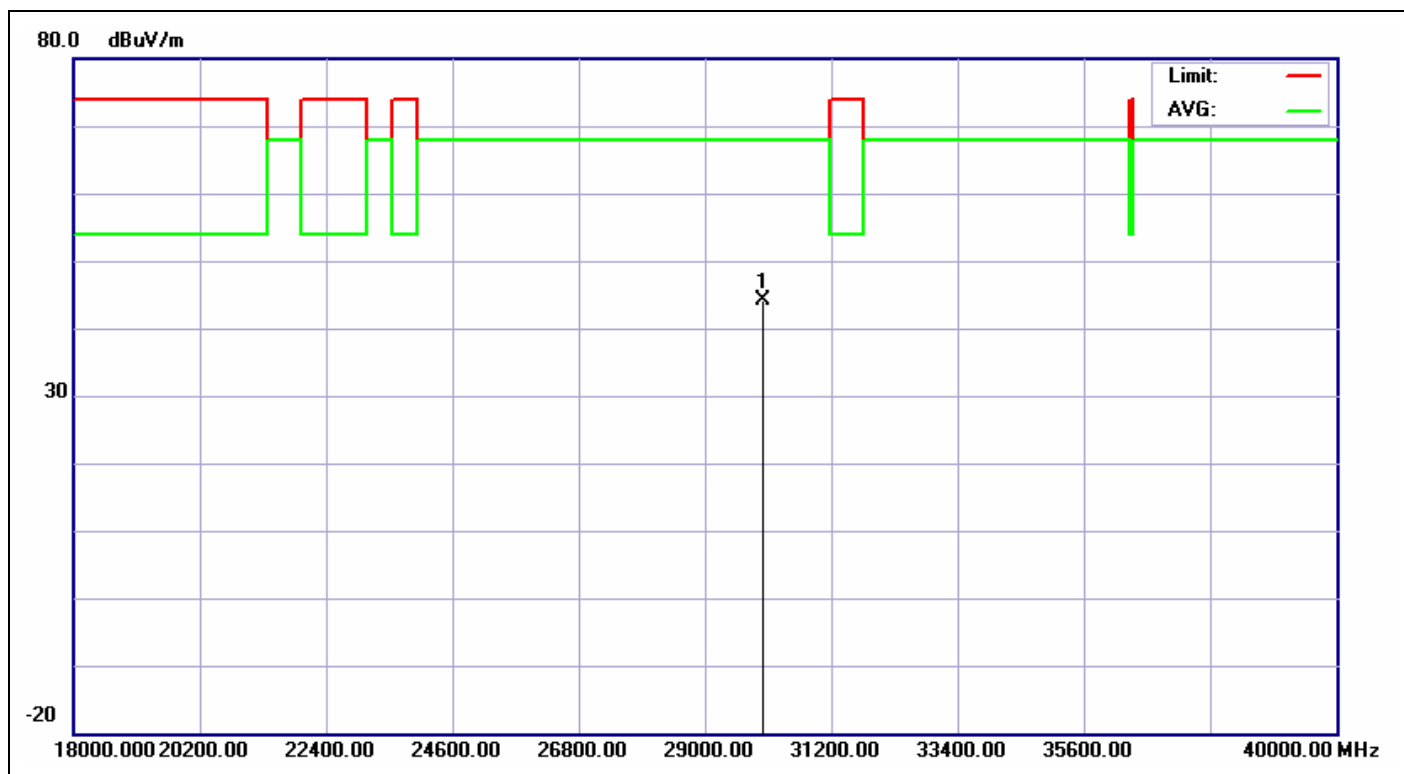

Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:22:33
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5240		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30016.000	30.40	13.71	44.11	68.00	-23.89	peak	100	360	

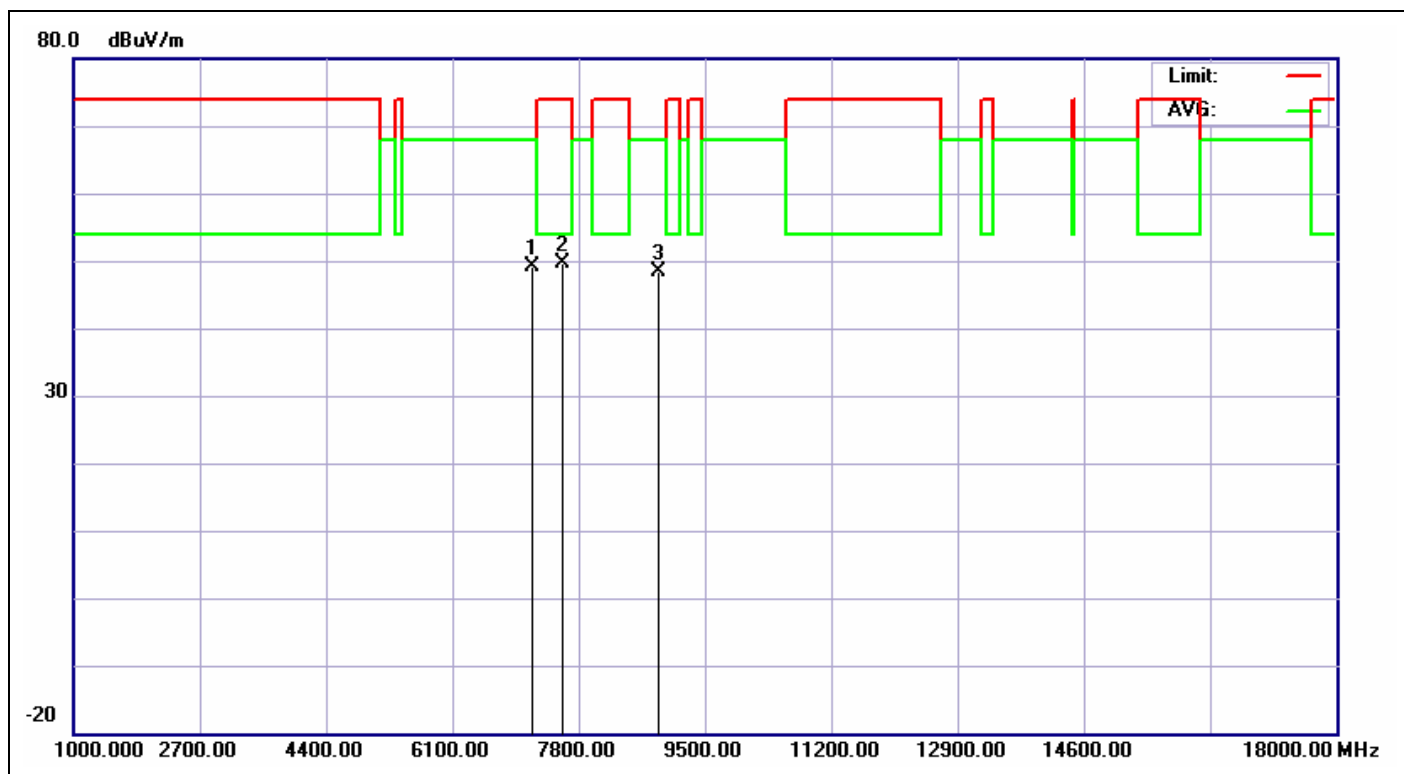

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2013/1/3 PM 06:57:50

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A20 CH5260

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7173.000	5.19	44.06	49.25	68.00	-18.75	peak	100	360	
2	7581.000	6.50	43.02	49.52	74.00	-24.48	peak	100	360	
3	8887.000	7.19	41.17	48.36	68.00	-19.64	peak	100	360	

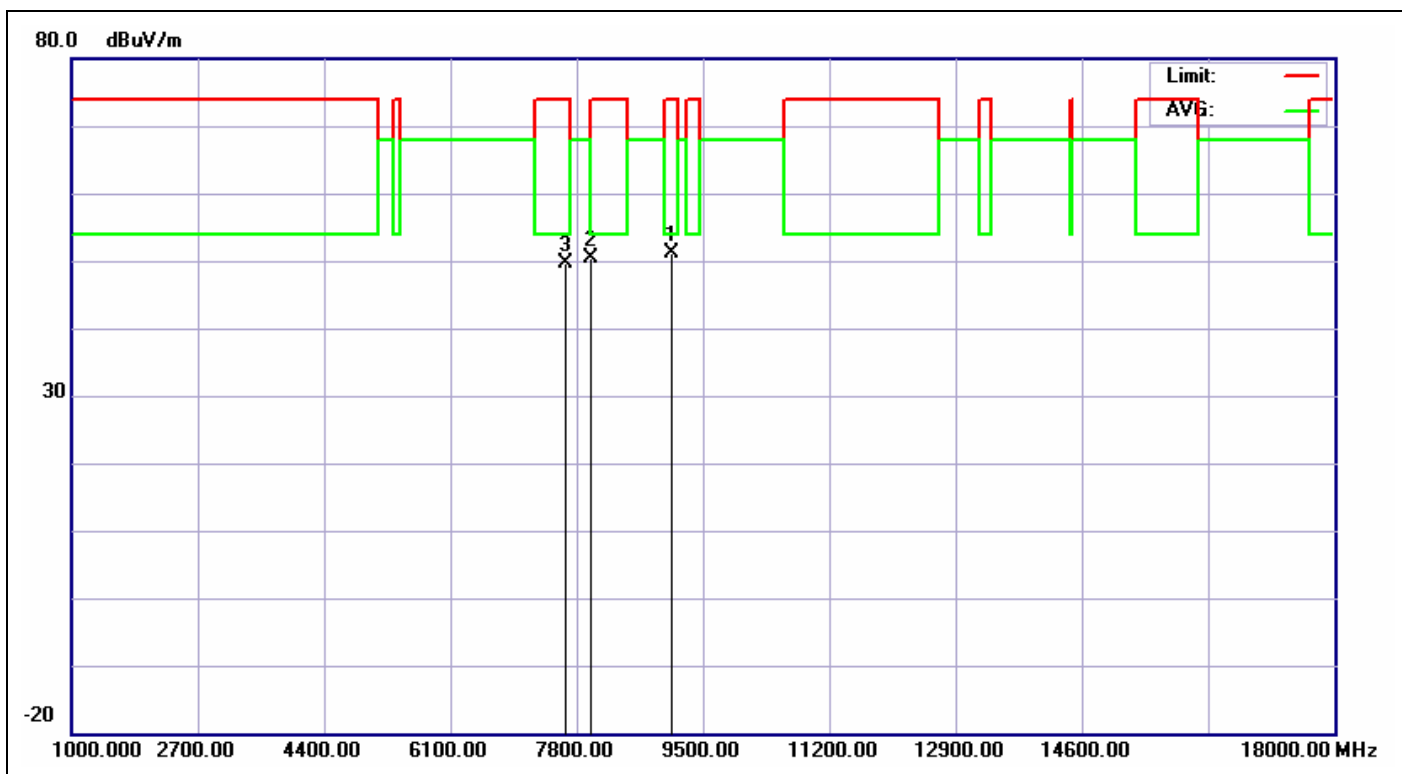

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Vertical

Test item: Radiation Emission

Test Time: 2013/1/3 PM 06:59:24

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A20 CH5260


Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9077.000	7.44	43.58	51.02	74.00	-22.98	peak	100	0	
2	7989.000	6.44	43.88	50.32	68.00	-17.68	peak	100	0	
3	7663.000	6.49	43.16	49.65	74.00	-24.35	peak	100	0	

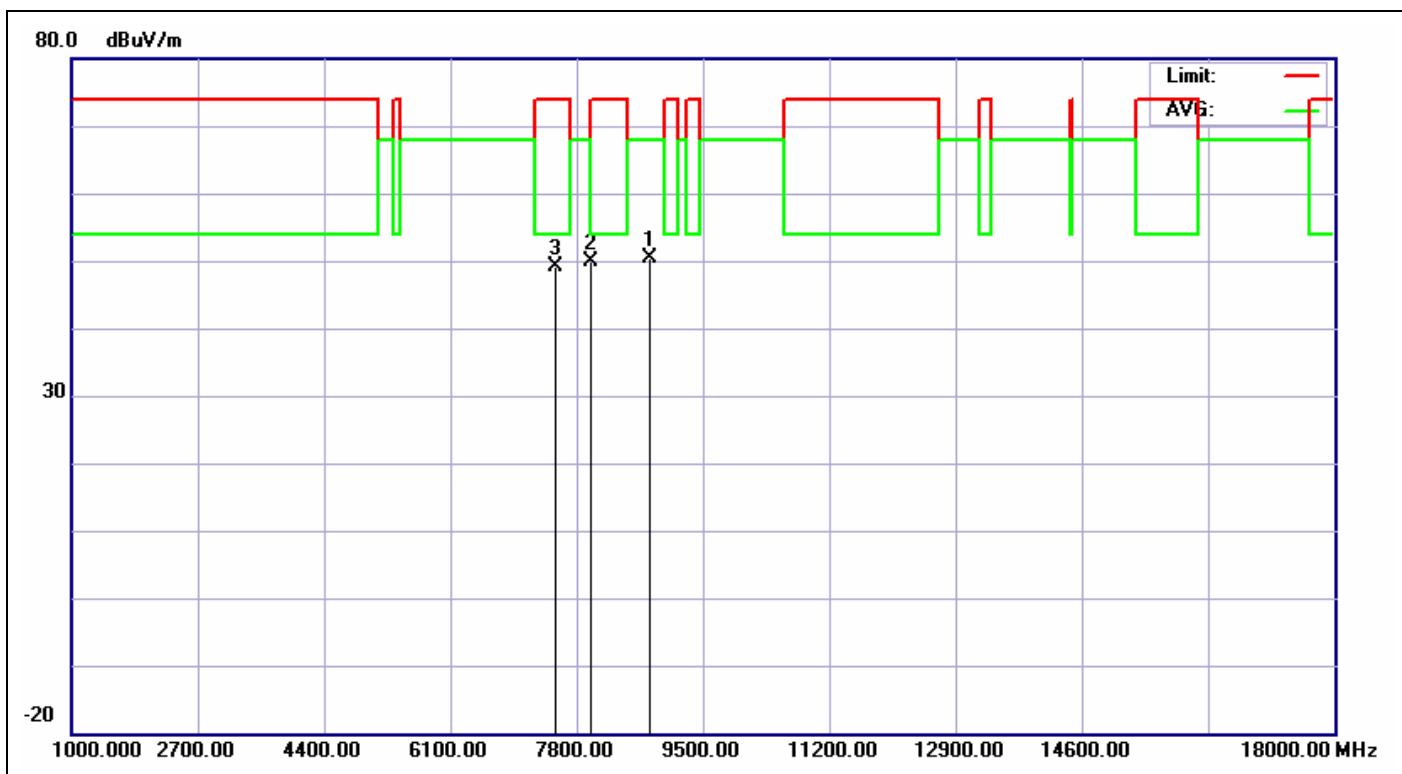


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:01:28
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5280		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8778.000	7.02	43.36	50.38	68.00	-17.62	peak	100	360	
2	7989.000	6.44	43.50	49.94	68.00	-18.06	peak	100	360	
3	7527.000	6.50	42.60	49.10	74.00	-24.90	peak	100	360	

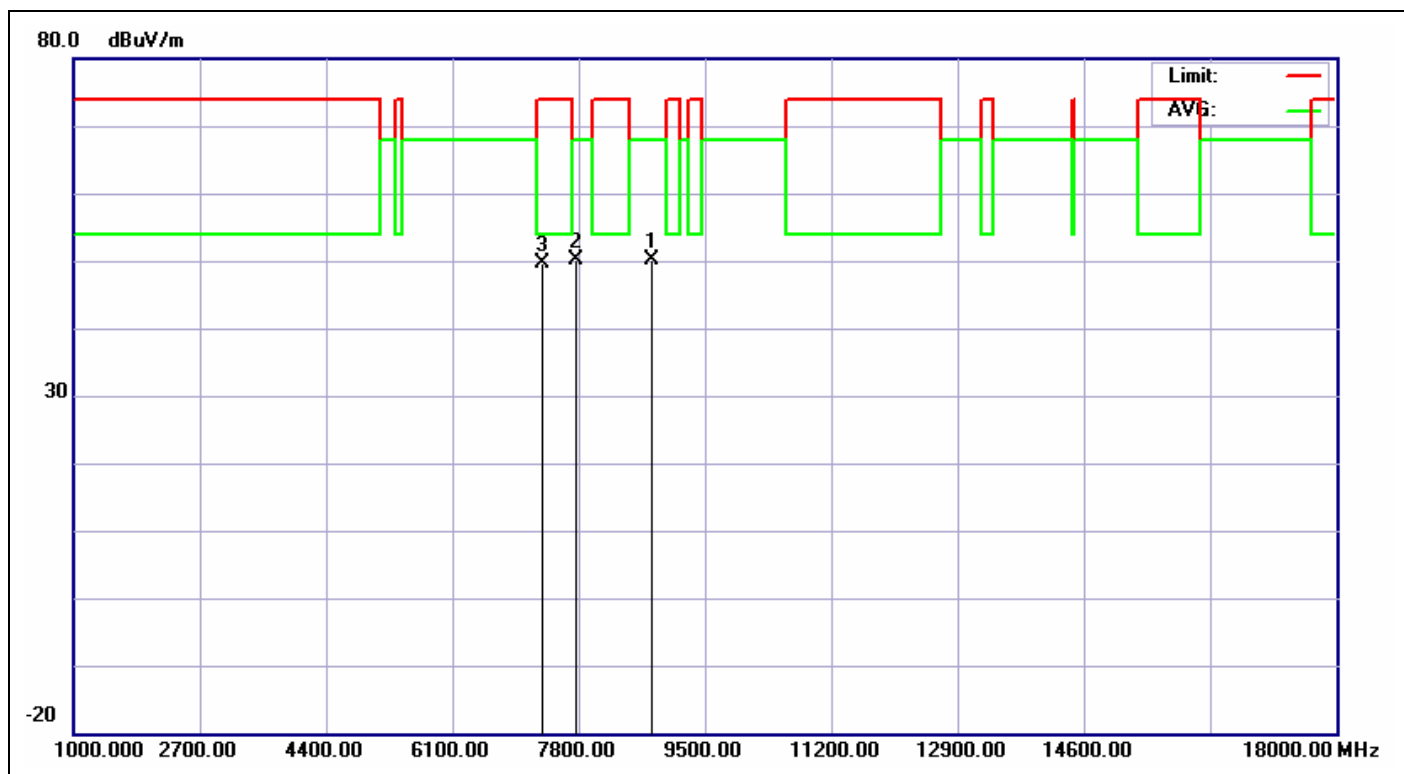

Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:02:59
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5280		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8778.000	7.02	42.99	50.01	68.00	-17.99	peak	100	0	
2	7771.000	6.47	43.78	50.25	68.00	-17.75	peak	100	0	
3	7309.000	5.74	43.88	49.62	74.00	-24.38	peak	100	0	

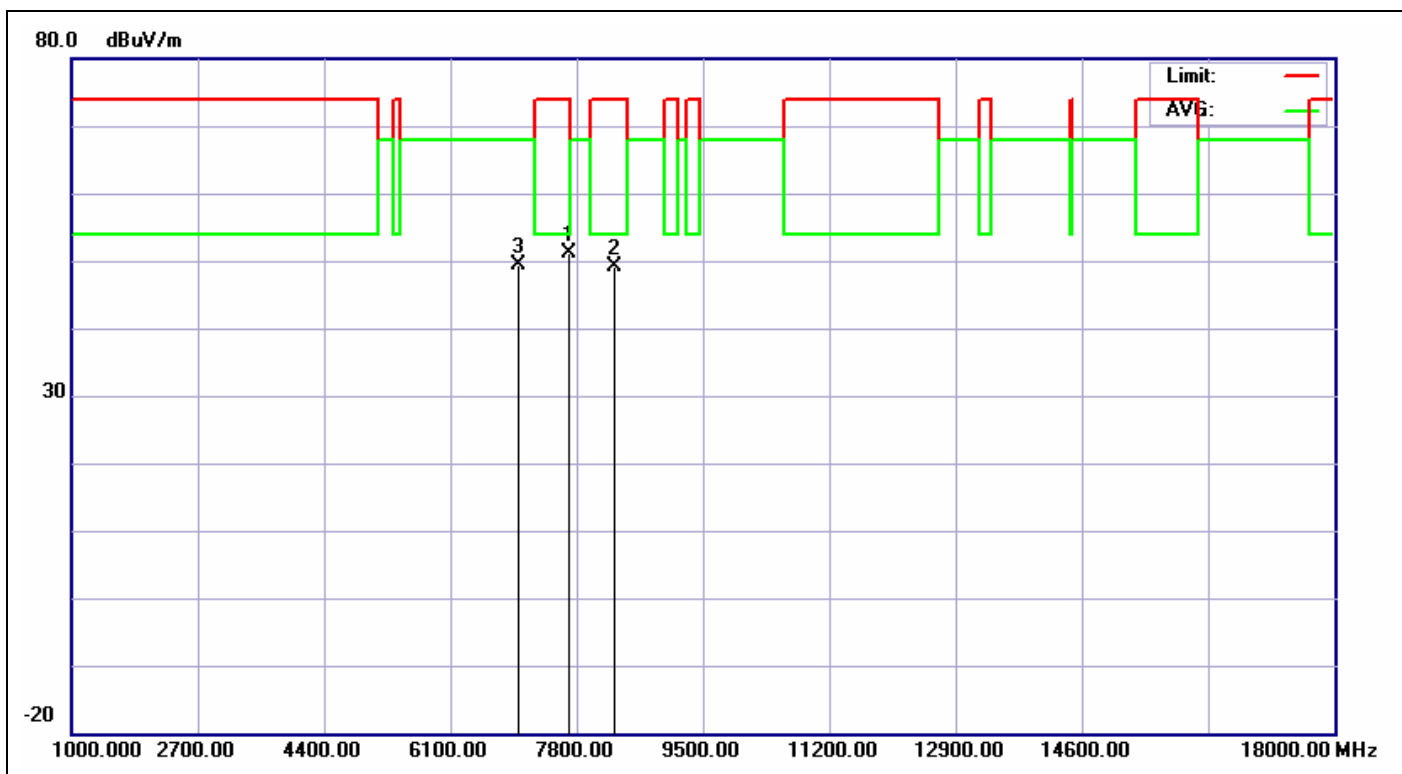

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2013/1/3 PM 07:04:49

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A20 CH5320


Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7690.000	6.49	44.62	51.11	74.00	-22.89	peak	100	360	
2	8315.000	6.55	42.68	49.23	74.00	-24.77	peak	100	360	
3	7010.000	4.54	44.80	49.34	68.00	-18.66	peak	100	360	

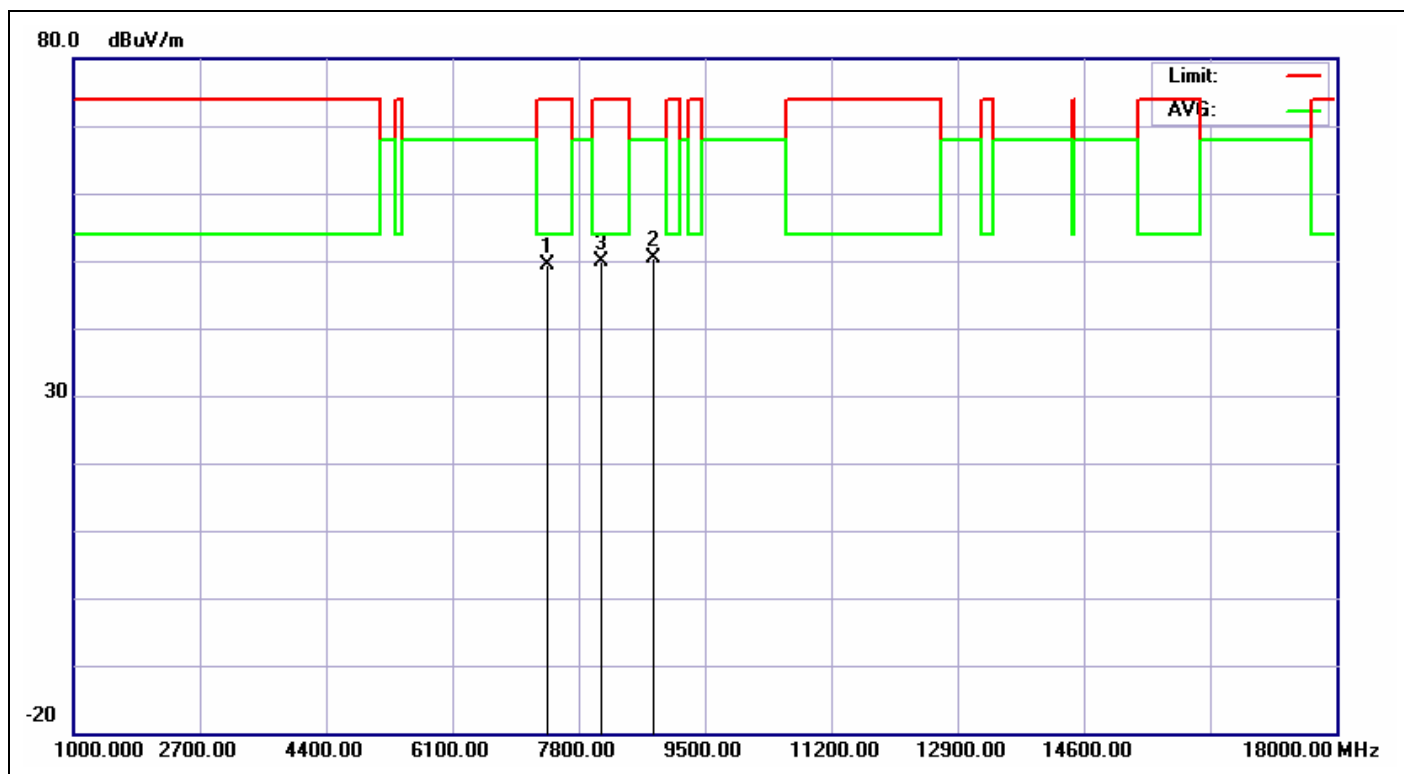

Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:06:29
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5320		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7391.000	6.07	43.19	49.26	74.00	-24.74	peak	100	0	
2	8805.000	7.07	43.21	50.28	68.00	-17.72	peak	100	0	
3	8098.000	6.47	43.46	49.93	74.00	-24.07	peak	100	0	

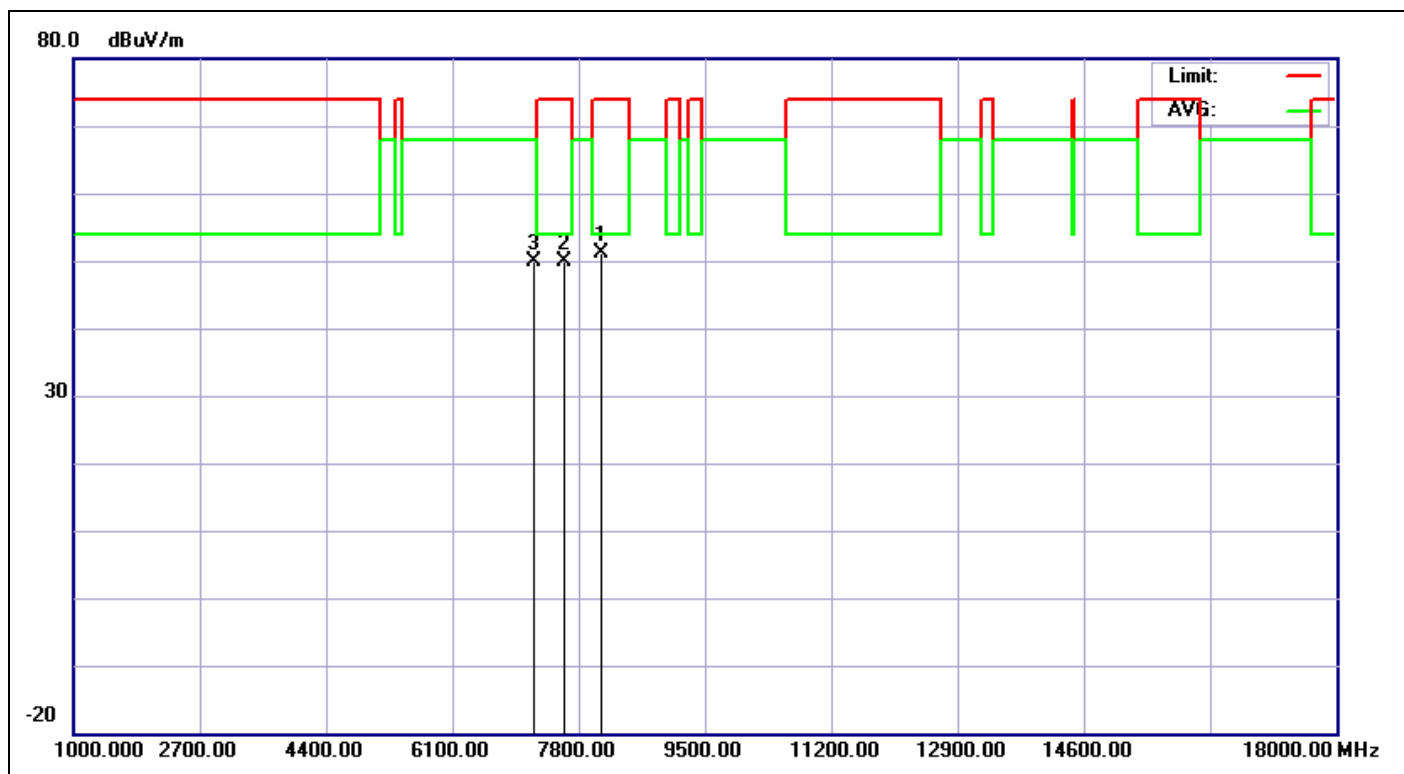

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2013/1/3 PM 07:08:33

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A40 CH5270

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8098.000	6.47	44.55	51.02	74.00	-22.98	peak	100	360	
2	7608.000	6.49	43.49	49.98	74.00	-24.02	peak	100	360	
3	7200.000	5.31	44.66	49.97	68.00	-18.03	peak	100	360	

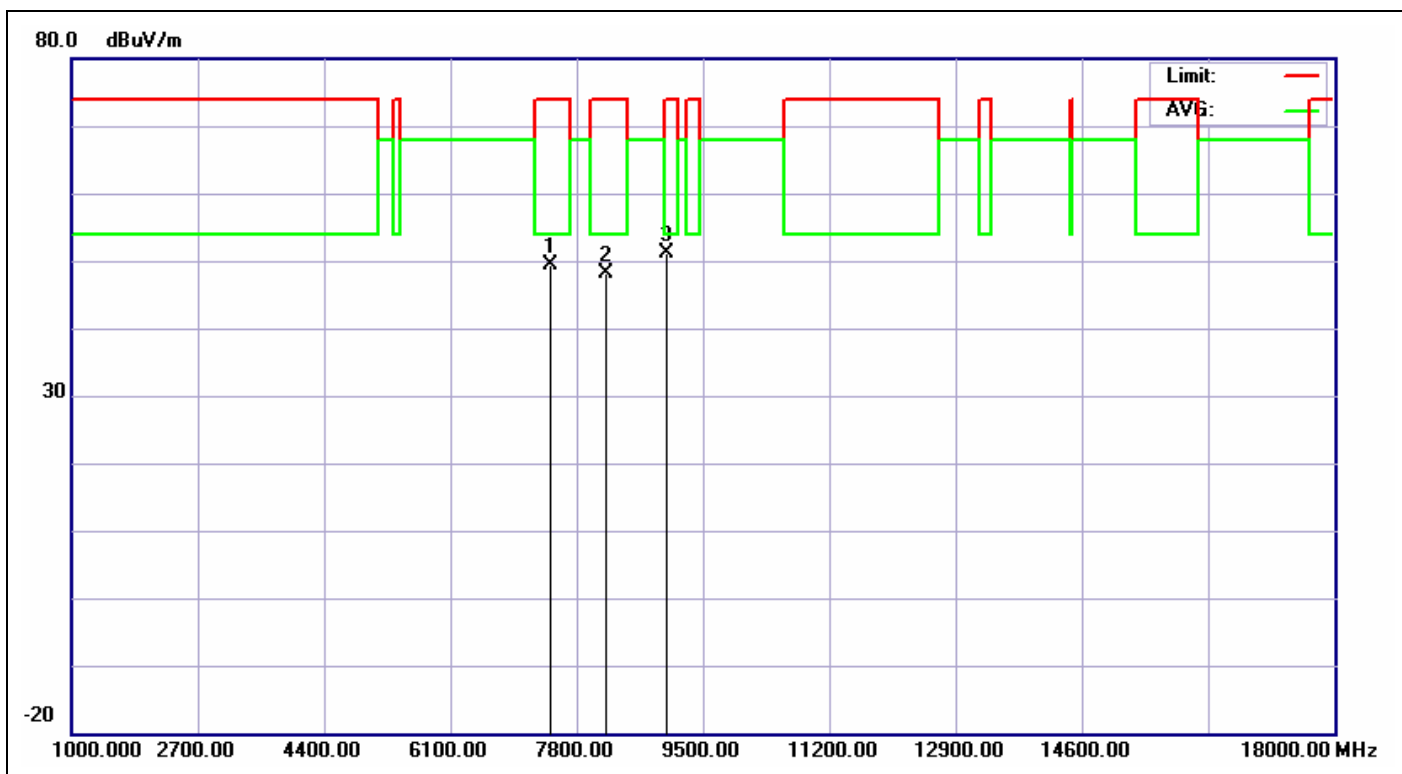

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Vertical

Test item: Radiation Emission

Test Time: 2013/1/3 PM 07:10:16

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A40 CH5270


Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7445.000	6.29	43.04	49.33	74.00	-24.67	peak	100	1	
2	8207.000	6.52	41.70	48.22	74.00	-25.78	peak	100	0	
3	9023.000	7.38	43.65	51.03	74.00	-22.97	peak	100	0	

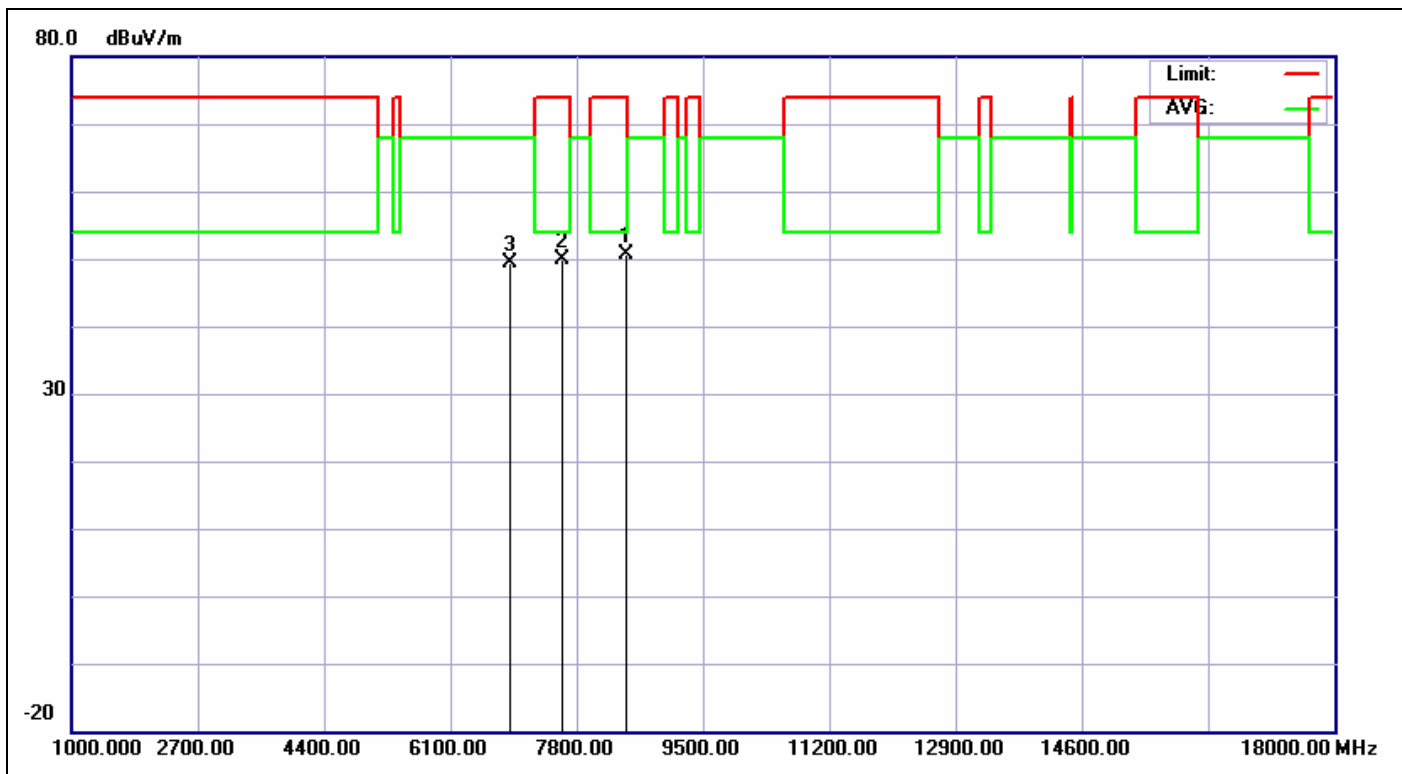


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:12:27
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5310		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8479.000	6.61	44.01	50.62	74.00	-23.38	peak	100	360	
2	7608.000	6.49	43.49	49.98	74.00	-24.02	peak	100	360	
3	6901.000	4.38	45.11	49.49	68.00	-18.51	peak	100	360	

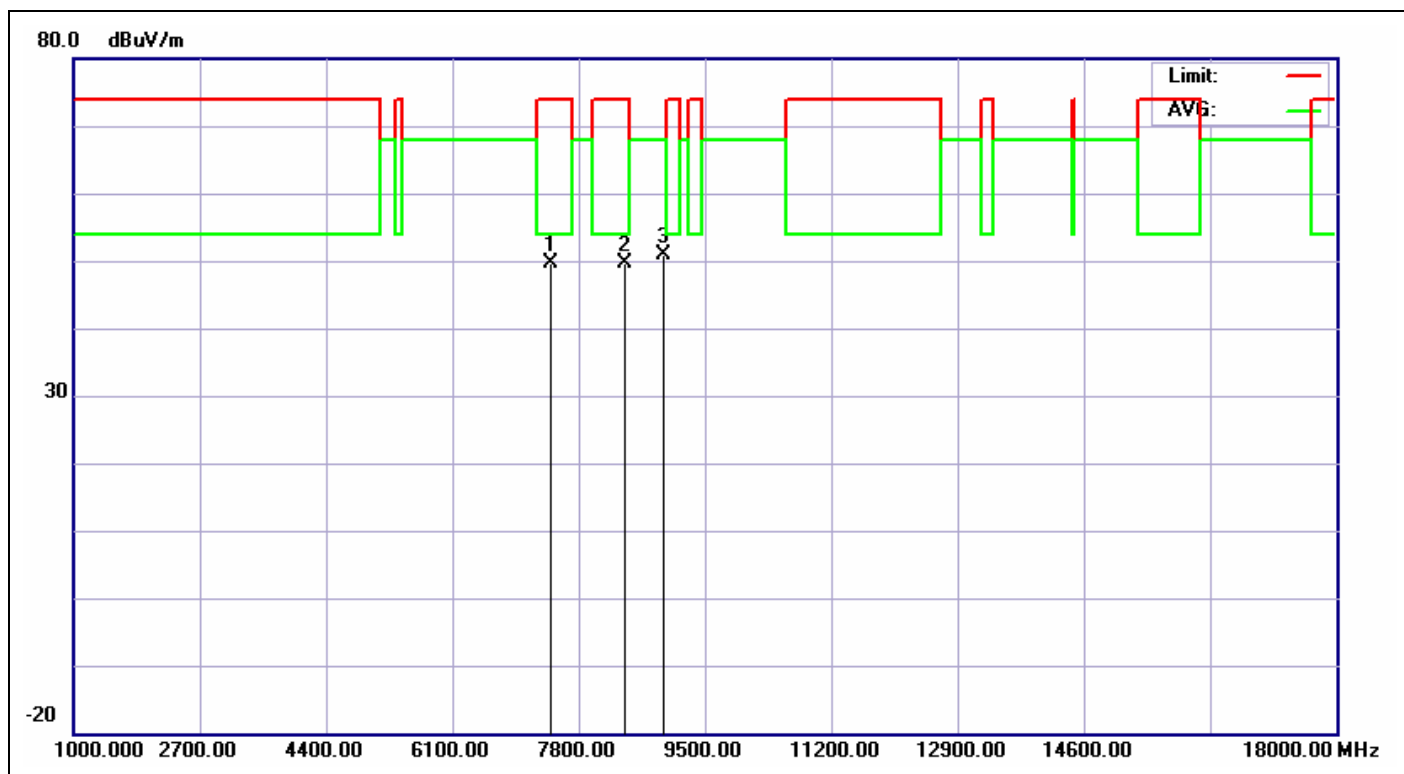


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:13:54
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5310		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7418.000	6.17	43.38	49.55	74.00	-24.45	peak	100	0	
2	8424.000	6.59	43.04	49.63	74.00	-24.37	peak	100	0	
3	8941.000	7.28	43.70	50.98	68.00	-17.02	peak	100	0	

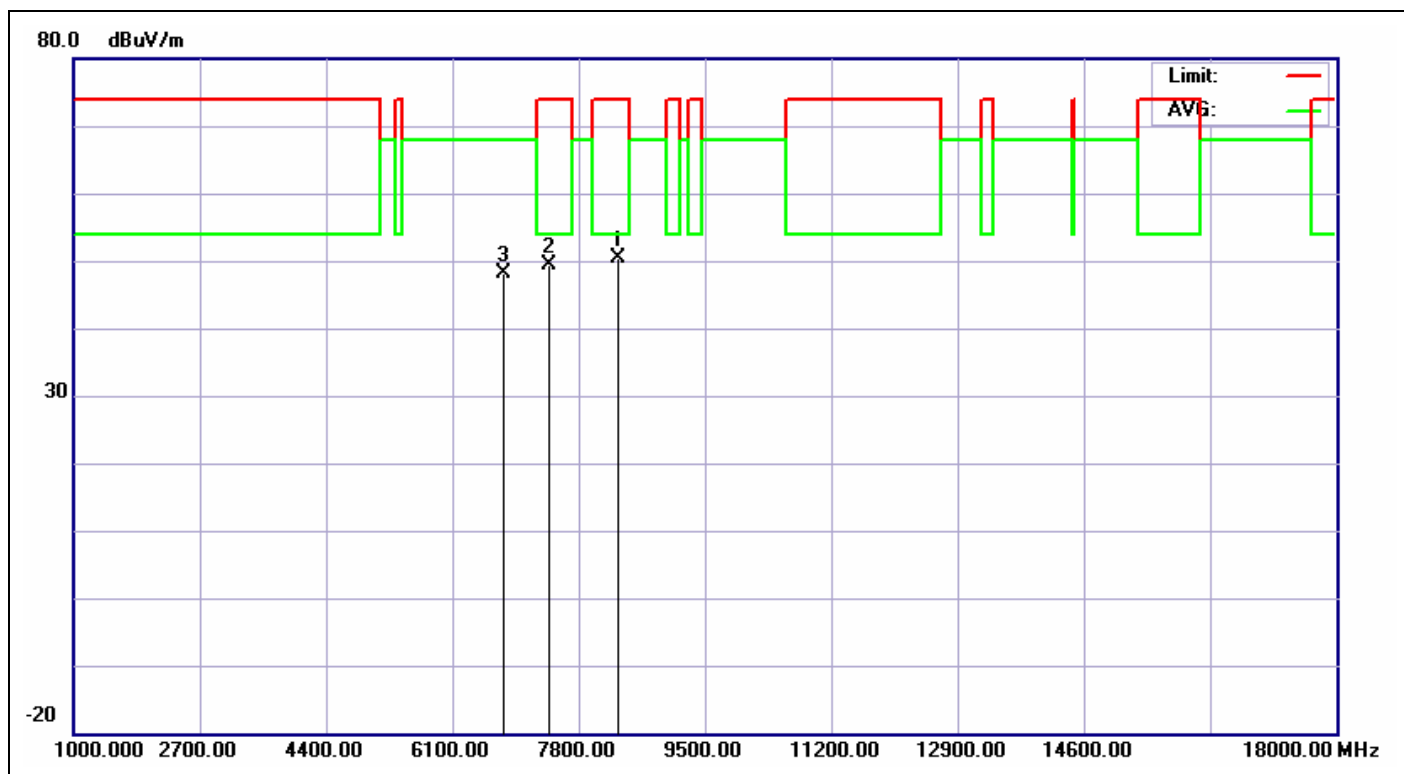


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 01:06:45
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5260		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8330.000	6.56	43.89	50.45	74.00	-23.55	peak	100	0	
2	7406.000	6.13	43.34	49.47	74.00	-24.53	peak	100	0	
3	6780.000	4.24	43.95	48.19	68.00	-19.81	peak	100	0	

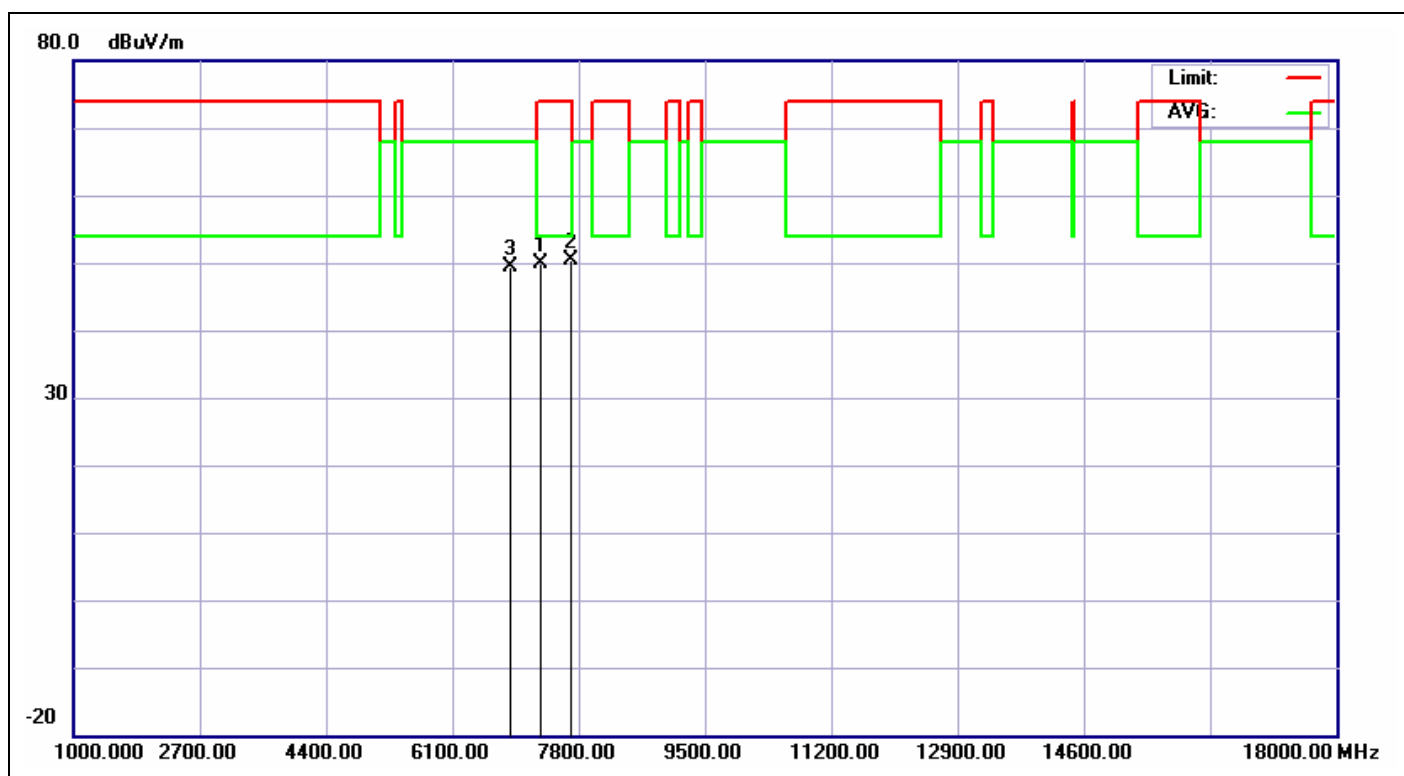


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 01:11:32
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5260		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7297.000	5.70	44.09	49.79	74.00	-24.21	peak	100	360	
2	7705.000	6.48	43.91	50.39	74.00	-23.61	peak	100	360	
3	6889.000	4.37	45.03	49.40	68.00	-18.60	peak	100	360	

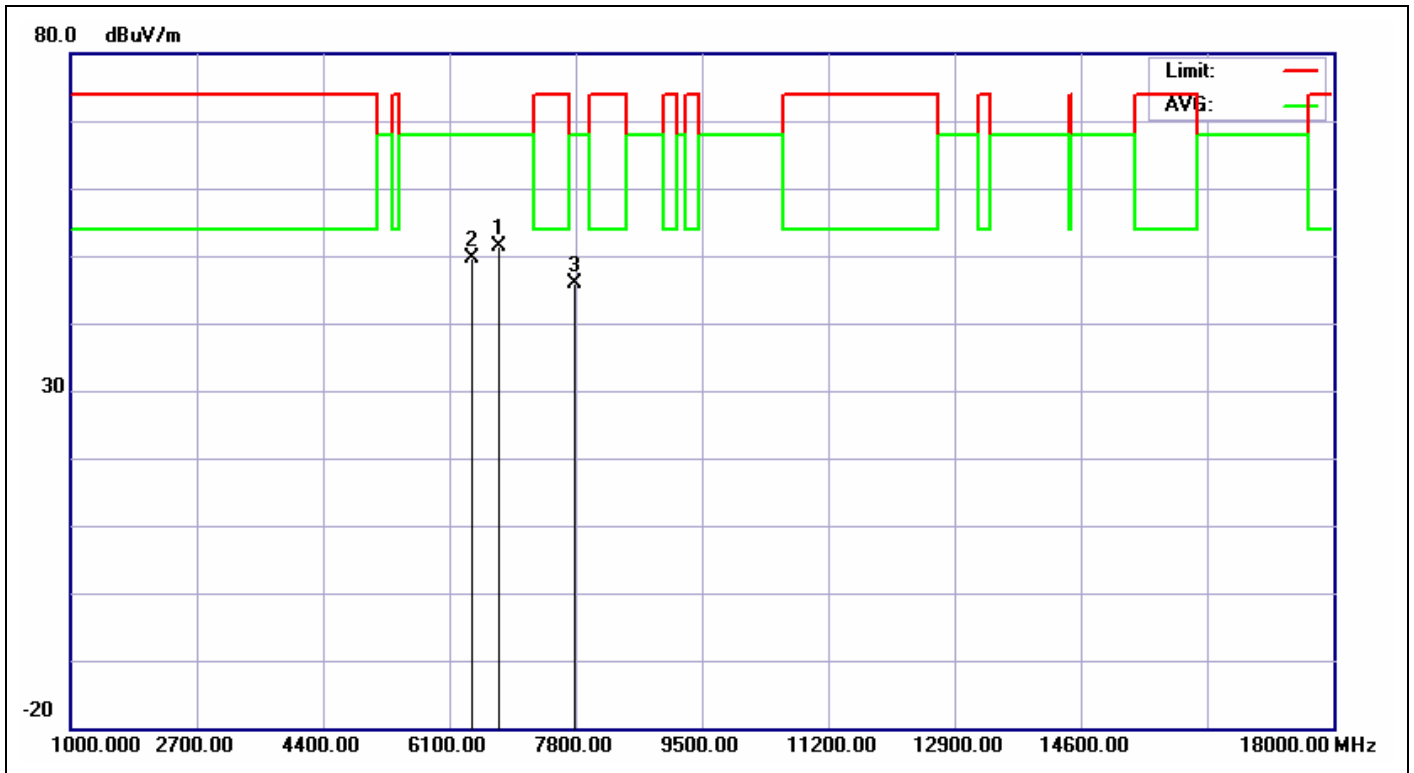


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 06:45:11
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5280		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	6765.000	4.22	47.27	51.49	68.00	-16.51	peak	100	360	
2	6411.000	3.52	46.23	49.75	68.00	-18.25	peak	100	360	
3	7799.000	6.47	39.36	45.83	68.00	-22.17	peak	100	360	

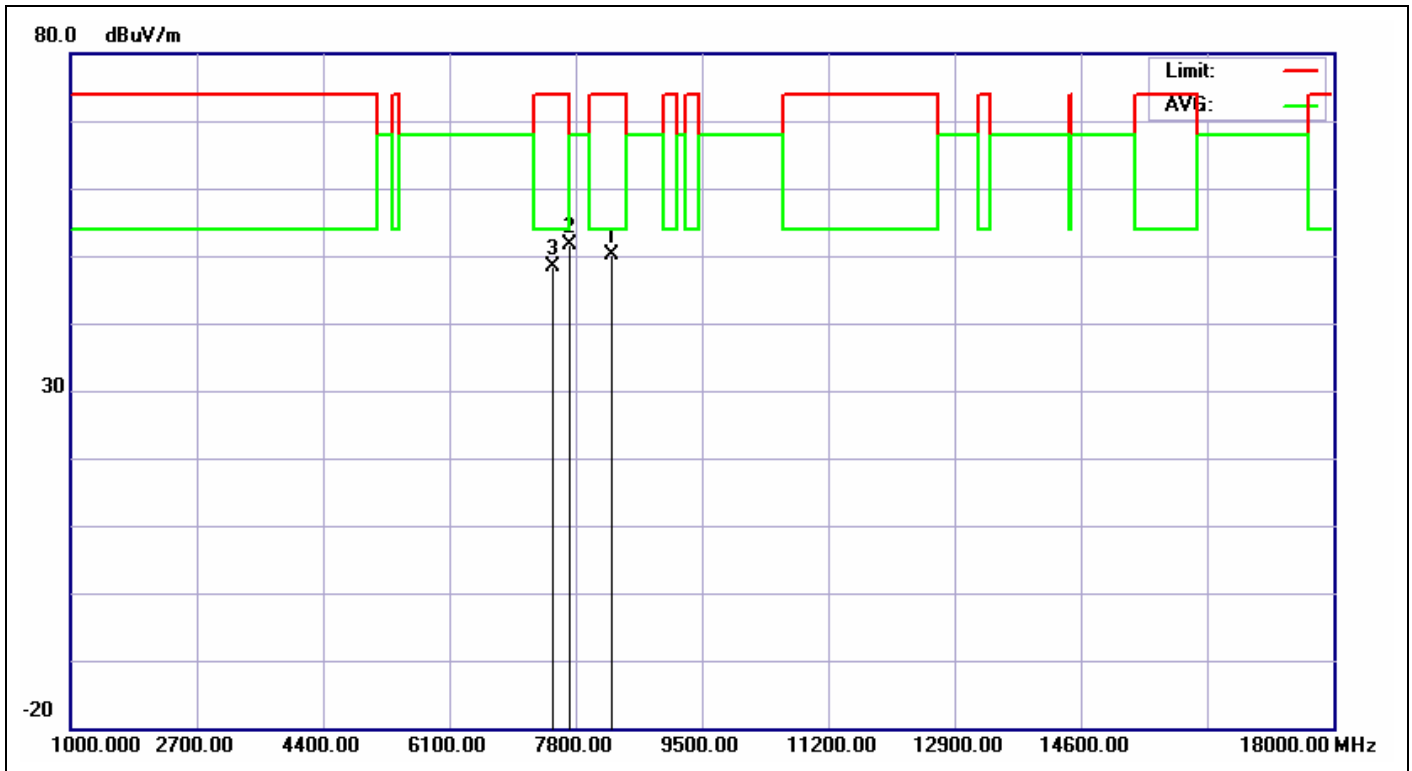


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 06:50:34
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5280		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8288.000	6.54	43.66	50.20	74.00	-23.80	peak	100	0	
2	7717.000	6.48	45.23	51.71	74.00	-22.29	peak	100	0	
3	7499.000	6.51	41.96	48.47	74.00	-25.53	peak	100	0	

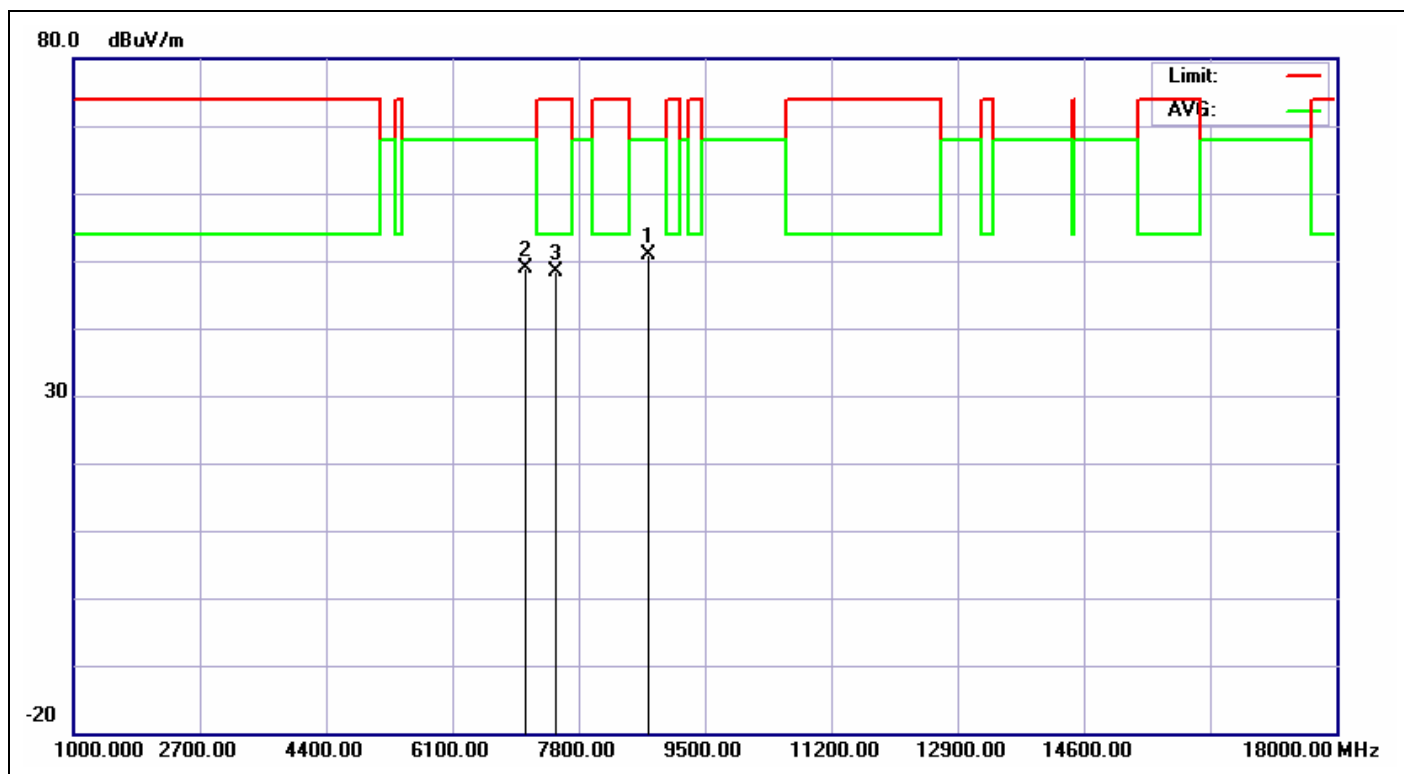


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 06:53:09
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5320		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8751.000	6.99	43.78	50.77	68.00	-17.23	peak	100	360	
2	7091.000	4.87	43.91	48.78	68.00	-19.22	peak	100	360	
3	7499.000	6.51	41.91	48.42	74.00	-25.58	peak	100	360	

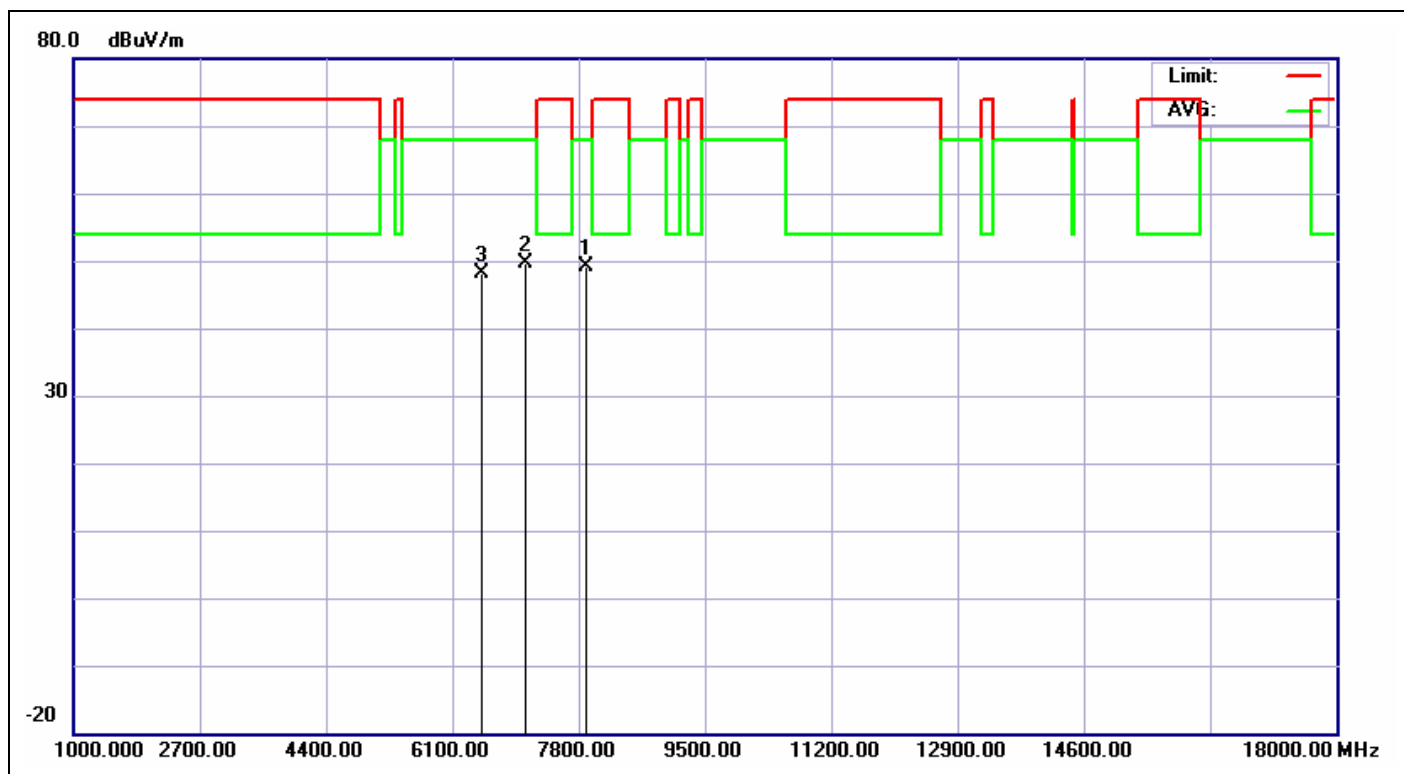


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 06:55:43
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5320		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7907.000	6.45	42.76	49.21	68.00	-18.79	peak	100	0	
2	7091.000	4.87	44.75	49.62	68.00	-18.38	peak	100	0	
3	6493.000	3.87	44.22	48.09	68.00	-19.91	peak	100	0	

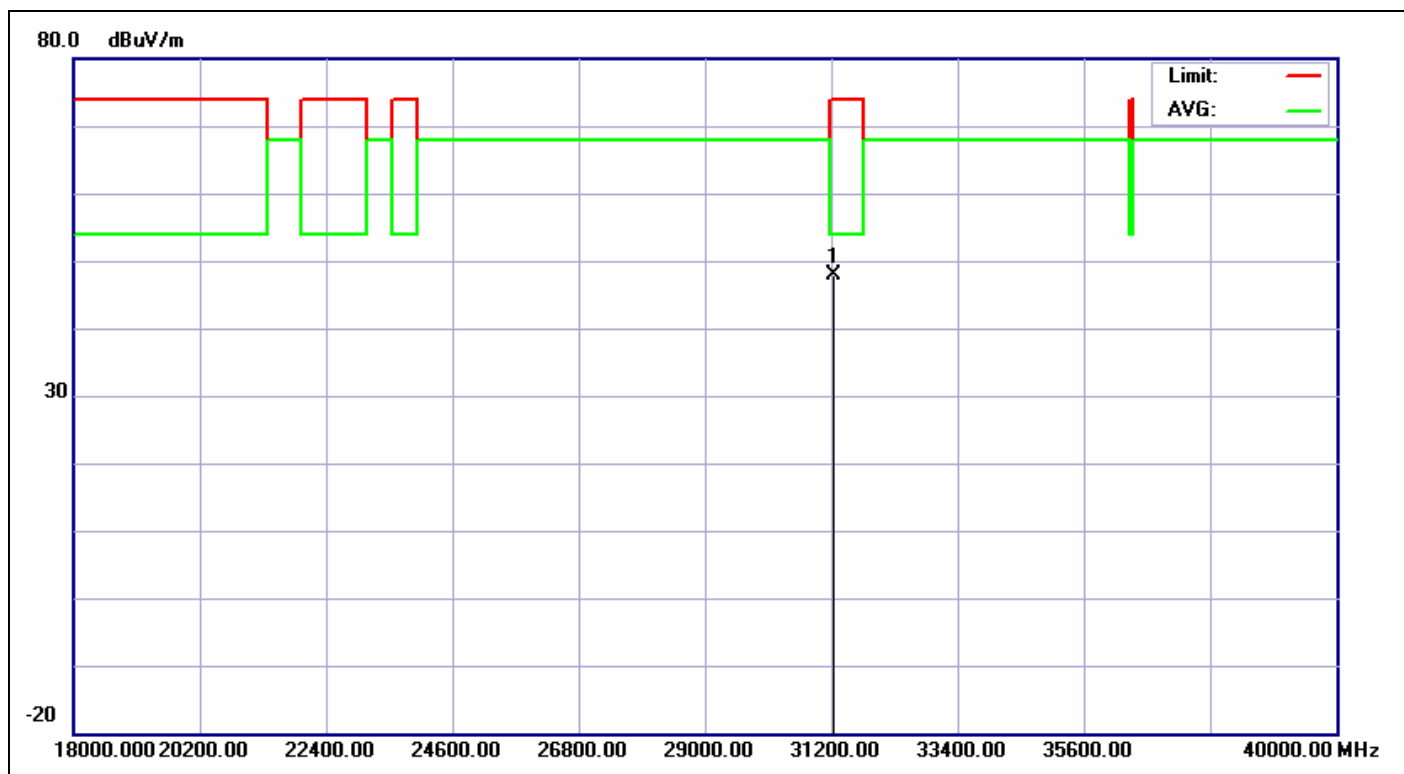


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:34:19
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5260		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31253.000	32.31	15.45	47.76	74.00	-26.24	peak	100	360	

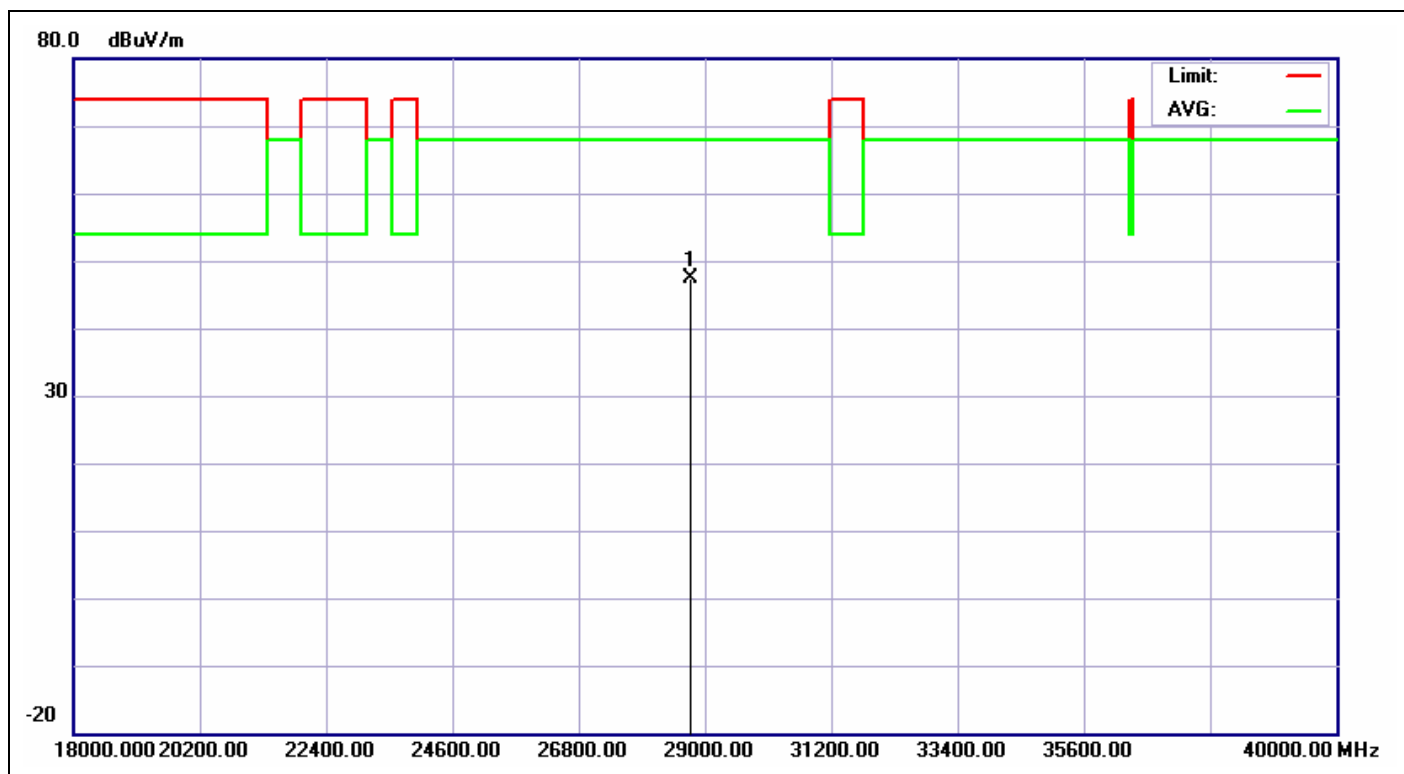


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:34:44
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5260		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28754.000	31.32	16.15	47.47	68.00	-20.53	peak	100	360	

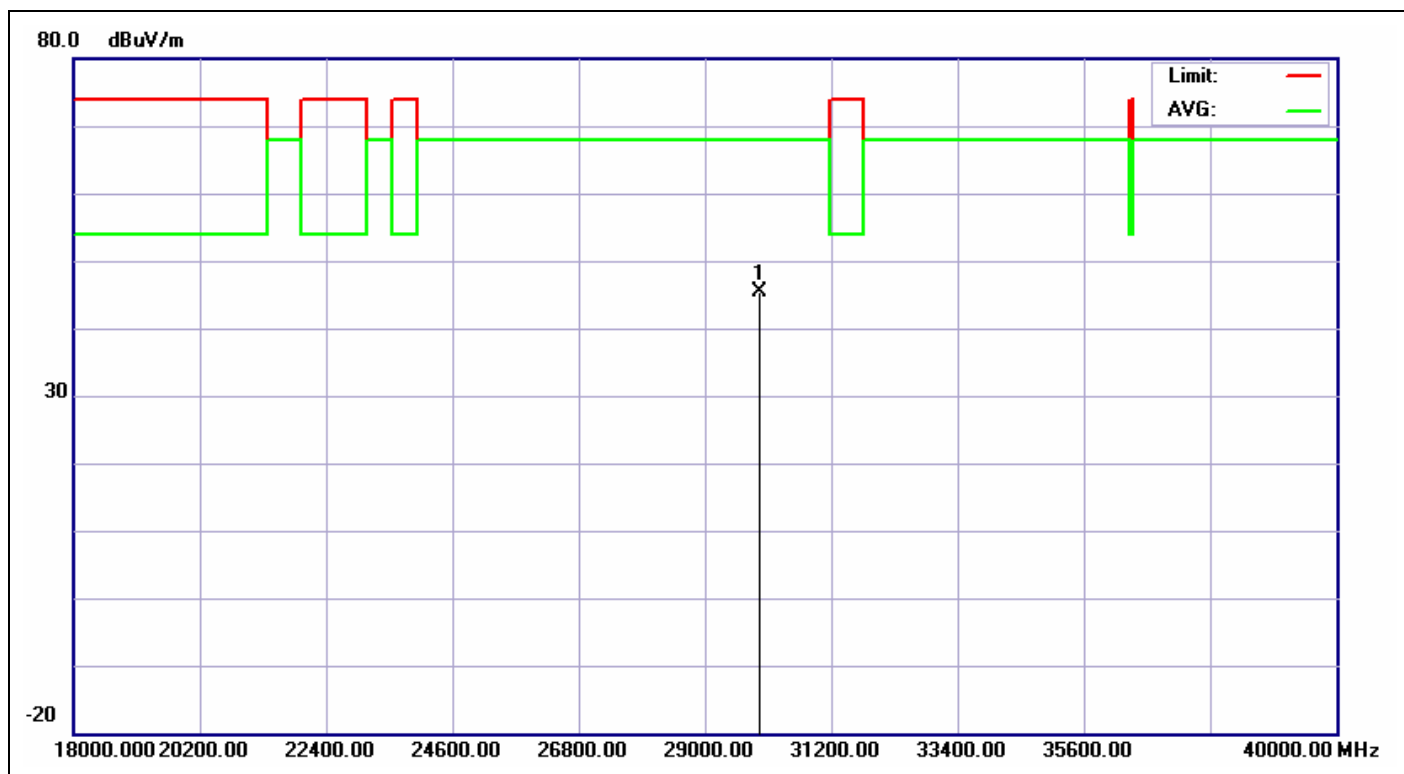


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:35:06
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5280		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	29950.000	30.36	15.08	45.44	68.00	-22.56	peak	100	360	

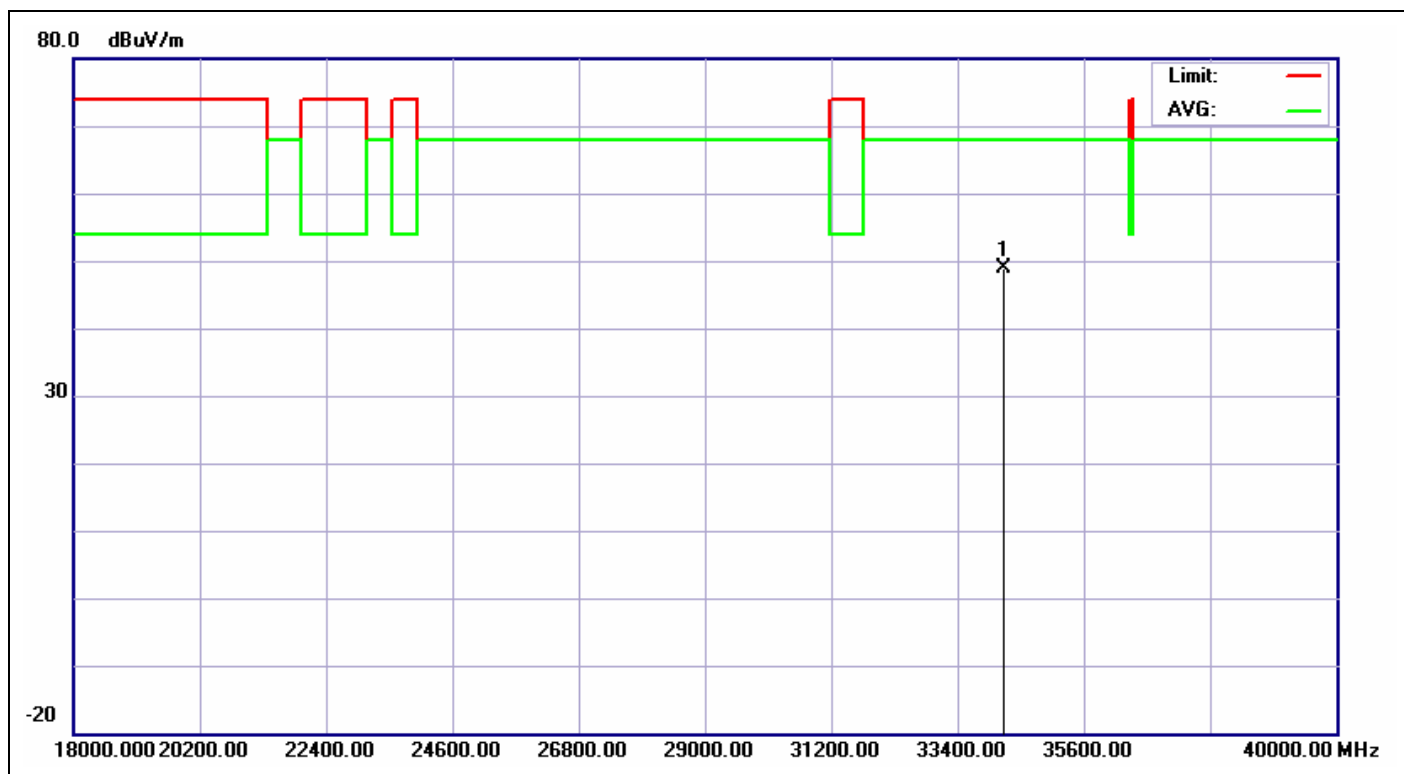


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:35:28
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5280		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	34210.000	33.53	15.42	48.95	68.00	-19.05	peak	100	360	

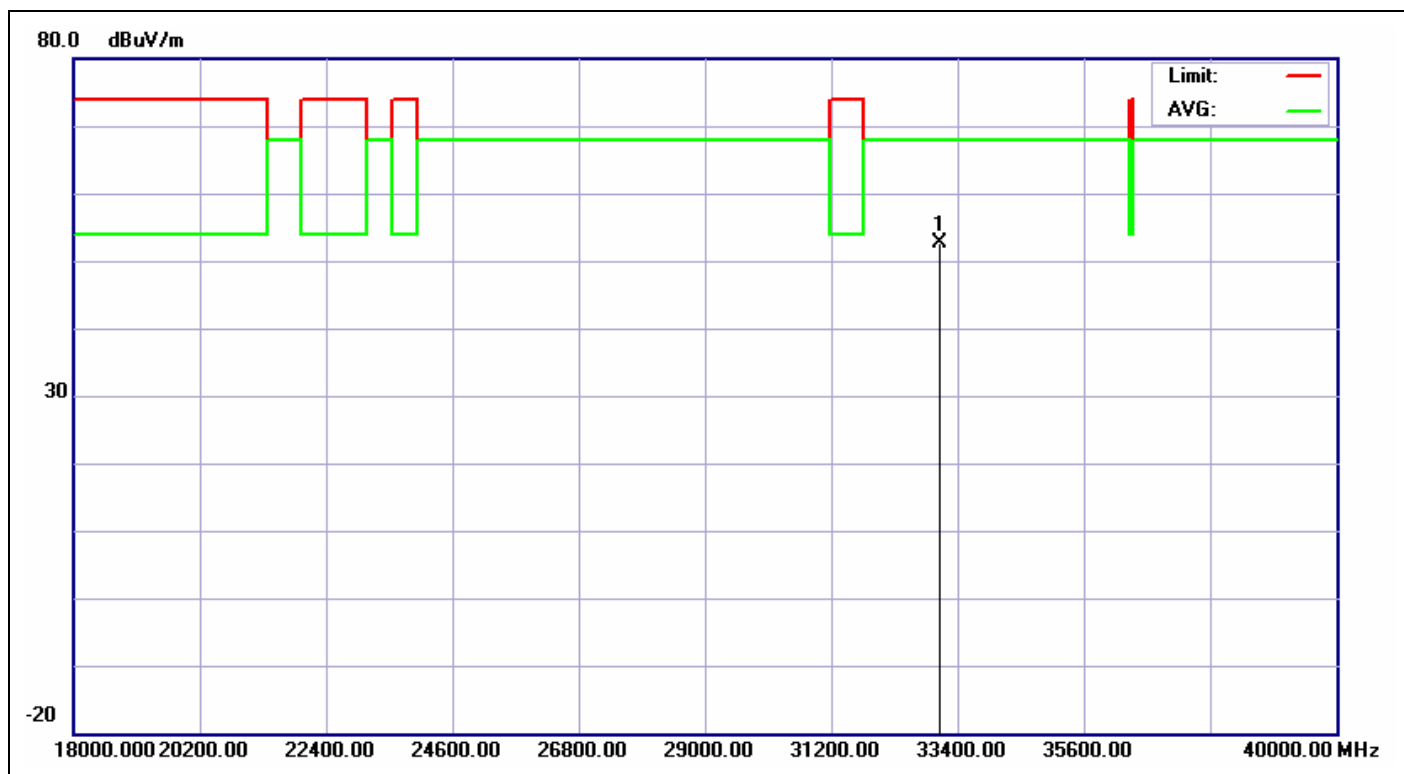

Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:36:07
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5320		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	33083.000	34.35	18.31	52.66	68.00	-15.34	peak	100	0	

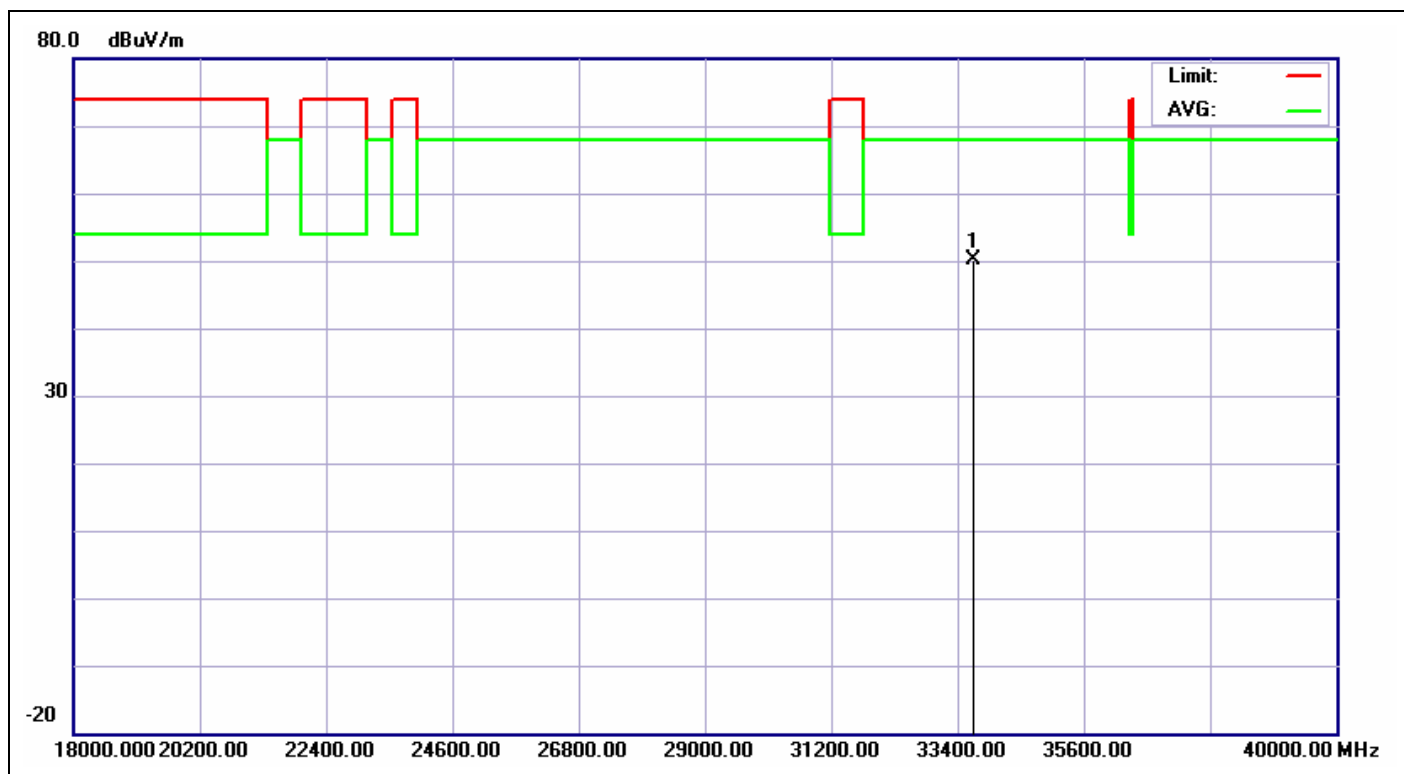

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Vertical

Test item: Radiation Emission

Test Time: 2013/1/3 PM 09:37:07

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A20 CH5320


Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	33682.000	33.93	16.28	50.21	68.00	-17.79	peak	100	360	

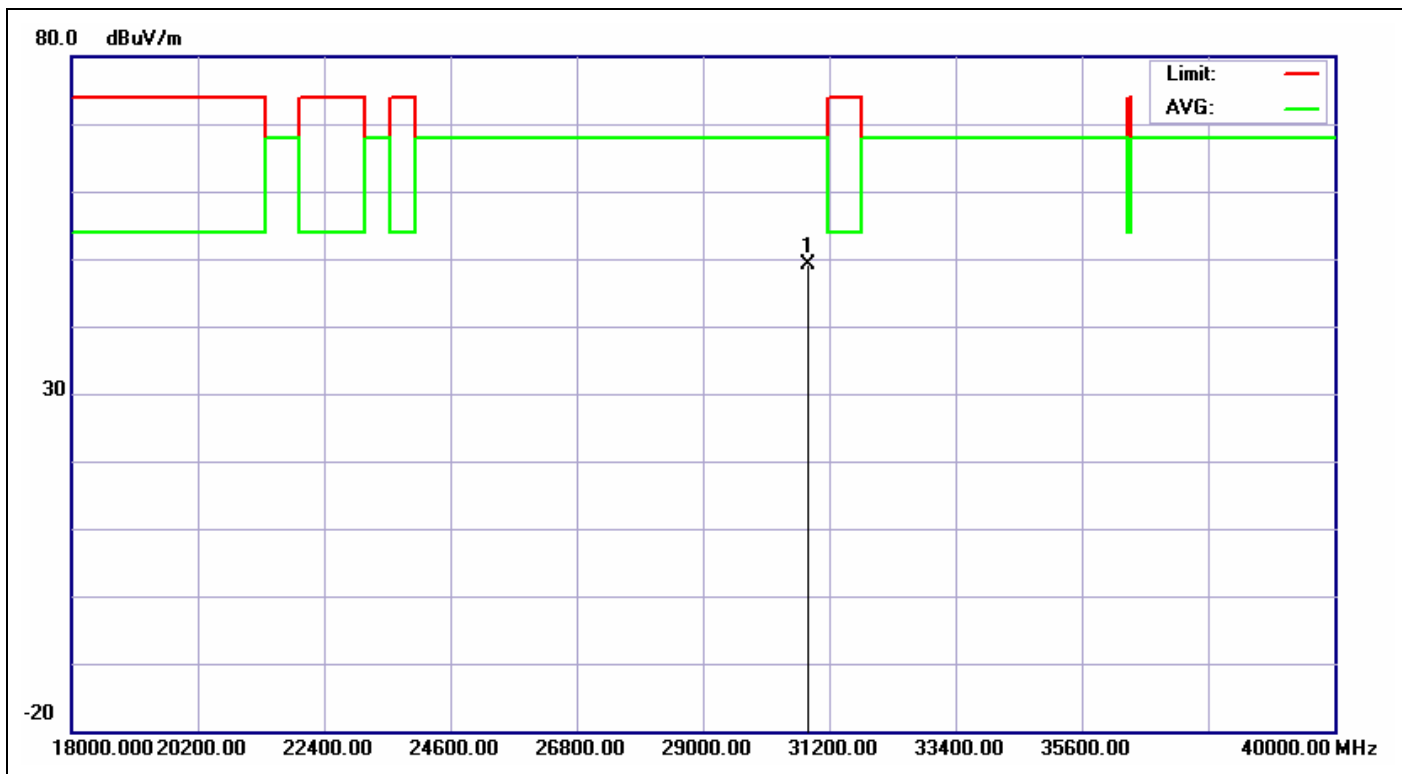


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:37:41
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5270		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30830.000	32.22	16.83	49.05	68.00	-18.95	peak	100	360	

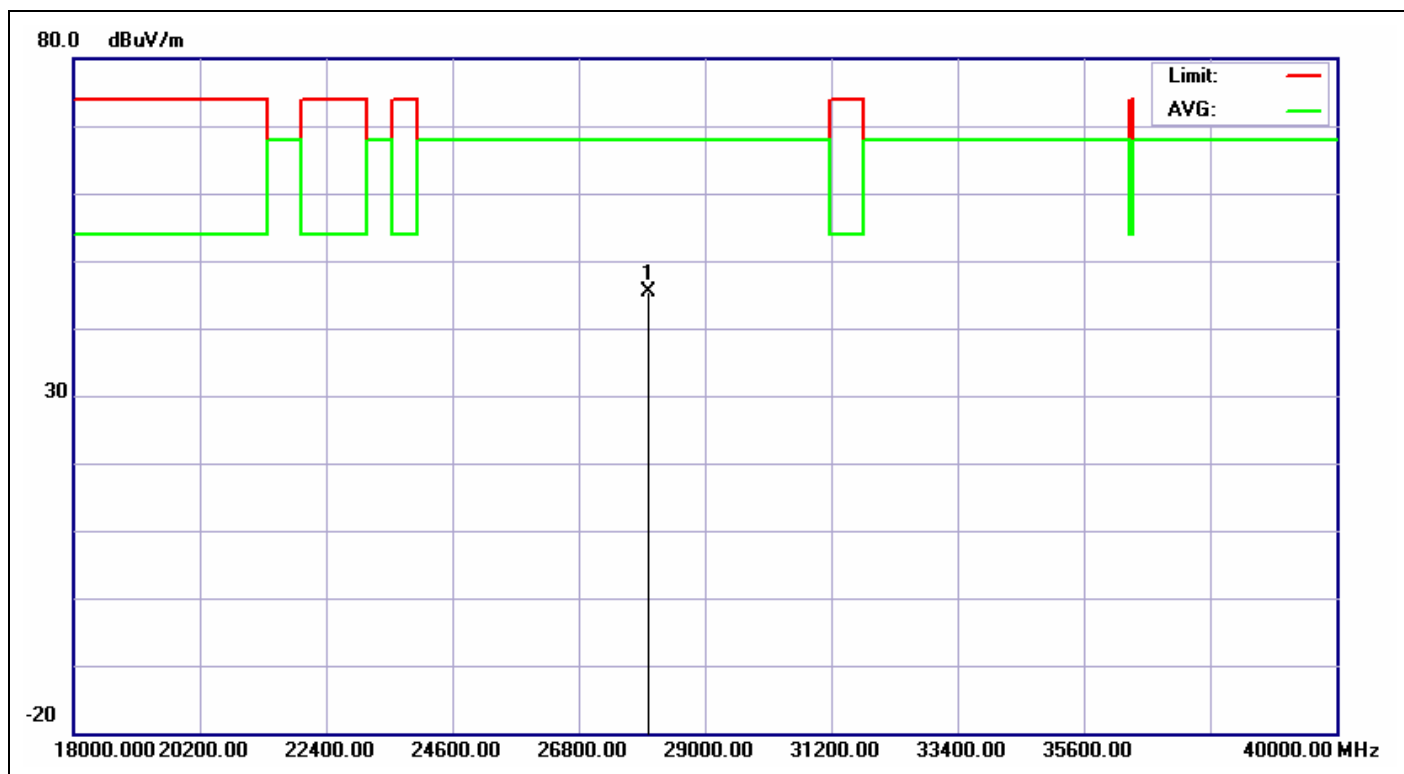


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:38:31
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5270		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28014.000	30.56	14.87	45.43	68.00	-22.57	peak	100	360	

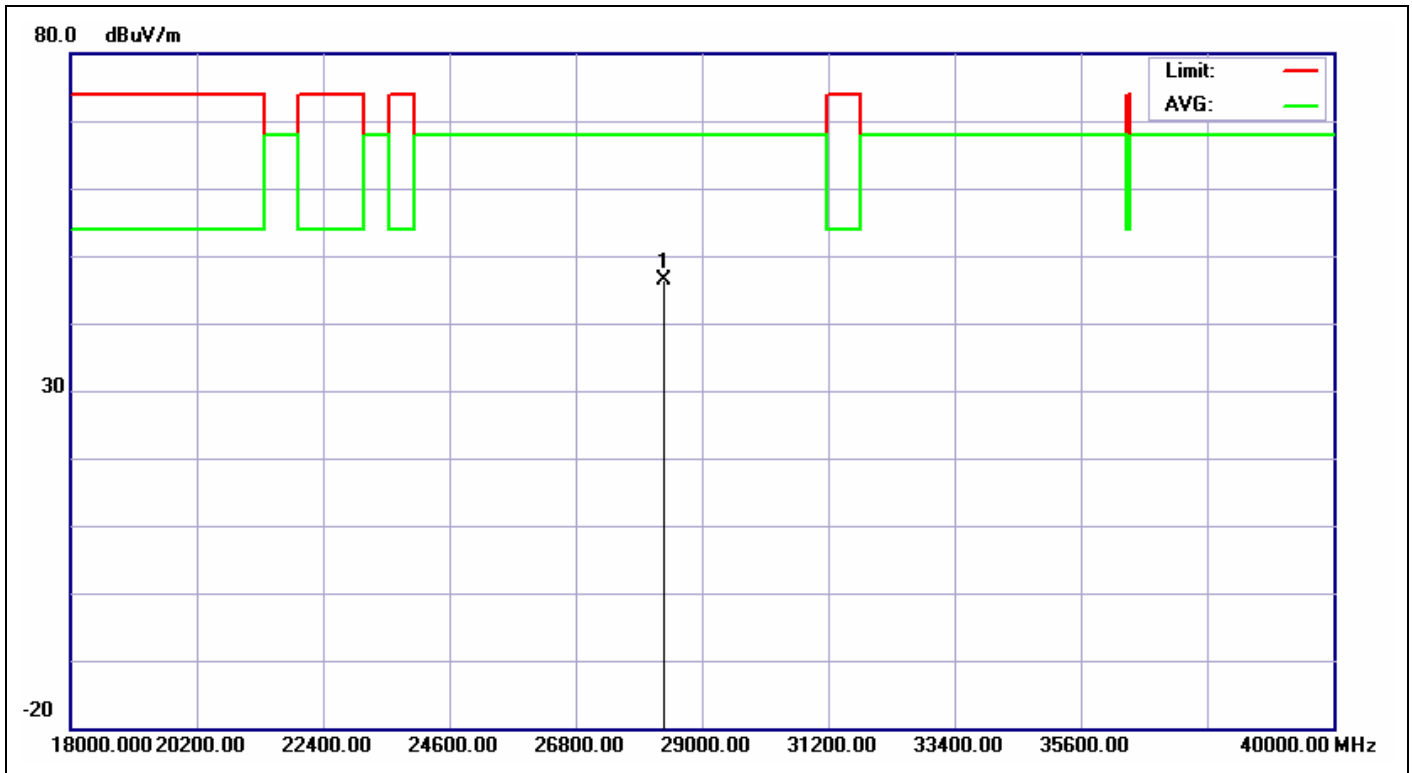


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:38:54
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5310		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28331.000	31.12	15.37	46.49	68.00	-21.51	peak	100	360	

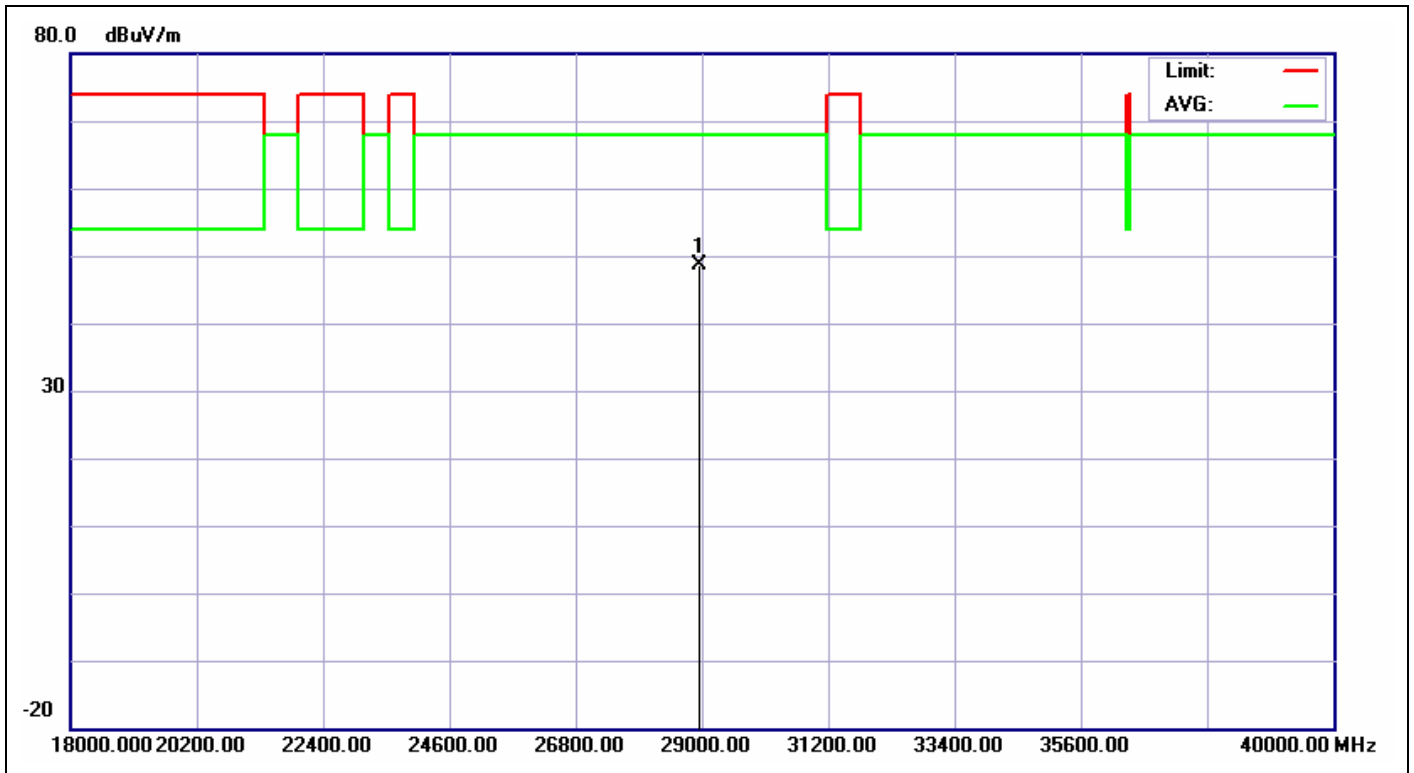


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:39:28
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5310		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28965.000	31.23	17.46	48.69	68.00	-19.31	peak	100	360	

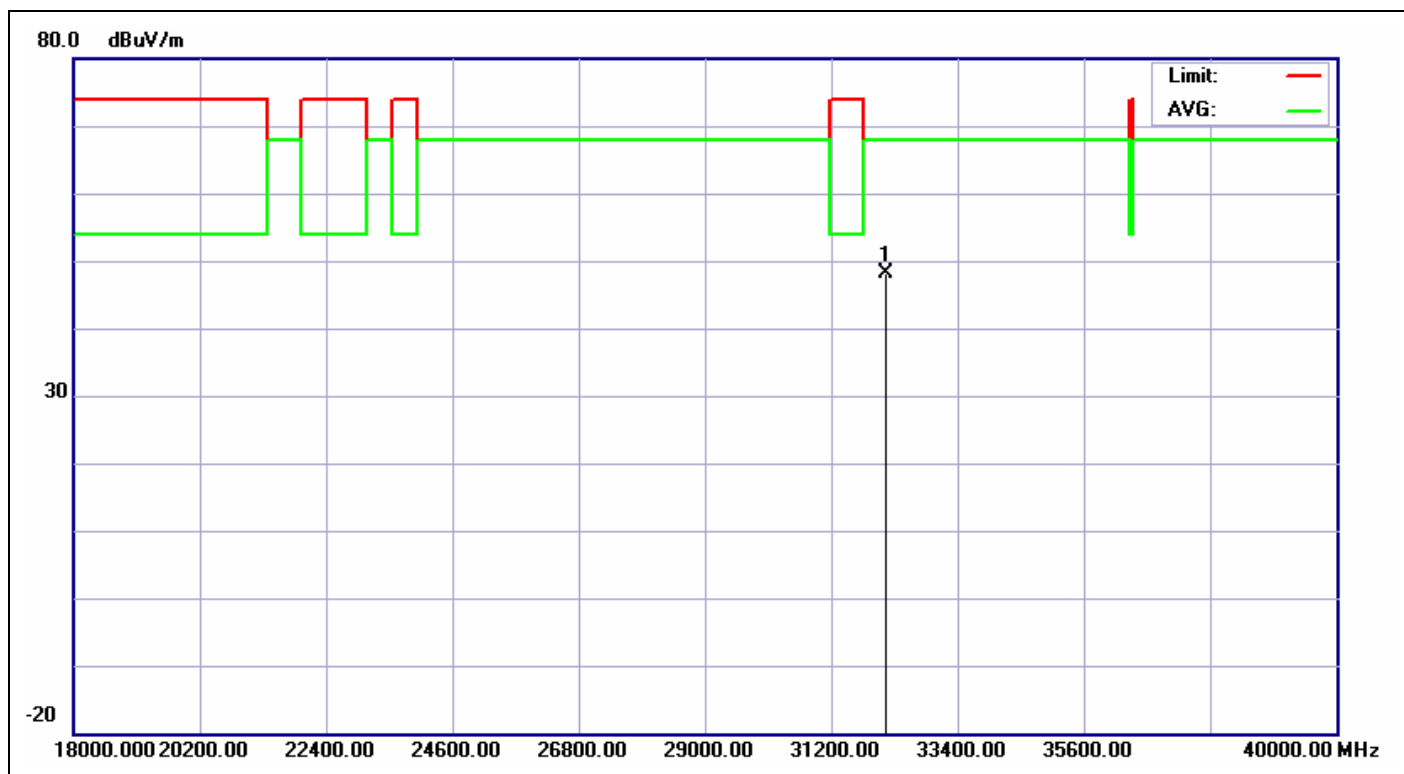


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:27:57
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5260		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32163.000	33.58	14.54	48.12	68.00	-19.88	peak	100	360	

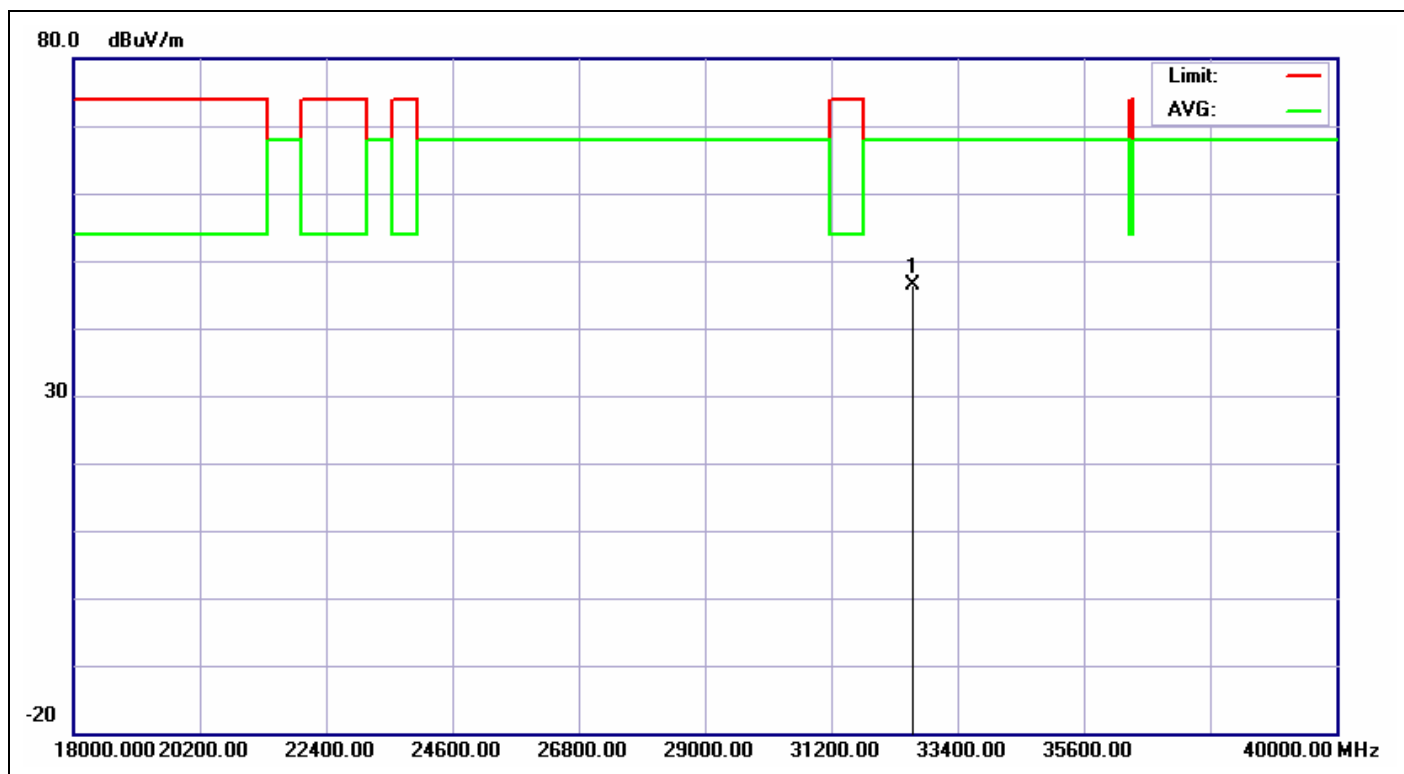


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:28:24
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5260		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32620.000	34.23	12.14	46.37	68.00	-21.63	peak	100	360	

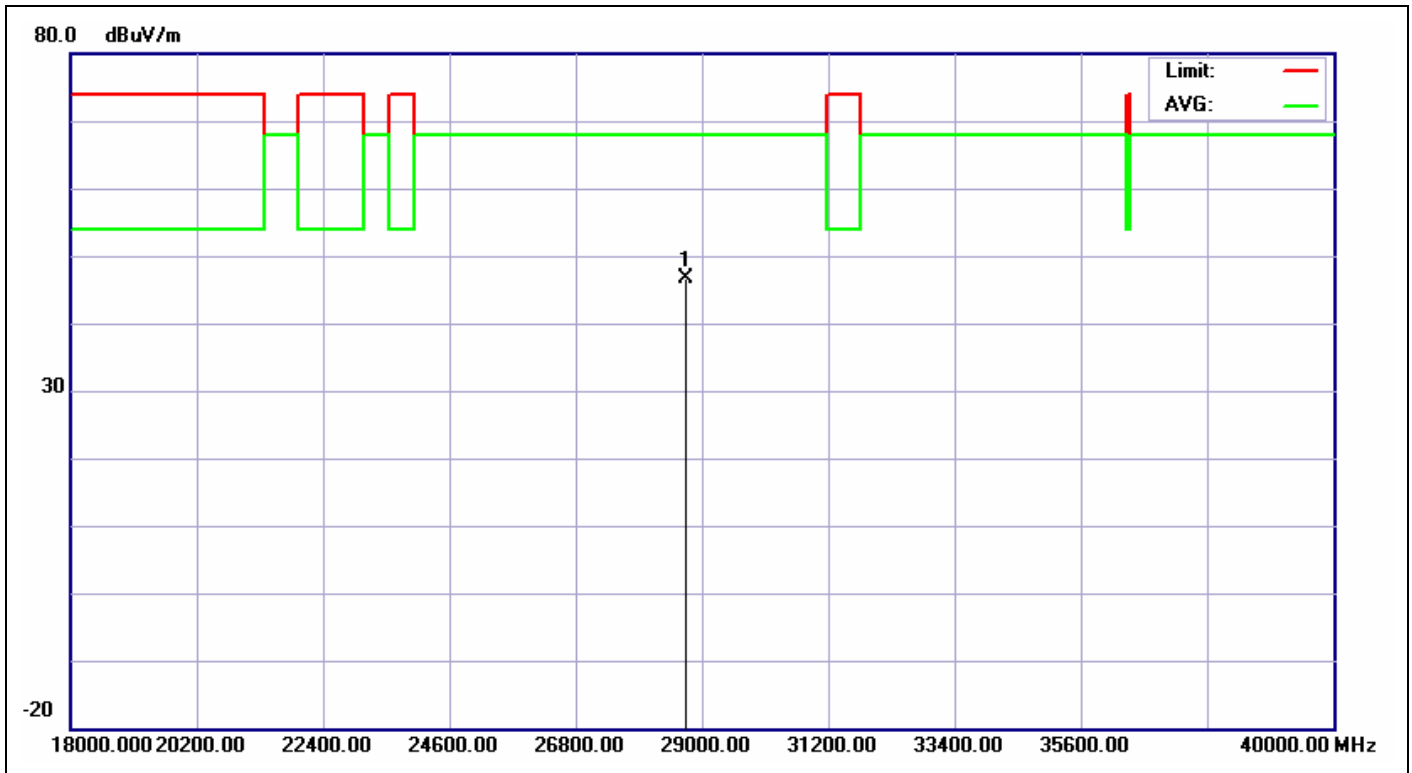


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:28:47
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5280		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28713.000	31.33	15.26	46.59	68.00	-21.41	peak	100	360	

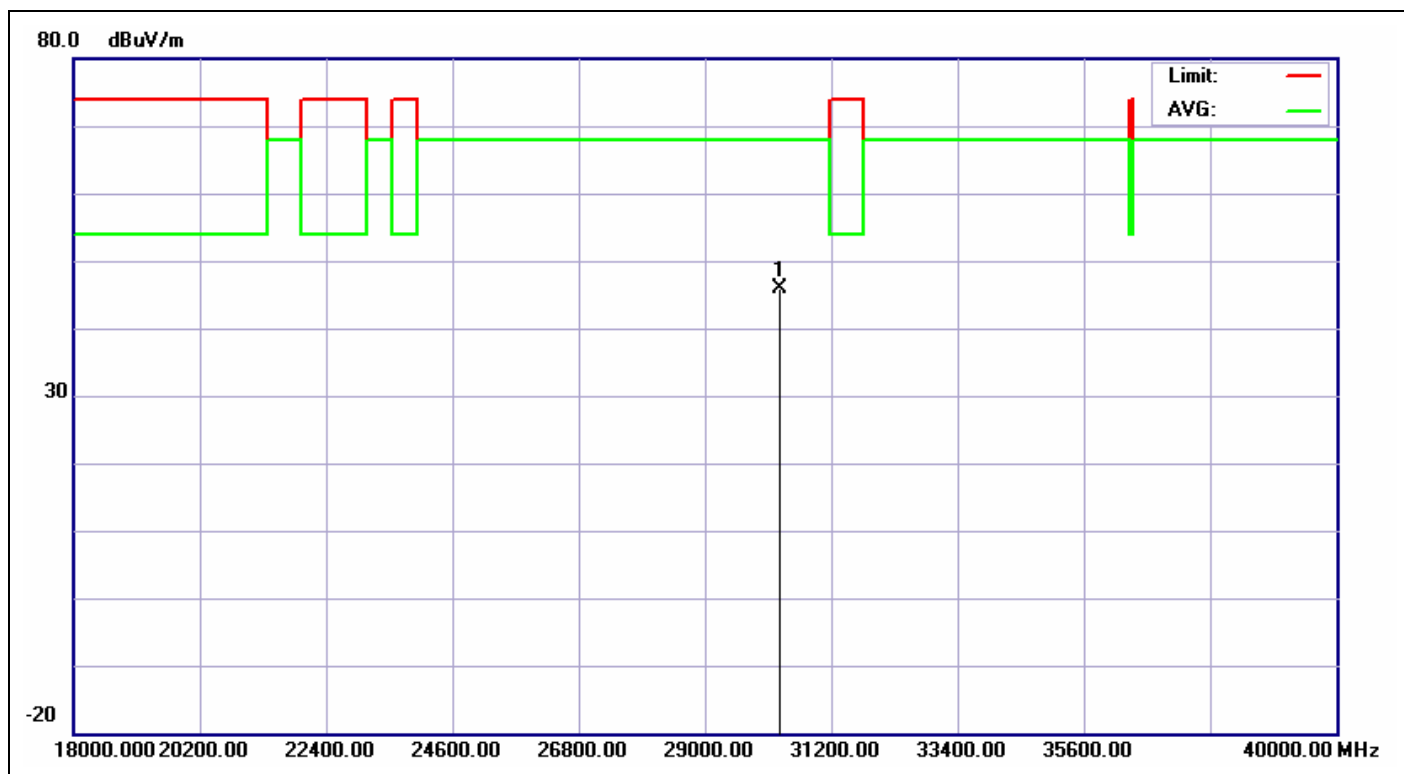


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:32:59
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5280		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30302.000	30.83	15.05	45.88	68.00	-22.12	peak	100	360	

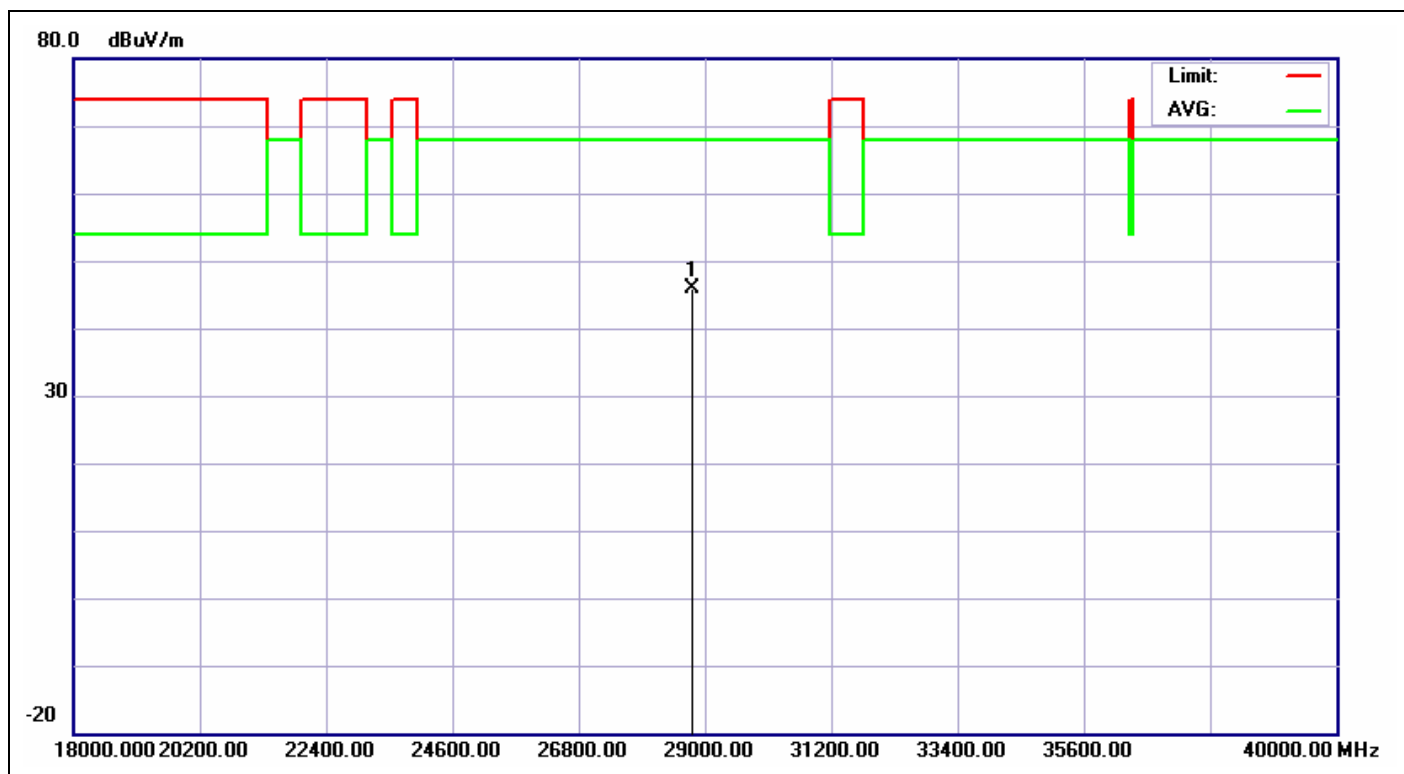


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:33:33
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5320		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28789.000	31.30	14.52	45.82	68.00	-22.18	peak	100	360	

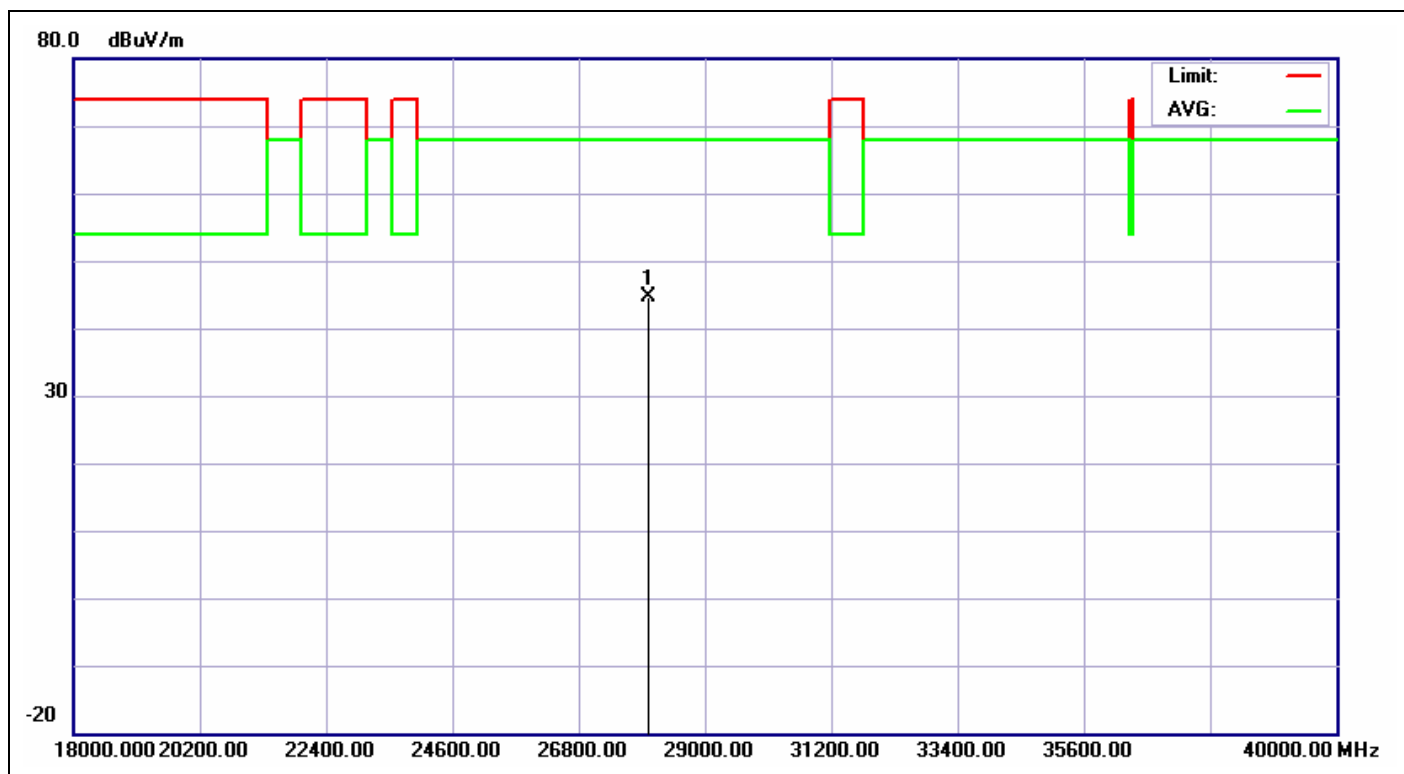


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:33:57
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5320		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28014.000	30.56	14.14	44.70	68.00	-23.30	peak	100	360	

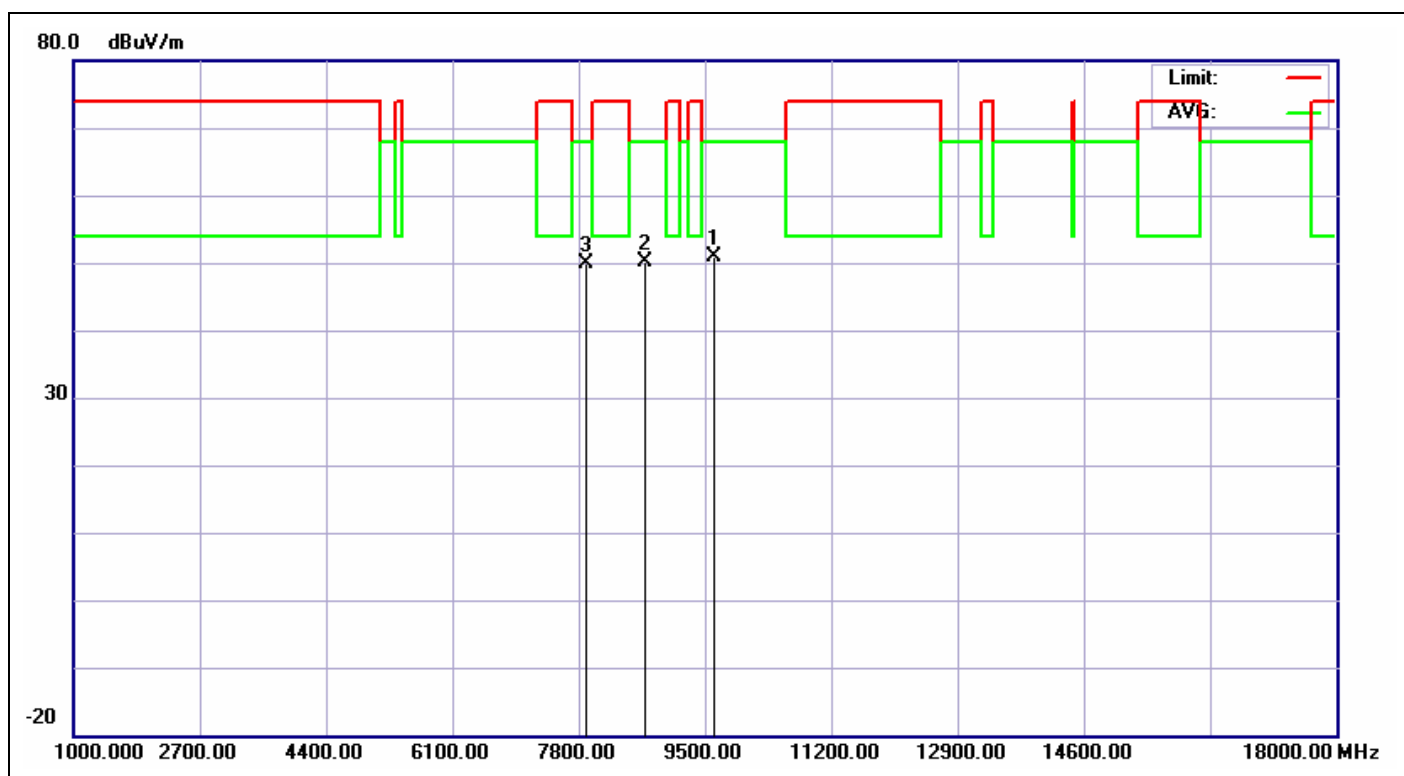


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:29:32
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5500		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9621.000	7.57	43.33	50.90	68.00	-17.10	peak	100	360	
2	8696.000	6.91	43.34	50.25	68.00	-17.75	peak	100	360	
3	7907.000	6.45	43.39	49.84	68.00	-18.16	peak	100	360	

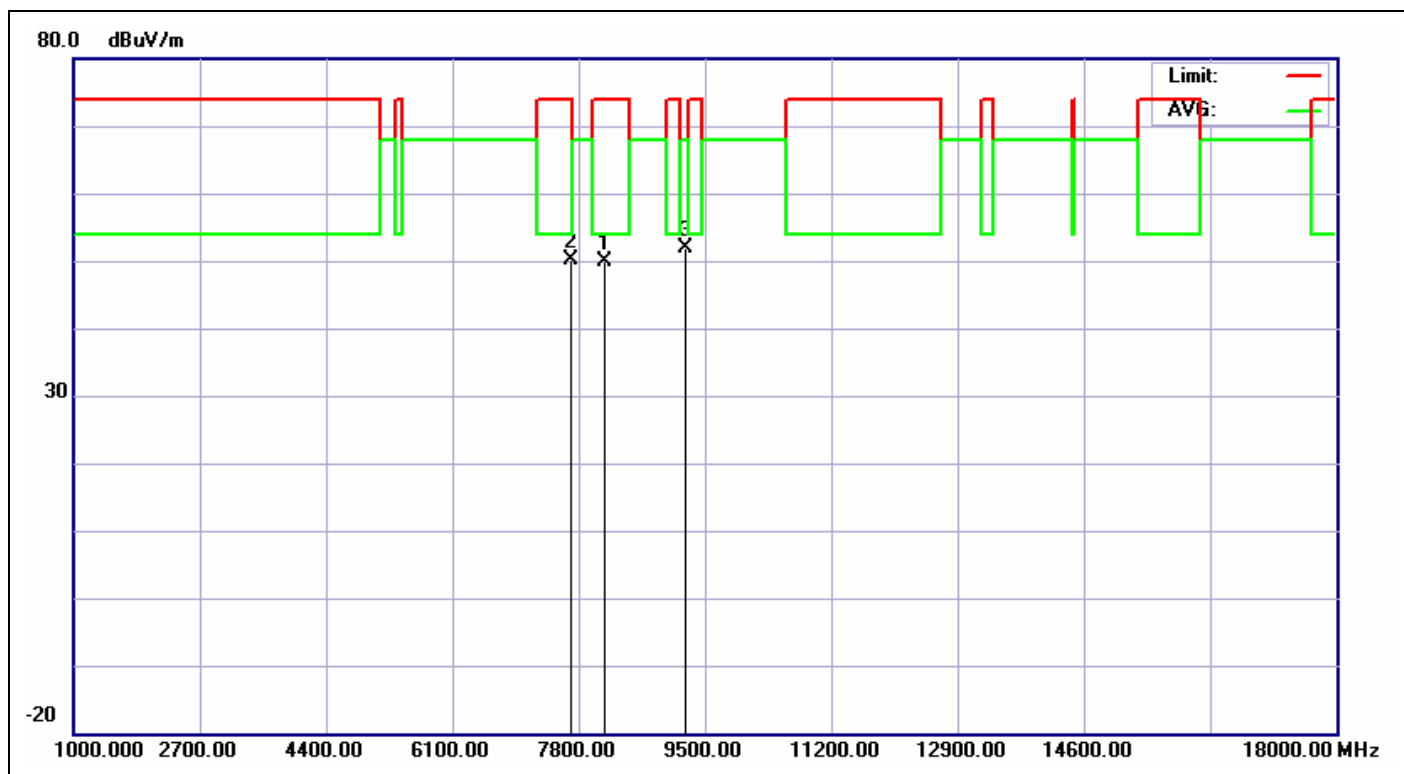

Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:31:28
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5500		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8152.000	6.49	43.35	49.84	74.00	-24.16	peak	100	0	
2	7690.000	6.49	43.62	50.11	74.00	-23.89	peak	100	0	
3	9240.000	7.61	44.21	51.82	68.00	-16.18	peak	100	0	

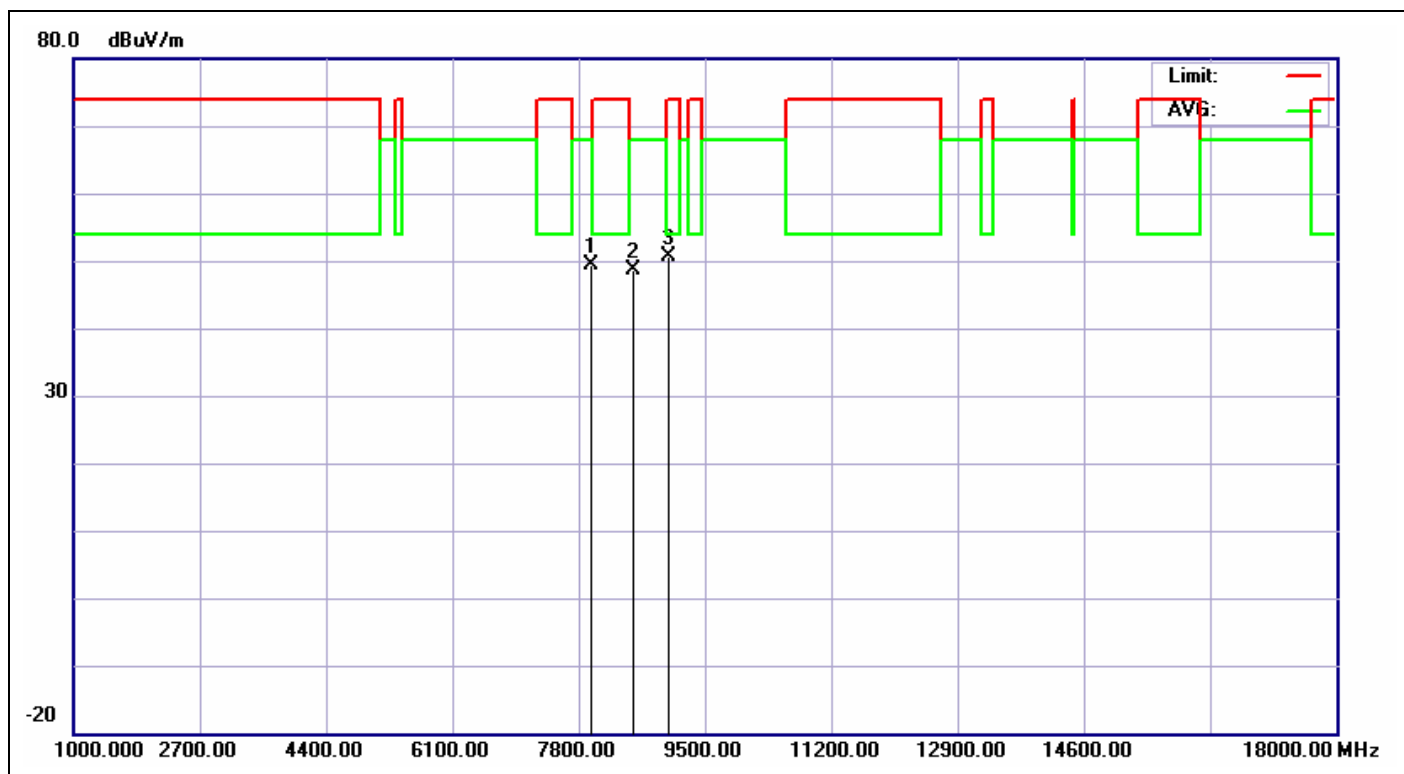

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2013/1/3 PM 07:36:12

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A20 CH5600


Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7962.000	6.44	43.05	49.49	68.00	-18.51	peak	100	360	
2	8533.000	6.67	41.86	48.53	68.00	-19.47	peak	100	360	
3	9023.000	7.38	43.26	50.64	74.00	-23.36	peak	100	360	

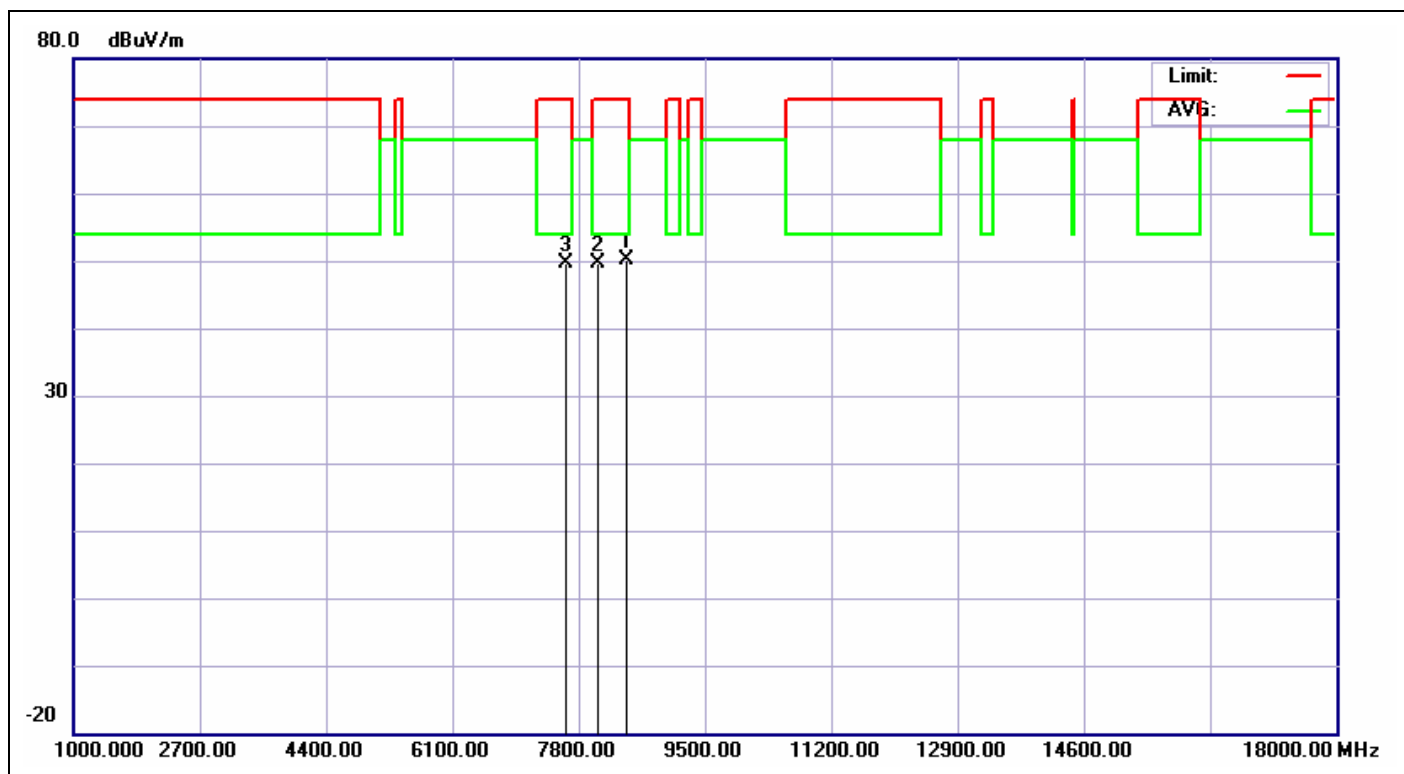


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:37:47
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5600		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8451.000	6.60	43.53	50.13	74.00	-23.87	peak	100	0	
2	8071.000	6.47	43.25	49.72	74.00	-24.28	peak	100	0	
3	7635.000	6.49	43.23	49.72	74.00	-24.28	peak	100	0	

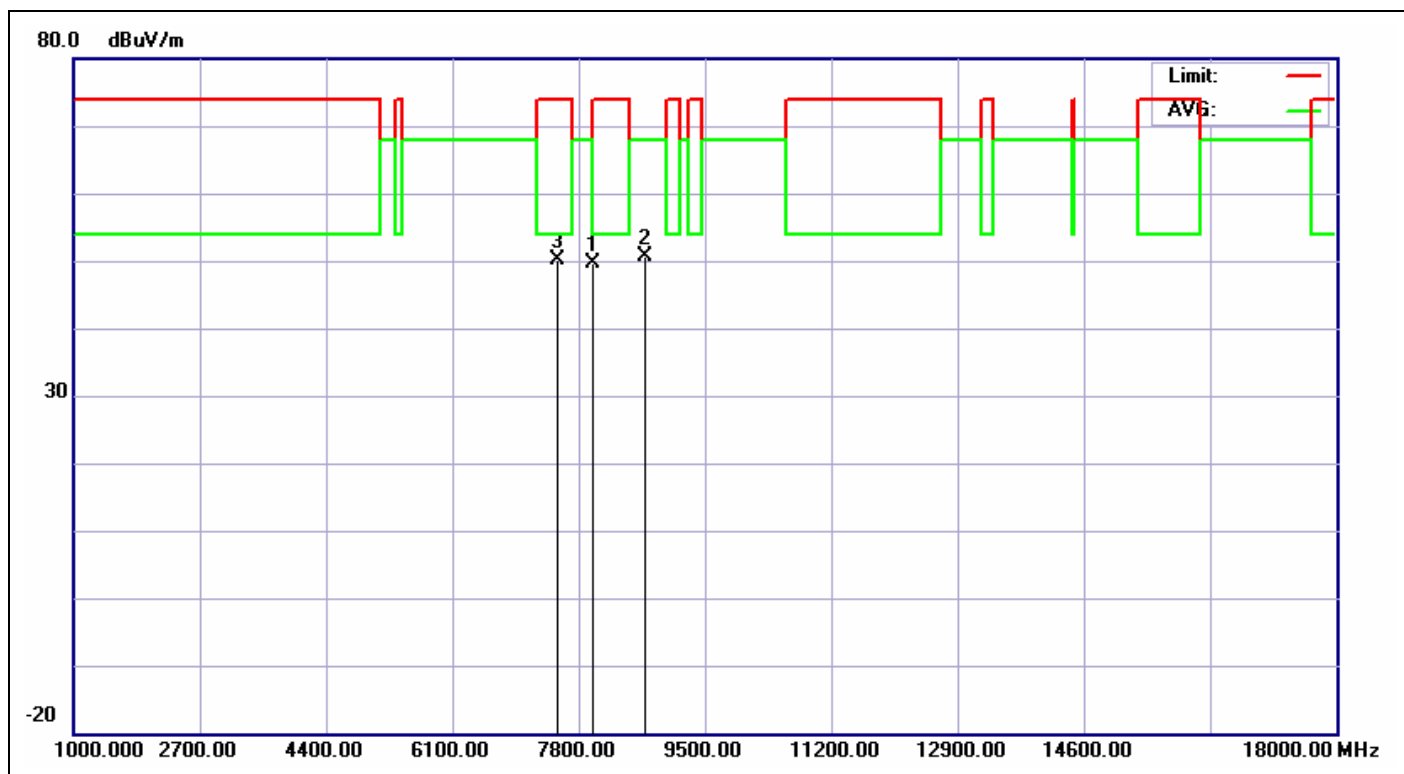

Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:39:16
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5700		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7989.000	6.44	43.30	49.74	68.00	-18.26	peak	100	360	
2	8696.000	6.91	43.79	50.70	68.00	-17.30	peak	100	360	
3	7527.000	6.50	43.62	50.12	74.00	-23.88	peak	100	360	

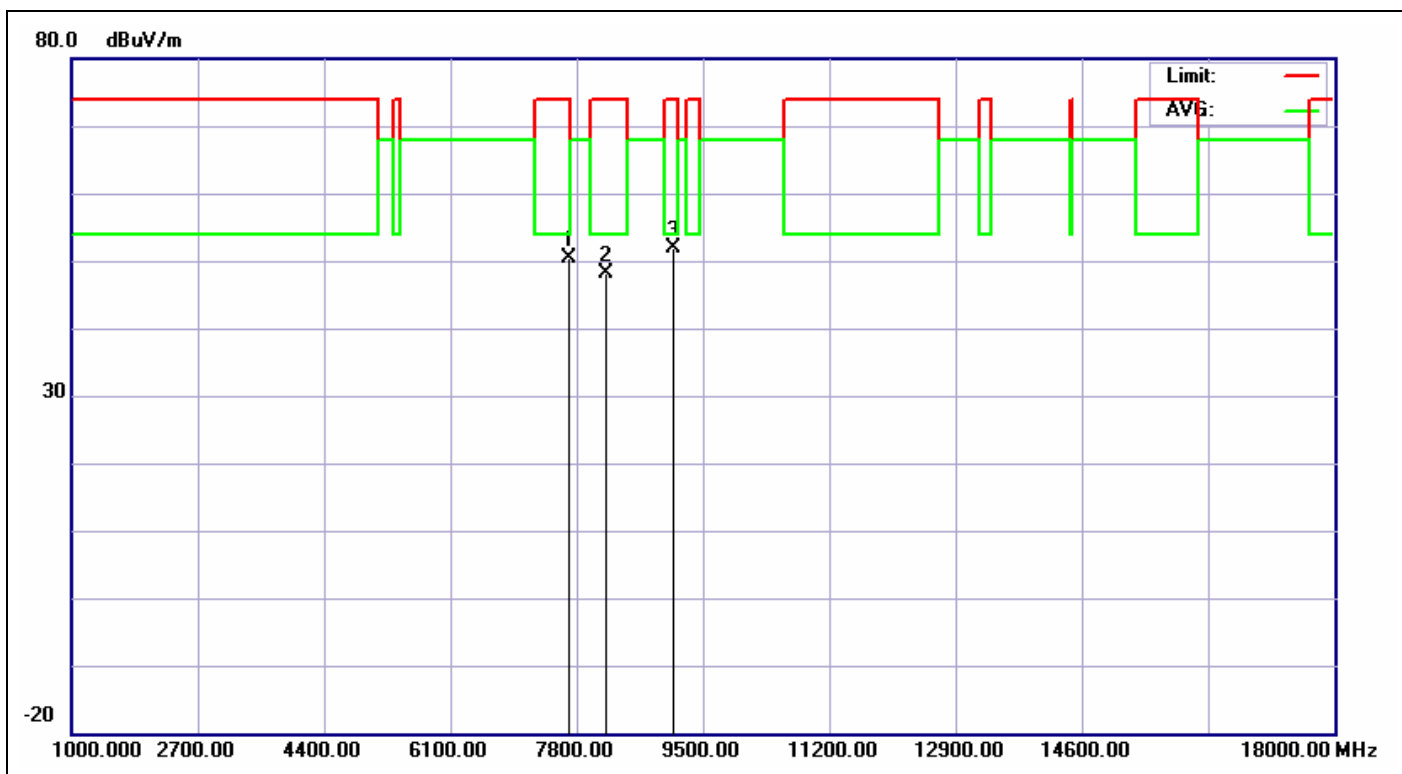

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Vertical

Test item: Radiation Emission

Test Time: 2013/1/3 PM 07:41:00

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A20 CH5700

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7690.000	6.49	43.89	50.38	74.00	-23.62	peak	100	0	
2	8207.000	6.52	41.51	48.03	74.00	-25.97	peak	100	0	
3	9104.000	7.46	44.44	51.90	74.00	-22.10	peak	100	0	

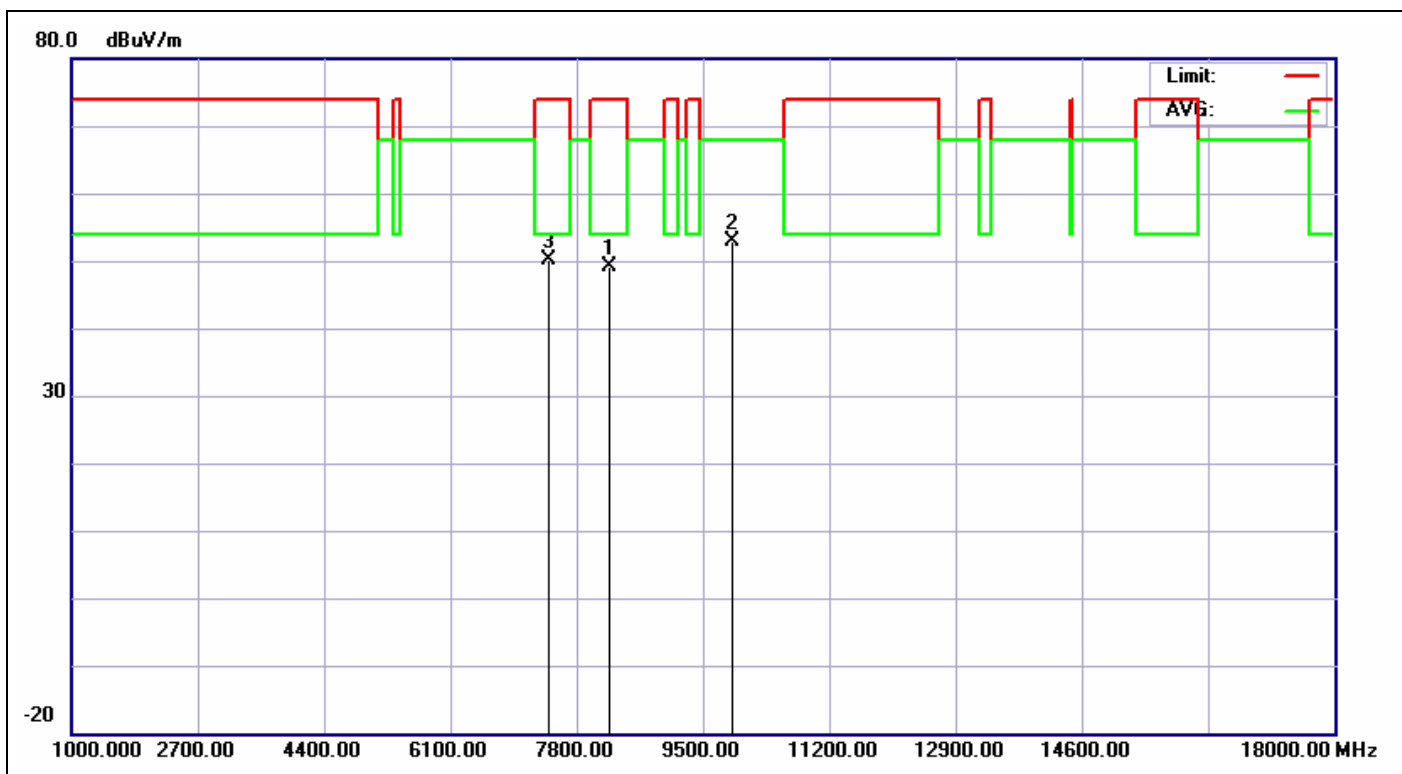

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2013/1/3 PM 07:43:15

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A40 CH5510

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8234.000	6.52	42.68	49.20	74.00	-24.80	peak	100	360	
2	9893.000	6.88	45.95	52.83	68.00	-15.17	peak	100	360	
3	7418.000	6.17	43.96	50.13	74.00	-23.87	peak	100	360	

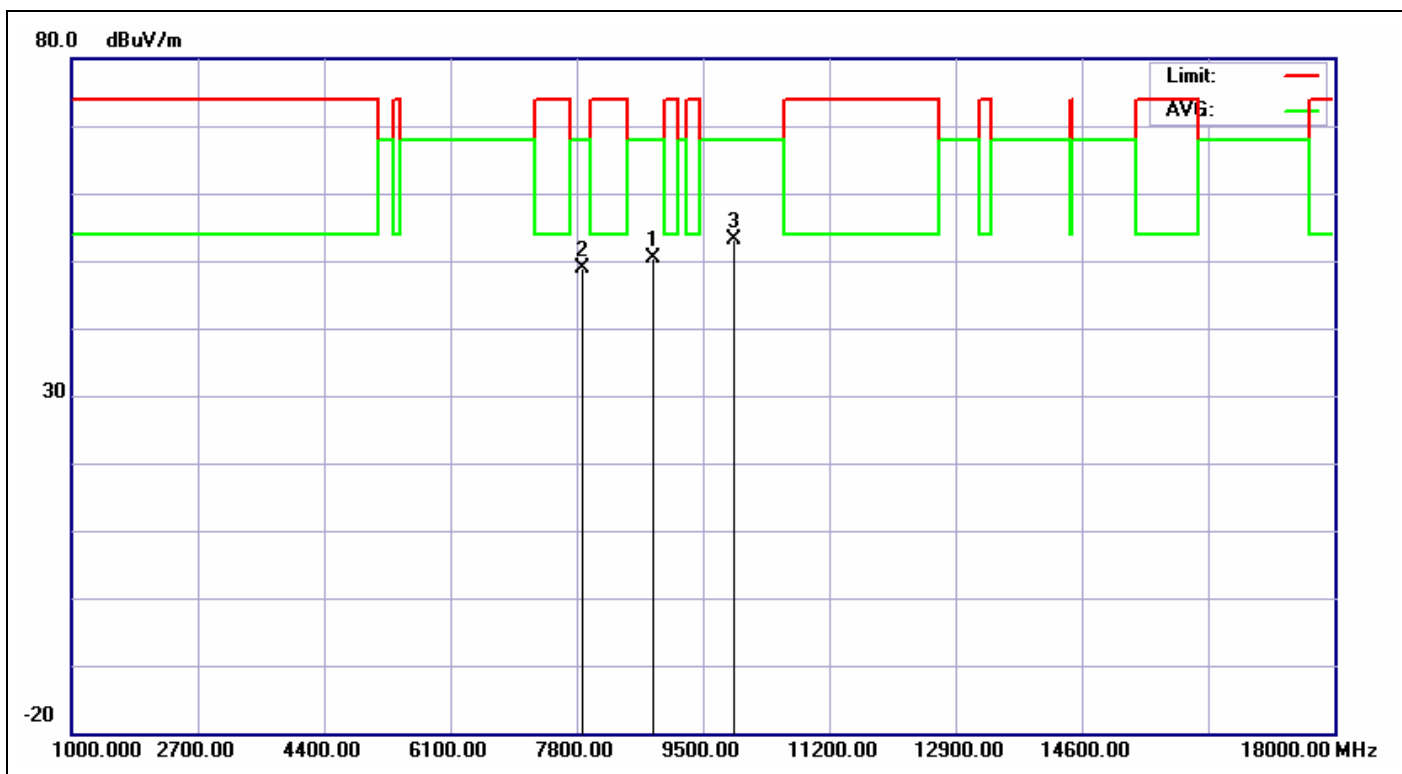

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Vertical

Test item: Radiation Emission

Test Time: 2013/1/3 PM 07:44:59

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A40 CH5510

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8832.000	7.12	43.30	50.42	68.00	-17.58	peak	100	0	
2	7880.000	6.45	42.43	48.88	68.00	-19.12	peak	100	0	
3	9920.000	6.82	46.26	53.08	68.00	-14.92	peak	100	0	

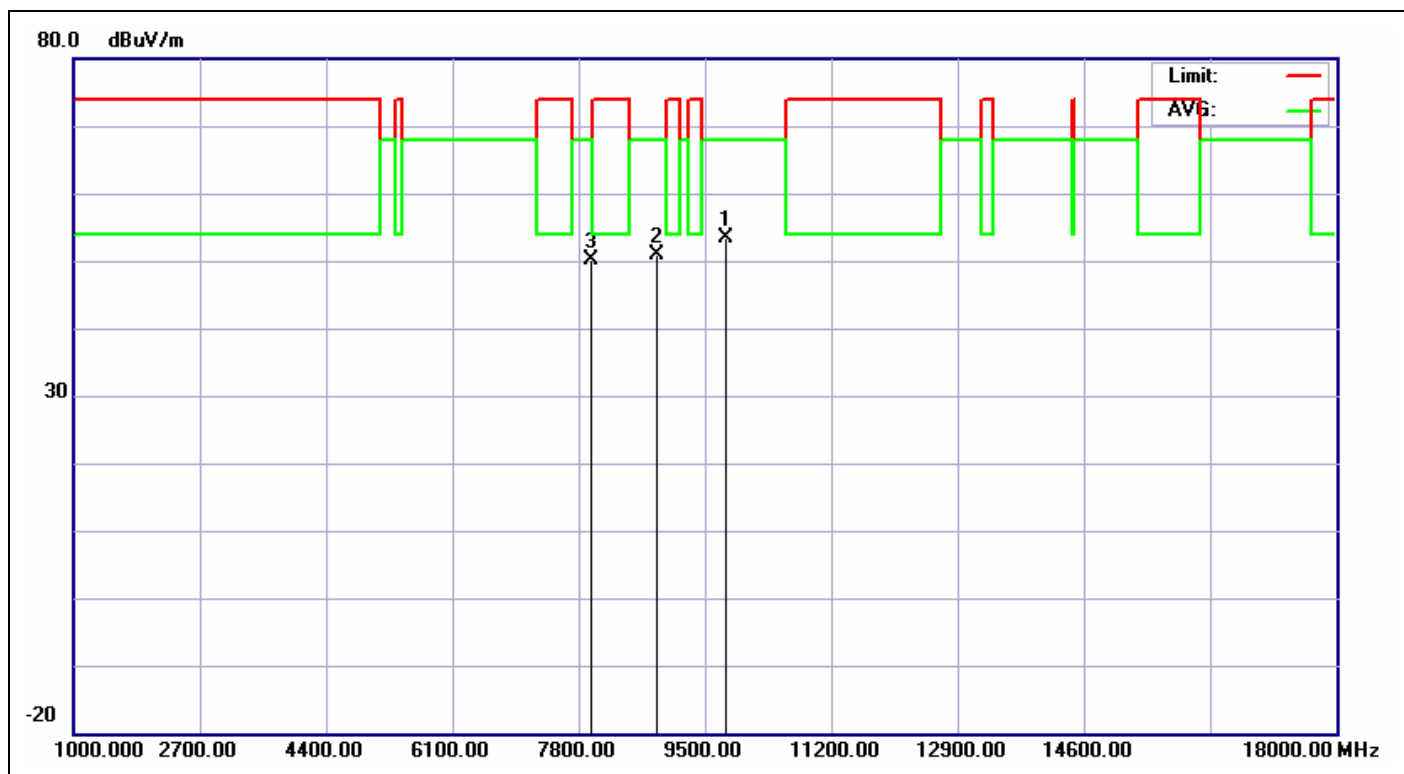

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2013/1/3 PM 07:46:29

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A40 CH5590


Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9784.000	7.15	46.28	53.43	68.00	-14.57	peak	100	360	
2	8859.000	7.15	43.65	50.80	68.00	-17.20	peak	100	360	
3	7962.000	6.44	43.72	50.16	68.00	-17.84	peak	100	360	

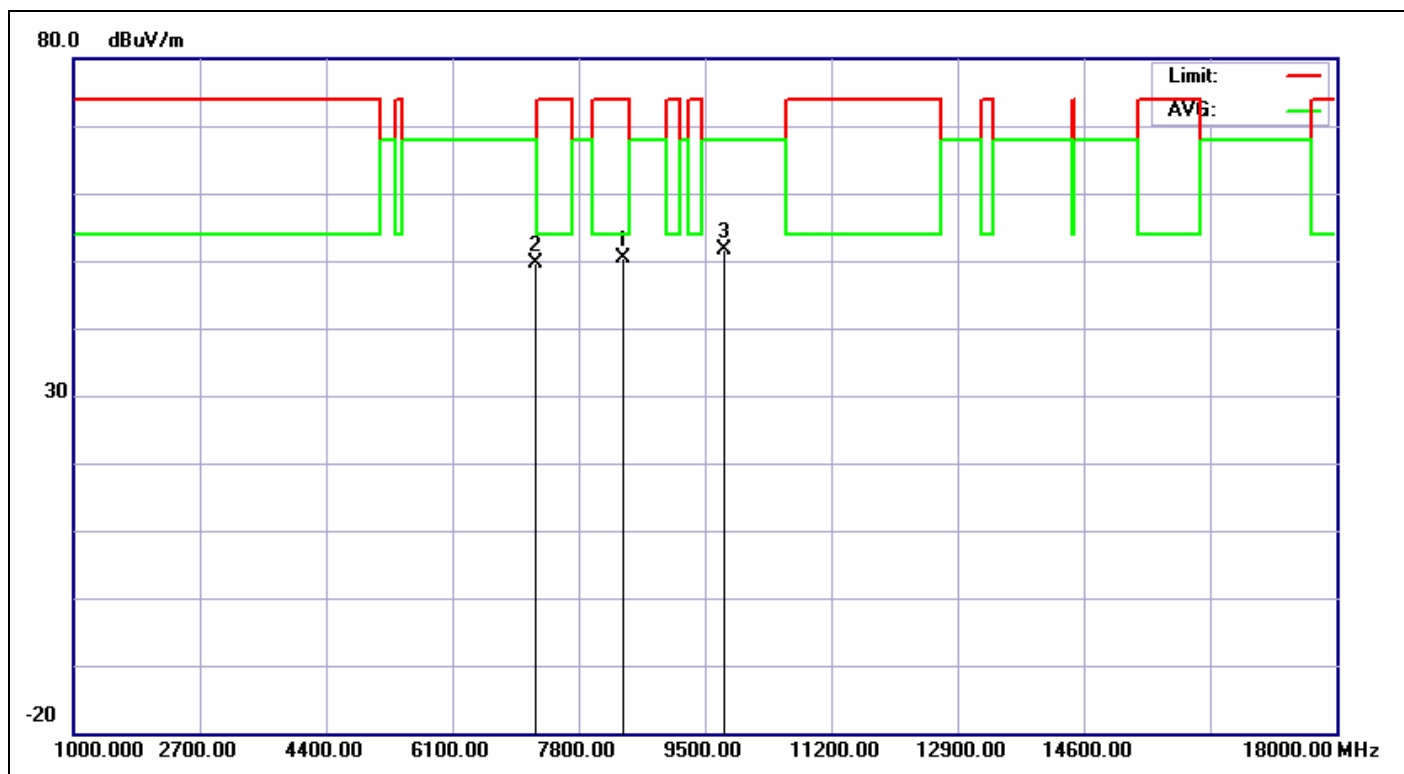


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:49:00
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5590		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8397.000	6.58	43.90	50.48	74.00	-23.52	peak	100	0	
2	7227.000	5.41	44.27	49.68	68.00	-18.32	peak	100	0	
3	9757.000	7.23	44.36	51.59	68.00	-16.41	peak	100	0	

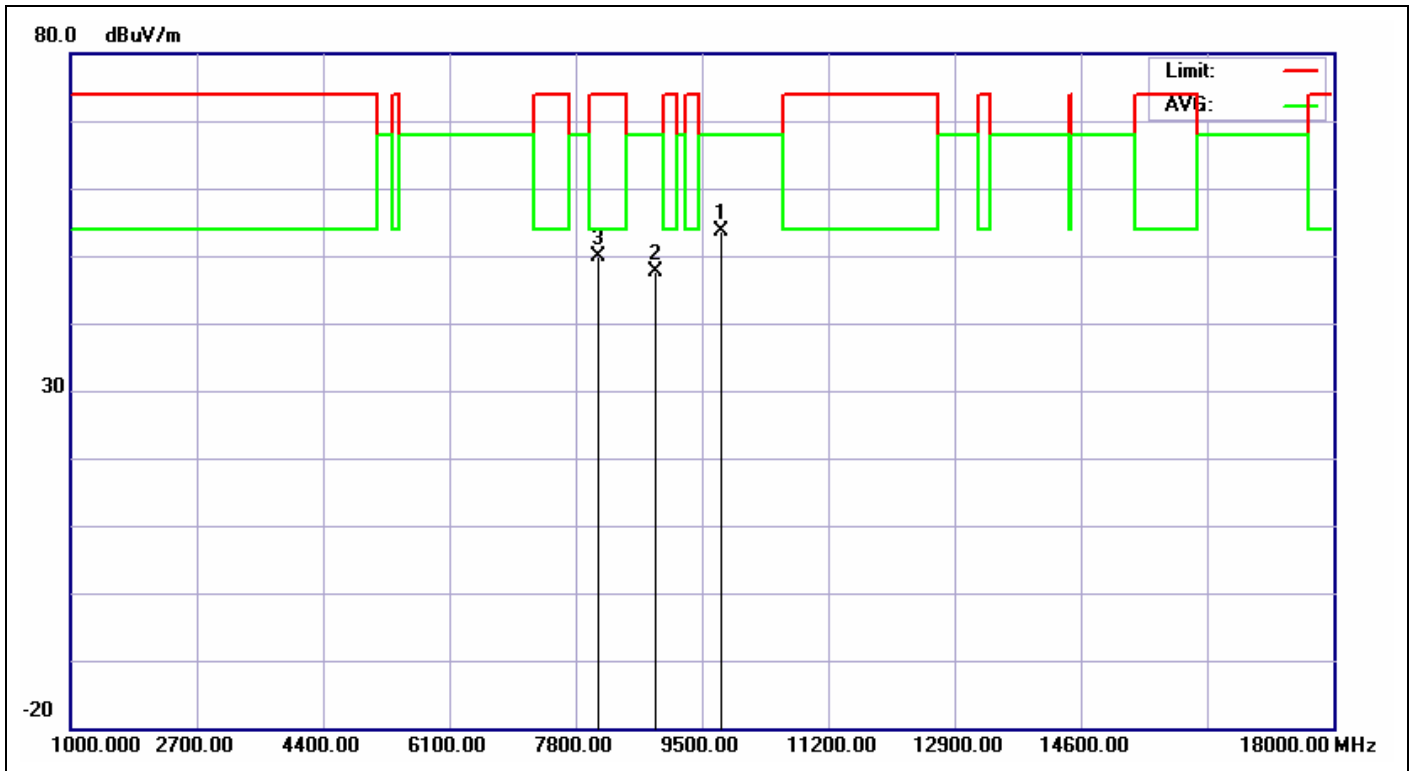


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:51:10
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5670		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9757.000	7.23	46.36	53.59	68.00	-14.41	peak	100	360	
2	8887.000	7.19	40.56	47.75	68.00	-20.25	peak	100	360	
3	8098.000	6.47	43.46	49.93	74.00	-24.07	peak	100	360	

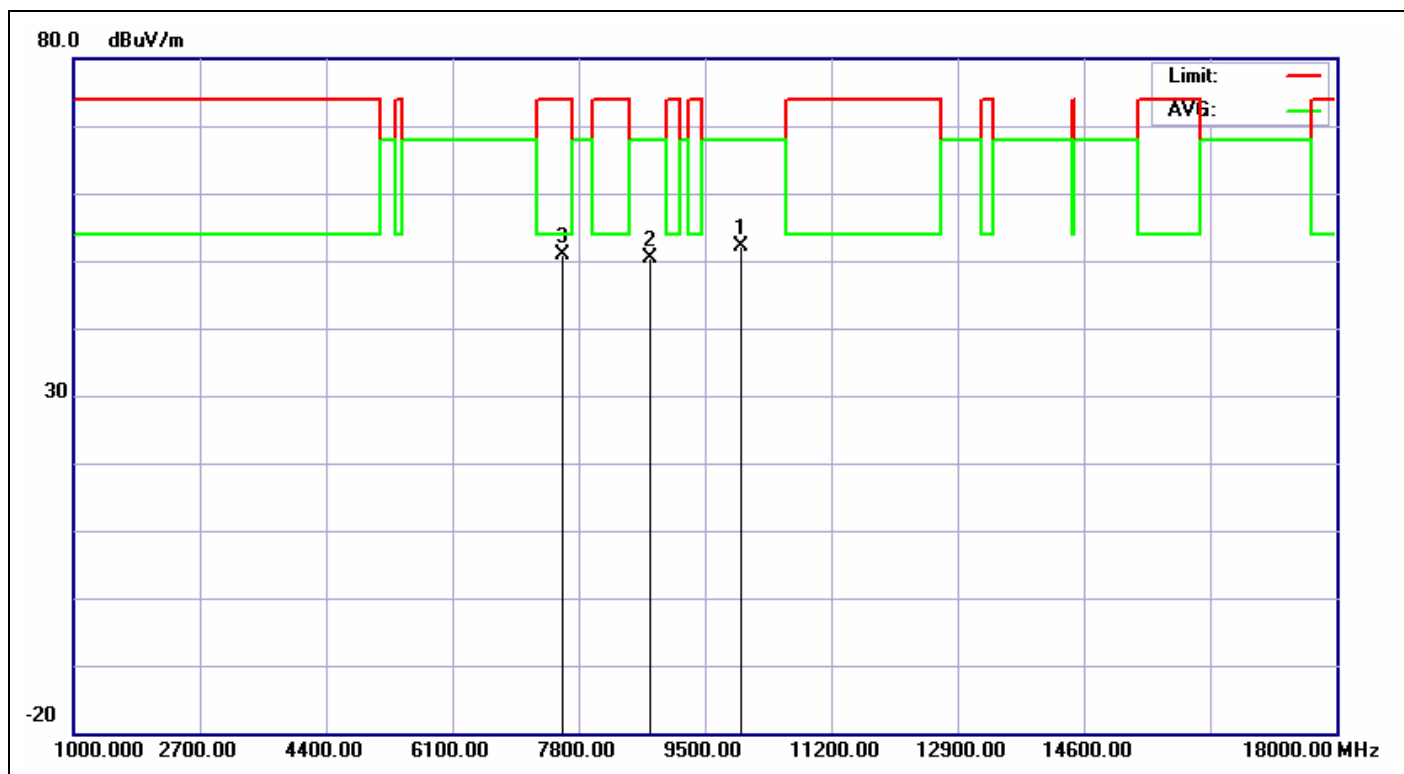

Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:52:55
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5670		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9980.000	6.67	45.46	52.13	68.00	-15.87	peak	100	0	
2	8756.000	7.00	43.32	50.32	68.00	-17.68	peak	100	0	
3	7586.000	6.49	44.50	50.99	74.00	-23.01	peak	100	0	

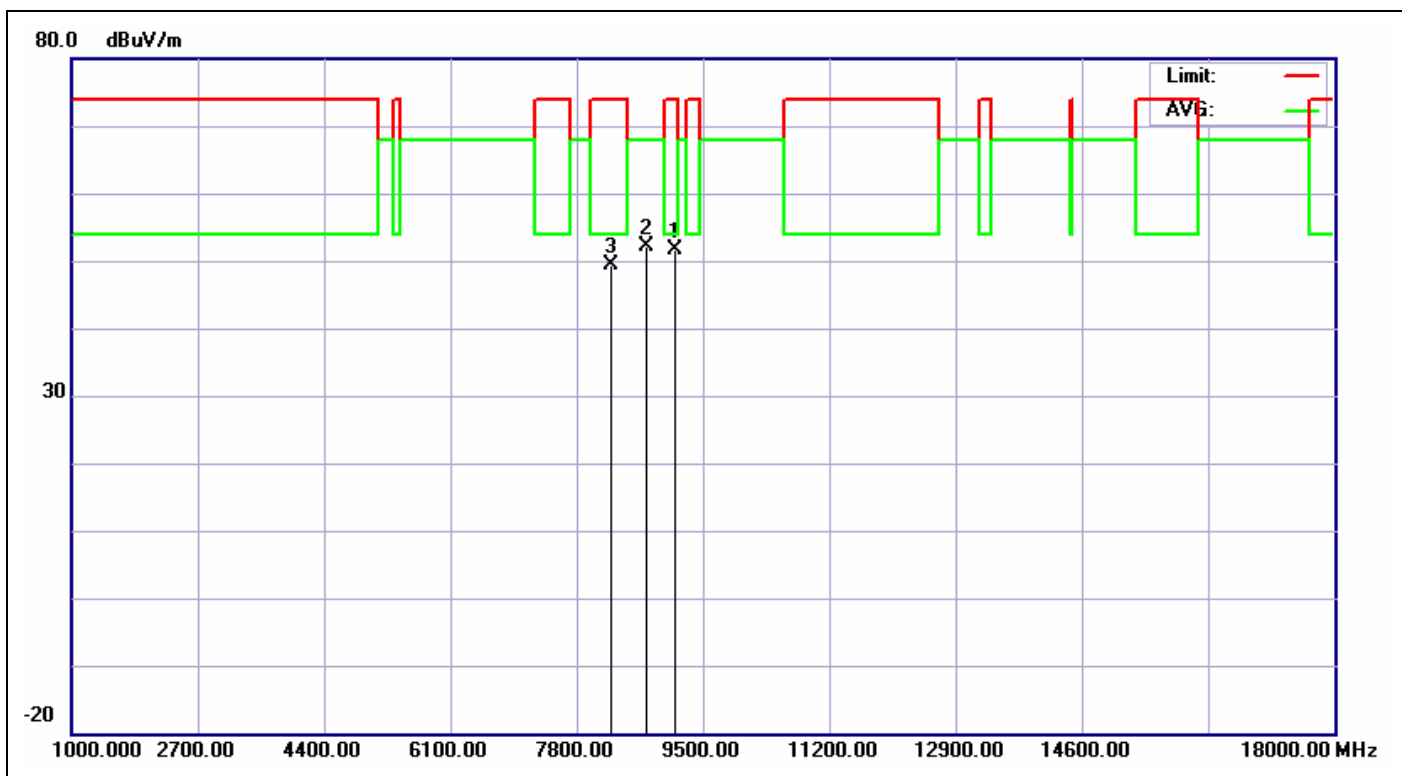

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2013/1/3 PM 07:20:46

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A CH5500


Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9131.000	7.50	44.06	51.56	74.00	-22.44	peak	100	360	
2	8751.000	6.99	45.25	52.24	68.00	-15.76	peak	100	360	
3	8261.000	6.54	42.89	49.43	74.00	-24.57	peak	100	360	

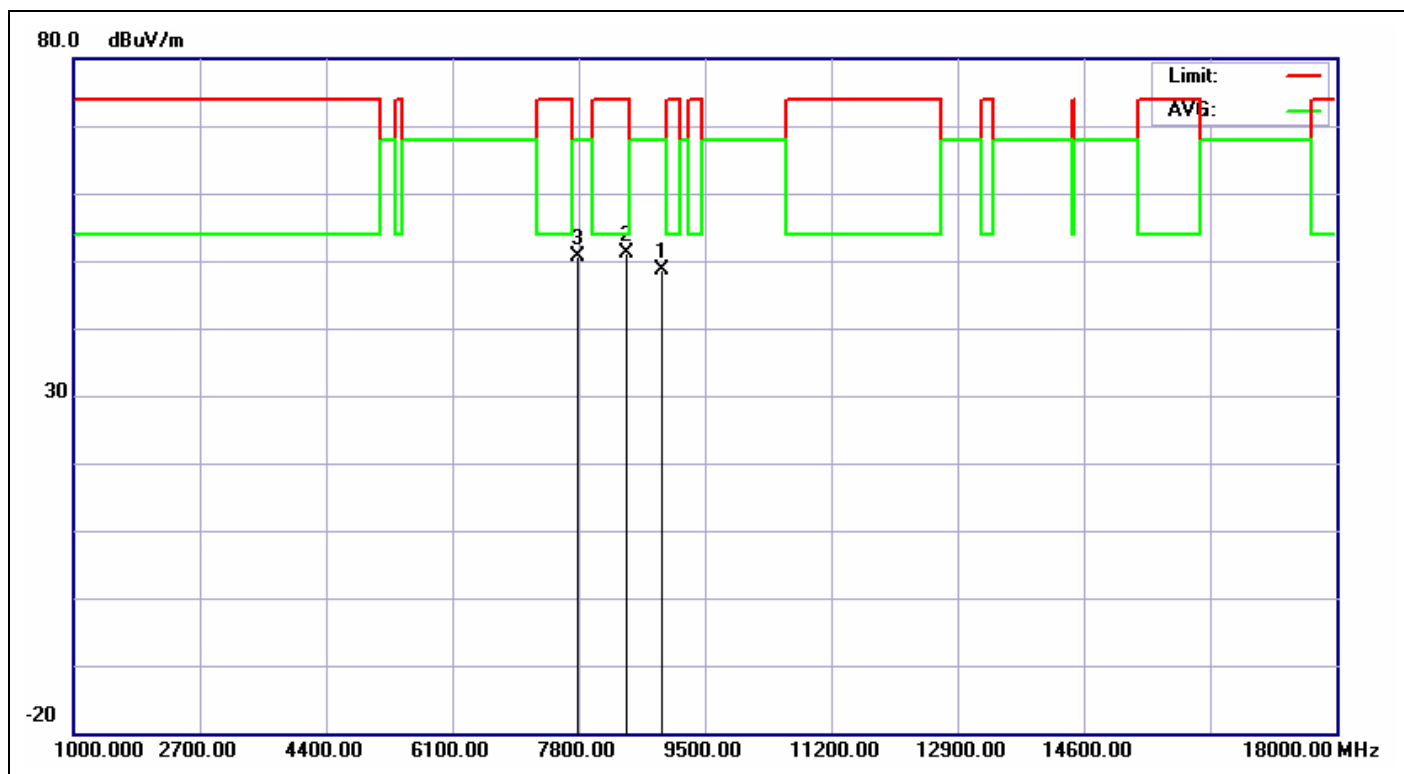


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:23:43
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5500		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8914.000	7.23	41.35	48.58	68.00	-19.42	peak	100	0	
2	8451.000	6.60	44.41	51.01	74.00	-22.99	peak	100	0	
3	7799.000	6.47	44.27	50.74	68.00	-17.26	peak	100	0	

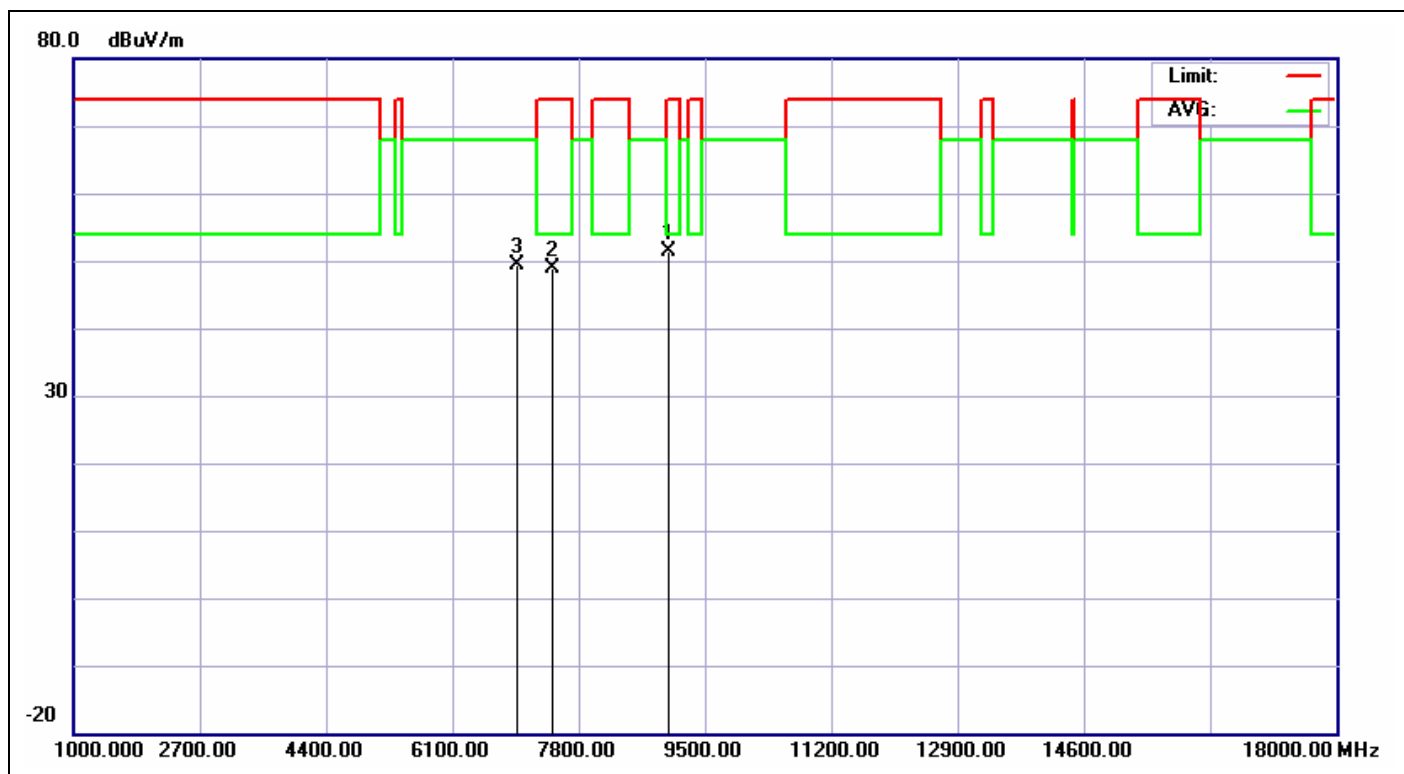


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:25:54
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5600		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9023.000	7.38	44.04	51.42	74.00	-22.58	peak	100	360	
2	7445.000	6.29	42.71	49.00	74.00	-25.00	peak	100	360	
3	6983.000	4.48	44.82	49.30	68.00	-18.70	peak	100	360	

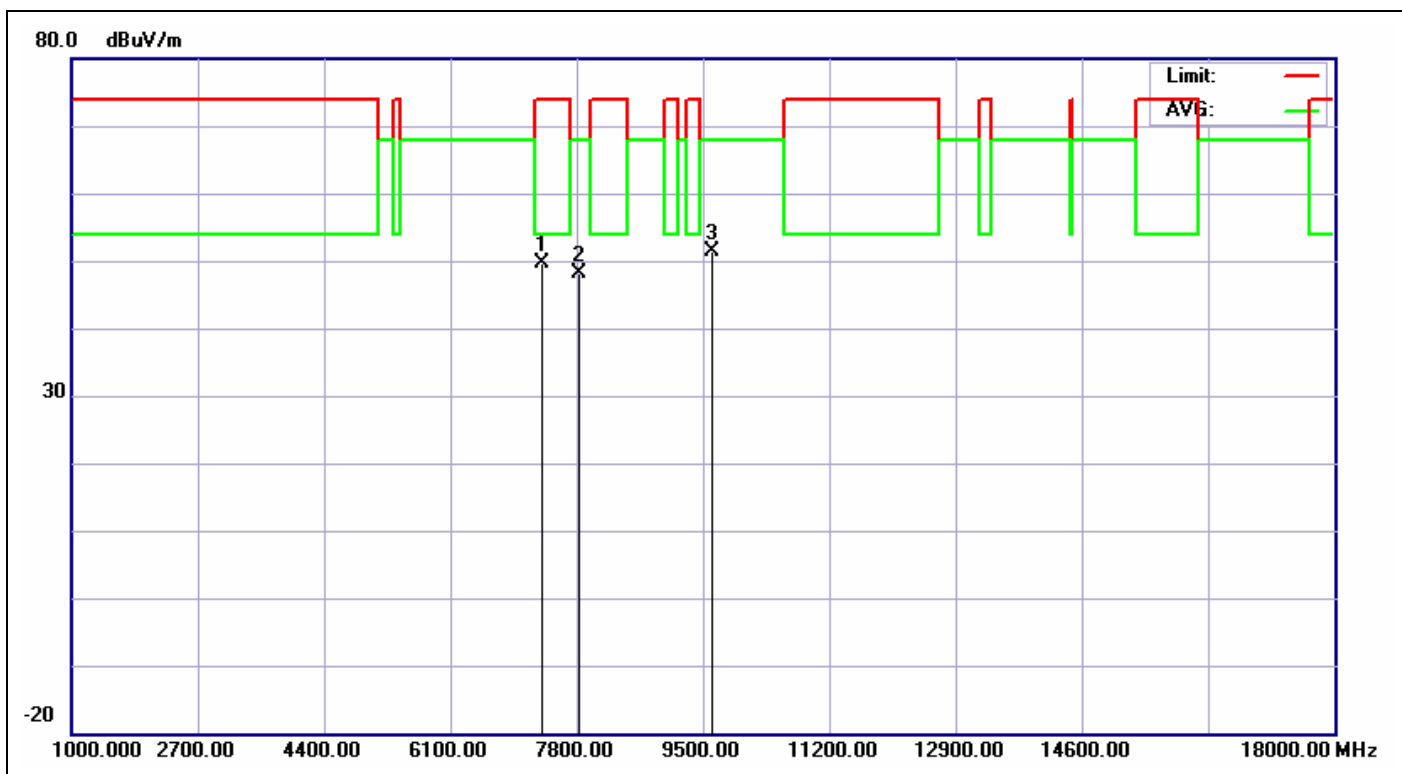


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:27:43
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5600		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	7336.000	5.86	43.84	49.70	74.00	-24.30	peak	100	0	
2	7826.000	6.47	41.57	48.04	68.00	-19.96	peak	100	0	
3	9621.000	7.57	43.85	51.42	68.00	-16.58	peak	100	0	

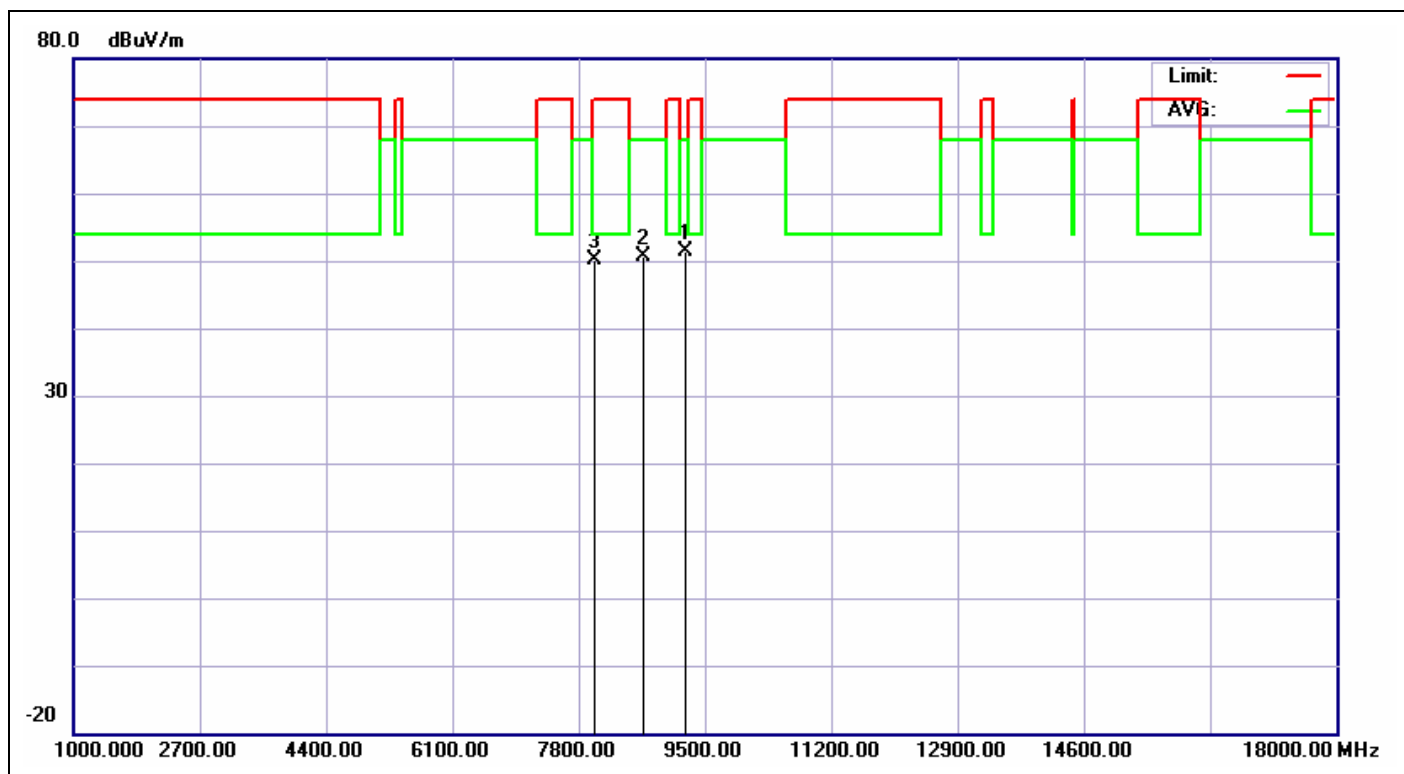


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:32:55
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5700		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	9240.000	7.61	43.88	51.49	68.00	-16.51	peak	100	360	
2	8669.000	6.87	43.74	50.61	68.00	-17.39	peak	100	360	
3	8016.000	6.44	43.72	50.16	68.00	-17.84	peak	100	360	

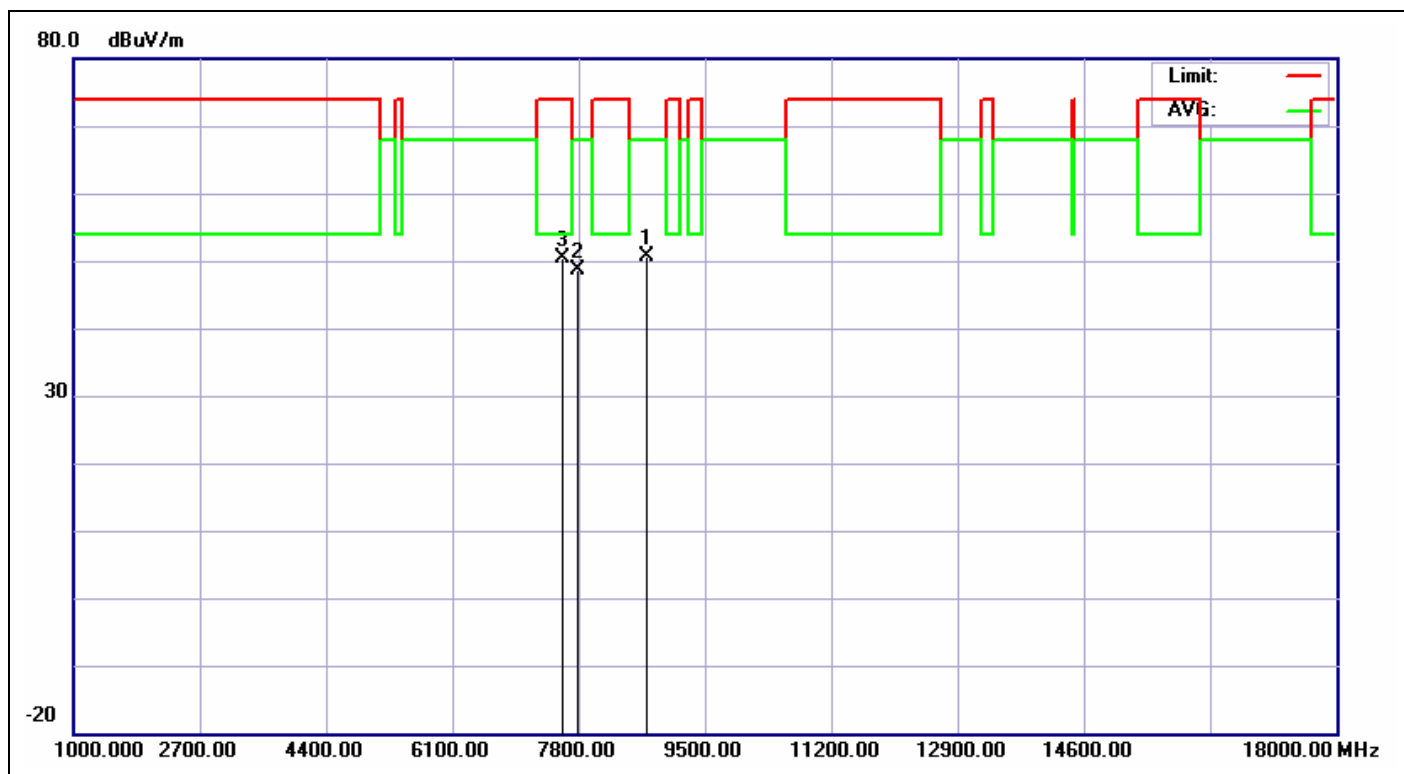


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 07:34:32
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5700		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	8723.000	6.95	43.72	50.67	68.00	-17.33	peak	100	0	
2	7799.000	6.47	42.25	48.72	68.00	-19.28	peak	100	0	
3	7581.000	6.50	43.79	50.29	74.00	-23.71	peak	100	0	

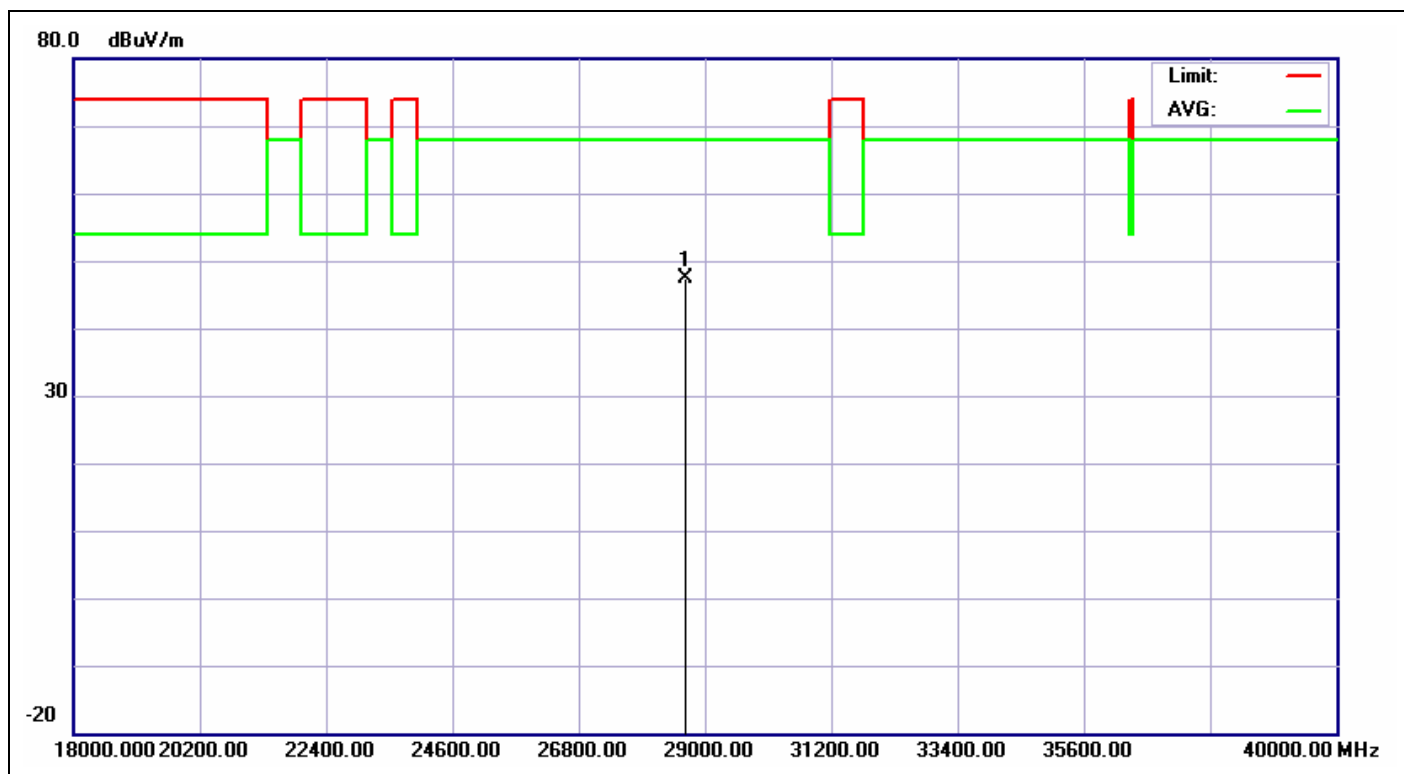


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:42:43
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5500		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28648.000	31.36	16.03	47.39	68.00	-20.61	peak	100	360	

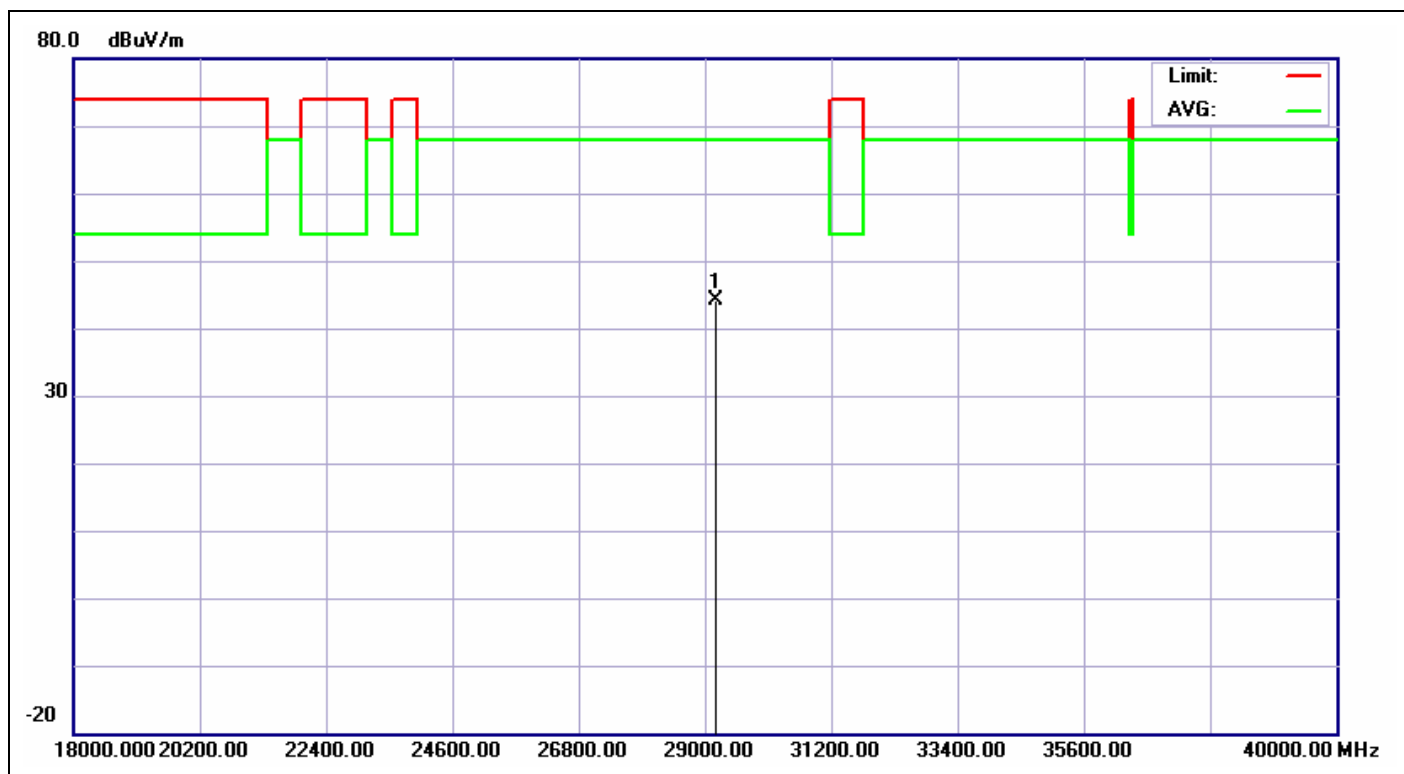


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:43:15
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5500		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	29176.000	30.89	13.13	44.02	68.00	-23.98	peak	100	360	

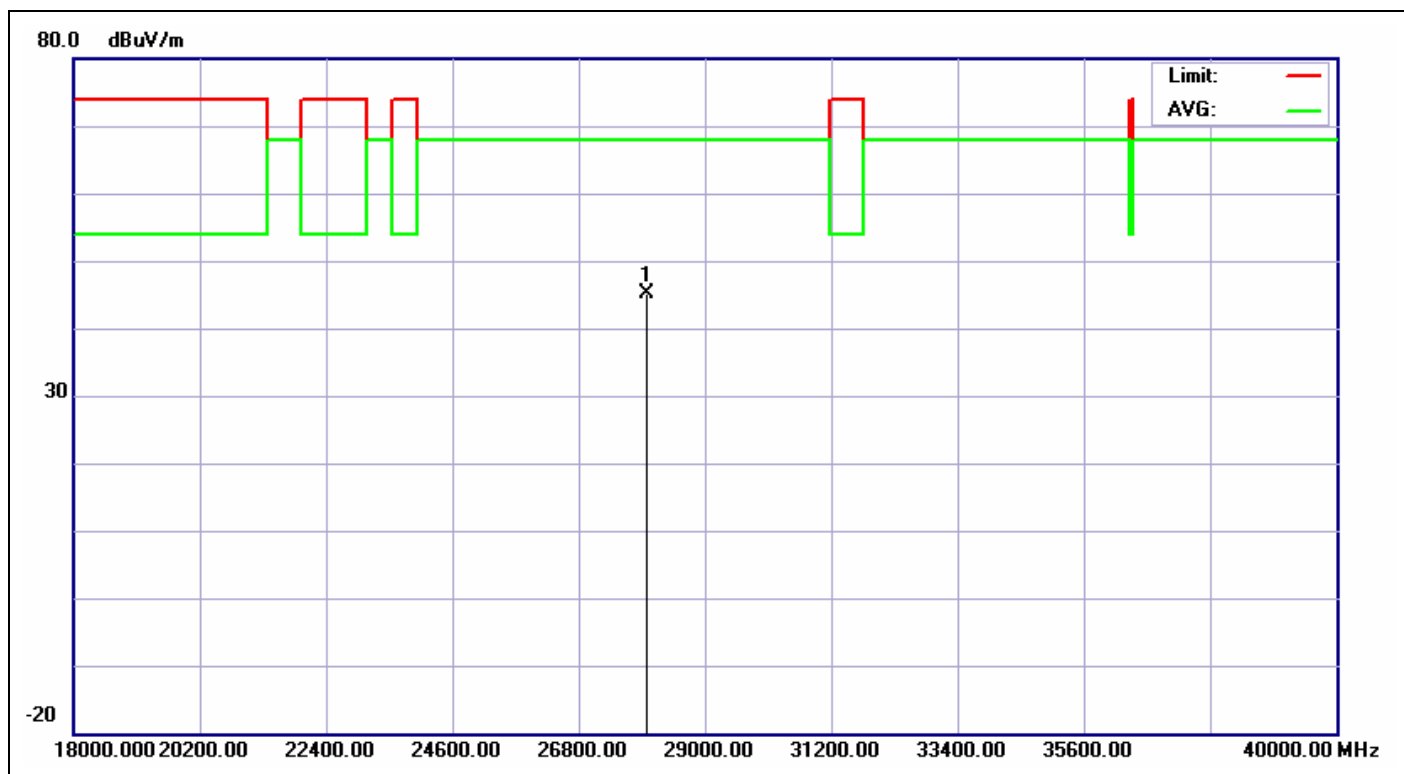

Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:43:40
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5600		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	27979.000	30.53	14.52	45.05	68.00	-22.95	peak	100	360	

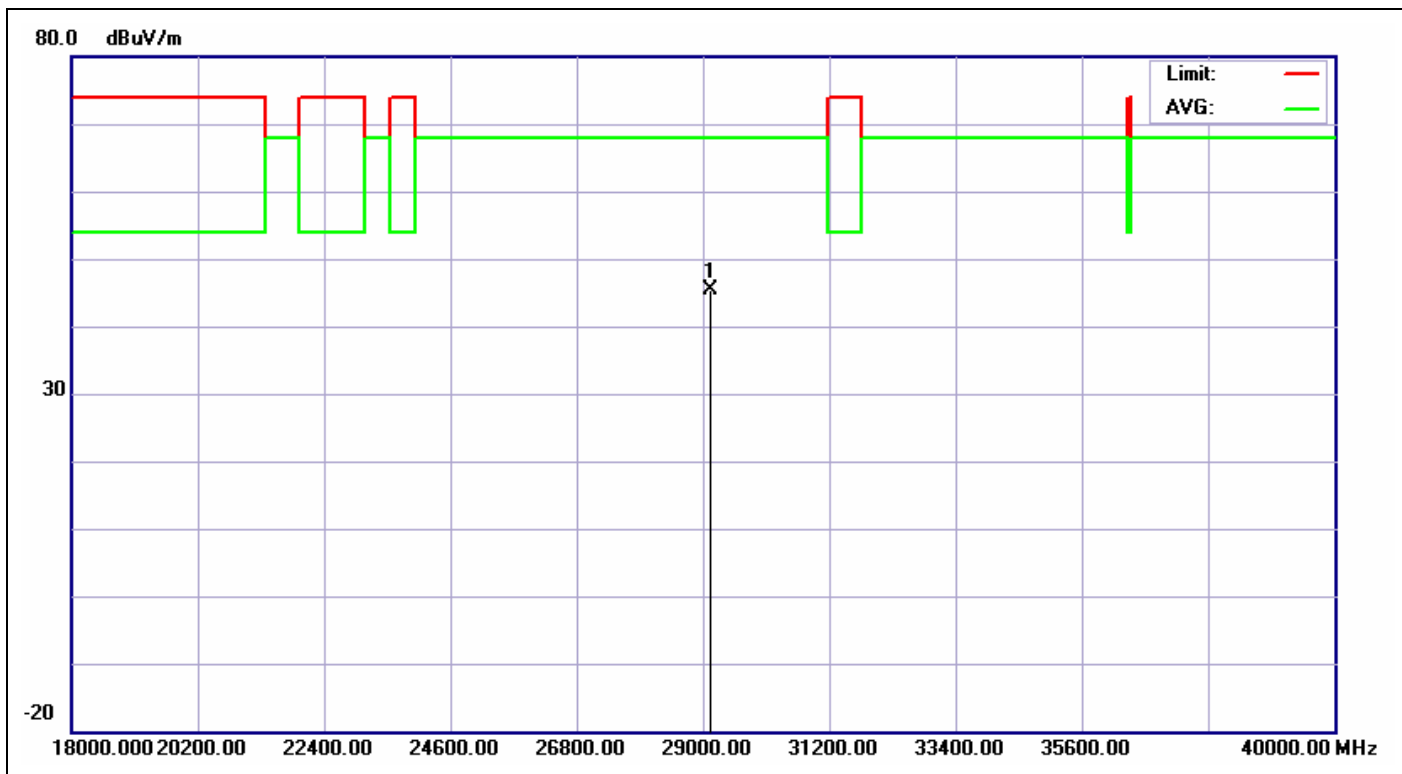

Service No.: 113161892-FCC wifi

Test Distance: 3M

Test Standard: FCC 1-40G UNII PEAK

Ant. Polarization: Vertical

Test item: Radiation Emission

Test Time: 2013/1/3 PM 09:44:12

Applicant: Lite-On

Test Rating: DC 3.3V

Product: Wireless module

Temp.(°C)/Hum.(%): 19(°C)/50%


Model No.: WBCN603MH

Test Engineer: Hugo Chang

Test Mode: A20 CH5600


Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	29141.000	30.96	14.40	45.36	68.00	-22.64	peak	100	360	

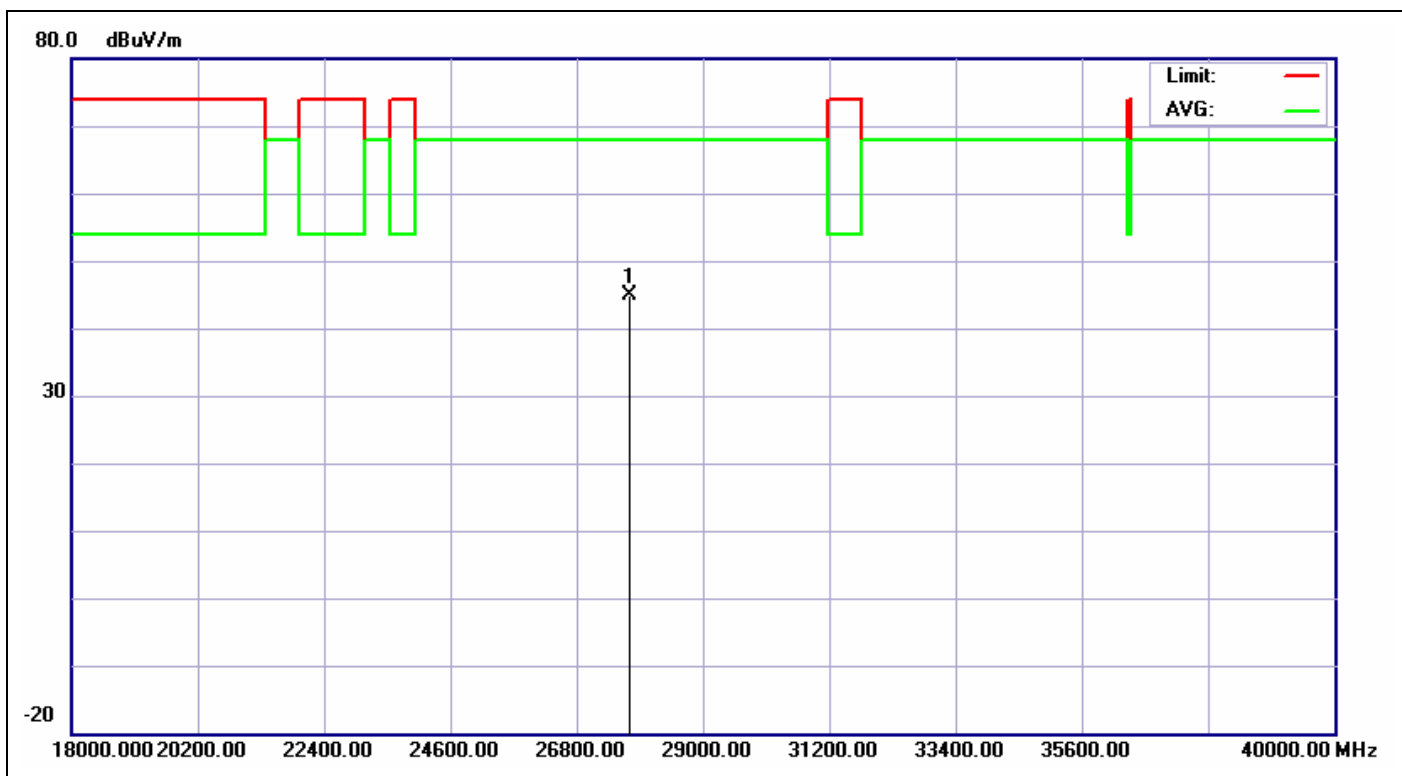


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:44:35
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5700		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	27733.000	30.47	14.36	44.83	68.00	-23.17	peak	100	360	

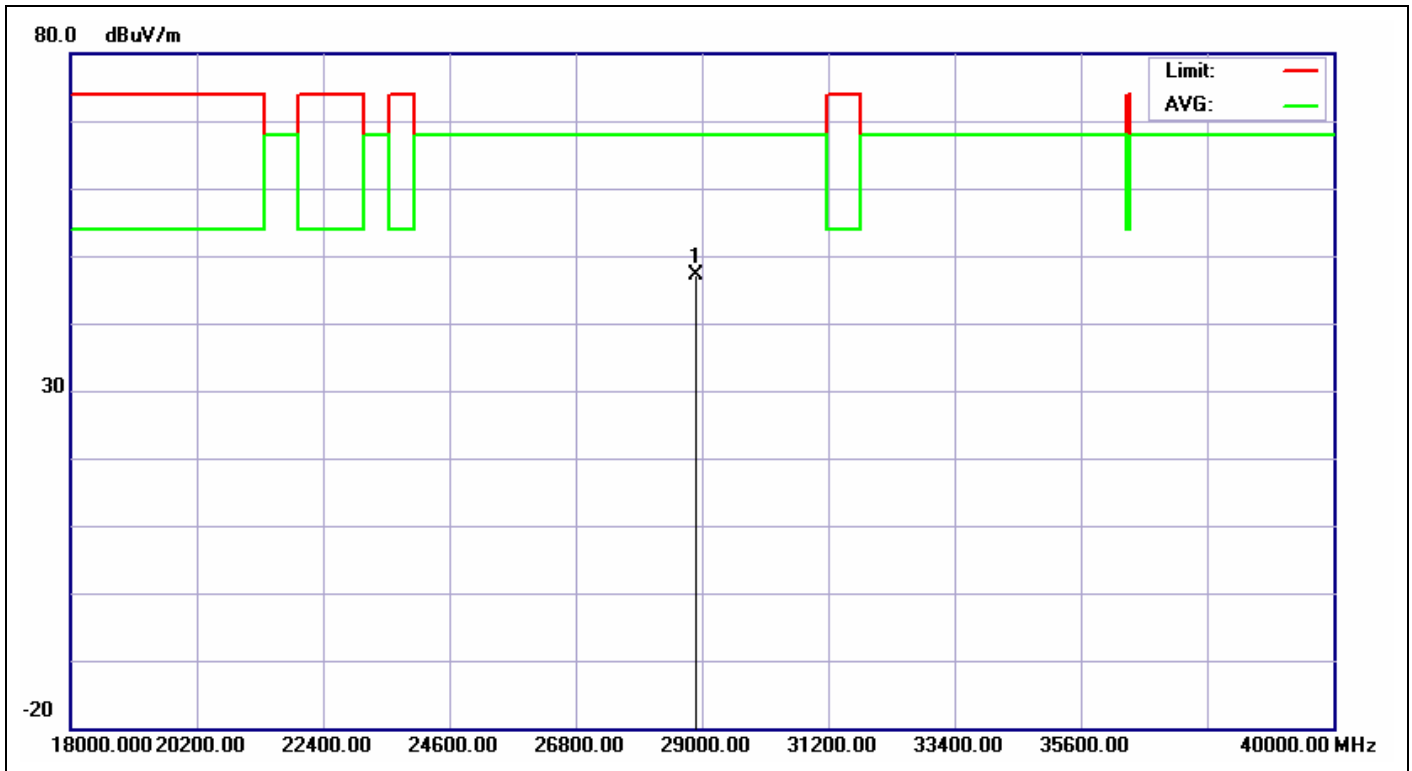


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:45:06
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A20 CH5700		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28894.000	31.26	15.77	47.03	68.00	-20.97	peak	100	360	

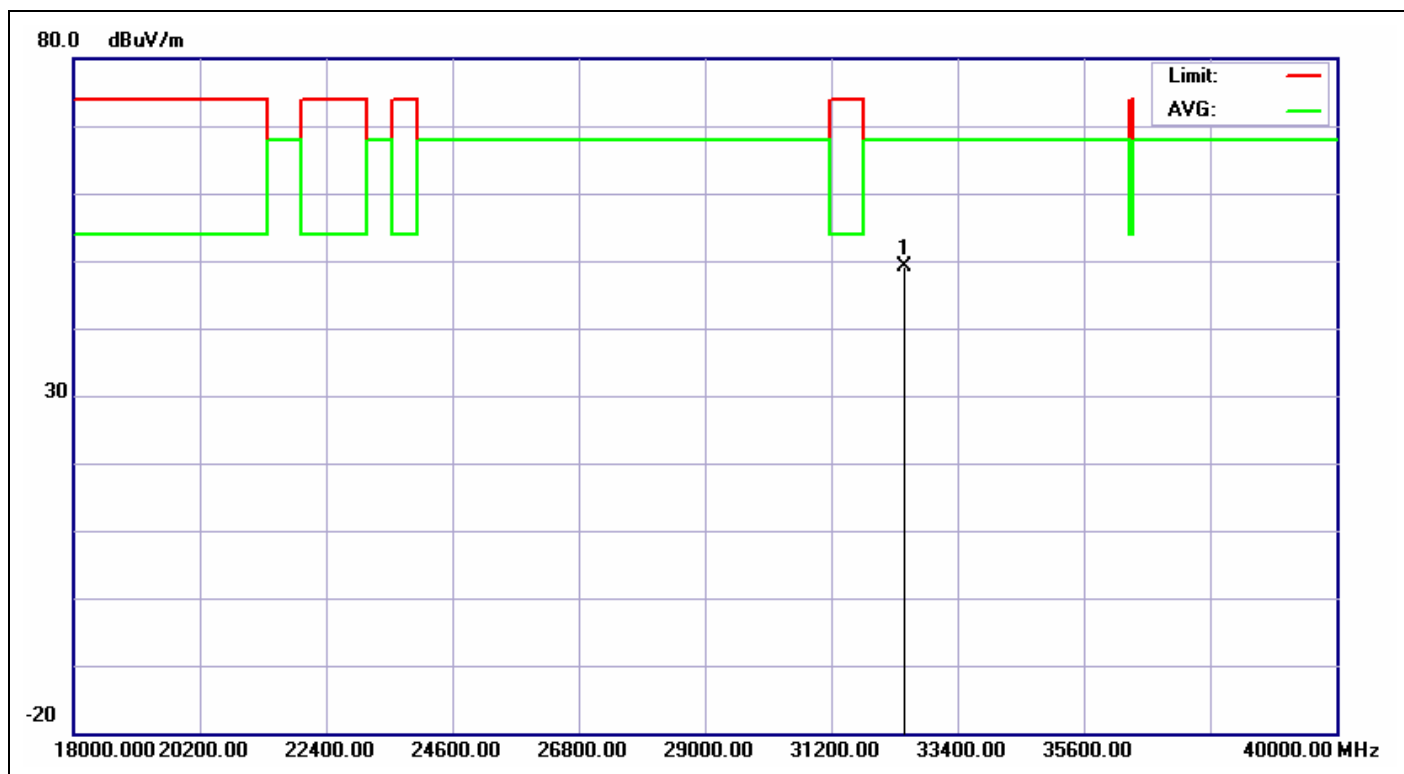


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:45:29
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5510		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32485.000	34.17	15.03	49.20	68.00	-18.80	peak	100	360	

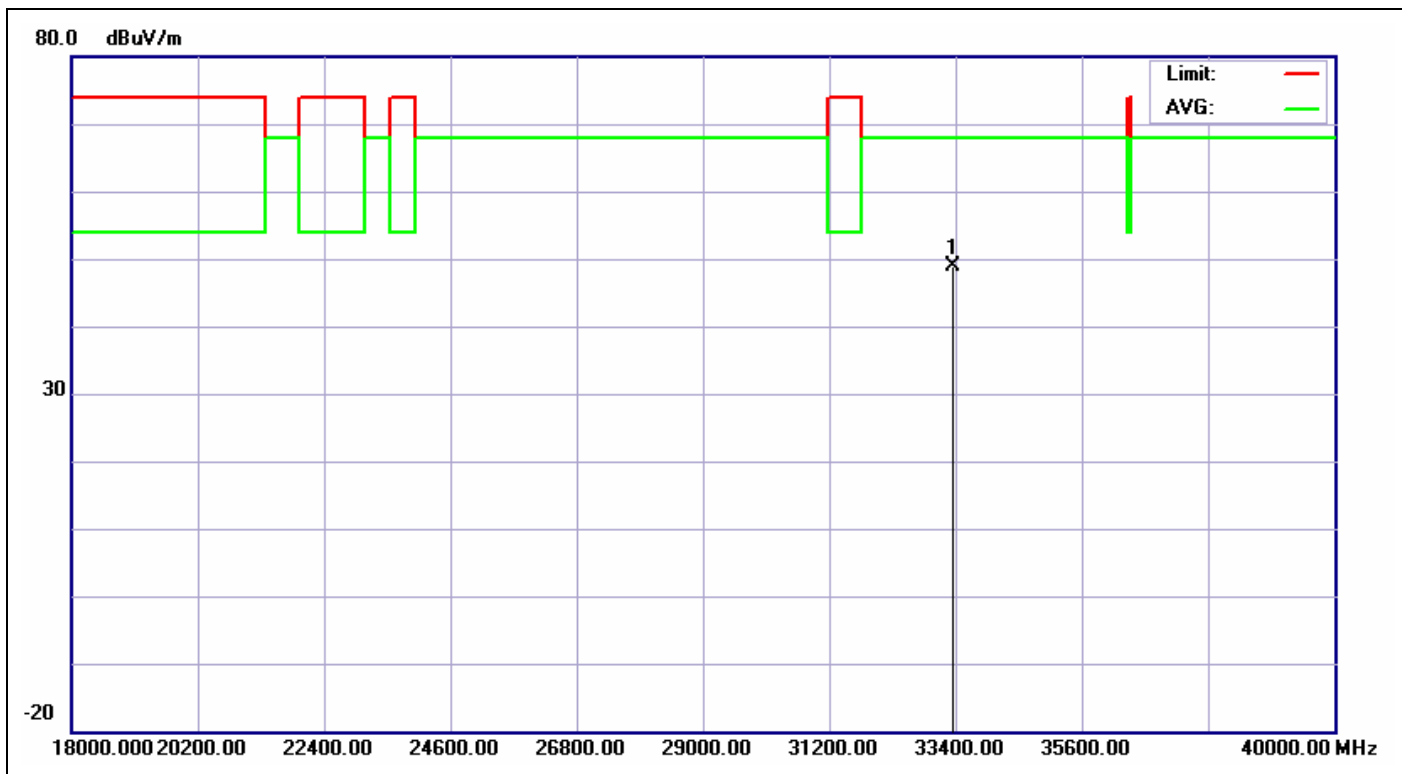


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:45:59
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5510		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	33365.000	34.29	14.69	48.98	68.00	-19.02	peak	100	360	

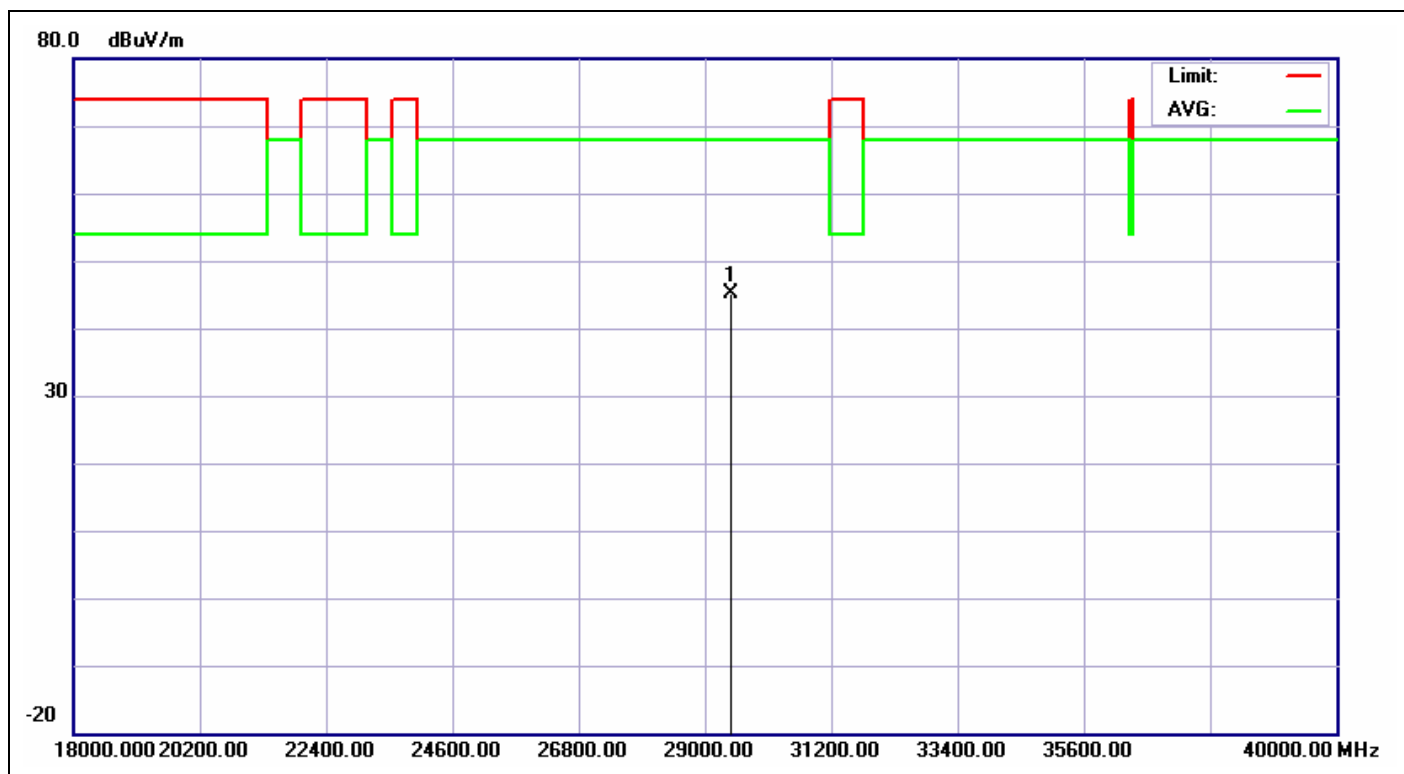


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:46:21
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5590		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	29458.000	30.37	14.70	45.07	68.00	-22.93	peak	100	360	

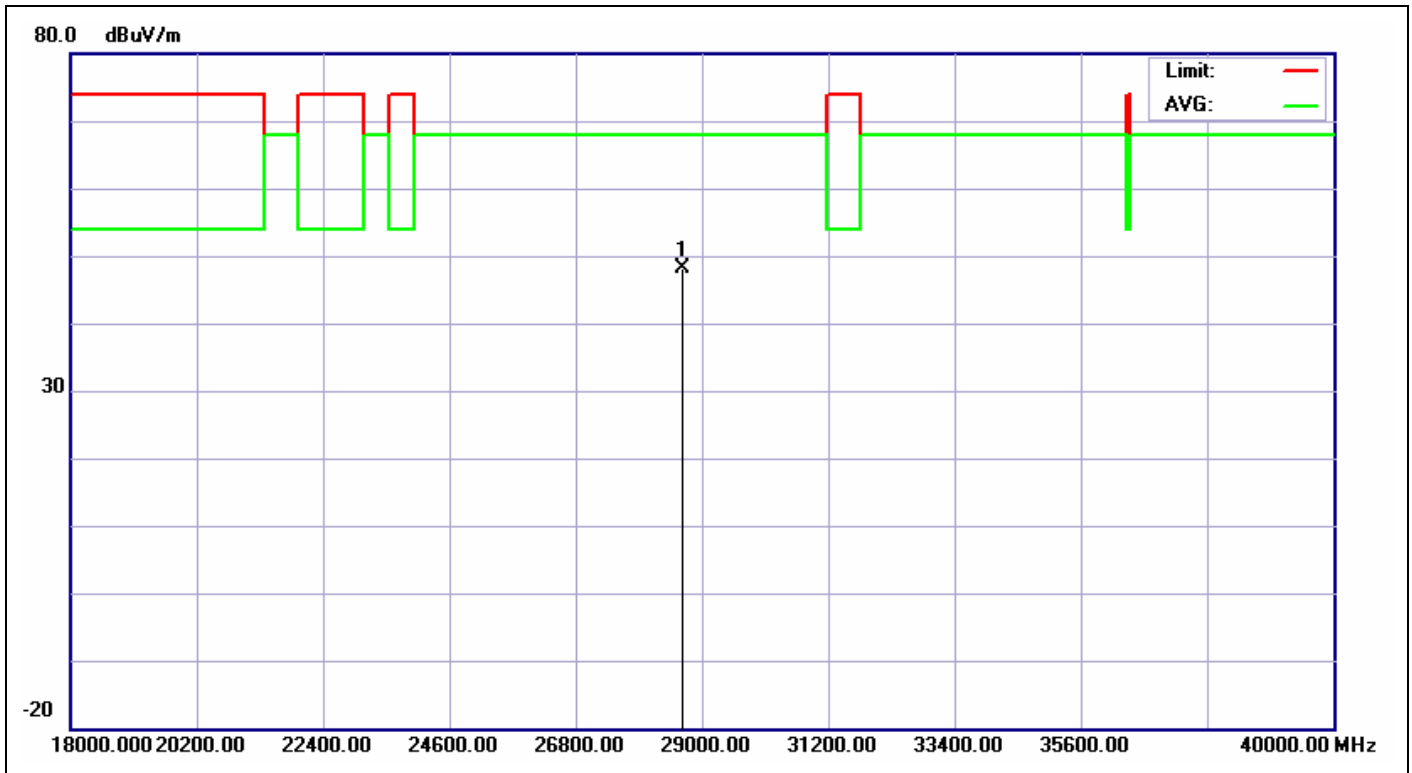


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:46:56
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%)	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5590		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28648.000	31.36	16.70	48.06	68.00	-19.94	peak	100	360	

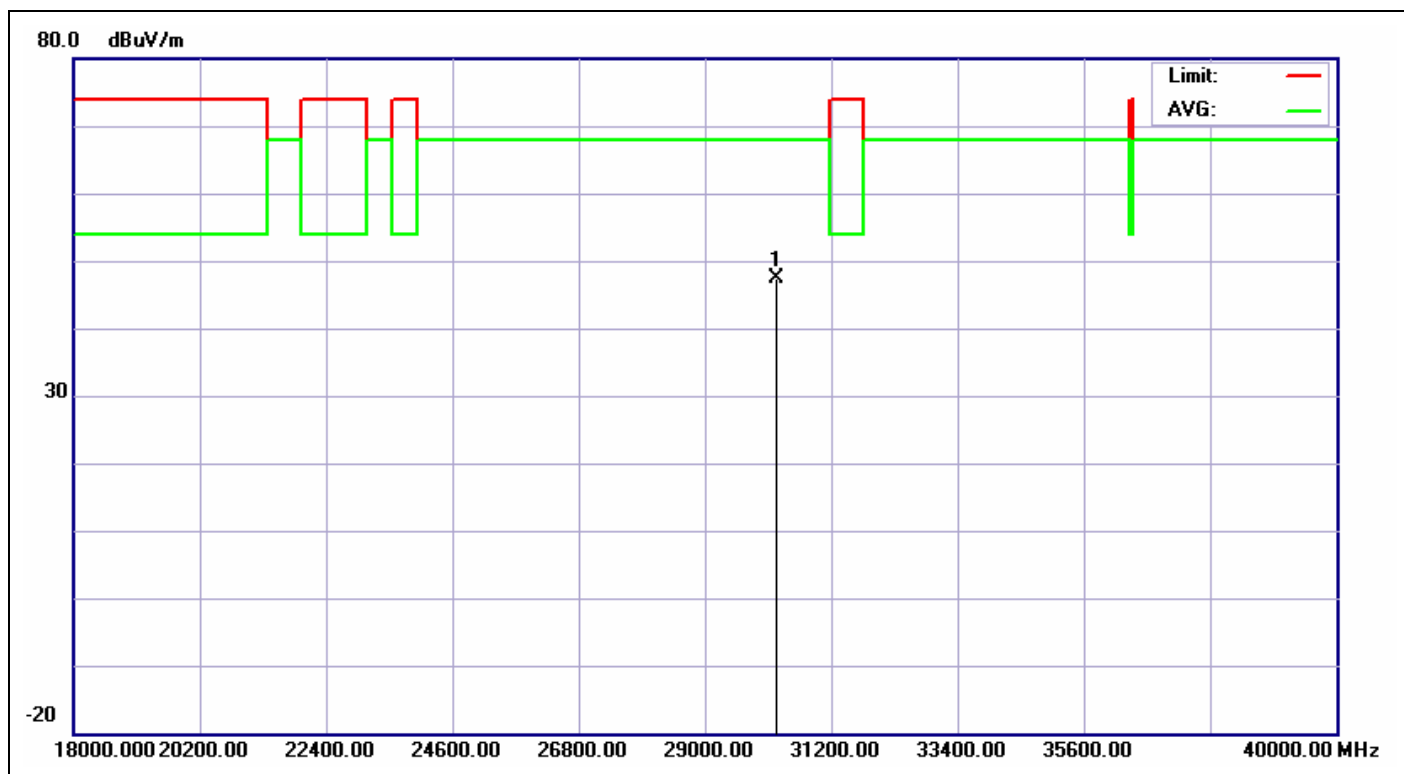


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:47:20
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5670		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30232.000	30.73	16.59	47.32	68.00	-20.68	peak	100	360	

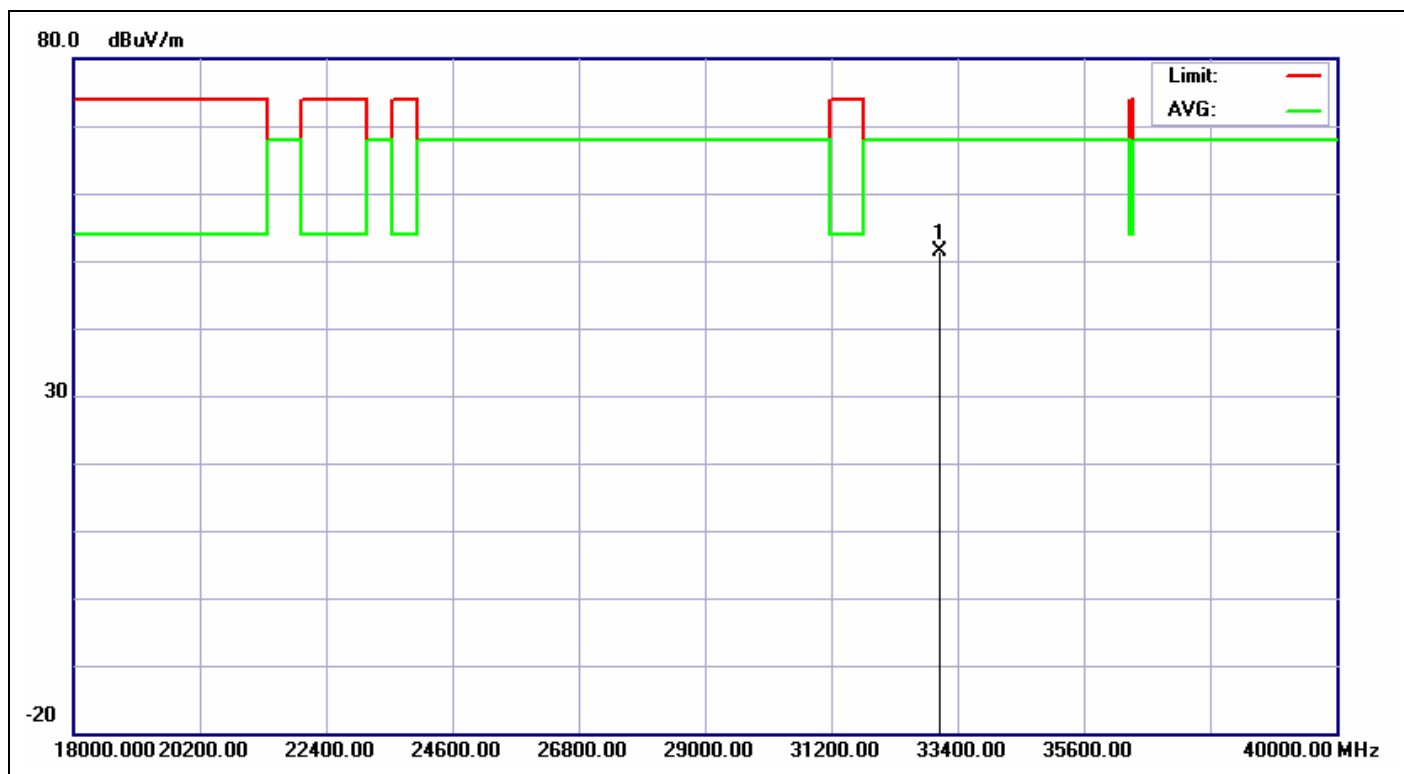


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:48:36
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A40 CH5670		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	33083.000	34.35	17.03	51.38	68.00	-16.62	peak	100	360	

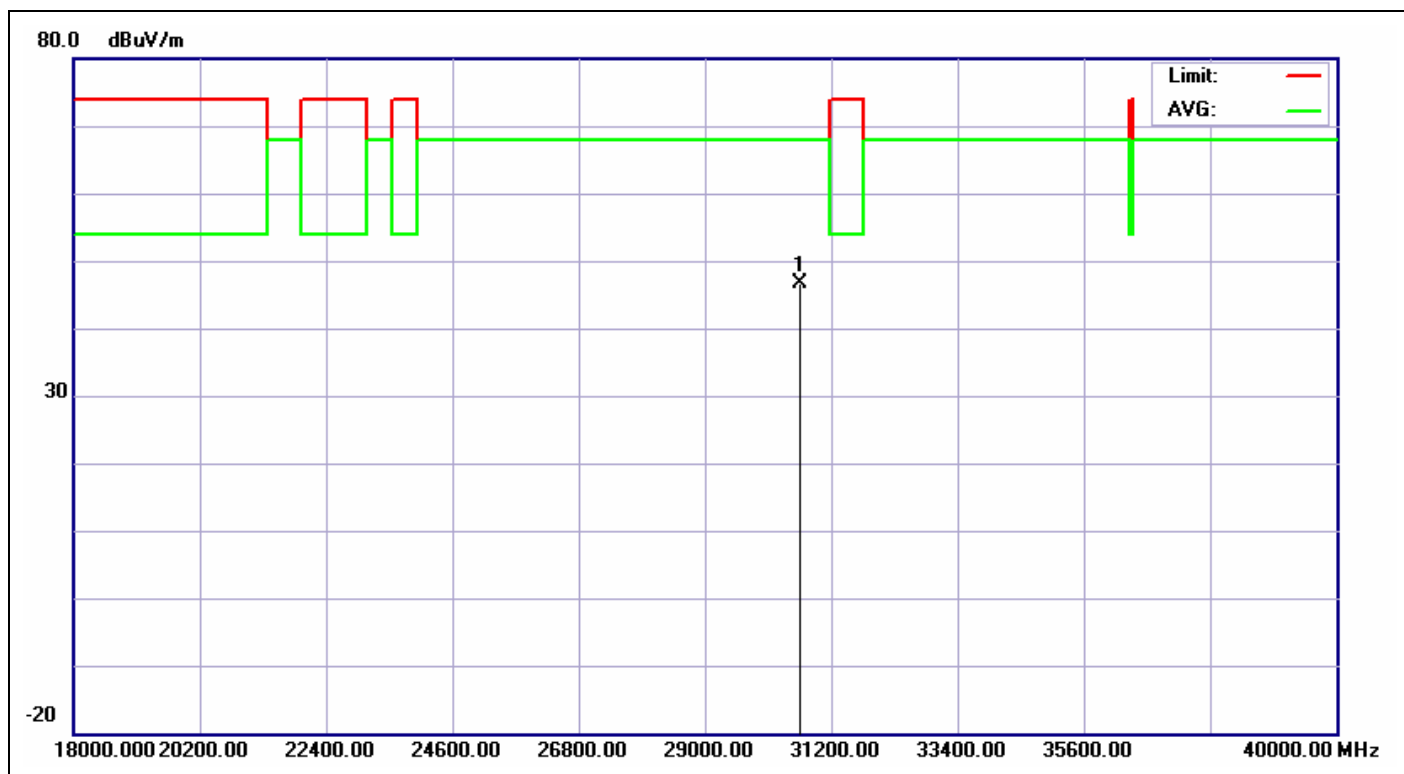


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:39:55
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5500		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30654.000	31.64	14.93	46.57	68.00	-21.43	peak	100	360	

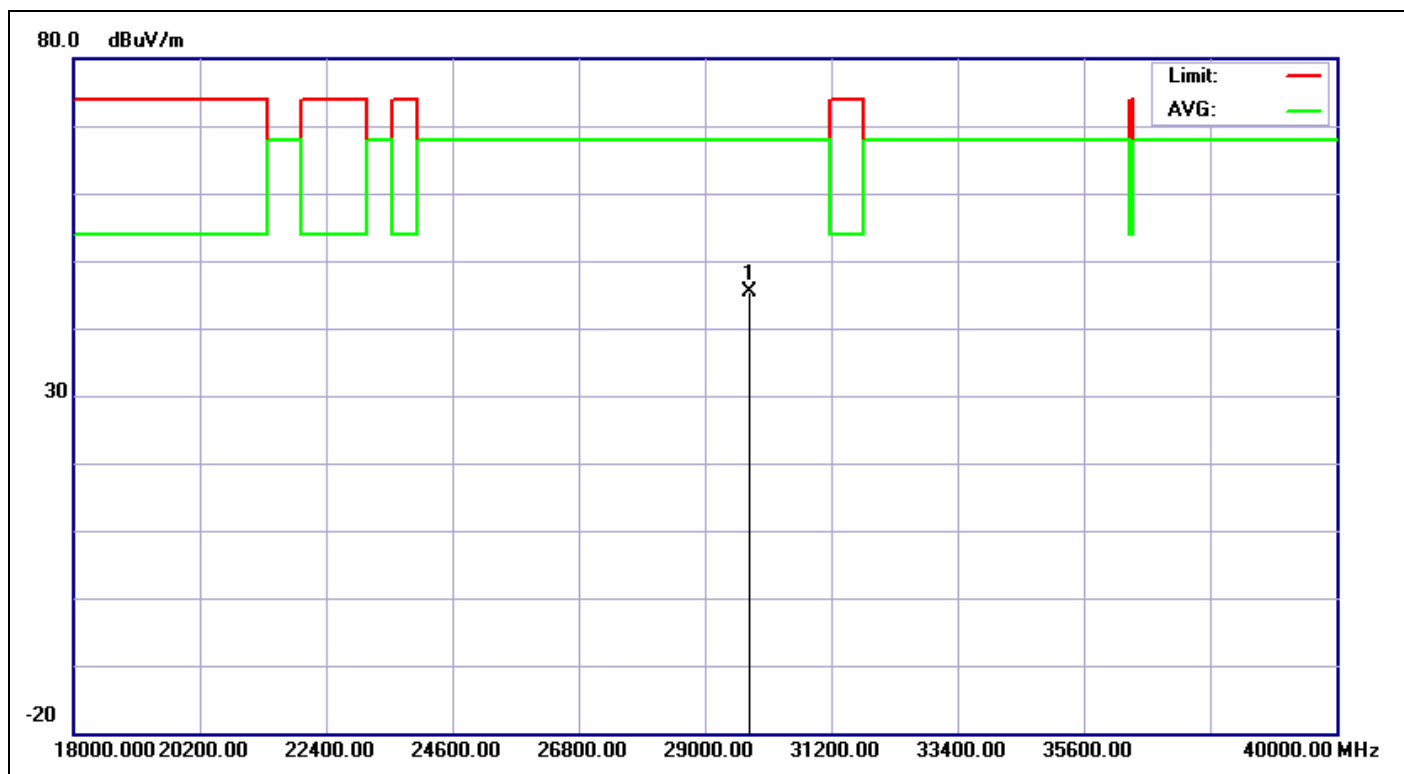


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:40:34
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5500		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	29774.000	30.34	15.05	45.39	68.00	-22.61	peak	100	360	

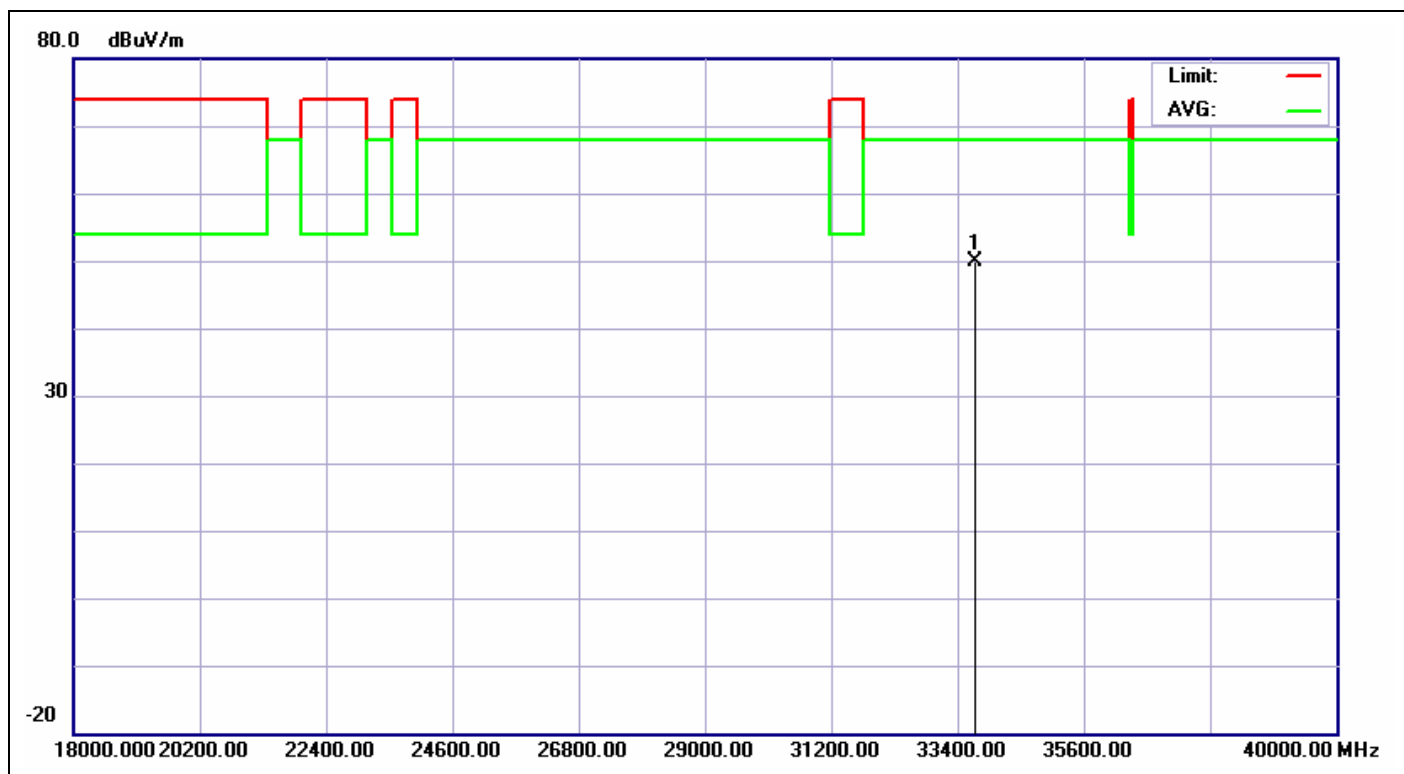


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:40:56
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5600		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	33717.000	33.86	15.91	49.77	68.00	-18.23	peak	100	360	

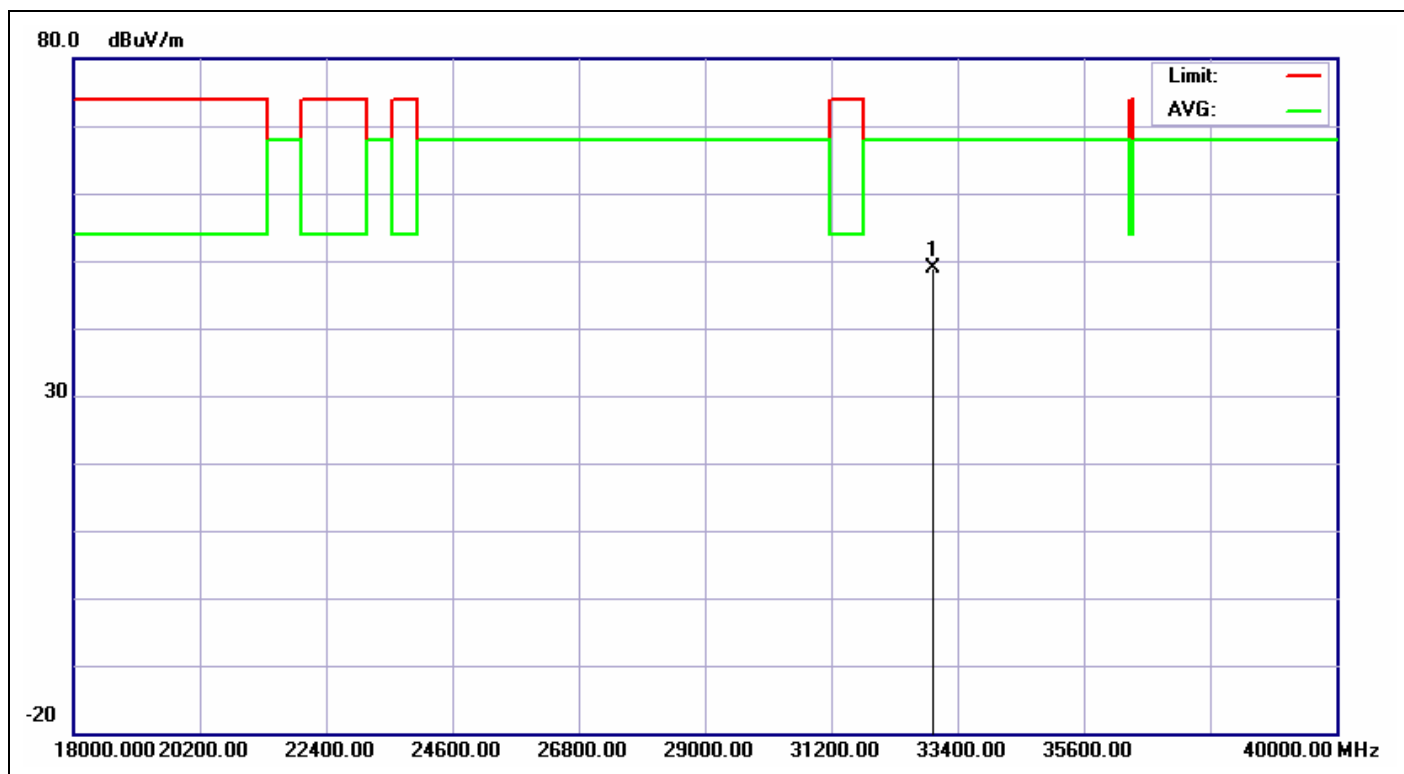


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:41:29
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5600		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32978.000	34.35	14.49	48.84	68.00	-19.16	peak	100	360	

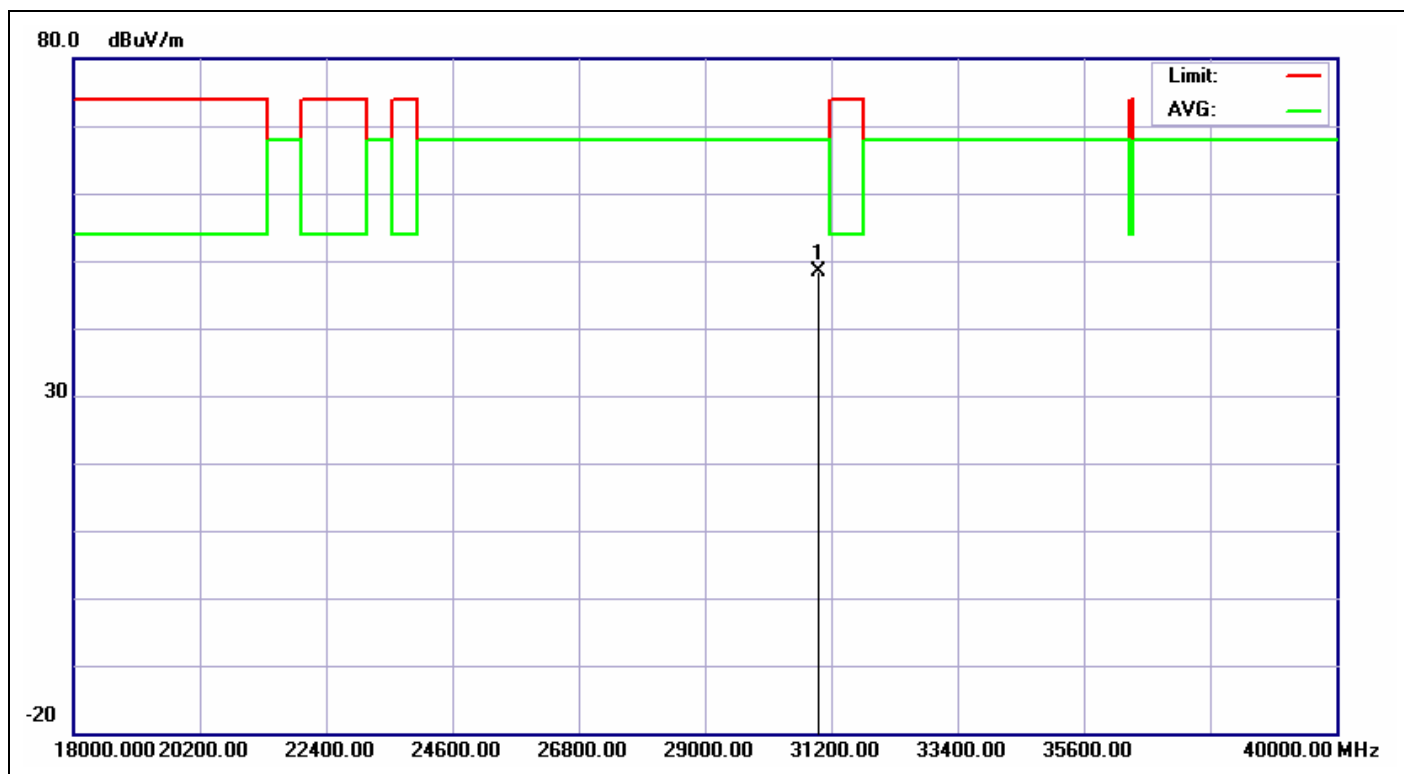

Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:41:54
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5700		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30971.000	32.67	15.61	48.28	68.00	-19.72	peak	100	360	

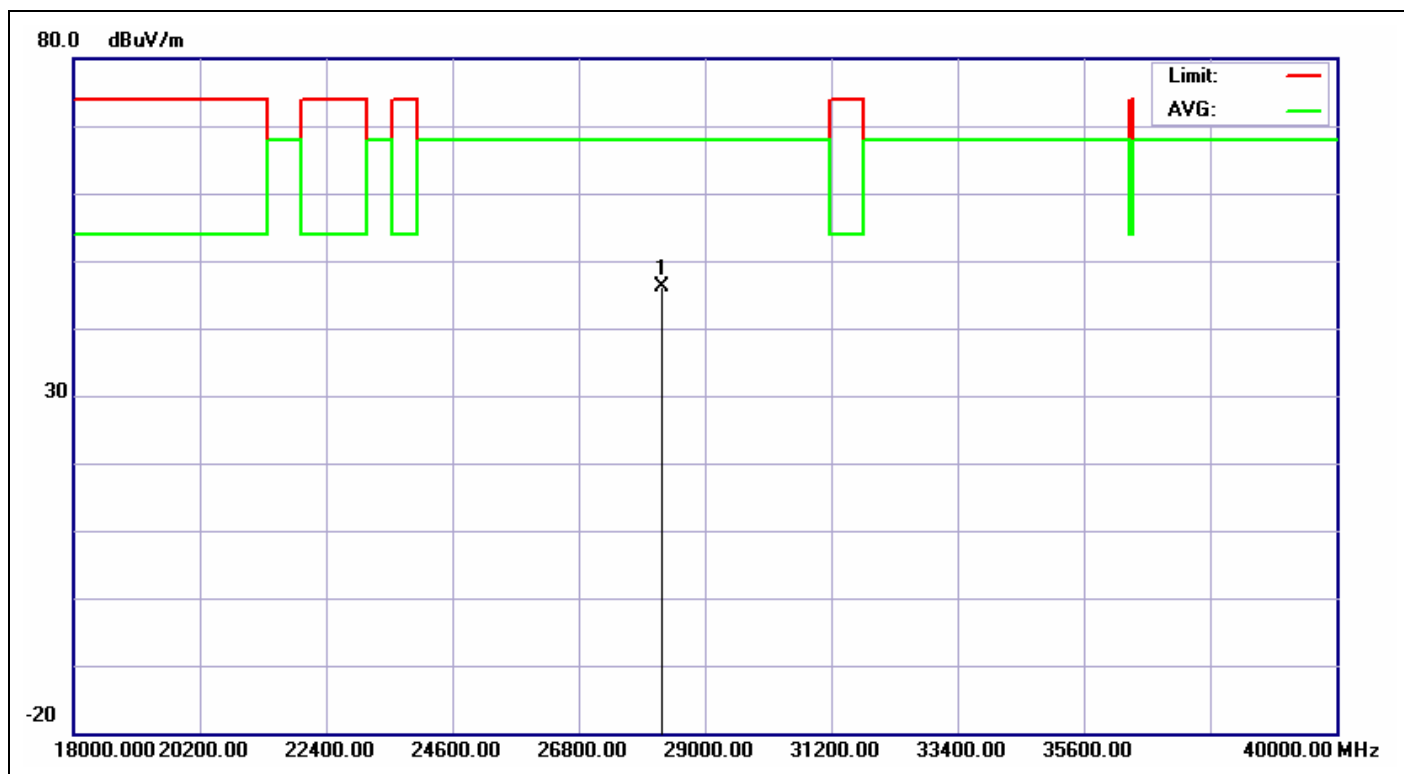


Service No.:	113161892-FCC wifi	Test Distance:	3M
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/1/3 PM 09:42:22
Applicant:	Lite-On	Test Rating:	DC 3.3V
Product:	Wireless module	Temp.(°C)/Hum.(%):	19(°C)/50%
Model No.:	WBCN603MH	Test Engineer:	Hugo Chang
Test Mode:	A CH5700		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	28261.000	31.00	15.19	46.19	68.00	-21.81	peak	100	360	

Radiated Bandedge (802.11A Band I Band II) PK


Low Channel (H)

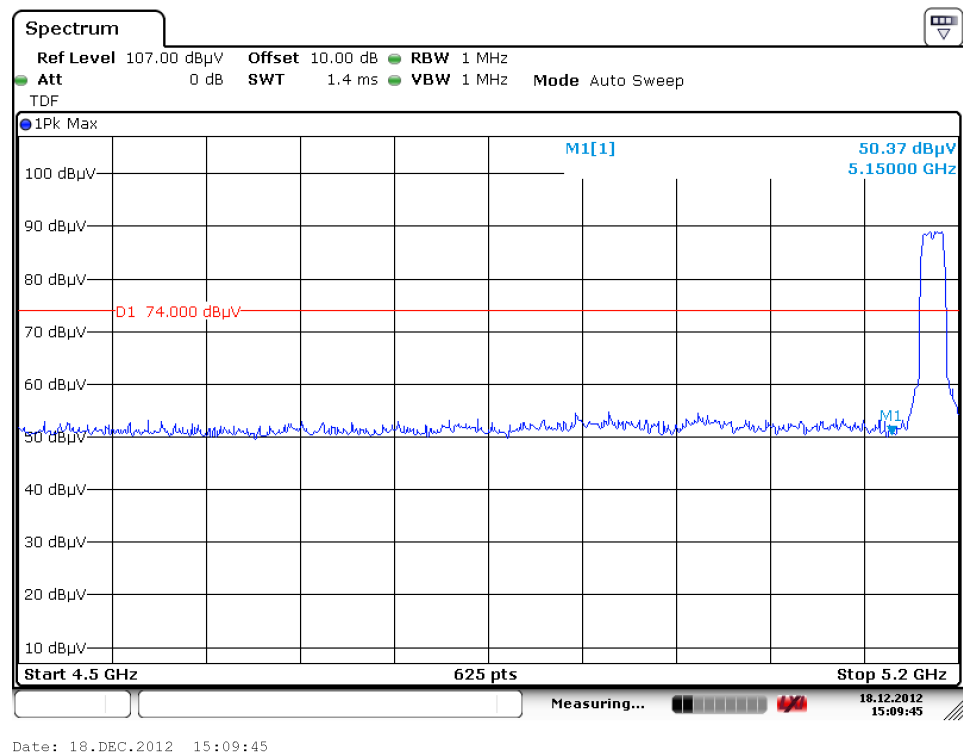


High Channel (H)

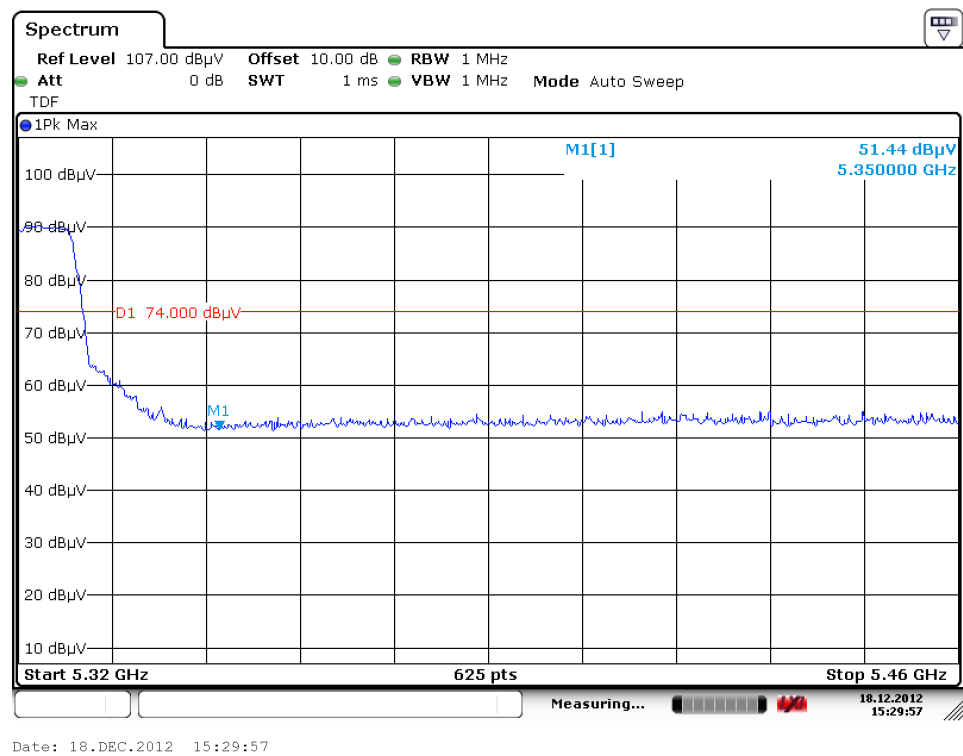

Low Channel (V)

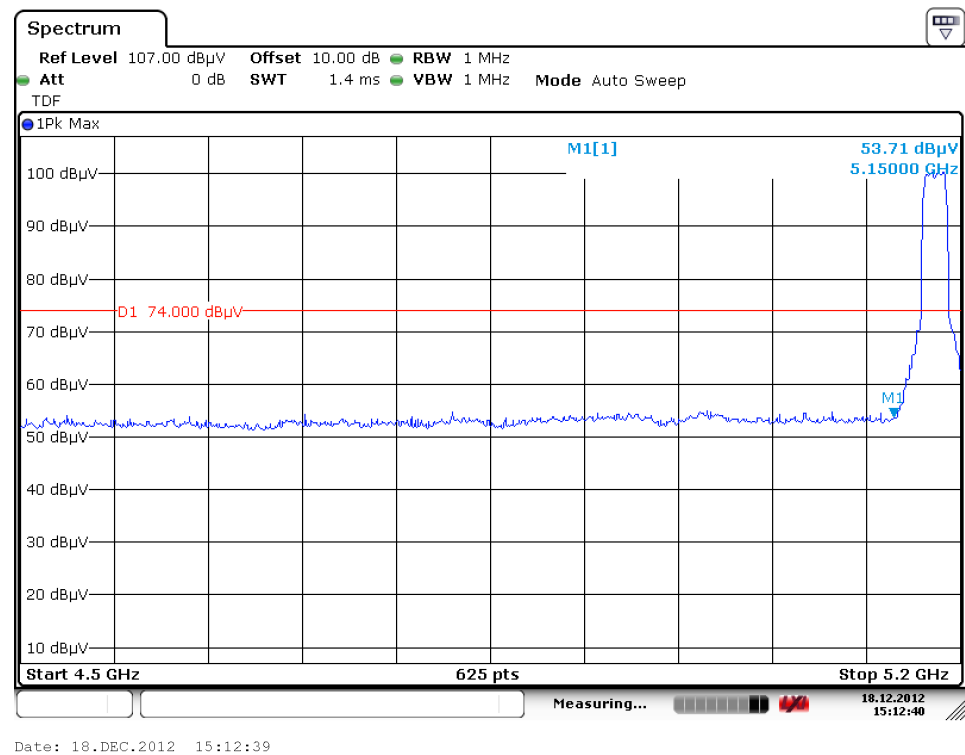


High Channel (V)

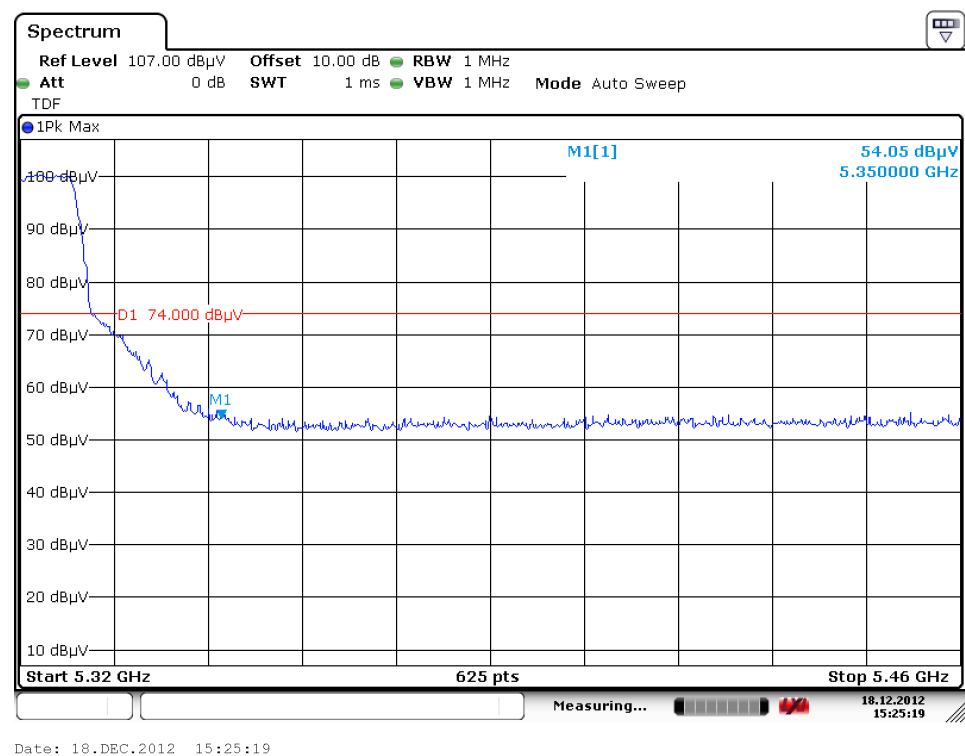


Radiated Bandedge (802.11A Band III) PK

Low Channel (H)

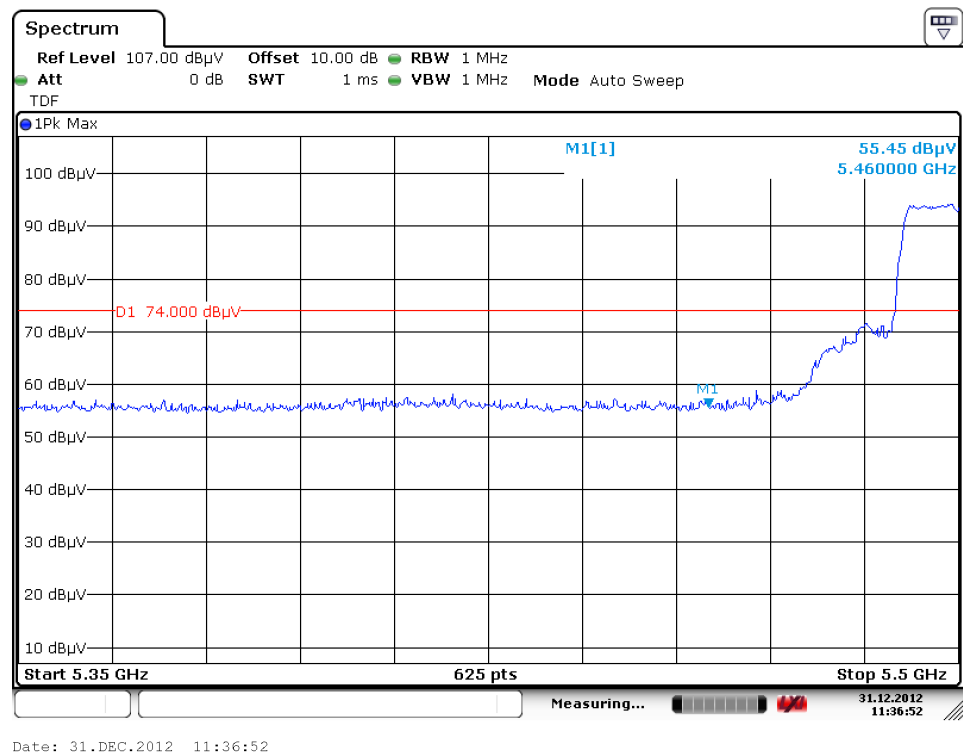


Low Channel (V)

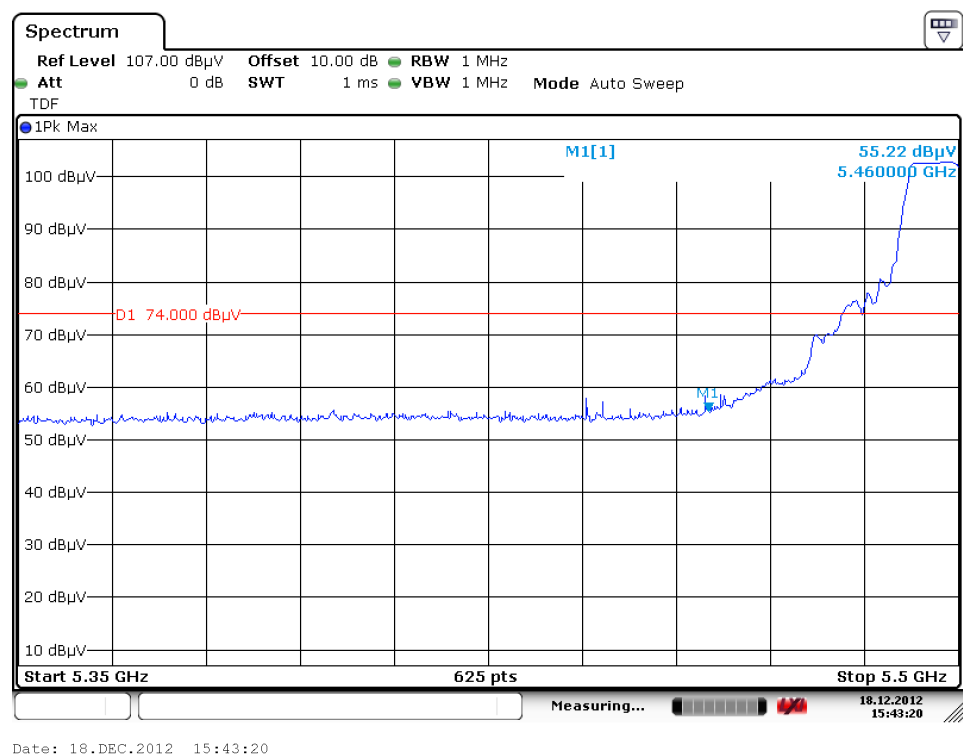


Radiated Bandedge (802.11N, HT20 Band I Band II) PK


Low Channel (H)

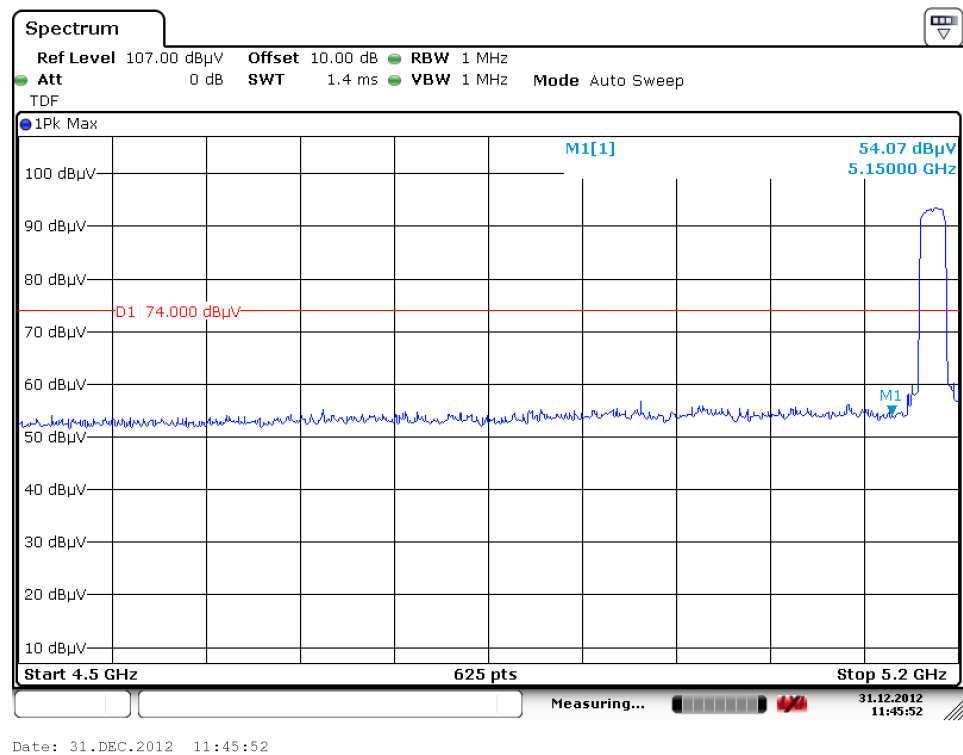


High Channel (H)

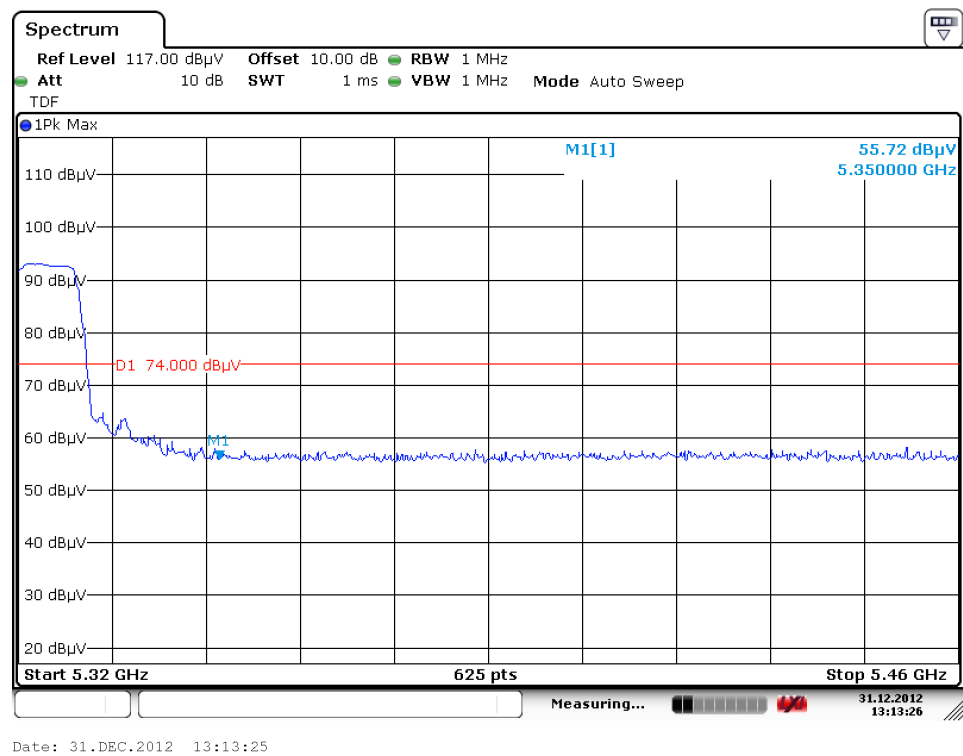

Low Channel (V)

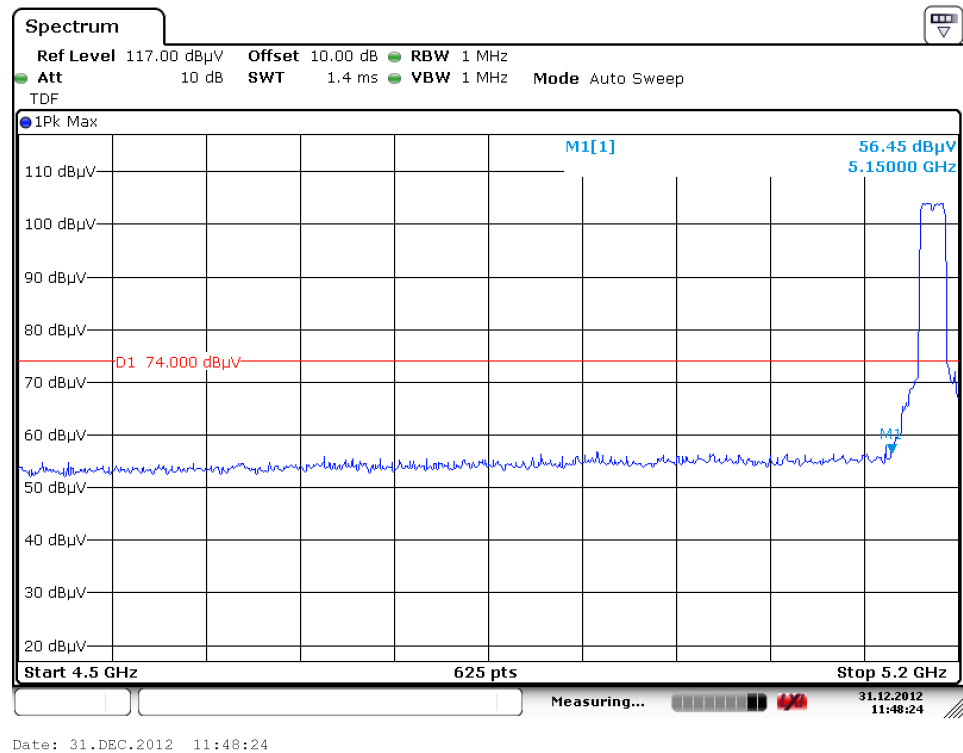


High Channel (V)

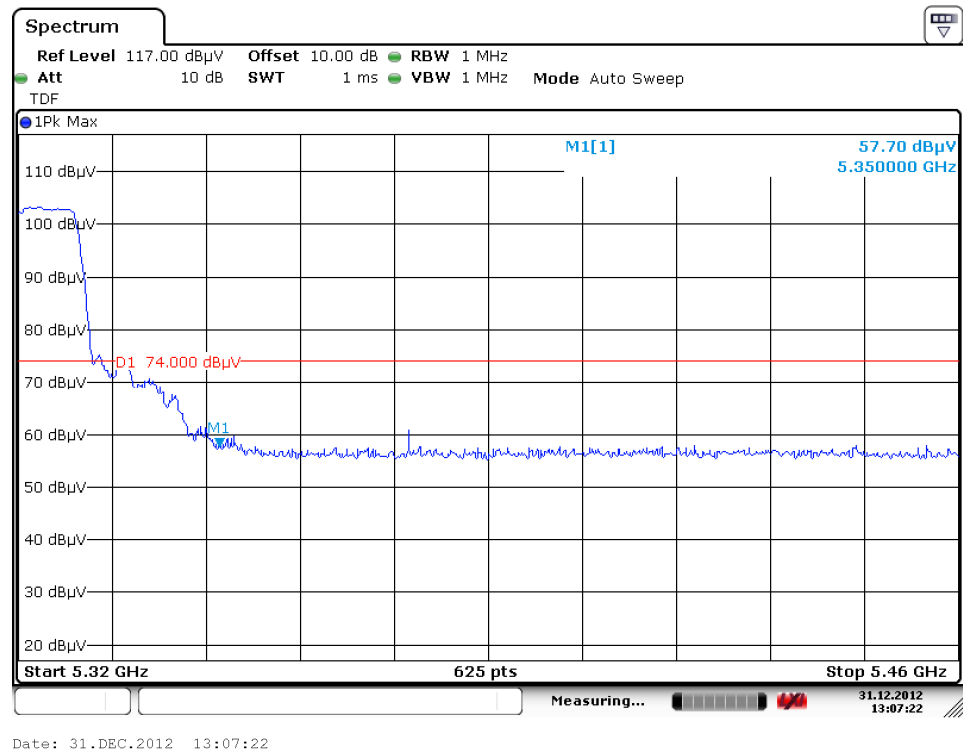


Radiated Bandedge (802.11N, HT20 Band III) PK

Low Channel (H)

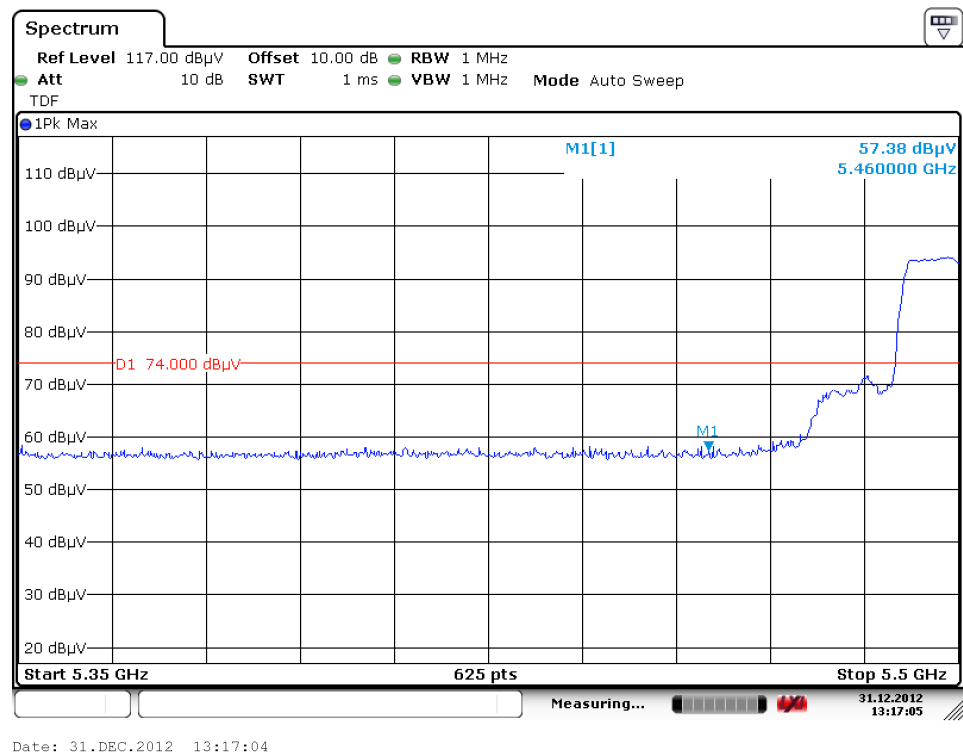


Low Channel (V)

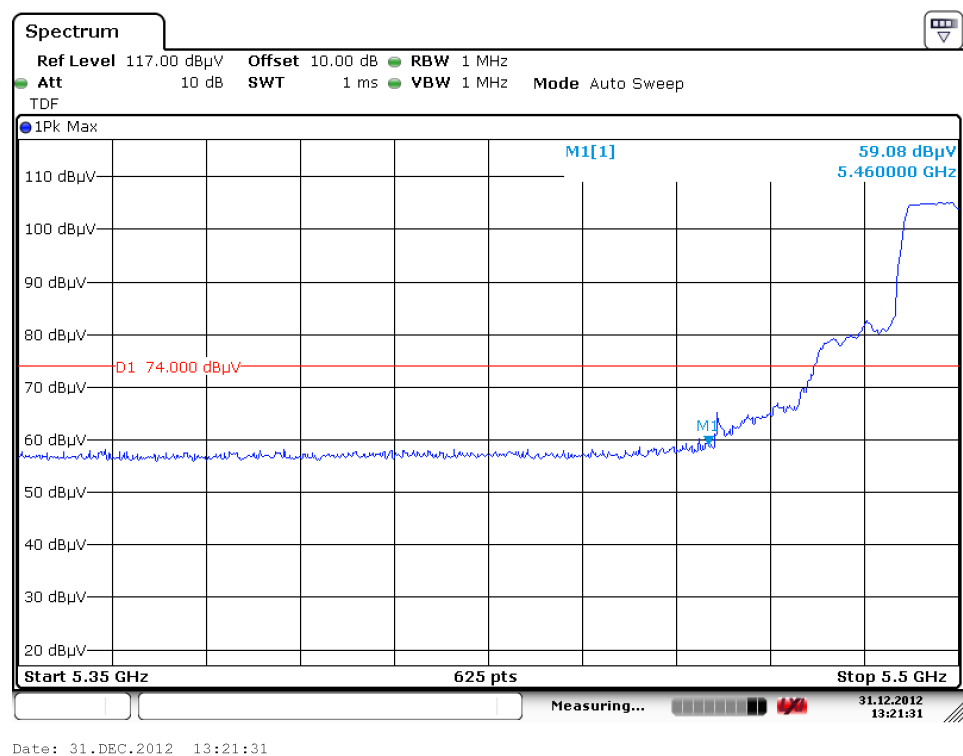


Radiated Bandedge (802.11N, HT40 Band I Band II) PK


Low Channel (H)

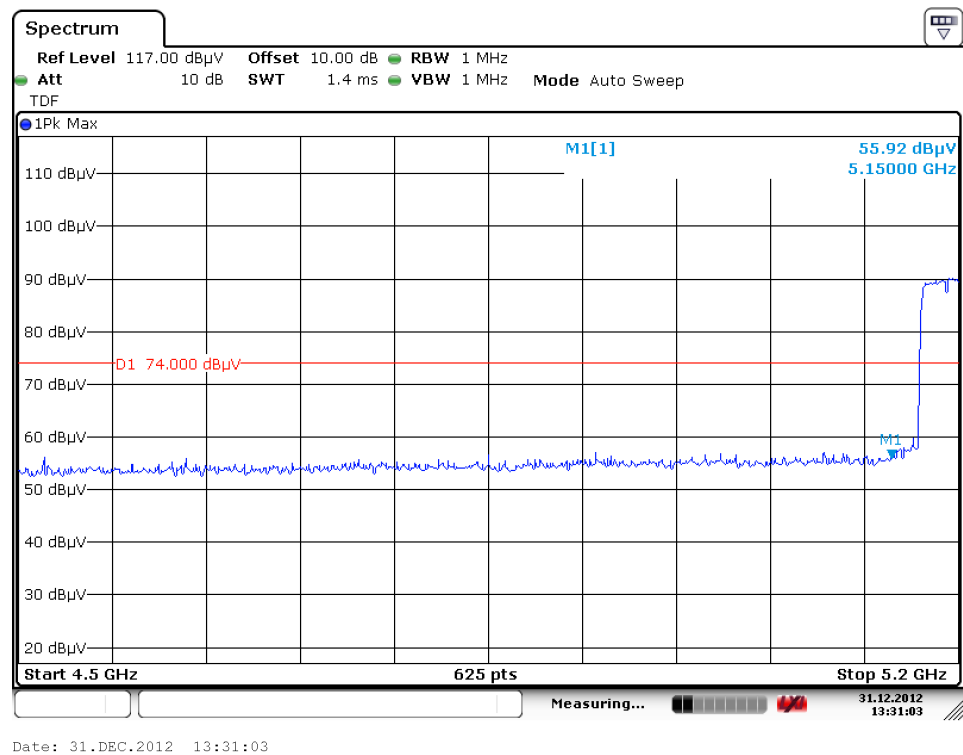


High Channel (H)

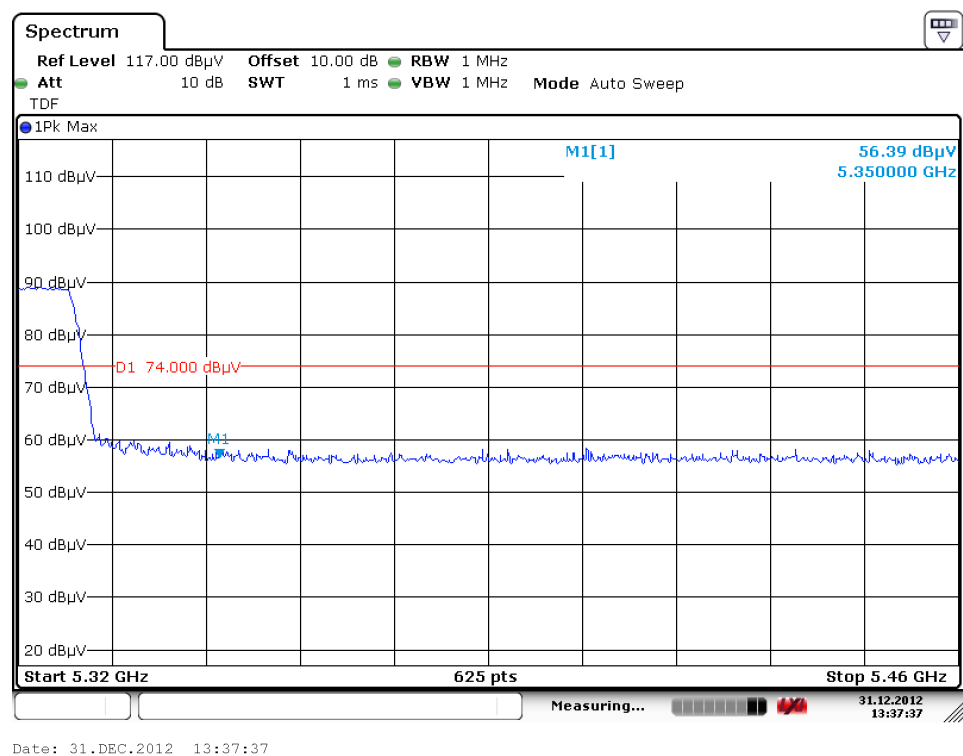

Low Channel (V)

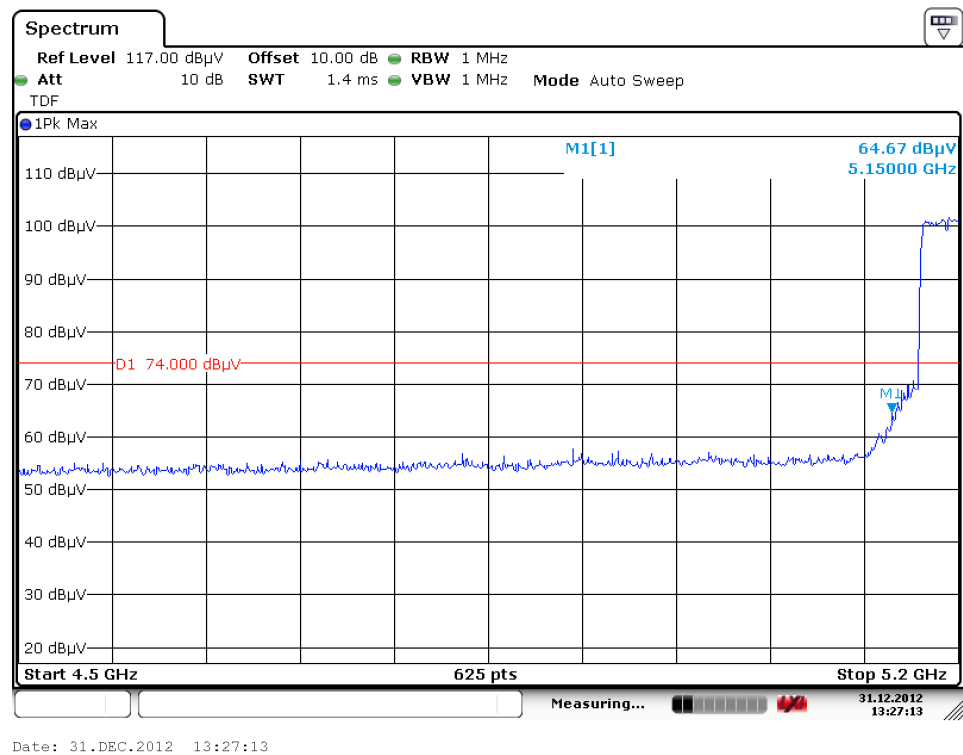


High Channel (V)

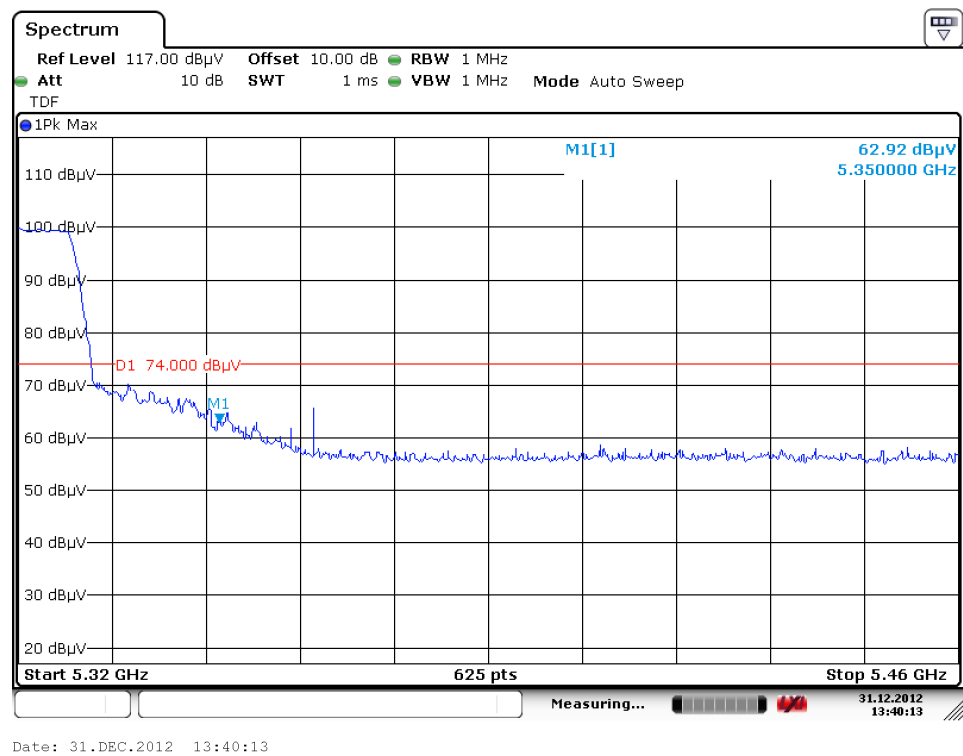


Radiated Bandedge (802.11N, HT40 Band III) PK

Low Channel (H)

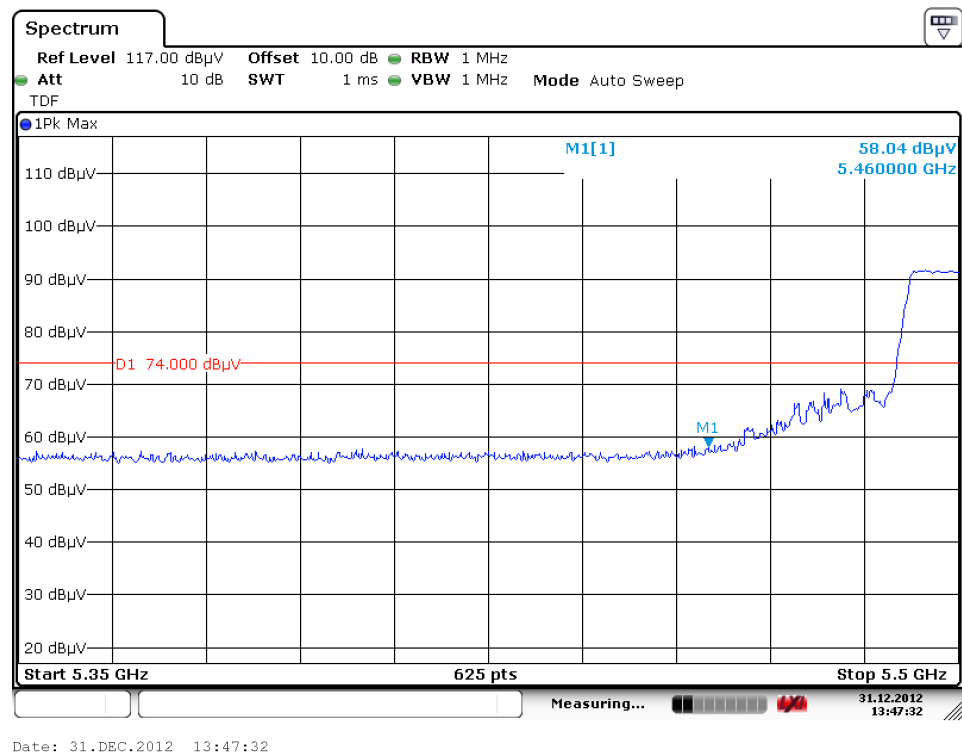


Low Channel (V)

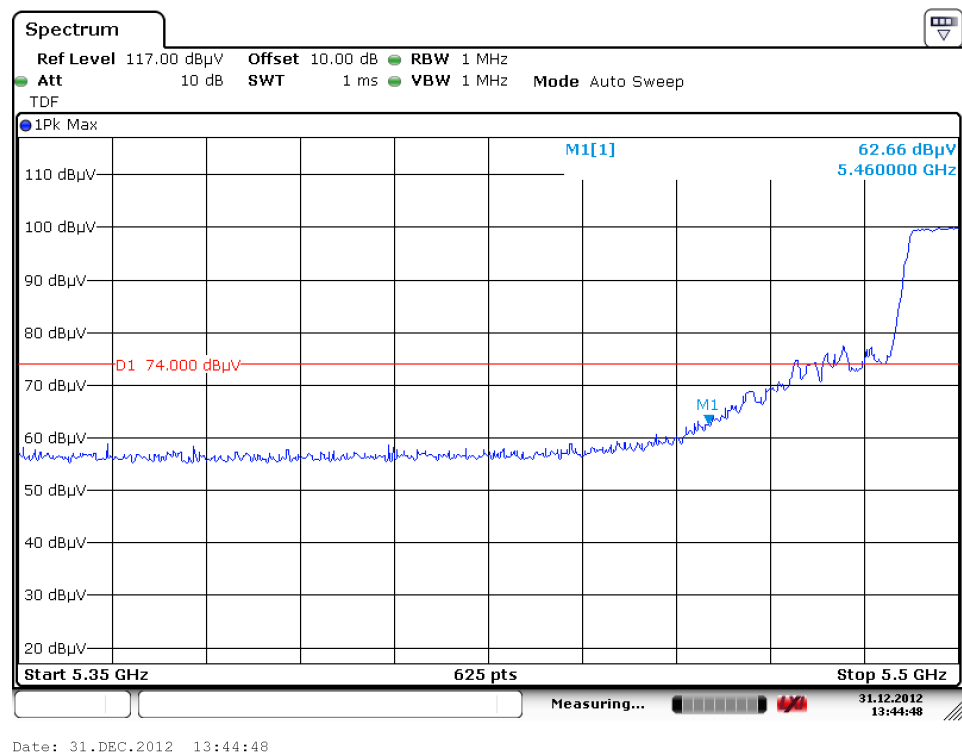


Radiated Bandedge (802.11A Band I Band II) AVG


Low Channel (H)

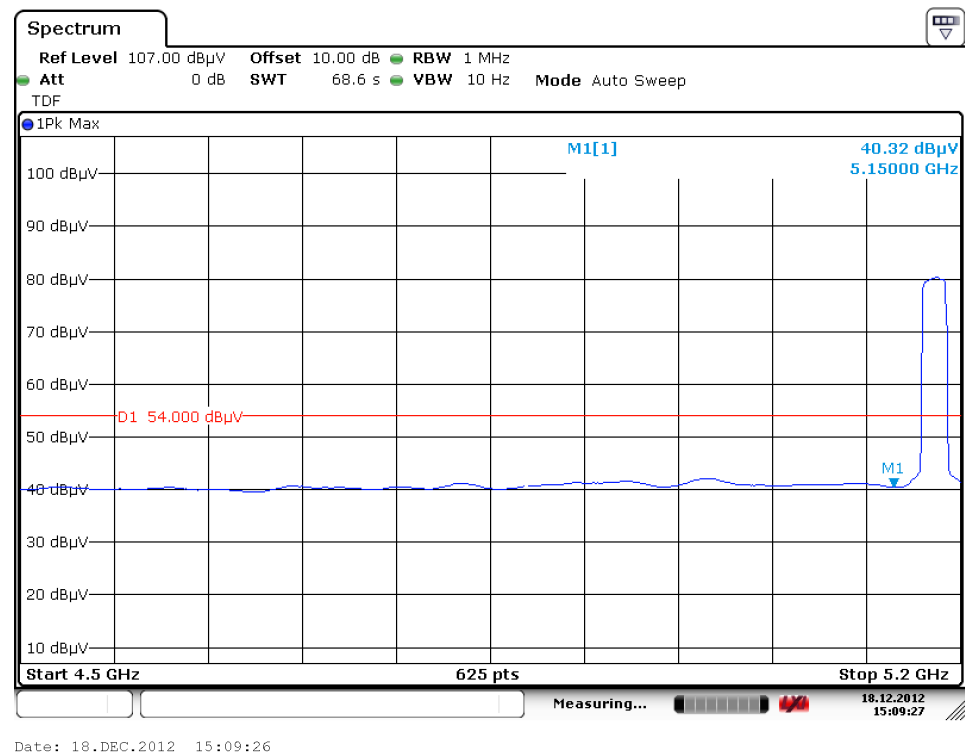


High Channel (H)

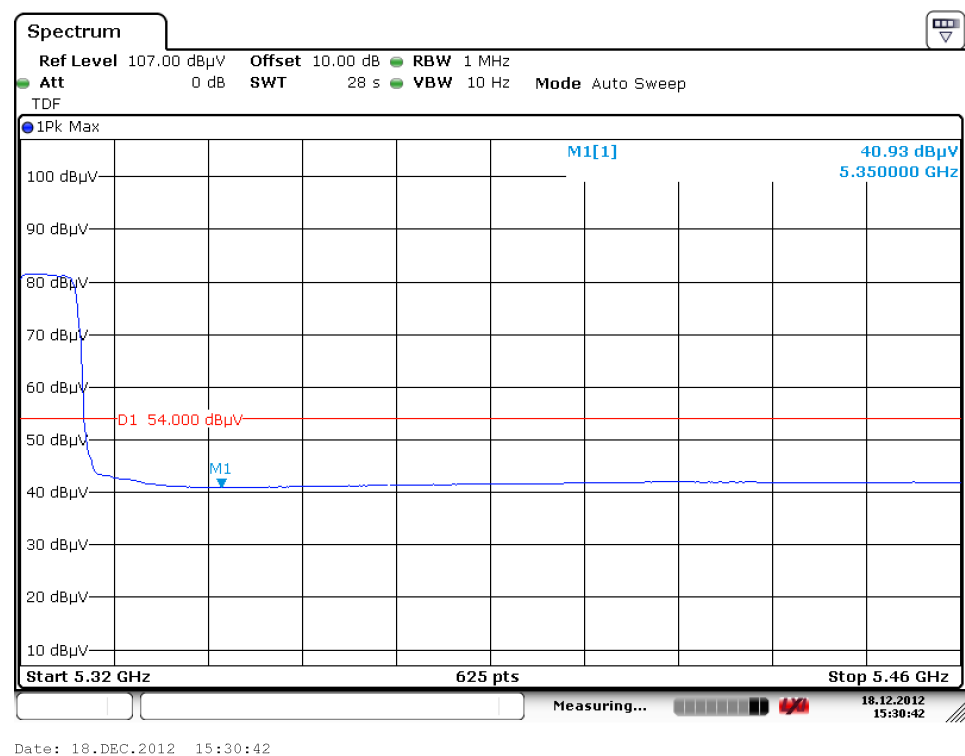

Low Channel (V)

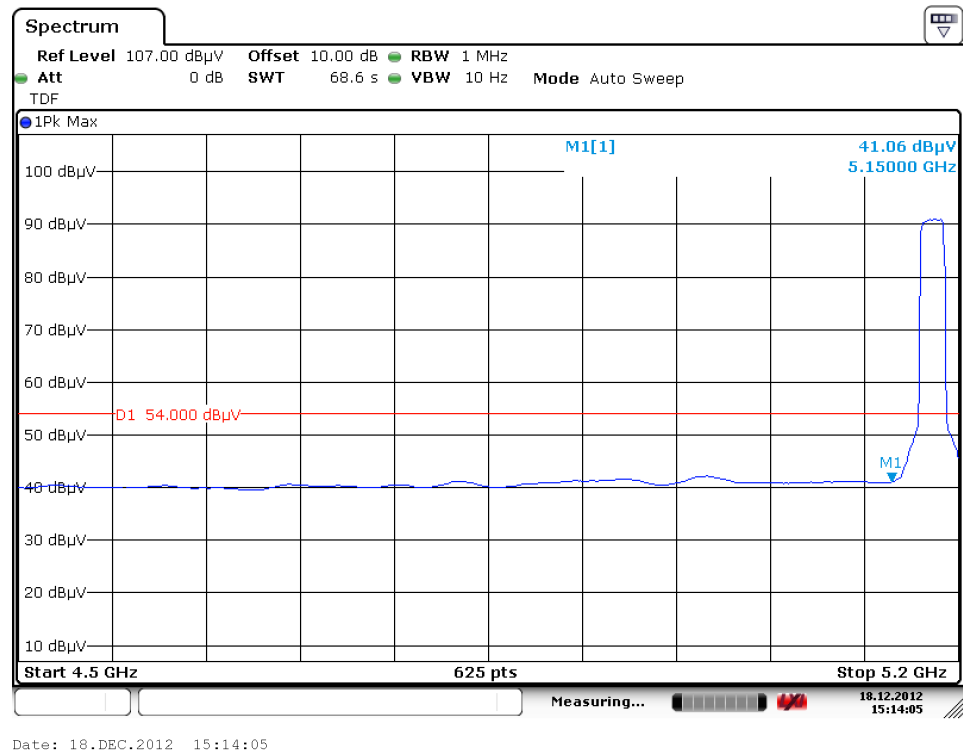


High Channel (V)

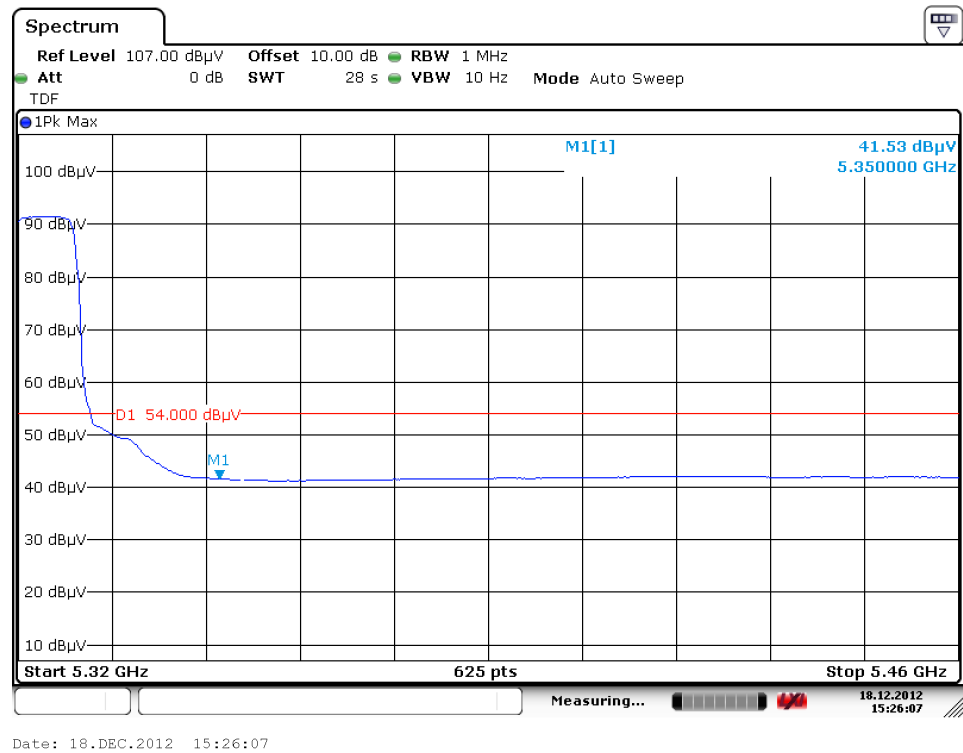


Radiated Bandedge (802.11A Band III) AVG

Low Channel (H)

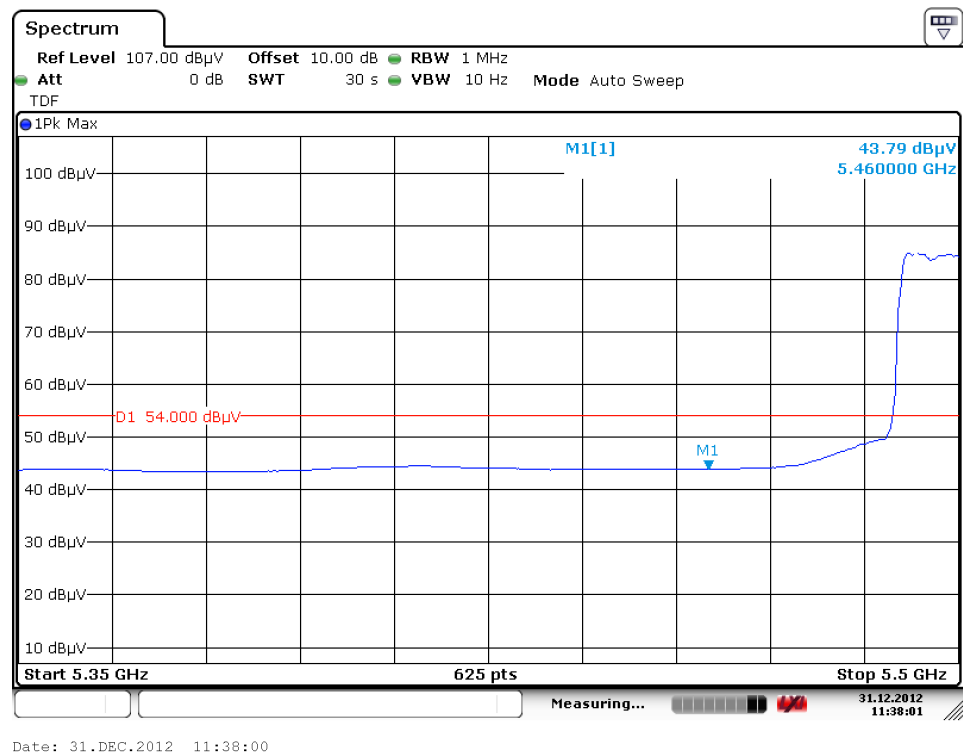


Low Channel (V)

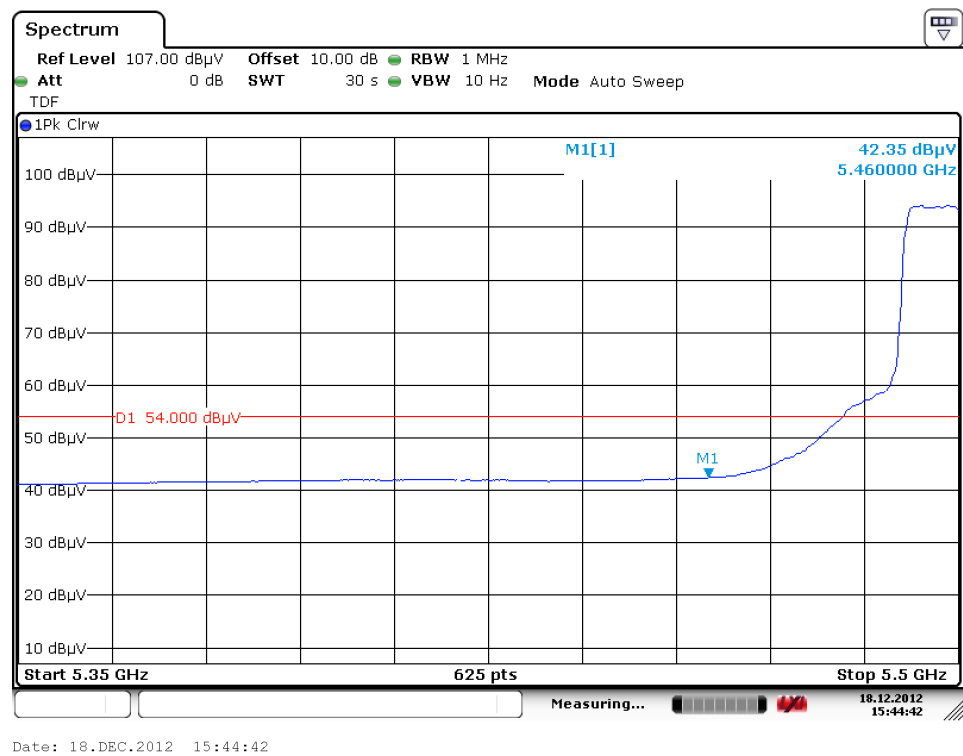


Radiated Bandedge (802.11N, HT20 Band I Band II)

AVG


Low Channel (H)

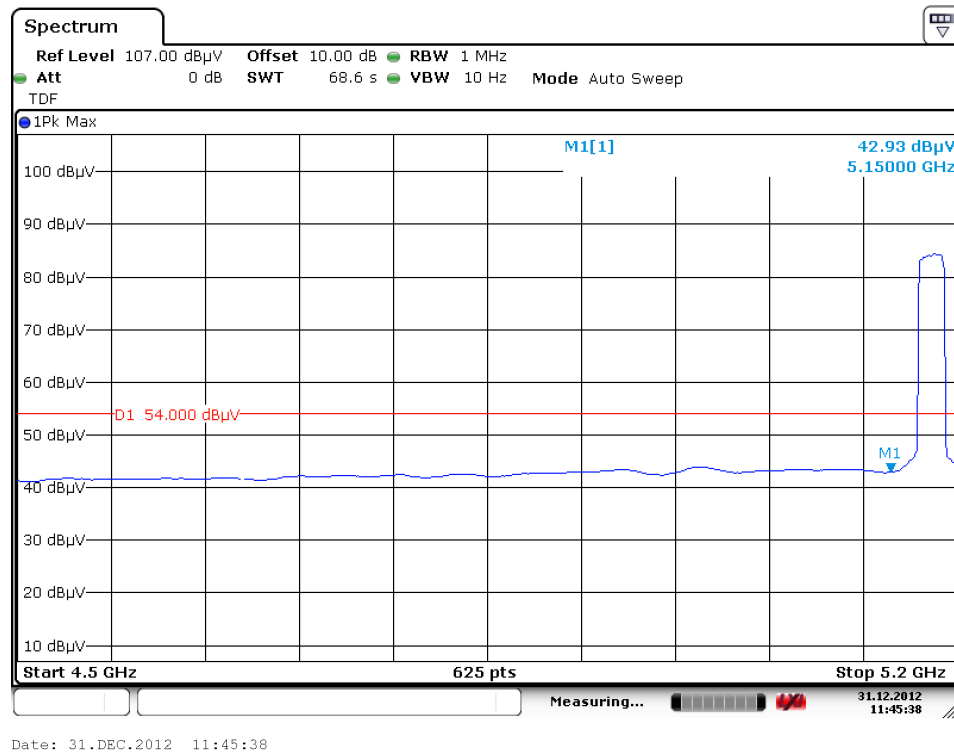


High Channel (H)

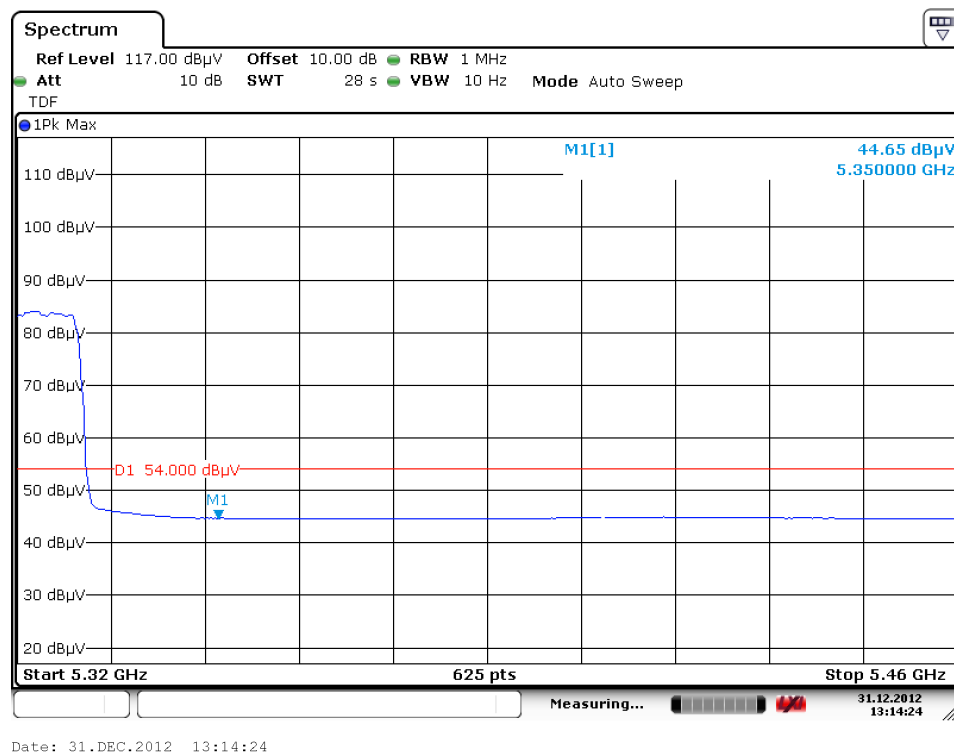

Low Channel (V)

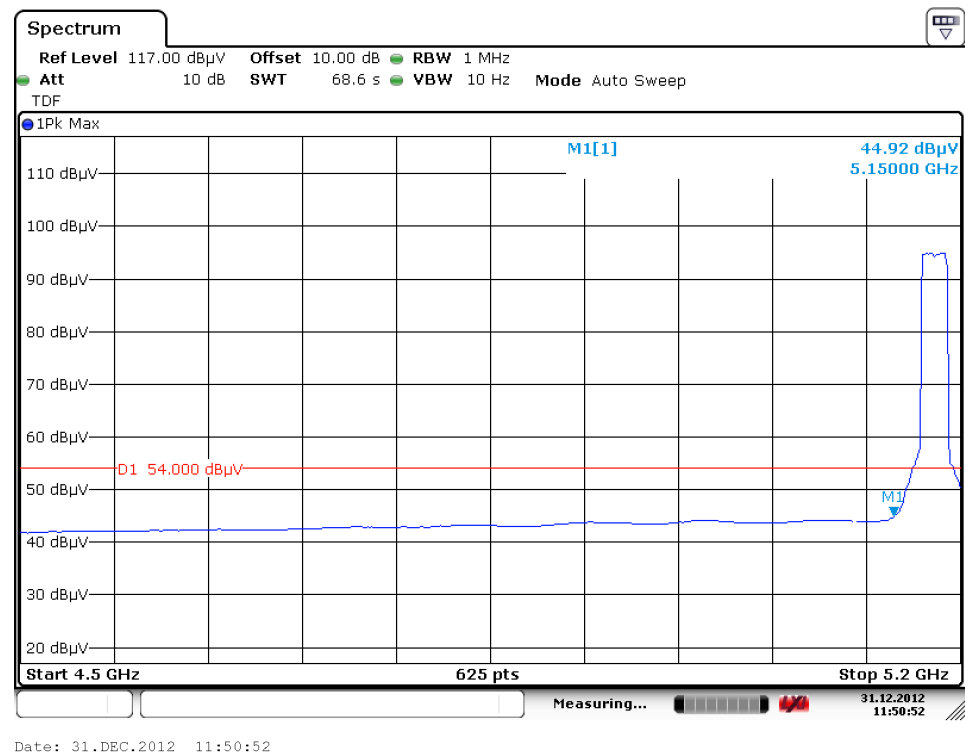


High Channel (V)

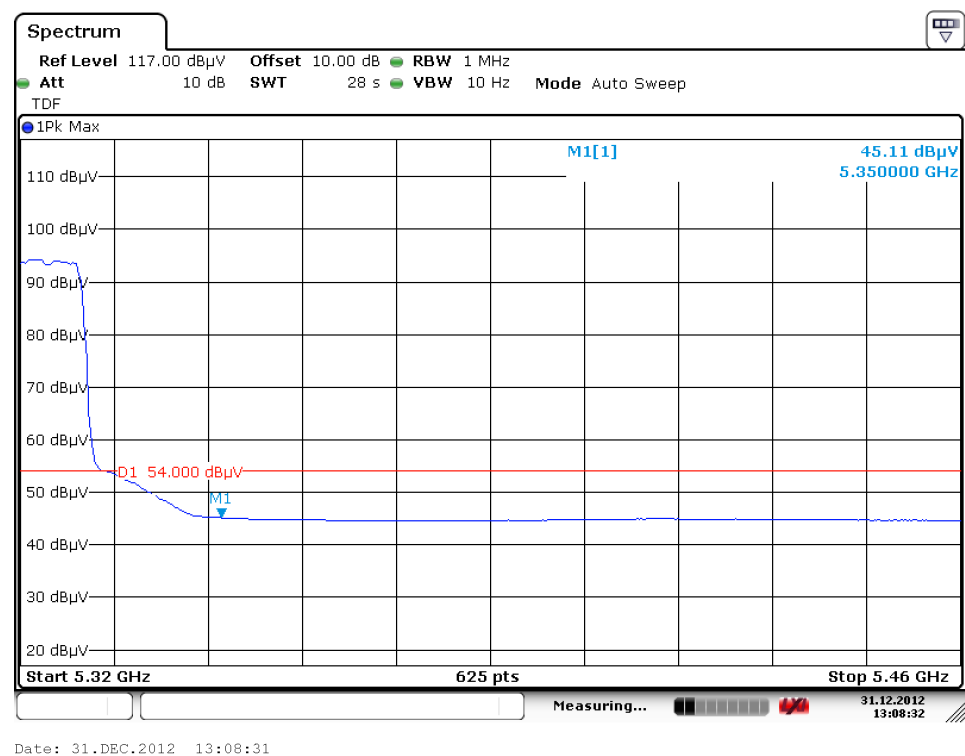


Radiated Bandedge (802.11N, HT20 Band III) AVG

Low Channel (H)

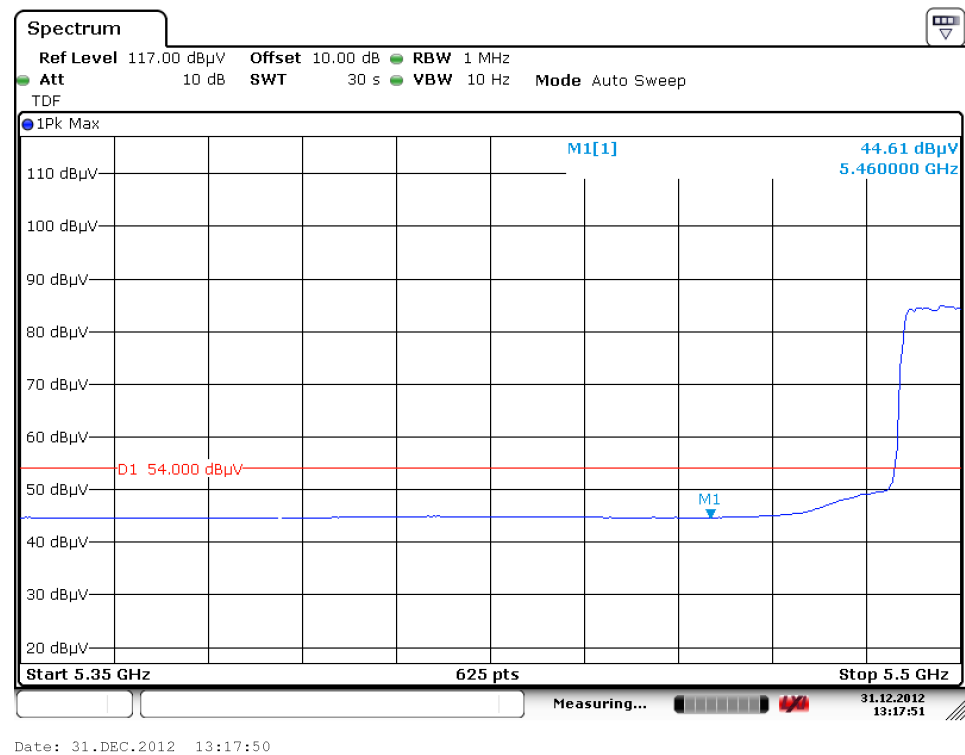


Low Channel (V)

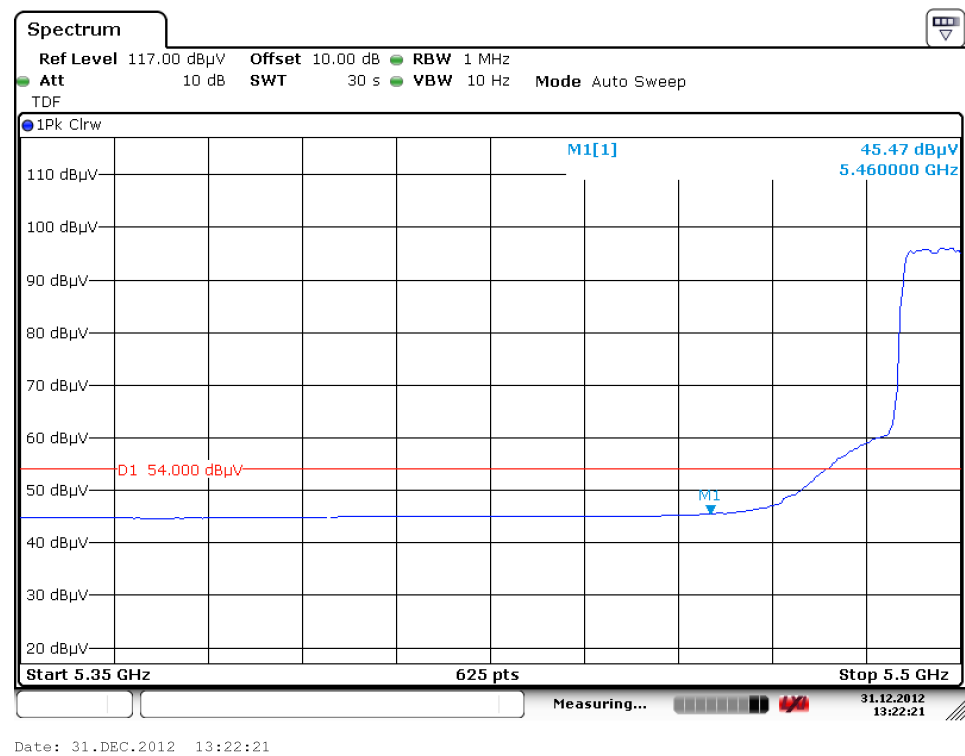


Radiated Bandedge (802.11N, HT40 Band I Band II)

AVG


Low Channel (H)

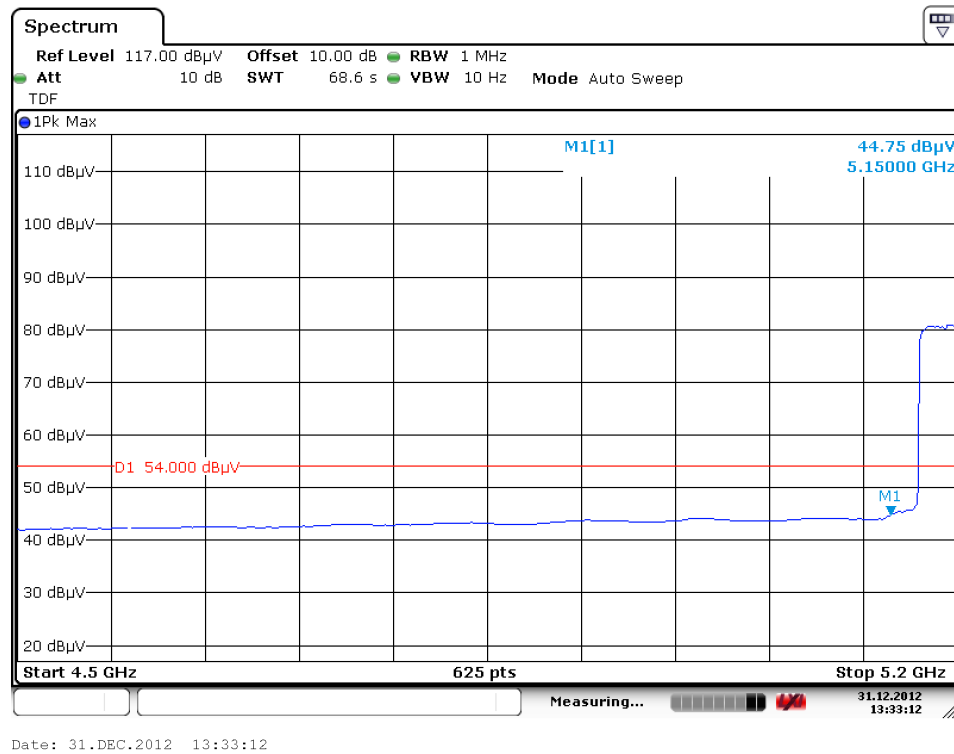


High Channel (H)

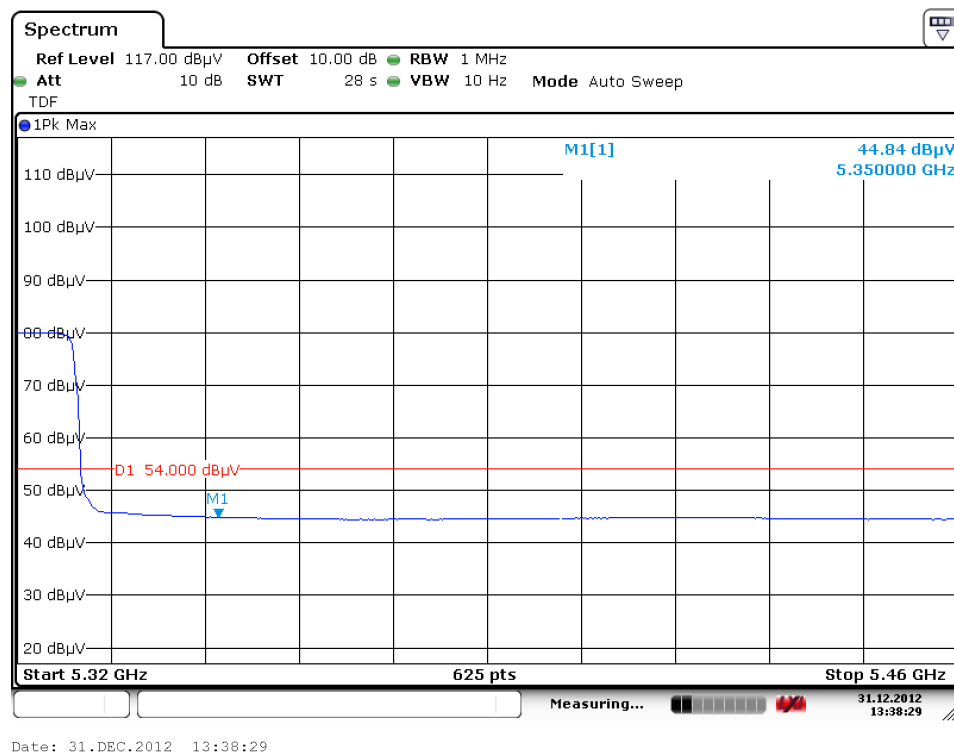

Low Channel (V)

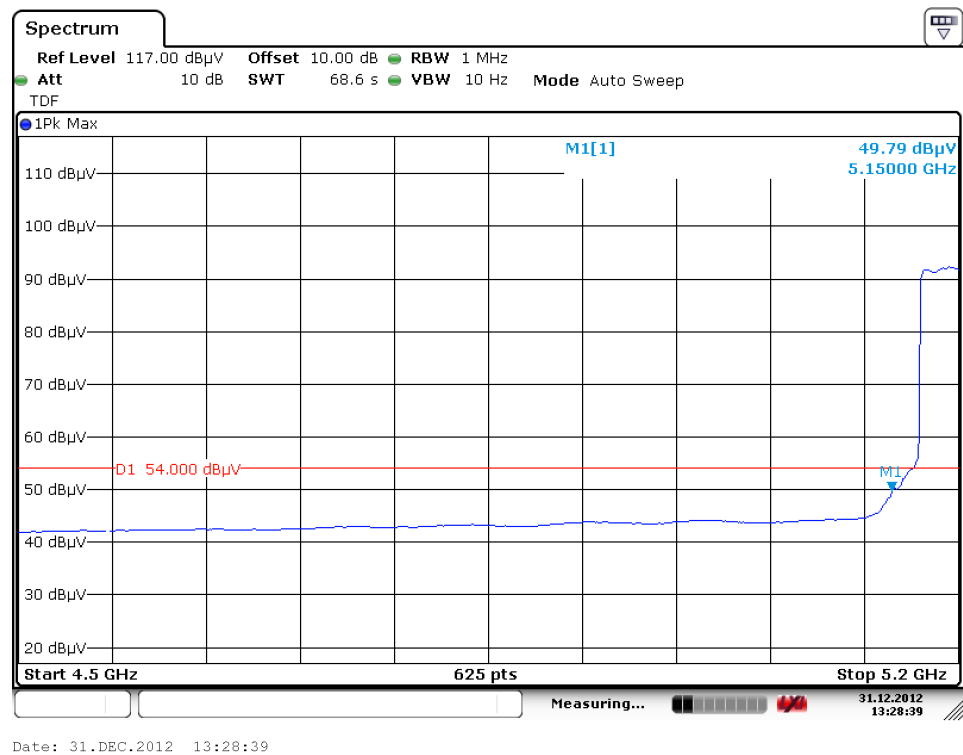


High Channel (V)

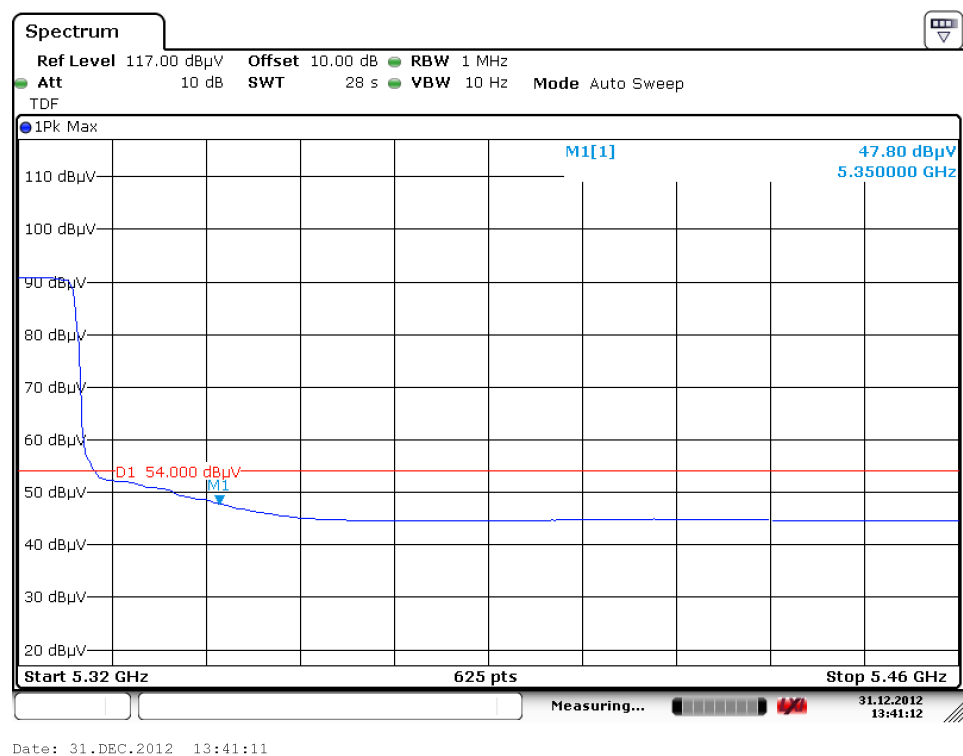

Radiated Bandedge (802.11N, HT40 Band III) AVG

Low Channel (H)

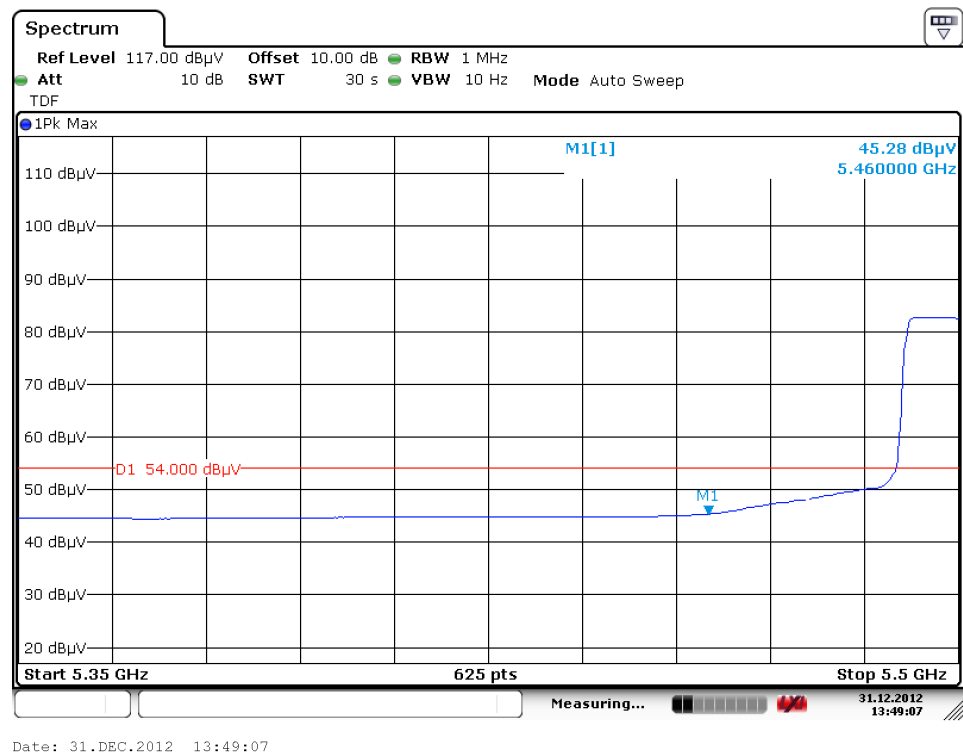

Low Channel (V)

