



**A RADIO TEST REPORT**

**FOR**

**Iridium Satellite LLC**

**ON**

**Iridium 9560 Wi-Fi Access Point with satellite transceiver**

**DOCUMENT NO. TRA-015542-03-47-00-D**

**HULL**

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.

**T** +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com

[www.tracglobal.com](http://www.tracglobal.com)

**TRaC Wireless Test Report** : TRA-015542-03-47-00-D

**Applicant** : Iridium Satellite LLC

**Apparatus** : Iridium 9560 Wi-Fi Access Point with satellite transceiver

**Specification** : FCC CFR47 Part 15(c) & Part 25

**Purpose of Test** : Verification of emission profile

**Authorised by** :



: Radio Product Manager

**Issue Date** :

**Authorised Copy Number** : PDF

**Contents**

Section 1:	Introduction	4
	1.1 General	4
	1.2 Tests Requested By	5
	1.3 Manufacturer	5
	1.4 Apparatus Assessed	5
	1.5 Test Result Summary	6
	1.6 Notes Relating To the Assessment	7
	1.7 Deviations from Test Standards	8
Section 2:	Measurement Uncertainty	9
	2.1 Measurement Uncertainty Values	9
Section 3:	Modifications	11
	3.1 Modifications Performed During Assessment	11
Appendix A:	Formal Emission Test Results	12
	A1 Radiated Electric Field Emissions	13
Appendix B:	Supporting Graphical Data	15
Appendix C:	Additional Test and Sample Details	34
Appendix D:	Additional Information	39
Appendix E:	Photographs and Figures	40

**Section 1:****Introduction****1.1 General**

This report contains an assessment of an apparatus based upon tests carried out on samples submitted to the Laboratory.

Test performed by: TRaC Global [ ]  
Unit E  
South Orbital Trading Park  
Hedon Road  
Hull, HU9 1NJ.  
United Kingdom.

Telephone: +44 (0) 1482 801801  
Fax: +44 (0) 1482 801806

TRaC Global [X]  
Unit 1  
Pendle Place  
Skelmersdale  
West Lancashire, WN8 9PN  
United Kingdom

Telephone: +44 (0) 1695 556666  
Fax: +44 (0) 1695 577077

Email: [test@tracglobal.com](mailto:test@tracglobal.com)  
Web site: <http://www.tracglobal.com>

Tests performed by: A. Tosif - D. Winstanley

Report author: A. Tosif - D. Winstanley

**This report must not be reproduced except in full without prior written permission from TRaC Global.**

## 1.2 Tests Requested By

This testing in this report was requested by:

Iridium Satellite, LLC  
1750 Tysons Blvd Suite 1400  
McLean, VA 22102  
+1.703.287.7434  
[Hermon.Pon@Iridium.com](mailto:Hermon.Pon@Iridium.com)

## 1.3 Manufacturer

Iridium Satellite, LLC  
1750 Tysons Blvd Suite 1400  
McLean, VA 22102  
+1.703.287.7434  
[Hermon.Pon@Iridium.com](mailto:Hermon.Pon@Iridium.com)

## 1.4 Apparatus Assessed

The following apparatus was assessed (i.e. tested for intermodulation products) between 9<sup>th</sup> November 2013 – 14<sup>th</sup> November 2013

Iridium 9560 Wi-Fi Access Point with satellite transceiver

The above device is a wireless access point that connects to the Iridium Satellite network to allow multiple users within WiFi range to the EUT to access a Wide Area Network for data and voice calls.

## 1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	Regulations		Measurement standard	Result
Co-located Radiated Emissions <1000MHz	Title 47 of the CFR: Part 15 Subpart (c) 15.247	Title 47 of the CFR: Part 25 Section 25.202 (f)	ANSI C63.10:2009	Pass
Co-located Radiated Emissions >1000MHz	Title 47 of the CFR: Part 15 Subpart (c) 15.247	Title 47 of the CFR: Part 25 Section 25.202 (f)	ANSI C63.10:2009	Pass

Abbreviations used in the above table:

CFR : Code of Federal Regulations  
REFE : Radiated Electric Field Emissions

ANSI : American National Standards Institution  
PLCE : Power Line Conducted Emissions

## 1.6 Notes Relating To the Assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 15 to 23 °C
Humidity	: 63 to 73 %
Barometric Pressure	: 86 to 106 kPa

Note that temperature and humidity conditions can be found in the relevant test results appendix A.

All dates used in this report are in the format dd/mm/yy.

## **1.7 Deviations from Test Standards**

No deviations were made from test standards



**Section 2:****Measurement Uncertainty****2.1 Measurement Uncertainty Values**

For any test data recorded in accordance with note (iii) of Section 2.1 the following measurement uncertainty was calculated:

**Radio Testing – General Uncertainty Schedule**

*All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.*

**[1] Adjacent Channel Power**

Uncertainty in test result = **1.86dB**

**[2] Carrier Power**

Uncertainty in test result (Power Meter) = **1.08dB**  
Uncertainty in test result (Spectrum Analyser) = **2.48dB**

**[3] Effective Radiated Power**

Uncertainty in test result = **4.71dB**

**[4] Spurious Emissions**

Uncertainty in test result = **4.75dB**

**[5] Maximum frequency error**

Uncertainty in test result (Power Meter) = **0.113ppm**  
Uncertainty in test result (Spectrum Analyser) = **0.265ppm**

**[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field**

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**,  
Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,  
Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

**[7] Frequency deviation**

Uncertainty in test result = **3.2%**

**[8] Magnetic Field Emissions**

Uncertainty in test result = **2.3dB**

**[9] Conducted Spurious**

Uncertainty in test result – Up to 8.1GHz = **3.31dB**  
Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**  
Uncertainty in test result – 15.3GHz – 21GHz = **5.34dB**  
Uncertainty in test result – Up to 26GHz = **3.14dB**

**[10] Channel Bandwidth**

Uncertainty in test result = **15.5%**

**[11] Amplitude and Time Measurement – Oscilloscope**

Uncertainty in overall test level = **2.1dB**,  
Uncertainty in time measurement = **0.59%**,  
Uncertainty in Amplitude measurement = **0.82%**

**[12] Power Line Conduction**

Uncertainty in test result = **3.4dB**

**[13] Spectrum Mask Measurements**

Uncertainty in test result = **2.59% (frequency)**  
Uncertainty in test result = **1.32dB (amplitude)**

**[14] Adjacent Sub Band Selectivity**

Uncertainty in test result = **1.24dB**

**[15] Receiver Blocking – Listen Mode, Radiated**

Uncertainty in test result = **3.42dB**

**[16] Receiver Blocking – Talk Mode, Radiated**

Uncertainty in test result = **3.36dB**

**[17] Receiver Blocking – Talk Mode, Conducted**

Uncertainty in test result = **1.24dB**

**[18] Receiver Threshold**

Uncertainty in test result = **3.23dB**

**[19] Transmission Time Measurement**

Uncertainty in test result = **7.98%**

**Section 3:**

**Modifications**

**3.1 Modifications Performed During Assessment**

No modifications were performed during the assessment

**Appendix A:****Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
EUT	: Equipment Under Test	ATS	: Alternative Test Site
SE	: Support Equipment		
		Ref	: Reference
		Freq	: Frequency
		MD	: Measurement Distance
L	: Live Power Line	SD	: Spec Distance
N	: Neutral Power Line		
E	: Earth Power Line	Pol	: Polarisation
		H	: Horizontal Polarisation
Pk	: Peak Detector	V	: Vertical Polarisation
QP	: Quasi-Peak Detector		
Av	: Average Detector	CDN	: Coupling & decoupling network

**A1 Radiated Electric Field Emissions**

Preliminary scans were performed using a peak detector with the RBW = 100 kHz. The radiated electric field emission test here applies only to Inter-modulation products. The EUT was set to transmit as required.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site :       3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

<b>Test Details:</b>	
Regulation	Part 15 Subpart (c) 15.247 / Part 25 Section 25.202 (f)
Measurement standard	ANSI C63.10:2009
Frequency range	30MHz – 25 GHz
EUT sample number	S16
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	24.8
Photographs	Refer to Appendix E

The only emissions detected were the harmonics of fundamentals. No inter-modulation products were detected.

**Notes:**

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10:2009: section 4.5, Table 1 For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW= 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak	RBW= 1MHz, VBW $\geq$ RBW
Average	RBW= 1MHz, VBW $\geq$ RBW

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 15 Clause 15.33(a) and 15.33(a)(1).

**Appendix B:**


**Supporting Graphical Data**

This appendix contains graphical data obtained during testing.


Notes:

- (a) The time and date on the plots do not necessarily equate to the time of the test.
- (b) Appendix D details the numbering system used to identify the sample and its modification state.
- (c) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.

Iridium@Bottom Channel - Wifi@Bottom Channel 30 MHz – 1 GHz

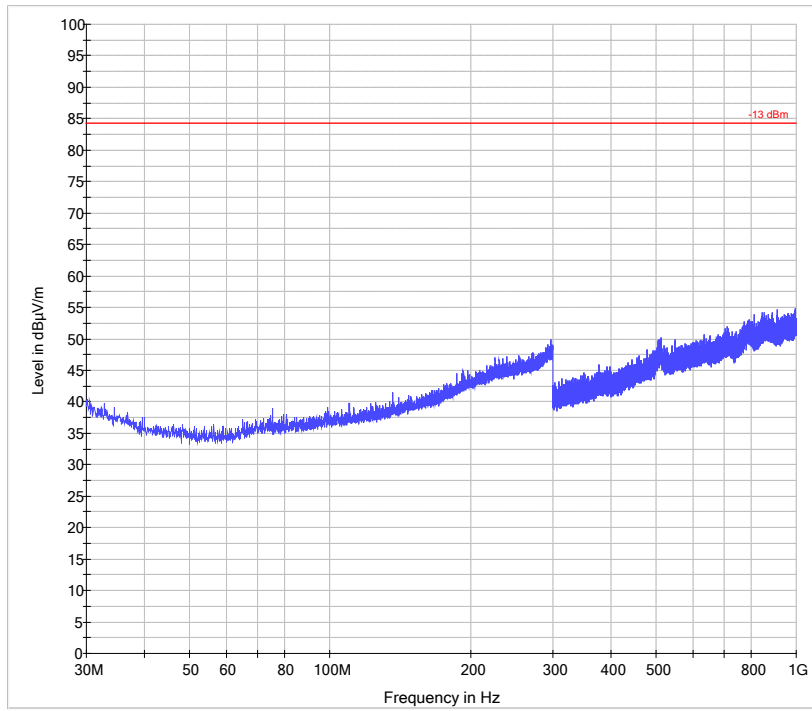


Iridium@Bottom Channel - Wifi@Medium Channel 30 MHz – 1 GHz

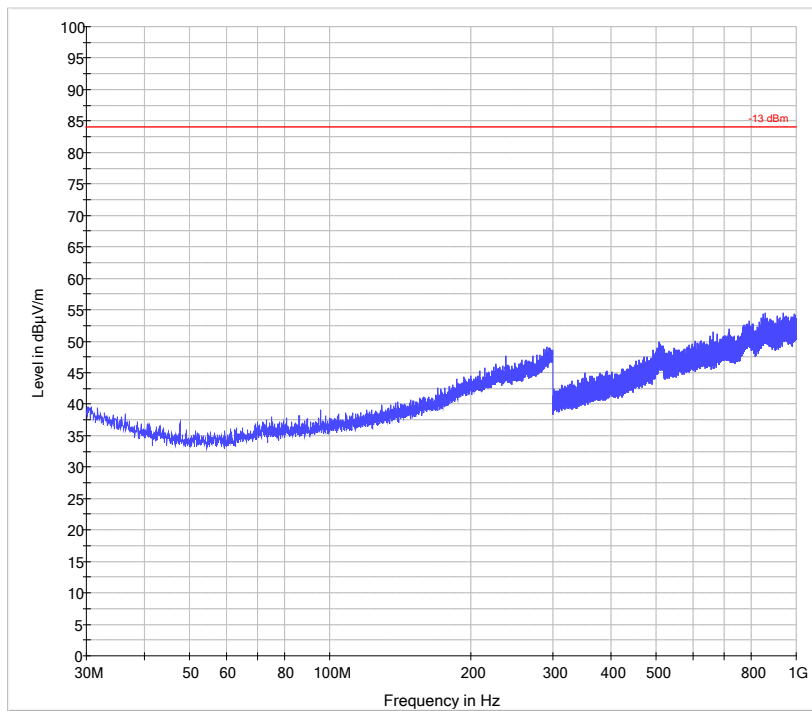





Iridium@Bottom Channel - Wifi@Top Channel 30 MHz – 1 GHz

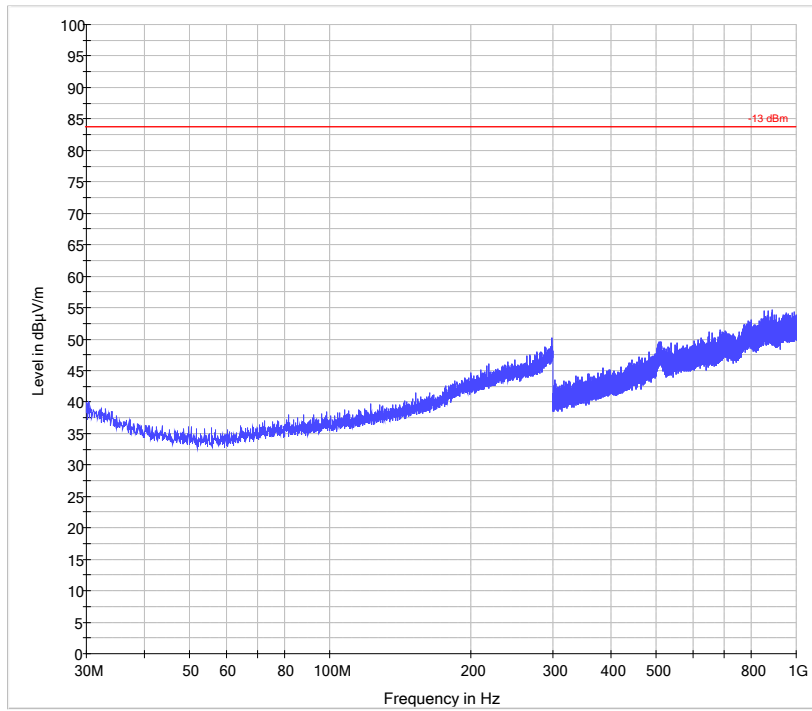


Iridium@Top Channel - Wifi@Bottom Channel 30 MHz – 1 GHz 30

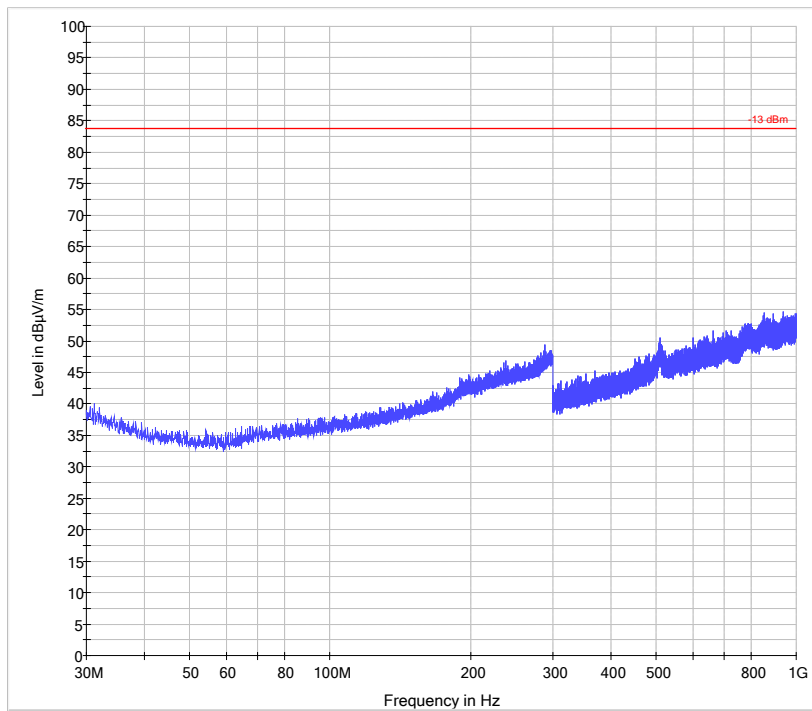


Iridium@Top Channel - Wifi@Medium Channel 30 MHz – 1 GHz

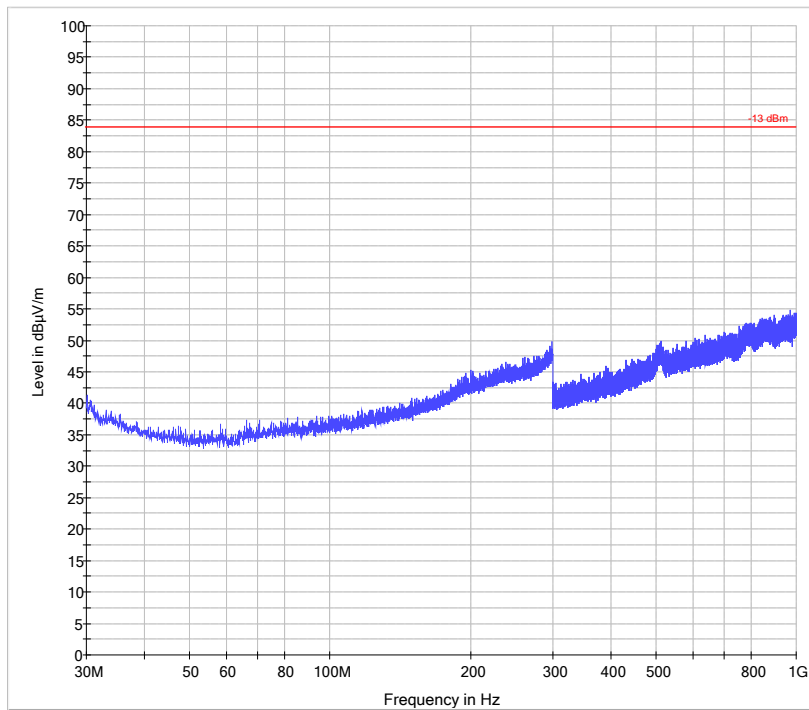

Iridium@Top Channel - Wifi@Top Channel 30 MHz – 1 GHz

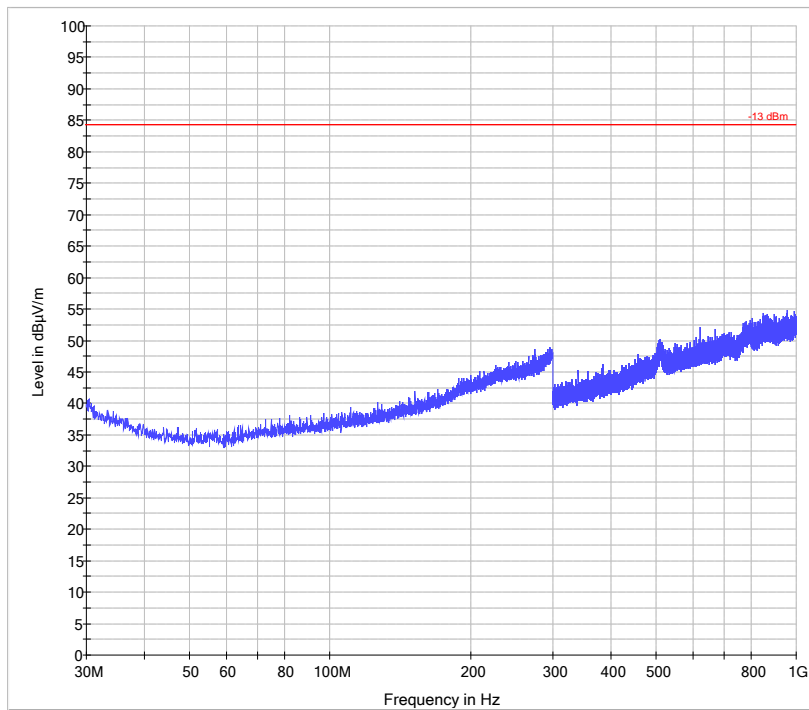


Iridium@Bottom Channel - Wifi@Bottom Channel 1 - 3 GHz

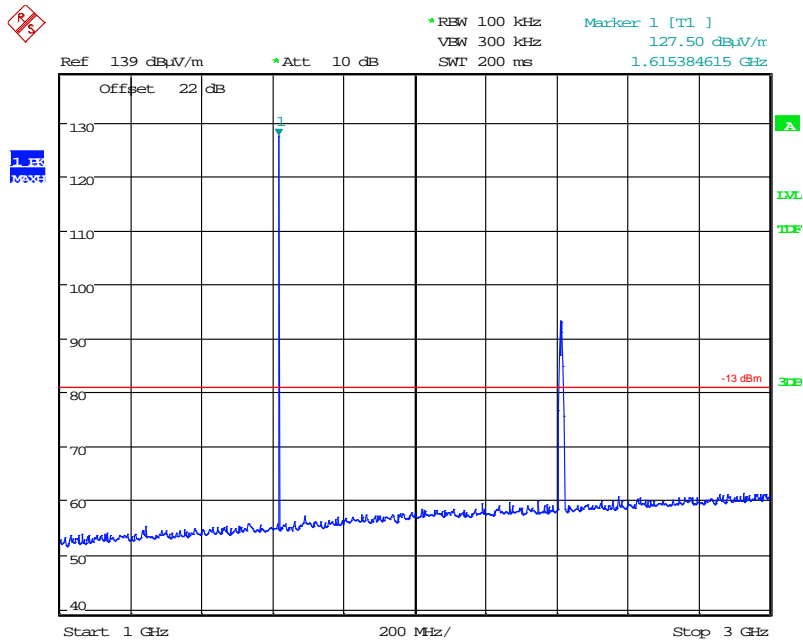


Date: 14.NOV.2013 16:04:54

Iridium@Bottom Channel - Wifi@Bottom Channel 3 - 8 GHz

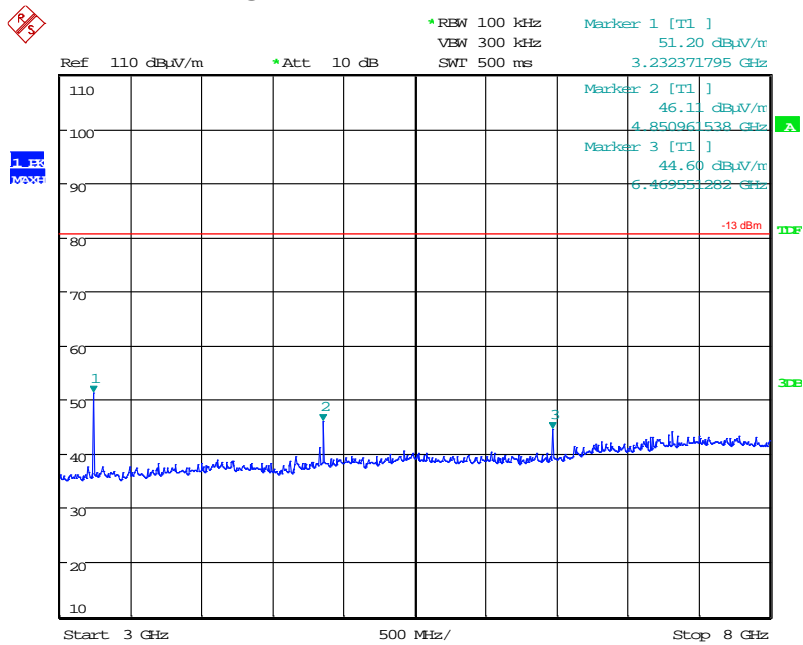


Date: 12.NOV.2013 16:15:06

Iridium@Bottom Channel - Wifi@Bottom Channel 8 - 13 GHz

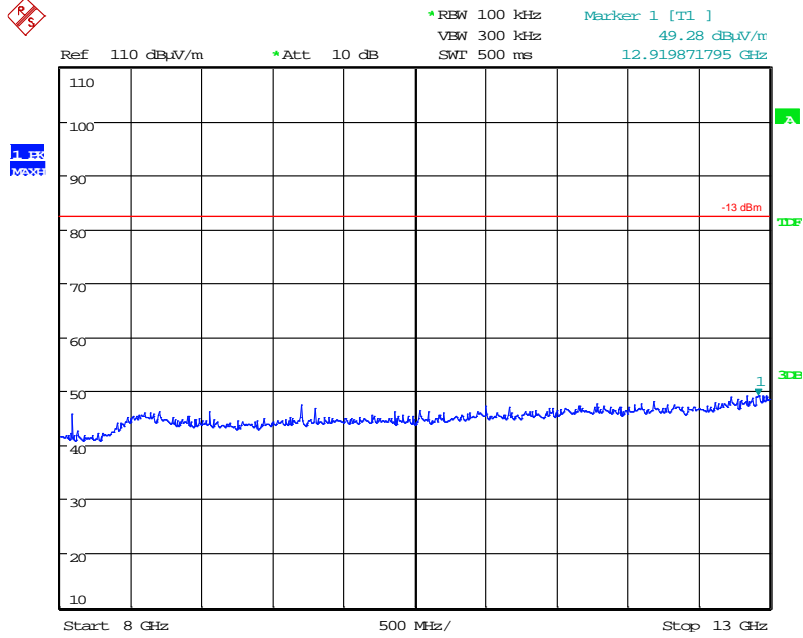


Date: 12.NOV.2013 16:07:34

Iridium@Bottom Channel - Wifi@Bottom Channel 13 - 18 GHz

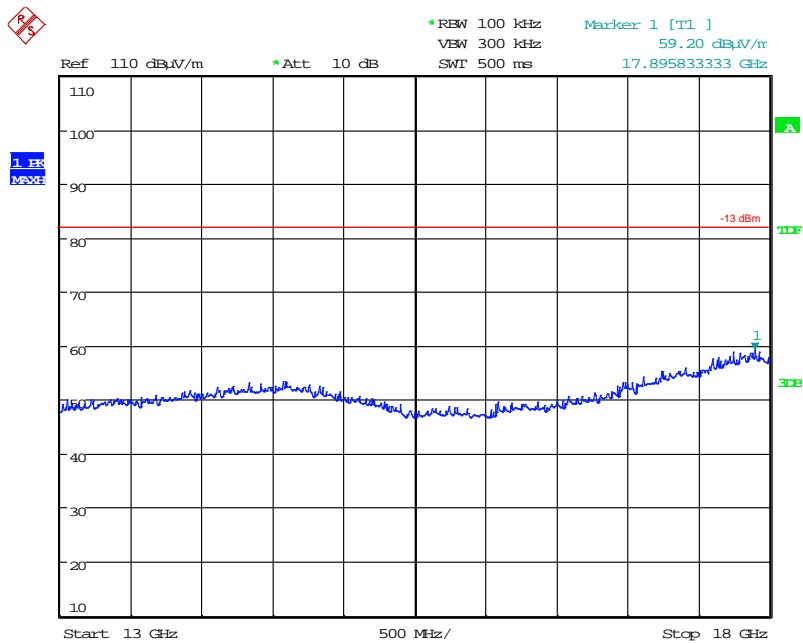


Date: 12.NOV.2013 16:09:16

Iridium@Bottom Channel - Wifi@Bottom Channel 18 - 25 GHz

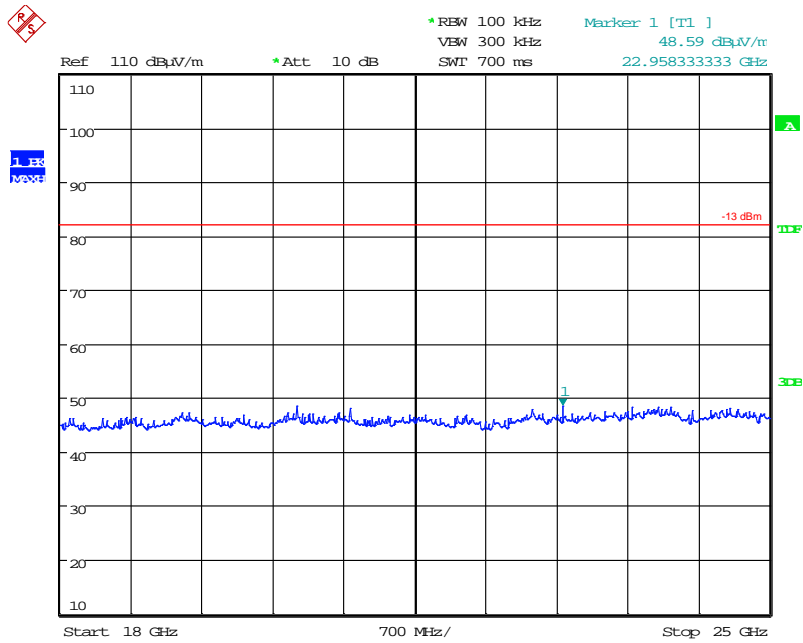


Date: 11.NOV.2013 11:52:50

Iridium@Bottom Channel - Wifi@Medium Channel 1 - 3 GHz

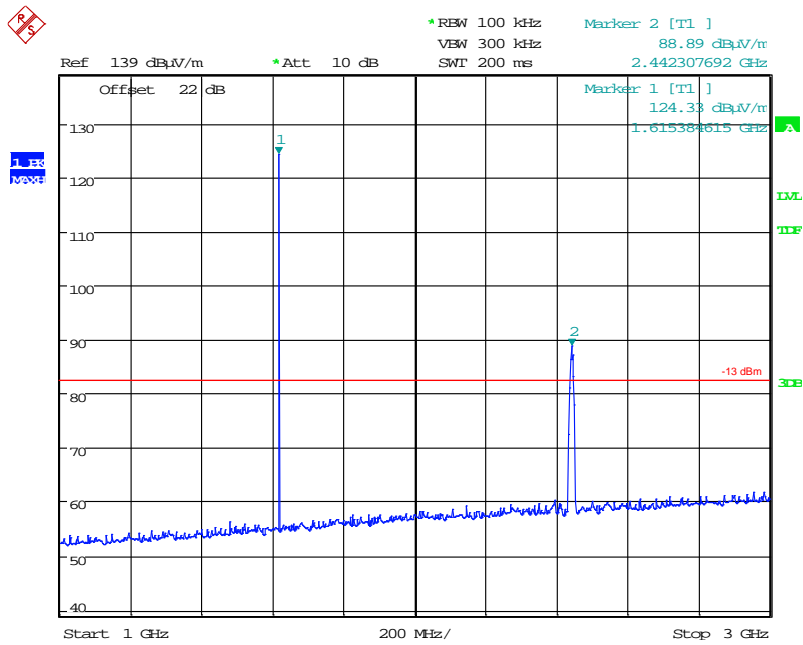


Date: 14.NOV.2013 16:13:10

Iridium@Bottom Channel - Wifi@Medium Channel 3 - 8 GHz

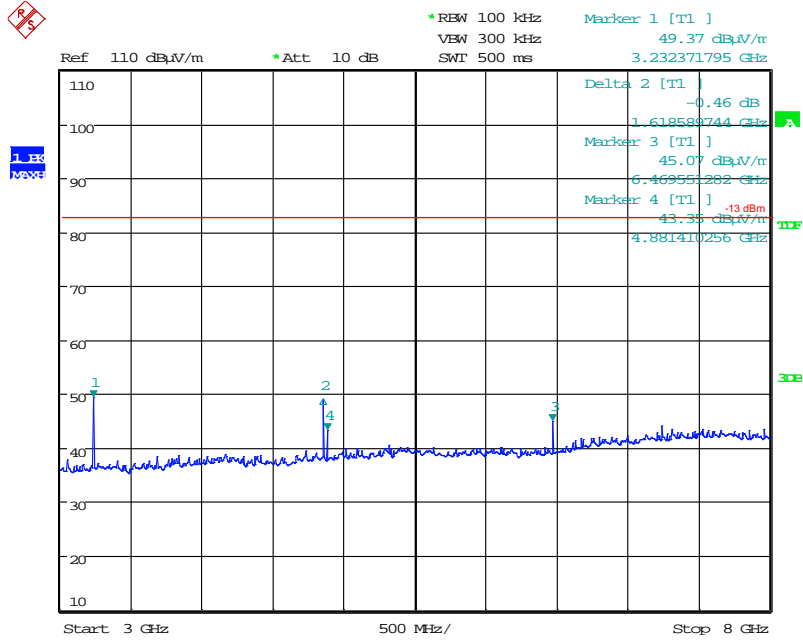


Date: 12.NOV.2013 16:18:59

Iridium@Bottom Channel - Wifi@Medium Channel 8 - 13 GHz

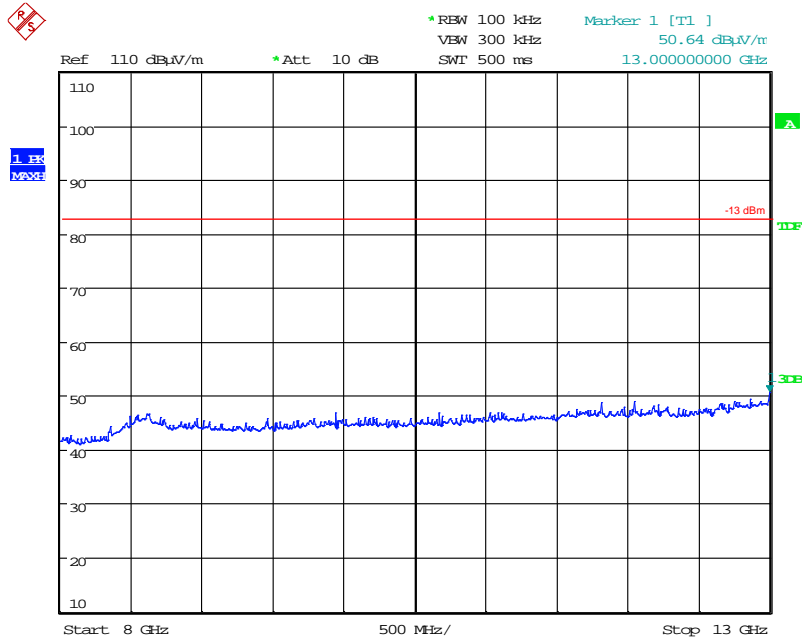


Date: 12.NOV.2013 16:22:36

Iridium@Bottom Channel - Wifi@Medium Channel 13 - 18 GHz

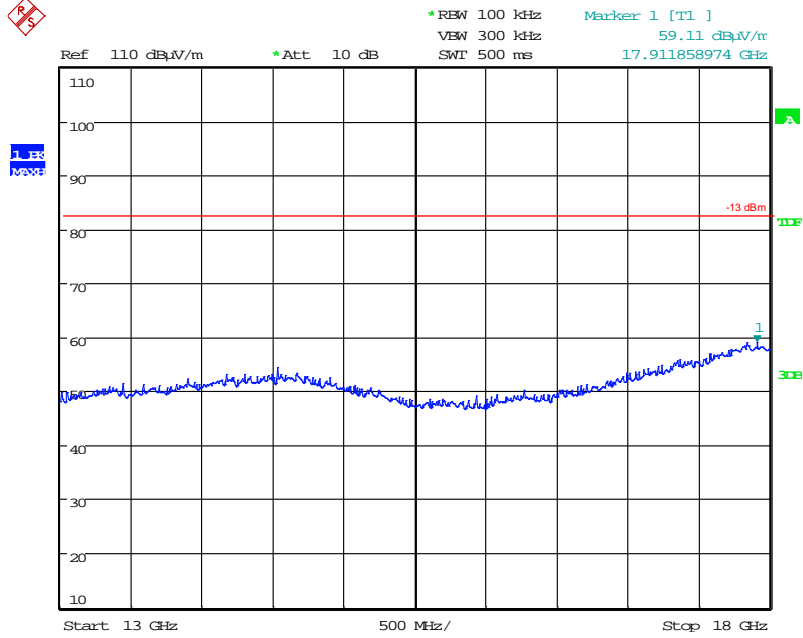


Date: 12.NOV.2013 16:25:49

Iridium@Bottom Channel - Wifi@Medium Channel 18 - 25 GHz

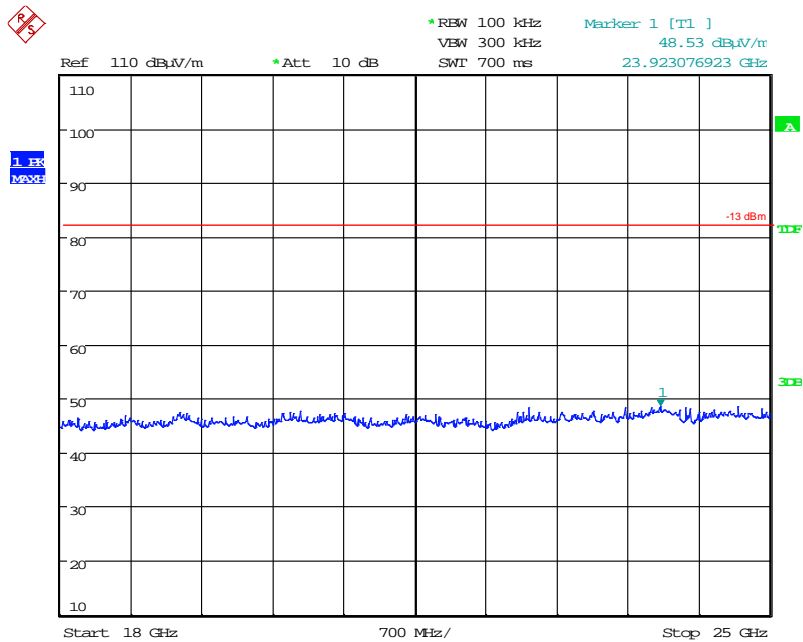


Date: 11.NOV.2013 12:01:50

Iridium@Bottom Channel - Wifi@Top Channel 1 - 3 GHz

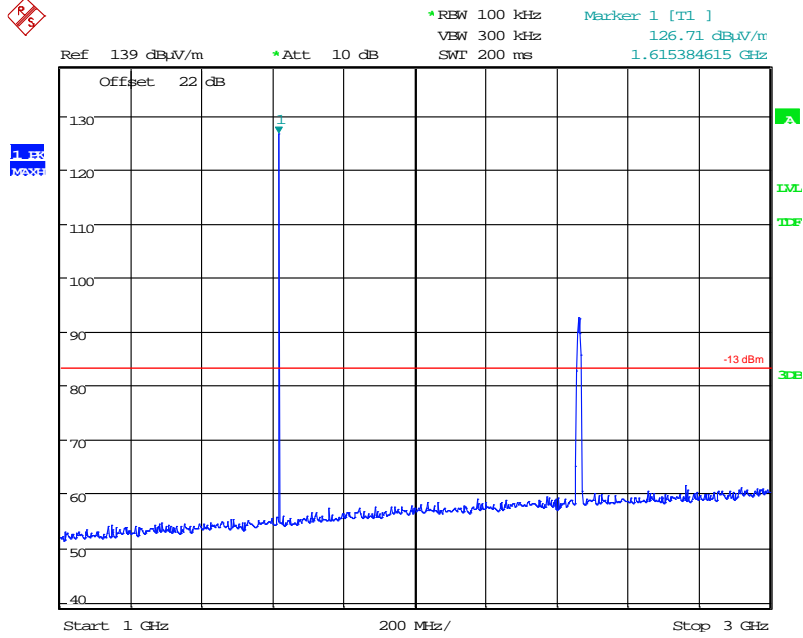

Date: 14.NOV.2013 16:09:24


Iridium@Bottom Channel - Wifi@Top Channel 3 - 8 GHz

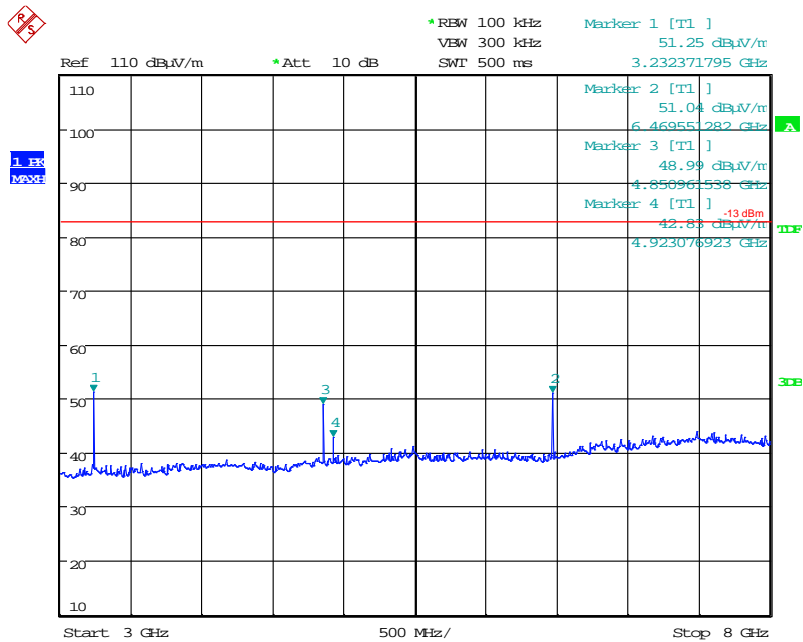

Date: 12.NOV.2013 16:37:51




Iridium@Bottom Channel - Wifi@Top Channel 8 - 13 GHz

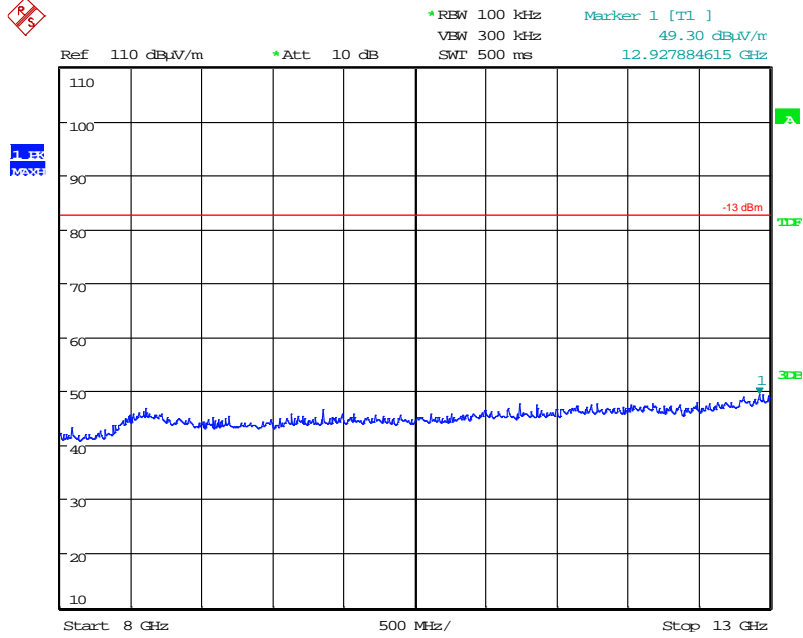


Date: 12.NOV.2013 16:39:52

Iridium@Bottom Channel - Wifi@Top Channel 13 - 18 GHz

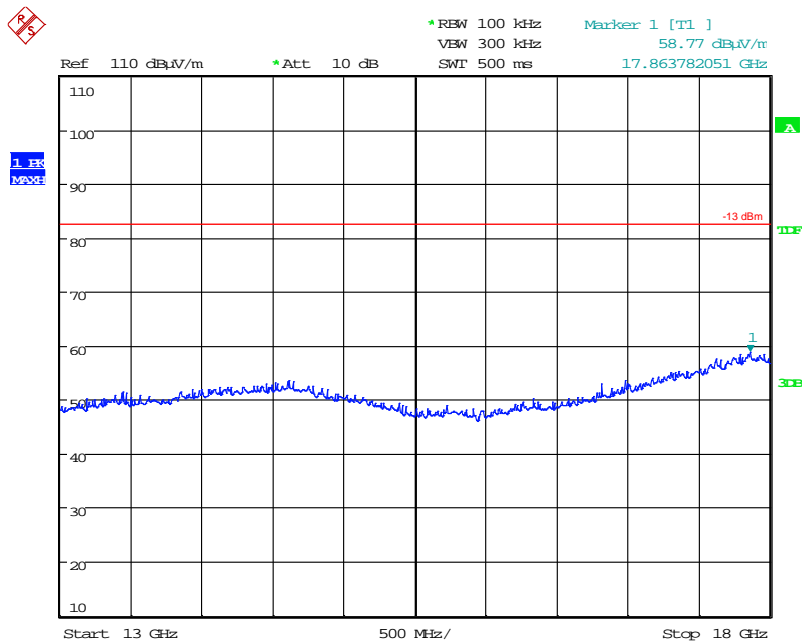


Date: 12.NOV.2013 16:41:40

Iridium@Bottom Channel - Wifi@Top Channel 18 - 25 GHz

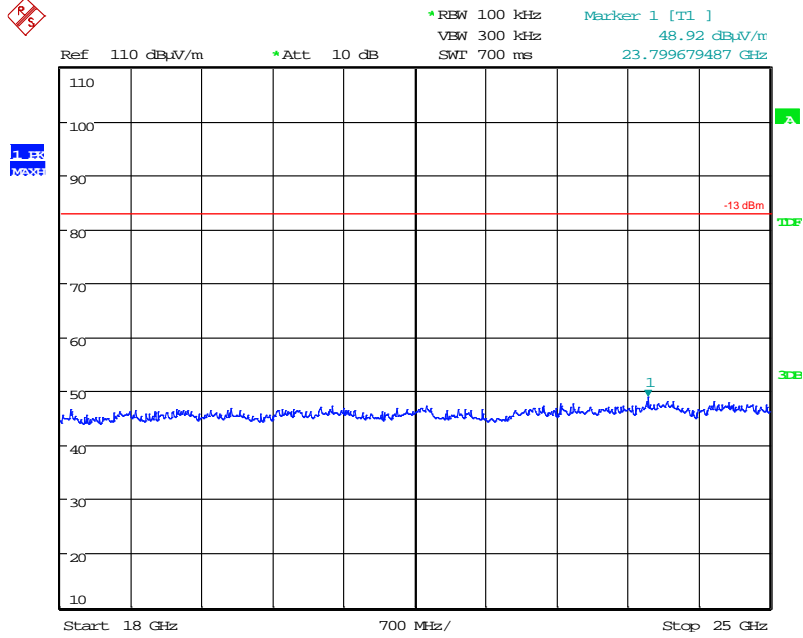


Date: 11.NOV.2013 12:08:18

Iridium@Top Channel - Wifi@Bottom Channel 1 - 3 GHz

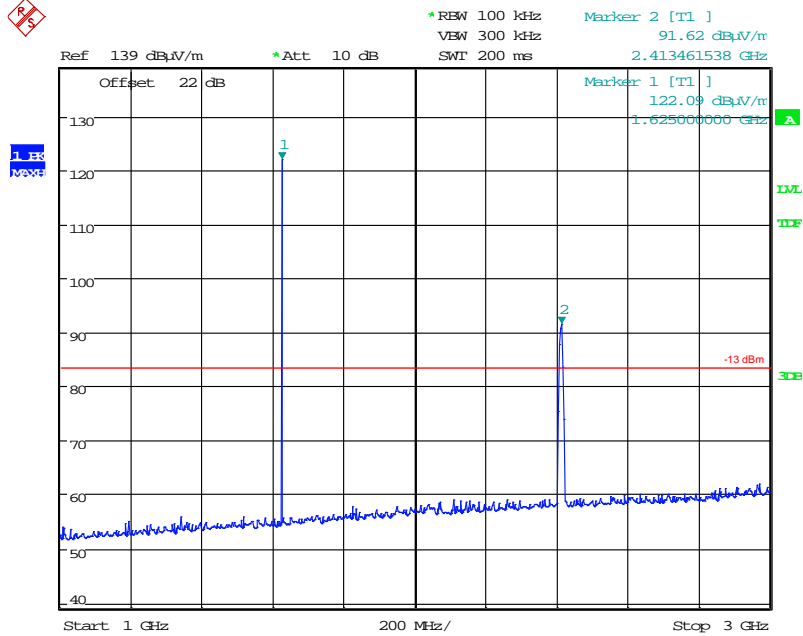


Date: 14.NOV.2013 16:28:46

Iridium@Top Channel - Wifi@Bottom Channel 3 - 8 GHz

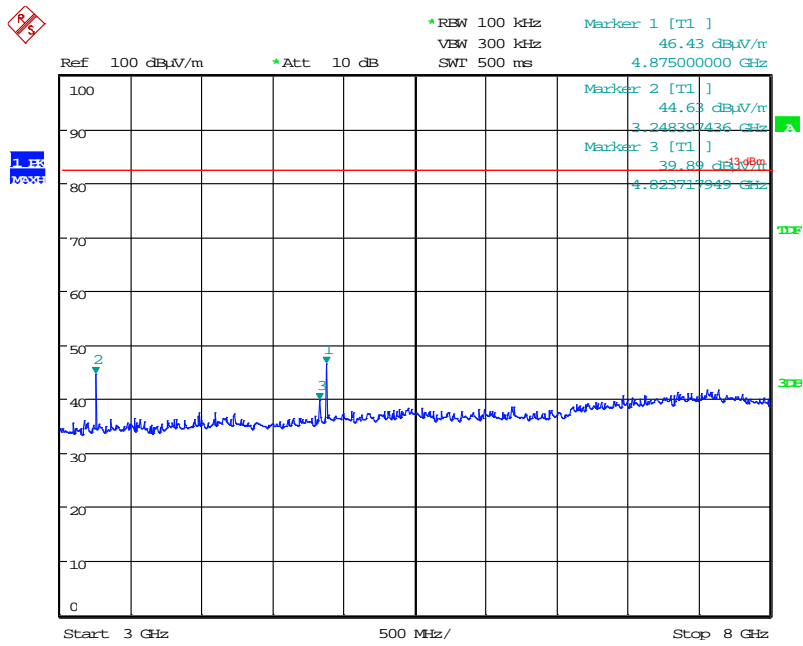


Date: 14.NOV.2013 16:58:30

Iridium@Top Channel - Wifi@Bottom Channel 8 - 13 GHz

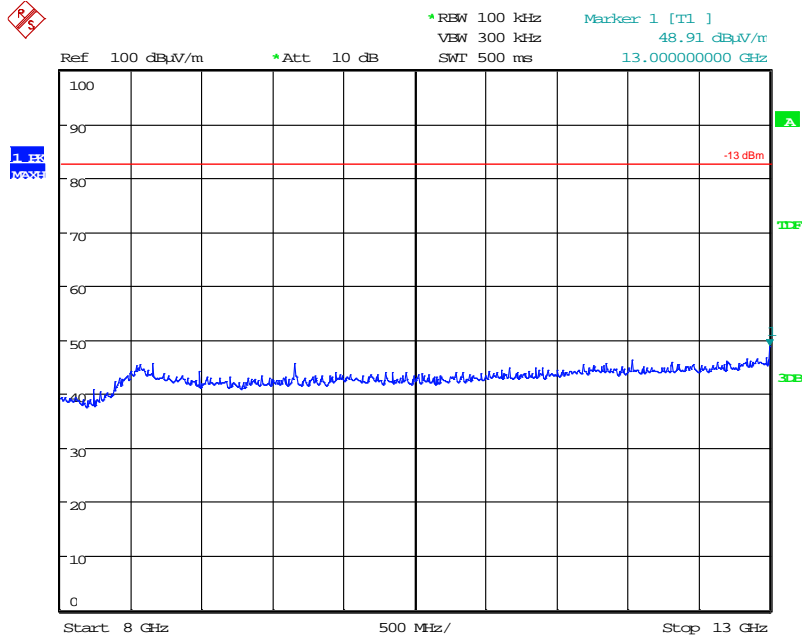


Date: 14.NOV.2013 16:59:23

Iridium@Top Channel - Wifi@Bottom Channel 13 - 18 GHz

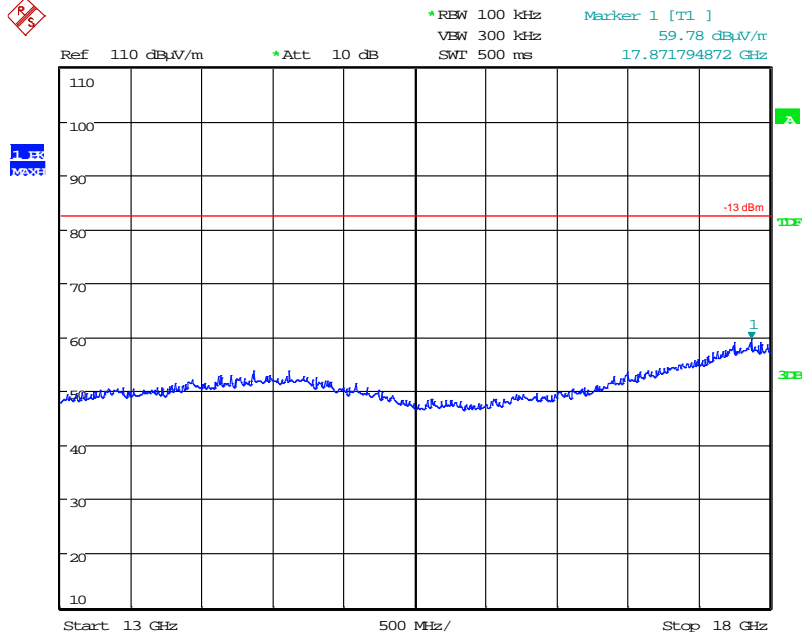


Date: 12.NOV.2013 17:10:49

Iridium@Top Channel - Wifi@Bottom Channel 18 - 25 GHz

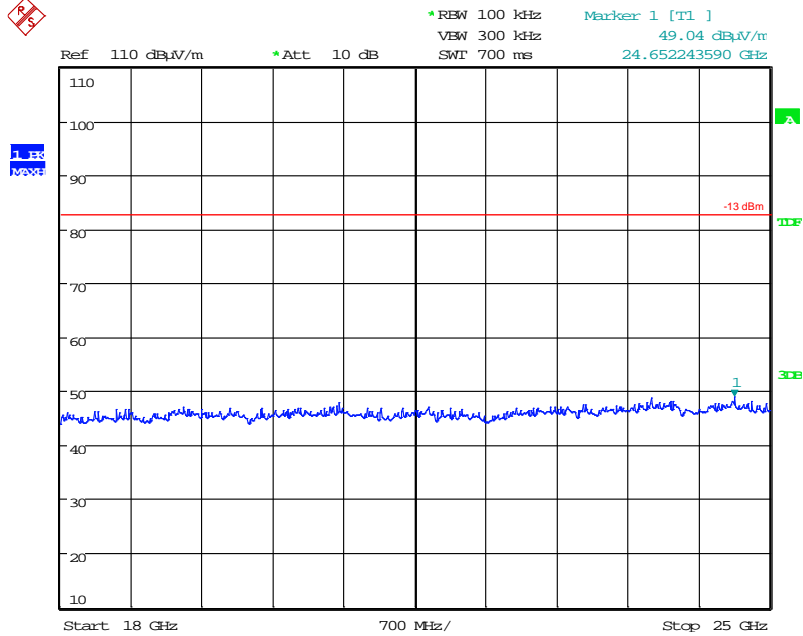


Date: 11.NOV.2013 12:28:21

Iridium@Top Channel - Wifi@Medium Channel 1 - 3 GHz

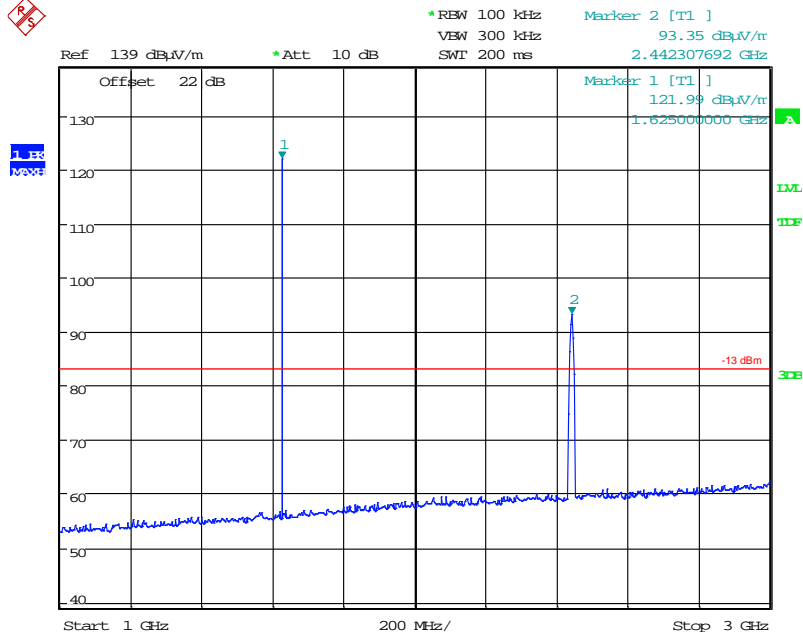


Date: 14.NOV.2013 16:43:47

Iridium@Top Channel - Wifi@Medium Channel 3 - 8 GHz

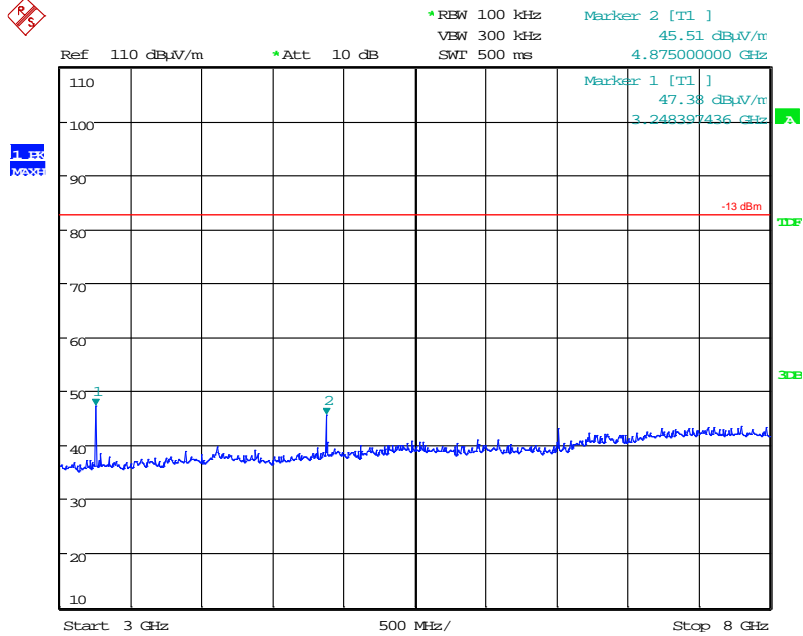


Date: 12.NOV.2013 17:50:19

Iridium@Top Channel - Wifi@Medium Channel 8 - 13 GHz

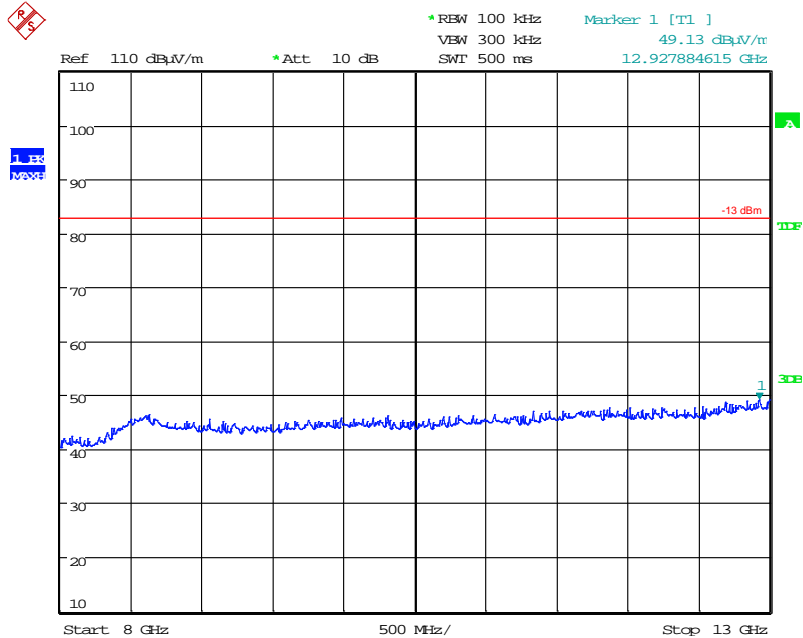


Date: 12.NOV.2013 17:52:00

Iridium@Top Channel - Wifi@Medium Channel 13 - 18 GHz

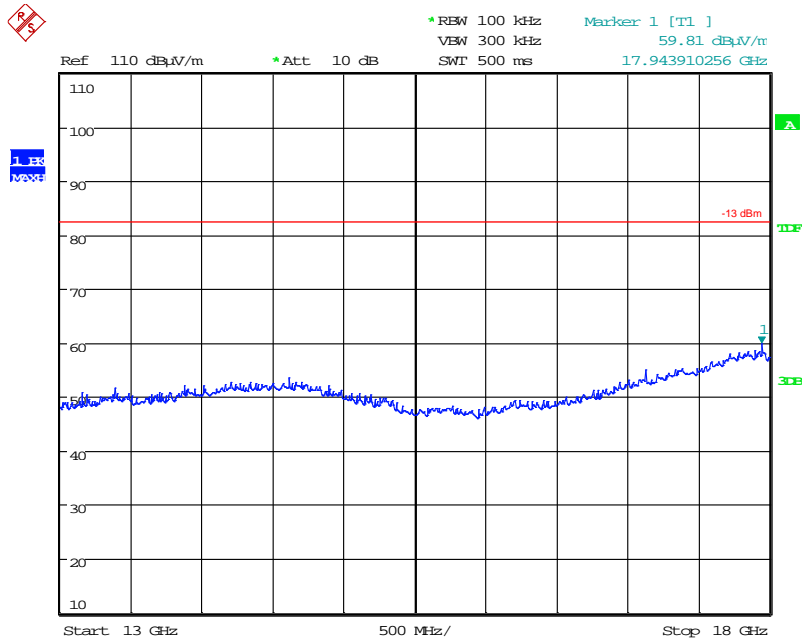


Date: 12.NOV.2013 17:53:27

Iridium@Top Channel - Wifi@Medium Channel 18 - 25 GHz

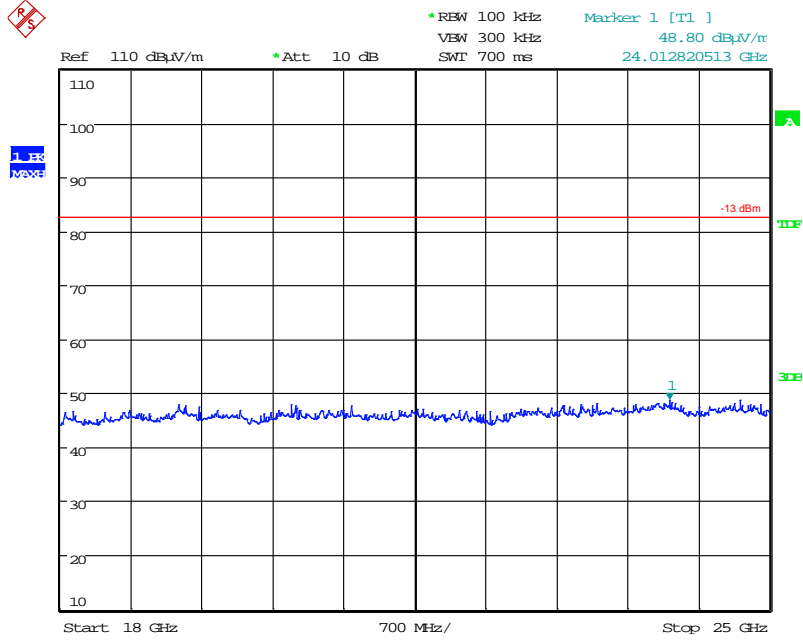


Date: 11.NOV.2013 11:59:21

Iridium@Top Channel - Wifi@Top Channel 1 - 3 GHz

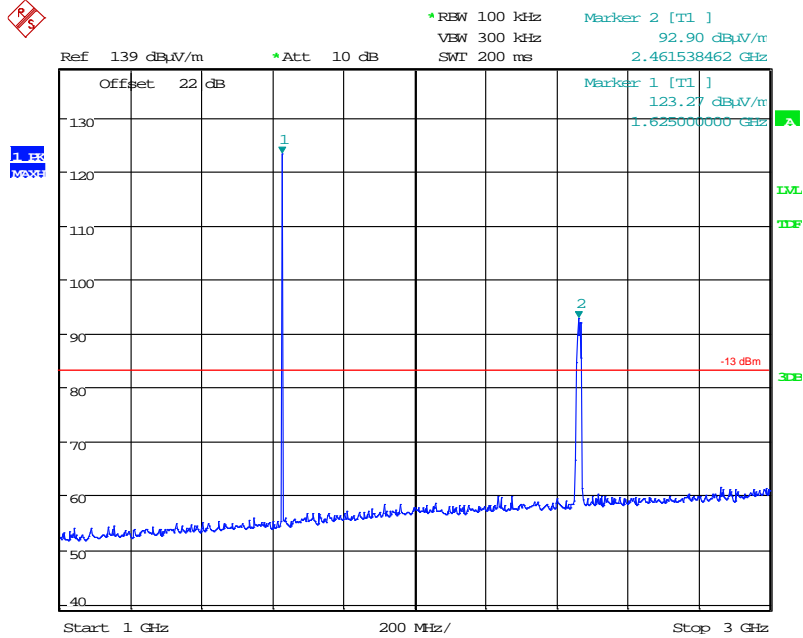


Date: 14.NOV.2013 16:49:31

Iridium@Top Channel - Wifi@Top Channel 3 - 8 GHz

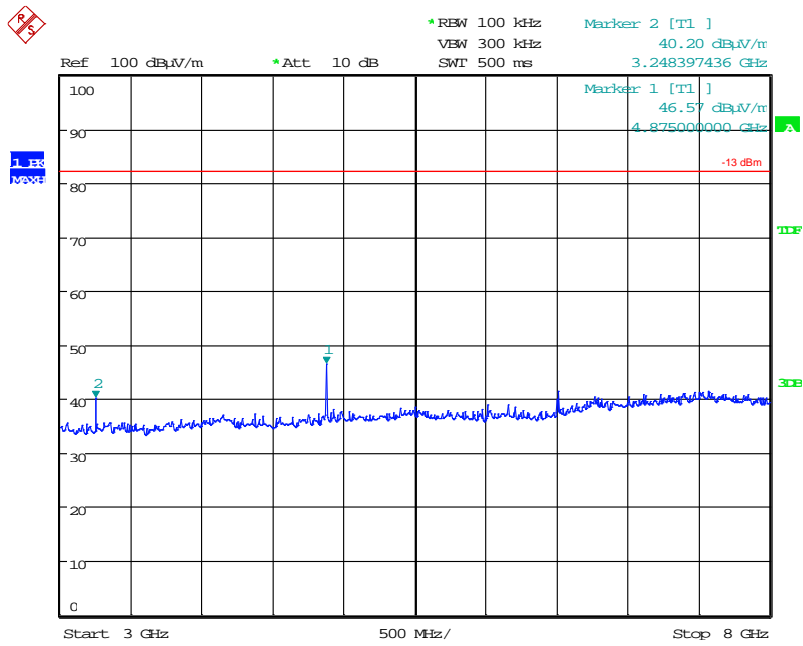

Date: 14.NOV.2013 17:52:29


Iridium@Top Channel - Wifi@Top Channel 8 - 13 GHz

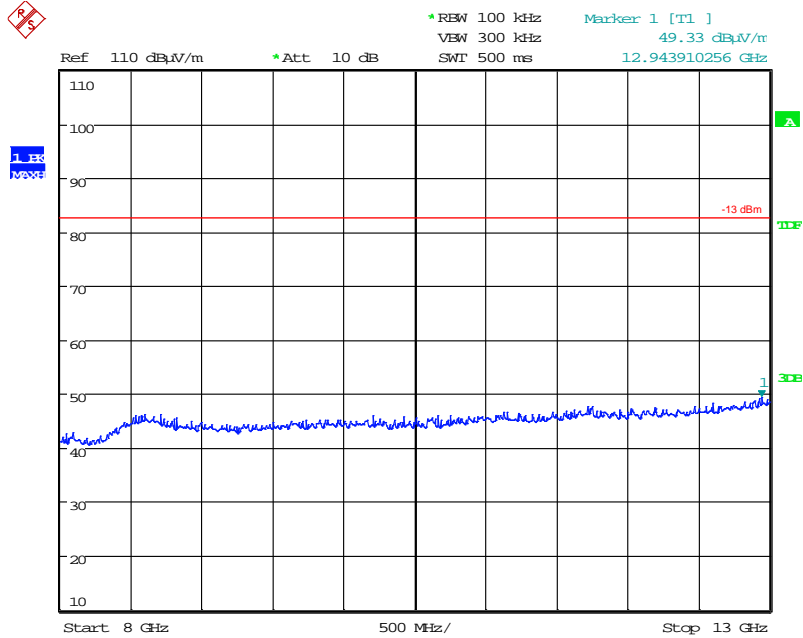

Date: 12.NOV.2013 17:47:39




Iridium@Top Channel - Wifi@Top Channel 13 - 18 GHz

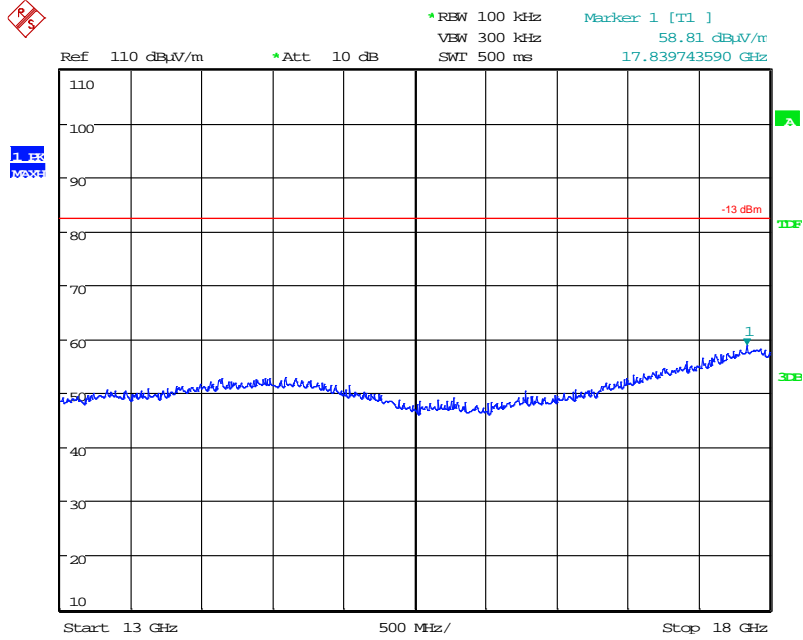

Date: 12.NOV.2013 17:46:10

Iridium@Top Channel - Wifi@Top Channel 18 - 25 GHz

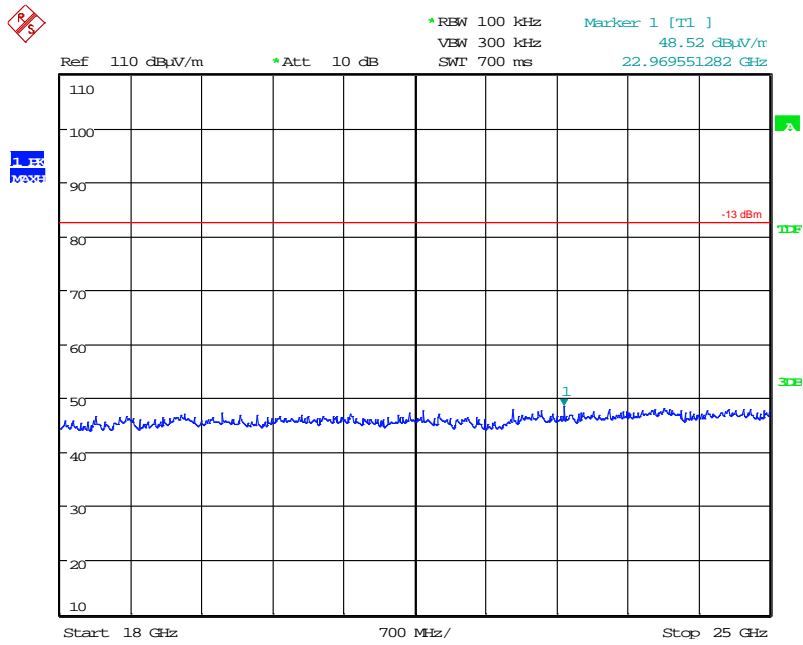

Date: 11.NOV.2013 12:16:36

**Appendix C:****Additional Test and Sample Details**

This appendix contains details of:

1. The samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and it's modification state:

**Sample No:** Sxx Mod w

where:

xx	= sample number	eg. S01
w	= modification number	eg. Mod 2

The following terminology is used throughout the test report:

**Support Equipment (SE)** is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

**EUT configuration** refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis.
- Setting of any internal switches.
- Circuit board jumper settings.
- Alternative internal power supplies.

Where no change in EUT configuration is **possible**, the configuration is described as "single possible configuration".

**EUT arrangement** refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods - An Overview", which can be supplied by TRaC Global upon request.

**C1) Test samples**

The following samples of the apparatus were submitted by the client for testing:

Sample No.	Description	Identification
S16	Iridium 9560 Wi-Fi Access Point with satellite transceiver	None

The following samples of apparatus were submitted by the client as host, support or drive equipment (auxiliary equipment):

Sample No.	Description	Identification
S15	Iridium 9560 Wi-Fi Access Point with satellite transceiver prototype - USB/SPI connection	None

The following samples of apparatus were supplied by TRaC Global as support or drive equipment (auxiliary equipment):

Identification	Description
None	Laptop

**C2) EUT Operating Mode during Testing.**

During testing, the EUT was exercised as described in the following table:

Test	Description of Operating Mode
Radiated Spurious Emissions	<ul style="list-style-type: none"><li>- TX mode</li><li>- Iridium at Top and Bottom Channels</li><li>- Wi-Fi at Top, Medium and Bottom Channels</li></ul>

**C3) EUT Configuration Information.**

The EUT was submitted for testing in one single possible configuration.

**C5 Details of Equipment Used**

TRAC Ref	Type	Description	Manufacturer	Date Calibrated.
TRL317	ESVS10	Receiver	Rhode & Schwarz	09/01/2013
TRL572	8449B	Pre Amp	Agilent	12/12/2012
TRL281	FSU46	Spectrum Analyser	Rhode & Schwarz	06/03/2013
TRL139	3115	Horn 1-18GHz	EMCO	20/09/2013
TRL300	20240-20	Horn 18-26GHz (&UH330)	Flann	17/11/2011
UH028	UHALP 9108	Log Periodic Ant	Schwarbeck	08/07/2013
TRL193	VHA 9103 balu	Bicone Antenna	Chase	19/06/2012

**Appendix D:**

**Additional Information**

**Appendix E:**

**Photographs and Figures**

- 1: EUT close up 1
- 2: EUT close up 2
- 3: Test Setup for Below 1 GHz
- 4: Test Setup for Above 18 GHz



EUT close up 1:



EUT close up 2:



Test Setup for Below 1 GHz:



Test Setup for Above 18 GHz:





**HULL**

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.

**T** +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com

[www.tracglobal.com](http://www.tracglobal.com)