







### ISO/IEC17025Accredited Lab.

Report No: FCC 1507165 File reference No: 2015-07-30

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Digital Photo Frame

Model No: W07A

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15 Subpart C, Paragraph 15.247 for the evaluation of electromagnetic

compatibility

Approved By

# Jack Chung

Jack Chung

Manager

Dated: July 30, 2015

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timewaytech.com

Report No: FCC1507165 Page 2 of 102

Date: 2015-07-30



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

### **CNAL-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

### FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

## IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Date: 2015-07-30



# **Test Report Conclusion**

### Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	13
5.1	Test Method and Test Procedure.	13
5.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	14
7.0	6dB and Bandwidth Measurement.	38
8.0	Maximum Output Power	58
9.0	Power Spectral Density Measurement.	61
10.0	Out of Band Measurement.	76
11.0	Antenna Requirement.	87
12.0	FCC ID/IC Label.	88
13.0	Photo of Test Setup and EUT View	89

Report No: FCC1507165 Page 4 of 102

Date: 2015-07-30



### 1.0 General Details

### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen,

Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

### 1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Futian District, Shenzhen, China

Telephone: 0755-83976295 Fax: 0755-83204874

### 1.3 Description of EUT

Product: Digital Photo Frame

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Futian District,

Shenzhen, China

Brand Name: N/A Model Number: W07A

Additional Model Number: N/A

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20/40): OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz; IEEE 802.11n (HT40): 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n(HT20/40) Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20/40: 150, 135, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6.5

Mbps

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels; IEEE 802.11n (HT40): 7 Channels,

Antenna: PCB Antenna and the maximum Gain of this antenna is 1.39dBi;

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1507165 Page 5 of 102

Date: 2015-07-30

Model No.: JHD-AP012U-050200BB Power Adapter

Input: 100-240V, 50/60Hz, 0.35A; Output: DC5V, 2000mA

Submitted Sample: 1Samples

1.5 Test Duration

2015-07-22 to 2015-07-30

Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

Test Engineer 1.7

The sample tested by

Print Name: Terry Tang

Page 6 of 102

Report No: FCC1507165

Date: 2015-07-30



2.0 Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2014-08-21	2015-08-20
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2014-08-22	2015-08-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2014-08-22	2015-08-21
Ultra Broadband ANT	R&S	HL562	100157	2014-08-23	2015-08-22
ESDV Test Receiver	R&S	ESDV	100008	2014-08-22	2015-08-21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2014-08-21	2015-08-20
System Controller	CT	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Loop Antenna	EMCO	6502	00042960	2014-08-22	2015-08-21
ESPI Test Receiver	R&S	ESI26	838786/013	2014-08-22	2015-08-21
3m OATS			N/A	2014-08-21	2015-08-20
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2014-08-23	2015-08-22
Horn Antenna	R&S	BBHA 9120D	9120D-631	2014-08-23	2015-08-22
Power meter	Anritsu	ML2487A	6K00003613	2014-08-22	2015-08-21
Power sensor	Anritsu	MA2491A	32263	2014-08-22	2015-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2014-08-23	2015-08-22
LISN	AFJ	LS16C	10010947251	2014-08-21	2015-08-20
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2014-08-22	2015-08-21
9*6*6 Anechoic			N/A	2014-08-21	2015-08-20
EMI Test Receiver	RS	ESCS30	100139	2014-08-22	2015-08-21

### **Auxiliary Equipment**

Name	Model No.	Rating	Manufacturer	FCC ID/DOC

Report No: FCC1507165 Page 7 of 102

Date: 2015-07-30



### 3. DESCRIPTION OF TEST MODES

### IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 11Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 54Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: 6.5Mbps data rate (worst case) were chosen for full testing

### IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: 6.5Mbps data rate (worst case) were chosen for full testing

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes.

Date: 2015-07-30



### 3.0 **Technical Details**

### 3.1 **Summary of test results**

	ccording to the following speci		
Standard	Test Type	Result	Notes
CCC Part 15, Paragraph 15.107 & 15.207	<b>Conducted Emission Test</b>	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247 and ANSI C63.10:2013 and ANSI C63.4:2014

### 4.0 **EUT Modification**


No modification by Shenzhen Timeway Technology Consulting Co., Ltd

Date: 2015-07-30



### 5.0 Power Line Conducted Emission Test

### 5.1 Schematics of the test




**EUT: Equipment Under Test** 

### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

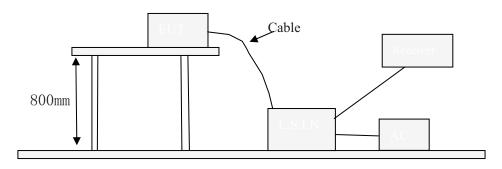

# 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

### A. EUT

Device	Manufacturer	Model	FCC ID/IC
Digital Photo Frame	Shenzhen Jingwah Information Technology Co., Ltd.	W07A	RBD-W07A

### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

### C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1507165 Page 10 of 102

Date: 2015-07-30



## 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

### 5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB $\mu$ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2015-07-30



### A: Conducted Emission on Live Terminal (150kHz to 30MHz)

**EUT Operating Environment** 


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Keep WIFI Transmitting** 

**Equipment Level: Class B** 

**Results: PASS** 

Please refer to following diagram for individual

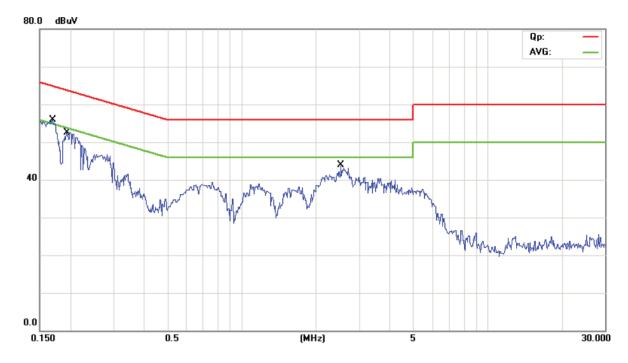

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1696	42.20	11.02	53.22	64.98	-11.76	QP	
2		0.1696	14.00	11.02	25.02	54.98	-29.96	AVG	
3		0.1926	36.70	11.05	47.75	63.92	-16.17	QP	
4		0.1926	6.90	11.05	17.95	53.92	-35.97	AVG	
5		2.5400	25.00	12.52	37.52	56.00	-18.48	QP	
6		2.5400	1.10	12.52	13.62	46.00	-32.38	AVG	

Date: 2015-07-30



### B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

**EUT Operating Environment** 


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Keep WIFI Transmitting** 

**Equipment Level: Class B** 

**Results: Pass** 

Please refer to following diagram for individual

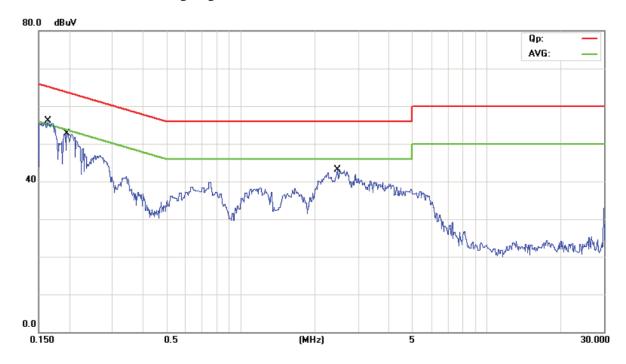

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1638	41.80	11.01	52.81	65.27	-12.46	QP	
2	0.1638	9.60	11.01	20.61	55.27	-34.66	AVG	
3	0.1952	37.00	11.05	48.05	63.81	-15.76	QP	
4	0.1952	8.20	11.05	19.25	53.81	-34.56	AVG	
5	2.4660	24.50	12.49	36.99	56.00	-19.01	QP	
6	2.4660	0.80	12.49	13.29	46.00	-32.71	AVG	

Report No: FCC1507165 Page 13 of 102

Date: 2015-07-30



### 6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

# Block diagram of Test setup Distance = 3m Computer Pre -Amplifier Furn-table Receiver

- 6.2 Configuration of The EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No: FCC1507165 Page 14 of 102

Date: 2015-07-30



### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

		9 1
Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note: 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Report No: FCC1507165 Page 15 of 102

Date: 2015-07-30



### Test result

### General Radiated Emission Data and Harmonics Radiated Emission Data

### Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

**EUT set Condition: Keep Transmitting** 

**Results: Pass** 

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
85.400	27.12	Н	40.00
958.280	40.89	Н	46.00
31.480	30.08	Н	40.00
35.120	30.14	V	40.00
820.240	38.63	V	46.00
112.160	23.89	V	43.50


Page 16 of 102

Report No: FCC1507165

Date: 2015-07-30



### Test Figure:

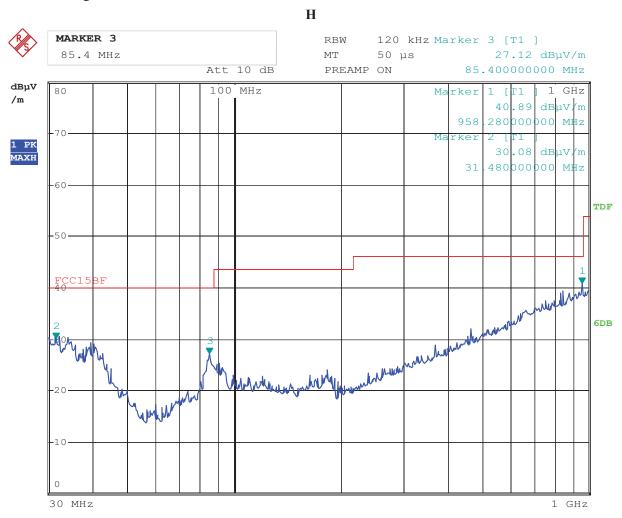


Page 17 of 102

Report No: FCC1507165

Date: 2015-07-30



### Test Figure:

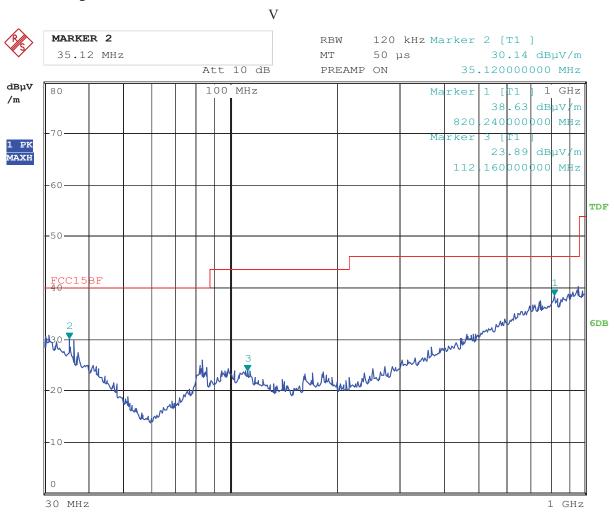

Report No: FCC1507165 Page 18 of 102

Date: 2015-07-30



### Operation Mode: Transmitting under CH01 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4824.00	48.78 (PK)	Н	74(Peak)/ 54(AV)
4824.00	48.82 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16884		H/V	74(Peak)/ 54(AV)
19296	-	H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54Mbps

Date: 2015-07-30



### Operation Mode: Transmitting under CH06 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4874.00	48.65 (PK)	V	74(Peak)/ 54(AV)
4874.00	48.70 (PK)	Н	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54 Mbps

### Operation Mode: Transmitting under CH11 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
4924	48.58 (PK)	Н	74(Peak)/ 54(AV)
4924	48.14 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode at 54 Mbps

Date: 2015-07-30




Please refer to the following test plots for details:

### CH01 for 11g at 54Mbps: Horizontal

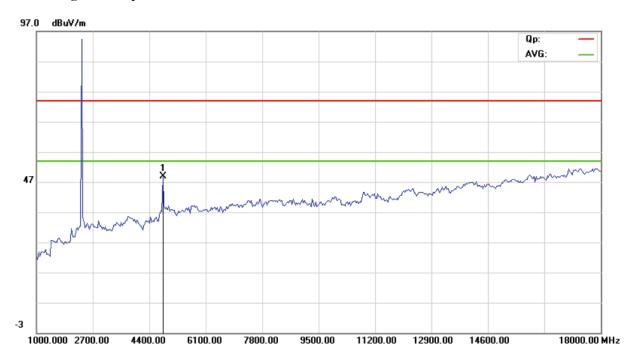

# CH01 for 11g at 54Mbps: Vertical

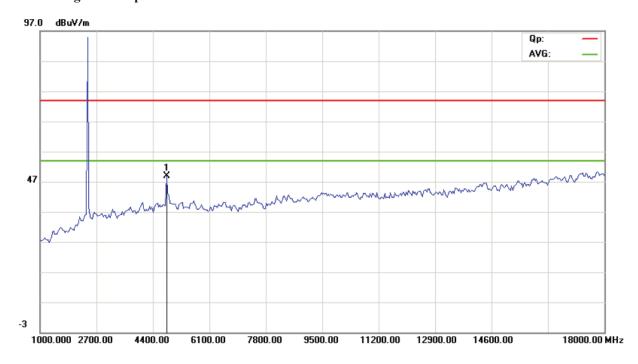

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2015-07-30



### CH06 for 11g at 54Mbps: Vertical

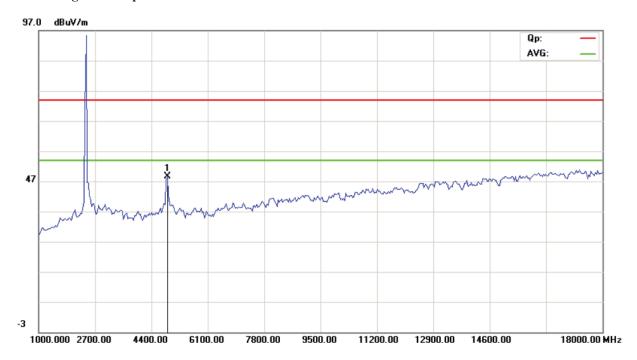


## CH06 for 11g at 54Mbps: Horizontal

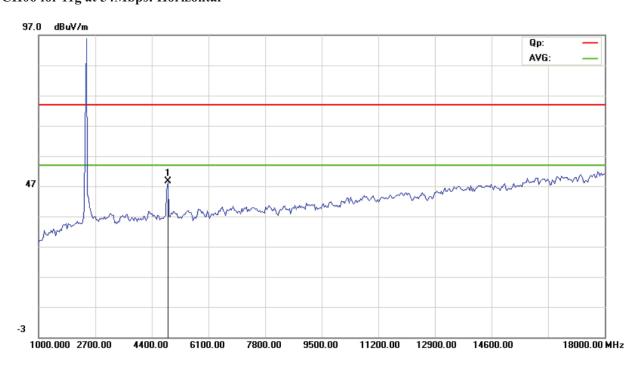


Date: 2015-07-30



### CH11 for 11g at 54Mbps: Vertical

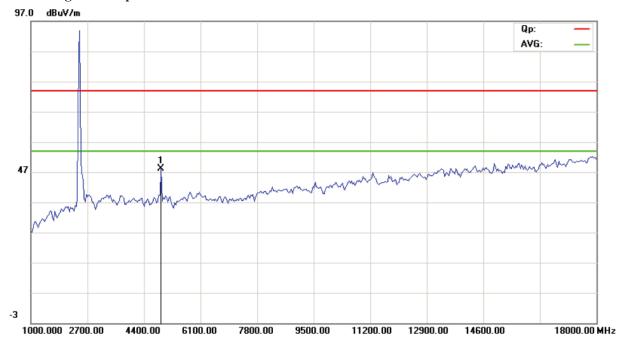

### CH11 for 11g at 54Mbps: Horizontal

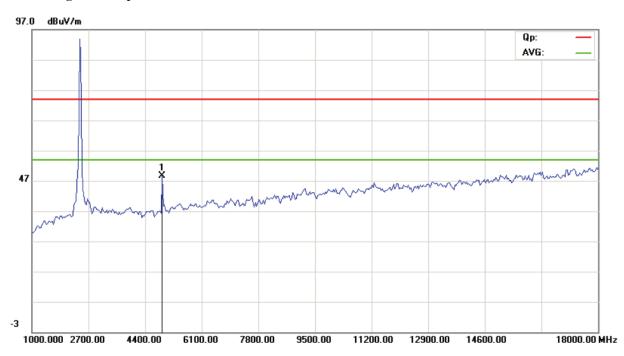

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

Date: 2015-07-30



### Operation Mode: Transmitting under CH01 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
4824.00	48.32 (PK)	Н	74(Peak)/ 54(AV)
4824.00	49.09 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

### Operation Mode: Transmitting under CH06 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
4874.00	48.01 (PK)	Н	74(Peak)/ 54(AV)
4874.00	48.08 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933	-	H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

Report No: FCC1507165 Page 24 of 102

Date: 2015-07-30



### Operation Mode: Transmitting under CH11 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4924	48.29 (PK)	Н	74(Peak)/ 54(AV)
4924	48.63 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode at 11Mbps

Date: 2015-07-30




Please refer to the following test plots for details:

### CH01 for 11b at 11Mbps: Horizontal

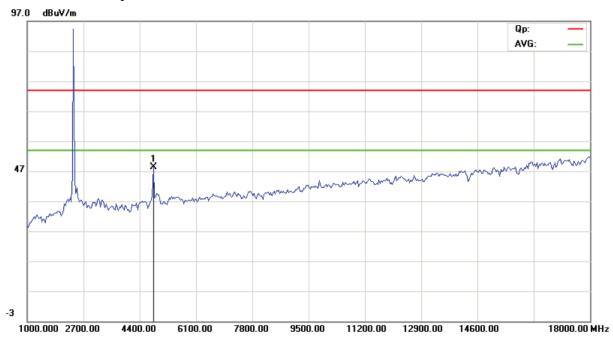

### CH01 for 11b at 11Mbps: Vertical

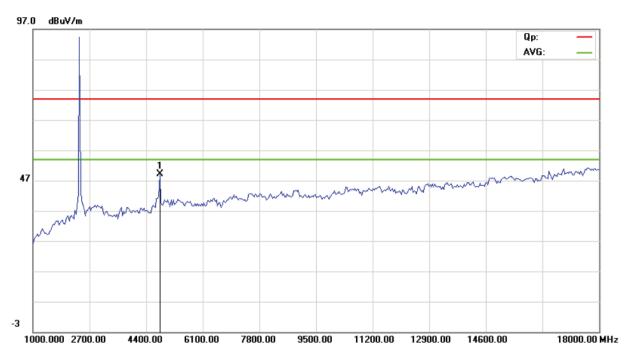

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 26 of 102

Report No: FCC1507165


Date: 2015-07-30



### CH06 for 11b at 11Mbps: Vertical

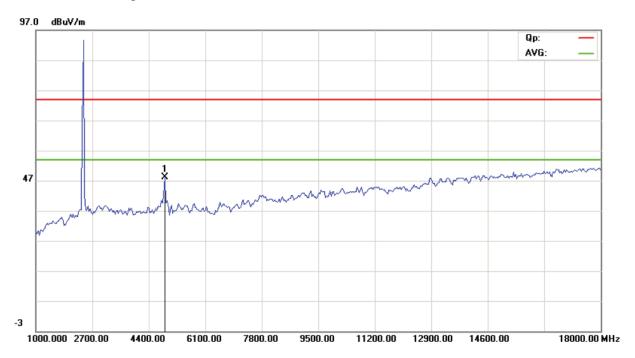

### CH06 for 11b at 11Mbps: Horizontal

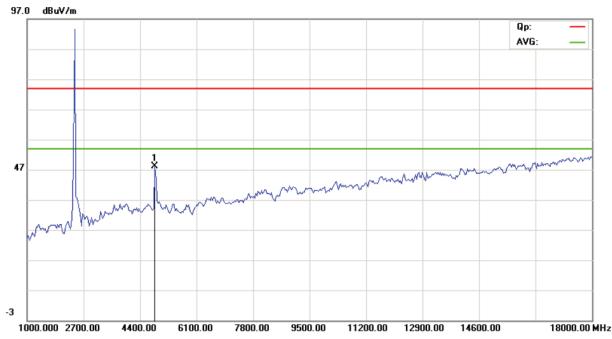

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2015-07-30



### CH11 for 11b at 11Mbps: Vertical

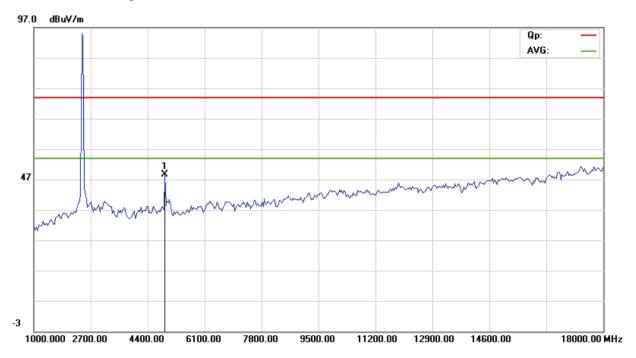

### CH11 for 11b at 11Mbps: Horizontal

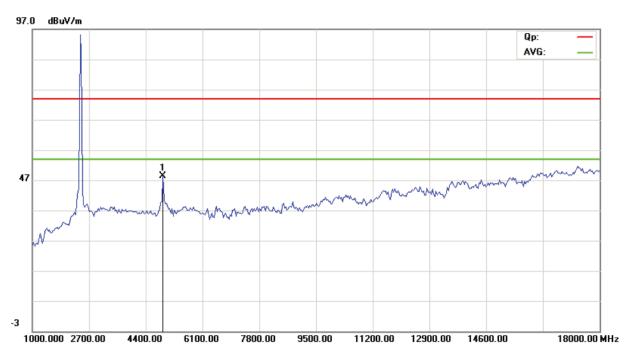

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-07-30



### Operation Mode: Transmitting under CH01 for 11n HT20 at 6.5Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4824.00	48.85 (PK)	Н	74(Peak)/ 54(AV)
4824.00	48.59 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00	-	H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684	-	H/V	74(Peak)/ 54(AV)
19296	-	H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 6.5Mbps

### Operation Mode: Transmitting under CH06 for 11n HT20 at 6.5Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
4874.00	48.04 (PK)	Н	74(Peak)/ 54(AV)
4874.00	48.19 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933	-	H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 6.5Mbps

Report No: FCC1507165 Page 29 of 102

Date: 2015-07-30



### Operation Mode: Transmitting under CH11 for 11n HT20 at 6.5Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4924	48.69 (PK)	Н	74(Peak)/ 54(AV)
4924	48.14 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 6.5Mbps

Date: 2015-07-30




Please refer to the following test plots for details:

### CH01 for 11n HT20 at 6.5Mbps: Horizontal

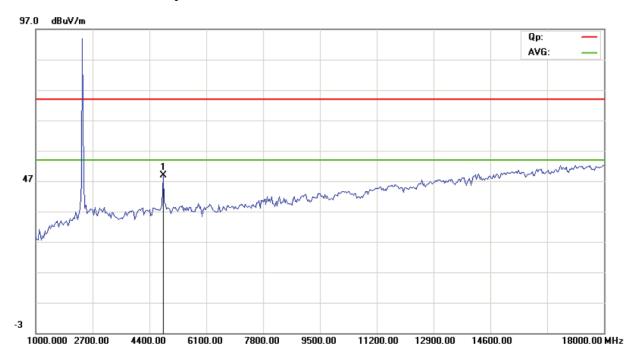

### CH01 for 11n HT20 at 6.5Mbps: Vertical

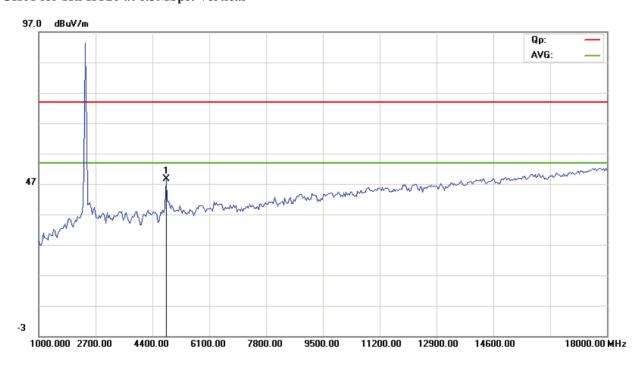

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Date: 2015-07-30



### CH06 for 11n HT20 at 6.5Mbps: Vertical

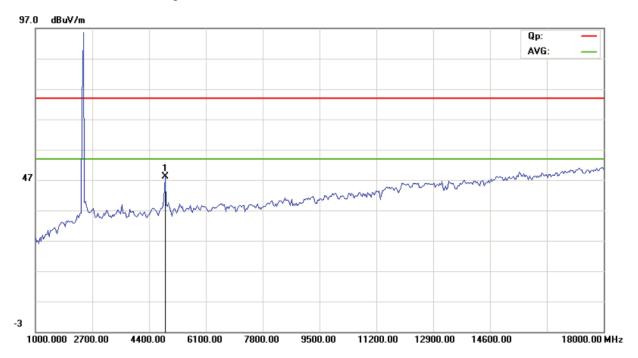

### CH06 for 11n HT20 at 6.5Mbps: Horizontal

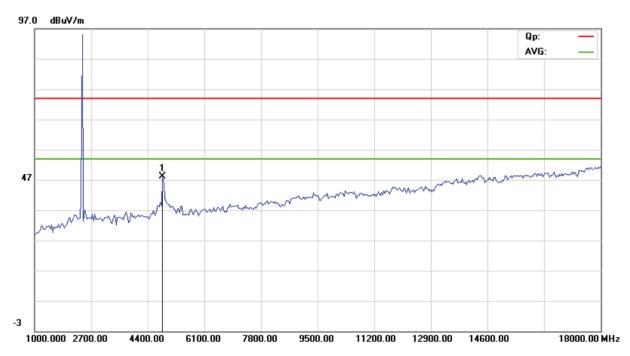

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2015-07-30



### CH11 for 11n HT20 at 6.5Mbps: Vertical

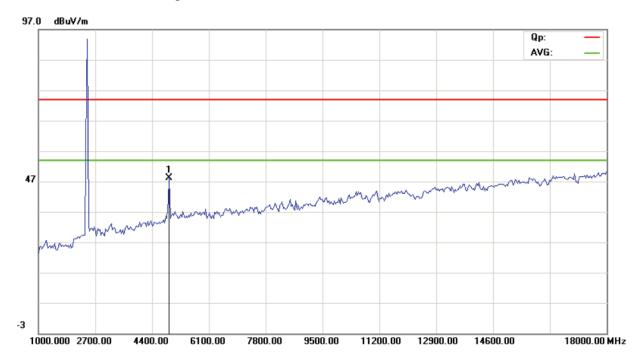

### CH11 for 11n HT20 at 6.5Mbps: Horizontal

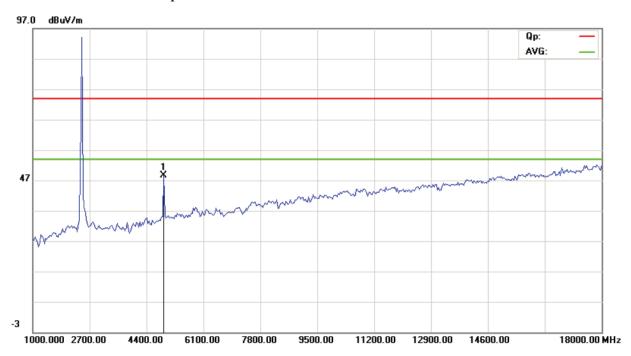

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-07-30



### Operation Mode: Transmitting under CH01 for 11n HT40 at 6.5Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4844.00	48.51 (PK)	Н	74(Peak)/ 54(AV)
4844.00	48.27 (PK)	V	74(Peak)/ 54(AV)
7266.00		H/V	74(Peak)/ 54(AV)
9688.00		H/V	74(Peak)/ 54(AV)
12110		H/V	74(Peak)/ 54(AV)
14532		H/V	74(Peak)/ 54(AV)
16954		H/V	74(Peak)/ 54(AV)
19376	-	H/V	74(Peak)/ 54(AV)
21798		H/V	74(Peak)/ 54(AV)
24220		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT40) mode 6.5Mbps

### Operation Mode: Transmitting under CH04 for 11n HT40 at 6.5Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
4874.00	48.16 (PK)	Н	74(Peak)/ 54(AV)
4874.00	48.53 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT40) mode 6.5Mbps

Report No: FCC1507165 Page 34 of 102

Date: 2015-07-30



### Operation Mode: Transmitting under CH07 for 11n HT40 at 6.5Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4904	48.32 (PK)	Н	74(Peak)/ 54(AV)
4904	49.08 (PK)	V	74(Peak)/ 54(AV)
7356		H/V	74(Peak)/ 54(AV)
9808		H/V	74(Peak)/ 54(AV)
12260		H/V	74(Peak)/ 54(AV)
14712		H/V	74(Peak)/ 54(AV)
17164		H/V	74(Peak)/ 54(AV)
19616		H/V	74(Peak)/ 54(AV)
22068		H/V	74(Peak)/ 54(AV)
24520		H/V	74(Peak)/ 54(AV)


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT40) mode 6.5Mbps

Date: 2015-07-30




Please refer to the following test plots for details:

### CH01 for 11n HT40 at 6.5Mbps: Horizontal

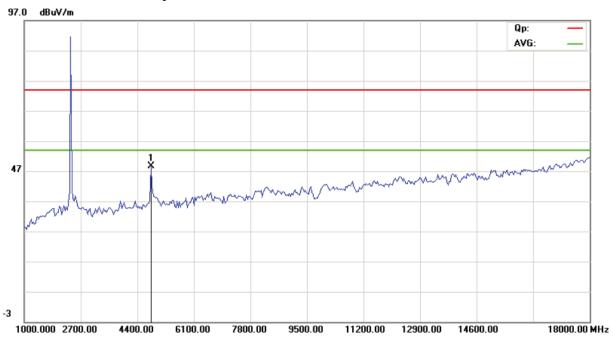

## CH01 for 11n HT40 at 6.5Mbps: Vertical

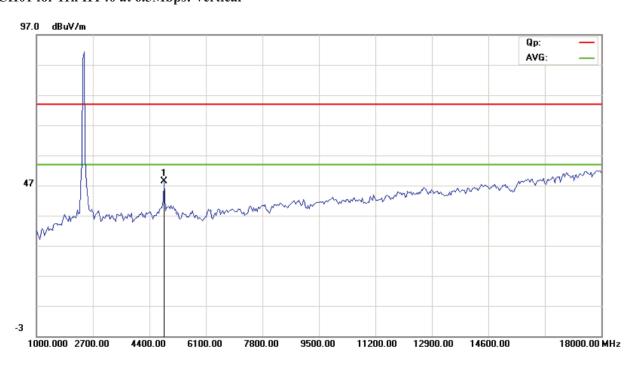


Page 36 of 102

Report No: FCC1507165


Date: 2015-07-30



# CH04 for 11n HT40 at 6.5Mbps: Vertical

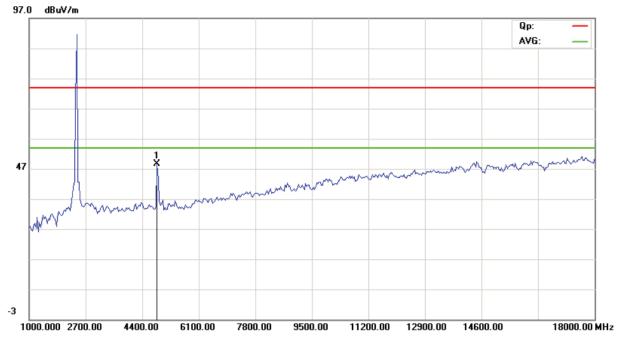

### CH04 for 11n HT40 at 6.5Mbps: Horizontal

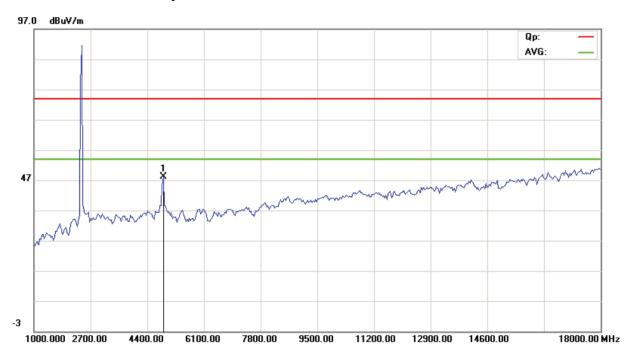


Report No: FCC1507165


Date: 2015-07-30



### CH07 for 11n HT40 at 6.5Mbps: Vertical

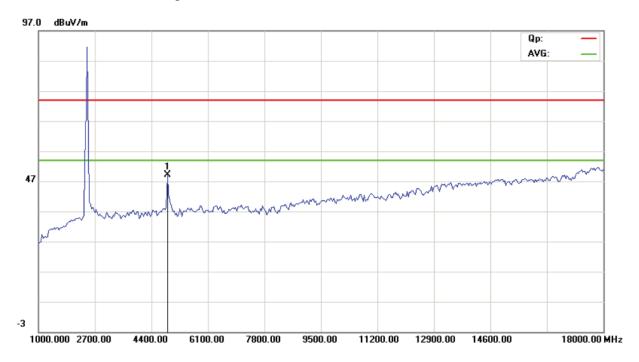

### CH07 for 11n HT40 at 6.5Mbps: Horizontal

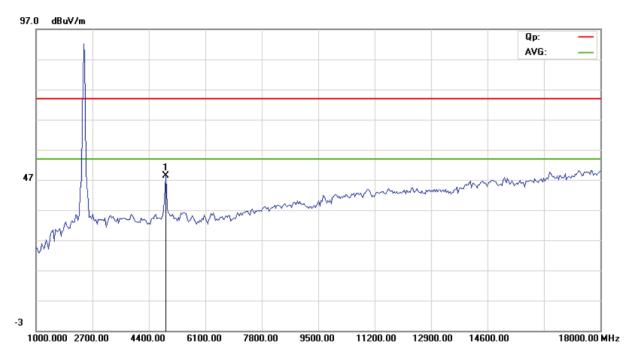

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Report No: FCC1507165 Page 38 of 102

Date: 2015-07-30



#### 7.0 6dB Bandwidth Measurement

### 7.1 Test Setup



#### 7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

#### 7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW)  $\geq$  3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 7.4 Test Result

Report No: FCC1507165 Page 39 of 102

Date: 2015-07-30



### 6dB Occupied Bandwidth


EUT		Digital	Photo Fran	me	Model		W	07A
Mode		8	302.11b		Input Vol	tage	AC	120V
Temperat	ure	24	4 deg. C,		Humidity	,	56%	% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		mum Limit MHz)	Pass/ Fail
1		2412	1	10	.04	0.5		Pass
6		2437	1	10	.04	0.5		Pass
11		2462	1	10	.04		0.5	Pass
1		2412	11	9.	32		0.5	Pass
6		2437	11 9.32		32		0.5	Pass
11	11 2462 11 9		9.	32		0.5	Pass	

Page 40 of 102

Report No: FCC1507165

Date: 2015-07-30



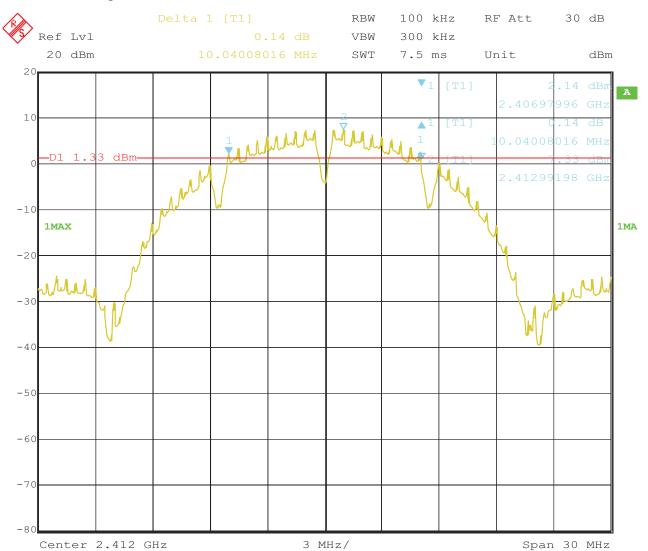


Page 41 of 102

Report No: FCC1507165

Date: 2015-07-30



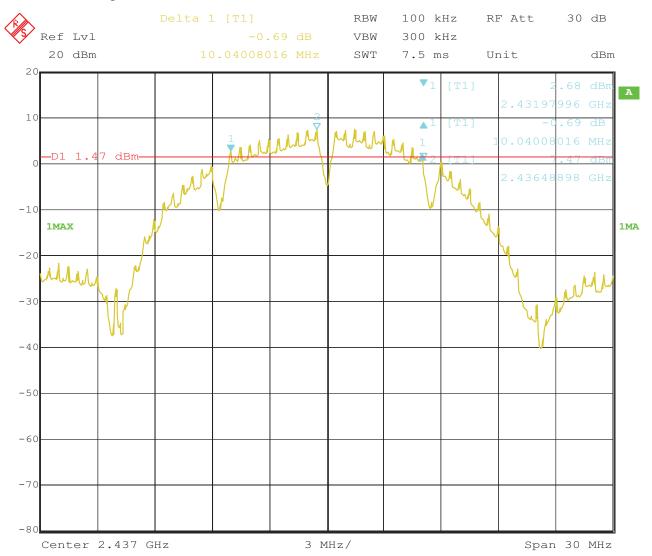


Page 42 of 102

Report No: FCC1507165

Date: 2015-07-30



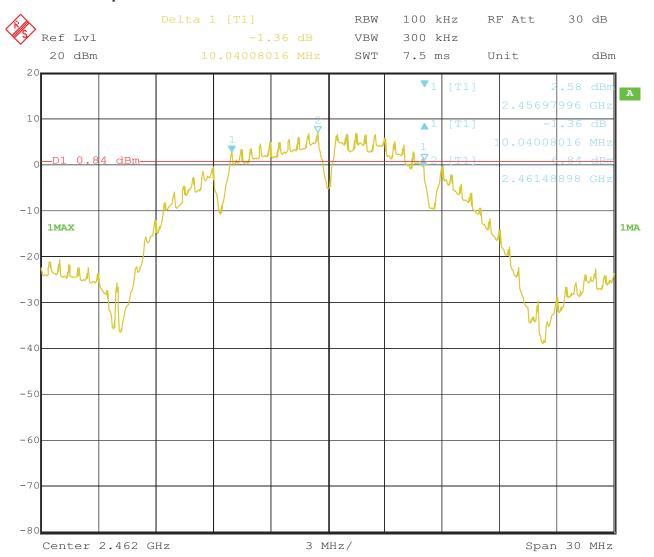


Page 43 of 102

Report No: FCC1507165

Date: 2015-07-30



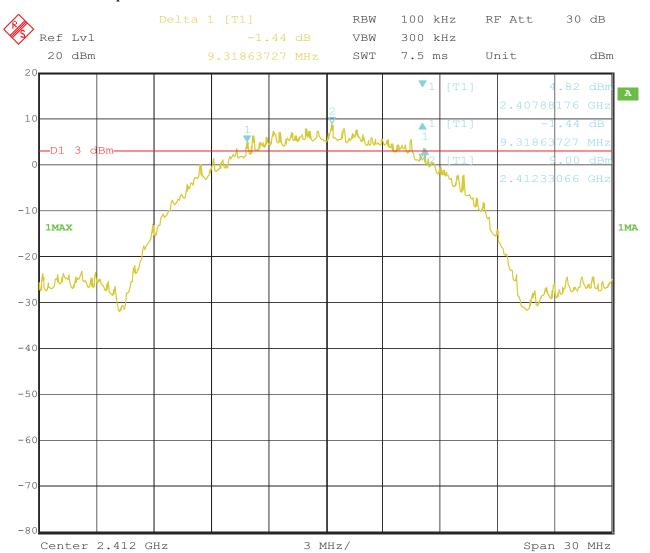


Page 44 of 102

Report No: FCC1507165

Date: 2015-07-30



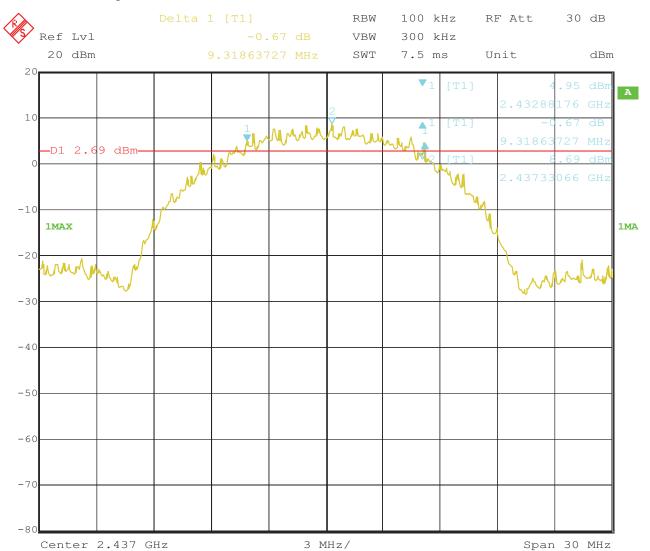


Page 45 of 102

Report No: FCC1507165

Date: 2015-07-30



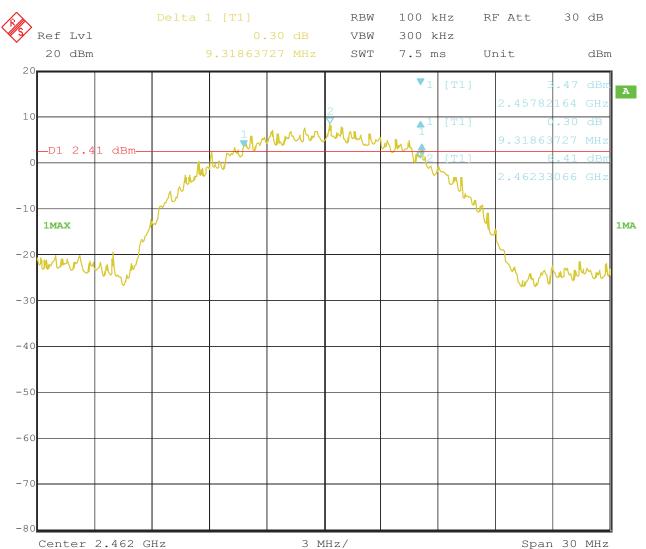

Report No: FCC1507165 Page 46 of 102

Date: 2015-07-30



# 6dB Occupied Bandwidth

EUT		Digital	Photo Fran	me	Model			W07A
Mode		8	302.11g		Input Vol	tage	A	AC120V
Temperat	ure	24	4 deg. C,		Humidity	,	56% RH	
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)		mum Limit MHz) Pass/ Fail	
1		2412	54	16	.41		0.5	Pass
6		2437	54	16	.41		0.5	Pass
11		2462	54	16	.41		0.5	Pass


Page 47 of 102

Report No: FCC1507165

Date: 2015-07-30



#### **Test Plots:**

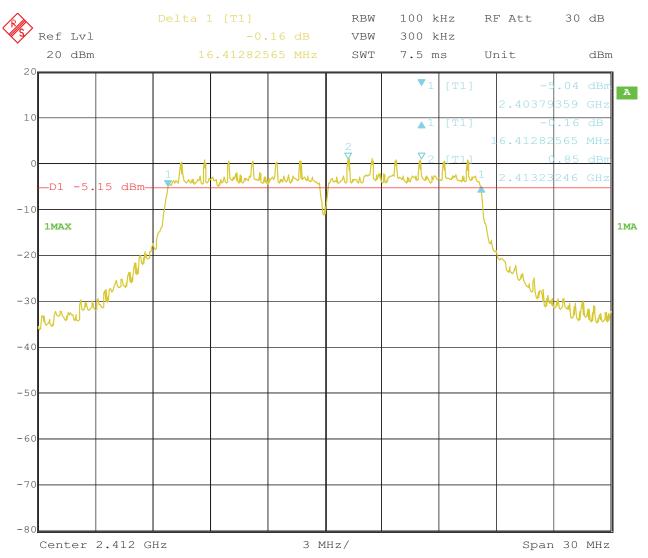


Page 48 of 102

Report No: FCC1507165

Date: 2015-07-30



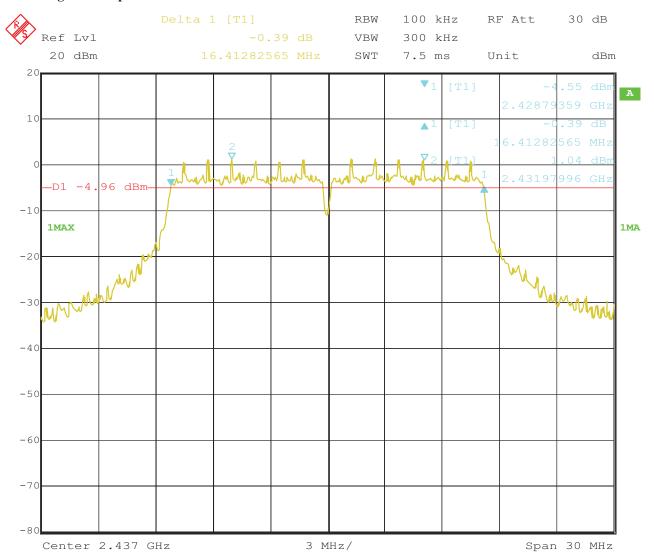


Page 49 of 102

Report No: FCC1507165

Date: 2015-07-30



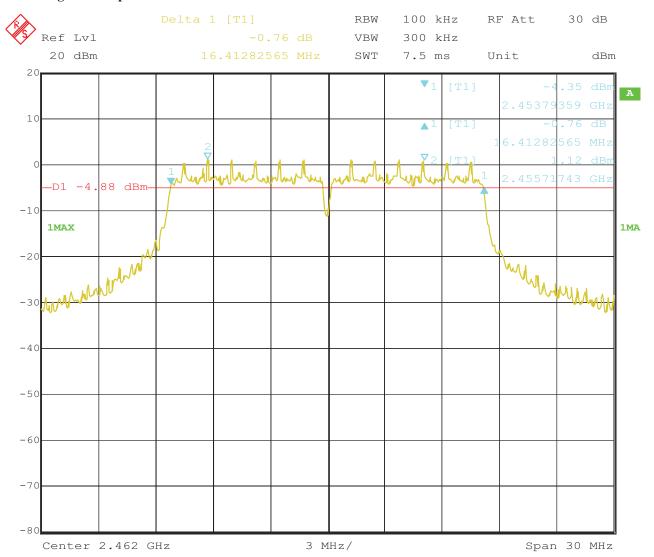

Report No: FCC1507165 Page 50 of 102

Date: 2015-07-30



### 6dB Occupied Bandwidth

EUT		Digital	Digital Photo Frame Model			W	07A	
Mode		802	.11n HT20		Input Vol	tage	AC	120V
Temperat	ure	24	4 deg. C,		Humidity		56%	% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		mum Limit MHz)	Pass/ Fail
1		2412	6.5M	17	.56		0.5	Pass
6		2437	6.5M	17	.56		0.5	Pass
11		2462	6.5M	17	.56		0.5	Pass


Page 51 of 102

Report No: FCC1507165

Date: 2015-07-30



#### **Test Plots:**

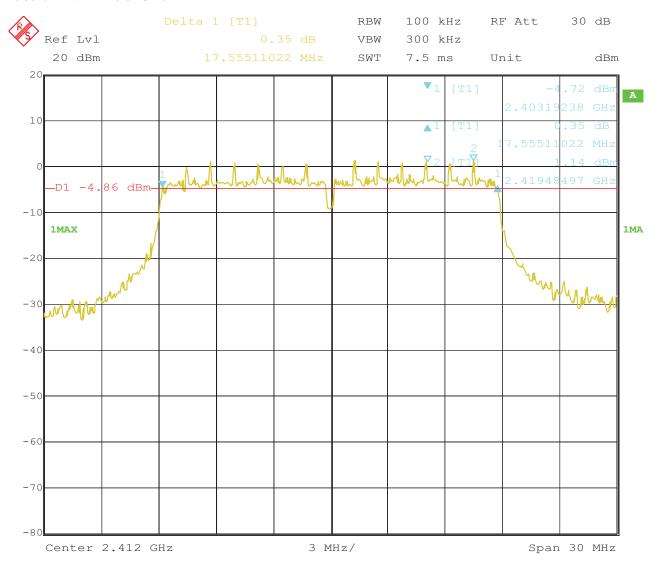


Page 52 of 102

Report No: FCC1507165

Date: 2015-07-30



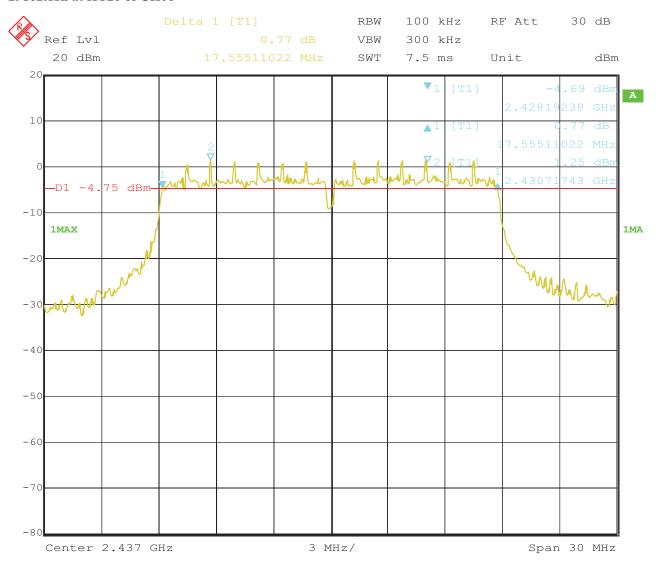


Page 53 of 102

Report No: FCC1507165

Date: 2015-07-30



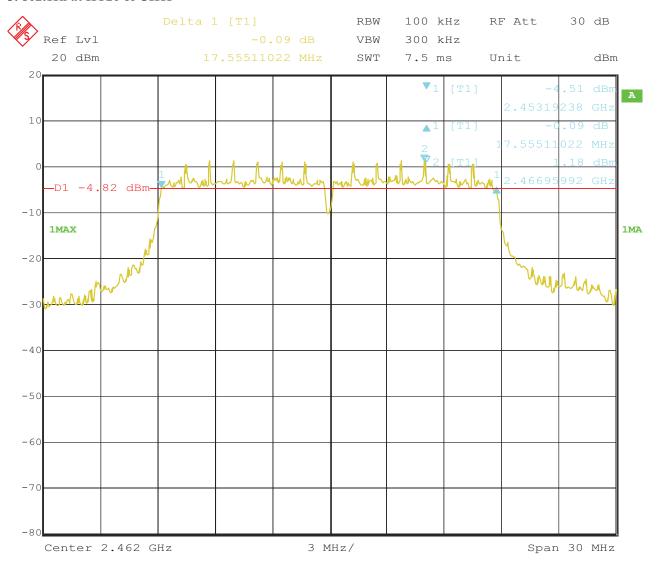

Report No: FCC1507165 Page 54 of 102

Date: 2015-07-30



# 6dB Occupied Bandwidth

EUT		Digital	Photo Fran	ne	Model	Model		07A
Mode		802	.11n HT40		Input Vol	age AC		120V
Temperat	ure	24	4 deg. C,		Humidity		56%	6 RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		num Limit MHz)	Pass/ Fail
1		2422	6.5M	35	.39		0.5	Pass
4		2437	6.5M	35	.39	9 0.5		Pass
7		2452	6.5M	35	.39		0.5	Pass


Page 55 of 102

Report No: FCC1507165

Date: 2015-07-30



#### **Test Plots:**

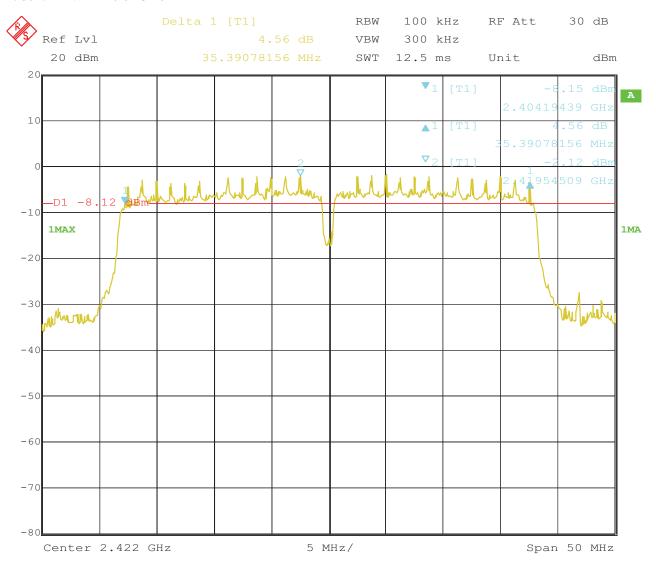


Page 56 of 102

Report No: FCC1507165

Date: 2015-07-30



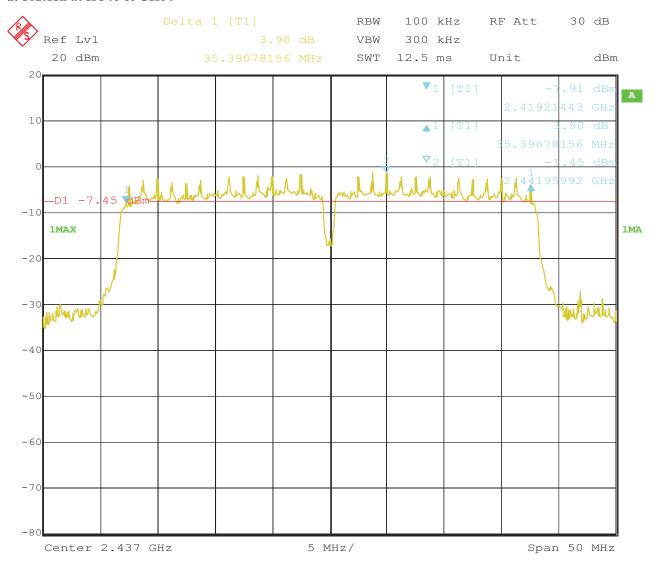


Page 57 of 102

Report No: FCC1507165

Date: 2015-07-30



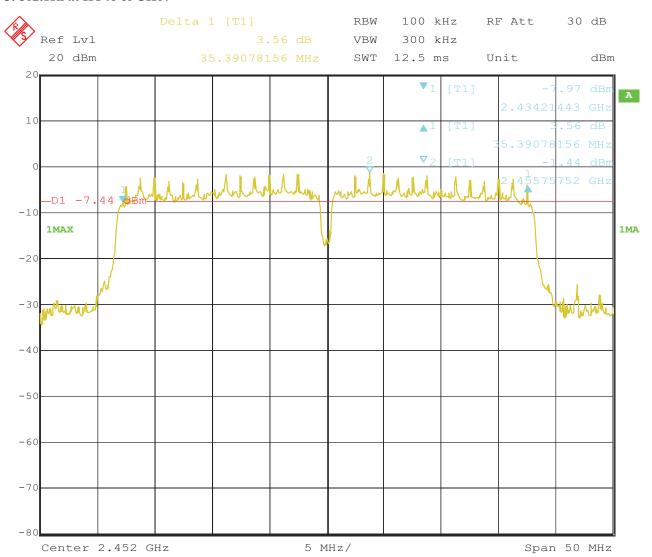

Report No: FCC1507165


Date: 2015-07-30



Page 58 of 102

### 8. Maximum Output Power

### 8.1 Test Setup



#### 8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

#### **8.3 Test Procedure**

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power was measured

Page 59 of 102

Report No: FCC1507165

Date: 2015-07-30



# **8.4Test Results**

EUT		Digital Pho	Digital Photo Frame		odel		W07A	
Mode 802		802.1	Ilb In		Input Voltage		AC120V	
Temperature		24 deg	24 deg. C,		Humidity		56% RH	
Channel	Channel Frequency (MHz)		Max. Power Output (dBm)		Power Limit (dBm)		Pass/ Fail	
1	2412		22.22		30		Pass	
6	6 2437		22.59		30		Pass	
11		2462	19.88		30	)	Pass	

Note: 1. At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	EUT Digital Phot		to Frame	M	odel		W07A	
Mode 802.		Input '		ıt Voltage		AC120V		
Temperature 24		24 deg	g. C, Hun		midity		56% RH	
Channel	Channel Frequency (MHz)		Max. Power Output (dBm)		Power Limit (dBm)		Pass/ Fail	
1		2412	19.40		30		Pass	
6	5 2437		19.86		30		Pass	
11		2462	19.65		30	)	Pass	

Note: 1. At finial test to get the worst-case emission at 54Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 60 of 102

Report No: FCC1507165

Date: 2015-07-30



EUT		Digital Pho	to Frame	M	odel		W07A
Mode		802.11n (	11n (HT20)		Input Voltage		AC120V
Temperat	ure	24 deg	24 deg. C,		Humidity		56% RH
Channel	Channel Frequency (MHz)		Max. Power Output (dBm)		Power Limit (dBm)		Pass/ Fail
1	2412		19.68		30		Pass
6	6 2437		20.02		30		Pass
11		2462	19.94		30	)	Pass

Note: 1. At finial test to get the worst-case emission at 6.5Mbps of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT Di		Digital Pho	ital Photo Frame		odel		W07A
Mode 8		802.11n (	802.11n (HT40)		Input Voltage		AC120V
Temperature		24 deg	24 deg. C,		Humidity		56% RH
Channel	Channel Frequency (MHz)		Max. Power Output (dBm)		Power Limit (dBm)		Pass/ Fail
1	2422		19.74		30		Pass
4	2437		20.10		30		Pass
7		2452	19.92		30	)	Pass

Note: 1. At finial test to get the worst-case emission at 6.5Mbps of 11n HT40 for CH01, CH04 and CH7

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded


Report No: FCC1507165 Page 61 of 102

Date: 2015-07-30



# 9. Power Spectral Density Measurement

# 9.1 Test Setup



### 9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

#### 9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW  $\geq$  30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be  $\leq 8$  dBm.

Report No: FCC1507165 Page 62 of 102

Date: 2015-07-30



#### 9.4Test Result

EUT		Digital Pho	to Frame	M	odel		W07A
Mode		802.11b 11Mbps		Input Voltage		AC120V	
Temperature		24 deg	24 deg. C,		Humidity		56% RH
Channel	Cha	annel Frequency (MHz)	Final RF Power Level (dBm)		Maximus (dB:		Pass/ Fail
			11Mbp	os			
1	1 2412		-2.18		8		Pass
6 2437		-2.04		8		Pass	
11		2462	-2.39		8		Pass

EUT		Digital Photo Frame			Model		W07A	
Mode		802.11g 54Mbps		Input Voltage		AC120V		
Temperat	ure	24 deg	24 deg. C,		Humidity		56% RH	
Channel	Cha	annel Frequency	Final RF Power		Maximum Limit		Pass/ Fail	
Chamiei		(MHz)	Level in (dI	Bm)	(dB	m)		
			54Mbps	S				
1	2412		-9.06		8		Pass	
6 2437		-7.96		8		Pass		
11 2462		-8.25		8		Pass		

Page 63 of 102

Report No: FCC1507165

Date: 2015-07-30



EUT		Digital Pho	to Frame	M	odel		W07A
Mode		802.11n HT20 6.5Mbps		Input Voltage			AC120V
Temperature		24 deg	24 deg. C,		Humidity		56% RH
Channel	Cha	annel Frequency	Final RF Power		Maximum Limit		Pass/ Fail
Chamier		(MHz)	Level (dB	m)	(dB	m)	
			HT20				
1	1 2412		-7.37		8		Pass
6 2437		-7.47		8		Pass	
11		2462	-7.72		8		Pass

EUT	EUT Digital Pho		to Frame	M	odel		W07A
Mode 802		802.11n HT4	0 6.5Mbps	Input Voltage			AC120V
Temperat	ure	24 deg	g. C,	Humidity		56% RH	
Channel	Cha	annel Frequency	Final RF Power		Maximum Limit		Pass/ Fail
		(MHz)	Level (dBm)		(dB:	m)	
			HT40				
1		2422	-11.16		8		Pass
4	2437		-11.27		8		Pass
7		2452	-11.05		8		Pass


Page 64 of 102

Report No: FCC1507165

Date: 2015-07-30



### 9.5 Photo of Power Spectral Density Measurement

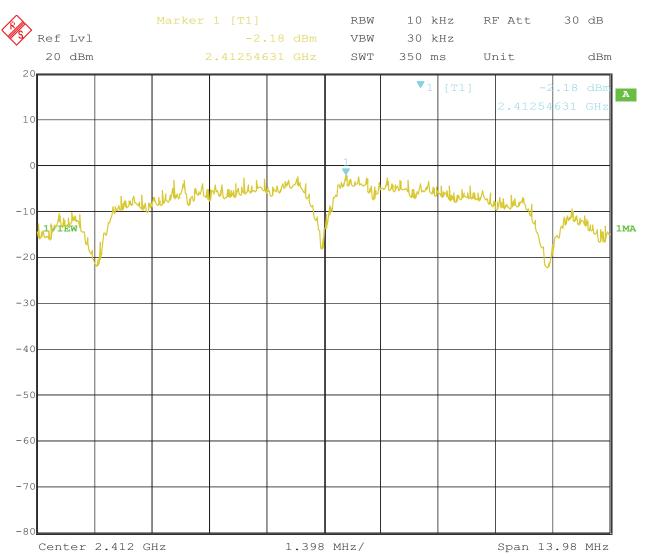


Page 65 of 102

Report No: FCC1507165

Date: 2015-07-30



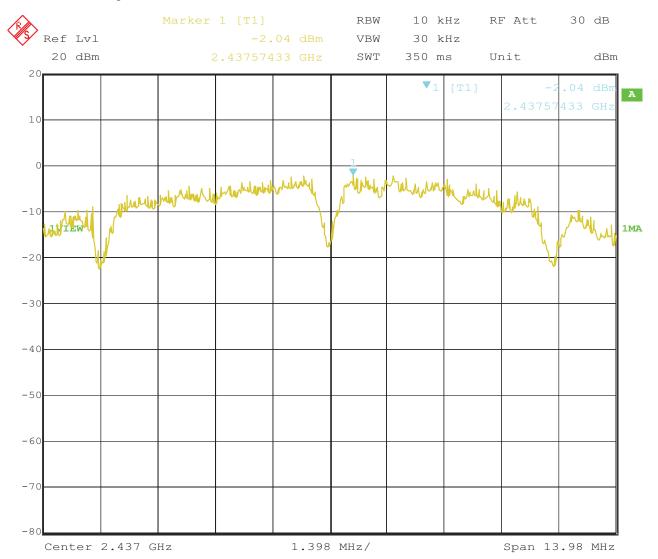


Page 66 of 102

Report No: FCC1507165

Date: 2015-07-30



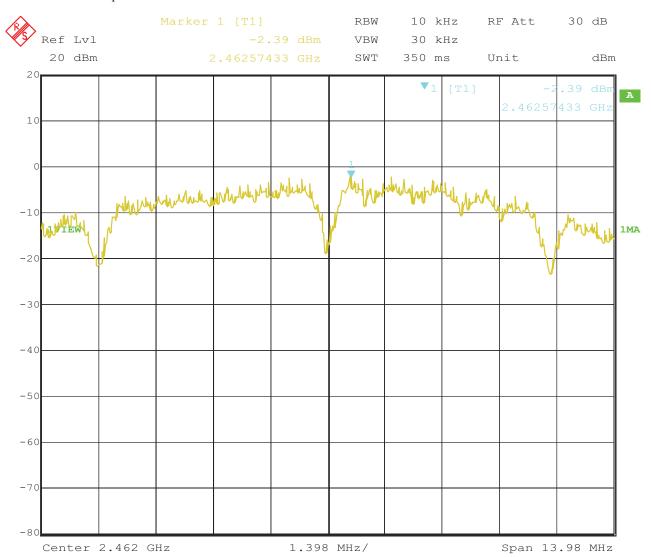


Page 67 of 102

Report No: FCC1507165

Date: 2015-07-30



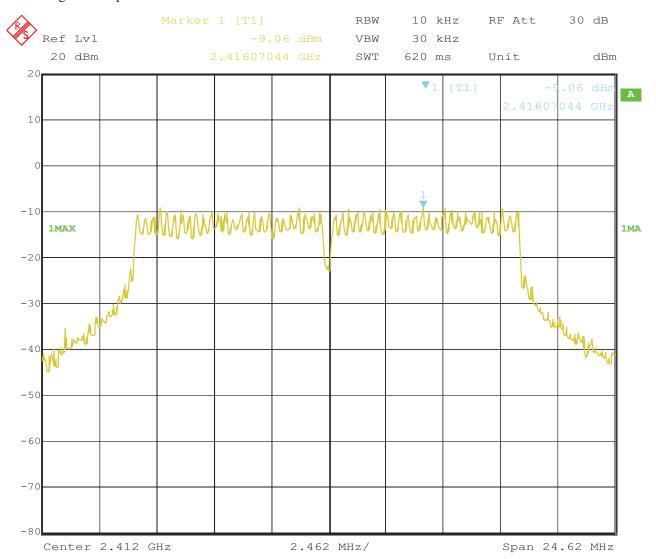


Page 68 of 102

Report No: FCC1507165

Date: 2015-07-30



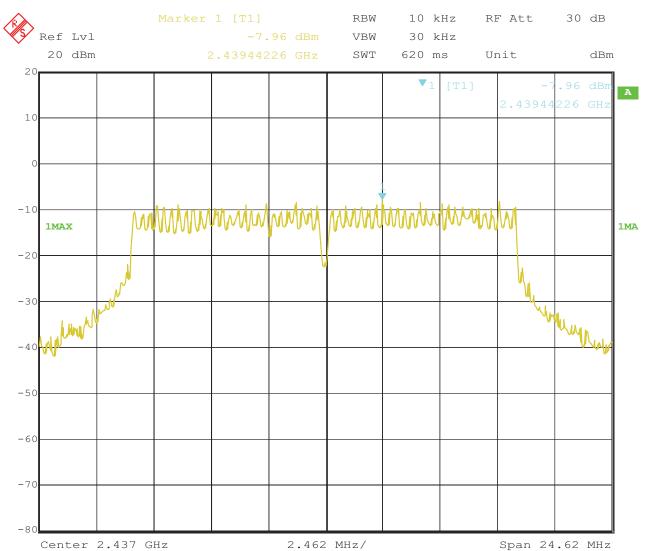


Page 69 of 102

Report No: FCC1507165

Date: 2015-07-30



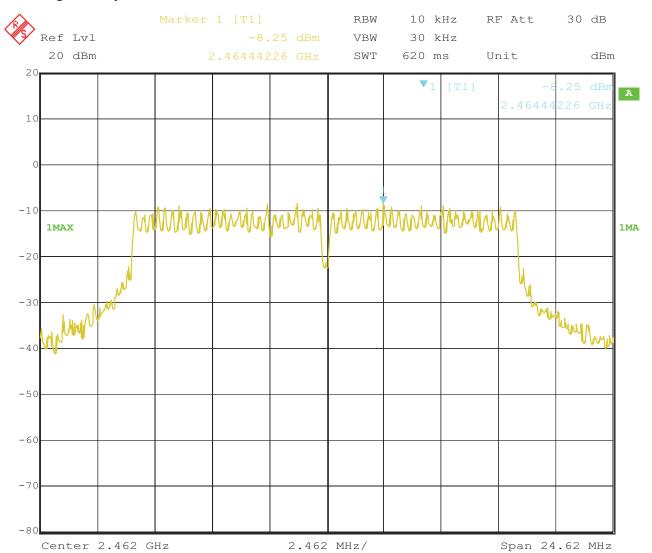


Page 70 of 102

Report No: FCC1507165

Date: 2015-07-30



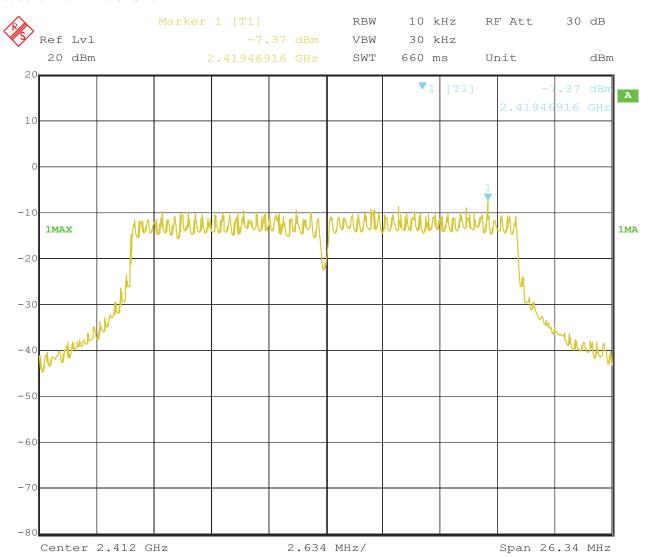


Page 71 of 102

Report No: FCC1507165

Date: 2015-07-30



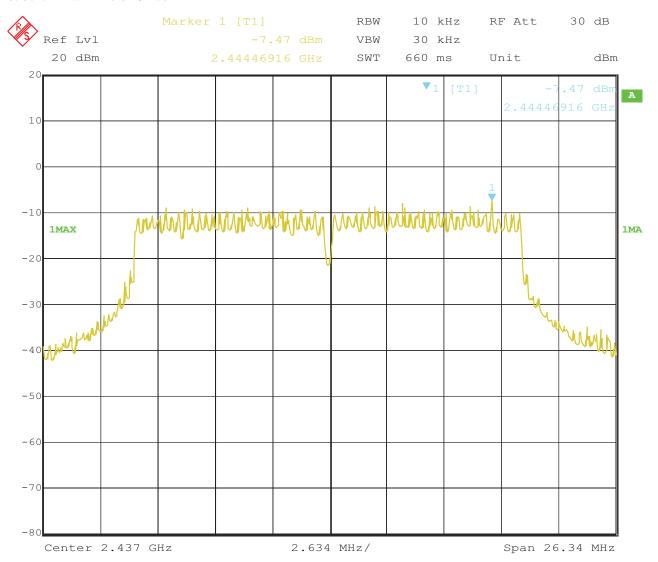


Page 72 of 102

Report No: FCC1507165

Date: 2015-07-30



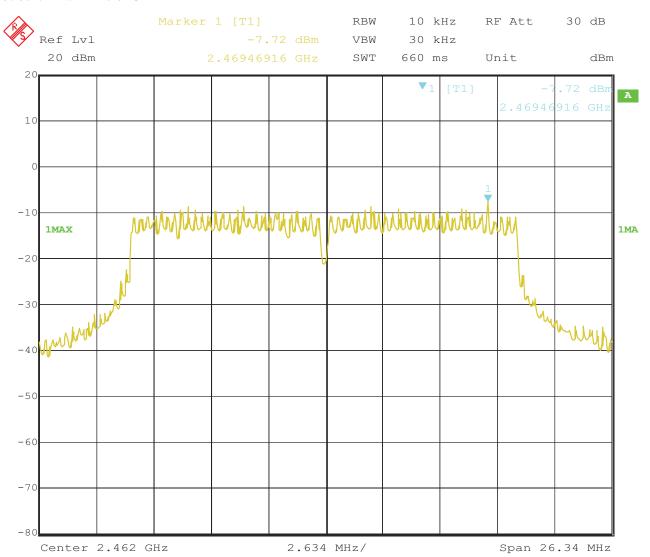


Page 73 of 102

Report No: FCC1507165

Date: 2015-07-30



#### 10. 802.11n at HT40 of CH01

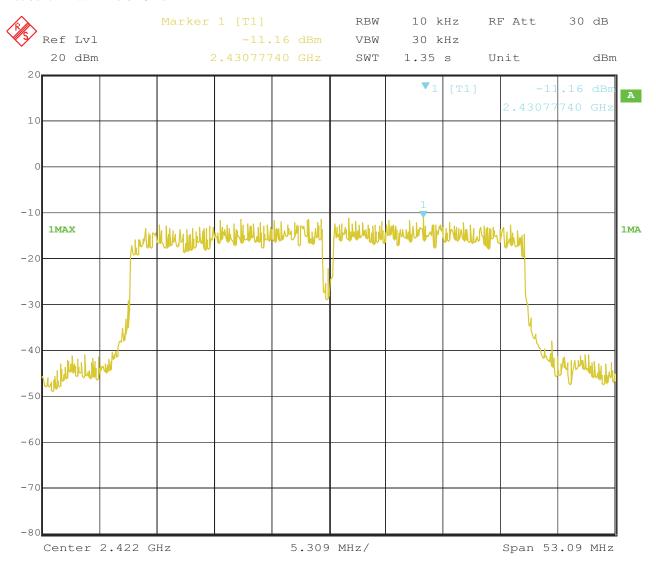


Page 74 of 102

Report No: FCC1507165

Date: 2015-07-30



#### 11. 802.11n at HT40 of CH04

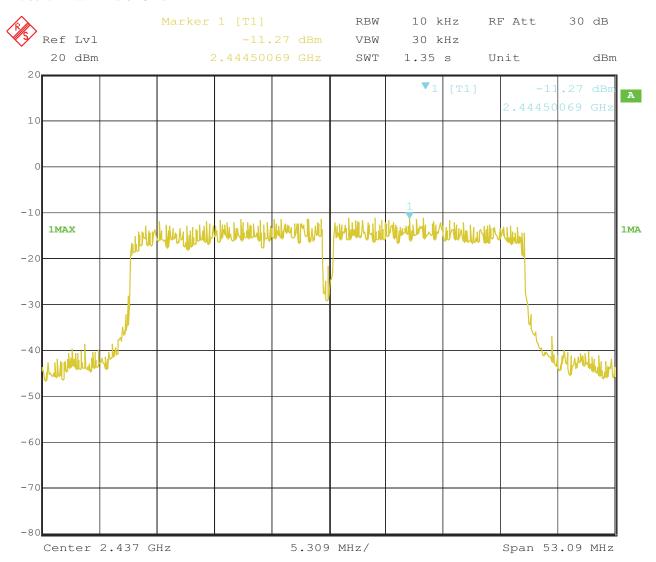


Page 75 of 102

Report No: FCC1507165

Date: 2015-07-30



#### 12. 802.11n at HT40 of CH07

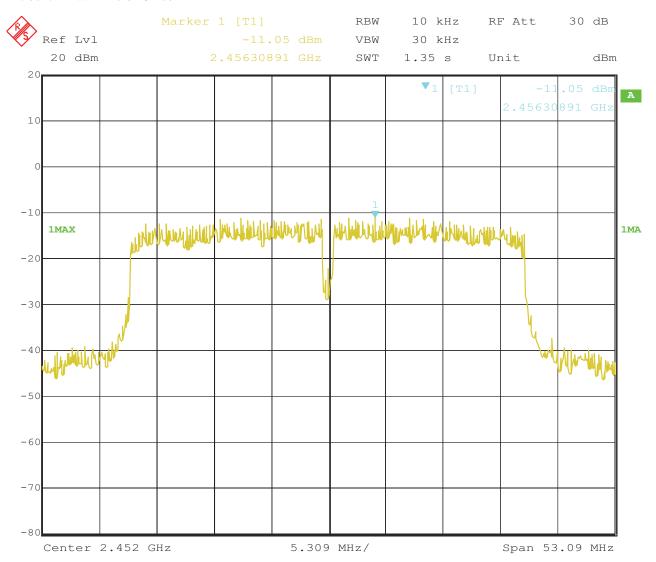

Report No: FCC1507165


Date: 2015-07-30



Page 76 of 102

### 10 Out of Band Measurement

## 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

### 10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### **10.3 Test Procedure**

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.( Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

### 10.4 Test Result

Please see next pages

Note: 1. this is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), after pre-test. It was found that the worse radiated emission was get at the lying position. the worse case was recorded

2. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 77 of 102

Report No: FCC1507165

Date: 2015-07-30




### For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Digital Photo Frame		Model	W07A
Mode	Keeping Transmitting		Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBµV/m)	66.2	T innit	$74(dB\mu V/m)$
	AV (dBμV/m)	47.3	Limit	$54(dB\mu V/m)$
2390	PK (dBµV/m)	45.6	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Lillit	$54(dB\mu V/m)$

### **Test Figure:**

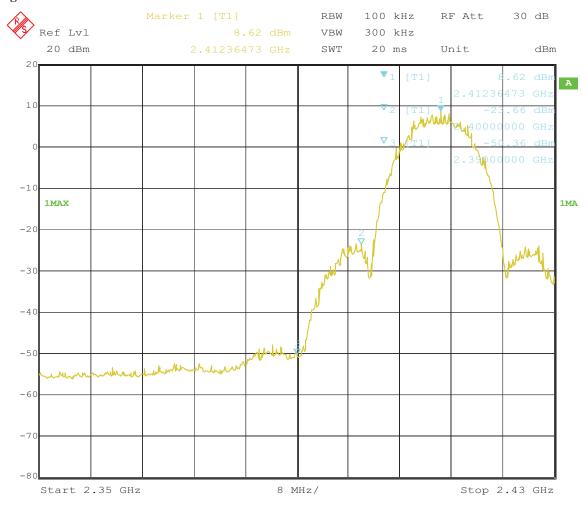

Page 78 of 102

Report No: FCC1507165

Date: 2015-07-30




### CH11 at 11Mbps

### **10.4** Band-edge and Restricted band Measurement

EUT	Digital Photo Frame		Model	W07A
Mode	Keeping Transmitting		Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	47.8	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBμV/m)

### **Test Figure:**

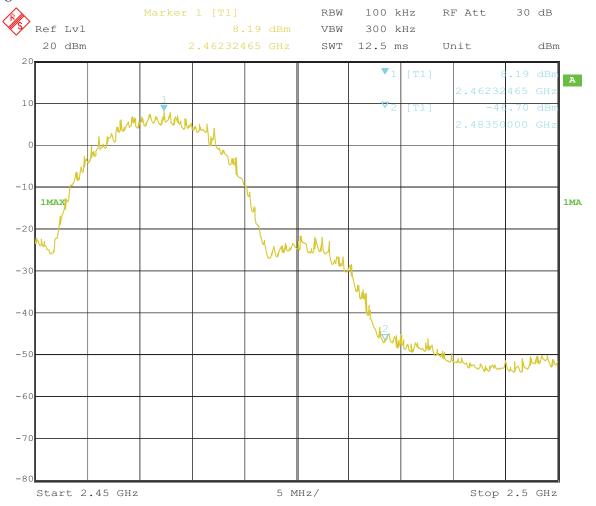

Page 79 of 102

Report No: FCC1507165

Date: 2015-07-30




### For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Digital Photo Frame		Model	W07A
Mode	Keeping Transmitting		Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass		PK
2400	PK (dBµV/m)	65.7	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)	46.9	Limit	$54(dB\mu V/m)$
2390	PK (dBµV/m)	44.5	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Lillit	$54(dB\mu V/m)$

### **Test Figure:**

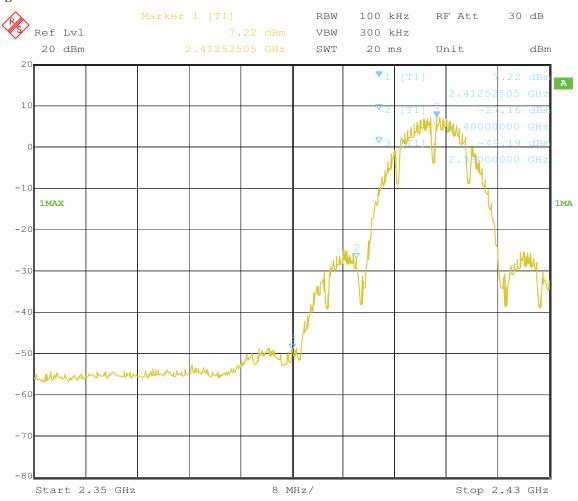

Page 80 of 102

Report No: FCC1507165

Date: 2015-07-30




### CH11 at 1Mbps

### **10.4** Band-edge and Restricted band Measurement

EUT	Digital Photo Frame		Model	W07A
Mode	Keeping	g Transmitting	Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	48.3	T ::4	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBμV/m)

# **Test Figure:**

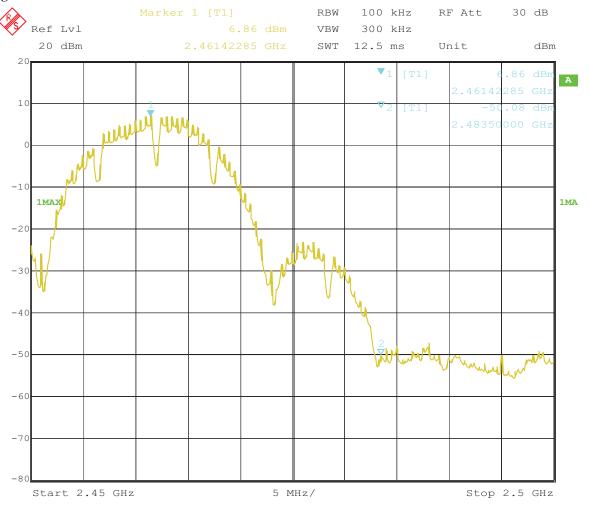

Page 81 of 102

Report No: FCC1507165

Date: 2015-07-30




### For 802.11g mode

CH01 at 54Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Digital Photo Frame		Model	W07A
Mode	Keeping Transmitting		Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass	Detector	PK
2400	PK (dBμV/m)	68.3	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)	49.2	Limit	$54(dB\mu V/m)$
2390	PK (dBμV/m)	55.5	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)	36.2	Limit	54(dBμV/m)

### **Test Figure:**

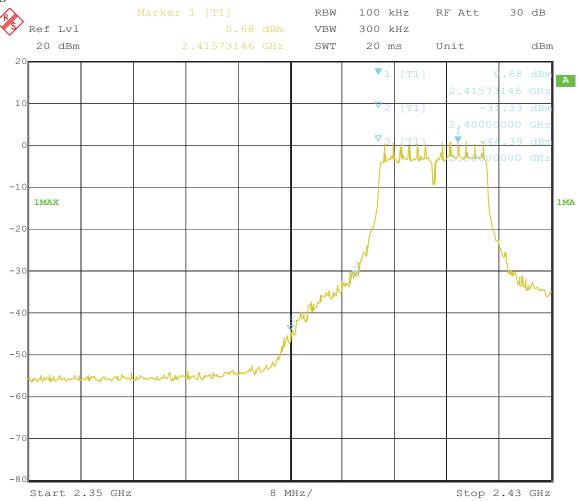

Page 82 of 102

Report No: FCC1507165

Date: 2015-07-30




### CH11 at 54Mbps

### 10.4 Band-edge and Restricted band Measurement

EUT	Digital Photo Frame		Mod	lel	W07A
Mode	Keeping Transmitting		Input V	oltage	AC120V
Temperature	24 deg. C,		Humi	dity	56% RH
Test Result:	Pass		Detec	ctor	PK
2483.5	PK (dBµV/m)	56.2	T ::4	$t = \frac{74(dB\mu V/m)}{54(dB\mu V/m)}$	
	AV (dBμV/m)	35.9	Limit		

# **Test Figure:**

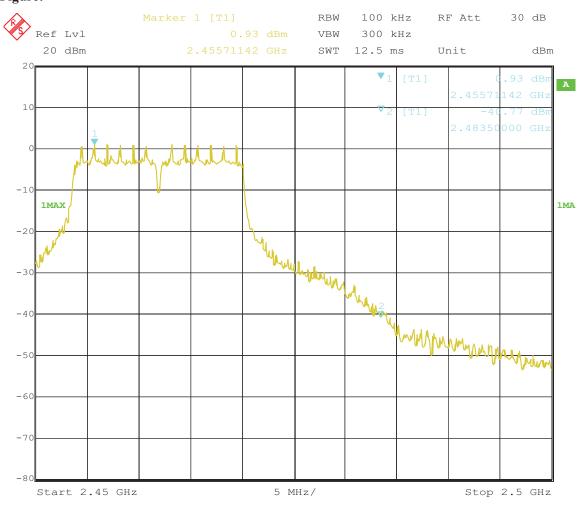

Page 83 of 102

Report No: FCC1507165

Date: 2015-07-30




# For 802.11n (HT20) mode

CH01 at 6.5Mbps

Band-edge and Restricted band Measurement 10.4

EUT	Digital Photo Frame		Model	W07A
Mode	Keeping Transmitting		Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass	Detector	PK
2400	PK (dBμV/m)	69.2	T :'4	$74(dB\mu V/m)$
	AV (dBμV/m)	50.1	Limit	$54(dB\mu V/m)$
2390	PK (dBµV/m)	57.2	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)	38.0	Limit	54(dBμV/m)

# **Test Figure:**

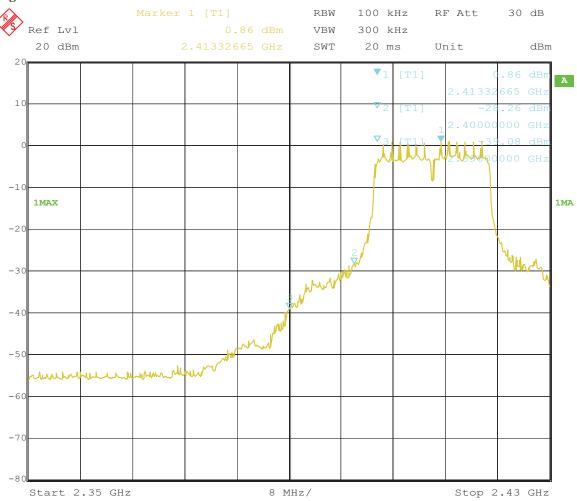

Page 84 of 102

Report No: FCC1507165

Date: 2015-07-30




### CH11 at 6.5Mbps

### **10.4** Band-edge and Restricted band Measurement

EUT	Digital Photo Frame		Model	W07A
Mode	Keeping Transmitting		Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	59.3	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)	40.2	Limit	$54(dB\mu V/m)$

### **Test Figure:**

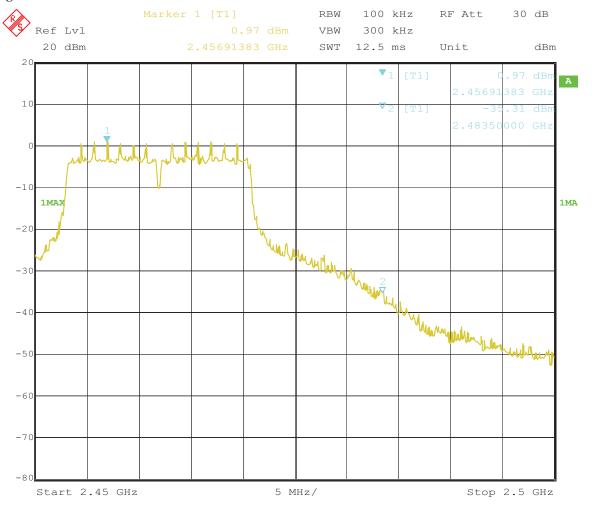

Page 85 of 102

Report No: FCC1507165

Date: 2015-07-30




### For 802.11n (HT40) mode

CH01 at 6.5Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Digital Photo Frame		Model	W07A
Mode	Keeping Transmitting		Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass	Detector	PK
2400	PK (dBμV/m)	66.2	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)	46.9	Limit	$54(dB\mu V/m)$
2390	PK (dBμV/m)	59.7	Limit	74(dBμV/m)
	AV (dBμV/m)	40.6	- Limit	$54(dB\mu V/m)$

### **Test Figure:**

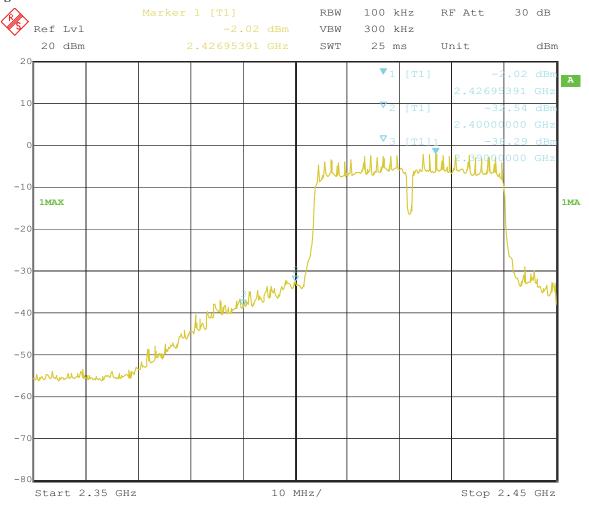

Page 86 of 102

Report No: FCC1507165

Date: 2015-07-30




### CH7 at 6.5Mbps

### Band-edge and Restricted band Measurement

EUT	Digital Photo Frame		Model	W07A
Mode	Keeping Transmitting		Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	60.2	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)	41.9	Limit	54(dBµV/m)

# **Test Figure:**

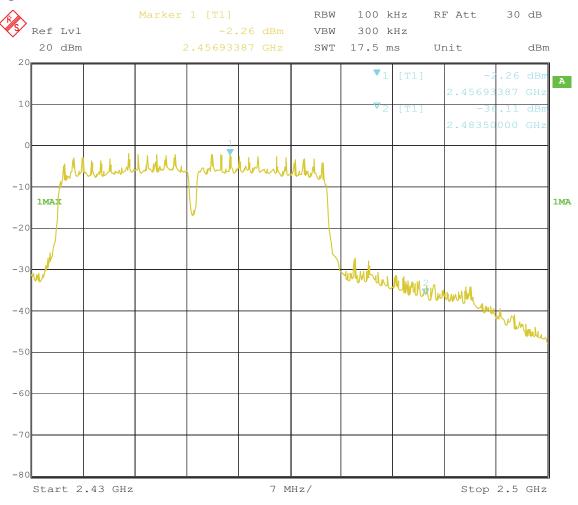

Report No: FCC1507165

Date: 2015-07-30



Page 87 of 102

### 11.0 Antenna Requirement

### 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 11.2 Antenna Connected construction

PCB antenna used. The maximum Gain of the antennas is 1.39dBi.

Report No: FCC1507165 Page 88 of 102

Date: 2015-07-30




### 12.0 FCC ID/ IC Label

### FCC ID: RBD-W07A

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### **Mark Location:**

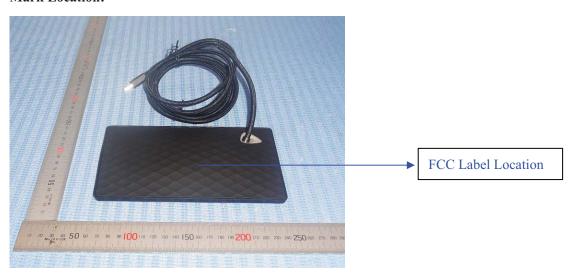

Page 89 of 102

Report No: FCC1507165

Date: 2015-07-30



#### 13.0 Photo of testing

Conducted Emission Test Setup:



Page 90 of 102

Report No: FCC1507165

Date: 2015-07-30



# Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1507165

Date: 2015-07-30



### Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 92 of 102

Report No: FCC1507165

Date: 2015-07-30



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 93 of 102

Report No: FCC1507165

Date: 2015-07-30



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 94 of 102

Report No: FCC1507165

Date: 2015-07-30



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 95 of 102

Report No: FCC1507165

Date: 2015-07-30



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 96 of 102

Report No: FCC1507165

Date: 2015-07-30



Outside view




Page 97 of 102


Report No: FCC1507165

Date: 2015-07-30



Inside view

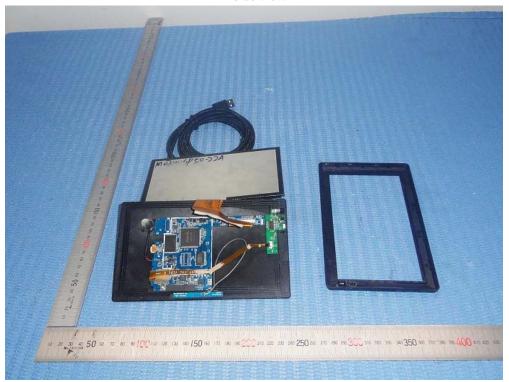

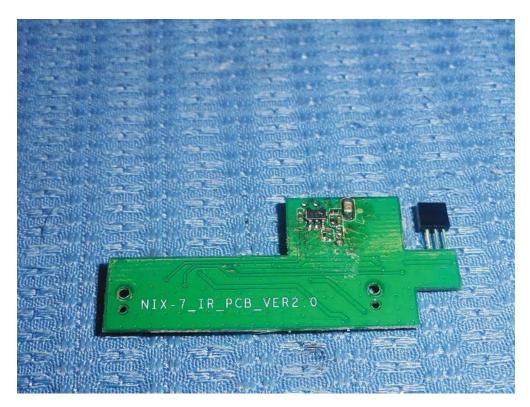

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 98 of 102

Report No: FCC1507165

Date: 2015-07-30



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 99 of 102

Report No: FCC1507165

Date: 2015-07-30



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 100 of 102


Report No: FCC1507165

Date: 2015-07-30



Inside view



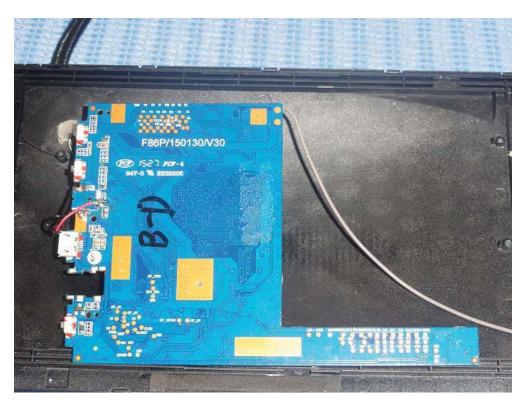

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 101 of 102

Report No: FCC1507165

Date: 2015-07-30



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No: FCC1507165

Date: 2015-07-30



Inside view

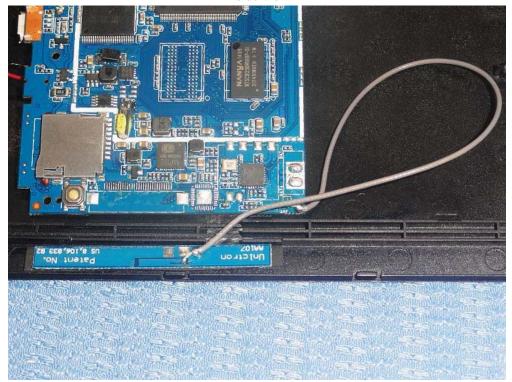

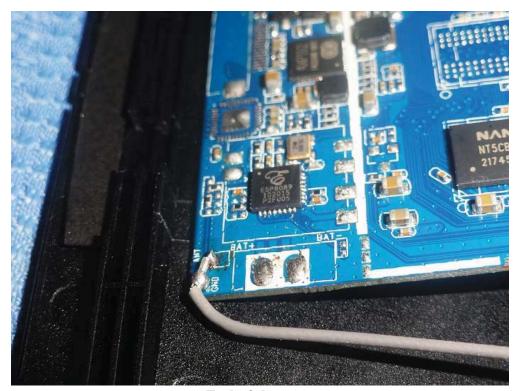

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.