



# RF TEST REPORT

**Applicant** ZTE Corporation

**FCC ID** SRQ-ZTEV9VITA

**Product** LTE/WCDMA/GSM(EDGE、 GPRS)  
Multi-Mode Digital Mobile Phone

**Model** ZTE BLADE V0920/ ZTE BLADE V9 VITA  
/BLADE V9 VITA

**Marketing** ZTE BLADE V0920/ ZTE BLADE V9 VITA  
/BLADE V9 VITA

**Report No.** R1803A0087-R3

**Issue Date** April 4, 2018

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2017)/ FCC CFR47 Part 27C (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Jiang peng Lan*

*Performed by: Jiangpeng Lan*

*Kai Xu*

*Approved by: Kai Xu*

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

## Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
3	Applied Standards.....	8
4	Test Configuration.....	9
5	Test Case Results.....	11
5.1	RF Power Output.....	11
5.2	Effective Isotropic Radiated Power.....	17
5.3	Occupied Bandwidth.....	22
5.4	Band Edge Compliance.....	36
5.5	Peak-to-Average Power Ratio (PAPR).....	53
5.6	Frequency Stability.....	56
5.7	Spurious Emissions at Antenna Terminals.....	60
5.8	Radiates Spurious Emission.....	80
6	Main Test Instruments.....	100

## Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Isotropic Radiated power	27.50(d)(4)/27.50(h)(2)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	27.53(h)/27.53(m)	PASS
5	Peak-to-Average Power Ratio	27.50(d)/KDB971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 27.54	PASS
7	Spurious Emissions at Antenna Terminals	2.1051/27.53(h) /27.53(m)	PASS
8	Radiates Spurious Emission	2.1053 /27.53(h) /27.53(m)	PASS
Date of Testing: January 9, 2018~January 25, 2018 and March 8, 2018~ March 31, 2018			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			

# 1 Test Laboratory

## 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

## 1.2 Test facility

### **CNAS (accreditation number: L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

### **VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2 General Description of Equipment under Test

### Client Information

<b>Applicant</b>	ZTE Corporation
<b>Applicant address</b>	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
<b>Manufacturer</b>	ZTE Corporation
<b>Manufacturer address</b>	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

### General information

EUT Description			
Model	ZTE BLADE V0920/ ZTE BLADE V9 VITA/BLADE V9 VITA		
IMEI	867942030014059		
Hardware Version	udvA		
Software Version	CLA_PE_BLADE_V9_VITAV1.0.0		
Power Supply	Battery/AC adapter		
Antenna Type	Internal Antenna		
Test Mode(s)	WCDMA Band IV;LTE Band 4; LTE Band 7;		
Test Modulation	(WCDMA)QPSK; (LTE)QPSK 16QAM;		
HSDPA UE Category	24		
HSUPA UE Category	6		
LTE Category	4		
Maximum E.I.R.P/ E.R.P	WCDMA Band IV:	20.04dBm	
	LTE Band 4:	20.90dBm	
	LTE Band 7:	23.05dBm	
Rated Power Supply Voltage:	3.85V		
Extreme Voltage	Minimum: 3.65V    Maximum: 4.4V		
Extreme Temperature	Lowest: -30°C    Highest: +55°C		
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)
	WCDMA Band IV	1710 ~ 1755	2110 ~ 2155
	LTE Band 4	1710 ~ 1755	2110 ~ 2155
	LTE Band 7	2500 ~ 2570	2620 ~ 2690

<b>EUT Accessory</b>	
Adapter 1	Manufacturer: Shenzhen Dokocom Energy Technology Co., Ltd. Model: STC-A515A-Z
Adapter 2	Manufacturer: SHENZHEN RUIJING INDUSTRIAL CO LTD Model: STC-A515A-Z
Adapter 3	Manufacturer: Jiangsu Chenyang Electron Co., Ltd. Model: STC-A515A-Z
Earphone 1	Manufacturer: JUWEI ELECTRONICS CO., LTD Model: JWEP1036-Z01R
Earphone 2	Manufacturer: Shenzhen FDC Electronics Co., Ltd. Model: DEM-66
Battery	Manufacturer: Zhongshan Tianmao Battery Co.,Ltd Model: Li3931T44P8h806139
USB Cable 1	Manufacturer: kingpower-tech 100cm Cable, Shielded
USB Cable 2	Manufacturer: LUXSHARE-ICT 100cm Cable, Shielded
<p>Note: 1. The information of the EUT is declared by the manufacturer.</p> <p>2. There is more than one USB cable, each one should be applied throughout the compliance test respectively, and however, only the worst case (USB cable 1) will be recorded in this report.</p>	

### 3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### Test standards

**FCC CFR47 Part 2 (2017)**

**FCC CFR47 Part 27C (2017)**

**ANSI/TIA-603-E (2016)**

**KDB 971168 D01 Power Meas License Digital Systems v03**



## 4 Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in WCDMA is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for WCDMA Band IV:

	Test items	Modes	Modulation
Conducted Test cases	RF power output	WCDMA Band IV	RMC /HSDPA/HSUPA /DC-HSDPA
	Effective Isotropic Radiated power	WCDMA Band IV	RMC
	Occupied Bandwidth	WCDMA Band IV	RMC
	Band Edge Compliance	WCDMA Band IV	RMC
	Peak-to-Average Power Ratio	WCDMA Band IV	RMC
	Frequency Stability	WCDMA Band IV	RMC
	Spurious Emissions at Antenna Terminals	WCDMA Band IV	RMC
Radiated Test cases	Radiates Spurious Emission	WCDMA Band IV	RMC

Test modes are chosen to be reported as the worst case configuration below for LTE Band 4/7:

Test items	Modes	Bandwidth (MHz)						Modulation		RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	LTE 4	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 7	-	-	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	LTE 4	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 7	-	-	O	O	O	O	O	O	-	-	O	O	O	O
Occupied Bandwidth	LTE 4	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 7	-	-	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	LTE 4	O	O	O	O	O	O	O	O	O	-	O	O	-	O
	LTE 7	-	-	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	LTE 4	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 7	-	-	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	LTE 4	O	O	O	O	O	O	O	O	-	-	O	-	O	-
	LTE 7	-	-	O	O	O	O	O	O	-	-	O	-	O	-
Spurious Emissions at Antenna Terminals	LTE 4	O	O	O	O	O	O	O	-	O	-	-	O	O	O
	LTE 7	-	-	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	LTE 4	O	O	O	O	O	O	O	-	O	-	-	O	O	O
	LTE 7	-	-	O	O	O	O	O	-	O	-	-	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.														

## 5 Test Case Results

### 5.1 RF Power Output


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

#### Test Setup

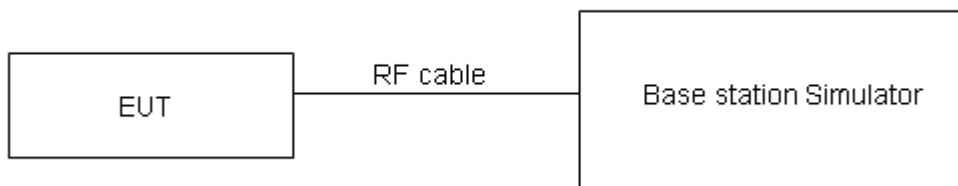

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

#### Limits

No specific RF power output requirements in part 2.1046.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U=0.4$  dB.

**Test Results**

WCDMA Band IV		Conducted Power(dBm)		
		Channel 1312	Channel 1413	Channel 1513
		1712.4 (MHz)	1732.6 (MHz)	1752.6(MHz)
<b>RMC</b>		23.12	23.26	23.34
<b>HSDPA</b>	Sub - Test 1	22.08	21.98	22.11
	Sub - Test 2	20.11	20.29	20.51
	Sub - Test 3	19.12	19.31	19.57
	Sub - Test 4	18.27	18.54	18.71
<b>HSUPA</b>	Sub - Test 1	21.93	22.07	22.21
	Sub - Test 2	21.34	21.58	21.76
	Sub - Test 3	21.92	22.16	22.21
	Sub - Test 4	21.97	22.18	22.24
	Sub - Test 5	22.01	22.23	22.29
<b>DC-HSDPA</b>	Sub - Test 1	21.94	21.92	21.98
	Sub - Test 2	19.96	20.13	20.37
	Sub - Test 3	18.96	19.14	19.42
	Sub - Test 4	18.10	18.38	18.55

Note:

- 1) The maximum RF Output Power numbers are marks in bold.
- 2) The following testing in RMC based on the maximum RF Output Power.

LTE Band 4				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				19957/1710.7	20175/1732.5	20393/1754.3
1.4MHz	QPSK	1	0	22.36	22.40	22.62
		1	2	22.27	22.48	22.41
		1	5	22.44	22.40	22.40
		3	0	22.15	22.30	22.41
		3	2	22.20	22.27	22.26
		3	3	22.22	22.26	22.23
		6	0	21.20	21.34	21.45
	16QAM	1	0	21.27	21.35	21.37
		1	2	21.17	21.39	21.39
		1	5	21.32	21.37	21.17
		3	0	21.26	21.34	21.32
		3	2	21.17	21.28	21.33
		3	3	21.24	21.34	21.16
		6	0	20.29	20.36	20.50

Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				19965/1711.5	20175/1732.5	20385/1753.5
3MHz	QPSK	1	0	22.38	22.44	22.65
		1	7	22.30	22.53	22.45
		1	14	22.47	22.45	22.44
		8	0	21.25	21.42	21.54
		8	4	21.32	21.37	21.38
		8	7	21.32	21.37	21.33
		15	0	21.23	21.38	21.48
	16QAM	1	0	21.30	21.37	21.40
		1	7	21.20	21.44	21.43
		1	14	21.34	21.41	21.20
		8	0	20.37	20.47	20.44
		8	4	20.28	20.41	20.45
		8	7	20.34	20.46	20.29
		15	0	20.32	20.40	20.53
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				19975/1712.5	20175/1732.5	20375/1752.5
5MHz	QPSK	1	0	22.35	22.42	22.61
		1	13	22.28	22.49	22.42
		1	24	22.44	22.40	22.40
		12	0	21.22	21.37	21.50
		12	6	21.30	21.33	21.33
		12	13	21.30	21.35	21.29
		25	0	21.21	21.37	21.46
	16QAM	1	0	21.27	21.33	21.37
		1	13	21.17	21.42	21.40
		1	24	21.31	21.39	21.16
		12	0	20.35	20.43	20.41
		12	6	20.25	20.36	20.41
		12	13	20.31	20.41	20.25
		25	0	20.30	20.36	20.48
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20000/1715	20175/1732.5	20350/1750
10MHz	QPSK	1	0	22.37	22.43	22.64
		1	25	22.31	22.54	22.46
		1	49	22.46	22.44	22.43
		25	0	21.25	21.42	21.54
		25	13	21.33	21.38	21.37
		25	25	21.32	21.39	21.34
		50	0	21.29	21.39	21.50
	16QAM	1	0	21.29	21.36	21.39
		1	25	21.20	21.46	21.43



		1	49	21.34	21.41	21.19
		25	0	20.38	20.48	20.45
		25	13	20.27	20.40	20.44
		25	25	20.34	20.46	20.29
		50	0	20.33	20.41	20.52
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20025/1717.5	20175/1732.5	20325/1747.5
15MHz	QPSK	1	0	22.36	22.39	22.62
		1	38	22.29	22.53	22.43
		1	74	22.43	22.39	22.39
		36	0	21.23	21.38	21.51
		36	18	21.30	21.33	21.33
		36	39	21.29	21.36	21.30
		75	0	21.27	21.35	21.45
	16QAM	1	0	21.24	21.34	21.37
		1	38	21.18	21.43	21.41
		1	74	21.31	21.37	21.16
		36	0	20.35	20.46	20.42
		36	18	20.24	20.35	20.40
		36	39	20.32	20.42	20.26
		75	0	20.30	20.36	20.48
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20050/1720	20175/1732.5	20300/1745
20MHz	QPSK	1	0	22.33	22.35	22.59
		1	50	22.28	22.49	22.41
		1	99	22.41	22.38	22.36
		50	0	21.20	21.33	21.47
		50	25	21.28	21.29	21.30
		50	50	21.26	21.31	21.26
		100	0	21.24	21.30	21.41
	16QAM	1	0	21.22	21.30	21.32
		1	50	21.14	21.41	21.37
		1	99	21.29	21.34	21.14
		50	0	20.32	20.42	20.39
		50	25	20.21	20.33	20.37
		50	50	20.29	20.37	20.22
		100	0	20.28	20.32	20.45

LTE Band 7				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20775/2502.5	21100/2535	21425/2567.5
5MHz	QPSK	1	0	22.43	22.41	22.61
		1	13	22.34	22.49	22.72
		1	24	22.46	22.47	22.58
		12	0	21.39	21.34	21.37
		12	6	21.42	21.38	21.41
		12	13	21.35	21.31	21.47
		25	0	21.35	21.37	21.47
	16QAM	1	0	21.32	21.31	21.19
		1	13	21.29	21.33	21.29
		1	24	21.35	21.38	21.31
		12	0	20.37	20.40	20.49
		12	6	20.36	20.37	20.54
		12	13	20.29	20.34	20.45
		25	0	20.27	20.37	20.55
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20800/2505	21100/2535	21400/2565
10MHz	QPSK	1	0	22.45	22.42	22.64
		1	25	22.37	22.54	22.76
		1	49	22.48	22.51	22.61
		25	0	21.42	21.39	21.41
		25	13	21.45	21.43	21.45
		25	25	21.37	21.35	21.52
		50	0	21.43	21.39	21.51
	16QAM	1	0	21.34	21.34	21.21
		1	25	21.32	21.37	21.32
		1	49	21.38	21.40	21.34
		25	0	20.40	20.45	20.53
		25	13	20.38	20.41	20.57
		25	25	20.32	20.39	20.49
		50	0	20.30	20.42	20.59
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20825/2507.5	21100/2535	21375/2562.5
15MHz	QPSK	1	0	22.44	22.38	22.62
		1	38	22.35	22.53	22.73
		1	74	22.45	22.46	22.57
		36	0	21.40	21.35	21.38
		36	18	21.42	21.38	21.41
		36	39	21.34	21.32	21.48
		75	0	21.41	21.35	21.46



Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20850/2510	21100/2535	21350/2560
20MHz	16QAM	1	0	21.29	21.32	21.19
		1	38	21.30	21.34	21.30
		1	74	21.35	21.36	21.31
		36	0	20.37	20.43	20.50
		36	18	20.35	20.36	20.53
		36	39	20.30	20.35	20.46
		75	0	20.27	20.37	20.55
	QPSK	1	0	22.41	22.34	22.59
		1	50	22.34	22.49	22.71
		1	99	22.43	22.45	22.54
		50	0	21.37	21.30	21.34
		50	25	21.40	21.34	21.38
		50	50	21.31	21.27	21.44
		100	0	21.38	21.30	21.42
16QAM	1	0	21.27	21.28	21.14	
	1	50	21.26	21.32	21.26	
	1	99	21.33	21.33	21.29	
	50	0	20.34	20.39	20.47	
	50	25	20.32	20.34	20.50	
	50	50	20.27	20.30	20.42	
	100	0	20.25	20.33	20.52	



## 5.2 Effective Isotropic Radiated Power


### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

1. The testing follows FCC KDB 971168 v03 Section 5.8 and ANSI/TIA-603-E (2016).
  - a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
  - b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
  - c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
  - d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading.  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
  - e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:  $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
  - f) The maximum ERP is the maximum value determined in the preceding step.
  - g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:  
 $ERP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBd)}$   
 where: dBd refers to gain relative to an ideal dipole.  
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

**Test setup**

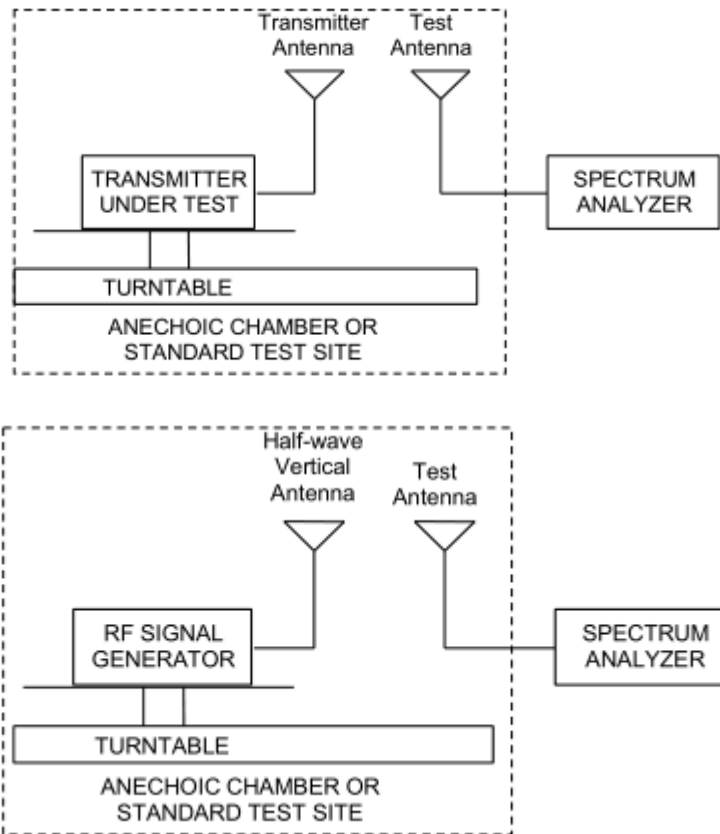

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

**Limits**

Rule Part 27.50(d) (4) specifies that “Fixed, mobile and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP”

Rule Part 27.50(h) (2) specifies that “Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.”

Part 27.50(d)(4)Limit (EIRP)	$\leq 1 \text{ W}$ (30 dBm)
Part 27.50(h)(2) Limit (EIRP)	$\leq 2 \text{ W}$ (33 dBm)

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 1.19 \text{ dB}$

**Test Results**

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Channel	Frequency (MHz)	Polarization	Output Power (dBm)	Losses (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Conclusion
WCDMA Band IV	Low	1712.4	Horizontal	-28.65	-45.44	1.82	18.61	30	Pass
	Mid	1732.6	Horizontal	-27.72	-45.38	1.96	19.62	30	Pass
	High	1752.6	Horizontal	-27.27	-45.38	1.93	20.04	30	Pass

LTE Band 4									
Bandwidth	Channel	Frequency (MHz)	Polarization	Output Power (dBm)	Losses (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	1710.7	Horizontal	-36.42	-54.30	1.44	19.32	30	Pass
	Mid	1732.5	Horizontal	-35.43	-54.32	1.57	20.45	30	Pass
	High	1754.3	Horizontal	-35.07	-54.10	1.72	20.75	30	Pass
3 MHz (QPSK)	Low	1711.5	Horizontal	-36.67	-54.35	1.44	19.12	30	Pass
	Mid	1732.5	Horizontal	-35.47	-54.41	1.57	20.51	30	Pass
	High	1753.5	Horizontal	-35.35	-54.48	1.72	20.85	30	Pass
5 MHz (QPSK)	Low	1712.5	Horizontal	-36.76	-54.34	1.44	19.02	30	Pass
	Mid	1732.5	Horizontal	-35.41	-54.32	1.57	20.47	30	Pass
	High	1752.5	Horizontal	-34.94	-54.13	1.72	20.90	30	Pass
10 MHz (QPSK)	Low	1715	Horizontal	-36.29	-54.32	1.44	19.47	30	Pass
	Mid	1732.5	Horizontal	-35.88	-54.41	1.57	20.10	30	Pass
	High	1750	Horizontal	-35.45	-54.52	1.66	20.73	30	Pass
15 MHz (QPSK)	Low	1717.5	Horizontal	-36.32	-54.35	1.49	19.51	30	Pass
	Mid	1732.5	Horizontal	-35.56	-54.32	1.57	20.32	30	Pass
	High	1747.5	Horizontal	-35.07	-54.17	1.66	20.76	30	Pass
20 MHz (QPSK)	Low	1720	Horizontal	-36.72	-54.44	1.49	19.21	30	Pass
	Mid	1732.5	Horizontal	-35.63	-54.41	1.57	20.35	30	Pass
	High	1745	Horizontal	-35.68	-54.59	1.63	20.54	30	Pass
1.4 MHz (16QAM)	Low	1710.7	Horizontal	-36.63	-54.30	1.44	19.11	30	Pass
	Mid	1732.5	Horizontal	-35.57	-54.32	1.57	20.31	30	Pass
	High	1754.3	Horizontal	-35.16	-54.10	1.72	20.66	30	Pass
3 MHz (16QAM)	Low	1711.5	Horizontal	-36.77	-54.35	1.44	19.02	30	Pass
	Mid	1732.5	Horizontal	-35.64	-54.41	1.57	20.34	30	Pass
	High	1753.5	Horizontal	-35.52	-54.48	1.72	20.68	30	Pass
5 MHz (16QAM)	Low	1712.5	Horizontal	-36.90	-54.34	1.44	18.88	30	Pass
	Mid	1732.5	Horizontal	-35.50	-54.32	1.57	20.38	30	Pass
	High	1752.5	Horizontal	-35.17	-54.13	1.72	20.67	30	Pass



10 MHz (16QAM)	Low	1715	Horizontal	-36.48	-54.32	1.44	19.28	30	Pass
	Mid	1732.5	Horizontal	-36.01	-54.41	1.57	19.97	30	Pass
	High	1750	Horizontal	-35.54	-54.52	1.66	20.64	30	Pass
15 MHz (16QAM)	Low	1717.5	Horizontal	-36.45	-54.35	1.49	19.38	30	Pass
	Mid	1732.5	Horizontal	-35.84	-54.32	1.57	20.04	30	Pass
	High	1747.5	Horizontal	-35.25	-54.17	1.66	20.58	30	Pass
20 MHz (16QAM)	Low	1720	Horizontal	-36.82	-54.44	1.49	19.11	30	Pass
	Mid	1732.5	Horizontal	-35.88	-54.41	1.57	20.10	30	Pass
	High	1745	Horizontal	-35.87	-54.59	1.63	20.35	30	Pass

## LTE Band 7

Band width	Channel	Frequency (MHz)	Polarization	Output Power (dBm)	Losses (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Conclusion
5 MHz (QPSK)	Low	2502.5	Horizontal	-39.03	-59.64	1.81	22.42	33	Pass
	Mid	2535	Horizontal	-38.61	-59.72	1.81	22.92	33	Pass
	High	2567.5	Horizontal	-39.12	-59.98	1.83	22.69	33	Pass
10 MHz (QPSK)	Low	2505	Horizontal	-38.99	-59.61	1.82	22.44	33	Pass
	Mid	2535	Horizontal	-38.95	-59.72	1.81	22.58	33	Pass
	High	2565	Horizontal	-38.78	-60.02	1.81	23.05	33	Pass
15 MHz (QPSK)	Low	2507.5	Horizontal	-38.74	-59.29	1.80	22.35	33	Pass
	Mid	2535	Horizontal	-38.64	-59.72	1.81	22.89	33	Pass
	High	2562.5	Horizontal	-38.74	-59.46	1.82	22.54	33	Pass
20 MHz (QPSK)	Low	2510	Horizontal	-38.91	-59.52	1.77	22.38	33	Pass
	Mid	2535	Horizontal	-38.74	-59.72	1.81	22.79	33	Pass
	High	2560	Horizontal	-39.49	-60.01	1.82	22.34	33	Pass
5 MHz (16QAM)	Low	2502.5	Horizontal	-39.21	-59.64	1.81	22.24	33	Pass
	Mid	2535	Horizontal	-38.78	-59.72	1.81	22.75	33	Pass
	High	2567.5	Horizontal	-39.43	-59.98	1.83	22.38	33	Pass
10 MHz (16QAM)	Low	2505	Horizontal	-39.12	-59.61	1.82	22.31	33	Pass
	Mid	2535	Horizontal	-39.06	-59.72	1.81	22.47	33	Pass
	High	2565	Horizontal	-38.96	-60.02	1.81	22.87	33	Pass
15 MHz (16QAM)	Low	2507.5	Horizontal	-38.88	-59.29	1.80	22.21	33	Pass
	Mid	2535	Horizontal	-38.89	-59.72	1.81	22.64	33	Pass
	High	2562.5	Horizontal	-38.97	-59.46	1.82	22.31	33	Pass
20 MHz (16QAM)	Low	2510	Horizontal	-39.22	-59.52	1.77	22.07	33	Pass
	Mid	2535	Horizontal	-39.05	-59.72	1.81	22.48	33	Pass
	High	2560	Horizontal	-39.67	-60.01	1.82	22.16	33	Pass

### 5.3 Occupied Bandwidth

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51 kHz, VBW is set to 160 kHz for WCDMA Band IV.

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 4 (1.4MHz).


RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 4 (3MHz).

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 4/7 (5MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 4/7 (10MHz/15MHz/20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

#### Test Setup

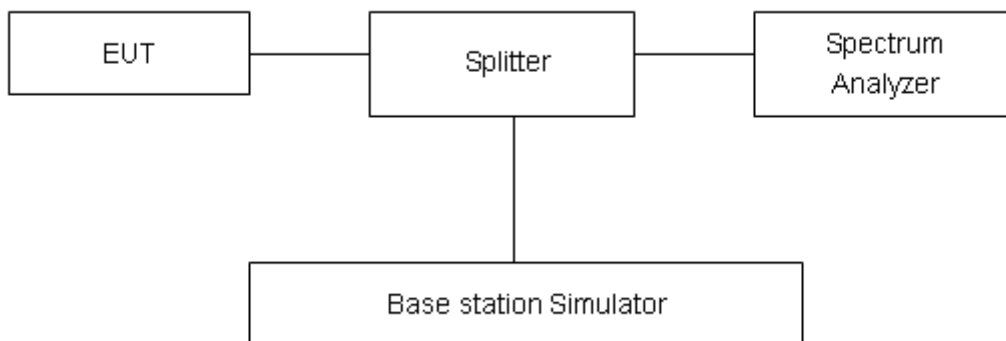

#### Limits

No specific occupied bandwidth requirements in part 2.1049.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U=624\text{Hz}$ .

#### Test Result



Mode	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
WCDMA Band IV (RMC)	1312	1712.4	4.1249	4.700
	1413	1732.6	4.1125	4.693
	1513	1752.6	4.0969	4.675




LTE Band 4						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	19957	1710.7	1.1295	1.374
			20175	1732.5	1.1321	1.424
			20393	1754.3	1.1273	1.335
		3	19965	1711.5	2.7444	3.074
			20175	1732.5	2.7542	3.084
			20385	1753.5	2.7412	3.064
		5	19975	1712.5	4.5117	5.006
			20175	1732.5	4.5201	5.015
			20375	1752.5	4.5084	5.056
		10	20000	1715	9.0481	10.170
			20175	1732.5	9.0286	13.370
			20350	1750	9.0419	10.130
		15	20025	1717.5	13.4680	14.790
			20175	1732.5	13.3990	14.610
			20325	1747.5	13.4540	14.700
		20	20050	1720	17.9020	19.180
			20175	1732.5	17.8510	19.300
			20300	1745	17.8650	19.540
	16QAM	1.4	19957	1710.7	1.1271	1.351
			20175	1732.5	1.1259	1.340
			20393	1754.3	1.1205	1.366
		3	19965	1711.5	2.7638	3.043
			20175	1732.5	2.7417	3.060
			20385	1753.5	2.7350	3.080
		5	19975	1712.5	4.5074	5.002
			20175	1732.5	4.5277	5.006
			20375	1752.5	4.5340	5.026
		10	20000	1715	9.0603	10.040
			20175	1732.5	9.0321	10.060
			20350	1750	9.0302	10.040
15	20025	1717.5	13.4630	14.670		















		20	20175	1732.5	13.4420	14.610
			20325	1747.5	13.4440	14.750
			20050	1720	17.9310	19.330
			20175	1732.5	17.8620	19.270
			20300	1745	17.8660	19.370

LTE Band 7						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	5	20775	2502.5	4.5208	4.999
			21100	2535	4.5105	5.008
			21425	2567.5	4.5042	5.030
		10	20800	2505	9.0511	10.180
			21100	2535	9.0113	10.050
			21400	2565	9.0303	10.020
		15	20825	2507.5	13.4730	14.880
			21100	2535	13.4160	14.700
			21375	2562.5	13.4410	14.750
		20	20850	2510	17.8720	19.330
			21100	2535	17.8770	19.290
			21350	2560	17.8800	19.430
	16QAM	5	20775	2502.5	4.5030	4.997
			21100	2535	4.5213	5.030
			21425	2567.5	4.5319	5.032
		10	20800	2505	9.0478	10.030
			21100	2535	9.0248	10.080
			21400	2565	9.0172	10.050
		15	20825	2507.5	13.4760	14.740
			21100	2535	13.4720	14.710
			21375	2562.5	13.4470	14.820
		20	20850	2510	17.9100	19.420
			21100	2535	17.8850	19.310
			21350	2560	17.8500	19.280



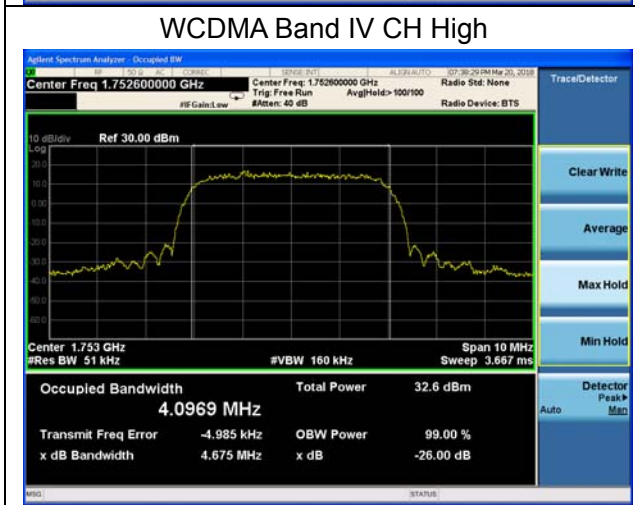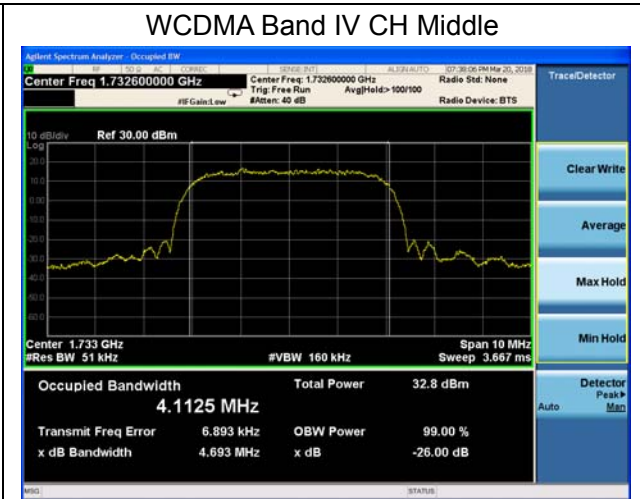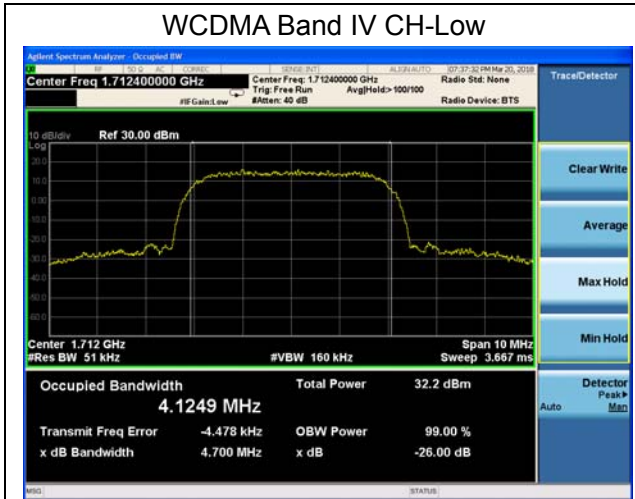


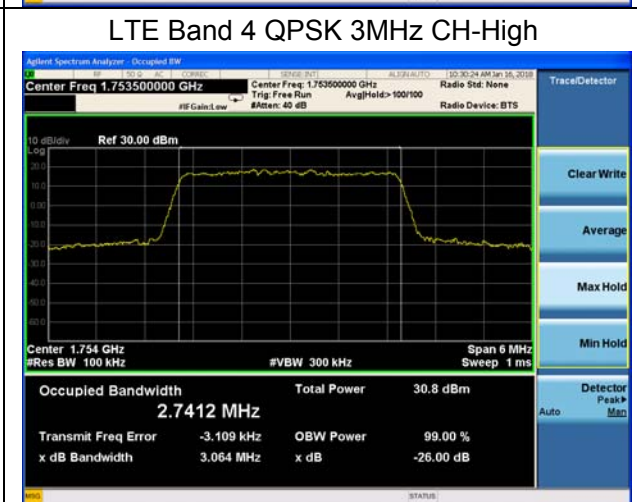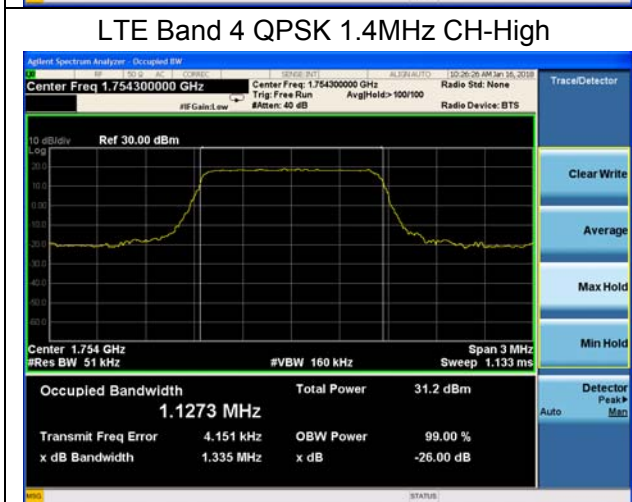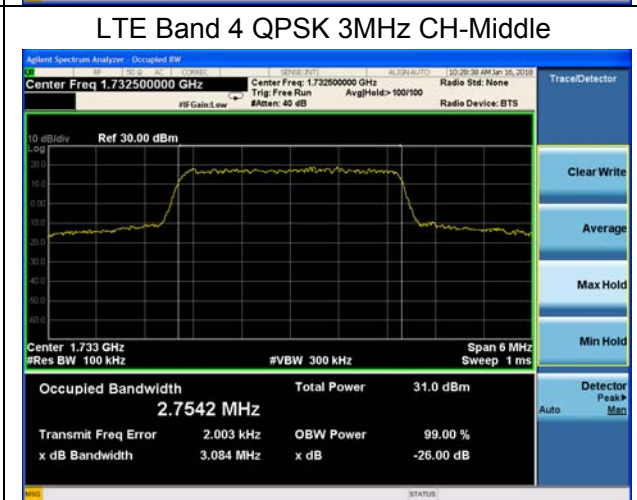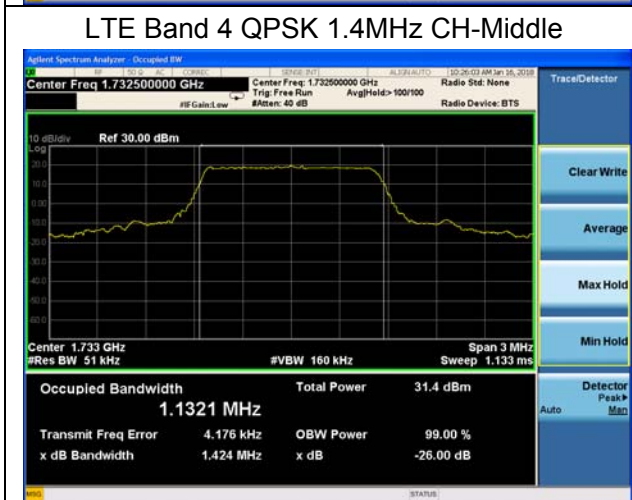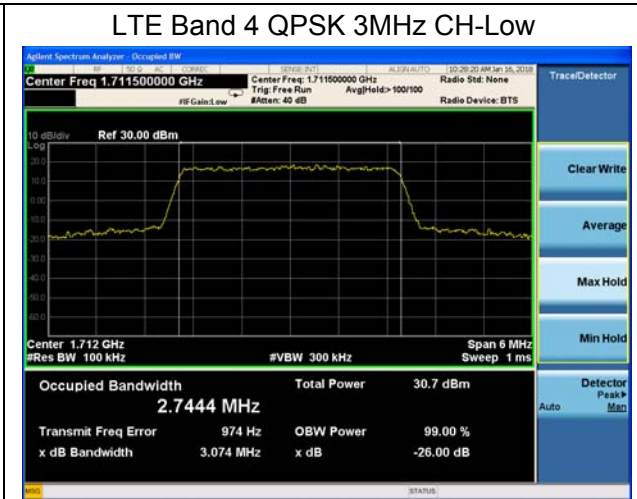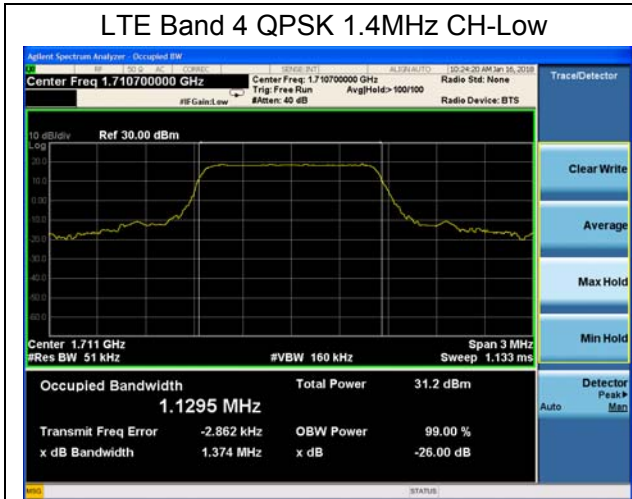

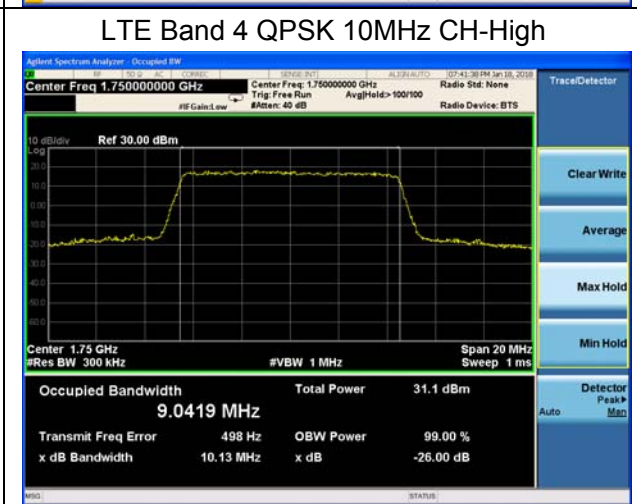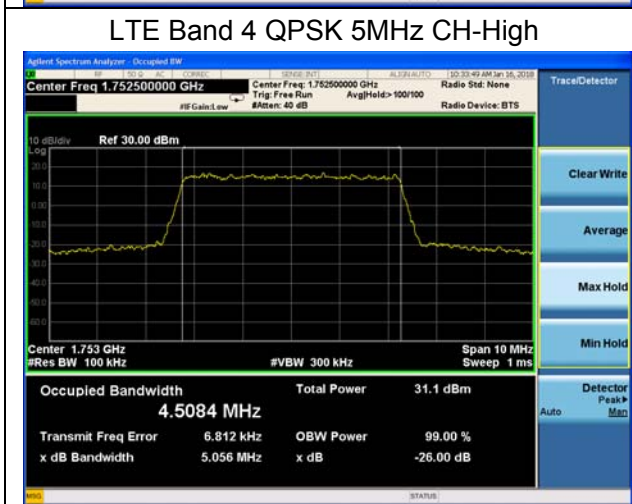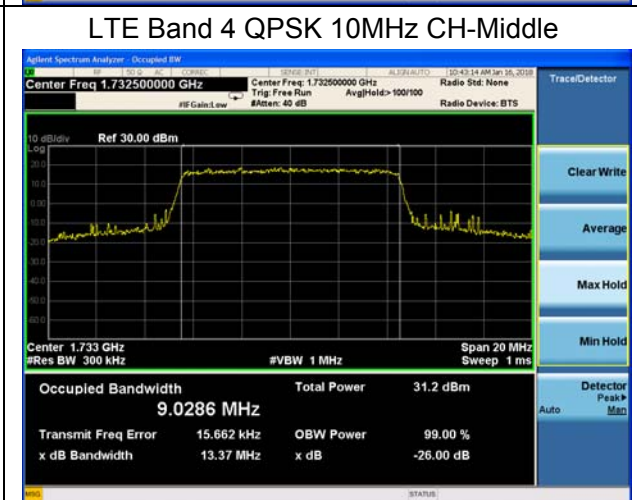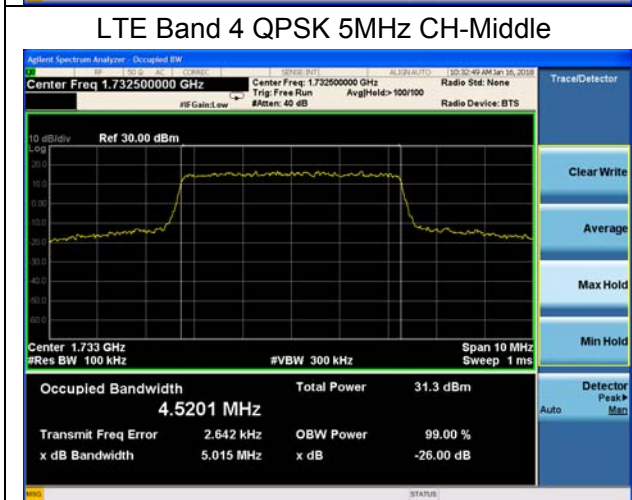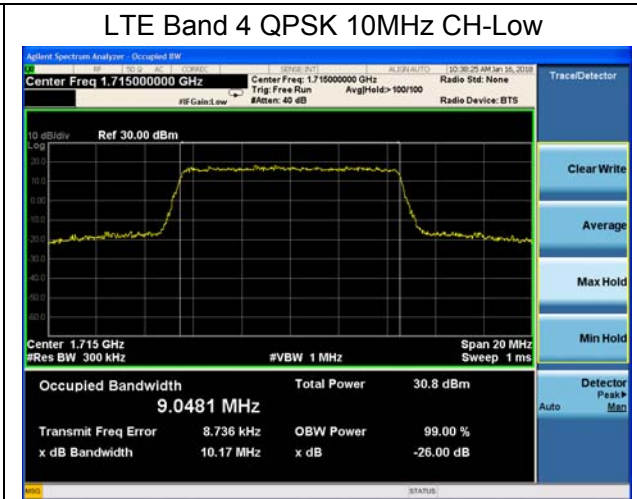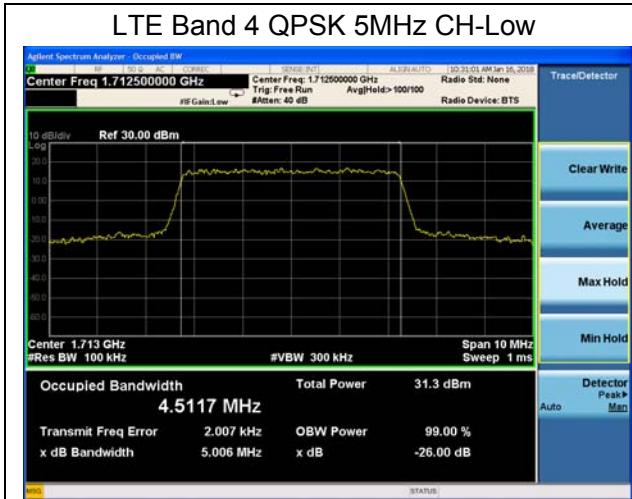





LTE Band 4 QPSK 15MHz CH-Low

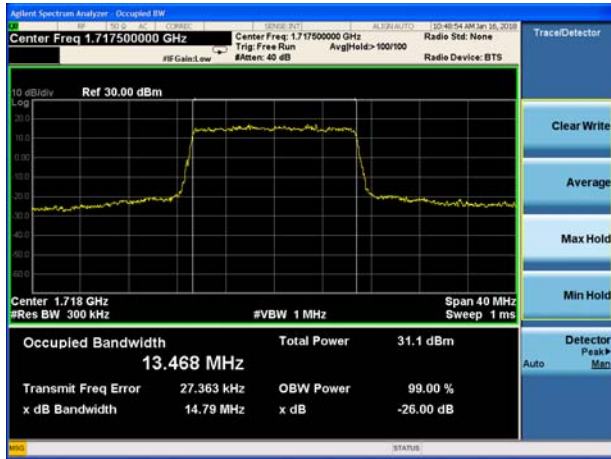

LTE Band 4 QPSK 20MHz CH-Low

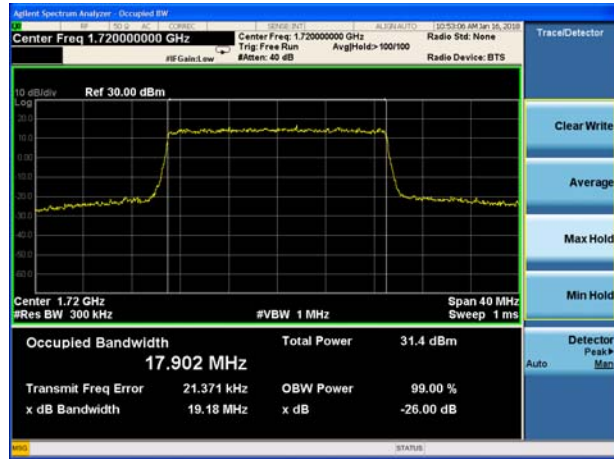


LTE Band 4 QPSK 15MHz CH-Middle

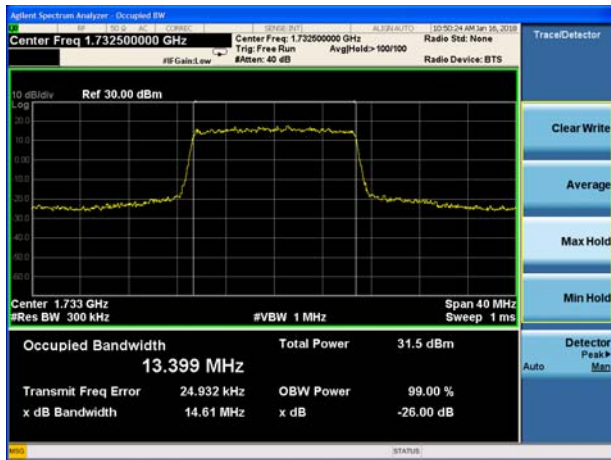

LTE Band 4 QPSK 20MHz CH-Middle















LTE Band 4 QPSK 15MHz CH-High






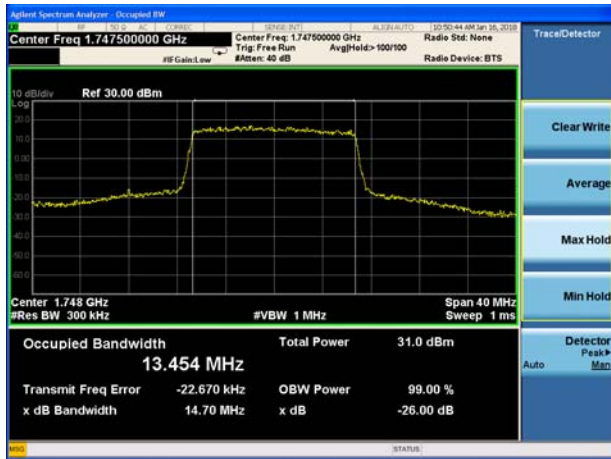








LTE Band 4 QPSK 20MHz CH-High



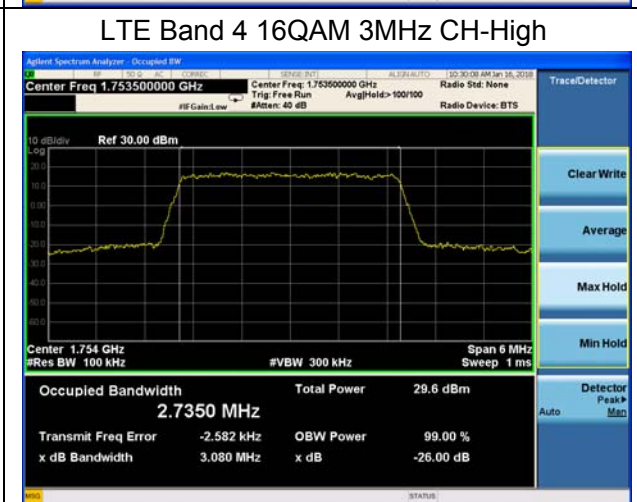
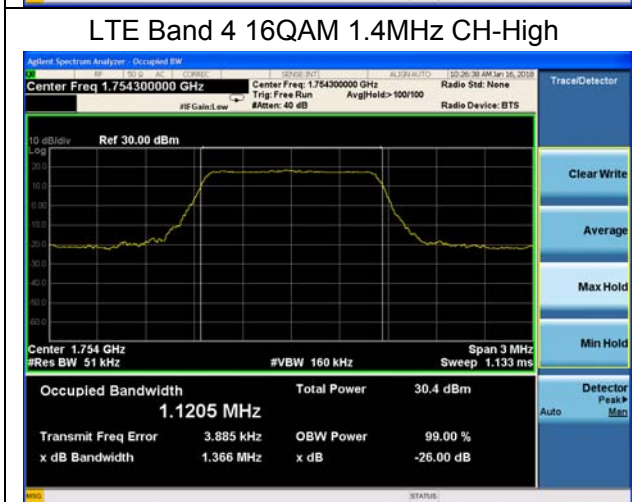
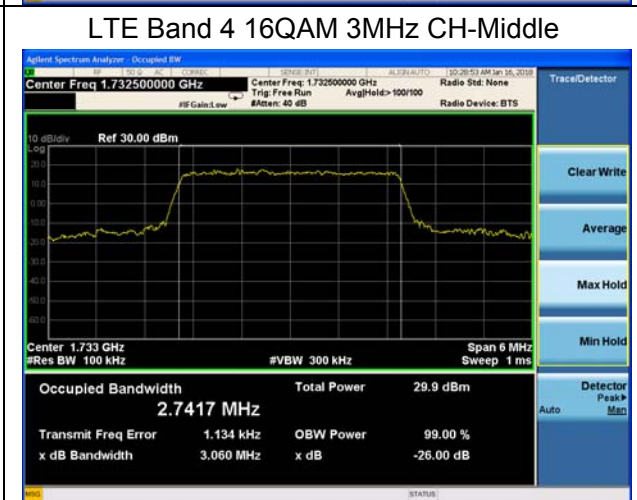
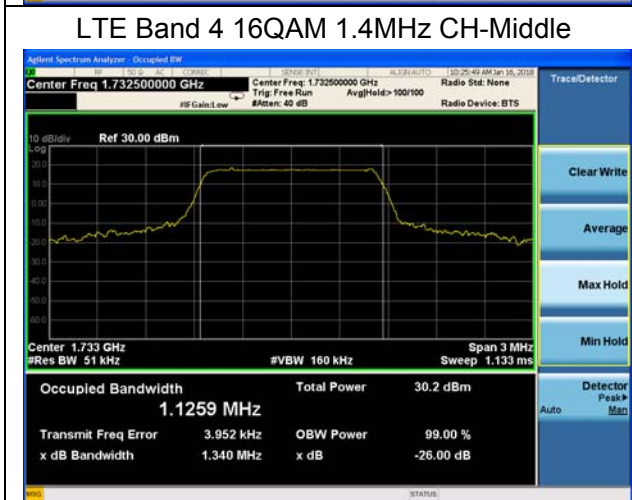
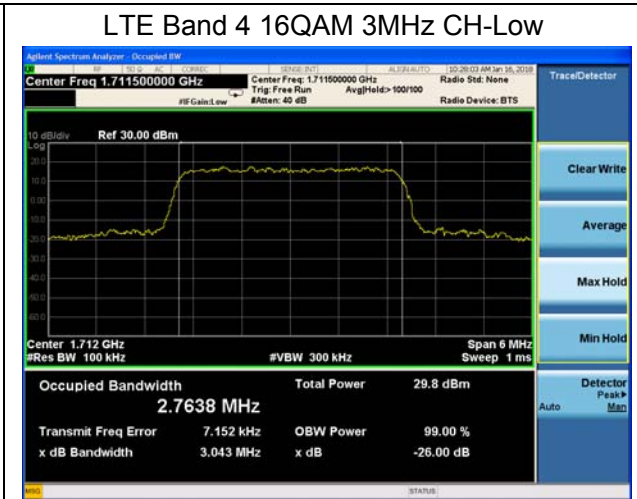
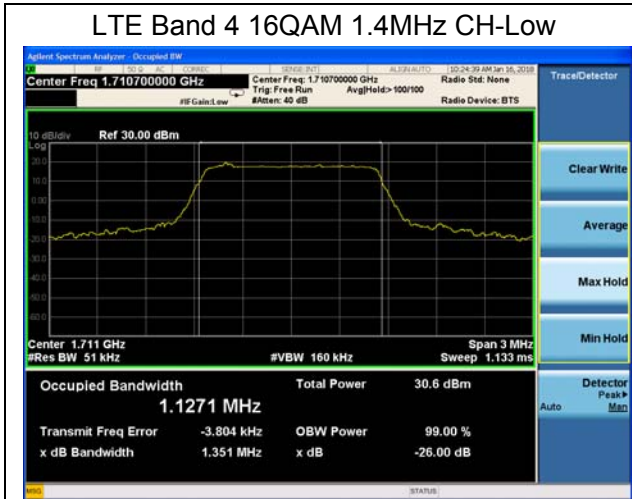


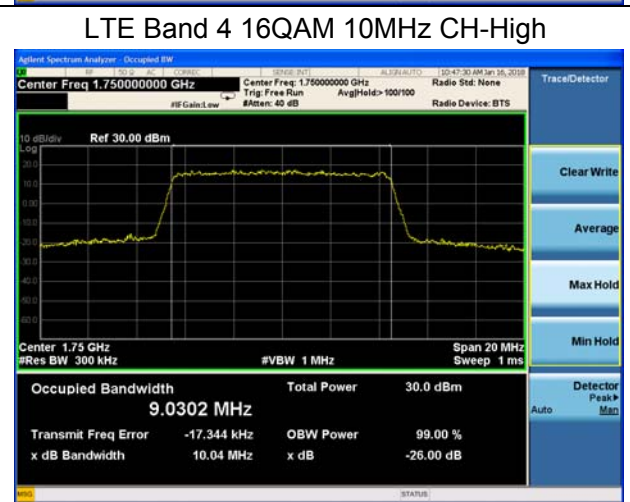
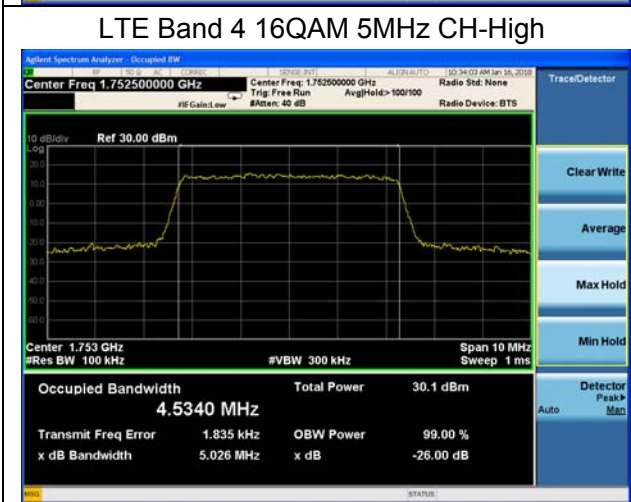
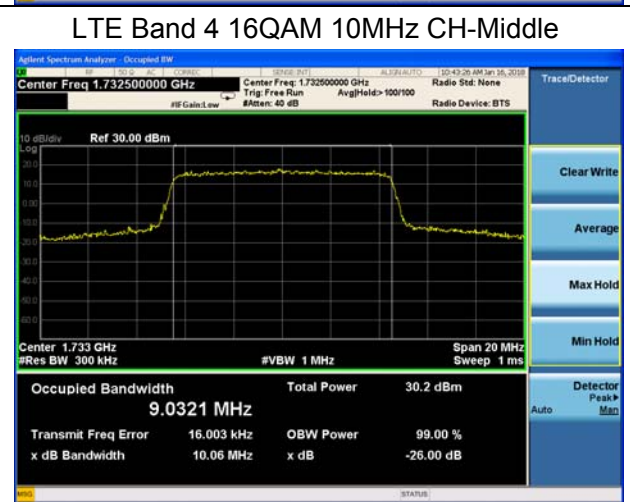
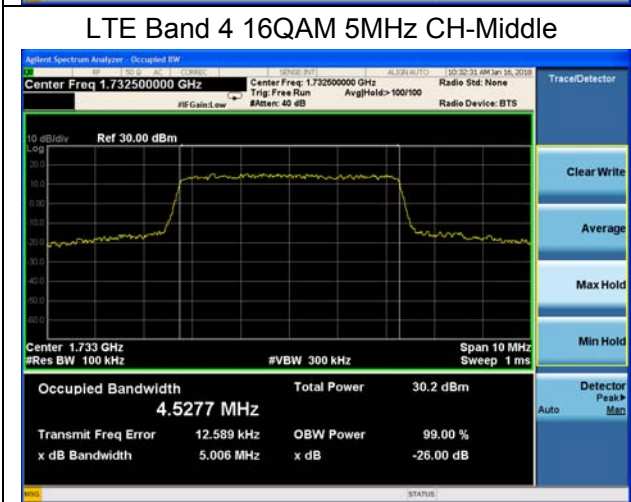
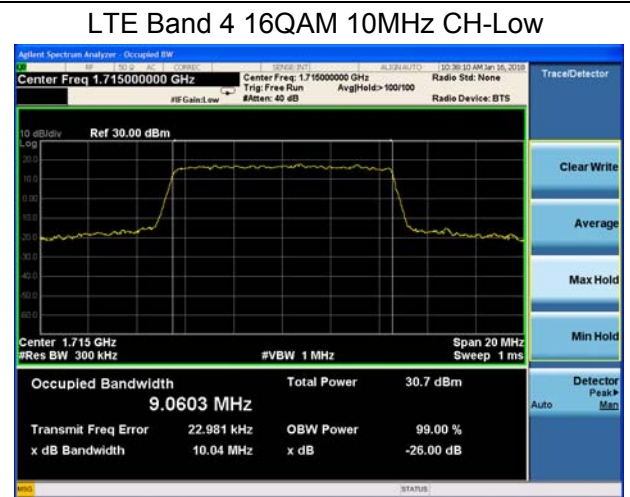
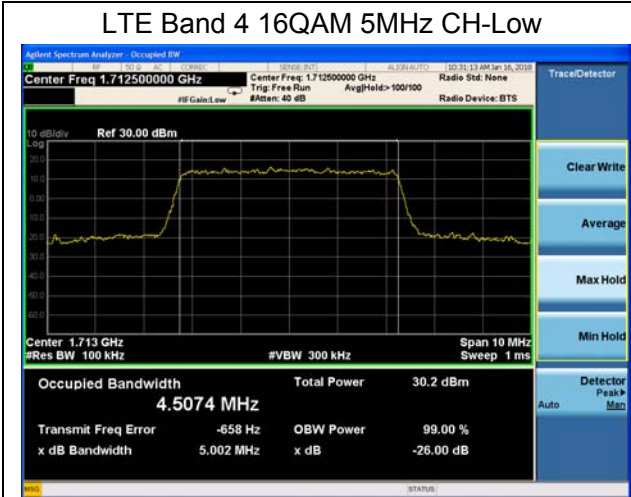


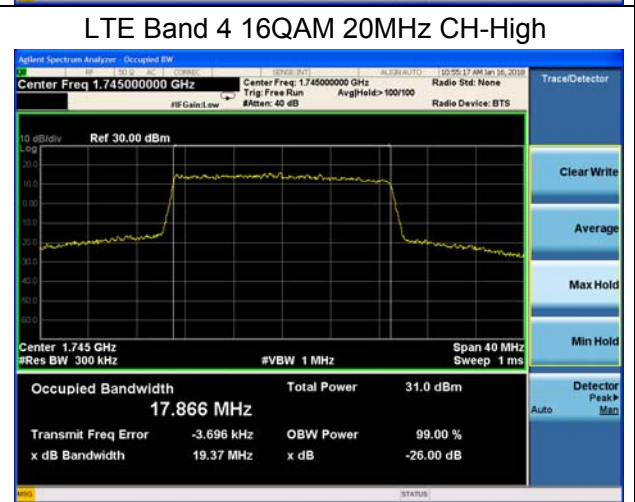
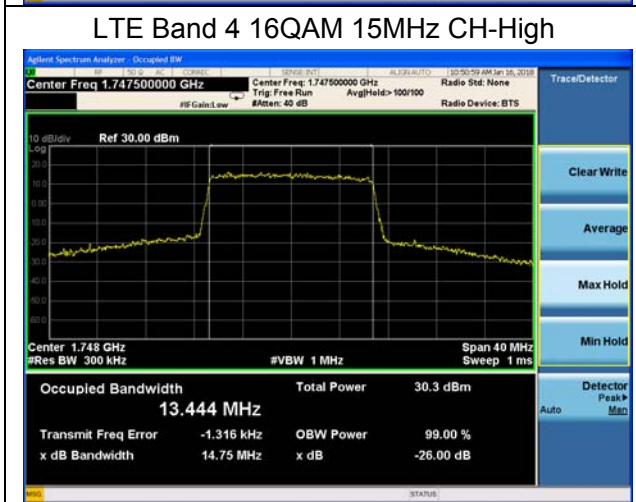
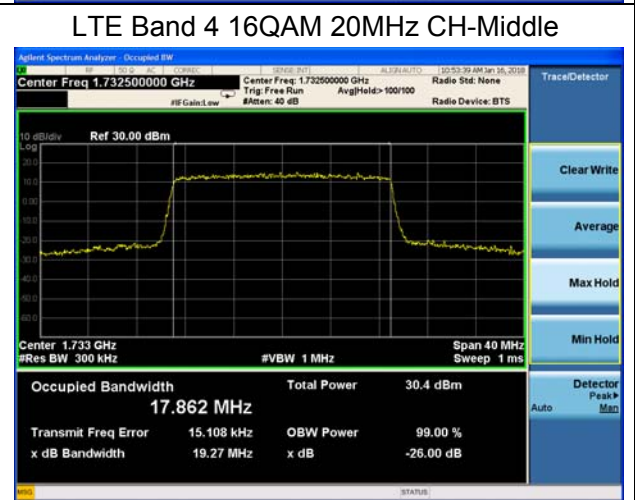
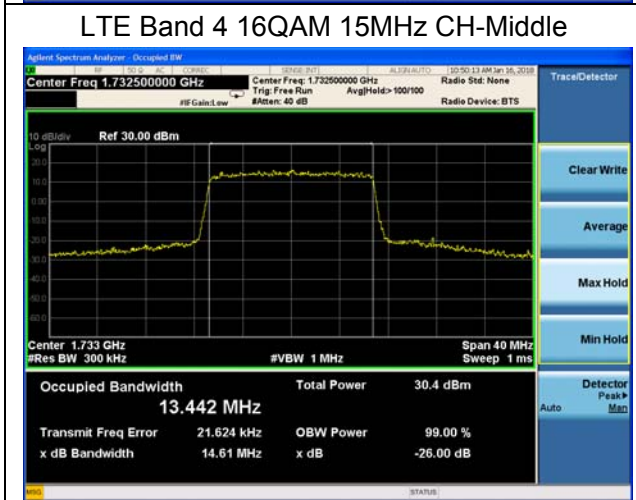
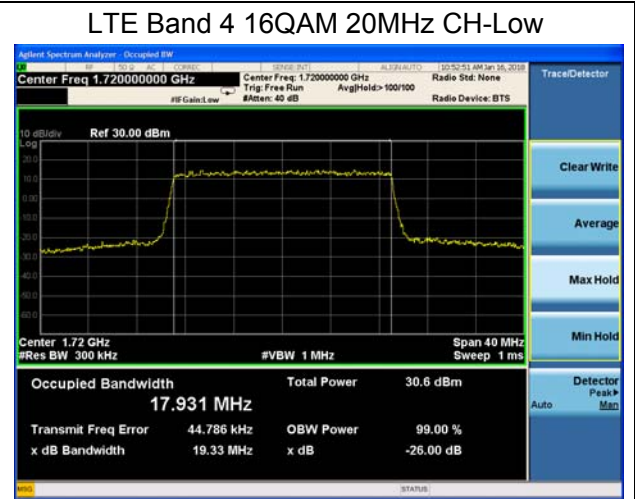
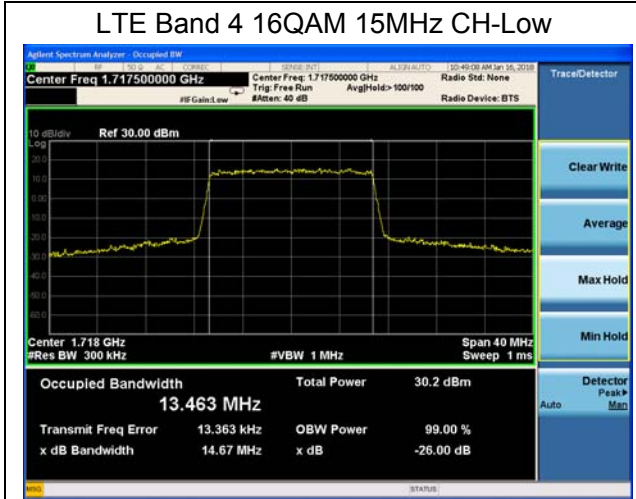


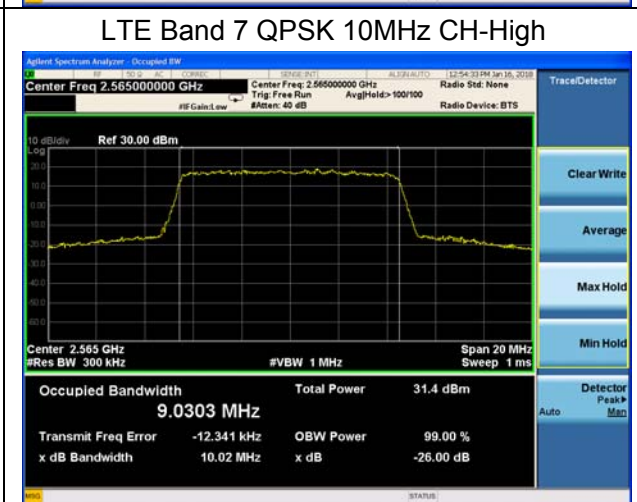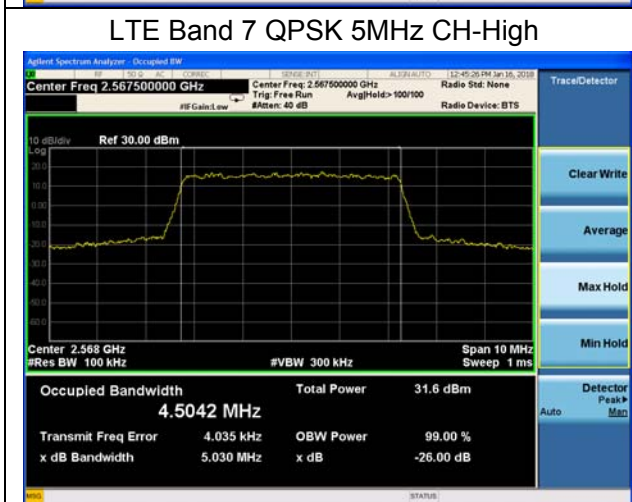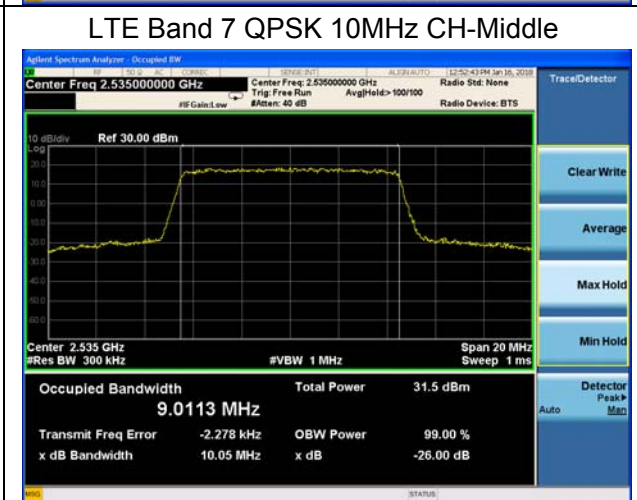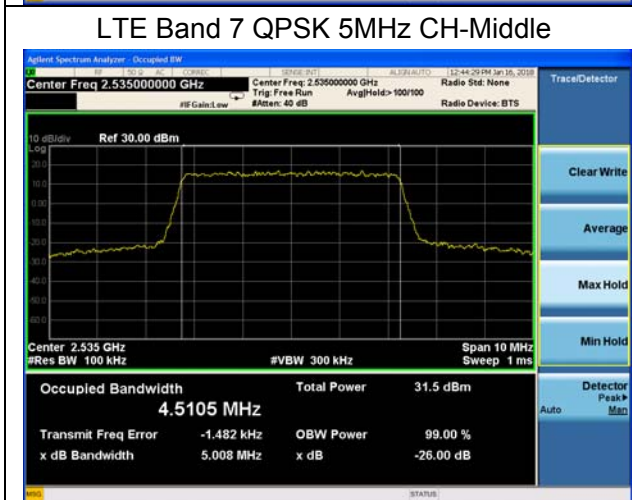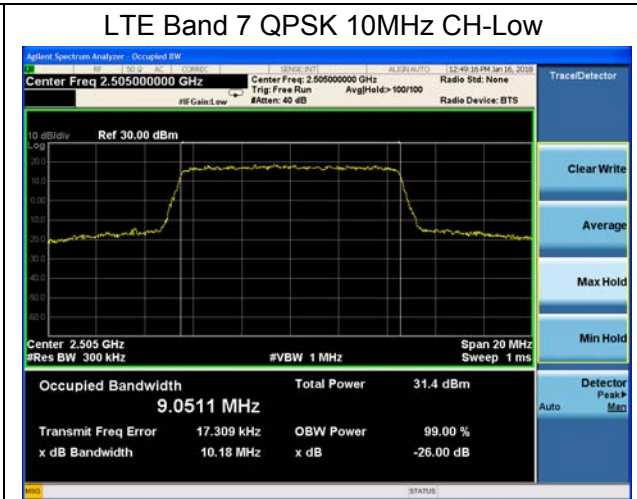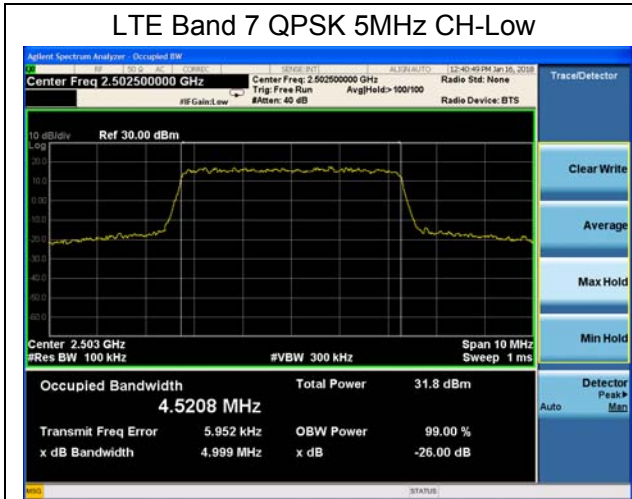



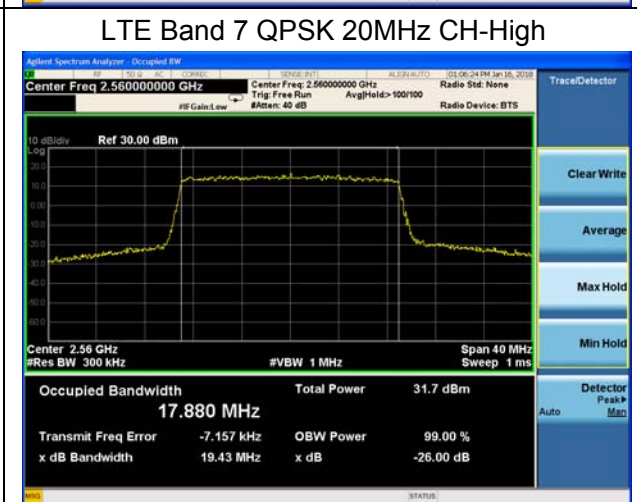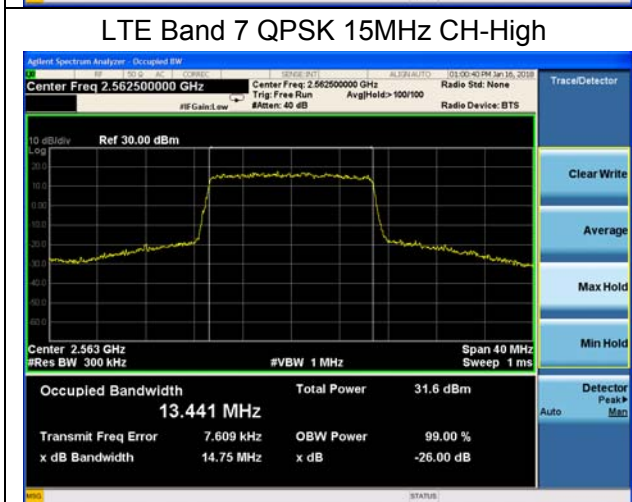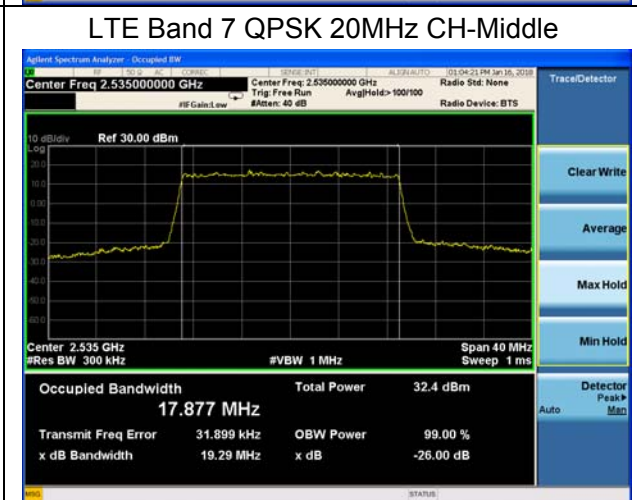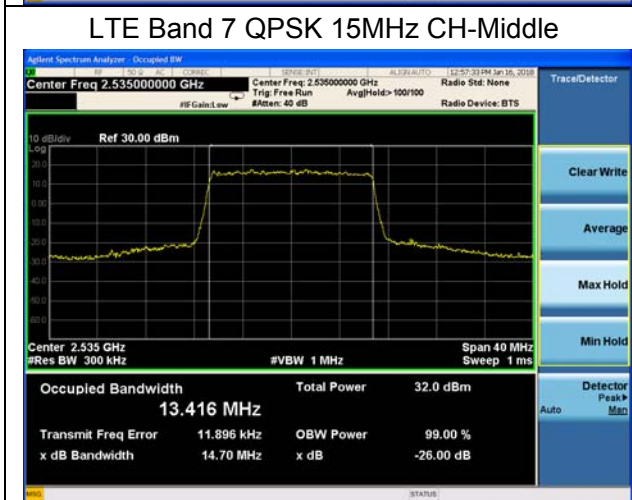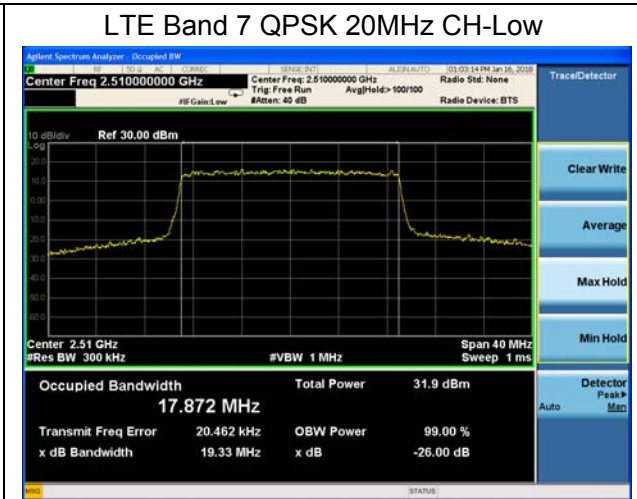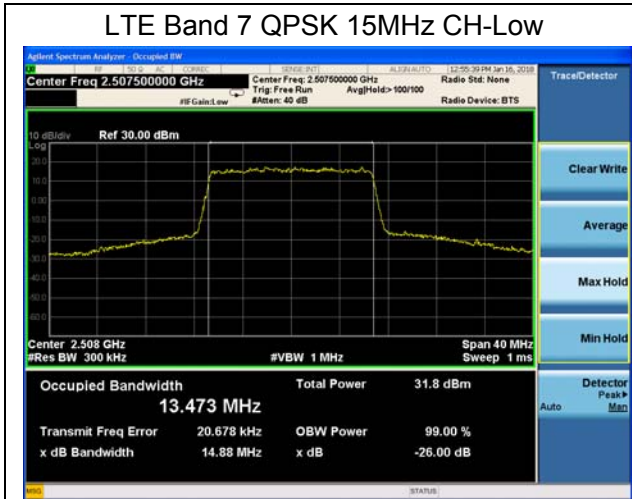

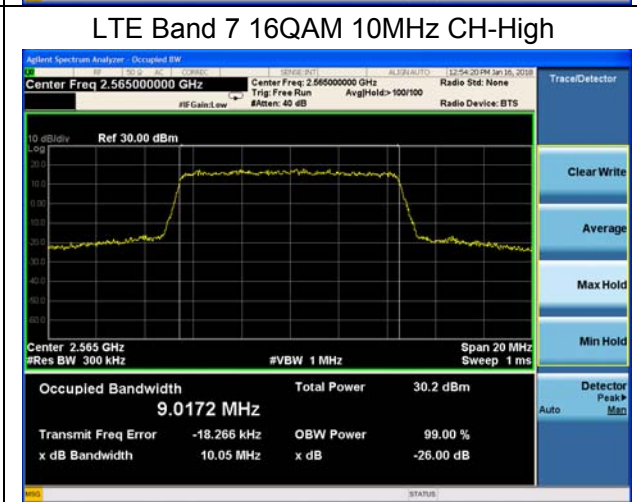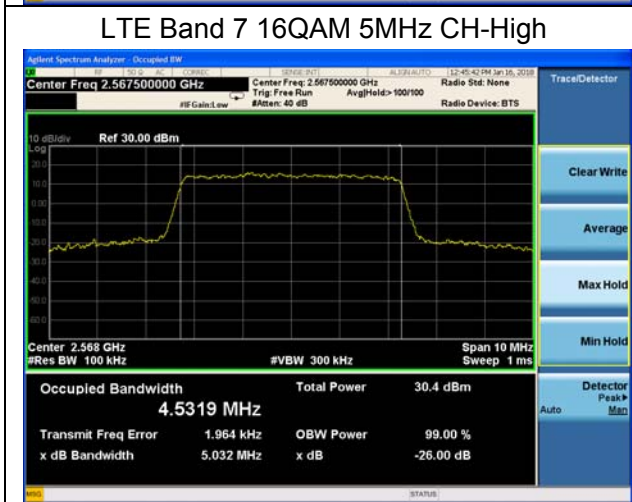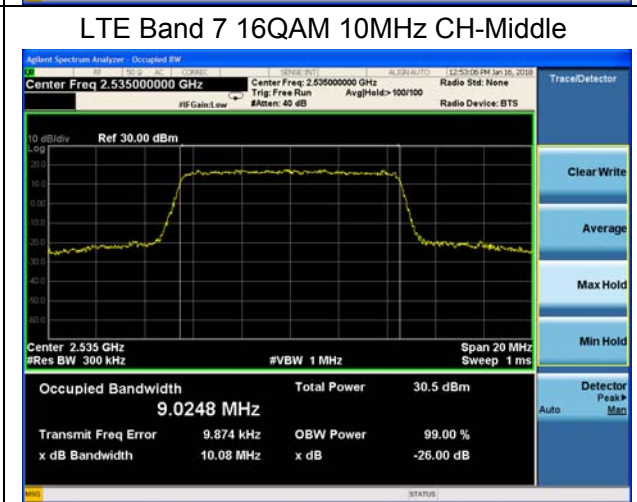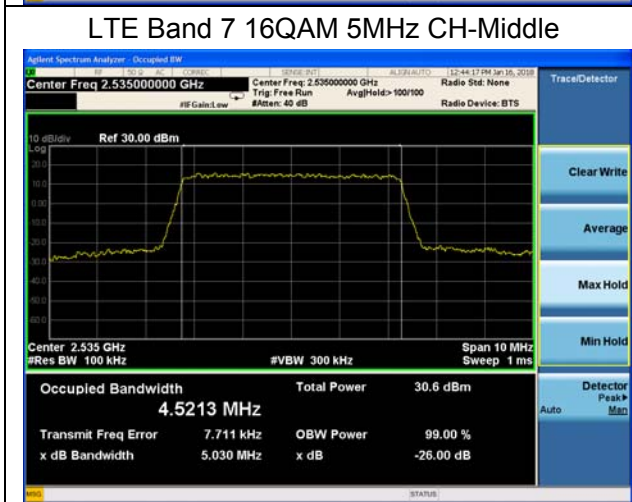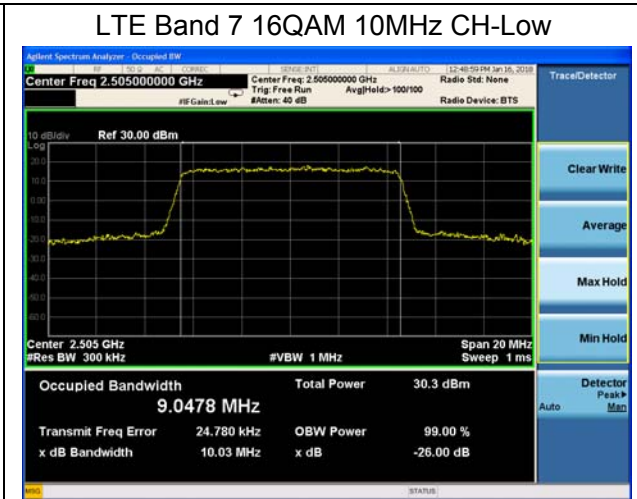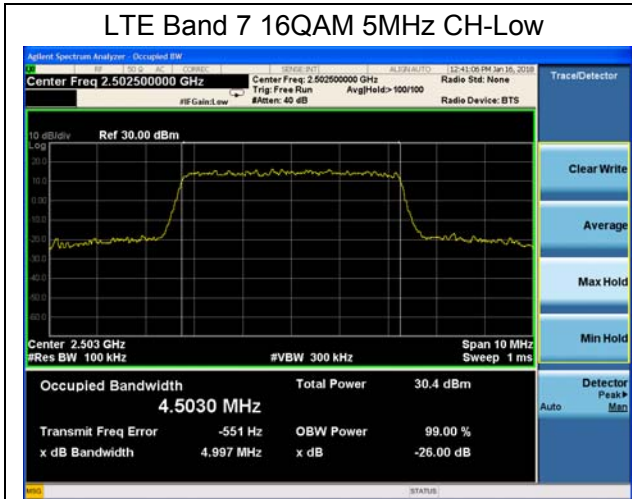

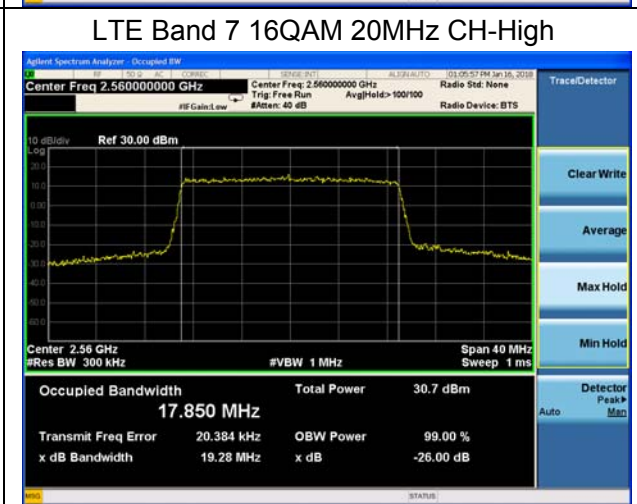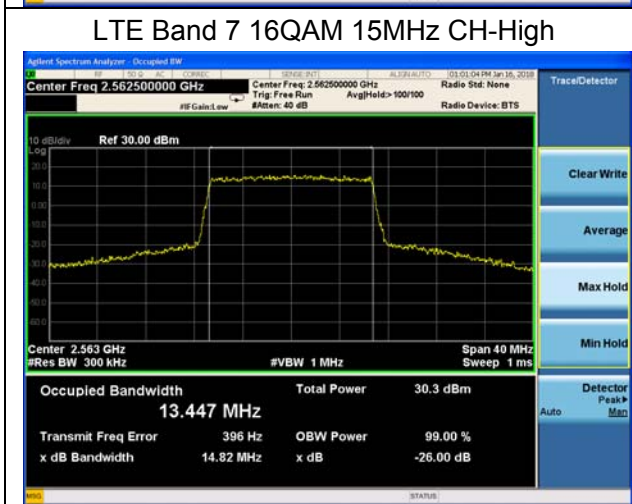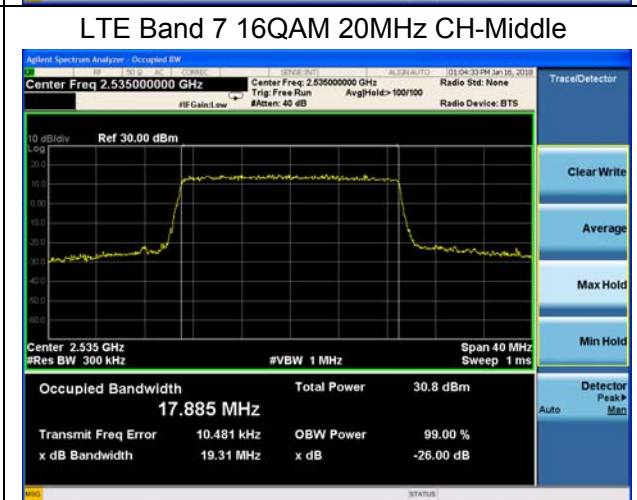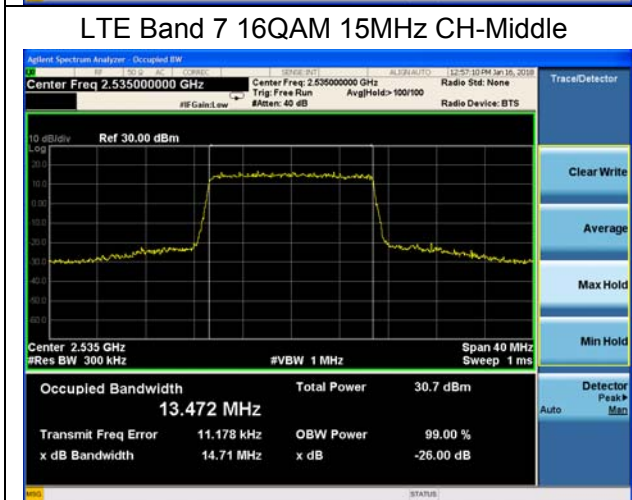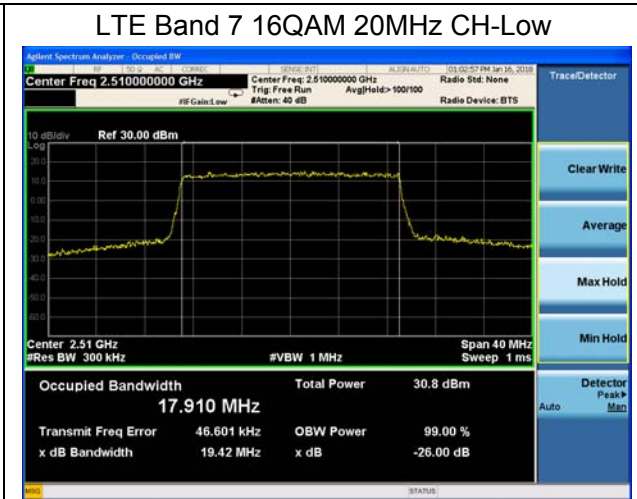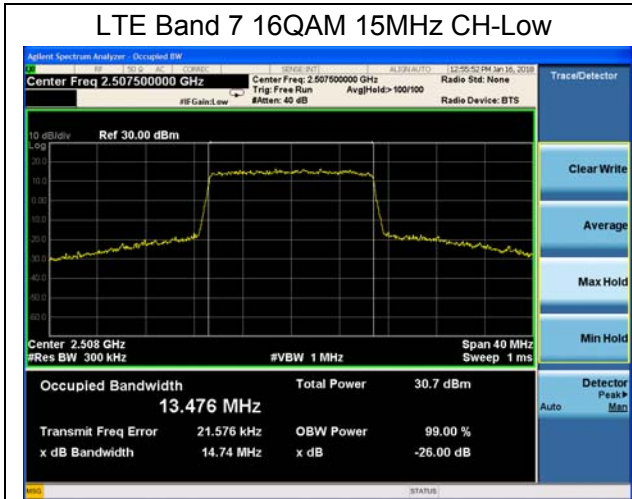

## 5.4 Band Edge Compliance

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 v03 Section 6.0

1.The EUT was connected to spectrum analyzer and system simulator via a power divider.

2. The band edges of low and high channels for the highest RF powers were measured.

RBW is set to 51 kHz, VBW is set to 160 kHz for WCDMA Band IV.

RBW is set to 15 kHz, VBW is set to 51 kHz for LTE Band 4 (1.4MHz).

RBW is set to 30 kHz, VBW is set to 100 kHz for LTE Band 4 (3MHz).

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 4/7 (5MHz).

RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 4/7 (10MHz).

RBW is set to 150 kHz, VBW is set to 510 kHz for LTE Band 4/7 (15MHz).


RBW is set to 200 kHz, VBW is set to 620 kHz for LTE Band 4/7 (20MHz)

4. Set spectrum analyzer with RMS detector.

5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

6. Checked that all the results comply with the emission limit line.

### Test Setup

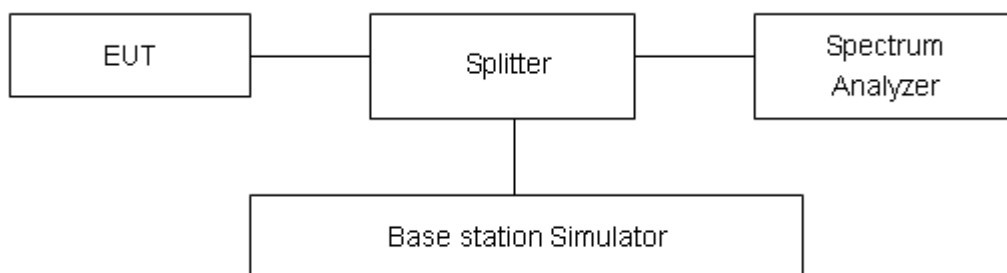

### Limits

Rule Part 27.53(h)/ specifies that “ for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee’s frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB”

Part 27.53(m) (4)/ specifies that “for BRS and EBS stations. For mobile digital stations, the



attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Example:


The limit line is derived from  $43 + 10 \log (P)$  dB below the transmitter power P(Watts)  
= P(W)-  $[43 + 10 \log (P)]$  (dB)  
=  $[30 + 10 \log (P)]$  (dBm) -  $[43 + 10 \log (P)]$  (dB) = -13dBm.







### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684$ dB.

**Test Result**

All the test traces in the plots shows the test results clearly.

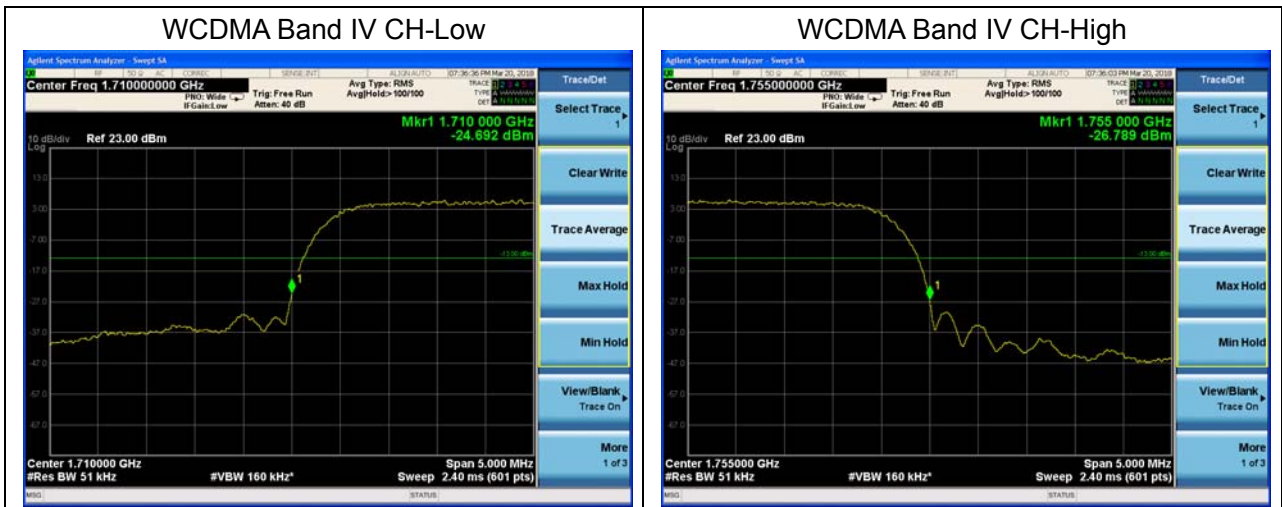

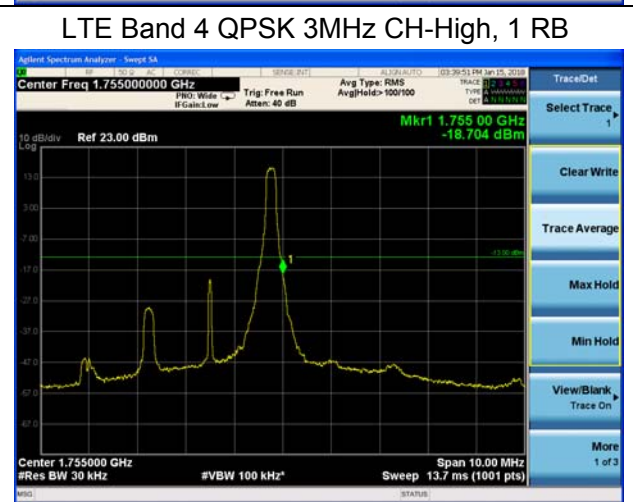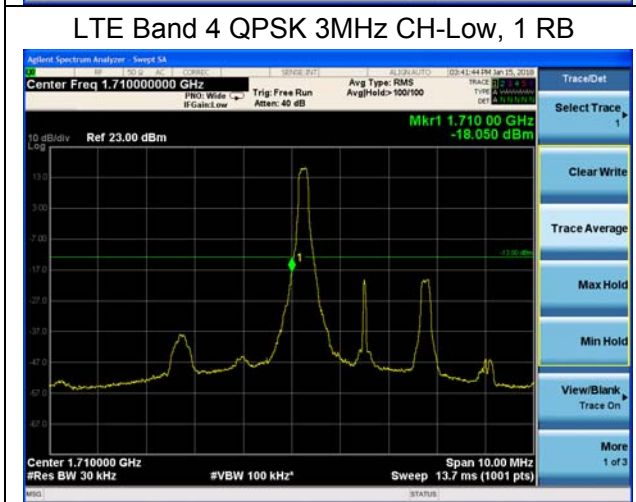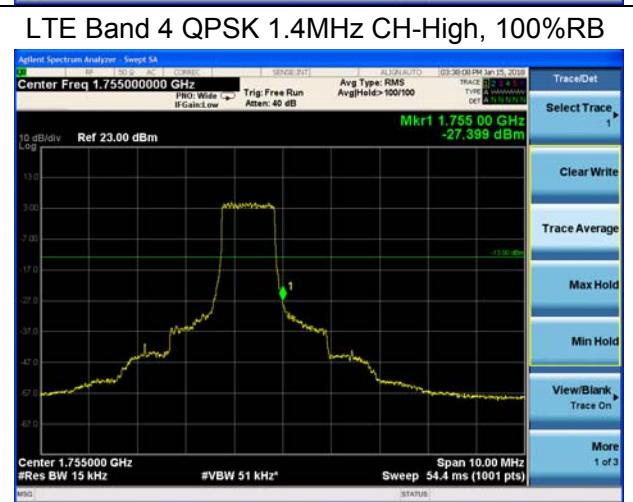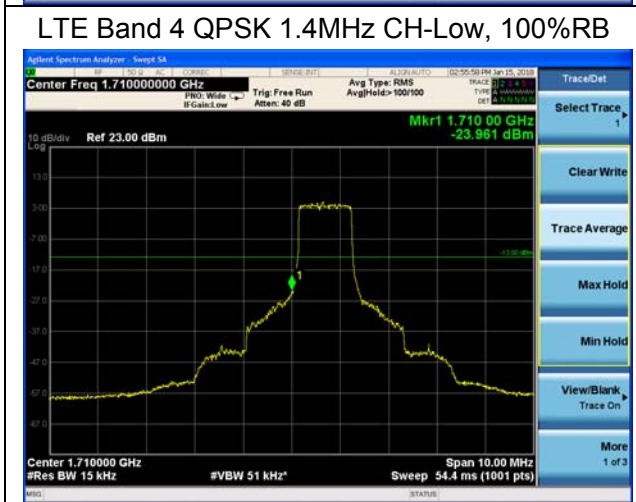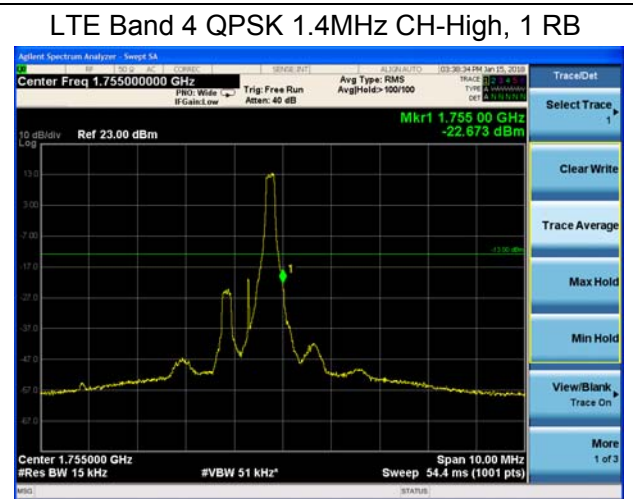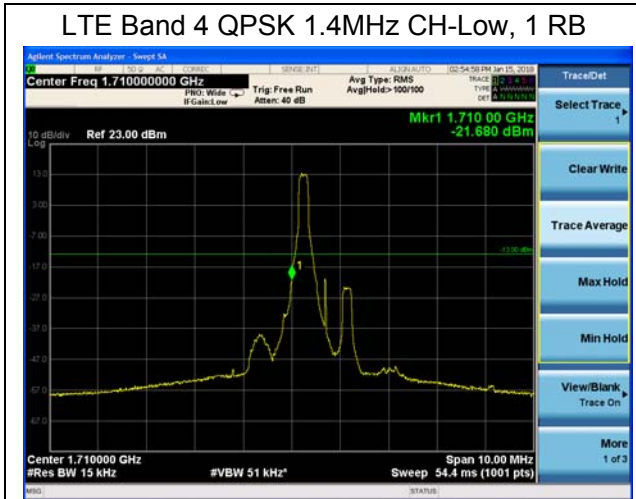




LTE Band 4 QPSK 3MHz CH-Low, 100%RB




LTE Band 4 QPSK 3MHz CH-High, 100%RB




LTE Band 4 QPSK 5MHz CH-Low, 1 RB

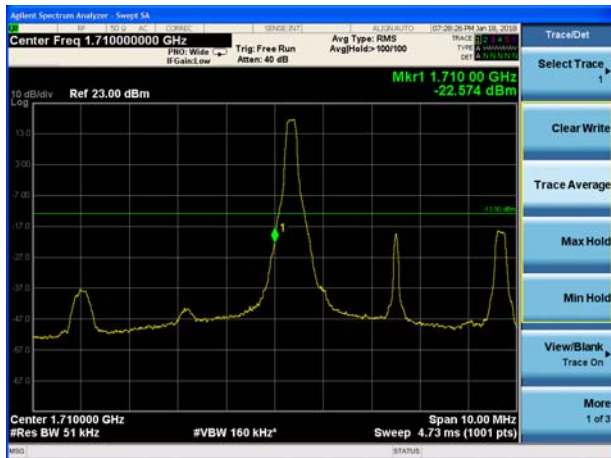

LTE Band 4 QPSK 5MHz CH-High, 1 RB

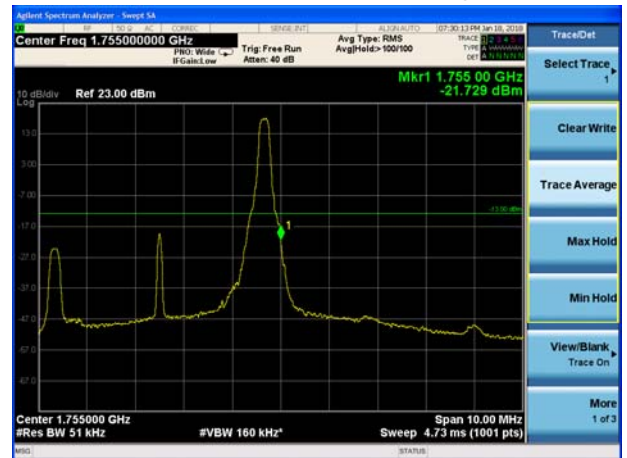

LTE Band 4 QPSK 5MHz CH-Low, 100%RB

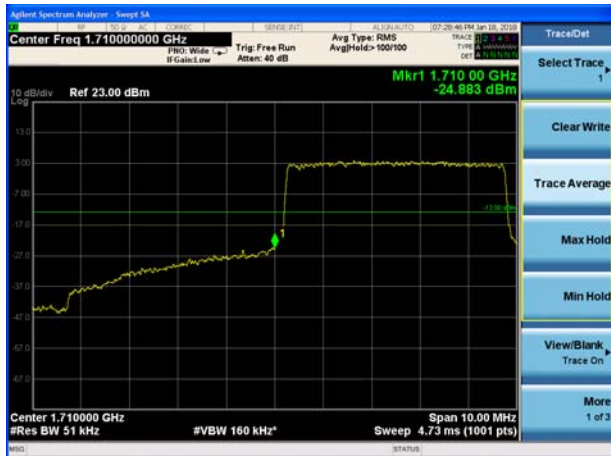


LTE Band 4 QPSK 5MHz CH-High, 100%RB








LTE Band 4 QPSK 10MHz CH-Low, 1 RB

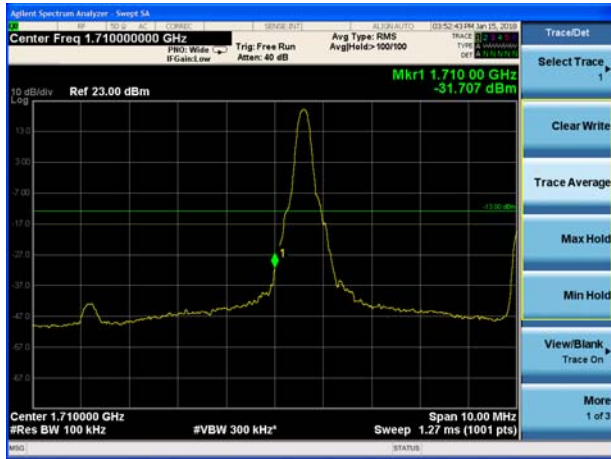

LTE Band 4 QPSK 10MHz CH-High, 1 RB

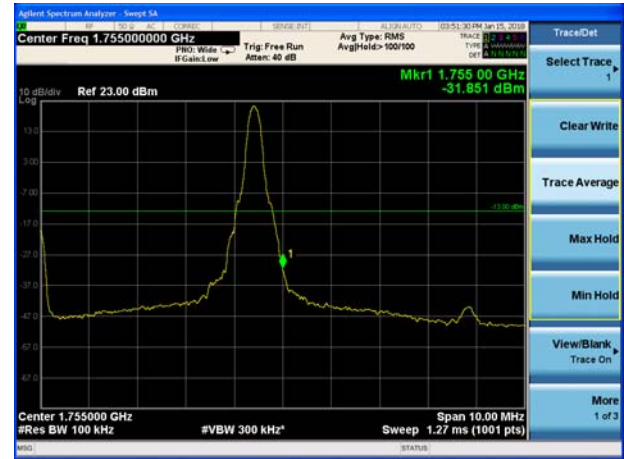

LTE Band 4 QPSK 10MHz CH-Low, 100%RB



LTE Band 4 QPSK 10MHz CH-High, 100%RB



LTE Band 4 QPSK 15MHz CH-Low, 1 RB



LTE Band 4 QPSK 15MHz CH-High, 1 RB






LTE Band 4 QPSK 15MHz CH-Low, 100%RB




LTE Band 4 QPSK 15MHz CH-High, 100%RB



LTE Band 4 QPSK 20MHz CH-Low, 1 RB

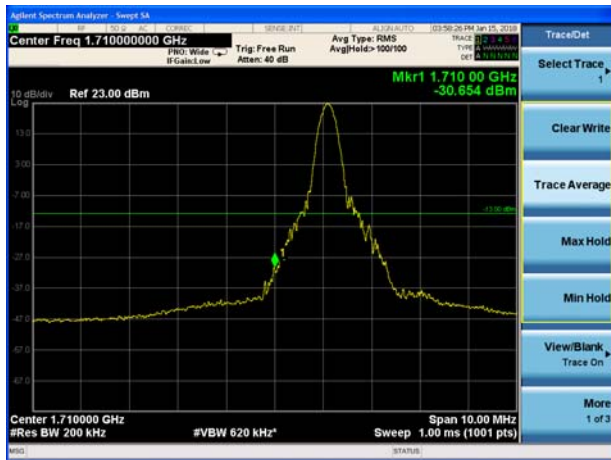

LTE Band 4 QPSK 20MHz CH-High, 1 RB

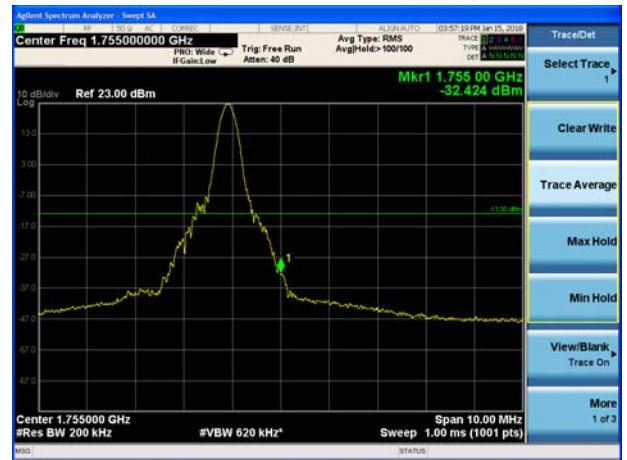

LTE Band 4 QPSK 20MHz CH-Low, 100%RB




LTE Band 4 QPSK 20MHz CH-High, 100%RB







LTE Band 4 16QAM 1.4MHz CH-Low, 1 RB

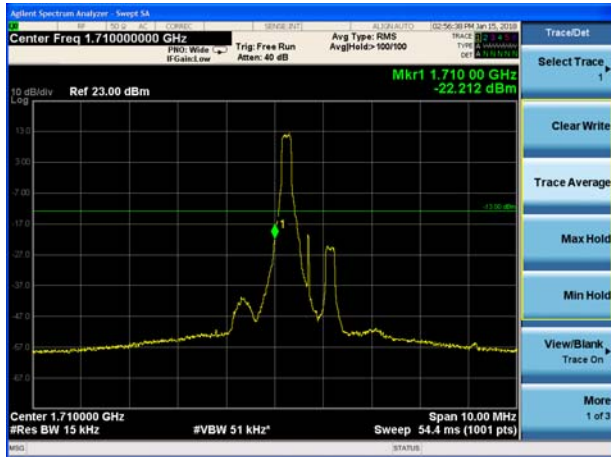


LTE Band 4 16QAM 1.4MHz CH-High, 1 RB

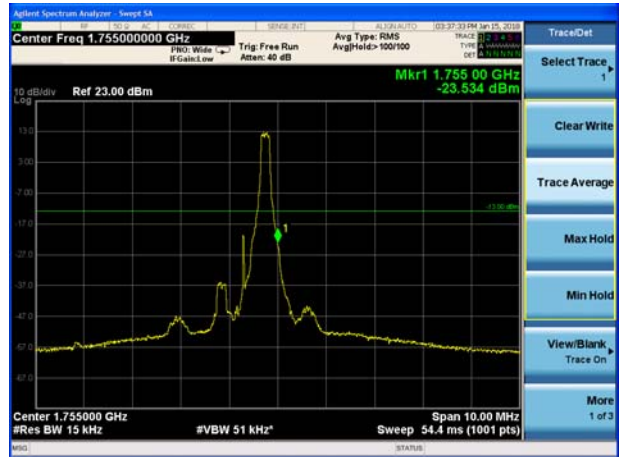


LTE Band 4 16QAM 1.4MHz CH-Low, 100%RB

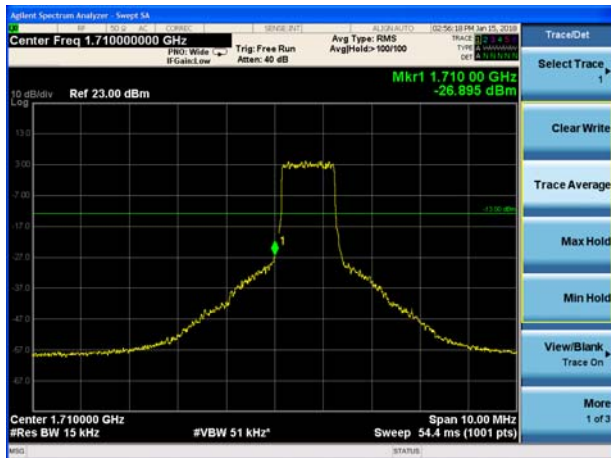


LTE Band 4 16QAM 1.4MHz CH-High, 100%RB

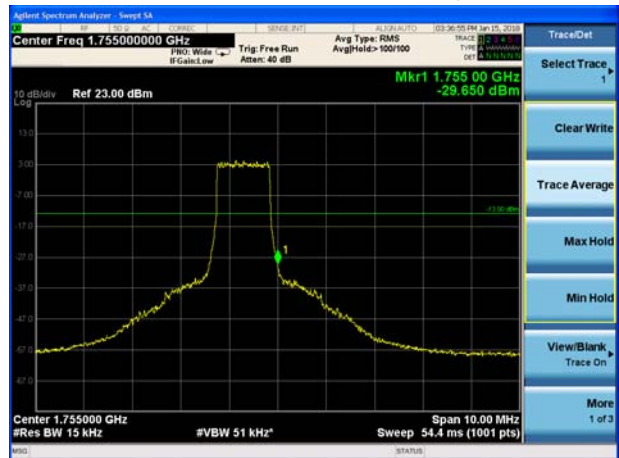

LTE Band 4 16QAM 3MHz CH-Low, 1 RB

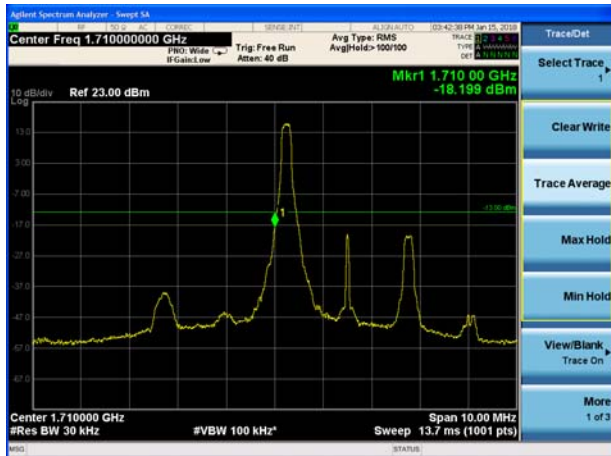

LTE Band 4 16QAM 3MHz CH-High, 1 RB

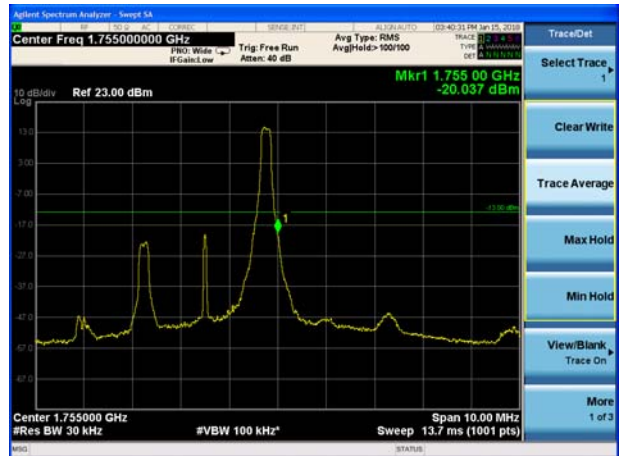




LTE Band 4 16QAM 3MHz CH-Low, 100%RB




LTE Band 4 16QAM 3MHz CH-High, 100%RB



LTE Band 4 16QAM 5MHz CH-Low, 1 RB

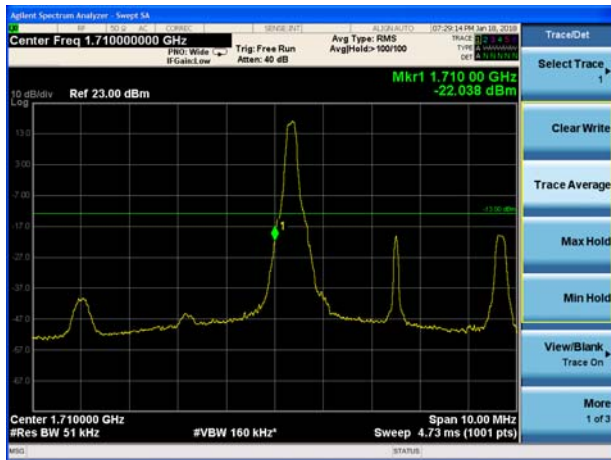

LTE Band 4 16QAM 5MHz CH-High, 1 RB

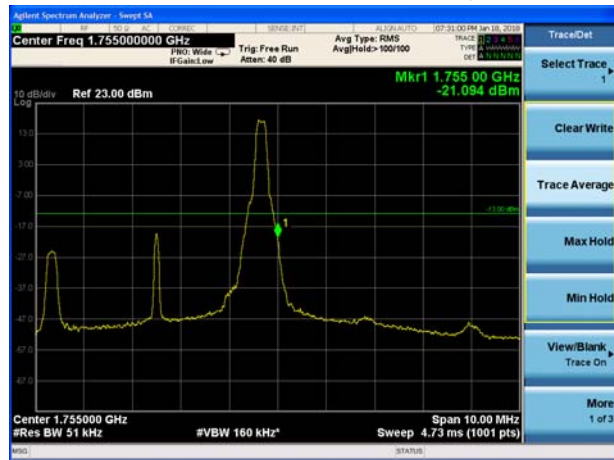

LTE Band 4 16QAM 5MHz CH-Low, 100%RB




LTE Band 4 16QAM 5MHz CH-High, 100%RB






LTE Band 4 16QAM 10MHz CH-Low, 1 RB

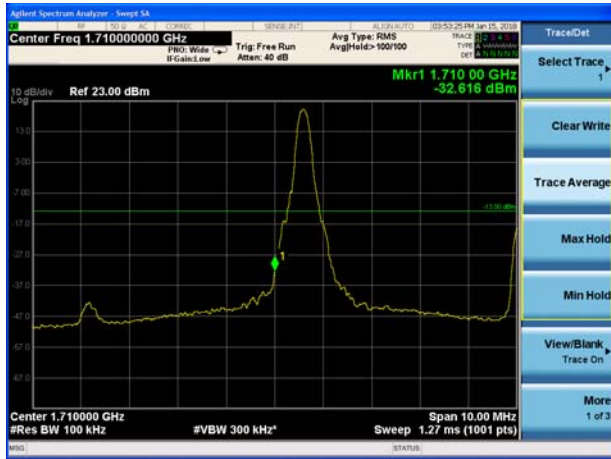

LTE Band 4 16QAM 10MHz CH-High, 1 RB

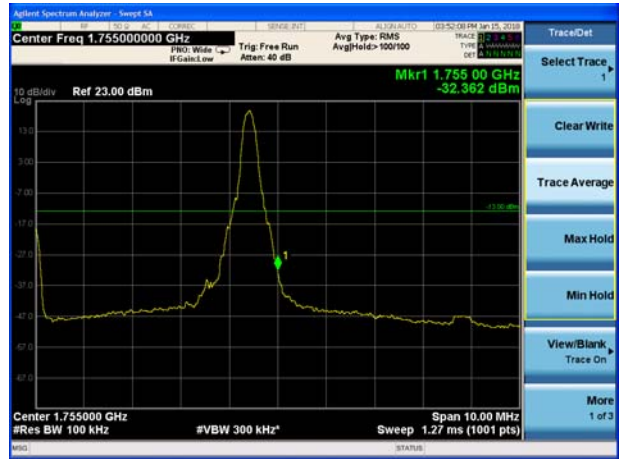

LTE Band 4 16QAM 10MHz CH-Low, 100%RB



LTE Band 4 16QAM 10MHz CH-High, 100%RB



LTE Band 4 16QAM 15MHz CH-Low, 1 RB



LTE Band 4 16QAM 15MHz CH-High, 1 RB






LTE Band 4 16QAM 15MHz CH-Low, 100%RB




LTE Band 4 16QAM 15MHz CH-High, 100%RB



LTE Band 4 16QAM 20MHz CH-Low, 1 RB

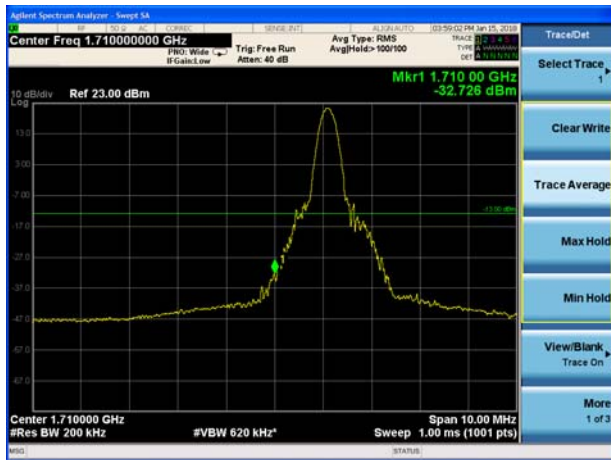

LTE Band 4 16QAM 20MHz CH-High, 1 RB

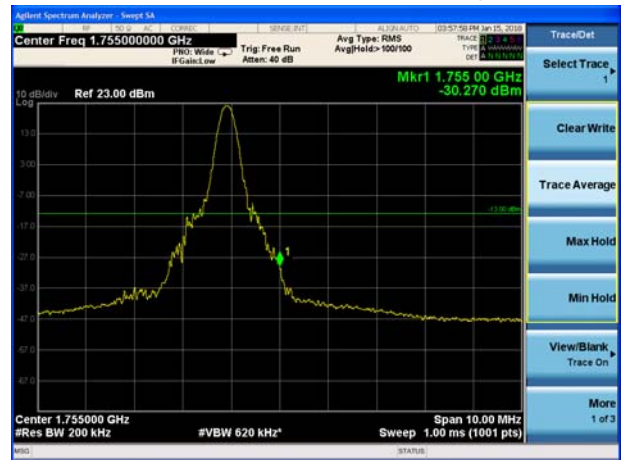

LTE Band 4 16QAM 20MHz CH-Low, 100%RB




LTE Band 4 16QAM 20MHz CH-High, 100%RB






### LTE Band 7 QPSK 5MHz CH-Low, 1 RB

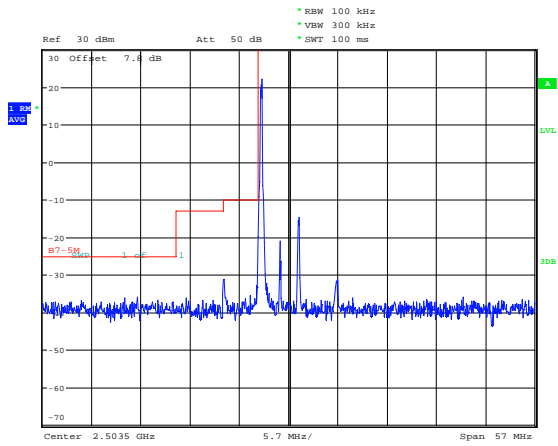


Date: 23.JAN.2018 13:35:20

### LTE Band 7 QPSK 5MHz CH-High, 1 RB

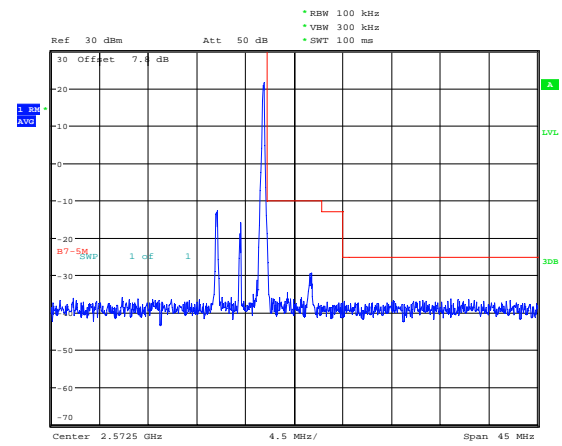


Date: 23.JAN.2018 13:53:18

### LTE Band 7 QPSK 5MHz CH-Low, 100%RB

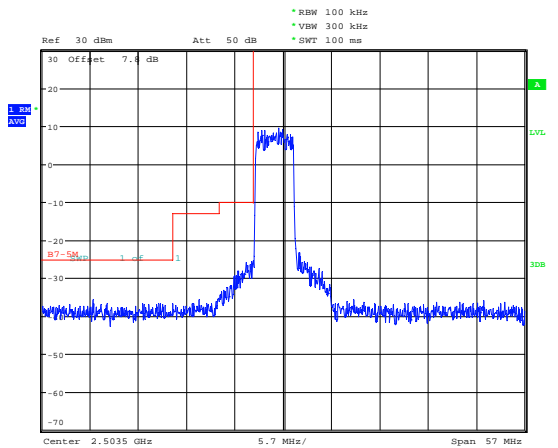


Date: 23.JAN.2018 13:37:03

### LTE Band 7 QPSK 5MHz CH-High, 100%RB

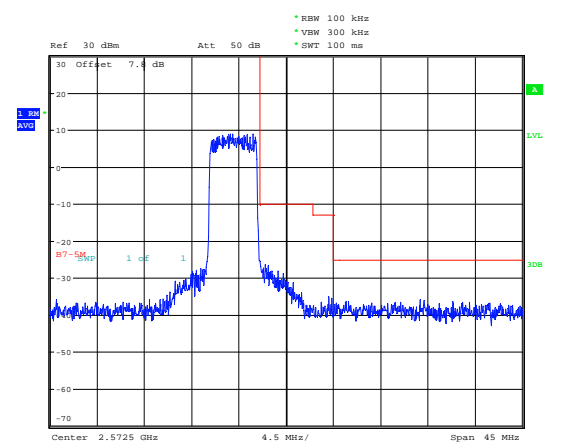


Date: 23.JAN.2018 13:52:23

### LTE Band 7 QPSK 10MHz CH-Low, 1 RB

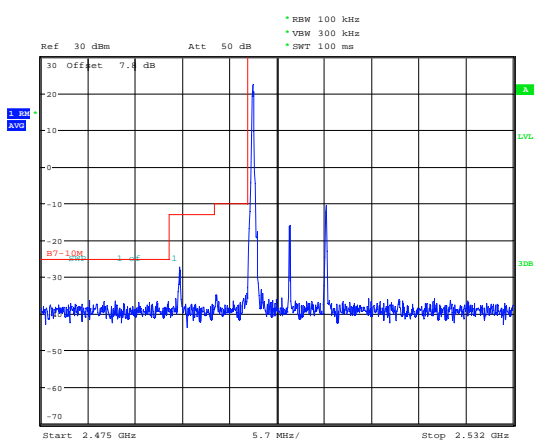

Date: 23.JAN.2018 13:32:55


### LTE Band 7 QPSK 10MHz CH-High, 1 RB

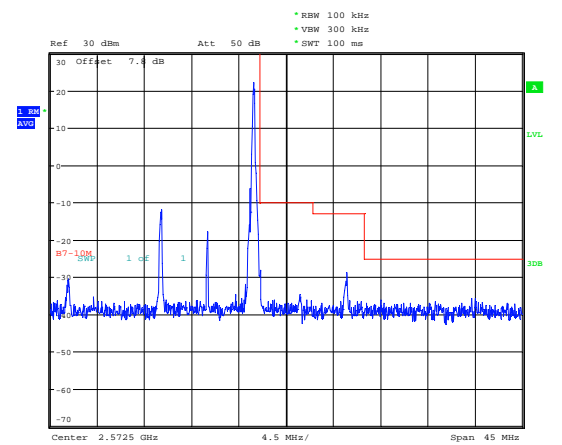

Date: 23.JAN.2018 13:49:05




LTE Band 7 QPSK 10MHz CH-Low, 100%RB

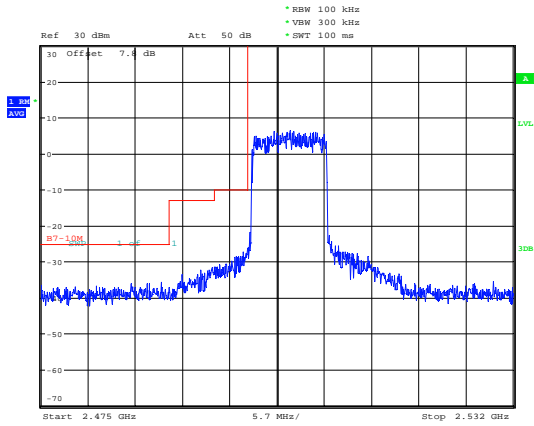


Date: 23.JAN.2018 13:33:54

LTE Band 7 QPSK 10MHz CH-High, 100%RB

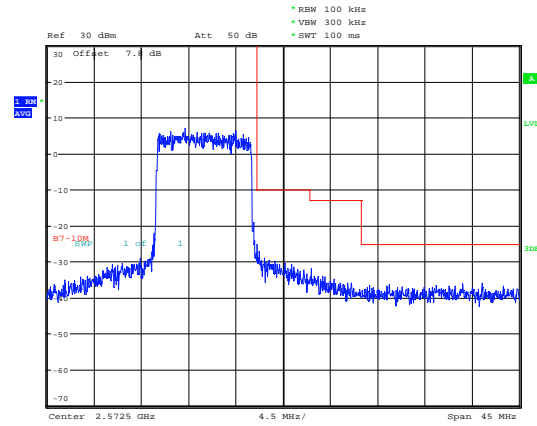


Date: 23.JAN.2018 13:49:35

LTE Band 7 QPSK 15MHz CH-Low, 1 RB

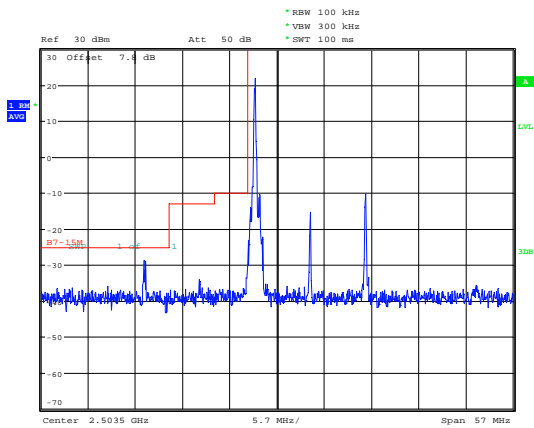


Date: 23.JAN.2018 13:38:45

LTE Band 7 QPSK 15MHz CH-High, 1 RB

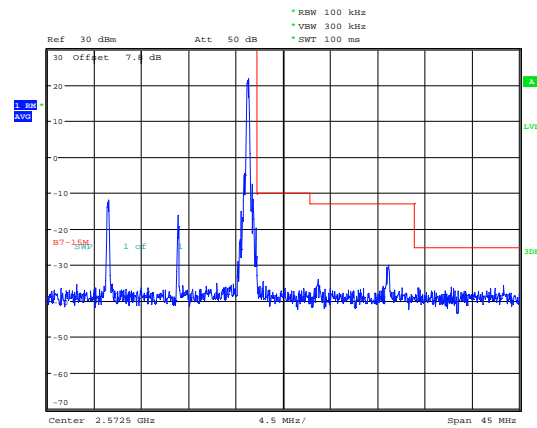


Date: 23.JAN.2018 13:46:46

LTE Band 7 QPSK 15MHz CH-Low, 100%RB

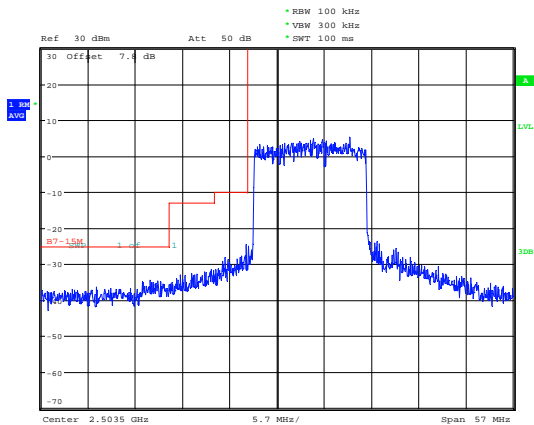

Date: 23.JAN.2018 13:39:26

LTE Band 7 QPSK 15MHz CH-High, 100%RB

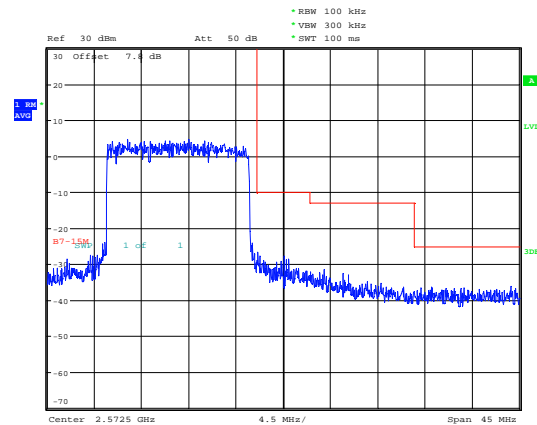


Date: 23.JAN.2018 13:47:21






### LTE Band 7 QPSK 20MHz CH-Low, 1 RB

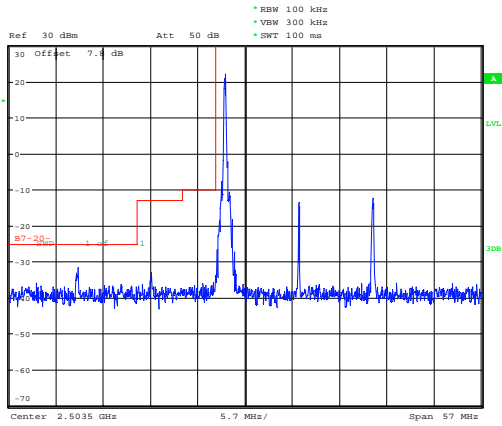


Date: 23.JAN.2018 13:41:01

### LTE Band 7 QPSK 20MHz CH-High, 1 RB

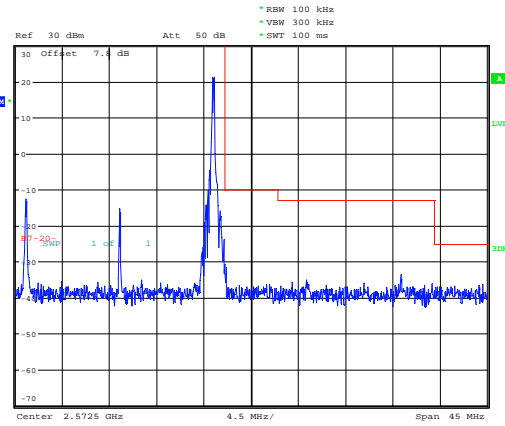


Date: 23.JAN.2018 13:44:58

### LTE Band 7 QPSK 20MHz CH-Low, 100%RB

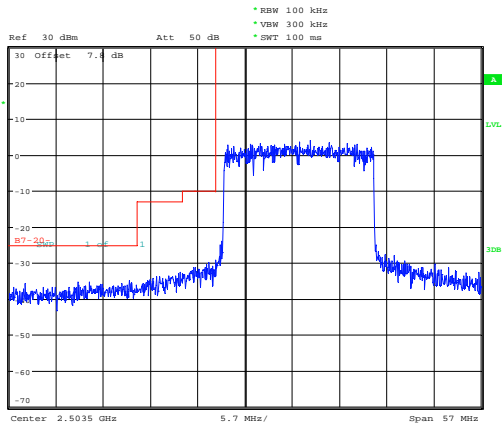


Date: 23.JAN.2018 13:41:39

### LTE Band 7 QPSK 20MHz CH-High, 100%RB

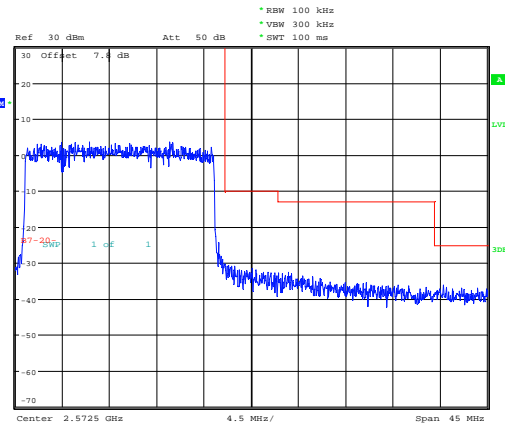


Date: 23.JAN.2018 13:45:31

### LTE Band 7 16QAM 5MHz CH-Low, 1 RB

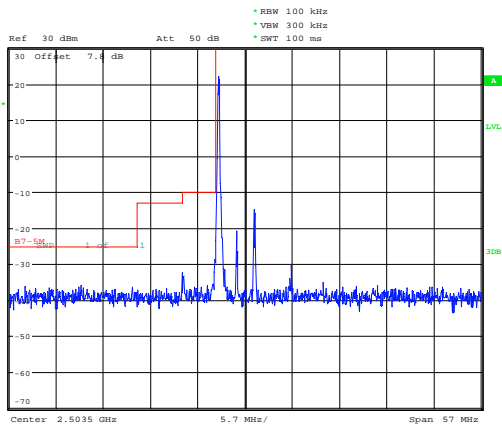

Date: 23.JAN.2018 13:35:36


### LTE Band 7 16QAM 5MHz CH-High, 1 RB

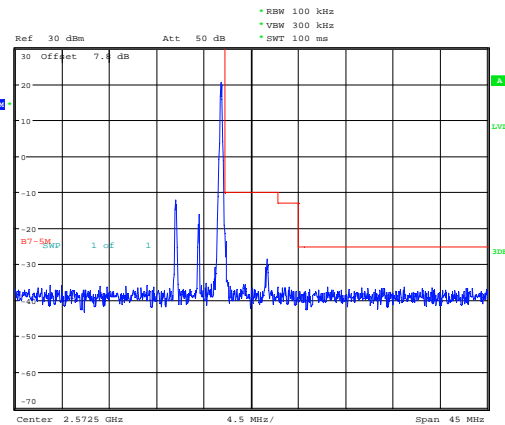

Date: 23.JAN.2018 13:53:59




LTE Band 7 16QAM 5MHz CH-Low, 100%RB

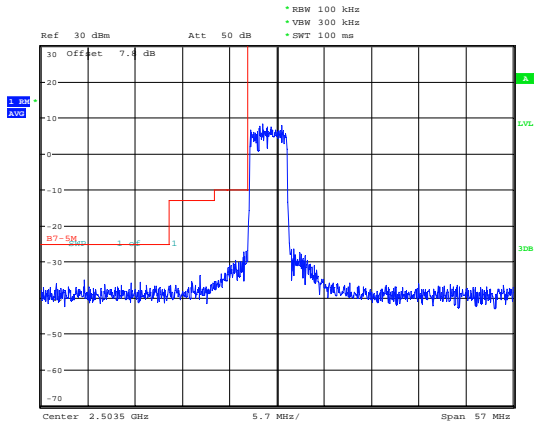


Date: 23.JAN.2018 13:37:26

LTE Band 7 16QAM 5MHz CH-High, 100%RB

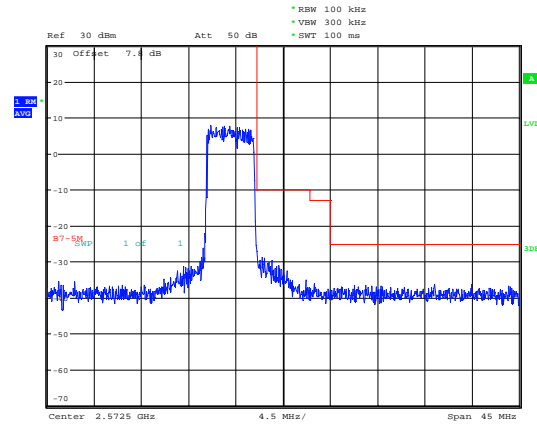


Date: 23.JAN.2018 13:52:42

LTE Band 7 16QAM 10MHz CH-Low, 1 RB

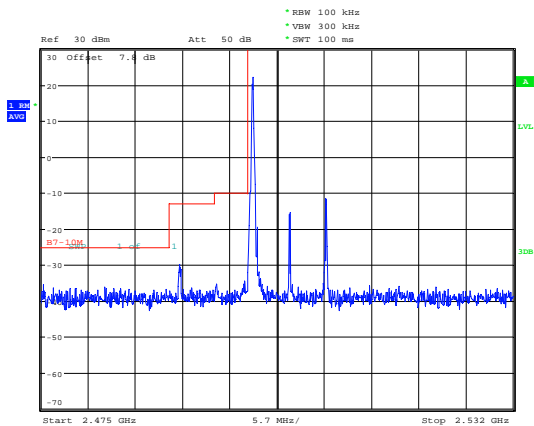


Date: 23.JAN.2018 13:33:27

LTE Band 7 16QAM 10MHz CH-High, 1 RB

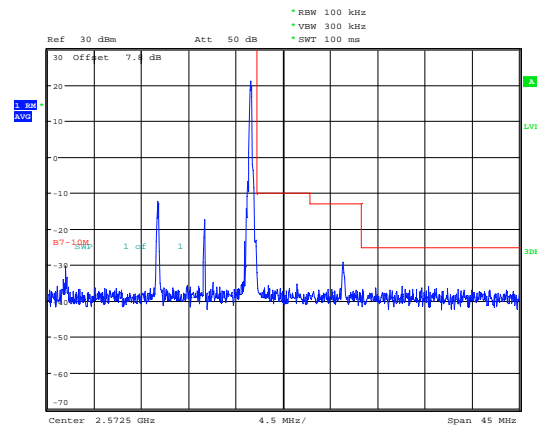


Date: 23.JAN.2018 13:49:19

LTE Band 7 16QAM 10MHz CH-Low, 100%RB

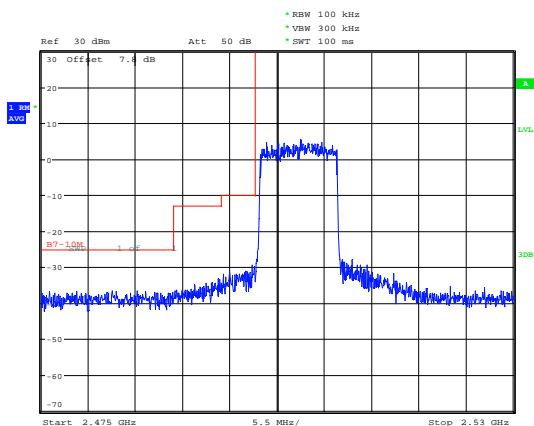

Date: 23.JAN.2018 14:04:14


LTE Band 7 16QAM 10MHz CH-High, 100%RB

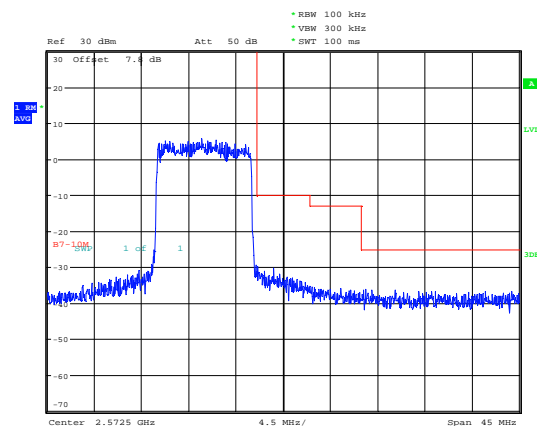

Date: 23.JAN.2018 13:49:50




LTE Band 7 16QAM 15MHz CH-Low, 1 RB

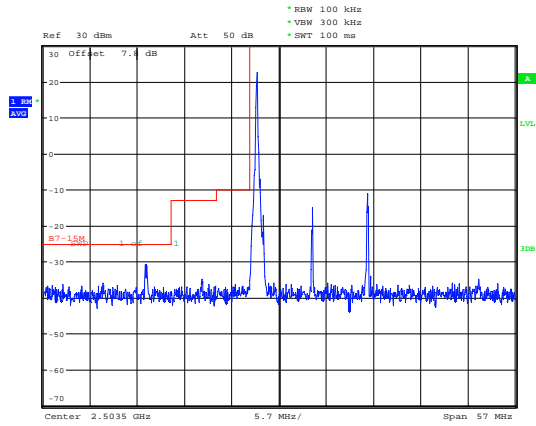


Date: 23.JAN.2018 13:39:01

LTE Band 7 16QAM 15MHz CH-High, 1 RB

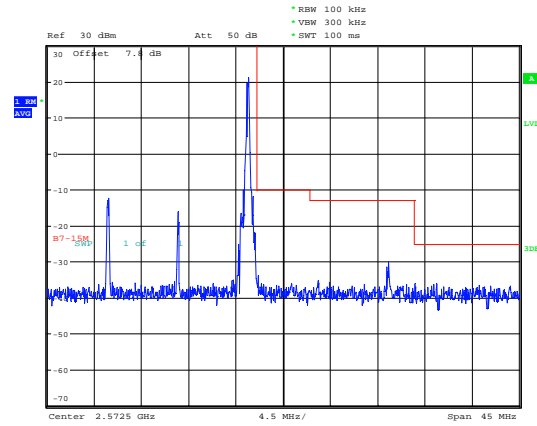


Date: 23.JAN.2018 13:47:03

LTE Band 7 16QAM 15MHz CH-Low, 100%RB

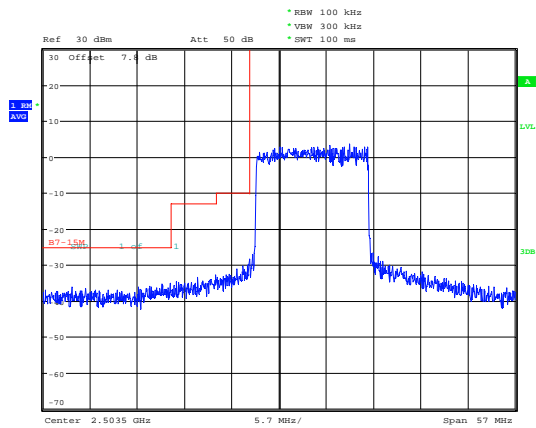


Date: 23.JAN.2018 13:39:48

LTE Band 7 16QAM 15MHz CH-High, 100%RB

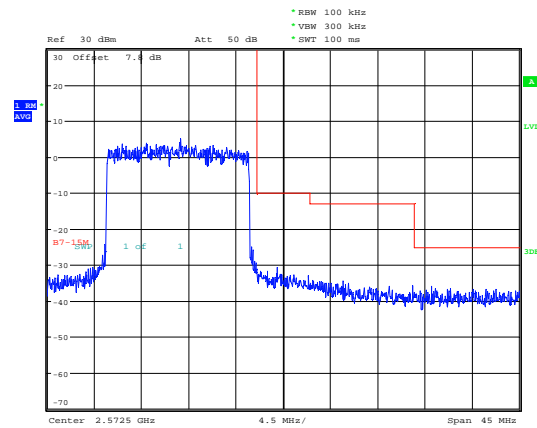


Date: 23.JAN.2018 13:47:43

LTE Band 7 16QAM 20MHz CH-Low, 1 RB

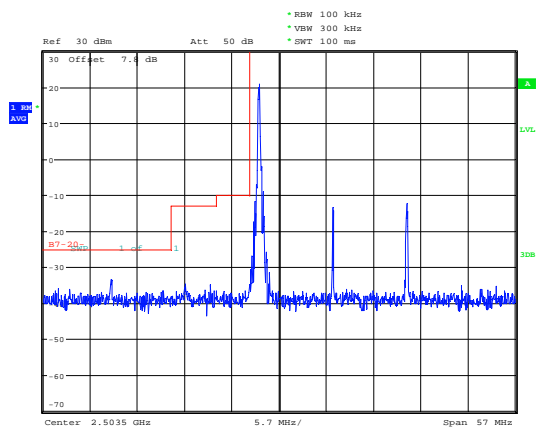

Date: 23.JAN.2018 13:41:18

LTE Band 7 16QAM 20MHz CH-High, 1 RB

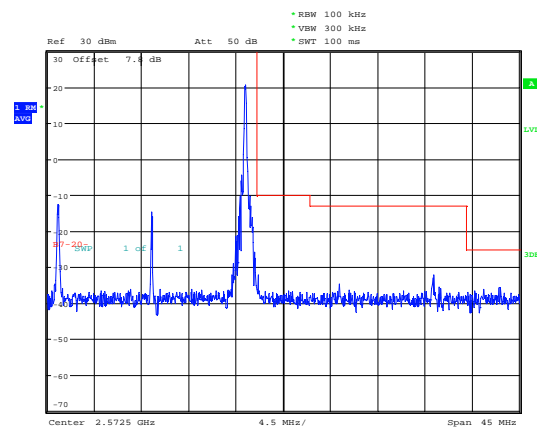


Date: 23.JAN.2018 13:45:16




LTE Band 7 16QAM 20MHz CH-Low, 100%RB

LTE Band 7 16QAM 20MHz CH-High, 100%RB

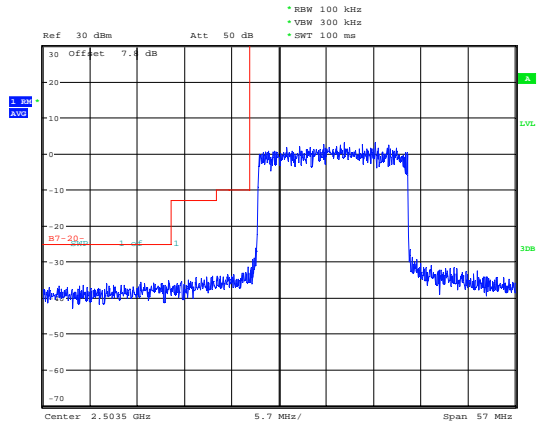

Date: 23.JAN.2018 13:41:56

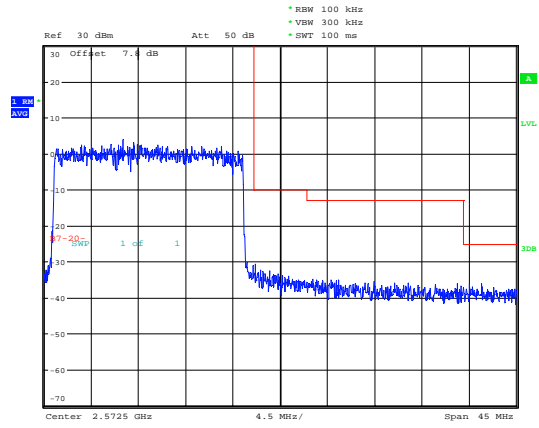

Date: 23.JAN.2018 13:45:47

## 5.5 Peak-to-Average Power Ratio (PAPR)

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

### Test Setup

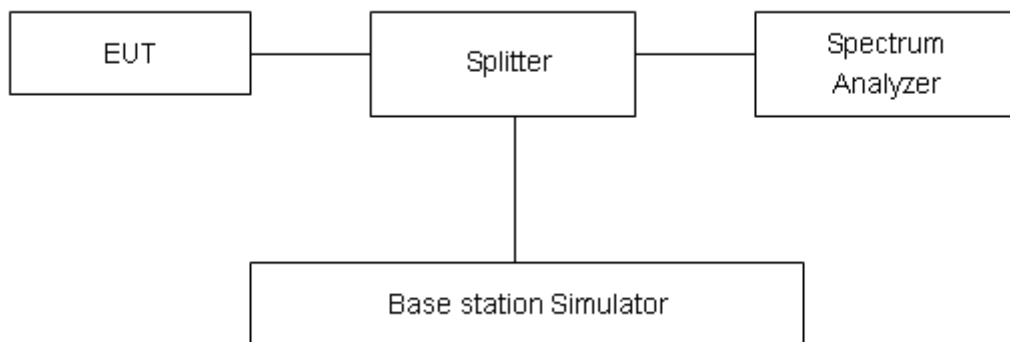

### Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

**Test Results**

WCDMA Band IV	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
<b>RMC</b>	1312	1712.4	26.25	23.12	3.13	≤13	PASS
	1413	1732.6	26.49	23.26	3.23	≤13	PASS
	1513	1752.6	26.37	23.34	3.03	≤13	PASS

<b>LTE Band 4</b>								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
<b>QPSK</b>	1.4	19957	1710.7	26.14	21.20	4.94	≤13	PASS
		20175	1732.5	25.07	21.34	3.73	≤13	PASS
		20393	1754.3	25.57	21.45	4.12	≤13	PASS
	3	19965	1711.5	26.17	21.23	4.94	≤13	PASS
		20175	1732.5	26.91	21.38	5.53	≤13	PASS
		20385	1753.5	26.21	21.48	4.73	≤13	PASS
	5	19975	1712.5	25.71	21.21	4.50	≤13	PASS
		20175	1732.5	26.63	21.37	5.26	≤13	PASS
		20375	1752.5	26.63	21.46	5.17	≤13	PASS
	10	20000	1715	25.60	21.29	4.31	≤13	PASS
		20175	1732.5	26.22	21.39	4.83	≤13	PASS
		20350	1750	27.17	21.50	5.67	≤13	PASS
	15	20025	1717.5	26.51	21.27	5.24	≤13	PASS
		20175	1732.5	25.82	21.35	4.47	≤13	PASS
		20325	1747.5	25.69	21.45	4.24	≤13	PASS
20	20050	1720	26.32	21.24	5.08	≤13	PASS	
	20175	1732.5	26.87	21.30	5.57	≤13	PASS	
	20300	1745	26.15	21.41	4.74	≤13	PASS	
<b>16QAM</b>	1.4	19957	1710.7	24.93	20.29	4.64	≤13	PASS
		20175	1732.5	25.83	20.36	5.47	≤13	PASS
		20393	1754.3	25.67	20.50	5.17	≤13	PASS
	3	19965	1711.5	24.88	20.32	4.56	≤13	PASS
		20175	1732.5	25.09	20.40	4.69	≤13	PASS
		20385	1753.5	26.03	20.53	5.50	≤13	PASS
	5	19975	1712.5	25.81	20.30	5.51	≤13	PASS
		20175	1732.5	25.10	20.36	4.74	≤13	PASS
		20375	1752.5	25.15	20.48	4.67	≤13	PASS
	10	20000	1715	25.83	20.33	5.50	≤13	PASS
		20175	1732.5	24.70	20.41	4.29	≤13	PASS

	15	20350	1750	25.04	20.52	4.52	≤13	PASS
		20025	1717.5	25.02	20.30	4.72	≤13	PASS
		20175	1732.5	25.95	20.36	5.59	≤13	PASS
		20325	1747.5	25.98	20.48	5.50	≤13	PASS
	20	20050	1720	24.91	20.28	4.63	≤13	PASS
		20175	1732.5	24.85	20.32	4.53	≤13	PASS
		20300	1745	25.72	20.45	5.27	≤13	PASS

LTE Band 7								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	5	20775	2502.5	26.84	21.35	5.49	≤13	PASS
		21100	2535	26.10	21.37	4.73	≤13	PASS
		21425	2567.5	26.41	21.47	4.94	≤13	PASS
	10	20800	2505	27.16	21.43	5.73	≤13	PASS
		21100	2535	26.85	21.39	5.46	≤13	PASS
		21400	2565	26.15	21.51	4.64	≤13	PASS
	15	20825	2507.5	26.20	21.41	4.79	≤13	PASS
		21100	2535	26.95	21.35	5.60	≤13	PASS
		21375	2562.5	27.24	21.46	5.78	≤13	PASS
	20	20850	2510	26.34	21.38	4.96	≤13	PASS
		21100	2535	26.02	21.30	4.72	≤13	PASS
		21350	2560	26.99	21.42	5.57	≤13	PASS
16QAM	5	20775	2502.5	25.89	20.27	5.62	≤13	PASS
		21100	2535	25.22	20.37	4.85	≤13	PASS
		21425	2567.5	25.56	20.55	5.01	≤13	PASS
	10	20800	2505	26.06	20.30	5.76	≤13	PASS
		21100	2535	26.02	20.42	5.60	≤13	PASS
		21400	2565	25.39	20.59	4.80	≤13	PASS
	15	20825	2507.5	25.04	20.27	4.77	≤13	PASS
		21100	2535	25.97	20.37	5.60	≤13	PASS
		21375	2562.5	26.27	20.55	5.72	≤13	PASS
	20	20850	2510	25.18	20.25	4.93	≤13	PASS
		21100	2535	25.14	20.33	4.81	≤13	PASS
		21350	2560	26.19	20.52	5.67	≤13	PASS

## 5.6 Frequency Stability

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

#### 1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size.

(1) With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

#### 2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.65 V and 4.4 V, with a nominal voltage of 3.85V.

### Test setup

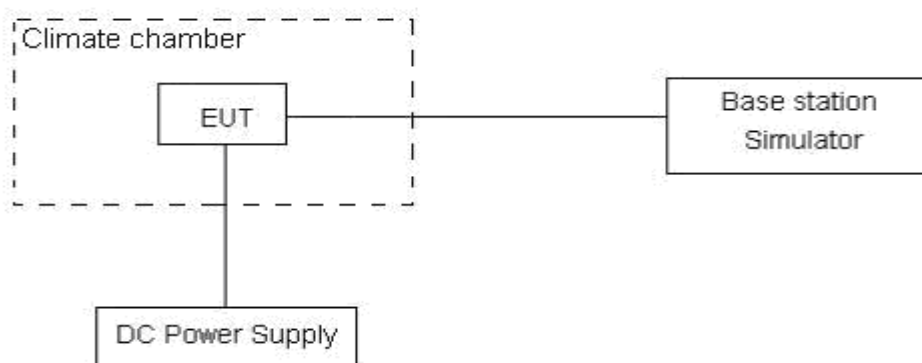

### Limits

No specific frequency stability requirements in part 27.54

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3, U=0.01\text{ppm}$ .



**Test Result**
**WCDMA Band IV**

Condition		1710	1755	Delta (Hz)	Frequency Stability (ppm)
		F low@-13dBm (MHz)	F high@-13dBm (MHz)		
Temperature	Voltage				
Normal (25°C)	Normal	1710.0267	1754.9125	-1.67	-0.00096
Extreme (55°C)		1710.0267	1754.9125	1.86	0.00108
Extreme (50°C)		1710.0267	1754.9125	0.76	0.00044
Extreme (40°C)		1710.0267	1754.9125	1.10	0.00064
Extreme (30°C)		1710.0267	1754.9125	0.53	0.00030
Extreme (20°C)		1710.0267	1754.9125	-1.69	-0.00097
Extreme (10°C)		1710.0267	1754.9125	-1.71	-0.00099
Extreme (0°C)		1710.0267	1754.9125	-1.74	-0.00100
Extreme (-10°C)		1710.0267	1754.9125	-2.55	-0.00147
Extreme (-20°C)		1710.0267	1754.9125	-0.12	-0.00007
Extreme (-30°C)		1710.0267	1754.9125	-2.82	-0.00163
25°C		LV	1710.0267	1754.9125	-3.13
	HV	1710.0267	1754.9125	2.97	0.00171

**LTE Band 4**

QPSK,(20MHz BANDWIDTH)					
Condition		1710	1755	Delta (Hz)	Frequency Stability (ppm)
		F low@-13dBm (MHz)	F high@-13dBm (MHz)		
Temperature	Voltage				
Normal (25°C)	Normal	1710.6497	1754.4261	2.42	0.00140
Extreme (55°C)		1710.6497	1754.4262	-2.37	-0.00137
Extreme (50°C)		1710.6497	1754.4262	-1.02	-0.00059
Extreme (40°C)		1710.6497	1754.4262	1.93	0.00111
Extreme (30°C)		1710.6497	1754.4262	-3.19	-0.00184
Extreme (20°C)		1710.6497	1754.4262	-0.92	-0.00053
Extreme (10°C)		1710.6497	1754.4262	1.59	0.00092
Extreme (0°C)		1710.6497	1754.4262	-0.04	-0.00002
Extreme (-10°C)		1710.6497	1754.4262	3.99	0.00230
Extreme (-20°C)		1710.6497	1754.4262	2.53	0.00146
Extreme (-30°C)		1710.6497	1754.4262	-0.10	-0.00006
25°C		LV	1710.6497	1754.4262	-1.87
	HV	1710.6497	1754.4262	-0.86	-0.00050
16QAM,(20MHz BANDWIDTH)					
Condition		1710	1755	Delta (Hz)	Frequency Stability (ppm)
		F low@-13dBm (MHz)	F high@-13dBm (MHz)		
Temperature	Voltage				
Normal (25°C)	Normal	1710.6421	1754.5146	4.73	0.00273
Extreme (55°C)		1710.6421	1754.5146	0.69	0.00040
Extreme (50°C)		1710.6421	1754.5146	-1.00	-0.00058
Extreme (40°C)		1710.6421	1754.5146	2.93	0.00169
Extreme (30°C)		1710.6421	1754.5146	1.03	0.00059
Extreme (20°C)		1710.6421	1754.5146	0.56	0.00032
Extreme (10°C)		1710.6421	1754.5146	-0.86	-0.00050
Extreme (0°C)		1710.6421	1754.5146	-4.01	-0.00231
Extreme (-10°C)		1710.6421	1754.5146	2.76	0.00159
Extreme (-20°C)		1710.6421	1754.5146	0.17	0.00010
Extreme (-30°C)		1710.6421	1754.5146	-0.84	-0.00049
25°C		LV	1710.6421	1754.5146	2.07
	HV	1710.6421	1754.5146	3.58	0.00206

**LTE Band 7**

QPSK,(20MHz BANDWIDTH)					
Condition		2500	2570	Delta (Hz)	Frequency Stability (ppm)
		F low@-13dBm (MHz)	F high@-13dBm (MHz)		
Temperature	Voltage				
Normal (25°C)	Normal	2500.4379	2569.6783	-6.06	-0.00239
Extreme (55°C)		2500.4379	2569.6783	-2.49	-0.00098
Extreme (50°C)		2500.4379	2569.6783	-2.97	-0.00117
Extreme (40°C)		2500.4379	2569.6783	-5.31	-0.00209
Extreme (30°C)		2500.4379	2569.6783	-1.16	-0.00046
Extreme (20°C)		2500.4379	2569.6783	-2.13	-0.00084
Extreme (10°C)		2500.4379	2569.6783	-3.06	-0.00121
Extreme (0°C)		2500.4379	2569.6783	-5.05	-0.00199
Extreme (-10°C)		2500.4379	2569.6783	-0.04	-0.00001
Extreme (-20°C)		2500.4379	2569.6783	-2.16	-0.00085
Extreme (-30°C)		2500.4379	2569.6783	-3.23	-0.00127
25°C		LV	2500.4379	2569.6783	-0.90
	HV	2500.4379	2569.6783	-2.46	-0.00097
16QAM,(20MHz BANDWIDTH)					
Condition		2500	2570	Delta (Hz)	Frequency Stability (ppm)
		F low@-13dBm (MHz)	F high@-13dBm (MHz)		
Temperature	Voltage				
Normal (25°C)	Normal	2500.3994	2569.6124	-2.82	-0.00111
Extreme (55°C)		2500.3994	2569.6124	-7.21	-0.00284
Extreme (50°C)		2500.3994	2569.6124	-1.24	-0.00049
Extreme (40°C)		2500.3994	2569.6124	-3.85	-0.00152
Extreme (30°C)		2500.3994	2569.6124	-3.06	-0.00121
Extreme (20°C)		2500.3994	2569.6124	-6.79	-0.00268
Extreme (10°C)		2500.3994	2569.6124	-6.05	-0.00239
Extreme (0°C)		2500.3994	2569.6124	-2.73	-0.00108
Extreme (-10°C)		2500.3994	2569.6124	-4.62	-0.00182
Extreme (-20°C)		2500.3994	2569.6124	-0.96	-0.00038
Extreme (-30°C)		2500.3994	2569.6124	0.13	0.00005
25°C		LV	2500.3994	2569.6124	1.28
	HV	2500.3994	2569.6124	-3.49	-0.00138

### 5.7 Spurious Emissions at Antenna Terminals

**Ambient condition**


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

**Method of Measurement**

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW 1MHz and VBW 3MHz, Sweep is set to ATUO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

**Test setup**

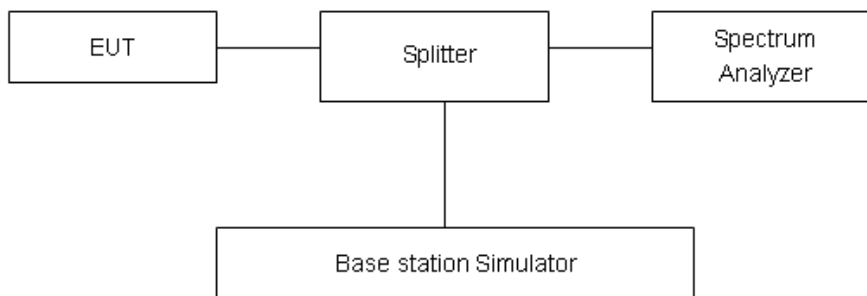

**Limits**

LTE -4 Rule Part 27.53(h) specifies that “for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least 43 + 10 log10 (P) dB..”

LTE -7 Rule Part 27.53(m) 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Part 27.53(h) Limit	-13 dBm
Part 27.53(m) Limit	-25 dBm

**Measurement Uncertainty**


The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-18GHz	1.407 dB

**Test Result**


Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.

If disturbances were found more than 20dB below limit line, the mark is not required for the EUT. The signal beyond the limit is carrier.

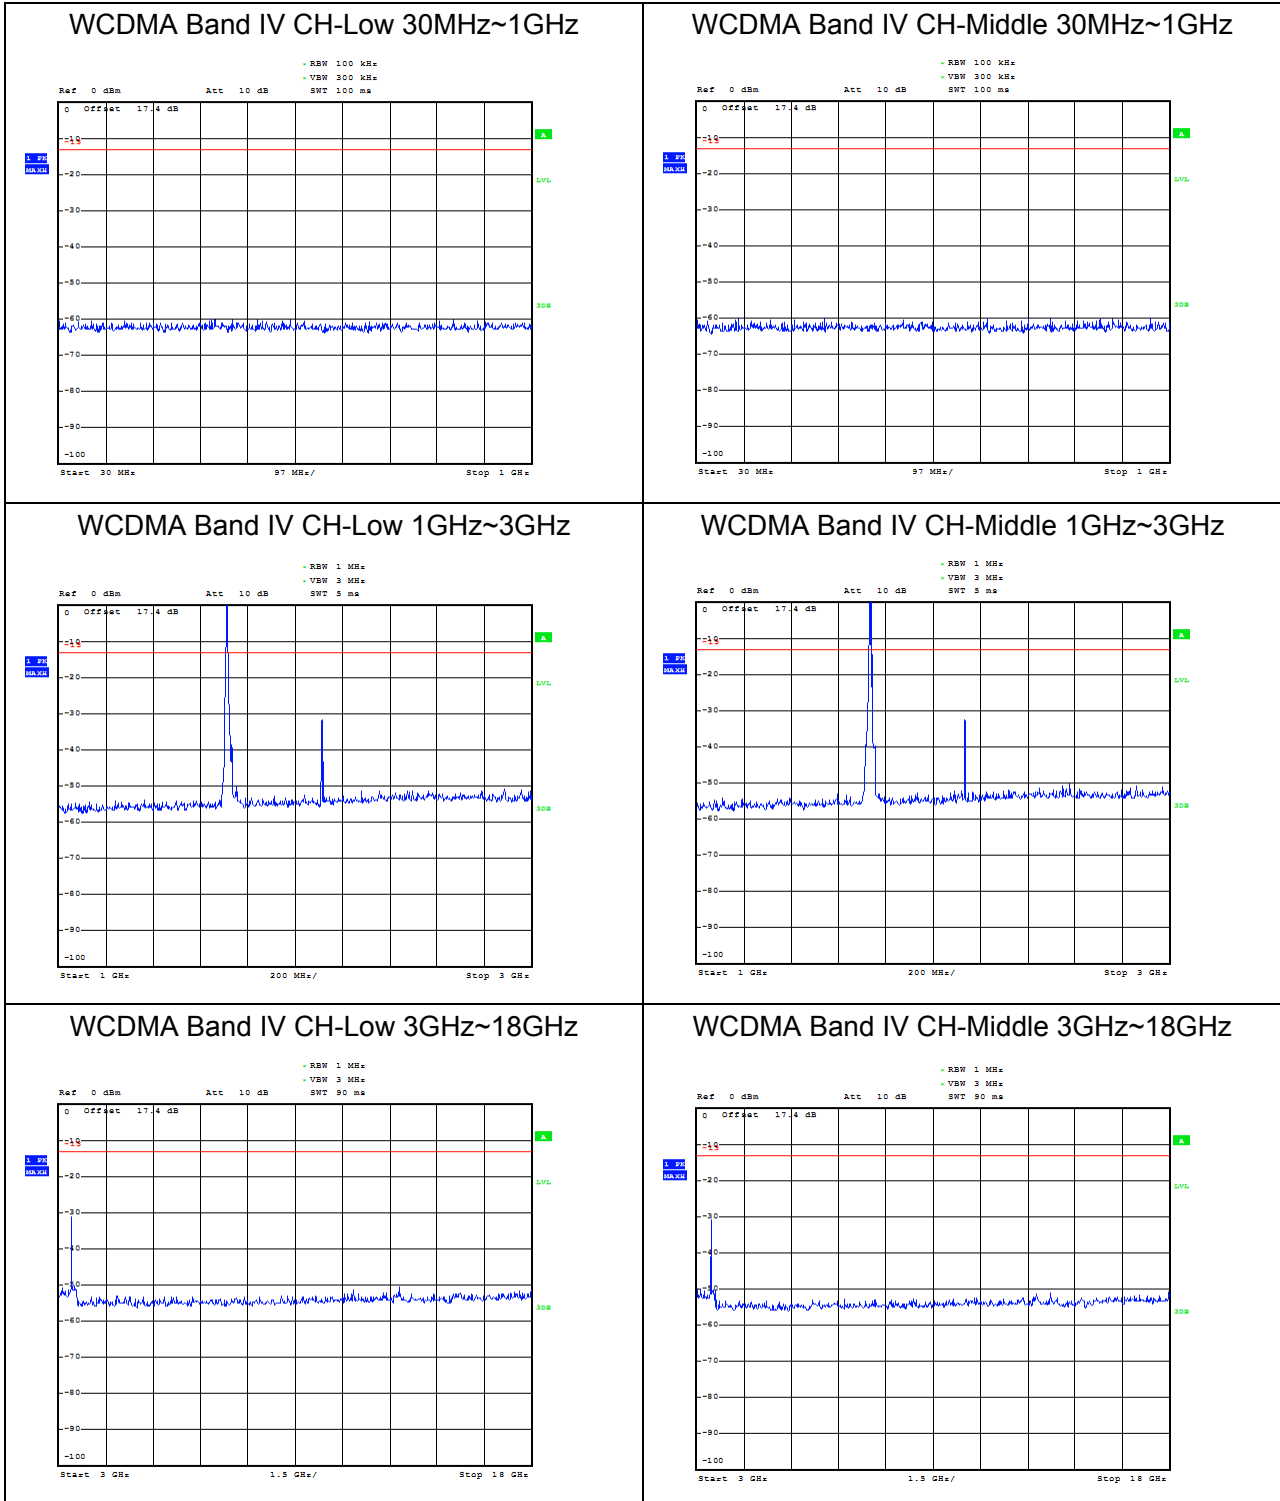





### WCDMA Band IV CH-High 30MHz~1GHz

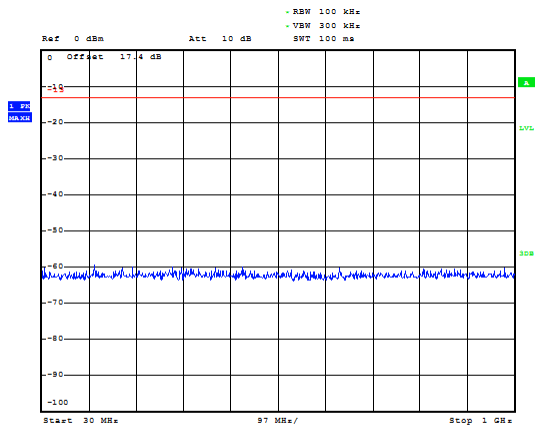


### WCDMA Band IV CH-High 1GHz~3GHz

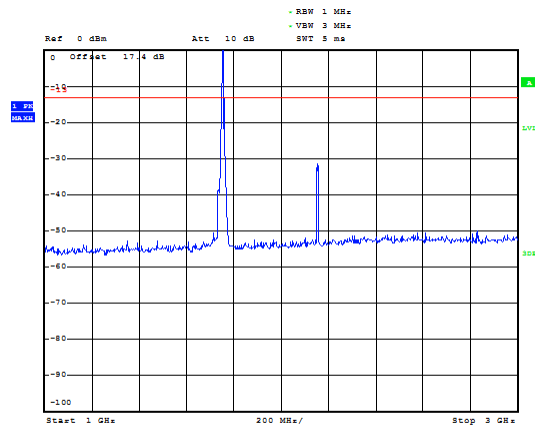


### WCDMA Band IV CH-High 3GHz~18GHz

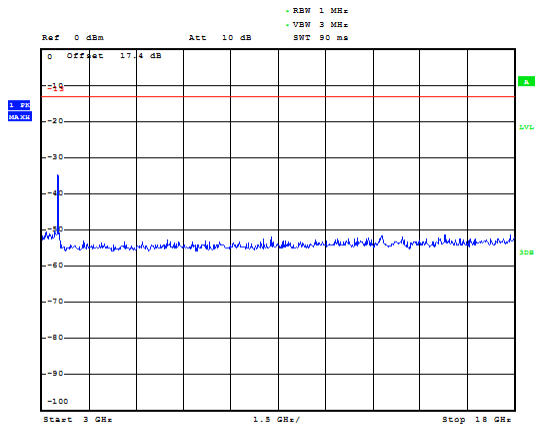


LTE Band 4 1.4MHz CH-Low 30MHz~1GHz

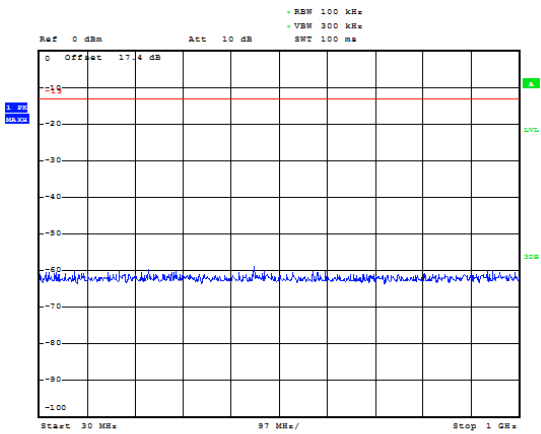


LTE Band 4 1.4MHz CH-Middle 30MHz~1GHz

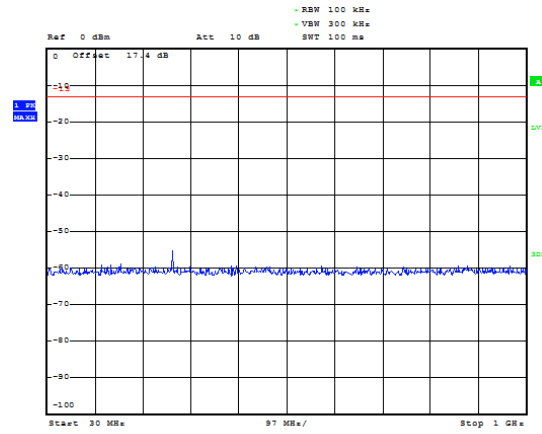


LTE Band 4 1.4MHz CH-Low 1GHz~3GHz

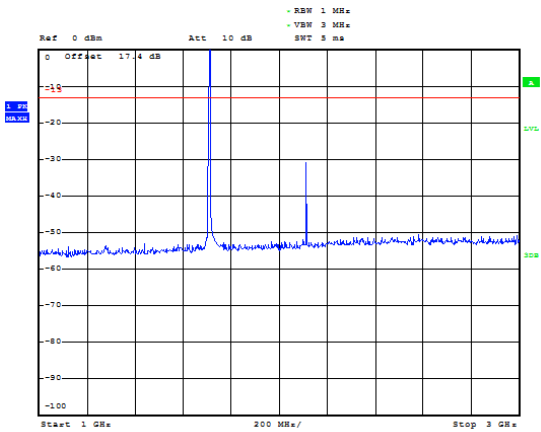


LTE Band 4 1.4MHz CH-Middle 1GHz~3GHz

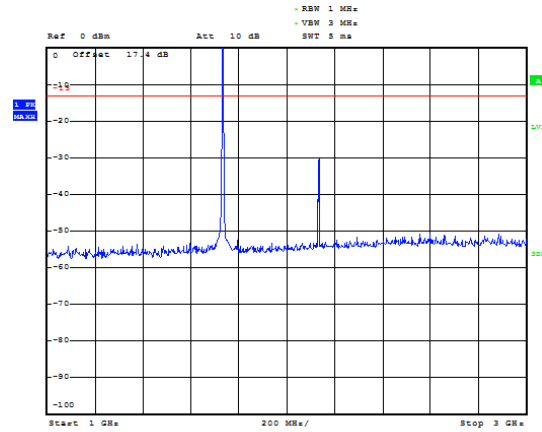







LTE Band 4 1.4MHz CH-Low 3GHz~18GHz






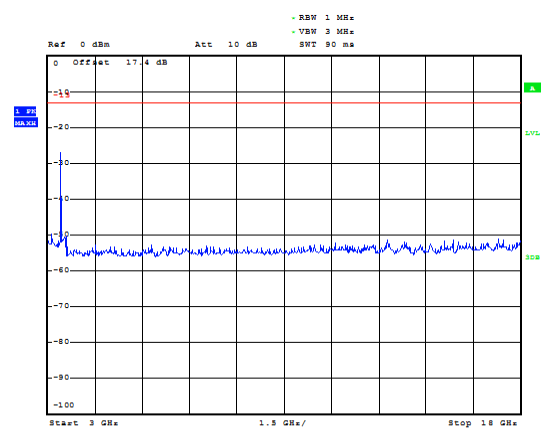


LTE Band 4 1.4MHz CH-Middle 3GHz~18GHz

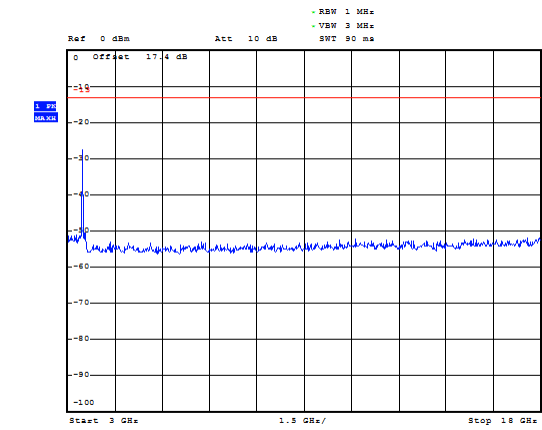




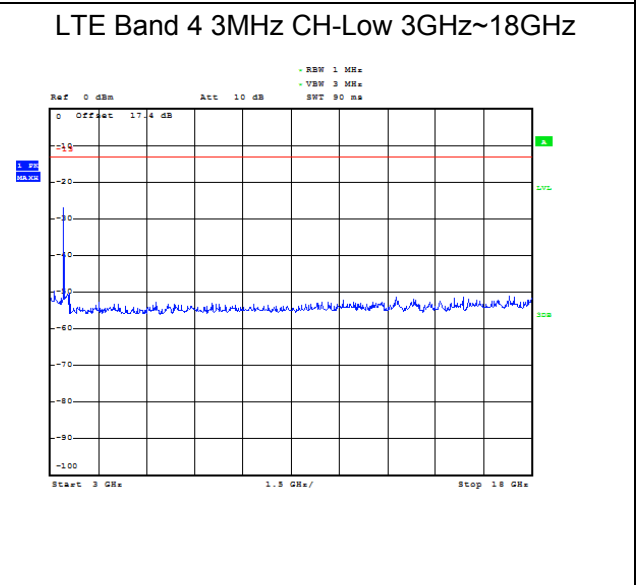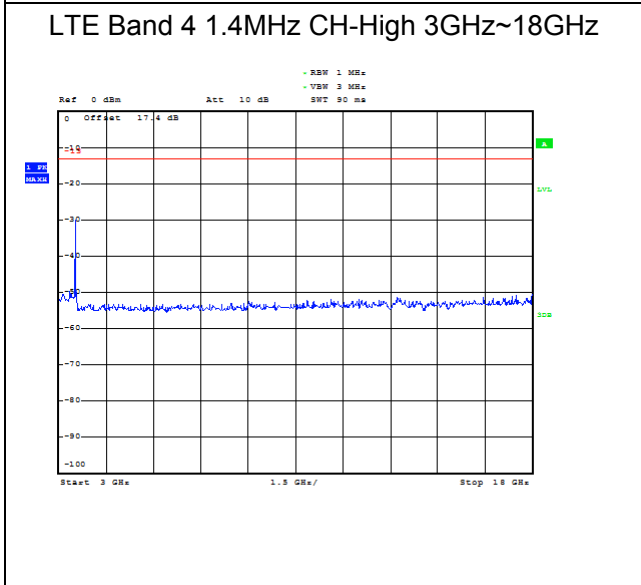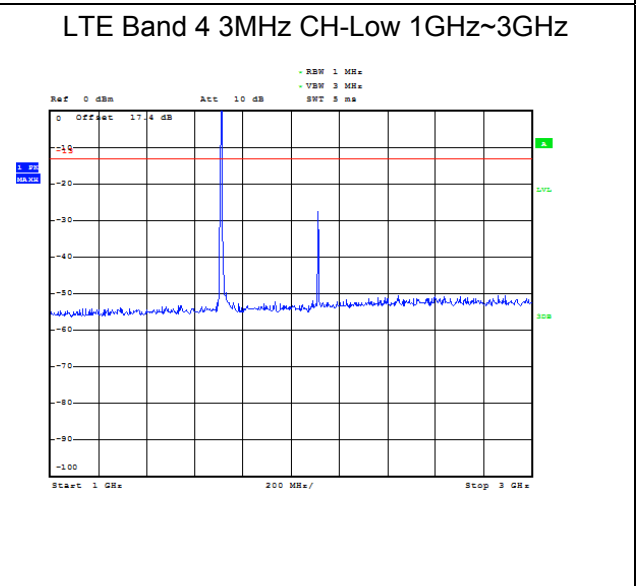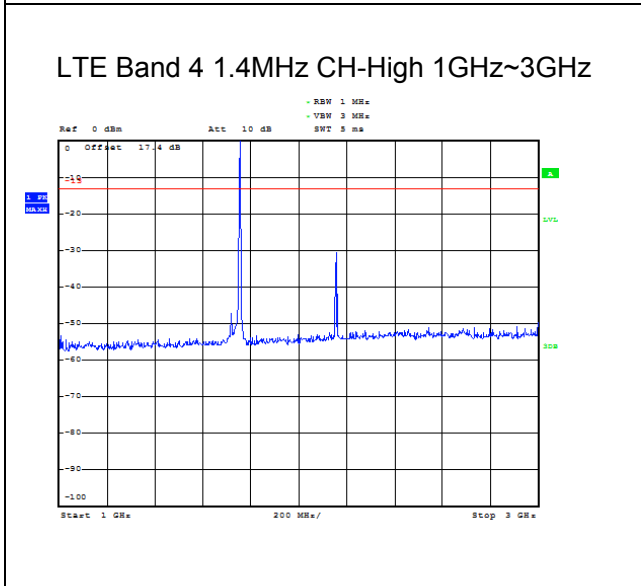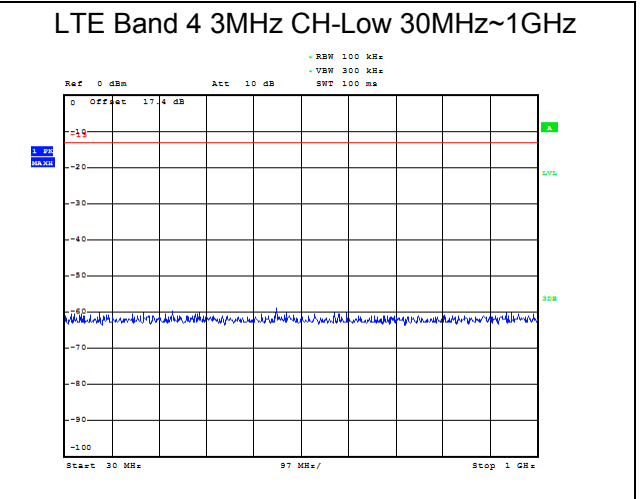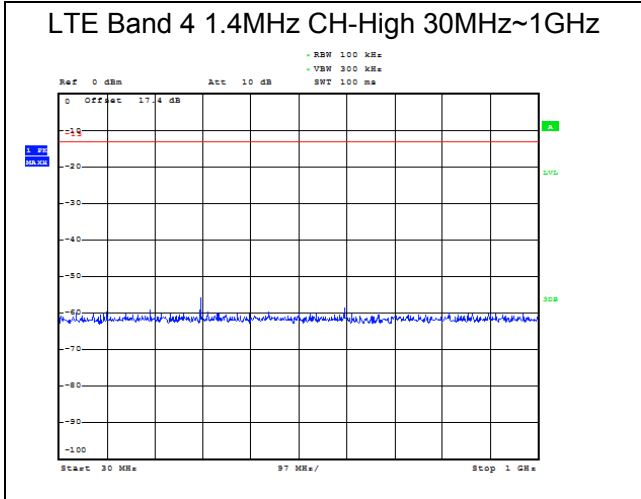

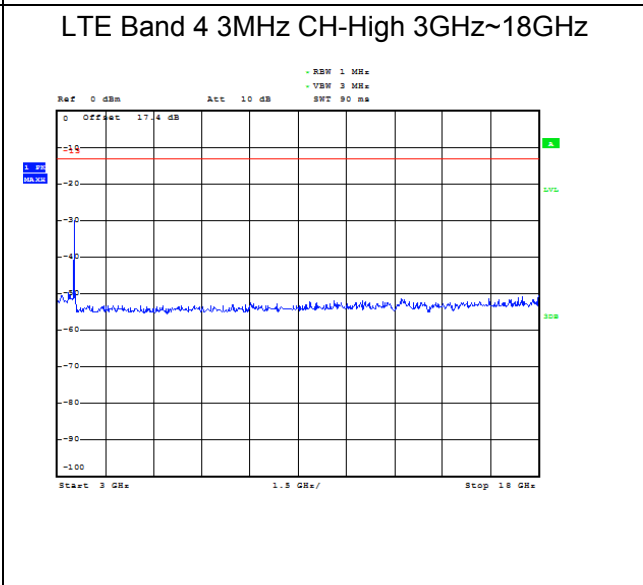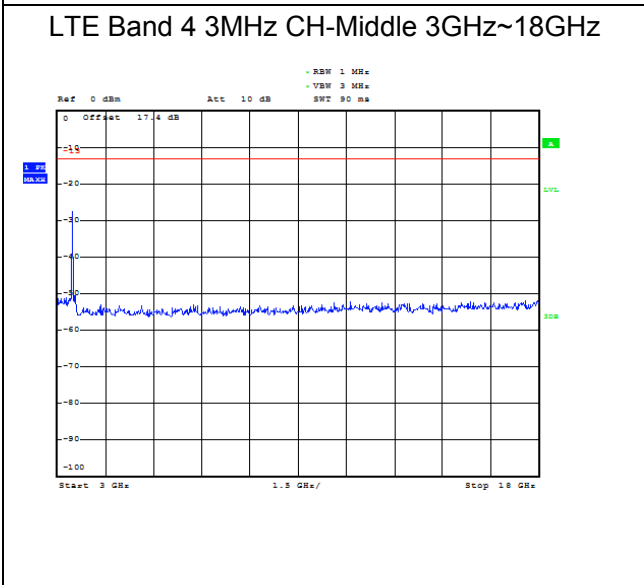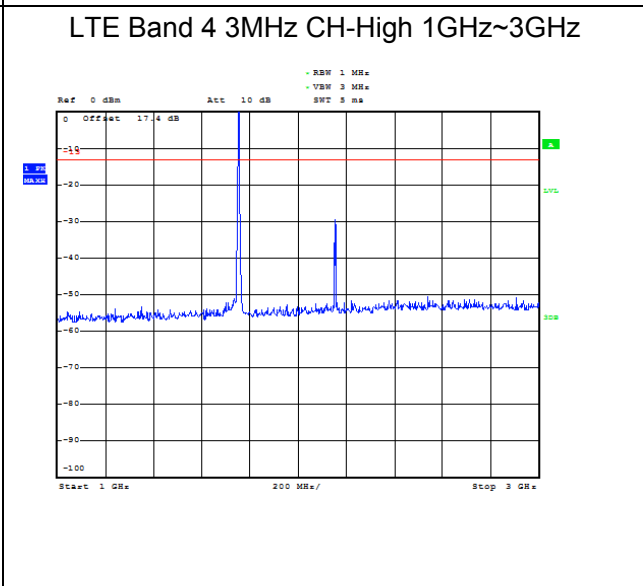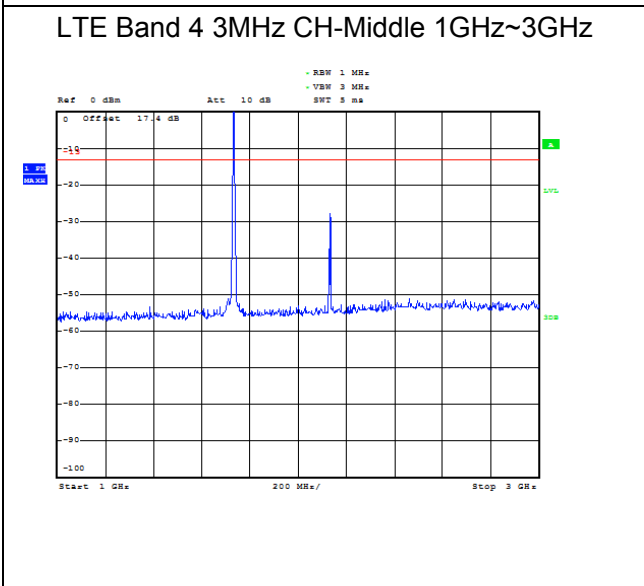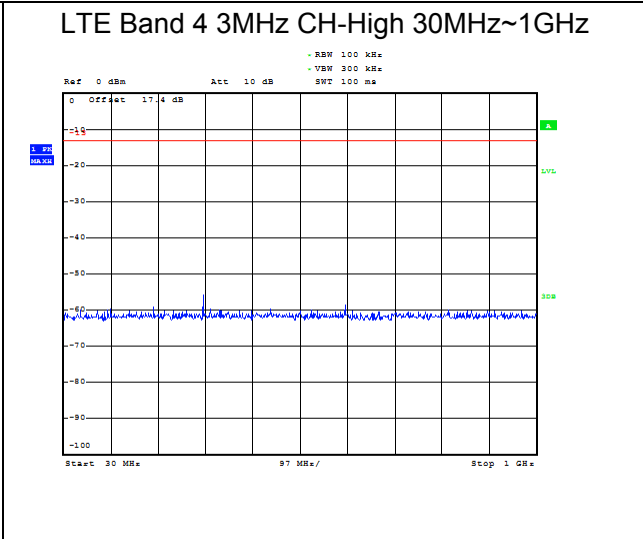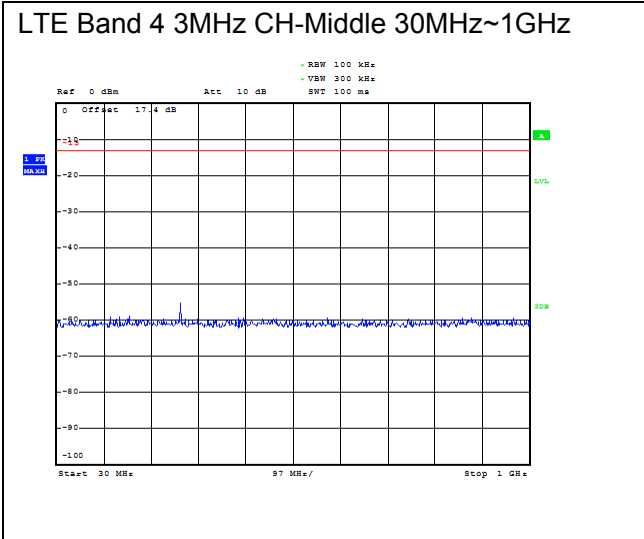





LTE Band 4 5MHz CH-Low 30MHz~1GHz

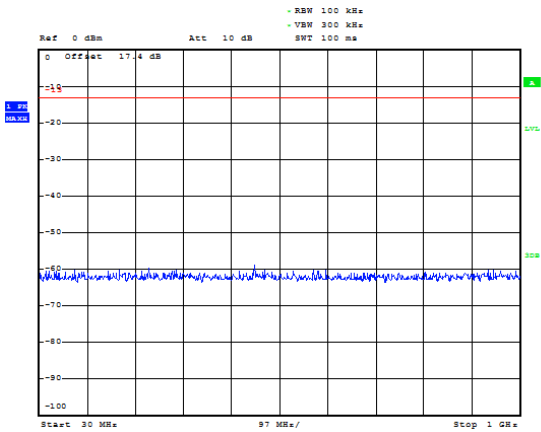


LTE Band 4 5MHz CH-Middle 30MHz~1GHz

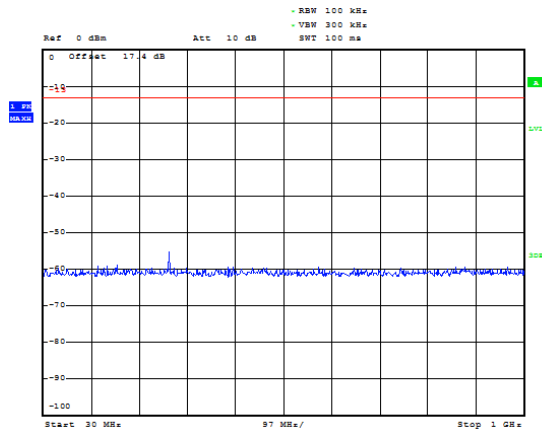


LTE Band 4 5MHz CH-Low 1GHz~3GHz

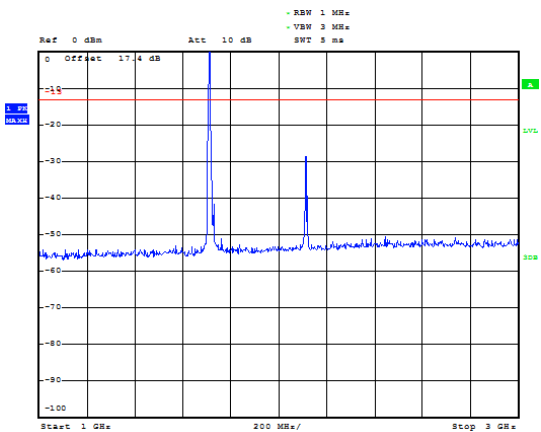


LTE Band 4 5MHz CH-Middle 1GHz~3GHz

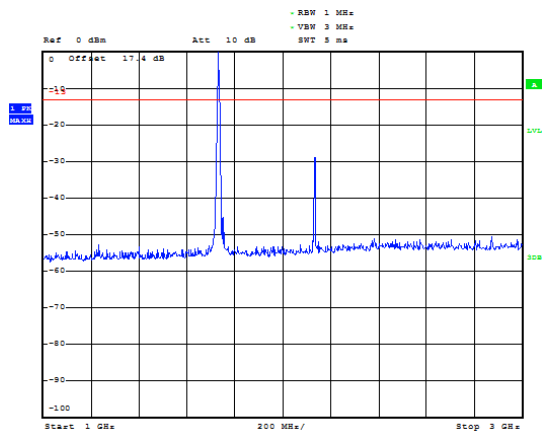

LTE Band 4 5MHz CH-Low 3GHz~18GHz

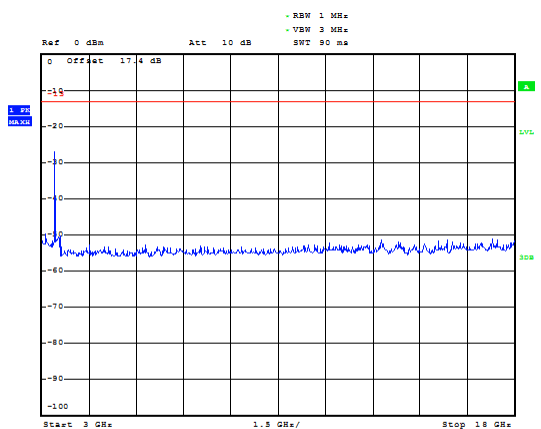


LTE Band 4 5MHz CH-Middle 3GHz~18GHz

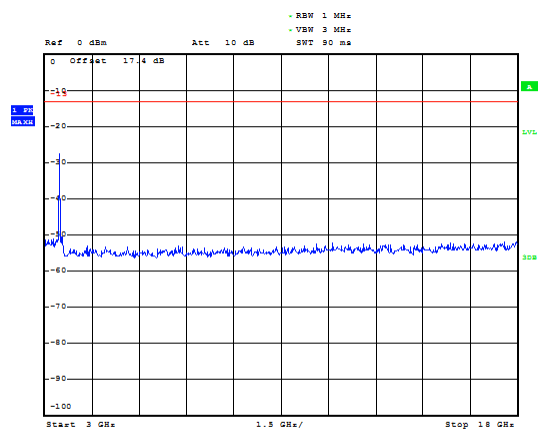





### LTE Band 4 5MHz CH-High 30MHz~1GHz

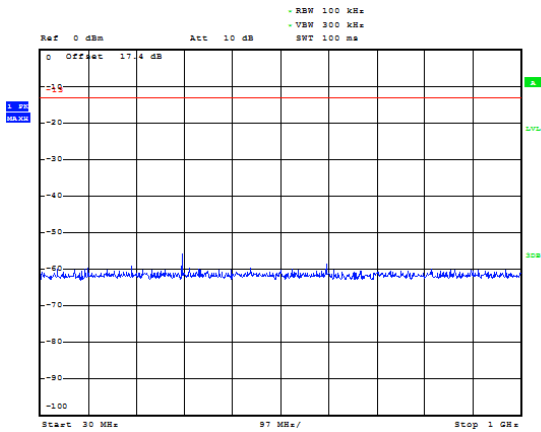


### LTE Band 4 10MHz CH-Low 30MHz~1GHz

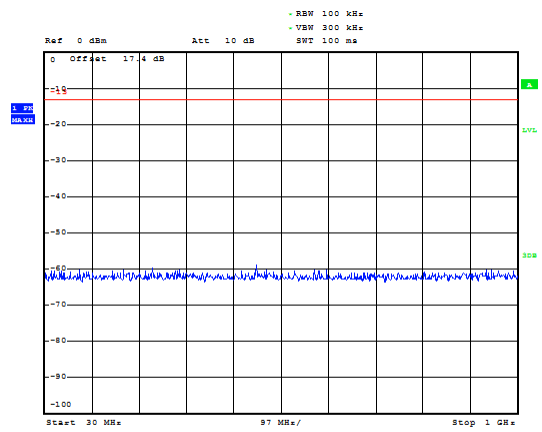


### LTE Band 4 5MHz CH-High 1GHz~3GHz

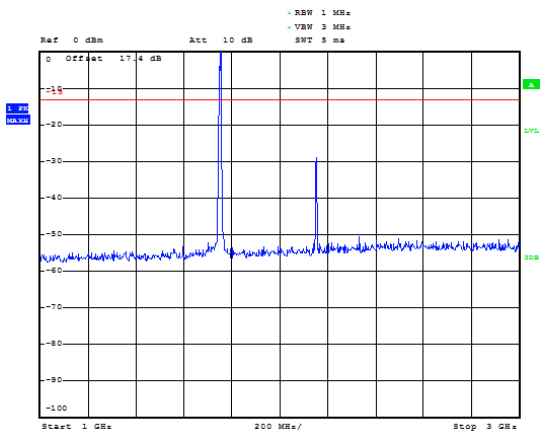


### LTE Band 4 10MHz CH-Low 1GHz~3GHz

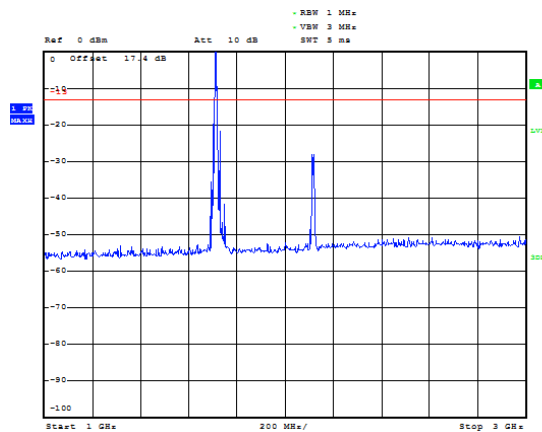

### LTE Band 4 5MHz CH-High 3GHz~18GHz

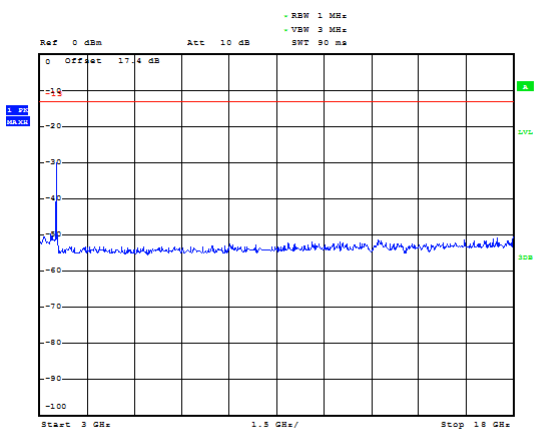


### LTE Band 4 10MHz CH-Low 3GHz~18GHz

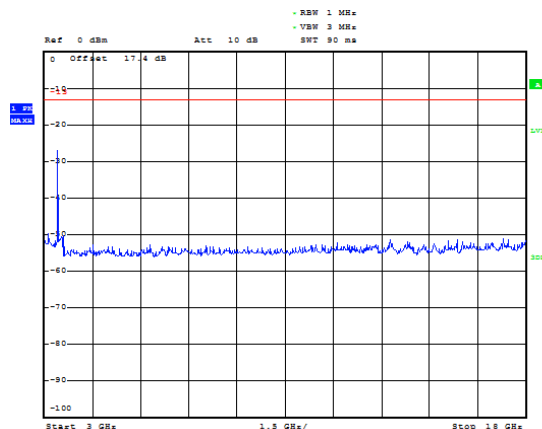





LTE Band 4 10MHz CH-Middle 30MHz~1GHz

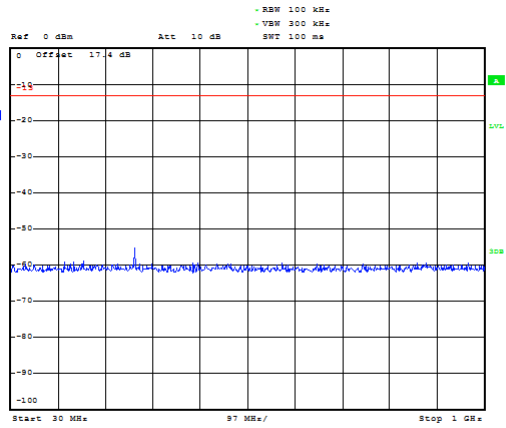


LTE Band 4 10MHz CH-High 30MHz~1GHz

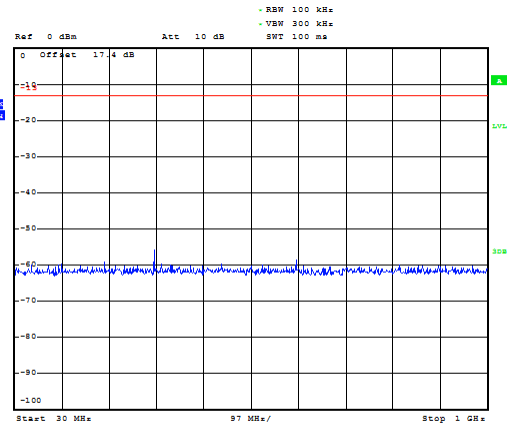


LTE Band 4 10MHz CH-Middle 1GHz~3GHz

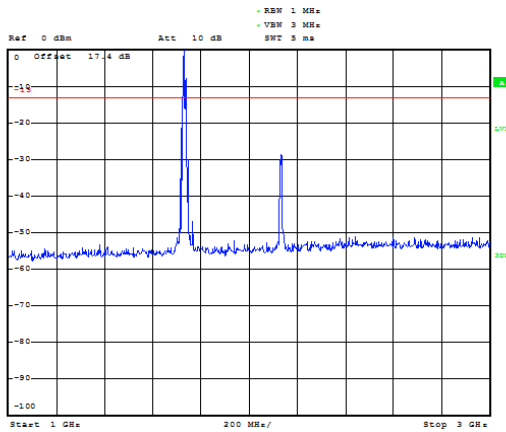


LTE Band 4 10MHz CH-High 1GHz~3GHz

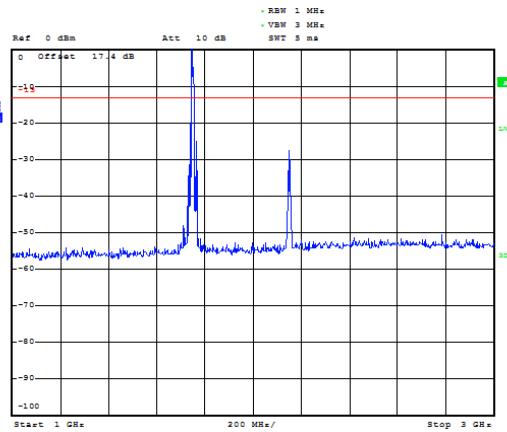

LTE Band 4 10MHz CH-Middle 3GHz~18GHz

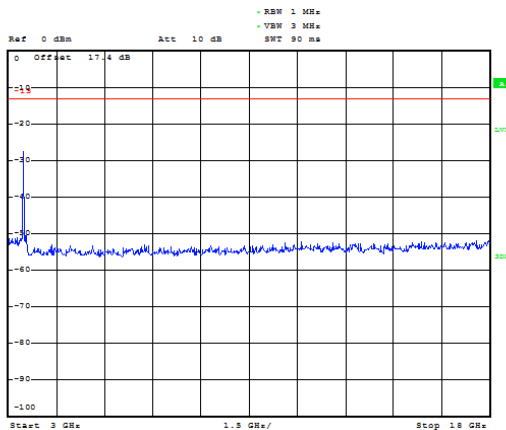


LTE Band 4 10MHz CH-High 3GHz~18GHz

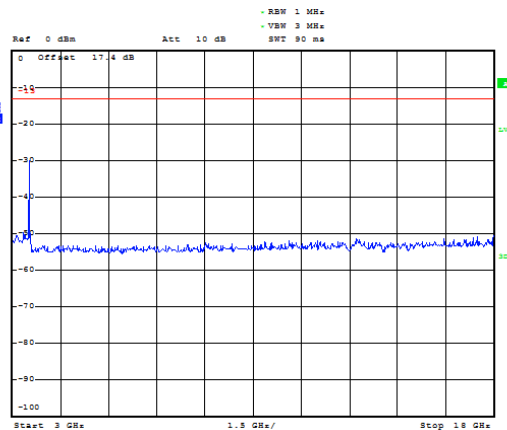





### LTE Band 4 15MHz CH-Low 30MHz~1GHz

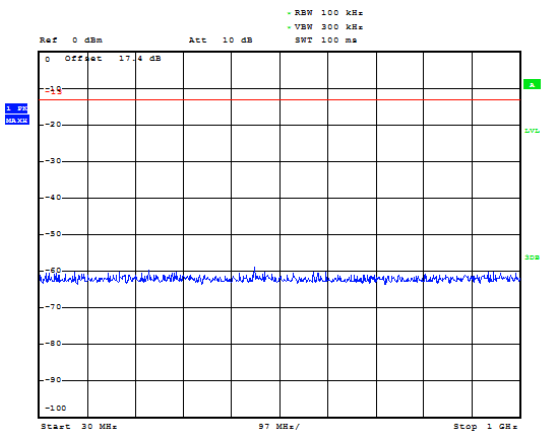


### LTE Band 4 15MHz CH-Middle 30MHz~1GHz

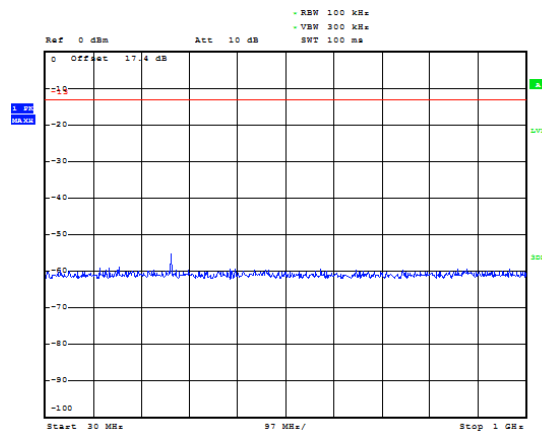


### LTE Band 4 15MHz CH-Low 1GHz~3GHz

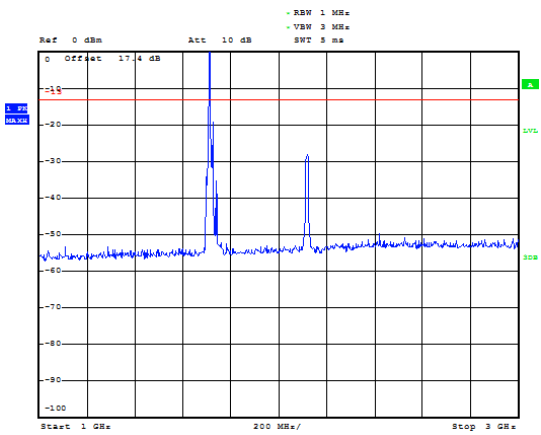


### LTE Band 4 15MHz CH-Middle 1GHz~3GHz

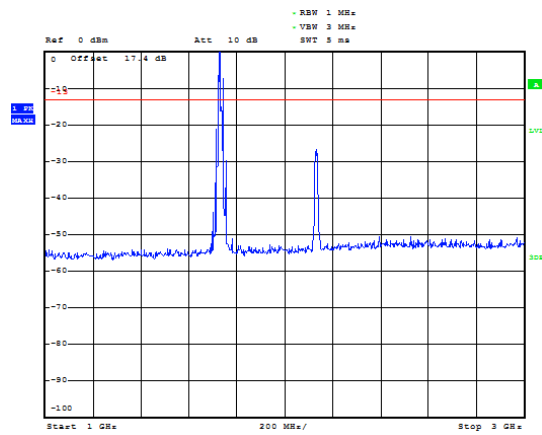

### LTE Band 4 15MHz CH-Low 3GHz~18GHz

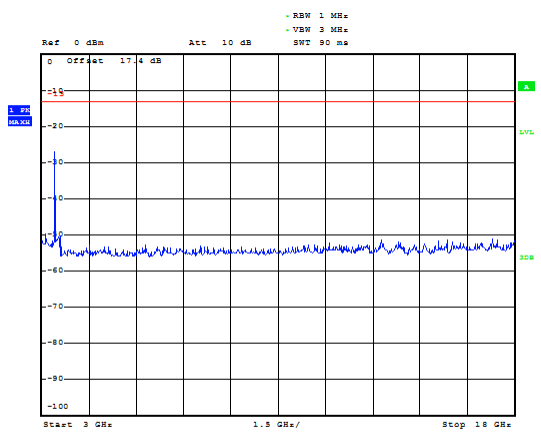


### LTE Band 4 15MHz CH-Middle 3GHz~18GHz

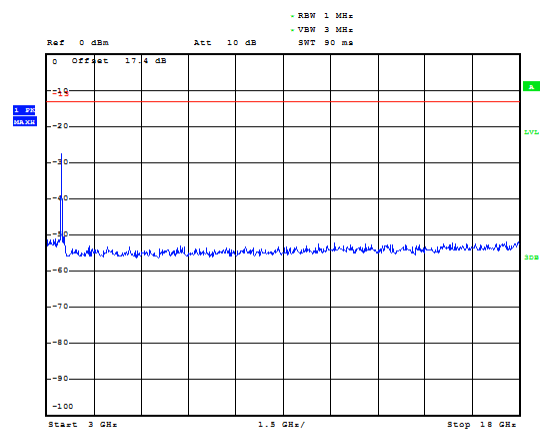





### LTE Band 4 15MHz CH-High 30MHz~1GHz

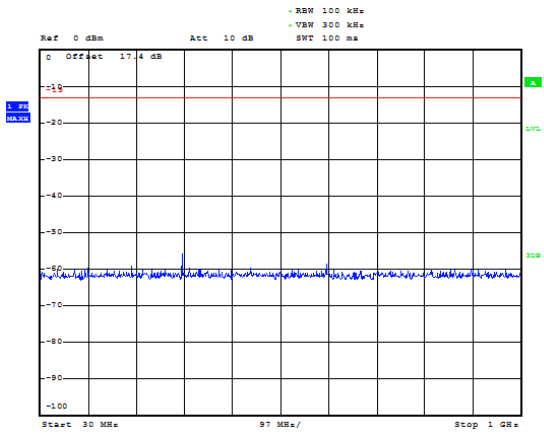


### LTE Band 4 20MHz CH-Low 30MHz~1GHz

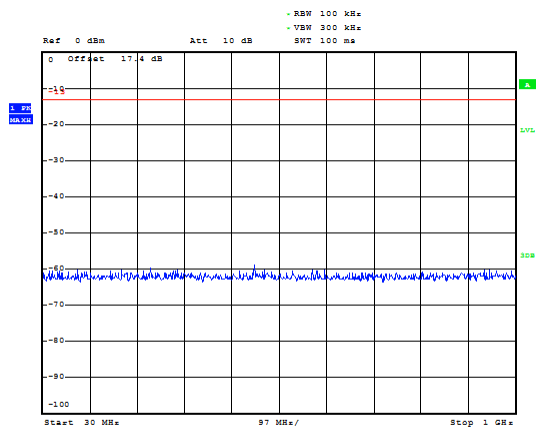


### LTE Band 4 15MHz CH-High 1GHz~3GHz

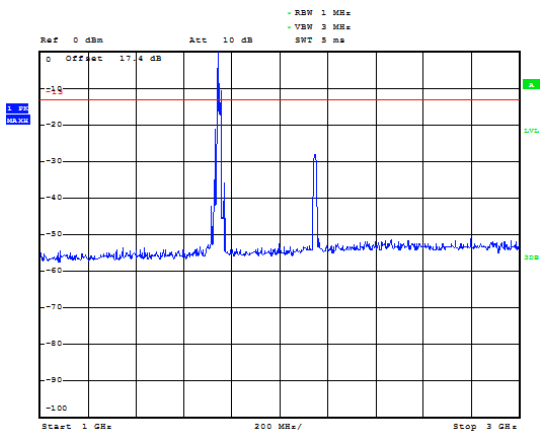


### LTE Band 4 20MHz CH-Low 1GHz~3GHz

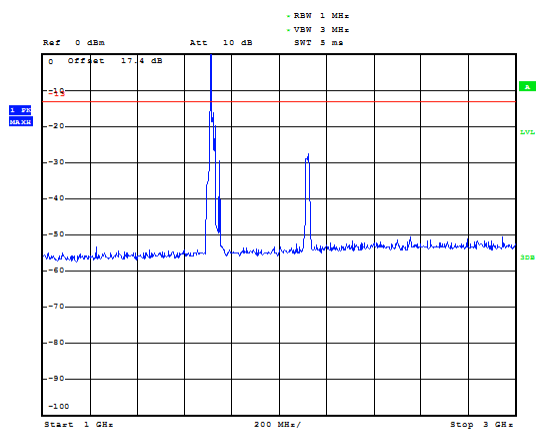

### LTE Band 4 15MHz CH-High 3GHz~18GHz

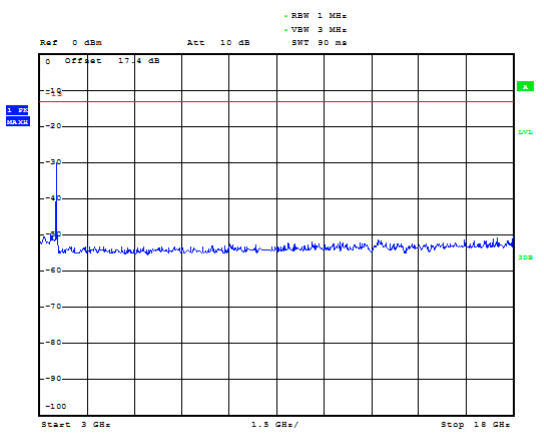


### LTE Band 4 20MHz CH-Low 3GHz~18GHz

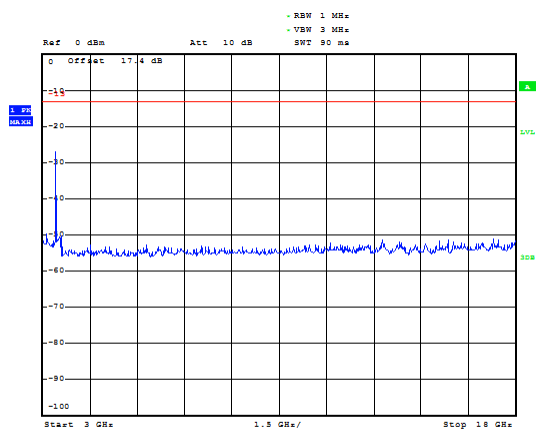





LTE Band 4 20MHz CH-Middle 30MHz~1GHz

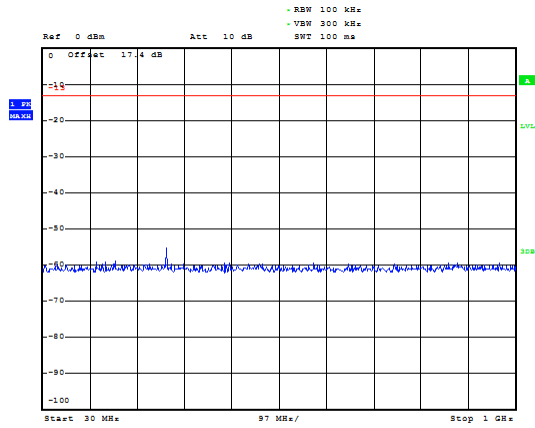


LTE Band 4 20MHz CH-High 30MHz~1GHz

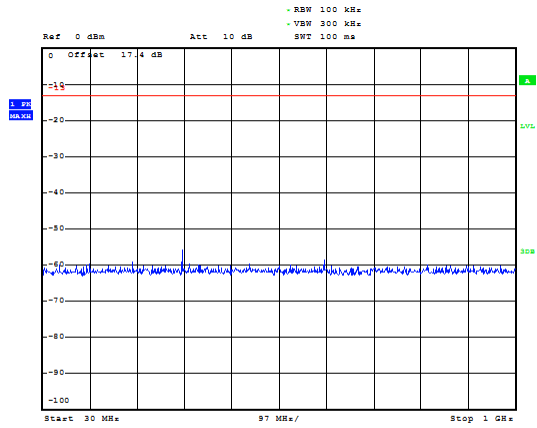


LTE Band 4 20MHz CH-Middle 1GHz~3GHz

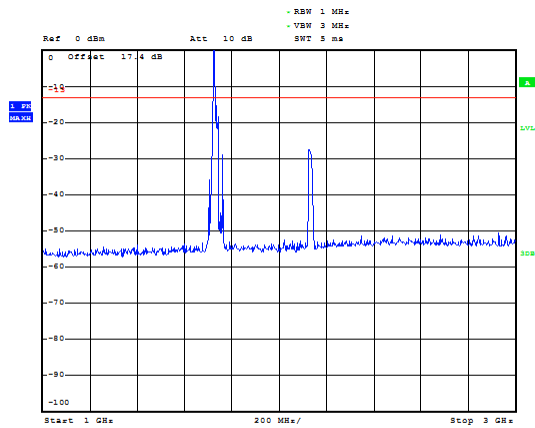


LTE Band 4 20MHz CH-High 1GHz~3GHz

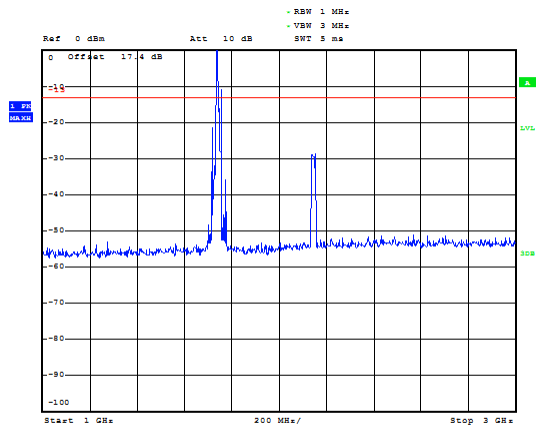

LTE Band 4 20MHz CH-Middle 3GHz~18GHz

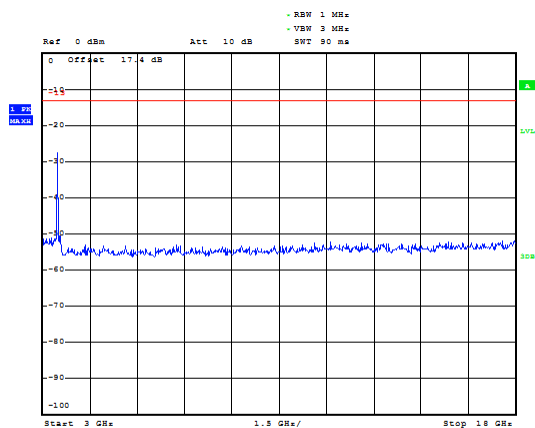


LTE Band 4 20MHz CH-High 3GHz~18GHz

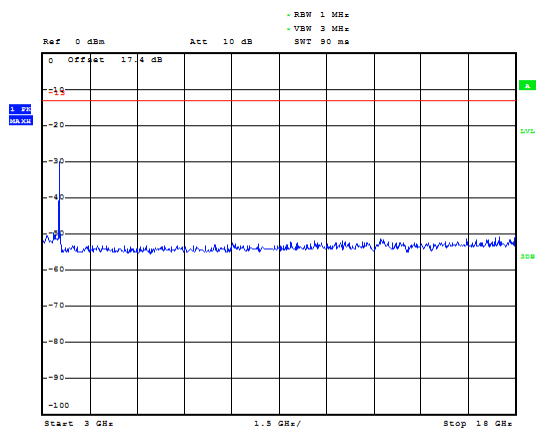







LTE Band 7 5MHz CH-Low 30MHz~1GHz

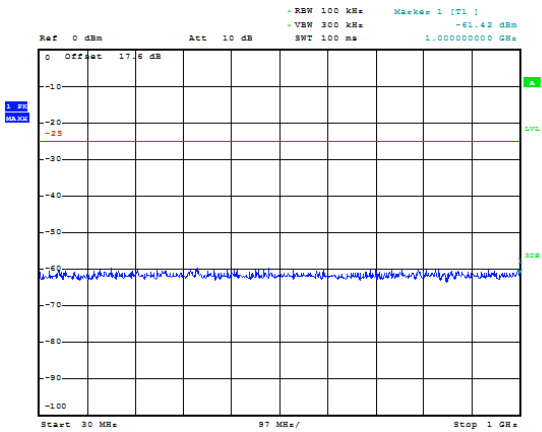


LTE Band 7 5MHz CH-Middle 30MHz~1GHz

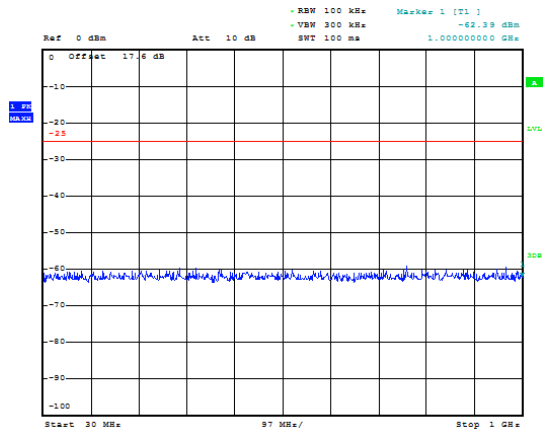


LTE Band 7 5MHz CH-Low 1GHz~3GHz

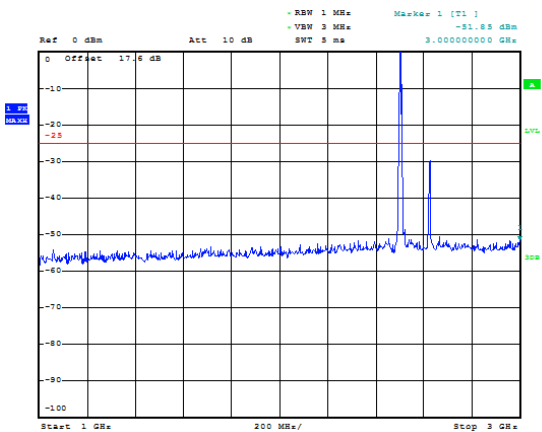


LTE Band 7 5MHz CH-Middle 1GHz~3GHz

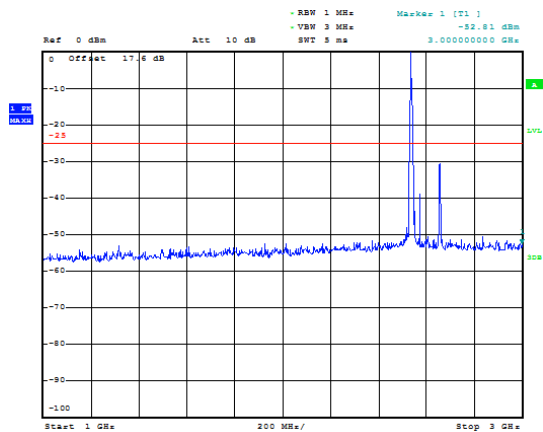

LTE Band 7 5MHz CH-Low 3GHz~26GHz

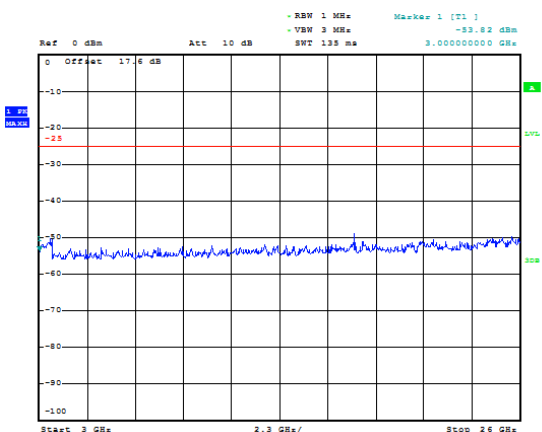


LTE Band 7 5MHz CH-Middle 3GHz~26GHz

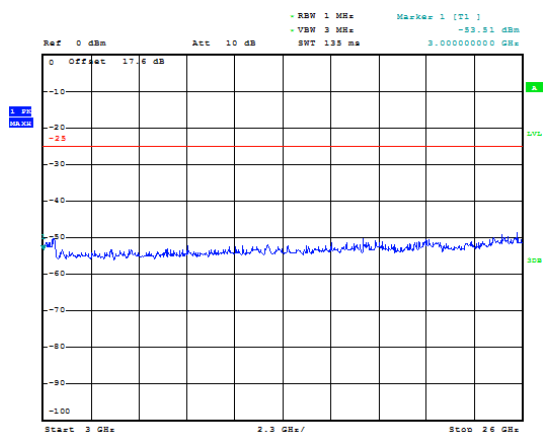





### LTE Band 7 5MHz CH-High 30MHz~1GHz

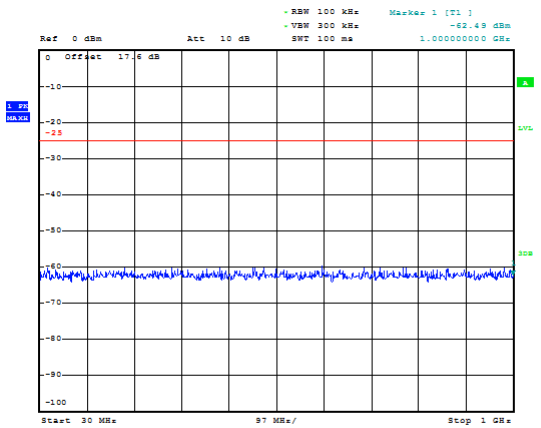


### LTE Band 7 10MHz CH-Low 30MHz~1GHz

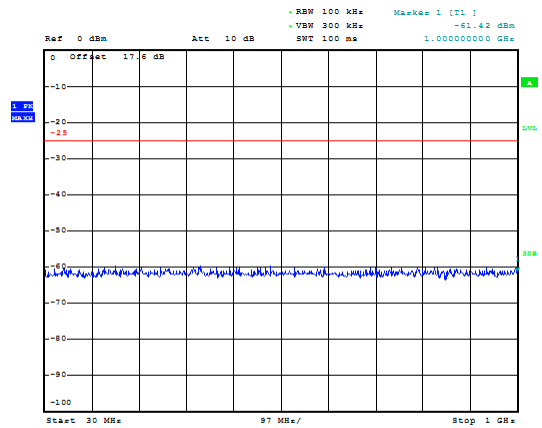


### LTE Band 7 5MHz CH-High 1GHz~3GHz

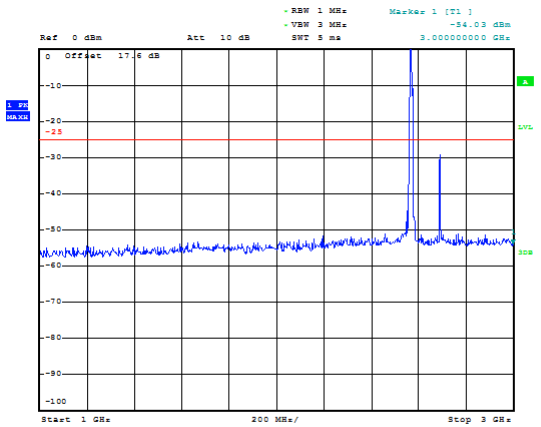


### LTE Band 7 10MHz CH-Low 1GHz~3GHz

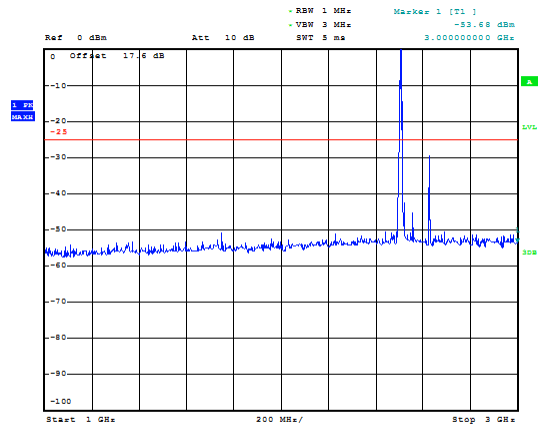

### LTE Band 7 5MHz CH-High 3GHz~26GHz

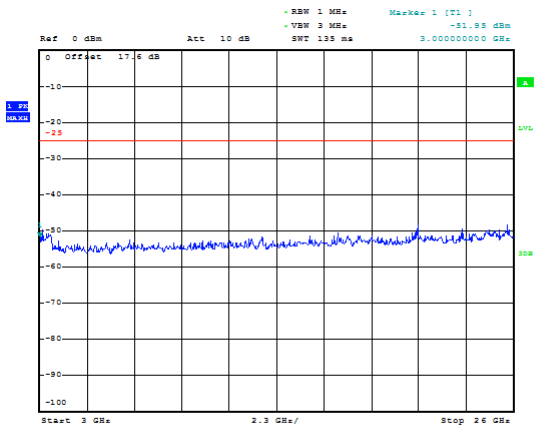


### LTE Band 7 10MHz CH-Low 3GHz~26GHz

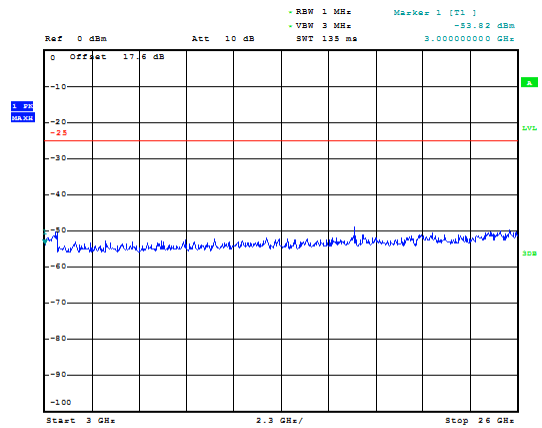





LTE Band 7 10MHz CH-Middle 30MHz~1GHz

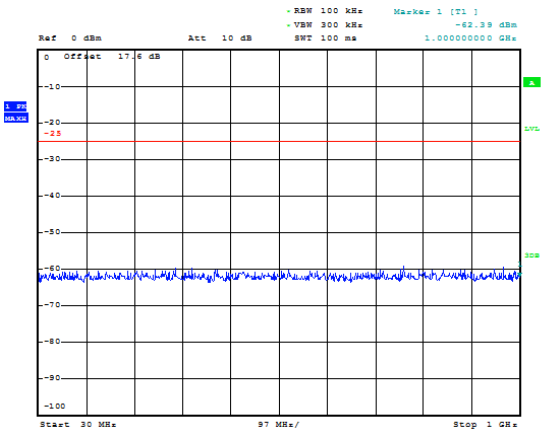


LTE Band 7 10MHz CH-High 30MHz~1GHz

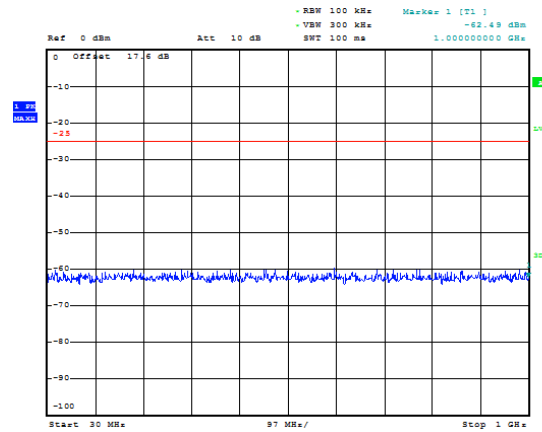


LTE Band 7 10MHz CH-Middle 1GHz~3GHz

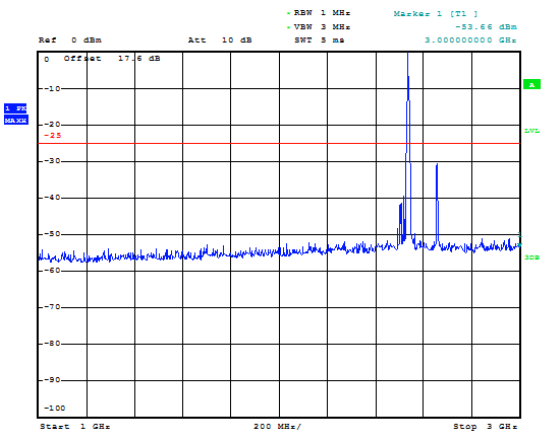


LTE Band 7 10MHz CH-High 1GHz~3GHz

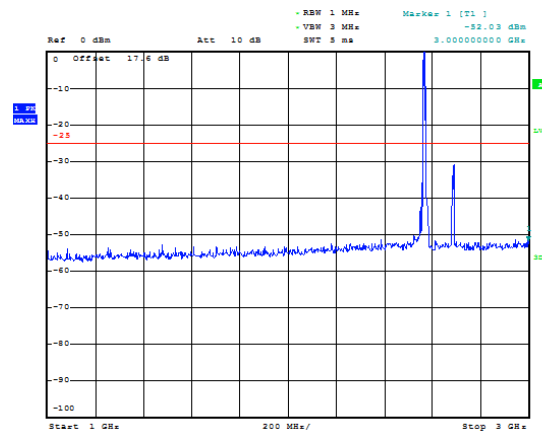

LTE Band 7 10MHz CH-Middle 3GHz~26GHz

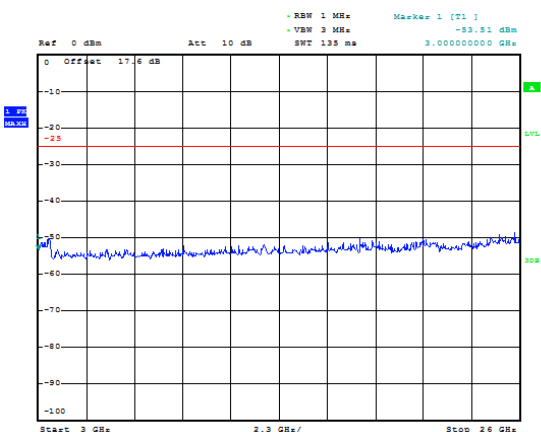


LTE Band 7 10MHz CH-High 3GHz~26GHz

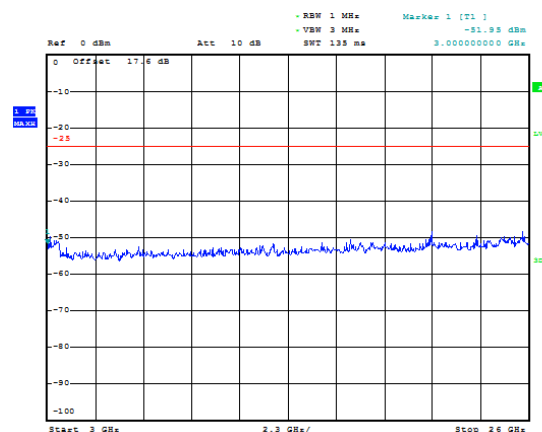





LTE Band 7 15MHz CH-Low 30MHz~1GHz

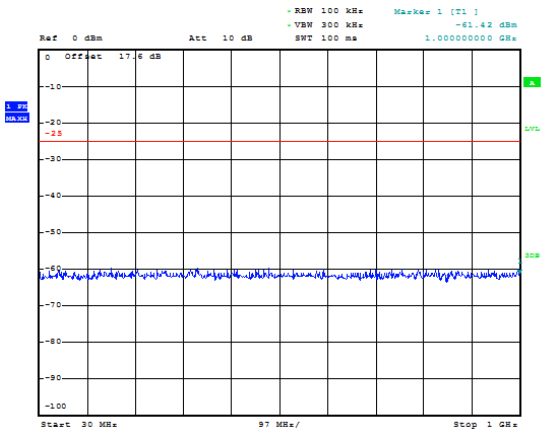


LTE Band 7 15MHz CH-Middle 30MHz~1GHz

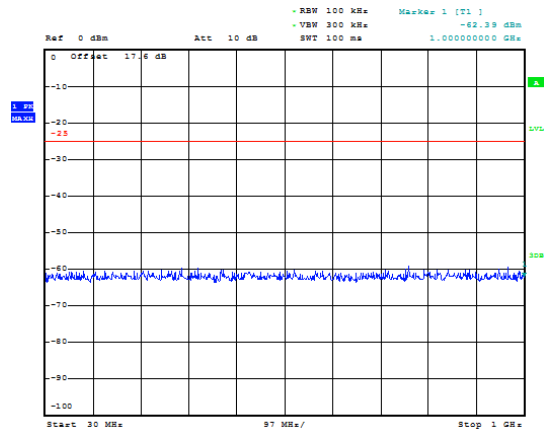


LTE Band 7 15MHz CH-Low 1GHz~3GHz

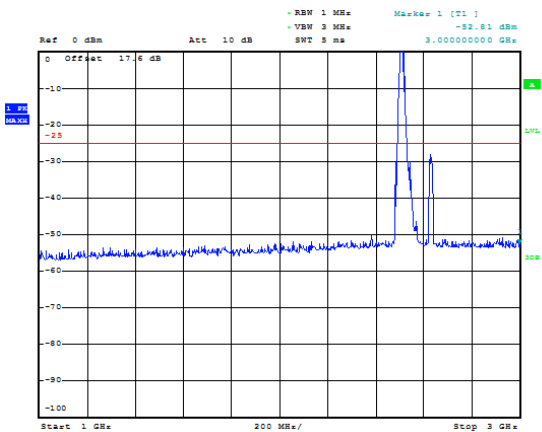


LTE Band 7 15MHz CH-Middle 1GHz~3GHz

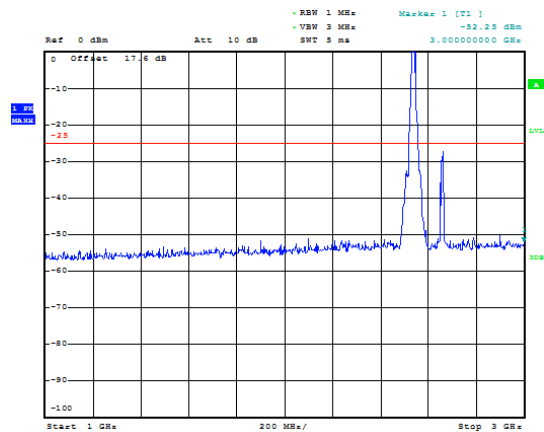

LTE Band 7 15MHz CH-Low 3GHz~26GHz

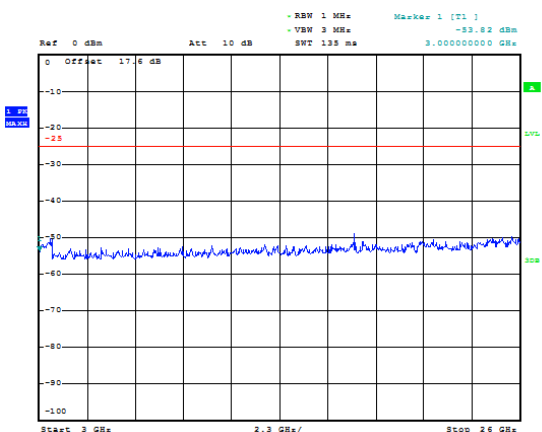


LTE Band 7 15MHz CH-Middle 3GHz~26GHz

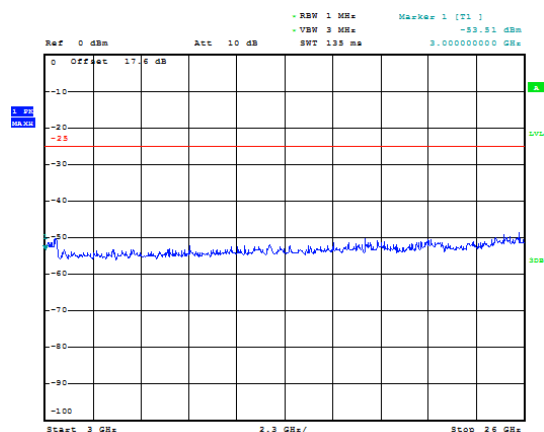





### LTE Band 7 15MHz CH-High 30MHz~1GHz

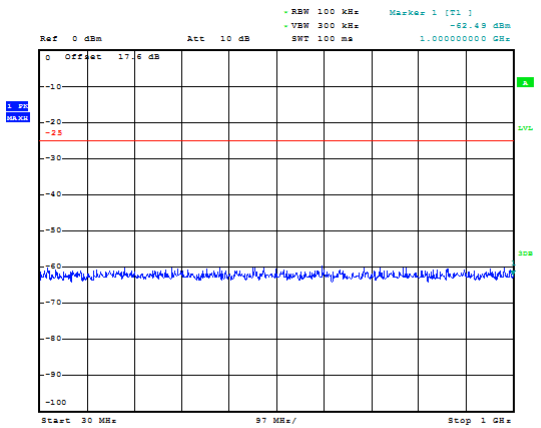


### LTE Band 7 20MHz CH-Low 30MHz~1GHz

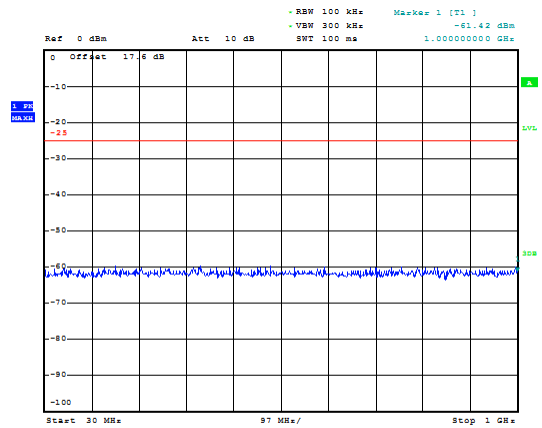


### LTE Band 7 15MHz CH-High 1GHz~3GHz

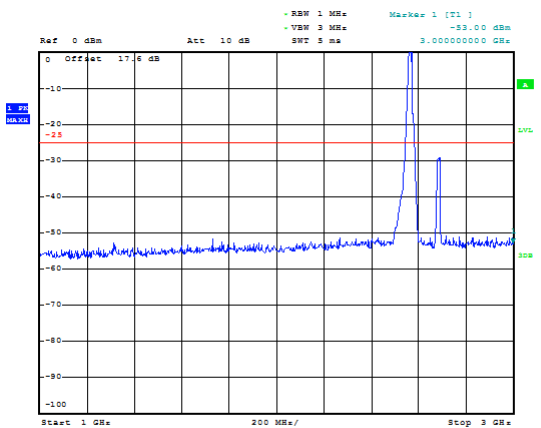


### LTE Band 7 20MHz CH-Low 1GHz~3GHz

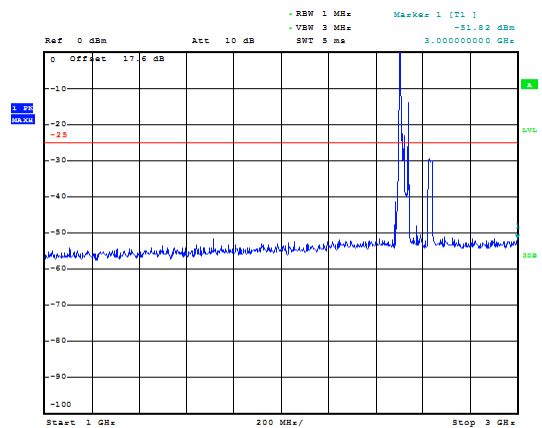

### LTE Band 7 15MHz CH-High 3GHz~26GHz

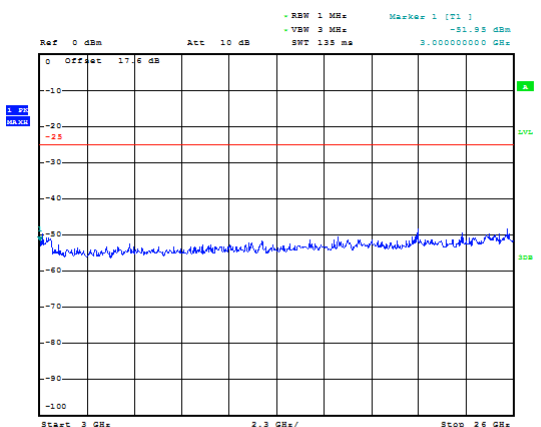


### LTE Band 7 20MHz CH-Low 3GHz~26GHz

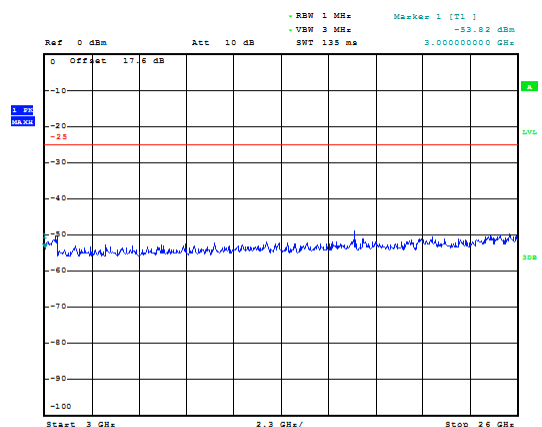





LTE Band 7 20MHz CH-Middle 30MHz~1GHz

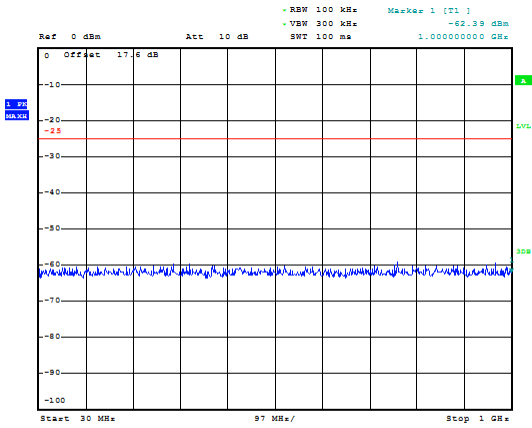


LTE Band 7 20MHz CH-High 30MHz~1GHz

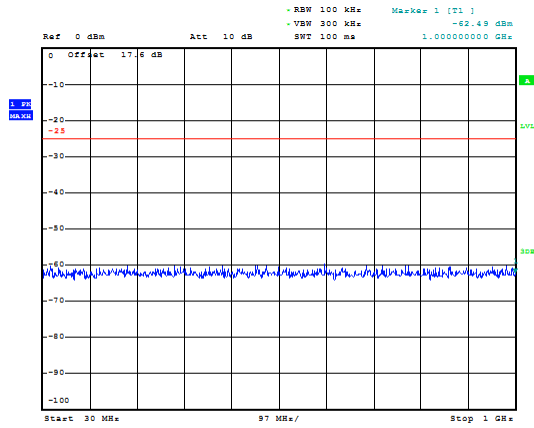


LTE Band 7 20MHz CH-Middle 1GHz~3GHz

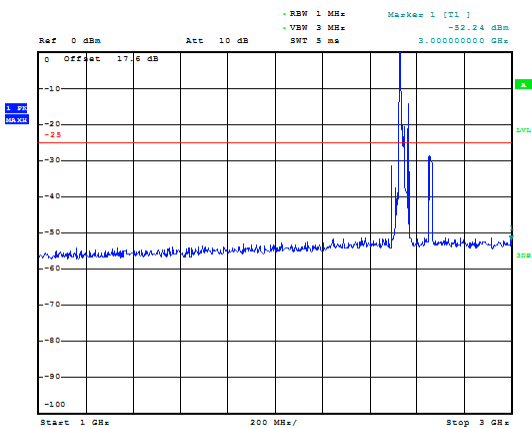


LTE Band 7 20MHz CH-High 1GHz~3GHz

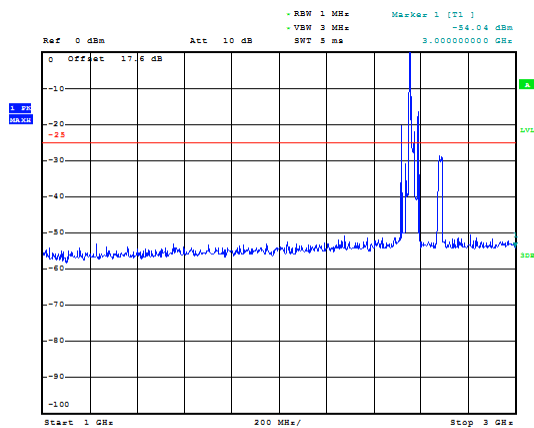

LTE Band 7 20MHz CH-Middle 3GHz~26GHz

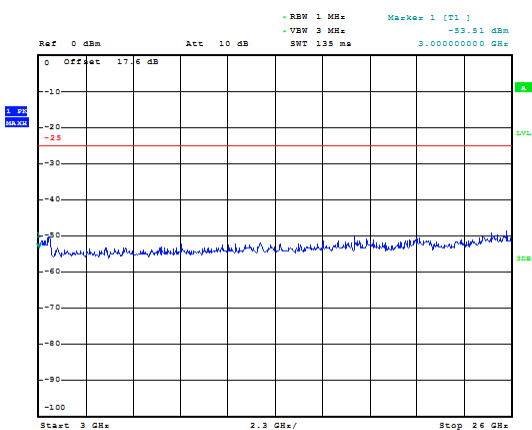

LTE Band 7 20MHz CH-High 3GHz~26GHz

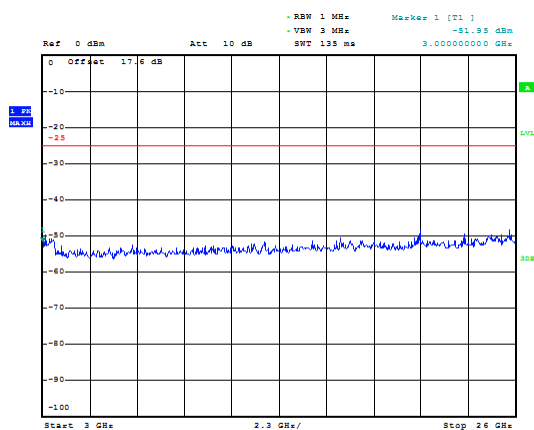

If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.  
The signal beyond the limit is carrier in the following plots.

Test Data File Name	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
WCDMA B4_CHLOW_3-18GHz	3426.6	-30.919	-13	17.919
WCDMA B4_CHMID_3-18GHz	3470.0	-30.642	-13	17.642
B4_CHLOW_1.4M_RB1_1-3GHz	2112.3	-30.338	-13	17.338
B4_CHMID_1.4M_RB1_1-3GHz	2130.8	-30.725	-13	17.725
B4_CHHIGH_1.4M_RB1_1-3GHz	2150.1	-30.231	-13	17.231
B4_CHLOW_3M_RB1_1-3GHz	2108.5	-28.645	-13	15.645
B4_CHMID_3M_RB1_1-3GHz	2129.2	-27.678	-13	14.678
B4_CHHIGH_3M_RB1_1-3GHz	2153.4	-29.981	-13	16.981
B4_CHLOW_5M_RB1_1-3GHz	2114.6	-29.045	-13	16.045
B4_CHMID_5M_RB1_1-3GHz	2138.3	-29.037	-13	16.037
B4_CHHIGH_5M_RB1_1-3GHz	2151.0	-30.064	-13	17.064
B4_CHLOW_10M_RB1_1-3GHz	2112.0	-29.714	-13	16.714
B4_CHMID_10M_RB1_1-3GHz	2131.3	-29.943	-13	16.943
B4_CHHIGH_10M_RB1_1-3GHz	2153.0	-28.737	-13	15.737
B4_CHLOW_15M_RB1_1-3GHz	2119.2	-28.441	-13	15.441
B4_CHMID_15M_RB1_1-3GHz	2133.7	-28.234	-13	15.234
B4_CHHIGH_15M_RB1_1-3GHz	2143.6	-28.709	-13	15.709
B4_CHLOW_20M_RB1_1-3GHz	2120.3	-29.422	-13	16.422
B4_CHMID_20M_RB1_1-3GHz	2135.6	-29.343	-13	16.343
B4_CHHIGH_20M_RB1_1-3GHz	2145.9	-29.802	-13	16.802

## 5.8 Radiates Spurious Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

- The testing follows FCC KDB 971168 v03 Section 5.8 and ANSI/TIA-603-E (2016).
- The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
- A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (Pr).
- The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- The measurement results are obtained as described below:  


$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
 The measurement results are amend as described below:  

$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .




**Test setup**

**30MHz~~~ 1GHz**

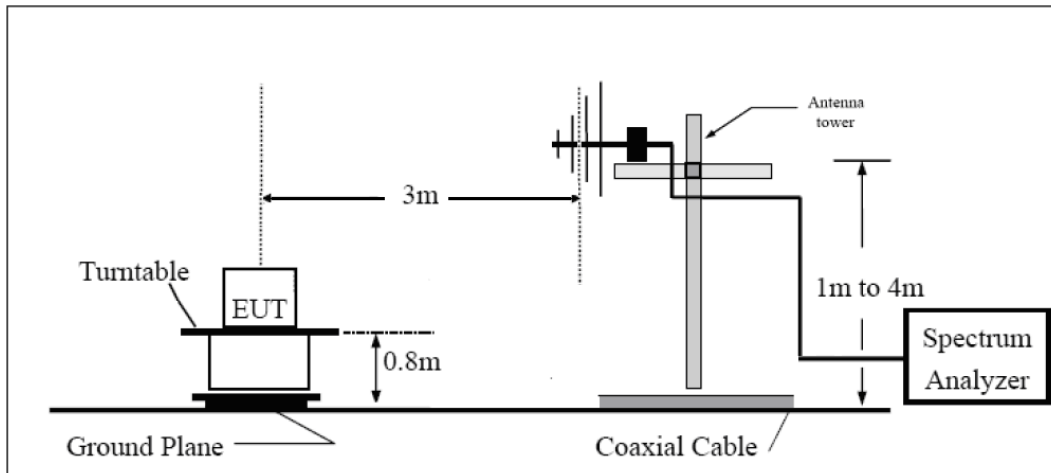

**Above 1GHz**

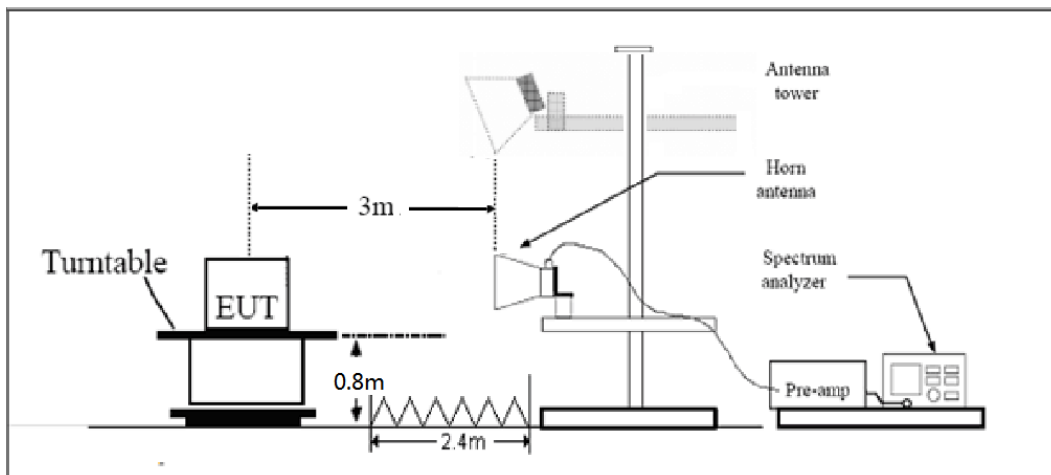

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

**Limits**

Rule Part 27.53(h) specifies that “for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB..”

Rule Part 27.53(m)  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.



Part 27.53(h) Limit	-13 dBm
Part 27.53(m)Limit	-25 dBm

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = \pm 1.96$ ,  $U = \pm 3.55$  dB.

**Test Result**
**WCDMA Band IV CH-Low**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3428.6	-59.06	2.6	10.15	Horizontal	-51.51	-13.00	38.51	315
3	5134.9	-54.65	2.4	11.35	Horizontal	-45.70	-13.00	32.70	90
4	6848.6	-50.30	4.5	10.85	Horizontal	-43.95	-13.00	30.95	0
5	8563.9	-47.48	5.1	11.35	Horizontal	-41.23	-13.00	28.23	180
6	10258.9	-46.03	5.3	11.95	Horizontal	-39.38	-13.00	26.38	90
7	11984.6	-45.86	5.5	13.55	Horizontal	-37.81	-13.00	24.81	270
8	13694.6	-44.56	6.3	13.75	Horizontal	-37.11	-13.00	24.11	225
9	15411.4	-45.94	6.7	13.85	Horizontal	-38.79	-13.00	25.79	0
10	17160.8	-42.81	6.8	14.25	Horizontal	-35.36	-13.00	22.36	45

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.  
 2. The worst emission was found in the antenna is Horizontal position.

**WCDMA Band IV CH-Middle**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3485.6	-57.71	2.6	10.75	Horizontal	-49.56	-13.00	36.56	135
3	5194.5	-52.96	2.4	11.05	Horizontal	-44.31	-13.00	31.31	45
4	6908.3	-49.46	4.5	11.15	Horizontal	-42.81	-13.00	29.81	180
5	8661.0	-47.35	5.1	11.35	Horizontal	-41.10	-13.00	28.10	0
6	10371.4	-45.54	5.3	11.95	Horizontal	-38.89	-13.00	25.89	180
7	12128.6	-46.54	5.5	13.55	Horizontal	-38.49	-13.00	25.49	135
8	13854.4	-42.92	6.3	13.75	Horizontal	-35.47	-13.00	22.47	315
9	15595.9	-45.38	6.7	13.85	Horizontal	-38.23	-13.00	25.23	0
10	17312.6	-43.08	6.8	14.25	Horizontal	-35.63	-13.00	22.63	180

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.  
 2. The worst emission was found in the antenna is Horizontal position.

**WCDMA Band IV CH-High**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3504.8	-59.52	2.6	10.15	Horizontal	-51.97	-13.00	38.97	315
3	5255.6	-56.53	2.4	11.05	Horizontal	-47.88	-13.00	34.88	45
4	7013.3	-51.56	4.5	11.15	Horizontal	-44.91	-13.00	31.91	45
5	8764.9	-48.79	5.1	11.35	Horizontal	-42.54	-13.00	29.54	90
6	10516.5	-43.73	5.3	11.95	Horizontal	-37.08	-13.00	24.08	90
7	11216.3	-46.93	5.5	13.55	Horizontal	-38.88	-13.00	25.88	315
8	14024.3	-43.72	6.3	13.75	Horizontal	-36.27	-13.00	23.27	270
9	15771.4	-45.32	6.7	13.85	Horizontal	-38.17	-13.00	25.17	315
10	17524.1	-44.03	6.8	14.25	Horizontal	-36.58	-13.00	23.58	180

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.  
 2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 1.4MHz CH-Low, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3421.4	-58.53	2.6	10.15	Horizontal	-50.98	-13.00	37.98	135
3	5130.8	-49.55	2.4	11.35	Horizontal	-40.60	-13.00	27.60	90
4	6842.8	-49.22	4.5	10.85	Horizontal	-42.87	-13.00	29.87	225
5	8553.5	-47.41	5.1	11.35	Horizontal	-41.16	-13.00	28.16	315
6	10264.2	-45.91	5.3	11.95	Horizontal	-39.26	-13.00	26.26	45
7	11974.9	-45.73	5.5	13.55	Horizontal	-37.68	-13.00	24.68	0
8	13685.6	-43.71	6.3	13.75	Horizontal	-36.26	-13.00	23.26	180
9	15396.3	-45.09	6.7	13.85	Horizontal	-37.94	-13.00	24.94	135
10	17107.0	-43.75	6.8	14.25	Horizontal	-36.30	-13.00	23.30	270

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.  
 2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 1.4MHz CH-Middle, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3462.8	-57.89	2.6	10.75	Horizontal	-49.74	-13.00	36.74	270
3	5196.0	-47.33	2.4	11.05	Horizontal	-38.68	-13.00	25.68	225
4	6930.0	-49.66	4.5	11.15	Horizontal	-43.01	-13.00	30.01	315
5	8662.5	-46.85	5.1	11.35	Horizontal	-40.60	-13.00	27.60	45
6	10395.0	-45.53	5.3	11.95	Horizontal	-38.88	-13.00	25.88	225
7	12127.5	-45.64	5.5	13.55	Horizontal	-37.59	-13.00	24.59	0
8	13860.0	-44.14	6.3	13.75	Horizontal	-36.69	-13.00	23.69	315
9	15592.5	-45.28	6.7	13.85	Horizontal	-38.13	-13.00	25.13	315
10	17325.0	-42.98	6.8	14.25	Horizontal	-35.53	-13.00	22.53	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 1.4MHz CH-High, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3507.8	-57.55	2.6	10.15	Horizontal	-50.00	-13.00	37.00	225
3	5261.6	-53.32	2.4	11.05	Horizontal	-44.67	-13.00	31.67	315
4	7017.2	-49.56	4.5	11.15	Horizontal	-42.91	-13.00	29.91	45
5	8771.5	-46.42	5.1	11.35	Horizontal	-40.17	-13.00	27.17	0
6	10525.8	-44.76	5.3	11.95	Horizontal	-38.11	-13.00	25.11	180
7	12280.1	-46.73	5.5	13.55	Horizontal	-38.68	-13.00	25.68	135
8	14034.4	-43.20	6.3	13.75	Horizontal	-35.75	-13.00	22.75	270
9	15788.7	-45.32	6.7	13.85	Horizontal	-38.17	-13.00	25.17	270
10	17543.0	-43.56	6.8	14.25	Horizontal	-36.11	-13.00	23.11	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 3MHz CH-Low, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3423.0	-58.18	2.6	10.15	Horizontal	-50.63	-13.00	37.63	315
3	5130.8	-52.58	2.4	11.35	Horizontal	-43.63	-13.00	30.63	45
4	6846.0	-48.98	4.5	10.85	Horizontal	-42.63	-13.00	29.63	225
5	8557.5	-47.41	5.1	11.35	Horizontal	-41.16	-13.00	28.16	315
6	10269.0	-45.40	5.3	11.95	Horizontal	-38.75	-13.00	25.75	45
7	11980.5	-47.17	5.5	13.55	Horizontal	-39.12	-13.00	26.12	0
8	13692.0	-44.24	6.3	13.75	Horizontal	-36.79	-13.00	23.79	180
9	15403.5	-44.79	6.7	13.85	Horizontal	-37.64	-13.00	24.64	135
10	17115.0	-43.24	6.8	14.25	Horizontal	-35.79	-13.00	22.79	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 3MHz CH-Middle, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3465.0	-58.15	2.6	10.75	Horizontal	-50.00	-13.00	37.00	90
3	5197.5	-53.80	2.4	11.05	Horizontal	-45.15	-13.00	32.15	225
4	6930.0	-49.32	4.5	11.15	Horizontal	-42.67	-13.00	29.67	315
5	8662.5	-46.82	5.1	11.35	Horizontal	-40.57	-13.00	27.57	45
6	10395.0	-44.92	5.3	11.95	Horizontal	-38.27	-13.00	25.27	0
7	12127.5	-46.35	5.5	13.55	Horizontal	-38.30	-13.00	25.30	180
8	13860.0	-44.04	6.3	13.75	Horizontal	-36.59	-13.00	23.59	135
9	15592.5	-45.82	6.7	13.85	Horizontal	-38.67	-13.00	25.67	270
10	17325.0	-43.47	6.8	14.25	Horizontal	-36.02	-13.00	23.02	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 3MHz CH-High, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3504.8	-57.25	2.6	10.15	Horizontal	-49.70	-13.00	36.70	135
3	5256.8	-54.18	2.4	11.05	Horizontal	-45.53	-13.00	32.53	270
4	7014.0	-48.99	4.5	11.15	Horizontal	-42.34	-13.00	29.34	90
5	8767.5	-46.20	5.1	11.35	Horizontal	-39.95	-13.00	26.95	225
6	10521.0	-44.01	5.3	11.95	Horizontal	-37.36	-13.00	24.36	315
7	12274.5	-45.85	5.5	13.55	Horizontal	-37.80	-13.00	24.80	45
8	14028.0	-43.37	6.3	13.75	Horizontal	-35.92	-13.00	22.92	0
9	15781.5	-44.77	6.7	13.85	Horizontal	-37.62	-13.00	24.62	180
10	17535.0	-43.42	6.8	14.25	Horizontal	-35.97	-13.00	22.97	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 5MHz CH-Low, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3425.0	-58.49	2.6	10.15	Horizontal	-50.94	-13.00	37.94	90
3	5131.1	-54.07	2.4	11.35	Horizontal	-45.12	-13.00	32.12	225
4	6850.0	-49.92	4.5	10.85	Horizontal	-43.57	-13.00	30.57	315
5	8562.5	-46.64	5.1	11.35	Horizontal	-40.39	-13.00	27.39	45
6	10275.0	-45.67	5.3	11.95	Horizontal	-39.02	-13.00	26.02	0
7	11987.5	-45.86	5.5	13.55	Horizontal	-37.81	-13.00	24.81	180
8	13700.0	-43.13	6.3	13.75	Horizontal	-35.68	-13.00	22.68	135
9	15412.5	-45.70	6.7	13.85	Horizontal	-38.55	-13.00	25.55	270
10	17125.0	-43.61	6.8	14.25	Horizontal	-36.16	-13.00	23.16	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 5MHz CH-Middle, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3460.5	-58.40	2.6	10.75	Horizontal	-50.25	-13.00	37.25	45
3	5191.5	-53.52	2.4	11.05	Horizontal	-44.87	-13.00	31.87	225
4	6930.0	-49.06	4.5	11.15	Horizontal	-42.41	-13.00	29.41	315
5	8662.5	-46.97	5.1	11.35	Horizontal	-40.72	-13.00	27.72	45
6	10395.0	-44.75	5.3	11.95	Horizontal	-38.10	-13.00	25.10	0
7	12127.5	-46.07	5.5	13.55	Horizontal	-38.02	-13.00	25.02	180
8	13860.0	-43.19	6.3	13.75	Horizontal	-35.74	-13.00	22.74	135
9	15592.5	-45.22	6.7	13.85	Horizontal	-38.07	-13.00	25.07	270
10	17325.0	-42.67	6.8	14.25	Horizontal	-35.22	-13.00	22.22	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 5MHz CH-High, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3500.6	-57.40	2.6	10.15	Horizontal	-49.85	-13.00	36.85	45
3	5251.1	-54.55	2.4	11.05	Horizontal	-45.90	-13.00	32.90	0
4	7010.0	-49.84	4.5	11.15	Horizontal	-43.19	-13.00	30.19	180
5	8762.5	-45.50	5.1	11.35	Horizontal	-39.25	-13.00	26.25	135
6	10515.0	-45.14	5.3	11.95	Horizontal	-38.49	-13.00	25.49	270
7	12267.5	-46.49	5.5	13.55	Horizontal	-38.44	-13.00	25.44	315
8	14020.0	-44.12	6.3	13.75	Horizontal	-36.67	-13.00	23.67	45
9	15772.5	-43.53	6.7	13.85	Horizontal	-36.38	-13.00	23.38	225
10	17525.0	-44.05	6.8	14.25	Horizontal	-36.60	-13.00	23.60	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.



**LTE Band 4 QPSK 10MHz CH-Low, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3430.0	-58.47	2.6	10.15	Horizontal	-50.92	-13.00	37.92	45
3	5131.9	-53.27	2.4	11.35	Horizontal	-44.32	-13.00	31.32	270
4	6860.0	-48.88	4.5	10.85	Horizontal	-42.53	-13.00	29.53	90
5	8575.0	-46.72	5.1	11.35	Horizontal	-40.47	-13.00	27.47	45
6	10290.0	-46.24	5.3	11.95	Horizontal	-39.59	-13.00	26.59	0
7	12005.0	-45.65	5.5	13.55	Horizontal	-37.60	-13.00	24.60	180
8	13720.0	-45.18	6.3	13.75	Horizontal	-37.73	-13.00	24.73	135
9	15435.0	-45.17	6.7	13.85	Horizontal	-38.02	-13.00	25.02	270
10	17150.0	-43.30	6.8	14.25	Horizontal	-35.85	-13.00	22.85	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 10MHz CH-Middle, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3456.0	-57.97	2.6	10.75	Horizontal	-49.82	-13.00	36.82	45
3	5184.4	-53.30	2.4	11.05	Horizontal	-44.65	-13.00	31.65	270
4	6930.0	-50.33	4.5	11.15	Horizontal	-43.68	-13.00	30.68	315
5	8662.5	-46.98	5.1	11.35	Horizontal	-40.73	-13.00	27.73	45
6	10395.0	-45.46	5.3	11.95	Horizontal	-38.81	-13.00	25.81	225
7	12127.5	-45.86	5.5	13.55	Horizontal	-37.81	-13.00	24.81	315
8	13860.0	-44.27	6.3	13.75	Horizontal	-36.82	-13.00	23.82	45
9	15592.5	-45.87	6.7	13.85	Horizontal	-38.72	-13.00	25.72	0
10	17325.0	-42.91	6.8	14.25	Horizontal	-35.46	-13.00	22.46	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 10MHz CH-High, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3490.9	-57.98	2.6	10.15	Horizontal	-50.43	-13.00	37.43	135
3	5236.9	-53.43	2.4	11.05	Horizontal	-44.78	-13.00	31.78	135
4	7000.0	-49.51	4.5	11.15	Horizontal	-42.86	-13.00	29.86	270
5	8750.0	-45.83	5.1	11.35	Horizontal	-39.58	-13.00	26.58	315
6	10500.0	-43.75	5.3	11.95	Horizontal	-37.10	-13.00	24.10	45
7	12250.0	-45.29	5.5	13.55	Horizontal	-37.24	-13.00	24.24	270
8	14000.0	-43.92	6.3	13.75	Horizontal	-36.47	-13.00	23.47	315
9	15750.0	-44.61	6.7	13.85	Horizontal	-37.46	-13.00	24.46	45
10	17500.0	-43.44	6.8	14.25	Horizontal	-35.99	-13.00	22.99	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 15MHz CH Low, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3435.0	-58.13	2.6	10.15	Horizontal	-50.58	-13.00	37.58	315
3	5132.6	-54.36	2.4	11.35	Horizontal	-45.41	-13.00	32.41	45
4	6870.0	-49.34	4.5	10.85	Horizontal	-42.99	-13.00	29.99	0
5	8587.5	-47.43	5.1	11.35	Horizontal	-41.18	-13.00	28.18	180
6	10305.0	-47.33	5.3	11.95	Horizontal	-40.68	-13.00	27.68	135
7	12022.5	-45.96	5.5	13.55	Horizontal	-37.91	-13.00	24.91	135
8	13740.0	-43.90	6.3	13.75	Horizontal	-36.45	-13.00	23.45	270
9	15457.5	-45.59	6.7	13.85	Horizontal	-38.44	-13.00	25.44	315
10	17175.0	-43.69	6.8	14.25	Horizontal	-36.24	-13.00	23.24	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 15MHz CH-Middle, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3465.0	-57.12	2.6	10.75	Horizontal	-48.97	-13.00	35.97	270
3	5197.5	-53.17	2.4	11.05	Horizontal	-44.52	-13.00	31.52	315
4	6930.0	-50.17	4.5	11.15	Horizontal	-43.52	-13.00	30.52	45
5	8662.5	-47.01	5.1	11.35	Horizontal	-40.76	-13.00	27.76	270
6	10395.0	-44.97	5.3	11.95	Horizontal	-38.32	-13.00	25.32	315
7	12127.5	-45.93	5.5	13.55	Horizontal	-37.88	-13.00	24.88	45
8	13860.0	-43.51	6.3	13.75	Horizontal	-36.06	-13.00	23.06	225
9	15592.5	-45.85	6.7	13.85	Horizontal	-38.70	-13.00	25.70	315
10	17325.0	-42.28	6.8	14.25	Horizontal	-34.83	-13.00	21.83	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 15MHz CH-High, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3481.5	-58.58	2.6	10.15	Horizontal	-51.03	-13.00	38.03	0
3	5222.3	-51.89	2.4	11.05	Horizontal	-43.24	-13.00	30.24	180
4	6990.0	-49.75	4.5	11.15	Horizontal	-43.10	-13.00	30.10	135
5	8737.5	-47.13	5.1	11.35	Horizontal	-40.88	-13.00	27.88	135
6	10485.0	-44.92	5.3	11.95	Horizontal	-38.27	-13.00	25.27	270
7	12232.5	-46.27	5.5	13.55	Horizontal	-38.22	-13.00	25.22	315
8	13980.0	-42.90	6.3	13.75	Horizontal	-35.45	-13.00	22.45	45
9	15727.5	-45.31	6.7	13.85	Horizontal	-38.16	-13.00	25.16	270
10	17475.0	-42.84	6.8	14.25	Horizontal	-35.39	-13.00	22.39	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.



## LTE Band 4 QPSK 20MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3440.0	-58.47	2.6	10.15	Horizontal	-50.92	-13.00	37.92	135
3	5133.8	-48.72	2.4	11.35	Horizontal	-39.77	-13.00	26.77	270
4	6880.0	-48.72	4.5	10.85	Horizontal	-42.37	-13.00	29.37	315
5	8600.0	-45.89	5.1	11.35	Horizontal	-39.64	-13.00	26.64	45
6	10320.0	-45.85	5.3	11.95	Horizontal	-39.20	-13.00	26.20	270
7	12040.0	-46.26	5.5	13.55	Horizontal	-38.21	-13.00	25.21	315
8	13760.0	-43.24	6.3	13.75	Horizontal	-35.79	-13.00	22.79	45
9	15480.0	-46.00	6.7	13.85	Horizontal	-38.85	-13.00	25.85	225
10	17200.0	-43.58	6.8	14.25	Horizontal	-36.13	-13.00	23.13	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

## LTE Band 4 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3465.0	-58.71	2.6	10.75	Horizontal	-50.56	-13.00	37.56	270
3	5170.9	-53.97	2.4	11.05	Horizontal	-45.32	-13.00	32.32	315
4	6930.0	-48.52	4.5	11.15	Horizontal	-41.87	-13.00	28.87	135
5	8662.5	-46.55	5.1	11.35	Horizontal	-40.30	-13.00	27.30	270
6	10395.0	-45.05	5.3	11.95	Horizontal	-38.40	-13.00	25.40	315
7	12127.5	-44.03	5.5	13.55	Horizontal	-35.98	-13.00	22.98	45
8	13860.0	-43.98	6.3	13.75	Horizontal	-36.53	-13.00	23.53	270
9	15592.5	-45.75	6.7	13.85	Horizontal	-38.60	-13.00	25.60	315
10	17325.0	-43.72	6.8	14.25	Horizontal	-36.27	-13.00	23.27	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 4 QPSK 20MHz CH-High, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3490.0	-57.88	2.6	10.15	Horizontal	-50.33	-13.00	37.33	315
3	5208.4	-49.62	2.4	11.05	Horizontal	-40.97	-13.00	27.97	45
4	6980.0	-49.01	4.5	11.15	Horizontal	-42.36	-13.00	29.36	225
5	8725.0	-45.81	5.1	11.35	Horizontal	-39.56	-13.00	26.56	315
6	10470.0	-44.14	5.3	11.95	Horizontal	-37.49	-13.00	24.49	270
7	12215.0	-45.78	5.5	13.55	Horizontal	-37.73	-13.00	24.73	315
8	13960.0	-42.64	6.3	13.75	Horizontal	-35.19	-13.00	22.19	135
9	15705.0	-44.27	6.7	13.85	Horizontal	-37.12	-13.00	24.12	270
10	17450.0	-43.08	6.8	14.25	Horizontal	-35.63	-13.00	22.63	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 7 QPSK 5MHz CH-Low, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5001.0	-46.14	2.00	9.15	Horizontal	-38.99	-25.00	13.99	135
3	7501.1	-50.94	2.50	11.35	Horizontal	-42.09	-25.00	17.09	270
4	10001.3	-49.06	4.20	12.05	Horizontal	-41.21	-25.00	16.21	90
5	12512.5	-45.90	5.20	12.85	Horizontal	-38.25	-25.00	13.25	45
6	15015.0	-46.42	5.50	14.23	Horizontal	-37.69	-25.00	12.69	0
7	17517.5	-44.50	5.70	14.15	Horizontal	-36.05	-25.00	11.05	180
8	20020.0	-44.06	6.30	13.76	Horizontal	-36.60	-25.00	11.60	180
9	22522.5	-43.35	6.80	14.05	Horizontal	-36.10	-25.00	11.10	225
10	25025.0	-43.44	6.90	14.84	Horizontal	-35.50	-25.00	10.50	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 7 QPSK 5MHz CH-Middle, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5065.8	-46.52	2.00	9.15	Horizontal	-39.37	-25.00	14.37	90
3	7598.6	-50.11	2.50	11.35	Horizontal	-41.26	-25.00	16.26	45
4	10130.6	-46.25	4.20	12.05	Horizontal	-38.40	-25.00	13.40	0
5	12675.0	-45.21	5.20	12.85	Horizontal	-37.56	-25.00	12.56	180
6	15210.0	-45.02	5.50	14.23	Horizontal	-36.29	-25.00	11.29	135
7	17745.0	-43.85	5.70	14.15	Horizontal	-35.40	-25.00	10.40	315
8	20280.0	-43.96	6.30	13.76	Horizontal	-36.50	-25.00	11.50	45
9	22815.0	-43.45	6.80	14.05	Horizontal	-36.20	-25.00	11.20	180
10	25350.0	-42.54	6.90	14.84	Horizontal	-34.60	-25.00	9.60	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 7 QPSK 5MHz CH-High, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5131.1	-43.96	2.00	9.15	Horizontal	-36.81	-25.00	11.81	90
3	7696.1	-50.02	2.50	11.35	Horizontal	-41.17	-25.00	16.17	45
4	10261.1	-47.40	4.20	12.05	Horizontal	-39.55	-25.00	14.55	0
5	12837.5	-45.39	5.20	12.85	Horizontal	-37.74	-25.00	12.74	270
6	15405.0	-47.58	5.50	14.23	Horizontal	-38.85	-25.00	13.85	225
7	17972.5	-43.62	5.70	14.15	Horizontal	-35.17	-25.00	10.17	180
8	20540.0	-43.66	6.30	13.76	Horizontal	-36.20	-25.00	11.20	135
9	23107.5	-43.05	6.80	14.05	Horizontal	-35.80	-25.00	10.80	180
10	25675.0	-43.54	6.90	14.84	Horizontal	-35.60	-25.00	10.60	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 7 QPSK 10MHz CH-Low, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5001.0	-46.35	2.00	9.15	Horizontal	-39.20	-25.00	14.20	45
3	7515.0	-49.85	2.50	11.35	Horizontal	-41.00	-25.00	16.00	135
4	10002.4	-49.05	4.20	12.05	Horizontal	-41.20	-25.00	16.20	270
5	12525.0	-47.41	5.20	12.85	Horizontal	-39.76	-25.00	14.76	315
6	15030.0	-45.98	5.50	14.23	Horizontal	-37.25	-25.00	12.25	225
7	17535.0	-44.69	5.70	14.15	Horizontal	-36.24	-25.00	11.24	180
8	20040.0	-45.06	6.30	13.76	Horizontal	-37.60	-25.00	12.60	225
9	22545.0	-44.05	6.80	14.05	Horizontal	-36.80	-25.00	11.80	90
10	25050.0	-43.84	6.90	14.84	Horizontal	-35.90	-25.00	10.90	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 7 QPSK 10MHz CH-Middle, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5061.4	-43.17	2.00	9.15	Horizontal	-36.02	-25.00	11.02	90
3	7598.6	-48.64	2.50	11.35	Horizontal	-39.79	-25.00	14.79	135
4	10130.6	-47.22	4.20	12.05	Horizontal	-39.37	-25.00	14.37	45
5	12675.0	-45.82	5.20	12.85	Horizontal	-38.17	-25.00	13.17	225
6	15210.0	-45.20	5.50	14.23	Horizontal	-36.47	-25.00	11.47	315
7	17745.0	-44.32	5.70	14.15	Horizontal	-35.87	-25.00	10.87	270
8	20280.0	-42.56	6.30	13.76	Horizontal	-35.10	-25.00	10.10	45
9	22815.0	-42.15	6.80	14.05	Horizontal	-34.90	-25.00	9.90	90
10	25350.0	-41.04	6.90	14.84	Horizontal	-33.10	-25.00	8.10	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 7 QPSK 10MHz CH-High, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5121.4	-44.31	2.00	10.15	Horizontal	-36.16	-25.00	11.16	90
3	7681.9	-50.45	2.50	11.35	Horizontal	-41.60	-25.00	16.60	135
4	10242.0	-47.22	4.20	12.05	Horizontal	-39.37	-25.00	14.37	0
5	12825.0	-47.57	5.20	14.85	Horizontal	-37.92	-25.00	12.92	45
6	15390.0	-46.09	5.50	13.23	Horizontal	-38.36	-25.00	13.36	315
7	17955.0	-42.56	5.70	12.15	Horizontal	-36.11	-25.00	11.11	225
8	20520.0	-43.46	6.30	13.76	Horizontal	-36.00	-25.00	11.00	270
9	23085.0	-42.65	6.80	14.05	Horizontal	-35.40	-25.00	10.40	180
10	25650.0	-42.14	6.90	14.84	Horizontal	-34.20	-25.00	9.20	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 7 QPSK 15MHz CH-Low, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5001.8	-47.80	2.00	10.15	Horizontal	-39.65	-25.00	14.65	135
3	7502.6	-48.96	2.50	11.35	Horizontal	-40.11	-25.00	15.11	135
4	10003.5	-47.49	4.20	12.05	Horizontal	-39.64	-25.00	14.64	45
5	12537.5	-48.96	5.20	14.85	Horizontal	-39.31	-25.00	14.31	90
6	15045.0	-45.14	5.50	13.23	Horizontal	-37.41	-25.00	12.41	270
7	17552.5	-41.64	5.70	12.15	Horizontal	-35.19	-25.00	10.19	315
8	20060.0	-43.36	6.30	13.76	Horizontal	-35.90	-25.00	10.90	180
9	22567.5	-41.75	6.80	14.05	Horizontal	-34.50	-25.00	9.50	270
10	25075.0	-41.74	6.90	14.84	Horizontal	-33.80	-25.00	8.80	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.



**LTE Band 7 QPSK 15MHz CH-Middle, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5065.8	-46.78	2.00	10.15	Horizontal	-38.63	-25.00	13.63	90
3	7598.6	-49.85	2.50	11.35	Horizontal	-41.00	-25.00	16.00	135
4	10130.6	-49.08	4.20	12.05	Horizontal	-41.23	-25.00	16.23	270
5	12675.0	-48.67	5.20	14.85	Horizontal	-39.02	-25.00	14.02	45
6	15210.0	-44.87	5.50	13.23	Horizontal	-37.14	-25.00	12.14	270
7	17745.0	-42.37	5.70	12.15	Horizontal	-35.92	-25.00	10.92	315
8	20280.0	-43.96	6.30	13.76	Horizontal	-36.50	-25.00	11.50	180
9	22815.0	-42.55	6.80	14.05	Horizontal	-35.30	-25.00	10.30	270
10	25350.0	-42.14	6.90	14.84	Horizontal	-34.20	-25.00	9.20	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 7 QPSK 15MHz CH-High, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5111.6	-44.64	2.00	10.15	Horizontal	-36.49	-25.00	11.49	90
3	7667.3	-49.99	2.50	11.35	Horizontal	-41.14	-25.00	16.14	270
4	10250.0	-46.77	4.20	12.05	Horizontal	-38.92	-25.00	13.92	0
5	12812.5	-46.00	5.20	14.85	Horizontal	-36.35	-25.00	11.35	45
6	15375.0	-45.33	5.50	13.23	Horizontal	-37.60	-25.00	12.60	315
7	17937.5	-43.07	5.70	12.15	Horizontal	-36.62	-25.00	11.62	225
8	20500.0	-44.26	6.30	13.76	Horizontal	-36.80	-25.00	11.80	135
9	23062.5	-43.15	6.80	14.05	Horizontal	-35.90	-25.00	10.90	180
10	25625.0	-42.54	6.90	14.84	Horizontal	-34.60	-25.00	9.60	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 7 QPSK 20MHz CH-Low, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5002.5	-48.13	2.00	10.15	Horizontal	-39.98	-25.00	14.98	225
3	7530.0	-49.47	2.50	11.35	Horizontal	-40.62	-25.00	15.62	135
4	10040.0	-47.31	4.20	12.05	Horizontal	-39.46	-25.00	14.46	315
5	12550.0	-48.22	5.20	14.85	Horizontal	-38.57	-25.00	13.57	90
6	15060.0	-45.63	5.50	13.23	Horizontal	-37.90	-25.00	12.90	225
7	17570.0	-42.46	5.70	12.15	Horizontal	-36.01	-25.00	11.01	45
8	20080.0	-43.96	6.30	13.76	Horizontal	-36.50	-25.00	11.50	135
9	22590.0	-43.05	6.80	14.05	Horizontal	-35.80	-25.00	10.80	45
10	25100.0	-42.84	6.90	14.84	Horizontal	-34.90	-25.00	9.90	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 7 QPSK 20MHz CH-Middle, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5052.0	-47.26	2.00	10.15	Horizontal	-39.11	-25.00	14.11	135
3	7605.0	-50.30	2.50	11.35	Horizontal	-41.45	-25.00	16.45	90
4	10140.0	-47.39	4.20	12.05	Horizontal	-39.54	-25.00	14.54	225
5	12675.0	-48.39	5.20	14.85	Horizontal	-38.74	-25.00	13.74	45
6	15210.0	-43.10	5.50	13.23	Horizontal	-35.37	-25.00	10.37	315
7	17745.0	-43.12	5.70	12.15	Horizontal	-36.67	-25.00	11.67	270
8	20280.0	-43.56	6.30	13.76	Horizontal	-36.10	-25.00	11.10	135
9	22815.0	-42.75	6.80	14.05	Horizontal	-35.50	-25.00	10.50	45
10	25350.0	-42.64	6.90	14.84	Horizontal	-34.70	-25.00	9.70	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

**LTE Band 7 QPSK 20MHz CH-High, RB 1**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5101.9	-46.09	2.00	10.15	Horizontal	-37.94	-25.00	12.94	90
3	7680.0	-49.98	2.50	11.35	Horizontal	-41.13	-25.00	16.13	135
4	10240.0	-46.56	4.20	12.05	Horizontal	-38.71	-25.00	13.71	270
5	12800.0	-46.27	5.20	14.85	Horizontal	-36.62	-25.00	11.62	45
6	15360.0	-45.58	5.50	13.23	Horizontal	-37.85	-25.00	12.85	315
7	17920.0	-42.10	5.70	12.15	Horizontal	-35.65	-25.00	10.65	225
8	20480.0	-43.86	6.30	13.76	Horizontal	-36.40	-25.00	11.40	180
9	23040.0	-42.95	6.80	14.05	Horizontal	-35.70	-25.00	10.70	270
10	25600.0	-42.84	6.90	14.84	Horizontal	-34.90	-25.00	9.90	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

## 6 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113645	2017-05-14	2018-05-13
Universal Radio Communication Tester	Agilent	E5515C	MY48367192	2017-05-20	2018-05-19
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	2017-05-14	2018-05-13
Spectrum Analyzer	Agilent	N9010A	MY47191109	2017-05-14	2018-05-13
Signal Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
Signal generator	R&S	SMB 100A	102594	2017-05-14	2018-05-13
EMI Test Receiver	R&S	ESCI	100948	2017-05-20	2018-05-19
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2014-12-06	2019-12-05
Horn Antenna	ETS-Lindgren	3160-09	00102643	2015-01-30	2020-01-29
Climatic Chamber	Re Ce	PT-30B	20101891	2015-07-18	2018-07-17
RF Cable	Agilent	SMA 15cm	0001	2017-08-04	2018-02-03
RF Cable	Agilent	SMA 15cm	0001	2018-02-03	2018-08-02
Preamplifier	R&S	SCU18	102327	2017-06-18	2018-06-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2017-05-14	2018-05-13
Software	R&S	EMC32	V 8.52.0	NA	NA

\*\*\*\*\*END OF REPORT \*\*\*\*\*