


Site: WZ-AC2	Time: 2022/01/22 - 00:43
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Lucas Wang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

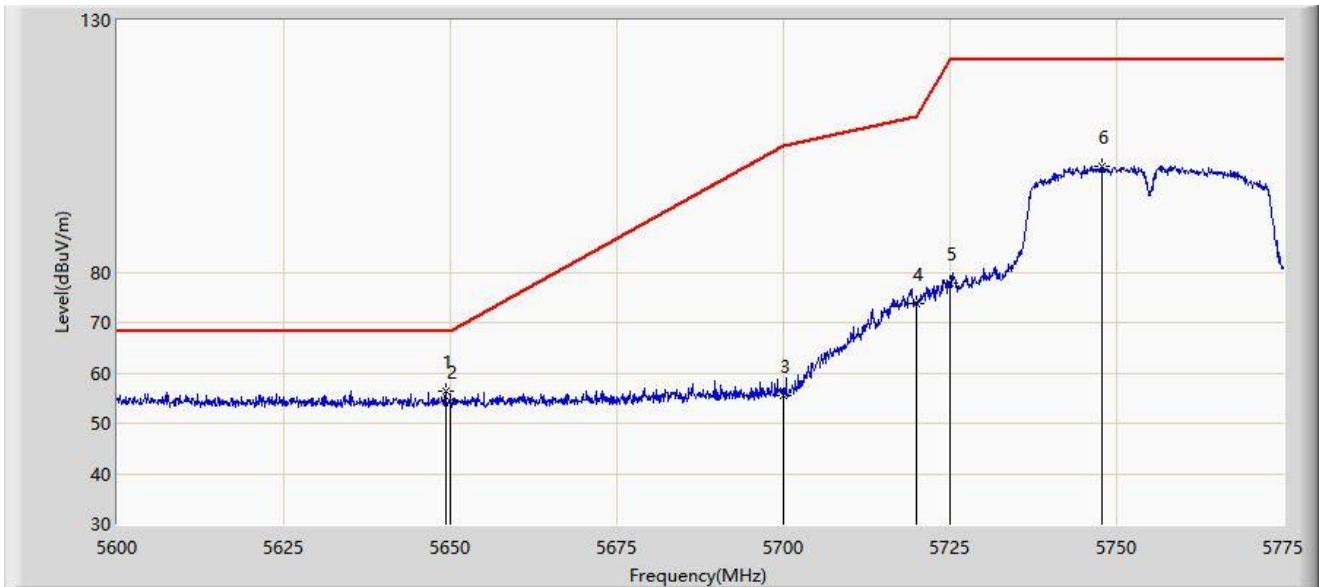


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5649.263	56.262	51.461	-11.938	68.200	4.801	PK
2			5650.000	54.313	49.502	-13.887	68.200	4.810	PK
3			5700.000	55.643	50.649	-49.557	105.200	4.993	PK
4			5720.000	73.715	68.463	-37.085	110.800	5.252	PK
5			5725.000	77.817	72.451	-44.383	122.200	5.366	PK
6			5747.700	101.067	95.606	N/A	N/A	5.461	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/22 - 00:40
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Lucas Wang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

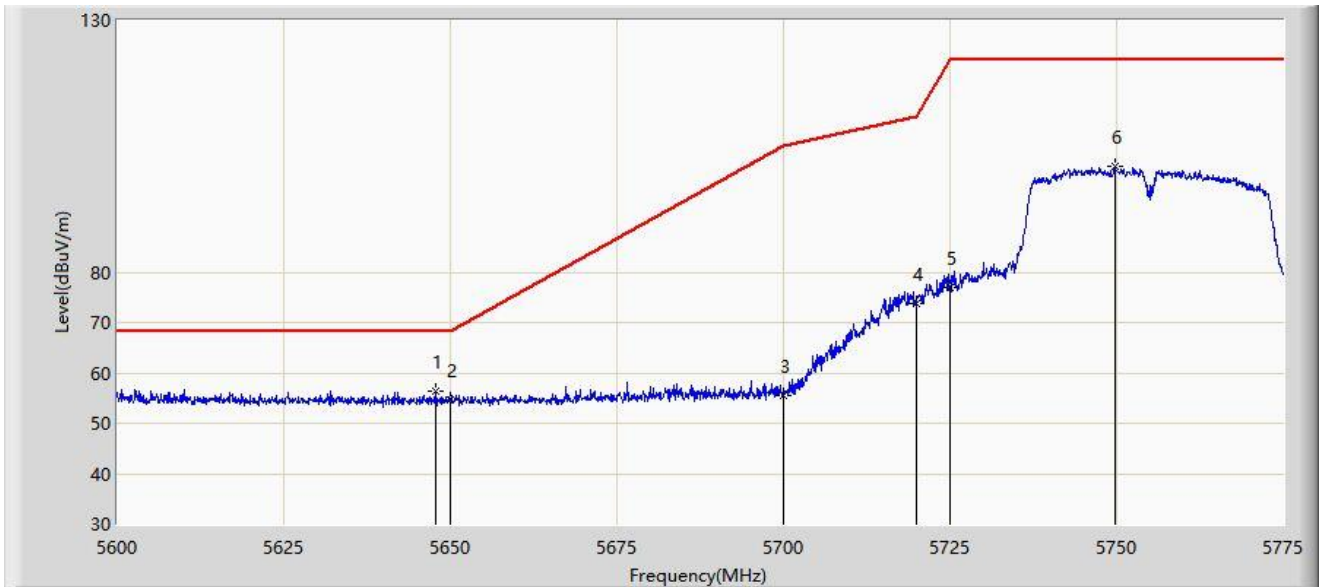


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5647.775	56.384	51.602	-11.816	68.200	4.783	PK
2			5650.000	54.700	49.889	-13.500	68.200	4.810	PK
3			5700.000	55.474	50.480	-49.726	105.200	4.993	PK
4			5720.000	73.696	68.444	-37.104	110.800	5.252	PK
5			5725.000	77.090	71.724	-45.110	122.200	5.366	PK
6			5749.712	100.871	95.434	N/A	N/A	5.437	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/22 - 00:43
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Lucas Wang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

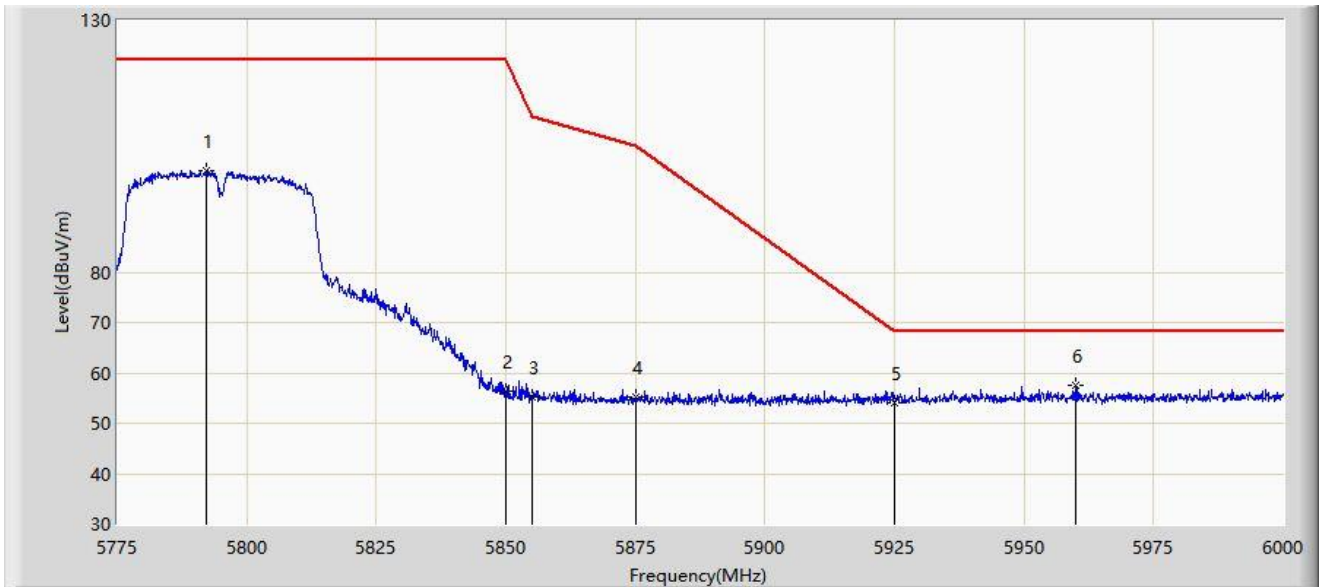


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5792.325	100.235	94.704	N/A	N/A	5.531	PK
2			5850.000	56.266	50.508	-65.934	122.200	5.758	PK
3			5855.000	55.266	49.480	-55.534	110.800	5.787	PK
4			5875.000	55.117	49.213	-50.083	105.200	5.904	PK
5			5925.000	53.994	47.974	-14.206	68.200	6.020	PK
6		*	5959.837	57.589	51.350	-10.611	68.200	6.239	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/22 - 00:47
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Lucas Wang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

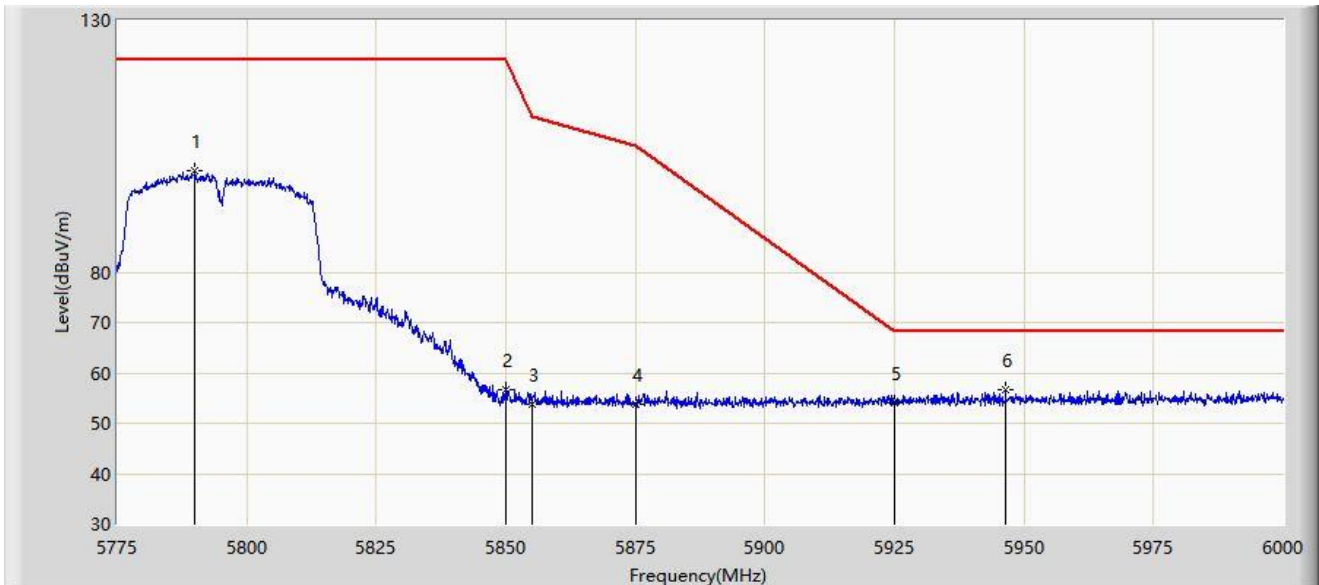


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5789.962	100.014	94.522	N/A	N/A	5.492	PK
2			5850.000	56.787	51.029	-65.413	122.200	5.758	PK
3			5855.000	53.795	48.009	-57.005	110.800	5.787	PK
4			5875.000	53.625	47.721	-51.575	105.200	5.904	PK
5			5925.000	54.099	48.079	-14.101	68.200	6.020	PK
6		*	5946.450	56.800	50.476	-11.400	68.200	6.324	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

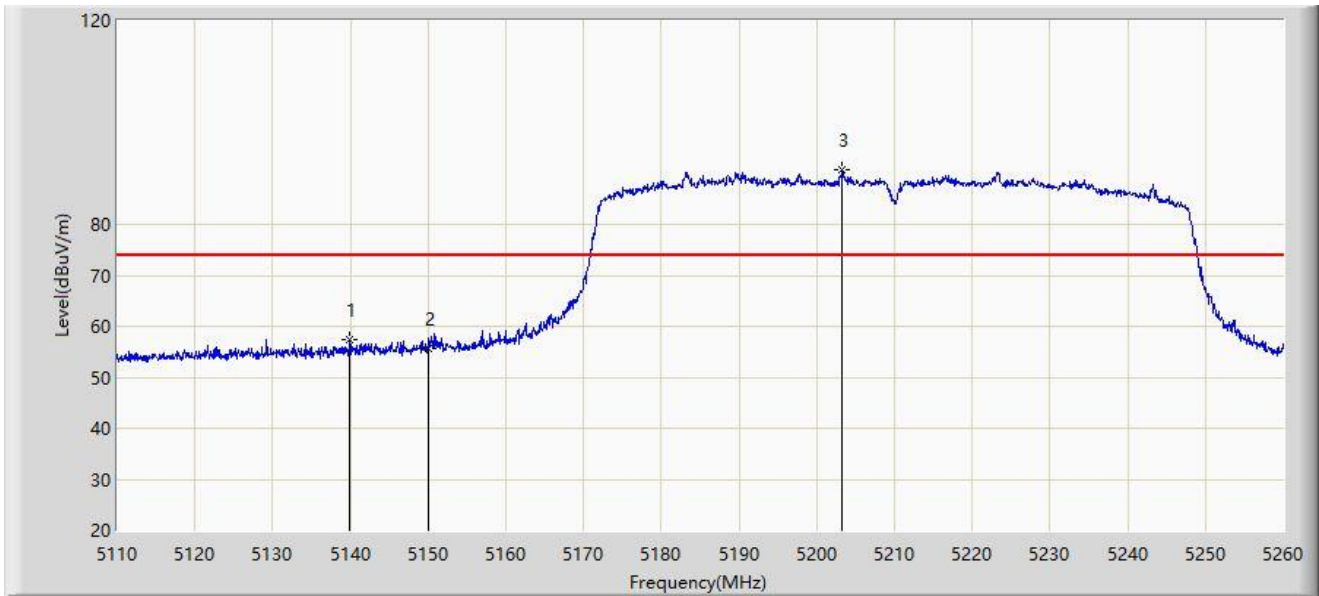


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5139.925	57.519	53.360	-16.481	74.000	4.159	PK
2			5150.000	55.560	51.388	-18.440	74.000	4.173	PK
3		*	5203.225	90.668	86.980	N/A	N/A	3.689	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

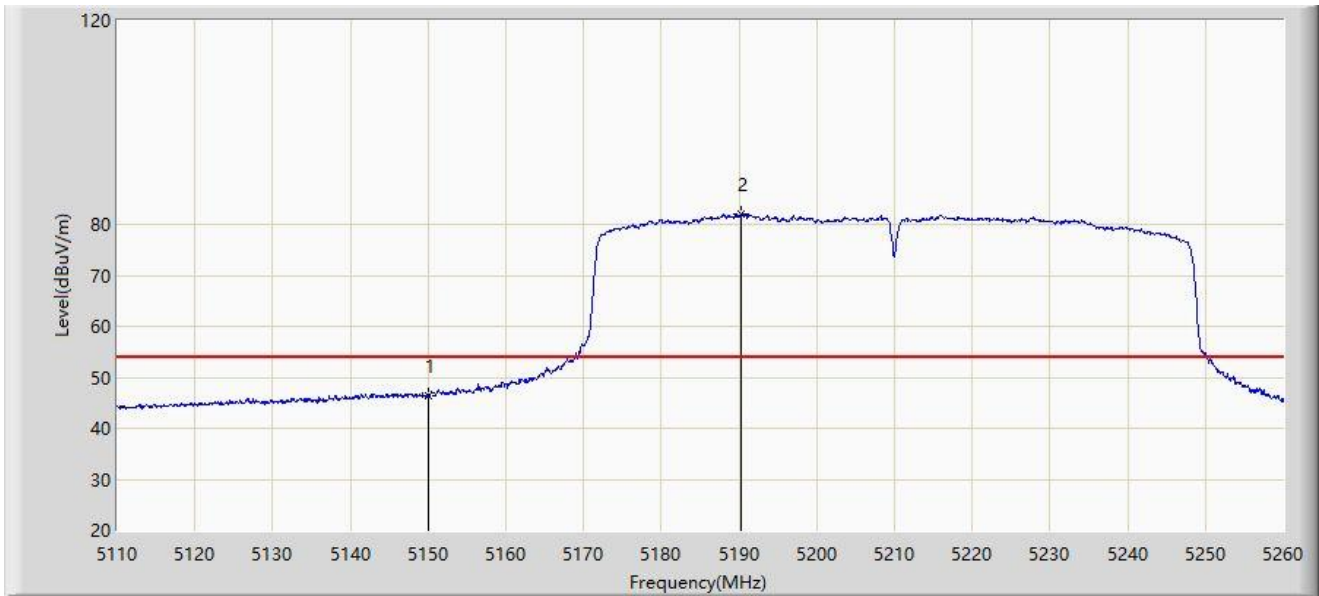


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5150.000	46.279	42.107	-7.721	54.000	4.173	AV
2		*	5190.325	82.023	78.395	N/A	N/A	3.628	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

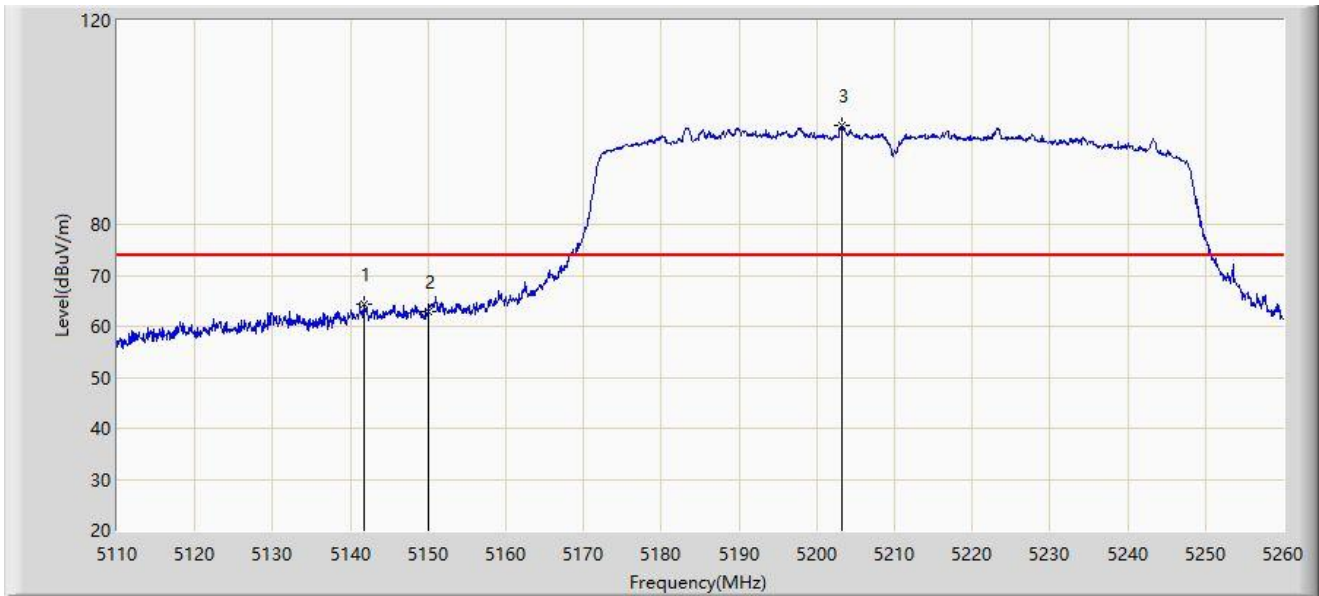


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5141.800	64.313	60.143	-9.687	74.000	4.170	PK
2			5150.000	62.991	58.819	-11.009	74.000	4.173	PK
3		*	5203.150	99.436	95.748	N/A	N/A	3.688	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

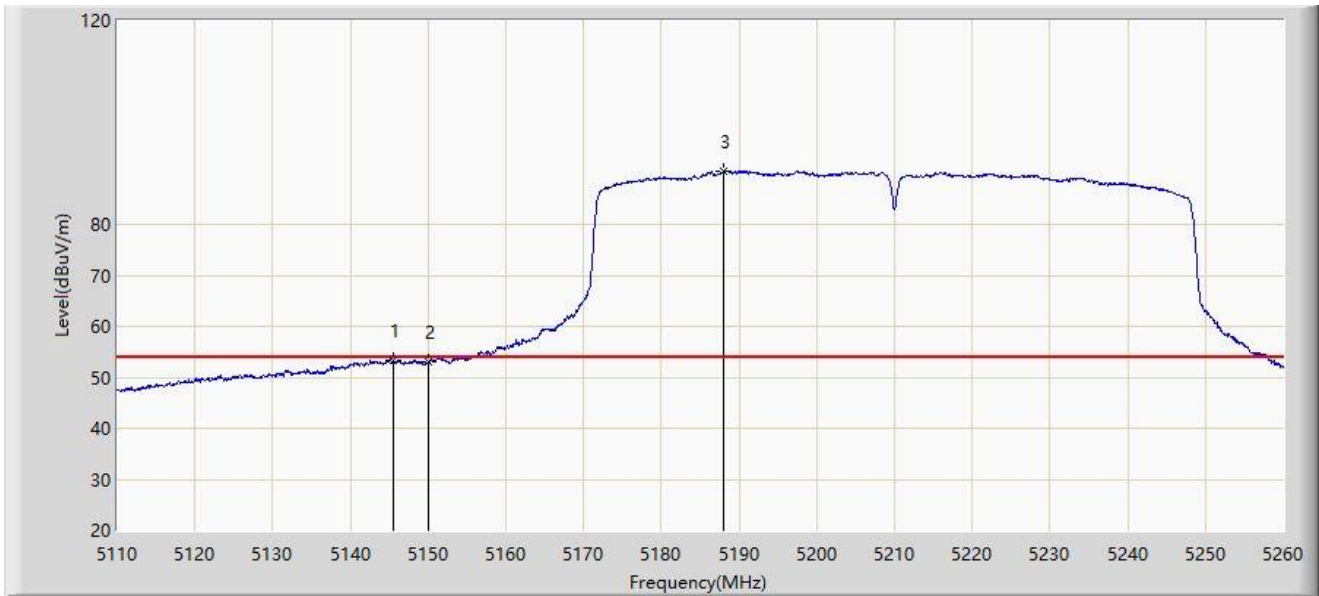


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5145.475	53.460	49.267	-0.540	54.000	4.193	AV
2			5150.000	53.117	48.945	-0.883	54.000	4.173	AV
3		*	5187.925	90.437	86.815	N/A	N/A	3.623	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

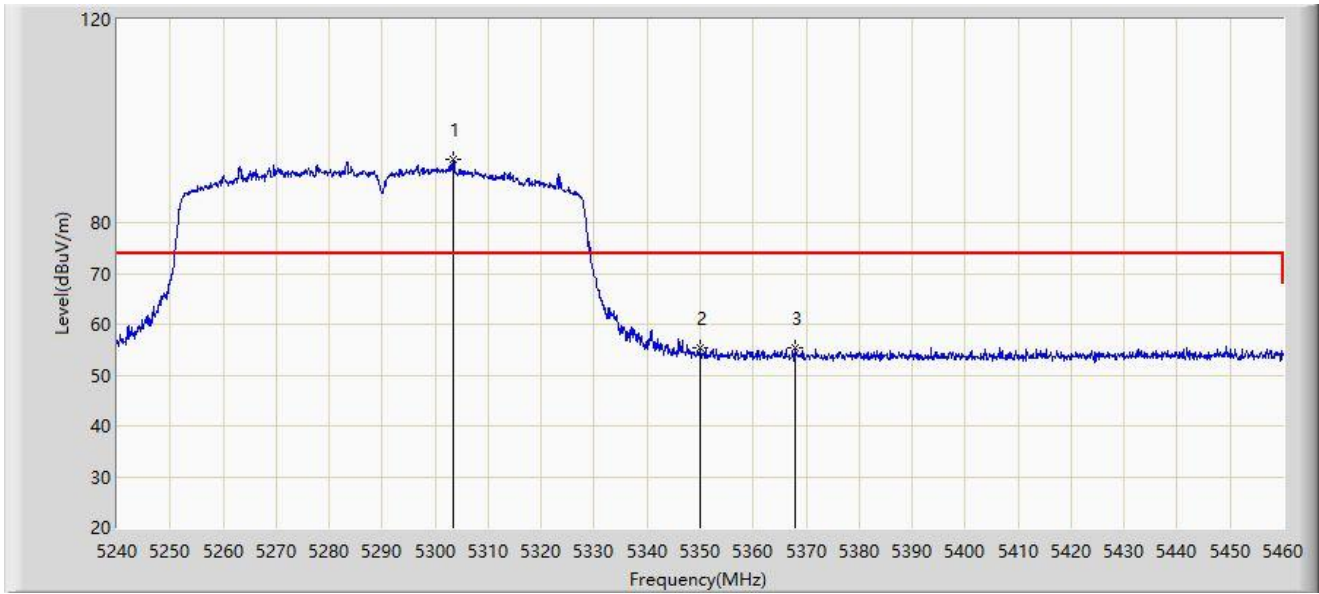


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5303.360	92.428	88.762	N/A	N/A	3.666	PK
2			5350.000	55.259	51.373	-18.741	74.000	3.886	PK
3			5367.820	55.454	51.256	-18.546	74.000	4.198	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

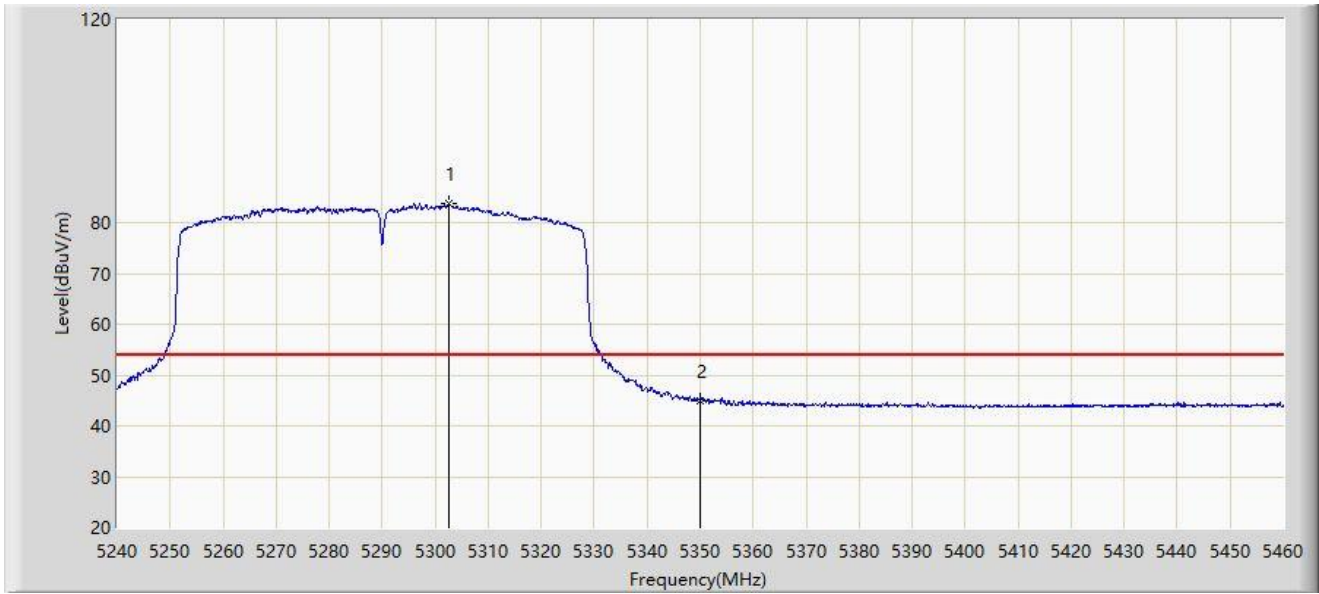


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5302.700	83.833	80.159	N/A	N/A	3.674	AV
2			5350.000	44.952	41.066	-9.048	54.000	3.886	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

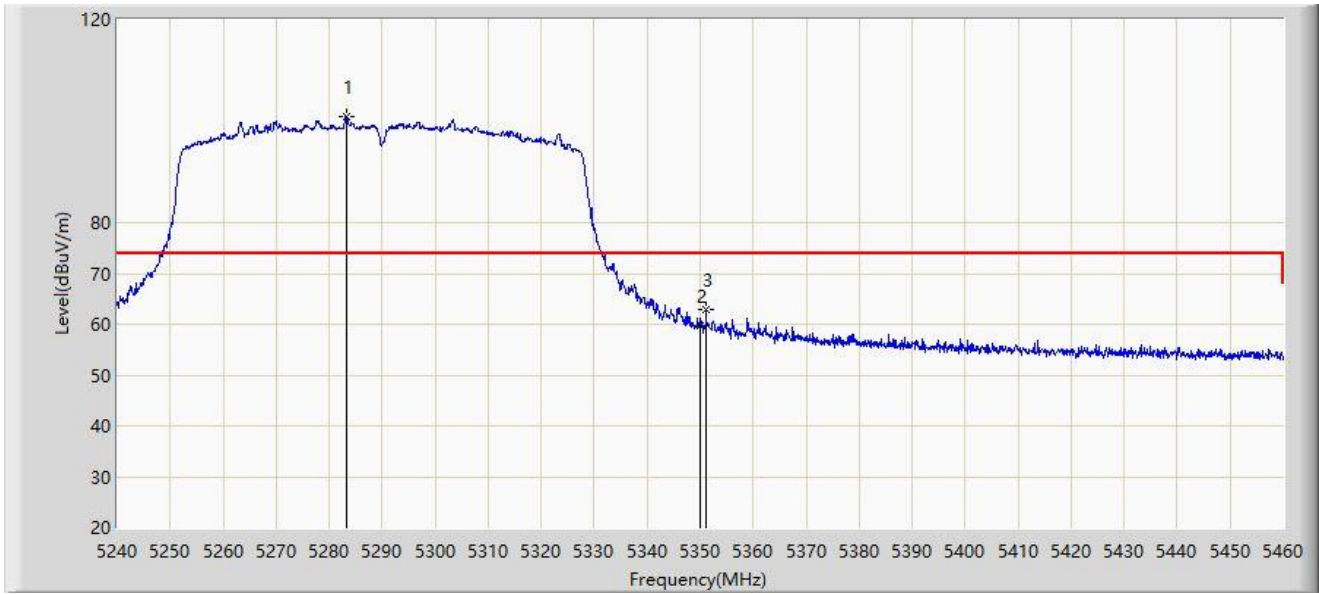


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5283.230	100.971	97.234	N/A	N/A	3.737	PK
2			5350.000	59.781	55.895	-14.219	74.000	3.886	PK
3			5351.100	62.761	58.852	-11.239	74.000	3.909	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

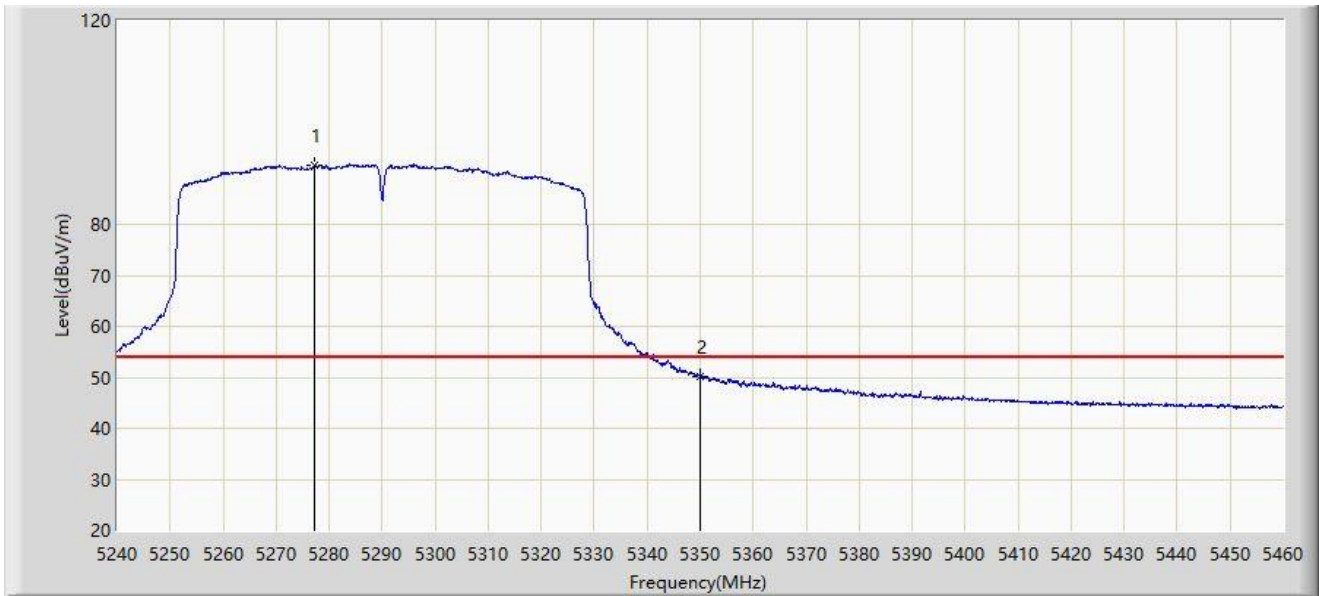


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5277.290	91.648	87.978	N/A	N/A	3.670	AV
2			5350.000	50.191	46.305	-3.809	54.000	3.886	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

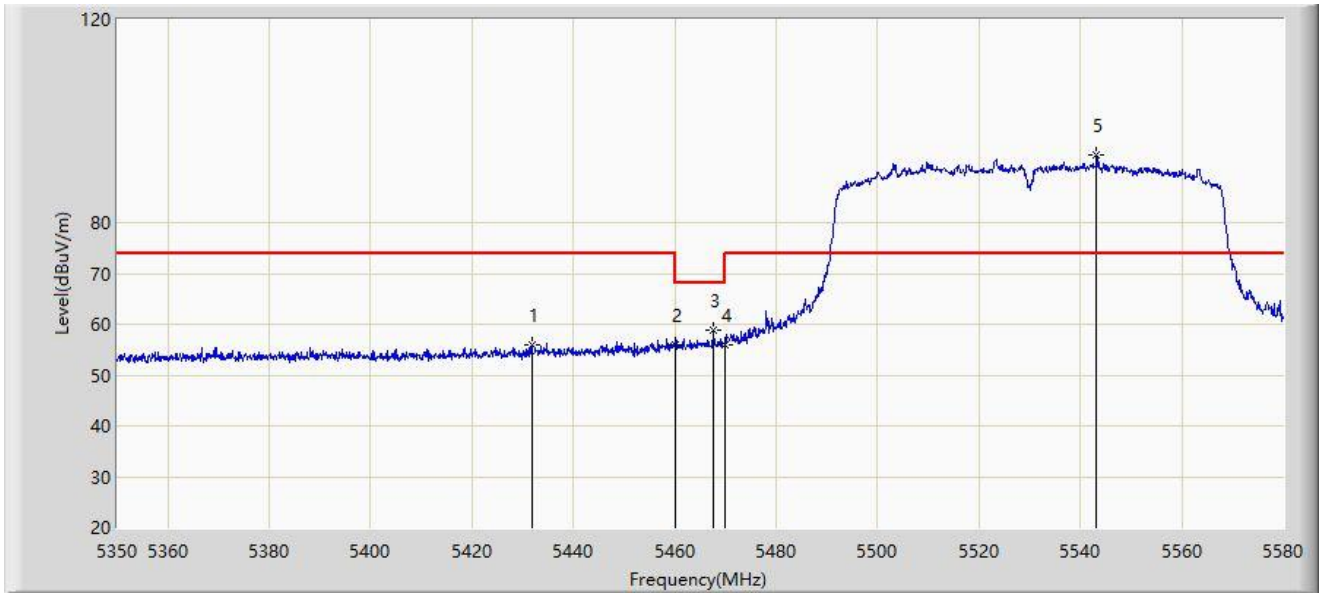


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5431.765	55.928	51.552	-18.072	74.000	4.376	PK
2			5460.000	55.986	51.778	-18.014	74.000	4.208	PK
3			5467.645	58.722	54.609	-9.478	68.200	4.114	PK
4			5470.000	55.972	51.888	-12.228	68.200	4.084	PK
5		*	5543.200	93.218	88.988	N/A	N/A	4.230	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

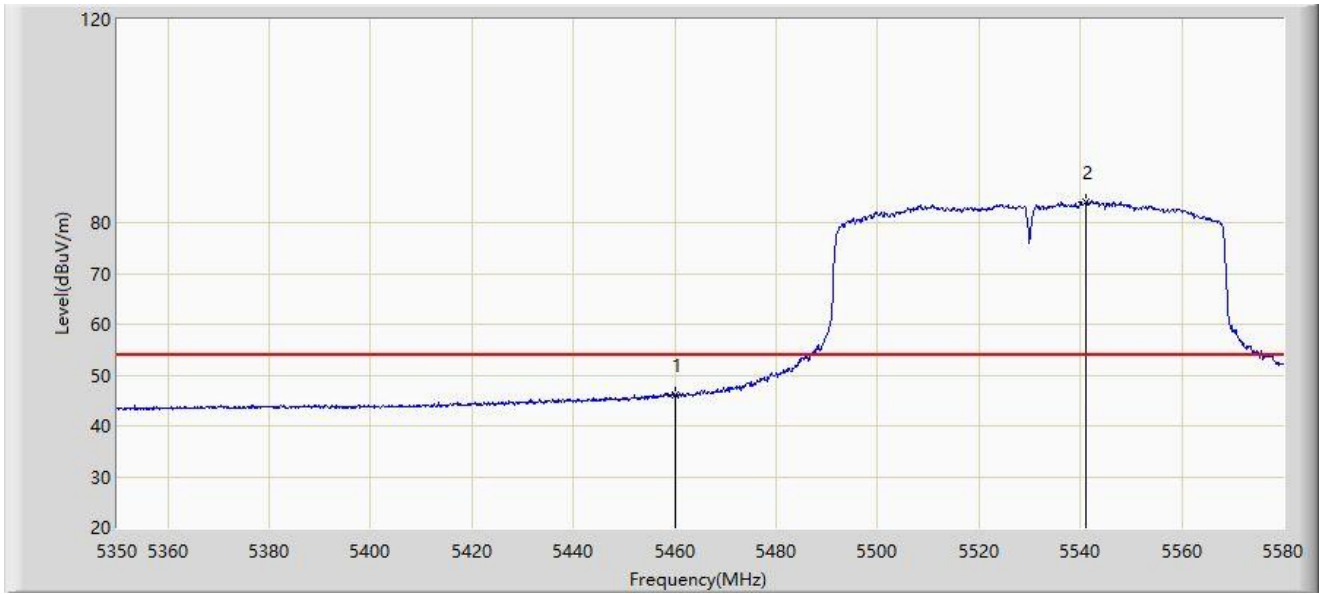


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5460.000	46.108	41.900	-7.892	54.000	4.208	AV
2		*	5541.130	84.165	79.933	N/A	N/A	4.232	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

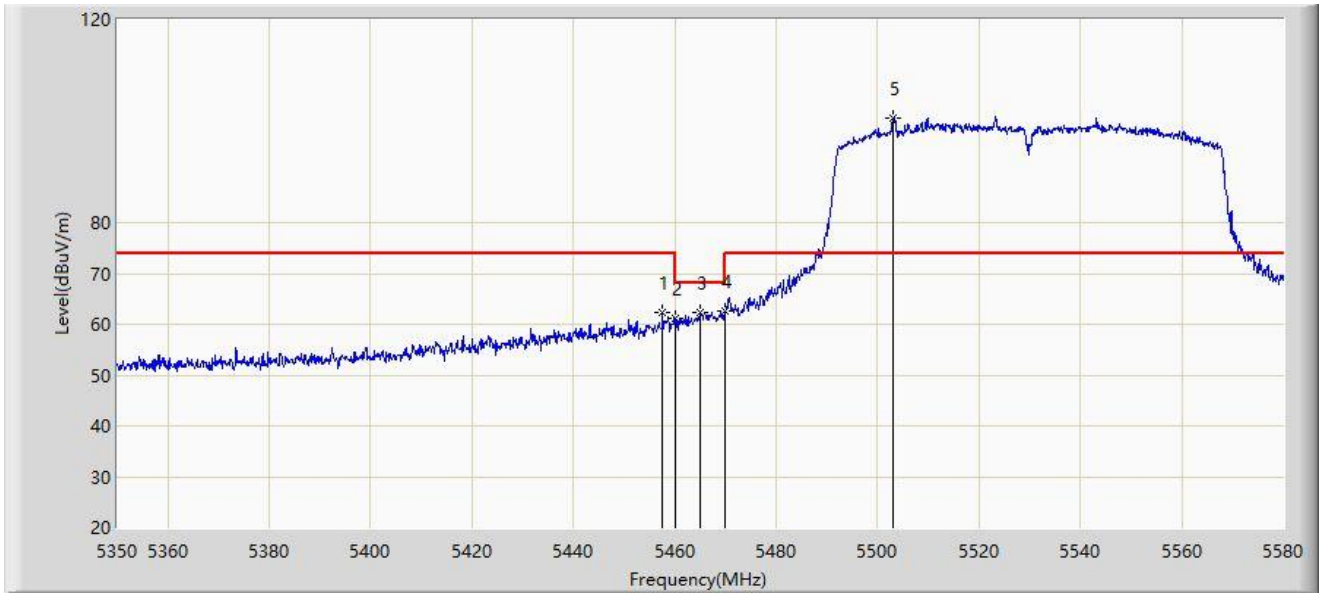


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5457.525	62.252	58.013	-11.748	74.000	4.239	PK
2			5460.000	61.240	57.032	-12.760	74.000	4.208	PK
3			5464.885	62.249	58.101	-5.951	68.200	4.148	PK
4			5470.000	62.682	58.598	-5.518	68.200	4.084	PK
5		*	5503.065	100.620	96.223	N/A	N/A	4.398	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

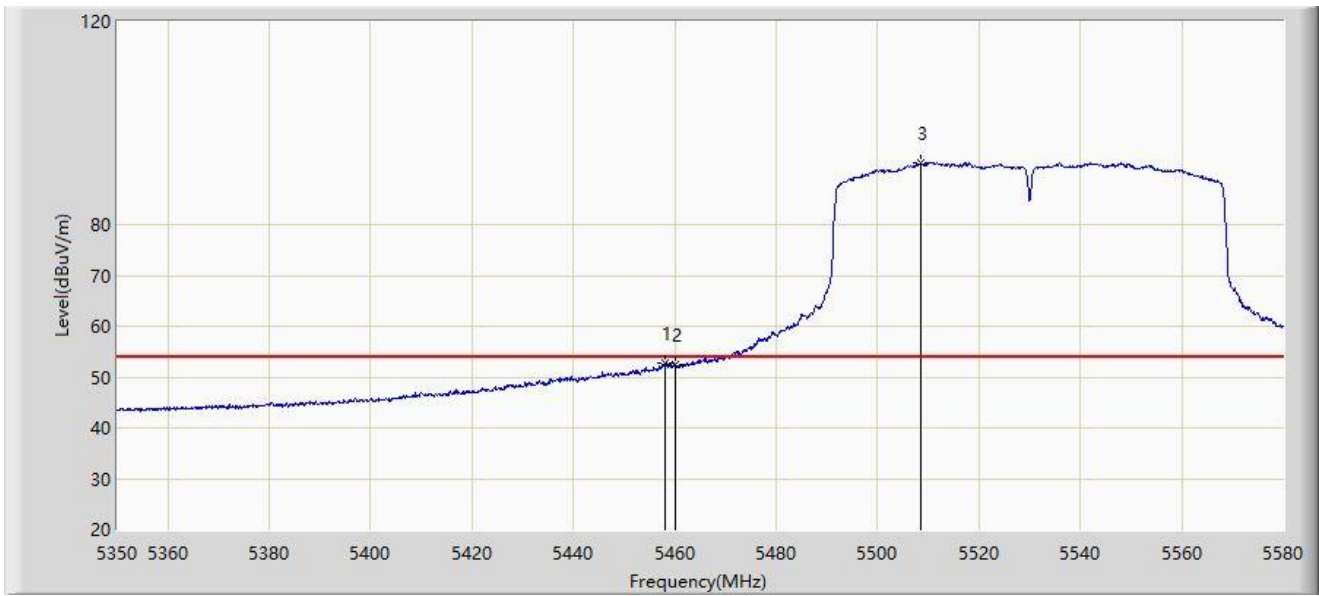


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5458.100	52.834	48.602	-1.166	54.000	4.232	AV
2			5460.000	52.374	48.166	-1.626	54.000	4.208	AV
3		*	5508.470	92.236	87.820	N/A	N/A	4.416	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

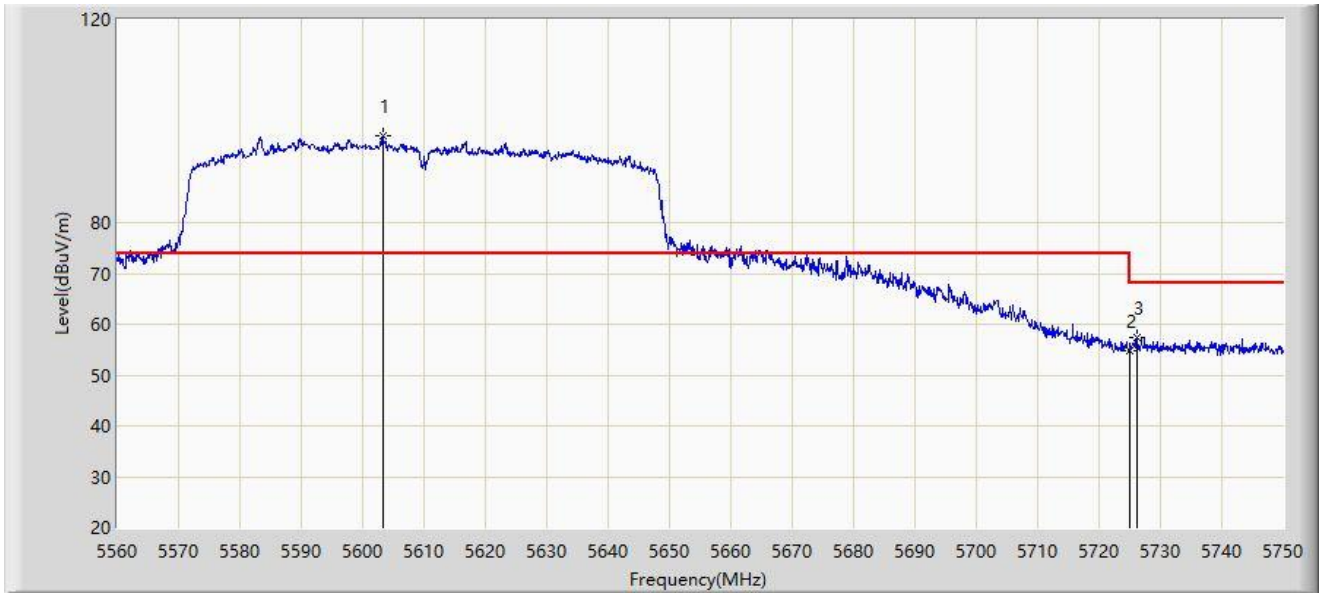


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5603.225	97.203	92.530	N/A	N/A	4.673	PK
2			5725.000	54.865	49.499	-13.335	68.200	5.366	PK
3			5726.250	57.296	51.906	-10.904	68.200	5.390	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

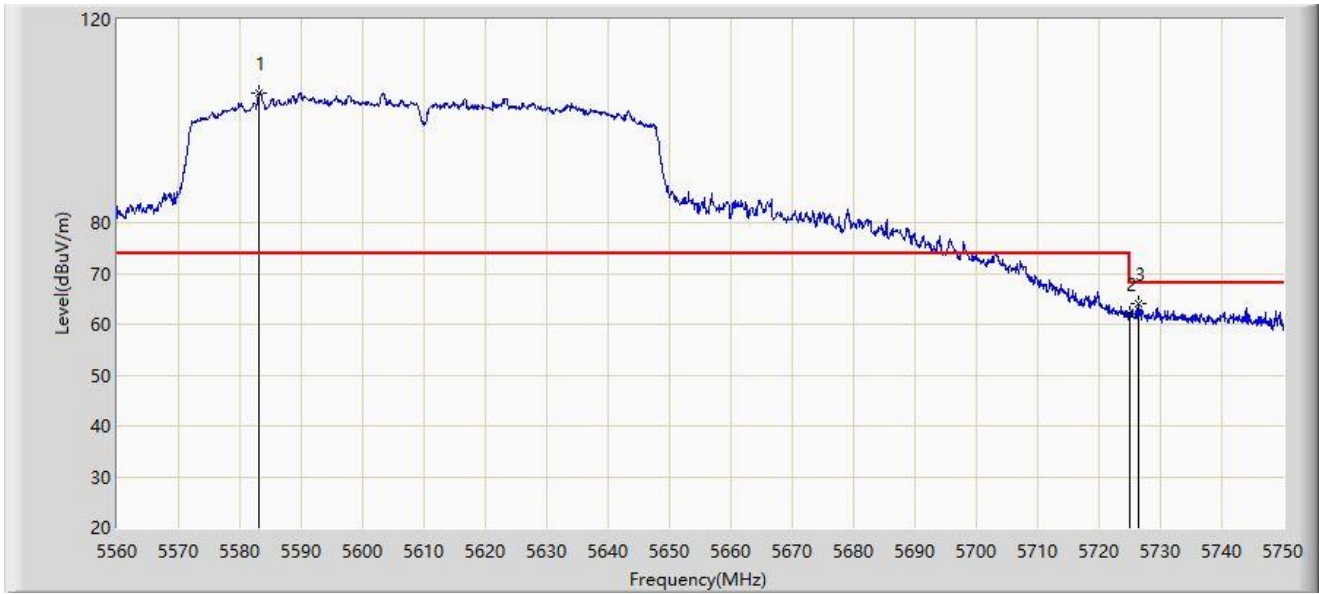


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5583.085	105.396	100.638	N/A	N/A	4.758	PK
2			5725.000	62.100	56.734	-6.100	68.200	5.366	PK
3			5726.440	64.053	58.661	-4.147	68.200	5.392	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:44
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

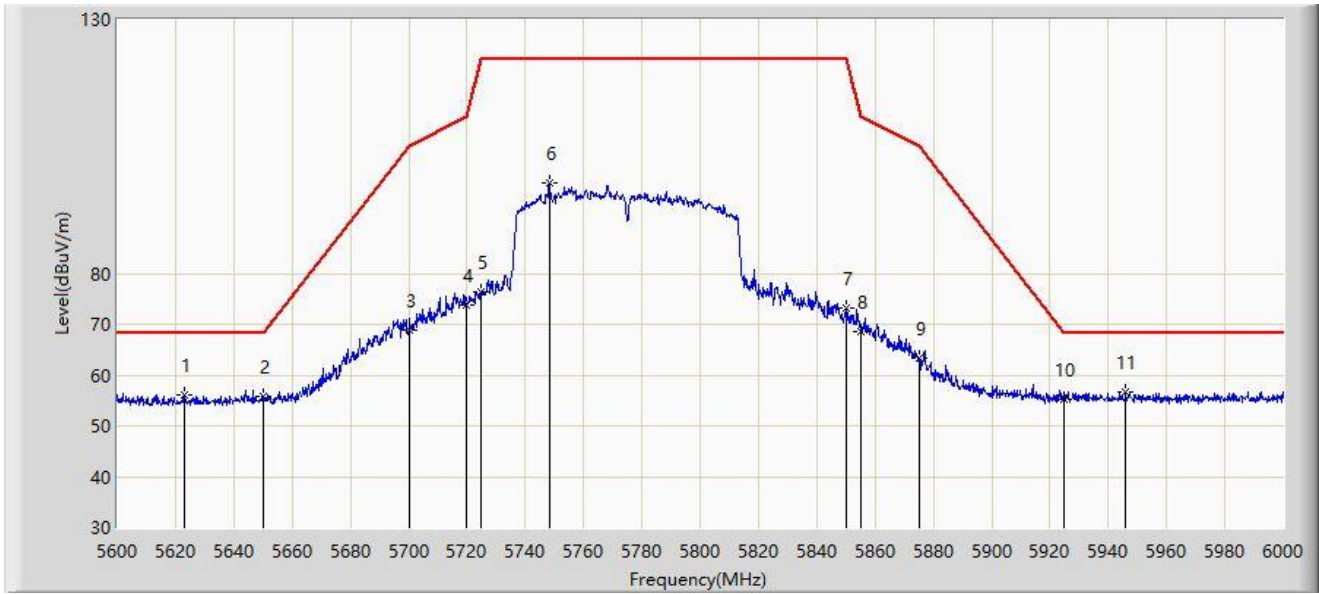


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5623.000	56.135	51.629	-12.065	68.200	4.506	PK
2			5650.000	55.844	51.033	-12.356	68.200	4.810	PK
3			5700.000	68.916	63.922	-36.284	105.200	4.993	PK
4			5720.000	73.763	68.511	-37.037	110.800	5.252	PK
5			5725.000	76.411	71.045	-45.789	122.200	5.366	PK
6			5748.200	97.760	92.305	N/A	N/A	5.455	PK
7			5850.000	73.225	67.467	-48.975	122.200	5.758	PK
8			5855.000	68.622	62.836	-42.178	110.800	5.787	PK
9			5875.000	63.325	57.421	-41.875	105.200	5.904	PK
10			5925.000	55.265	49.245	-12.935	68.200	6.020	PK
11		*	5946.000	56.696	50.375	-11.504	68.200	6.322	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Radio 3 Test Data

Site: WZ-AC2	Time: 2022/01/28 - 23:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

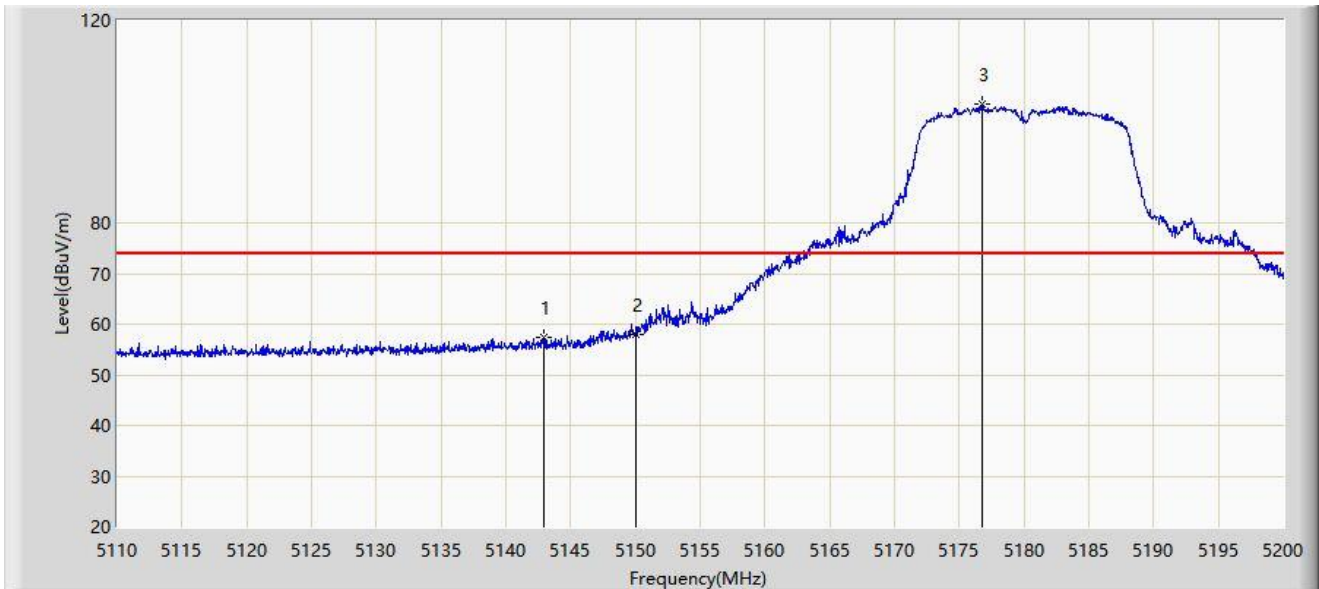


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5142.895	57.447	53.270	-16.553	74.000	4.178	PK
2			5150.000	57.940	53.768	-16.060	74.000	4.173	PK
3		*	5176.735	103.469	99.722	N/A	N/A	3.747	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/28 - 23:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

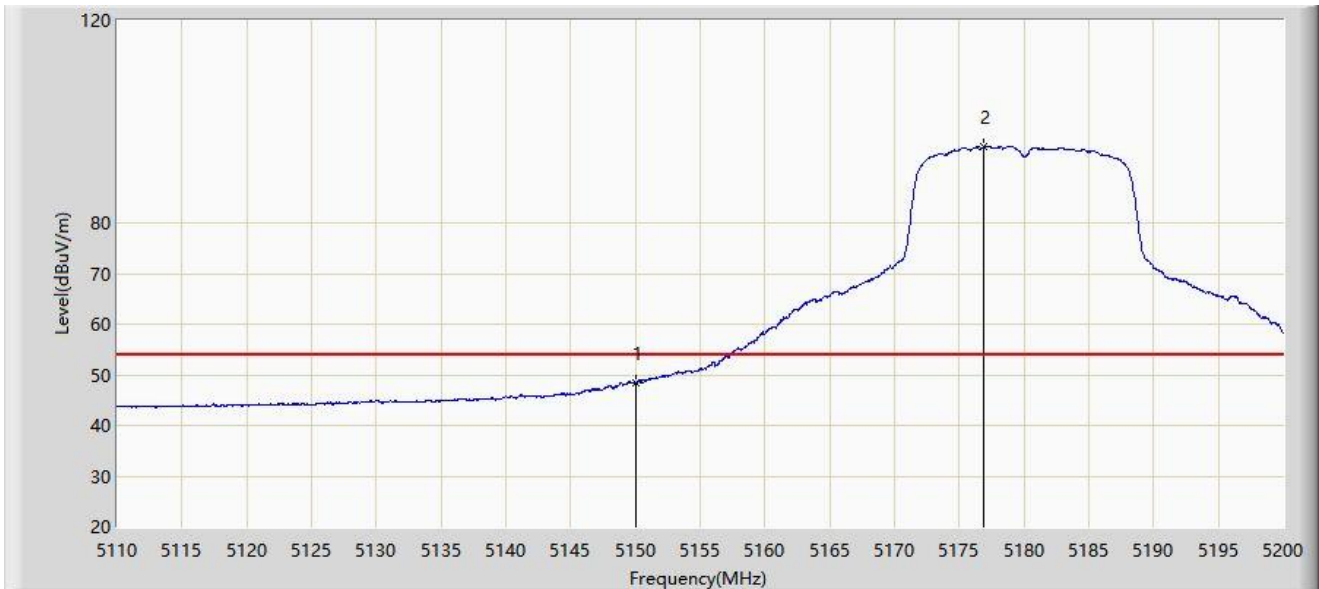


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5150.000	48.431	44.259	-5.569	54.000	4.173	AV
2		*	5176.915	95.072	91.329	N/A	N/A	3.743	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/28 - 23:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

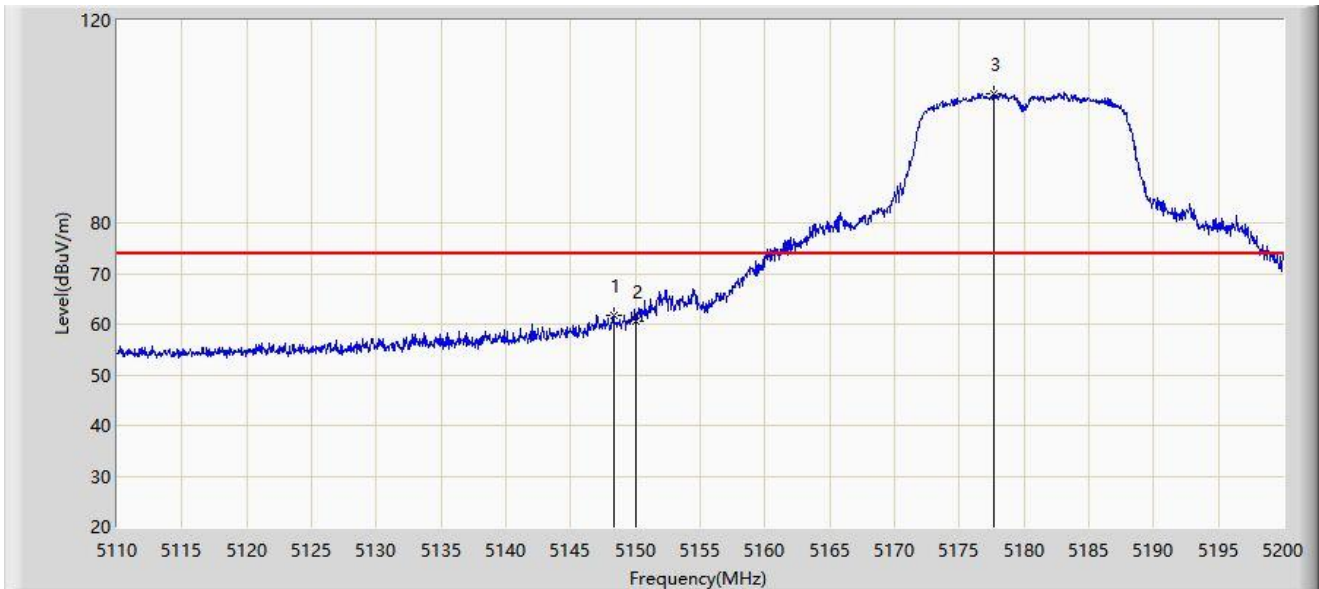


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5148.295	61.871	57.668	-12.129	74.000	4.203	PK
2			5150.000	60.678	56.506	-13.322	74.000	4.173	PK
3		*	5177.680	105.591	101.866	N/A	N/A	3.725	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/28 - 23:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

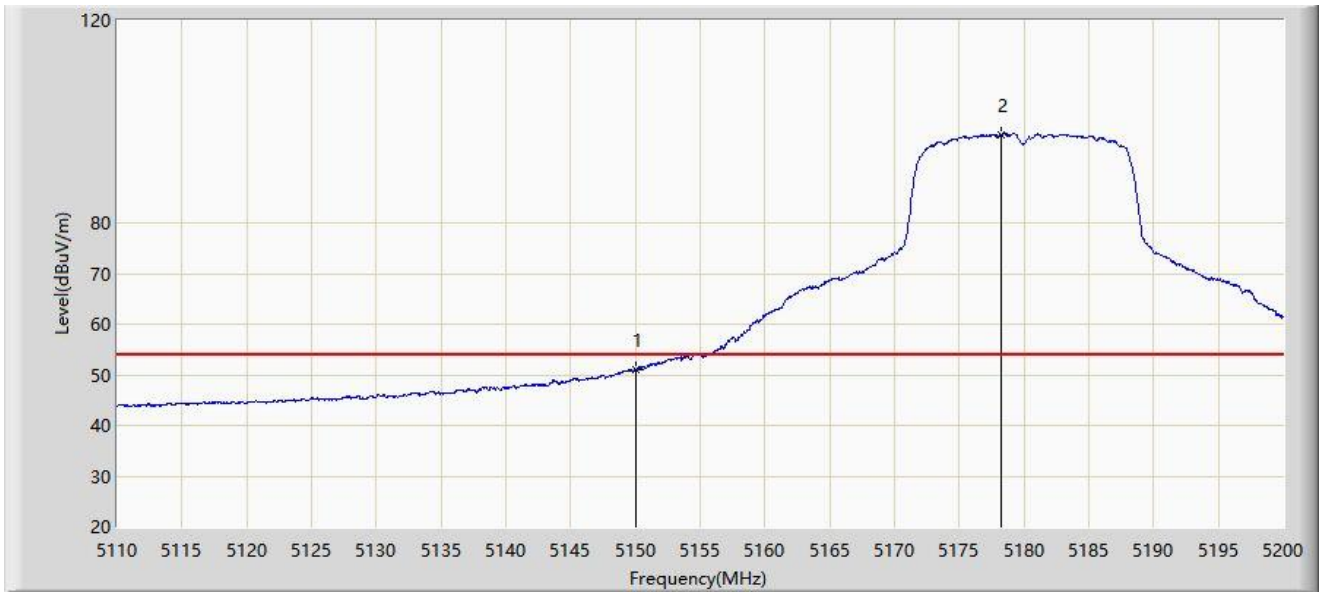


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5150.000	50.893	46.721	-3.107	54.000	4.173	AV
2		*	5178.220	97.521	93.808	N/A	N/A	3.713	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/28 - 23:58
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz	

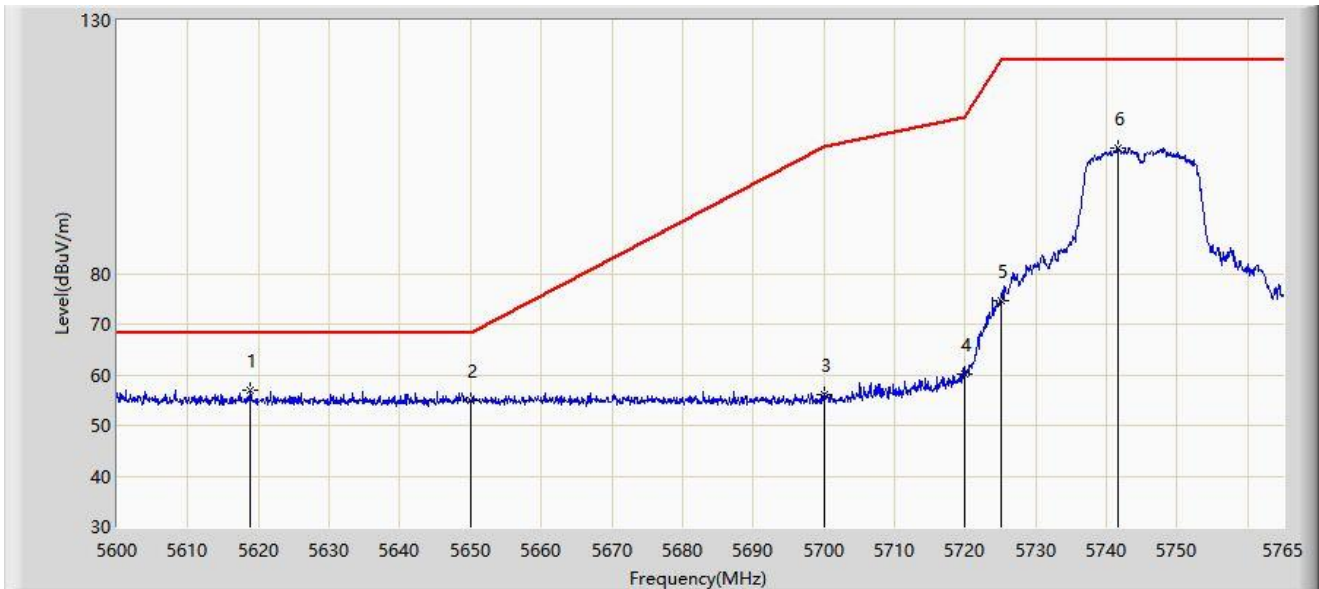


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5618.893	56.954	52.410	-11.246	68.200	4.544	PK
2			5650.000	54.783	49.972	-13.417	68.200	4.810	PK
3			5700.000	56.151	51.157	-49.049	105.200	4.993	PK
4			5720.000	60.059	54.807	-50.741	110.800	5.252	PK
5			5725.000	74.685	69.319	-47.515	122.200	5.366	PK
6			5741.570	104.889	99.392	N/A	N/A	5.496	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:00
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz	

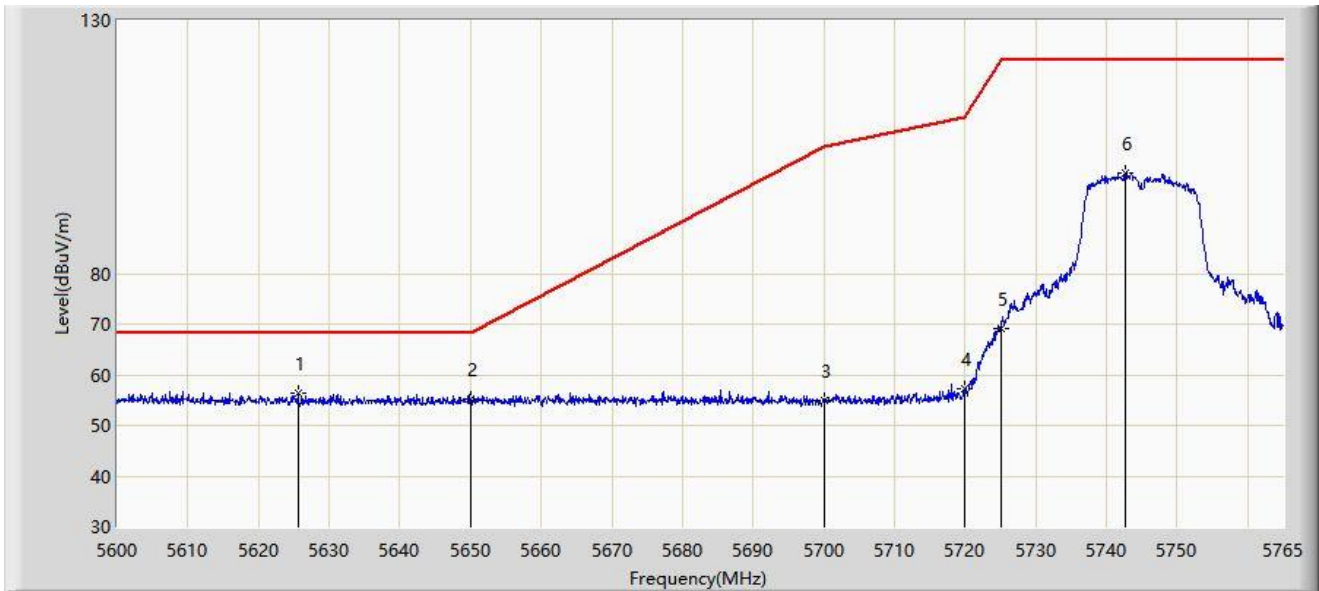


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5625.658	56.446	51.927	-11.754	68.200	4.519	PK
2			5650.000	55.145	50.334	-13.055	68.200	4.810	PK
3			5700.000	55.051	50.057	-50.149	105.200	4.993	PK
4			5720.000	57.315	52.063	-53.485	110.800	5.252	PK
5			5725.000	69.087	63.721	-53.113	122.200	5.366	PK
6			5742.725	99.733	94.228	N/A	N/A	5.506	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:03
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz	

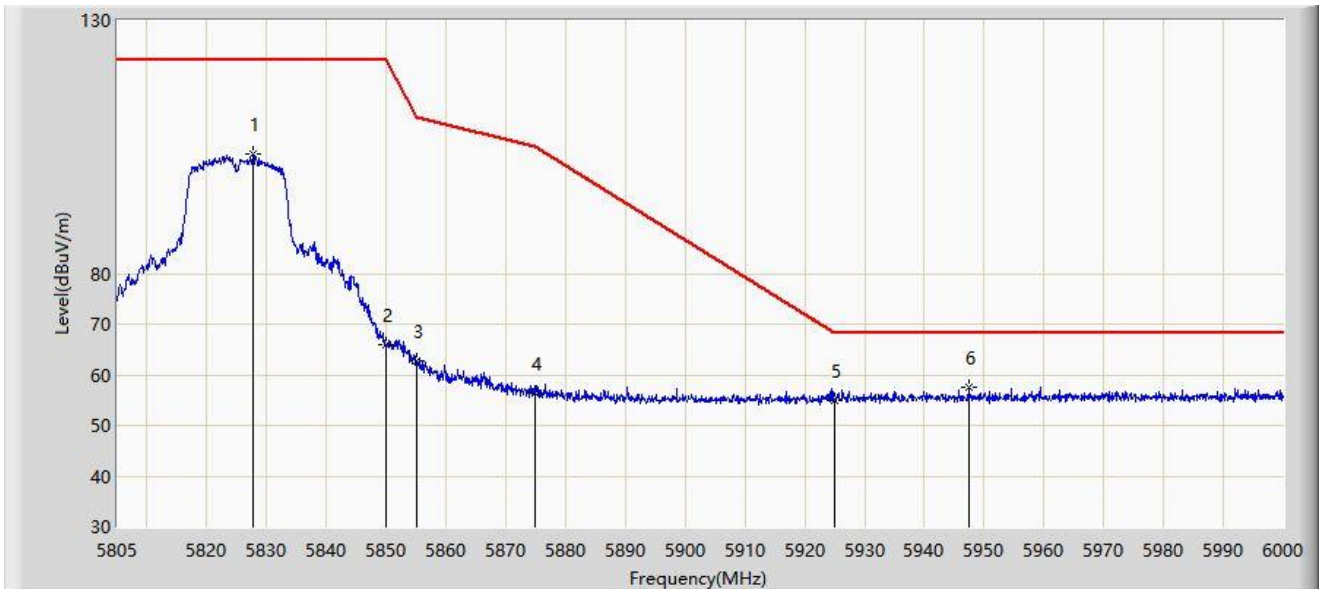


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5827.815	103.481	97.779	N/A	N/A	5.702	PK
2			5850.000	65.901	60.143	-56.299	122.200	5.758	PK
3			5855.000	62.686	56.900	-48.114	110.800	5.787	PK
4			5875.000	56.290	50.386	-48.910	105.200	5.904	PK
5			5925.000	54.924	48.904	-13.276	68.200	6.020	PK
6		*	5947.447	57.511	51.187	-10.689	68.200	6.324	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:04
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz	

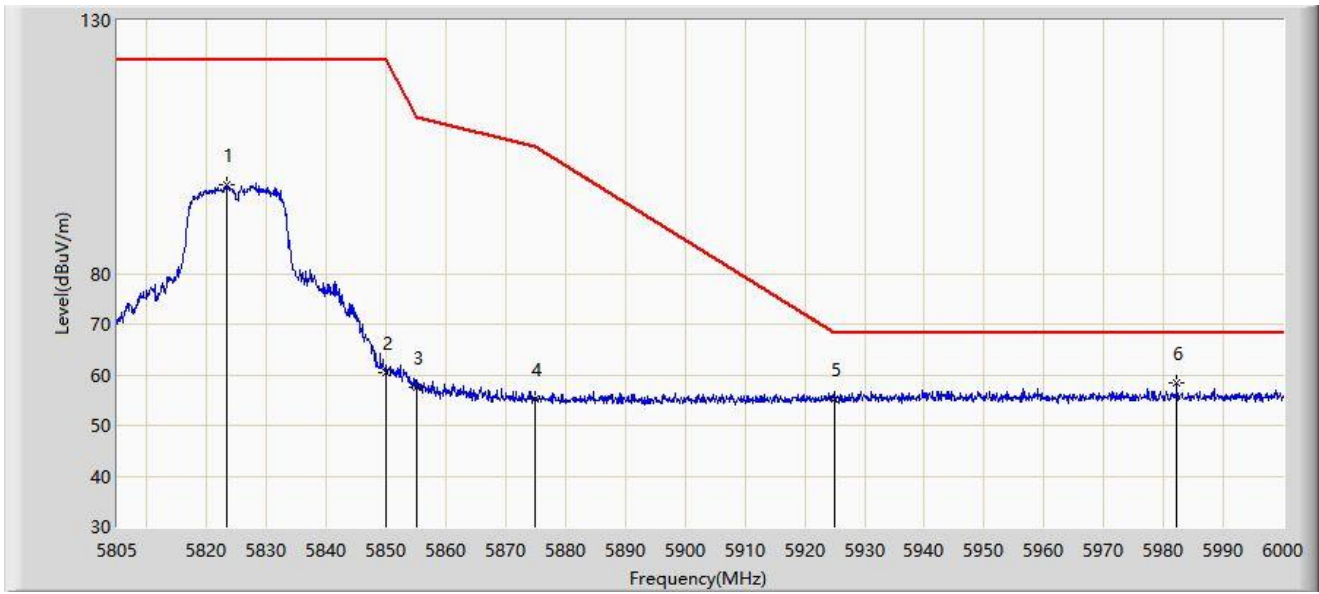


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5823.232	97.637	91.928	N/A	N/A	5.709	PK
2			5850.000	60.565	54.807	-61.635	122.200	5.758	PK
3			5855.000	57.554	51.768	-53.246	110.800	5.787	PK
4			5875.000	55.260	49.356	-49.940	105.200	5.904	PK
5			5925.000	55.255	49.235	-12.945	68.200	6.020	PK
6		*	5982.255	58.278	52.101	-9.922	68.200	6.177	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

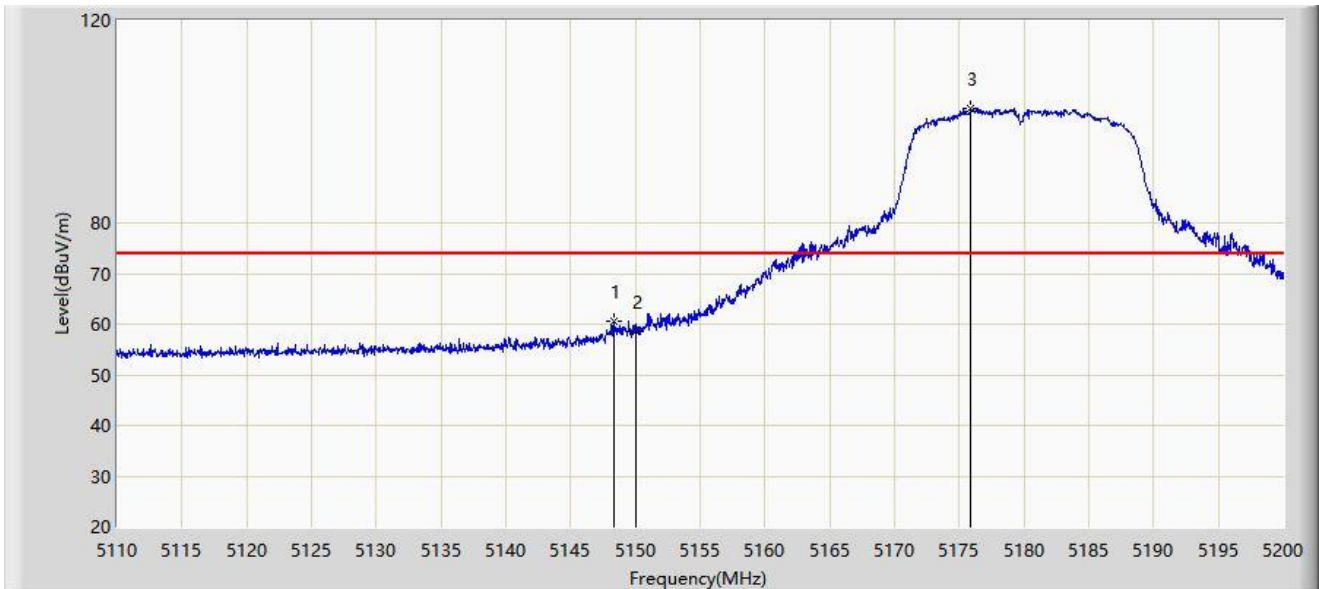


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5148.340	60.437	56.234	-13.563	74.000	4.203	PK
2			5150.000	58.551	54.379	-15.449	74.000	4.173	PK
3		*	5175.880	102.483	98.716	N/A	N/A	3.766	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

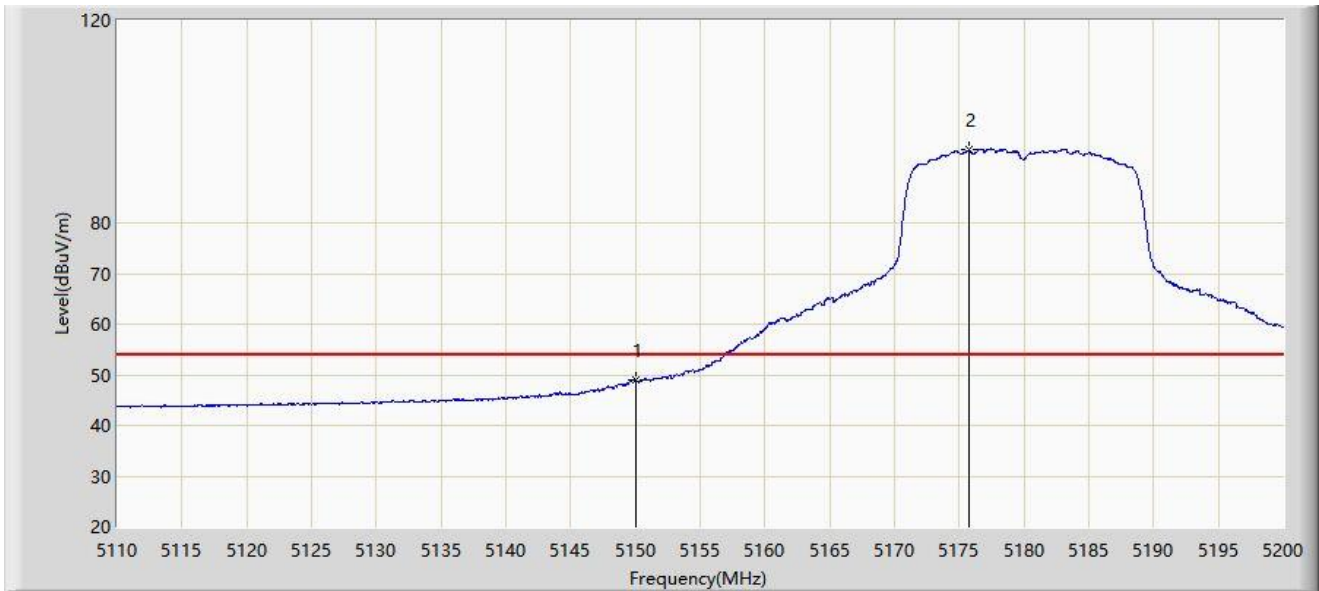


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5150.000	48.905	44.733	-5.095	54.000	4.173	AV
2		*	5175.745	94.421	90.651	N/A	N/A	3.770	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

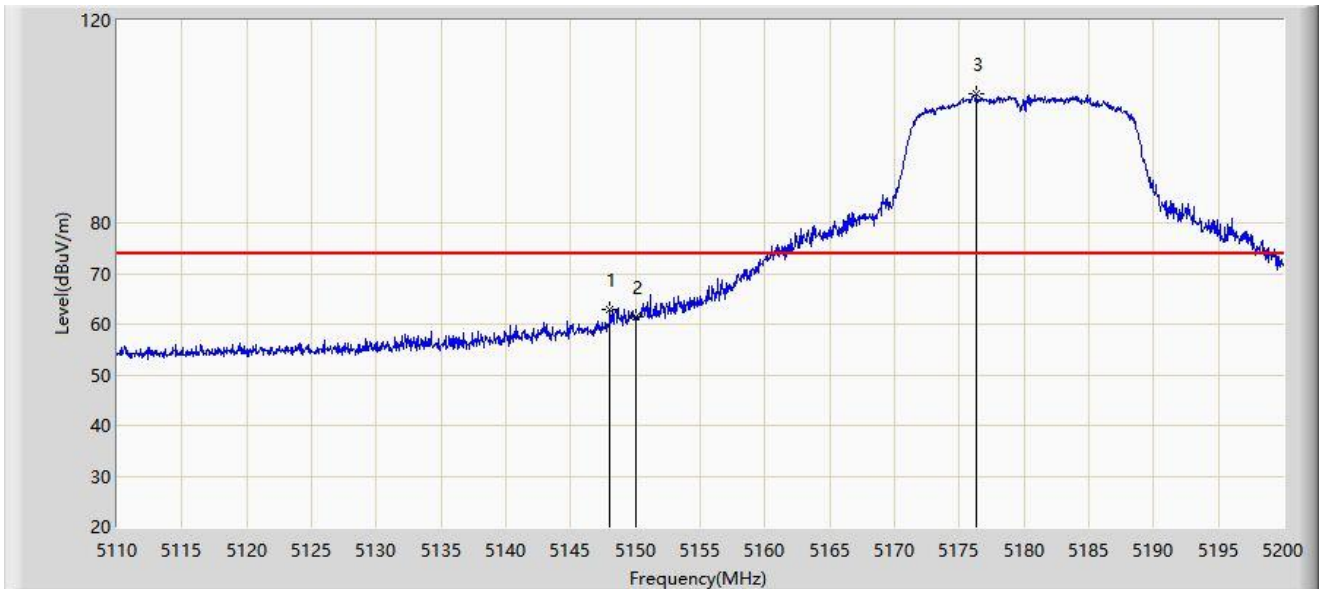


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5148.025	62.836	58.628	-11.164	74.000	4.208	PK
2			5150.000	61.305	57.133	-12.695	74.000	4.173	PK
3		*	5176.285	105.412	101.655	N/A	N/A	3.757	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

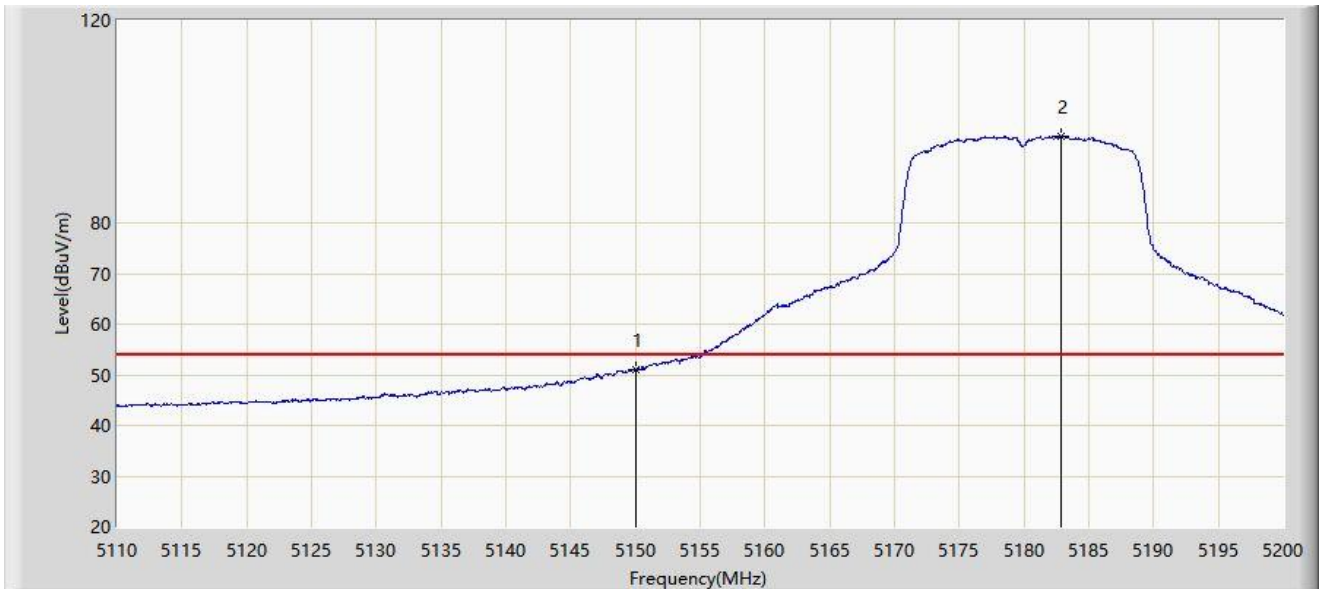


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5150.000	51.115	46.943	-2.885	54.000	4.173	AV
2		*	5182.855	97.229	93.604	N/A	N/A	3.625	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:19
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

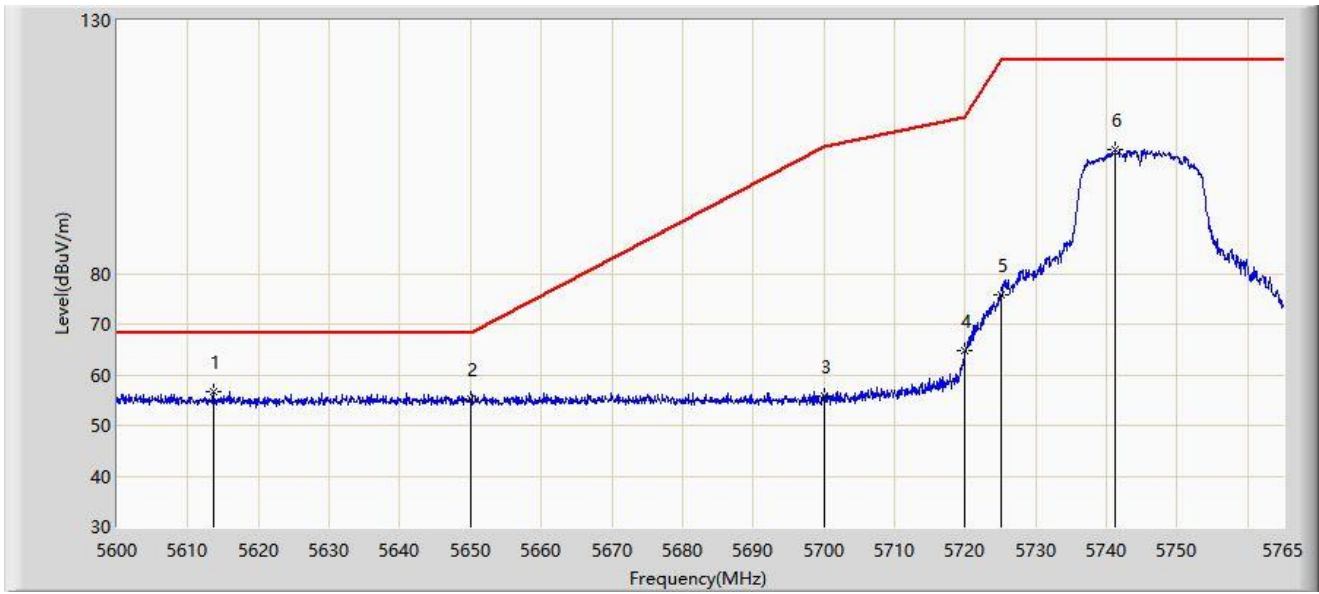


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5613.612	56.756	52.169	-11.444	68.200	4.587	PK
2			5650.000	55.102	50.291	-13.098	68.200	4.810	PK
3			5700.000	55.673	50.679	-49.527	105.200	4.993	PK
4			5720.000	64.737	59.485	-46.063	110.800	5.252	PK
5			5725.000	75.795	70.429	-46.405	122.200	5.366	PK
6			5741.240	104.418	98.924	N/A	N/A	5.494	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:20
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

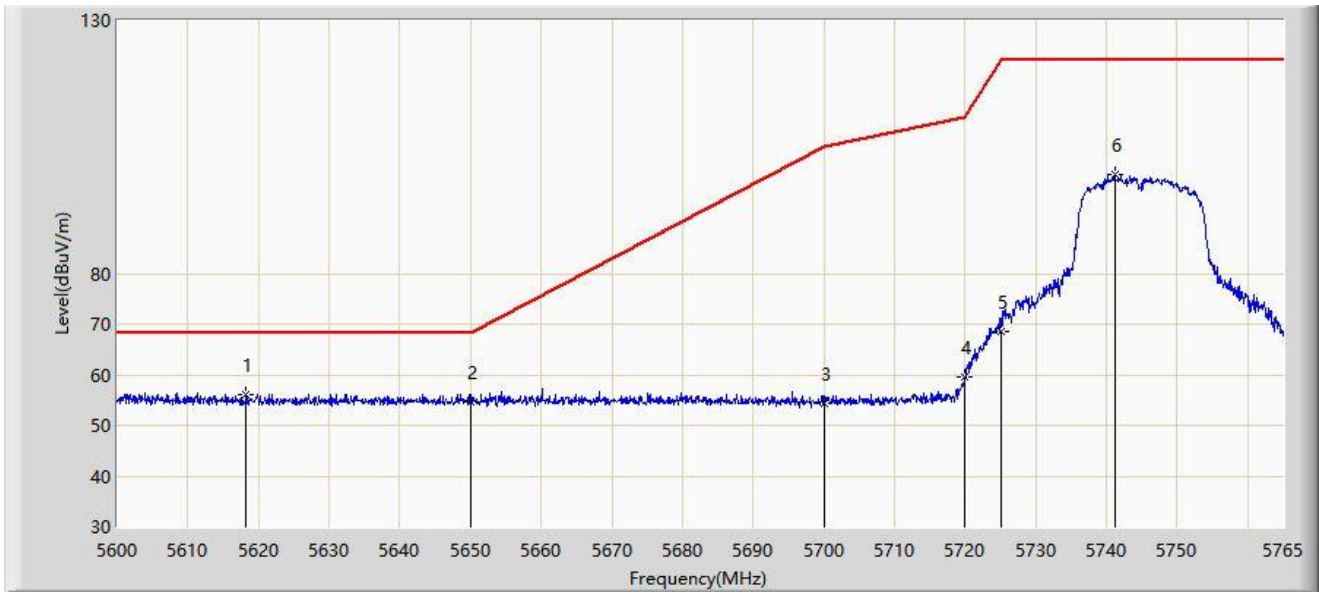


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5618.232	56.072	51.523	-12.128	68.200	4.549	PK
2			5650.000	54.597	49.786	-13.603	68.200	4.810	PK
3			5700.000	54.330	49.336	-50.870	105.200	4.993	PK
4			5720.000	59.708	54.456	-51.092	110.800	5.252	PK
5			5725.000	68.634	63.268	-53.566	122.200	5.366	PK
6			5741.240	99.678	94.184	N/A	N/A	5.494	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:23
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

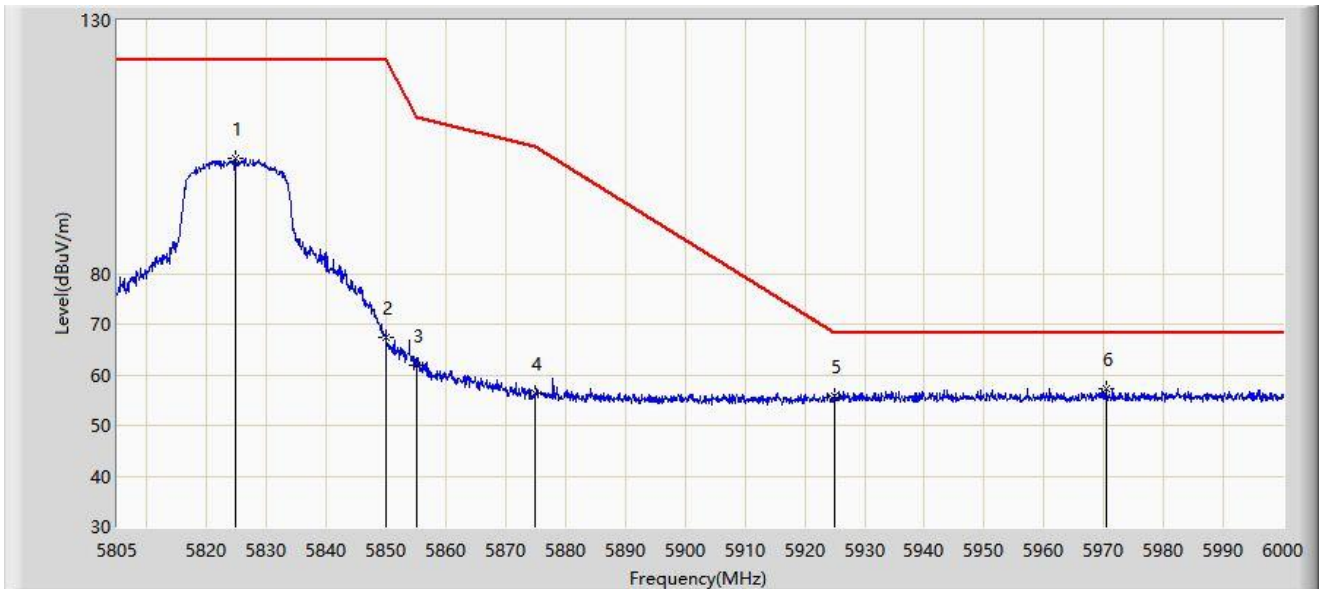


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5824.792	102.702	96.995	N/A	N/A	5.706	PK
2			5850.000	67.381	61.623	-54.819	122.200	5.758	PK
3			5855.000	61.905	56.119	-48.895	110.800	5.787	PK
4			5875.000	56.471	50.567	-48.729	105.200	5.904	PK
5			5925.000	55.880	49.860	-12.320	68.200	6.020	PK
6		*	5970.360	57.343	51.131	-10.857	68.200	6.212	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:24
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

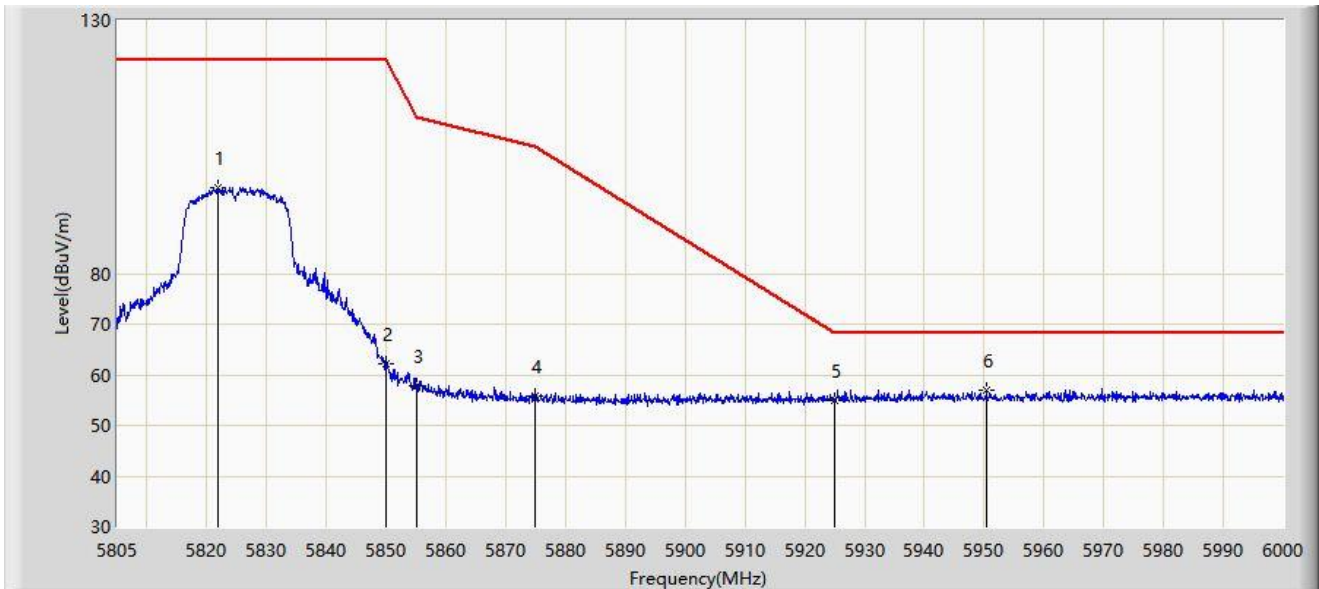


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5821.868	97.090	91.379	N/A	N/A	5.711	PK
2			5850.000	62.212	56.454	-59.988	122.200	5.758	PK
3			5855.000	57.717	51.931	-53.083	110.800	5.787	PK
4			5875.000	55.851	49.947	-49.349	105.200	5.904	PK
5			5925.000	55.050	49.030	-13.150	68.200	6.020	PK
6		*	5950.373	56.877	50.573	-11.323	68.200	6.304	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

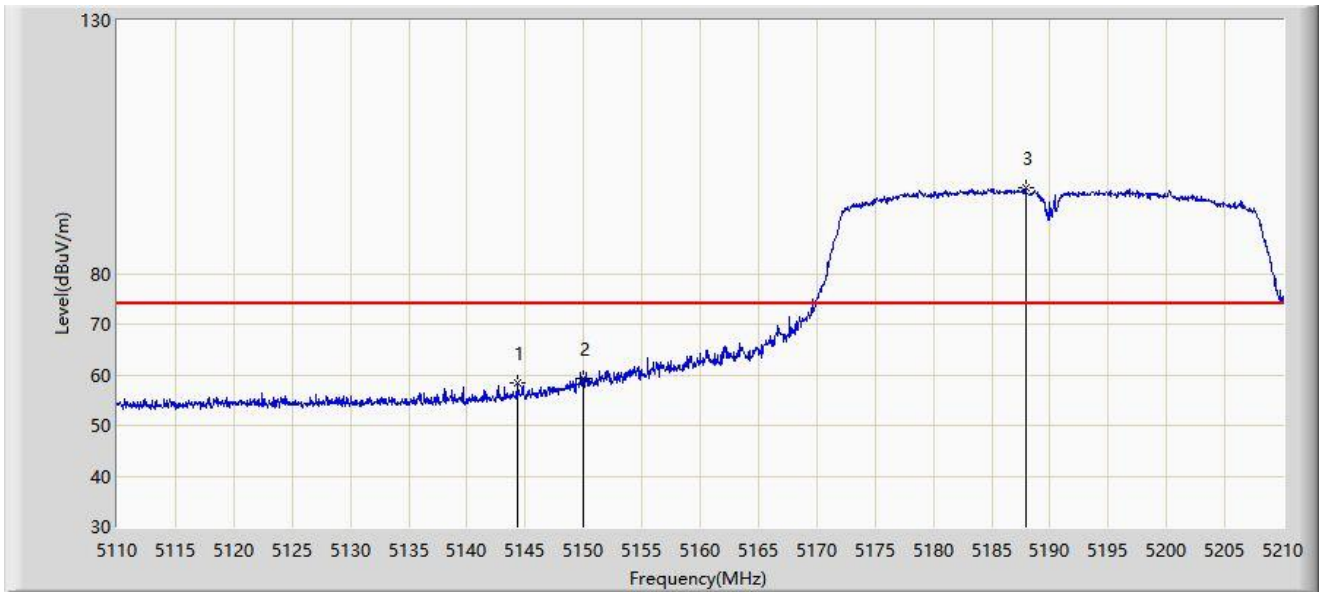


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5144.300	58.380	54.194	-15.620	74.000	4.186	PK
2			5150.000	59.212	55.040	-14.788	74.000	4.173	PK
3		*	5187.950	97.013	93.391	N/A	N/A	3.623	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

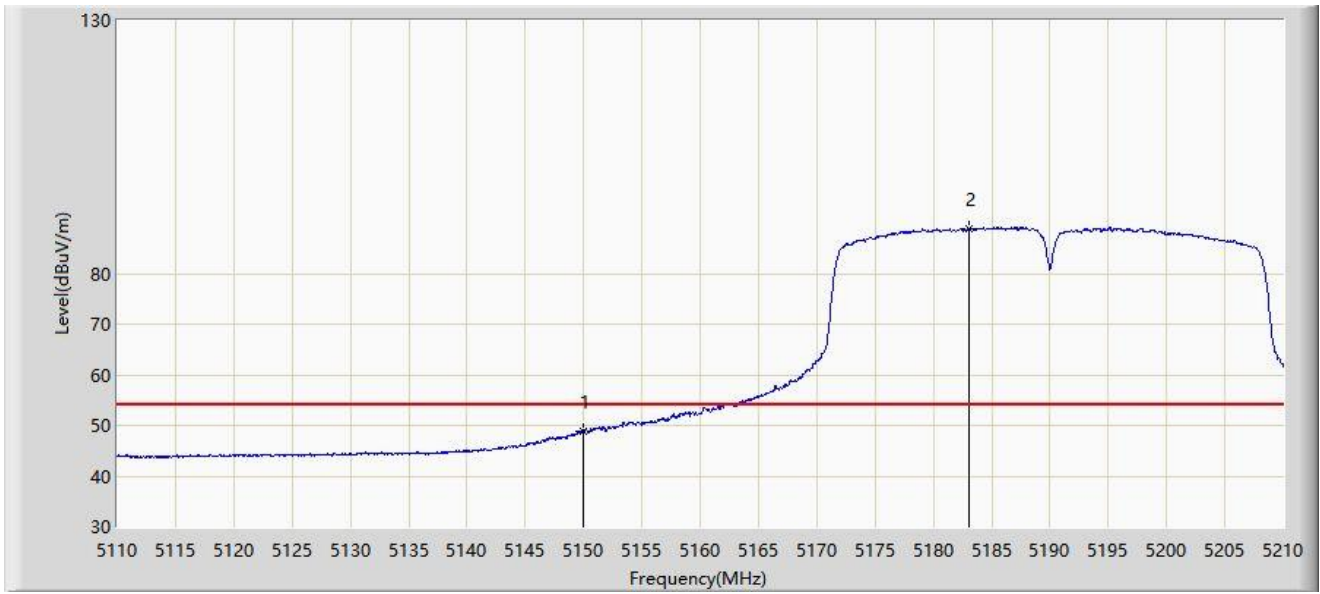


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5150.000	48.955	44.783	-5.045	54.000	4.173	AV
2		*	5183.000	88.889	85.264	N/A	N/A	3.624	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

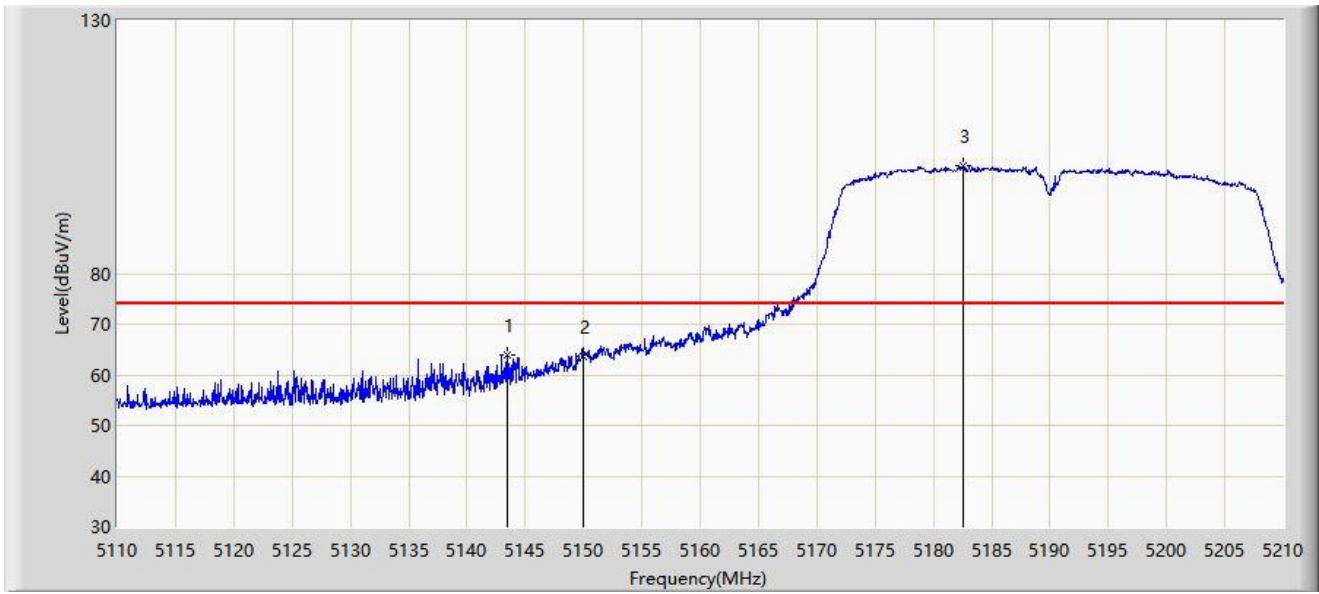


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5143.400	63.826	59.646	-10.174	74.000	4.180	PK
2			5150.000	63.567	59.395	-10.433	74.000	4.173	PK
3		*	5182.500	101.380	97.755	N/A	N/A	3.625	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

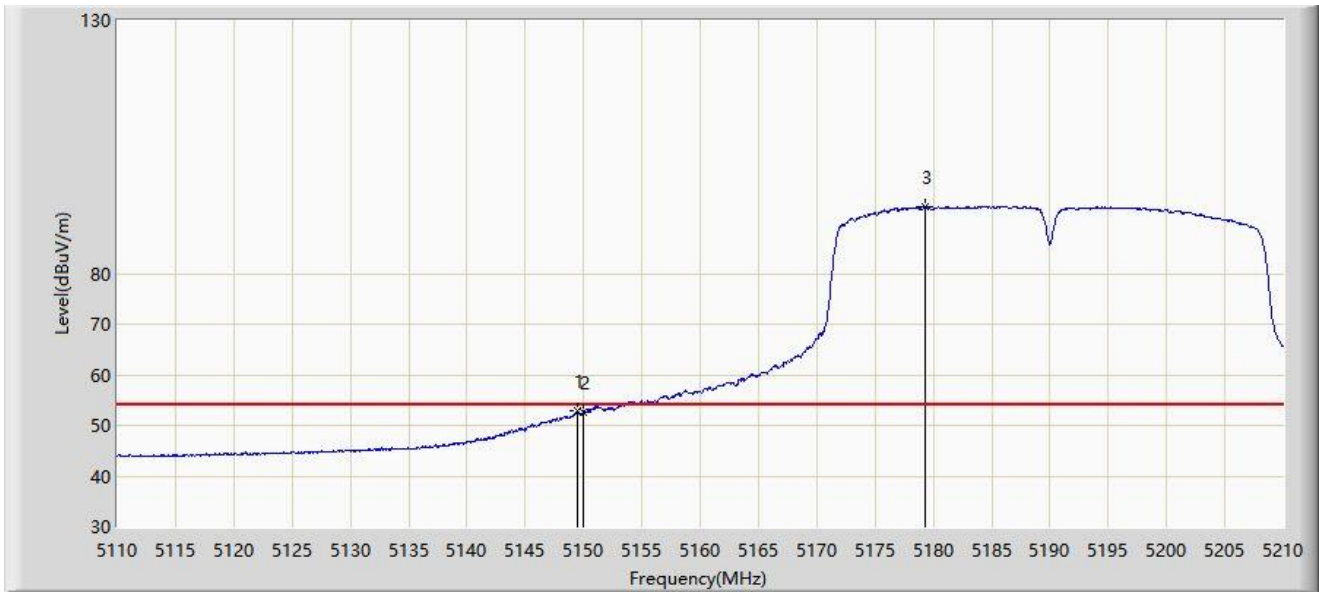


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5149.500	52.823	48.642	-1.177	54.000	4.181	AV
2			5150.000	52.604	48.432	-1.396	54.000	4.173	AV
3		*	5179.350	93.244	89.557	N/A	N/A	3.686	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:46
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

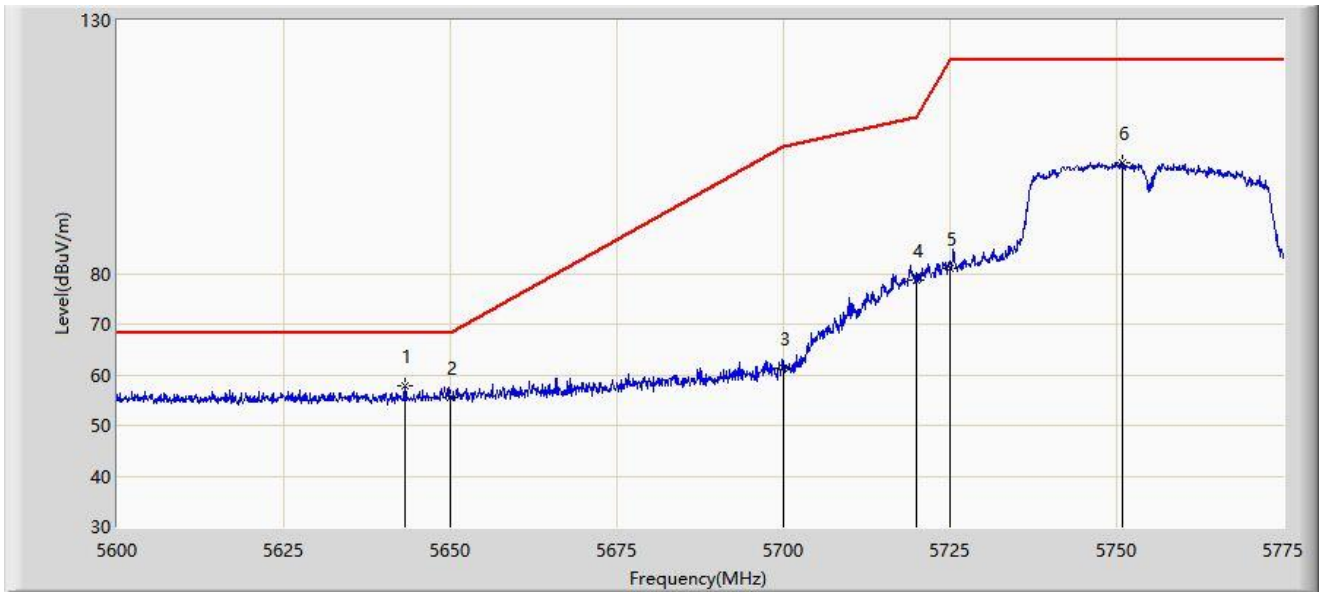


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5643.138	57.726	53.004	-10.474	68.200	4.722	PK
2			5650.000	55.473	50.662	-12.727	68.200	4.810	PK
3			5700.000	61.286	56.292	-43.914	105.200	4.993	PK
4			5720.000	78.715	73.463	-32.085	110.800	5.252	PK
5			5725.000	80.901	75.535	-41.299	122.200	5.366	PK
6			5750.937	101.934	96.512	N/A	N/A	5.423	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:47
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

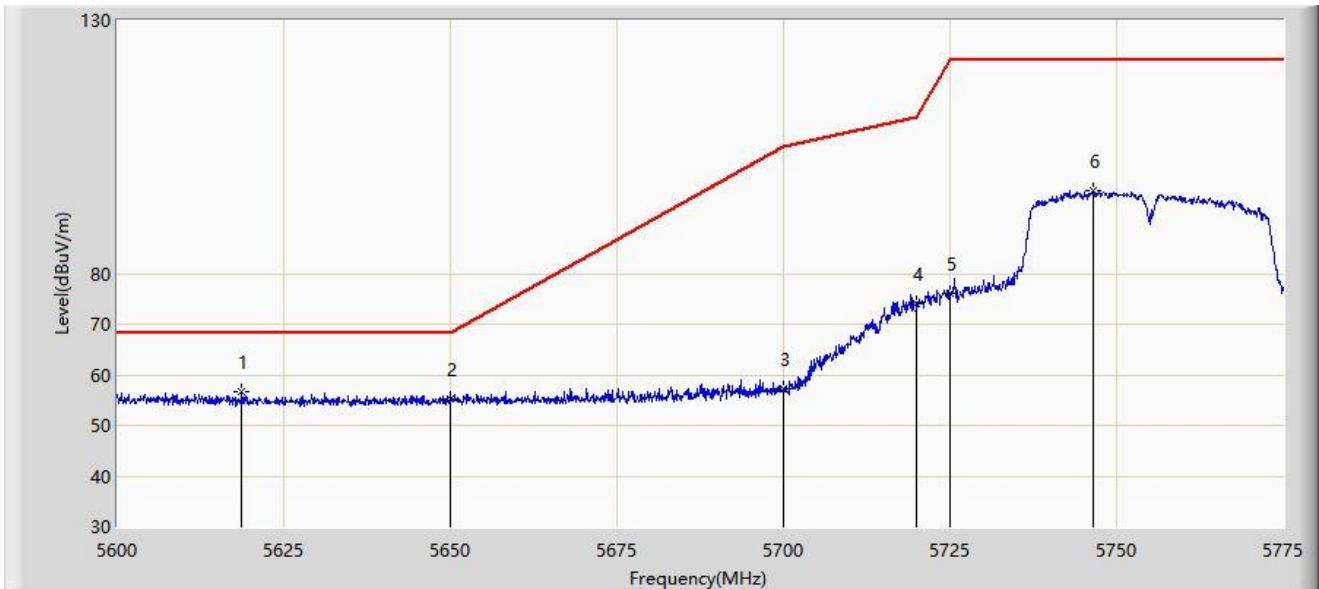


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5618.725	56.726	52.181	-11.474	68.200	4.545	PK
2			5650.000	55.277	50.466	-12.923	68.200	4.810	PK
3			5700.000	57.277	52.283	-47.923	105.200	4.993	PK
4			5720.000	74.103	68.851	-36.697	110.800	5.252	PK
5			5725.000	76.003	70.637	-46.197	122.200	5.366	PK
6			5746.388	96.396	90.919	N/A	N/A	5.478	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:50
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

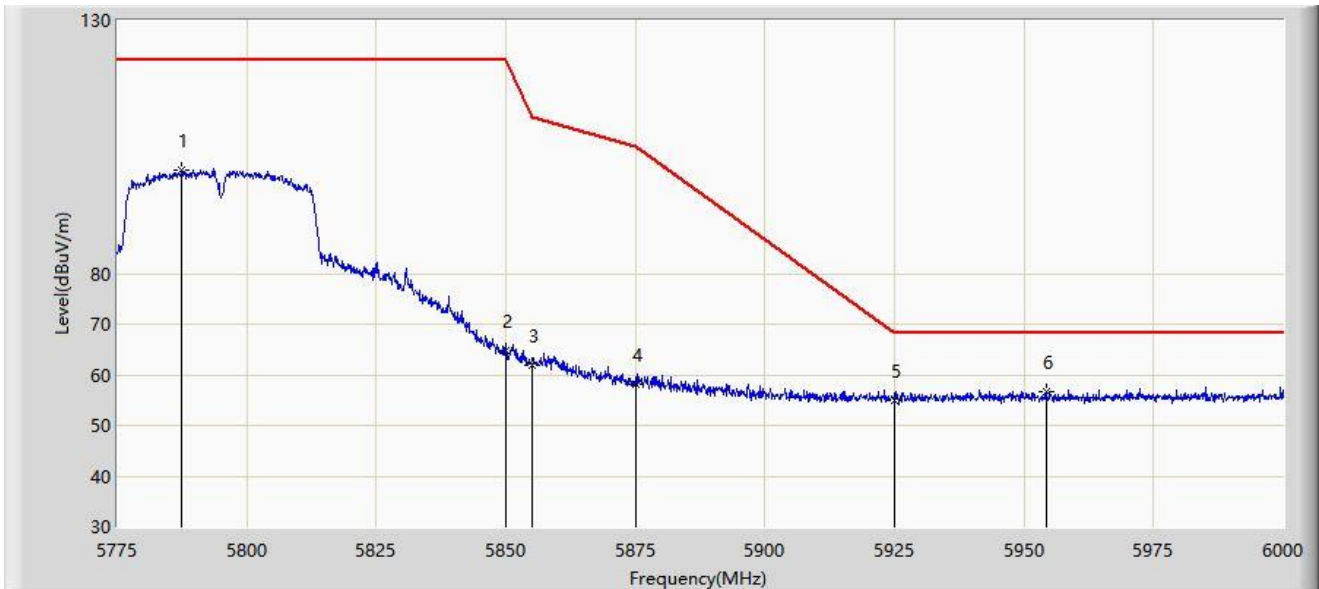


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5787.487	100.361	94.911	N/A	N/A	5.451	PK
2			5850.000	64.849	59.091	-57.351	122.200	5.758	PK
3			5855.000	61.972	56.186	-48.828	110.800	5.787	PK
4			5875.000	58.095	52.191	-47.105	105.200	5.904	PK
5			5925.000	55.037	49.017	-13.163	68.200	6.020	PK
6		*	5954.437	56.747	50.471	-11.453	68.200	6.276	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:51
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

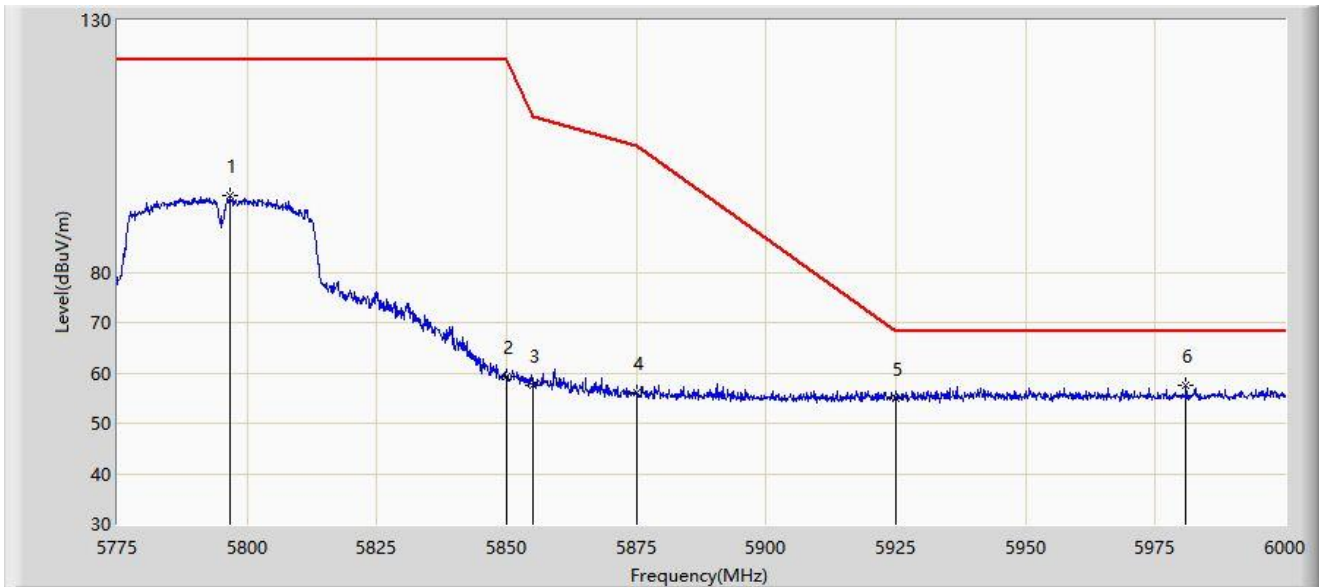


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5796.600	95.252	89.652	N/A	N/A	5.600	PK
2			5850.000	59.327	53.569	-62.873	122.200	5.758	PK
3			5855.000	57.606	51.820	-53.194	110.800	5.787	PK
4			5875.000	56.079	50.175	-49.121	105.200	5.904	PK
5			5925.000	54.980	48.960	-13.220	68.200	6.020	PK
6		*	5980.875	57.554	51.383	-10.646	68.200	6.171	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

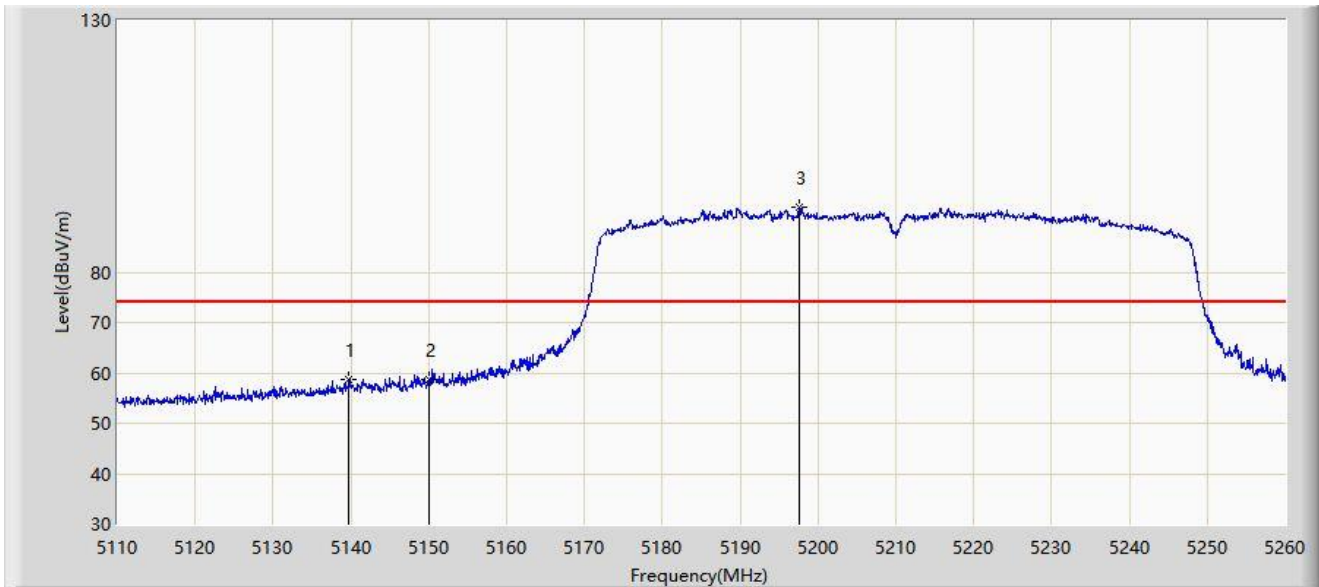


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5139.775	58.806	54.648	-15.194	74.000	4.158	PK
2			5150.000	58.782	54.610	-15.218	74.000	4.173	PK
3		*	5197.600	92.942	89.296	N/A	N/A	3.646	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 01:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

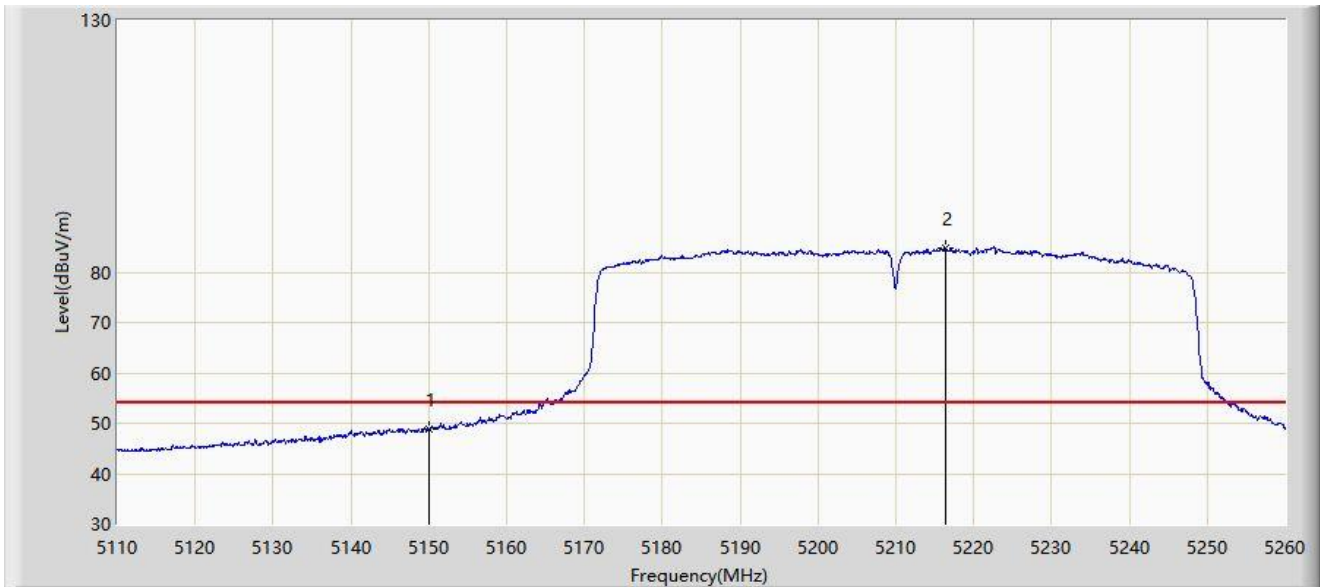


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5150.000	48.714	44.542	-5.286	54.000	4.173	AV
2		*	5216.350	84.833	80.955	N/A	N/A	3.878	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

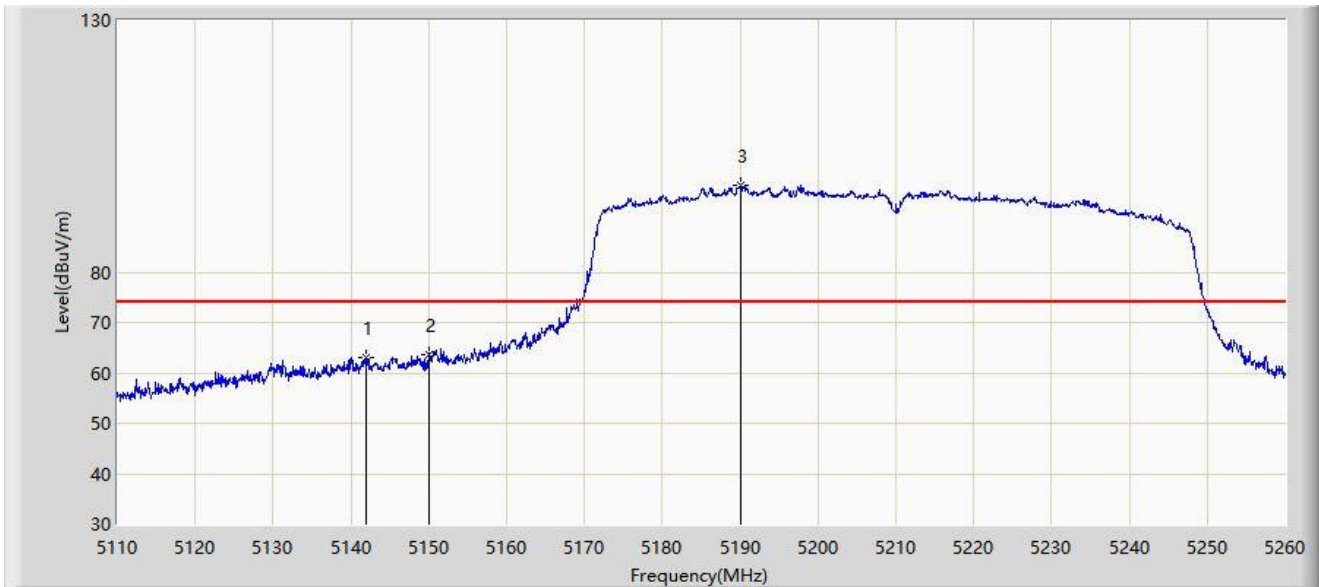


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5141.950	63.005	58.834	-10.995	74.000	4.171	PK
2			5150.000	63.610	59.438	-10.390	74.000	4.173	PK
3		*	5190.100	97.359	93.731	N/A	N/A	3.628	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

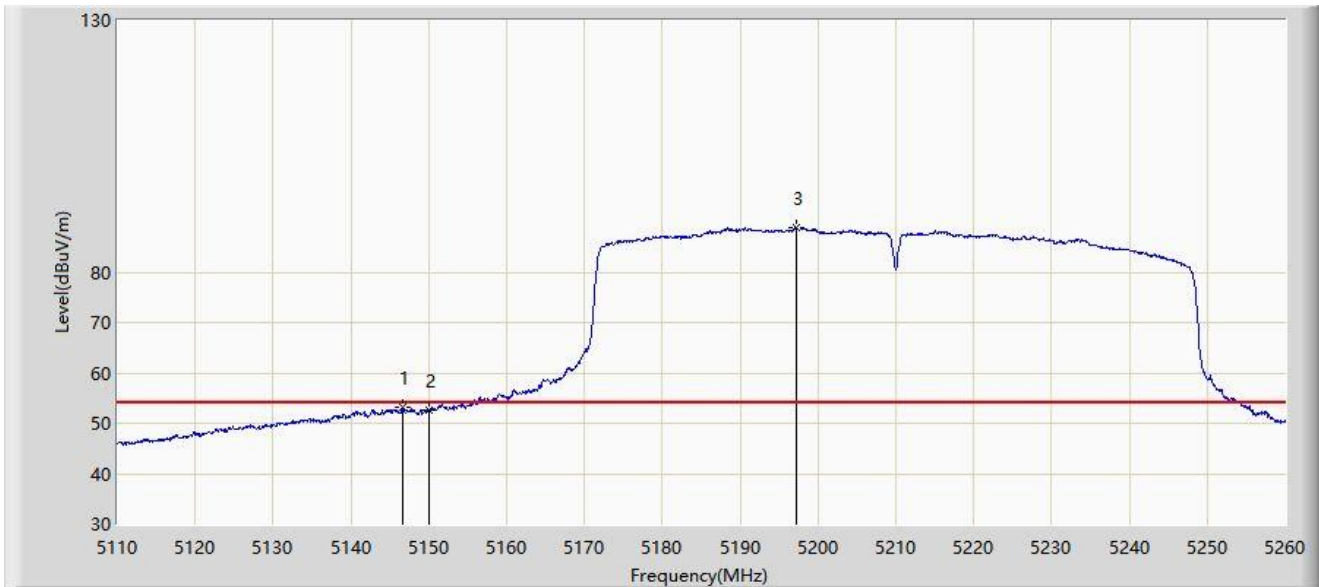


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5146.675	53.062	48.861	-0.938	54.000	4.201	AV
2			5150.000	52.718	48.546	-1.282	54.000	4.173	AV
3		*	5197.150	88.862	85.217	N/A	N/A	3.645	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 01:02
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

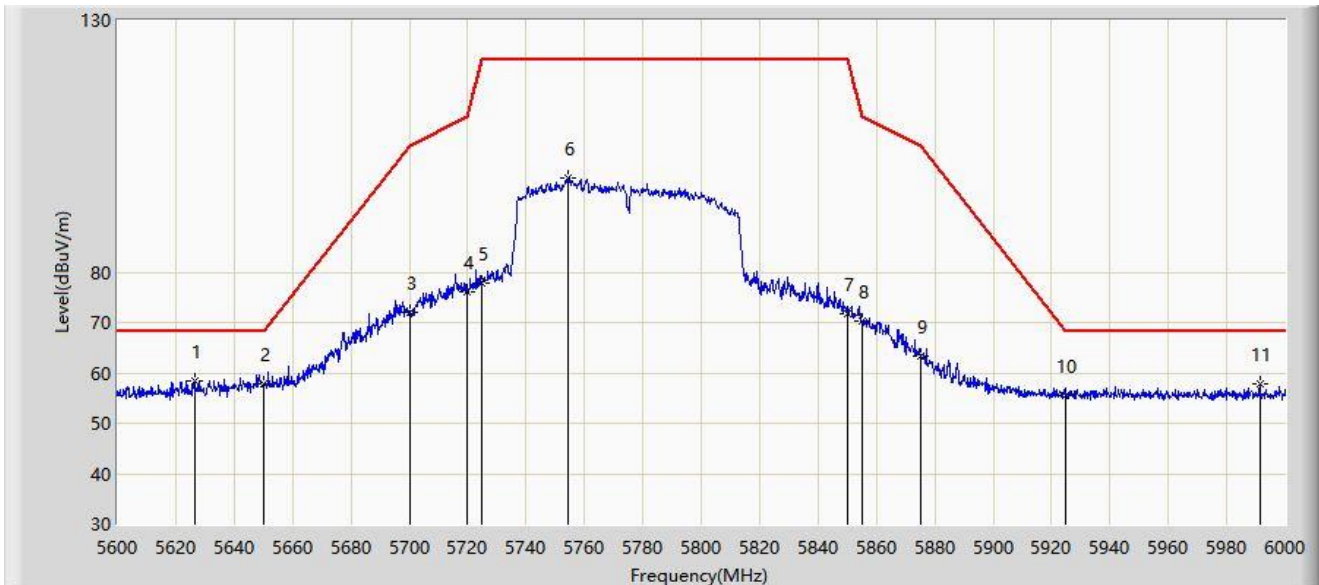


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5626.400	58.457	53.929	-9.743	68.200	4.528	PK
2			5650.000	57.922	53.111	-10.278	68.200	4.810	PK
3			5700.000	71.893	66.899	-33.307	105.200	4.993	PK
4			5720.000	76.053	70.801	-34.747	110.800	5.252	PK
5			5725.000	77.856	72.490	-44.344	122.200	5.366	PK
6			5754.600	98.837	93.458	N/A	N/A	5.379	PK
7			5850.000	71.704	65.946	-50.496	122.200	5.758	PK
8			5855.000	70.320	64.534	-40.480	110.800	5.787	PK
9			5875.000	63.281	57.377	-41.919	105.200	5.904	PK
10			5925.000	55.553	49.533	-12.647	68.200	6.020	PK
11			5991.400	57.849	51.627	-10.351	68.200	6.222	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 01:04
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

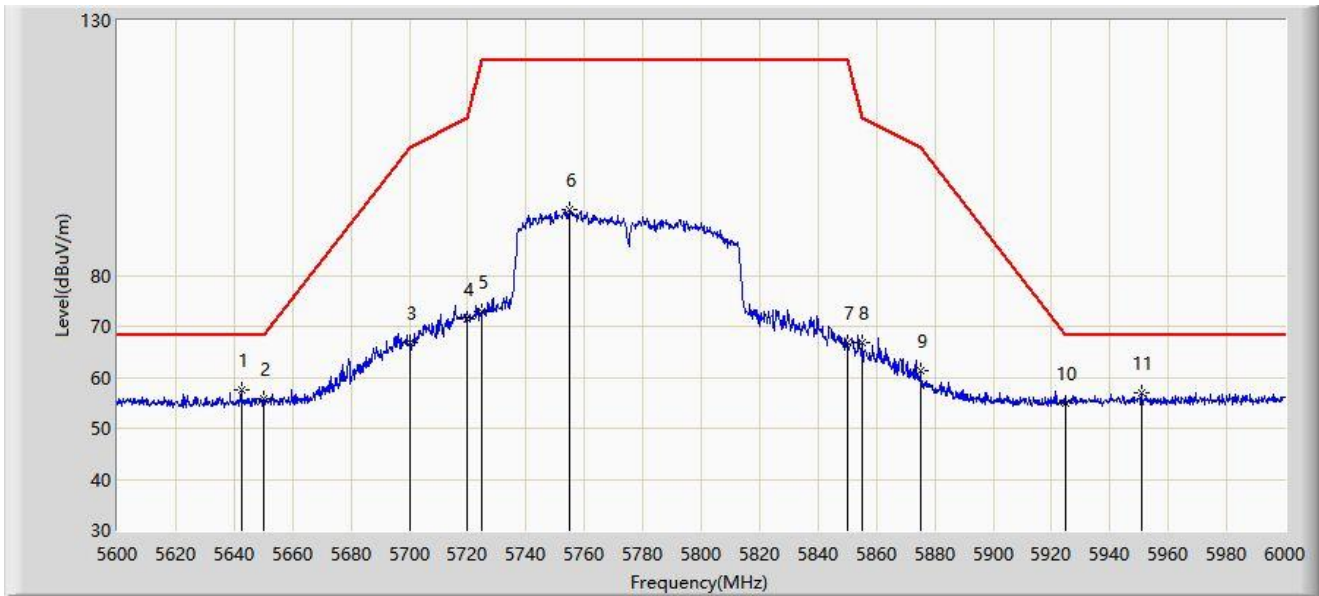


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5642.400	57.502	52.790	-10.698	68.200	4.712	PK
2			5650.000	55.826	51.015	-12.374	68.200	4.810	PK
3			5700.000	66.697	61.703	-38.503	105.200	4.993	PK
4			5720.000	71.511	66.259	-39.289	110.800	5.252	PK
5			5725.000	72.760	67.394	-49.440	122.200	5.366	PK
6			5755.000	93.028	87.654	N/A	N/A	5.373	PK
7			5850.000	66.866	61.108	-55.334	122.200	5.758	PK
8			5855.000	66.747	60.961	-44.053	110.800	5.787	PK
9			5875.000	61.281	55.377	-43.919	105.200	5.904	PK
10			5925.000	55.045	49.025	-13.155	68.200	6.020	PK
11			5950.800	56.961	50.660	-11.239	68.200	6.302	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:43
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

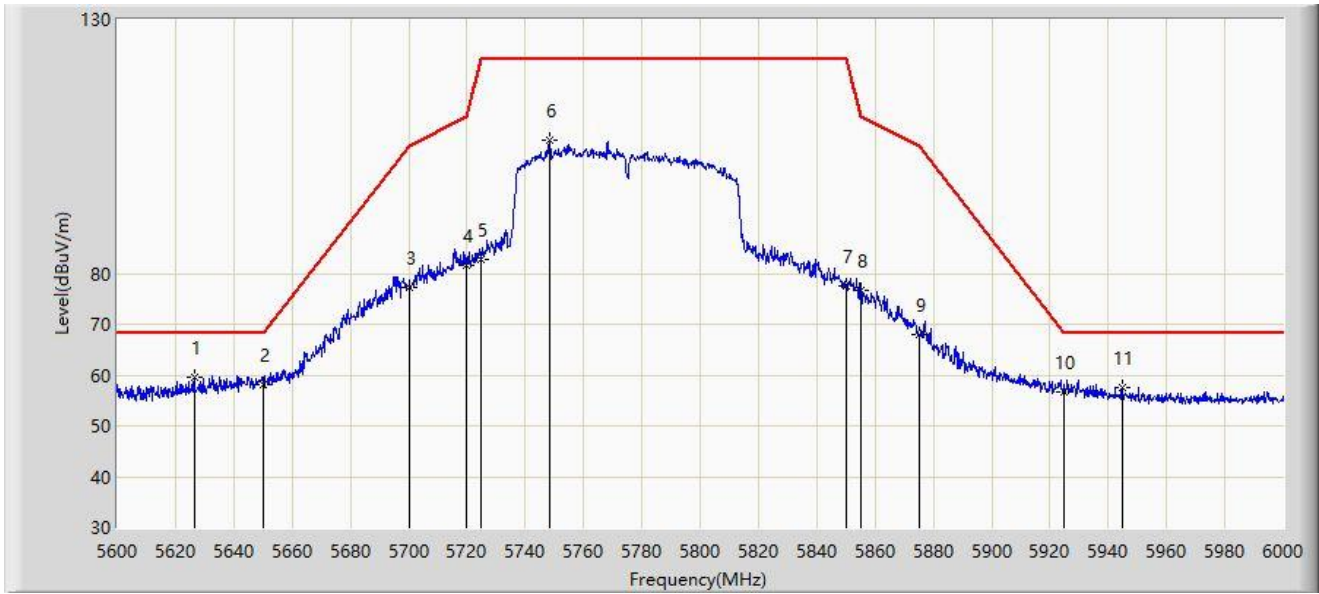

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5626.400	59.685	55.157	-8.515	68.200	4.528	PK
2			5650.000	58.258	53.447	-9.942	68.200	4.810	PK
3			5700.000	77.257	72.263	-27.943	105.200	4.993	PK
4			5720.000	81.451	76.199	-29.349	110.800	5.252	PK
5			5725.000	82.823	77.457	-39.377	122.200	5.366	PK
6			5748.400	106.231	100.778	N/A	N/A	5.453	PK
7			5850.000	77.577	71.819	-44.623	122.200	5.758	PK
8			5855.000	76.732	70.946	-34.068	110.800	5.787	PK
9			5875.000	68.061	62.157	-37.139	105.200	5.904	PK
10			5925.000	56.809	50.789	-11.391	68.200	6.020	PK
11			5944.800	57.591	51.277	-10.609	68.200	6.314	PK


Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

A.9 AC Conducted Emissions Test Result

Radio 2 Test Data

Site: WZ-SR2	Time: 2022/03/11 - 10:28
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_C	Polarity: Line
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5230MHz	

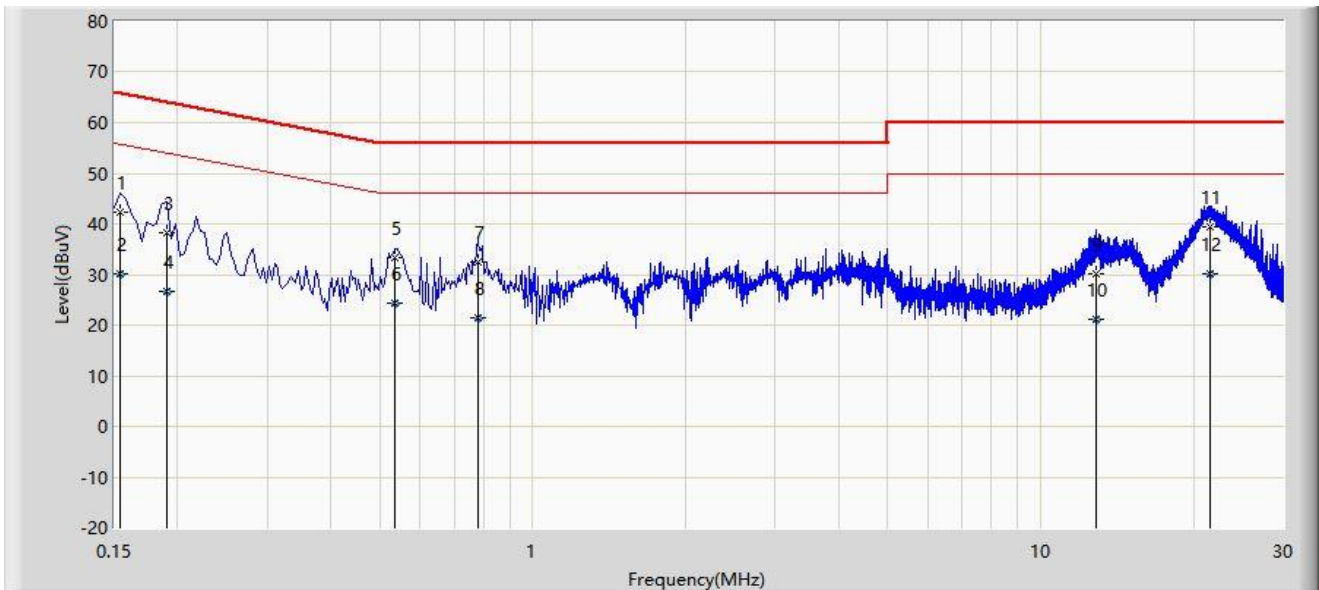


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.154	42.261	32.212	-23.521	65.781	10.049	QP
2			0.154	30.155	20.106	-25.626	55.781	10.049	AV
3			0.190	38.158	28.116	-25.878	64.037	10.042	QP
4			0.190	26.561	16.518	-27.476	54.037	10.042	AV
5			0.534	33.220	23.092	-22.780	56.000	10.129	QP
6			0.534	24.247	14.118	-21.753	46.000	10.129	AV
7			0.778	32.429	22.248	-23.571	56.000	10.182	QP
8			0.778	21.318	11.136	-24.682	46.000	10.182	AV
9			12.834	30.206	19.343	-29.794	60.000	10.863	QP
10			12.834	21.115	10.252	-28.885	50.000	10.863	AV
11			21.494	39.311	28.065	-20.689	60.000	11.246	QP
12		*	21.494	30.167	18.921	-19.833	50.000	11.246	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Time: 2022/03/11 - 10:33
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_C	Polarity: Neutral
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5230MHz	

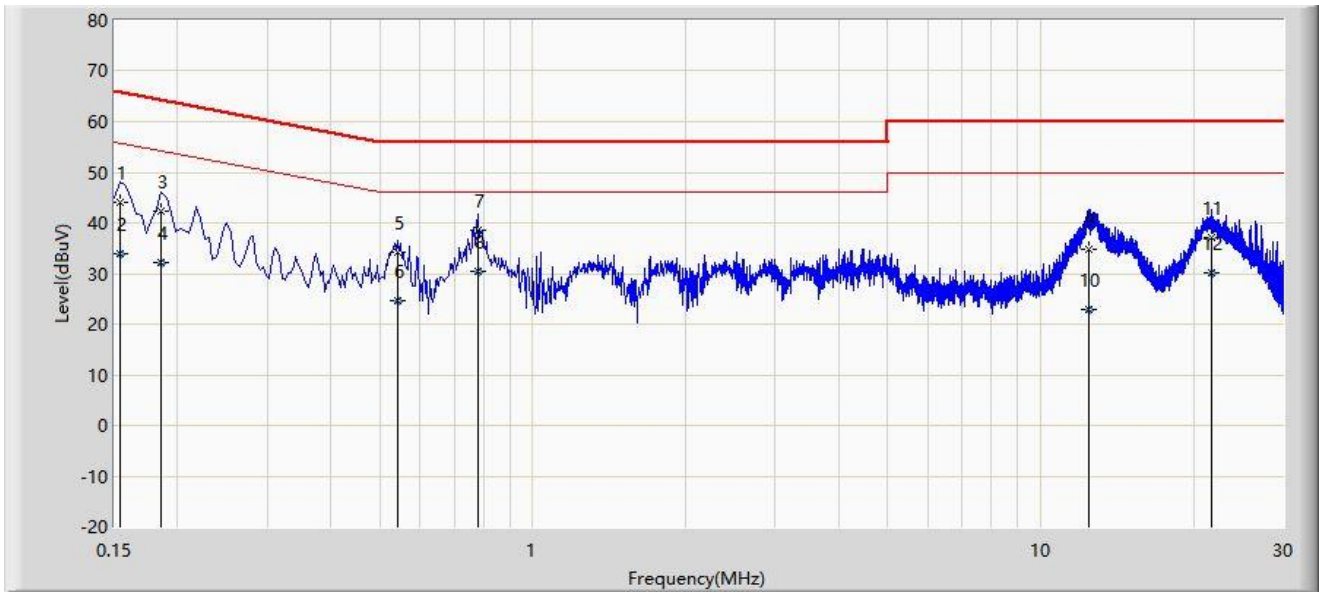


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.154	44.142	33.771	-21.640	65.781	10.370	QP
2			0.154	33.989	23.618	-21.793	55.781	10.370	AV
3			0.186	42.205	31.863	-22.009	64.213	10.341	QP
4			0.186	32.060	21.718	-22.154	54.213	10.341	AV
5			0.542	34.189	23.801	-21.811	56.000	10.388	QP
6			0.542	24.757	14.369	-21.243	46.000	10.388	AV
7			0.778	38.680	28.248	-17.320	56.000	10.432	QP
8		*	0.778	30.423	19.991	-15.577	46.000	10.432	AV
9			12.462	34.892	23.762	-25.108	60.000	11.130	QP
10			12.462	22.986	11.856	-27.014	50.000	11.130	AV
11			21.662	37.163	25.730	-22.837	60.000	11.433	QP
12			21.662	30.225	18.792	-19.775	50.000	11.433	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Radio 2 Test Data

Site: WZ-SR2	Time: 2022/03/11 - 10:48
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_C	Polarity: Line
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5230MHz	

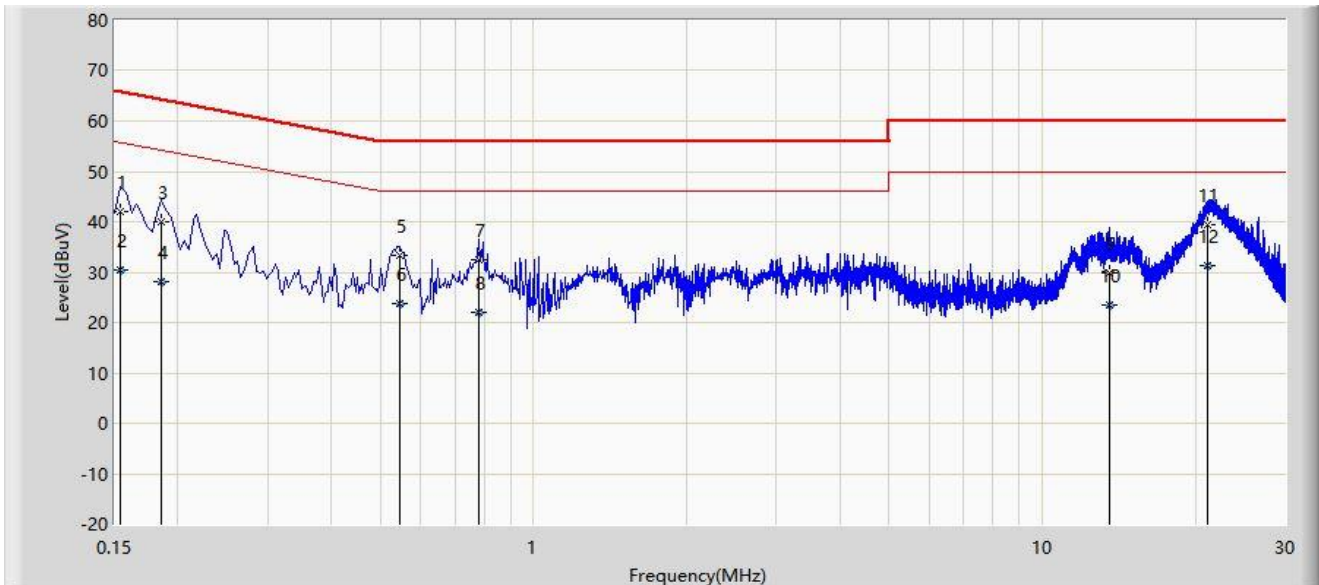


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.154	41.979	31.930	-23.802	65.781	10.049	QP
2			0.154	30.455	20.406	-25.326	55.781	10.049	AV
3			0.186	39.979	29.936	-24.235	64.213	10.043	QP
4			0.186	28.156	18.113	-26.057	54.213	10.043	AV
5			0.546	33.258	23.126	-22.742	56.000	10.131	QP
6			0.546	23.768	13.637	-22.232	46.000	10.131	AV
7			0.778	32.466	22.284	-23.534	56.000	10.182	QP
8			0.778	22.038	11.856	-23.962	46.000	10.182	AV
9			13.594	29.821	18.962	-30.179	60.000	10.859	QP
10			13.594	23.406	12.547	-26.594	50.000	10.859	AV
11			21.174	39.380	28.142	-20.620	60.000	11.238	QP
12		*	21.174	31.321	20.083	-18.679	50.000	11.238	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Time: 2022/03/11 - 10:53
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_C	Polarity: Neutral
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5230MHz	

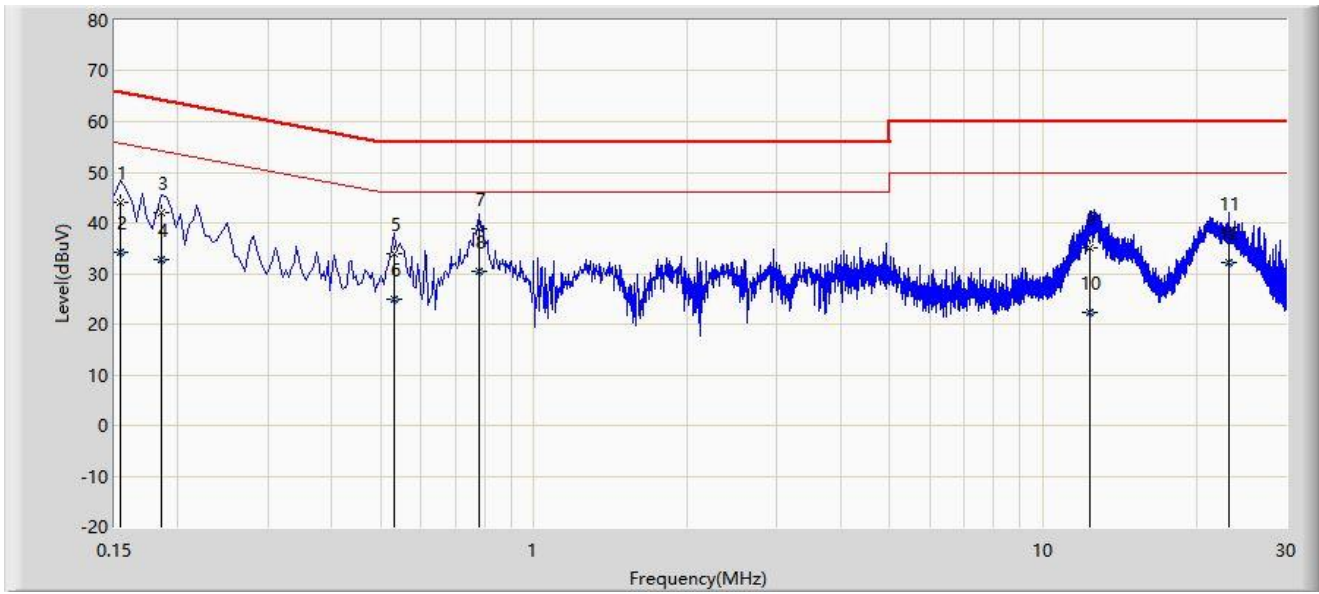

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.154	44.119	33.749	-21.662	65.781	10.370	QP
2			0.154	34.191	23.821	-21.590	55.781	10.370	AV
3			0.186	42.074	31.732	-22.140	64.213	10.341	QP
4			0.186	32.623	22.282	-21.590	54.213	10.341	AV
5			0.530	33.820	23.434	-22.180	56.000	10.385	QP
6			0.530	24.881	14.495	-21.119	46.000	10.385	AV
7			0.778	38.732	28.300	-17.268	56.000	10.432	QP
8		*	0.778	30.397	19.966	-15.603	46.000	10.432	AV
9			12.386	35.024	23.894	-24.976	60.000	11.130	QP
10			12.386	22.343	11.213	-27.657	50.000	11.130	AV
11			23.126	37.831	26.325	-22.169	60.000	11.506	QP
12			23.126	32.270	20.764	-17.730	50.000	11.506	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Appendix B – Test Setup Photograph

Refer to “2105RSU032-UT” file.

Appendix C – EUT Photograph

Refer to “2105RSU032-UE” file.

_____ The End _____