



Report no.: HK9080880-1
Talk Mode (with IP Phone
Connected)
AC Mains "N"

Report No.:HK09080880-1


Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	1	9k	30M
2	9k	30M	0700
3	9k	30M	0090

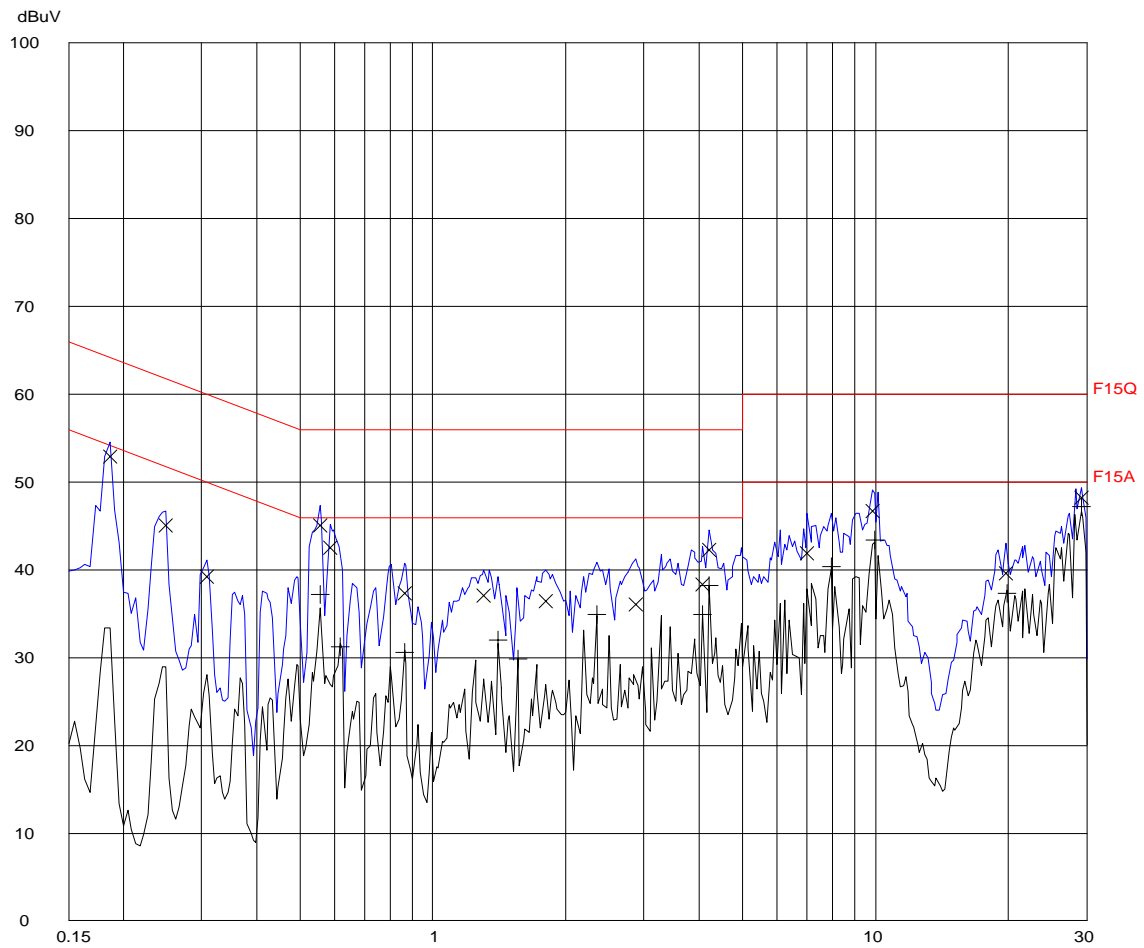

Ctrl No.: N/A



Report no.: HK9080880-1
Talk Mode (with IP Phone
Connected)
AC Mains "N"

Report No.:HK09080880-1

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.18600	52.8	64.2	-11.4
0.24900	45.0	61.8	-16.8
0.30750	39.2	60.0	-20.8
0.55500	45.0	56.0	-11.0
0.58650	42.4	56.0	-13.6
0.86100	37.3	56.0	-18.7
1.30200	37.0	56.0	-19.0
1.79700	36.4	56.0	-19.6
2.86800	36.0	56.0	-20.0
4.06050	38.3	56.0	-17.7
4.21350	42.3	56.0	-13.7
7.02150	41.8	60.0	-18.2
9.83400	46.6	60.0	-13.4
19.67100	39.6	60.0	-20.4
29.18850	48.1	60.0	-11.9

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.55500	37.1	46.0	-8.9
0.61800	31.1	46.0	-14.9
0.86100	30.6	46.0	-15.4
1.40550	32.0	46.0	-14.0
1.55850	29.9	46.0	-16.1
2.34150	34.8	46.0	-11.2
4.05600	34.9	46.0	-11.1
4.21350	38.2	46.0	-7.8
7.96200	40.3	50.0	-9.7
9.99150	43.3	50.0	-6.7
19.82400	37.3	50.0	-12.7
29.18850	47.2	50.0	-2.8

* limit exceeded

Ctrl No.: N/A



Report no.: HK9080880-1
Talk Mode (with IP Phone
Connected)
AC Mains "L"

Report No.: HK9080880-1


Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	1	9k	30M
2	9k	30M	0700
3	9k	30M	0090

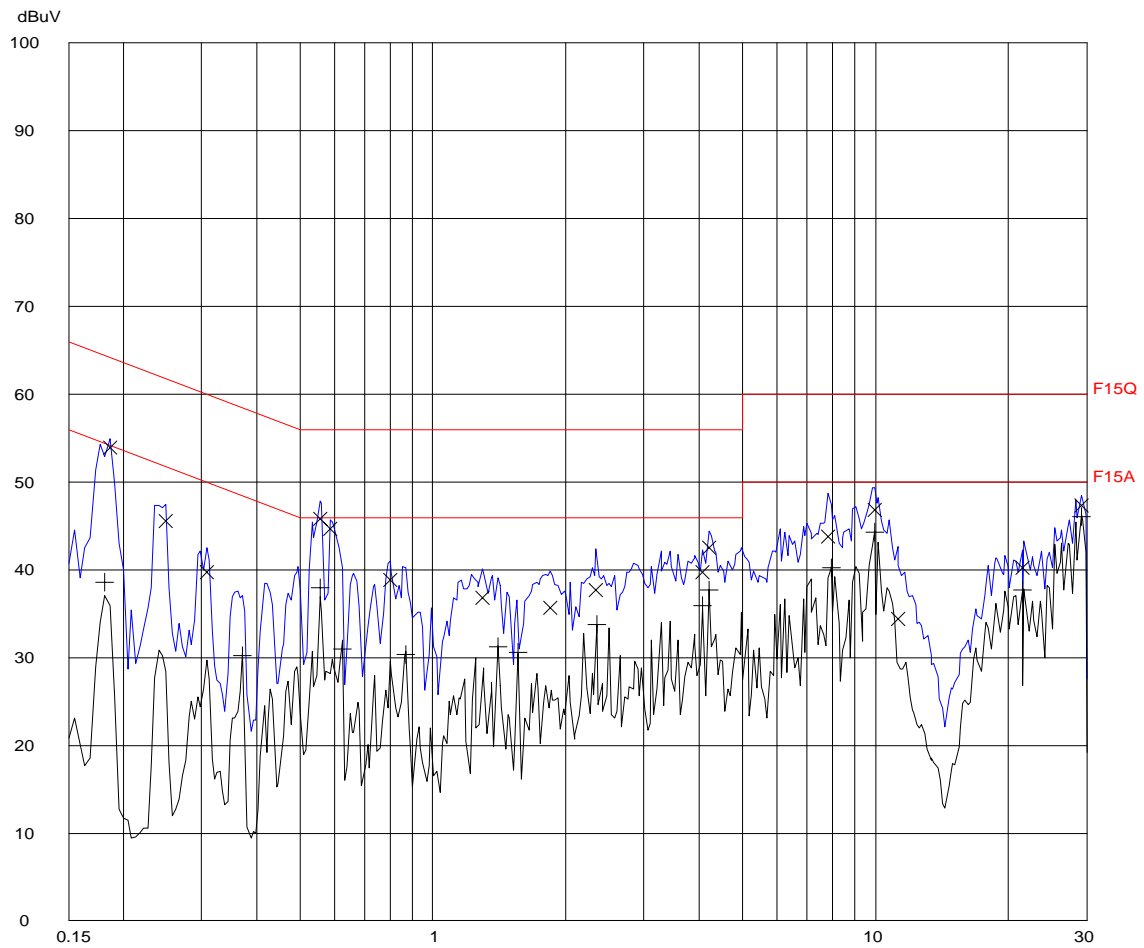

Ctrl No.: N/A



Report no.: HK9080880-1
Talk Mode (with IP Phone
Connected)
AC Mains "L"

Report No.:HK09080880-1

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.18600	53.9	64.2	-10.3
0.24900	45.5	61.8	-16.3
0.30750	39.7	60.0	-20.3
0.55500	45.8	56.0	-10.2
0.58650	44.6	56.0	-11.4
0.80250	38.8	56.0	-17.2
1.29300	36.7	56.0	-19.3
1.84200	35.6	56.0	-20.4
2.33700	37.7	56.0	-18.3
4.05600	39.7	56.0	-16.3
4.20900	42.4	56.0	-13.6
7.80000	43.7	60.0	-16.3
9.98250	46.8	60.0	-13.2
11.22900	34.3	60.0	-25.7
21.52950	40.1	60.0	-19.9
29.17500	47.3	60.0	-12.7

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.18150	38.6	54.4	-15.8
0.37050	30.2	48.5	-18.3
0.55500	37.9	46.0	-8.1
0.62250	31.0	46.0	-15.0
0.86550	30.3	46.0	-15.7
1.40550	31.2	46.0	-14.8
1.55850	30.5	46.0	-15.5
2.34150	33.8	46.0	-12.2
4.05600	35.8	46.0	-10.2
4.20900	37.6	46.0	-8.4
7.95750	40.2	50.0	-9.8
9.98250	44.3	50.0	-5.7
21.52950	37.6	50.0	-12.4
29.17500	46.1	50.0	-3.9

* limit exceeded

Ctrl No.: N/A