




Report No.: HK08070361-1
Bluetooth Tx Mode
AC Mains "L"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1 9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0090

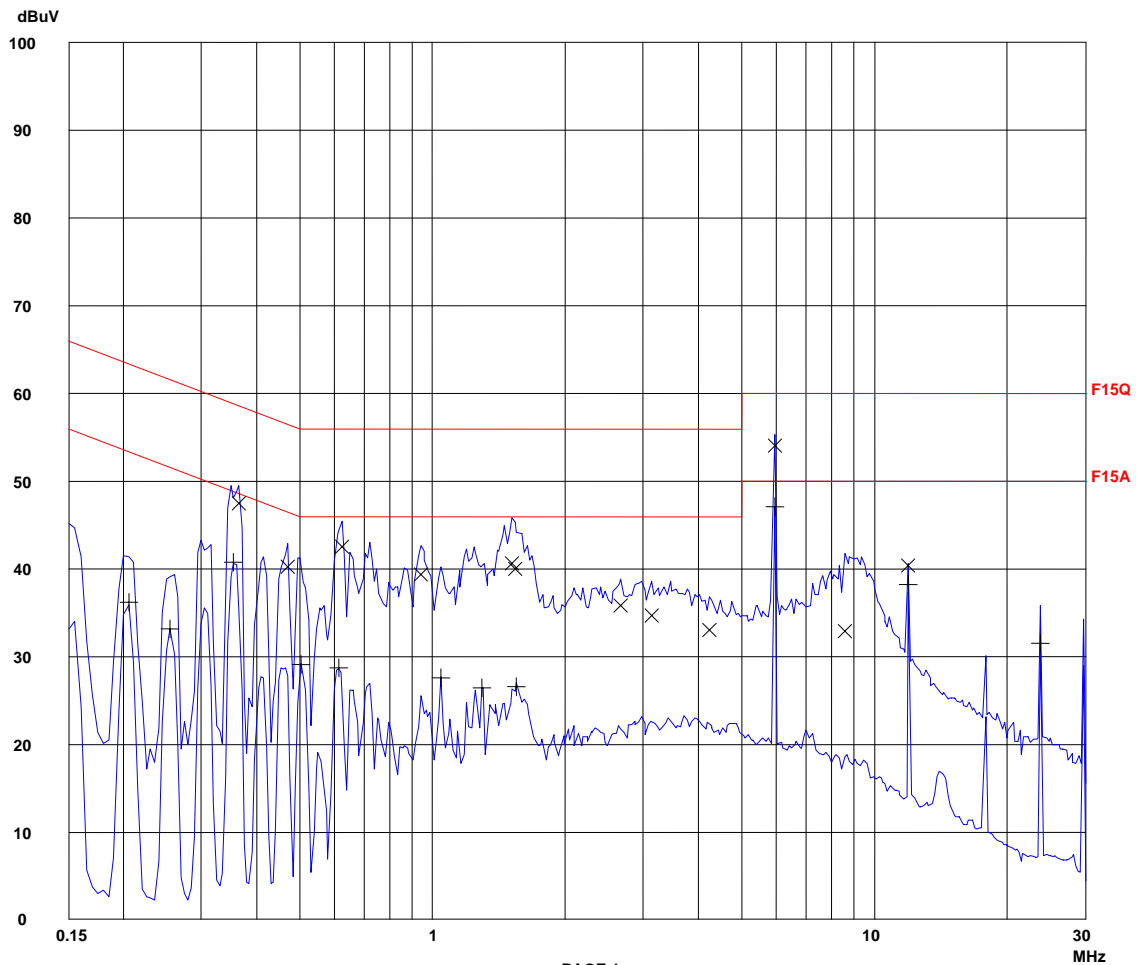



Report No.: HK08070361-1
Bluetooth Tx Mode
AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.36500	47.4	58.6	-11.2
0.47000	40.3	56.5	-16.2
0.62500	42.5	56.0	-13.5
0.94000	39.3	56.0	-16.7
1.51000	40.6	56.0	-15.4
1.54000	39.9	56.0	-16.1
2.66500	35.7	56.0	-20.3
3.13500	34.6	56.0	-21.4
4.23500	33.0	56.0	-23.0
5.94500	54.0	60.0	-6.0
8.58000	32.9	60.0	-27.1
11.89500	40.4	60.0	-19.6

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.20500	36.2	53.4	-17.2
0.25500	33.1	51.6	-18.5
0.35500	40.7	48.8	-8.1
0.50500	29.1	46.0	-16.9
0.61500	28.7	46.0	-17.3
1.04500	27.5	46.0	-18.5
1.29500	26.3	46.0	-19.7
1.54500	26.5	46.0	-19.5
5.94500	47.0	50.0	-3.0
11.89500	38.2	50.0	-11.8
23.78500	31.4	50.0	-18.6

* limit exceeded




Report No.: HK08070361-1
Bluetooth Tx Mode
AC Mains "N"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1 9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0090

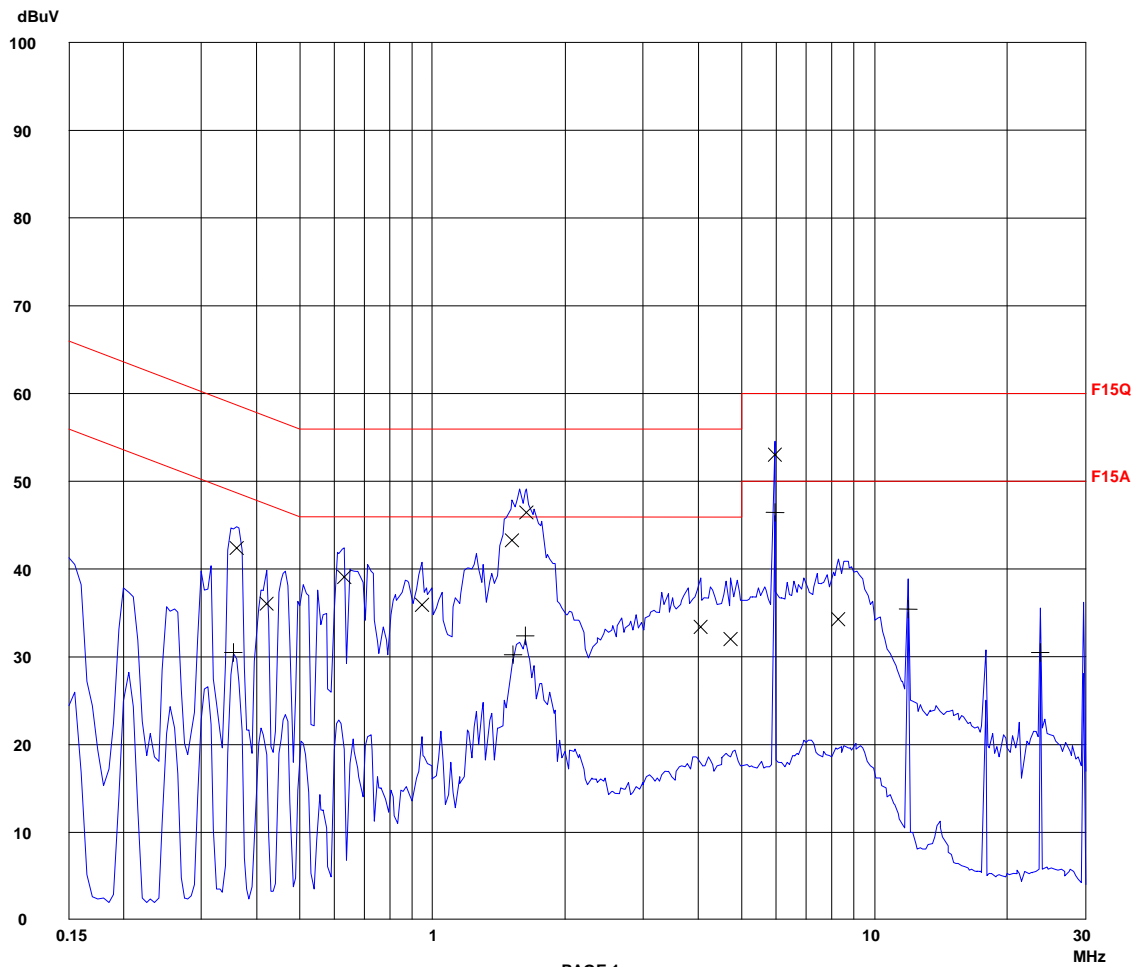



Report No.: HK08070361-1
Bluetooth Tx Mode
AC Mains "N"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.36000	42.3	58.7	-16.4
0.42000	36.1	57.5	-21.4
0.63000	39.1	56.0	-16.9
0.94500	35.9	56.0	-20.1
1.51500	43.3	56.0	-12.7
1.63000	46.3	56.0	-9.7
4.04500	33.3	56.0	-22.7
4.73000	32.0	56.0	-24.0
5.94500	53.0	60.0	-7.0
8.30500	34.3	60.0	-25.7

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.35500	30.5	48.8	-18.3
1.52000	30.2	46.0	-15.8
1.62000	32.3	46.0	-13.7
5.94500	46.4	50.0	-3.6
11.89500	35.3	50.0	-14.7
23.78500	30.4	50.0	-19.6

* limit exceeded