



FCC RADIO TEST REPORT

FCC ID : TX2-RTL8822C
Equipment : Module
Brand Name : Realtek
Model Name : RTL8822C
Marketing Name : 11a/b/g/n/ac RTL8822C Combo module
Applicant : Realtek Semiconductor Corp.
No. 2, Innovation Road II, Hsinchu Science
Park, Hsinchu 300, Taiwan
Standard : FCC Part 15 Subpart C §15.247

The product was received on Aug. 12, 2021 and testing was started from Aug. 17, 2021 and completed on Aug. 28, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
3 Test Result	10
3.1 Output Power Measurement.....	10
3.2 Radiated Band Edges and Spurious Emission Measurement	11
3.3 AC Conducted Emission Measurement.....	15
3.4 Antenna Requirements	17
4 List of Measuring Equipment.....	18
5 Uncertainty of Evaluation	20
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR180221C	01	Initial issue of report	Sep. 10, 2021
FR180221C	02	1. Revise antenna information 2. Add channel 10 at bandwidth VHT40 in section 2.2 3. Revise appendix E 4. Revise Support Unit used in test configuration and system	Sep. 22, 2021



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(2)	6dB Bandwidth	-	See Note
-	2.1049	99% Occupied Bandwidth	-	See Note
3.1	15.247(b)	Power Output Measurement	Pass	-
-	15.247(e)	Power Spectral Density	-	See Note
-	15.247(d)	Conducted Band Edges	-	See Note
		Conducted Spurious Emission	-	See Note
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 0.62 dB at 2483.520 MHz
3.3	15.207	AC Conducted Emission	Pass	Under limit 8.87 dB at 0.499 MHz
3.4	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Note: The module (Model: RTL8822C) makes no difference after verifying output power, this report reuses test data from the module report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Keven Cheng

Report Producer: Celery Wei



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, and Wi-Fi 5GHz 802.11a/n/ac.

Product Specification subjective to this standard	
Installed into host	Equipment Name: Steam Deck Brand Name: Valve Model Name: 1010
Sample 1	Host with INPAQ Antenna
Sample 2	Host with AWAN Antenna
Sample 3	Host with High-Tek Antenna
Antenna Type	WLAN <Main>: PIFA Antenna <Aux.>: PIFA Antenna Bluetooth: PIFA Antenna

Antenna information (INPAQ Technology Co., Ltd.)		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	<Main>: 2.62 <Aux.>: 1.64

Antenna information (AWAN Advanced Wireless and Antenna INC.)		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	<Main>: 1.68 <Aux.>: 0.8

Antenna information (High-Tek Harness Enterprise Co Ltd.)		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	<Main>: 1.37 <Aux.>: -0.55

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH02-HY, CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH20-HY (TAF Code: 3786)
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). The measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane as worst plane.

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442		

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1: Bluetooth Link + WLAN (2.4GHz) Link + Adapter for Sample 1
Remark: For Radiated Test Cases, the tests were performed with Sample 1.	

Ch. #	2400-2483.5 MHz			
	802.11b	802.11g	802.11ac VHT20	802.11ac VHT40
Low	01	01	01	03
Middle	06	06	06	06
High	13	11	11	10
				11

Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

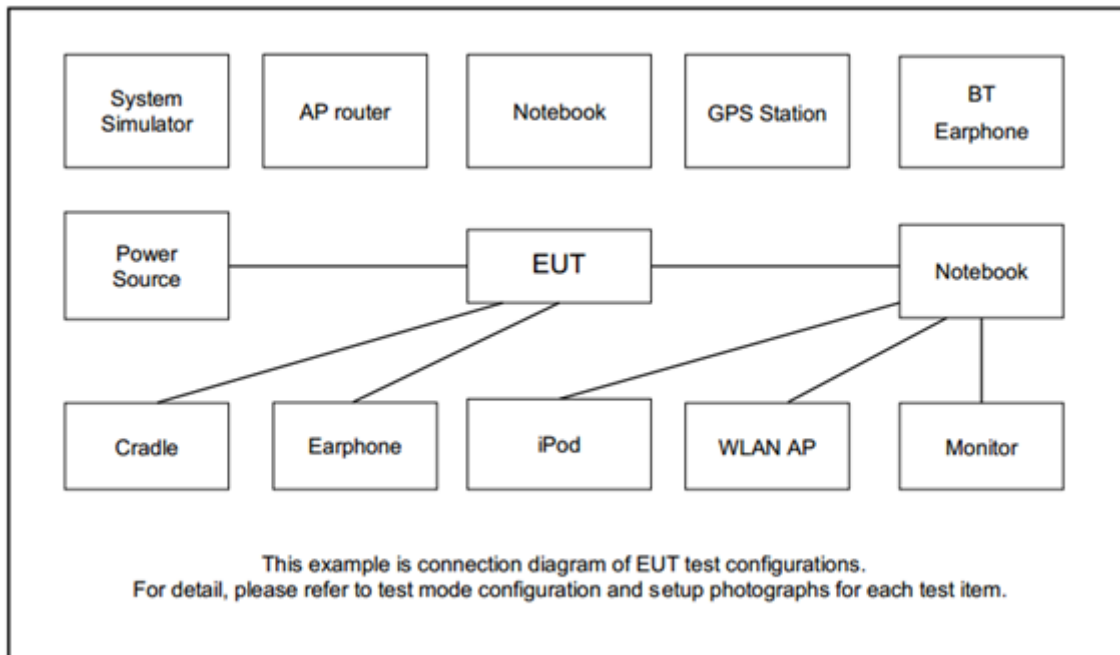



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
4.	Earphone	Moto	SJYN1181B	N/A	Shielded, 1.2m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “CNAME Terminal V3.36.2” was installed in Host which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.1.4 Test Setup

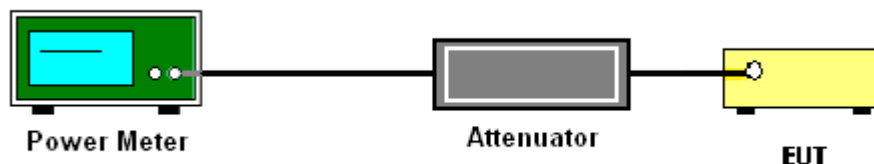

3.1.5 Test Result of Average Output Power

Please refer to Appendix A.



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments


See list of measuring equipment of this test report.

**3.2.3 Test Procedures**


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1 GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.2.4 Test Setup


For radiated emissions below 30MHz

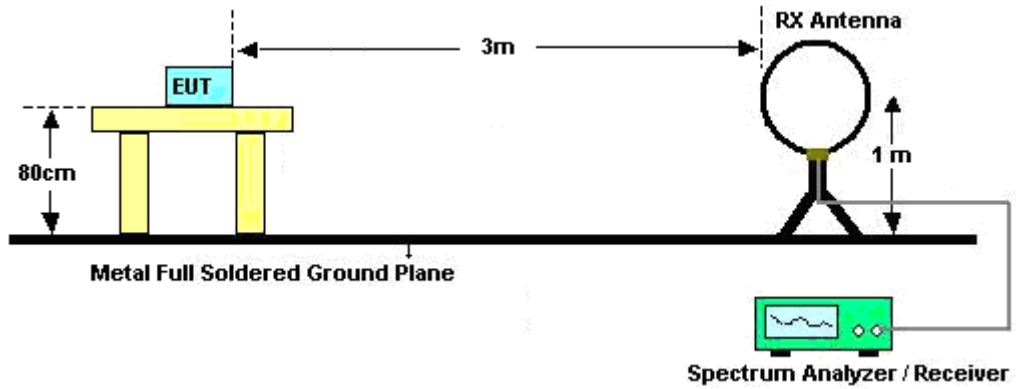

For radiated emissions from 30MHz to 1GHz

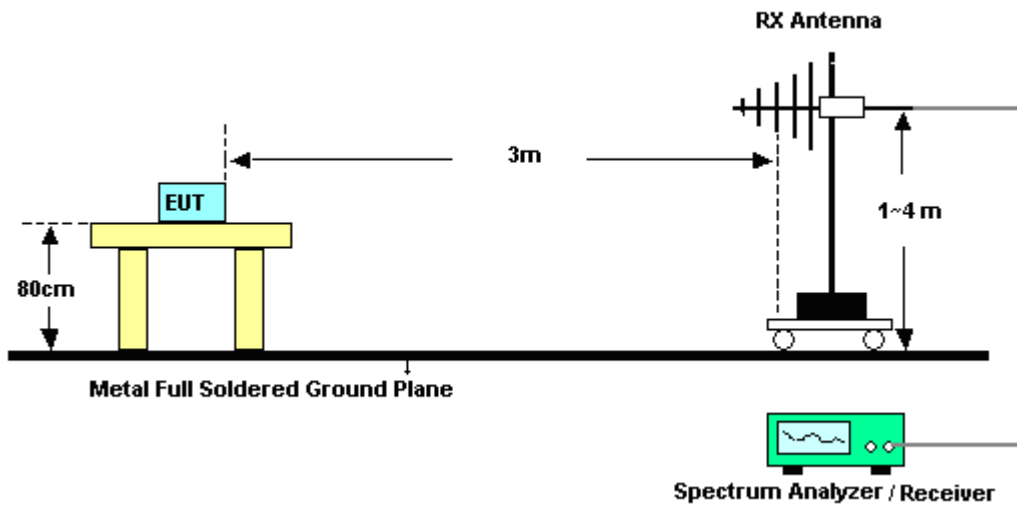

For radiated test above 1GHz

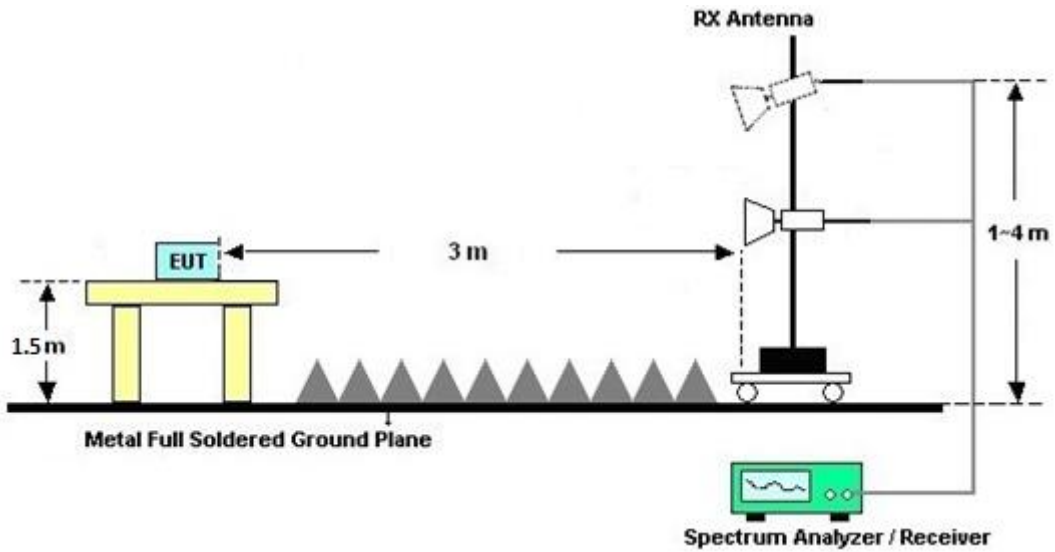

3.2.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.2.7 Duty Cycle

Please refer to Appendix E.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.3 AC Conducted Emission Measurement

3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.3.4 Test Setup



3.3.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.4 Antenna Requirements

3.4.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.4.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 23, 2020	Aug. 26, 2021~ Aug. 28, 2021	Oct. 22, 2021	Radiation (03CH20-HY)
EMI Test Receiver	Keysight	N9038A	MY59053012	N/A	Nov. 18, 2020	Aug. 26, 2021~ Aug. 28, 2021	Nov. 17, 2021	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Aug. 26, 2021~ Aug. 28, 2021	Jan. 03, 2022	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802 N1D01N-06	55606 & 08	30MHz~1GHz	Oct. 22, 2020	Aug. 26, 2021~ Aug. 28, 2021	Oct. 21, 2021	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	002360	1GHz-18GHz	Nov. 03, 2020	Aug. 26, 2021~ Aug. 28, 2021	Nov. 02, 2021	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz-40GHz	Nov. 19, 2020	Aug. 26, 2021~ Aug. 28, 2021	Nov. 18, 2021	Radiation (03CH20-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN27	1.53GHz Low Pass Filter	May 25, 2021	Aug. 26, 2021~ Aug. 28, 2021	May 24, 2022	Radiation (03CH20-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 OST	SN8	N/A	Mar. 26, 2021	Aug. 26, 2021~ Aug. 28, 2021	Mar. 25, 2022	Radiation (03CH20-HY)
Notch Filter	Wainwright	WRCGV2400/ 2483-2390/249 3-35/10SS	SN5	N/A	Sep. 17, 2020	Aug. 26, 2021~ Aug. 28, 2021	Sep. 16, 2021	Radiation (03CH20-HY)
Notch Filter	Wainwright	STI15_9935_5 150-5850	NA	NA	Apr. 08, 2021	Aug. 26, 2021~ Aug. 28, 2021	Apr. 07, 2022	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Jan. 04, 2021	Aug. 26, 2021~ Aug. 28, 2021	Jan. 03, 2022	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45S E	980792	N/A	Nov. 16, 2020	Aug. 26, 2021~ Aug. 28, 2021	Nov. 15, 2021	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 11, 2020	Aug. 26, 2021~ Aug. 28, 2021	Dec. 10, 2021	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,804 015/2,804027 /2	N/A	Jan. 20, 2021	Aug. 26, 2021~ Aug. 28, 2021	Jan. 19, 2022	Radiation (03CH20-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Aug. 26, 2021~ Aug. 28, 2021	N/A	Radiation (03CH20-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Aug. 26, 2021~ Aug. 28, 2021	N/A	Radiation (03CH20-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Aug. 26, 2021~ Aug. 28, 2021	N/A	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303B	TP200728	N/A	Mar. 09, 2021	Aug. 26, 2021~ Aug. 28, 2021	Mar. 08, 2022	Radiation (03CH20-HY)
Software	Audix	E3 6.2009-8-24	RK-002156	N/A	N/A	Aug. 26, 2021~ Aug. 28, 2021	N/A	Radiation (03CH20-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 01, 2021	Aug. 17, 2021~ Aug. 25, 2021	Feb. 28, 2022	Conducted (TH02-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO 12	10MHz~6GHz	Dec. 16, 2020	Aug. 17, 2021~ Aug. 25, 2021	Dec. 15, 2021	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101565	10Hz ~ 40GHz	Nov. 13, 2020	Aug. 17, 2021~ Aug. 25, 2021	Nov. 12, 2021	Conducted (TH02-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2021	Aug. 17, 2021~ Aug. 25, 2021	Mar. 16, 2022	Conducted (TH02-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Aug. 20, 2021	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 30, 2020	Aug. 20, 2021	Nov. 29, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 18, 2020	Aug. 20, 2021	Nov. 17, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 01, 2020	Aug. 20, 2021	Nov. 30, 2021	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Aug. 20, 2021	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 28, 2021	Aug. 20, 2021	Jul. 27, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 31, 2020	Aug. 20, 2021	Dec. 30, 2021	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Junyu Jhou	Temperature:	24.5~24.8	°C
Test Date:	2021/8/17~2021/8/25	Relative Humidity:	46.5~46.6	%

Remark: For Conducted Test Items, Ant. 1 means Chain 0 and Ant. 2 means Chain 1.

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	16.90	16.90		30.00	30.00	2.62	1.64	19.52	18.54	36.00	36.00	Pass
11b	1Mbps	1	6	2437	16.90	16.80		30.00	30.00	2.62	1.64	19.52	18.44	36.00	36.00	Pass
11b	1Mbps	1	11	2462	16.90	16.80		30.00	30.00	2.62	1.64	19.52	18.44	36.00	36.00	Pass
11b	1Mbps	1	12	2467	14.70	14.80		30.00	30.00	2.62	1.64	17.32	16.44	36.00	36.00	Pass
11b	1Mbps	1	13	2472	10.30	10.30		30.00	30.00	2.62	1.64	12.92	11.94	36.00	36.00	Pass
11g	6Mbps	1	1	2412	14.60	14.40		30.00	30.00	2.62	1.64	17.22	16.04	36.00	36.00	Pass
11g	6Mbps	1	6	2437	16.80	16.80		30.00	30.00	2.62	1.64	19.42	18.44	36.00	36.00	Pass
11g	6Mbps	1	11	2462	14.90	14.50		30.00	30.00	2.62	1.64	17.52	16.14	36.00	36.00	Pass
11g	6Mbps	1	12	2467	11.80	11.50		30.00	30.00	2.62	1.64	14.42	13.14	36.00	36.00	Pass
11g	6Mbps	1	13	2472	8.80	8.40		30.00	30.00	2.62	1.64	11.42	10.04	36.00	36.00	Pass
VHT20	MCS0	1	1	2412	14.50	14.40		30.00	30.00	2.62	1.64	17.12	16.04	36.00	36.00	Pass
VHT20	MCS0	1	6	2437	16.80	16.90		30.00	30.00	2.62	1.64	19.42	18.54	36.00	36.00	Pass
VHT20	MCS0	1	11	2462	14.70	14.40		30.00	30.00	2.62	1.64	17.32	16.04	36.00	36.00	Pass
VHT20	MCS0	1	12	2467	11.70	11.40		30.00	30.00	2.62	1.64	14.32	13.04	36.00	36.00	Pass
VHT20	MCS0	1	13	2472	8.80	8.60		30.00	30.00	2.62	1.64	11.42	10.24	36.00	36.00	Pass
VHT40	MCS0	1	3	2422	13.90	13.80		30.00	30.00	2.62	1.64	16.52	15.44	36.00	36.00	Pass
VHT40	MCS0	1	6	2437	16.30	16.30		30.00	30.00	2.62	1.64	18.92	17.94	36.00	36.00	Pass
VHT40	MCS0	1	9	2452	14.90	14.60		30.00	30.00	2.62	1.64	17.52	16.24	36.00	36.00	Pass
VHT40	MCS0	1	10	2457	11.80	11.50		30.00	30.00	2.62	1.64	14.42	13.14	36.00	36.00	Pass
VHT40	MCS0	1	11	2462	6.40	6.40		30.00	30.00	2.62	1.64	9.02	8.04	36.00	36.00	Pass

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	1	2412	16.90	16.80	19.86	30.00		2.62		22.48		36.00		Pass
11b	1Mbps	2	6	2437	16.80	16.80	19.81	30.00		2.62		22.43		36.00		Pass
11b	1Mbps	2	11	2462	16.80	16.90	19.86	30.00		2.62		22.48		36.00		Pass
11b	1Mbps	2	12	2467	14.70	14.70	17.71	30.00		2.62		20.33		36.00		Pass
11b	1Mbps	2	13	2472	10.40	10.40	13.41	30.00		2.62		16.03		36.00		Pass
11g	6Mbps	2	1	2412	14.70	14.40	17.56	30.00		2.62		20.18		36.00		Pass
11g	6Mbps	2	6	2437	16.70	16.90	19.81	30.00		2.62		22.43		36.00		Pass
11g	6Mbps	2	11	2462	14.40	14.40	17.41	30.00		2.62		20.03		36.00		Pass
11g	6Mbps	2	12	2467	11.40	11.50	14.46	30.00		2.62		17.08		36.00		Pass
11g	6Mbps	2	13	2472	8.40	8.50	11.46	30.00		2.62		14.08		36.00		Pass
VHT20	MCS0	2	1	2412	14.30	14.50	17.41	30.00		2.62		20.03		36.00		Pass
VHT20	MCS0	2	6	2437	16.70	16.70	19.71	30.00		2.62		22.33		36.00		Pass
VHT20	MCS0	2	11	2462	14.40	14.50	17.46	30.00		2.62		20.08		36.00		Pass
VHT20	MCS0	2	12	2467	11.50	11.60	14.56	30.00		2.62		17.18		36.00		Pass
VHT20	MCS0	2	13	2472	8.40	8.60	11.51	30.00		2.62		14.13		36.00		Pass
VHT40	MCS0	2	3	2422	13.30	13.40	16.36	30.00		2.62		18.98		36.00		Pass
VHT40	MCS0	2	6	2437	16.20	16.20	19.21	30.00		2.62		21.83		36.00		Pass
VHT40	MCS0	2	9	2452	14.50	14.40	17.46	30.00		2.62		20.08		36.00		Pass
VHT40	MCS0	2	10	2457	11.40	11.70	14.56	30.00		2.62		17.18		36.00		Pass
VHT40	MCS0	2	11	2462	6.50	6.40	9.46	30.00		2.62		12.08		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	40~50%

EUT Information

Report NO : 180221
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

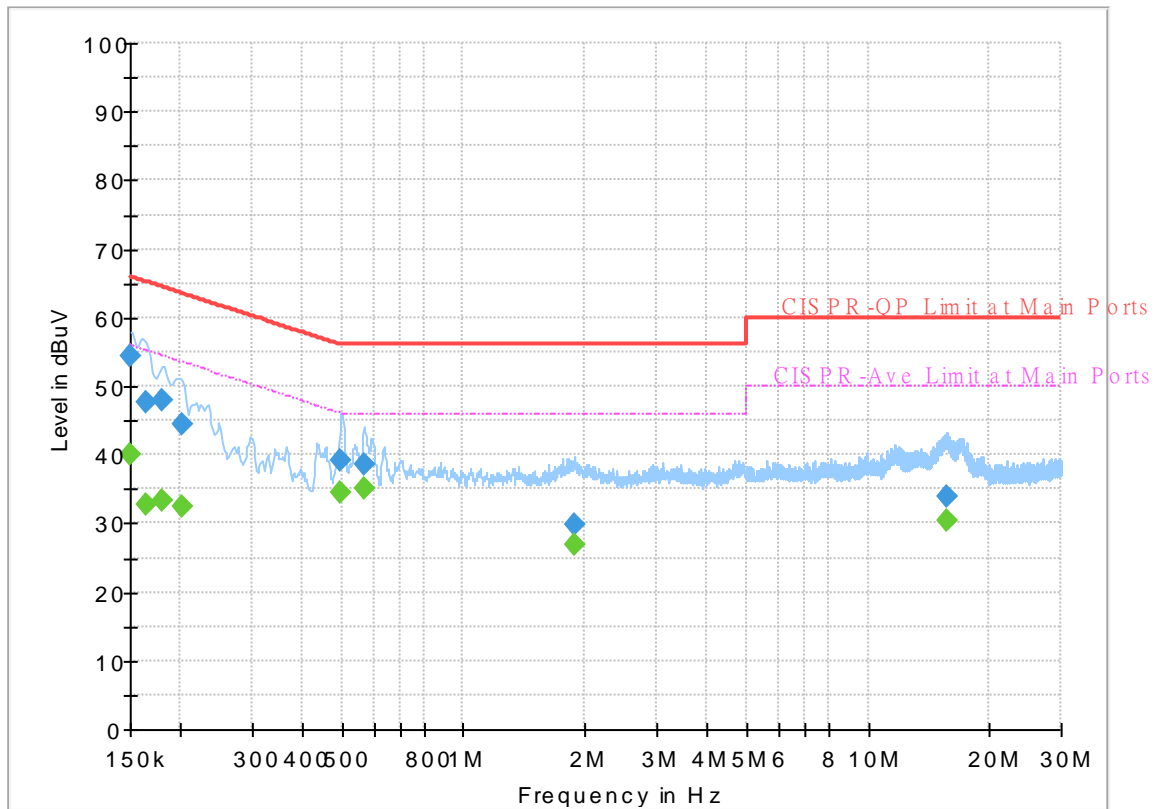


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	40.04	56.00	15.96	L1	OFF	19.6
0.150000	54.35	---	66.00	11.65	L1	OFF	19.6
0.163500	---	32.74	55.28	22.54	L1	OFF	19.6
0.163500	47.57	---	65.28	17.71	L1	OFF	19.6
0.179250	---	33.42	54.52	21.10	L1	OFF	19.6
0.179250	47.82	---	64.52	16.70	L1	OFF	19.6
0.201750	---	32.34	53.54	21.20	L1	OFF	19.6
0.201750	44.57	---	63.54	18.97	L1	OFF	19.6
0.496500	---	34.63	46.06	11.43	L1	OFF	19.8
0.496500	39.15	---	56.06	16.91	L1	OFF	19.8
0.568500	---	34.99	46.00	11.01	L1	OFF	19.9
0.568500	38.66	---	56.00	17.34	L1	OFF	19.9
1.882500	---	26.94	46.00	19.06	L1	OFF	20.2
1.882500	29.87	---	56.00	26.13	L1	OFF	20.2
15.596250	---	30.46	50.00	19.54	L1	OFF	20.3
15.596250	34.00	---	60.00	26.00	L1	OFF	20.3

EUT Information

Report NO : 180221
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

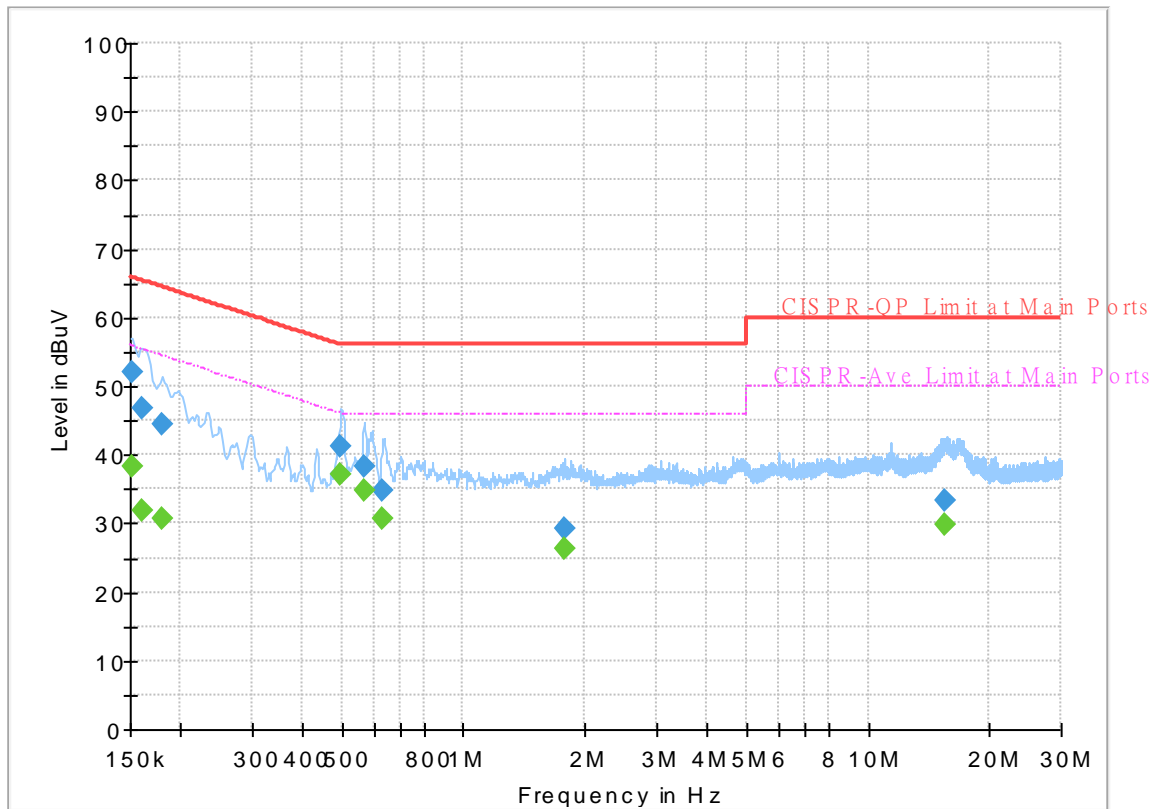

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	38.38	55.88	17.50	N	OFF	19.7
0.152250	51.96	---	65.88	13.92	N	OFF	19.7
0.161250	---	31.78	55.40	23.62	N	OFF	19.7
0.161250	46.67	---	65.40	18.73	N	OFF	19.7
0.179250	---	30.73	54.52	23.79	N	OFF	19.7
0.179250	44.34	---	64.52	20.18	N	OFF	19.7
0.498750	---	37.15	46.02	8.87	N	OFF	19.8
0.498750	41.30	---	56.02	14.72	N	OFF	19.8
0.566250	---	34.80	46.00	11.20	N	OFF	19.9
0.566250	38.38	---	56.00	17.62	N	OFF	19.9
0.631500	---	30.74	46.00	15.26	N	OFF	19.9
0.631500	34.85	---	56.00	21.15	N	OFF	19.9
1.783500	---	26.45	46.00	19.55	N	OFF	20.2
1.783500	29.28	---	56.00	26.72	N	OFF	20.2
15.470250	---	29.92	50.00	20.08	N	OFF	20.4
15.470250	33.43	---	60.00	26.57	N	OFF	20.4



Appendix C. Radiated Spurious Emission

Test Engineer :	Troye Hsieh and Bigshow Wang	Temperature :	21.4~23.5°C
		Relative Humidity :	48~54.2%

Remark: For Radiated Spurious Emission Test Items, Ant. 1 means Chain 0 and Ant. 2 means Chain 1.

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 01 2412MHz		2385.39	53.39	-20.61	74	43.93	27.24	18.41	36.19	150	236	P	H	
		2386.965	44	-10	54	34.52	27.25	18.42	36.19	150	236	A	H	
	*	2412	111.38	-	-	101.77	27.35	18.46	36.2	150	236	P	H	
	*	2412	108.27	-	-	98.66	27.35	18.46	36.2	150	236	A	H	
													H	
														H
			2388.54	54.7	-19.3	74	45.22	27.25	18.42	36.19	400	308	P	V
			2385.81	43.48	-10.52	54	34.02	27.24	18.41	36.19	400	308	A	V
	*		2412	110.6	-	-	100.99	27.35	18.46	36.2	400	308	P	V
	*		2412	107.26	-	-	97.65	27.35	18.46	36.2	400	308	A	V
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 13 2472MHz	*	2472	104.95	-	-	95.01	27.59	18.57	36.22	100	235	P	H	
	*	2472	101.82	-	-	91.88	27.59	18.57	36.22	100	235	A	H	
		2483.56	72.1	-1.9	74	62.1	27.63	18.59	36.22	100	235	P	H	
		2486.56	51.21	-2.79	54	41.2	27.65	18.59	36.23	100	235	A	H	
													H	
													H	
	*	2472	102.82	-	-	92.88	27.59	18.57	36.22	399	284	P	V	
	*	2472	99.69	-	-	89.75	27.59	18.57	36.22	399	284	A	V	
		2483.56	69.07	-4.93	74	59.07	27.63	18.59	36.22	399	284	P	V	
		2486.76	49.15	-4.85	54	39.14	27.65	18.59	36.23	399	284	A	V	
													V	
													V	
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 06 2437MHz		4874	42.46	-31.54	74	34.87	32.3	12.77	37.48	100	0	P	H	
		7311	47.52	-26.48	74	33.73	36.76	15.38	38.35	100	0	P	H	
													H	
													H	
													H	
													H	
			4874	42.61	-31.39	74	35.02	32.3	12.77	37.48	100	0	P	V
			7311	47.13	-26.87	74	33.34	36.76	15.38	38.35	100	0	P	V
														V
														V
														V
														V



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11g CH 01 2412MHz		2389.275	63.2	-10.8	74	53.71	27.26	18.42	36.19	100	231	P	H	
		2389.905	47.89	-6.11	54	38.4	27.26	18.42	36.19	100	231	A	H	
	*	2412	110.35	-	-	100.74	27.35	18.46	36.2	100	231	P	H	
	*	2412	102.65	-	-	93.04	27.35	18.46	36.2	100	231	A	H	
													H	
														H
			2389.905	63.13	-10.87	74	53.64	27.26	18.42	36.19	400	308	P	V
			2390	46.91	-7.09	54	37.42	27.26	18.42	36.19	400	308	A	V
	*		2412	109.75	-	-	100.14	27.35	18.46	36.2	400	308	P	V
	*		2412	102	-	-	92.39	27.35	18.46	36.2	400	308	A	V
														V
														V
802.11g CH 11 2462MHz	*	2462	111.47	-	-	101.59	27.55	18.55	36.22	100	236	P	H	
	*	2462	104.03	-	-	94.15	27.55	18.55	36.22	100	236	A	H	
			2485.24	66.77	-7.23	74	56.77	27.64	18.59	36.23	100	236	P	H
			2483.52	50.41	-3.59	54	40.41	27.63	18.59	36.22	100	236	A	H
														H
														H
	*		2462	108.69	-	-	98.81	27.55	18.55	36.22	326	284	P	V
	*		2462	101.67	-	-	91.79	27.55	18.55	36.22	326	284	A	V
			2485.04	63.17	-10.83	74	53.17	27.64	18.59	36.23	326	284	P	V
			2483.6	46.66	-7.34	54	36.66	27.63	18.59	36.22	326	284	A	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11g CH 06 2437MHz		4874	42.27	-31.73	74	34.68	32.3	12.77	37.48	100	0	P	H	
		7311	47.51	-26.49	74	33.72	36.76	15.38	38.35	100	0	P	H	
													H	
													H	
													H	
													H	
			4874	42.59	-31.41	74	35	32.3	12.77	37.48	100	0	P	V
			7311	46.75	-27.25	74	32.96	36.76	15.38	38.35	100	0	P	V
														V
														V
														V
														V



**2.4GHz 2400~2483.5MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 01 2412MHz		2389.59	61.85	-12.15	74	52.36	27.26	18.42	36.19	147	231	P	H	
		2390	48.05	-5.95	54	38.56	27.26	18.42	36.19	147	231	A	H	
	*	2412	110.36	-	-	100.75	27.35	18.46	36.2	147	231	P	H	
	*	2412	102.87	-	-	93.26	27.35	18.46	36.2	147	231	A	H	
													H	
														H
			2390	62.38	-11.62	74	52.89	27.26	18.42	36.19	390	307	P	V
			2390	47.79	-6.21	54	38.3	27.26	18.42	36.19	390	307	A	V
		*	2412	110.99	-	-	101.38	27.35	18.46	36.2	390	307	P	V
		*	2412	103.2	-	-	93.59	27.35	18.46	36.2	390	307	A	V
802.11ac VHT20 CH 11 2462MHz													V	
													V	
		*	2462	112.08	-	-	102.2	27.55	18.55	36.22	100	234	P	H
		*	2462	104.37	-	-	94.49	27.55	18.55	36.22	100	234	A	H
			2483.88	64.14	-9.86	74	54.13	27.64	18.59	36.22	100	234	P	H
			2483.6	51.88	-2.12	54	41.88	27.63	18.59	36.22	100	234	A	H
														H
														H
		*	2462	109.6	-	-	99.72	27.55	18.55	36.22	326	285	P	V
		*	2462	101.91	-	-	92.03	27.55	18.55	36.22	326	285	A	V
		2484.08	61.03	-12.97	74	51.02	27.64	18.59	36.22	326	285	P	V	
		2483.52	47.88	-6.12	54	37.88	27.63	18.59	36.22	326	285	A	V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**2.4GHz 2400~2483.5MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 06 2437MHz		4874	42.94	-31.06	74	35.35	32.3	12.77	37.48	100	0	P	H	
		7311	47.21	-26.79	74	33.42	36.76	15.38	38.35	100	0	P	H	
													H	
													H	
													H	
													H	
														H
			4874	42.84	-31.16	74	35.25	32.3	12.77	37.48	100	0	P	V
			7311	47.15	-26.85	74	33.36	36.76	15.38	38.35	100	0	P	V
														V
													V	
													V	
													V	



**2.4GHz 2400~2483.5MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 03 2422MHz		2389.52	63.49	-10.51	74	54	27.26	18.42	36.19	142	235	P	H
		2389.2	49.83	-4.17	54	40.34	27.26	18.42	36.19	142	235	A	H
	*	2422	106.22	-	-	96.56	27.39	18.48	36.21	142	235	P	H
	*	2422	98.46	-	-	88.8	27.39	18.48	36.21	142	235	A	H
		2485.44	57.1	-16.9	74	47.1	27.64	18.59	36.23	142	235	P	H
		2484.16	41.85	-12.15	54	31.84	27.64	18.59	36.22	142	235	A	H
		2390	62.5	-11.5	74	53.01	27.26	18.42	36.19	377	309	P	V
		2389.52	48.48	-5.52	54	38.99	27.26	18.42	36.19	377	309	A	V
	*	2422	106.46	-	-	96.8	27.39	18.48	36.21	377	309	P	V
	*	2422	98.68	-	-	89.02	27.39	18.48	36.21	377	309	A	V
		2485.92	55.79	-18.21	74	45.79	27.64	18.59	36.23	377	309	P	V
		2483.52	40.73	-13.27	54	30.73	27.63	18.59	36.22	377	309	A	V
802.11ac VHT40 CH 06 2437MHz		2389.84	61.3	-12.7	74	51.81	27.26	18.42	36.19	115	230	P	H
		2389.68	49.52	-4.48	54	40.03	27.26	18.42	36.19	115	230	A	H
	*	2437	108.93	-	-	99.19	27.45	18.5	36.21	115	230	P	H
	*	2437	101.31	-	-	91.57	27.45	18.5	36.21	115	230	A	H
		2484.56	65.07	-8.93	74	55.07	27.64	18.59	36.23	115	230	P	H
		2483.68	50.15	-3.85	54	40.15	27.63	18.59	36.22	115	230	A	H
		2389.36	59.9	-14.1	74	50.41	27.26	18.42	36.19	379	310	P	V
		2390	48.84	-5.16	54	39.35	27.26	18.42	36.19	379	310	A	V
	*	2437	109.09	-	-	99.35	27.45	18.5	36.21	379	310	P	V
	*	2437	101.27	-	-	91.53	27.45	18.5	36.21	379	310	A	V
	2485.04	62.83	-11.17	74	52.83	27.64	18.59	36.23	379	310	P	V	
	2484	47.67	-6.33	54	37.66	27.64	18.59	36.22	379	310	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 10 2457MHz		2390	54.79	-19.21	74	45.3	27.26	18.42	36.19	100	237	P	H
		2390	40.27	-13.73	54	30.78	27.26	18.42	36.19	100	237	A	H
	*	2457	105.61	-	-	95.76	27.53	18.54	36.22	100	237	P	H
	*	2457	97.79	-	-	87.94	27.53	18.54	36.22	100	237	A	H
		2484.64	65.51	-8.49	74	55.51	27.64	18.59	36.23	100	237	P	H
		2483.52	49.96	-4.04	54	39.96	27.63	18.59	36.22	100	237	A	H
		2375.76	52.55	-21.45	74	43.14	27.2	18.4	36.19	322	283	P	V
		2390	39.34	-14.66	54	29.85	27.26	18.42	36.19	322	283	A	V
	*	2457	102.81	-	-	92.98	27.51	18.53	36.21	322	283	P	V
	*	2457	95.08	-	-	85.23	27.53	18.54	36.22	322	283	A	V
		2485.2	62.58	-11.42	74	52.58	27.64	18.59	36.23	322	283	P	V
		2483.92	46.76	-7.24	54	36.75	27.64	18.59	36.22	322	283	A	V
802.11ac VHT40 CH 11 2462MHz		2379.44	50.68	-23.32	74	41.25	27.22	18.4	36.19	100	235	P	H
		2390	39.27	-14.73	54	29.78	27.26	18.42	36.19	100	235	A	H
	*	2462	100.77	-	-	90.92	27.53	18.54	36.22	100	235	P	H
	*	2462	93.03	-	-	83.14	27.56	18.55	36.22	100	235	A	H
		2483.52	70.27	-3.73	74	60.27	27.63	18.59	36.22	100	235	P	H
		2483.52	53.38	-0.62	54	43.38	27.63	18.59	36.22	100	235	A	H
		2376.72	49.8	-24.2	74	40.38	27.21	18.4	36.19	323	285	P	V
		2382	38.62	-15.38	54	29.17	27.23	18.41	36.19	323	285	A	V
	*	2462	98.6	-	-	88.72	27.55	18.55	36.22	323	285	P	V
	*	2462	90.86	-	-	80.98	27.55	18.55	36.22	323	285	A	V
	2483.52	66.96	-7.04	74	56.96	27.63	18.59	36.22	323	285	P	V	
	2483.52	50.06	-3.94	54	40.06	27.63	18.59	36.22	323	285	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT40 CH 06 2437MHz		4874	42.78	-31.22	74	35.19	32.3	12.77	37.48	100	0	P	H	
		7311	46.8	-27.2	74	33.01	36.76	15.38	38.35	100	0	P	H	
													H	
													H	
													H	
													H	
			4874	43.81	-30.19	74	36.22	32.3	12.77	37.48	100	0	P	V
			7311	47	-27	74	33.21	36.76	15.38	38.35	100	0	P	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz WIFI 802.11ac VHT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz 802.11ac VHT40 LF		75.59	33.79	-6.21	40	55.13	12.85	1.49	35.68	100	0	P	H	
		92.08	35.69	-7.81	43.5	54.83	14.86	1.66	35.66	-	-	P	H	
		135.73	30.91	-12.59	43.5	46.74	17.72	2.04	35.59	-	-	P	H	
		288.02	35.39	-10.61	46	48.59	19.11	2.97	35.28	-	-	P	H	
		935.98	34.24	-11.76	46	31.86	30.01	5.58	33.21	-	-	P	H	
		957.32	35.26	-10.74	46	31.69	31.06	5.63	33.12	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
														H
														H
			71.71	33.45	-6.55	40	55.25	12.45	1.44	35.69	100	0	P	V
			92.08	35.71	-7.79	43.5	54.85	14.86	1.66	35.66	-	-	P	V
			135.73	32.63	-10.87	43.5	48.46	17.72	2.04	35.59	-	-	P	V
		303.54	33.57	-12.43	46	46.46	19.3	3.05	35.24	-	-	P	V	
		925.31	33.96	-12.04	46	31.93	29.72	5.56	33.25	-	-	P	V	
		949.56	35.33	-10.67	46	32.16	30.71	5.61	33.15	-	-	P	V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Troye Hsieh and Bigshow Wang	Temperature :	21.4~23.5°C
		Relative Humidity :	48~54.2%

Remark: For Radiated Spurious Emission Test Items, Ant. 1 means Chain 0 and Ant. 2 means Chain 1.

Note symbol

-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH20-HY Condition : AVG_BE_54 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : AVG_54 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH20-1FV Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH20-1FV Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH20-1FV Condition : AVG_BE_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>	<p>Site : 03CH20-1FV Condition : AVG_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH13 2472MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH20-1FV Condition : PEAK_BE_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH20-1FV Condition : PEAK_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH20-1FV Condition : AVG_BE_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>	<p>Site : 03CH20-1FV Condition : AVG_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>

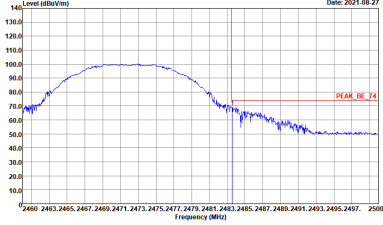
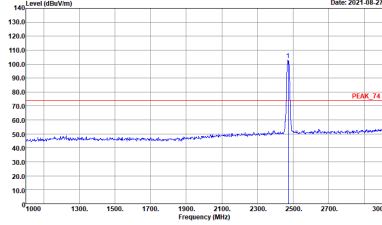
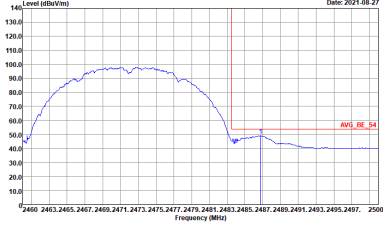
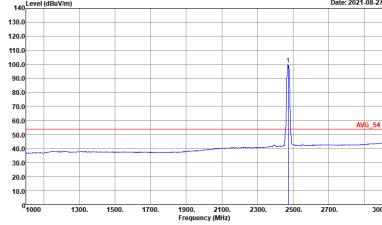


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH13 2472MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH20-1FV Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-1FV Condition : AVG_BE_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : AVG_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>







2.4GHz 2400~2483.5MHz





WIFI 802.11g (Band Edge @ 3m)

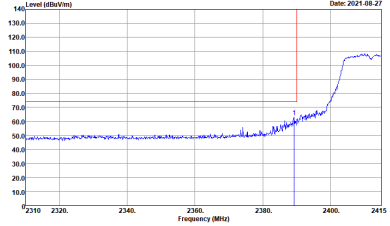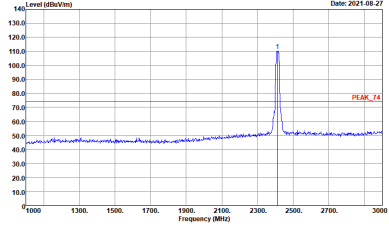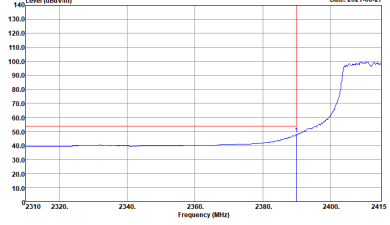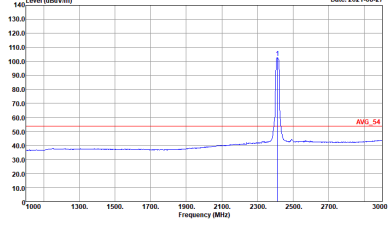WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AVG_54 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

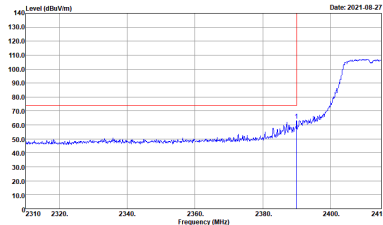
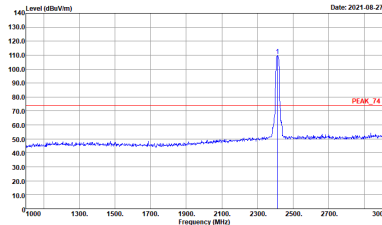
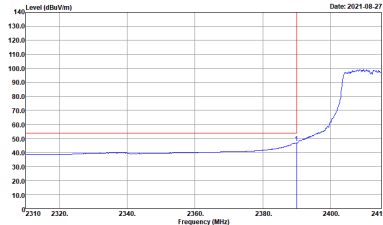
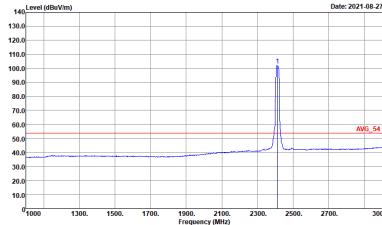


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH20-1FV Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-1FV Condition : AVG_BE_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : AVG_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>

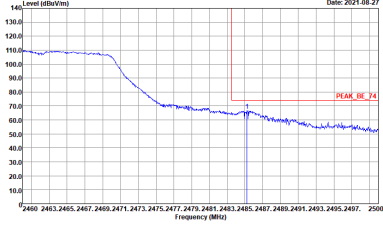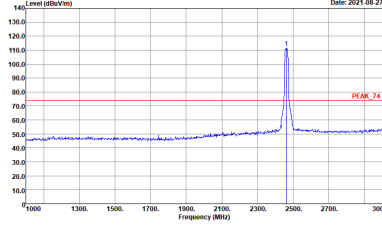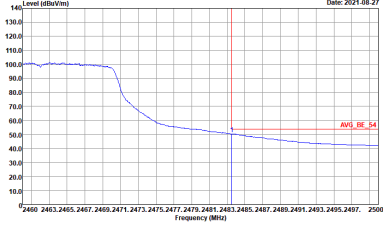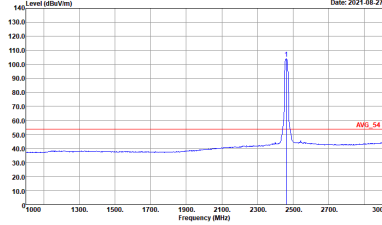

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-1FV Condition : PEAK_BE_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : PEAK_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-1FV Condition : AVG_BE_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : AVG_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>

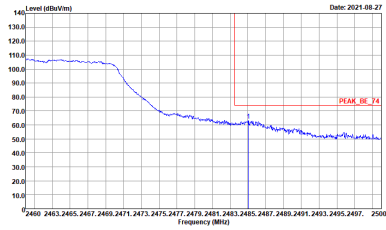
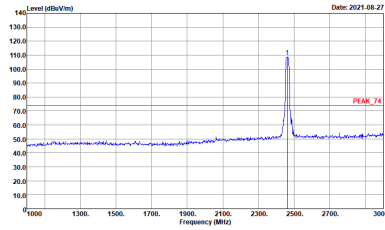
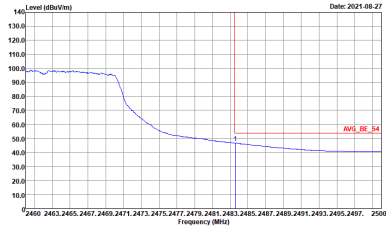
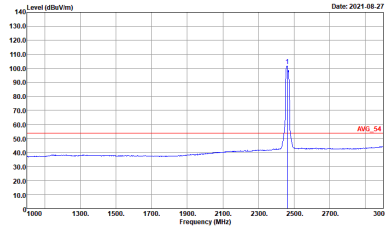


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH20-1FV Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-1FV Condition : AVG_BE_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : AVG_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>







2.4GHz 2400~2483.5MHz





WIFI 802.11ac VHT20 (Band Edge @ 3m)

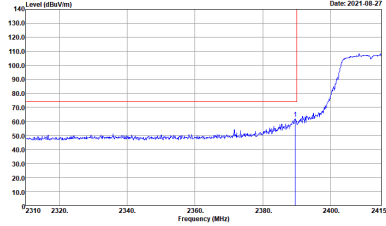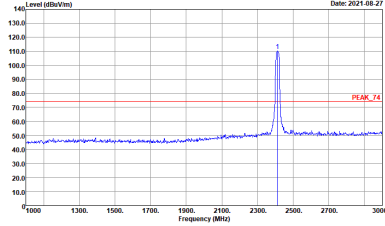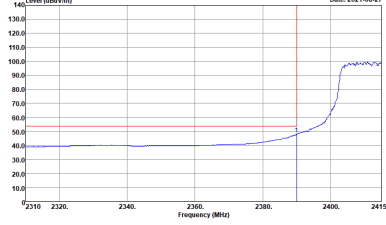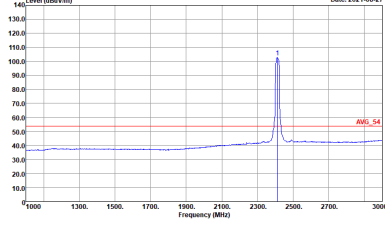WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH01 2412MHz	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_FA_3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AVG_FA_3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

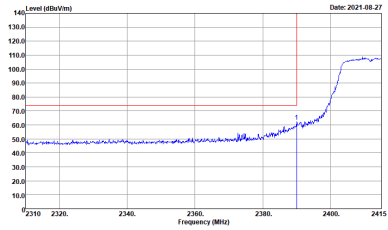
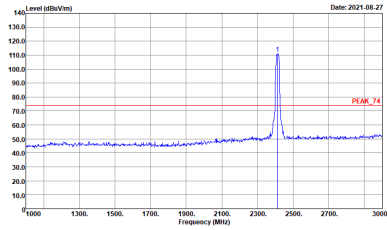
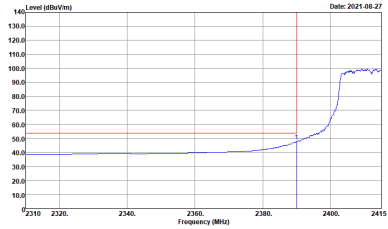
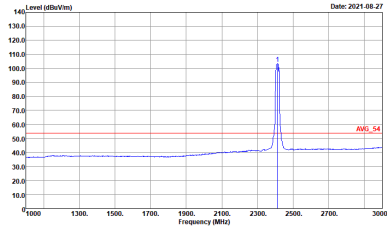


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH01 2412MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH20-1FV Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-1FV Condition : AVG_BE_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : AVG_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>

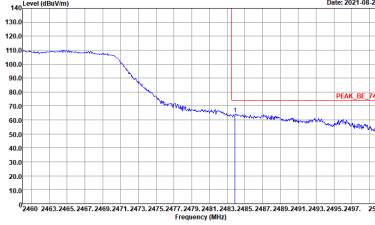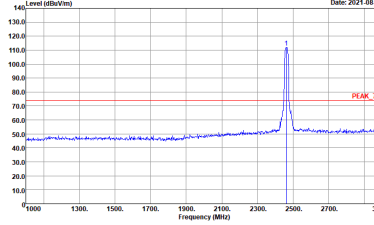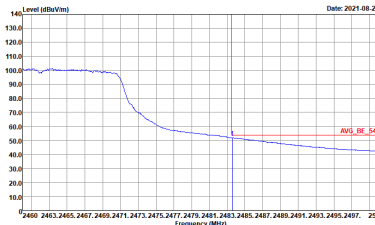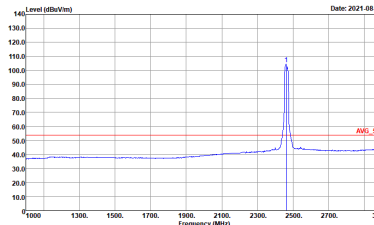

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VH20 CH11 2462MHz	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-1FV Condition : PEAK_BE_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : PEAK_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-1FV Condition : AVG_BE_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:10000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : AVG_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:10000kHz SWT:Auto</p>

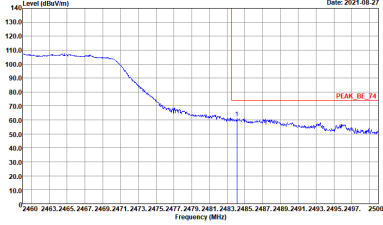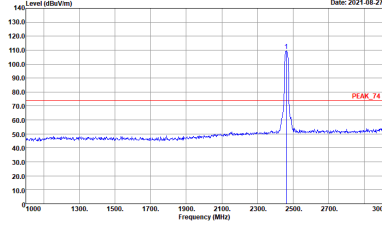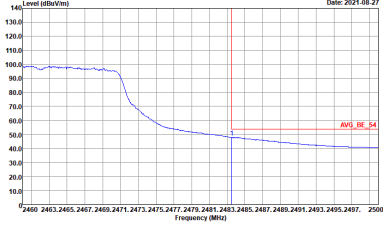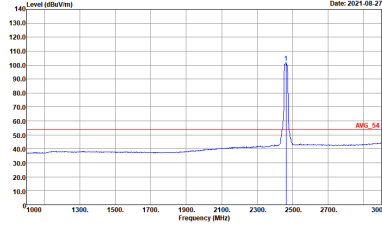

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VH20 CH11 2462MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH20-1FY Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FY Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-1FY Condition : AVG_BE_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FY Condition : AVG_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz





WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VH40 CH03 2422MHz - L	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : PEAK_F4 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH20-HY Condition : AV6_BE_54 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : AV6_54 3m 9120D_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VH40 CH03 2422MHz - R	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:0.0100kHz SWT:Auto</p>	Left blank

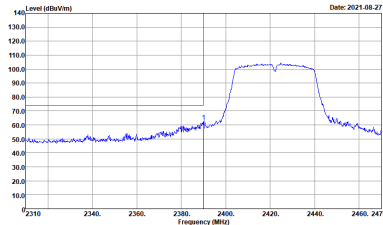
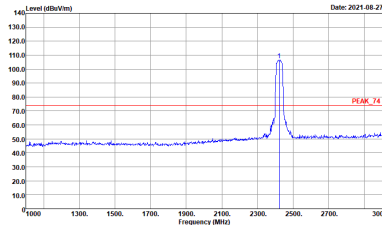
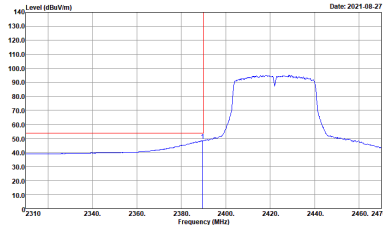
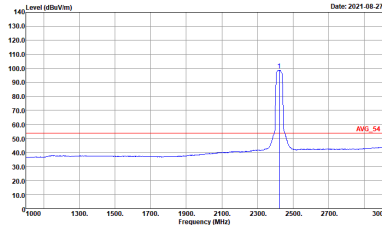


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VH40 CH03 2422MHz - L	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH20-1FV Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-1FV Condition : AVG_BE_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:0.0100kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : AVG_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:0.0100kHz SWT:Auto</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VH40 CH03 2422MHz - R	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_002360_1091103 VERTICAL RBW:1000.000kHz VBW:10100kHz SWT:Auto</p>	Left blank

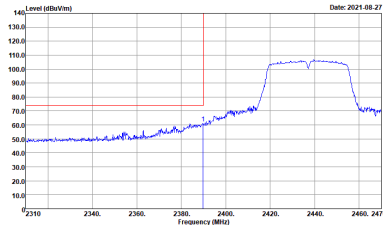
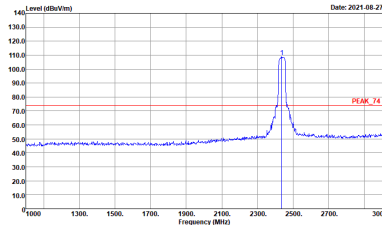
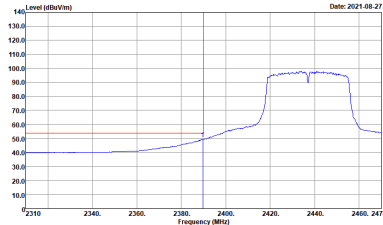
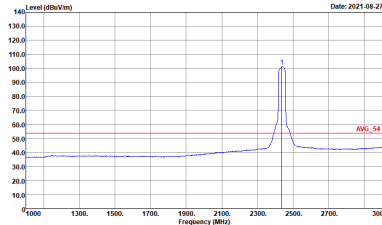


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VH40 CH06 2437MHz - L	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-1FY Condition : PEAK_BE_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FY Condition : PEAK_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-1FY Condition : AVG_BE_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:10000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FY Condition : AVG_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:10000kHz SWT:Auto</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VH40 CH06 2437MHz - R	
1+2	Horizontal	Fundamental
<p>Peak</p>		<p>Left blank</p>
<p>Avg.</p>		<p>Left blank</p>

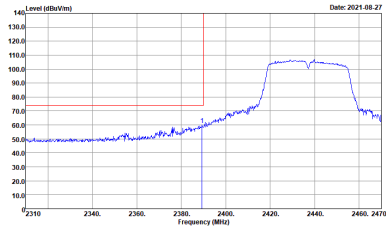
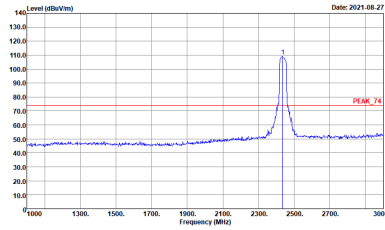
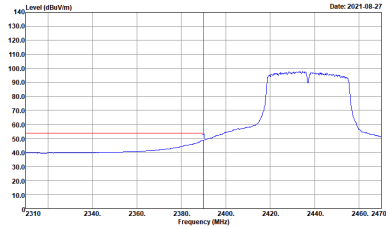
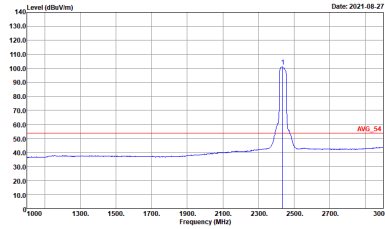


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VH40 CH06 2437MHz - L	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH20-1FV Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-1FV Condition : AVG_BE_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : AVG_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VH40 CH06 2437MHz - R	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000KHz VBW:1010KHz SWT:Auto</p>	Left blank

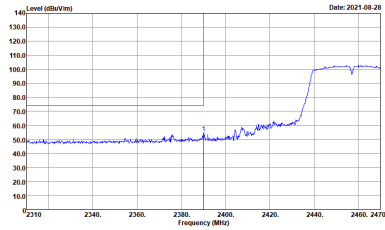
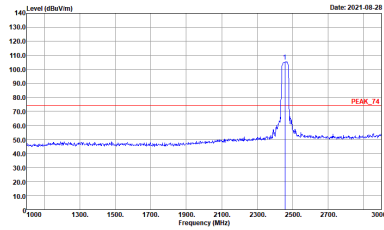
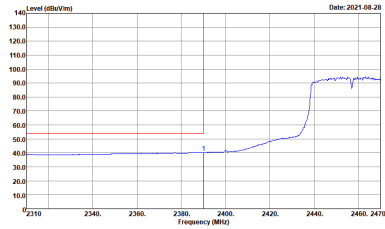
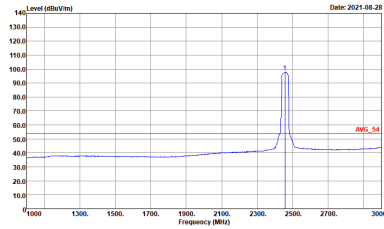


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH10 2457MHz - L	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AVG_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH10 2457MHz - R	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	Left blank

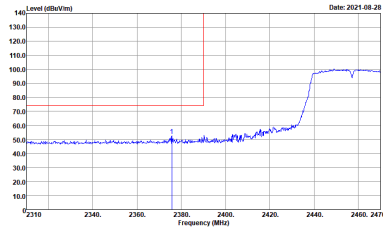
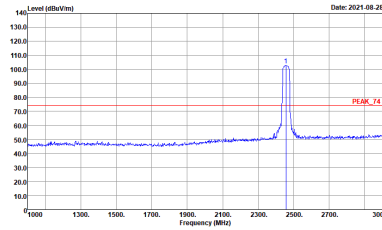
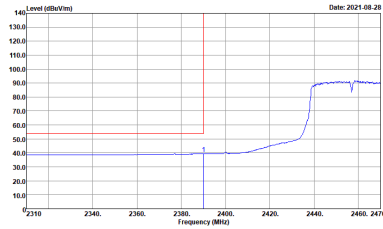
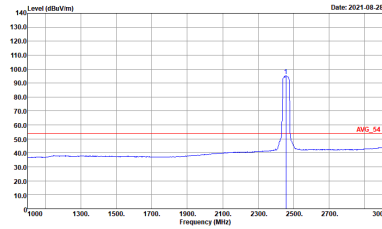


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH10 2457MHz - L	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AVG_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH10 2457MHz - R	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	Left blank

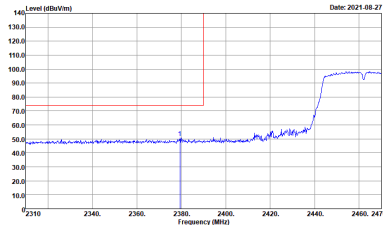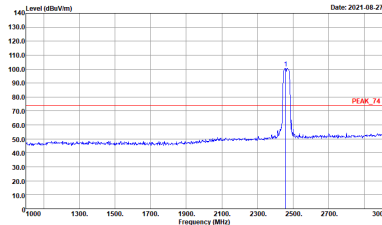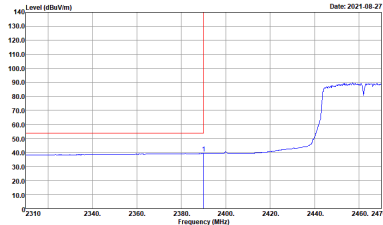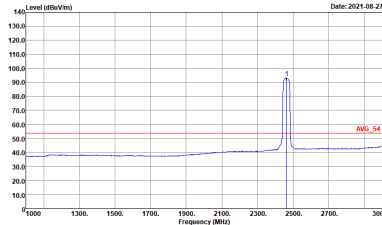

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH11 2462MHz - L	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-1FV Condition : PEAK_BE_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : PEAK_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-1FV Condition : AVG_BE_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-1FV Condition : AVG_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto</p>

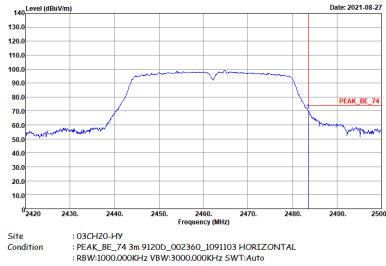
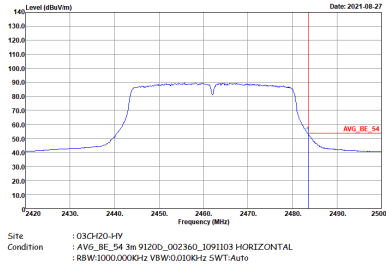


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH11 2462MHz - R	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_002360_1091103 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH11 2462MHz - L	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH20-1FV Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH20-1FV Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH20-1FV Condition : AVG_BE_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:0.0100kHz SWT:Auto</p>	<p>Site : 03CH20-1FV Condition : AVG_54 3m 91200_002360_1091103 VERTICAL : RBW:1000.000kHz VBW:0.0100kHz SWT:Auto</p>

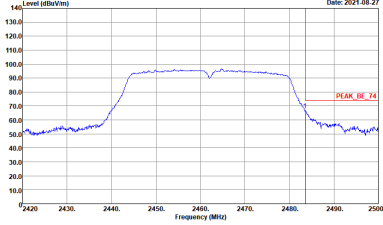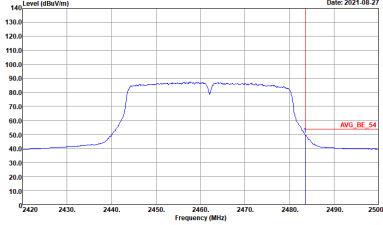

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH11 2462MHz - R	
1+2	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_002360_1091103 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH20-HY Condition : AVG_BE_64 3m 91200_002360_1091103 VERTICAL : RBW:1000.000KHz VBW:1000.000KHz SWT:Auto</p>	<p>Left blank</p>



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_002360_1091103 HORIZONTAL</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL</p>



2.4GHz 2400~2483.5MHz



WIFI 802.11g (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_002360_1091103 HORIZONTAL</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL</p>



2.4GHz 2400~2483.5MHz



WIFI 802.11ac VHT20 (Harmonic @ 3m)

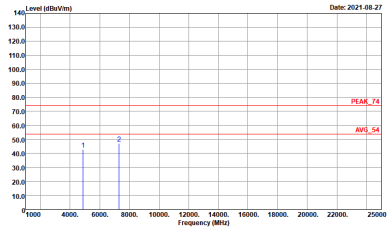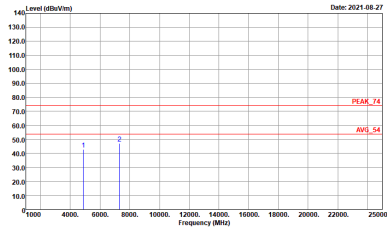WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH06 2437MHz	
1+2	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_002360_1091103 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL</p>



2.4GHz 2400~2483.5MHz

WIFI 802.11ac VHT40 (Harmonic @ 3m)

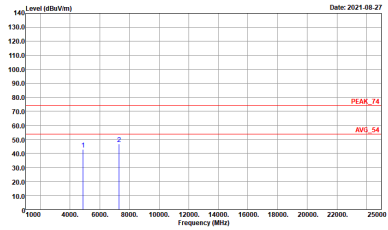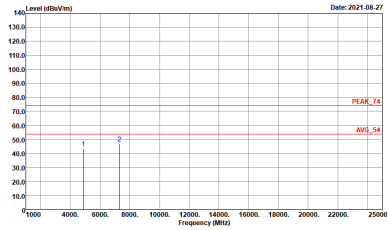WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11ac VHT40 CH06 2437MHz	
1+2	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_002360_1091103 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_002360_1091103 VERTICAL</p>



Emission below 1GHz
2.4GHz WIFI 802.11ac VHT40 (LF)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11ac VHT40 LF	
1+2	Horizontal	Vertical
QP / Peak	<p>Site : 03CH20-HY Condition : QP 3m LF_55606&08_1091022 HORIZONTAL</p>	<p>Site : 03CH20-HY Condition : QP 3m LF_55606&08_1091022 VERTICAL</p>



Appendix E. Duty Cycle Plots

Chain	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
0+1	802.11b	100.00	-	-	10Hz
0+1	802.11g	100.00	-	-	10Hz
0+1	2.4GHz 802.11ac VHT20	100.00	-	-	10Hz
0+1	2.4GHz 802.11ac VHT40	100.00	-	-	10Hz

MIMO <Chain 0+1>

