

FCC Radio Test Report

FCC ID: UZZSFQ14

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1706C196
Equipment : Sound Rise Classic
Model Name : SFQ-14
Applicant : Beautiful Enterprise Co., Ltd.
Address : 27th Floor, Beautiful Group Tower, 77 Connaught Road Central, Hong Kong

Date of Receipt : Jun. 21, 2017
Date of Test : Jun. 21, 2017 ~ Jul. 04, 2017
Issued Date : Jul. 05, 2017
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 EUT TEST CONDITIONS	19
4.2.7 TEST RESULTS (9 KHZ TO 30 MHZ)	19
4.2.8 TEST RESULTS (30 MHZ TO 1000 MHZ)	19
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	19
5 . NUMBER OF HOPPING CHANNEL	20
5.1 APPLIED PROCEDURES	20
5.1.1 TEST PROCEDURE	20
5.1.2 DEVIATION FROM STANDARD	20
5.1.3 TEST SETUP	20
5.1.4 EUT OPERATION CONDITIONS	20
5.1.5 EUT TEST CONDITIONS	20
5.1.6 TEST RESULTS	20

Table of Contents	Page
6 . AVERAGE TIME OF OCCUPANCY	21
6.1 APPLIED PROCEDURES / LIMIT	21
6.1.1 TEST PROCEDURE	21
6.1.2 DEVIATION FROM STANDARD	21
6.1.3 TEST SETUP	21
6.1.4 EUT OPERATION CONDITIONS	22
6.1.5 EUT TEST CONDITIONS	22
6.1.6 TEST RESULTS	22
7 . HOPPING CHANNEL SEPARATION MEASUREMENT	23
7.1 APPLIED PROCEDURES / LIMIT	23
7.1.1 TEST PROCEDURE	23
7.1.2 DEVIATION FROM STANDARD	23
7.1.3 TEST SETUP	23
7.1.4 EUT TEST CONDITIONS	23
7.1.5 TEST RESULTS	23
8 . BANDWIDTH TEST	24
8.1 APPLIED PROCEDURES	24
8.1.1 TEST PROCEDURE	24
8.1.2 DEVIATION FROM STANDARD	24
8.1.3 TEST SETUP	24
8.1.4 EUT OPERATION CONDITIONS	24
8.1.5 EUT TEST CONDITIONS	24
8.1.6 TEST RESULTS	24
9 . PEAK OUTPUT POWER TEST	25
9.1 APPLIED PROCEDURES / LIMIT	25
9.1.1 TEST PROCEDURE	25
9.1.2 DEVIATION FROM STANDARD	25
9.1.3 TEST SETUP	25
9.1.4 EUT OPERATION CONDITIONS	25
9.1.5 EUT TEST CONDITIONS	25
9.1.6 TEST RESULTS	25
10 . ANTENNA CONDUCTED SPURIOUS EMISSION	26
10.1 APPLIED PROCEDURES / LIMIT	26
10.1.1 TEST PROCEDURE	26
10.1.2 DEVIATION FROM STANDARD	26
10.1.3 TEST SETUP	26
10.1.4 EUT OPERATION CONDITIONS	26
10.1.5 EUT TEST CONDITIONS	26
10.1.6 TEST RESULTS	26
11 . MEASUREMENT INSTRUMENTS LIST	27

Table of Contents	Page
12 . EUT TEST PHOTO	29
ATTACHMENT A - CONDUCTED EMISSION	33
ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)	36
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	41
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	54
ATTACHMENT E - NUMBER OF HOPPING CHANNEL	79
ATTACHMENT F - AVERAGE TIME OF OCCUPANCY	81
ATTACHMENT G - HOPPING CHANNEL SEPARATION MEASUREMENT	94
ATTACHMENT H - BANDWIDTH	99
ATTACHMENT I - PEAK OUTPUT POWER	104
ATTACHMENT J - ANTENNA CONDUCTED SPURIOUS EMISSION	109

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1706C196	Original Issue.	Jul. 05, 2017

1. CERTIFICATION

Equipment : Sound Rise Classic
Brand Name : **SOUNDFREQ®**
Model Name : SFQ-14
Applicant : Beautiful Enterprise Co., Ltd.
Manufacturer : Beautiful Enterprise Co., Ltd.
Address : 27th Floor, Beautiful Group Tower, 77 Connaught Road Central, Hong Kong
Factory : Shenzhen Synchron Electronics Co., Ltd.
Address : No. 9 Mei Li Road, Xia Mei Lin, Fu Tian Area, Shenzhen, Guangdong, China
Date of Test : Jun. 21, 2017 ~ Jul. 04, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C (15.247)/ ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1706C196) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15, Subpart C (15.247)			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247 (a)(1)	Hopping Channel Separation	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.247 (b)(1)	Peak Output Power	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.247 (a)(1)(iii)	Number of Hopping Frequency	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205	Restricted Bands	PASS	
15.203	Antenna Requirement	PASS	

Note:

(1) "N/A" denotes test is not applicable in this test report

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
 BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

C. Other Measurement:

Test Item	Uncertainty
Conducted Spurious Emission	2.67dB
Hopping Channel Separation	53.46MHz
Peak Output Power	0.95dB
Number of Hopping Frequency	53.46MHz
Temperature	0.08°C
Humidity	1.5%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Sound Rise Classic	
Brand Name	SOUNDFREQ®	
Model Name	SFQ-14	
Model Difference	N/A	
Output Power (Max.)	Operation Frequency	2402~2480 MHz
	Modulation Technology	GFSK(1Mbps) $\pi/4$ -DQPSK(2Mbps)
	Bit Rate of Transmitter	8-DPSK(3Mbps)
	Output Power Max.	2.16 dBm(1Mbps) 3.22 dBm(3Mbps)
Power Source	#1 DC voltage supplied from AC/DC adapter. Model: DYS612-070150W-1 #2 Insert 1x AA backup battery.	
Power Rating	#1 I/P: 100-240V~50/60Hz 0.4A MAX O/P: 7.0V --- 1.5A #2 DC 1.5V	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3 Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB	N/A	1.30

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode Note (1)

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode Note (1)

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) The measurements for Hopping Channel Separation, Bandwidth and Peak Output Power were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test Software Version	ACTsBTAPP		
	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	5	5	5
Parameters(3Mbps)	5	5	5

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	DC Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP



- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz -1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Spectrum Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz ~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz ~110KHz for QP detector
Start ~ Stop Frequency	110KHz ~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz ~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz



(B) Radiated Emission Test Set-Up Frequency Above 1 GHz



(C) For Radiated Emissions Below 30MHz

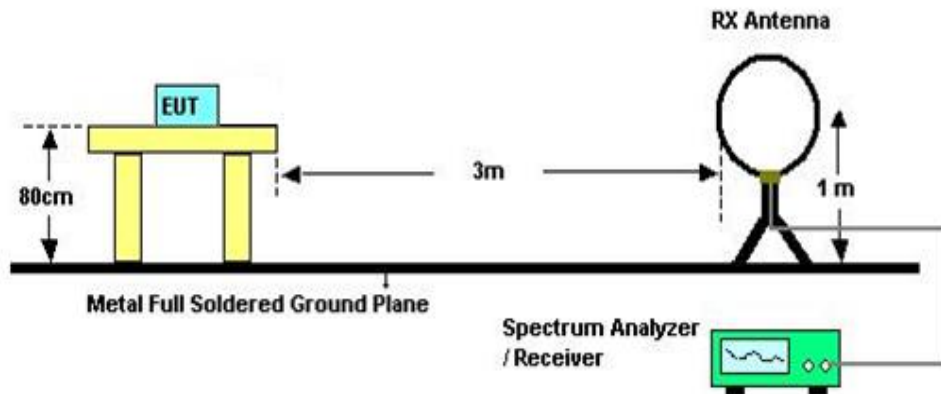

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9 KHZ TO 30 MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30 MHZ TO 1000 MHZ)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

5. NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Number of Hopping Channel	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E

6. AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds.
- j. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
- k. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F

7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.1.1 TEST PROCEDURE

- a. The EUT must have its hopping function enabled
- b. Span = wide enough to capture the peaks of two adjacent channels
 - Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
 - Video (or Average) Bandwidth (VBW) \geq RBW
 - Sweep = Auto
 - Detector function = Peak
 - Trace = Max Hold

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V/60Hz

7.1.5 TEST RESULTS

Please refer to the Attachment G

8. BANDWIDTH TEST

8.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C		
Section	Test Item	Frequency Range (MHz)
15.247(a)(2)	Bandwidth	2400-2483.5

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep Time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H

9. PEAK OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	1 Watt or 30dBm (hopping channel >75) 0.125Watt or 21dBm (hopping channel <75)	2400-2483.5	PASS


9.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1MHz/3MHz, VBW= 1MHz/3MHz, Sweep time = Auto.

9.1.2 DEVIATION FROM STANDARD

No deviation.

9.1.3 TEST SETUP



9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

9.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

9.1.6 TEST RESULTS

Please refer to the Attachment I

10. ANTENNA CONDUCTED SPURIOUS EMISSION

10.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

10.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.
- c. Offset=antenna gain+cable loss

10.1.2 DEVIATION FROM STANDARD

No deviation.

10.1.3 TEST SETUP



10.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

10.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V/60Hz

10.1.6 TEST RESULTS

Please refer to the Attachment J

11. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018
2	LISN	EMCO	3816/2	52765	Mar. 26, 2018
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 26, 2018
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
5	Cable	emci	RG223(9KHz-30 MHz)(5m)	N/A	Mar. 07, 2018
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Amplifier	HP	8447D	2944A09673	Oct. 20, 2017
3	Receiver	AGILENT	N9038A	MY52130039	Sep. 04, 2017
4	Cable	emci	LMR-400(30MHz-1GHz) (8m+5m)	N/A	Jun. 26, 2018
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 26, 2018
8	Amplifier	Agilent	8449B	3008A02274	Feb. 22, 2018
9	Receiver	AGILENT	N9038A	MY52130039	Sep. 04, 2017
10	Test Cable	emci	EMC104-SM-S M-10000(1GHz-26.5GHz)	C-68	Jun. 26, 2018
11	Controller	CT	SC100	N/A	N/A
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 22, 2018
13	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018
14	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 06, 2017
15	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Number of Hopping Channel					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Average Time of Occupancy					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Hopping Channel Separation Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Peak Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Antenna Conducted Spurious Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

12. EUT TEST PHOTO

Conducted Measurement Photos




Radiated Measurement Photos

9KHz to 30MHz





Radiated Measurement Photos

30MHz to 1000MHz



Radiated Measurement Photos


Above 1000MHz



ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX Mode


Line



No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1815	25.80	9.77	35.57	64.42	-28.85	Peak	
2 *	0.3435	22.64	9.79	32.43	59.12	-26.69	Peak	
3	0.5955	13.19	9.81	23.00	56.00	-33.00	Peak	
4	1.0050	11.58	9.84	21.42	56.00	-34.58	Peak	
5	6.2250	12.95	10.15	23.10	60.00	-36.90	Peak	
6	26.5605	12.92	10.84	23.76	60.00	-36.24	Peak	

Test Mode: TX Mode

Neutral




No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1680	27.43	9.68	37.11	65.06	-27.95	Peak	
2 *	0.3615	28.93	9.70	38.63	58.69	-20.06	Peak	
3	0.6180	14.00	9.71	23.71	56.00	-32.29	Peak	
4	6.1080	12.71	10.07	22.78	60.00	-37.22	Peak	
5	14.5860	11.07	10.60	21.67	60.00	-38.33	Peak	
6	26.2635	14.42	11.00	25.42	60.00	-34.58	Peak	

ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)

Test Mode: TX Mode

Ant 0°

160 dBuV/m




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0114	22.44	20.74	43.18	127.90	-84.72	AVG	
2	0.0320	16.71	19.26	35.97	122.82	-86.85	AVG	
3 *	0.0813	9.85	18.07	27.92	110.64	-82.72	AVG	

Test Mode: TX Mode

Ant 0°

160 dBuV/m




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2442	17.97	16.67	34.64	102.19	-67.55	AVG	
2 *	2.1783	23.11	15.46	38.57	69.54	-30.97	QP	
3	3.8603	18.93	14.99	33.92	69.54	-35.62	QP	

Test Mode: TX Mode

Ant 90°

160 dBuV/m




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0120	20.85	20.66	41.51	127.75	-86.24	AVG	
2	0.0246	15.42	19.48	34.90	124.64	-89.74	AVG	
3 *	0.0974	13.76	17.69	31.45	107.87	-76.42	AVG	

Test Mode: TX Mode

Ant 90°

160 dBuV/m




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2562	17.94	16.65	34.59	101.78	-67.19	AVG	
2 *	2.1783	23.38	15.46	38.84	69.54	-30.70	QP	
3	4.0920	18.41	14.90	33.31	69.54	-36.23	QP	

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX 2402MHz _CH00_1Mbps


Vertical



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	55.2200	37.15	-13.94	23.21	40.00	-16.79	Peak	
2	118.2700	34.25	-15.53	18.72	43.50	-24.78	Peak	
3	140.5800	35.54	-14.18	21.36	43.50	-22.14	Peak	
4	173.5600	32.91	-12.23	20.68	43.50	-22.82	Peak	
5	554.7700	31.38	-7.59	23.79	46.00	-22.21	Peak	
6	727.4300	30.65	-3.12	27.53	46.00	-18.47	Peak	

Test Mode: TX 2402MHz _CH00_1Mbps


Horizontal



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	49.4000	29.53	-13.46	16.07	40.00	-23.93	Peak	
2	141.5500	30.84	-14.11	16.73	43.50	-26.77	Peak	
3	178.4100	30.37	-12.09	18.28	43.50	-25.22	Peak	
4	316.1500	30.09	-12.55	17.54	46.00	-28.46	Peak	
5	502.3900	30.86	-8.67	22.19	46.00	-23.81	Peak	
6 *	784.6599	30.07	-1.69	28.38	46.00	-17.62	Peak	

Test Mode: TX 2441MHz _CH39_1Mbps

Vertical




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	55.2200	36.17	-13.94	22.23	40.00	-17.77	Peak	
2	114.3900	34.93	-15.84	19.09	43.50	-24.41	Peak	
3	147.3700	32.90	-13.71	19.19	43.50	-24.31	Peak	
4	179.3800	31.59	-12.06	19.53	43.50	-23.97	Peak	
5	608.1200	29.79	-6.27	23.52	46.00	-22.48	Peak	
6	742.9500	30.21	-2.66	27.55	46.00	-18.45	Peak	

Test Mode: TX 2441MHz _CH39_1Mbps

Horizontal


80 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	46.4900	27.92	-12.98	14.94	40.00	-25.06	Peak	
2	110.5100	30.86	-16.15	14.71	43.50	-28.79	Peak	
3	144.4600	31.05	-13.91	17.14	43.50	-26.36	Peak	
4 *	178.4100	32.15	-12.09	20.06	43.50	-23.44	Peak	
5	315.1800	30.59	-12.56	18.03	46.00	-27.97	Peak	
6	542.1599	29.94	-7.87	22.07	46.00	-23.93	Peak	

Test Mode: TX 2480MHz _CH78_1Mbps

Vertical




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	53.2800	36.30	-13.88	22.42	40.00	-17.58	Peak	
2	113.4200	37.59	-15.92	21.67	43.50	-21.83	Peak	
3	142.5200	35.19	-14.04	21.15	43.50	-22.35	Peak	
4	178.4100	33.66	-12.09	21.57	43.50	-21.93	Peak	
5	400.5400	30.35	-11.34	19.01	46.00	-26.99	Peak	
6 *	741.0100	32.12	-2.71	29.41	46.00	-16.59	Peak	

Test Mode: TX 2480MHz _CH78_1Mbps

Horizontal


80 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	48.4300	29.12	-13.28	15.84	40.00	-24.16	Peak	
2	140.5800	31.10	-14.18	16.92	43.50	-26.58	Peak	
3	174.5300	31.04	-12.20	18.84	43.50	-24.66	Peak	
4	302.5700	29.87	-12.78	17.09	46.00	-28.91	Peak	
5	551.8600	31.15	-7.67	23.48	46.00	-22.52	Peak	
6 *	691.5400	31.04	-4.20	26.84	46.00	-19.16	Peak	

Test Mode: TX 2402MHz _CH00_3Mbps


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		55.220	38.15	-13.94	24.21	40.00	-15.79	peak	
2		140.580	35.54	-14.18	21.36	43.50	-22.14	peak	
3		175.500	33.16	-12.18	20.98	43.50	-22.52	peak	
4		496.570	31.35	-8.81	22.54	46.00	-23.46	peak	
5		554.770	31.39	-7.60	23.79	46.00	-22.21	peak	
6 *		831.220	33.19	-0.52	32.67	46.00	-13.33	peak	

Test Mode: TX 2402MHz _CH00_3Mbps


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		49.400	29.53	-13.46	16.07	40.00	-23.93	peak	
2		178.410	30.36	-12.08	18.28	43.50	-25.22	peak	
3		410.240	31.10	-11.06	20.04	46.00	-25.96	peak	
4		502.390	31.87	-8.68	23.19	46.00	-22.81	peak	
5		701.240	30.05	-3.90	26.15	46.00	-19.85	peak	
6 *		831.220	31.62	-0.52	31.10	46.00	-14.90	peak	

Test Mode: TX 2441MHz _CH39_3Mbps


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		55.220	36.17	-13.94	22.23	40.00	-17.77	peak	
2		147.370	34.90	-13.71	21.19	43.50	-22.31	peak	
3		297.720	31.63	-13.14	18.49	46.00	-27.51	peak	
4		372.410	30.88	-11.69	19.19	46.00	-26.81	peak	
5		608.120	29.79	-6.27	23.52	46.00	-22.48	peak	
6	*	835.100	30.84	-0.41	30.43	46.00	-15.57	peak	

Test Mode: TX 2441MHz _CH39_3Mbps


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		54.250	29.76	-13.95	15.81	40.00	-24.19	peak	
2		178.410	33.14	-12.08	21.06	43.50	-22.44	peak	
3		315.180	31.59	-12.56	19.03	46.00	-26.97	peak	
4		485.900	29.95	-9.06	20.89	46.00	-25.11	peak	
5		648.860	30.22	-5.51	24.71	46.00	-21.29	peak	
6	*	831.220	30.04	-0.52	29.52	46.00	-16.48	peak	

Test Mode: TX 2480MHz _CH78_3Mbps


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		53.280	36.30	-13.88	22.42	40.00	-17.58	peak	
2		113.420	37.59	-15.92	21.67	43.50	-21.83	peak	
3		178.410	33.65	-12.08	21.57	43.50	-21.93	peak	
4		400.540	30.35	-11.34	19.01	46.00	-26.99	peak	
5		583.870	30.25	-6.84	23.41	46.00	-22.59	peak	
6	*	853.530	30.44	0.07	30.51	46.00	-15.49	peak	

Test Mode: TX 2480MHz _CH78_3Mbps

Horizontal




No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	48.430	30.12	-13.28	16.84	40.00	-23.16	peak	
2	174.530	31.04	-12.20	18.84	43.50	-24.66	peak	
3	315.180	29.98	-12.56	17.42	46.00	-28.58	peak	
4	491.720	31.57	-8.93	22.64	46.00	-23.36	peak	
5	551.860	31.65	-7.67	23.98	46.00	-22.02	peak	
6 *	691.540	31.54	-4.20	27.34	46.00	-18.66	peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Test Mode : TX 2402MHz _CH00_1Mbps

Vertical


115 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.74	33.06	55.80	74.00	-18.20	Peak	
2	2390.0000	13.21	33.06	46.27	54.00	-7.73	AVG	
3	2401.8500	68.85	33.10	101.95	74.00	27.95	Peak	No Limit
4 *	2402.0000	67.56	33.10	100.66	54.00	46.66	AVG	No Limit

Test Mode : TX 2402MHz _CH00_1Mbps


Vertical



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4803.8400	38.26	6.27	44.53	74.00	-29.47	Peak	
2 *	4803.9950	31.84	6.27	38.11	54.00	-15.89	AVG	

Test Mode : TX 2402MHz _CH00_1Mbps


Horizontal



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.16	33.06	56.22	74.00	-17.78	Peak	
2	2390.0000	13.19	33.06	46.25	54.00	-7.75	AVG	
3	2401.8500	68.09	33.10	101.19	74.00	27.19	Peak	No Limit
4 *	2402.0000	66.83	33.10	99.93	54.00	45.93	AVG	No Limit

Test Mode : TX 2402MHz _CH00_1Mbps

Horizontal




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4803.8140	39.88	6.27	46.15	74.00	-27.85	Peak	
2 *	4804.0179	33.78	6.27	40.05	54.00	-13.95	AVG	

Test Mode : TX 2441MHz _CH39_1Mbps

Vertical


115 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2440.8500	68.46	33.25	101.71	74.00	27.71	Peak	No Limit
2 *	2441.0000	67.22	33.25	100.47	54.00	46.47	AVG	No Limit

Test Mode : TX 2441MHz _CH39_1Mbps


Vertical



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4881.8280	39.88	6.46	46.34	74.00	-27.66	Peak	
2 *	4881.9660	34.13	6.46	40.59	54.00	-13.41	AVG	

Test Mode : TX 2441MHz _CH39_1Mbps


Horizontal



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2440.8000	69.43	33.25	102.68	74.00	28.68	Peak	No Limit
2 *	2441.0000	68.17	33.25	101.42	54.00	47.42	AVG	No Limit

Test Mode : TX 2441MHz _CH39_1Mbps

Horizontal




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4881.9520	38.24	6.46	44.70	54.00	-9.30	AVG	
2	4882.2180	43.02	6.46	49.48	74.00	-24.52	Peak	

Test Mode : TX 2480MHz _CH78_1Mbps

Vertical


115 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.8000	67.92	33.39	101.31	74.00	27.31	Peak	No Limit
2 *	2480.0000	66.74	33.39	100.13	54.00	46.13	AVG	No Limit
3	2483.5000	25.12	33.41	58.53	74.00	-15.47	Peak	
4	2483.5000	13.47	33.41	46.88	54.00	-7.12	AVG	

Test Mode : TX 2480MHz _CH78_1Mbps


Vertical



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4959.6140	43.25	6.66	49.91	74.00	-24.09	Peak	
2 *	4959.8960	39.78	6.66	46.44	54.00	-7.56	AVG	

Test Mode : TX 2480MHz _CH78_1Mbps


Horizontal



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.8500	70.32	33.39	103.71	74.00	29.71	Peak	No Limit
2 *	2480.0000	69.13	33.39	102.52	54.00	48.52	AVG	No Limit
3	2483.5000	25.73	33.41	59.14	74.00	-14.86	Peak	
4	2483.5000	13.68	33.41	47.09	54.00	-6.91	AVG	

Test Mode : TX 2480MHz _CH78_1Mbps

Horizontal




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4959.6660	48.78	6.66	55.44	74.00	-18.56	Peak	
2 *	4959.9460	45.25	6.66	51.91	54.00	-2.09	AVG	

Test Mode : TX 2402MHz _CH00_3Mbps

Vertical


115 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.68	33.06	55.74	74.00	-18.26	Peak	
2	2390.0000	13.22	33.06	46.28	54.00	-7.72	AVG	
3 *	2402.0000	64.73	33.10	97.83	54.00	43.83	AVG	No Limit
4	2402.1000	68.74	33.10	101.84	74.00	27.84	Peak	No Limit

Test Mode : TX 2402MHz _CH00_3Mbps


Vertical



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4803.9560	28.55	6.27	34.82	54.00	-19.18	AVG	
2	4803.7559	38.85	6.27	45.12	74.00	-28.88	Peak	

Test Mode : TX 2402MHz _CH00_3Mbps


Horizontal



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.66	33.06	56.72	74.00	-17.28	Peak	
2	2390.0000	13.22	33.06	46.28	54.00	-7.72	AVG	
3 *	2402.0000	64.62	33.10	97.72	54.00	43.72	AVG	No Limit
4	2402.2000	68.63	33.10	101.73	74.00	27.73	Peak	No Limit

Test Mode : TX 2402MHz _CH00_3Mbps

Horizontal




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4803.5680	40.10	6.26	46.36	74.00	-27.64	Peak	
2 *	4803.9850	31.17	6.27	37.44	54.00	-16.56	AVG	

Test Mode : TX 2441MHz _CH39_3Mbps

Vertical


115 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2441.0000	64.81	33.25	98.06	54.00	44.06	AVG	No Limit
2	2441.1000	68.64	33.25	101.89	74.00	27.89	Peak	No Limit

Test Mode : TX 2441MHz _CH39_3Mbps


Vertical



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4881.9320	39.83	6.46	46.29	74.00	-27.71	Peak	
2 *	4881.9800	31.12	6.46	37.58	54.00	-16.42	AVG	

Test Mode : TX 2441MHz _CH39_3Mbps


Horizontal



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2441.0000	65.99	33.25	99.24	54.00	45.24	AVG	No Limit
2	2441.0500	69.78	33.25	103.03	74.00	29.03	Peak	No Limit

Test Mode : TX 2441MHz _CH39_3Mbps

Horizontal




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4881.8960	36.24	6.46	42.70	54.00	-11.30	AVG	
2	4881.9500	43.55	6.46	50.01	74.00	-23.99	Peak	

Test Mode : TX 2480MHz _CH78_3Mbps

Vertical


115 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.8000	67.95	33.39	101.34	74.00	27.34	Peak	No Limit
2 *	2480.0000	64.57	33.39	97.96	54.00	43.96	AVG	No Limit
3	2483.5000	24.10	33.41	57.51	74.00	-16.49	Peak	
4	2483.5000	14.00	33.41	47.41	54.00	-6.59	AVG	

Test Mode : TX 2480MHz _CH78_3Mbps


Vertical



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4959.7980	44.77	6.66	51.43	74.00	-22.57	Peak	
2 *	4959.8480	37.18	6.66	43.84	54.00	-10.16	AVG	

Test Mode : TX 2480MHz _CH78_3Mbps


Horizontal



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2480.0000	66.97	33.39	100.36	54.00	46.36	AVG	No Limit
2	2480.0500	70.32	33.39	103.71	74.00	29.71	Peak	No Limit
3	2483.5000	24.92	33.41	58.33	74.00	-15.67	Peak	
4	2483.5000	14.53	33.41	47.94	54.00	-6.06	AVG	

Test Mode : TX 2480MHz _CH78_3Mbps

Horizontal




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4959.8480	48.62	6.66	55.28	74.00	-18.72	Peak	
2 *	4959.9180	42.52	6.66	49.18	54.00	-4.82	AVG	

ATTACHMENT E - NUMBER OF HOPPING CHANNEL

Test Mode **Hopping Mode_1Mbps**


Number of Hopping Channel 79



Date: 30.JUN.2017 15:02:10

Test Mode **Hopping Mode_3Mbps**

Number of Hopping Channel 79




Date: 30.JUN.2017 15:17:49

ATTACHMENT F - AVERAGE TIME OF OCCUPANCY

Test Mode :	TX Mode_1Mbps
-------------	---------------


Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402	2.9200	0.3115	0.4000	Pass
DH3	2402	1.6400	0.2624	0.4000	Pass
DH1	2402	0.3950	0.1264	0.4000	Pass
DH5	2441	2.9200	0.3115	0.4000	Pass
DH3	2441	1.6400	0.2624	0.4000	Pass
DH1	2441	0.3900	0.1248	0.4000	Pass
DH5	2480	2.9200	0.3115	0.4000	Pass
DH3	2480	1.6600	0.2656	0.4000	Pass
DH1	2480	0.3900	0.1248	0.4000	Pass

CH00-DH1




Date: 30.JUN.2017 14:56:57

CH00-DH3




Date: 30.JUN.2017 15:04:01

CH00-DH5




Date: 30.JUN.2017 15:04:30

CH39-DH1




Date: 30.JUN.2017 14:57:01

CH39-DH3




Date: 30.JUN.2017 15:04:04

CH39-DH5




Date: 30.JUN.2017 15:04:34

CH78-DH1




Date: 30.JUN.2017 14:57:04

CH78-DH3



Date: 30.JUN.2017 15:04:08

CH78-DH5




Date: 30.JUN.2017 15:04:38

Test Mode :	TX Mode_3Mbps
-------------	---------------


Data Packet	Frequency	Pulse Duration(ms)	Dwell Time(s)	Limits(s)	Test Result
DH5	2402	2.8800	0.3072	0.4000	Pass
DH3	2402	1.6600	0.2656	0.4000	Pass
DH1	2402	0.4000	0.1280	0.4000	Pass
DH5	2441	2.9200	0.3115	0.4000	Pass
DH3	2441	1.6400	0.2624	0.4000	Pass
DH1	2441	0.4000	0.1280	0.4000	Pass
DH5	2480	2.8800	0.3072	0.4000	Pass
DH3	2480	1.6600	0.2656	0.4000	Pass
DH1	2480	0.4000	0.1280	0.4000	Pass

CH00-DH1




Date: 30.JUN.2017 15:12:45

CH00-DH3




Date: 30.JUN.2017 15:19:18

CH00-DH5




Date: 30.JUN.2017 15:19:43

CH39-DH1




Date: 30.JUN.2017 15:12:48

CH39-DH3




Date: 30.JUN.2017 15:19:22

CH39-DH5




Date: 30.JUN.2017 15:19:47

CH78-DH1




Date: 30.JUN.2017 15:12:52

CH78-DH3



Date: 30.JUN.2017 15:19:25

CH78-DH5




Date: 30.JUN.2017 15:19:51

ATTACHMENT G - HOPPING CHANNEL SEPARATION MEASUREMENT

Test Mode : Hopping on _1Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.163	0.692	Pass
2441	0.995	0.685	Pass
2480	0.998	0.695	Pass




Date: 30.JUN.2017 14:58:12

CH39



Ref 20 dBm *Att 30 dB *RBW 30 kHz Delta 1 [T1]
*VBW 100 kHz -0.07 dB
SWT 5 ms 994.500000000 kHz




Date: 30.JUN.2017 14:59:18

CH78




Ref 20 dBm *Att 30 dB *RBW 30 kHz Delta 1 [T1]
*VBW 100 kHz 0.68 dB
SWT 5 ms 998.000000000 kHz



Date: 30.JUN.2017 15:00:24

Test Mode : Hopping on _3Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	0.990	0.864	Pass
2441	0.996	0.865	Pass
2480	0.990	0.864	Pass




Date: 30.JUN.2017 15:13:56

CH39



Ref 20 dBm *Att 30 dB *RBW 30 kHz Delta 1 [T1] 1.30 dB
*VBW 100 kHz 996.000000000 kHz
SWT 5 ms




Date: 30.JUN.2017 15:15:00

CH78



Ref 20 dBm *Att 30 dB *RBW 30 kHz Delta 1 [T1] 1.49 dB
*VBW 100 kHz 990.000000000 kHz
SWT 5 ms




Date: 30.JUN.2017 15:16:03

ATTACHMENT H - BANDWIDTH


Test Mode : TX Mode _1Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.038	0.912	Pass
2441	1.028	0.916	Pass
2480	1.042	0.916	Pass




Date: 30.JUN.2017 14:52:49

CH39



Date: 30.JUN.2017 14:54:57


CH78



Date: 30.JUN.2017 14:55:51


Test Mode : TX Mode _3Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.296	1.176	Pass
2441	1.297	1.176	Pass
2480	1.296	1.176	Pass




Date: 30.JUN.2017 15:09:00

CH39



Date: 30.JUN.2017 15:10:33

CH78




Date: 30.JUN.2017 15:11:40

ATTACHMENT I - PEAK OUTPUT POWER


Test Mode : TX Mode _1Mbps

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	2.09	0.0016	30.00	1.00	Pass
2441	2.05	0.0016	30.00	1.00	Pass
2480	2.16	0.0016	30.00	1.00	Pass




Date: 30.JUN.2017 14:53:20

CH39



Date: 30.JUN.2017 14:55:03


CH78



Date: 30.JUN.2017 14:56:22


Test Mode : TX Mode _3Mbps

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	3.01	0.0020	30.00	1.00	Pass
2441	2.93	0.0020	30.00	1.00	Pass
2480	3.22	0.0021	30.00	1.00	Pass




Date: 30.JUN.2017 15:09:31

CH39



Date: 30.JUN.2017 15:10:39


CH78



Date: 30.JUN.2017 15:12:11


ATTACHMENT J - ANTENNA CONDUCTED SPURIOUS EMISSION

CH00 (Lower)_1Mbps




Date: 30.JUN.2017 14:52:29

CH78 (Upper)_1Mbps




Date: 30.JUN.2017 14:55:31

CH00 Hopping on mode (Lower)_1Mbps




Date: 30.JUN.2017 15:02:44

CH78 Hopping on mode (Upper)_1Mbps




Date: 30.JUN.2017 15:03:17


CH00 (10 Harmonic of the frequency) _1Mbps



Date: 30.JUN.2017 14:53:01




Date: 30.JUN.2017 14:53:08




Date: 30.JUN.2017 14:53:15


CH39 (10 Harmonic of the frequency) _1Mbps



Date: 30.JUN.2017 14:54:23




Date: 30.JUN.2017 14:54:30




Date: 30.JUN.2017 14:54:36


CH78 (10 Harmonic of the frequency) _1Mbps



Date: 30.JUN.2017 14:56:03




Date: 30.JUN.2017 14:56:10




Date: 30.JUN.2017 14:56:17

CH00 (Lower) _3Mbps




Date: 30.JUN.2017 15:08:43

CH78 (Upper) _3Mbps




Date: 30.JUN.2017 15:11:23

CH00 Hopping on mode (Lower)_3Mbps




Date: 30.JUN.2017 15:18:23

CH78 Hopping on mode (Upper)_3Mbps




Date: 30.JUN.2017 15:18:56


CH00 (10 Harmonic of the frequency) _3Mbps



Date: 30.JUN.2017 15:09:13




Date: 30.JUN.2017 15:09:19




Date: 30.JUN.2017 15:09:26


CH39 (10 Harmonic of the frequency) _3Mbps



Date: 30.JUN.2017 15:10:04




Date: 30.JUN.2017 15:10:11




Date: 30.JUN.2017 15:10:18


CH78 (10 Harmonic of the frequency) _3Mbps



Date: 30.JUN.2017 15:11:53



Date: 30.JUN.2017 15:11:59



Date: 30.JUN.2017 15:12:06