

FCC TEST REPORT

(PART 27)



Applicant:	POINTMOBILE CO.,LTD
Address:	9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu, Seoul, Korea 08512

Manufacturer or Supplier:	POINTMOBILE CO.,LTD
Address:	9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu, Seoul, Korea 08512
Product:	Moblie computer
Brand Name:	Point mobile
Model Name:	PM95
FCC ID:	V2X-PM95
Date of tests:	Jan. 08, 2024 ~ May. 10, 2024

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 27** ☒ **ANSI/TIA/EIA-603-D**
☒ **FCC Part 2** ☒ **ANSI/TIA/EIA-603-E** ☒ **ANSI C63.26-2015**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: May. 10, 2024	 Date: May. 10, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1 SUMMARY OF TEST RESULTS	6
1.1 MEASUREMENT UNCERTAINTY	8
1.2 TEST SITE AND INSTRUMENTS	9
2 GENERAL INFORMATION	11
2.1 GENERAL DESCRIPTION OF EUT	11
2.2 CONFIGURATION OF SYSTEM UNDER TEST	17
2.3 DESCRIPTION OF SUPPORT UNITS	18
2.4 TEST ITEM AND TEST CONFIGURATION	18
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	27
3 TEST TYPES AND RESULTS	28
3.1 OUTPUT POWER MEASUREMENT	28
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	28
3.1.2 TEST PROCEDURES	28
3.1.3 TEST SETUP	29
3.1.4 TEST RESULTS	30
3.2 FREQUENCY STABILITY MEASUREMENT	78
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	78
3.2.2 TEST PROCEDURE	78
3.2.3 TEST SETUP	78
3.2.4 TEST RESULTS	79
3.3 OCCUPIED BANDWIDTH MEASUREMENT	80
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	80
3.3.2 TEST SETUP	80
3.3.3 TEST PROCEDURES	80
3.3.4 TEST RESULTS	81
3.4 BAND EDGE MEASUREMENT	82
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	82
3.4.2 TEST SETUP	83
3.4.3 TEST PROCEDURES	84
3.4.4 TEST RESULTS	85
3.5 CONDUCTED SPURIOUS EMISSIONS	86
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	86
3.5.2 TEST PROCEDURE	86
3.5.3 TEST SETUP	86
3.5.4 TEST RESULTS	87
3.6 RADIATED EMISSION MEASUREMENT	88
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	88
3.6.2 TEST PROCEDURES	88
3.6.3 DEVIATION FROM TEST STANDARD	88
3.6.4 TEST SETUP	89
3.6.5 TEST RESULTS	91
3.7 PEAK TO AVERAGE RATIO	145
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	145
3.7.2 TEST SETUP	145
3.7.3 TEST PROCEDURES	145
3.7.4 TEST RESULTS	146
4 INFORMATION ON THE TESTING LABORATORIES	147

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB. 148

5 APPENDIX	149
LTE BAND 38	149
PEAK-TO-AVERAGE RATIO(CCDF)	149
TEST RESULT	149
TEST GRAPHS	150
26DB BANDWIDTH AND OCCUPIED BANDWIDTH	156
TEST RESULT	156
TEST GRAPHS	157
BAND EDGE	169
TEST RESULT	169
TEST GRAPHS	170
CONDUCTED SPURIOUS EMISSION	186
TEST RESULT	186
TEST GRAPHS	187
FREQUENCY STABILITY	199
TEST RESULT	199
LTE BAND41	200
PEAK-TO-AVERAGE RATIO(CCDF)	200
TEST RESULT	200
TEST GRAPHS	201
26DB BANDWIDTH AND OCCUPIED BANDWIDTH	207
TEST RESULT	207
TEST GRAPHS	208
BAND EDGE	220
TEST RESULT	220
TEST GRAPHS	221
CONDUCTED SPURIOUS EMISSION	237
TEST RESULT	237
TEST GRAPHS	238
FREQUENCY STABILITY	250
TEST RESULT	250
LTE BAND42	251
PEAK-TO-AVERAGE RATIO(CCDF)	251
TEST RESULT	251
TEST GRAPHS	252
26DB BANDWIDTH AND OCCUPIED BANDWIDTH	258
TEST RESULT	258
TEST GRAPHS	259
BAND EDGE	271
TEST RESULT	271
TEST GRAPHS	272
CONDUCTED SPURIOUS EMISSION	288
TEST RESULT	288
TEST GRAPHS	289
FREQUENCY STABILITY	301
TEST RESULT	301
LTE BAND66 (INCLUDING LTE BAND4)	304
PEAK-TO-AVERAGE RATIO(CCDF)	304
TEST RESULT	304
TEST GRAPHS	305
26DB BANDWIDTH AND OCCUPIED BANDWIDTH	311
TEST RESULT	311



Test Report No.: W7L-P23120020RF04

TEST GRAPHS	312
BAND EDGE	330
TEST RESULT	330
TEST GRAPHS	332
CONDUCTED SPURIOUS EMISSION	356
TEST RESULT	356
TEST GRAPHS	357
FREQUENCY STABILITY	375
TEST RESULT	375



Test Report No.: W7L-P23120020RF04

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P23120020RF04	Original release	May. 10, 2024

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 27 & PART 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	TEST LAB*
§2.1046	Conducted Output Power	Compliance	A
§27.50(d)(4) §27.50(h)(2) §27.50(k)(3)	Equivalent Isotropically Radiated Power (Band 4) (Band 38) (Band 41) (Band 42) (Band 66)	Compliance	A
§2.1055 §27.54	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§2.1051 §27.53(h) §27.53(m)(4)(6) §27.53(n)(2)	Conducted Band Edge Measurements (Band 4) (Band 38) (Band 41) (Band 42) (Band 66)	Compliance	A
§2.1051 §27.53(h) §27.53(m)(4)(6) §27.53(n)(2)	Conducted Spurious Emissions (Band 4) (Band 38) (Band 41) (Band 42) (Band 66)	Compliance	A
§2.1053 §27.53(h) §27.53(m)(4)(6) §27.53(n)(2)	Radiated Spurious Emissions (Band 4) (Band 38) (Band 41) (Band 42) (Band 66)	Compliance	A
§27.50(k)(4)	Peak to average ratio	Compliance	A



Test Report No.: W7L-P23120020RF04

***Test Lab Information Reference**

Lab A:

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

Lab Address:

Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District Shenzhen, Guangdong, People's Republic of China

Accredited Test Lab Cert 3939.01

The FCC Site Registration No. : 525120; Designation No. : CN1171;

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions & Radiated Power (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,23	Mar. 27,24
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 27,24	Mar. 26,25
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.10,23	May.09,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.09,24	May.08,25
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.02,23	Sep.01,24
Bilog Antenna	ETS-LINDGRE N	3143B	00161965	Feb. 18,23	Feb. 17,24
Bilog Antenna	ETS-LINDGRE N	3143B	00161965	Feb. 17,24	Feb. 16,25
Horn Antenna	ETS-LINDGRE N	3117	00168692	Feb. 18,23	Feb. 17,24
Horn Antenna	ETS-LINDGRE N	3117	00168692	Feb. 17,24	Feb. 16,25
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Sep.03, 23	Sep.02, 24
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 14,23	Feb. 13,24
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 13,24	Feb. 12,25
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 06,23	May. 05,24
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 05,24	May. 04,25
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.10,23	May.09,24
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.09,24	May.08,25
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,23	Feb.16,24
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb.16,24	Feb.15,25
3m Semi-anechoic Chamber	ETS-LINDGRE N	9m*6m*6m	Euroshieldpn- CT0001143-121 6	Nov. 14,23	Nov. 13,26
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120	3.1.36	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	50HF-010-SMA	May. 06,23	May. 05,24
10dB Attenuator	JFW/USA	50HF-010-SMA	50HF-010-SMA	May. 05,24	May. 04,25
Power Meter	Anritsu	ML2495A	1506002	Feb. 14,23	Feb. 13,24
Power Meter	Anritsu	ML2495A	1506002	Feb. 13,24	Feb. 12,25
Power Sensor	Anritsu	MA2411B	1339352	Feb. 14,23	Feb. 13,24
Power Sensor	Anritsu	MA2411B	1339352	Feb. 13,24	Feb. 12,25
Temperature Chamber	ESPEC	SH-242	93000855	May. 06,23	May. 05,24
Temperature Chamber	ESPEC	SH-242	93000855	May. 05,24	May. 04,25
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 14,23	Feb. 13,24
MXG Analog Microvave	KEYSIGHT	N5183A	MY50143024	Feb. 13,24	Feb. 12,25



Test Report No.: W7L-P23120020RF04

Signal Generator					
Base station R&S CMW500	Rohde&Schwarz	CMW500	153085	May.10,23	May.09,24
Base station R&S CMW500	Rohde&Schwarz	CMW500	153085	May.09,24	May.08,25
DC Source	Kikusui/JP	PMX18-5A	N/A	Aug. 11,23	Aug. 10,24
N9010B keysight SN	KEYSIGHT	N9010B	MY62170516	Aug. 01,23	Jul. 31, 24

- NOTE:**
1. The calibration interval of the above test instruments is 12/ 36 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Mobile computer	
BRAND NAME	Point mobile	
MODEL NAME	PM95	
NOMINAL VOLTAGE	5.0Vdc (adapter) 3.87Vdc (battery)	
MODULATION TECHNOLOGY	LTE	QPSK, 16QAM, 64QAM, 256QAM
FREQUENCY RANGE	LTE Band 4 Channel Bandwidth: 1.4MHz	1710.7MHz ~ 1754.3MHz
	LTE Band 4 Channel Bandwidth: 3MHz	1711.5MHz ~ 1753.5MHz
	LTE Band 4 Channel Bandwidth: 5MHz	1712.5MHz ~ 1752.5MHz
	LTE Band 4 Channel Bandwidth: 10MHz	1715MHz ~ 1750MHz
	LTE Band 4 Channel Bandwidth: 15MHz	1717.5MHz ~ 1747.5 MHz
	LTE Band 4 Channel Bandwidth: 20MHz	1720MHz ~ 1745MHz
	LTE Band 38 Channel Bandwidth: 5MHz	2572.5MHz ~ 2617.5MHz
	LTE Band 38 Channel Bandwidth: 10MHz	2575MHz ~ 2615MHz
	LTE Band 38 Channel Bandwidth: 15MHz	2577.5MHz ~ 2612.5MHz
	LTE Band 38 Channel Bandwidth: 20MHz	2580MHz ~ 2610MHz
	LTE Band 41 Channel Bandwidth: 5MHz	2498.5MHz ~ 2687.5MHz
	LTE Band 41 Channel Bandwidth: 10MHz	2501MHz ~ 2685MHz
	LTE Band 41 Channel Bandwidth: 15MHz	2503.5MHz ~ 2682.5MHz
	LTE Band 41 Channel Bandwidth: 20MHz	2506MHz ~ 2680MHz
	LTE Band 42 Channel Bandwidth: 5MHz	3452.5 MHz ~ 3547.5MHz
	LTE Band 42 Channel Bandwidth: 10MHz	3455MHz ~ 3545MHz

FREQUENCY RANGE	LTE Band 42 Channel Bandwidth: 15MHz	3457.5MHz ~ 3542.5MHz
	LTE Band 42 Channel Bandwidth: 20MHz	3460MHz ~ 3540MHz
	LTE Band 66 Channel Bandwidth: 1.4MHz	1710.7MHz ~ 1779.3MHz
	LTE Band 66 Channel Bandwidth: 3MHz	1711.5MHz ~ 1778.5MHz
	LTE Band 66 Channel Bandwidth: 5MHz	1712.5MHz ~ 1777.5MHz
	LTE Band 66 Channel Bandwidth: 10MHz	1715MHz ~ 1775MHz
	LTE Band 66 Channel Bandwidth: 15MHz	1717.5MHz ~ 1772.5MHz
	LTE Band 66 Channel Bandwidth: 20MHz	1720MHz ~ 1770MHz
	LTE CA	The following only support downlink: CA_4A-12A CA_4A-13A CA_4A-17A CA_4A-29A CA_4A-48A CA_4A-4A CA_4A-5A CA_4A-71A CA_4A-7A CA_4A-30A CA_4A-4A-13A CA_4A-4A-5A CA_38C CA_41A-41A CA_41C CA_66A-66A CA_66A-71A CA_66B CA_66C CA_66A-66A-66A
MAX. EIRP POWER	LTE Band 4 Channel Bandwidth: 1.4MHz	181.97mW
	LTE Band 4 Channel Bandwidth: 3MHz	183.65mW
	LTE Band 4 Channel Bandwidth: 5MHz	182.81mW

MAX. EIRP POWER	LTE Band 4 Channel Bandwidth: 10MHz	181.55mW
	LTE Band 4 Channel Bandwidth: 15MHz	178.65mW
	LTE Band 4 Channel Bandwidth: 20MHz	184.08mW
	LTE Band 38 Channel Bandwidth: 5MHz	104.71mW
	LTE Band 38 Channel Bandwidth: 10MHz	100.69mW
	LTE Band 38 Channel Bandwidth: 15MHz	106.91mW
	LTE Band 38 Channel Bandwidth: 20MHz	107.4mW
	LTE Band 41 Channel Bandwidth: 5MHz	492.04mW
	LTE Band 41 Channel Bandwidth: 10MHz	481.95mW
	LTE Band 41 Channel Bandwidth: 15MHz	490.91mW
	LTE Band 41 Channel Bandwidth: 20MHz	495.45mW
	LTE Band 42 Channel Bandwidth: 5MHz	163.68mW
	LTE Band 42 Channel Bandwidth: 10MHz	167.49mW
	LTE Band 42 Channel Bandwidth: 15MHz	168.27mW
	LTE Band 42 Channel Bandwidth: 20MHz	168.66mW
	LTE Band 66 Channel Bandwidth: 1.4MHz	238.78mW
	LTE Band 66 Channel Bandwidth: 3MHz	241.55mW
	LTE Band 66 Channel Bandwidth: 5MHz	238.78mW
	LTE Band 66 Channel Bandwidth: 10MHz	236.05mW
	LTE Band 66 Channel Bandwidth: 15MHz	240.44mW
	LTE Band 66 Channel Bandwidth: 20MHz	242.66mW

MAX. EIRP POWER	ENDC LTE Band 66 Channel Bandwidth: 1.4MHz	236.59mW
	ENDC LTE Band 66 Channel Bandwidth: 3MHz	236.59mW
	ENDC LTE Band 66 Channel Bandwidth: 5MHz	233.35mW
	ENDC LTE Band 66 Channel Bandwidth: 10MHz	234.96mW
	ENDC LTE Band 66 Channel Bandwidth: 15MHz	232.27mW
	ENDC LTE Band 66 Channel Bandwidth: 20MHz	239.33mW
EMISSION DESIGNATOR	LTE Band 38 Channel Bandwidth: 5MHz	QPSK: 4M52G7D 16QAM: 4M53W7D
	LTE Band 38 Channel Bandwidth: 10MHz	QPSK: 9M01G7D 16QAM: 9M03W7D
	LTE Band 38 Channel Bandwidth: 15MHz	QPSK: 13M5G7D 16QAM: 13M5W7D
	LTE Band 38 Channel Bandwidth: 20MHz	QPSK: 18M0G7D 16QAM: 18M0W7D
	LTE Band 41 Channel Bandwidth: 5MHz	QPSK: 4M52G7D 16QAM: 4M53W7D
	LTE Band 41 Channel Bandwidth: 10MHz	QPSK: 9M03G7D 16QAM: 9M01W7D
	LTE Band 41 Channel Bandwidth: 15MHz	QPSK: 13M5G7D 16QAM: 13M5W7D
	LTE Band 41 Channel Bandwidth: 20MHz	QPSK: 18M0G7D 16QAM: 18M0W7D
	LTE Band 42 Channel Bandwidth: 5MHz	QPSK: 4M53G7D 16QAM: 4M52W7D
	LTE Band 42 Channel Bandwidth: 10MHz	QPSK: 9M01G7D 16QAM: 9M01W7D
	LTE Band 42 Channel Bandwidth: 15MHz	QPSK: 13M5G7D 16QAM: 13M5W7D
	LTE Band 42 Channel Bandwidth: 20MHz	QPSK: 18M0G7D 16QAM: 18M0W7D

EMISSION DESIGNATOR	LTE Band 66 Channel Bandwidth: 1.4MHz	QPSK: 1M10G7D
		16QAM: 1M11W7D
	LTE Band 66 Channel Bandwidth: 3MHz	QPSK: 2M71G7D
		16QAM: 2M71W7D
	LTE Band 66 Channel Bandwidth: 5MHz	QPSK: 4M53G7D
		16QAM: 4M53W7D
	LTE Band 66 Channel Bandwidth: 10MHz	QPSK: 9M01G7D
		16QAM: 9M03W7D
	LTE Band 66 Channel Bandwidth: 15MHz	QPSK: 13M5G7D
		16QAM: 13M5W7D
	LTE Band 66 Channel Bandwidth: 20MHz	QPSK: 18M0G7D
		16QAM: 18M0W7D
ANTENNA TYPE	ANT0 Internal Antenna with 0.08dBi gain for LTE B4 Internal Antenna with 1.32dBi gain for LTE B66 ANT6: Internal Antenna with -2.48dBi gain for LTE B38 ANT10: Internal Antenna with 3.65dBi gain for LTE B41 ANT11: Internal Antenna with -0.96dBi gain for LTE B42	
HW VERSION	MP	
SW VERSION	95.00	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	USB cable: non-shielded cable, with w/o ferrite core, 1.5meter	
EXTREME TEMPERATURE	-20-60 °C	
EXTREME VOLTAGE	3.5V – 4.45V	

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.





MODULATION MODE	TX FUNCTION
LTE	1TX/4RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.
5. The worst-case scenario for all measurements is based on an engineering evaluation made on different modulations. Then, QPSK and 16QAM were observed as the worst mode to LTE bands respectively and set for all conducted and radiated. Output power measurements were measured on QPSK, 16QAM, 64QAM, and 256QAM modulations, and tests other than output power are performed only in worse-case QPSK and 16QAM modulations.

List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery	N/A	Shenzhen Guangwei Electronic Technology CO., LTD	95-BTSC	Capacity: 3.87Vdc, 4820mAh
AC Adapter 1	N/A	Shenzhen Shi Ying Yuan Electronics Co Ltd	ICP12-050-2000D(ICP12-xxx-yyyf)	I/P: 100-240Vac, 0.3mA, O/P: 5.0Vdc, 2A
AC Adapter 2	N/A	SHENZHEN AQUILSTAR TECHNOLOGY CO.,LTD.	ASUC71w-050912300	I/P: 100-240V~50/60Hz, 0.7A O/P: 5.0Vdc, 3A or 9.0Vdc, 2A or 12.0Vdc, 1.5A
USB Cable	N/A	Dongguan DAWEI PRECISION Technology Co., Ltd.	SC-109B205	USB3.0, 1.5m

2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION TEST

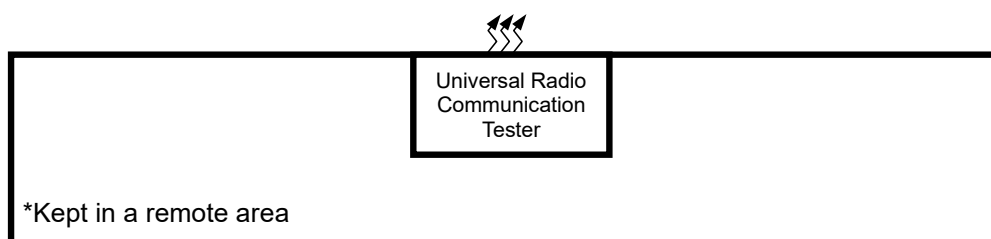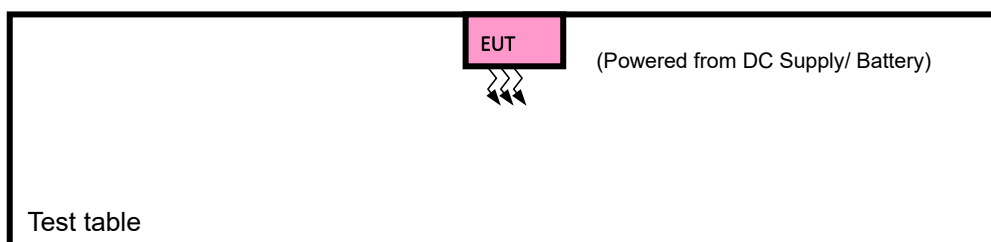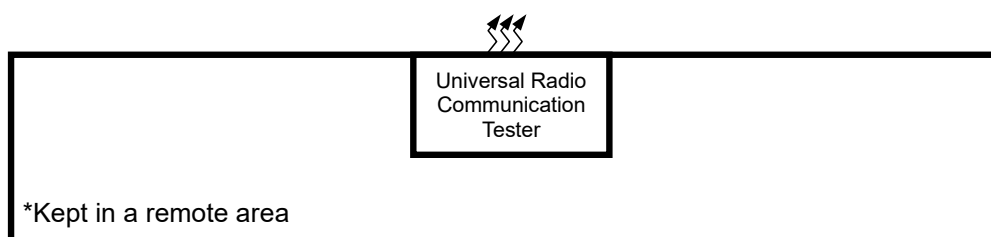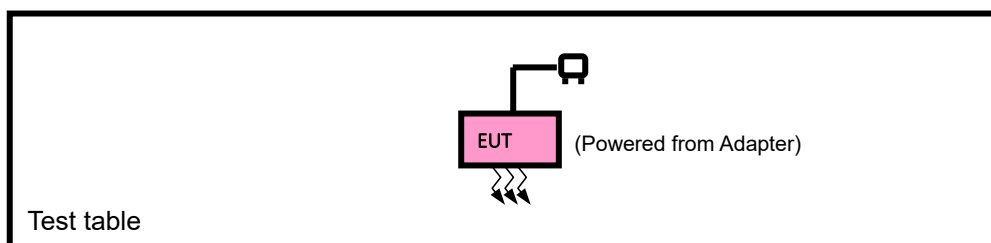

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB Line: Unshielded, Detachable, 1.5m;

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with LTE link
B	EUT + DC Supply /Battery with LTE link

LTE BAND 4 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset

Note: 1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. LTE Band 4 are covered by LTE Band 66, Because it is a subset of LTE Band 66 with the same output power and supported bandwidths, So the conducted test data and RSE test data please refer to LTE Band 66

LTE BAND 38 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	37775 to 38225	37775, 38000, 38225	5MHz	QPSK,16QAM,64QAM,256QAM	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10MHz	QPSK,16QAM,64QAM,256QAM	1 RB / 0RB Offset
		37825 to 38175	37825, 38000, 38175	15MHz	QPSK,16QAM,64QAM,256QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20MHz	QPSK,16QAM,64QAM,256QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	37800 to 38200	37800, 38000, 38200	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	37775 to 38225	37775, 38000, 38225	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20MHz	QPSK, 16QAM	100 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	37850 to 38150	37850, 38000, 38150	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset
A	BAND EDGE	37775 to 38225	37775	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			38225	5MHz	QPSK, 16QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		37800 to 38200	37800	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			38200	10MHz	QPSK, 16QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset
		37825 to 38175	37825	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset
			38175	15MHz	QPSK, 16QAM	1 RB / 74 RB Offset 75 RB / 0 RB Offset
		37850 to 38150	37850	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset
			38150	20MHz	QPSK, 16QAM	1 RB / 99 RB Offset 100 RB / 0 RB Offset

A	CONDUCTED EMISSION	37775 to 38225	37775, 38000, 38225	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	37775 to 38225	38000	5MHz	QPSK	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10MHz	QPSK	1 RB / 0 RB Offset
		37825 to 38175	38000	15MHz	QPSK	1 RB / 0 RB Offset
		37850 to 38150	38000	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 41 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	39675 to 41565	39675, 40620, 41565	5MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	39700 to 41540	39700, 40620, 41540	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	39675 to 41565	39675, 40620, 41565	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20MHz	QPSK, 16QAM	100 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	39750 to 41490	39750, 40620, 41490	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset
A	BAND EDGE	39675 to 41565	39675	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			41565	5MHz	QPSK, 16QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		39700 to 41540	39700	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset

			41540	10MHz	QPSK, 16QAM	1 RB / 49 RB Offset
						50 RB / 0 RB Offset
		39725 to 41515	39725	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
						75 RB / 0 RB Offset
			41515	15MHz	QPSK, 16QAM	1 RB / 74 RB Offset
						75 RB / 0 RB Offset
		39750 to 41490	39750	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
						100 RB / 0 RB Offset
A	CONDUCTED EMISSION	39675 to 41565	39675, 40620, 41565	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	39675 to 41565	39675, 40620, 41565	5MHz	QPSK	1 RB / 0 RB Offset
		39700 to 41540	40620	10MHz	QPSK	1 RB / 0 RB Offset
		39725 to 41515	40620	15MHz	QPSK	1 RB / 0 RB Offset
		39750 to 41490	40620	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE band 42

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	42115 to 43065	42115 (3452.5MHz), 42590 (3500.0MHz), 43065 (3547.5MHz)	5MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		42140 to 43040	42140 (3455.0MHz), 42590 (3500.0MHz), 43040 (3545.0MHz)	10MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		42165 to 43015	42165 (3457.5MHz), 42590 (3500.0MHz), 43015 (3542.5MHz)	15MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		42190 to 42990	42190 (3460.0MHz), 42590 (3500.0MHz), 42990 (3540.0MHz)	20MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	42140 to 43040	42140 (3455.0MHz), 42590 (3500.0MHz), 43040 (3545.0MHz)	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	42115 to 43065	42115 (3452.5MHz), 42590 (3500.0MHz), 43065 (3547.5MHz)	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		42140 to 43040	42140 (3455.0MHz), 42590 (3500.0MHz), 43040 (3545.0MHz)	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		42165 to 43015	42165 (3457.5MHz), 42590 (3500.0MHz), 43015 (3542.5MHz)	15MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		42190 to 42990	42190 (3460.0MHz), 42590 (3500.0MHz), 42990 (3540.0MHz)	20MHz	QPSK, 16QAM	100 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	42190 to 42990	42190 (3460.0MHz), 42590 (3500.0MHz), 42990 (3540.0MHz)	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset
A	BAND EDGE	42115 to 43065	42115	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			43065	5MHz	QPSK, 16QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
			42140	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			43040	10MHz	QPSK, 16QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset
		42165 to 43015	42165	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset
			43015	15MHz	QPSK, 16QAM	1 RB / 74 RB Offset 75 RB / 0 RB Offset
		42140 to 43040	42140	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			43040	10MHz	QPSK, 16QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset
			42165	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset
			43015	15MHz	QPSK, 16QAM	1 RB / 74 RB Offset 75 RB / 0 RB Offset

		42190 to 42990	42190	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
						100 RB / 0 RB Offset
		42990	42990	20MHz	QPSK, 16QAM	1 RB / 99 RB Offset
						100 RB / 0 RB Offset
A	CONDUCTED EMISSION	42115 to 43065	42115 (3452.5MHz), 42590 (3500.0MHz), 43065 (3547.5MHz)	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		42140 to 43040	42140 (3455.0MHz), 42590 (3500.0MHz), 43040 (3545.0MHz)	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		42165 to 43015	42165 (3457.50MHz), 42590 (3500.0MHz), 43015 (3542.5MHz)	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		42190 to 42990	42190 (3460.0MHz), 42590 (3500.0MHz), 42990 (3540.0MHz)	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	42115 to 43065	42590 (3500.0MHz),	5MHz	QPSK	1 RB / 0 RB Offset
		42140 to 43040	42590 (3500.0MHz),	10MHz	QPSK	1 RB / 0 RB Offset
		42165 to 43015	42590 (3500.0MHz),	15MHz	QPSK	1 RB / 0 RB Offset
		42190 to 42990	42190 (3460.0MHz), 42590 (3500.0MHz), 42990 (3540.0MHz)	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 66 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	131979 to 132665	131979, 132322, 132665	1.4MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		131987 to 132657	131987, 132322, 132657	3MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		131997 to 132647	131997, 132322, 132647	5MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		132022 to 132622	132022, 132322, 132622	10MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		132047 to 132597	132047, 132322, 132597	15MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
		132072 to 132572	132072, 132322, 132572	20MHz	QPSK, 16QAM, 64QAM, 256QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	132022 to 132622	132022, 132322, 132622	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	131979 to 132665	131979, 132322, 132665	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		131987 to 132657	131987, 132322, 132657	3MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		131997 to 132647	131997, 132322, 132647	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		132022 to 132622	132022, 132322, 132622	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		132047 to 132597	132047, 132322, 132597	15MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		132072 to 132572	132072, 132322, 132572	20MHz	QPSK, 16QAM	100 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	132072 to 132572	132072, 132572	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset
A	BAND EDGE	131979 to 132322	131979	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			132322	1.4MHz	QPSK, 16QAM	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		131987 to 132657	131987	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset 15 RB / 0 RB Offset
			132657	3MHz	QPSK, 16QAM	1 RB / 14 RB Offset 15 RB / 0 RB Offset
		131997 to 132647	131997	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			132647	5MHz	QPSK, 16QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		132022 to	132022	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset

		132622				50 RB / 0 RB Offset
			132622	10MHz	QPSK, 16QAM	1 RB / 49 RB Offset
		132047 to 132597	132047	15MHz	QPSK, 16QAM	50 RB / 0 RB Offset
						1 RB / 0 RB Offset
			132597	15MHz	QPSK, 16QAM	75 RB / 0 RB Offset
						1 RB / 74 RB Offset
		132072 to 132572	132072	20MHz	QPSK, 16QAM	75 RB / 0 RB Offset
						1 RB / 0 RB Offset
A	CONDUCTED EMISSION	131979 to 132665	131979, 132322, 132665	1.4MHz	QPSK, 16QAM	100 RB / 0 RB Offset
		131987 to 132657	131987, 132322, 132657	3MHz	QPSK, 16QAM	1 RB / 99 RB Offset
		131997 to 132647	131997, 132322, 132647	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		132022 to 132622	132022, 132322, 132622	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		132047 to 132597	132047, 132322, 132597	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		132072 to 132572	132072, 132322, 132572	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	131979 to 132665	132322	1.4MHz	QPSK	1 RB / 0 RB Offset
		131987 to 132657	132322	3MHz	QPSK	1 RB / 0 RB Offset
		131997 to 132647	132322	5MHz	QPSK	1 RB / 0 RB Offset
		132022 to 132622	132022, 132322, 132622	10MHz	QPSK	1 RB / 0 RB Offset
		132047 to 132597	132322	15MHz	QPSK	1 RB / 0 RB Offset
		132072 to 132572	132322	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: W7L-P23120020RF04

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP&EIRP	23deg. C, 70%RH	DC 5.0Vdc by Adapter	Jace Hu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 3.5V/ 3.87V/ 4.45V By Battery	James Fu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC 5.0Vdc by Adapter	James Fu
BAND EDGE	23deg. C, 70%RH	DC 5.0Vdc by Adapter	James Fu
CONDUCTED EMISSION	23deg. C, 70%RH	DC 5.0Vdc by Adapter	James Fu
RADIATED EMISSION	23deg. C, 70%RH	DC 5.0Vdc by Adapter	Jace Hu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC 5.0Vdc by Adapter	James Fu



Test Report No.: W7L-P23120020RF04

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP

According to the specific rule Part 27.50 (k)(3) Mobile devices are limited to 1Watt (30 dBm) EIRP, Mobile devices operating inl these bands must employ a means for limiting power to the minimum necessary for successful communications

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determing the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:

- The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

MAIN ANT

LTE Band 4(ANT0)

Band/BW	Modulation	RB Size	RB Offset	Low CH 19957	Mid CH 20175	High CH 20393
				Frequency 1710.7 MHz	Frequency 1732.5 MHz	Frequency 1754.3 MHz
4/ 1.4	QPSK	1	0	22.52	22.35	22.44
		1	2	22.34	22.41	22.35
		1	5	22.26	22.31	22.33
		3	0	22.10	22.14	22.11
		3	1	22.34	22.13	22.19
		3	3	22.29	22.30	22.25
		6	0	21.41	21.41	21.46
	16QAM	1	0	21.61	21.53	21.60
		1	2	21.51	21.42	21.30
		1	5	21.57	21.38	21.45
		3	0	21.32	21.49	21.31
		3	1	21.45	21.55	21.49
		3	3	21.49	21.42	21.43
		6	0	20.49	20.38	20.44
	64QAM	1	0	20.48	20.52	20.52
		1	2	20.40	20.45	20.47
		1	5	20.61	20.34	20.55
		3	0	20.54	20.48	20.42
		3	1	20.46	20.46	20.38
		3	3	20.47	20.29	20.37
		6	0	19.46	19.56	19.46
	256QAM	1	0	17.52	17.51	17.43
		1	2	17.43	17.44	17.44
		1	5	17.61	17.43	17.50
		3	0	17.40	17.33	17.48
		3	1	17.28	17.25	17.28
		3	3	17.34	17.25	17.31
		6	0	17.49	17.40	17.33

Band/BW	Modulation	RB Size	RB Offset	Low CH 19965	Mid CH 20175	High CH 20385
				Frequency 1711.5 MHz	Frequency 1732.5 MHz	Frequency 1753.5 MHz
4/ 3	QPSK	1	0	22.56	22.46	22.37
		1	7	22.35	22.40	22.41
		1	14	22.31	22.35	22.30
		8	0	21.33	21.34	21.31
		8	3	21.45	21.32	21.49
		8	7	21.43	21.38	21.34
		15	0	21.34	21.40	21.45
	16QAM	1	0	21.69	21.48	21.60
		1	7	21.45	21.34	21.36
		1	14	21.56	21.49	21.52
		8	0	20.38	20.36	20.30
		8	3	20.54	20.42	20.44
		8	7	20.44	20.43	20.44
		15	0	20.46	20.38	20.46
	64QAM	1	0	20.57	20.53	20.58
		1	7	20.42	20.49	20.51
		1	14	20.63	20.39	20.51
		8	0	19.43	19.35	19.48
		8	3	19.50	19.33	19.39
		8	7	19.39	19.29	19.43
		15	0	19.43	19.55	19.34
	256QAM	1	0	17.43	17.53	17.55
		1	7	17.31	17.38	17.46
		1	14	17.61	17.44	17.54
		8	0	17.32	17.34	17.44
		8	3	17.35	17.31	17.29
		8	7	17.43	17.28	17.34
		15	0	17.42	17.49	17.34

Band/BW	Modulation	RB Size	RB Offset	Low CH 19975	Mid CH 20175	High CH 20375
				Frequency 1712.5 MHz	Frequency 1732.5 MHz	Frequency 1752.5 MHz
4/ 5	QPSK	1	0	22.54	22.33	22.47
		1	12	22.24	22.31	22.39
		1	24	22.24	22.41	22.35
		12	0	21.39	21.23	21.38
		12	6	21.54	21.42	21.42
		12	13	21.51	21.40	21.46
		25	0	21.37	21.45	21.36
	16QAM	1	0	21.63	21.51	21.59
		1	12	21.47	21.34	21.40
		1	24	21.49	21.45	21.48
		12	0	20.39	20.44	20.32
		12	6	20.50	20.42	20.53
		12	13	20.53	20.50	20.30
		25	0	20.41	20.35	20.51
	64QAM	1	0	20.51	20.50	20.59
		1	12	20.42	20.43	20.42
		1	24	20.63	20.39	20.59
		12	0	19.51	19.44	19.37
		12	6	19.50	19.45	19.38
		12	13	19.48	19.31	19.36
		25	0	19.55	19.52	19.43
	256QAM	1	0	17.48	17.53	17.52
		1	12	17.43	17.44	17.51
		1	24	17.61	17.45	17.46
		12	0	17.34	17.36	17.50
		12	6	17.34	17.29	17.31
		12	13	17.43	17.23	17.30
		25	0	17.54	17.45	17.41

Band/BW	Modulation	RB Size	RB Offset	Low CH 20000	Mid CH 20175	High CH 20350
				Frequency 1715 MHz	Frequency 1732.5 MHz	Frequency 1750 MHz
4/ 10	QPSK	1	0	22.51	22.43	22.35
		1	24	22.30	22.33	22.31
		1	49	22.20	22.41	22.29
		25	0	21.40	21.23	21.35
		25	12	21.44	21.34	21.38
		25	25	21.48	21.39	21.32
		50	0	21.42	21.46	21.40
	16QAM	1	0	21.59	21.48	21.64
		1	24	21.51	21.42	21.31
		1	49	21.46	21.43	21.46
		25	0	20.43	20.37	20.38
		25	12	20.41	20.43	20.48
		25	25	20.50	20.49	20.33
		50	0	20.46	20.40	20.44
	64QAM	1	0	20.49	20.50	20.53
		1	24	20.43	20.37	20.44
		1	49	20.56	20.35	20.49
		25	0	19.54	19.42	19.44
		25	12	19.41	19.38	19.42
		25	25	19.39	19.39	19.40
		50	0	19.55	19.53	19.36
	256QAM	1	0	17.55	17.59	17.50
		1	24	17.31	17.42	17.45
		1	49	17.61	17.34	17.57
		25	0	17.38	17.31	17.50
		25	12	17.38	17.32	17.33
		25	25	17.43	17.17	17.37
		50	0	17.54	17.43	17.28

Band/BW	Modulation	RB Size	RB Offset	Low CH 20025	Mid CH 20175	High CH 20325
				Frequency 1717.5 MHz	Frequency 1732.5 MHz	Frequency 1747.5 MHz
4/ 15	QPSK	1	0	22.42	22.44	22.36
		1	37	22.37	22.34	22.31
		1	74	22.22	22.41	22.33
		36	0	21.43	21.25	21.34
		36	19	21.48	21.35	21.46
		36	39	21.40	21.44	21.35
		75	0	21.44	21.42	21.37
	16QAM	1	0	21.69	21.50	21.60
		1	37	21.43	21.43	21.41
		1	74	21.49	21.51	21.43
		36	0	20.42	20.39	20.39
		36	19	20.51	20.42	20.48
		36	39	20.47	20.37	20.34
		75	0	20.50	20.49	20.46
	64QAM	1	0	20.54	20.59	20.58
		1	37	20.44	20.42	20.41
		1	74	20.63	20.34	20.59
		36	0	19.50	19.44	19.38
		36	19	19.42	19.39	19.36
		36	39	19.41	19.39	19.36
		75	0	19.52	19.46	19.42
	256QAM	1	0	17.50	17.49	17.52
		1	37	17.41	17.43	17.46
		1	74	17.54	17.33	17.58
		36	0	17.40	17.34	17.40
		36	19	17.28	17.25	17.28
		36	39	17.41	17.18	17.23
		75	0	17.49	17.53	17.42

Band/BW	Modulation	RB Size	RB Offset	Low CH 20050	Mid CH 20175	High CH 20300
				Frequency 1720 MHz	Frequency 1732.5 MHz	Frequency 1745 MHz
4/ 20	QPSK	1	0	22.57	22.47	22.50
		1	50	22.39	22.42	22.45
		1	99	22.35	22.44	22.37
		50	0	21.45	21.35	21.43
		50	25	21.58	21.47	21.53
		50	50	21.52	21.52	21.47
		100	0	21.49	21.54	21.51
	16QAM	1	0	21.70	21.60	21.73
		1	50	21.55	21.46	21.43
		1	99	21.61	21.52	21.55
		50	0	20.45	20.50	20.42
		50	25	20.55	20.57	20.58
		50	50	20.57	20.51	20.45
		100	0	20.51	20.50	20.54
	64QAM	1	0	20.62	20.61	20.61
		1	50	20.52	20.50	20.54
		1	99	20.65	20.48	20.63
		50	0	19.57	19.50	19.52
		50	25	19.51	19.47	19.43
		50	50	19.53	19.44	19.51
		100	0	19.58	19.58	19.47
	256QAM	1	0	17.58	17.60	17.56
		1	50	17.45	17.46	17.53
		1	99	17.62	17.46	17.60
		50	0	17.42	17.37	17.51
		50	25	17.42	17.33	17.37
		50	50	17.44	17.32	17.38
		100	0	17.55	17.54	17.43

LTE Band 38(ANT6)

Band/BW	Modulation	RB Size	RB Offset	Low CH 37775	Mid CH 38000	High CH 38225
				Frequency 2572.5 MHz	Frequency 2595 MHz	Frequency 2617.5MHz
38/ 5	QPSK	1	0	22.46	22.52	22.66
		1	12	22.47	22.50	22.68
		1	24	22.43	22.53	22.63
		12	0	21.38	21.52	21.64
		12	6	21.48	21.57	21.66
		12	13	21.65	21.52	21.69
		25	0	21.62	21.65	21.78
	16QAM	1	0	21.51	21.42	21.52
		1	12	21.44	21.59	21.61
		1	24	21.45	21.55	21.60
		12	0	20.46	20.65	20.54
		12	6	20.59	20.66	20.63
		12	13	20.50	20.60	20.71
		25	0	20.57	20.64	20.64
	64QAM	1	0	20.54	20.60	20.48
		1	12	20.58	20.67	20.75
		1	24	20.58	20.66	20.72
		12	0	19.45	19.44	19.61
		12	6	19.53	19.65	19.67
		12	13	19.63	19.70	19.65
		25	0	19.51	19.78	19.82
	256QAM	1	0	17.41	17.54	17.61
		1	12	17.60	17.69	17.67
		1	24	17.49	17.38	17.39
		12	0	17.45	17.48	17.66
		12	6	17.49	17.61	17.77
		12	13	17.59	17.75	17.76
		25	0	17.54	17.73	17.63

Band/BW	Modulation	RB Size	RB Offset	Low CH 37800	Mid CH 38000	High CH 38200
				Frequency 2575 MHz	Frequency 2595 MHz	Frequency 2615 MHz
38/ 10	QPSK	1	0	22.44	22.51	22.66
		1	24	22.50	22.50	22.64
		1	49	22.48	22.49	22.60
		25	0	21.43	21.58	21.67
		25	12	21.57	21.55	21.69
		25	25	21.66	21.52	21.65
		50	0	21.55	21.64	21.75
	16QAM	1	0	21.53	21.49	21.56
		1	24	21.52	21.55	21.59
		1	49	21.53	21.65	21.59
		25	0	20.53	20.61	20.59
		25	12	20.60	20.63	20.71
		25	25	20.54	20.62	20.72
		50	0	20.47	20.67	20.59
	64QAM	1	0	20.45	20.54	20.59
		1	24	20.54	20.63	20.64
		1	49	20.49	20.63	20.71
		25	0	19.45	19.54	19.67
		25	12	19.64	19.59	19.70
		25	25	19.65	19.70	19.64
		50	0	19.59	19.70	19.74
	256QAM	1	0	17.42	17.47	17.61
		1	24	17.67	17.61	17.66
		1	49	17.48	17.37	17.35
		25	0	17.36	17.57	17.55
		25	12	17.44	17.52	17.70
		25	25	17.65	17.74	17.80
		50	0	17.54	17.69	17.63

Band/BW	Modulation	RB Size	RB Offset	Low CH 37825	Mid CH 38000	High CH 38175
				Frequency 2577.5 MHz	Frequency 2595 MHz	Frequency 2612.5MHz
38/ 15	QPSK	1	0	22.35	22.44	22.58
		1	37	22.58	22.61	22.77
		1	74	22.48	22.51	22.57
		36	0	21.39	21.49	21.69
		36	19	21.50	21.59	21.72
		36	39	21.62	21.59	21.70
		75	0	21.56	21.74	21.76
	16QAM	1	0	21.51	21.49	21.52
		1	37	21.51	21.50	21.68
		1	74	21.44	21.68	21.65
		36	0	20.48	20.63	20.48
		36	19	20.65	20.56	20.71
		36	39	20.53	20.63	20.65
		75	0	20.56	20.60	20.62
	64QAM	1	0	20.46	20.49	20.52
		1	37	20.56	20.64	20.66
		1	74	20.48	20.58	20.65
		36	0	19.45	19.46	19.54
		36	19	19.52	19.70	19.72
		36	39	19.65	19.69	19.76
		75	0	19.58	19.67	19.72
	256QAM	1	0	17.54	17.58	17.56
		1	37	17.56	17.64	17.68
		1	74	17.52	17.41	17.41
		36	0	17.42	17.46	17.55
		36	19	17.50	17.63	17.76
		36	39	17.60	17.72	17.85
		75	0	17.54	17.75	17.55

Band/BW	Modulation	RB Size	RB Offset	Low CH 37850	Mid CH 38000	High CH 38150
				Frequency 2580 MHz	Frequency 2595 MHz	Frequency 2610 MHz
38/ 20	QPSK	1	0	22.49	22.59	22.72
		1	50	22.62	22.64	22.79
		1	99	22.54	22.61	22.65
		50	0	21.53	21.60	21.70
		50	25	21.62	21.65	21.76
		50	50	21.69	21.67	21.80
		100	0	21.70	21.77	21.79
	16QAM	1	0	21.57	21.56	21.63
		1	50	21.59	21.64	21.70
		1	99	21.56	21.70	21.73
		50	0	20.54	20.66	20.63
		50	25	20.68	20.69	20.72
		50	50	20.64	20.72	20.74
		100	0	20.61	20.72	20.70
	64QAM	1	0	20.58	20.62	20.62
		1	50	20.63	20.73	20.77
		1	99	20.61	20.68	20.74
		50	0	19.57	19.59	19.69
		50	25	19.67	19.71	19.77
		50	50	19.71	19.79	19.79
		100	0	19.65	19.80	19.83
	256QAM	1	0	17.55	17.60	17.65
		1	50	17.68	17.70	17.77
		1	99	17.55	17.50	17.48
		50	0	17.46	17.61	17.68
		50	25	17.59	17.65	17.81
		50	50	17.67	17.81	17.90
		100	0	17.57	17.80	17.70

LTE Band 41(ANT10)

Band/BW	Modulation	RB Size	RB Offset	Low CH (39675)	Mid CH (40620)	High CH (41565)
				Frequency (2498.5)MHz	Frequency (2593)MHz	Frequency (2687.5)MHz
41/ 5	QPSK	1	0	22.90	23.18	23.27
		1	12	22.92	23.01	23.04
		1	24	22.94	23.15	23.18
		12	0	22.04	22.08	22.10
		12	6	21.89	22.14	22.14
		12	13	22.00	22.07	22.12
		25	0	21.87	22.06	22.12
	16QAM	1	0	22.11	22.14	22.24
		1	12	21.94	22.18	22.25
		1	24	21.96	22.15	22.22
		12	0	20.87	21.19	21.19
		12	6	21.04	21.05	21.22
		12	13	20.92	21.03	21.09
		25	0	21.10	21.06	21.24
	64QAM	1	0	20.83	21.00	21.09
		1	12	20.91	20.96	21.13
		1	24	21.12	21.17	21.24
		12	0	20.02	20.00	20.04
		12	6	20.08	20.14	20.11
		12	13	19.94	20.09	20.23
		25	0	20.12	20.14	20.19
	256QAM	1	0	17.92	18.03	18.02
		1	12	17.90	17.97	18.03
		1	24	18.16	18.16	18.30
		12	0	18.05	18.09	18.07
		12	6	18.01	18.17	18.09
		12	13	17.91	18.05	18.17
		25	0	17.99	18.17	18.15

Band/BW	Modulation	RB Size	RB Offset	Low CH (39700)	Mid CH (40620)	High CH (41540)
				Frequency (2501)MHz	Frequency (2593)MHz	Frequency (2685)MHz
41/ 10	QPSK	1	0	22.91	23.11	23.18
		1	24	23.00	22.98	23.03
		1	49	23.05	23.17	23.16
		25	0	21.99	21.96	22.14
		25	12	21.96	22.12	22.01
		25	25	21.91	22.09	22.13
		50	0	21.94	22.09	22.25
	16QAM	1	0	22.00	22.13	22.25
		1	24	21.92	22.14	22.13
		1	49	21.96	22.18	22.28
		25	0	20.88	21.10	21.19
		25	12	20.99	21.14	21.18
		25	25	20.95	21.02	21.10
		50	0	21.10	21.10	21.21
	64QAM	1	0	20.93	20.99	21.02
		1	24	20.82	21.01	21.11
		1	49	21.13	21.24	21.19
		25	0	20.01	19.99	20.05
		25	12	20.08	20.14	20.18
		25	25	19.91	20.15	20.16
		50	0	20.10	20.08	20.18
	256QAM	1	0	17.91	17.95	18.13
		1	24	17.94	18.01	18.15
		1	49	18.17	18.22	18.30
		25	0	18.04	17.97	17.98
		25	12	18.09	18.27	18.19
		25	25	17.89	18.08	18.19
		50	0	18.00	18.07	18.20

Band/BW	Modulation	RB Size	RB Offset	Low CH (39725)	Mid CH (40620)	High CH (41515)
				Frequency (2503.5)MHz	Frequency (2593)MHz	Frequency (2682.5)MHz
41/ 15	QPSK	1	0	22.90	23.13	23.18
		1	37	22.93	22.92	23.08
		1	74	22.96	23.13	23.26
		36	0	22.03	22.04	22.09
		36	19	21.91	22.06	22.05
		36	39	21.96	22.04	22.08
		75	0	21.87	22.06	22.16
	16QAM	1	0	22.00	22.12	22.20
		1	37	22.06	22.11	22.22
		1	74	22.09	22.19	22.25
		36	0	20.95	21.11	21.14
		36	19	20.96	21.05	21.25
		36	39	20.88	21.01	21.11
		75	0	21.07	21.06	21.19
	64QAM	1	0	20.80	21.04	21.01
		1	37	20.87	20.93	21.08
		1	74	21.13	21.29	21.21
		36	0	19.91	19.98	20.06
		36	19	20.06	20.14	20.09
		36	39	19.96	20.05	20.12
		75	0	20.07	20.17	20.10
	256QAM	1	0	17.84	17.91	18.14
		1	37	17.89	17.93	18.14
		1	74	18.16	18.16	18.22
		36	0	18.05	18.00	17.98
		36	19	18.10	18.22	18.10
		36	39	17.88	18.06	18.13
		75	0	18.05	18.17	18.12

Band/BW	Modulation	RB Size	RB Offset	Low CH (39750)	Mid CH (40620)	High CH (41490)
				Frequency (2506)MHz	Frequency (2593)MHz	Frequency (2680)MHz
41/ 20	QPSK	1	0	23.06	23.26	23.30
		1	50	23.02	23.05	23.12
		1	99	23.06	23.22	23.29
		50	0	22.06	22.19	22.24
		50	25	21.99	22.10	22.15
		50	50	22.01	22.15	22.21
		100	0	22.01	22.10	22.26
	16QAM	1	0	22.12	22.22	22.26
		1	50	22.07	22.25	22.28
		1	99	22.11	22.24	22.31
		50	0	20.99	21.21	21.24
		50	25	21.10	21.20	21.28
		50	50	21.00	21.11	21.20
		100	0	21.13	21.19	21.29
	64QAM	1	0	20.94	21.06	21.15
		1	50	20.97	21.04	21.18
		1	99	21.22	21.30	21.33
		50	0	20.06	20.11	20.13
		50	25	20.14	20.29	20.20
		50	50	20.00	20.17	20.24
		100	0	20.14	20.19	20.23
	256QAM	1	0	17.94	18.06	18.15
		1	50	17.97	18.04	18.18
		1	99	18.22	18.30	18.33
		50	0	18.06	18.11	18.13
		50	25	18.14	18.29	18.20
		50	50	18.00	18.17	18.24
		100	0	18.14	18.19	18.23

LTE band 42(ANT11)

Band/BW	Modulation	RB Size	RB Offset	Low CH (42115)	Mid CH (42590)	High CH (43065)
				Frequency (3452.5)MHz	Frequency (3500)MHz	Frequency (3547.5)MHz
42/ 5	QPSK	1	0	22.96	23.10	23.09
		1	12	22.87	23.03	22.95
		1	24	22.71	22.94	22.93
		12	0	21.95	22.11	22.05
		12	6	21.79	22.17	22.06
		12	13	21.87	22.20	21.95
		25	0	21.86	22.06	21.97
	16QAM	1	0	21.85	22.11	21.97
		1	12	21.87	22.01	21.94
		1	24	21.63	21.85	21.83
		12	0	20.89	21.14	20.91
		12	6	20.84	21.10	20.92
		12	13	20.85	21.05	21.00
		25	0	20.94	21.07	20.96
	64QAM	1	0	20.97	21.23	21.06
		1	12	20.94	21.14	21.11
		1	24	20.73	20.94	20.79
		12	0	20.01	20.03	20.09
		12	6	19.89	19.96	20.03
		12	13	19.84	20.12	19.89
		25	0	19.89	20.02	20.05
	256QAM	1	0	17.98	18.10	17.89
		1	12	17.87	18.09	17.97
		1	24	17.67	17.87	17.61
		12	0	17.82	18.10	17.83
		12	6	17.77	17.93	17.95
		12	13	17.75	18.04	17.85
		25	0	17.78	17.97	17.90

Band/BW	Modulation	RB Size	RB Offset	Low CH (42140)	Mid CH (42590)	High CH (43040)
				Frequency (3455)MHz	Frequency (3500)MHz	Frequency (3545)MHz
42/ 10	QPSK	1	0	22.94	23.20	23.13
		1	24	22.81	23.05	23.04
		1	49	22.73	22.89	22.90
		25	0	22.01	22.09	22.08
		25	12	21.88	22.15	21.95
		25	25	21.88	22.15	21.93
		50	0	21.78	21.98	21.98
	16QAM	1	0	21.78	22.10	22.01
		1	24	21.81	22.09	21.95
		1	49	21.66	21.95	21.94
		25	0	21.01	21.20	20.97
		25	12	20.78	21.16	20.92
		25	25	20.78	21.03	20.96
		50	0	20.98	21.14	20.92
	64QAM	1	0	20.95	21.13	21.04
		1	24	20.93	21.13	21.17
		1	49	20.75	20.94	20.81
		25	0	19.98	20.05	20.08
		25	12	19.89	20.09	19.98
		25	25	19.85	20.12	20.01
		50	0	19.88	20.12	20.12
	256QAM	1	0	17.89	18.14	17.90
		1	24	17.97	18.08	17.95
		1	49	17.68	17.90	17.56
		25	0	17.92	18.12	17.89
		25	12	17.64	17.96	17.89
		25	25	17.79	18.09	17.84
		50	0	17.86	17.97	17.95

Band/BW	Modulation	RB Size	RB Offset	Low CH (42165)	Mid CH (42590)	High CH (43015)
				Frequency (3457.5)MHz	Frequency (3500)MHz	Frequency (3542.5)MHz
42/ 15	QPSK	1	0	22.92	23.22	23.15
		1	37	22.80	23.04	22.98
		1	74	22.66	22.91	22.89
		36	0	21.91	22.13	22.12
		36	19	21.81	22.21	22.09
		36	39	21.88	22.21	21.92
		75	0	21.84	21.96	21.99
	16QAM	1	0	21.73	22.11	21.95
		1	37	21.80	22.13	21.93
		1	74	21.65	21.97	21.81
		36	0	20.90	21.14	21.01
		36	19	20.81	21.16	20.94
		36	39	20.81	21.07	21.00
		75	0	20.99	21.15	20.96
	64QAM	1	0	20.98	21.21	20.95
		1	37	20.95	21.18	21.03
		1	74	20.75	20.89	20.85
		36	0	20.02	20.15	20.09
		36	19	19.79	19.99	19.96
		36	39	19.88	20.06	19.96
		75	0	19.94	20.04	20.01
	256QAM	1	0	17.92	18.17	17.93
		1	37	17.89	18.12	17.98
		1	74	17.63	17.88	17.63
		36	0	17.93	18.03	17.81
		36	19	17.64	17.89	17.92
		36	39	17.71	18.07	17.76
		75	0	17.86	18.08	17.83

Band/BW	Modulation	RB Size	RB Offset	Low CH (42190)	Mid CH (42590)	High CH (42990)
				Frequency (3460)MHz	Frequency (3500)MHz	Frequency (3540)MHz
42/ 20	QPSK	1	0	23.05	23.23	23.17
		1	50	22.94	23.16	23.07
		1	99	22.79	23.03	22.99
		50	0	22.02	22.25	22.17
		50	25	21.89	22.22	22.10
		50	50	21.91	22.17	22.04
		100	0	21.87	22.10	22.06
	16QAM	1	0	21.88	22.15	22.04
		1	50	21.92	22.16	21.97
		1	99	21.72	21.99	21.96
		50	0	21.02	21.22	21.05
		50	25	20.88	21.19	21.05
		50	50	20.90	21.18	21.09
		100	0	21.00	21.18	20.99
	64QAM	1	0	21.09	21.24	21.08
		1	50	21.04	21.28	21.18
		1	99	20.82	21.04	20.86
		50	0	20.03	20.18	20.10
		50	25	19.94	20.10	20.11
		50	50	19.91	20.15	20.02
		100	0	20.02	20.14	20.13
	256QAM	1	0	17.99	18.19	17.99
		1	50	18.00	18.19	18.04
		1	99	17.77	18.00	17.71
		50	0	17.95	18.13	17.95
		50	25	17.79	17.97	18.04
		50	50	17.86	18.10	17.88
		100	0	17.93	18.09	17.98

LTE Band 66(ANT0)

Band/BW	Modulation	RB Size	RB Offset	Low CH 131979	Mid CH 132322	High CH 132665
				Frequency 1710.7MHz	Frequency 1745MHz	Frequency 1779.3MHz
66/ 1.4	QPSK	1	0	22.31	22.41	22.46
		1	2	22.43	22.38	22.27
		1	5	22.39	22.32	22.35
		3	0	22.06	22.15	22.02
		3	1	22.24	22.20	22.15
		3	3	22.14	22.33	22.09
		6	0	21.32	21.45	21.25
	16QAM	1	0	21.62	21.67	21.47
		1	2	21.55	21.50	21.33
		1	5	21.61	21.63	21.50
		3	0	21.46	21.31	21.30
		3	1	21.31	21.38	21.34
		3	3	21.36	21.37	21.35
		6	0	20.34	20.45	20.39
	64QAM	1	0	20.51	20.51	20.34
		1	2	20.46	20.48	20.59
		1	5	20.43	20.35	20.31
		3	0	20.45	20.36	20.29
		3	1	20.38	20.46	20.36
		3	3	20.53	20.36	20.46
		6	0	19.35	19.48	19.35
	256QAM	1	0	17.48	17.47	17.43
		1	2	17.48	17.36	17.52
		1	5	17.32	17.22	17.24
		3	0	17.41	17.30	17.22
		3	1	17.36	17.27	17.22
		3	3	17.38	17.25	17.45
		6	0	17.32	17.42	17.12

Band/BW	Modulation	RB Size	RB Offset	Low CH 131987	Mid CH 132322	High CH 132657
				Frequency 1711.5MHz	Frequency 1745MHz	Frequency 1778.5MHz
66/ 3	QPSK	1	0	22.34	22.51	22.35
		1	7	22.45	22.42	22.32
		1	14	22.33	22.30	22.25
		8	0	21.29	21.38	21.36
		8	3	21.39	21.38	21.25
		8	7	21.39	21.40	21.26
		15	0	21.34	21.40	21.36
	16QAM	1	0	21.64	21.61	21.52
		1	7	21.48	21.56	21.41
		1	14	21.60	21.64	21.50
		8	0	20.44	20.35	20.27
		8	3	20.38	20.45	20.29
		8	7	20.49	20.39	20.36
		15	0	20.28	20.42	20.29
	64QAM	1	0	20.41	20.55	20.40
		1	7	20.52	20.53	20.52
		1	14	20.37	20.33	20.26
		8	0	19.36	19.35	19.40
		8	3	19.43	19.48	19.33
		8	7	19.48	19.35	19.47
		15	0	19.34	19.47	19.37
	256QAM	1	0	17.45	17.43	17.43
		1	7	17.46	17.36	17.47
		1	14	17.46	17.31	17.19
		8	0	17.29	17.32	17.19
		8	3	17.38	17.34	17.18
		8	7	17.47	17.25	17.33
		15	0	17.45	17.55	17.18

Band/BW	Modulation	RB Size	RB Offset	Low CH 131997	Mid CH 132322	High CH 132647
				Frequency 1712.5MHz	Frequency 1745MHz	Frequency 1777.5MHz
66/ 5	QPSK	1	0	22.42	22.40	22.36
		1	12	22.43	22.46	22.26
		1	24	22.42	22.37	22.31
		12	0	21.33	21.37	21.28
		12	6	21.41	21.43	21.26
		12	13	21.28	21.52	21.26
		25	0	21.35	21.42	21.27
	16QAM	1	0	21.59	21.61	21.44
		1	12	21.58	21.52	21.43
		1	24	21.65	21.55	21.44
		12	0	20.43	20.45	20.29
		12	6	20.38	20.42	20.39
		12	13	20.36	20.37	20.37
		25	0	20.36	20.35	20.39
	64QAM	1	0	20.49	20.55	20.37
		1	12	20.46	20.43	20.55
		1	24	20.43	20.26	20.24
		12	0	19.40	19.39	19.39
		12	6	19.34	19.46	19.35
		12	13	19.48	19.38	19.46
		25	0	19.35	19.48	19.37
	256QAM	1	0	17.48	17.52	17.42
		1	12	17.54	17.43	17.46
		1	24	17.42	17.23	17.21
		12	0	17.41	17.32	17.17
		12	6	17.29	17.29	17.27
		12	13	17.46	17.24	17.33
		25	0	17.43	17.53	17.26

Band/BW	Modulation	RB Size	RB Offset	Low CH 132022	Mid CH 132322	High CH 132622
				Frequency 1715MHz	Frequency 1745MHz	Frequency 1775MHz
66/ 10	QPSK	1	0	22.28	22.41	22.32
		1	24	22.39	22.39	22.30
		1	49	22.39	22.31	22.32
		25	0	21.40	21.32	21.34
		25	12	21.38	21.36	21.35
		25	25	21.40	21.40	21.38
		50	0	21.38	21.46	21.31
	16QAM	1	0	21.64	21.68	21.44
		1	24	21.44	21.45	21.31
		1	49	21.68	21.60	21.47
		25	0	20.41	20.32	20.28
		25	12	20.31	20.40	20.35
		25	25	20.39	20.45	20.29
		50	0	20.35	20.47	20.36
	64QAM	1	0	20.46	20.54	20.42
		1	24	20.48	20.52	20.60
		1	49	20.45	20.32	20.23
		25	0	19.35	19.33	19.30
		25	12	19.30	19.50	19.37
		25	25	19.49	19.32	19.33
		50	0	19.47	19.51	19.30
	256QAM	1	0	17.37	17.41	17.33
		1	24	17.55	17.46	17.53
		1	49	17.35	17.22	17.14
		25	0	17.28	17.31	17.16
		25	12	17.33	17.30	17.21
		25	25	17.42	17.33	17.34
		50	0	17.32	17.46	17.15

Band/BW	Modulation	RB Size	RB Offset	Low CH 132047	Mid CH 132322	High CH 132597
				Frequency 1717.5 MHz	Frequency 1745MHz	Frequency 1772.5 MHz
66/ 15	QPSK	1	0	22.33	22.49	22.39
		1	37	22.45	22.41	22.33
		1	74	22.38	22.33	22.21
		36	0	21.35	21.44	21.32
		36	19	21.38	21.36	21.29
		36	39	21.28	21.40	21.28
		75	0	21.32	21.49	21.28
	16QAM	1	0	21.63	21.67	21.55
		1	37	21.46	21.52	21.39
		1	74	21.63	21.60	21.46
		36	0	20.39	20.42	20.28
		36	19	20.35	20.41	20.27
		36	39	20.43	20.44	20.28
		75	0	20.37	20.44	20.38
	64QAM	1	0	20.41	20.51	20.32
		1	37	20.48	20.48	20.49
		1	74	20.38	20.29	20.26
		36	0	19.47	19.44	19.35
		36	19	19.36	19.38	19.36
		36	39	19.39	19.41	19.35
		75	0	19.43	19.56	19.36
	256QAM	1	0	17.51	17.45	17.34
		1	37	17.57	17.49	17.45
		1	74	17.46	17.27	17.24
		36	0	17.29	17.28	17.20
		36	19	17.34	17.34	17.17
		36	39	17.47	17.32	17.38
		75	0	17.44	17.53	17.12

Band/BW	Modulation	RB Size	RB Offset	Low CH 132072	Mid CH 132322	High CH 132572
				Frequency 1720MHz	Frequency 1745MHz	Frequency 1770MHz
66/ 20	QPSK	1	0	22.43	22.53	22.47
		1	50	22.46	22.51	22.39
		1	99	22.45	22.45	22.36
		50	0	21.41	21.45	21.37
		50	25	21.43	21.49	21.40
		50	50	21.46	21.54	21.41
		100	0	21.47	21.51	21.37
	16QAM	1	0	21.74	21.72	21.58
		1	50	21.59	21.59	21.46
		1	99	21.72	21.69	21.59
		50	0	20.48	20.46	20.42
		50	25	20.39	20.46	20.40
		50	50	20.50	20.52	20.39
		100	0	20.39	20.50	20.44
	64QAM	1	0	20.55	20.64	20.47
		1	50	20.60	20.57	20.61
		1	99	20.50	20.41	20.38
		50	0	19.48	19.45	19.42
		50	25	19.45	19.52	19.41
		50	50	19.54	19.44	19.48
		100	0	19.49	19.59	19.39
	256QAM	1	0	17.52	17.56	17.45
		1	50	17.59	17.50	17.54
		1	99	17.47	17.37	17.25
		50	0	17.43	17.39	17.31
		50	25	17.44	17.38	17.32
		50	50	17.50	17.36	17.47
		100	0	17.46	17.57	17.27

EIRP

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19957	1710.7	22.52	0.08	22.6	181.97	1
20175	1732.5	22.41	0.08	22.49	177.42	1
20393	1754.3	22.44	0.08	22.52	178.65	1

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19957	1710.7	21.61	0.08	21.69	147.57	1
20175	1732.5	21.55	0.08	21.63	145.55	1
20393	1754.3	21.6	0.08	21.68	147.23	1

CHANNEL BANDWIDTH: 1.4MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19957	1710.7	20.61	0.08	20.69	117.22	1
20175	1732.5	20.52	0.08	20.6	114.82	1
20393	1754.3	20.55	0.08	20.63	115.61	1

CHANNEL BANDWIDTH: 1.4MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19957	1710.7	17.61	0.08	17.69	58.75	1
20175	1732.5	17.51	0.08	17.59	57.41	1
20393	1754.3	17.5	0.08	17.58	57.28	1

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19965	1711.5	22.56	0.08	22.64	183.65	1
20175	1732.5	22.46	0.08	22.54	179.47	1
20385	1753.5	22.41	0.08	22.49	177.42	1

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19965	1711.5	21.69	0.08	21.77	150.31	1
20175	1732.5	21.56	0.08	21.64	145.88	1
20385	1753.5	21.56	0.08	21.64	145.88	1

CHANNEL BANDWIDTH: 3MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19965	1711.5	20.63	0.08	20.71	117.76	1
20175	1732.5	20.53	0.08	20.61	115.08	1
20385	1753.5	20.58	0.08	20.66	116.41	1

CHANNEL BANDWIDTH: 3MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19965	1711.5	17.61	0.08	17.69	58.75	1
20175	1732.5	17.53	0.08	17.61	57.68	1
20385	1753.5	17.55	0.08	17.63	57.94	1

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19975	1712.5	22.54	0.08	22.62	182.81	1
20175	1732.5	22.41	0.08	22.49	177.42	1
20375	1752.5	22.47	0.08	22.55	179.89	1

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19975	1712.5	21.63	0.08	21.71	148.25	1
20175	1732.5	21.51	0.08	21.59	144.21	1
20375	1752.5	21.59	0.08	21.67	146.89	1

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19975	1712.5	20.63	0.08	20.71	117.76	1
20175	1732.5	20.5	0.08	20.58	114.29	1
20375	1752.5	20.59	0.08	20.67	116.68	1

CHANNEL BANDWIDTH: 5MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19975	1712.5	17.61	0.08	17.69	58.75	1
20175	1732.5	17.53	0.08	17.61	57.68	1
20375	1752.5	17.52	0.08	17.6	57.54	1

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20000	1715	22.51	0.08	22.59	181.55	1
20175	1732.5	22.43	0.08	22.51	178.24	1
20350	1750	22.35	0.08	22.43	174.98	1

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20000	1715	21.59	0.08	21.67	146.89	1
20175	1732.5	21.48	0.08	21.56	143.22	1
20350	1750	21.64	0.08	21.72	148.59	1

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20000	1715	20.56	0.08	20.64	115.88	1
20175	1732.5	20.5	0.08	20.58	114.29	1
20350	1750	20.53	0.08	20.61	115.08	1

CHANNEL BANDWIDTH: 10MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20000	1715	17.61	0.08	17.69	58.75	1
20175	1732.5	17.59	0.08	17.67	58.48	1
20350	1750	17.57	0.08	17.65	58.21	1

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20025	1717.5	22.42	0.08	22.5	177.83	1
20175	1732.5	22.44	0.08	22.52	178.65	1
20325	1747.5	22.36	0.08	22.44	175.39	1

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20025	1717.5	21.69	0.08	21.77	150.31	1
20175	1732.5	21.51	0.08	21.59	144.21	1
20325	1747.5	21.6	0.08	21.68	147.23	1

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20025	1717.5	20.63	0.08	20.71	117.76	1
20175	1732.5	20.59	0.08	20.67	116.68	1
20325	1747.5	20.59	0.08	20.67	116.68	1

CHANNEL BANDWIDTH: 15MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20025	1717.5	17.54	0.08	17.62	57.81	1
20175	1732.5	17.53	0.08	17.61	57.68	1
20325	1747.5	17.58	0.08	17.66	58.34	1

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20050	1720	22.57	0.08	22.65	184.08	1
20175	1732.5	22.47	0.08	22.55	179.89	1
20300	1745	22.5	0.08	22.58	181.13	1

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20050	1720	21.7	0.08	21.78	150.66	1
20175	1732.5	21.6	0.08	21.68	147.23	1
20300	1745	21.73	0.08	21.81	151.71	1

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20050	1720	20.65	0.08	20.73	118.3	1
20175	1732.5	20.61	0.08	20.69	117.22	1
20300	1745	20.63	0.08	20.71	117.76	1

CHANNEL BANDWIDTH: 20MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20050	1720	17.62	0.08	17.7	58.88	1
20175	1732.5	17.6	0.08	17.68	58.61	1
20300	1745	17.6	0.08	17.68	58.61	1

LTE BAND 38

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37775	2572.5	22.47	-2.48	19.99	99.77	2
38000	2595.0	22.53	-2.48	20.05	101.16	2
38225	2617.5	22.68	-2.48	20.2	104.71	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37775	2572.5	21.51	-2.48	19.03	79.98	2
38000	2595.0	21.59	-2.48	19.11	81.47	2
38225	2617.5	21.61	-2.48	19.13	81.85	2

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37775	2572.5	20.58	-2.48	18.1	64.57	2
38000	2595	20.67	-2.48	18.19	65.92	2
38225	2617.5	20.75	-2.48	18.27	67.14	2

CHANNEL BANDWIDTH: 5MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37775	2572.5	17.6	-2.48	15.12	32.51	2
38000	2595	17.75	-2.48	15.27	33.65	2
38225	2617.5	17.77	-2.48	15.29	33.81	2

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37800	2575.0	22.5	-2.48	20.02	100.46	2
38000	2595.0	22.51	-2.48	20.03	100.69	2
38200	2615.0	22.66	-2.48	20.18	104.23	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37800	2575.0	21.53	-2.48	19.05	80.35	2
38000	2595.0	21.65	-2.48	19.17	82.6	2
38200	2615.0	21.59	-2.48	19.11	81.47	2

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37800	2575	20.54	-2.48	18.06	63.97	2
38000	2595	20.63	-2.48	18.15	65.31	2
38200	2615	20.71	-2.48	18.23	66.53	2

CHANNEL BANDWIDTH: 10MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37800	2575	17.67	-2.48	15.19	33.04	2
38000	2595	17.74	-2.48	15.26	33.57	2
38200	2615	17.8	-2.48	15.32	34.04	2

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37825	2577.5	22.58	-2.48	20.1	102.33	2
38000	2595.0	22.61	-2.48	20.13	103.04	2
38175	2612.5	22.77	-2.48	20.29	106.91	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37825	2577.5	21.51	-2.48	19.03	79.98	2
38000	2595.0	21.68	-2.48	19.2	83.18	2
38175	2612.5	21.68	-2.48	19.2	83.18	2

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37825	2577.5	20.56	-2.48	18.08	64.27	2
38000	2595	20.64	-2.48	18.16	65.46	2
38175	2612.5	20.66	-2.48	18.18	65.77	2

CHANNEL BANDWIDTH: 15MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37825	2577.5	17.6	-2.48	15.12	32.51	2
38000	2595	17.75	-2.48	15.27	33.65	2
38175	2612.5	17.85	-2.48	15.37	34.43	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37850	2580.0	22.62	-2.48	20.14	103.28	2
38000	2595.0	22.64	-2.48	20.16	103.75	2
38150	2610.0	22.79	-2.48	20.31	107.4	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37850	2580.0	21.59	-2.48	19.11	81.47	2
38000	2595.0	21.7	-2.48	19.22	83.56	2
38150	2610.0	21.73	-2.48	19.25	84.14	2

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37850	2580	20.63	-2.48	18.15	65.31	2
38000	2595	20.73	-2.48	18.25	66.83	2
38150	2610	20.77	-2.48	18.29	67.45	2

CHANNEL BANDWIDTH: 20MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
37850	2580	17.68	-2.48	15.2	33.11	2
38000	2595	17.81	-2.48	15.33	34.12	2
38150	2610	17.9	-2.48	15.42	34.83	2

LTE BAND 41

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39675	2498.5	22.94	3.65	26.59	456.04	2
40620	2593.0	23.18	3.65	26.83	481.95	2
41565	2687.5	23.27	3.65	26.92	492.04	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39675	2498.5	22.11	3.65	25.76	376.7	2
40620	2593.0	22.18	3.65	25.83	382.82	2
41565	2687.5	22.25	3.65	25.9	389.05	2

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39675	2498.5	21.12	3.65	24.77	299.92	2
40620	2593.0	21.17	3.65	24.82	303.39	2
41565	2687.5	21.24	3.65	24.89	308.32	2

CHANNEL BANDWIDTH: 5MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39675	2498.5	18.16	3.65	21.81	151.71	2
40620	2593.0	18.17	3.65	21.82	152.05	2
41565	2687.5	18.3	3.65	21.95	156.68	18.3

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39700	2501.0	23.05	3.65	26.7	467.74	2
40620	2593.0	23.17	3.65	26.82	480.84	2
41540	2685.0	23.18	3.65	26.83	481.95	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39700	2501.0	23.18	3.65	26.83	481.95	2
40620	2593.0	22.18	3.65	25.83	382.82	2
41540	2685.0	22.28	3.65	25.93	391.74	2

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39700	2501.0	21.13	3.65	24.78	300.61	2
40620	2593.0	21.24	3.65	24.89	308.32	2
41540	2685.0	21.19	3.65	24.84	304.79	2

CHANNEL BANDWIDTH: 10MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39700	2501.0	18.17	3.65	21.82	152.05	2
40620	2593.0	18.27	3.65	21.92	155.6	2
41540	2685.0	18.3	3.65	21.95	156.68	2

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39725	2503.5	22.96	3.65	26.61	458.14	2
40620	2593.0	23.13	3.65	26.78	476.43	2
41515	2682.5	23.26	3.65	26.91	490.91	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39725	2503.5	22.09	3.65	25.74	374.97	2
40620	2593.0	22.19	3.65	25.84	383.71	2
41515	2682.5	22.25	3.65	25.9	389.05	2

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39725	2503.5	21.13	3.65	24.78	300.61	2
40620	2593.0	21.29	3.65	24.94	311.89	2
41515	2682.5	21.21	3.65	24.86	306.2	2

CHANNEL BANDWIDTH: 15MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39725	2503.5	18.16	3.65	21.81	151.71	2
40620	2593.0	18.22	3.65	21.87	153.82	2
41515	2682.5	18.22	3.65	21.87	153.82	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39750	2506.0	23.06	3.65	26.71	468.81	2
40620	2593.0	23.26	3.65	26.91	490.91	2
41490	2680.0	23.3	3.65	26.95	495.45	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39750	2506.0	22.12	3.65	25.77	377.57	2
40620	2593.0	22.25	3.65	25.9	389.05	2
41490	2680.0	22.31	3.65	25.96	394.46	2

CHANNEL BANDWIDTH: 20 MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39750	2506.0	21.22	3.65	24.87	306.9	2
40620	2593.0	21.3	3.65	24.95	312.61	2
41490	2680.0	21.33	3.65	24.98	314.77	2

CHANNEL BANDWIDTH: 20 MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
39750	2506.0	18.22	3.65	21.87	153.82	2
40620	2593.0	18.3	3.65	21.95	156.68	2
41490	2680.0	18.33	3.65	21.98	157.76	2

LTE Band 42

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42115	3452.5	22.96	-0.96	22	158.49	1
42590	3500	23.1	-0.96	22.14	163.68	1
43065	3547.5	23.09	-0.96	22.13	163.31	1

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42115	3452.5	21.87	-0.96	20.91	123.31	1
42590	3500	22.11	-0.96	21.15	130.32	1
43065	3547.5	21.97	-0.96	21.01	126.18	1

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42115	3452.5	20.97	-0.96	20.01	100.23	1
42590	3500	21.23	-0.96	20.27	106.41	1
43065	3547.5	21.11	-0.96	20.15	103.51	1

CHANNEL BANDWIDTH: 5MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42115	3452.5	17.98	-0.96	17.02	50.35	1
42590	3500	18.1	-0.96	17.14	51.76	1
43065	3547.5	17.97	-0.96	17.01	50.23	1

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42140	3455	22.94	-0.96	21.98	157.76	1
42590	3500	23.2	-0.96	22.24	167.49	1
43040	3545	23.13	-0.96	22.17	164.82	1

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42140	3455	21.81	-0.96	20.85	121.62	1
42590	3500	22.1	-0.96	21.14	130.02	1
43040	3545	22.01	-0.96	21.05	127.35	1

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42140	3455	20.95	-0.96	19.99	99.77	1
42590	3500	21.13	-0.96	20.17	103.99	1
43040	3545	21.17	-0.96	20.21	104.95	1

CHANNEL BANDWIDTH: 10MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42140	3455	17.97	-0.96	17.01	50.23	1
42590	3500	18.14	-0.96	17.18	52.24	1
43040	3545	17.95	-0.96	16.99	50	1

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42165	3457.5	22.92	-0.96	21.96	157.04	1
42590	3500	23.22	-0.96	22.26	168.27	1
43015	3542.5	23.15	-0.96	22.19	165.58	1

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42165	3457.5	21.8	-0.96	20.84	121.34	1
42590	3500	22.13	-0.96	21.17	130.92	1
43015	3542.5	21.95	-0.96	20.99	125.6	1

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42165	3457.5	20.98	-0.96	20.02	100.46	1
42590	3500	21.21	-0.96	20.25	105.93	1
43015	3542.5	21.03	-0.96	20.07	101.62	1

CHANNEL BANDWIDTH: 15MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42165	3457.5	17.93	-0.96	16.97	49.77	1
42590	3500	18.17	-0.96	17.21	52.6	1
43015	3542.5	17.98	-0.96	17.02	50.35	1

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42190	3460	23.05	-0.96	22.09	161.81	1
42590	3500	23.23	-0.96	22.27	168.66	1
42990	3540	23.17	-0.96	22.21	166.34	1

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42190	3460	21.92	-0.96	20.96	124.74	1
42590	3500	22.16	-0.96	21.2	131.83	1
42990	3540	22.04	-0.96	21.08	128.23	1

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42190	3460	21.09	-0.96	20.13	103.04	1
42590	3500	21.28	-0.96	20.32	107.65	1
42990	3540	21.18	-0.96	20.22	105.2	1

CHANNEL BANDWIDTH: 20MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
42190	3460	18	-0.96	17.04	50.58	1
42590	3500	18.19	-0.96	17.23	52.84	1
42990	3540	18.04	-0.96	17.08	51.05	1

LTE BAND 66

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131979	1710.7	22.43	1.32	23.75	237.14	1
132322	1745	22.41	1.32	23.73	236.05	1
132665	1779.3	22.46	1.32	23.78	238.78	1

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131979	1710.7	21.62	1.32	22.94	196.79	1
132322	1745	21.67	1.32	22.99	199.07	1
132665	1779.3	21.5	1.32	22.82	191.43	1

CHANNEL BANDWIDTH: 1.4MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131979	1710.7	20.53	1.32	21.85	153.11	1
132322	1745	20.51	1.32	21.83	152.41	1
132665	1779.3	20.59	1.32	21.91	155.24	1

CHANNEL BANDWIDTH: 1.4MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131979	1710.7	17.48	1.32	18.8	75.86	1
132322	1745	17.47	1.32	18.79	75.68	1
132665	1779.3	17.52	1.32	18.84	76.56	1

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131987	1711.5	22.45	1.32	23.77	238.23	1
132322	1745	22.51	1.32	23.83	241.55	1
132657	1778.5	22.35	1.32	23.67	232.81	1

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131987	1711.5	21.64	1.32	22.96	197.7	1
132322	1745	21.64	1.32	22.96	197.7	1
132657	1778.5	21.52	1.32	22.84	192.31	1

CHANNEL BANDWIDTH: 3MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131987	1711.5	20.52	1.32	21.84	152.76	1
132322	1745	20.55	1.32	21.87	153.82	1
132657	1778.5	20.52	1.32	21.84	152.76	1

CHANNEL BANDWIDTH: 3MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131987	1711.5	17.47	1.32	18.79	75.68	1
132322	1745	17.55	1.32	18.87	77.09	1
132657	1778.5	17.47	1.32	18.79	75.68	1

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131997	1712.5	22.43	1.32	23.75	237.14	1
132322	1745	22.46	1.32	23.78	238.78	1
132647	1777.5	22.36	1.32	23.68	233.35	1

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131997	1712.5	21.65	1.32	22.97	198.15	1
132322	1745	21.61	1.32	22.93	196.34	1
132647	1777.5	21.44	1.32	22.76	188.8	1

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131997	1712.5	20.49	1.32	21.81	151.71	1
132322	1745	20.55	1.32	21.87	153.82	1
132647	1777.5	20.55	1.32	21.87	153.82	1

CHANNEL BANDWIDTH: 5MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131997	1712.5	17.54	1.32	18.86	76.91	1
132322	1745	17.53	1.32	18.85	76.74	1
132647	1777.5	17.46	1.32	18.78	75.51	1

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132022	1715	22.39	1.32	23.71	234.96	1
132322	1745	22.41	1.32	23.73	236.05	1
132622	1775	22.32	1.32	23.64	231.21	1

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132022	1715	21.68	1.32	23	199.53	1
132322	1745	21.68	1.32	23	199.53	1
132622	1775	21.47	1.32	22.79	190.11	1

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132022	1715	20.48	1.32	21.8	151.36	1
132322	1745	20.54	1.32	21.86	153.46	1
132622	1775	20.6	1.32	21.92	155.6	1

CHANNEL BANDWIDTH: 10MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132022	1715	17.55	1.32	18.87	77.09	1
132322	1745	17.46	1.32	18.78	75.51	1
132622	1775	17.53	1.32	18.85	76.74	1

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132047	1717.5	22.45	1.32	23.77	238.23	1
132322	1745	22.49	1.32	23.81	240.44	1
132597	1772.5	22.39	1.32	23.71	234.96	1

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132047	1717.5	21.63	1.32	22.95	197.24	1
132322	1745	21.67	1.32	22.99	199.07	1
132597	1772.5	21.55	1.32	22.87	193.64	1

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132047	1717.5	20.48	1.32	21.8	151.36	1
132322	1745	20.51	1.32	21.83	152.41	1
132597	1772.5	20.49	1.32	21.81	151.71	1

CHANNEL BANDWIDTH: 15MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132047	1717.5	17.57	1.32	18.89	77.45	1
132322	1745	17.53	1.32	18.85	76.74	1
132597	1772.5	17.45	1.32	18.77	75.34	1

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132072	1720	22.46	1.32	23.78	238.78	1
132322	1745	22.53	1.32	23.85	242.66	1
132572	1770	22.47	1.32	23.79	239.33	1

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132072	1720	21.74	1.32	23.06	202.3	1
132322	1745	21.72	1.32	23.04	201.37	1
132572	1770	21.59	1.32	22.91	195.43	1

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132072	1720	20.6	1.32	21.92	155.6	1
132322	1745	20.64	1.32	21.96	157.04	1
132572	1770	20.61	1.32	21.93	155.96	1

CHANNEL BANDWIDTH: 20MHz 256QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132072	1720	17.59	1.32	18.91	77.8	1
132322	1745	17.57	1.32	18.89	77.45	1
132572	1770	17.54	1.32	18.86	76.91	1

REMARKS: EIRP Output Power (dBm) = EIRP (dBm) -2.15(dB).

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

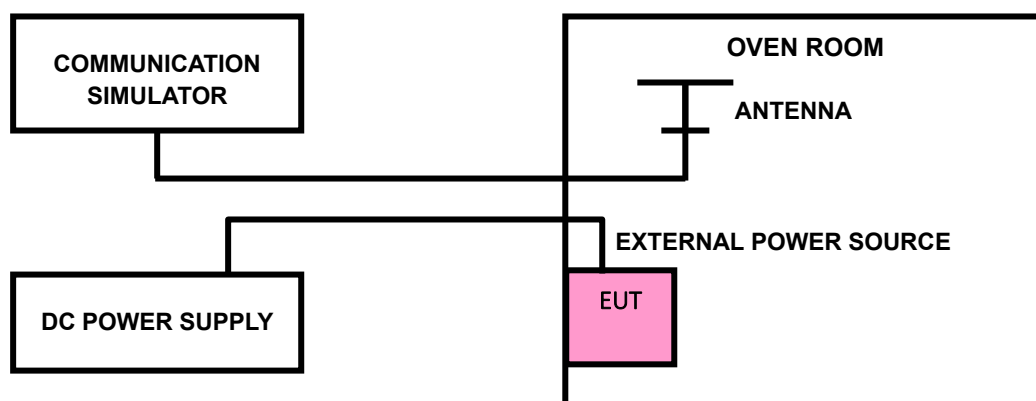



Test Report No.: W7L-P23120020RF04

3.2.4 TEST RESULTS

Please Refer to Appendix Of this test report.


Note: VL = Low voltage(3.5V); VN/NV = Normal voltage(3.87V); VH = High voltage(4.45V);
NT = Normal temperature (25°C)

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

3.3.2 TEST SETUP

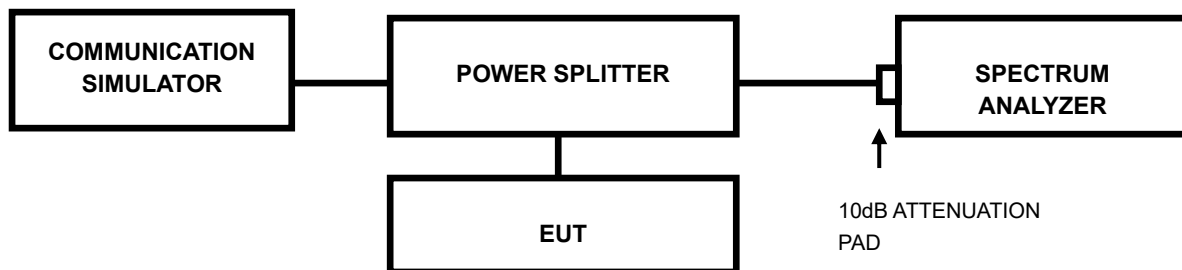

3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



Test Report No.: W7L-P23120020RF04

3.3.4 TEST RESULTS

Please Refer to Appendix Of this test report.

3.4 BAND EDGE MEASUREMENT


3.4.1 LIMITS OF BAND EDGE MEASUREMENT

According to FCC Part 27.53(h) specified that For operations in the 1710-1755 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

According to FCC Part 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

According to FCC Part 27.53 (n)(2) For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.4.2 TEST SETUP

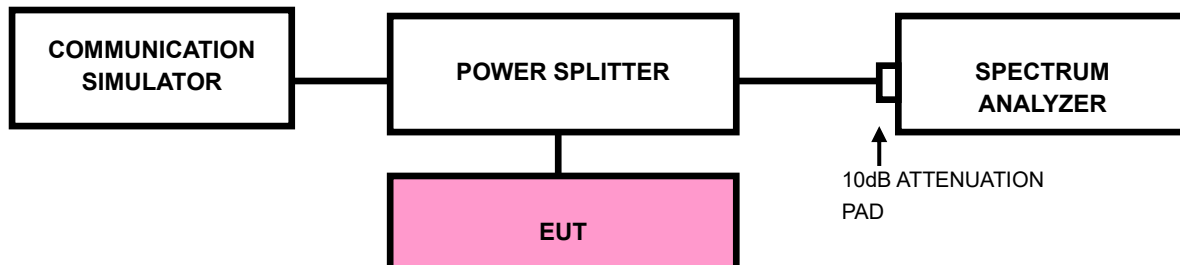

3.4.3 TEST PROCEDURES

- a) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- b) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW).
- c) Set the resolution bandwidth (RBW) $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- d) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- e) Set the video bandwidth (VBW) to $\geq 3 \times$ RBW.
- f) Select the average power (RMS) display detector.
- g) Set the number of measurement points to ≥ 1001 .
- h) Use auto-coupled sweep time.
- i) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- j) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- k) Record the max trace plot into the test report.



Test Report No.: W7L-P23120020RF04

3.4.4 TEST RESULTS

Please Refer to Appendix Of this test report.

3.5 CONDUCTED SPURIOUS EMISSIONS

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .


For: LTE Band7/Band41

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

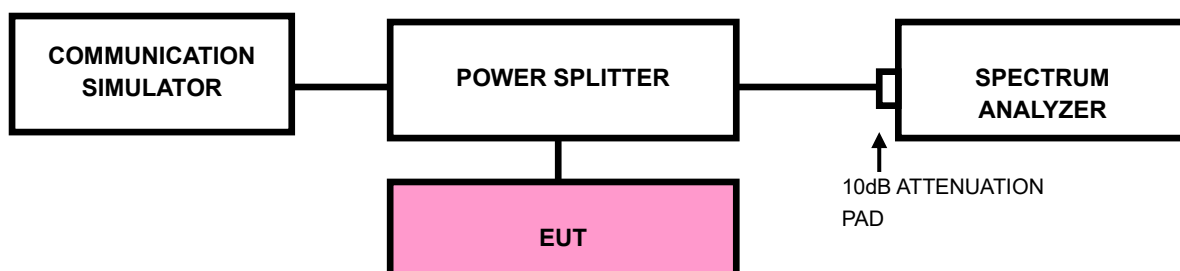



Test Report No.: W7L-P23120020RF04

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix Of this test report.

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

For: LTE Band7/ Band41

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G.
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP


< Frequency Range below 30MHz >

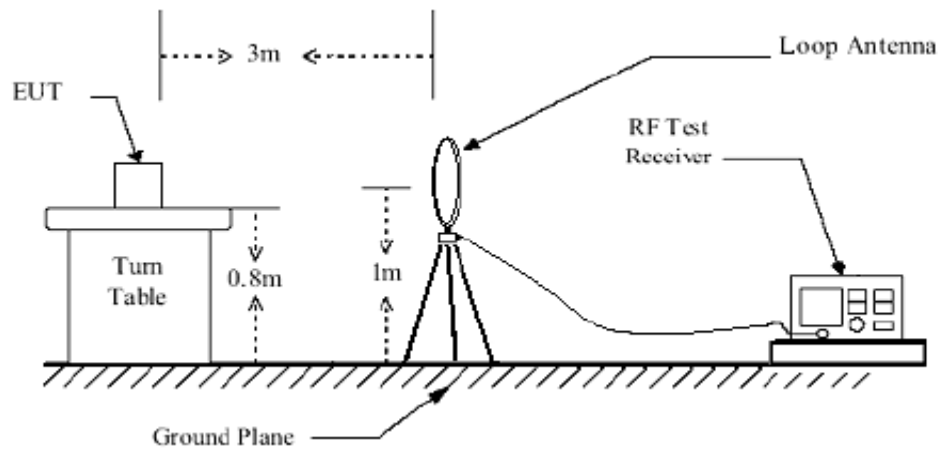

< Frequency Range 30MHz~1GHz >

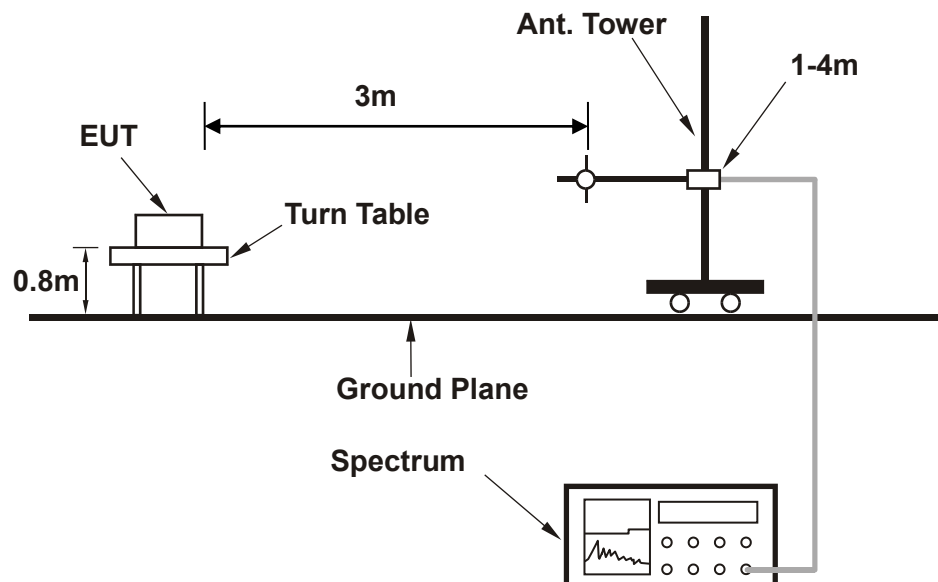

<Frequency Range above 1GHz>

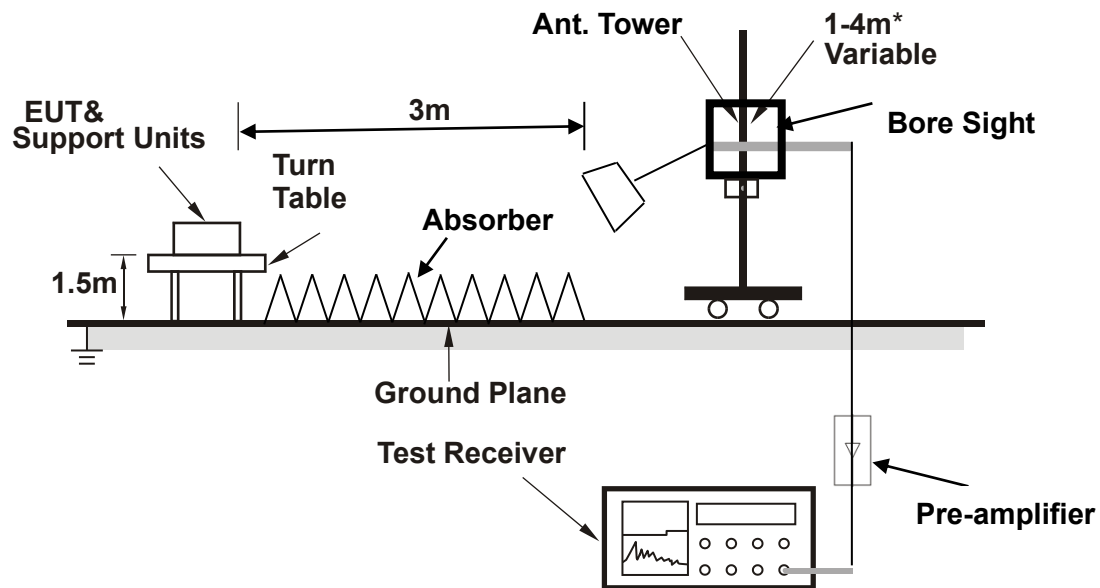

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 38

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 40620	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	30.000	-67.59	-65.61	-25.00	-42.59	-1.98	Peak	Horizontal
2	89.170	-55.74	-43.01	-25.00	-30.74	-12.73	Peak	Horizontal
3	126.030	-70.19	-54.47	-25.00	-45.19	-15.72	Peak	Horizontal
4	164.830	-74.15	-58.15	-25.00	-49.15	-16.00	Peak	Horizontal
5	307.420	-68.04	-59.38	-25.00	-43.04	-8.66	Peak	Horizontal
6 PP	900.090	-52.11	-52.53	-25.00	-27.11	0.42	Peak	Horizontal

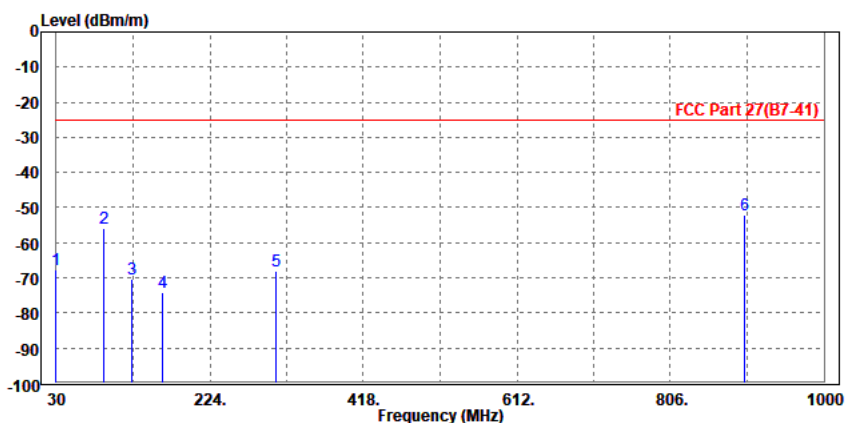

MODE	TX channel 40620	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	47.460	-72.37	-51.91	-25.00	-47.37	-20.46	Peak	Vertical
2	89.170	-58.60	-41.09	-25.00	-33.60	-17.51	Peak	Vertical
3	117.300	-69.93	-53.68	-25.00	-44.93	-16.25	Peak	Vertical
4	197.810	-68.33	-59.74	-25.00	-43.33	-8.59	Peak	Vertical
5	288.020	-64.45	-60.96	-25.00	-39.45	-3.49	Peak	Vertical
6 PP	900.090	-34.72	-46.84	-25.00	-9.72	12.12	Peak	Vertical

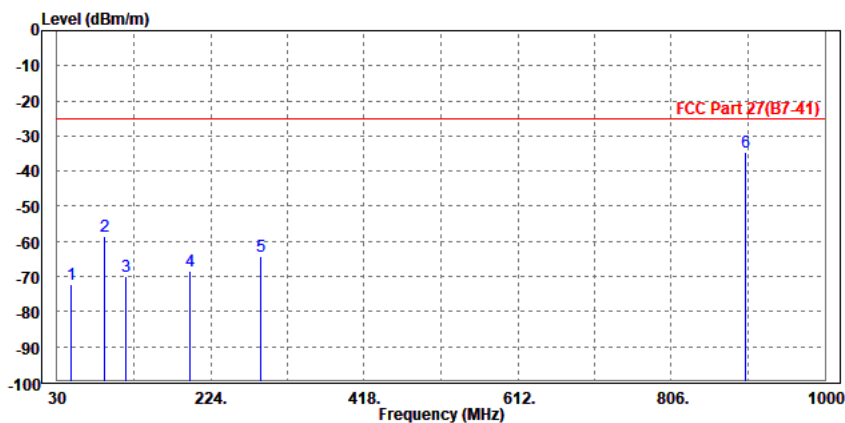

ABOVE 1GHz


Note: For higher frequency, the emission is too low to be detected.

LTE BAND 38

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 38000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5186.000	-46.77	-58.11	-25.00	-21.77	11.34	Peak	Horizontal
2	7785.000	-48.48	-63.31	-25.00	-23.48	14.83	Peak	Horizontal

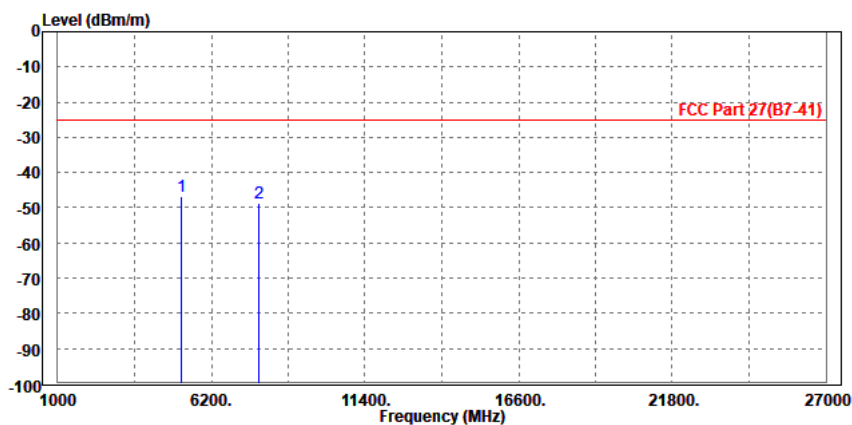

MODE	TX channel 38000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	5186.000	-47.20	-58.93	-25.00	-22.20	11.73	Peak	Vertical
2		7785.000	-49.59	-63.85	-25.00	-24.59	14.26	Peak	Vertical

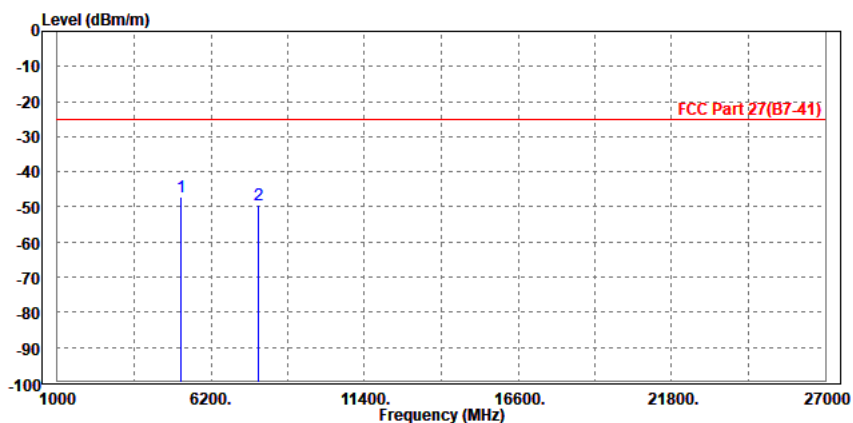




Test Report No.: W7L-P23120020RF04

CHANNEL BANDWIDTH: 10MHz / QPSK

CH37800


MODE	TX channel 37800	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5160.000	-47.77	-59.07	-25.00	-22.77	11.30	Peak	Horizontal
2	7725.000	-48.45	-63.18	-25.00	-23.45	14.73	Peak	Horizontal

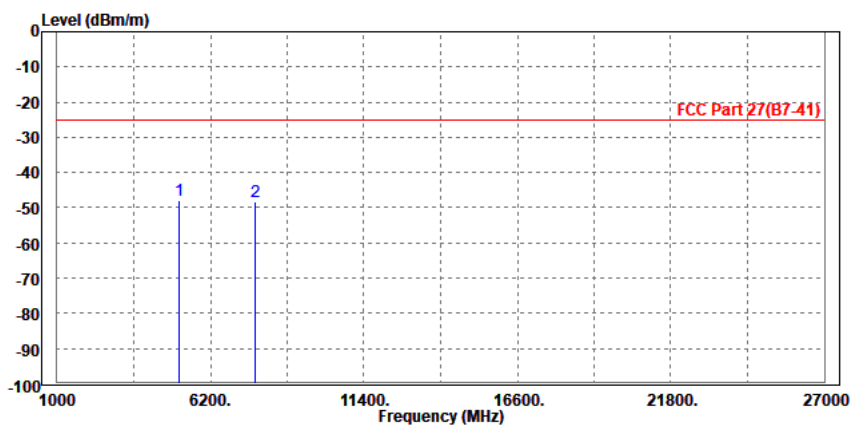

MODE	TX channel 37800	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5160.000	-47.48	-59.16	-25.00	-22.48	11.68	Peak	Vertical
2	7725.000	-49.68	-63.68	-25.00	-24.68	14.00	Peak	Vertical

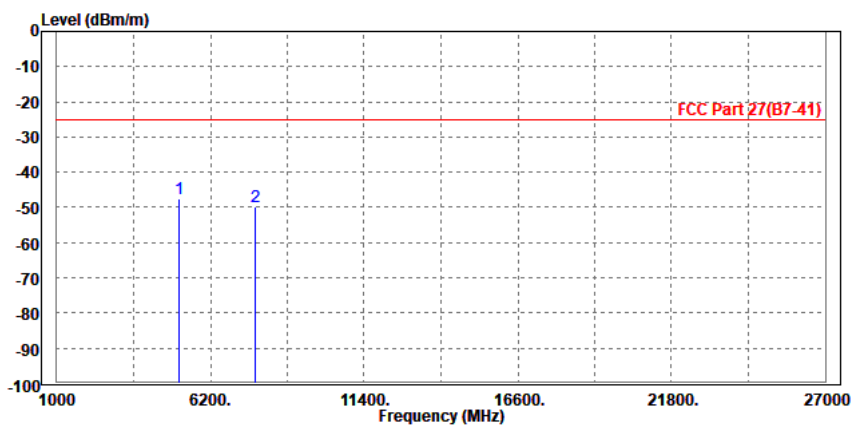

CH38000

MODE	TX channel 38000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	5186.000	-45.18	-56.52	-25.00	-20.18	11.34	Peak	Horizontal
2	7785.000	-49.07	-63.90	-25.00	-24.07	14.83	Peak	Horizontal

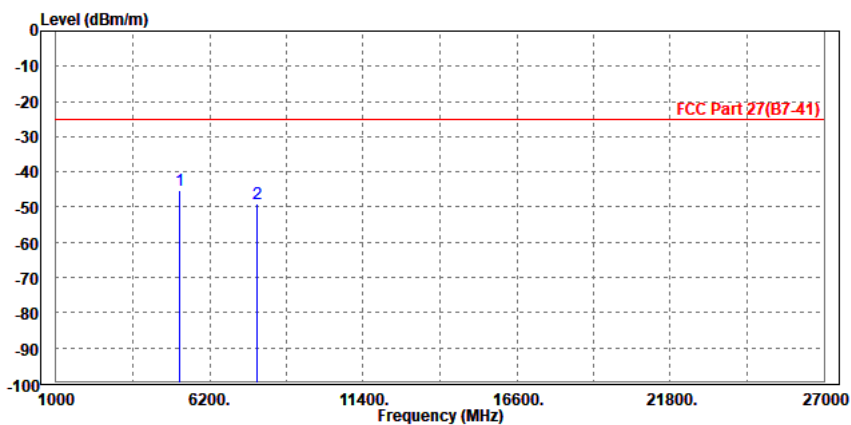




Test Report No.: W7L-P23120020RF04

MODE	TX channel 38000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5186.000	-46.50	-58.23	-25.00	-21.50	11.73	Peak	Vertical
2	7785.000	-46.90	-61.16	-25.00	-21.90	14.26	Peak	Vertical

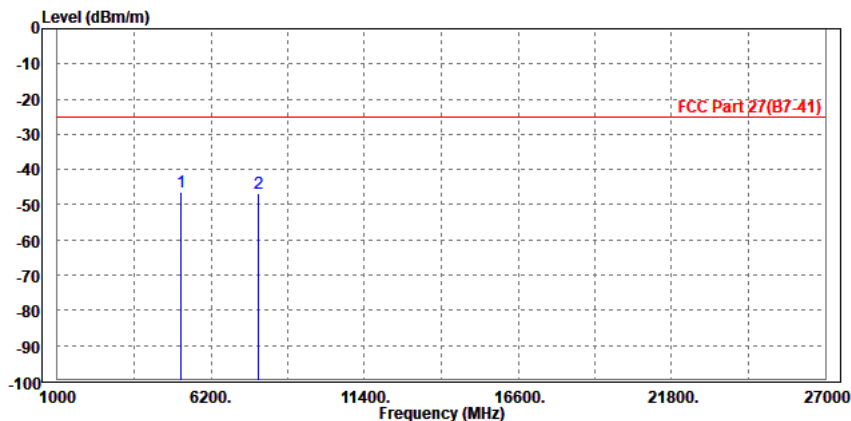

CH38200


MODE	TX channel 38200	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	5238.000	-47.11	-58.52	-25.00	-22.11	11.41	Peak	Horizontal
2		7845.000	-48.47	-63.40	-25.00	-23.47	14.93	Peak	Horizontal

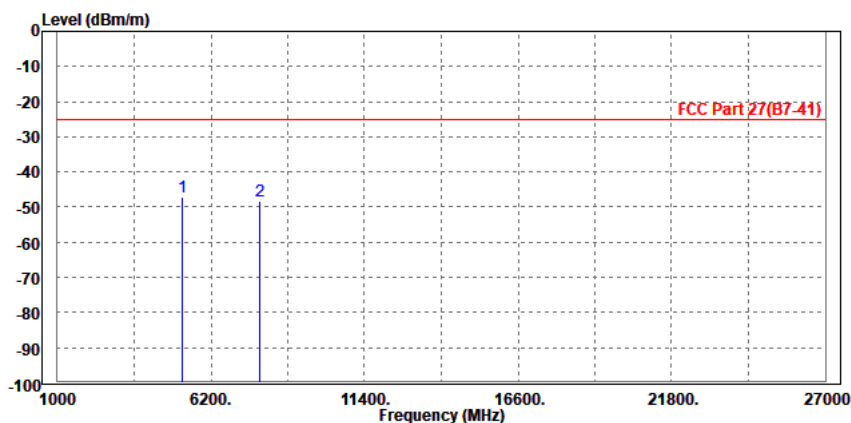

MODE	TX channel 38200	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5238.000	-47.41	-59.24	-25.00	-22.41	11.83	Peak	Vertical
2	7845.000	-49.58	-64.10	-25.00	-24.58	14.52	Peak	Vertical

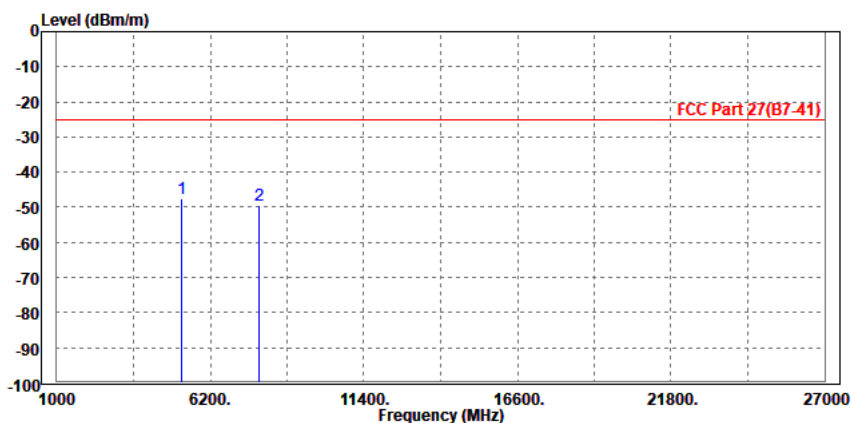

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 38000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	5186.000	-47.13	-58.47	-25.00	-22.13	11.34	Peak	Horizontal
2	7785.000	-48.81	-63.64	-25.00	-23.81	14.83	Peak	Horizontal

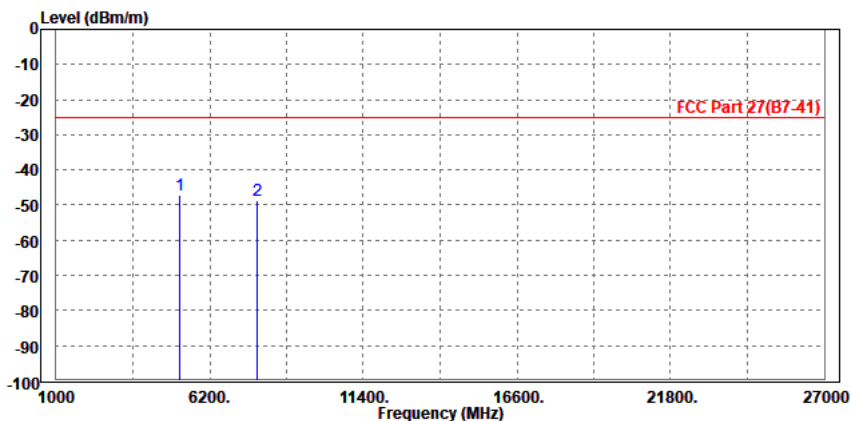




Test Report No.: W7L-P23120020RF04

MODE	TX channel 38000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	5186.000	-47.25	-58.98	-25.00	-22.25	11.73	Peak	Vertical
2		7785.000	-50.04	-64.30	-25.00	-25.04	14.26	Peak	Vertical

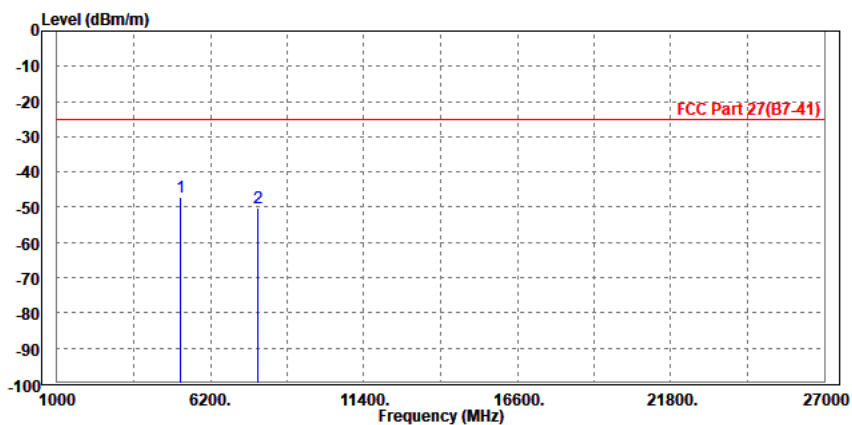

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 38000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	5186.000	-47.55	-58.89	-25.00	-22.55	11.34	Peak	Horizontal
2		7785.000	-49.13	-63.96	-25.00	-24.13	14.83	Peak	Horizontal

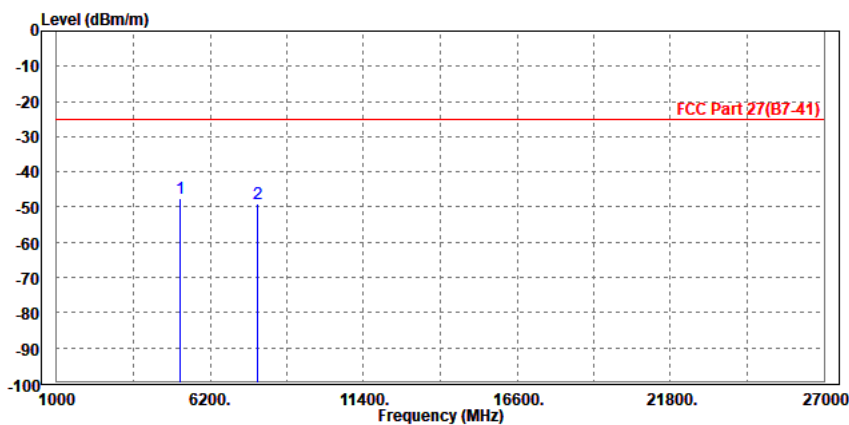




Test Report No.: W7L-P23120020RF04

MODE	TX channel 38000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

			Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase	
MHz	dBm/m	dBm	dBm/m	dB	dB/m			
1 PP 5190.000	-46.84	-58.58	-25.00	-21.84	11.74	Peak	Vertical	
2 7786.000	-48.67	-62.93	-25.00	-23.67	14.26	Peak	Vertical	

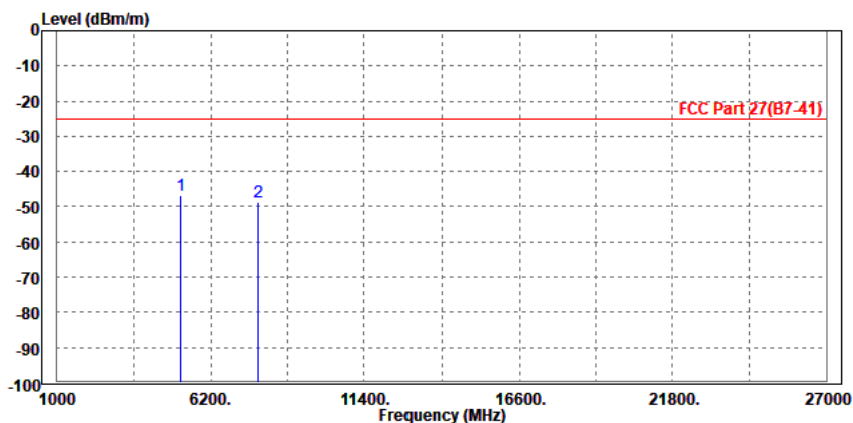


LTE BAND 41

CHANNEL BANDWIDTH: 5MHz / QPSK

CH39675


MODE	TX channel 39675	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5004.000	-48.29	-59.36	-25.00	-23.29	11.07	Peak	Horizontal
2 PP	7495.500	-45.44	-59.77	-25.00	-20.44	14.33	Peak	Horizontal

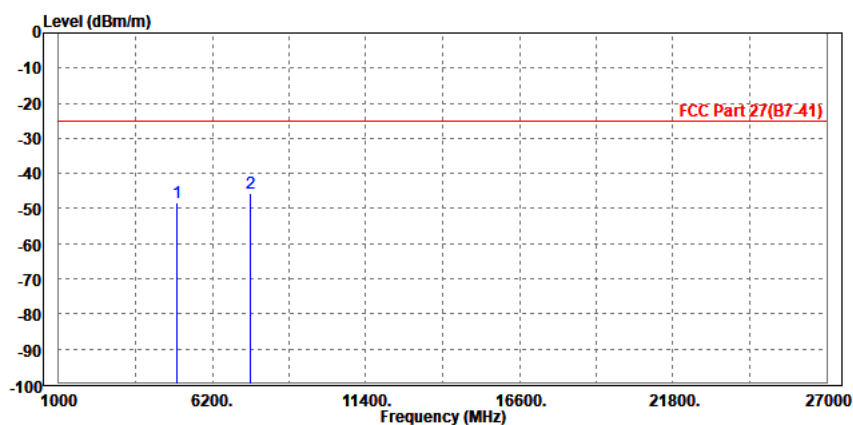

MODE	TX channel 39675	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	4997.000	-48.84	-60.20	-25.00	-23.84	11.36	Peak	Vertical
2 PP	7500.000	-47.34	-60.36	-25.00	-22.34	13.02	Peak	Vertical

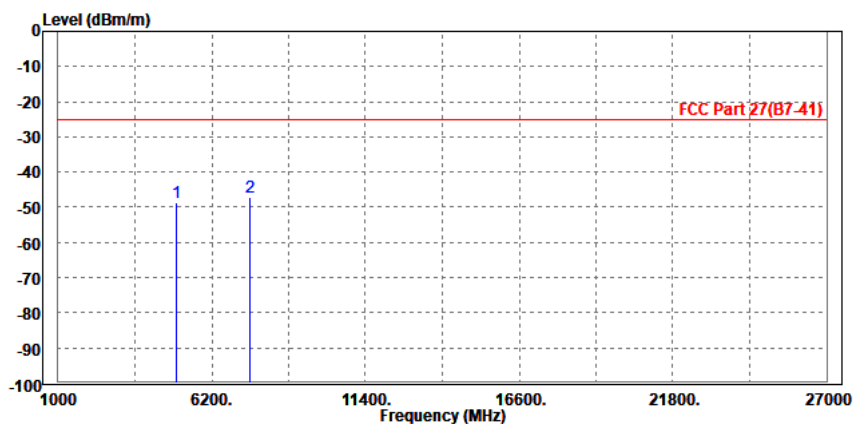




Test Report No.: W7L-P23120020RF04

CH40620


MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5186.000	-46.58	-57.92	-25.00	-21.58	11.34	Peak	Horizontal
2	7786.000	-47.08	-61.91	-25.00	-22.08	14.83	Peak	Horizontal

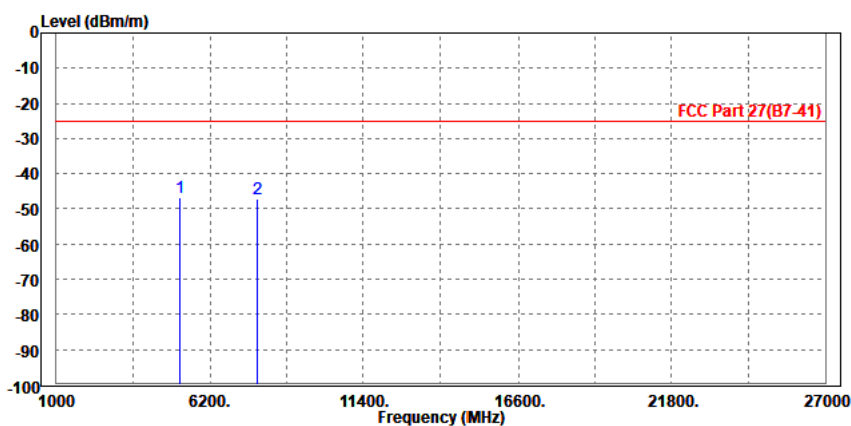

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	5186.000	-46.72	-58.45	-25.00	-21.72	11.73	Peak	Vertical
2	7779.000	-49.41	-63.64	-25.00	-24.41	14.23	Peak	Vertical

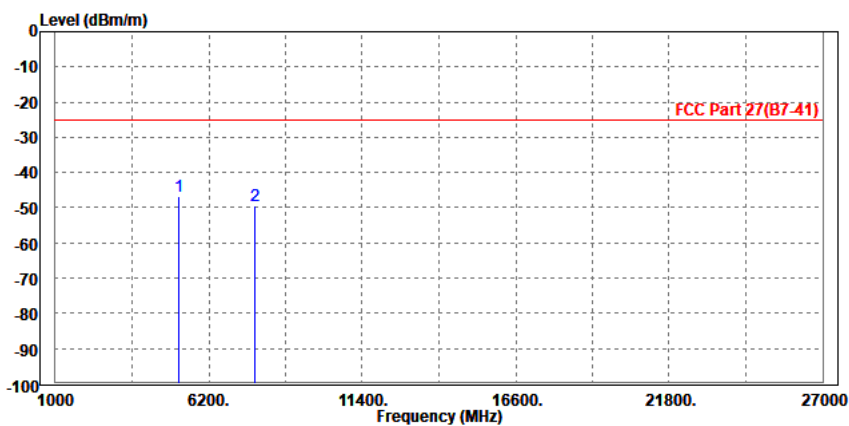

CH41565


MODE	TX channel 41565	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5375.000	-46.29	-57.90	-25.00	-21.29	11.61	Peak	Horizontal
2	8072.000	-48.16	-63.49	-25.00	-23.16	15.33	Peak	Horizontal

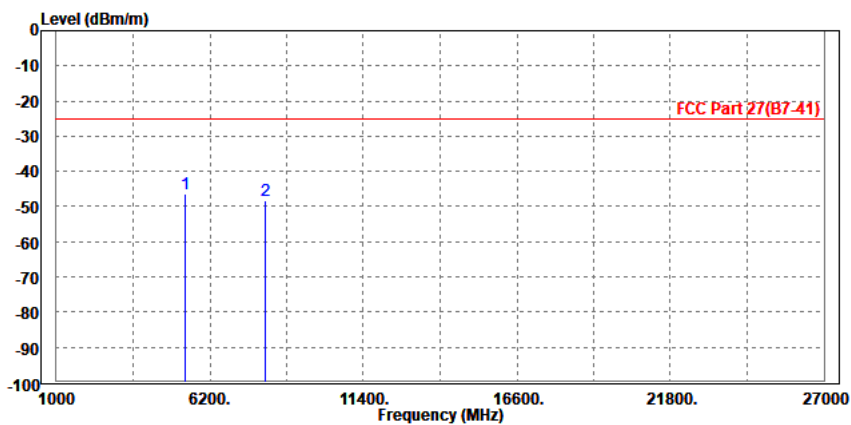

MODE	TX channel 41565	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	5368.000	-46.73	-58.81	-25.00	-21.73	12.08	Peak	Vertical
2		8062.500	-47.71	-63.12	-25.00	-22.71	15.41	Peak	Vertical

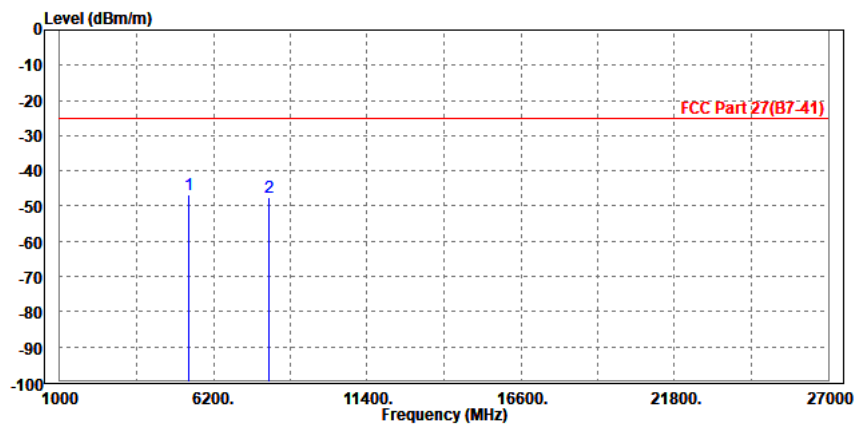

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	5186.000	-47.85	-59.19	-25.00	-22.85	11.34	Peak	Horizontal
2	7779.000	-48.66	-63.48	-25.00	-23.66	14.82	Peak	Horizontal

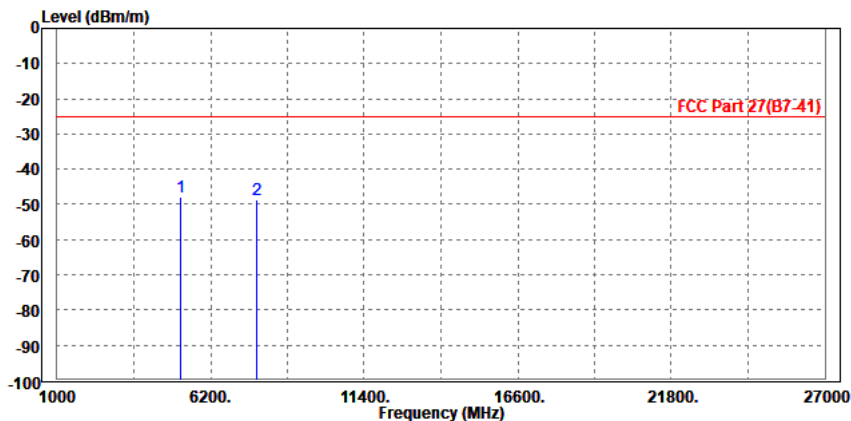

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	5186.000	-46.70	-58.43	-25.00	-21.70	11.73	Peak	Vertical
2		7786.000	-49.25	-63.51	-25.00	-24.25	14.26	Peak	Vertical

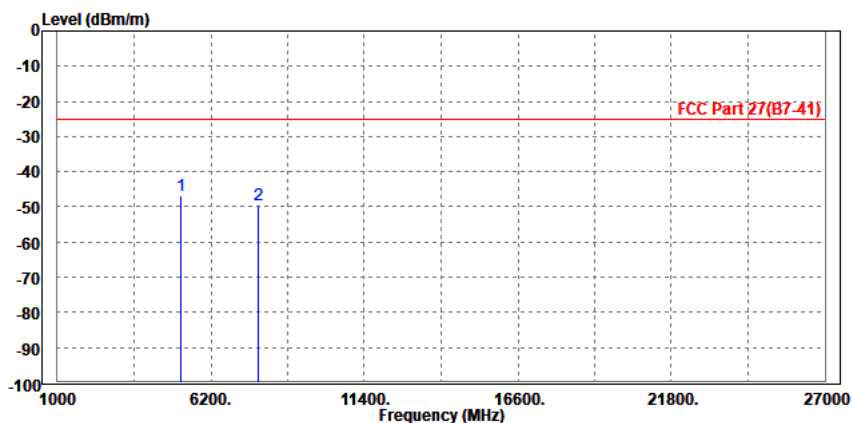

CHANNEL BANDWIDTH: 15MHz / QPSK


MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5186.000	-47.01	-58.35	-25.00	-22.01	11.34	Peak	Horizontal
2	7779.000	-47.52	-62.34	-25.00	-22.52	14.82	Peak	Horizontal

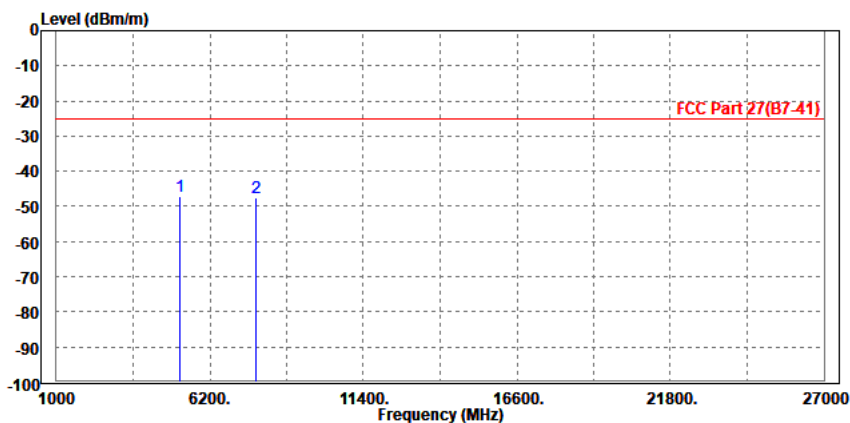

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	5186.000	-47.71	-59.44	-25.00	-22.71	11.73	Peak	Vertical
2		7786.000	-48.70	-62.96	-25.00	-23.70	14.26	Peak	Vertical

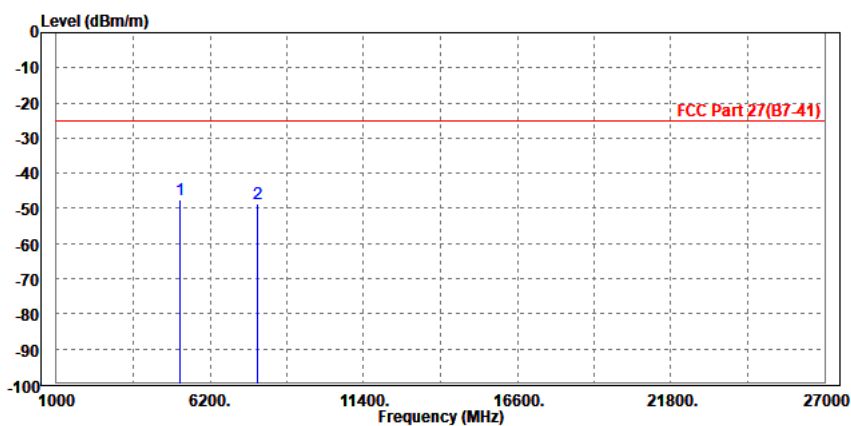

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	5186.000	-47.88	-59.22	-25.00	-22.88	11.34	Peak	Horizontal
2		7786.000	-48.89	-63.72	-25.00	-23.89	14.83	Peak	Horizontal

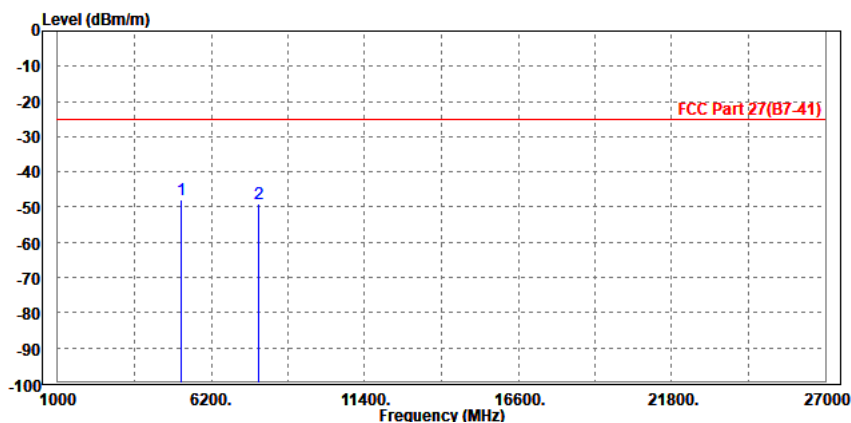




Test Report No.: W7L-P23120020RF04

MODE	TX channel 40620	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5186.000	-47.06	-58.79	-25.00	-22.06	11.73	Peak	Vertical
2	7779.000	-48.74	-62.97	-25.00	-23.74	14.23	Peak	Vertical

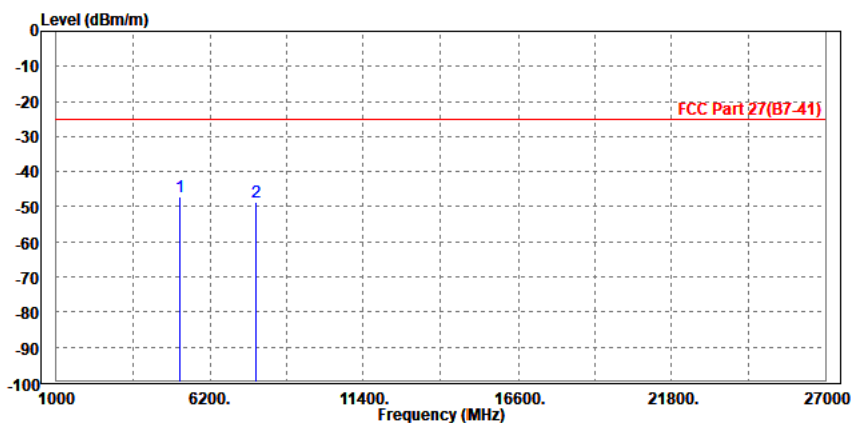


LTE BAND 42

Note: For frequency above 27GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7000.000	-49.31	-63.08	-13.00	-36.31	13.77	Peak	Horizontal
2	PP10503.000	-42.49	-62.14	-13.00	-29.49	19.65	Peak	Horizontal

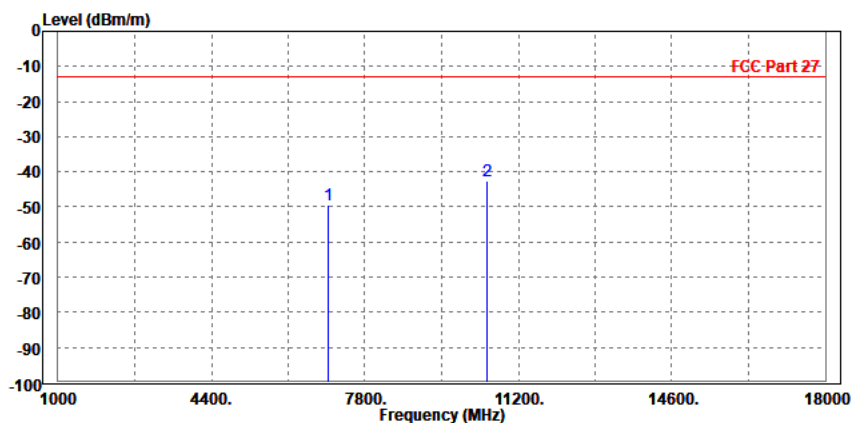

MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7001.000	-48.83	-63.40	-13.00	-35.83	14.57	Peak	Vertical
2	PP10500.000	-41.90	-62.47	-13.00	-28.90	20.57	Peak	Vertical

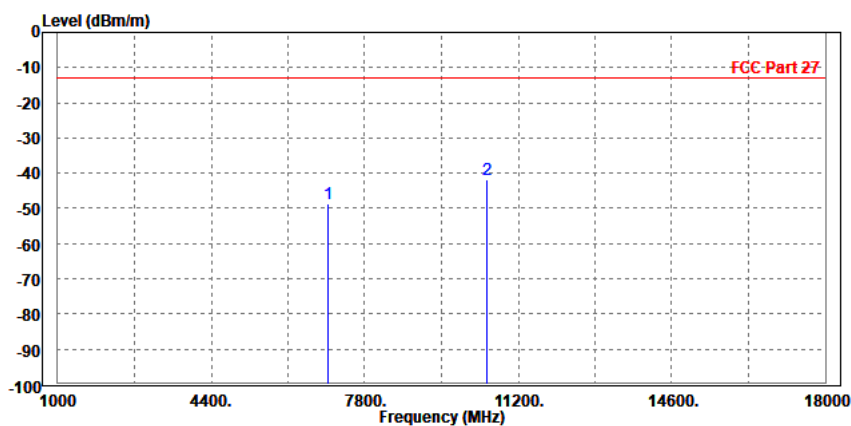

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7001.000	-50.03	-63.80	-13.00	-37.03	13.77	Peak	Horizontal
2	PP10500.000	-41.39	-61.04	-13.00	-28.39	19.65	Peak	Horizontal

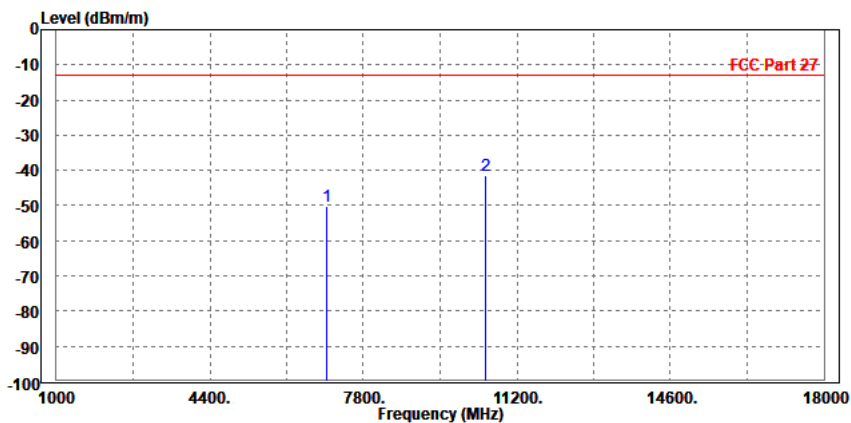

MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7000.000	-49.41	-63.98	-13.00	-36.41	14.57	Peak	Vertical
2	PP10503.000	-40.88	-61.45	-13.00	-27.88	20.57	Peak	Vertical

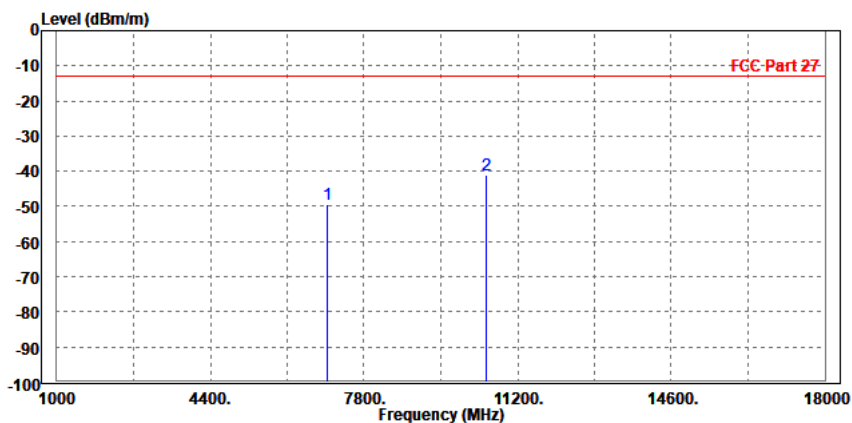

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7001.000	-50.22	-63.99	-13.00	-37.22	13.77	Peak	Horizontal
2	PP10500.000	-42.04	-61.69	-13.00	-29.04	19.65	Peak	Horizontal

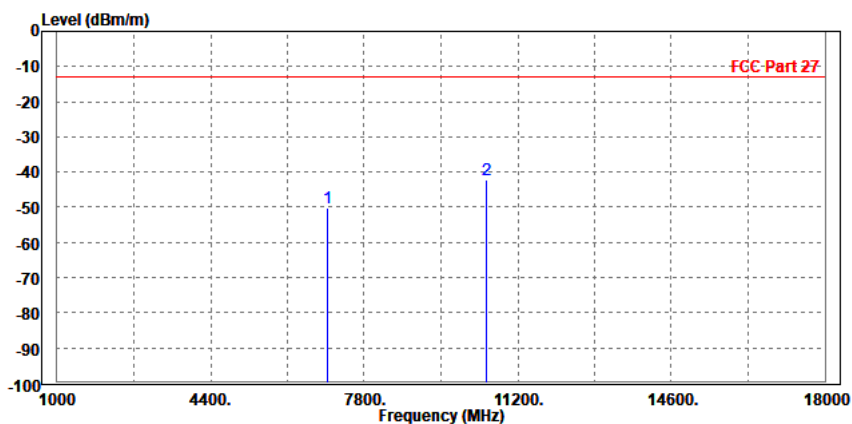

MODE	TX channel 42590	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	7000.000	-49.26	-63.83	-13.00	-36.26	14.57	Peak	Vertical
2	PP10503.000	-41.48	-62.05	-13.00	-28.48	20.57	Peak	Vertical

