


Site: AC1	Time: 2018/08/23 - 11:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5320MHz	

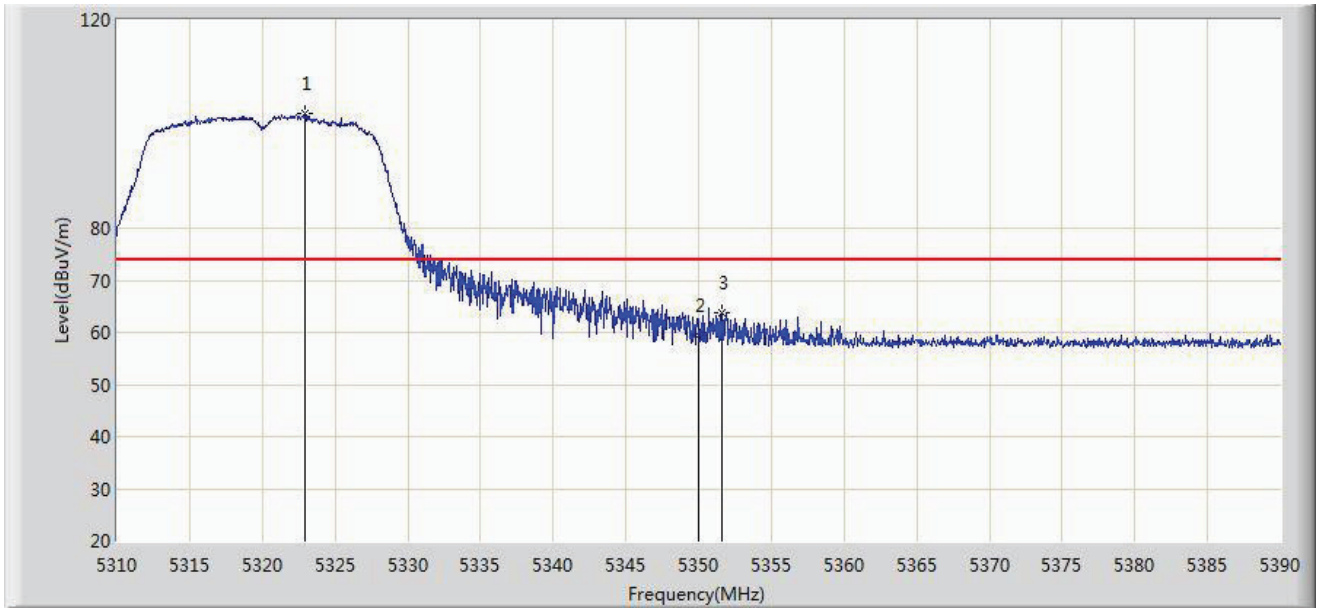


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.960	101.984	95.674	N/A	N/A	6.310	PK
2			5350.000	59.429	52.969	-14.571	74.000	6.460	PK
3			5351.640	63.899	57.430	-10.101	74.000	6.469	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 11:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5320MHz	

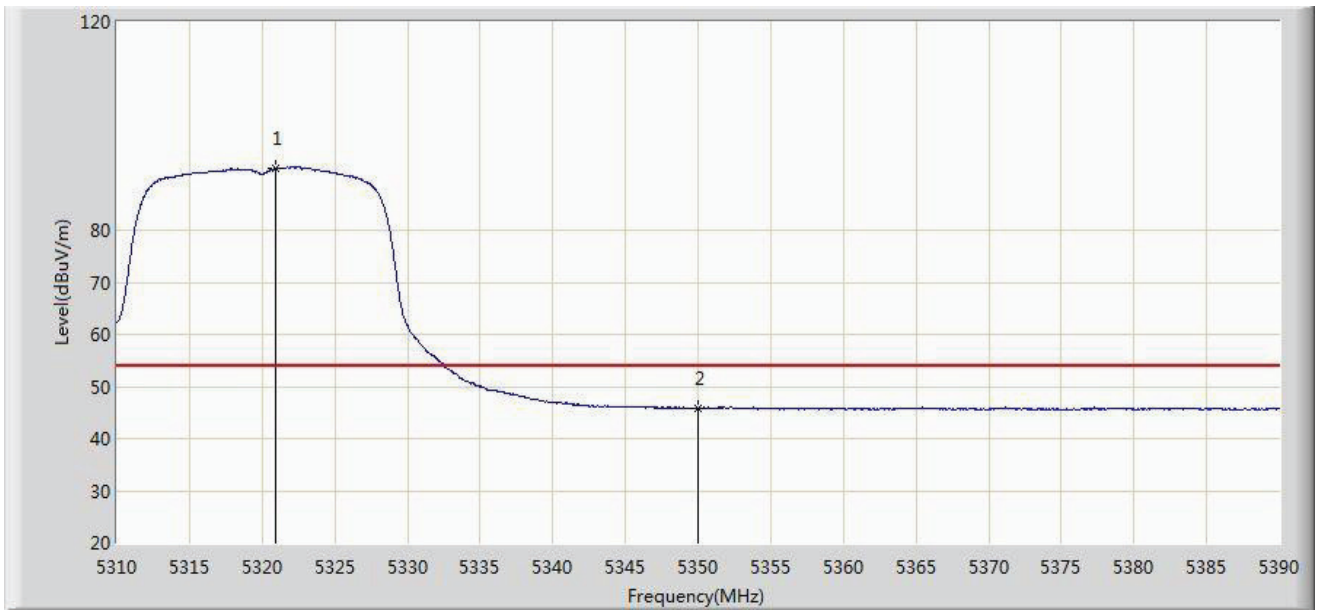


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.880	91.923	85.624	N/A	N/A	6.298	AV
2			5350.000	45.827	39.367	-8.173	54.000	6.460	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 11:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5500MHz	

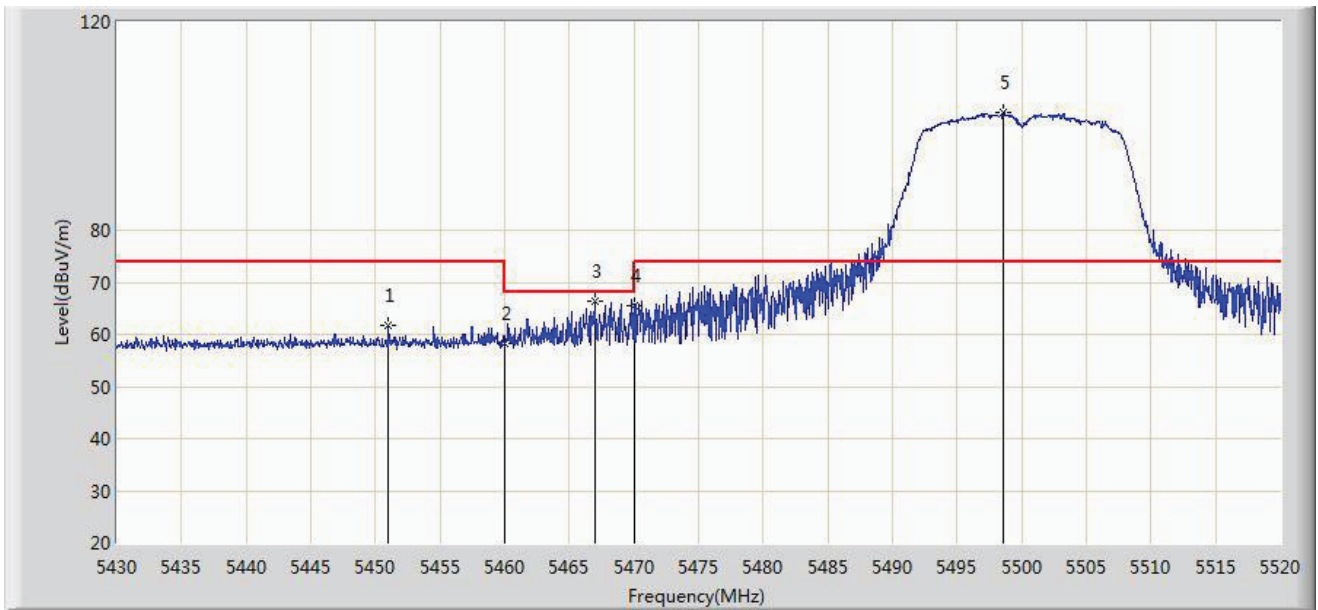


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.015	61.850	55.098	-12.150	74.000	6.752	PK
2			5460.000	58.154	51.352	-15.846	74.000	6.802	PK
3			5467.035	66.368	59.536	-1.832	68.200	6.832	PK
4			5470.000	65.477	58.632	-2.723	68.200	6.845	PK
5		*	5498.535	102.660	95.838	N/A	N/A	6.821	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 11:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5500MHz	

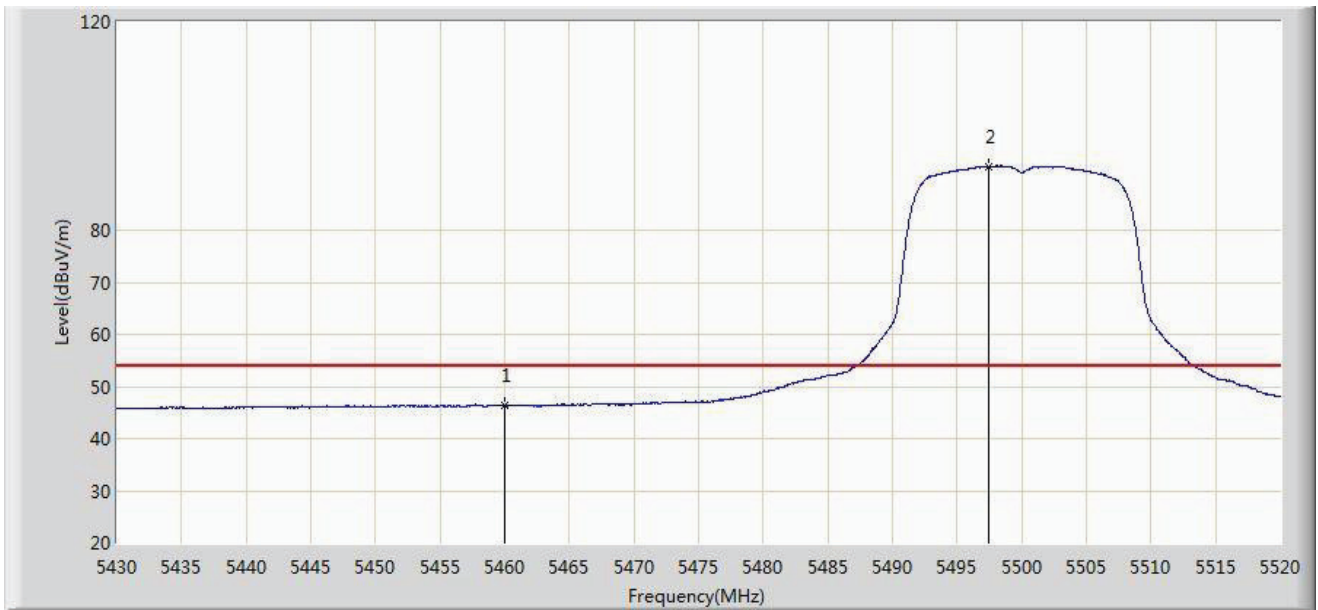


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.416	39.614	-7.584	54.000	6.802	AV
2		*	5497.455	92.231	85.408	N/A	N/A	6.823	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 11:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5500MHz	

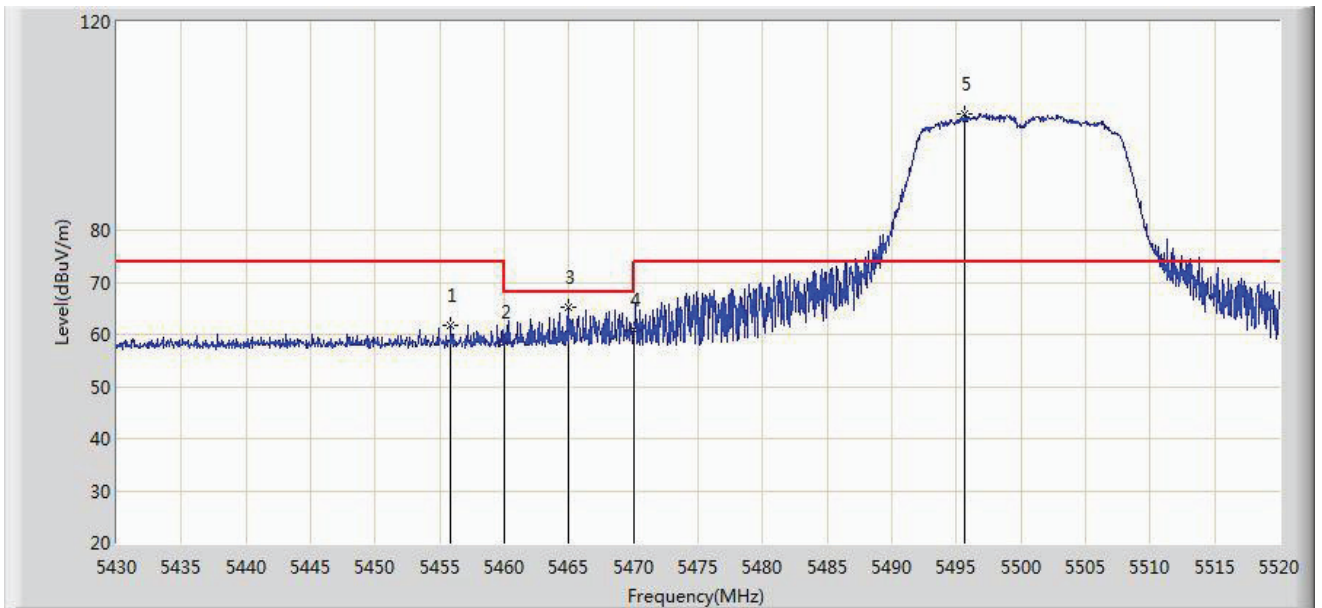


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.875	61.613	54.829	-12.387	74.000	6.784	PK
2			5460.000	58.529	51.727	-15.471	74.000	6.802	PK
3			5464.920	65.320	58.497	-2.880	68.200	6.823	PK
4			5470.000	60.833	53.988	-7.367	68.200	6.845	PK
5		*	5495.655	102.354	95.527	N/A	N/A	6.826	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 11:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5500MHz	

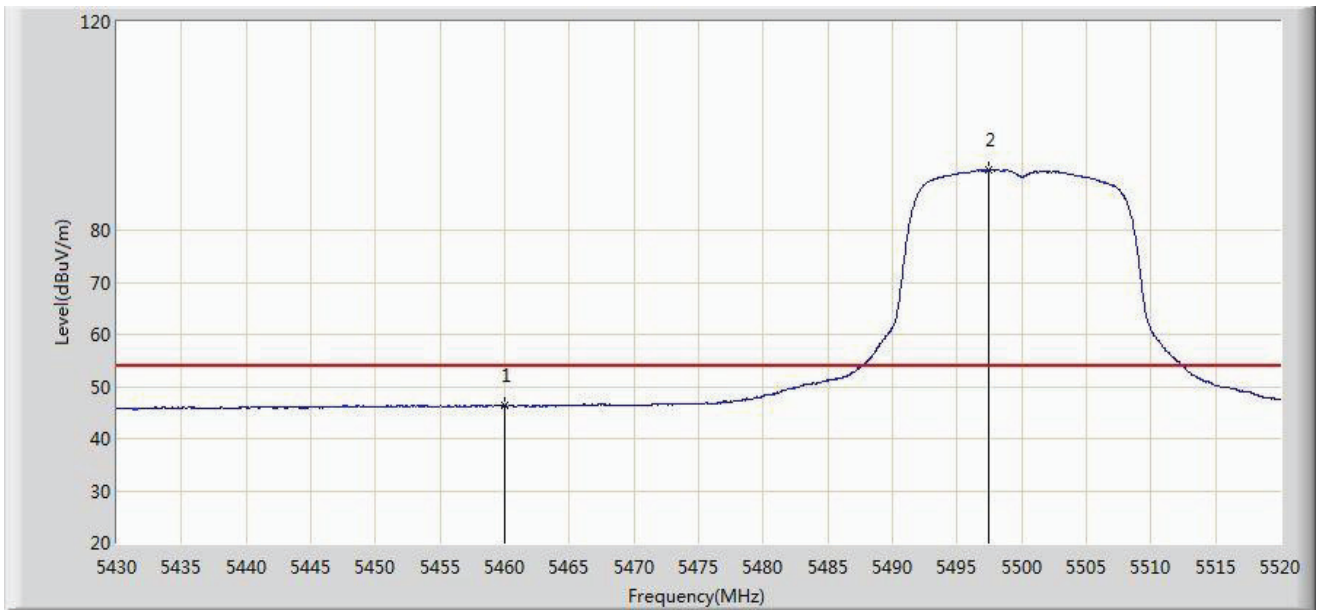


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.329	39.527	-7.671	54.000	6.802	AV
2		*	5497.455	91.615	84.792	N/A	N/A	6.823	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 11:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5700MHz	

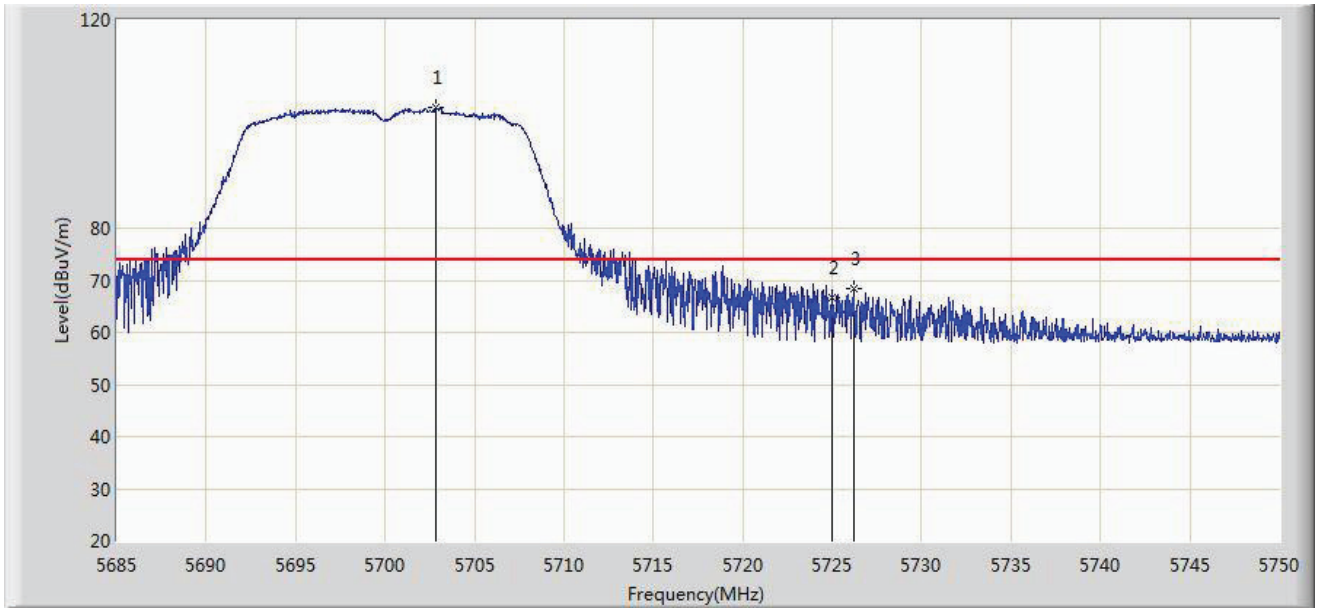


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.810	103.105	95.921	N/A	N/A	7.185	PK
2			5725.000	66.643	59.315	-7.357	74.000	7.328	PK
3			5726.178	68.283	60.949	-5.717	74.000	7.334	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 11:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5700MHz	

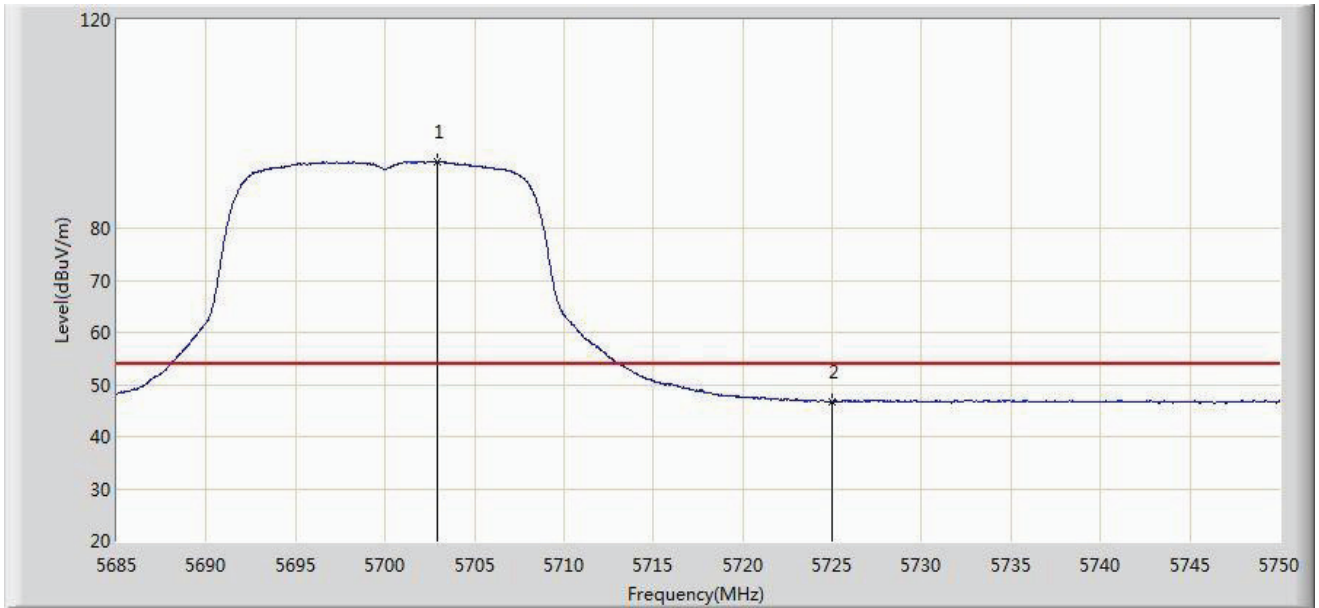


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.908	92.839	85.654	N/A	N/A	7.185	AV
2			5725.000	46.809	39.481	-7.191	54.000	7.328	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 11:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5700MHz	

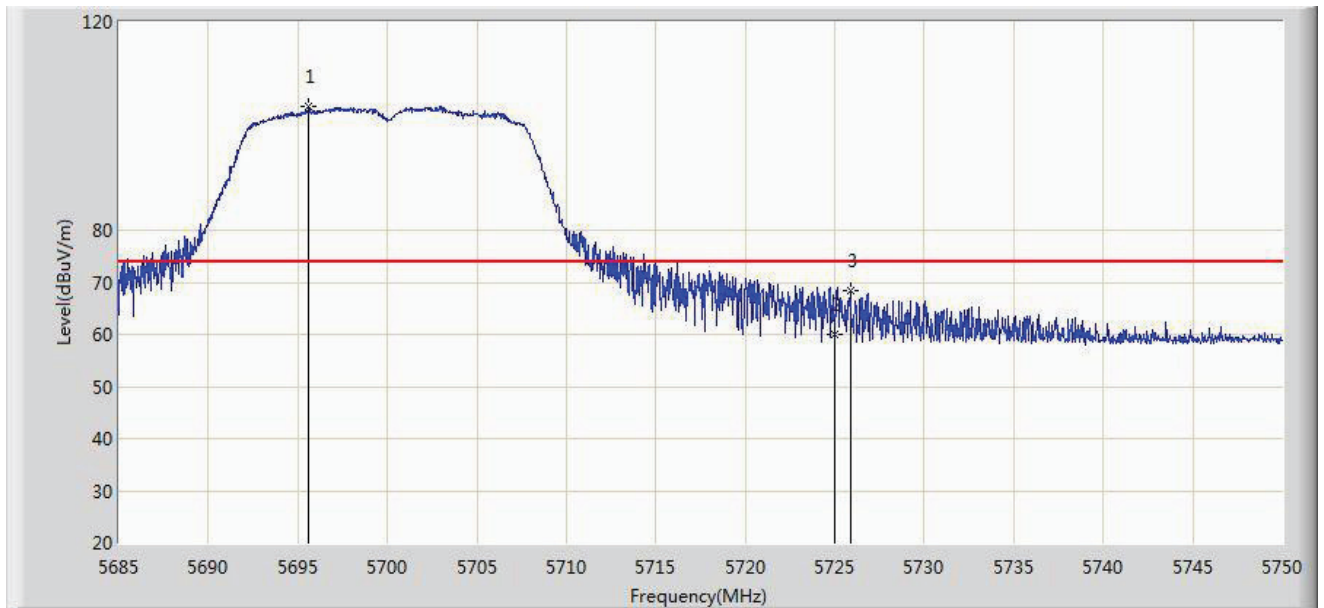


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.627	103.721	96.585	N/A	N/A	7.136	PK
2			5725.000	60.023	52.695	-13.977	74.000	7.328	PK
3			5725.885	68.362	61.029	-5.638	74.000	7.333	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 11:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5700MHz	

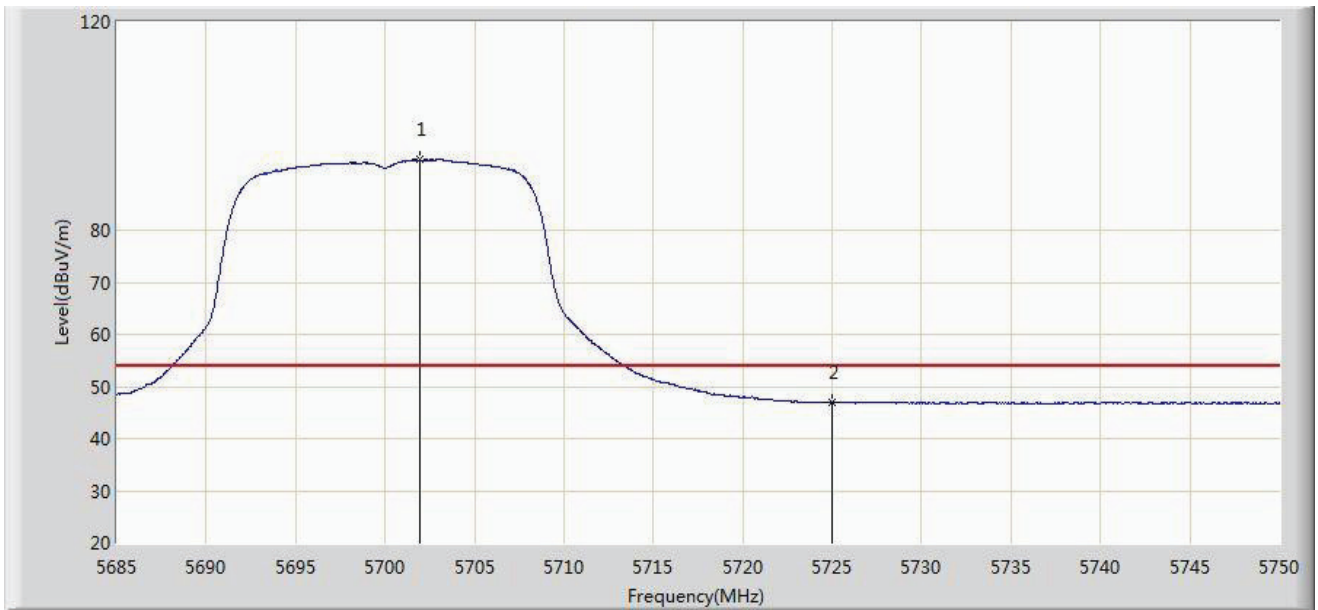


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.933	93.491	86.313	N/A	N/A	7.179	AV
2			5725.000	46.978	39.650	-7.022	54.000	7.328	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 13:12
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5745MHz	

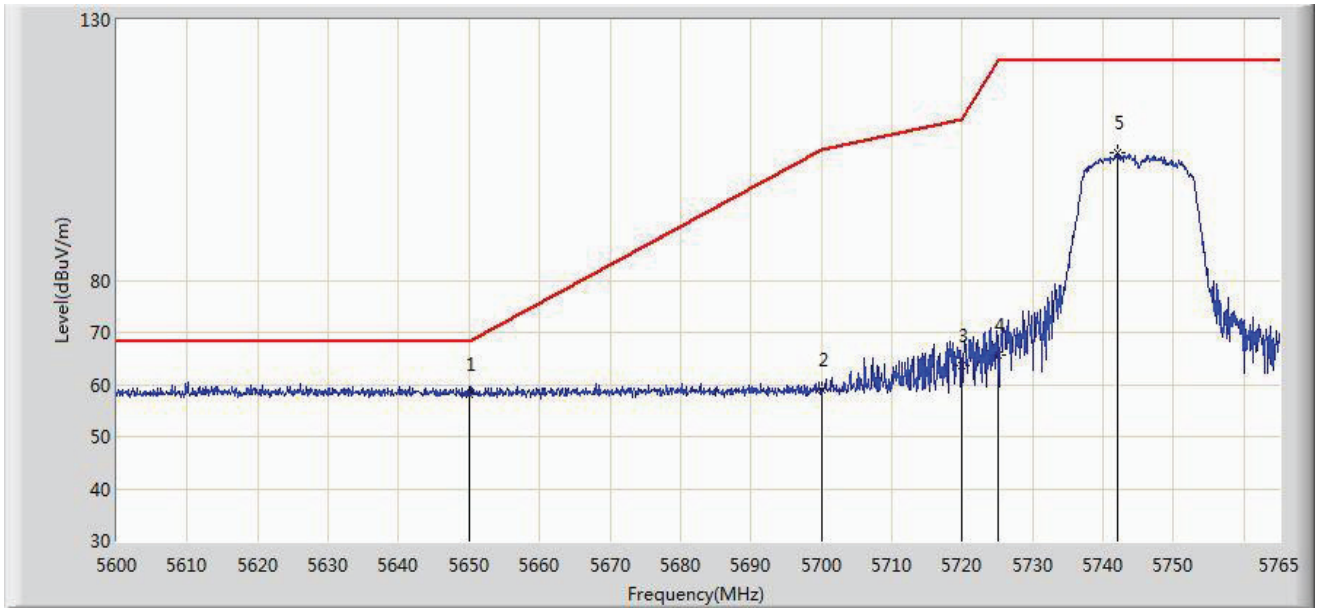


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5650.000	58.015	51.010	-10.185	68.200	7.005	PK
2			5700.000	59.112	51.947	-46.088	105.200	7.165	PK
3			5720.000	63.593	56.294	-47.207	110.800	7.299	PK
4			5725.000	65.755	58.427	-56.445	122.200	7.328	PK
5			5741.982	104.383	96.984	N/A	N/A	7.399	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 13:15
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5745MHz	

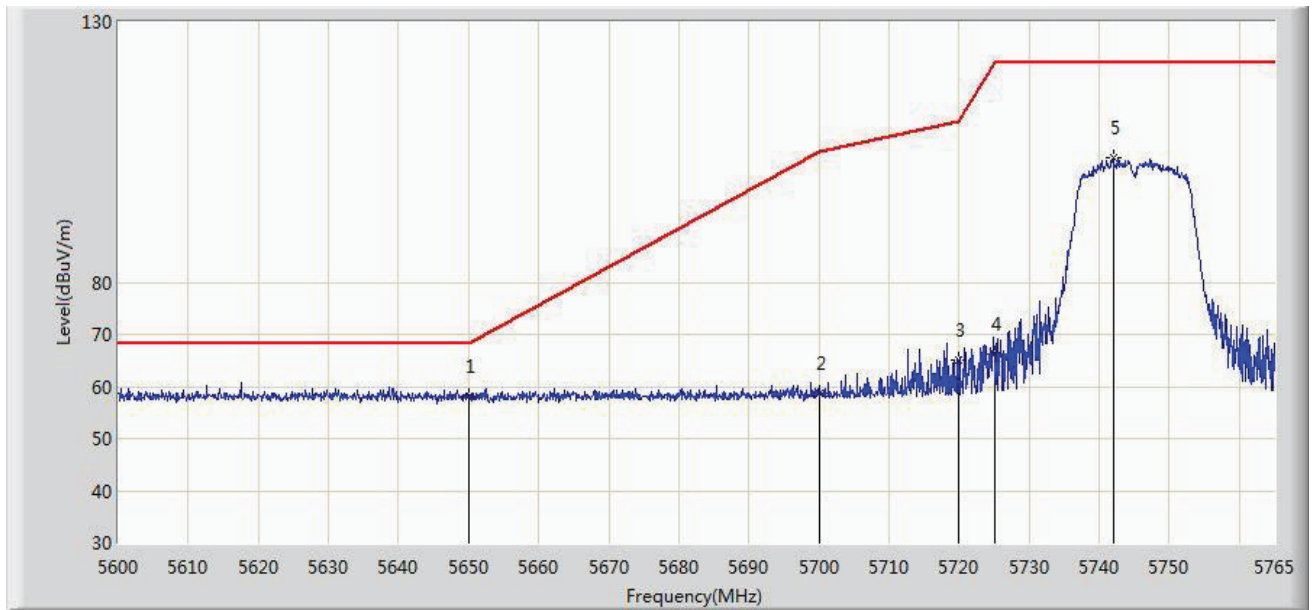


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5650.000	58.241	51.236	-9.959	68.200	7.005	PK
2			5700.000	58.688	51.523	-46.512	105.200	7.165	PK
3			5720.000	65.099	57.800	-45.701	110.800	7.299	PK
4			5725.000	66.160	58.832	-56.040	122.200	7.328	PK
5			5741.982	103.805	96.406	N/A	N/A	7.399	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 13:18
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5825MHz	

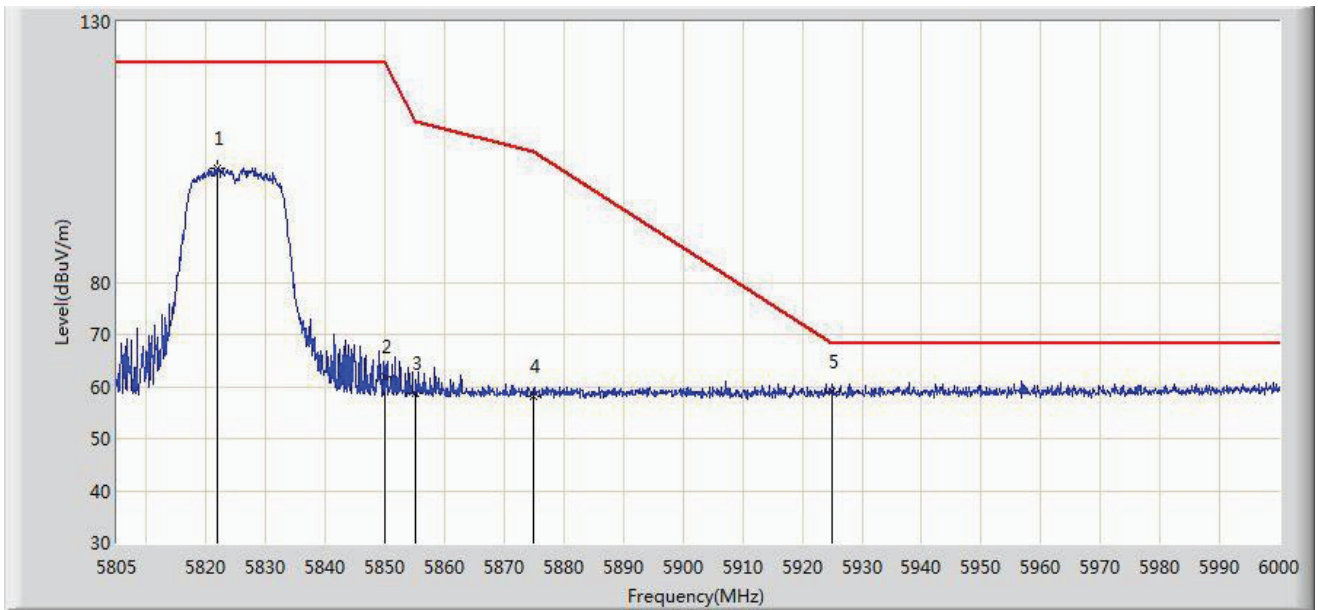


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5821.965	101.929	94.284	N/A	N/A	7.645	PK
2			5850.000	61.810	54.037	-60.390	122.200	7.774	PK
3			5855.000	58.820	51.044	-51.980	110.800	7.775	PK
4			5875.000	58.176	50.358	-47.024	105.200	7.818	PK
5		*	5925.000	58.939	51.120	-9.261	68.200	7.819	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 13:20
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11a at channel 5825MHz	

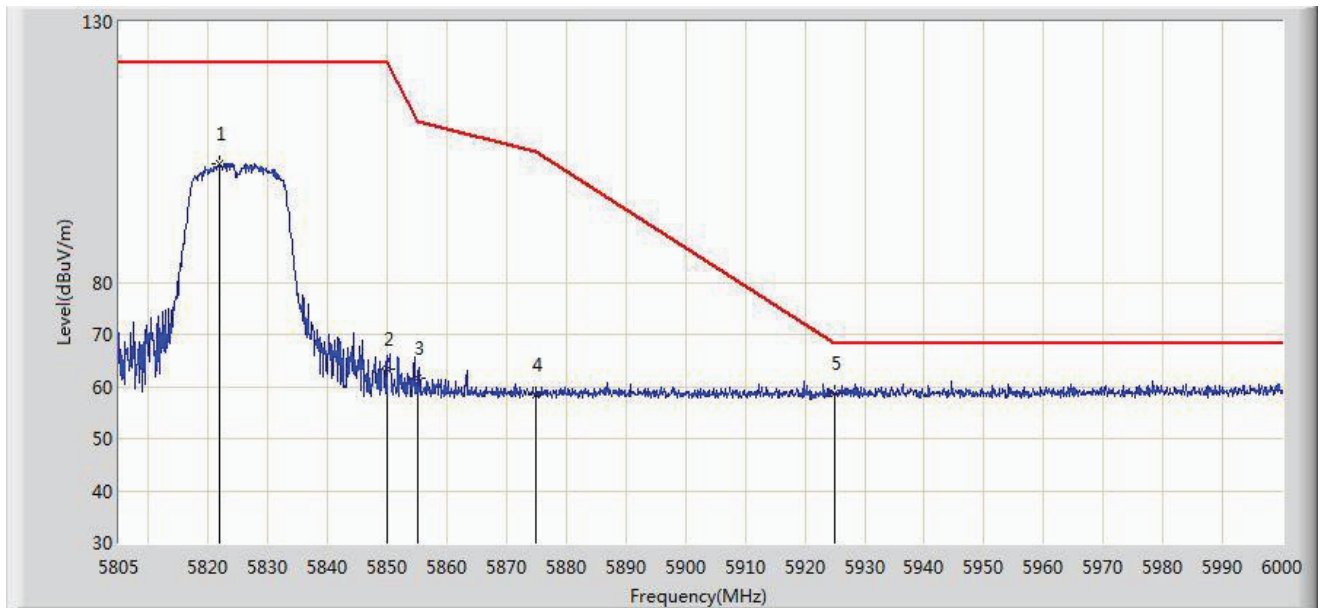


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5821.770	102.847	95.203	N/A	N/A	7.643	PK
2			5850.000	63.423	55.650	-58.777	122.200	7.774	PK
3			5855.000	61.557	53.781	-49.243	110.800	7.775	PK
4			5875.000	58.280	50.462	-46.920	105.200	7.818	PK
5		*	5925.000	58.604	50.785	-9.596	68.200	7.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 13:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5180MHz	

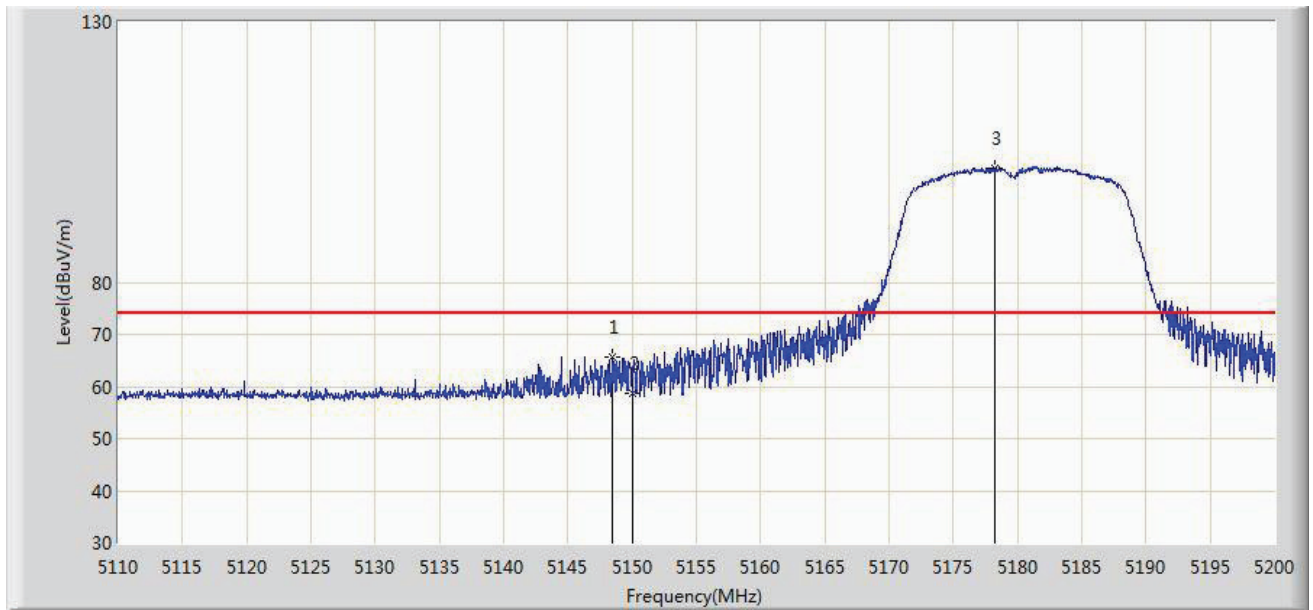


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.430	65.642	59.083	-8.358	74.000	6.559	PK
2			5150.000	58.579	52.017	-15.421	74.000	6.562	PK
3		*	5178.220	101.918	95.460	N/A	N/A	6.458	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 17:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5180MHz	

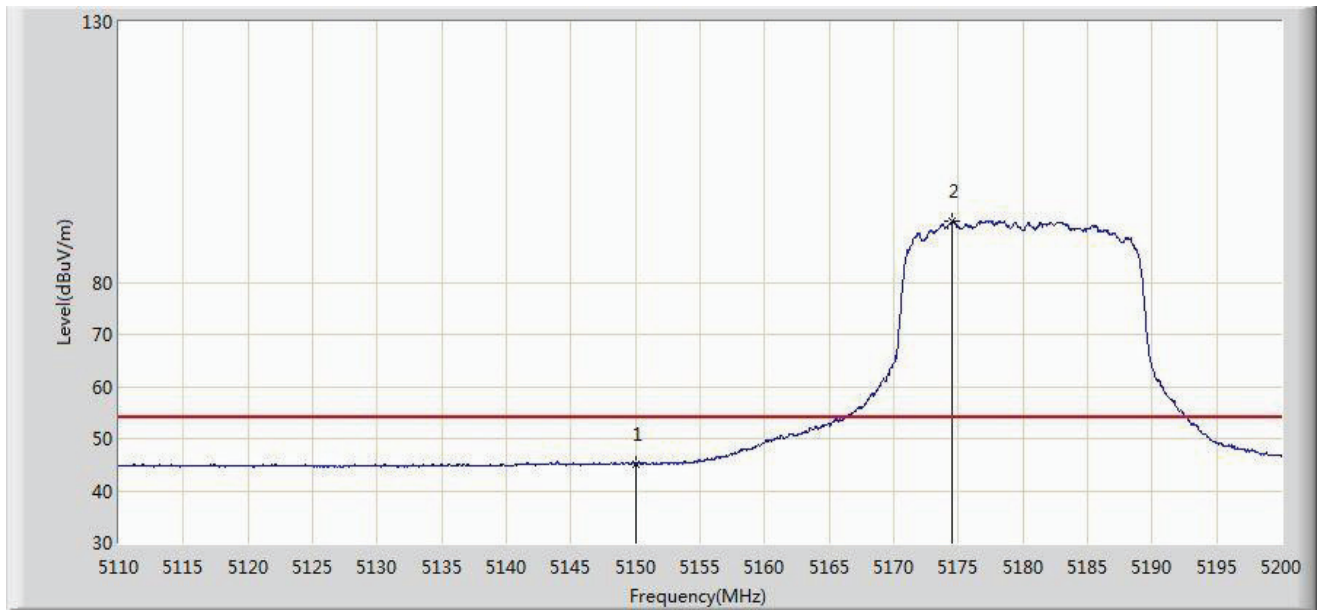


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.204	38.642	-8.796	54.000	6.562	AV
2		*	5174.485	91.687	85.199	N/A	N/A	6.488	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 17:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5180MHz	

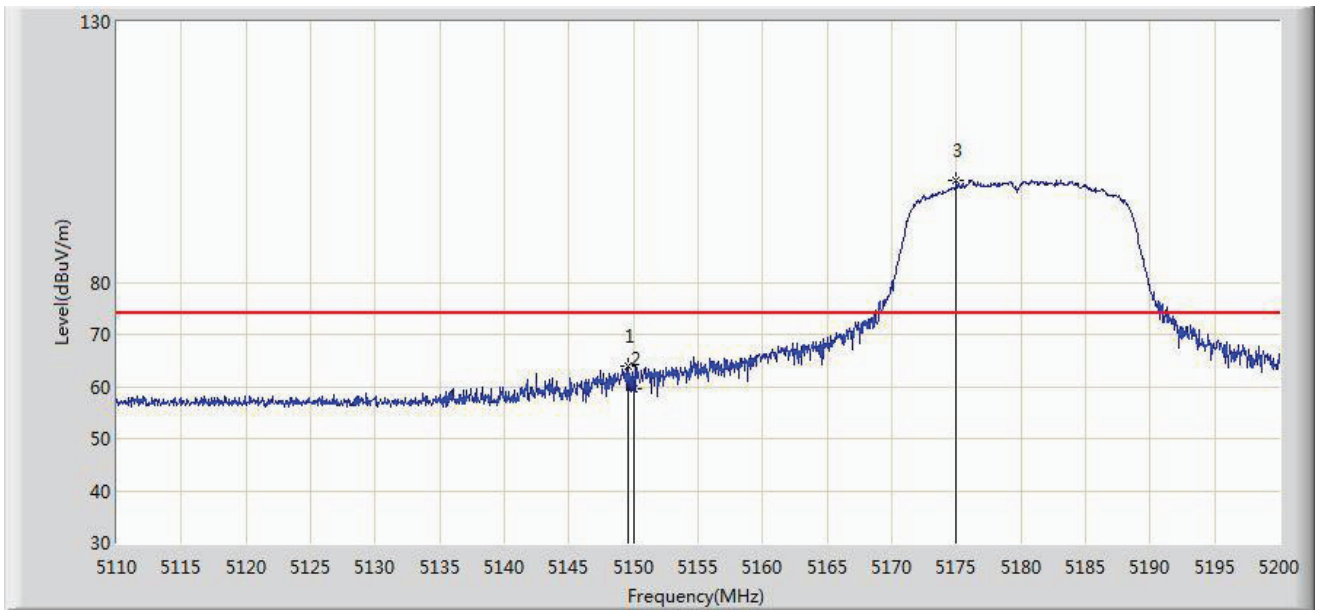


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.555	63.901	57.340	-10.099	74.000	6.562	PK
2			5150.000	59.443	52.881	-14.557	74.000	6.562	PK
3		*	5174.980	99.642	93.158	N/A	N/A	6.483	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 17:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5180MHz	

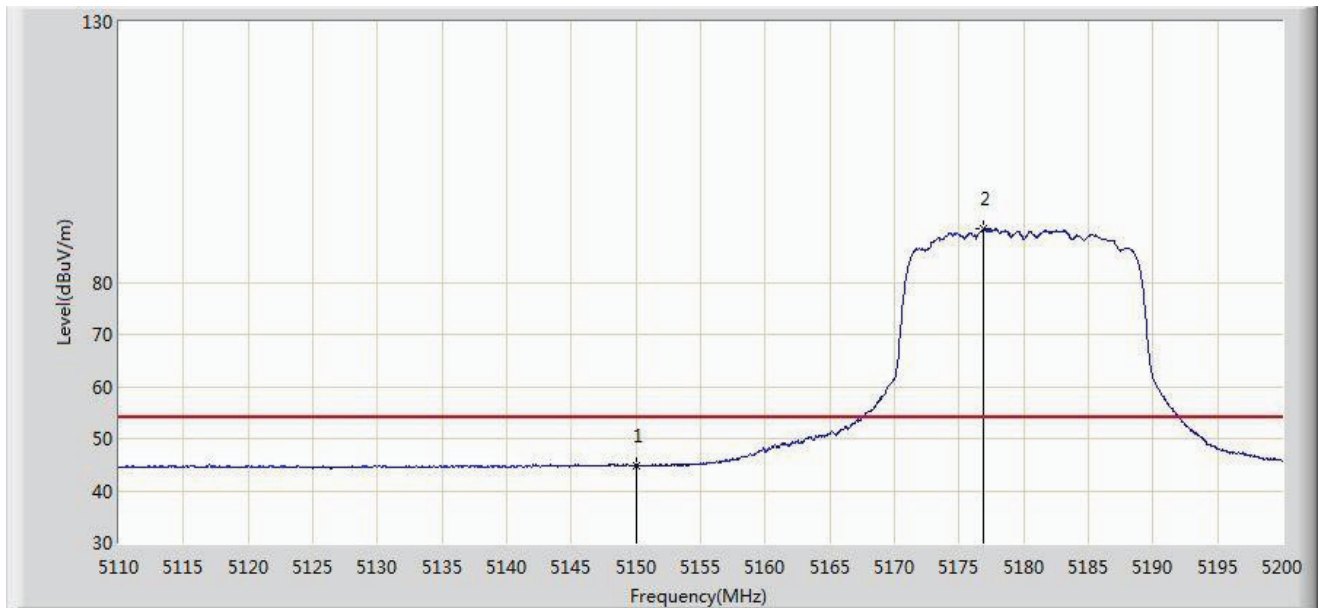


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.836	38.274	-9.164	54.000	6.562	AV
2		*	5176.825	90.172	83.703	N/A	N/A	6.470	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 17:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5320MHz	

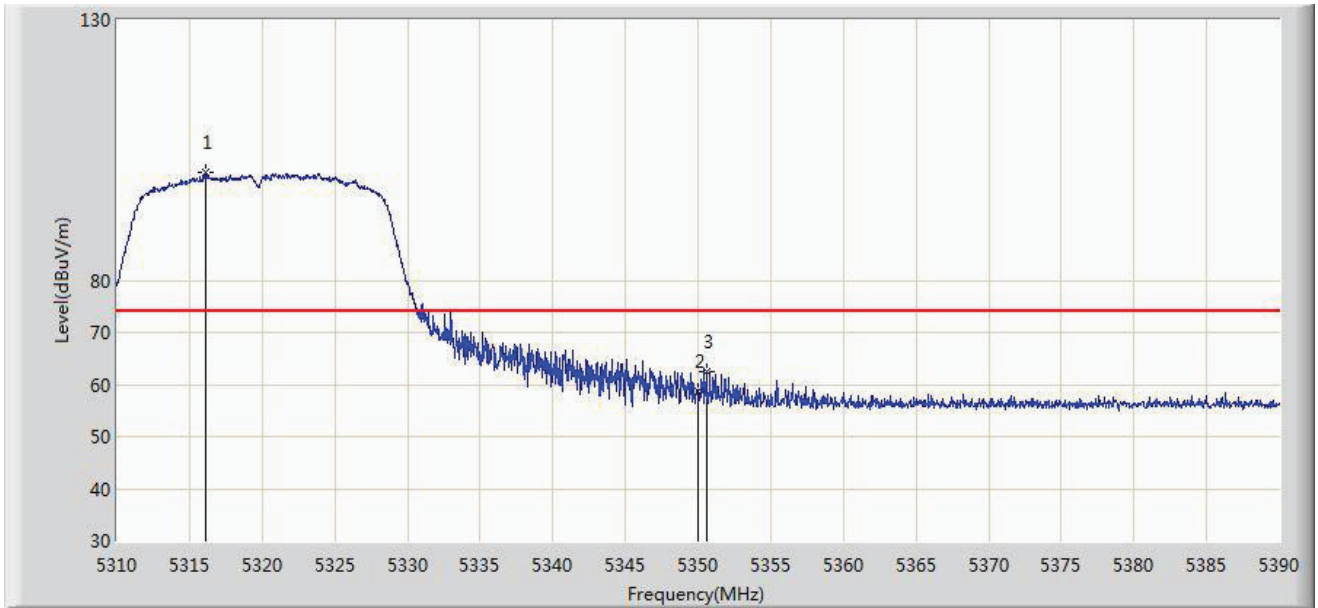


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.160	100.581	94.302	N/A	N/A	6.279	PK
2			5350.000	58.763	52.303	-15.237	74.000	6.460	PK
3			5350.600	62.491	56.028	-11.509	74.000	6.463	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 17:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5320MHz	

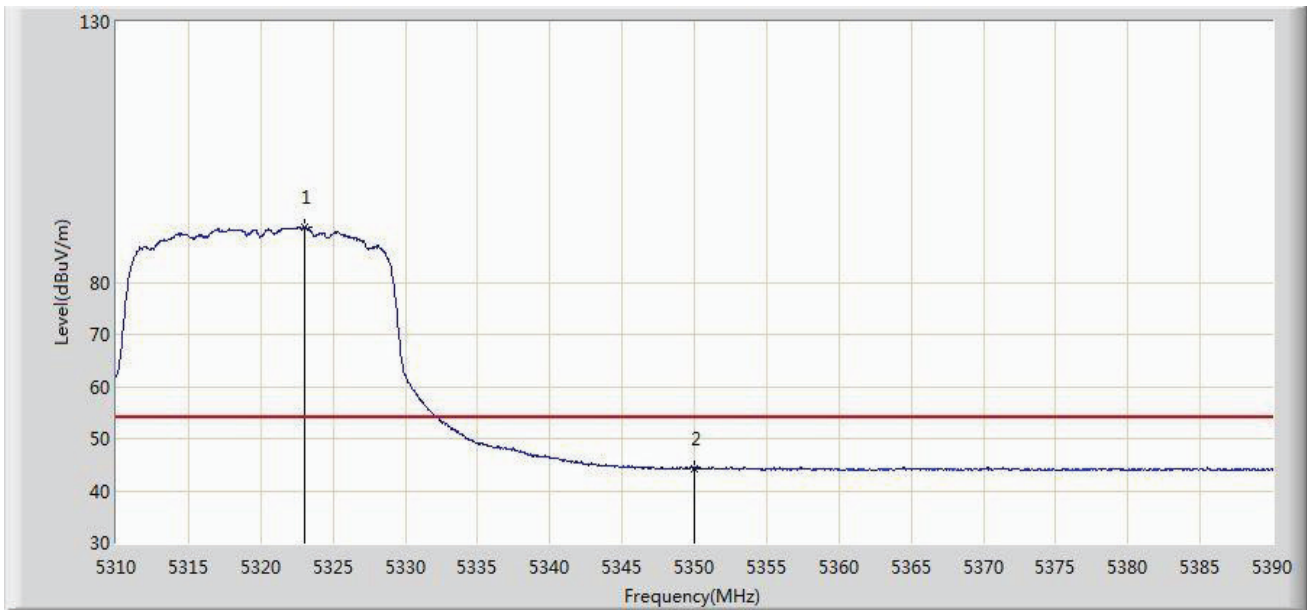


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.080	90.461	84.150	N/A	N/A	6.311	AV
2			5350.000	44.325	37.865	-9.675	54.000	6.460	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 17:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5320MHz	

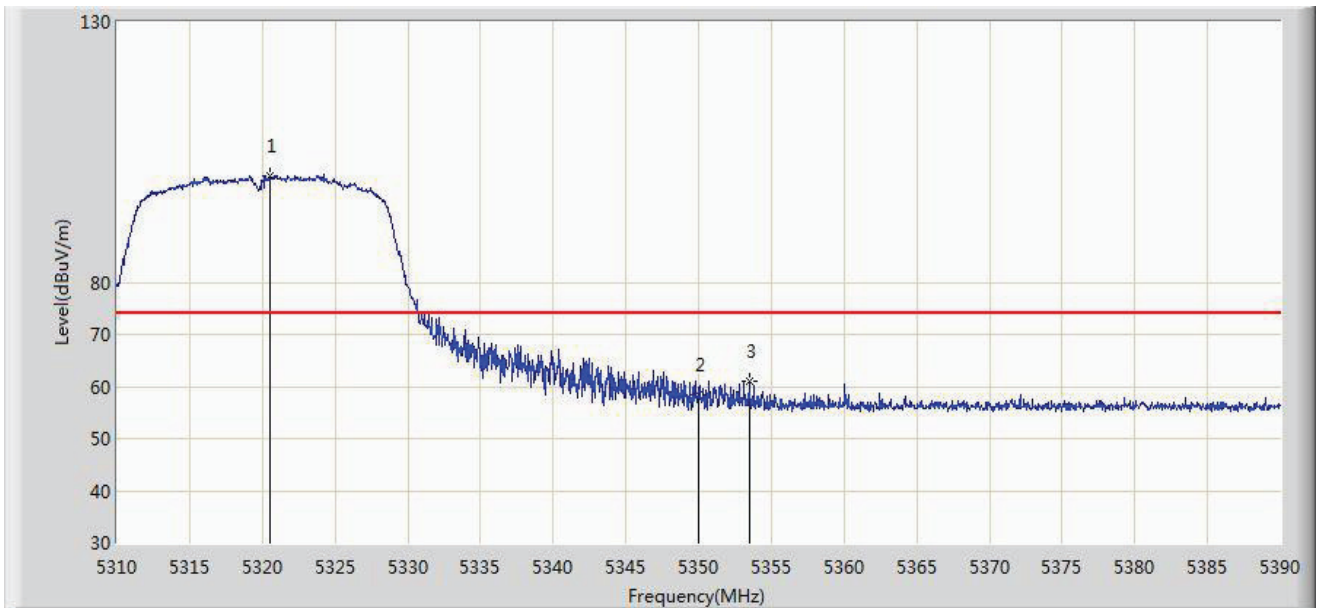


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.480	100.414	94.118	N/A	N/A	6.297	PK
2			5350.000	58.290	51.830	-15.710	74.000	6.460	PK
3			5353.480	61.007	54.531	-12.993	74.000	6.475	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 17:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5320MHz	

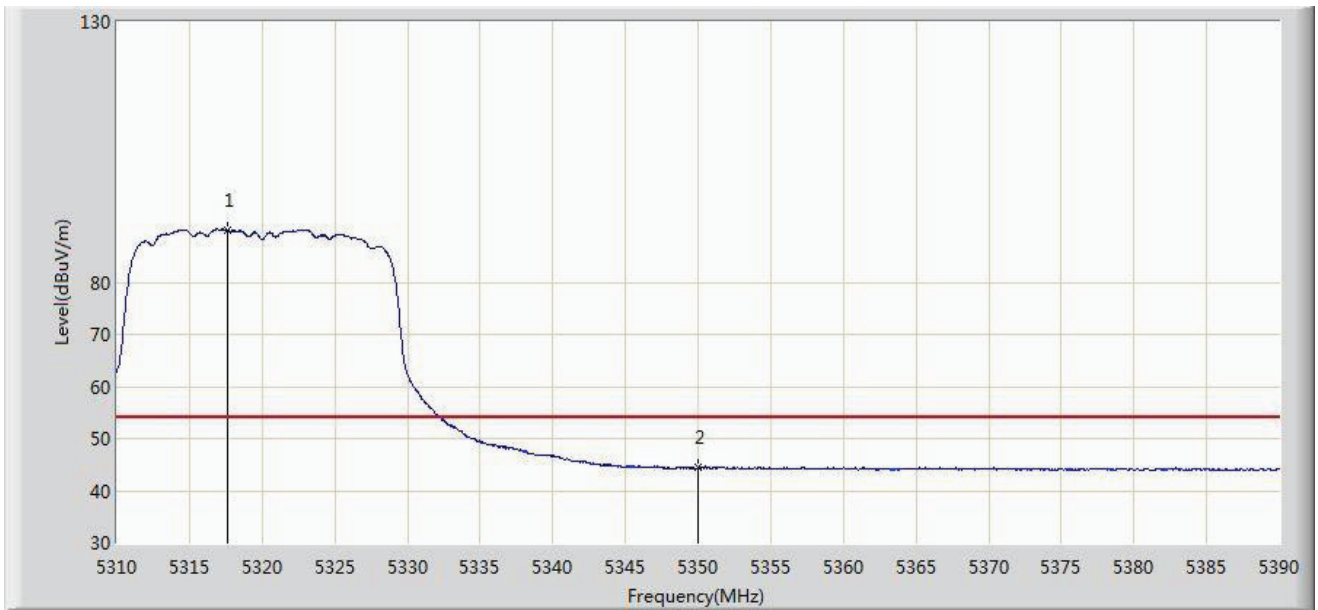


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.640	90.120	83.839	N/A	N/A	6.281	AV
2			5350.000	44.468	38.008	-9.532	54.000	6.460	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5500MHz	

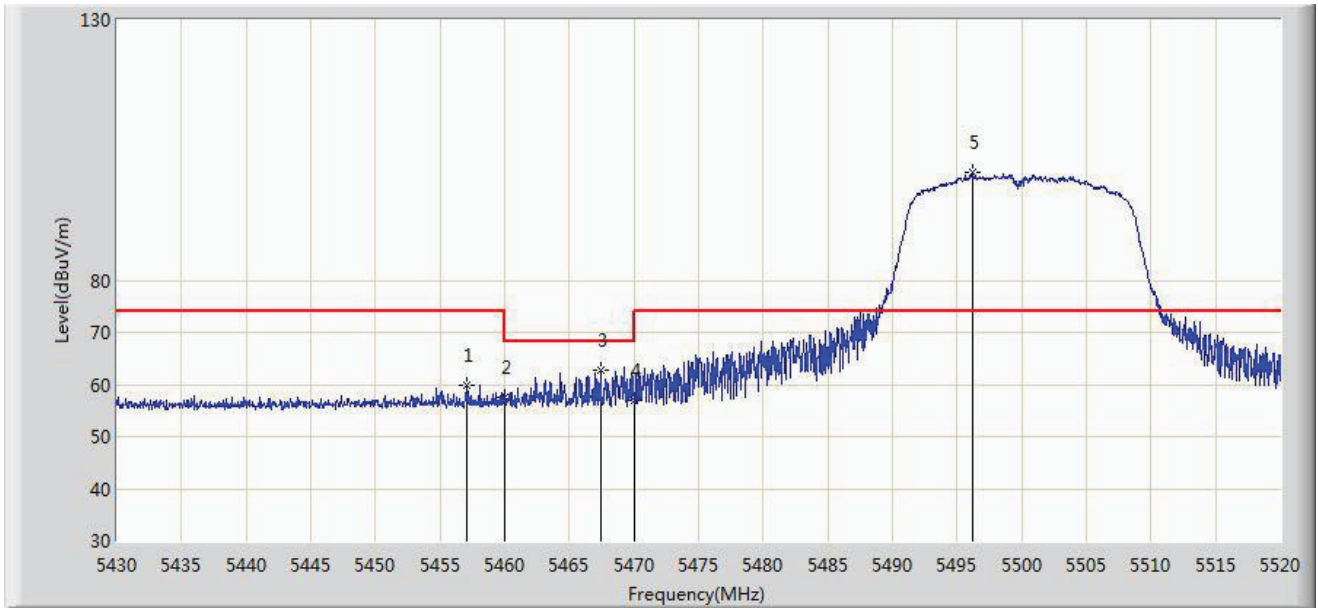


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.045	59.719	52.930	-14.281	74.000	6.789	PK
2			5460.000	57.447	50.645	-16.553	74.000	6.802	PK
3			5467.395	62.642	55.808	-5.558	68.200	6.835	PK
4			5470.000	56.958	50.113	-11.242	68.200	6.845	PK
5		*	5496.195	100.651	93.825	N/A	N/A	6.826	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5500MHz	

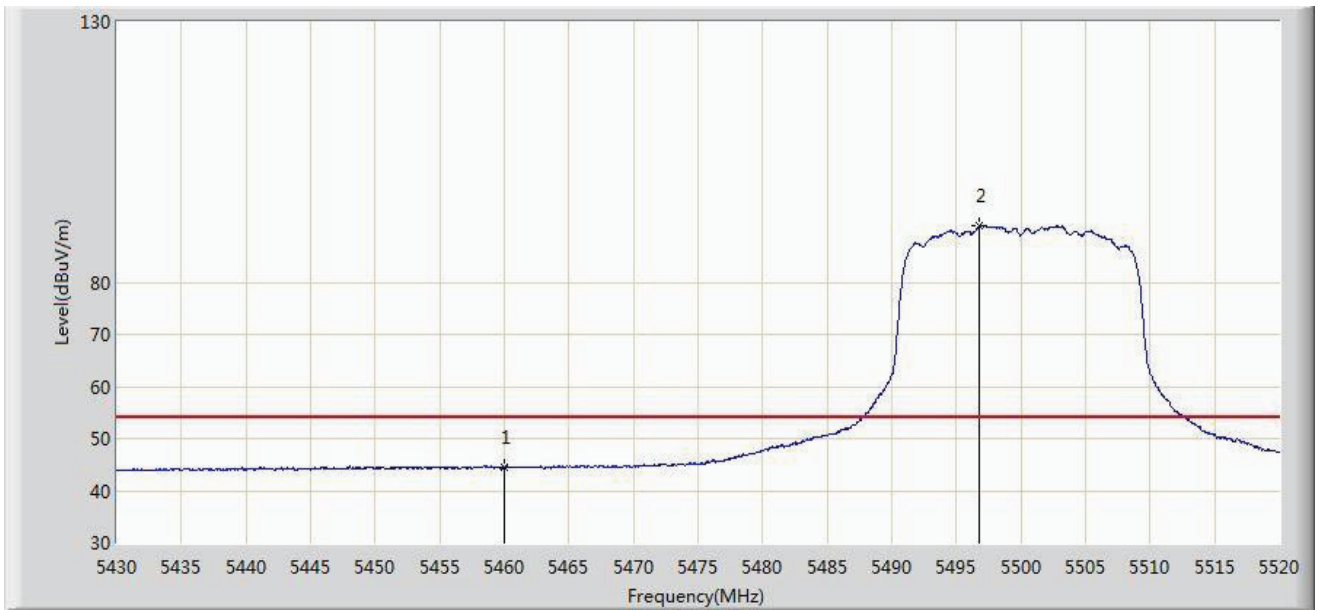


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.552	37.750	-9.448	54.000	6.802	AV
2		*	5496.735	90.751	83.926	N/A	N/A	6.825	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5500MHz	

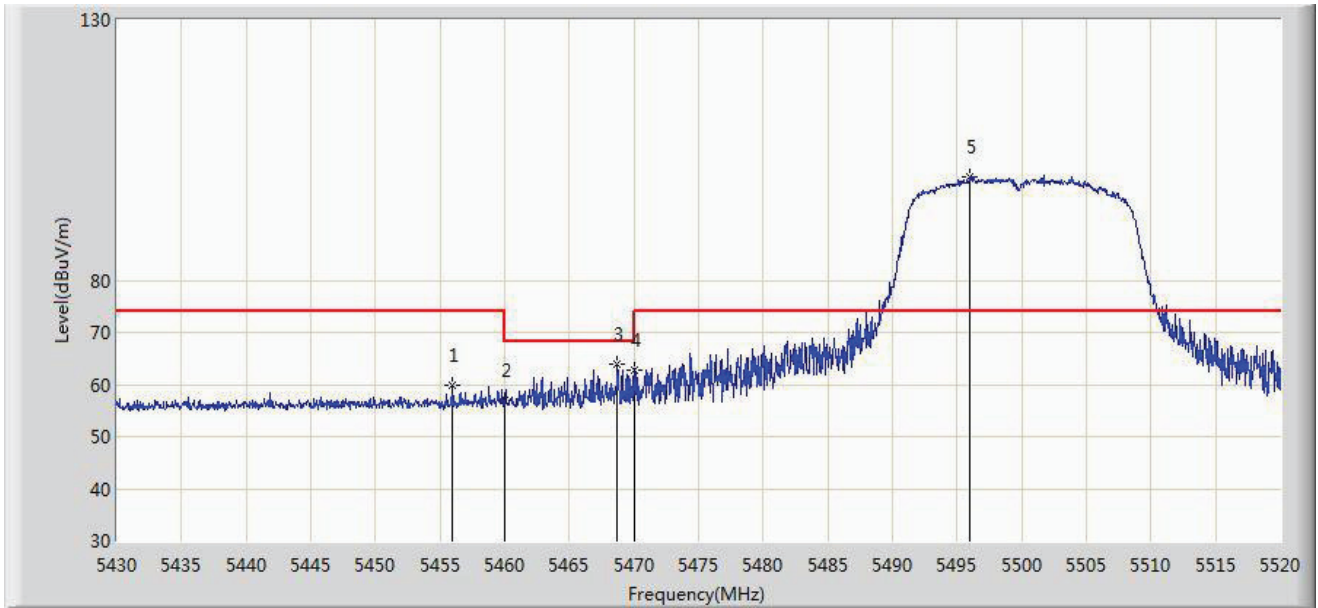


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.965	59.807	53.023	-14.193	74.000	6.785	PK
2			5460.000	56.941	50.139	-17.059	74.000	6.802	PK
3			5468.700	64.028	57.189	-4.172	68.200	6.840	PK
4			5470.000	62.617	55.772	-5.583	68.200	6.845	PK
5		*	5496.015	99.723	92.897	N/A	N/A	6.826	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5500MHz	

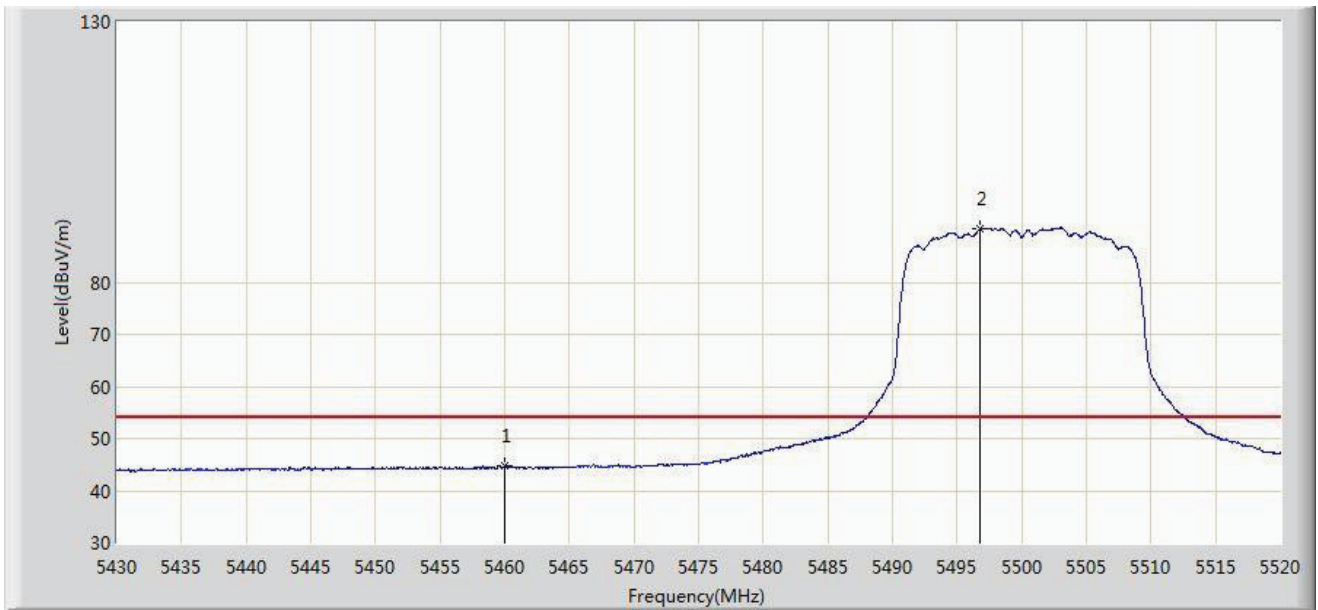


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.685	37.883	-9.315	54.000	6.802	AV
2		*	5496.735	90.159	83.334	N/A	N/A	6.825	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5700MHz	

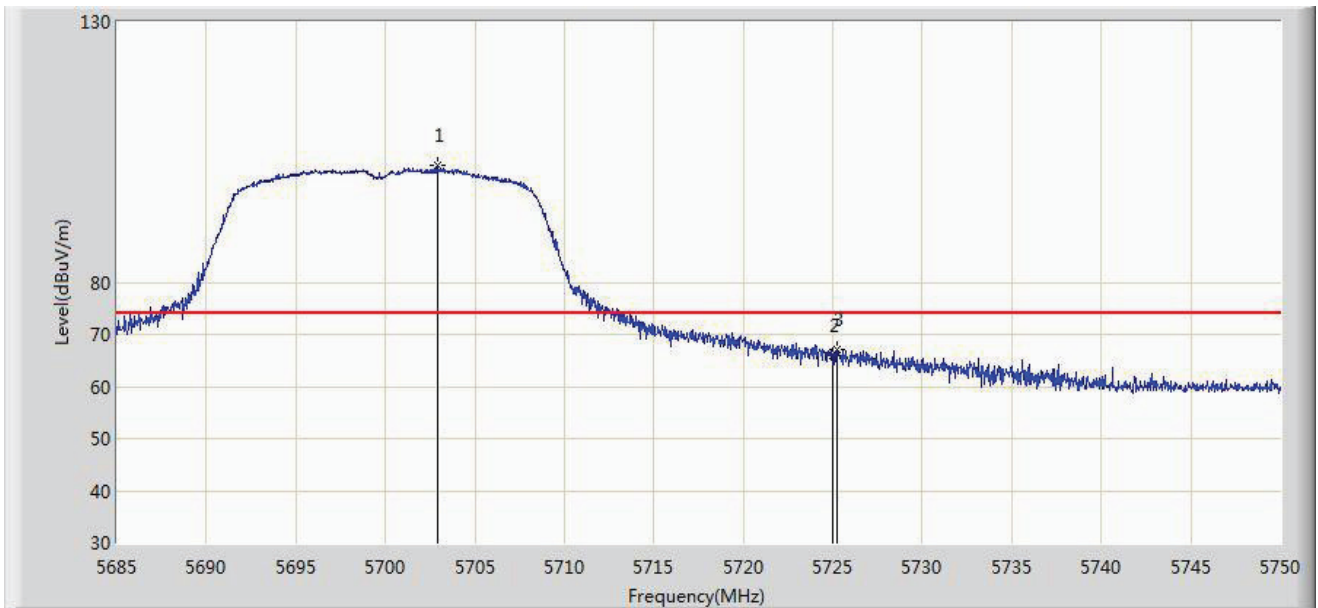


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.908	102.415	95.230	N/A	N/A	7.185	PK
2			5725.000	66.036	58.708	-7.964	74.000	7.328	PK
3			5725.203	67.079	59.750	-6.921	74.000	7.329	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5700MHz	

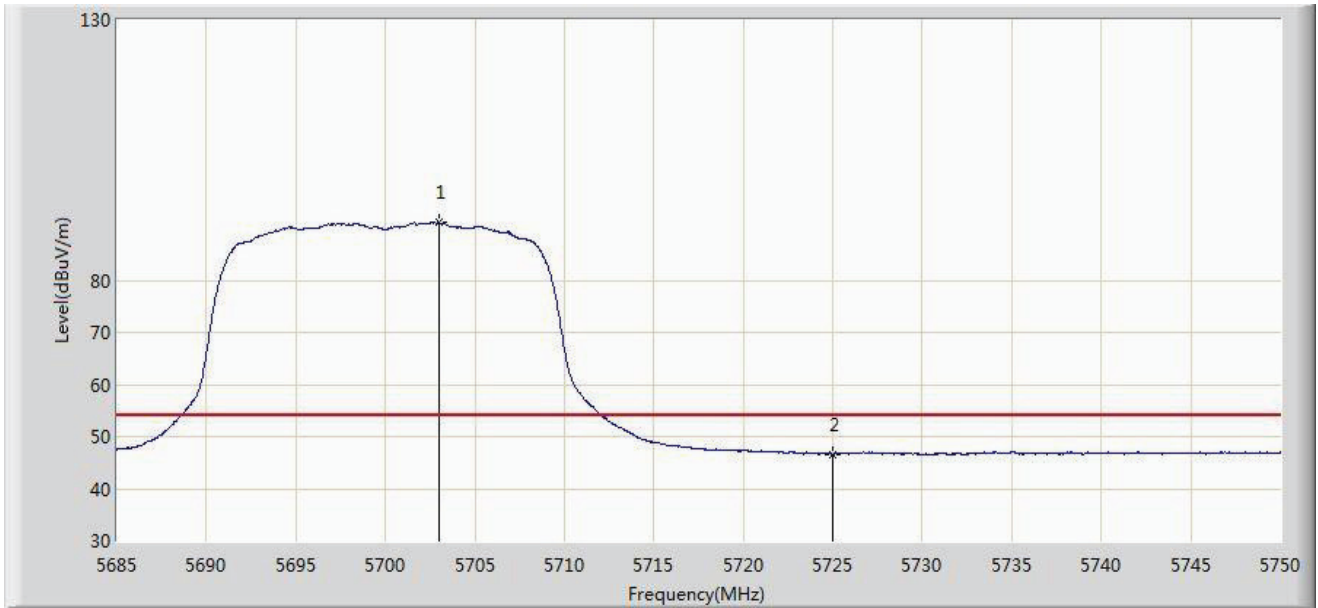


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.973	91.156	83.970	N/A	N/A	7.185	AV
2			5725.000	46.651	39.323	-7.349	54.000	7.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5700MHz	

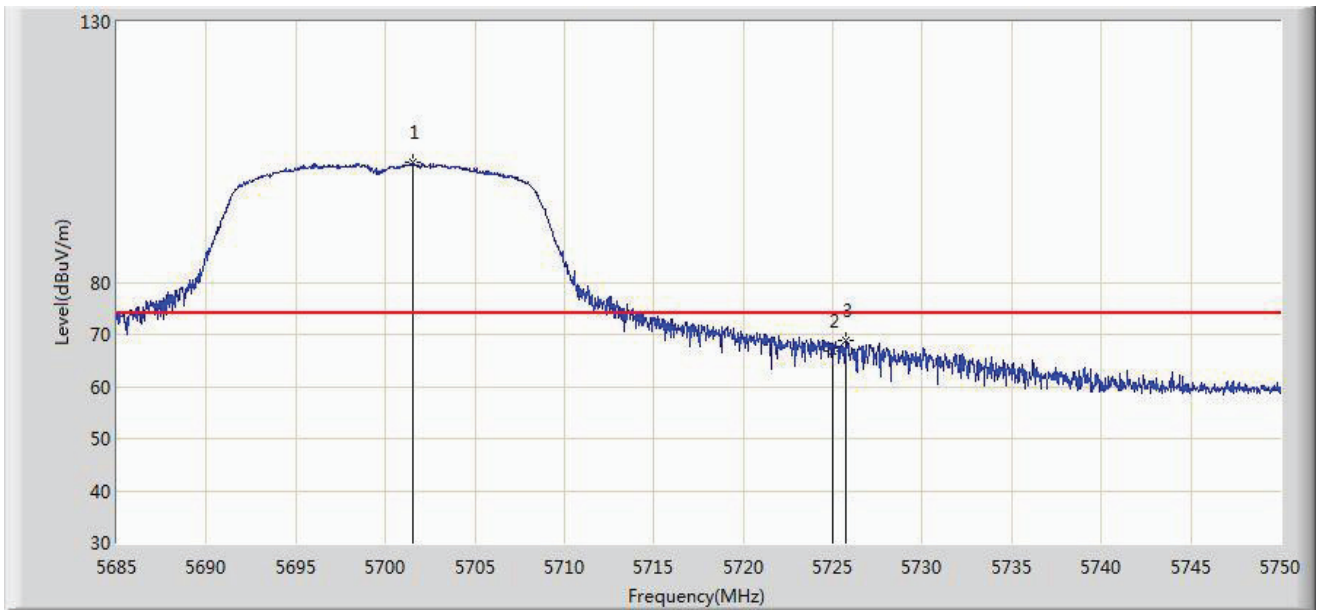


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.510	103.101	95.925	N/A	N/A	7.175	PK
2			5725.000	66.780	59.452	-7.220	74.000	7.328	PK
3			5725.690	68.854	61.522	-5.146	74.000	7.332	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5700MHz	

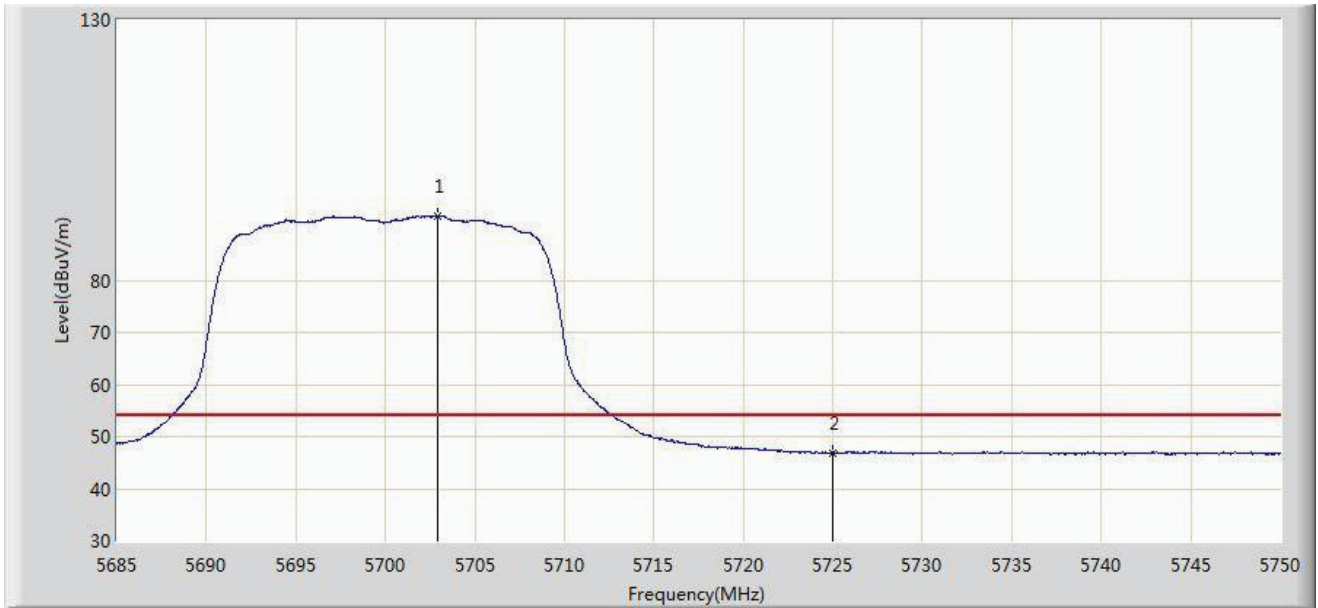


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.940	92.285	85.100	N/A	N/A	7.185	AV
2			5725.000	46.925	39.597	-7.075	54.000	7.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:38
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5745MHz	

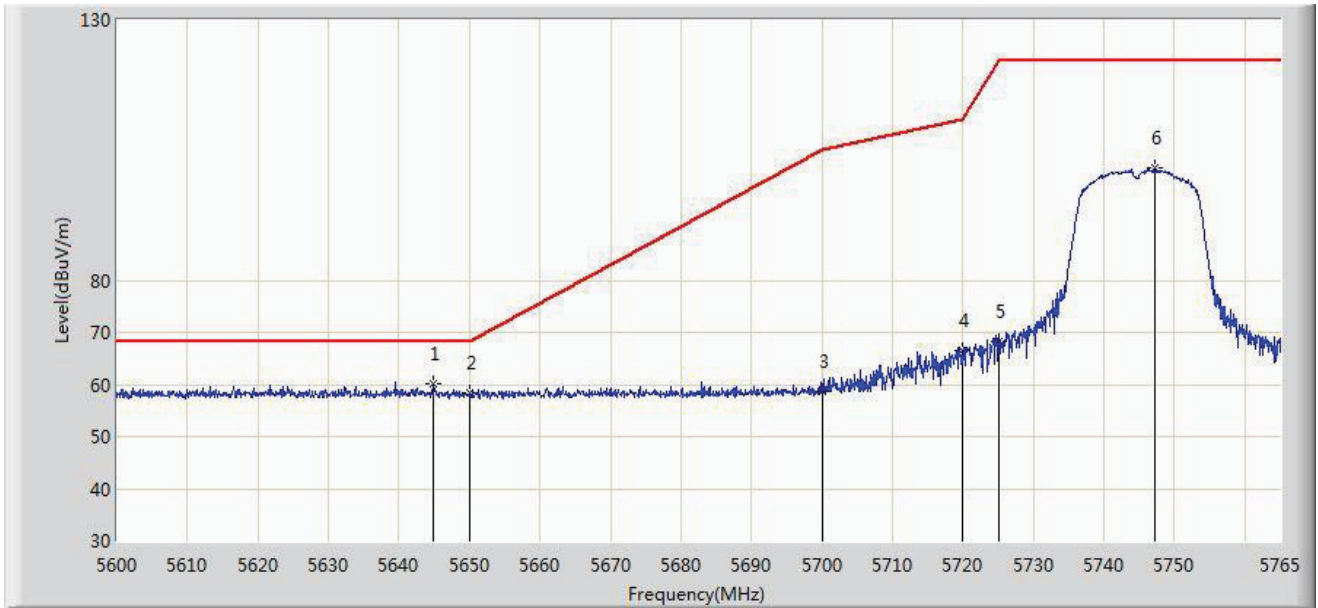


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5644.797	60.134	53.140	-8.066	68.200	6.994	PK
2			5650.000	58.371	51.366	-9.829	68.200	7.005	PK
3			5700.000	58.807	51.642	-46.393	105.200	7.165	PK
4			5720.000	66.415	59.116	-44.385	110.800	7.299	PK
5			5725.000	68.207	60.879	-53.993	122.200	7.328	PK
6			5747.180	101.696	94.290	N/A	N/A	7.407	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:44
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5745MHz	

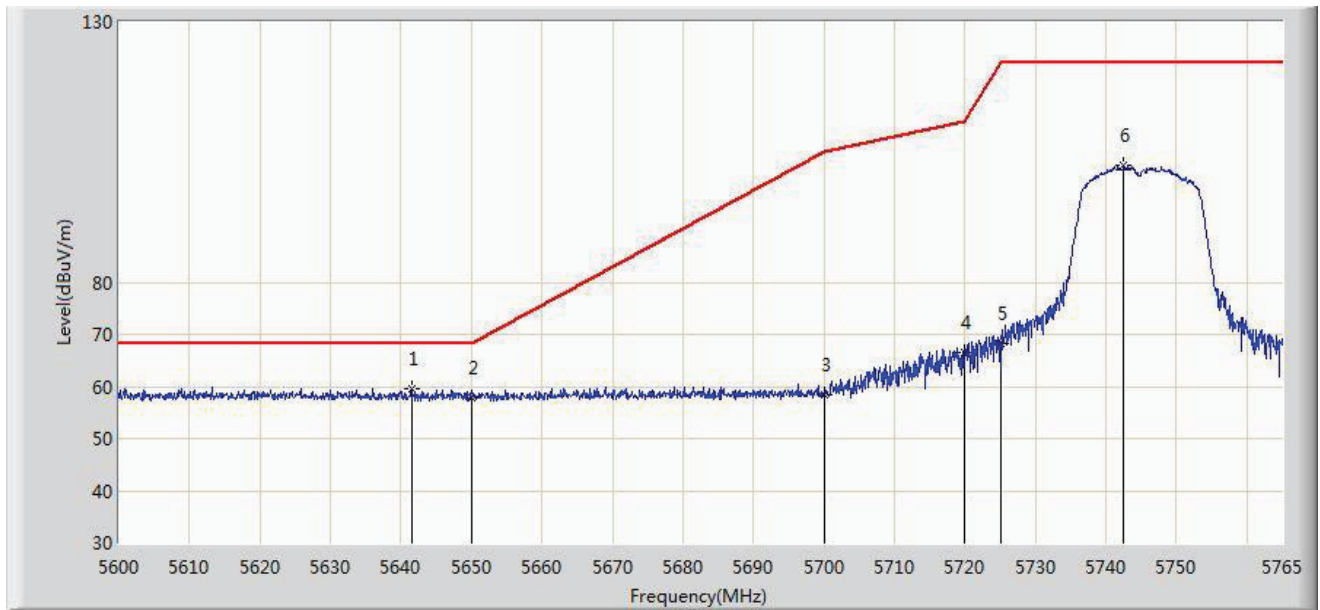


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5641.498	59.479	52.493	-8.721	68.200	6.987	PK
2			5650.000	57.939	50.934	-10.261	68.200	7.005	PK
3			5700.000	58.531	51.366	-46.669	105.200	7.165	PK
4			5720.000	66.663	59.364	-44.137	110.800	7.299	PK
5			5725.000	68.196	60.868	-54.004	122.200	7.328	PK
6			5742.560	102.354	94.952	N/A	N/A	7.402	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:48
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5825MHz	

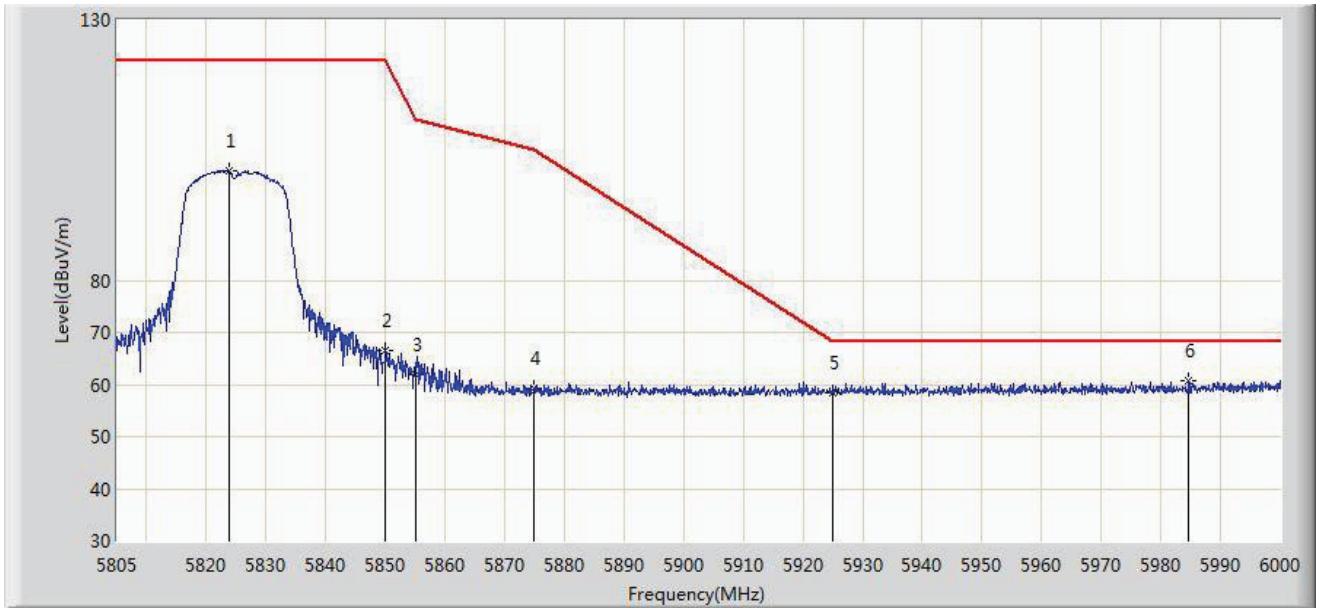


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5823.817	101.067	93.414	N/A	N/A	7.654	PK
2			5850.000	66.622	58.849	-55.578	122.200	7.774	PK
3			5855.000	61.935	54.159	-48.865	110.800	7.775	PK
4			5875.000	59.202	51.384	-45.998	105.200	7.818	PK
5			5925.000	58.458	50.639	-9.742	68.200	7.819	PK
6		*	5984.692	60.779	52.872	-7.421	68.200	7.908	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:51
Limit: FCC_Part15.407_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT20 at channel 5825MHz	

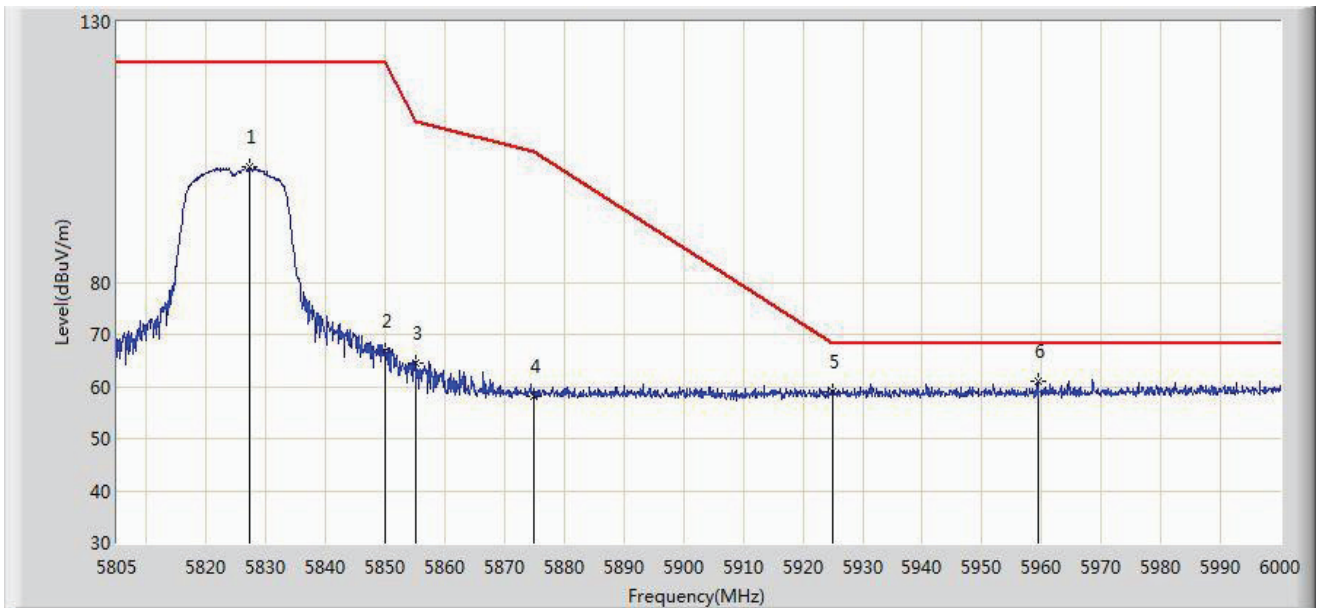


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5827.132	102.037	94.369	N/A	N/A	7.668	PK
2			5850.000	66.854	59.081	-55.346	122.200	7.774	PK
3			5855.000	64.627	56.851	-46.173	110.800	7.775	PK
4			5875.000	58.242	50.424	-46.958	105.200	7.818	PK
5			5925.000	59.113	51.294	-9.087	68.200	7.819	PK
6		*	5959.440	61.143	53.288	-7.057	68.200	7.855	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5190MHz	

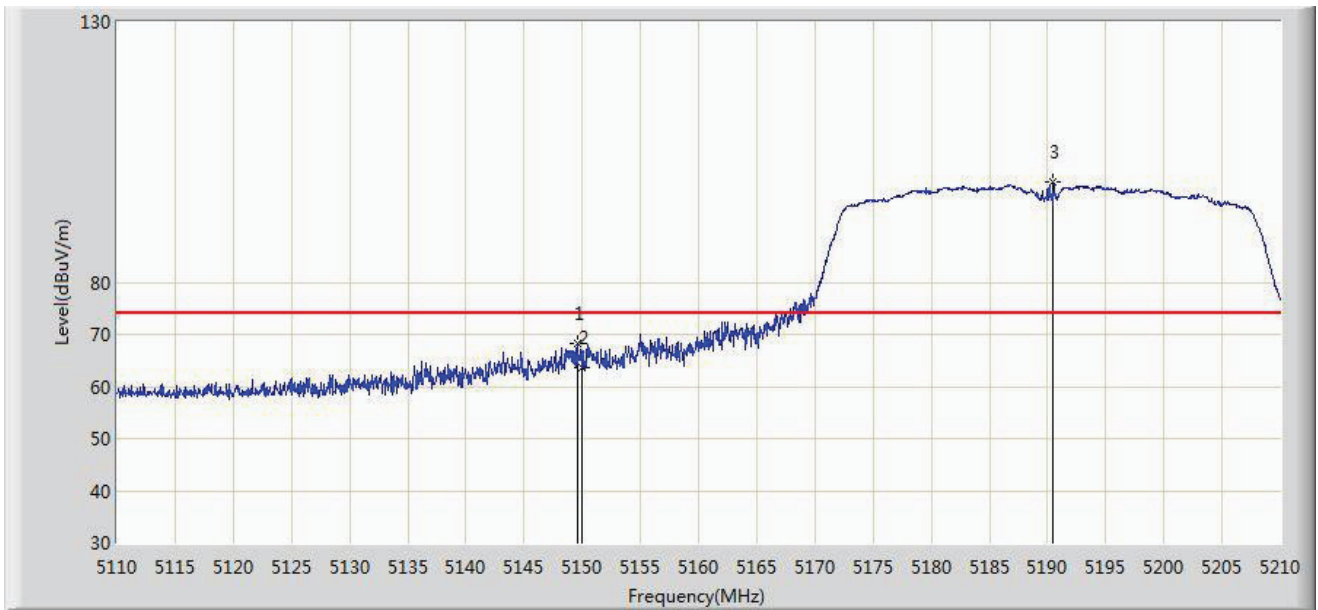


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.550	68.186	61.625	-5.814	74.000	6.562	PK
2			5150.000	63.538	56.976	-10.462	74.000	6.562	PK
3		*	5190.500	99.307	92.928	N/A	N/A	6.379	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 18:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5190MHz	

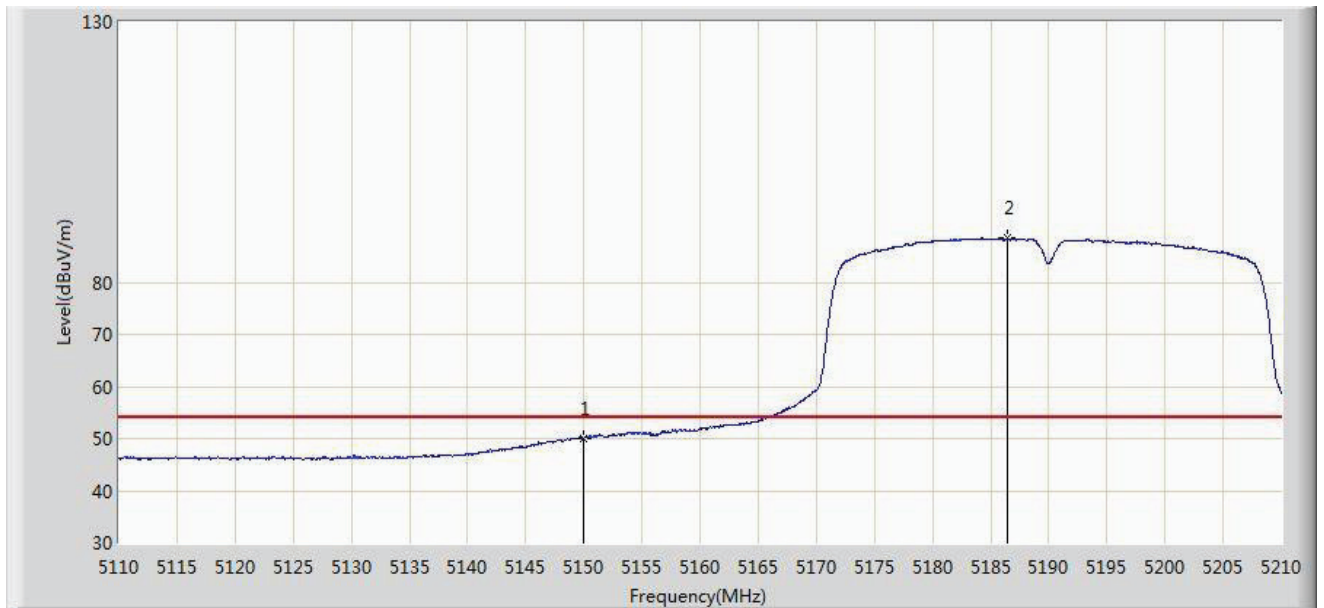


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.031	43.469	-3.969	54.000	6.562	AV
2		*	5186.450	88.472	82.070	N/A	N/A	6.402	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5190MHz	

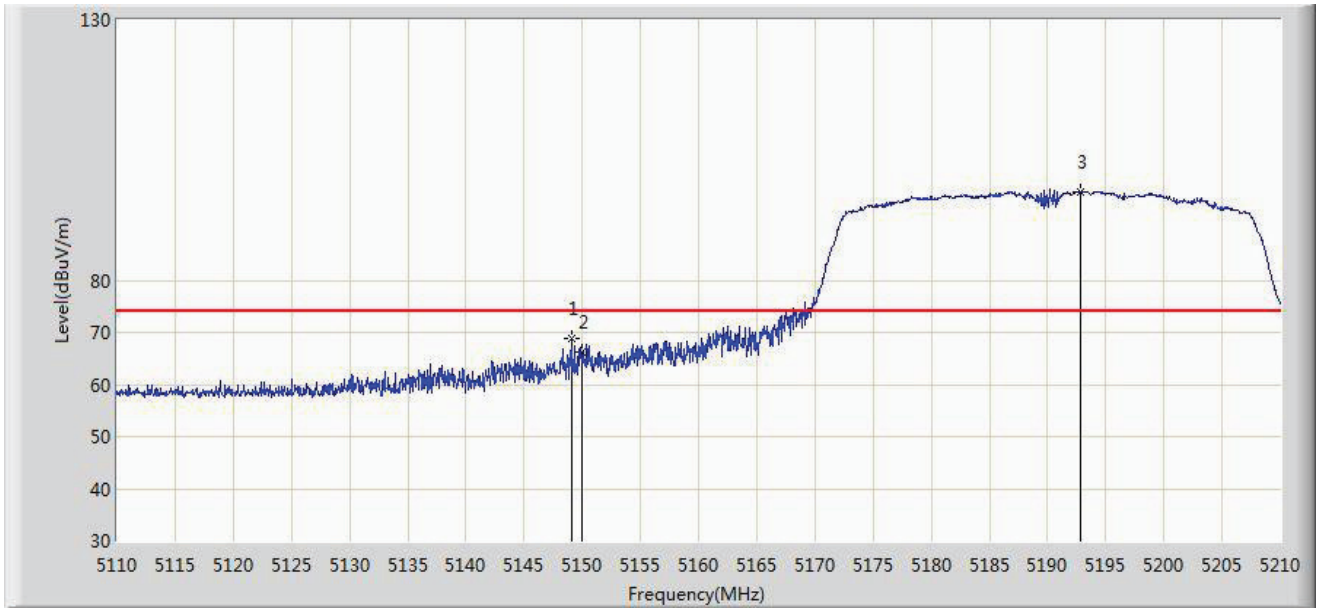


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.050	68.746	62.186	-5.254	74.000	6.560	PK
2			5150.000	66.135	59.573	-7.865	74.000	6.562	PK
3		*	5192.850	97.058	90.693	N/A	N/A	6.366	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5190MHz	

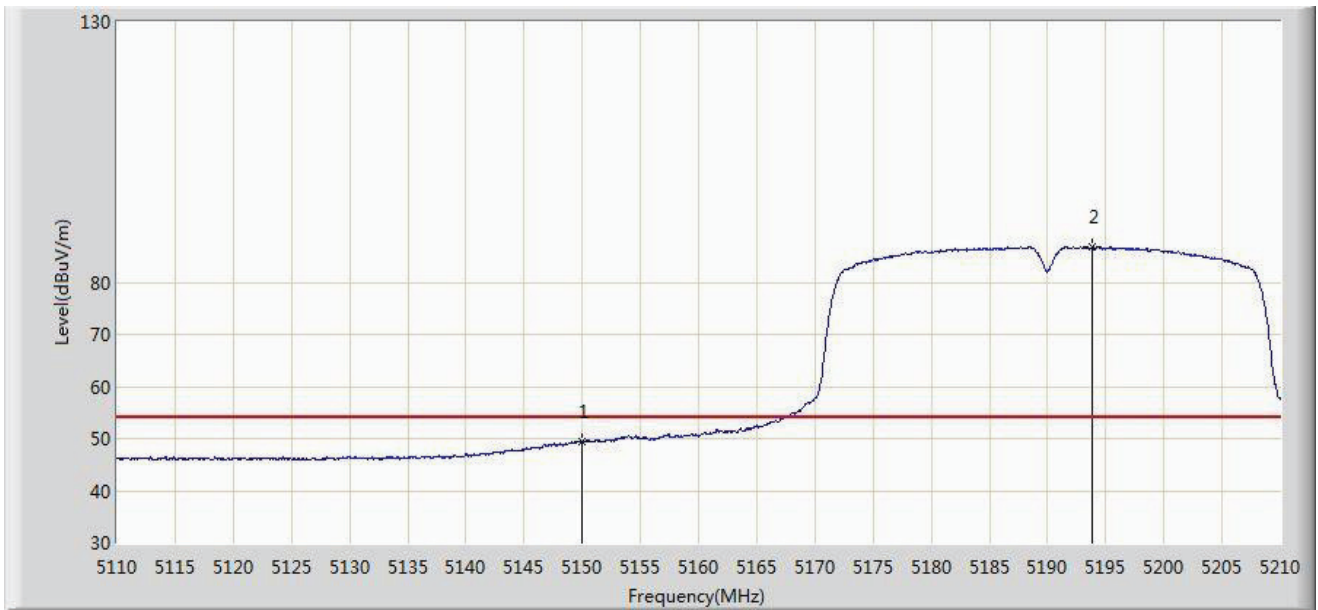


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.481	42.919	-4.519	54.000	6.562	AV
2		*	5193.850	86.905	80.545	N/A	N/A	6.359	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5310MHz	

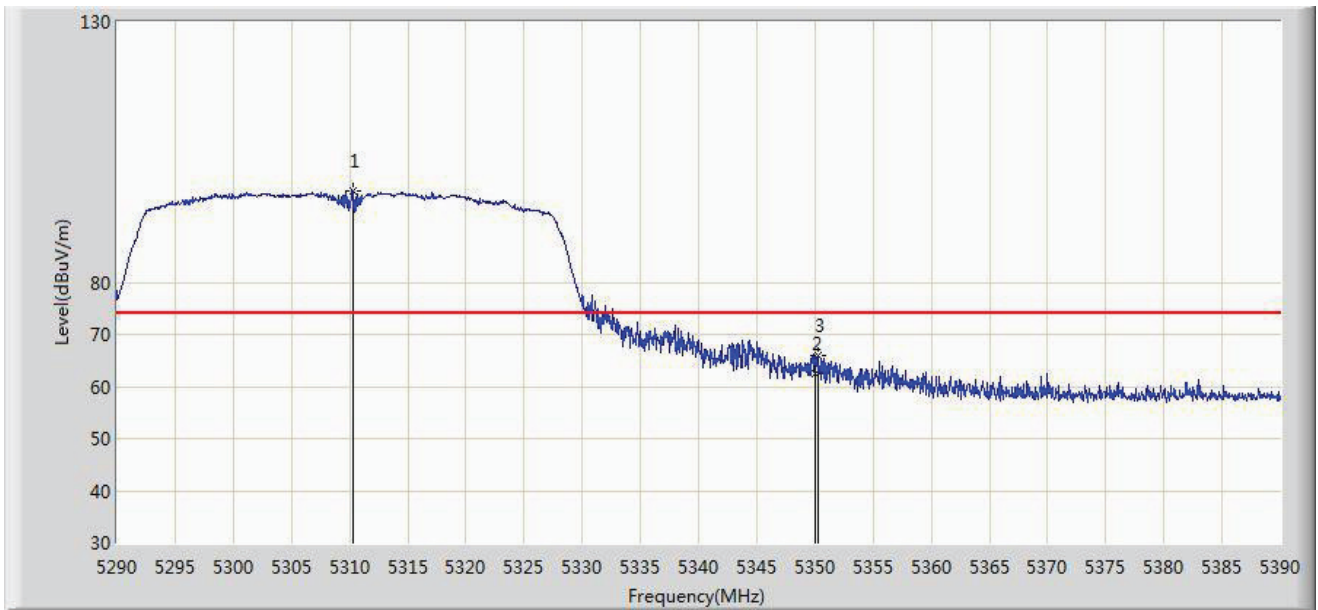


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5310.300	97.620	91.350	N/A	N/A	6.270	PK
2			5350.000	62.432	55.972	-11.568	74.000	6.460	PK
3			5350.250	65.798	59.337	-8.202	74.000	6.461	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5310MHz	

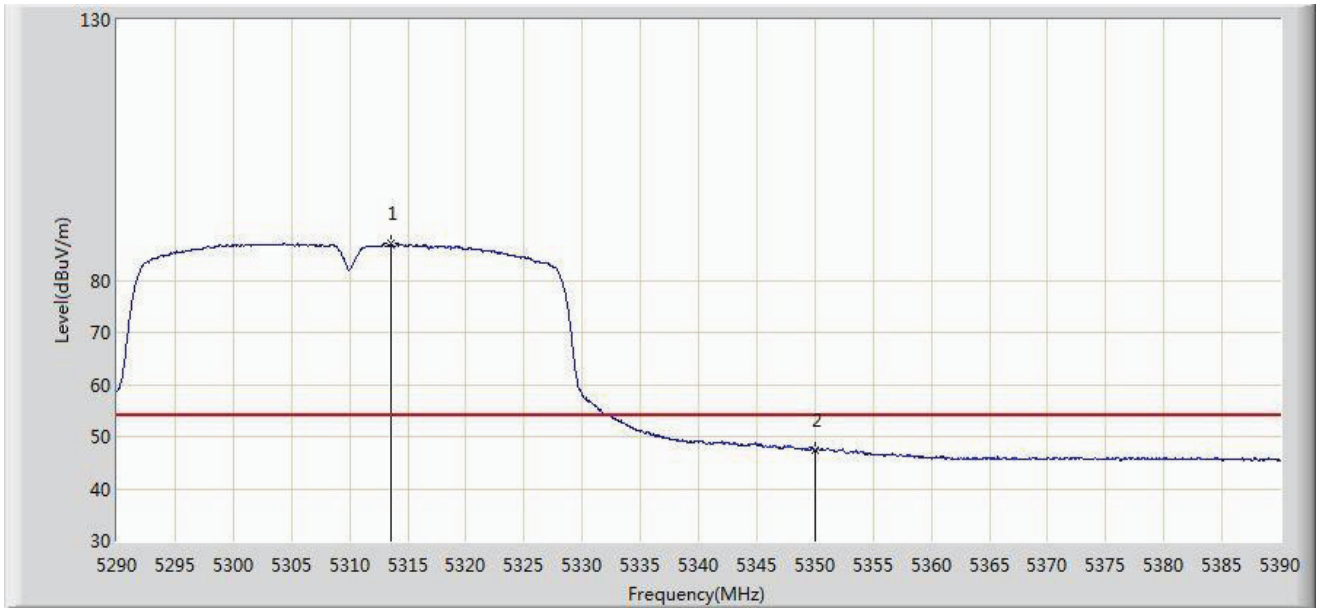


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.550	86.963	80.689	N/A	N/A	6.274	AV
2			5350.000	47.481	41.021	-6.519	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5310MHz	

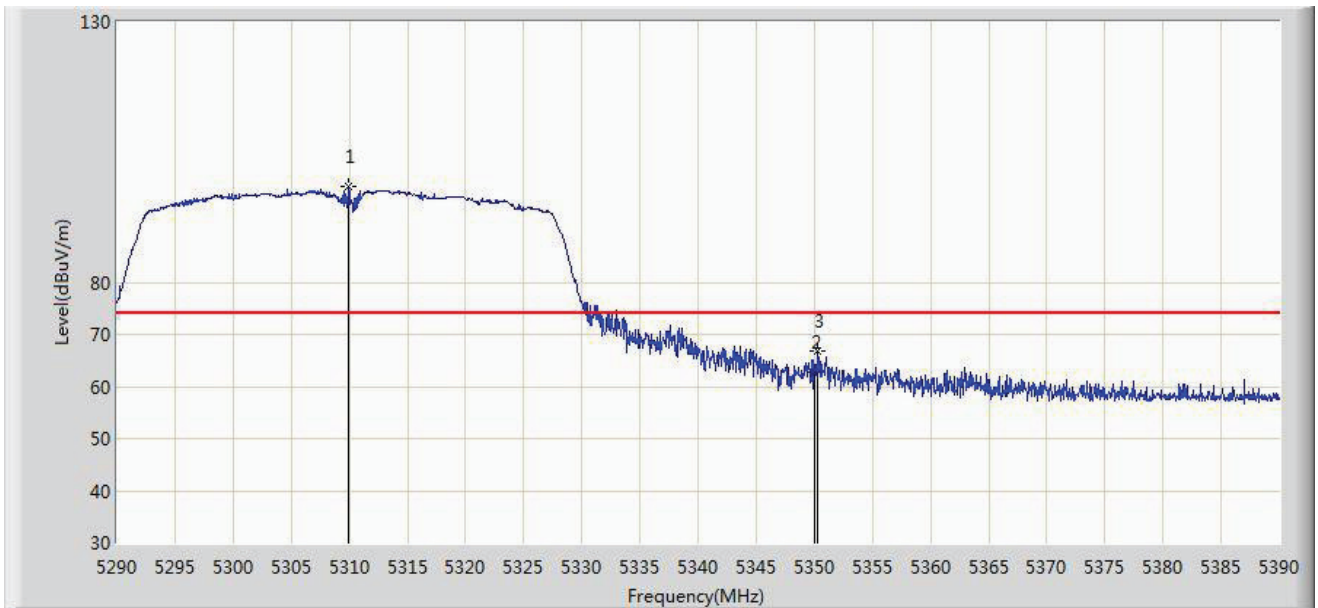


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5309.900	98.476	92.207	N/A	N/A	6.269	PK
2			5350.000	62.664	56.204	-11.336	74.000	6.460	PK
3			5350.300	66.700	60.239	-7.300	74.000	6.462	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5310MHz	

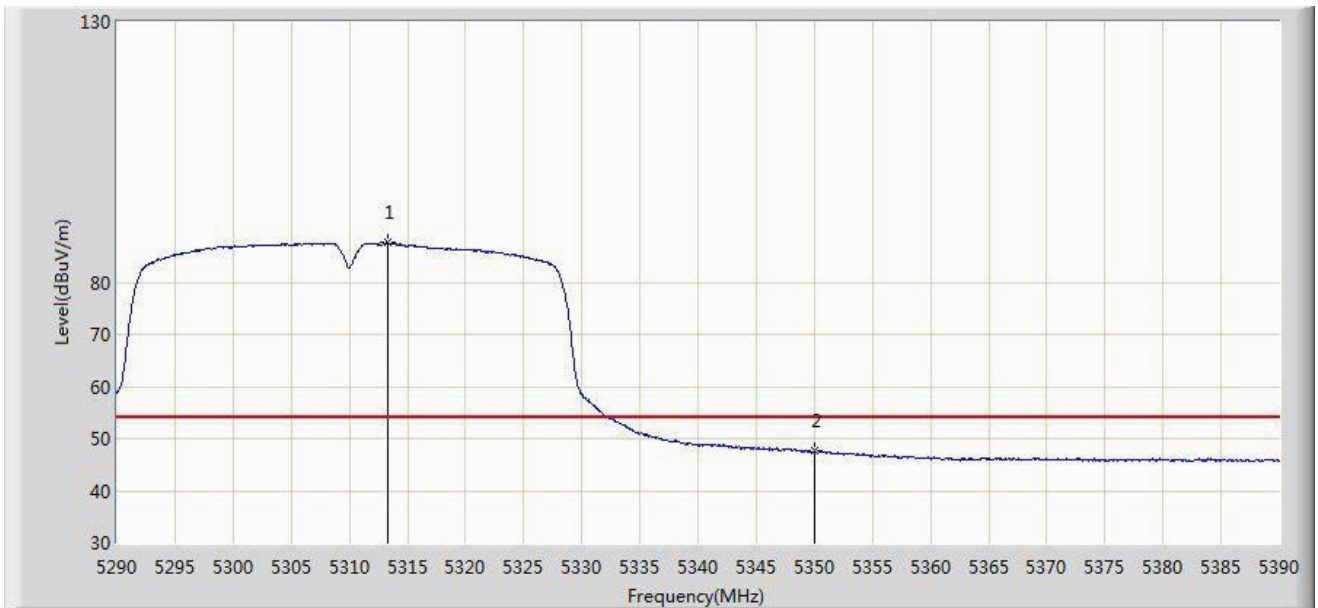


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.300	87.609	81.336	N/A	N/A	6.274	AV
2			5350.000	47.591	41.131	-6.409	54.000	6.460	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5510MHz	

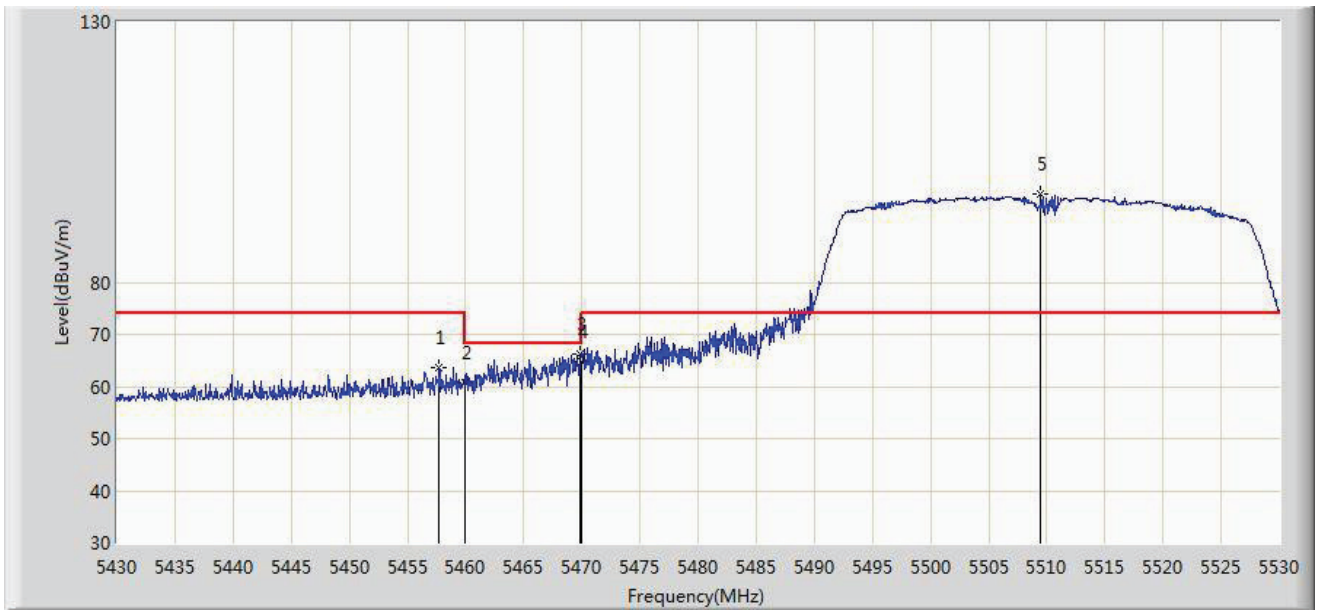


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.700	63.573	56.781	-10.427	74.000	6.792	PK
2			5460.000	60.744	53.942	-13.256	74.000	6.802	PK
3			5469.800	66.316	59.472	-1.884	68.200	6.844	PK
4			5470.000	64.734	57.889	-3.466	68.200	6.845	PK
5		*	5509.450	96.883	90.072	N/A	N/A	6.811	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5510MHz	

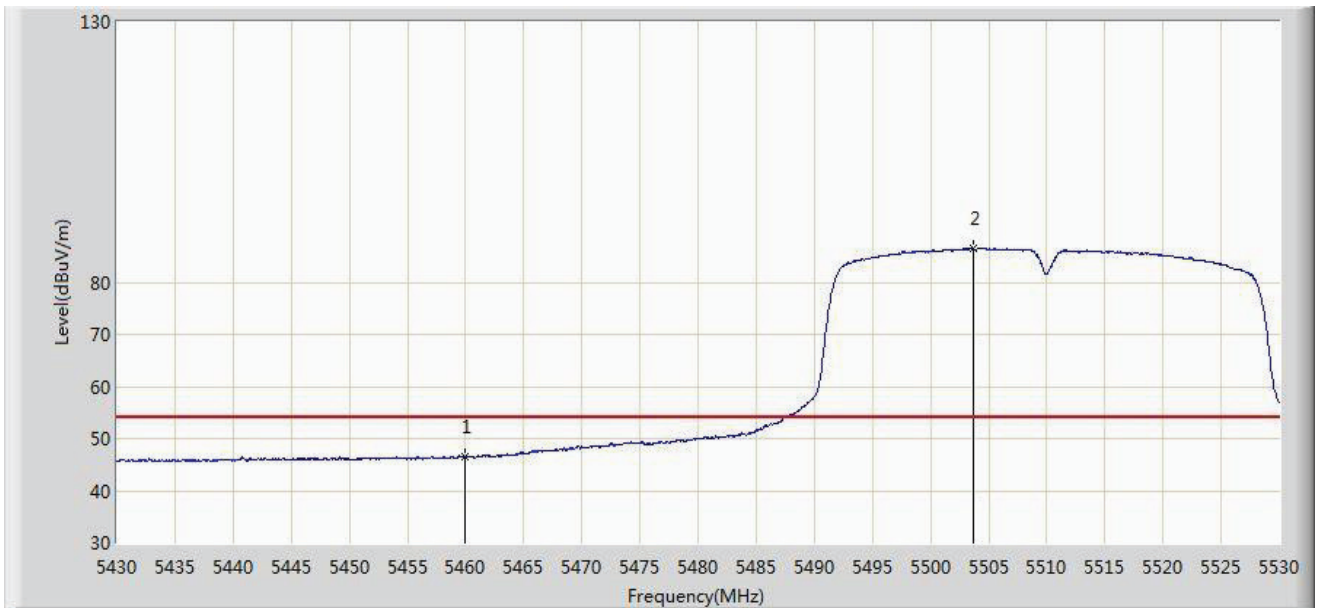


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.533	39.731	-7.467	54.000	6.802	AV
2		*	5503.650	86.426	79.613	N/A	N/A	6.812	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5510MHz	

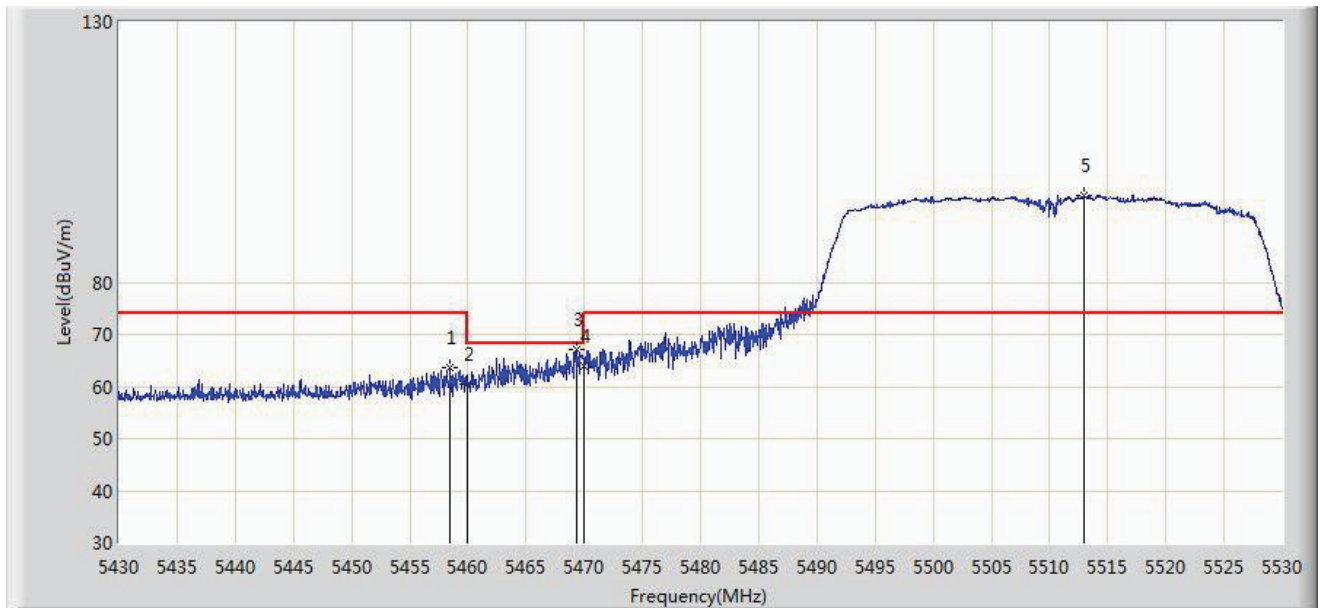


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.450	63.699	56.904	-10.301	74.000	6.794	PK
2			5460.000	60.441	53.639	-13.559	74.000	6.802	PK
3			5469.300	67.144	60.302	-1.056	68.200	6.841	PK
4			5470.000	64.030	57.185	-4.170	68.200	6.845	PK
5		*	5512.950	96.615	89.803	N/A	N/A	6.812	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5510MHz	

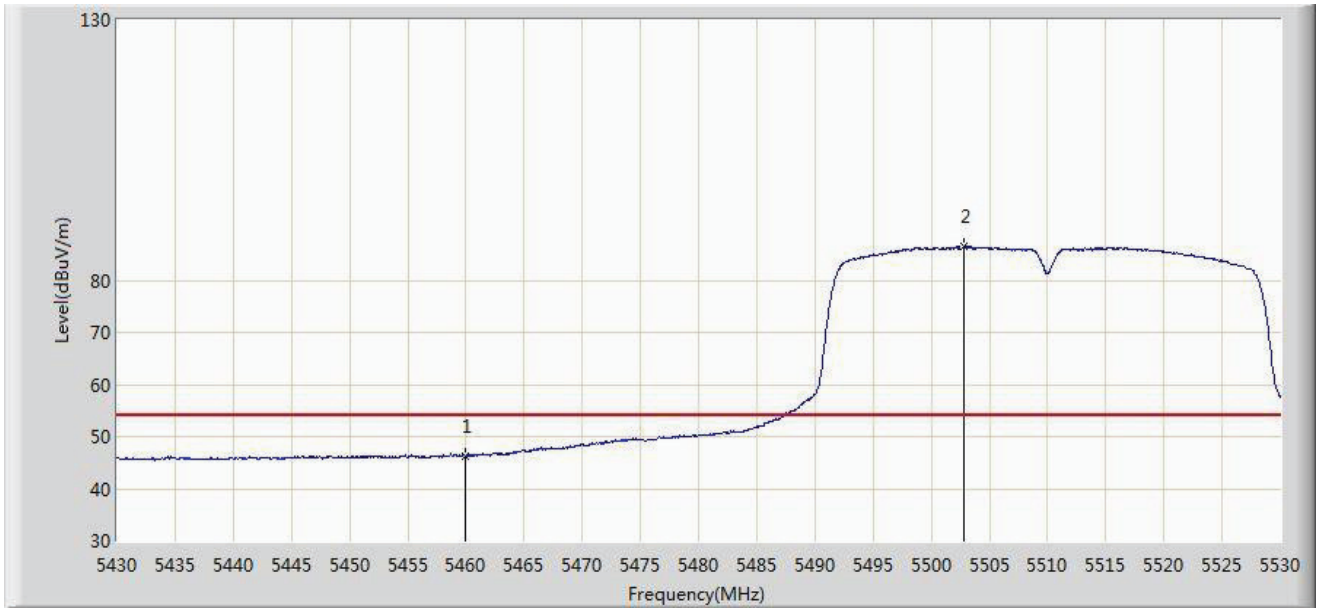


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.254	39.452	-7.746	54.000	6.802	AV
2		*	5502.850	86.455	79.641	N/A	N/A	6.815	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5670MHz	

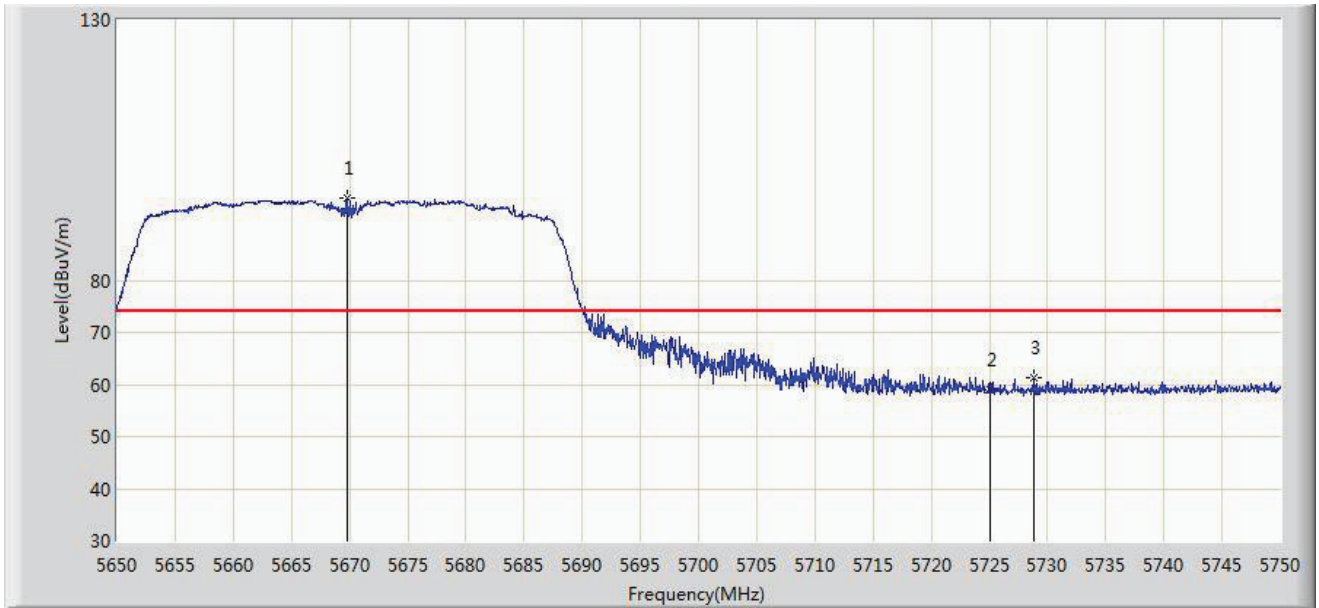


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5669.850	95.774	88.727	N/A	N/A	7.048	PK
2			5725.000	58.883	51.555	-15.117	74.000	7.328	PK
3			5728.850	61.285	53.939	-12.715	74.000	7.346	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5670MHz	

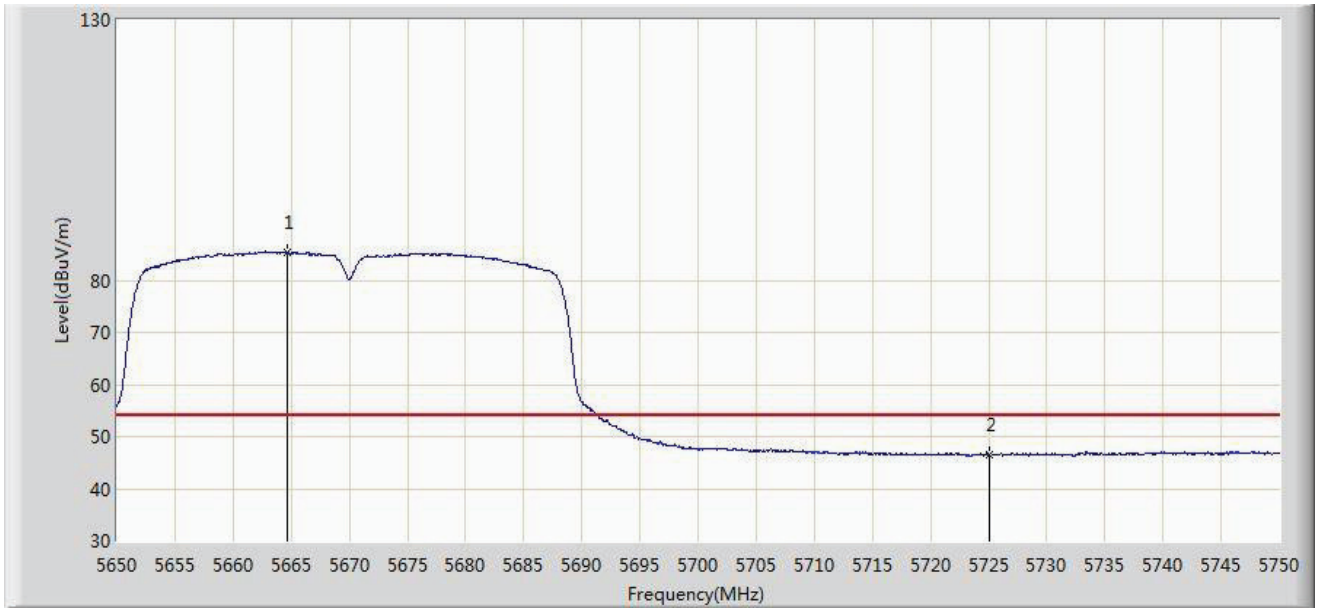


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5664.600	85.431	78.392	N/A	N/A	7.039	AV
2			5725.000	46.427	39.099	-7.573	54.000	7.328	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5670MHz	

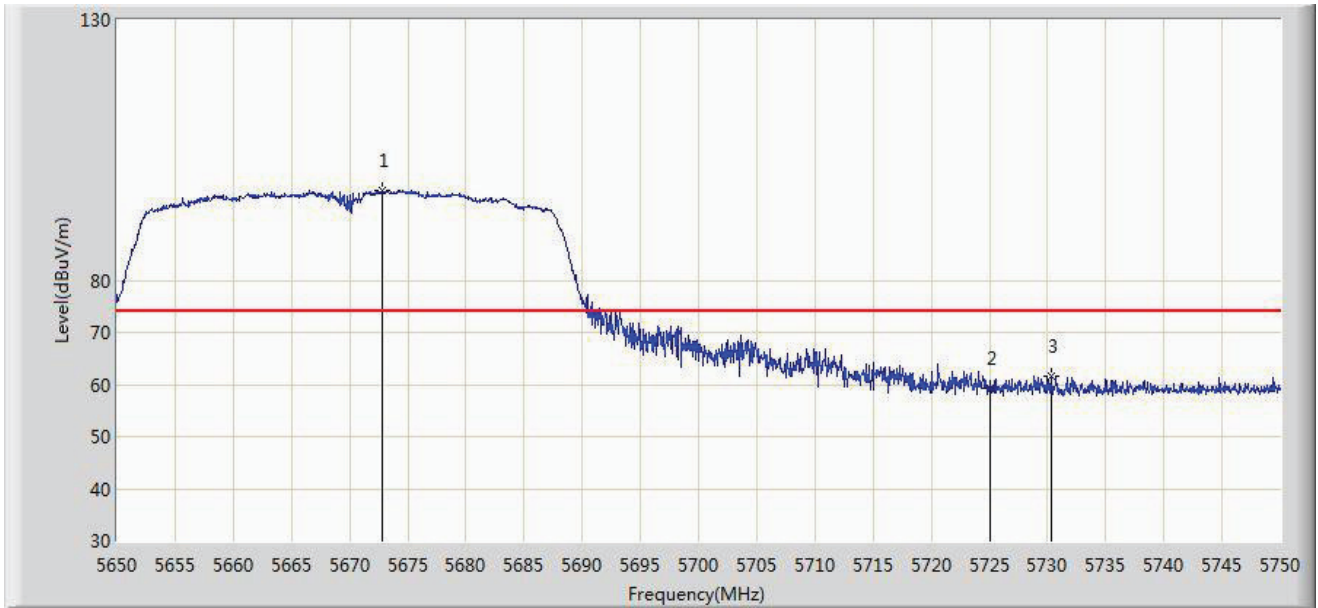


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5672.850	97.345	90.293	N/A	N/A	7.052	PK
2			5725.000	59.261	51.933	-14.739	74.000	7.328	PK
3			5730.350	61.539	54.187	-12.461	74.000	7.351	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/08/23 - 19:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: W-LAN + Bluetooth Module	Power: DC 3.3V
Note: Transmit by 802.11n-HT40 at channel 5670MHz	

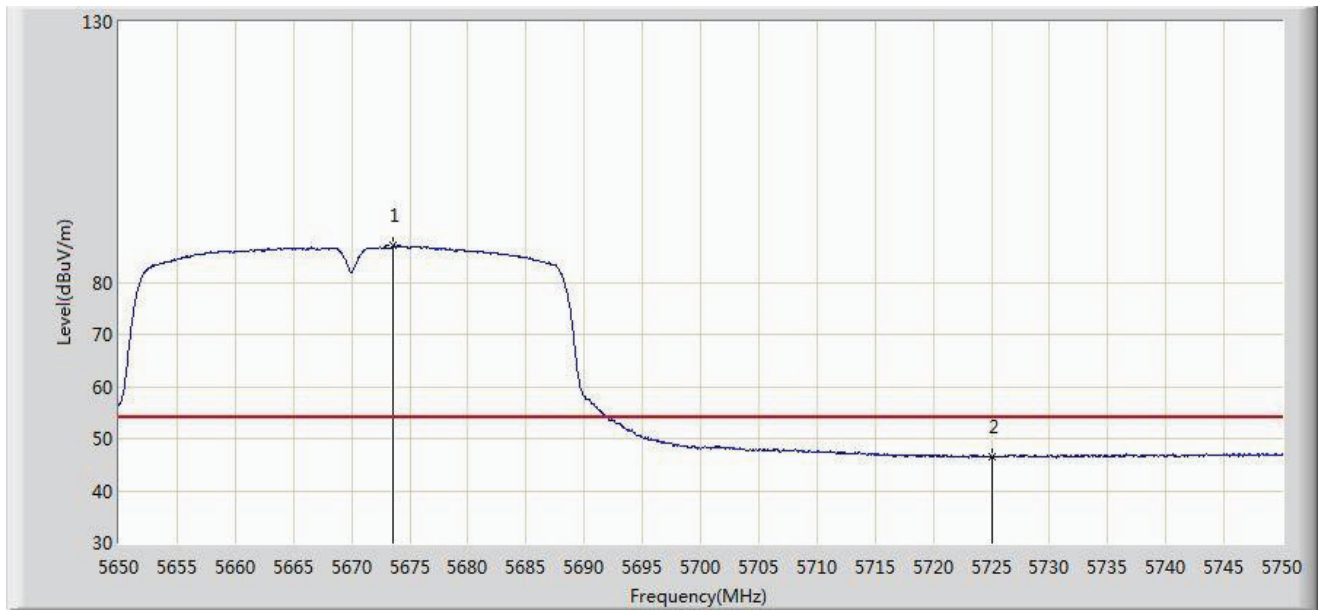

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5673.600	87.011	79.957	N/A	N/A	7.053	AV
2			5725.000	46.482	39.154	-7.518	54.000	7.328	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)