

RADIO TEST REPORT

FCC ID: WA5WN1980

Product : Weather Station(receiver)

Trade Mark : N/A

Model Name : WN1980BU

Family Model : WN1980, WN198X (X=0~9) , WN198XBU
(X=0~9)

Report No. : S24062403802001

Prepared for

Shenzhen Fine Offset Electronics Co., Ltd.
A, 4/F, Bldg.C, Dist.A, Minzhu Jiujiu Ind. City, Xihuan Rd., Shajing St.,
Baoan Dist. Shenzhen, Guangdong, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an
District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Fine Offset Electronics Co., Ltd.
Address : A, 4/F, Bldg.C, Dist.A, Minzhu Jiujiu Ind. City, Xihuan Rd., Shajing St., Baoan Dist. Shenzhen, Guangdong, China
Manufacturer's Name : Shenzhen Fine Offset Electronics Co., Ltd.
Address : A, 4/F, Bldg.C, Dist.A, Minzhu Jiujiu Ind. City, Xihuan Rd., Shajing St., Baoan Dist. Shenzhen, Guangdong, China

Product description

Product name : Weather Station(receiver)
Model and/or type reference : WN1980BU
Family Model WN1980, WN198X (X=0~9) , WN198XBU (X=0~9)
Rating(s) : DC 5V from USB port or DC 3x1.5V AA battery
Standards : FCC Part15.249

Test procedure ANSI C63.10-2013

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.


Test Sample Number.....: S240624038002


Date of Test

Date (s) of performance of tests: 24 Jun., 2024 ~ 16 Jul. 2024

Date of Issue.....: 16 Jul. 2024

Test Result.....: **Pass**

Prepared By : 
Allen Liu
(Project Engineer)

Reviewed By : 
Aaron Cheng
(Supervisor)


Approved By : 
Alex Li
(Manager)

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . ANTENNA REQUIREMENT	13
3.1 STANDARD REQUIREMENT	13
3.2 EUT ANTENNA	13
3.3 CONDUCTED EMISSION MEASUREMENT	14
3.3.1 POWER LINE CONDUCTED EMISSION LIMITS	14
3.3.2 TEST PROCEDURE	15
3.3.3 DEVIATION FROM TEST STANDARD	15
3.3.4 TEST SETUP	15
3.2.5 TEST RESULT	16
3.4 RADIATED EMISSION MEASUREMENT	18
3.4.1 RADIATED EMISSION LIMITS	18
3.4.2 TEST PROCEDURE	19
3.4.3 DEVIATION FROM TEST STANDARD	19
3.4.4 TEST RESULTS (BELOW 30MHZ)	21
3.4.5 TEST RESULTS (BELOW 1000 MHZ)	22
3.4.6 TEST RESULTS (ABOVE 1000 MHZ)	24
3.4.7 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	26
4. BANDWIDTH TEST	28
4.1 TEST PROCEDURE	28
4.2 DEVIATION FROM STANDARD	28
4.3 TEST SETUP	28
6. TEST RESULTS	29

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C (15.249)			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	Pass	
15.203	Antenna Requirement	Pass	
15.249 15.209	Radiated Spurious Emission	Pass	
15.249(2)	Frequency Tolerance	N/A	
15.249(a)	Fundamental Measurement	Pass	
15.205	Band Edge Emission	Pass	
15.215	Occupied Bandwidth	Pass	

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd
 Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126 P.R. China
 FCC FRN Registration No.:463705; FCC FRN Designation Number: CN1184
 IC Registration No.:9270A
 CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	Occupied bandwidth	$\pm 4.7\%$
9	All emissions, radiated(9KHz~30MHz)	$\pm 6\text{dB}$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Weather Station(receiver)	
Trade Mark	N/A	
Model Name	WN1980BU	
Family Model	WN1980, WN198X (X=0~9) , WN198XBU (X=0~9)	
Model Difference	All models are the same circuit and RF module, except for the packaging is different in different sales areas.	
Product Description	The EUT is a Weather Station(receiver)	
	Operation Frequency:	915MHz
	Modulation Type:	FSK
	Antenna Designation:	WIRE antenna
	Antenna Gain(Peak)	1 dBi
	Based on the application, features, or specification exhibited in User's Manual. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Adapter	N/A	
Battery	DC 2*1.5AA	
Hardware version	WHP0249C1V04	
Firmware version	N/A	
Software version	V1.3.0	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency(MHz)
01	915

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	WIRE	N/A	1	Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	CH01
Mode 2	Normal link

For Radiated Spurious Emission	
Pretest Mode	Description
Mode 1	CH01

For Conducted Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	Normal link

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode



For Radiated Test Cases



For Conducted Test Cases



Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

2.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Weather Station(receiver)	WN1980BU	N/A	N/A	EUT
E-2	Adapter	N/A	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable	NO	NO	1.5m	
C-2	RF Cable	YES	NO	0.1m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4440A	MY41000130	2024.03.12	2025.03.11	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024.04.26	2025.04.25	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2024.04.26	2025.04.25	1 year
4	Test Receiver	R&S	ESPI7	101318	2024.03.12	2025.03.11	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2024.03.11	2025.03.10	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2023.05.06	2026.05.05	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2023.01.12	2026.01.11	3 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2022.11.07	2025.11.06	3 year
9	Amplifier	EMC	EMC051835SE	980246	2024.01.23	2025.01.22	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2023.11.03	2026.11.02	3 year
11	Power Meter	DARE	RPR3006W	15I00041SNO84	2024.04.25	2025.04.24	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2023.03.26	2026.03.25	3 year
16	Filter	TRILTHIC	2400MHz	29	2024.03.12	2025.03.11	1 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2024.03.12	2025.03.11	1 year
2	LISN	R&S	ENV216	101313	2024.03.12	2025.03.11	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2024.03.12	2025.03.11	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2023.05.06	2026.05.05	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2023.05.06	2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

3. ANTENNA REQUIREMENT

3.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.2 EUT ANTENNA

The EUT antenna is WIRE Antenna (Gain: 1 dBi). It comply with the standard requirement.

3.3 CONDUCTED EMISSION MEASUREMENT

3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.3.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP



Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


3.2.5 TEST RESULT

EUT :	Weather Station(receiver)	Model Name. :	WN1980BU
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from USB port AC 120V/60Hz	Test Mode :	Normal Link

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.3700	28.01	10.38	38.39	58.50	-20.11	QP
0.3700	19.23	10.38	29.61	48.50	-18.89	AVG
0.7260	32.83	11.11	43.94	56.00	-12.06	QP
0.7260	23.77	11.11	34.88	46.00	-11.12	AVG
1.3779	22.68	12.42	35.10	56.00	-20.90	QP
1.3779	9.86	12.42	22.28	46.00	-23.72	AVG
2.9460	15.78	9.67	25.45	56.00	-30.55	QP
2.9460	2.84	9.67	12.51	46.00	-33.49	AVG
8.3620	15.69	9.68	25.37	60.00	-34.63	QP
8.3620	5.43	9.68	15.11	50.00	-34.89	AVG
12.1180	15.82	9.70	25.52	60.00	-34.48	QP
12.1180	5.78	9.70	15.48	50.00	-34.52	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.




EUT :	Weather Station(receiver)	Model Name. :	WN1980BU
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from USB port AC 120V/60Hz	Test Mode :	Normal Link

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1500	17.99	9.93	27.92	66.00	-38.08	QP
0.1500	9.24	9.93	19.17	56.00	-36.83	AVG
0.3500	22.29	10.34	32.63	58.96	-26.33	QP
0.3500	14.71	10.34	25.05	48.96	-23.91	AVG
0.7420	27.75	11.13	38.88	56.00	-17.12	QP
0.7420	18.80	11.13	29.93	46.00	-16.07	AVG
1.8660	15.78	13.40	29.18	56.00	-26.82	QP
1.8660	6.52	13.40	19.92	46.00	-26.08	AVG
3.5700	15.83	9.67	25.50	56.00	-30.50	QP
3.5700	7.68	9.67	17.35	46.00	-28.65	AVG
12.0420	12.31	9.70	22.01	60.00	-37.99	QP
12.0420	0.64	9.70	10.34	50.00	-39.66	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.



3.4 RADIATED EMISSION MEASUREMENT

3.4.1 Radiated Emission Limits (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
Frequency (MHz)	Limit (dBuV)	
30~88	40	3
88~216	43.5	3
216~960	46	3
960 -10000	54.00	3
*902 - 928	94.00	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).
- (3) *Note: This is the limit for the fundamental frequency.

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.249)

Frequency of Emission (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
902-928	50	500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


3.4.3 DEVIATION FROM TEST STANDARD

No deviation


(A) Radiated Emission Test-Up Frequency Below 30MHz



(B) Radiated Emission Test-Up Frequency 30MHz~1GHz



(C) Radiated Emission Test-Up Frequency Above 1GHz



3.4.4 TEST RESULTS (BELOW 30MHz)

EUT :	Weather Station(receiver)	Model Name. :	WN1980BU
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Remark :1. Emission level in dBuV/m= $20 \log (\mu\text{V/m})$

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor = $40 \log (\text{Specific distance/ test distance})(\text{dB})$;

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor = $20 \log (\text{Specific distance/ test distance})(\text{dB})$;

Limit line=Specific limits(dBuV) + distance extrapolation factor.


3.4.5 TEST RESULTS (BELOW 1000 MHz)

EUT :	Weather Station(receiver)	Model Name :	WN1980BU
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3V
Test Mode :	Mode 1	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
34.6385	11.56	18.29	29.85	40.00	-10.15	QP
63.5356	10.08	18.78	28.86	40.00	-11.14	QP
144.3347	17.59	14.89	32.48	43.50	-11.02	QP
215.2678	9.01	18.43	27.44	43.50	-16.06	QP
312.1794	8.04	20.55	28.59	46.00	-17.41	QP
915.0000	47.67	29.67	77.34	94.00	-16.66	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.




EUT :	Weather Station(receiver)	Model Name :	WN1980BU
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3V
Test Mode :	Mode 1	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
52.5753	5.42	20.09	25.51	40.00	-14.49	QP
109.0286	6.33	18.78	25.11	43.50	-18.39	QP
215.2678	6.32	18.43	24.75	43.50	-18.75	QP
256.5211	9.01	19.47	28.48	46.00	-17.52	QP
291.0360	9.18	20.02	29.20	46.00	-16.80	QP
915.0000	52.94	29.67	82.61	94.00	-11.39	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.




3.4.6 TEST RESULTS (ABOVE 1000 MHZ)

EUT :	Weather Station(receiver)	Model Name :	WN1980BU
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3V
Test Mode :	Mode 1	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1833.000	59.17	-21.54	37.63	74.00	-36.37	peak
1833.000	53.56	-21.54	32.02	54.00	-21.98	AVG
3652.000	60.96	-15.53	45.43	74.00	-28.57	peak
3652.000	52.88	-15.53	37.35	54.00	-16.65	AVG
5607.000	50.73	-12.58	38.15	74.00	-35.85	peak
5607.000	40.69	-12.58	28.11	54.00	-25.89	AVG
7239.000	49.53	-8.41	41.12	74.00	-32.88	peak
7239.000	37.71	-8.41	29.30	54.00	-24.70	AVG
7902.000	49.42	-7.81	41.61	74.00	-32.39	peak
7902.000	38.83	-7.81	31.02	54.00	-22.98	AVG
10401.000	47.39	-4.14	43.25	74.00	-30.75	peak
10401.000	37.39	-4.14	33.25	54.00	-20.75	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.




EUT :	Weather Station(receiver)	Model Name :	WN1980BU
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3V
Test Mode :	Mode 1	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1833.000	63.22	-21.54	41.68	74.00	-32.32	peak
1833.000	56.56	-21.54	35.02	54.00	-18.98	AVG
2751.000	58.70	-17.07	41.63	74.00	-32.37	peak
2751.000	53.29	-17.07	36.22	54.00	-17.78	AVG
3652.000	64.19	-15.53	48.66	74.00	-25.34	peak
3652.000	56.78	-15.53	41.25	54.00	-12.75	AVG
5488.000	53.55	-12.77	40.78	74.00	-33.22	peak
5488.000	42.97	-12.77	30.20	54.00	-23.80	AVG
6967.000	50.11	-9.10	41.01	74.00	-32.99	peak
6967.000	40.70	-9.10	31.60	54.00	-22.40	AVG
9500.000	47.63	-5.35	42.28	74.00	-31.72	peak
9500.000	38.25	-5.35	32.90	54.00	-21.10	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Note:

- 1) EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report(X orientation).
- 2) Since the PEAK test results are below the AV limit, according to 15.31, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


3.4.7 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)

EUT :	Weather Station(receiver)	Model Name :	WN1980BU
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3V
Test Mode :	TX-915MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.0000	-2.52	30.54	28.02	46.00	-17.98	QP
928.0000	-5.34	30.67	25.33	46.00	-20.67	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.




EUT :	Weather Station(receiver)	Model Name :	WN1980BU
Temperature :	25 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	DC 3V
Test Mode :	TX-915MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
902.0000	-4.44	30.54	26.10	46.00	-19.90	QP
928.0000	-4.87	30.67	25.80	46.00	-20.20	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



4. BANDWIDTH TEST


4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value., Sweep time = Auto.

4.2 DEVIATION FROM STANDARD

No deviation.

4.3 TEST SETUP




6. TEST RESULTS

EUT :	Weather Station(receiver)	Model Name :	WN1980BU
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 3V
Test Mode :	Mode 1		

Test Channel	Frequency (MHz)	20 dBc Bandwidth (MHz)
CH01	915	0.1216

915 MHz

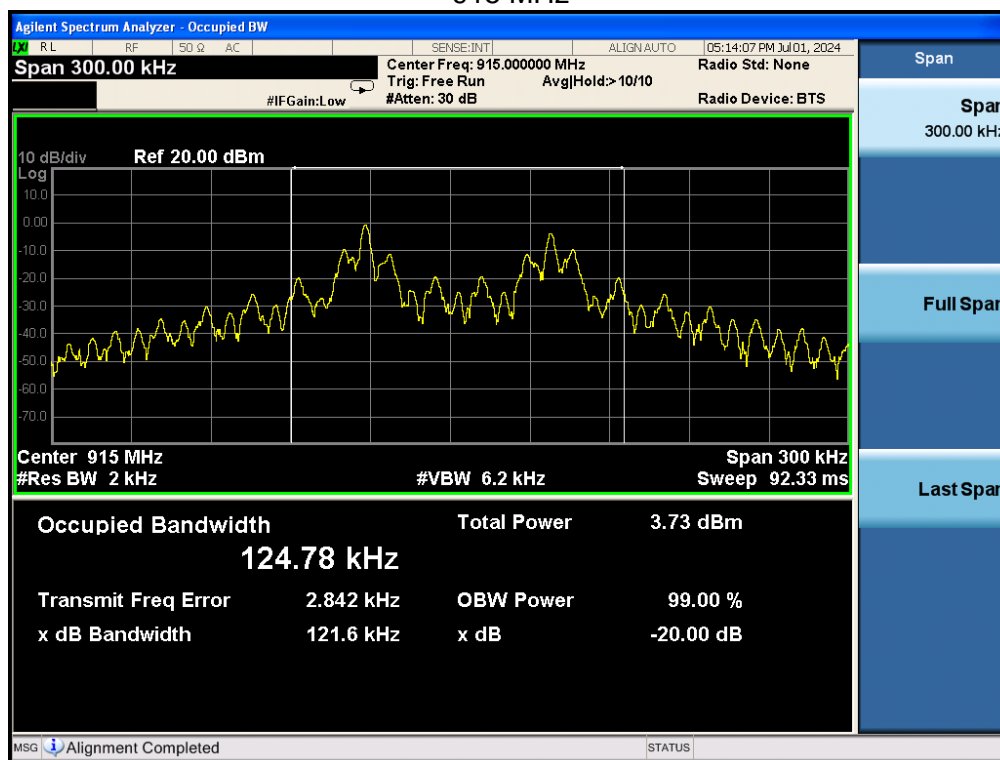

END OF REPORT