




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: PZ #1429	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2462MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 g--3TX (Non-Beamforming)

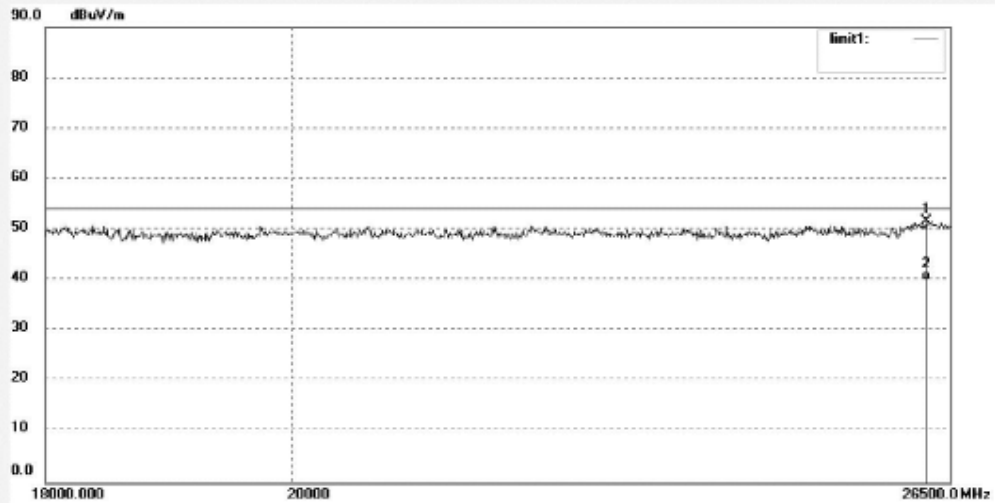

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26234.849	35.03	16.50	51.53	74.00	-22.47	peak			
2	26234.849	23.47	16.50	39.97	54.00	-14.03	AVG			

Produkte  
 Products

**Appendix F.9: Spurious Emissions, Non-Beamforming, 802.11n HT20\_3TX**




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1346	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2412MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---3TX(Non-Beamforming)

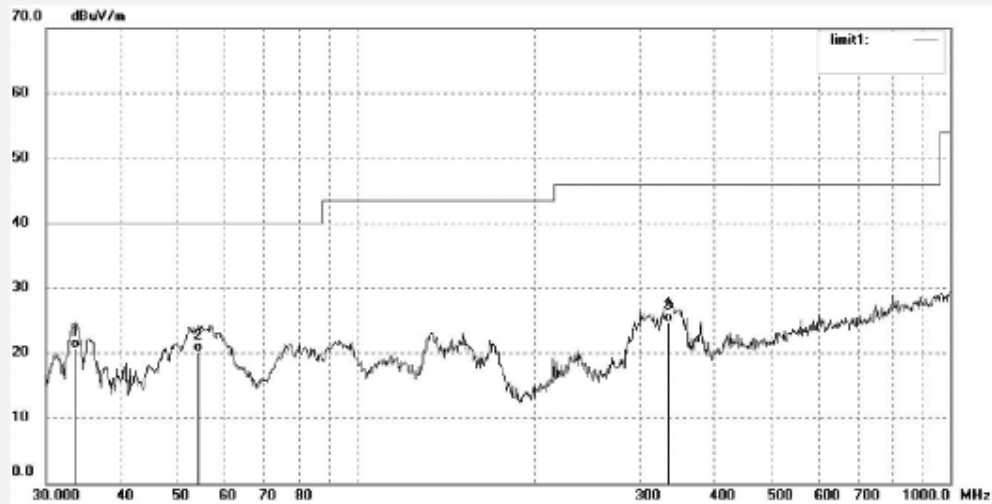

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.5624	30.99	-10.27	20.72	40.00	-19.28	QP			
2	54.2610	33.21	-12.92	20.29	40.00	-19.71	QP			
3	334.8589	32.96	-8.26	24.70	46.00	-21.30	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1347	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2412MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---3TX(Non-Beamforming)

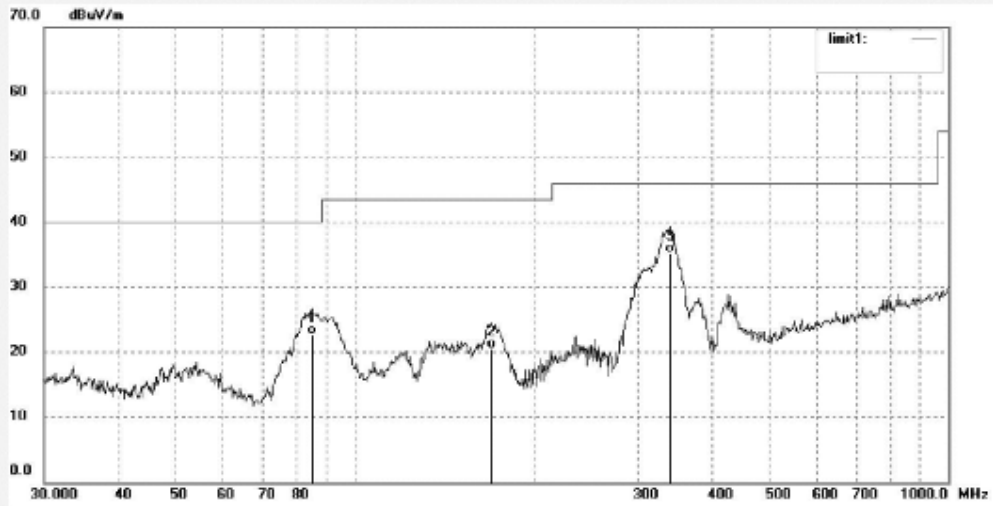

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	84.7018	38.20	-15.45	22.75	40.00	-17.25	QP			
2	170.1947	34.18	-13.68	20.50	43.50	-23.00	QP			
3	339.5887	43.31	-8.08	35.23	46.00	-10.77	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1348	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---3TX(Non-Beamforming)

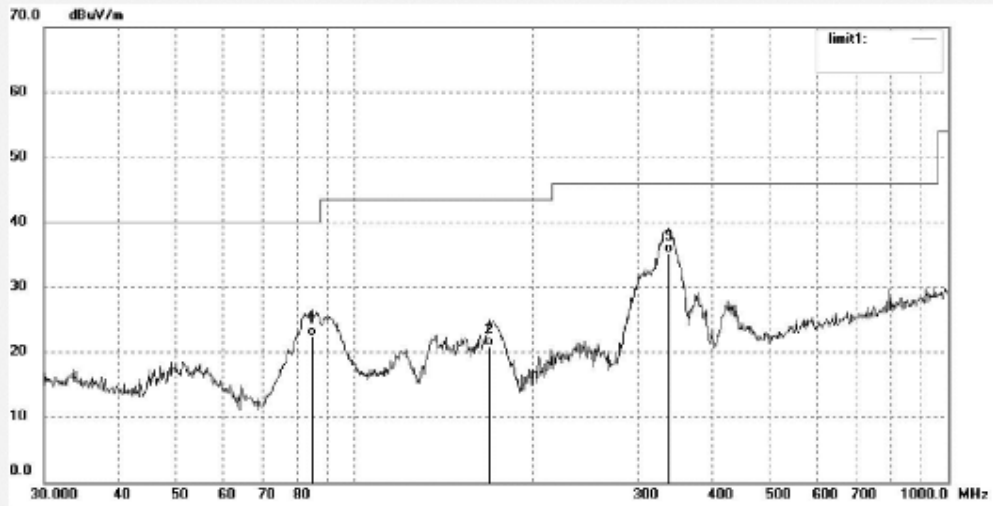

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	84.7018	37.95	-15.45	22.50	40.00	-17.50	QP			
2	168.4138	34.84	-13.93	20.91	43.50	-22.59	QP			
3	338.4001	43.33	-8.13	35.20	46.00	-10.80	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1349	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---3TX(Non-Beamforming)

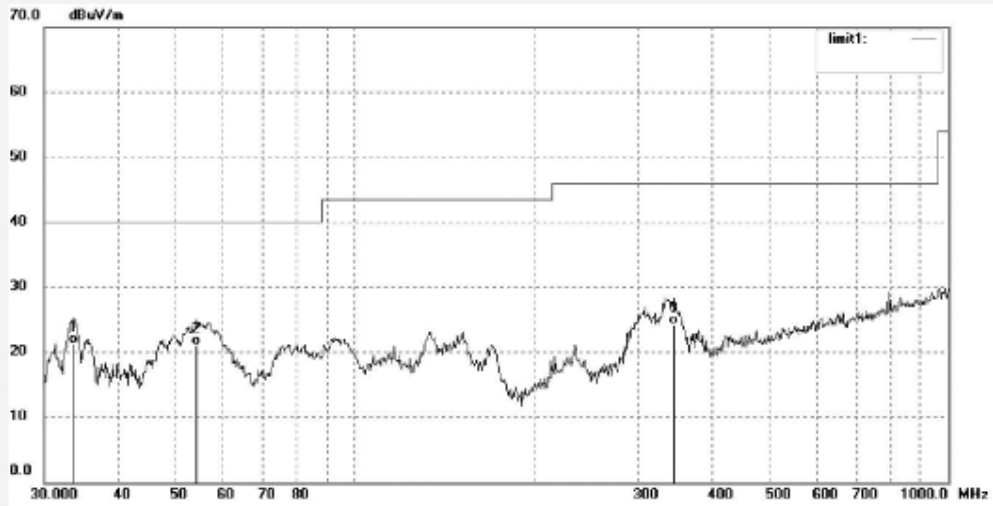

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.6802	31.61	-10.29	21.32	40.00	-18.68	QP			
2	54.0711	33.92	-12.91	21.01	40.00	-18.99	QP			
3	344.3854	32.16	-7.89	24.27	46.00	-21.73	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1350	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2462MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---3TX(Non-Beamforming)

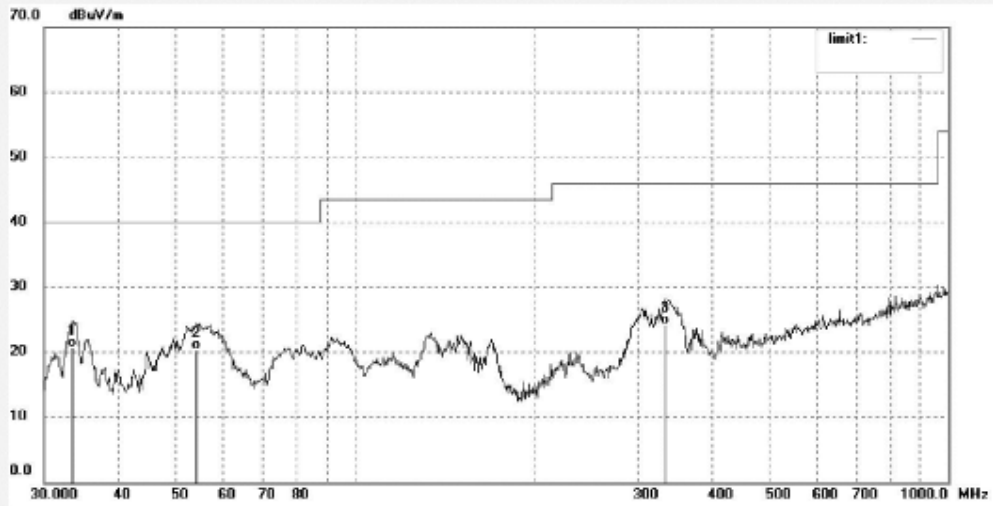

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.4448	31.03	-10.26	20.77	40.00	-19.23	QP			
2	54.2610	33.37	-12.92	20.45	40.00	-19.55	QP			
3	333.6865	32.55	-8.28	24.27	46.00	-21.73	QP			



**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1351	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2462MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---3TX(Non-Beamforming)

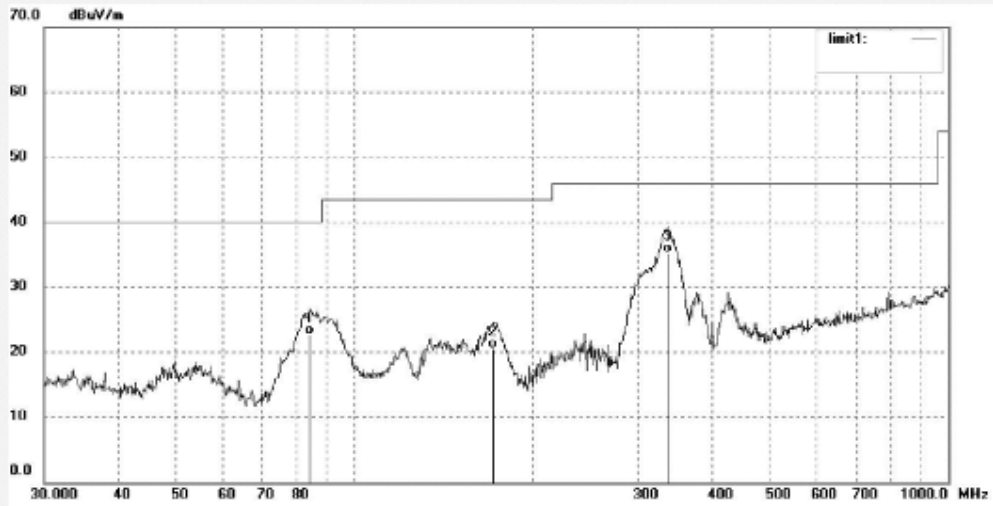

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	84.1099	38.23	-15.59	22.64	40.00	-17.36	QP			
2	171.3925	34.32	-13.67	20.65	43.50	-22.85	QP			
3	337.2155	43.44	-8.18	35.26	46.00	-10.74	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1239	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp ( C)/Hum (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2412MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---3TX(Non-Beamforming)

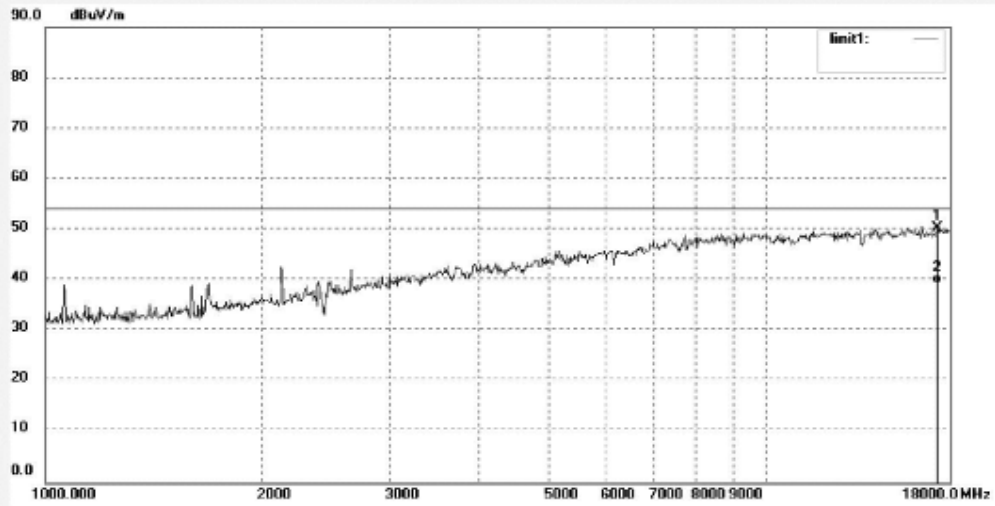

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	17286.166	7.35	42.84	50.19	74.00	-23.81	peak			
2	17286.166	-3.68	42.84	39.16	54.00	-14.84	AVG			



**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1240	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp ( C)/Hum (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2412MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---3TX(Non-Beamforming)

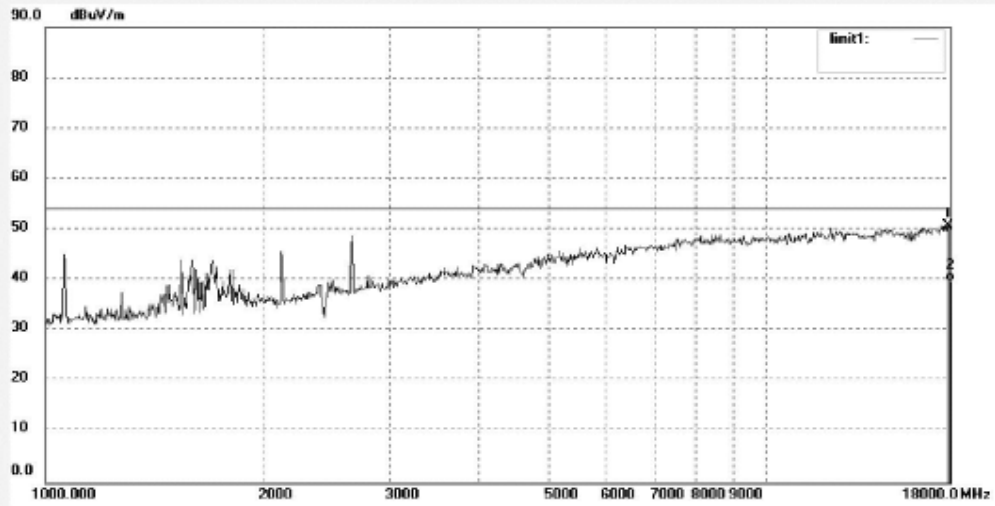

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	17896.247	5.13	45.60	50.73	74.00	-23.27	peak			
2	17896.247	-5.85	45.60	39.75	54.00	-14.25	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1241	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---3TX(Non-Beamforming)

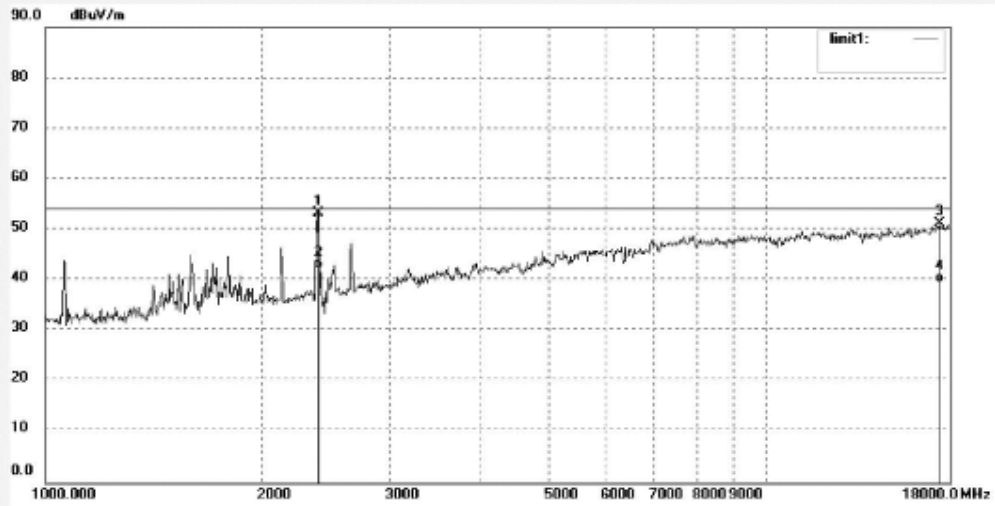

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2393.824	60.79	-7.50	53.29	74.00	-20.71	peak			
2	2393.824	49.71	-7.50	42.21	54.00	-11.79	AVG			
3	17386.383	8.04	43.25	51.29	74.00	-22.71	peak			
4	17386.383	-3.86	43.25	39.39	54.00	-14.61	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1242	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---3TX(Non-Beamforming)

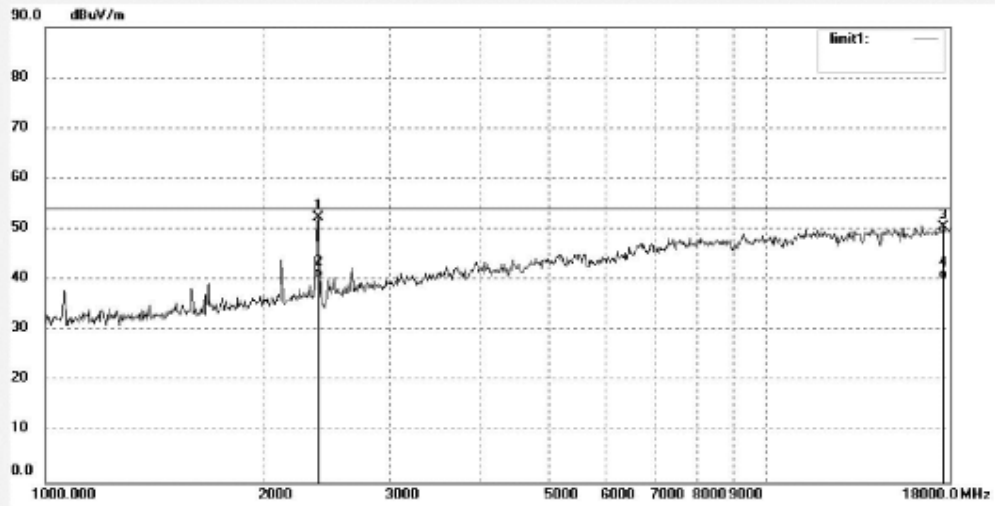

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2393.824	59.79	-7.50	52.29	74.00	-21.71	peak			
2	2393.824	47.88	-7.50	40.38	54.00	-13.62	AVG			
3	17639.473	6.04	44.37	50.41	74.00	-23.59	peak			
4	17639.473	-4.10	44.37	40.27	54.00	-13.73	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1243	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2462MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---3TX(Non-Beamforming)

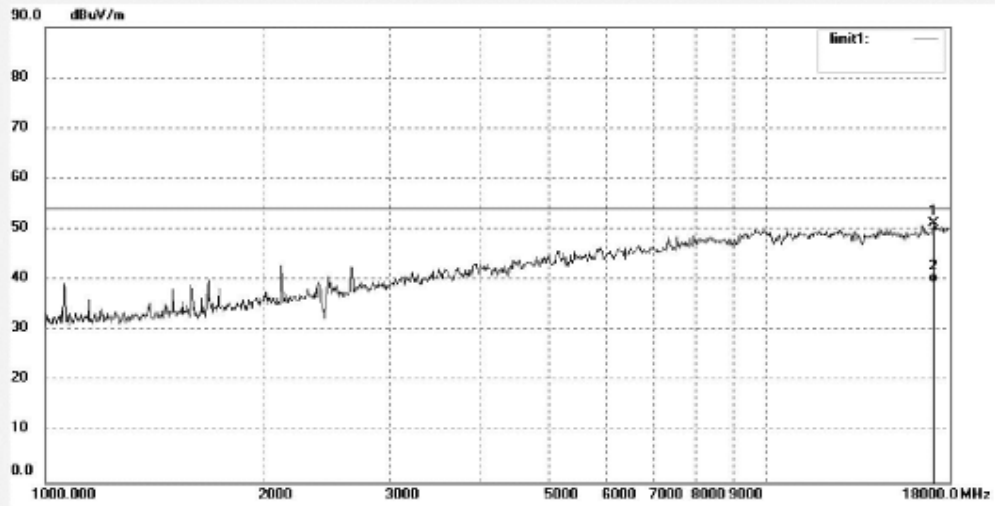

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	17087.464	9.06	42.05	51.11	74.00	-22.89	peak			
2	17087.464	-2.47	42.05	39.58	54.00	-14.42	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1244	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2462MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---3TX(Non-Beamforming)

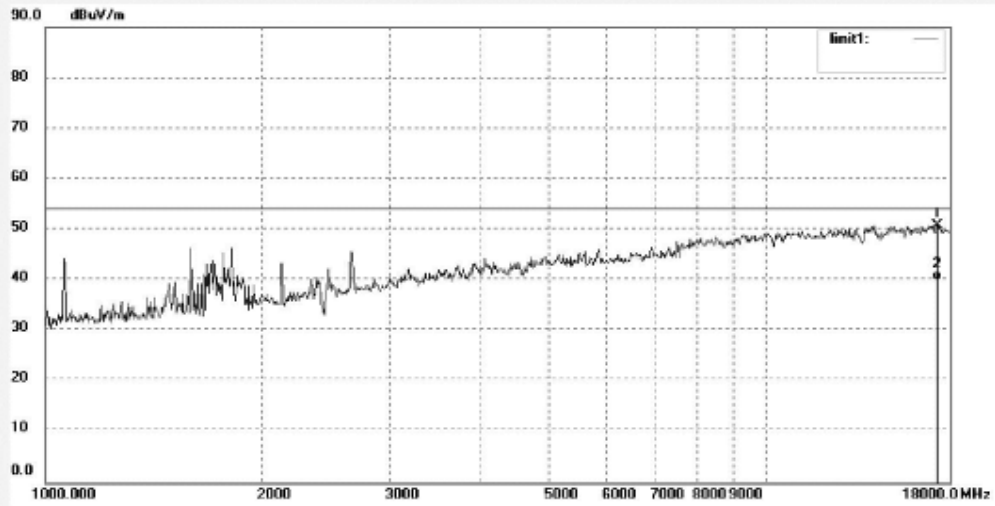

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	17286.166	7.90	42.84	50.74	74.00	-23.26	peak			
2	17286.166	-2.88	42.84	39.96	54.00	-14.04	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1442	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2412MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n20---3TX (Non-Beamforming)

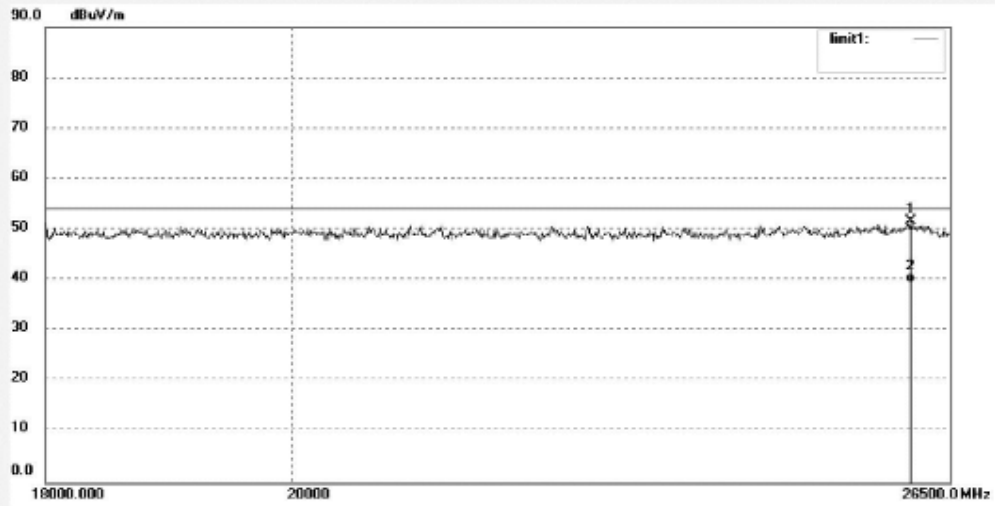

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26052.838	35.20	16.50	51.70	74.00	-22.30	peak			
2	26052.838	23.05	16.50	39.55	54.00	-14.45	AVG			



**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1443	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp ( C)/Hum (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2412MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n20---3TX (Non-Beamforming)

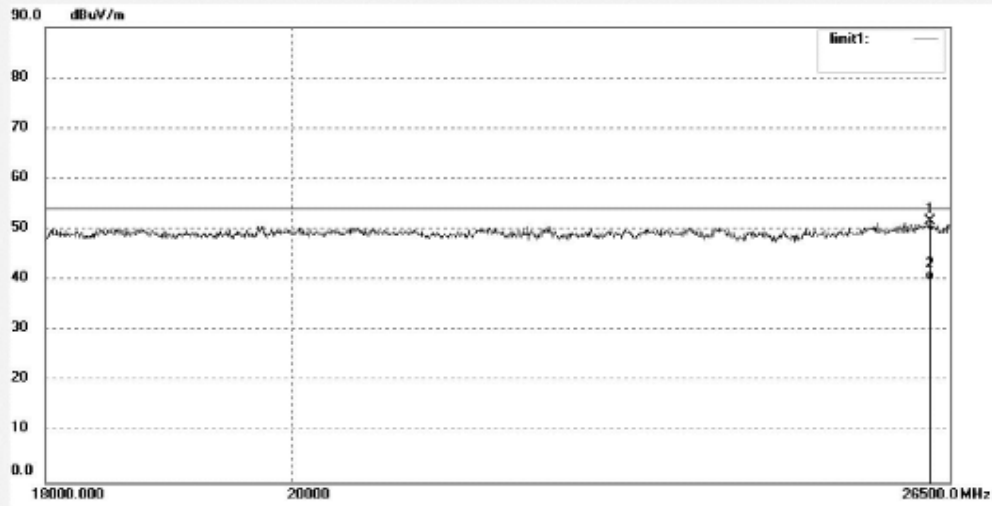

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26275.468	34.60	17.05	51.65	74.00	-22.35	peak			
2	26275.468	22.96	17.05	40.01	54.00	-13.99	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1444	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n20---3TX (Non-Beamforming)

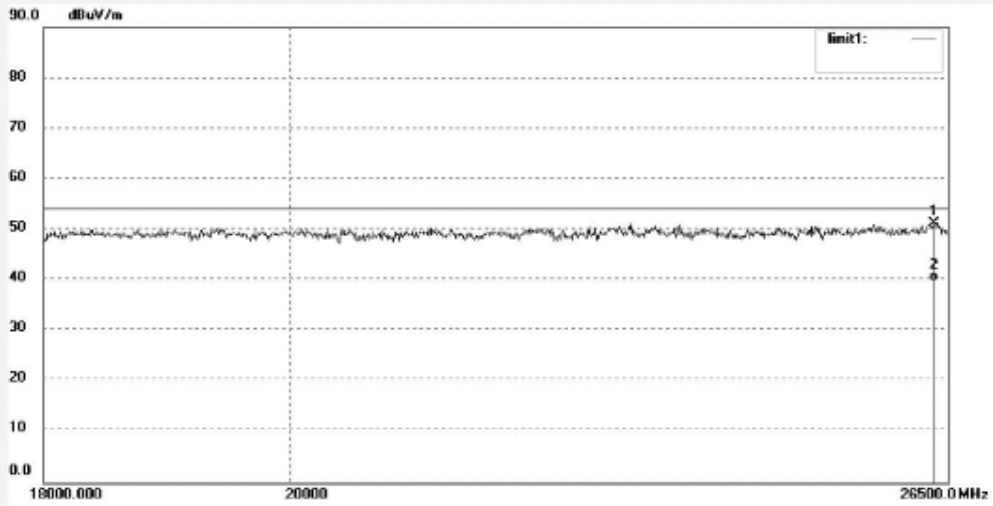

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26346.703	34.30	17.00	51.30	74.00	-22.70	peak			
2	26346.703	22.73	17.00	39.73	54.00	-14.27	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1445	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n20---3TX (Non-Beamforming)

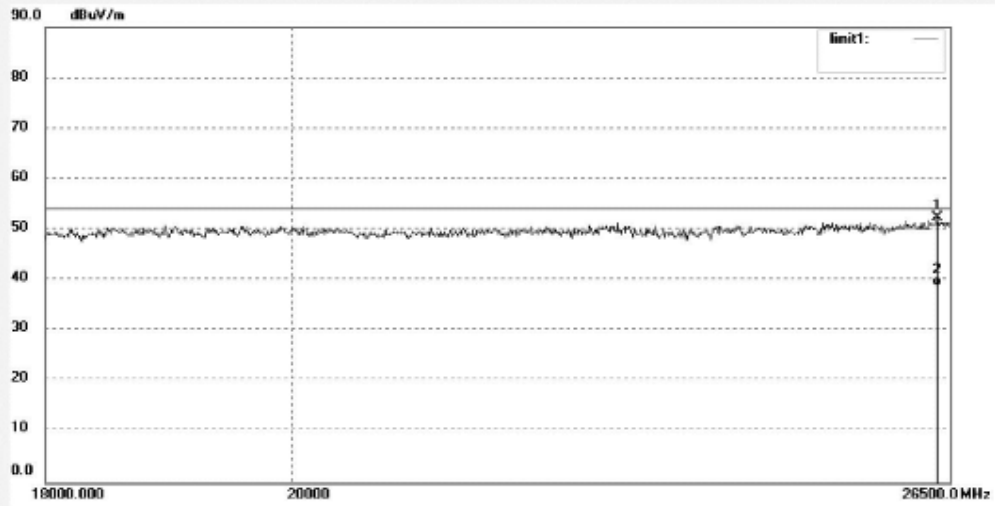

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26356.895	35.85	16.50	52.35	74.00	-21.65	peak			
2	26356.895	22.22	16.50	38.72	54.00	-15.28	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1446	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2462MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n20---3TX (Non-Beamforming)

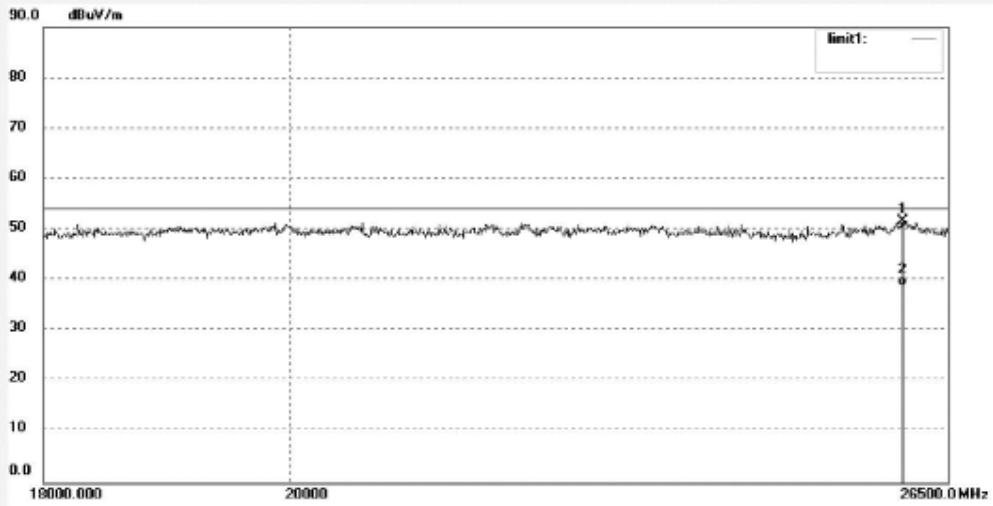

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25992.449	35.23	16.50	51.73	74.00	-22.27	peak			
2	25992.449	22.37	16.50	38.87	54.00	-15.13	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1447	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2462MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n20---3TX (Non-Beamforming)

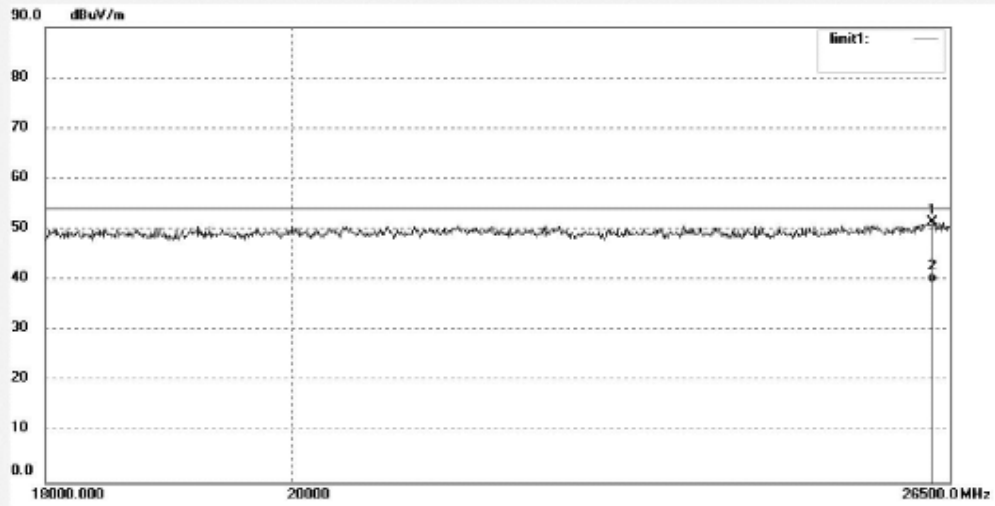

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26305.974	34.29	17.03	51.32	74.00	-22.68	peak			
2	26305.974	22.50	17.03	39.53	54.00	-14.47	AVG			

Produkte  
 Products

**Appendix F.10: Spurious Emissions, Non-Beamforming, 802.11n HT40\_3TX**




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1364	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2422MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n40---3TX(Non-Beamforming)

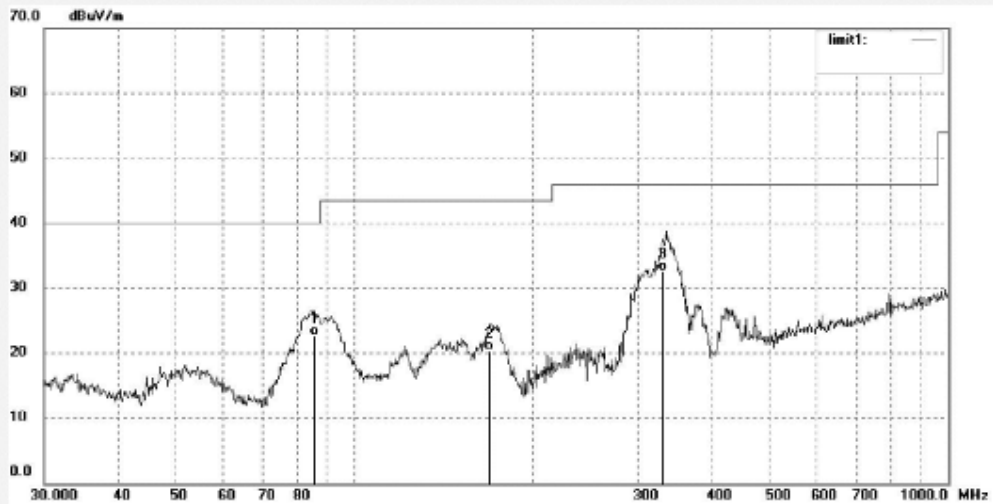

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	85.5977	37.94	-15.35	22.59	40.00	-17.41	QP			
2	169.0054	34.27	-13.84	20.43	43.50	-23.07	QP			
3	329.0389	41.01	-8.38	32.63	46.00	-13.37	QP			




**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1365	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2422MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n40---3TX(Non-Beamforming)

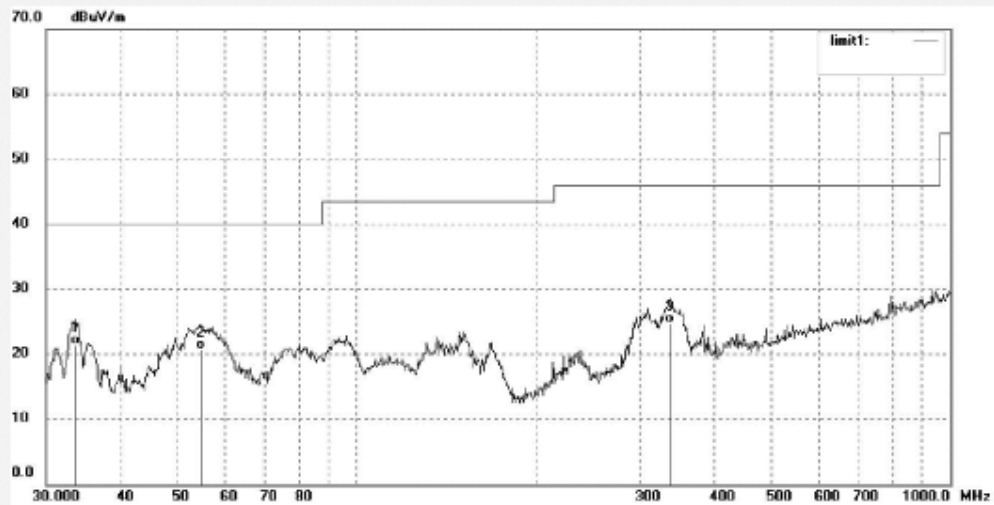


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.6802	31.72	-10.29	21.43	40.00	-18.57	QP			
2	54.6428	33.62	-12.95	20.67	40.00	-19.33	QP			
3	337.2155	32.88	-8.18	24.70	46.00	-21.30	QP			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1366	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	
Note: 802.11 n40---3TX(Non-Beamforming)	

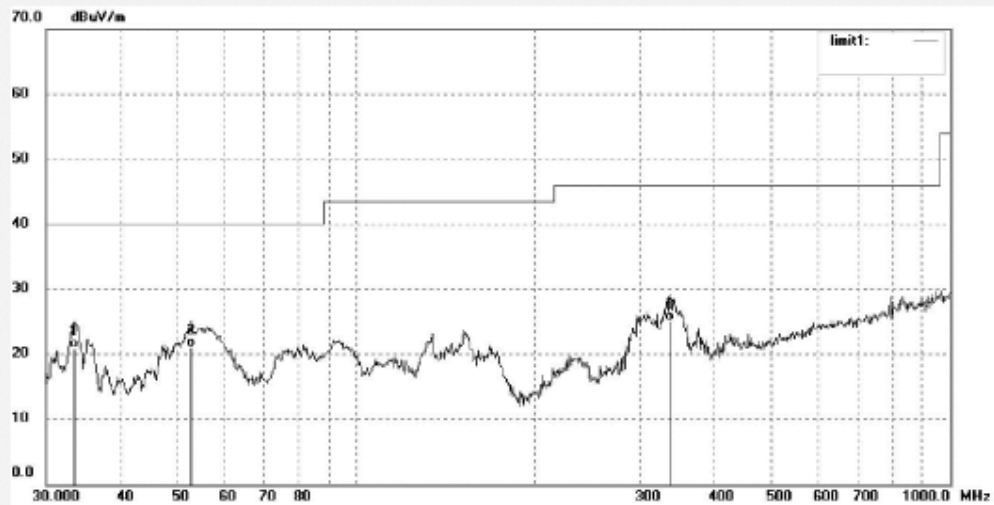

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.4448	31.15	-10.26	20.89	40.00	-19.11	QP			
2	52.7599	33.95	-12.81	21.14	40.00	-18.86	QP			
3	337.2155	33.35	-8.18	25.17	46.00	-20.83	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1367	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n40---3TX(Non-Beamforming)

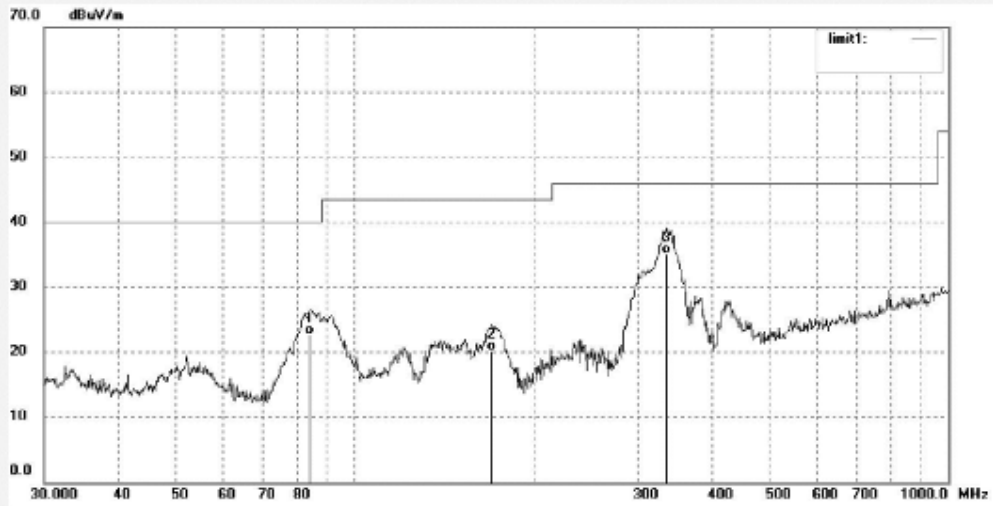

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	84.1099	38.19	-15.59	22.60	40.00	-17.40	QP			
2	170.1947	33.89	-13.68	20.21	43.50	-23.29	QP			
3	336.0351	43.37	-8.23	35.14	46.00	-10.86	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1368	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2452MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n40---3TX(Non-Beamforming)

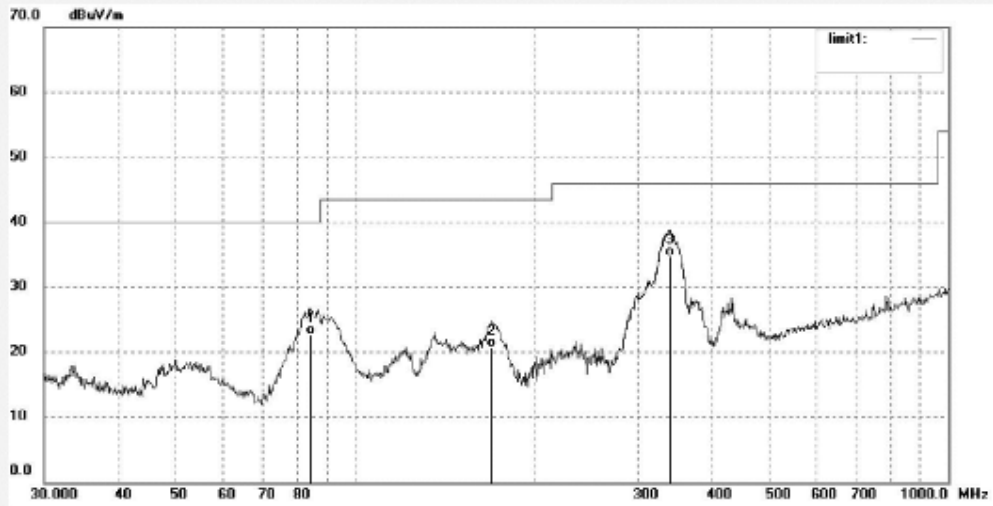

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	84.4054	38.15	-15.53	22.62	40.00	-17.38	QP			
2	170.1948	34.38	-13.68	20.70	43.50	-22.80	QP			
3	339.5888	42.84	-8.08	34.76	46.00	-11.24	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1369	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2452MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n40---3TX(Non-Beamforming)

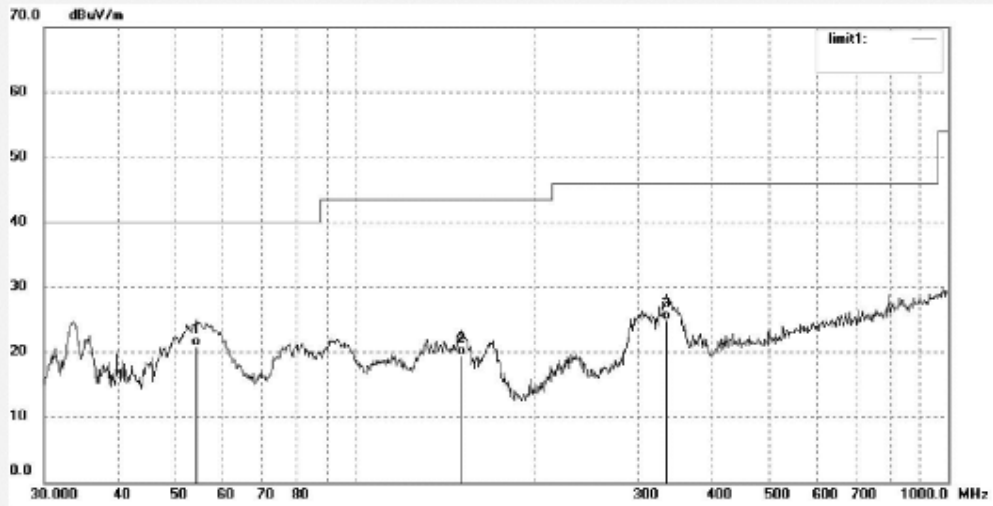

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	54.2610	33.89	-12.92	20.97	40.00	-19.03	QP			
2	151.5972	34.70	-15.14	19.56	43.50	-23.94	QP			
3	336.0352	33.22	-8.23	24.99	46.00	-21.01	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1245	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp ( C)/Hum (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2422MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n40---3TX(Non-Beamforming)

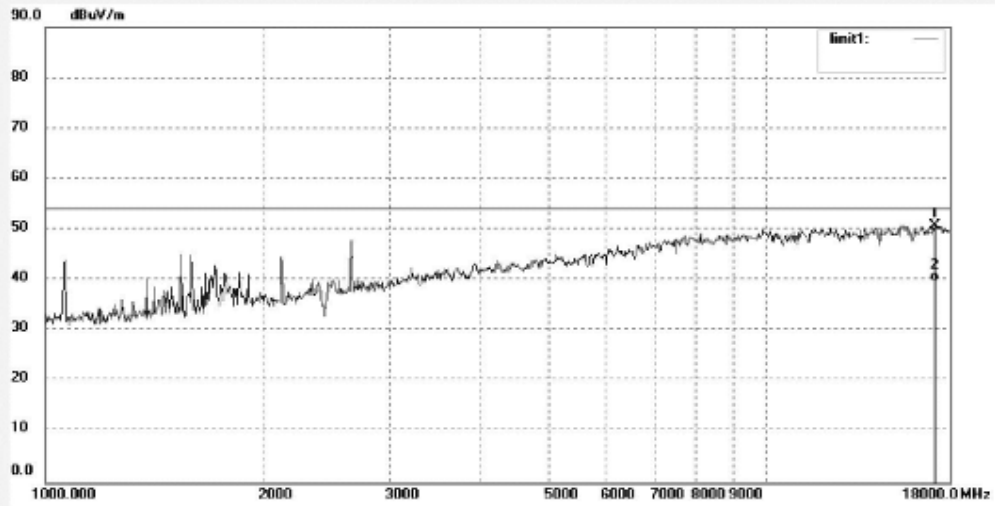

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	17136.924	8.55	42.25	50.80	74.00	-23.20	peak			
2	17136.924	-2.61	42.25	39.64	54.00	-14.36	AVG			



**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1246	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp ( C)/Hum (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2422MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n40---3TX(Non-Beamforming)

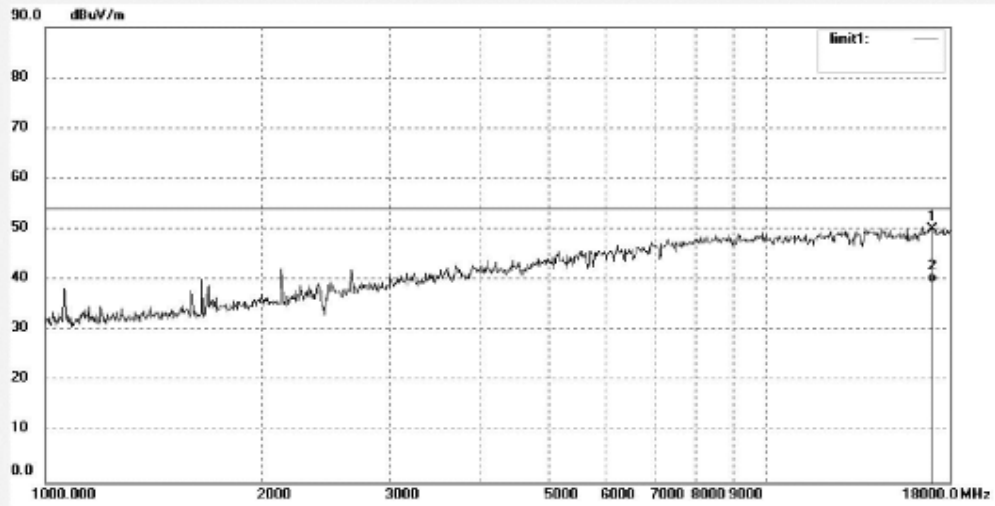

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	17038.146	8.24	41.85	50.09	74.00	-23.91	peak			
2	17038.146	-2.35	41.85	39.50	54.00	-14.50	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1247	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n40---3TX(Non-Beamforming)

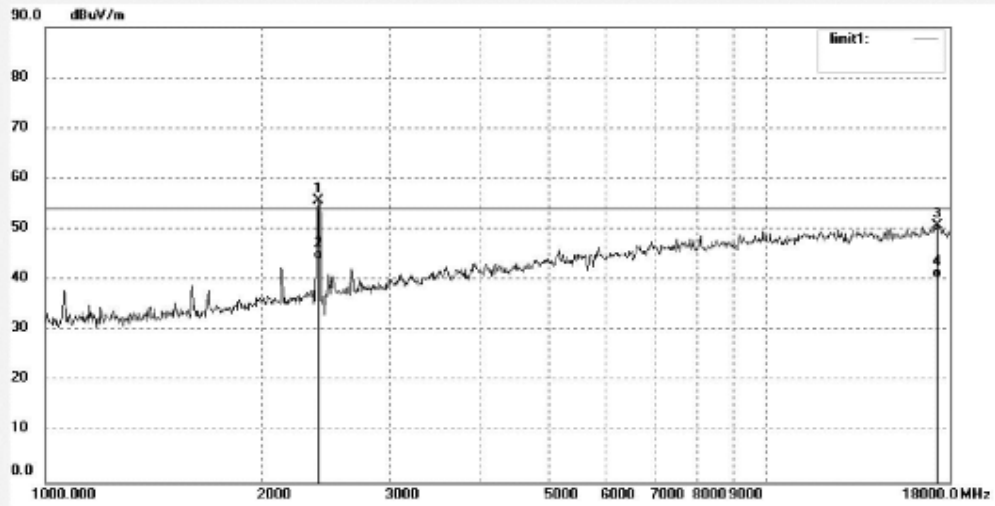

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2393.824	63.23	-7.50	55.73	74.00	-18.27	peak			
2	2393.824	51.58	-7.50	44.08	54.00	-9.92	AVG			
3	17286.166	7.80	42.84	50.64	74.00	-23.36	peak			
4	17286.166	-2.38	42.84	40.46	54.00	-13.54	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1248	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n40---3TX(Non-Beamforming)

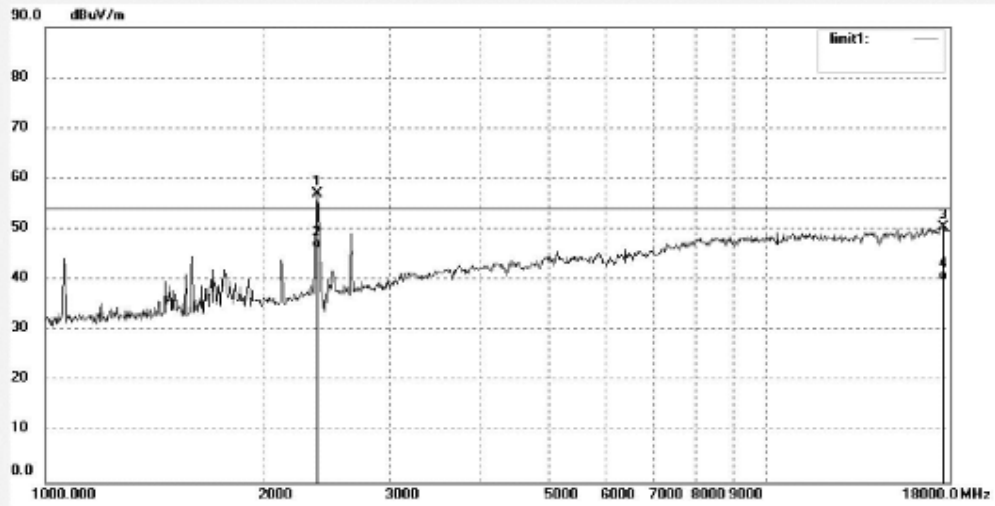

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2393.291	64.47	-7.51	56.96	74.00	-17.04	peak			
2	2393.291	53.82	-7.51	46.31	54.00	-7.69	AVG			
3	17639.473	6.10	44.37	50.47	74.00	-23.53	peak			
4	17639.473	-4.53	44.37	39.84	54.00	-14.16	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1249	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2452MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n40---3TX(Non-Beamforming)

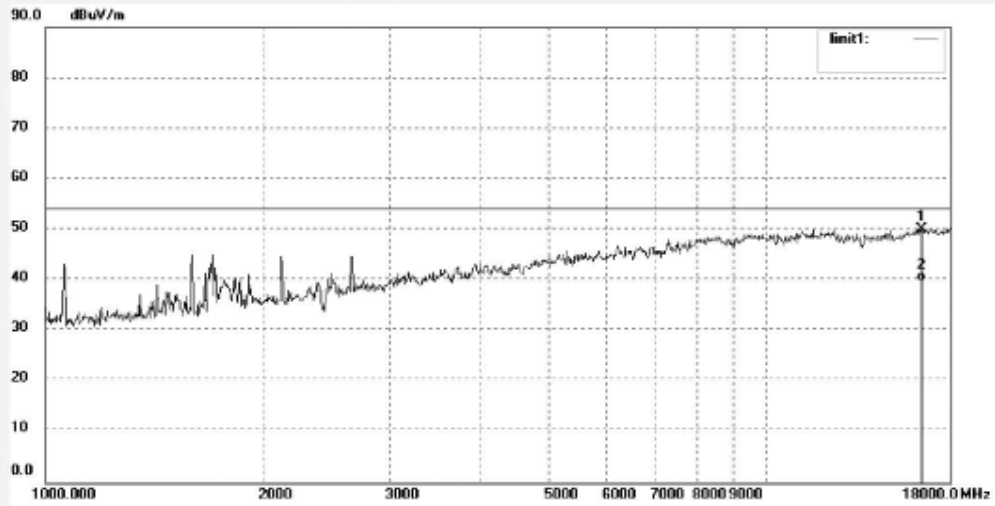

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	16457.318	9.87	40.27	50.14	74.00	-23.86	peak			
2	16457.318	-0.49	40.27	39.78	54.00	-14.22	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1250	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2452MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n40---3TX(Non-Beamforming)

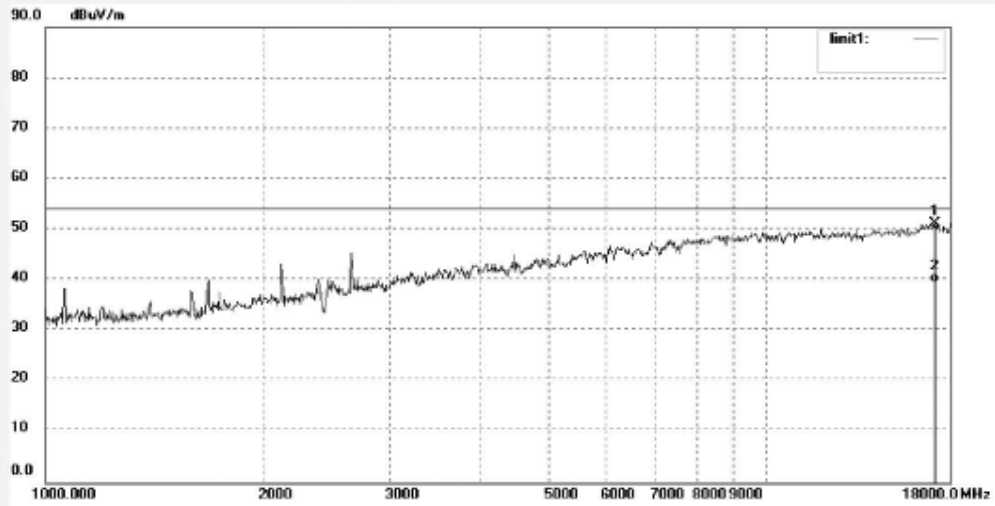

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	17136.924	8.86	42.25	51.11	74.00	-22.89	peak			
2	17136.924	-2.84	42.25	39.41	54.00	-14.59	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1460	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2422MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n40---3TX (Non-Beamforming)

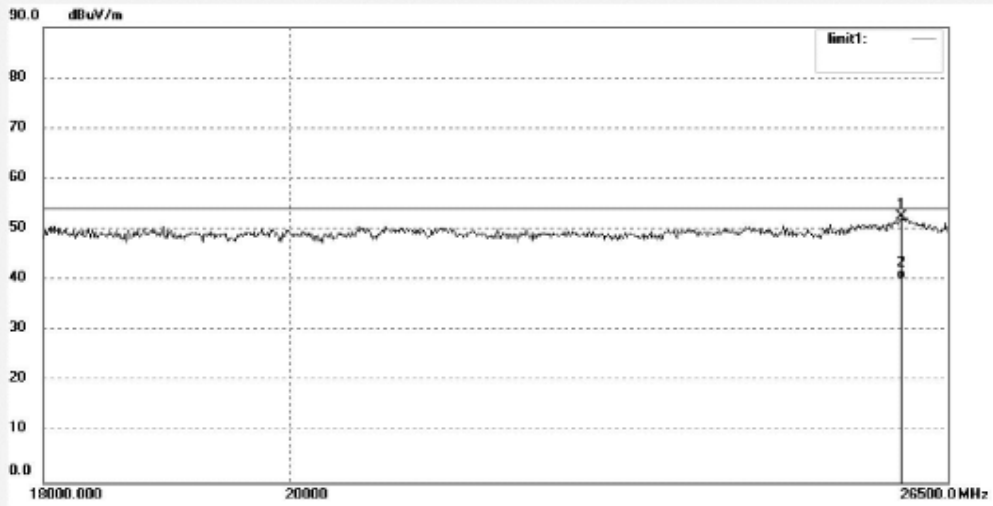

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25972.351	35.22	17.25	52.47	74.00	-21.53	peak			
2	25972.351	22.87	17.25	40.12	54.00	-13.88	AVG			



**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1461	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp ( C)/Hum (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2422MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n40---3TX (Non-Beamforming)

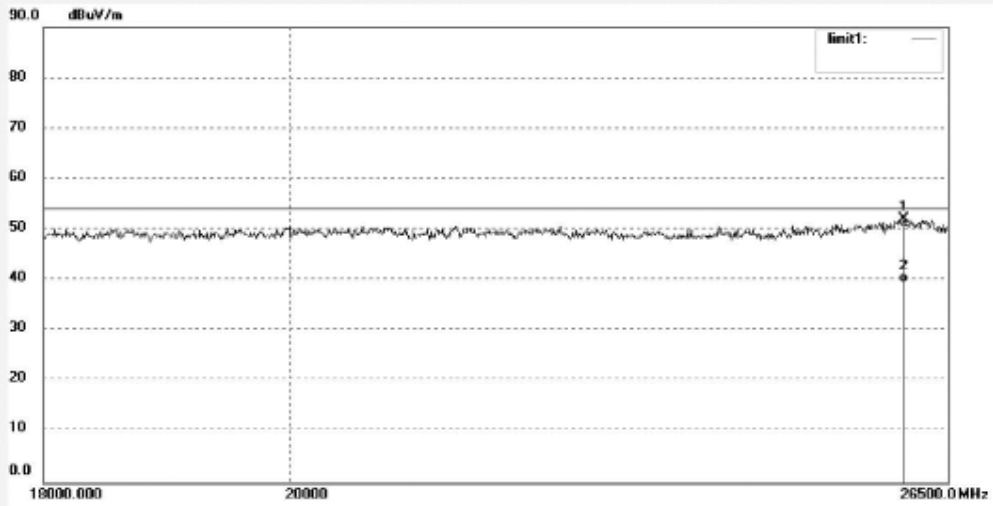

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26002.504	35.49	16.50	51.99	74.00	-22.01	peak			
2	26002.504	23.04	16.50	39.54	54.00	-14.46	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1462	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp ( C)/Hum (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n40---3TX (Non-Beamforming)

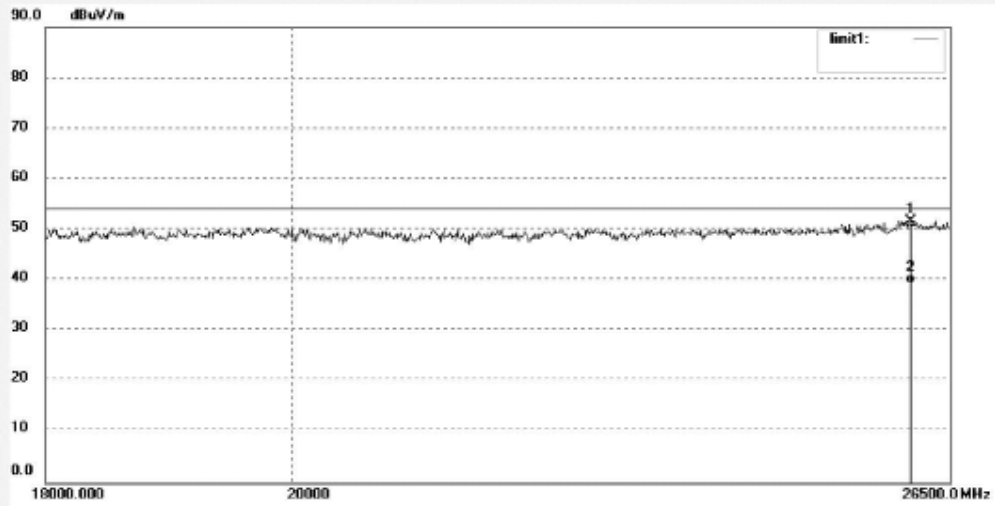

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26062.917	35.24	16.50	51.74	74.00	-22.26	peak			
2	26062.917	22.80	16.50	39.30	54.00	-14.70	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1463	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n40---3TX (Non-Beamforming)

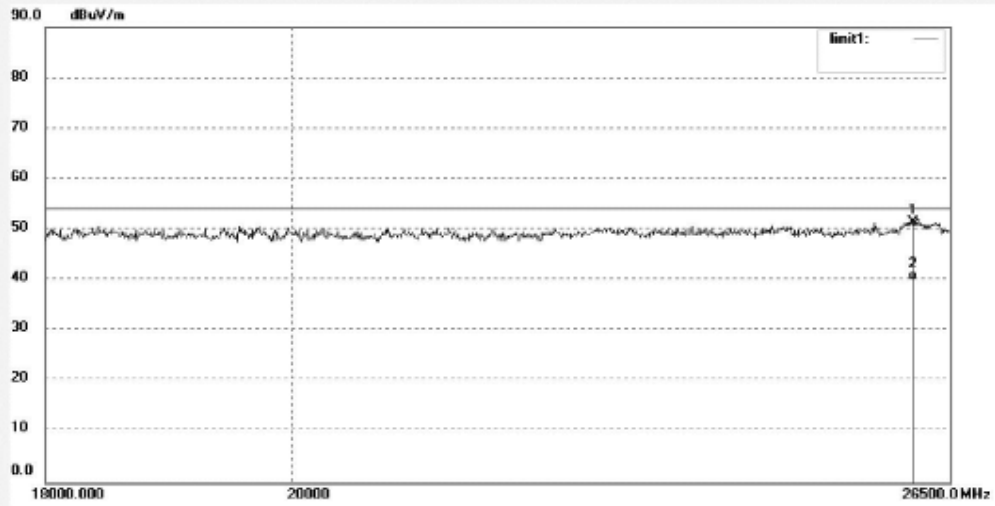

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26083.086	34.23	17.18	51.41	74.00	-22.59	peak			
2	26083.086	22.76	17.18	39.94	54.00	-14.06	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1464	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2452MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n40---3TX (Non-Beamforming)

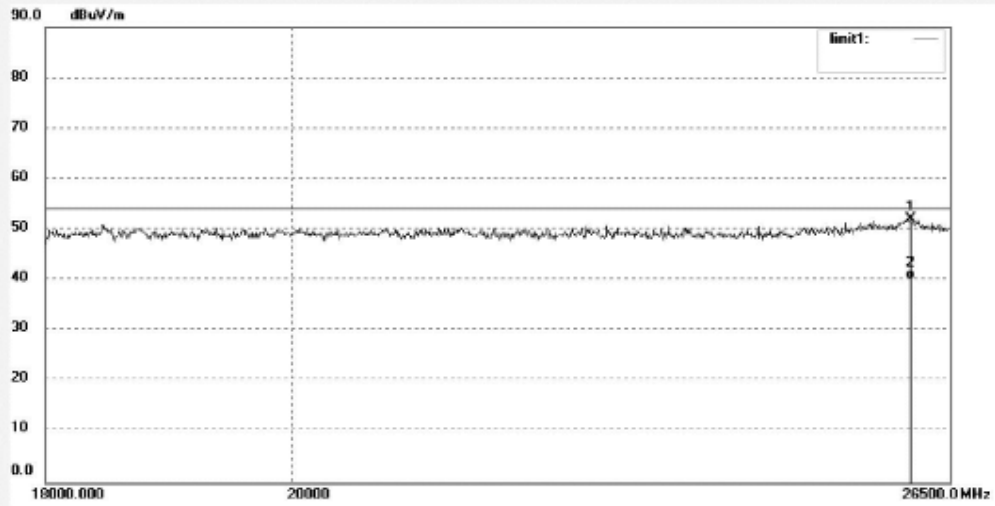

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26052.838	34.94	17.20	52.14	74.00	-21.86	peak			
2	26052.838	23.01	17.20	40.21	54.00	-13.79	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1465	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2452MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n40---3TX (Non-Beamforming)

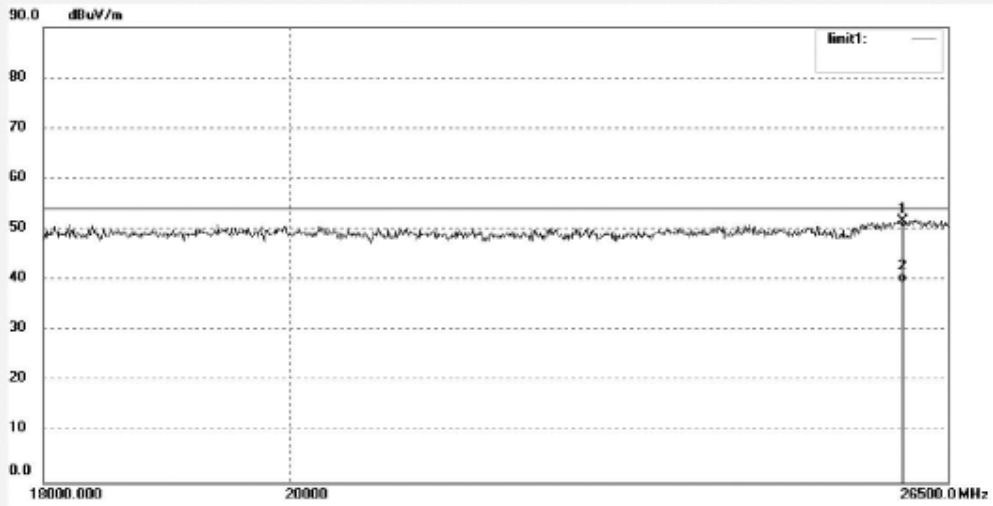

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25992.449	35.19	16.50	51.69	74.00	-22.31	peak			
2	25992.449	23.09	16.50	39.59	54.00	-14.41	AVG			

Produkte  
 Products

**Appendix F.11: Spurious Emissions, Beamforming, 802.11n HT20\_2TX**




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1370	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2412MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---2TX ( Beamforming)

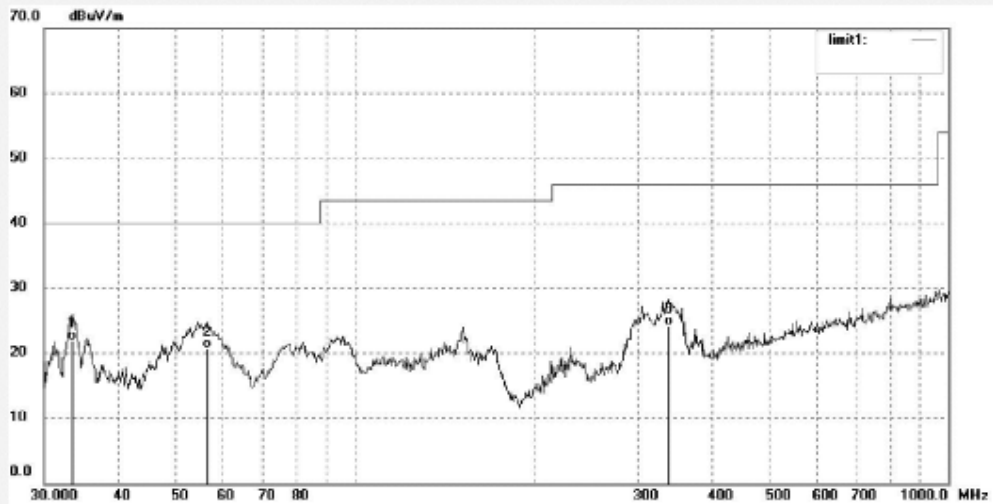

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.4448	32.26	-10.26	22.00	40.00	-18.00	QP			
2	56.3947	34.00	-13.24	20.76	40.00	-19.24	QP			
3	338.4001	32.33	-8.13	24.20	46.00	-21.80	QP			



**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1371	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2412MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---2TX ( Beamforming)

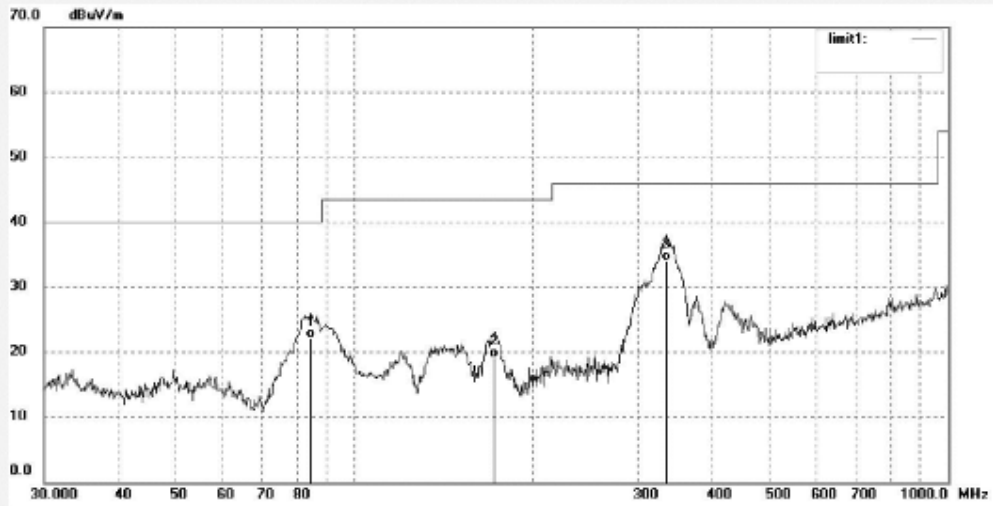

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	84.4054	37.60	-15.53	22.07	40.00	-17.93	QP			
2	171.9946	32.86	-13.66	19.20	43.50	-24.30	QP			
3	334.8589	42.36	-8.26	34.10	46.00	-11.90	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1372	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---2TX ( Beamforming)

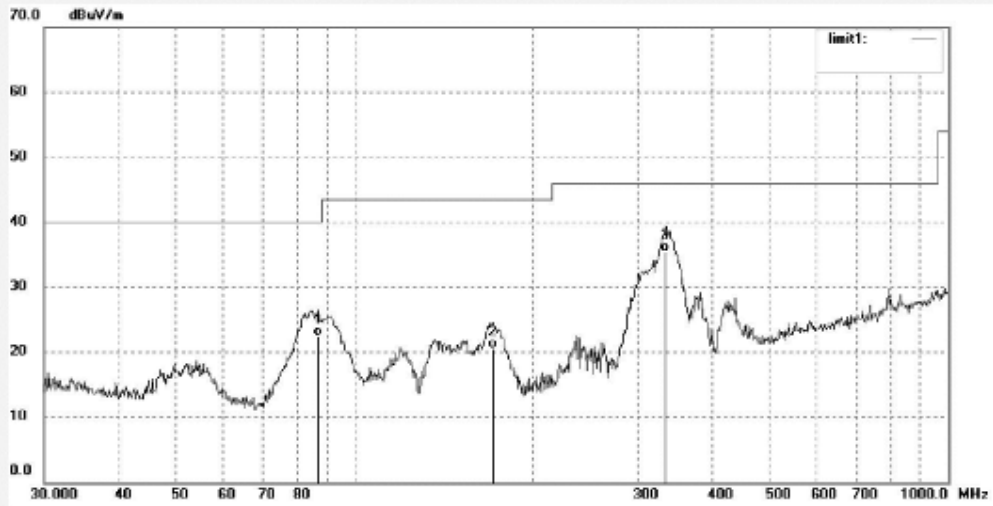

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	86.8067	37.82	-15.27	22.55	40.00	-17.45	QP			
2	170.7925	34.30	-13.68	20.62	43.50	-22.88	QP			
3	333.6865	43.72	-8.28	35.44	46.00	-10.56	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1373	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---2TX ( Beamforming)

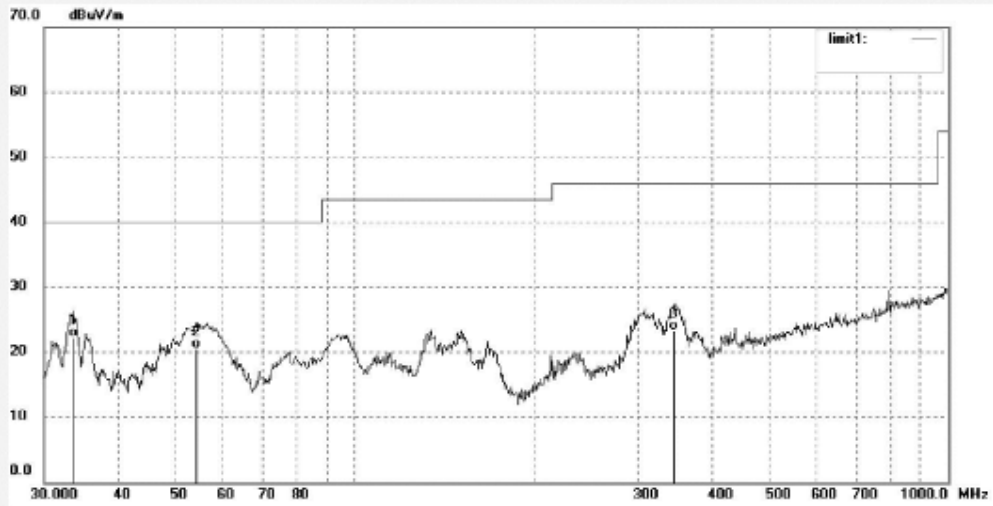

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.6802	32.59	-10.29	22.30	40.00	-17.70	QP			
2	54.0711	33.42	-12.91	20.51	40.00	-19.49	QP			
3	344.3854	31.23	-7.89	23.34	46.00	-22.66	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1374	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2462MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---2TX ( Beamforming)

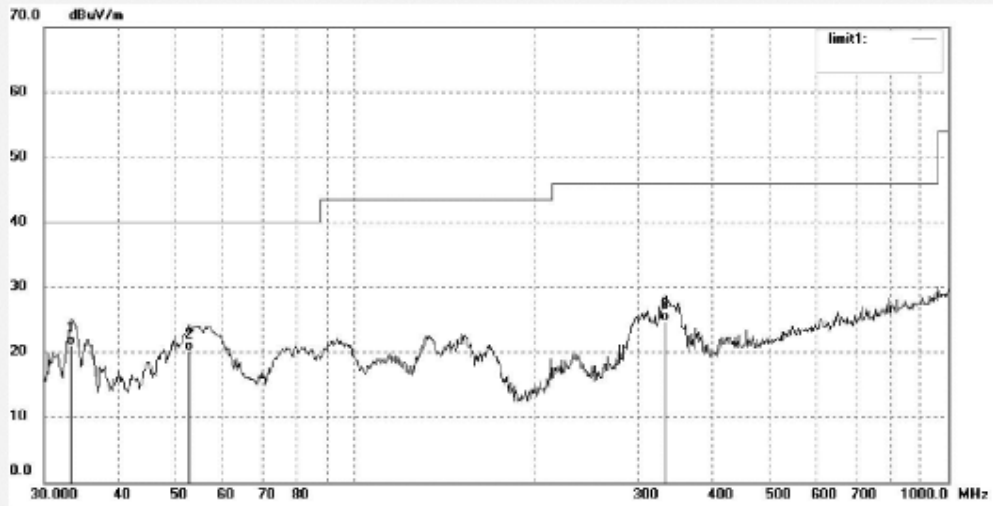

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.3278	31.33	-10.25	21.08	40.00	-18.92	QP			
2	52.5752	32.97	-12.79	20.18	40.00	-19.82	QP			
3	333.6865	33.06	-8.28	24.78	46.00	-21.22	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1375	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/06
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2462MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---2TX ( Beamforming)

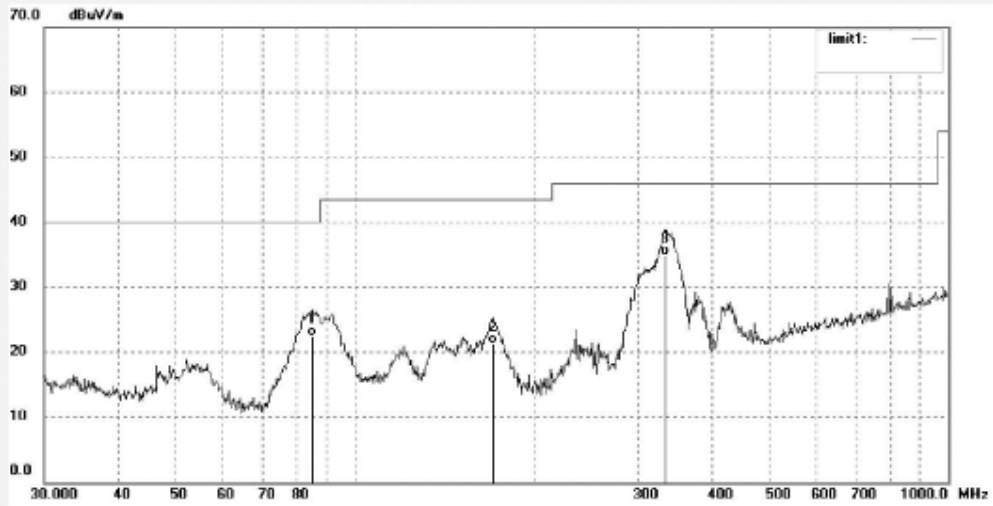

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	84.7018	37.88	-15.45	22.43	40.00	-17.57	QP			
2	170.7925	34.96	-13.68	21.28	43.50	-22.22	QP			
3	333.6865	43.22	-8.28	34.94	46.00	-11.06	QP			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1251	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp ( C)/Hum (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2412MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---2TX(Beamforming)

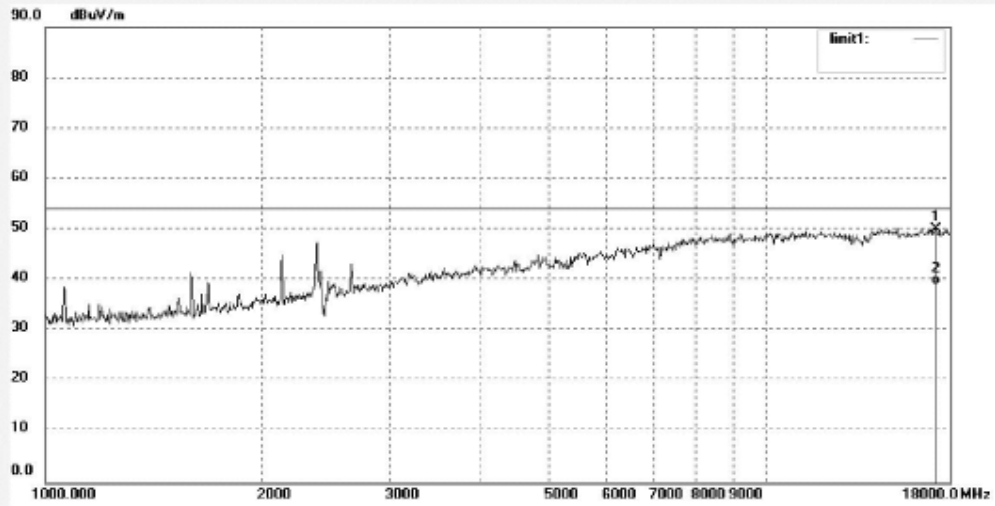

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	17186.528	7.54	42.45	49.99	74.00	-24.01	peak			
2	17186.528	-3.46	42.45	38.99	54.00	-15.01	AVG			



**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1252	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2412MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---2TX(Beamforming)

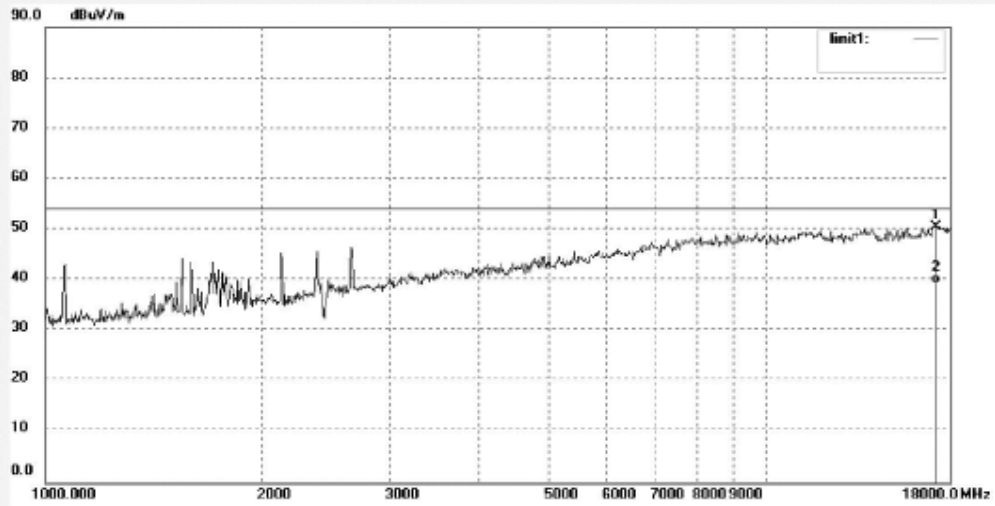

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	17186.528	8.17	42.45	50.62	74.00	-23.38	peak			
2	17186.528	-3.12	42.45	39.33	54.00	-14.67	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1253	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---2TX(Beamforming)

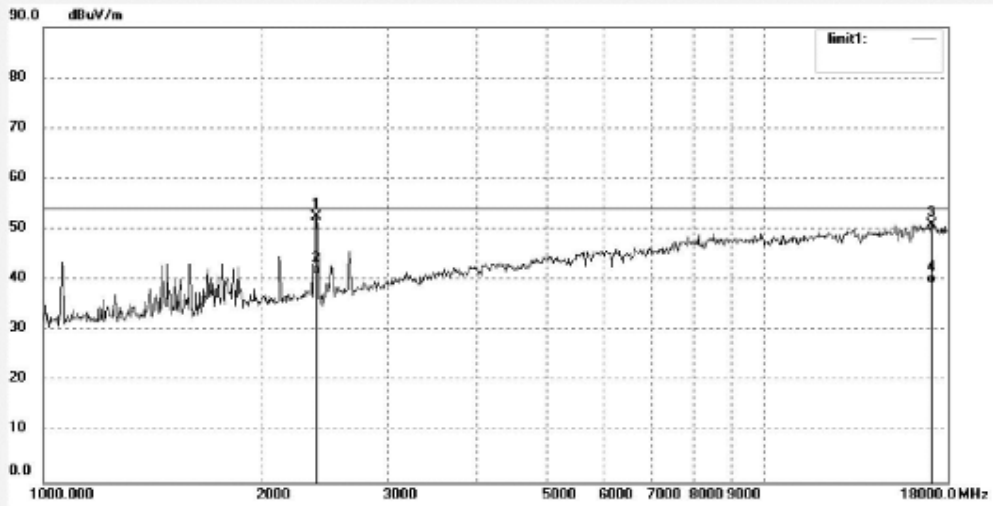

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2393.824	60.09	-7.50	52.59	74.00	-21.41	peak			
2	2393.824	48.65	-7.50	41.15	54.00	-12.85	AVG			
3	17087.464	8.85	42.05	50.90	74.00	-23.10	peak			
4	17087.464	-2.86	42.05	39.19	54.00	-14.81	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1254	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---2TX(Beamforming)

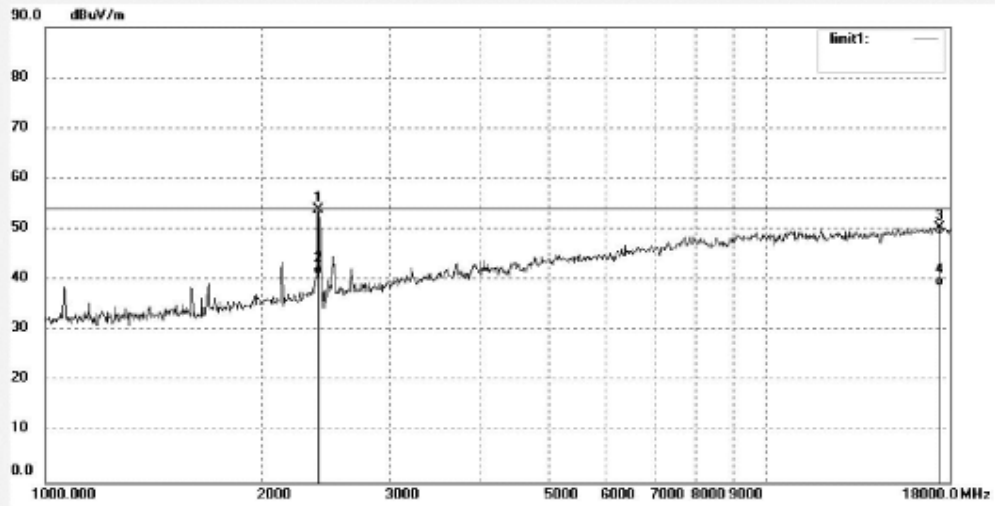

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2393.824	61.47	-7.50	53.97	74.00	-20.03	peak			
2	2393.824	48.65	-7.50	41.15	54.00	-12.85	AVG			
3	17386.383	6.94	43.25	50.19	74.00	-23.81	peak			
4	17386.383	-4.52	43.25	38.73	54.00	-15.27	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1255	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2462MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---2TX(Beamforming)

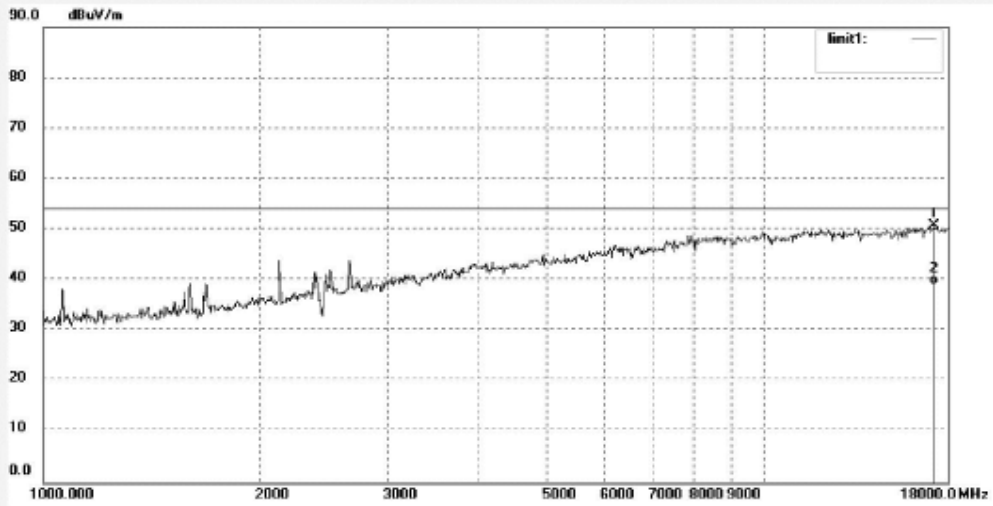

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	17186.528	8.23	42.45	50.68	74.00	-23.32	peak			
2	17186.528	-3.51	42.45	38.94	54.00	-15.06	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1256	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/11/04/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2462MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11 n20---2TX(Beamforming)

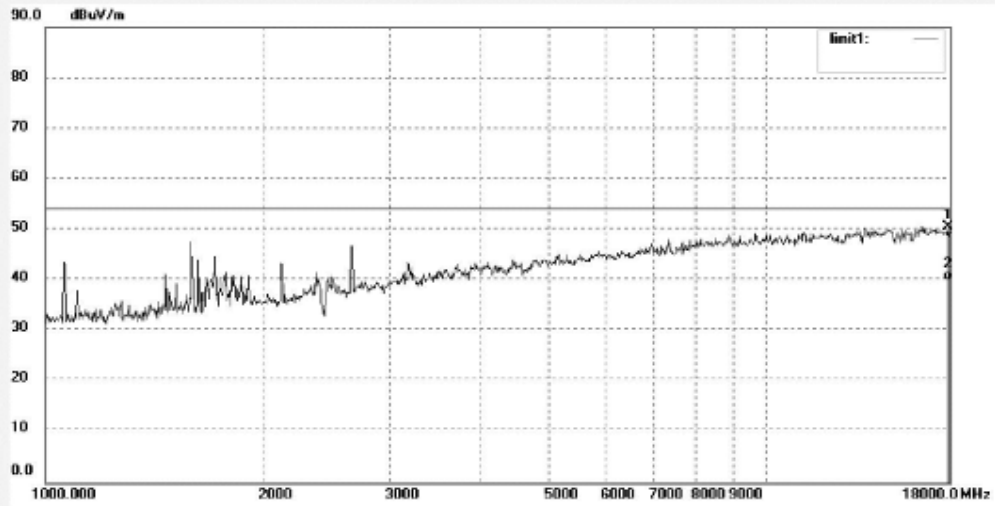

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	17896.247	4.83	45.60	50.43	74.00	-23.57	peak			
2	17896.247	-5.63	45.60	39.97	54.00	-14.03	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1466	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2412MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n20---2TX (Beamforming)

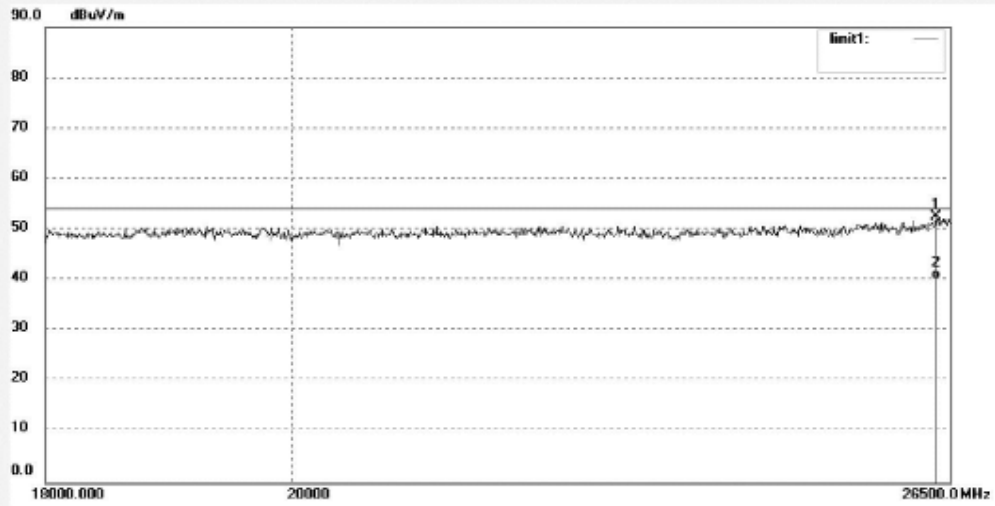

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26336.515	36.13	16.50	52.63	74.00	-21.37	peak			
2	26336.515	23.62	16.50	40.12	54.00	-13.88	AVG			



**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1467	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp ( C)/Hum (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2412MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n20---2TX (Beamforming)

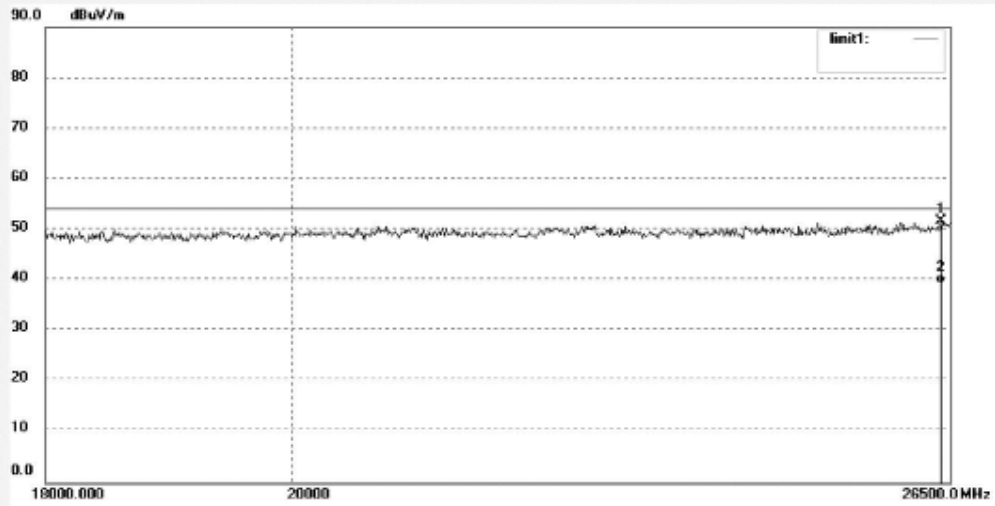

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26397.703	34.65	16.97	51.62	74.00	-22.38	peak			
2	26397.703	22.40	16.97	39.37	54.00	-14.63	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1468	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp ( C)/Hum (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n20---2TX (Beamforming)

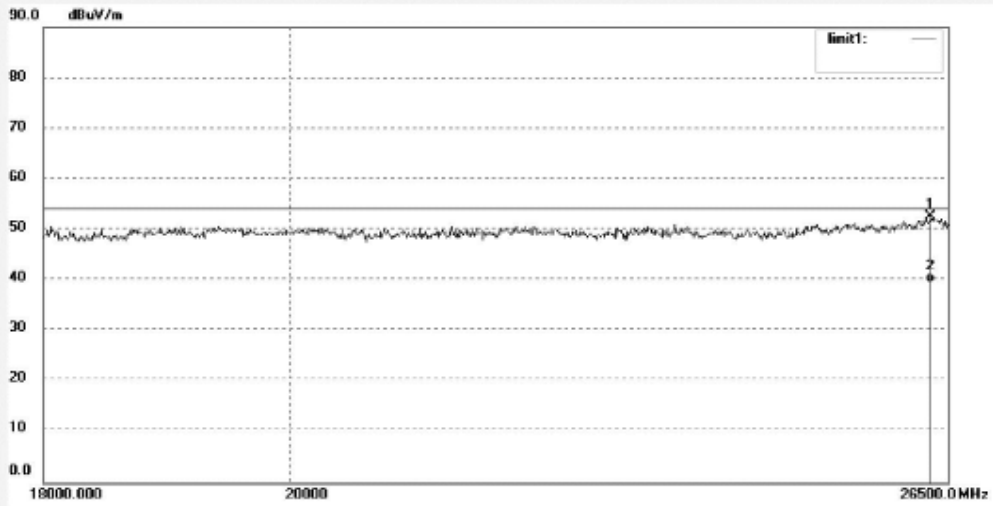

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26305.974	35.58	17.03	52.61	74.00	-21.39	peak			
2	26305.974	22.56	17.03	39.59	54.00	-14.41	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1469	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp ( C)/Hum (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2437MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n20---2TX (Beamforming)

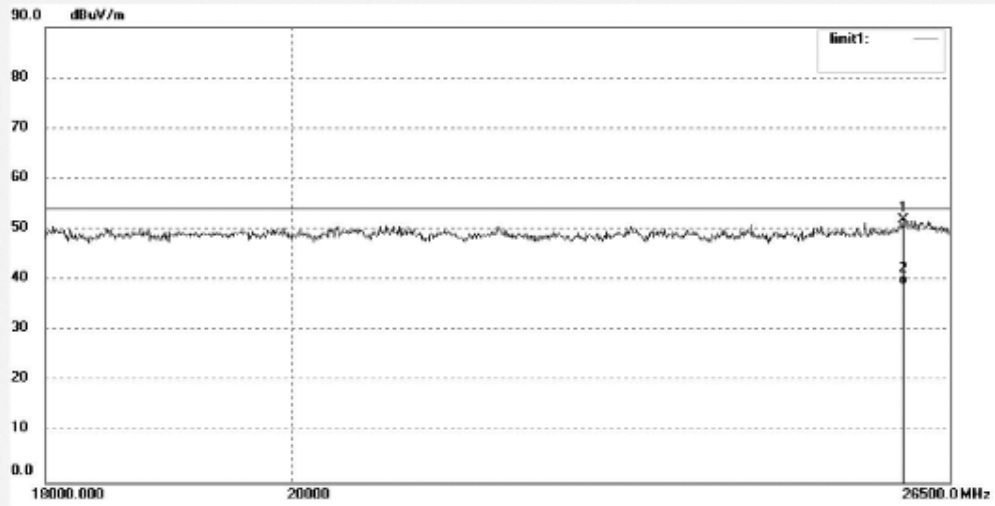

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25972.351	35.40	16.50	51.90	74.00	-22.10	peak			
2	25972.351	22.55	16.50	39.05	54.00	-14.95	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1470	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp ( C)/Hum (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2462MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n20---2TX (Beamforming)

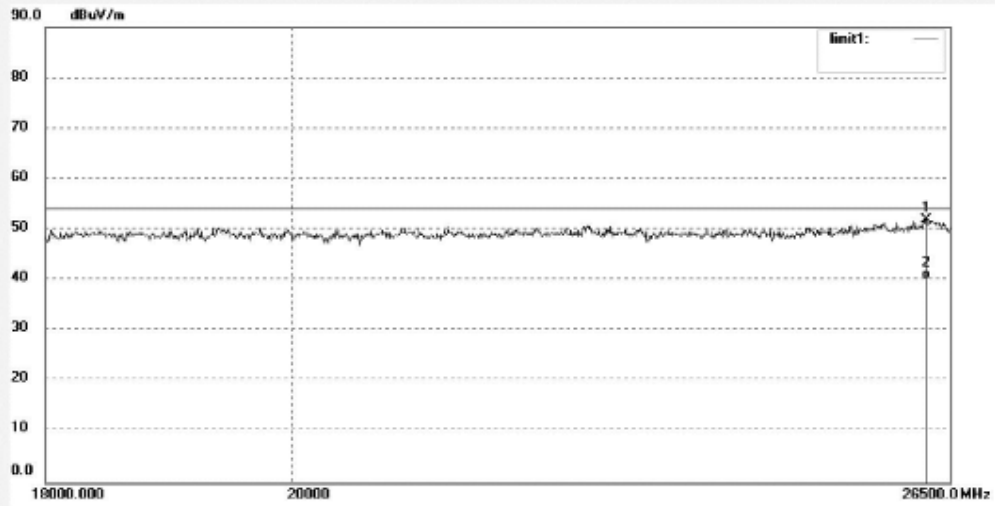

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26234.849	35.42	16.50	51.92	74.00	-22.08	peak			
2	26234.849	23.62	16.50	40.12	54.00	-13.88	AVG			

**Produkte**  
 Products




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: PZ #1471	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2014/11/09
Temp ( C)/Hum (%) 23 C / 48 %	Time:
EUT: WiFi Advisor	Engineer Signature: PEI
Mode: TX 2462MHz	Distance: 3m
Model: WFED-300AC	
Manufacturer: JDSU	

Note: 802.11n20---2TX (Beamforming)

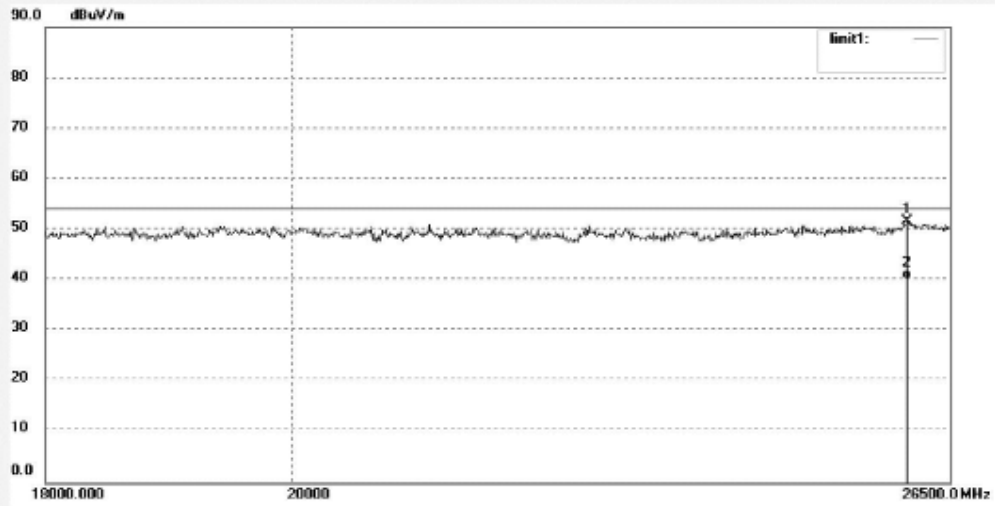

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26022.626	34.35	17.22	51.57	74.00	-22.43	peak			
2	26022.626	22.85	17.22	40.07	54.00	-13.93	AVG			