

KC.IA.00479

Antenna Specification

1. Application:

This application shall apply for antenna unit which shall be used such as automotive, conventional communications, smart home, etc..

2. Electrical Specification:

Those specifications were specially defined for customer's model, and all characteristics were measured under the model's handset testing jig .

2-1. Frequency Band:


Frequency Band	MHz
WIFI	1575.42/ 2400-2500/5150-5850


2-2. Impedance

50 ohm nominal

2.3:VSWR

Frequency Band(MHz)	2400	2500	5150	5850	1575.42
2-3-3. Typical Value:	1.9	1.3	1.9	1.6	2.7







UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 TOXU TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.IA.00476 Antenna Specification		SPEC REV. P0

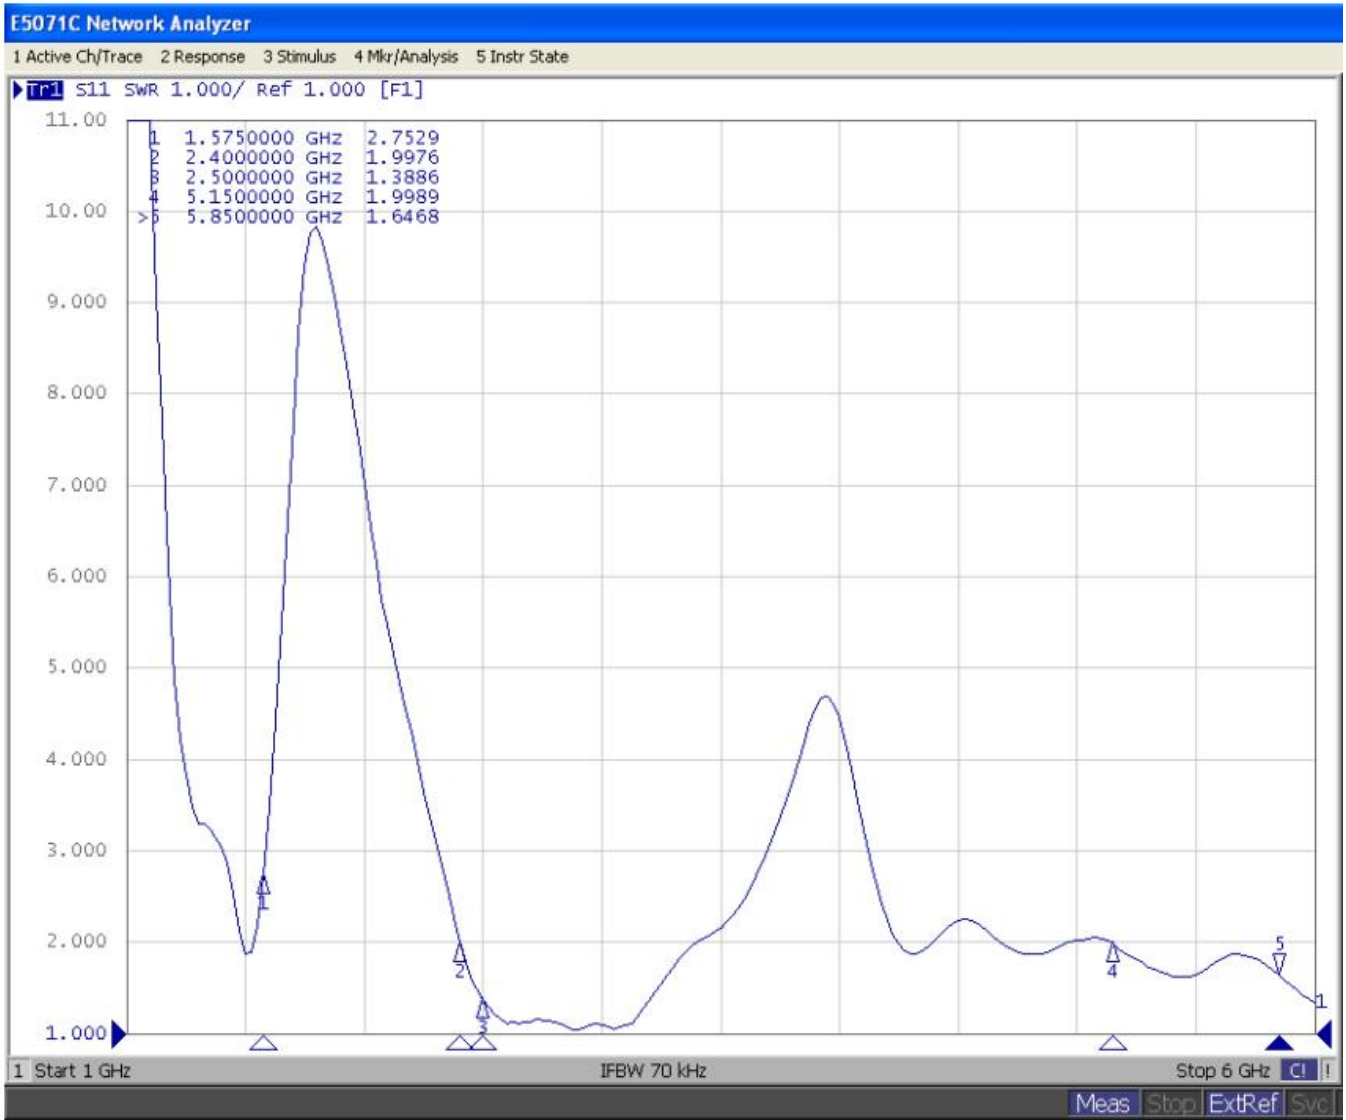


UNLESS OTHER SPECIFIED TOLERANCES ON :		TOXU 同讯技术	TOXU TECHNOLOGY CO., LTD.
X=±	X.X=±		
ANGLES=±		HOLEDIA=±	
SCALE :	UNIT : mm		
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.IA.00476 Antenna Specification			SPEC REV.
			P0

Efficiency and Gain

Frequency/Mhz	MaxGain/dBi	Efficiency / %
1561	0.21	46.21
1575	0.07	44.34
1602	-0.19	40.57
2400	3.12	52.24
2450	3.63	50.35
2500	3.7	54.33
5150	2.68	51.88
5510	4.21	52.48
5850	3.6	45.92

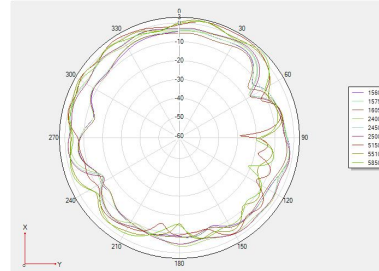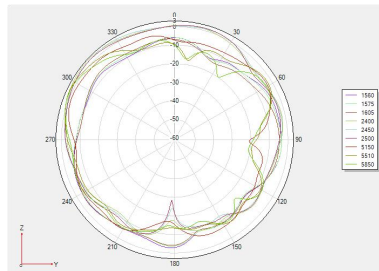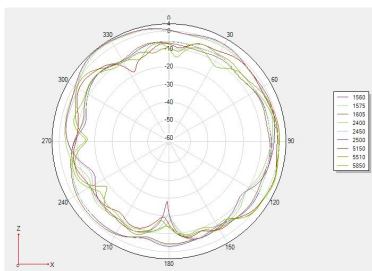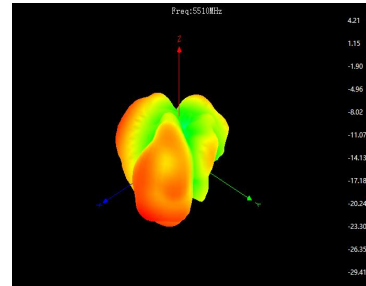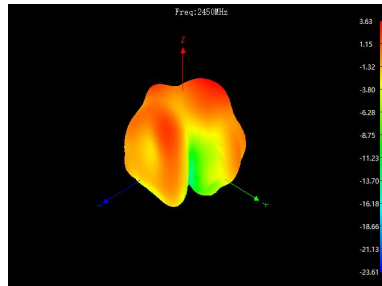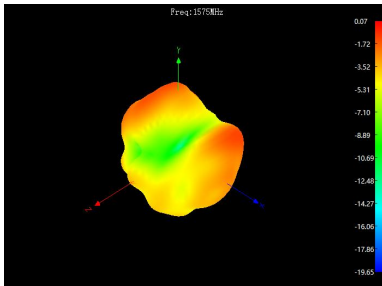


UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 TOXU TECHNOLOGY CO., LTD.
SCALE : DRAWN BY: LI DESIGNED BY: De wen	UNIT : mm CHECKED BY: YS APPROVED BY: YS	
TITLE : KC.IA.00476 Antenna Specification		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
		SPEC REV. P0

3. Mechanical Specification:



3-1. Mechanical Configuration (Unit: mm)


The appearance of the antenna is according to drawing

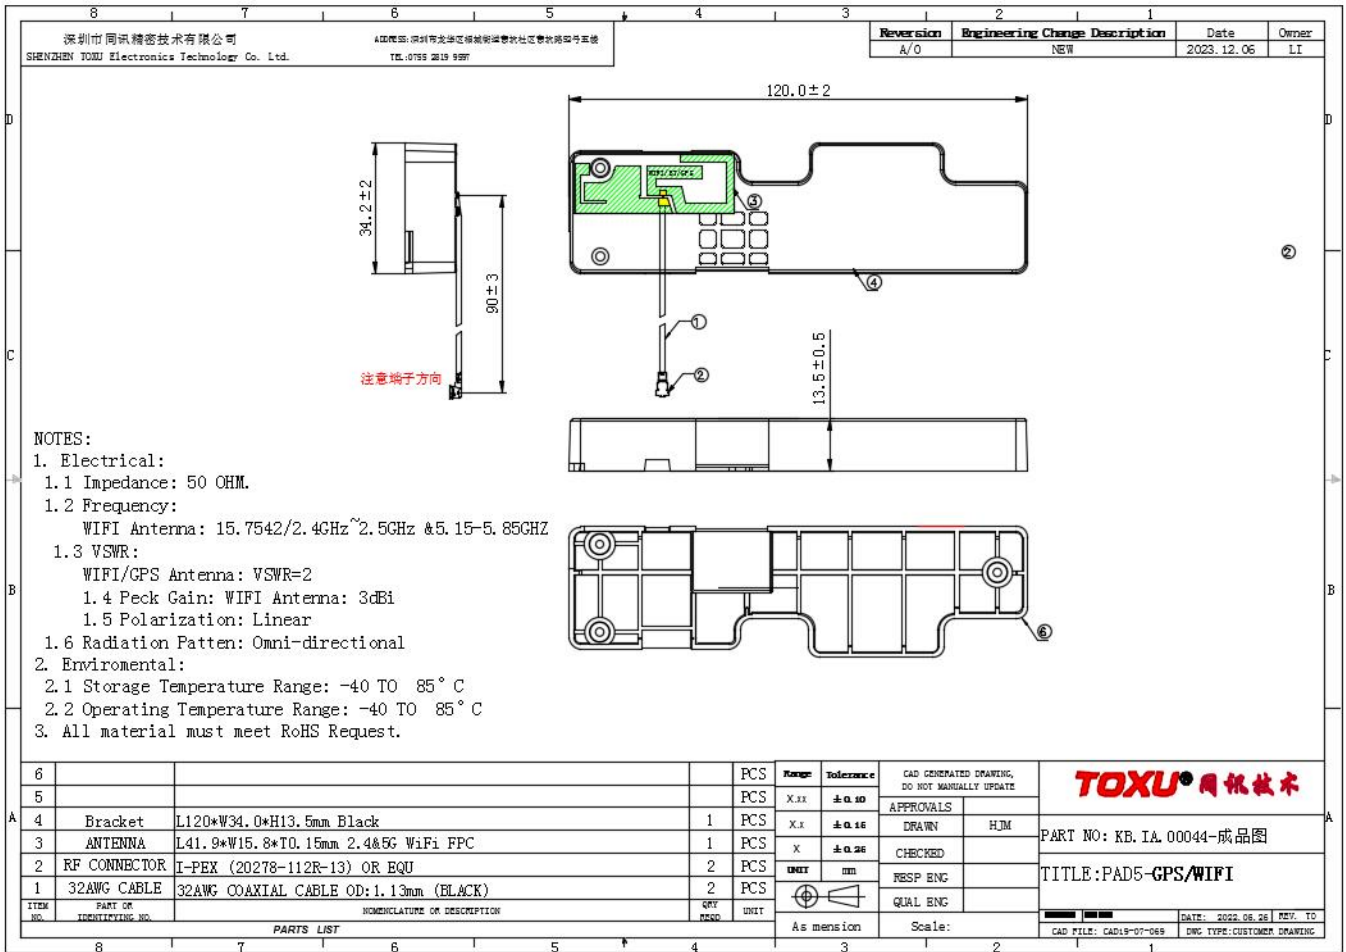

UNLESS OTHER SPECIFIED TOLERANCES ON :		TOXU 同讯技术	TOXU TECHNOLOGY CO., LTD.
X=±	X.X=±		
ANGLES=±	HOLEDIA=±	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
SCALE :	UNIT : mm		
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.IA.00476 Antenna Specification			SPEC REV.
			P0

4.包装规格:

产品料号: XXX			
产品型号: XXX			
一、标签要求:			
需方	XXX		
供方	XXXXX		
物料编码	XX		
产品型号	XX		
数量/单	XXX PCS	出厂日期	X 年 X 月 X 日
备注/其他			
二、装箱要求:			
作业说明:			
1. 内包装:			
产品 XX pcs 一袋, 放入小 PE 袋;			
2. 外包装:			
XxPCS 一箱;			
3. 注意事项:			
a. 是否要增设隔板、珍珠棉;			
b. 标签的帖附, 如 ROHS 等;			

UNLESS OTHER SPECIFIED TOLERANCES ON :			TOXU TECHNOLOGY CO., LTD.
X=±	X.X=±		
ANGLES=±	HOLEDIA=±		
SCALE :	UNIT : mm		
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
<small>THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION</small>			SPEC REV.
			P0
TITLE : KC.IA.00476 Antenna Specification			