






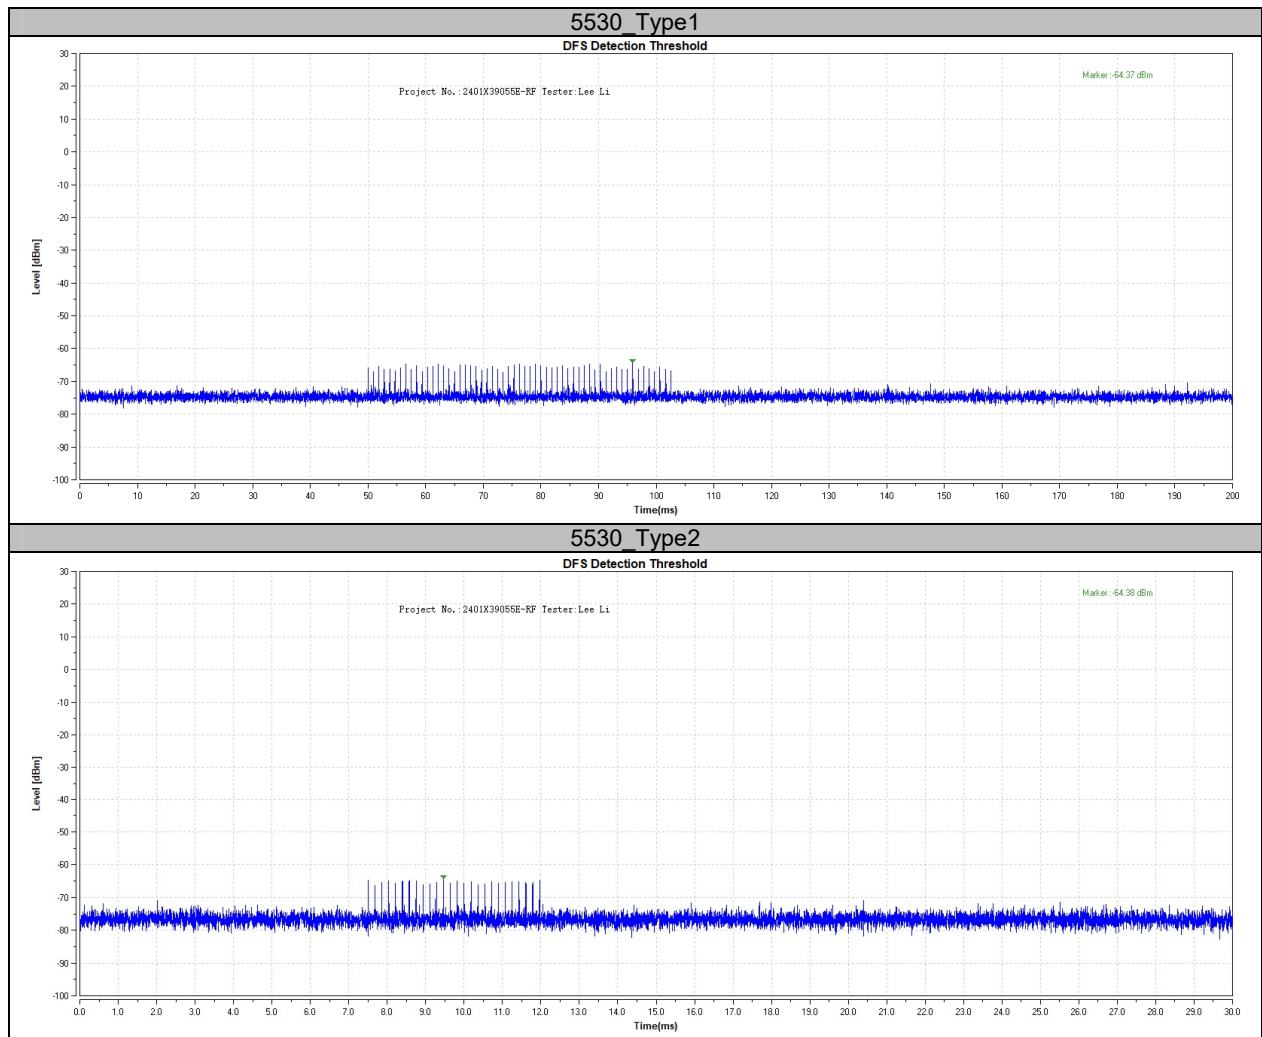


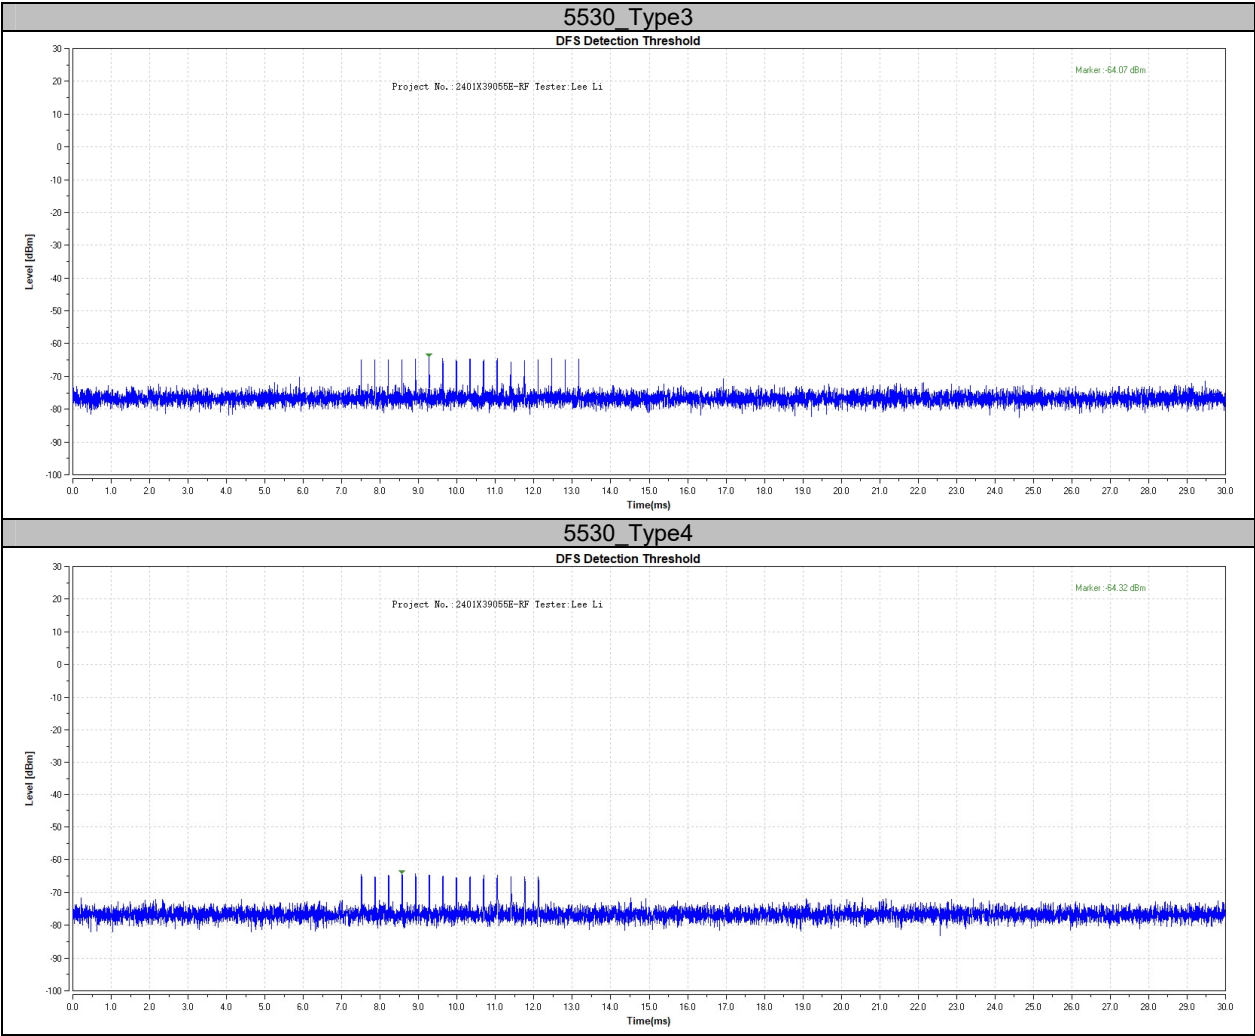


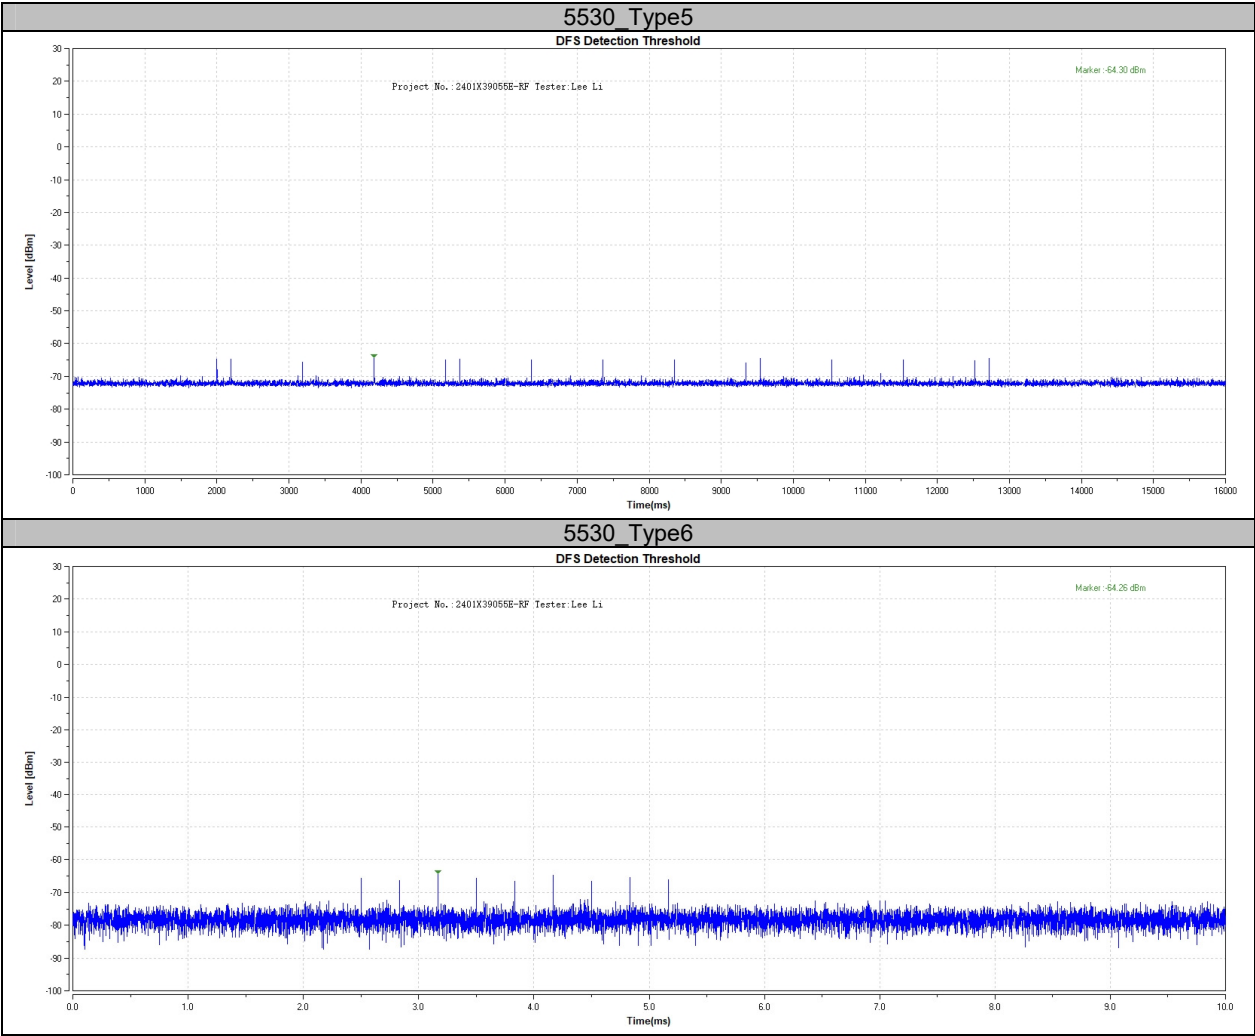


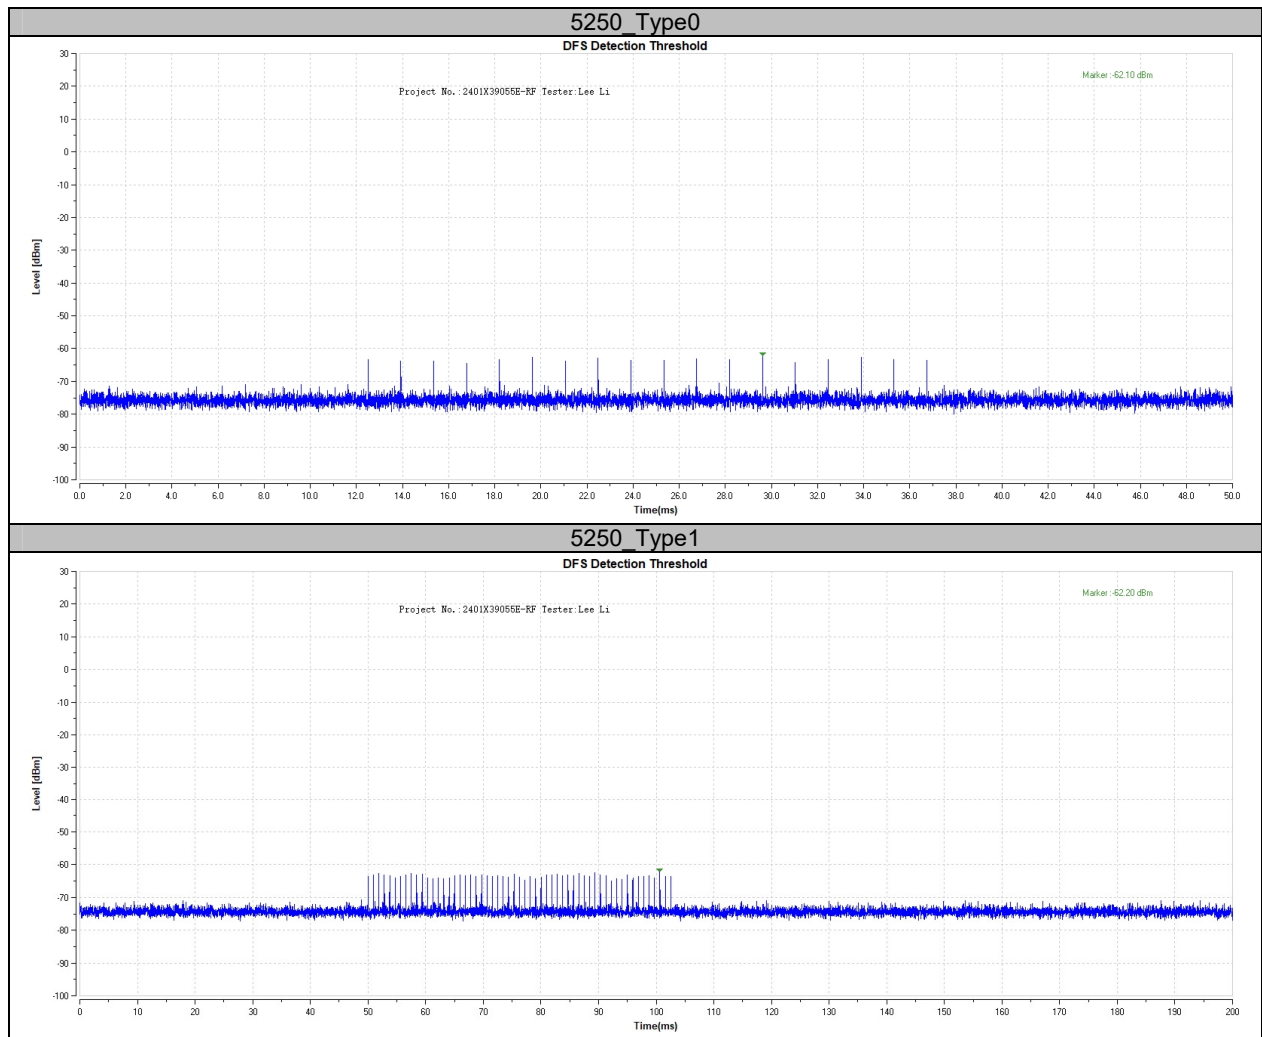


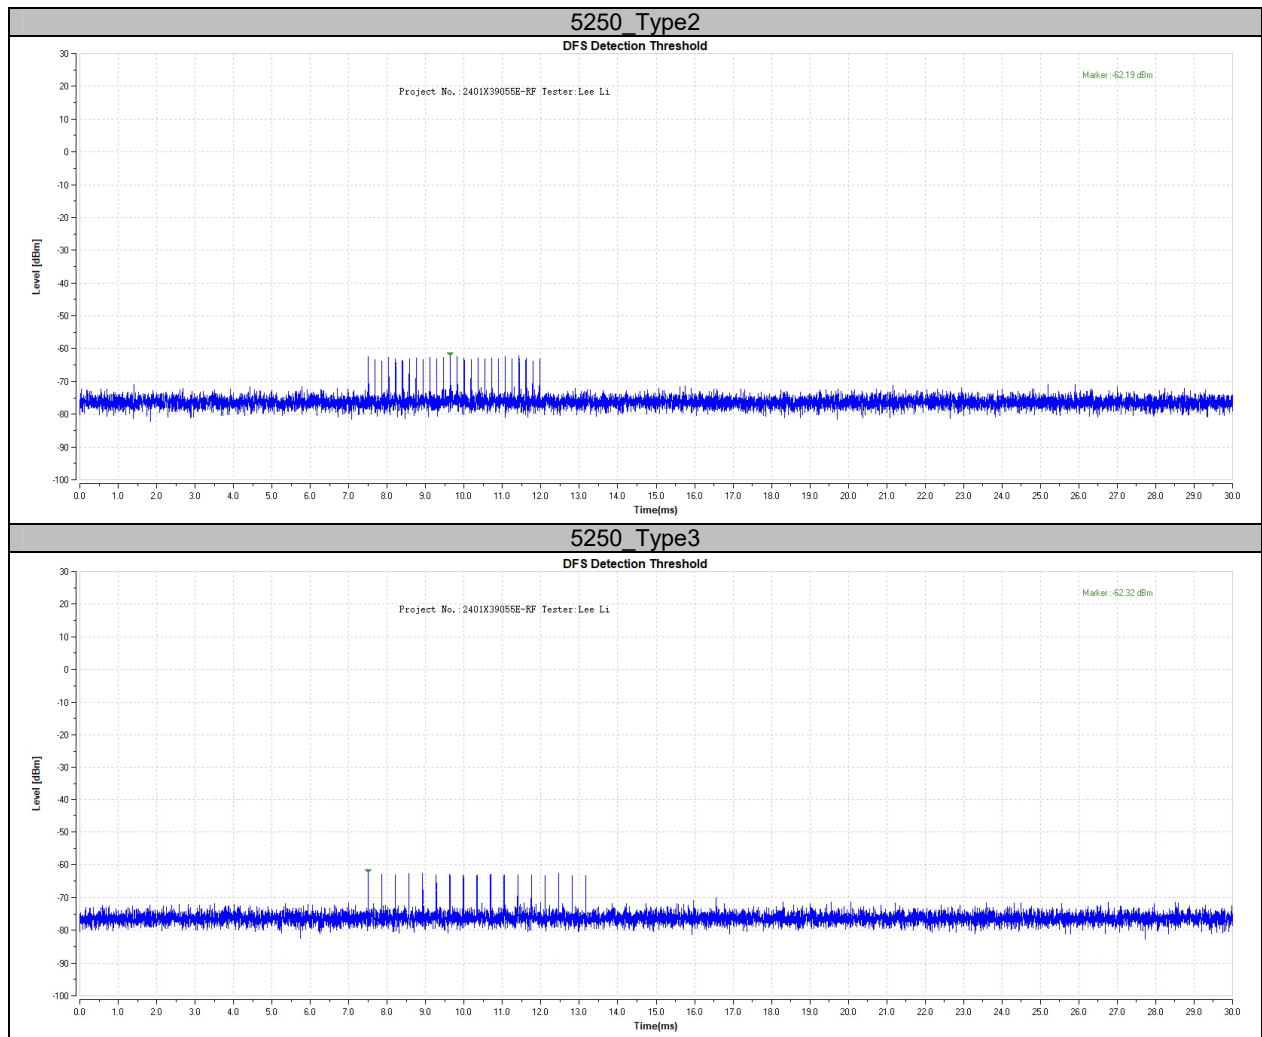


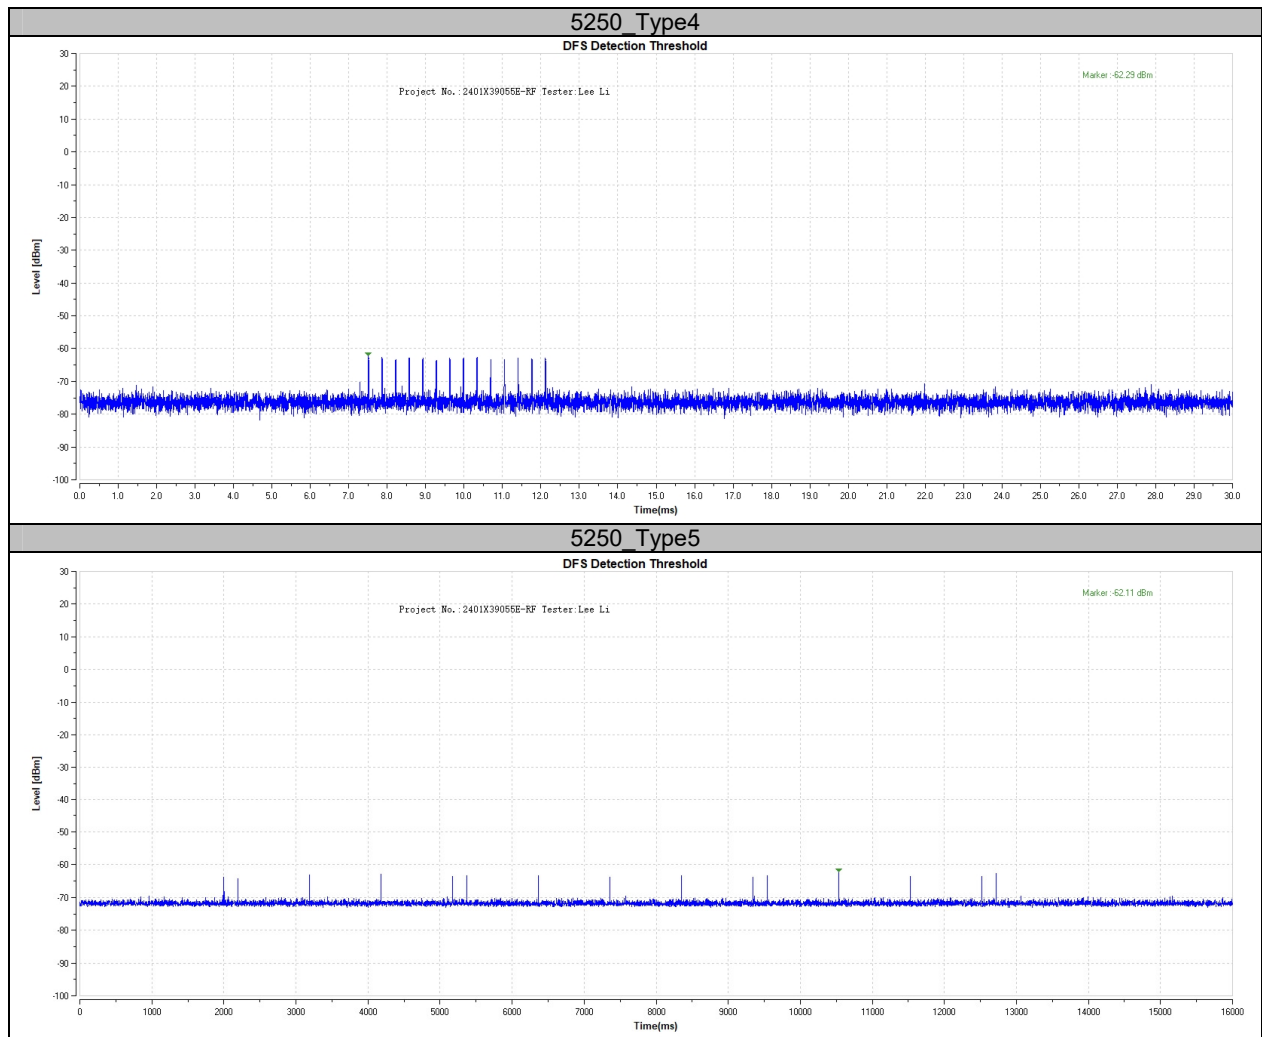

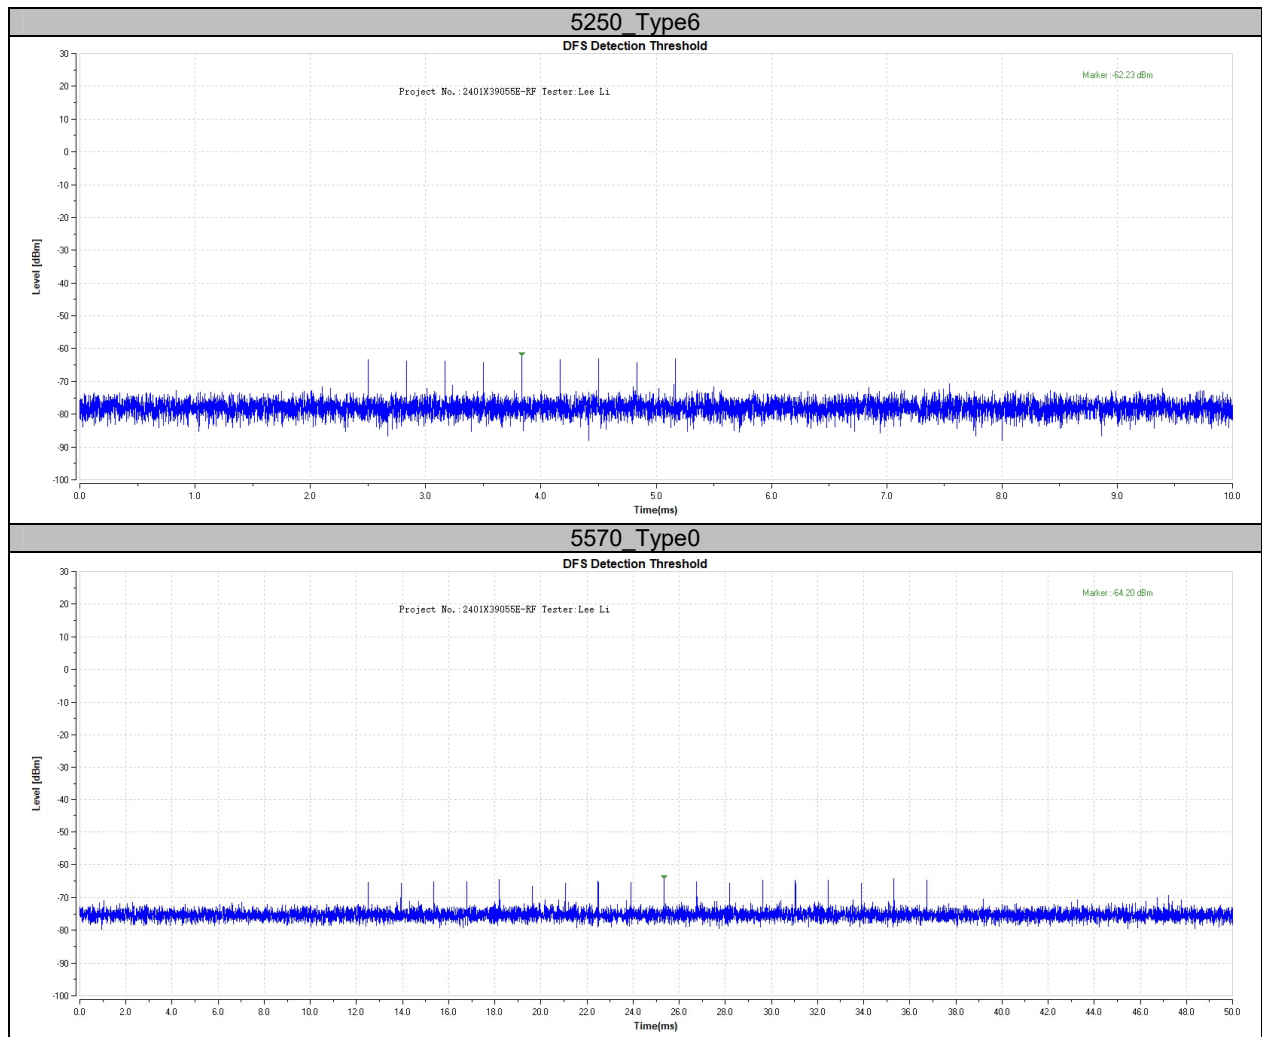

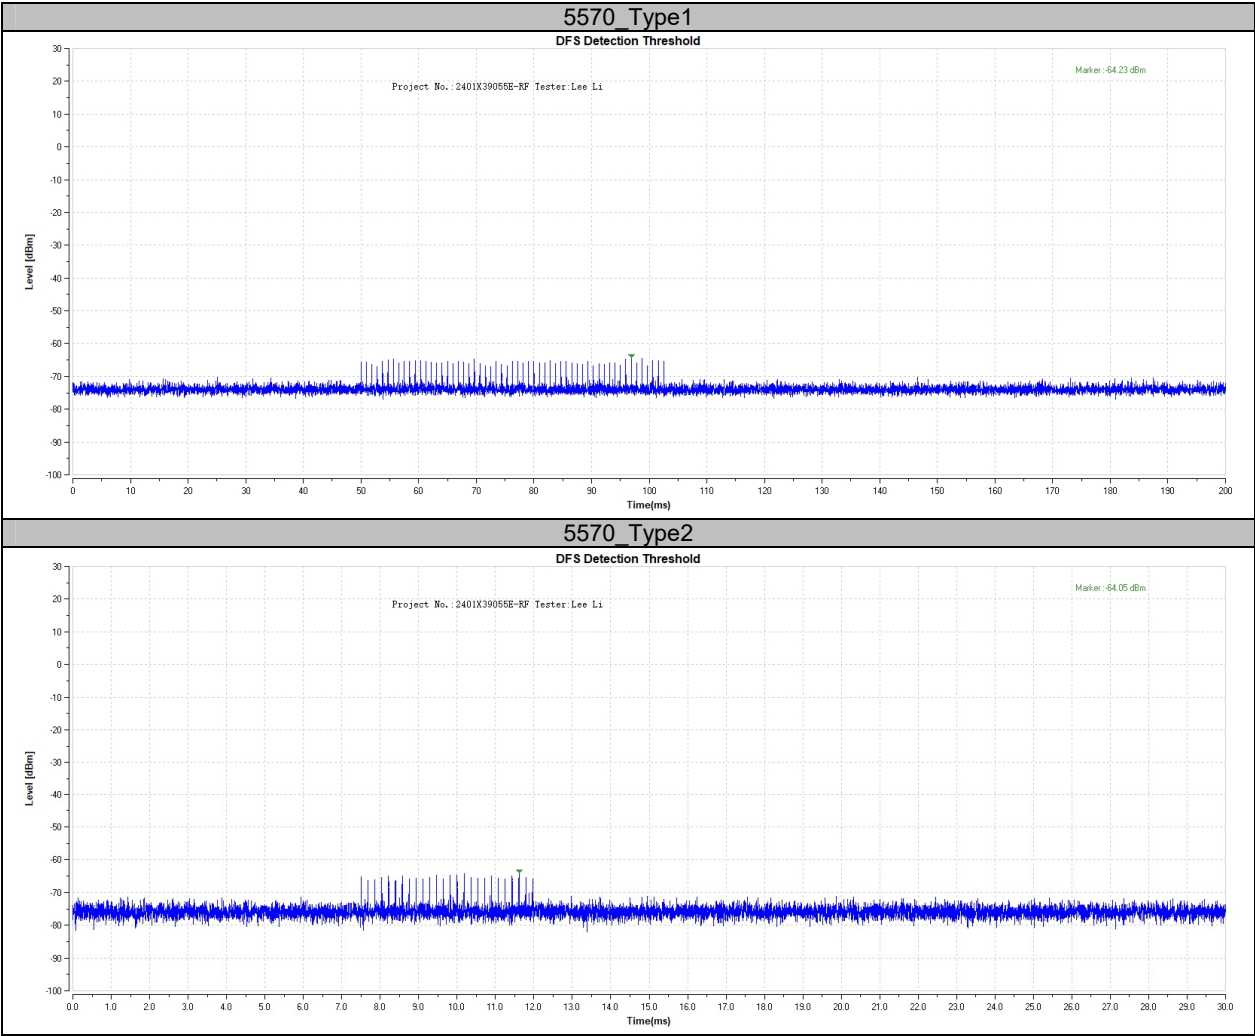

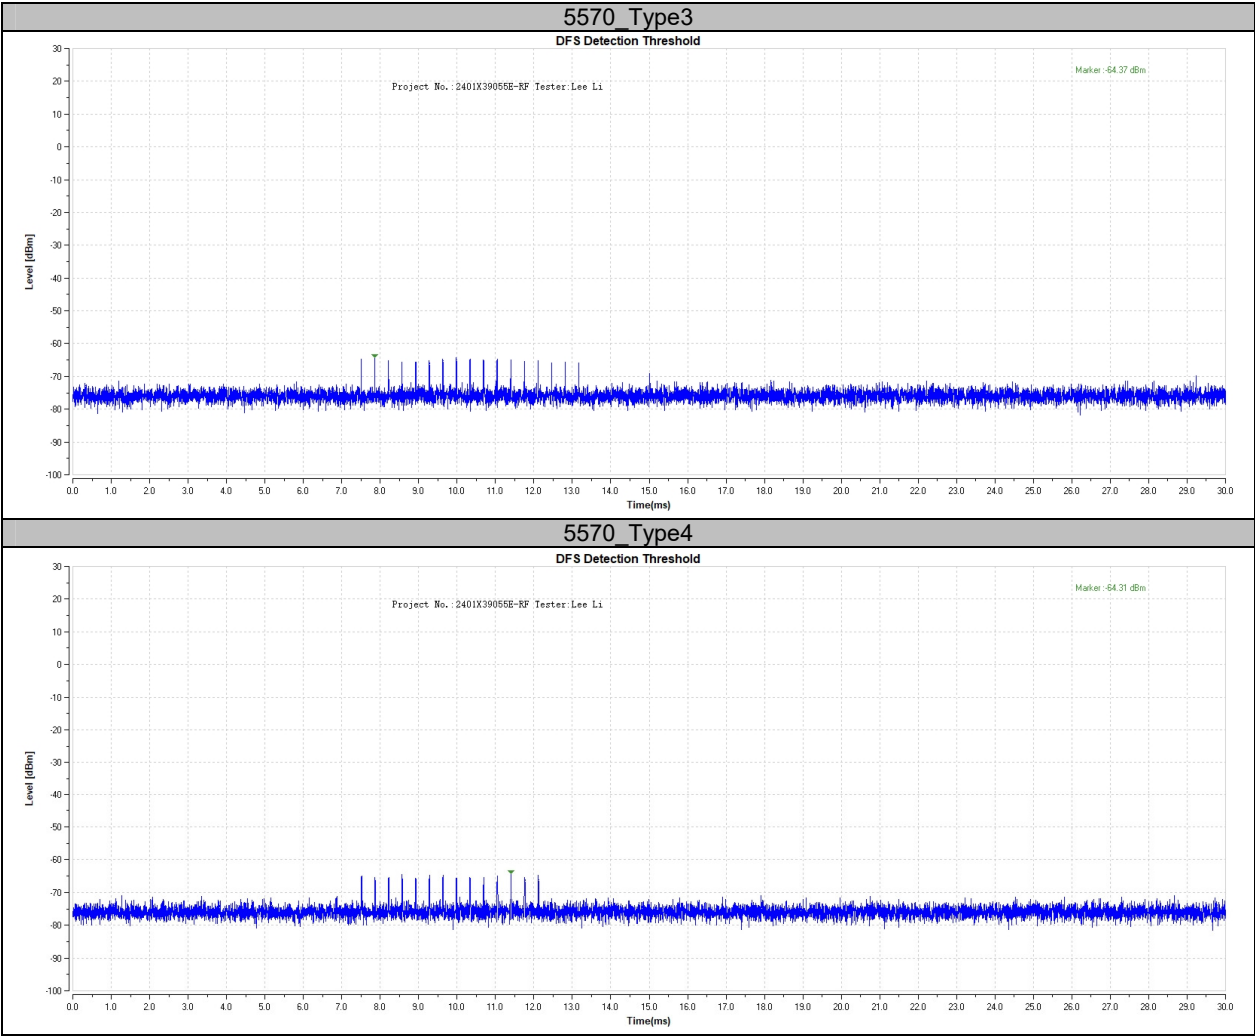

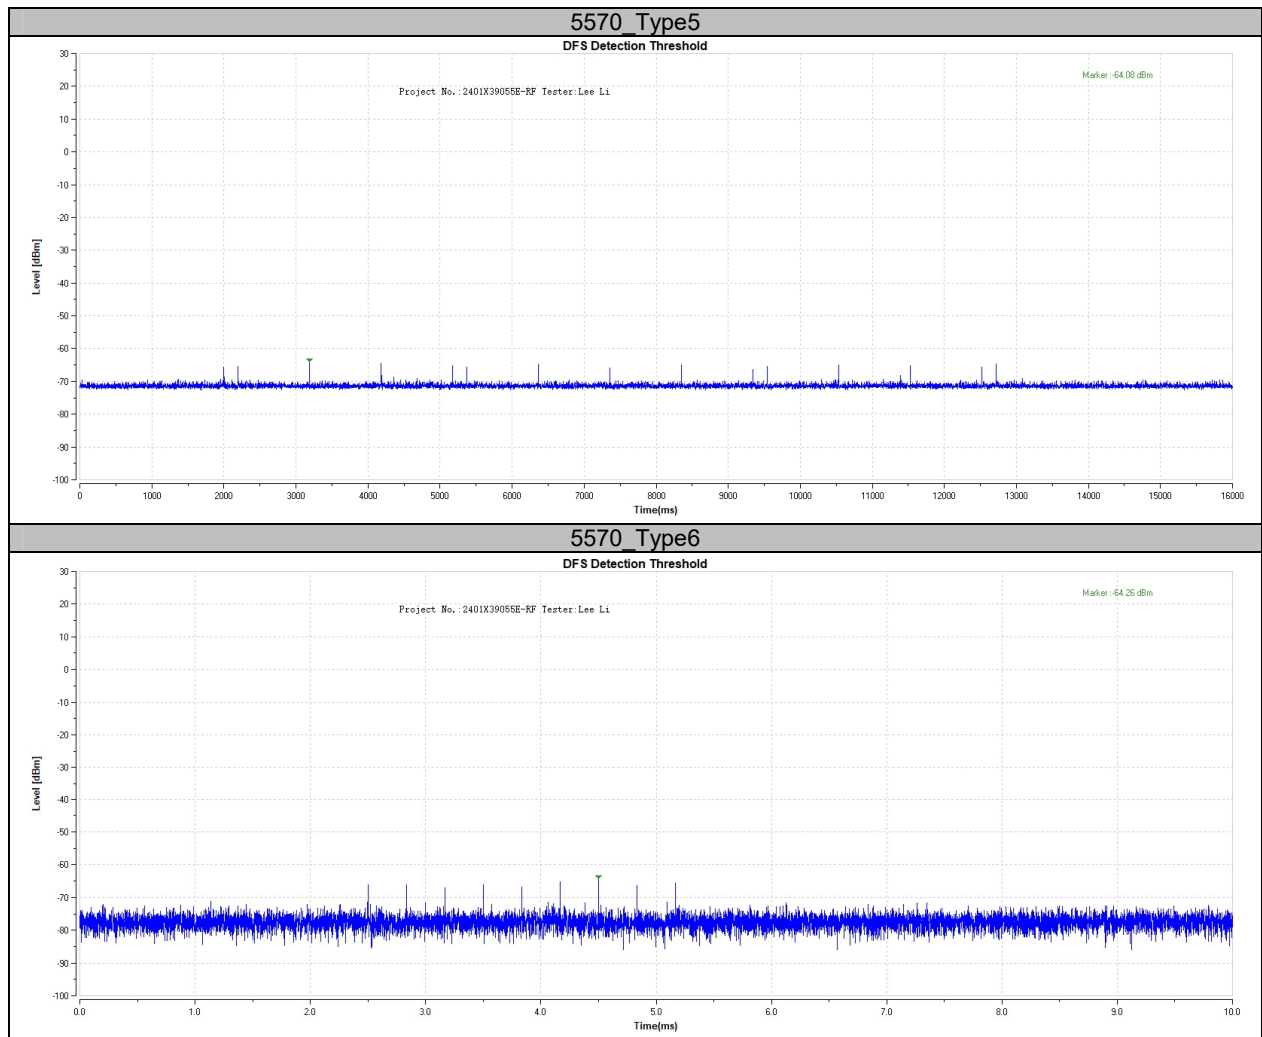

Appendix B: Channel Availability Check Time**Test Result****Initial Channel Availability Check Time**

Test Mode	Frequency[MHz]	Result	Verdict
11AX20MIMO	5260	See test Graph	PASS
	5500	See test Graph	PASS
11AX160MIMO	5250	See test Graph	PASS
	5570	See test Graph	PASS


Beginning of Channel Availability Check Time


Test Mode	Frequency[MHz]	Result	Verdict
11AX20MIMO	5260	See test Graph	PASS
	5500	See test Graph	PASS
11AX160MIMO	5250	See test Graph	PASS
	5570	See test Graph	PASS

End of Channel Availability Check Time

Test Mode	Frequency[MHz]	Result	Verdict
11AX20MIMO	5260	See test Graph	PASS
	5500	See test Graph	PASS
11AX160MIMO	5250	See test Graph	PASS
	5570	See test Graph	PASS


Test Graphs

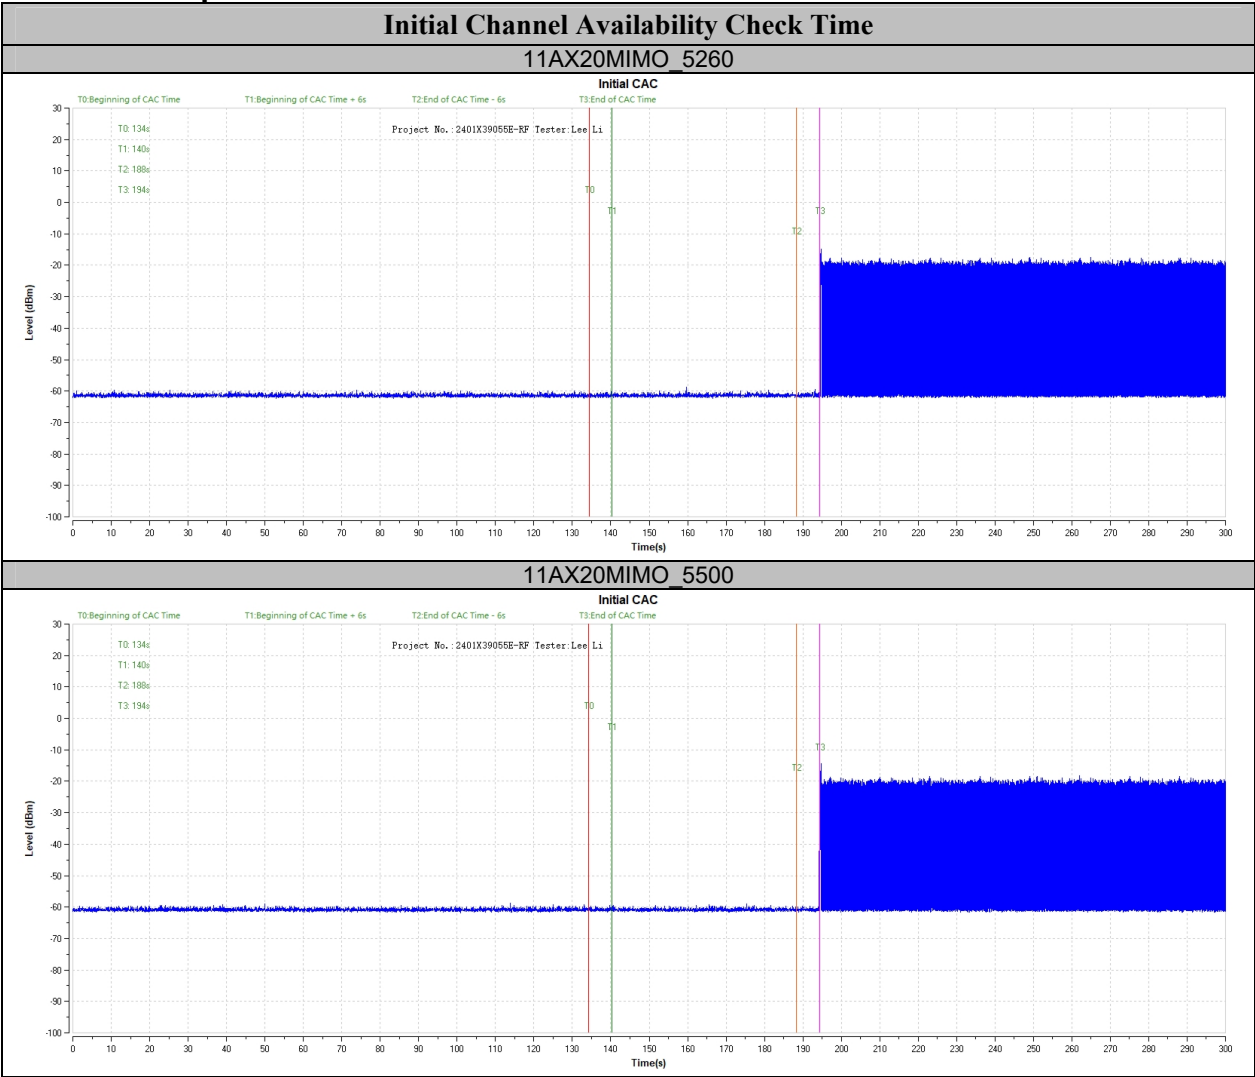

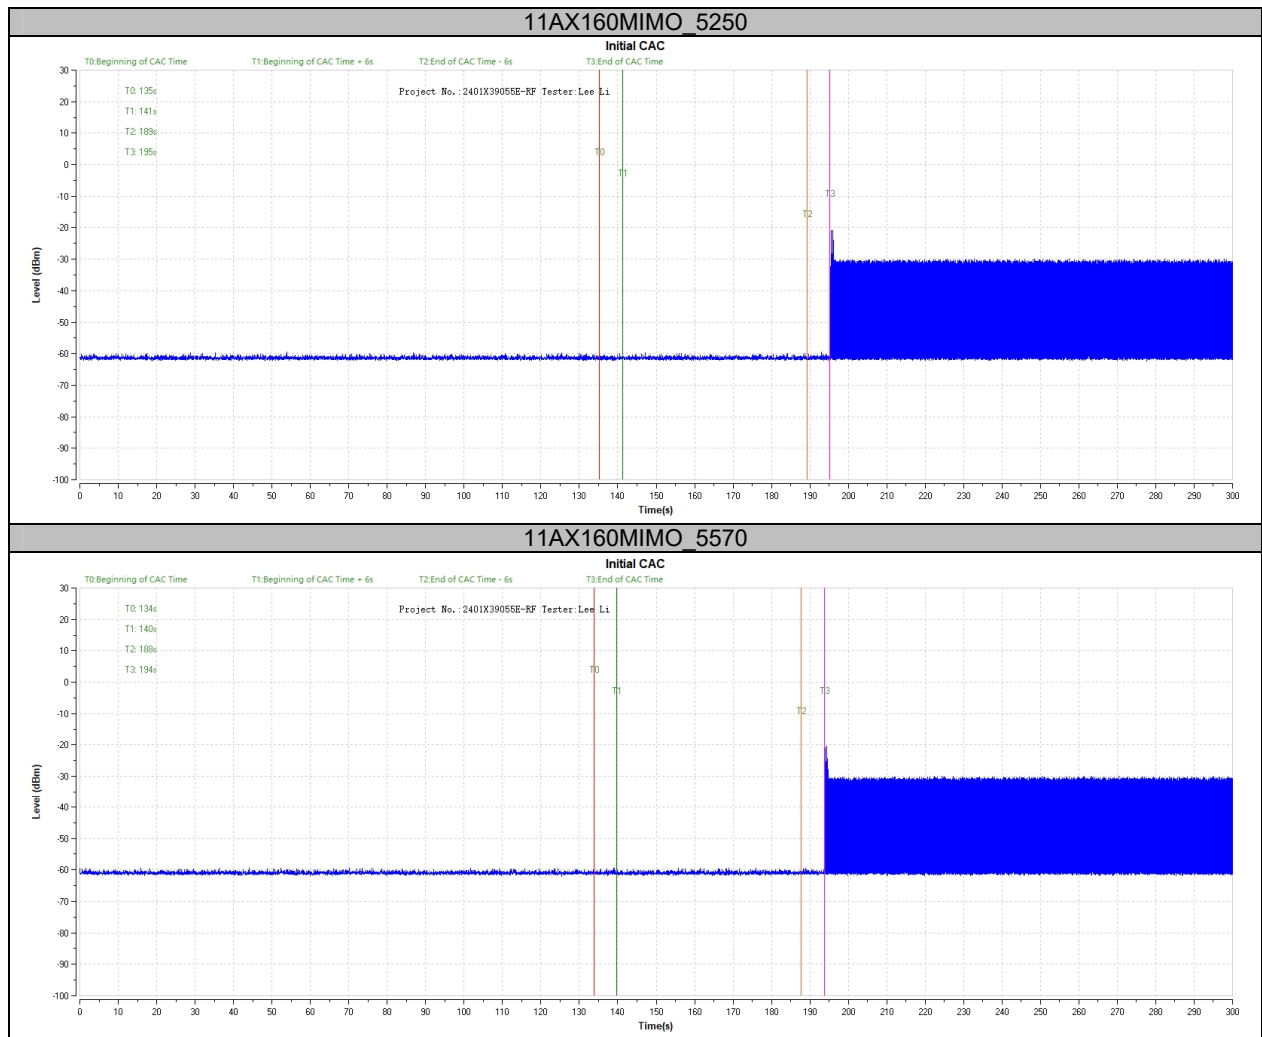



Beginning of Channel Availability Check Time

11AX20MIMO_5260

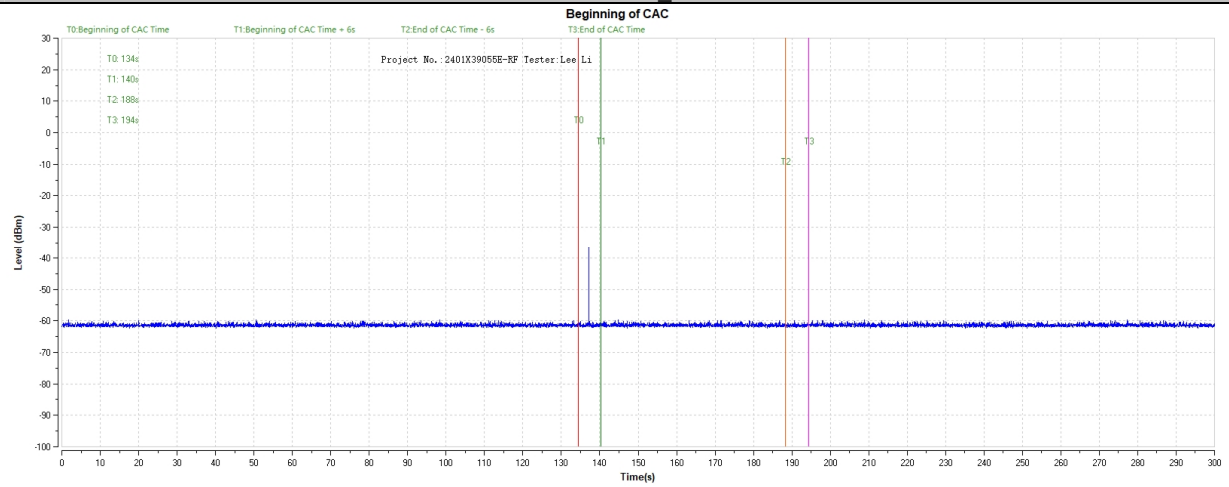


11AX20MIMO_5500

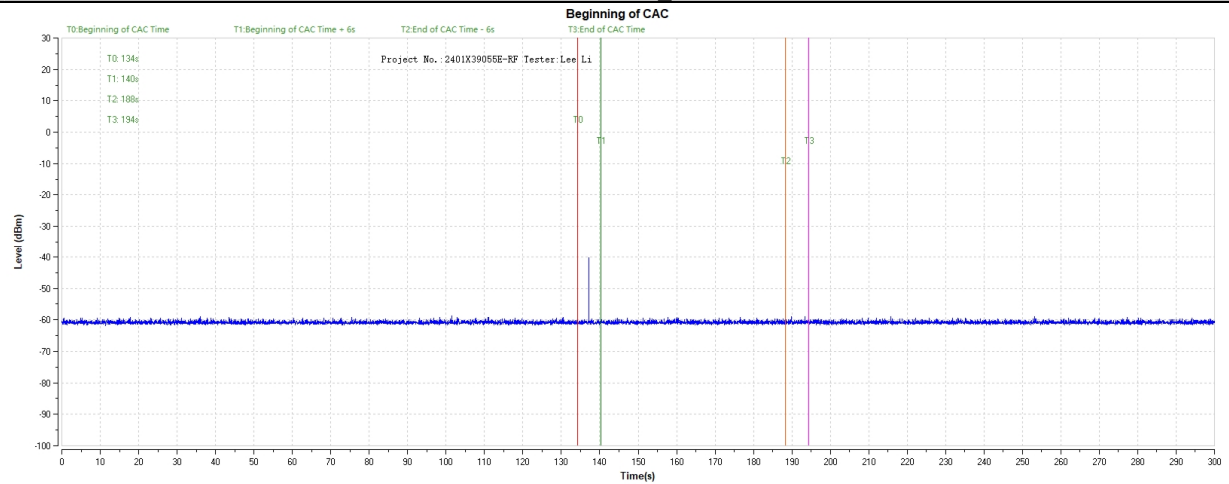

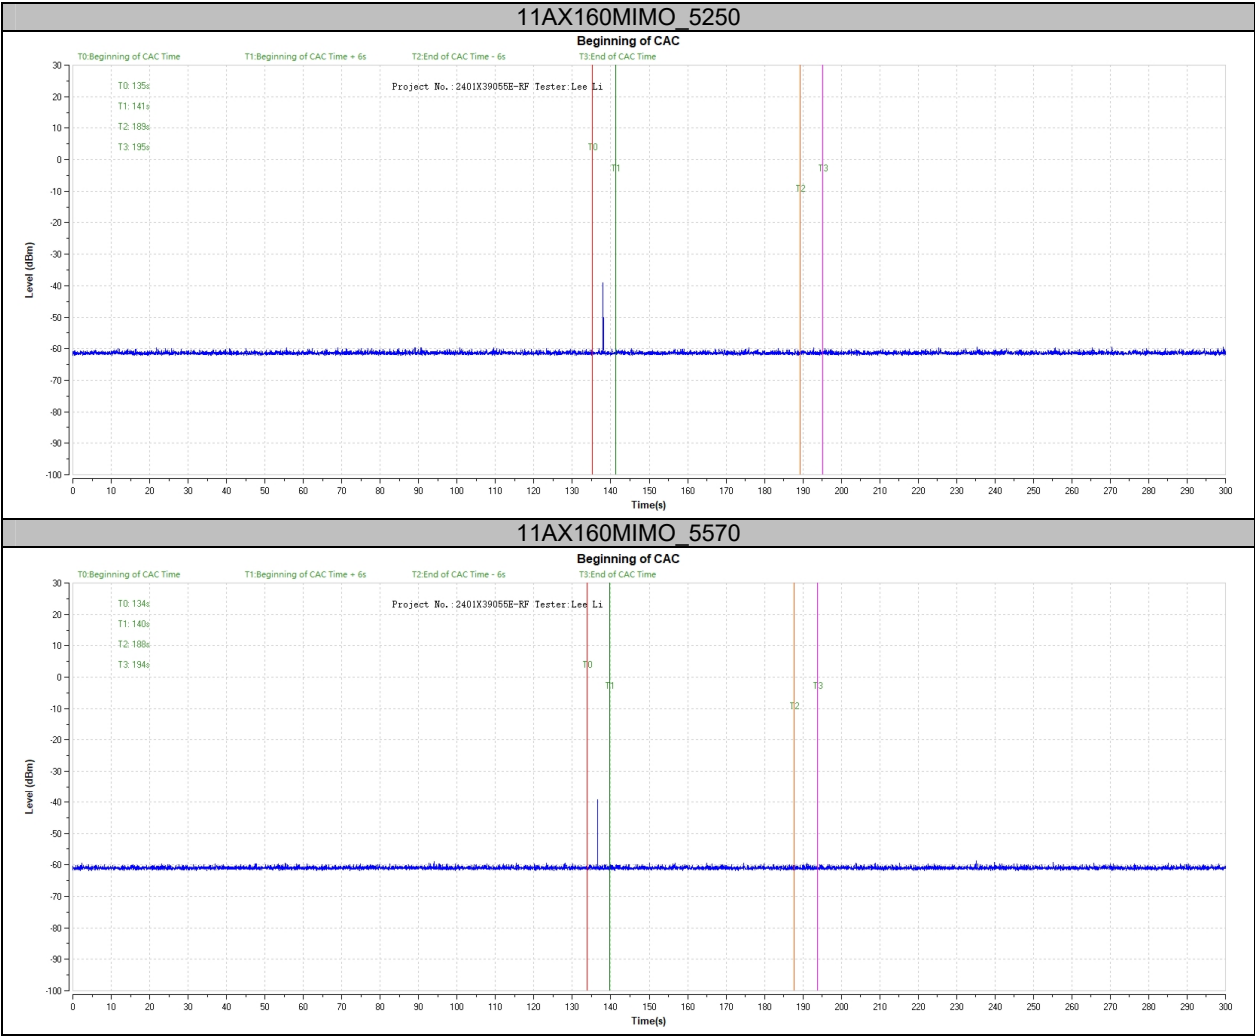



End of Channel Availability Check Time

11AX20MIMO_5260

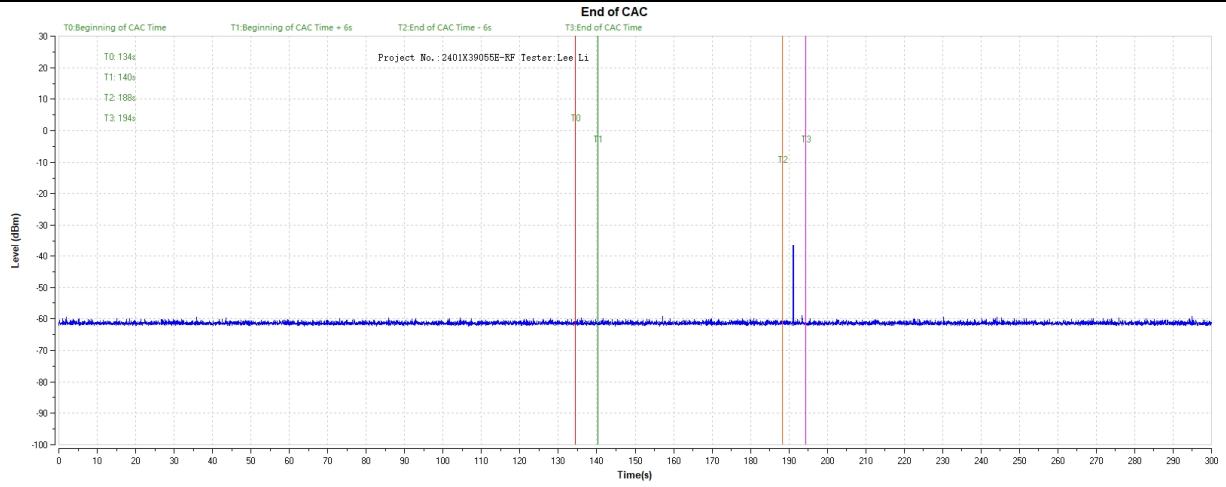

11AX20MIMO_5500

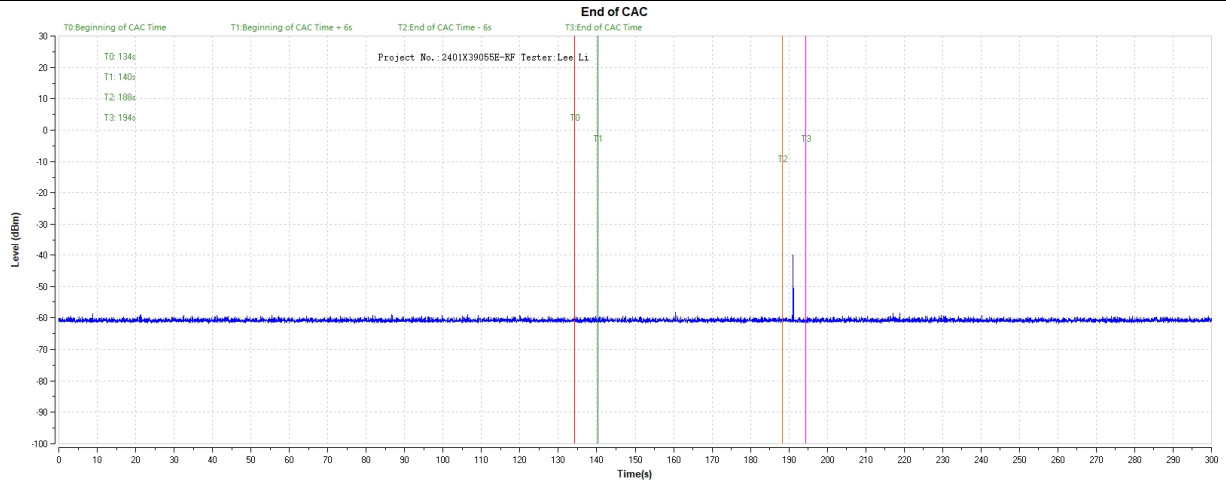

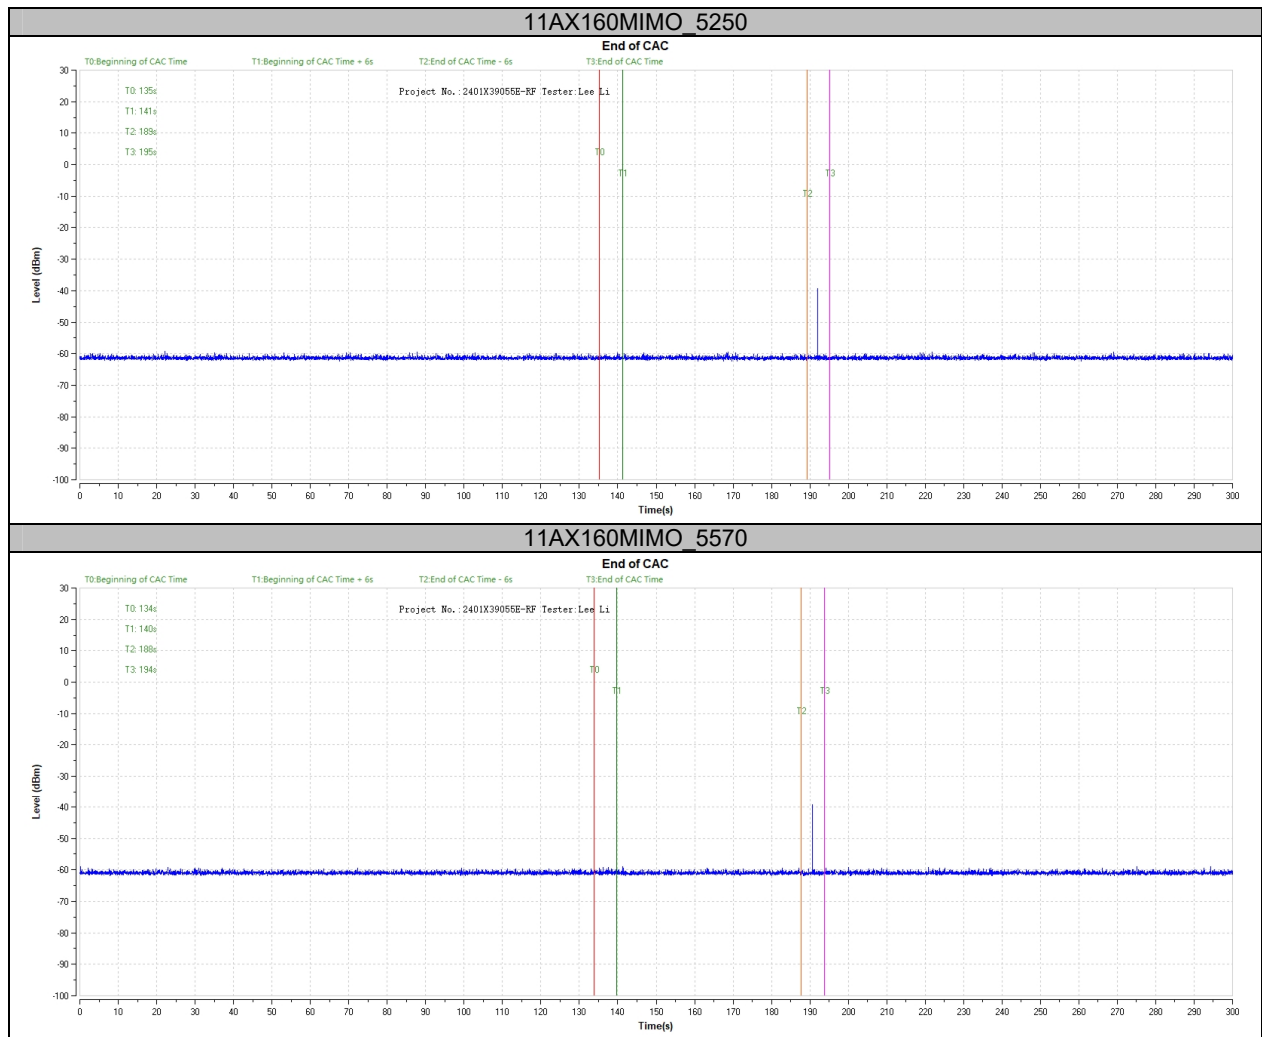



Appendix C: Channel Move Time and Channel Closing Transmission Time

Test Result

Test Mode	Frequency[MHz]	CCTT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11AX20MIMO	5260	200+7.8	200+60	488.8	10000	PASS
	5500	200+10.4	200+60	525.2	10000	PASS
11AX160MIMO	5250	200+9.1	200+60	495.3	10000	PASS
	5570	200+6.5	200+60	456.2	10000	PASS

Test Graphs

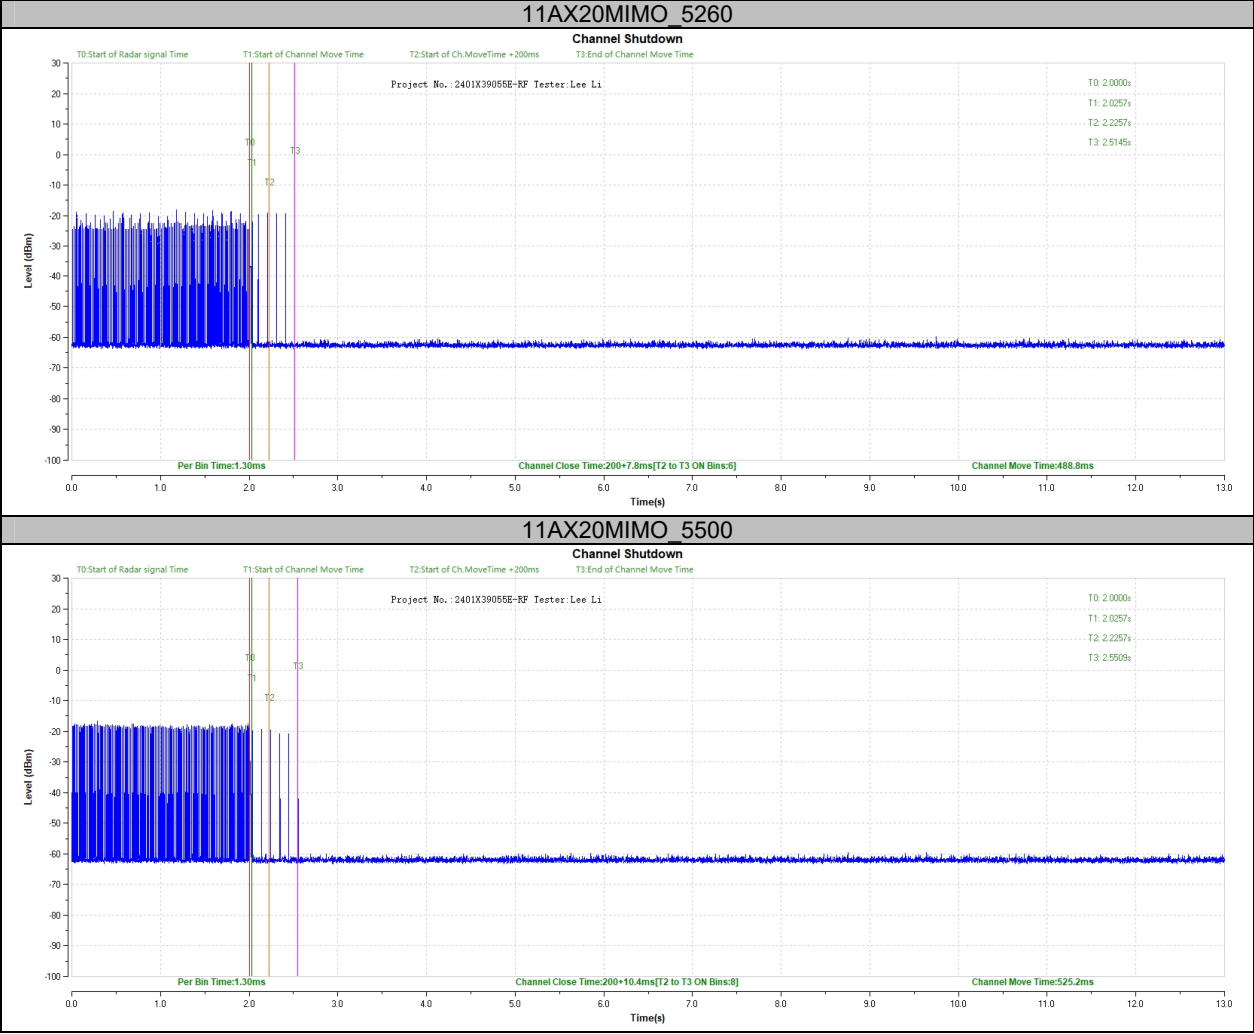

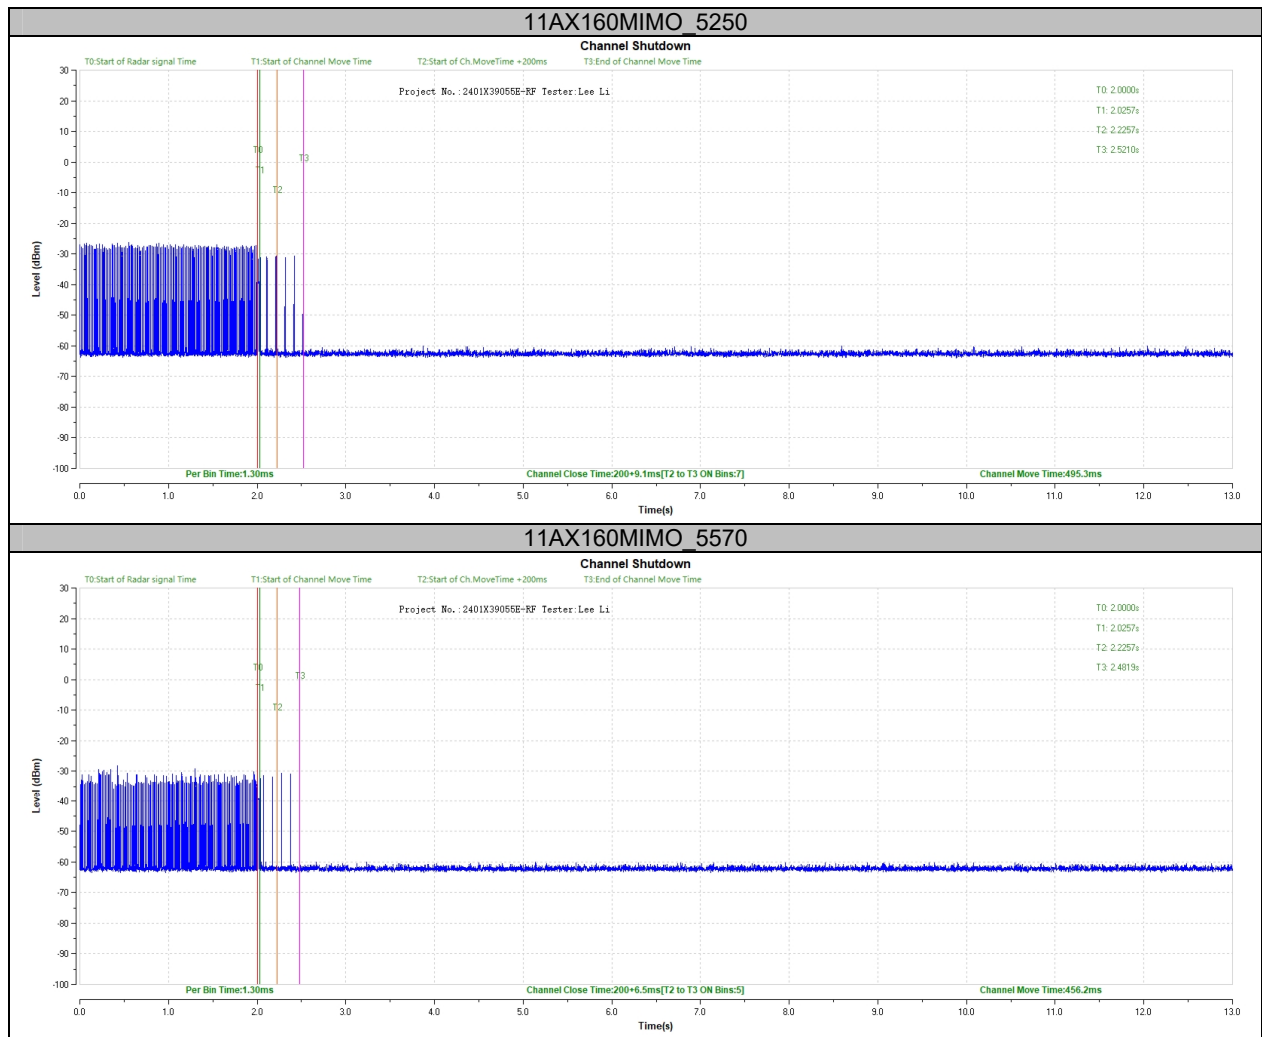



Appendix D: Non-Occupancy Period

Test Result

Test Mode	Frequency[MHz]	Result	Limit[s]	Verdict
11AX20MIMO	5260	see test graph	≥1800	PASS
	5500	see test graph	≥1800	PASS
11AX160MIMO	5250	see test graph	≥1800	PASS
	5570	see test graph	≥1800	PASS

Test Graphs

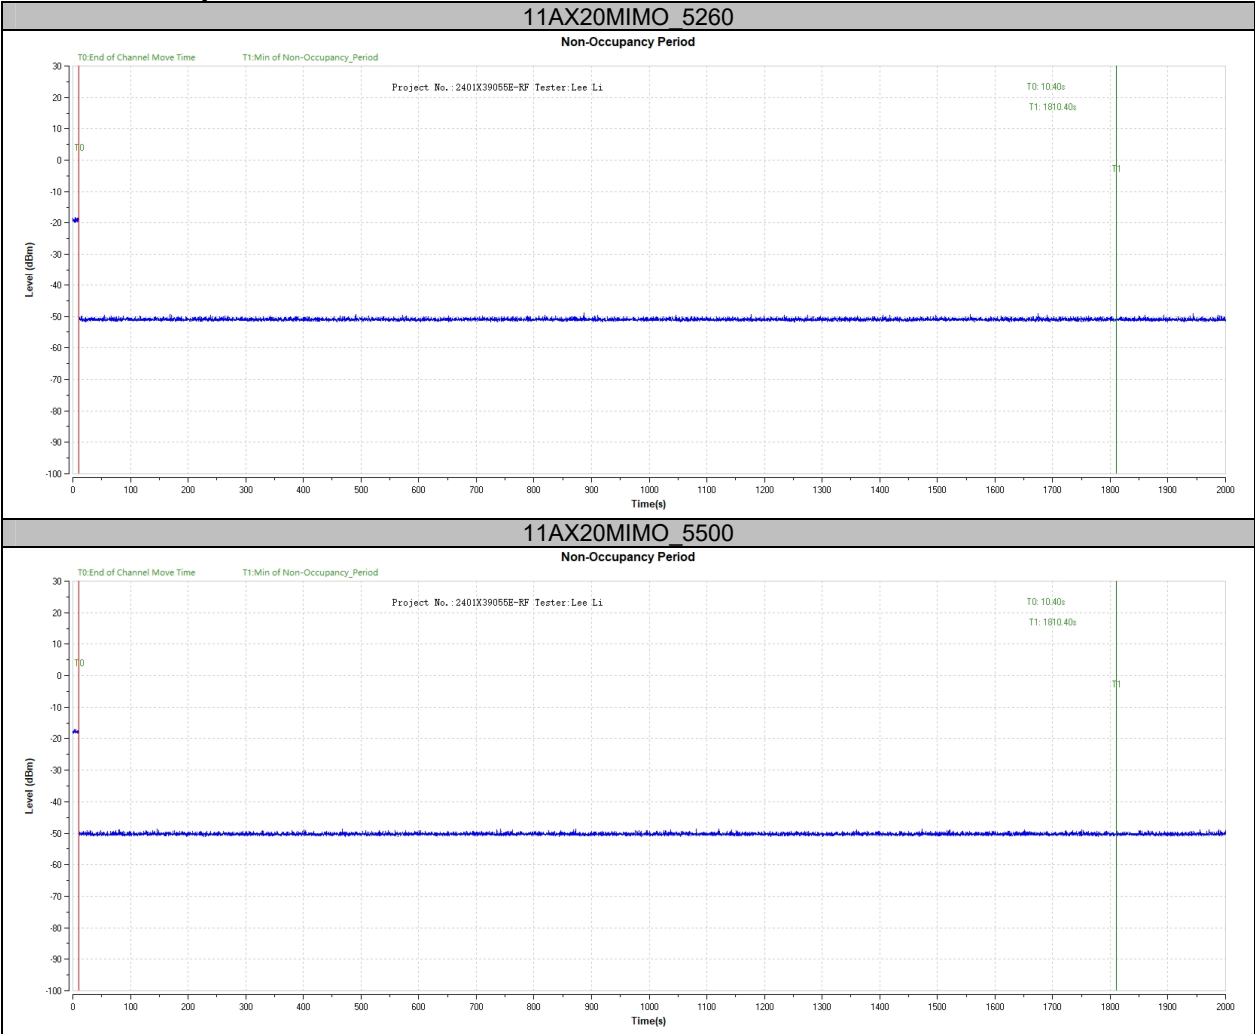

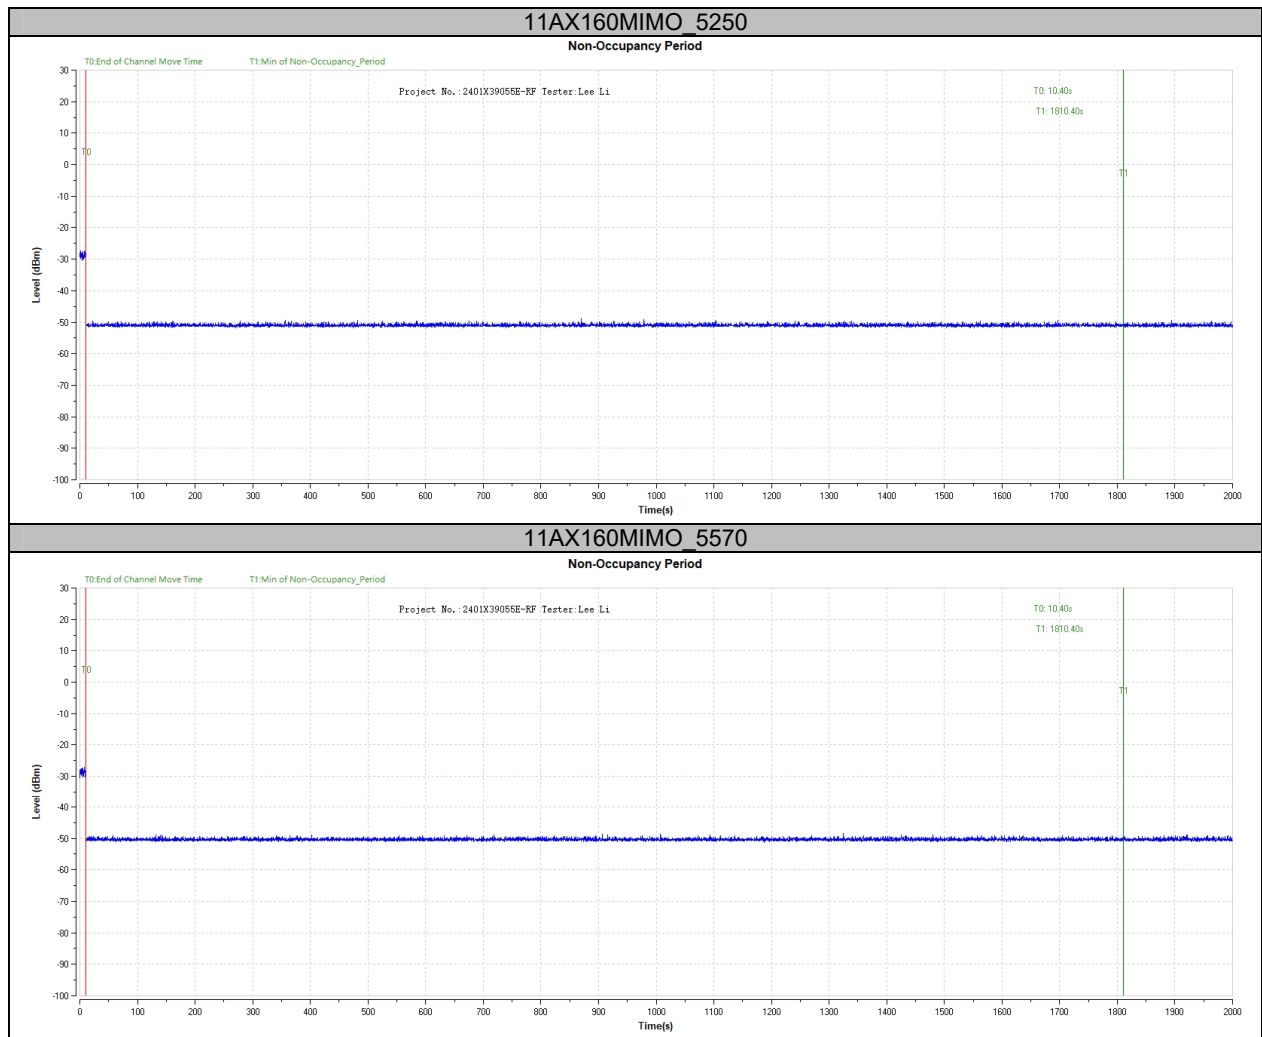

Appendix E: U-NII Detection Bandwidth**Test Result**

Test Mode	Frequency [MHz]	FL[MHz]	FH[MHz]	Detection Bandwidth [MHz]	OCB [MHz]	Ratio [%]	Limit [%]	Verdict
11AX20MIMO	5260	5250	5270	20	19.141	104.49	≥100	PASS
	5500	5490	5510	20	19.383	103.18	≥100	PASS
11AX40MIMO	5270	5249	5291	42	37.722	111.34	≥100	PASS
	5510	5489	5531	42	37.802	111.11	≥100	PASS
11AX80MIMO	5290	5250	5330	80	76.963	103.95	≥100	PASS
	5530	5490	5570	80	75.964	105.31	≥100	PASS
11AX160MIMO	5290*	5250	5330	80	78.619	101.76	≥100	PASS
	5570	5490	5650	160	157.238	101.76	≥100	PASS

Note*: For Channel 5250MHz 160MHz bandwidth mode, only half of the band (5250-5330MHz) fall into the DFS band(5250-5350MHz), so the centre frequency(5290MHz, 80MHz bandwidth) in the DFS band was selected for full DFS test

Test Mode	Freq.[MHz]	Radar Freq.	Trial 1	Trial 2	Trial 3	Trial 4	Trial 5	Trial 6	Trial 7	Trial 8	Trial 9	Trial 10	Ratio (%)
11AX20MIMO	5260	5249	0	0	0	0	0	0	0	0	0	0	0
		5250	1	1	1	1	1	1	1	1	1	1	100
		5255	1	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	1	100
		5265	1	1	1	1	1	1	1	1	1	1	100
		5270	1	1	1	1	1	1	1	1	1	1	100
		5271	0	0	0	0	0	0	0	0	0	0	0
	5500	5489	0	0	0	0	0	0	0	0	0	0	0
		5490	1	1	1	1	1	1	1	1	1	1	100
		5495	1	1	1	1	1	1	1	1	1	1	100
		5500	1	1	1	1	1	1	1	1	1	1	100
		5505	1	1	1	1	1	1	1	1	1	1	100
		5510	1	1	1	1	1	1	1	1	1	1	100
		5511	0	0	0	0	0	0	0	0	0	0	0
11AX40MIMO	5270	5248	0	0	0	0	0	0	0	0	0	0	0
		5249	1	1	1	1	1	1	1	1	1	1	100
		5250	1	1	1	1	1	1	1	1	1	1	100
		5255	1	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	1	100
		5265	1	1	1	1	1	1	1	1	1	1	100
		5270	1	1	1	1	1	1	1	1	1	1	100
		5275	1	1	1	1	1	1	1	1	1	1	100
		5280	1	1	1	1	1	1	1	1	1	1	100
		5285	1	1	1	1	1	1	1	1	1	1	100
		5290	1	1	1	1	1	1	1	1	1	1	100
		5291	1	1	1	1	1	1	1	1	1	1	100
		5292	1	0	0	0	0	0	0	0	0	0	10

	5510	5488	1	0	0	0	0	0	0	0	0	10
		5489	1	1	1	1	1	1	1	1	1	100
		5490	1	1	1	1	1	1	1	1	1	100
		5495	1	1	1	1	1	1	1	1	1	100
		5500	1	1	1	1	1	1	1	1	1	100
		5505	1	1	1	1	1	1	1	1	1	100
		5510	1	1	1	1	1	1	1	1	1	100
		5515	1	1	1	1	1	1	1	1	1	100
		5520	1	1	1	1	1	1	1	1	1	100
		5525	1	1	1	1	1	1	1	1	1	100
		5530	1	1	1	1	1	1	1	1	1	100
		5531	1	1	1	1	1	1	1	1	1	100
		5532	0	0	0	0	0	0	0	0	0	0
11AX80MIMO	5290	5249	0	0	0	0	0	0	0	0	0	0
		5250	1	1	1	1	1	1	1	1	1	100
		5255	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	100
		5265	1	1	1	1	1	1	1	1	1	100
		5270	1	1	1	1	1	1	1	1	1	100
		5275	1	1	1	1	1	1	1	1	1	100
		5280	1	1	1	1	1	1	1	1	1	100
		5285	1	1	1	1	1	1	1	1	1	100
		5290	1	1	1	1	1	1	1	1	1	100
		5295	1	1	1	1	1	1	1	1	1	100
		5300	1	1	1	1	1	1	1	1	1	100
		5305	1	1	1	1	1	1	1	1	1	100
		5310	1	1	1	1	1	1	1	1	1	100
		5315	1	1	1	1	1	1	1	1	1	100
		5320	1	1	1	1	1	1	1	1	1	100
		5325	1	1	1	1	1	1	1	1	1	100
		5330	1	1	1	1	1	1	1	1	1	100
		5331	0	0	0	0	0	0	0	0	0	0
	5530	5489	0	0	0	0	0	0	0	0	0	0
		5490	1	1	1	1	1	1	1	1	1	100
		5495	1	1	1	1	1	1	1	1	1	100
		5500	1	1	1	1	1	1	1	1	1	100
		5505	1	1	1	1	1	1	1	1	1	100
		5510	1	1	1	1	1	1	1	1	1	100
		5515	1	1	1	1	1	1	1	1	1	100
		5520	1	1	1	1	1	1	1	1	1	100
		5525	1	1	1	1	1	1	1	1	1	100
		5530	1	1	1	1	1	1	1	1	1	100
		5535	1	1	1	1	1	1	1	1	1	100
		5540	1	1	1	1	1	1	1	1	1	100

		5545	1	1	1	1	1	1	1	1	1	1	100
		5550	1	1	1	1	1	1	1	1	1	1	100
		5555	1	1	1	1	1	1	1	1	1	1	100
		5560	1	1	1	1	1	1	1	1	1	1	100
		5565	1	1	1	1	1	1	1	1	1	1	100
		5570	1	1	1	1	1	1	1	1	1	1	100
		5571	0	0	0	0	0	0	0	0	0	0	0
11AX160MIMO	5250	5249	1	1	0	0	0	0	0	0	0	0	20
		5255	1	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	1	100
		5265	1	1	1	1	1	1	1	1	1	1	100
		5270	1	1	1	1	1	1	1	1	1	1	100
		5275	1	1	1	1	1	1	1	1	1	1	100
		5280	1	1	1	1	1	1	1	1	1	1	100
		5285	1	1	1	1	1	1	1	1	1	1	100
		5290	1	1	1	1	1	1	1	1	1	1	100
		5295	1	1	1	1	1	1	1	1	1	1	100
		5300	1	1	1	1	1	1	1	1	1	1	100
		5305	1	1	1	1	1	1	1	1	1	1	100
		5310	1	1	1	1	1	1	1	1	1	1	100
		5315	1	1	1	1	1	1	1	1	1	1	100
		5320	1	1	1	1	1	1	1	1	1	1	100
		5325	1	1	1	1	1	1	1	1	1	1	100
		5330	1	1	1	1	1	1	1	1	1	1	100
		5331	0	0	0	0	0	0	0	0	0	0	0
	5570	5489	0	0	0	0	0	0	0	0	0	0	0
		5490	1	1	1	1	1	1	1	1	1	1	100
		5495	1	1	1	1	1	1	1	1	1	1	100
		5500	1	1	1	1	1	1	1	1	1	1	100
		5505	1	1	1	1	1	1	1	1	1	1	100
		5510	1	1	1	1	1	1	1	1	1	1	100
		5515	1	1	1	1	1	1	1	1	1	1	100
		5520	1	1	1	1	1	1	1	1	1	1	100
		5525	1	1	1	1	1	1	1	1	1	1	100
		5530	1	1	1	1	1	1	1	1	1	1	100
		5535	1	1	1	1	1	1	1	1	1	1	100
		5540	1	1	1	1	1	1	1	1	1	1	100
		5545	1	1	1	1	1	1	1	1	1	1	100
		5550	1	1	1	1	1	1	1	1	1	1	100
		5555	1	1	1	1	1	1	1	1	1	1	100
		5560	1	1	1	1	1	1	1	1	1	1	100
		5565	1	1	1	1	1	1	1	1	1	1	100
		5570	1	1	1	1	1	1	1	1	1	1	100
		5575	1	1	1	1	1	1	1	1	1	1	100

		5580	1	1	1	1	1	1	1	1	1	1	100
		5585	1	1	1	1	1	1	1	1	1	1	100
		5590	1	1	1	1	1	1	1	1	1	1	100
		5595	1	1	1	1	1	1	1	1	1	1	100
		5600	1	1	1	1	1	1	1	1	1	1	100
		5605	1	1	1	1	1	1	1	1	1	1	100
		5610	1	1	1	1	1	1	1	1	1	1	100
		5615	1	1	1	1	1	1	1	1	1	1	100
		5620	1	1	1	1	1	1	1	1	1	1	100
		5625	1	1	1	1	1	1	1	1	1	1	100
		5630	1	1	1	1	1	1	1	1	1	1	100
		5635	1	1	1	1	1	1	1	1	1	1	100
		5640	1	1	1	1	1	1	1	1	1	1	100
		5645	1	1	1	1	1	1	1	1	1	1	100
		5650	1	1	1	1	1	1	1	1	1	1	100
		5651	0	0	0	0	0	0	0	0	0	0	0

Appendix F: Statistical Performance Check**Test Result**

Test Mode	Frequency[MHz]	Radar Type	Pass Times	Fail Times	Probability (%)	Limit (%)	Verdict
11AX20MIMO	5260	Type1	30	0	100.00	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Type 1-4	---	---	100.00	80	PASS
		Type5	30	0	100.00	80	PASS
		Type6	30	0	100.00	70	PASS
	5500	Type1	30	0	100.00	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Type 1-4	---	---	100.00	80	PASS
		Type5	30	0	100.00	80	PASS
		Type6	30	0	100.00	70	PASS
11AX40MIMO	5270	Type1	30	0	100	60	PASS
		Type2	30	0	100	60	PASS
		Type3	30	0	100	60	PASS
		Type4	30	0	100	60	PASS
		Type 1-4	---	---	100	80	PASS
		Type5	30	0	100	80	PASS
		Type6	30	0	100	70	PASS
	5510	Type1	30	0	100	60	PASS
		Type2	29	1	96.67	60	PASS
		Type3	30	0	100	60	PASS
		Type4	30	0	100	60	PASS
		Type 1-4	---	---	99.17	80	PASS
		Type5	30	0	100	80	PASS
		Type6	30	0	100	70	PASS
11AX80MIMO	5290	Type1	30	0	100	60	PASS
		Type2	30	0	100	60	PASS
		Type3	30	0	100	60	PASS
		Type4	30	0	100	60	PASS
		Type 1-4	---	---	100	80	PASS
		Type5	30	0	100	80	PASS
		Type6	30	0	100	70	PASS
	5530	Type1	30	0	100	60	PASS
		Type2	30	0	100	60	PASS
		Type3	30	0	100	60	PASS
		Type4	30	0	100	60	PASS
		Type 1-4	---	---	100	80	PASS
		Type5	30	0	100	80	PASS

		Type6	30	0	100	70	PASS
11AX160MIMO	5250	Type1	30	0	100.00	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Type 1-4	---	---	100.00	80	PASS
		Type5	30	0	100.00	80	PASS
		Type6	30	0	100.00	70	PASS
	5570	Type1	30	0	100.00	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Type 1-4	---	---	100.00	80	PASS
		Type5	30	0	100.00	80	PASS
		Type6	30	0	100.00	70	PASS

Bridge Mode:

Test Mode	Frequency[MHz]	Radar Type	Pass Times	Fail Times	Probability (%)	Limit (%)	Verdict
11AX160MIMO	5570	Type2	28	2	93.33	60	PASS

Test Mode	Frequency [MHz]	Radar Type	Trial ID	Pulse width(μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11AX20MI MO	5260	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1
		Type2	13	2.2	197.0	25	1
		Type2	14	4.5	163.0	29	1
		Type2	15	3.0	203.0	26	1
		Type2	16	5.0	168.0	29	1
		Type2	17	2.4	217.0	25	1
		Type2	18	2.9	191.0	26	1
		Type2	19	2.3	166.0	25	1
		Type2	20	3.7	150.0	27	1
		Type2	21	2.2	176.0	25	1
		Type2	22	4.9	195.0	29	1
		Type2	23	2.9	202.0	26	1
		Type2	24	2.5	178.0	25	1

	Type2	25	1.1	206.0	23	1
	Type2	26	3.8	155.0	27	1
	Type2	27	4.7	157.0	29	1
	Type2	28	2.4	224.0	25	1
	Type2	29	4.2	159.0	28	1
	Type3	0	8.2	355.0	17	1
	Type3	1	6.1	487.0	16	1
	Type3	2	7.1	344.0	16	1
	Type3	3	9.8	288.0	18	1
	Type3	4	8.9	230.0	18	1
	Type3	5	7.9	432.0	17	1
	Type3	6	8.2	207.0	17	1
	Type3	7	7.5	443.0	17	1
	Type3	8	8.1	439.0	17	1
	Type3	9	6.2	223.0	16	1
	Type3	10	8.9	208.0	18	1
	Type3	11	9.6	463.0	18	1
	Type3	12	8.2	441.0	17	1
	Type3	13	7.2	323.0	16	1
	Type3	14	9.5	297.0	18	1
	Type3	15	8.0	412.0	17	1
	Type3	16	10.0	324.0	18	1
	Type3	17	7.4	271.0	17	1
	Type3	18	7.9	349.0	17	1
	Type3	19	7.3	409.0	16	1
	Type3	20	8.7	373.0	18	1
	Type3	21	7.2	254.0	16	1
	Type3	22	9.9	274.0	18	1
	Type3	23	7.9	278.0	17	1
	Type3	24	7.5	317.0	17	1
	Type3	25	6.1	260.0	16	1
	Type3	26	8.8	211.0	18	1
	Type3	27	9.7	272.0	18	1
	Type3	28	7.4	264.0	17	1
	Type3	29	9.2	284.0	18	1
	Type4	0	16.0	355.0	14	1
	Type4	1	11.3	487.0	12	1
	Type4	2	13.5	344.0	13	1
	Type4	3	19.4	288.0	16	1
	Type4	4	17.5	230.0	15	1
	Type4	5	15.3	432.0	14	1
	Type4	6	15.9	207.0	14	1
	Type4	7	14.3	443.0	13	1
	Type4	8	15.8	439.0	14	1
	Type4	9	11.5	223.0	12	1
	Type4	10	17.4	208.0	15	1
	Type4	11	19.0	463.0	16	1
	Type4	12	16.0	441.0	14	1
	Type4	13	13.8	323.0	13	1
	Type4	14	18.9	297.0	16	1
	Type4	15	15.5	412.0	14	1
	Type4	16	19.9	324.0	16	1
	Type4	17	14.1	271.0	13	1
	Type4	18	15.2	349.0	14	1
	Type4	19	13.8	409.0	13	1
	Type4	20	17.1	373.0	15	1
	Type4	21	13.8	254.0	13	1
	Type4	22	19.8	274.0	16	1

		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
	5500	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1
		Type2	13	2.2	197.0	25	1
		Type2	14	4.5	163.0	29	1
		Type2	15	3.0	203.0	26	1
		Type2	16	5.0	168.0	29	1
		Type2	17	2.4	217.0	25	1
		Type2	18	2.9	191.0	26	1
		Type2	19	2.3	166.0	25	1
		Type2	20	3.7	150.0	27	1

Type2	21	2.2	176.0	25	1
Type2	22	4.9	195.0	29	1
Type2	23	2.9	202.0	26	1
Type2	24	2.5	178.0	25	1
Type2	25	1.1	206.0	23	1
Type2	26	3.8	155.0	27	1
Type2	27	4.7	157.0	29	1
Type2	28	2.4	224.0	25	1
Type2	29	4.2	159.0	28	1
Type3	0	8.2	355.0	17	1
Type3	1	6.1	487.0	16	1
Type3	2	7.1	344.0	16	1
Type3	3	9.8	288.0	18	1
Type3	4	8.9	230.0	18	1
Type3	5	7.9	432.0	17	1
Type3	6	8.2	207.0	17	1
Type3	7	7.5	443.0	17	1
Type3	8	8.1	439.0	17	1
Type3	9	6.2	223.0	16	1
Type3	10	8.9	208.0	18	1
Type3	11	9.6	463.0	18	1
Type3	12	8.2	441.0	17	1
Type3	13	7.2	323.0	16	1
Type3	14	9.5	297.0	18	1
Type3	15	8.0	412.0	17	1
Type3	16	10.0	324.0	18	1
Type3	17	7.4	271.0	17	1
Type3	18	7.9	349.0	17	1
Type3	19	7.3	409.0	16	1
Type3	20	8.7	373.0	18	1
Type3	21	7.2	254.0	16	1
Type3	22	9.9	274.0	18	1
Type3	23	7.9	278.0	17	1
Type3	24	7.5	317.0	17	1
Type3	25	6.1	260.0	16	1
Type3	26	8.8	211.0	18	1
Type3	27	9.7	272.0	18	1
Type3	28	7.4	264.0	17	1
Type3	29	9.2	284.0	18	1
Type4	0	16.0	355.0	14	1
Type4	1	11.3	487.0	12	1
Type4	2	13.5	344.0	13	1
Type4	3	19.4	288.0	16	1
Type4	4	17.5	230.0	15	1
Type4	5	15.3	432.0	14	1
Type4	6	15.9	207.0	14	1
Type4	7	14.3	443.0	13	1
Type4	8	15.8	439.0	14	1
Type4	9	11.5	223.0	12	1
Type4	10	17.4	208.0	15	1
Type4	11	19.0	463.0	16	1
Type4	12	16.0	441.0	14	1
Type4	13	13.8	323.0	13	1
Type4	14	18.9	297.0	16	1
Type4	15	15.5	412.0	14	1
Type4	16	19.9	324.0	16	1
Type4	17	14.1	271.0	13	1
Type4	18	15.2	349.0	14	1

		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
11AX40MI MO	5270	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1
		Type2	13	2.2	197.0	25	1
		Type2	14	4.5	163.0	29	1
		Type2	15	3.0	203.0	26	1
		Type2	16	5.0	168.0	29	1

Type2	17	2.4	217.0	25	1
Type2	18	2.9	191.0	26	1
Type2	19	2.3	166.0	25	1
Type2	20	3.7	150.0	27	1
Type2	21	2.2	176.0	25	1
Type2	22	4.9	195.0	29	1
Type2	23	2.9	202.0	26	1
Type2	24	2.5	178.0	25	1
Type2	25	1.1	206.0	23	1
Type2	26	3.8	155.0	27	1
Type2	27	4.7	157.0	29	1
Type2	28	2.4	224.0	25	1
Type2	29	4.2	159.0	28	1
Type3	0	8.2	355.0	17	1
Type3	1	6.1	487.0	16	1
Type3	2	7.1	344.0	16	1
Type3	3	9.8	288.0	18	1
Type3	4	8.9	230.0	18	1
Type3	5	7.9	432.0	17	1
Type3	6	8.2	207.0	17	1
Type3	7	7.5	443.0	17	1
Type3	8	8.1	439.0	17	1
Type3	9	6.2	223.0	16	1
Type3	10	8.9	208.0	18	1
Type3	11	9.6	463.0	18	1
Type3	12	8.2	441.0	17	1
Type3	13	7.2	323.0	16	1
Type3	14	9.5	297.0	18	1
Type3	15	8.0	412.0	17	1
Type3	16	10.0	324.0	18	1
Type3	17	7.4	271.0	17	1
Type3	18	7.9	349.0	17	1
Type3	19	7.3	409.0	16	1
Type3	20	8.7	373.0	18	1
Type3	21	7.2	254.0	16	1
Type3	22	9.9	274.0	18	1
Type3	23	7.9	278.0	17	1
Type3	24	7.5	317.0	17	1
Type3	25	6.1	260.0	16	1
Type3	26	8.8	211.0	18	1
Type3	27	9.7	272.0	18	1
Type3	28	7.4	264.0	17	1
Type3	29	9.2	284.0	18	1
Type4	0	16.0	355.0	14	1
Type4	1	11.3	487.0	12	1
Type4	2	13.5	344.0	13	1
Type4	3	19.4	288.0	16	1
Type4	4	17.5	230.0	15	1
Type4	5	15.3	432.0	14	1
Type4	6	15.9	207.0	14	1
Type4	7	14.3	443.0	13	1
Type4	8	15.8	439.0	14	1
Type4	9	11.5	223.0	12	1
Type4	10	17.4	208.0	15	1
Type4	11	19.0	463.0	16	1
Type4	12	16.0	441.0	14	1
Type4	13	13.8	323.0	13	1
Type4	14	18.9	297.0	16	1

		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
	5510	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	0
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1

Type2	13	2.2	197.0	25	1
Type2	14	4.5	163.0	29	1
Type2	15	3.0	203.0	26	1
Type2	16	5.0	168.0	29	1
Type2	17	2.4	217.0	25	1
Type2	18	2.9	191.0	26	1
Type2	19	2.3	166.0	25	1
Type2	20	3.7	150.0	27	1
Type2	21	2.2	176.0	25	1
Type2	22	4.9	195.0	29	1
Type2	23	2.9	202.0	26	1
Type2	24	2.5	178.0	25	1
Type2	25	1.1	206.0	23	1
Type2	26	3.8	155.0	27	1
Type2	27	4.7	157.0	29	1
Type2	28	2.4	224.0	25	1
Type2	29	4.2	159.0	28	1
Type3	0	8.2	355.0	17	1
Type3	1	6.1	487.0	16	1
Type3	2	7.1	344.0	16	1
Type3	3	9.8	288.0	18	1
Type3	4	8.9	230.0	18	1
Type3	5	7.9	432.0	17	1
Type3	6	8.2	207.0	17	1
Type3	7	7.5	443.0	17	1
Type3	8	8.1	439.0	17	1
Type3	9	6.2	223.0	16	1
Type3	10	8.9	208.0	18	1
Type3	11	9.6	463.0	18	1
Type3	12	8.2	441.0	17	1
Type3	13	7.2	323.0	16	1
Type3	14	9.5	297.0	18	1
Type3	15	8.0	412.0	17	1
Type3	16	10.0	324.0	18	1
Type3	17	7.4	271.0	17	1
Type3	18	7.9	349.0	17	1
Type3	19	7.3	409.0	16	1
Type3	20	8.7	373.0	18	1
Type3	21	7.2	254.0	16	1
Type3	22	9.9	274.0	18	1
Type3	23	7.9	278.0	17	1
Type3	24	7.5	317.0	17	1
Type3	25	6.1	260.0	16	1
Type3	26	8.8	211.0	18	1
Type3	27	9.7	272.0	18	1
Type3	28	7.4	264.0	17	1
Type3	29	9.2	284.0	18	1
Type4	0	16.0	355.0	14	1
Type4	1	11.3	487.0	12	1
Type4	2	13.5	344.0	13	1
Type4	3	19.4	288.0	16	1
Type4	4	17.5	230.0	15	1
Type4	5	15.3	432.0	14	1
Type4	6	15.9	207.0	14	1
Type4	7	14.3	443.0	13	1
Type4	8	15.8	439.0	14	1
Type4	9	11.5	223.0	12	1
Type4	10	17.4	208.0	15	1

		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
11AX80MI MO	5290	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1

	Type2	9	1.2	156.0	23	1
	Type2	10	3.9	210.0	27	1
	Type2	11	4.6	201.0	29	1
	Type2	12	3.2	162.0	26	1
	Type2	13	2.2	197.0	25	1
	Type2	14	4.5	163.0	29	1
	Type2	15	3.0	203.0	26	1
	Type2	16	5.0	168.0	29	1
	Type2	17	2.4	217.0	25	1
	Type2	18	2.9	191.0	26	1
	Type2	19	2.3	166.0	25	1
	Type2	20	3.7	150.0	27	1
	Type2	21	2.2	176.0	25	1
	Type2	22	4.9	195.0	29	1
	Type2	23	2.9	202.0	26	1
	Type2	24	2.5	178.0	25	1
	Type2	25	1.1	206.0	23	1
	Type2	26	3.8	155.0	27	1
	Type2	27	4.7	157.0	29	1
	Type2	28	2.4	224.0	25	1
	Type2	29	4.2	159.0	28	1
	Type3	0	8.2	355.0	17	1
	Type3	1	6.1	487.0	16	1
	Type3	2	7.1	344.0	16	1
	Type3	3	9.8	288.0	18	1
	Type3	4	8.9	230.0	18	1
	Type3	5	7.9	432.0	17	1
	Type3	6	8.2	207.0	17	1
	Type3	7	7.5	443.0	17	1
	Type3	8	8.1	439.0	17	1
	Type3	9	6.2	223.0	16	1
	Type3	10	8.9	208.0	18	1
	Type3	11	9.6	463.0	18	1
	Type3	12	8.2	441.0	17	1
	Type3	13	7.2	323.0	16	1
	Type3	14	9.5	297.0	18	1
	Type3	15	8.0	412.0	17	1
	Type3	16	10.0	324.0	18	1
	Type3	17	7.4	271.0	17	1
	Type3	18	7.9	349.0	17	1
	Type3	19	7.3	409.0	16	1
	Type3	20	8.7	373.0	18	1
	Type3	21	7.2	254.0	16	1
	Type3	22	9.9	274.0	18	1
	Type3	23	7.9	278.0	17	1
	Type3	24	7.5	317.0	17	1
	Type3	25	6.1	260.0	16	1
	Type3	26	8.8	211.0	18	1
	Type3	27	9.7	272.0	18	1
	Type3	28	7.4	264.0	17	1
	Type3	29	9.2	284.0	18	1
	Type4	0	16.0	355.0	14	1
	Type4	1	11.3	487.0	12	1
	Type4	2	13.5	344.0	13	1
	Type4	3	19.4	288.0	16	1
	Type4	4	17.5	230.0	15	1
	Type4	5	15.3	432.0	14	1
	Type4	6	15.9	207.0	14	1

		Type4	7	14.3	443.0	13	1
		Type4	8	15.8	439.0	14	1
		Type4	9	11.5	223.0	12	1
		Type4	10	17.4	208.0	15	1
		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
	5530	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1

Type2	5	2.9	222.0	26	1
Type2	6	3.2	204.0	26	1
Type2	7	2.5	192.0	25	1
Type2	8	3.1	164.0	26	1
Type2	9	1.2	156.0	23	1
Type2	10	3.9	210.0	27	1
Type2	11	4.6	201.0	29	1
Type2	12	3.2	162.0	26	1
Type2	13	2.2	197.0	25	1
Type2	14	4.5	163.0	29	1
Type2	15	3.0	203.0	26	1
Type2	16	5.0	168.0	29	1
Type2	17	2.4	217.0	25	1
Type2	18	2.9	191.0	26	1
Type2	19	2.3	166.0	25	1
Type2	20	3.7	150.0	27	1
Type2	21	2.2	176.0	25	1
Type2	22	4.9	195.0	29	1
Type2	23	2.9	202.0	26	1
Type2	24	2.5	178.0	25	1
Type2	25	1.1	206.0	23	1
Type2	26	3.8	155.0	27	1
Type2	27	4.7	157.0	29	1
Type2	28	2.4	224.0	25	1
Type2	29	4.2	159.0	28	1
Type3	0	8.2	355.0	17	1
Type3	1	6.1	487.0	16	1
Type3	2	7.1	344.0	16	1
Type3	3	9.8	288.0	18	1
Type3	4	8.9	230.0	18	1
Type3	5	7.9	432.0	17	1
Type3	6	8.2	207.0	17	1
Type3	7	7.5	443.0	17	1
Type3	8	8.1	439.0	17	1
Type3	9	6.2	223.0	16	1
Type3	10	8.9	208.0	18	1
Type3	11	9.6	463.0	18	1
Type3	12	8.2	441.0	17	1
Type3	13	7.2	323.0	16	1
Type3	14	9.5	297.0	18	1
Type3	15	8.0	412.0	17	1
Type3	16	10.0	324.0	18	1
Type3	17	7.4	271.0	17	1
Type3	18	7.9	349.0	17	1
Type3	19	7.3	409.0	16	1
Type3	20	8.7	373.0	18	1
Type3	21	7.2	254.0	16	1
Type3	22	9.9	274.0	18	1
Type3	23	7.9	278.0	17	1
Type3	24	7.5	317.0	17	1
Type3	25	6.1	260.0	16	1
Type3	26	8.8	211.0	18	1
Type3	27	9.7	272.0	18	1
Type3	28	7.4	264.0	17	1
Type3	29	9.2	284.0	18	1
Type4	0	16.0	355.0	14	1
Type4	1	11.3	487.0	12	1
Type4	2	13.5	344.0	13	1

		Type4	3	19.4	288.0	16	1
		Type4	4	17.5	230.0	15	1
		Type4	5	15.3	432.0	14	1
		Type4	6	15.9	207.0	14	1
		Type4	7	14.3	443.0	13	1
		Type4	8	15.8	439.0	14	1
		Type4	9	11.5	223.0	12	1
		Type4	10	17.4	208.0	15	1
		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
11AX160MI MO	5250	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1

Type2	1	1.1	207.0	23	1
Type2	2	2.1	230.0	24	1
Type2	3	4.8	200.0	29	1
Type2	4	3.9	214.0	28	1
Type2	5	2.9	222.0	26	1
Type2	6	3.2	204.0	26	1
Type2	7	2.5	192.0	25	1
Type2	8	3.1	164.0	26	1
Type2	9	1.2	156.0	23	1
Type2	10	3.9	210.0	27	1
Type2	11	4.6	201.0	29	1
Type2	12	3.2	162.0	26	1
Type2	13	2.2	197.0	25	1
Type2	14	4.5	163.0	29	1
Type2	15	3.0	203.0	26	1
Type2	16	5.0	168.0	29	1
Type2	17	2.4	217.0	25	1
Type2	18	2.9	191.0	26	1
Type2	19	2.3	166.0	25	1
Type2	20	3.7	150.0	27	1
Type2	21	2.2	176.0	25	1
Type2	22	4.9	195.0	29	1
Type2	23	2.9	202.0	26	1
Type2	24	2.5	178.0	25	1
Type2	25	1.1	206.0	23	1
Type2	26	3.8	155.0	27	1
Type2	27	4.7	157.0	29	1
Type2	28	2.4	224.0	25	1
Type2	29	4.2	159.0	28	1
Type3	0	8.2	355.0	17	1
Type3	1	6.1	487.0	16	1
Type3	2	7.1	344.0	16	1
Type3	3	9.8	288.0	18	1
Type3	4	8.9	230.0	18	1
Type3	5	7.9	432.0	17	1
Type3	6	8.2	207.0	17	1
Type3	7	7.5	443.0	17	1
Type3	8	8.1	439.0	17	1
Type3	9	6.2	223.0	16	1
Type3	10	8.9	208.0	18	1
Type3	11	9.6	463.0	18	1
Type3	12	8.2	441.0	17	1
Type3	13	7.2	323.0	16	1
Type3	14	9.5	297.0	18	1
Type3	15	8.0	412.0	17	1
Type3	16	10.0	324.0	18	1
Type3	17	7.4	271.0	17	1
Type3	18	7.9	349.0	17	1
Type3	19	7.3	409.0	16	1
Type3	20	8.7	373.0	18	1
Type3	21	7.2	254.0	16	1
Type3	22	9.9	274.0	18	1
Type3	23	7.9	278.0	17	1
Type3	24	7.5	317.0	17	1
Type3	25	6.1	260.0	16	1
Type3	26	8.8	211.0	18	1
Type3	27	9.7	272.0	18	1
Type3	28	7.4	264.0	17	1

		Type3	29	9.2	284.0	18	1
		Type4	0	16.0	355.0	14	1
		Type4	1	11.3	487.0	12	1
		Type4	2	13.5	344.0	13	1
		Type4	3	19.4	288.0	16	1
		Type4	4	17.5	230.0	15	1
		Type4	5	15.3	432.0	14	1
		Type4	6	15.9	207.0	14	1
		Type4	7	14.3	443.0	13	1
		Type4	8	15.8	439.0	14	1
		Type4	9	11.5	223.0	12	1
		Type4	10	17.4	208.0	15	1
		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
	5570	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1

Type1	27	1.0	1600.0	33	1
Type1	28	1.0	1172.0	46	1
Type1	29	1.0	1177.0	45	1
Type2	0	3.2	179.0	26	1
Type2	1	1.1	207.0	23	1
Type2	2	2.1	230.0	24	1
Type2	3	4.8	200.0	29	1
Type2	4	3.9	214.0	28	1
Type2	5	2.9	222.0	26	1
Type2	6	3.2	204.0	26	1
Type2	7	2.5	192.0	25	1
Type2	8	3.1	164.0	26	1
Type2	9	1.2	156.0	23	1
Type2	10	3.9	210.0	27	1
Type2	11	4.6	201.0	29	1
Type2	12	3.2	162.0	26	1
Type2	13	2.2	197.0	25	1
Type2	14	4.5	163.0	29	1
Type2	15	3.0	203.0	26	1
Type2	16	5.0	168.0	29	1
Type2	17	2.4	217.0	25	1
Type2	18	2.9	191.0	26	1
Type2	19	2.3	166.0	25	1
Type2	20	3.7	150.0	27	1
Type2	21	2.2	176.0	25	1
Type2	22	4.9	195.0	29	1
Type2	23	2.9	202.0	26	1
Type2	24	2.5	178.0	25	1
Type2	25	1.1	206.0	23	1
Type2	26	3.8	155.0	27	1
Type2	27	4.7	157.0	29	1
Type2	28	2.4	224.0	25	1
Type2	29	4.2	159.0	28	1
Type3	0	8.2	355.0	17	1
Type3	1	6.1	487.0	16	1
Type3	2	7.1	344.0	16	1
Type3	3	9.8	288.0	18	1
Type3	4	8.9	230.0	18	1
Type3	5	7.9	432.0	17	1
Type3	6	8.2	207.0	17	1
Type3	7	7.5	443.0	17	1
Type3	8	8.1	439.0	17	1
Type3	9	6.2	223.0	16	1
Type3	10	8.9	208.0	18	1
Type3	11	9.6	463.0	18	1
Type3	12	8.2	441.0	17	1
Type3	13	7.2	323.0	16	1
Type3	14	9.5	297.0	18	1
Type3	15	8.0	412.0	17	1
Type3	16	10.0	324.0	18	1
Type3	17	7.4	271.0	17	1
Type3	18	7.9	349.0	17	1
Type3	19	7.3	409.0	16	1
Type3	20	8.7	373.0	18	1
Type3	21	7.2	254.0	16	1
Type3	22	9.9	274.0	18	1
Type3	23	7.9	278.0	17	1
Type3	24	7.5	317.0	17	1

	Type3	25	6.1	260.0	16	1
	Type3	26	8.8	211.0	18	1
	Type3	27	9.7	272.0	18	1
	Type3	28	7.4	264.0	17	1
	Type3	29	9.2	284.0	18	1
	Type4	0	16.0	355.0	14	1
	Type4	1	11.3	487.0	12	1
	Type4	2	13.5	344.0	13	1
	Type4	3	19.4	288.0	16	1
	Type4	4	17.5	230.0	15	1
	Type4	5	15.3	432.0	14	1
	Type4	6	15.9	207.0	14	1
	Type4	7	14.3	443.0	13	1
	Type4	8	15.8	439.0	14	1
	Type4	9	11.5	223.0	12	1
	Type4	10	17.4	208.0	15	1
	Type4	11	19.0	463.0	16	1
	Type4	12	16.0	441.0	14	1
	Type4	13	13.8	323.0	13	1
	Type4	14	18.9	297.0	16	1
	Type4	15	15.5	412.0	14	1
	Type4	16	19.9	324.0	16	1
	Type4	17	14.1	271.0	13	1
	Type4	18	15.2	349.0	14	1
	Type4	19	13.8	409.0	13	1
	Type4	20	17.1	373.0	15	1
	Type4	21	13.8	254.0	13	1
	Type4	22	19.8	274.0	16	1
	Type4	23	15.3	278.0	14	1
	Type4	24	14.5	317.0	13	1
	Type4	25	11.3	260.0	12	1
	Type4	26	17.3	211.0	15	1
	Type4	27	19.2	272.0	16	1
	Type4	28	14.2	264.0	13	1
	Type4	29	18.2	284.0	15	1

Test Mode	Frequency [MHz]	Radar Type	Trial ID	Number Of Bursts	Wavform Length (s)	Radar Frequency	Detection (1: Yes; 0: No)
11AX20MI MO	5260	Type5	0	15	12	5260	1
		Type5	1	8	12	5260	1
		Type5	2	11	12	5260	1
		Type5	3	20	12	5260	1
		Type5	4	17	12	5260	1
		Type5	5	14	12	5260	1
		Type5	6	15	12	5260	1
		Type5	7	12	12	5260	1
		Type5	8	14	12	5260	1
		Type5	9	8	12	5260	1
		Type5	10	17	12	5228.8375	1
		Type5	11	19	12	5230.0375	1
		Type5	12	15	12	5227.6375	1
		Type5	13	12	12	5226.4375	1
		Type5	14	19	12	5229.6375	1
		Type5	15	14	12	5227.2375	1
		Type5	16	20	12	5230.4375	1
		Type5	17	12	12	5226.4375	1
		Type5	18	14	12	5227.2375	1
		Type5	19	12	12	5226.4375	1
		Type5	20	16	12	5291.5625	1
		Type5	21	12	12	5293.9625	1
		Type5	22	20	12	5289.5625	1
		Type5	23	14	12	5292.7625	1
		Type5	24	13	12	5293.1625	1
		Type5	25	8	12	5295.5625	1
		Type5	26	17	12	5291.1625	1
		Type5	27	19	12	5289.9625	1
		Type5	28	12	12	5293.5625	1
		Type5	29	18	12	5290.7625	1
	5500	Type5	0	15	12	5500	1
		Type5	1	8	12	5500	1
		Type5	2	11	12	5500	1
		Type5	3	20	12	5500	1
		Type5	4	17	12	5500	1
		Type5	5	14	12	5500	1
		Type5	6	15	12	5500	1
		Type5	7	12	12	5500	1
		Type5	8	14	12	5500	1
		Type5	9	8	12	5500	1
		Type5	10	17	12	5468.8375	1
		Type5	11	19	12	5470.0375	1
		Type5	12	15	12	5467.6375	1
		Type5	13	12	12	5466.4375	1
		Type5	14	19	12	5469.6375	1
		Type5	15	14	12	5467.2375	1
		Type5	16	20	12	5470.4375	1
		Type5	17	12	12	5466.4375	1
		Type5	18	14	12	5467.2375	1
		Type5	19	12	12	5466.4375	1
		Type5	20	16	12	5531.5625	1
		Type5	21	12	12	5533.9625	1
		Type5	22	20	12	5529.5625	1
		Type5	23	14	12	5532.7625	1

		Type5	24	13	12	5533.1625	1
		Type5	25	8	12	5535.5625	1
11AX40MI MO	5270	Type5	26	17	12	5531.1625	1
		Type5	27	19	12	5529.9625	1
		Type5	28	12	12	5533.5625	1
		Type5	29	18	12	5530.7625	1
		Type5	0	15	12	5270	1
		Type5	1	8	12	5270	1
		Type5	2	11	12	5270	1
		Type5	3	20	12	5270	1
		Type5	4	17	12	5270	1
		Type5	5	14	12	5270	1
		Type5	6	15	12	5270	1
		Type5	7	12	12	5270	1
		Type5	8	14	12	5270	1
		Type5	9	8	12	5270	1
		Type5	10	17	12	5258.271	1
		Type5	11	19	12	5259.471	1
		Type5	12	15	12	5257.071	1
		Type5	13	12	12	5255.871	1
		Type5	14	19	12	5259.071	1
		Type5	15	14	12	5256.671	1
		Type5	16	20	12	5259.871	1
		Type5	17	12	12	5255.871	1
		Type5	18	14	12	5256.671	1
		Type5	19	12	12	5255.871	1
		Type5	20	16	12	5282.129	1
		Type5	21	12	12	5284.529	1
		Type5	22	20	12	5280.129	1
		Type5	23	14	12	5283.329	1
		Type5	24	13	12	5283.729	1
		Type5	25	8	12	5286.129	1
		Type5	26	17	12	5281.729	1
		Type5	27	19	12	5280.529	1
		Type5	28	12	12	5284.129	1
		Type5	29	18	12	5281.329	1
	5510	Type5	0	15	12	5510	1
		Type5	1	8	12	5510	1
		Type5	2	11	12	5510	1
		Type5	3	20	12	5510	1
		Type5	4	17	12	5510	1
		Type5	5	14	12	5510	1
		Type5	6	15	12	5510	1
		Type5	7	12	12	5510	1
		Type5	8	14	12	5510	1
		Type5	9	8	12	5510	1
		Type5	10	17	12	5498.271	1
		Type5	11	19	12	5499.471	1
		Type5	12	15	12	5497.071	1
		Type5	13	12	12	5495.871	1
		Type5	14	19	12	5499.071	1
		Type5	15	14	12	5496.671	1
		Type5	16	20	12	5499.871	1
		Type5	17	12	12	5495.871	1
		Type5	18	14	12	5496.671	1
		Type5	19	12	12	5495.871	1
		Type5	20	16	12	5522.129	1
		Type5	21	12	12	5524.529	1

		Type5	22	20	12	5520.129	1
		Type5	23	14	12	5523.329	1
		Type5	24	13	12	5523.729	1
		Type5	25	8	12	5526.129	1
		Type5	26	17	12	5521.729	1
		Type5	27	19	12	5520.529	1
		Type5	28	12	12	5524.129	1
11AX80MI MO	5290	Type5	29	18	12	5521.329	1
		Type5	0	15	12	5290	1
		Type5	1	8	12	5290	1
		Type5	2	11	12	5290	1
		Type5	3	20	12	5290	1
		Type5	4	17	12	5290	1
		Type5	5	14	12	5290	1
		Type5	6	15	12	5290	1
		Type5	7	12	12	5290	1
		Type5	8	14	12	5290	1
		Type5	9	8	12	5290	1
		Type5	10	17	12	5257.2375	1
		Type5	11	19	12	5258.4375	1
		Type5	12	15	12	5256.0375	1
		Type5	13	12	12	5254.8375	1
		Type5	14	19	12	5258.0375	1
		Type5	15	14	12	5255.6375	1
		Type5	16	20	12	5258.8375	1
		Type5	17	12	12	5254.8375	1
		Type5	18	14	12	5255.6375	1
		Type5	19	12	12	5254.8375	1
		Type5	20	16	12	5323.1625	1
		Type5	21	12	12	5325.5625	1
		Type5	22	20	12	5321.1625	1
		Type5	23	14	12	5324.3625	1
		Type5	24	13	12	5324.7625	1
		Type5	25	8	12	5327.1625	1
		Type5	26	17	12	5322.7625	1
		Type5	27	19	12	5321.5625	1
		Type5	28	12	12	5325.1625	1
		Type5	29	18	12	5322.3625	1
	5530	Type5	0	15	12	5530	1
		Type5	1	8	12	5530	1
		Type5	2	11	12	5530	1
		Type5	3	20	12	5530	1
		Type5	4	17	12	5530	1
		Type5	5	14	12	5530	1
		Type5	6	15	12	5530	1
		Type5	7	12	12	5530	1
		Type5	8	14	12	5530	1
		Type5	9	8	12	5530	1
		Type5	10	17	12	5497.2375	1
		Type5	11	19	12	5498.4375	1
		Type5	12	15	12	5496.0375	1
		Type5	13	12	12	5494.8375	1
		Type5	14	19	12	5498.0375	1
		Type5	15	14	12	5495.6375	1
		Type5	16	20	12	5498.8375	1
		Type5	17	12	12	5494.8375	1
		Type5	18	14	12	5495.6375	1
		Type5	19	12	12	5494.8375	1

11AX160MI MO		Type5	20	16	12	5563.1625	1
		Type5	21	12	12	5565.5625	1
		Type5	22	20	12	5561.1625	1
		Type5	23	14	12	5564.3625	1
		Type5	24	13	12	5564.7625	1
		Type5	25	8	12	5567.1625	1
		Type5	26	17	12	5562.7625	1
		Type5	27	19	12	5561.5625	1
		Type5	28	12	12	5565.1625	1
		Type5	29	18	12	5562.3625	1
	5250	Type5	0	15	12	5260	1
		Type5	1	8	12	5260	1
		Type5	2	11	12	5260	1
		Type5	3	20	12	5260	1
		Type5	4	17	12	5260	1
		Type5	5	14	12	5260	1
		Type5	6	15	12	5260	1
		Type5	7	12	12	5260	1
		Type5	8	14	12	5260	1
		Type5	9	8	12	5260	1
		Type5	10	17	12	5228.8375	1
		Type5	11	19	12	5230.0375	1
		Type5	12	15	12	5227.6375	1
		Type5	13	12	12	5226.4375	1
		Type5	14	19	12	5229.6375	1
		Type5	15	14	12	5227.2375	1
		Type5	16	20	12	5230.4375	1
		Type5	17	12	12	5226.4375	1
		Type5	18	14	12	5227.2375	1
		Type5	19	12	12	5226.4375	1
		Type5	20	16	12	5291.5625	1
		Type5	21	12	12	5293.9625	1
		Type5	22	20	12	5289.5625	1
		Type5	23	14	12	5292.7625	1
		Type5	24	13	12	5293.1625	1
		Type5	25	8	12	5295.5625	1
		Type5	26	17	12	5291.1625	1
		Type5	27	19	12	5289.9625	1
		Type5	28	12	12	5293.5625	1
		Type5	29	18	12	5290.7625	1
	5570	Type5	0	15	12	5570	1
		Type5	1	8	12	5570	1
		Type5	2	11	12	5570	1
		Type5	3	20	12	5570	1
		Type5	4	17	12	5570	1
		Type5	5	14	12	5570	1
		Type5	6	15	12	5570	1
		Type5	7	12	12	5570	1
		Type5	8	14	12	5570	1
		Type5	9	8	12	5570	1
		Type5	10	17	12	5538.8375	1
		Type5	11	19	12	5540.0375	1
		Type5	12	15	12	5537.6375	1
		Type5	13	12	12	5536.4375	1
		Type5	14	19	12	5539.6375	1
		Type5	15	14	12	5537.2375	1
		Type5	16	20	12	5540.4375	1
		Type5	17	12	12	5536.4375	1

	Type5	18	14	12	5537.2375	1
	Type5	19	12	12	5536.4375	1
	Type5	20	16	12	5601.5625	1
	Type5	21	12	12	5603.9625	1
	Type5	22	20	12	5599.5625	1
	Type5	23	14	12	5602.7625	1
	Type5	24	13	12	5603.1625	1
	Type5	25	8	12	5605.5625	1
	Type5	26	17	12	5601.1625	1
	Type5	27	19	12	5599.9625	1
	Type5	28	12	12	5603.5625	1
	Type5	29	18	12	5600.7625	1

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
		Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
		Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
		Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
	5500	Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
		Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
11AX40MI MO	5270	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
		Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
		Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
	5510	Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
		Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
		Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
		Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
		Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---

		Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
11AX80MI MO	5290	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
		Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
	5530	Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
		Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
		Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
	5250	Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
		Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
		Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
		Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
		Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
		Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---
		Type5	0	9	783794.0	13	1	53.2	1147.0	---	---
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
	5570	Type5	0	14	154262.0	13	3	93.5	1444.0	1130.0	1468.0
		Type5	0	13	759583.0	13	1	65.7	1512.0	---	---
		Type5	0	12	564893.0	13	2	77.6	1294.0	1671.0	---
		Type5	0	11	370624.0	13	3	94.3	1670.0	1426.0	1935.0
		Type5	0	10	177933.0	13	3	85.7	1433.0	1695.0	1394.0
		Type5	0	8	588564.0	13	2	76.7	2000.0	1155.0	---
		Type5	0	0	636185.0	13	2	77.8	1665.0	1477.0	---

	Type5	0	1	32674.0	13	1	51.9	1074.0	---	---
	Type5	0	2	226294.0	13	1	63.8	1584.0	---	---
	Type5	0	3	417976.0	13	3	96.6	1682.0	1786.0	1843.0
	Type5	0	4	611152.0	13	3	85.9	1795.0	1215.0	1729.0
	Type5	0	5	8789.0	13	2	73.7	1198.0	1549.0	---
	Type5	0	6	201917.0	13	2	77.2	1837.0	1819.0	---
	Type5	0	7	395530.0	13	2	68.4	1587.0	1114.0	---
	Type5	0	9	783794.0	13	1	53.2	1147.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
	5500	Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
		Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
11AX40MI MO	5270	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
		Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
	5510	Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
		Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
		Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
11AX80MI MO	5290	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
		Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
	5530	Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
11AX160MI MO	5250	Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0

	5570	Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
		Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	4	609113.0	5	1	65.9	1432.0	---	---
		Type5	1	0	653020.0	5	2	75.0	1880.0	1527.0	---
		Type5	1	1	1015643.0	5	3	99.4	1401.0	1262.0	1257.0
		Type5	1	3	245489.0	5	2	73.6	1449.0	1041.0	---
		Type5	1	5	970852.0	5	3	83.8	1356.0	1292.0	1419.0
		Type5	1	6	1335913.0	5	1	65.5	1543.0	---	---
		Type5	1	7	200406.0	5	3	98.6	1548.0	1796.0	1728.0
		Type5	1	2	1379398.0	5	2	67.4	1531.0	1403.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
		Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
		Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
	5500	Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
		Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
11AX40MI MO	5270	Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
		Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
	5510	Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
		Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
11AX80MI MO	5290	Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
		Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
		Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	9	609331.0	9	1	53.7	1597.0	---	---

	5530	Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
		Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
		Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
		Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
11AX160MI MO	5250	Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
		Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
		Type5	2	7	80863.0	9	2	81.9	1022.0	1689.0	---
	5570	Type5	2	0	409565.0	9	2	73.8	1806.0	1538.0	---
		Type5	2	1	673692.0	9	2	69.5	1117.0	1649.0	---
		Type5	2	2	938562.0	9	1	51.9	1651.0	---	---
		Type5	2	3	113209.0	9	3	84.6	1976.0	1032.0	1271.0
		Type5	2	4	376726.0	9	3	95.4	1060.0	1903.0	1388.0
		Type5	2	6	903714.0	9	3	89.6	1338.0	1514.0	1573.0
		Type5	2	8	344067.0	9	3	88.3	1810.0	1330.0	1838.0
		Type5	2	9	609331.0	9	1	53.7	1597.0	---	---
		Type5	2	10	871542.0	9	3	91.3	1961.0	1106.0	1001.0
		Type5	2	5	641212.0	9	2	68.0	1368.0	1351.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
	5500	Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
11AX40MI MO	5270	Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---

11AX80MI MO	5510	Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
	5510	Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
	5290	Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
	5530	Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0

		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
11AX160MI MO	5250	Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
	5570	Type5	3	16	553328.0	19	1	65.0	1767.0	---	---
		Type5	3	19	390012.0	19	2	67.3	1091.0	1218.0	---
		Type5	3	9	135674.0	19	2	82.8	1883.0	1005.0	---
		Type5	3	10	279928.0	19	3	88.0	1061.0	1928.0	1101.0
		Type5	3	11	424279.0	19	3	93.2	1207.0	1907.0	1223.0
		Type5	3	12	570132.0	19	2	70.4	1526.0	1360.0	---
		Type5	3	13	117439.0	19	3	95.3	1171.0	1955.0	1775.0
		Type5	3	14	262502.0	19	2	81.9	1690.0	1545.0	---
		Type5	3	15	406573.0	19	3	98.5	1975.0	1169.0	1062.0
		Type5	3	17	99799.0	19	3	85.4	1011.0	1637.0	1425.0
		Type5	3	7	443177.0	19	2	80.0	1482.0	1369.0	---
		Type5	3	6	299238.0	19	1	59.5	1072.0	---	---
		Type5	3	5	153995.0	19	1	57.7	1013.0	---	---
		Type5	3	4	8677.0	19	3	99.7	1196.0	1708.0	1159.0
		Type5	3	3	461864.0	19	1	56.4	1753.0	---	---
		Type5	3	2	316229.0	19	2	75.3	1136.0	1640.0	---
		Type5	3	1	171821.0	19	1	58.7	1251.0	---	---
		Type5	3	18	244095.0	19	3	91.6	1878.0	1445.0	1325.0
		Type5	3	8	587671.0	19	2	82.0	1993.0	1197.0	---
		Type5	3	0	26541.0	19	2	68.1	1339.0	1355.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
		Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
	5500	Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
11AX40MI MO	5270	Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
	5510	Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0

		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
		Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
11AX80MI MO	5290	Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
		Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
	5530	Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
11AX160MI MO	5250	Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0

		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
		Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
	5570	Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	9	54571.0	16	3	87.1	1116.0	1996.0	1756.0
		Type5	4	8	588736.0	16	1	50.3	1075.0	---	---
		Type5	4	16	544060.0	16	3	99.7	1150.0	1244.0	1988.0
		Type5	4	15	373812.0	16	3	84.7	1021.0	1718.0	1854.0
		Type5	4	14	203957.0	16	3	97.6	1365.0	1073.0	1361.0
		Type5	4	13	33643.0	16	3	86.3	1596.0	1183.0	1792.0
		Type5	4	12	565361.0	16	3	90.6	1561.0	1040.0	1354.0
		Type5	4	7	416355.0	16	2	81.8	1833.0	1676.0	---
		Type5	4	10	225175.0	16	2	71.3	1225.0	1815.0	---
		Type5	4	0	629614.0	16	2	67.9	1320.0	1133.0	---
		Type5	4	6	245638.0	16	3	89.1	1240.0	1384.0	1939.0
		Type5	4	5	75610.0	16	3	83.9	1278.0	1232.0	1459.0
		Type5	4	4	608289.0	16	2	77.1	1166.0	1646.0	---
		Type5	4	3	436784.0	16	3	90.0	1900.0	1153.0	1346.0
		Type5	4	2	267719.0	16	1	53.3	1592.0	---	---
		Type5	4	1	96856.0	16	1	62.3	1957.0	---	---
		Type5	4	11	394825.0	16	3	97.5	1884.0	1465.0	1132.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
	5500	Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
11AX40MI MO	5270	Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
		Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
	5510	Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---

		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
11AX80MI MO	5290	Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
	5530	Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
11AX160MI MO	5250	Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---
		Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---
		Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
	5570	Type5	5	8	818057.0	12	2	76.3	1606.0	1926.0	---
		Type5	5	0	15438.0	12	3	92.9	1085.0	1564.0	1407.0
		Type5	5	1	222486.0	12	2	67.7	1744.0	1747.0	---
		Type5	5	2	430731.0	12	1	65.8	1092.0	---	---
		Type5	5	3	637784.0	12	1	56.3	1851.0	---	---
		Type5	5	4	845342.0	12	1	53.7	1727.0	---	---
		Type5	5	5	196720.0	12	3	83.5	1679.0	1930.0	1025.0
		Type5	5	7	610711.0	12	3	85.9	1134.0	1034.0	1808.0
		Type5	5	9	171459.0	12	2	81.5	1891.0	1714.0	---
		Type5	5	10	377969.0	12	3	89.4	1310.0	1594.0	1827.0
		Type5	5	11	586875.0	12	1	63.4	1568.0	---	---
		Type5	5	12	792834.0	12	2	69.6	1307.0	1925.0	---

		Type5	5	13	146044.0	12	2	74.5	1264.0	1846.0	---
		Type5	5	6	404955.0	12	1	65.8	1519.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
		Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
		Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
		Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
		Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
		Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
	5500	Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
		Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
		Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
		Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
		Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
		Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
		Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
11AX40MI MO	5270	Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
		Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
		Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
		Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
		Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
		Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
		Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
		Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
	5510	Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
		Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
		Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---

		Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
		Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
		Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
11AX80MI MO	5290	Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
		Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
		Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
	5530	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
		Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
		Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
		Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
		Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
		Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
		Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
		Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
11AX160MI MO	5250	Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
		Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
		Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
		Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
		Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
		Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
		Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---
		Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
	5570	Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
		Type5	6	8	282508.0	13	1	65.7	1476.0	---	---
		Type5	6	14	643395.0	13	3	90.6	1233.0	1562.0	1887.0
		Type5	6	13	452335.0	13	1	61.4	1451.0	---	---

	Type5	6	12	257755.0	13	3	94.9	1830.0	1070.0	1349.0
	Type5	6	11	64845.0	13	2	79.6	1882.0	1331.0	---
	Type5	6	9	475842.0	13	2	68.6	1008.0	1028.0	---
	Type5	6	0	329022.0	13	3	96.6	1182.0	1609.0	1581.0
	Type5	6	1	521718.0	13	3	96.7	1829.0	1799.0	1154.0
	Type5	6	2	714222.0	13	3	86.5	1923.0	1396.0	1865.0
	Type5	6	3	112450.0	13	2	73.3	1908.0	1318.0	---
	Type5	6	4	306283.0	13	1	55.8	1688.0	---	---
	Type5	6	5	500239.0	13	1	55.4	1145.0	---	---
	Type5	6	7	88645.0	13	2	79.4	1344.0	1893.0	---
	Type5	6	6	690932.0	13	3	85.3	1336.0	1504.0	1820.0
	Type5	6	10	667887.0	13	2	77.7	1972.0	1835.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
	5500	Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
11AX40MI MO	5270	Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
		Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
	5510	Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
11AX80MI MO	5290	Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---

		Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
	5530	Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
11AX160MI MO	5250	Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
	5570	Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
		Type5	7	6	505581.0	10	2	67.6	1175.0	1027.0	---
		Type5	7	9	234024.0	10	1	64.2	1138.0	---	---
		Type5	7	10	475207.0	10	2	78.8	1784.0	1604.0	---
		Type5	7	8	989976.0	10	1	60.9	1798.0	---	---
		Type5	7	7	747058.0	10	2	75.7	1026.0	1871.0	---
		Type5	7	5	263385.0	10	2	72.2	1771.0	1184.0	---
		Type5	7	4	21542.0	10	3	98.8	1544.0	1386.0	1302.0
		Type5	7	3	775564.0	10	3	97.3	1341.0	1446.0	1755.0
		Type5	7	2	533989.0	10	3	97.7	1139.0	1868.0	1805.0
		Type5	7	0	51446.0	10	1	52.6	1210.0	---	---
		Type5	7	11	715825.0	10	3	87.5	1511.0	1712.0	1683.0
		Type5	7	1	292696.0	10	3	84.1	1314.0	1725.0	1529.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
		Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
	5500	Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
11AX40MI MO	5270	Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
	5510	Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---

		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
		Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
11AX80MI MO	5290	Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
	5530	Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
11AX160MI MO	5250	Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
		Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---
	5570	Type5	8	7	563824.0	13	2	74.8	1149.0	1204.0	---
		Type5	8	0	823112.0	13	1	54.1	1415.0	---	---
		Type5	8	1	174965.0	13	1	50.7	1221.0	---	---
		Type5	8	2	382216.0	13	1	52.3	1974.0	---	---
		Type5	8	3	587395.0	13	3	99.8	1558.0	1696.0	1949.0
		Type5	8	4	796897.0	13	2	68.4	1014.0	1099.0	---
		Type5	8	6	356750.0	13	1	62.5	1778.0	---	---
		Type5	8	8	772314.0	13	1	50.8	1049.0	---	---
		Type5	8	9	123796.0	13	1	54.0	1417.0	---	---
		Type5	8	10	331215.0	13	1	63.0	1730.0	---	---
		Type5	8	11	537402.0	13	3	91.8	1143.0	1270.0	1347.0
		Type5	8	12	744805.0	13	2	79.3	1274.0	1992.0	---

	Type5	8	13	98172.0	13	1	64.3	1937.0	---	---
	Type5	8	5	149042.0	13	2	80.8	1736.0	1505.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
		Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
	5500	Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
		Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
11AX40MI MO	5270	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
		Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
		Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
	5510	Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
		Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
		Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
11AX80MI MO	5290	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
		Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
	5530	Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
11AX160MI MO	5250	Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0

		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
		Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
	5570	Type5	9	4	490358.0	6	2	74.2	1280.0	1219.0	---
		Type5	9	0	535615.0	6	1	63.4	1043.0	---	---
		Type5	9	1	898668.0	6	1	52.0	1863.0	---	---
		Type5	9	3	127106.0	6	2	78.7	1466.0	1743.0	---
		Type5	9	5	852409.0	6	3	88.7	1293.0	1934.0	1273.0
		Type5	9	6	1217152.0	6	1	54.3	1991.0	---	---
		Type5	9	7	82296.0	6	3	95.4	1580.0	1555.0	1791.0
		Type5	9	2	1259235.0	6	3	97.2	1973.0	1605.0	1583.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
	5500	Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
11AX40MI MO	5270	Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
	5510	Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---

		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
11AX80MI MO	5290	Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
	5530	Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
11AX160MI MO	5250	Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---

		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
	5570	Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	9	338262.0	16	1	59.1	1697.0	---	---
		Type5	10	8	167197.0	16	2	75.6	1437.0	1430.0	---
		Type5	10	16	125509.0	16	1	59.3	1093.0	---	---
		Type5	10	15	657326.0	16	2	68.9	1849.0	1423.0	---
		Type5	10	14	488056.0	16	1	63.3	1634.0	---	---
		Type5	10	13	316923.0	16	2	78.7	1247.0	1121.0	---
		Type5	10	12	146031.0	16	2	81.2	1720.0	1932.0	---
		Type5	10	7	700166.0	16	2	70.9	1050.0	1358.0	---
		Type5	10	10	508324.0	16	2	77.0	1397.0	1304.0	---
		Type5	10	0	209249.0	16	2	73.7	1208.0	1497.0	---
		Type5	10	6	528886.0	16	2	78.9	1308.0	1984.0	---
		Type5	10	5	359277.0	16	1	52.3	1740.0	---	---
		Type5	10	4	187952.0	16	2	70.8	1968.0	1821.0	---
		Type5	10	3	17733.0	16	1	66.2	1393.0	---	---
		Type5	10	2	548411.0	16	3	91.7	1999.0	1702.0	1462.0
		Type5	10	1	378386.0	16	3	97.4	1942.0	1754.0	1613.0
		Type5	10	11	678689.0	16	2	67.9	1803.0	1083.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
	5500	Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
11AX40MI MO	5270	Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0

	5510	Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
		Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
11AX80MI MO	5290	Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
	5530	Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---

11AX160MI MO	5250	Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
	5570	Type5	11	15	36803.0	19	2	83.1	1943.0	1406.0	---
		Type5	11	18	495737.0	19	1	55.0	1012.0	---	---
		Type5	11	9	380056.0	19	1	58.8	1715.0	---	---
		Type5	11	10	533408.0	19	1	65.6	1017.0	---	---
		Type5	11	11	55547.0	19	2	78.5	1911.0	1704.0	---
		Type5	11	12	207876.0	19	2	82.3	1845.0	1686.0	---
		Type5	11	13	359771.0	19	3	90.1	1938.0	1071.0	1266.0
		Type5	11	14	511297.0	19	3	90.2	1989.0	1089.0	1950.0
		Type5	11	16	189652.0	19	1	58.8	1742.0	---	---
		Type5	11	7	74413.0	19	2	67.9	1350.0	1372.0	---
		Type5	11	6	551431.0	19	1	55.9	1947.0	---	---
		Type5	11	5	397609.0	19	2	71.1	1921.0	1789.0	---
		Type5	11	4	245155.0	19	3	98.6	1507.0	1194.0	1461.0
		Type5	11	3	92979.0	19	3	89.7	1861.0	1068.0	1282.0
		Type5	11	2	567902.0	19	3	86.7	1211.0	1400.0	1919.0
		Type5	11	1	416459.0	19	2	82.3	1716.0	1855.0	---
		Type5	11	17	341809.0	19	2	77.0	1187.0	1657.0	---
		Type5	11	8	226559.0	19	3	84.4	1203.0	1107.0	1443.0
		Type5	11	0	263736.0	19	3	98.9	1381.0	1680.0	1488.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
		Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
		Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
	5500	Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
		Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
11AX40MI MO	5270	Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
		Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
		Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
		Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
	5510	Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
		Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---

		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
11AX80MI MO	5290	Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
		Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
		Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
	5530	Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
		Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
		Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
11AX160MI MO	5250	Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
		Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
		Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
		Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
		Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
		Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
		Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
		Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
		Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
		Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---
	5570	Type5	12	10	361606.0	13	2	83.2	1692.0	1858.0	---
		Type5	12	14	337856.0	13	2	69.3	1731.0	1717.0	---
		Type5	12	13	144710.0	13	2	78.3	1258.0	1951.0	---
		Type5	12	11	553866.0	13	3	84.7	1533.0	1677.0	1638.0
		Type5	12	3	603671.0	13	1	60.2	1812.0	---	---

	Type5	12	9	168898.0	13	1	61.4	1390.0	---	---
	Type5	12	0	22911.0	13	1	58.1	1929.0	---	---
	Type5	12	1	216473.0	13	1	52.1	1910.0	---	---
	Type5	12	2	410004.0	13	1	59.9	1971.0	---	---
	Type5	12	8	773423.0	13	1	64.7	1800.0	---	---
	Type5	12	7	579862.0	13	1	53.8	1763.0	---	---
	Type5	12	6	385590.0	13	2	78.5	1238.0	1917.0	---
	Type5	12	5	192251.0	13	2	79.9	1626.0	1859.0	---
	Type5	12	4	794160.0	13	3	95.9	1399.0	1906.0	1608.0
	Type5	12	12	747241.0	13	3	88.7	1703.0	1528.0	1058.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
		Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
		Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
	5500	Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
		Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
		Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
11AX40MI MO	5270	Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
		Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
	5510	Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
		Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
11AX80MI MO	5290	Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0

		Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
		Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
		Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
	5530	Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
		Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
		Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
		Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
		Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
		Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
11AX160MI MO	5250	Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
		Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
		Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
	5570	Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
		Type5	13	6	121278.0	10	3	85.7	1547.0	1362.0	1924.0
		Type5	13	0	664275.0	10	2	75.3	1994.0	1612.0	---
		Type5	13	1	907886.0	10	1	56.3	1456.0	---	---
		Type5	13	2	151316.0	10	2	67.7	1617.0	1185.0	---
		Type5	13	3	393746.0	10	1	55.6	1337.0	---	---
		Type5	13	5	876993.0	10	2	76.3	1359.0	1305.0	---
		Type5	13	7	362696.0	10	3	98.4	1873.0	1550.0	1249.0
		Type5	13	8	604342.0	10	3	86.4	1779.0	1439.0	1046.0
		Type5	13	9	846453.0	10	3	93.6	1059.0	1031.0	1452.0
		Type5	13	10	91871.0	10	1	63.3	1328.0	---	---
		Type5	13	11	333050.0	10	3	92.4	1412.0	1673.0	1322.0
		Type5	13	4	635093.0	10	2	75.2	1421.0	1267.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
	5500	Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
11AX40MI MO	5270	Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---

	5510	Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
11AX80MI MO	5290	Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
	5530	Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---

11AX160MI MO		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
	5250	Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0
	5570	Type5	14	15	134759.0	18	3	91.2	1382.0	1832.0	1661.0
		Type5	14	18	592780.0	18	2	74.1	1471.0	1245.0	---
		Type5	14	9	475841.0	18	3	88.9	1886.0	1964.0	1489.0
		Type5	14	10	1489.0	18	2	72.0	1909.0	1297.0	---
		Type5	14	11	153647.0	18	3	90.9	1261.0	1566.0	1370.0
		Type5	14	12	307096.0	18	1	59.8	1552.0	---	---
		Type5	14	13	458804.0	18	2	70.0	1759.0	1291.0	---
		Type5	14	14	610798.0	18	2	67.2	1625.0	1881.0	---
		Type5	14	16	288306.0	18	1	56.5	1483.0	---	---
		Type5	14	7	172999.0	18	1	60.8	1979.0	---	---
		Type5	14	6	20319.0	18	1	58.3	1429.0	---	---
		Type5	14	5	497624.0	18	1	51.7	1447.0	---	---
		Type5	14	4	343941.0	18	2	72.3	1094.0	1916.0	---
		Type5	14	3	190900.0	18	3	84.9	1894.0	1948.0	1118.0
		Type5	14	2	39025.0	18	3	86.9	1044.0	1152.0	1148.0
		Type5	14	1	515261.0	18	2	69.1	1102.0	1794.0	---
		Type5	14	17	441296.0	18	1	51.2	1237.0	---	---
		Type5	14	8	325872.0	18	1	57.1	1641.0	---	---
		Type5	14	0	361323.0	18	3	93.3	1983.0	1912.0	1535.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
		Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
	5500	Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
11AX40MI MO	5270	Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
	5510	Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
		Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---

		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
11AX80MI MO	5290	Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
	5530	Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
11AX160MI MO	5250	Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---
		Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
		Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---
	5570	Type5	15	7	755333.0	12	1	51.7	1603.0	---	---
		Type5	15	0	158286.0	12	2	76.9	1110.0	1140.0	---
		Type5	15	1	366024.0	12	1	50.2	1316.0	---	---
		Type5	15	2	573452.0	12	1	62.9	1520.0	---	---
		Type5	15	3	780619.0	12	1	64.7	1902.0	---	---
		Type5	15	4	132455.0	12	3	83.8	1410.0	1097.0	1621.0
		Type5	15	6	548208.0	12	1	53.2	1024.0	---	---
		Type5	15	8	107117.0	12	2	78.7	1804.0	1168.0	---
		Type5	15	9	314500.0	12	2	72.4	1030.0	1343.0	---
		Type5	15	10	522447.0	12	1	53.8	1327.0	---	---
		Type5	15	11	728517.0	12	2	73.6	1524.0	1553.0	---
		Type5	15	12	81611.0	12	2	66.7	1722.0	1122.0	---

		Type5	15	13	288948.0	12	2	82.5	1404.0	1019.0	---
		Type5	15	5	340207.0	12	1	65.4	1944.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
		Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
	5500	Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
11AX40MI MO	5270	Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---

11AX80MI MO	5510	Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
	5510	Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
		Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
	5290	Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
		Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
	5530	Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---

		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
		Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
		Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
11AX160MI MO	5250	Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
	5570	Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---
		Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
		Type5	16	10	3515.0	20	3	86.4	1773.0	1966.0	1263.0
		Type5	16	9	456884.0	20	1	62.1	1495.0	---	---
		Type5	16	19	112787.0	20	2	69.5	1038.0	1224.0	---
		Type5	16	18	563464.0	20	3	85.2	1732.0	1551.0	1189.0
		Type5	16	17	418579.0	20	3	91.9	1970.0	1978.0	1165.0
		Type5	16	16	274684.0	20	3	94.5	1296.0	1700.0	1283.0
		Type5	16	15	130832.0	20	1	59.0	1402.0	---	---
		Type5	16	14	584015.0	20	1	55.2	1644.0	---	---
		Type5	16	13	436922.0	20	3	95.8	1192.0	1298.0	1844.0
		Type5	16	8	310973.0	20	2	67.5	1764.0	1181.0	---
		Type5	16	11	147928.0	20	3	84.3	1593.0	1188.0	1788.0
		Type5	16	0	345766.0	20	3	87.6	1565.0	1055.0	1840.0
		Type5	16	7	165992.0	20	2	80.4	1824.0	1752.0	---
		Type5	16	6	21394.0	20	2	83.0	1080.0	1010.0	---
		Type5	16	5	474728.0	20	1	60.9	1540.0	---	---
		Type5	16	4	328777.0	20	2	76.5	1518.0	1485.0	---
		Type5	16	3	183923.0	20	2	77.9	1749.0	1460.0	---
		Type5	16	2	39073.0	20	3	84.8	1534.0	1889.0	1463.0
		Type5	16	1	490019.0	20	3	85.2	1735.0	1541.0	1408.0
		Type5	16	12	293225.0	20	2	76.9	1226.0	1537.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
	5500	Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
		Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
		Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
11AX40MI MO	5270	Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
		Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
		Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
	5510	Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
		Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
11AX80MI MO	5290	Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
		Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
		Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---

		Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
		Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
	5530	Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
		Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
	5250	Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---
		Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
		Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
		Type5	17	6	883823.0	10	2	69.1	1279.0	1639.0	---
		Type5	17	0	429224.0	10	3	86.4	1259.0	1918.0	1455.0
		Type5	17	1	670241.0	10	3	92.2	1598.0	1719.0	1895.0
11AX160MI MO	5570	Type5	17	2	912880.0	10	2	80.4	1816.0	1899.0	---
		Type5	17	3	158603.0	10	1	54.3	1335.0	---	---
		Type5	17	5	641915.0	10	2	69.4	1503.0	1546.0	---
		Type5	17	7	128373.0	10	3	100.0	1375.0	1438.0	1595.0
		Type5	17	8	370379.0	10	2	79.6	1239.0	1705.0	---
		Type5	17	9	611194.0	10	3	88.4	1374.0	1579.0	1623.0
		Type5	17	10	855665.0	10	1	53.3	1016.0	---	---
		Type5	17	11	98897.0	10	1	65.3	1709.0	---	---
		Type5	17	4	400824.0	10	1	53.1	1303.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
	5500	Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
11AX40MI MO	5270	Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
	5510	Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
		Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---

		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
11AX80MI MO	5290	Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
	5530	Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
11AX160MI MO	5250	Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---
		Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---
	5570	Type5	18	7	33519.0	12	3	90.3	1660.0	1853.0	1123.0
		Type5	18	0	292143.0	12	1	55.3	1920.0	---	---
		Type5	18	1	499633.0	12	1	58.3	1797.0	---	---
		Type5	18	2	706377.0	12	2	72.3	1610.0	1039.0	---
		Type5	18	3	58989.0	12	3	84.8	1131.0	1761.0	1721.0
		Type5	18	4	266161.0	12	2	82.5	1875.0	1431.0	---
		Type5	18	6	680544.0	12	2	80.0	1119.0	1913.0	---
		Type5	18	8	240319.0	12	3	91.1	1539.0	1783.0	1172.0
		Type5	18	9	447400.0	12	3	96.6	1525.0	1036.0	1385.0
		Type5	18	10	654516.0	12	2	82.7	1710.0	1990.0	---
		Type5	18	11	8083.0	12	1	50.7	1234.0	---	---
		Type5	18	12	215435.0	12	2	78.4	1047.0	1109.0	---

		Type5	18	13	421325.0	12	3	99.5	1299.0	1965.0	1869.0
		Type5	18	5	474469.0	12	1	63.3	1095.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
	5500	Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
		Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
11AX40MI MO	5270	Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
		Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
		Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
	5510	Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
11AX80MI MO	5290	Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---

		Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
		Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
	5530	Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
		Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
		Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
11AX160MI MO	5250	Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
	5570	Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	6	191373.0	10	3	88.4	1997.0	1077.0	1366.0
		Type5	19	0	733725.0	10	3	88.6	1501.0	1067.0	1927.0
		Type5	19	1	977882.0	10	1	57.4	1723.0	---	---
		Type5	19	2	221197.0	10	3	96.6	1086.0	1658.0	1324.0
		Type5	19	3	462915.0	10	2	69.7	1751.0	1945.0	---
		Type5	19	5	947923.0	10	1	62.0	1866.0	---	---
		Type5	19	7	432561.0	10	3	97.3	1790.0	1896.0	1367.0
		Type5	19	8	674004.0	10	3	96.2	1391.0	1787.0	1672.0
		Type5	19	9	915842.0	10	3	95.4	1020.0	1892.0	1414.0
		Type5	19	10	162176.0	10	1	54.8	1084.0	---	---
		Type5	19	11	403553.0	10	2	80.4	1850.0	1436.0	---
		Type5	19	4	705071.0	10	2	77.9	1642.0	1317.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
	5500	Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
11AX40MI MO	5270	Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
	5510	Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---

		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
11AX80MI MO	5290	Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
	5530	Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
11AX160MI MO	5250	Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0

	5570	Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	8	438554.0	15	2	79.0	1777.0	1960.0	---
		Type5	20	0	483470.0	15	2	74.7	1619.0	1611.0	---
		Type5	20	1	666072.0	15	1	57.1	1560.0	---	---
		Type5	20	2	98810.0	15	3	91.9	1392.0	1475.0	1276.0
		Type5	20	3	279914.0	15	2	83.1	1809.0	1772.0	---
		Type5	20	4	462536.0	15	1	50.7	1003.0	---	---
		Type5	20	5	642324.0	15	2	79.2	1574.0	1600.0	---
		Type5	20	7	257785.0	15	2	71.0	1521.0	1567.0	---
		Type5	20	9	620397.0	15	2	68.5	1284.0	1428.0	---
		Type5	20	10	54310.0	15	2	73.5	1904.0	1352.0	---
		Type5	20	11	235506.0	15	2	70.5	1864.0	1115.0	---
		Type5	20	12	417036.0	15	2	76.6	1045.0	1300.0	---
		Type5	20	13	597974.0	15	2	81.2	1160.0	1675.0	---
		Type5	20	14	32086.0	15	1	61.8	1277.0	---	---
		Type5	20	15	212751.0	15	3	94.9	1450.0	1206.0	1860.0
		Type5	20	6	76831.0	15	1	58.7	1186.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
	5500	Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
		Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
		Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
11AX40MI MO	5270	Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
	5510	Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
		Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
		Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
11AX80MI MO	5290	Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
		Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---

		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
	5530	Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
		Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
11AX160M IMO	5250	Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
	5570	Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	7	225249.0	9	1	61.6	1724.0	---	---
		Type5	21	0	526149.0	9	2	78.5	1653.0	1698.0	---
		Type5	21	1	767135.0	9	3	89.8	1174.0	1962.0	1167.0
		Type5	21	2	12955.0	9	1	59.4	1982.0	---	---
		Type5	21	3	254612.0	9	2	79.6	1633.0	1890.0	---
		Type5	21	4	496588.0	9	2	76.0	1112.0	1811.0	---
		Type5	21	6	980872.0	9	2	80.9	1220.0	1053.0	---
		Type5	21	8	467279.0	9	1	53.4	1901.0	---	---
		Type5	21	9	709720.0	9	1	59.9	1379.0	---	---
		Type5	21	10	951847.0	9	1	60.4	1453.0	---	---
		Type5	21	11	194839.0	9	3	91.4	1768.0	1726.0	1227.0
		Type5	21	5	739728.0	9	1	53.6	1144.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
	5500	Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
11AX40MI MO	5270	Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---

11AX80MI MO	5510	Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
	5510	Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
	5290	Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
	5530	Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
		Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0

		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
11AX160MI MO	5250	Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
	5570	Type5	22	10	514197.0	20	3	95.9	1659.0	1870.0	1066.0
		Type5	22	9	371906.0	20	1	57.9	1193.0	---	---
		Type5	22	19	27594.0	20	3	96.8	1760.0	1614.0	1817.0
		Type5	22	18	478825.0	20	3	93.2	1985.0	1018.0	1340.0
		Type5	22	17	335330.0	20	2	76.1	1557.0	1057.0	---
		Type5	22	16	189821.0	20	3	84.0	1765.0	1630.0	1176.0
		Type5	22	15	45553.0	20	2	70.0	1042.0	1664.0	---
		Type5	22	14	497515.0	20	2	70.5	1684.0	1586.0	---
		Type5	22	13	353638.0	20	1	57.3	1834.0	---	---
		Type5	22	8	225245.0	20	3	98.5	1839.0	1746.0	1389.0
		Type5	22	11	63561.0	20	1	53.5	1162.0	---	---
		Type5	22	0	261858.0	20	2	77.0	1191.0	1363.0	---
		Type5	22	7	81159.0	20	2	72.9	1922.0	1387.0	---
		Type5	22	6	531093.0	20	3	88.6	1693.0	1995.0	1905.0
		Type5	22	5	389464.0	20	1	52.0	1701.0	---	---
		Type5	22	4	243514.0	20	2	80.0	1914.0	1852.0	---
		Type5	22	3	99107.0	20	2	76.9	1334.0	1236.0	---
		Type5	22	2	552319.0	20	1	62.1	1836.0	---	---
		Type5	22	1	407646.0	20	1	58.1	1248.0	---	---
		Type5	22	12	207510.0	20	3	92.0	1745.0	1654.0	1458.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
		Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
	5500	Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
		Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
11AX40MI MO	5270	Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
	5510	Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
		Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
		Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---

		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
11AX80MI MO	5290	Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
	5530	Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
		Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
		Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
11AX160M IMO	5250	Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---
		Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---
	5570	Type5	23	7	843157.0	12	2	71.1	1329.0	1243.0	---
		Type5	23	0	247117.0	12	1	50.1	1841.0	---	---
		Type5	23	1	453362.0	12	3	93.5	1590.0	1081.0	1413.0
		Type5	23	2	660875.0	12	2	68.8	1707.0	1577.0	---
		Type5	23	3	14140.0	12	1	56.3	1056.0	---	---
		Type5	23	4	220734.0	12	3	86.0	1953.0	1108.0	1987.0
		Type5	23	6	636681.0	12	1	54.4	1517.0	---	---
		Type5	23	8	195585.0	12	2	76.2	1940.0	1770.0	---
		Type5	23	9	403231.0	12	2	80.2	1098.0	1209.0	---
		Type5	23	10	610202.0	12	2	79.7	1588.0	1214.0	---
		Type5	23	11	815229.0	12	3	90.9	1615.0	1862.0	1601.0
		Type5	23	12	170267.0	12	2	68.7	1377.0	1441.0	---

	Type5	23	13	377306.0	12	2	67.4	1872.0	1313.0	---
	Type5	23	5	428367.0	12	2	75.2	1572.0	1536.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
		Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
	5500	Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
11AX40MI MO	5270	Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
	5510	Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
		Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0

11AX80MI MO	5290	Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
		Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
	5530	Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
		Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
11AX160MI MO	5250	Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
	5570	Type5	24	7	351161.0	11	3	89.0	1493.0	1135.0	1380.0
		Type5	24	0	628071.0	11	3	94.0	1643.0	1748.0	1941.0
		Type5	24	1	853391.0	11	2	70.8	1177.0	1201.0	---
		Type5	24	2	156223.0	11	1	56.3	1006.0	---	---
		Type5	24	3	378734.0	11	3	96.7	1230.0	1163.0	1332.0
		Type5	24	4	601331.0	11	3	90.6	1217.0	1582.0	1498.0
		Type5	24	6	128265.0	11	3	92.6	1065.0	1669.0	1222.0
		Type5	24	8	573425.0	11	3	96.5	1607.0	1822.0	1602.0
		Type5	24	9	798431.0	11	2	70.5	1141.0	1178.0	---
		Type5	24	10	100737.0	11	3	94.0	1009.0	1629.0	1956.0
		Type5	24	11	324661.0	11	1	55.8	1290.0	---	---
		Type5	24	12	546278.0	11	3	87.7	1435.0	1963.0	1164.0
		Type5	24	5	825462.0	11	2	74.5	1569.0	1281.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
		Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
		Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
	5500	Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
		Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
		Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
11AX40MI MO	5270	Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
		Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
		Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
		Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
	5510	Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
		Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
		Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
		Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
11AX80MI MO	5290	Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
		Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
		Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
	5530	Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
		Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
		Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
11AX160MI MO	5250	Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
		Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---

		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
		Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
		Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
	5570	Type5	25	4	1208428.0	5	2	77.4	1793.0	1510.0	---
		Type5	25	0	1253842.0	5	2	68.6	1306.0	1161.0	---
		Type5	25	1	119486.0	5	2	83.1	1420.0	1315.0	---
		Type5	25	3	845641.0	5	2	77.7	1776.0	1158.0	---
		Type5	25	5	74748.0	5	2	66.8	1576.0	1323.0	---
		Type5	25	6	438300.0	5	1	63.7	1333.0	---	---
		Type5	25	7	800152.0	5	3	91.2	1409.0	1681.0	1275.0
		Type5	25	2	482958.0	5	1	60.9	1687.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
	5500	Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
11AX40MI MO	5270	Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
	5510	Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---

		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
11AX80MI MO	5290	Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
	5530	Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
11AX160MI MO	5250	Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---

		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
	5570	Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	9	675297.0	16	2	78.3	1591.0	1082.0	---
		Type5	26	8	504006.0	16	2	68.3	1750.0	1954.0	---
		Type5	26	16	461322.0	16	3	87.3	1931.0	1051.0	1831.0
		Type5	26	15	292606.0	16	1	63.6	1647.0	---	---
		Type5	26	14	121457.0	16	3	99.8	1035.0	1515.0	1120.0
		Type5	26	13	655022.0	16	1	63.3	1885.0	---	---
		Type5	26	12	482953.0	16	2	74.6	1959.0	1856.0	---
		Type5	26	7	333410.0	16	3	96.7	1589.0	1469.0	1268.0
		Type5	26	10	142890.0	16	1	55.0	1427.0	---	---
		Type5	26	0	545865.0	16	3	83.6	1632.0	1195.0	1000.0
		Type5	26	6	163568.0	16	2	67.5	1571.0	1434.0	---
		Type5	26	5	694806.0	16	3	97.7	1734.0	1202.0	1250.0
		Type5	26	4	526388.0	16	1	54.7	1825.0	---	---
		Type5	26	3	353759.0	16	3	90.9	1981.0	1554.0	1998.0
		Type5	26	2	184953.0	16	1	55.8	1532.0	---	---
		Type5	26	1	14067.0	16	3	89.4	1173.0	1627.0	1656.0
		Type5	26	11	312479.0	16	3	84.9	1129.0	1936.0	1199.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
	5500	Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
11AX40MI MO	5270	Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---

	5510	Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
11AX80MI MO	5290	Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
		Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
	5530	Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---

11AX160MI MO		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
	5250	Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
		Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
	5570	Type5	27	10	204582.0	19	3	88.1	1023.0	1124.0	1631.0
		Type5	27	9	52247.0	19	3	85.8	1847.0	1348.0	1472.0
		Type5	27	18	167387.0	19	2	81.5	1491.0	1103.0	---
		Type5	27	17	14858.0	19	1	60.4	1758.0	---	---
		Type5	27	16	491053.0	19	2	76.2	1376.0	1502.0	---
		Type5	27	15	339327.0	19	1	54.9	1479.0	---	---
		Type5	27	14	186023.0	19	2	74.1	1915.0	1200.0	---
		Type5	27	13	33698.0	19	1	52.3	1312.0	---	---
		Type5	27	8	527806.0	19	3	87.5	1216.0	1448.0	1179.0
		Type5	27	11	357941.0	19	1	65.3	1848.0	---	---
		Type5	27	0	565136.0	19	3	85.6	1946.0	1078.0	1015.0
		Type5	27	7	376127.0	19	2	80.2	1126.0	1769.0	---
		Type5	27	6	224093.0	19	1	62.4	1655.0	---	---
		Type5	27	5	70998.0	19	3	98.3	1142.0	1699.0	1622.0
		Type5	27	4	546225.0	19	3	97.1	1157.0	1969.0	1100.0
		Type5	27	3	396034.0	19	1	61.2	1104.0	---	---
		Type5	27	2	243121.0	19	1	54.2	1111.0	---	---
		Type5	27	1	89970.0	19	2	68.6	1029.0	1780.0	---
		Type5	27	12	510977.0	19	1	52.5	1470.0	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
		Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
	5500	Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
11AX40MI MO	5270	Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
		Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
		Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
		Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
	5510	Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
		Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
11AX80MI MO	5290	Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
		Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0

		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
		Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
	5530	Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
		Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
		Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
		Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
11AX160MI MO	5250	Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
	5570	Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
		Type5	28	6	960895.0	10	2	78.1	1301.0	1757.0	---
		Type5	28	0	507709.0	10	1	50.5	1857.0	---	---
		Type5	28	1	750249.0	10	1	55.7	1246.0	---	---
		Type5	28	2	989003.0	10	3	85.8	1774.0	1002.0	1967.0
		Type5	28	3	235634.0	10	2	76.9	1125.0	1474.0	---
		Type5	28	5	718312.0	10	3	92.3	1180.0	1486.0	1492.0
		Type5	28	7	205370.0	10	3	92.2	1898.0	1252.0	1713.0
		Type5	28	8	446940.0	10	3	89.0	1260.0	1706.0	1411.0
		Type5	28	9	689225.0	10	2	70.9	1578.0	1620.0	---
		Type5	28	10	932305.0	10	1	63.1	1782.0	---	---
		Type5	28	11	176231.0	10	1	55.3	1522.0	---	---
		Type5	28	4	477675.0	10	2	75.1	1254.0	1052.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MI MO	5260	Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
		Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
	5500	Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
11AX40MI MO	5270	Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0

	5510	Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
11AX80MI MO	5290	Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
		Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
	5530	Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
11AX160MI MO	5250	Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---

		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
		Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
	5570	Type5	29	9	398605.0	17	3	93.5	1867.0	1373.0	1087.0
		Type5	29	8	238032.0	17	3	91.1	1105.0	1599.0	1442.0
		Type5	29	17	359754.0	17	2	81.0	1326.0	1668.0	---
		Type5	29	16	198794.0	17	2	76.0	1733.0	1255.0	---
		Type5	29	15	37916.0	17	1	65.7	1496.0	---	---
		Type5	29	14	540896.0	17	2	81.4	1096.0	1464.0	---
		Type5	29	13	379234.0	17	2	79.4	1933.0	1667.0	---
		Type5	29	12	219083.0	17	1	61.8	1585.0	---	---
		Type5	29	7	77366.0	17	3	86.5	1054.0	1128.0	1828.0
		Type5	29	10	562025.0	17	1	60.7	1033.0	---	---
		Type5	29	0	277485.0	17	3	83.4	1454.0	1205.0	1801.0
		Type5	29	6	580724.0	17	2	80.0	1253.0	1137.0	---
		Type5	29	5	419893.0	17	1	59.5	1952.0	---	---
		Type5	29	4	257251.0	17	3	98.2	1876.0	1977.0	1766.0
		Type5	29	3	97088.0	17	3	91.8	1563.0	1151.0	1802.0
		Type5	29	2	598445.0	17	3	90.4	1079.0	1986.0	1674.0
		Type5	29	1	437880.0	17	3	97.3	1319.0	1826.0	1635.0
		Type5	29	11	57684.0	17	2	67.2	1288.0	1405.0	---

Test Mode	Frequency [MHz]	Radar Type	Trial ID	Pulse width (μs)	PRI (μs)	Pulses per Hop	Detection (1: Yes; 0: No)
11AX20MI MO	5260	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
	5500	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1

11AX40MI MO		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
	5270	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
	5510	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1

		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
11AX80MI MO	5290	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
	5530	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1

11AX160MI MO		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
	5250	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
	5570	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1

	Type6	15	1	333.3	9	1
	Type6	16	1	333.3	9	1
	Type6	17	1	333.3	9	1
	Type6	18	1	333.3	9	1
	Type6	19	1	333.3	9	1
	Type6	20	1	333.3	9	1
	Type6	21	1	333.3	9	1
	Type6	22	1	333.3	9	1
	Type6	23	1	333.3	9	1
	Type6	24	1	333.3	9	1
	Type6	25	1	333.3	9	1
	Type6	26	1	333.3	9	1
	Type6	27	1	333.3	9	1
	Type6	28	1	333.3	9	1
	Type6	29	1	333.3	9	1

Bridge Mode:

Test Mode	Frequency [MHz]	Radar Type	Trial ID	Pulse width(μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11AX160MI MO	5570	Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1
		Type2	13	2.2	197.0	25	1
		Type2	14	4.5	163.0	29	1
		Type2	15	3.0	203.0	26	1
		Type2	16	5.0	168.0	29	0
		Type2	17	2.4	217.0	25	1
		Type2	18	2.9	191.0	26	1
		Type2	19	2.3	166.0	25	1
		Type2	20	3.7	150.0	27	1
		Type2	21	2.2	176.0	25	1
		Type2	22	4.9	195.0	29	1
		Type2	23	2.9	202.0	26	1
		Type2	24	2.5	178.0	25	0
		Type2	25	1.1	206.0	23	1
		Type2	26	3.8	155.0	27	1
		Type2	27	4.7	157.0	29	1
		Type2	28	2.4	224.0	25	1
		Type2	29	4.2	159.0	28	1

***** END OF REPORT *****