




Test Data


Maximm Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant3	7.984	30	Pass
NVNT	BLE	2442	Ant3	7.95	30	Pass
NVNT	BLE	2480	Ant3	7.002	30	Pass



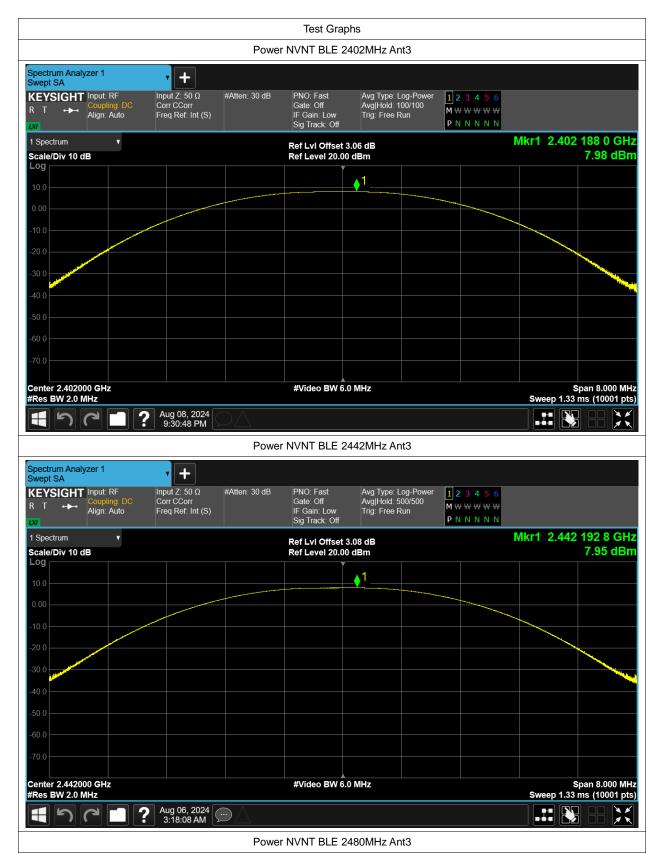



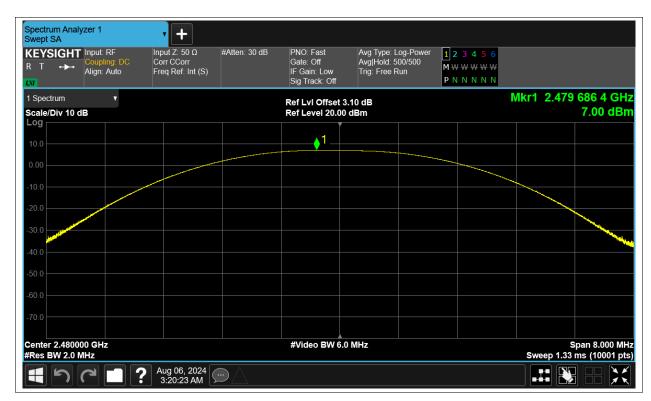






-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant3	0.598	0.5	Pass
NVNT	BLE	2442	Ant3	0.598	0.5	Pass
NVNT	BLE	2480	Ant3	0.599	0.5	Pass







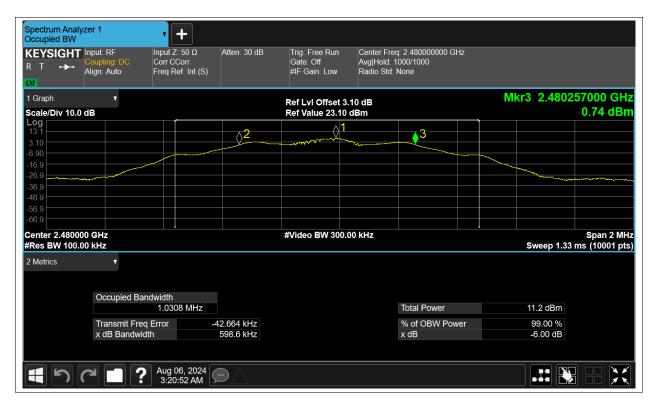





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant3	1.047	
NVNT	BLE	2442	Ant3	1.045	
NVNT	BLE	2480	Ant3	1.045	













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant3	1.866	8	Pass
NVNT	BLE	2442	Ant3	1.823	8	Pass
NVNT	BLE	2480	Ant3	0.858	8	Pass















Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant3	-62.41	-20	Pass
NVNT	BLE	2480	Ant3	-56.35	-20	Pass



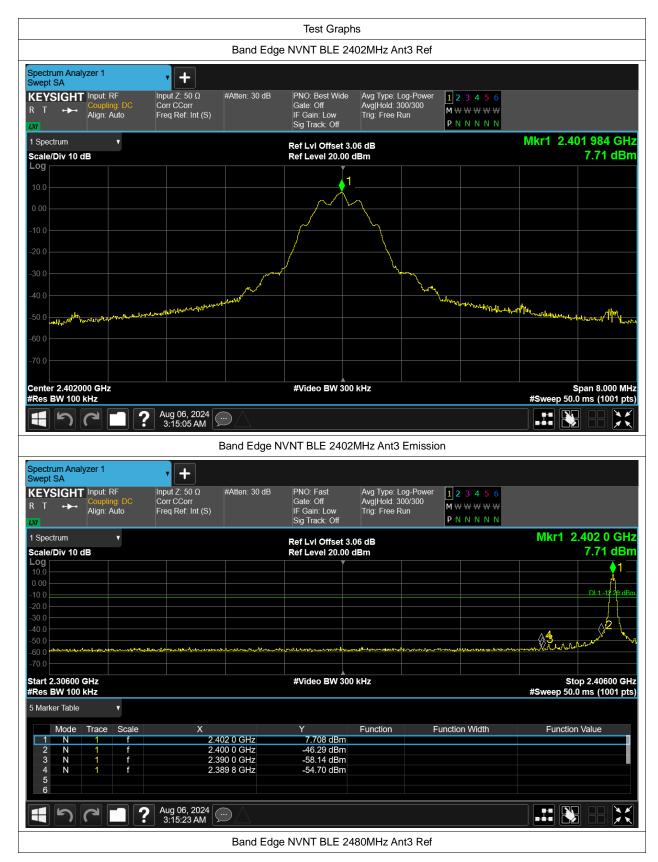



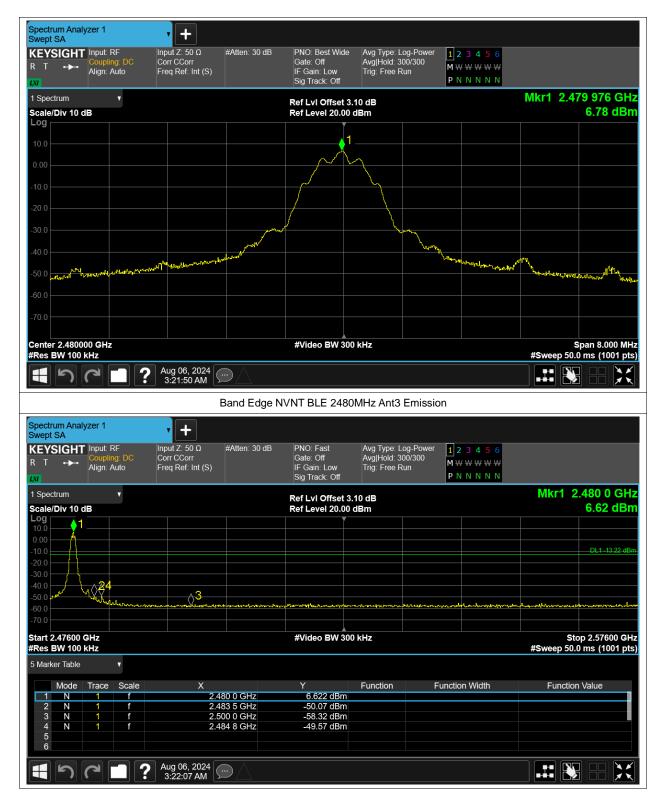





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant3	-56.92	-20	Pass
NVNT	BLE	2442	Ant3	-57.04	-20	Pass
NVNT	BLE	2480	Ant3	-55.99	-20	Pass









Tx. Spurious NVNT BLE 2480MHz Ant3 Ref



