

FCC SAR TEST REPORT

FCC ID : B94HNC09CTKR
Equipment : Convertible PC
Brand Name : HP
Model Name : HSN-C09C
Applicant : HP Inc.
3390 East Harmony Road, Fort Collins, Colorado, United States 80528
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Sep 10, 2020 and testing was started from Oct. 22, 2020 and completed on Nov. 20, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.


Approved by: Cona Huang / Deputy Manager



SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	5
3. Equipment Under Test (EUT) Information.....	5
3.1 General Information	5
3.2 General LTE SAR Test and Reporting Considerations	8
3.3 General 5G NR SAR Test and Reporting Considerations	11
4. Sensor Detection Evaluated	13
4.1 Proximity Sensor.....	13
5. Smart Transmit feature for RF Exposure compliance.....	19
6. RF Exposure Limits.....	22
6.1 Uncontrolled Environment.....	22
6.2 Controlled Environment.....	22
7. Specific Absorption Rate (SAR).....	23
7.1 Introduction	23
7.2 SAR Definition.....	23
8. System Description and Setup	24
8.1 Test Site Location.....	24
8.2 E-Field Probe	25
8.3 Data Acquisition Electronics (DAE)	25
8.4 Phantom.....	26
8.5 Device Holder.....	27
9. Measurement Procedures	28
9.1 Spatial Peak SAR Evaluation	28
9.2 Power Reference Measurement.....	29
9.3 Area Scan	29
9.4 Zoom Scan.....	30
9.5 Volume Scan Procedures.....	30
9.6 Power Drift Monitoring.....	30
10. Test Equipment List.....	31
11. System Verification	32
11.1 Tissue Verification	32
11.2 System Performance Check Results.....	33
12. RF Exposure Positions	34
12.1 SAR Testing for Tablet.....	34
13. UMTS/LTE Output Power (Unit: dBm)	35
14. 5G NR Output Power (Unit: dBm)	126
15. Antenna Location	139
16. SAR Test Results	143
16.1 Body SAR	145
16.2 Repeated SAR Measurement	154
16.3 LTE Band 41 Power Class 2 and Power Class 3 Linearity	154
17. Simultaneous Transmission Analysis.....	155
17.1 5G NR + LTE + WLAN + BT Sim-Tx analysis.....	156
17.2 Body Exposure Conditions	157
17.3 SPLSR Evaluation and Analysis.....	159
18. Uncertainty Assessment	169
19. References.....	169
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA082123-01	01	Initial issue of report	Dec. 19, 2020

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **HP Inc., Convertible PC, HSN-C09C**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary	Highest Simultaneous Transmission 1g SAR (W/kg)
		Body	
		1g SAR (W/kg)	
Licensed	WCDMA II	1.18	1.59
	WCDMA IV	1.13	
	WCDMA V	1.20	
	LTE Band 2	1.13	
	LTE Band 5	1.15	
	LTE Band 7	1.19	
	LTE Band 12 / 17	1.10	
	LTE Band 13	1.17	
	LTE Band 14	1.18	
	LTE Band 25	1.17	
	LTE Band 26	1.14	
	LTE Band 30	1.18	
	LTE Band 38 / 41	1.19	
	LTE Band 42 / 48	1.19	
	LTE Band 4 / 66	1.20	
	FR1 n2	1.19	
	FR1 n5	1.07	
	FR1 n7	1.18	
	FR1 n12	1.15	
	FR1 n41	1.19	
	FR1 n66	1.20	
Date of Testing:		2020/10/22–2020/11/20	

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Daisy Peng



2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Convertible PC
Brand Name	HP
Model Name	HSN-C09C
FCC ID	B94HNC09CTKR
Integrated WWAN Module	Brand Name: FOXCONN Model Name: T99W175
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz → IC no LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 41: 2500 MHz ~ 2690 MHz for IC LTE Band 42: 3550 MHz ~ 3600 MHz IC no LTE Band 48: 3550 MHz ~ 3700 MHz IC no LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/HE20/HE40/HE80 Bluetooth BR/EDR/LE
EUT Stage	Production Unit
Remark: 1. The WLAN/BT module of Murata LBEE58D1VF is also integrated in the same host, the 2.4GHz/5 GHz WLAN and Bluetooth SAR results are referenced from SAR report, report number: FA001919 (FCC ID: B94-C09CWLM) and these SAR results are also used to perform simultaneous transmission analysis.	

WLAN Antenna Information_NB Mode			
Antenna Part Number	Manufacture	Antenna Type	Peak Gain (dBi)
260-24315 (DC33002FX20)	HONG-BO	Couple	2400-2500MHz -2.40 dBi (peak)
			5150-5350MHz -4.28 dBi (peak)
			5470-5725MHz -3.23 dBi (peak)
			5725-5850MHz -3.34 dBi (peak)
260-24315 (DC33002FX20)	HONG-BO	Couple	2400-2500MHz -3.14 dBi (peak)
			5150-5350MHz -1.51 dBi (peak)
			5470-5725MHz -5.06 dBi (peak)
			5725-5850MHz -6.14 dBi (peak)

WLAN Antenna Information_TB Mode			
Antenna Part Number	Manufacture	Antenna Type	Peak Gain (dBi)
260-24315 (DC33002FX20)	HONG-BO	Couple	2400-2500MHz -0.27 dBi (peak)
			5150-5350MHz -3.44 dBi (peak)
			5470-5725MHz -1.80 dBi (peak)
			5725-5850MHz -6.96 dBi (peak)
260-24315 (DC33002FX20)	HONG-BO	Couple	2400-2500MHz 0.00 dBi (peak)
			5150-5350MHz -6.93 dBi (peak)
			5470-5725MHz -5.64 dBi (peak)
			5725-5850MHz -6.11 dBi (peak)

WWAN Antenna Information_NB Mode			
Antenna Part Number	Manufacture	Antenna Type	Peak Gain (dBi)
Tx1 Main Antenna 260-24315 (DC33002FX20)	HONG-BO	PIFA	824-849MHz -5.33 dBi (peak)
			880-915MHz -5.19 dBi (peak)
			1710-1785MHz -3.50 dBi (peak)
			1850-1910MHz -1.81 dBi (peak)
			1920-1980MHz -0.23 dBi (peak)
			704-716MHz -5.56 dBi (peak)
			746-756MHz -3.93 dBi (peak)
			777-787MHz -5.35 dBi (peak)
			832-862MHz -4.85 dBi (peak)
			1710-1755MHz -4.61 dBi (peak)
			2500-2570MHz -1.34 dBi (peak)
			2570-2620MHz -3.21 dBi (peak)
			2300-2400MHz 0.40 dBi (peak)
Rx2(Aux) Antenna 260-24315 (DC33002FX20)	HONG-BO	PIFA	869-894MHz -5.76 dBi (peak)
			925-960MHz -6.32 dBi (peak)
			1805-1880MHz -0.89 dBi (peak)
			1930-1990MHz -2.70 dBi (peak)
			2110-2170MHz -0.66 dBi (peak)
			734-746MHz -2.85 dBi (peak)
			746-756MHz -2.74 dBi (peak)
			791-821MHz -2.78 dBi (peak)
			2132-2155MHz -0.85 dBi (peak)
			2620-2690MHz -7.89 dBi (peak)
			2570-2620MHz -5.26 dBi (peak)
			2300-2400MHz -4.47 dBi (peak)

WWAN Antenna Information_TB Mode			
Antenna Part Number	Manufacture	Antenna Type	Peak Gain loss (dBi)
Tx1 Main Antenna 260-24315 (DC33002FX20)	HONG-BO	PIFA	824-849MHz -4.92 dBi (peak)
			880-915MHz -5.52 dBi (peak)
			1710-1785MHz -0.09 dBi (peak)
			1850-1910MHz -0.45 dBi (peak)
			1920-1980MHz -0.17 dBi (peak)
			704-716MHz -8.11 dBi (peak)
			746-756MHz -7.17 dBi (peak)
			777-787MHz -6.54 dBi (peak)
			832-862MHz -4.92 dBi (peak)
			1710-1755MHz -0.31 dBi (peak)
			2500-2570MHz -3.24dBi (peak)
			2570-2620MHz -3.24 dBi (peak)
			2300-2400MHz -0.58 dBi (peak)
			869-894MHz -6.55 dBi (peak)
Rx2(Aux) Antenna 260-24315 (DC33002FX20)	HONG-BO	PIFA	925-960MHz -11.41 dBi (peak)
			1805-1880MHz -1.34 dBi (peak)
			1930-1990MHz -0.94 dBi (peak)
			2110-2170MHz -0.26 dBi (peak)
			734-746MHz -8.16 dBi (peak)
			746-756MHz -6.21 dBi (peak)
			791-821MH -3.36 dBi (peak)
			2132-2155MHz -2.31 dBi (peak)
			2620-2690MHz -7.03 dBi (peak)
			2570-2620MHz -5.03 dBi (peak)
			2300-2400MHz -1.65 dBi dBi (peak)

3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																							
FCC ID	B94HNC09CTKR																																																																						
Equipment Name	Convertible PC																																																																						
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42:3550 MHz ~ 3600 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz																																																																						
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 42: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																																						
uplink modulations used	QPSK / 16QAM / 64QAM																																																																						
LTE Voice / Data requirements	Data only																																																																						
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																							
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																
256 QAM	≥ 1						≤ 5																																																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																						
Power reduction applied to satisfy SAR compliance	Yes, Proximity Sensor.																																																																						
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 13.																																																																						
LTE Carrier Aggregation Additional Information	This device supports maximum of 6 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																						

Transmission (H, M, L) channel numbers and frequencies in each LTE band														
LTE Band 2														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860		
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880		
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900		
LTE Band 4														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720		
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5		
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745		
LTE Band 5														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20407	824.7	20415	825.5	20425	826.5	20450	829						
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5						
H	20643	848.3	20635	847.5	20625	846.5	20600	844						
LTE Band 7														
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510						
M	21100	2535	21100	2535	21100	2535	21100	2535						
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560						
LTE Band 12														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	23017	699.7	23025	700.5	23035	701.5	23060	704						
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5						
H	23173	715.3	23165	714.5	23155	713.5	23130	711						
LTE Band 13														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)							
L	23205		779.5		23230		782							
M	23230		782											
H	23255		784.5											
LTE Band 14														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Channel #		Channel #		Freq.(MHz)							
L	23305		790.5		23330		793							
M	23330		793											
H	23355		795.5											
LTE Band 17														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)							
L	23755		706.5		23780		709							
M	23790		710		23790		710							
H	23825		713.5		23800		711							
LTE Band 25														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860		

M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 30												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #			Freq.(MHz)		Channel #				Freq.(MHz)		
L	27685			2307.5		27710				2310		
M	27710			2310								
H	27735			2312.5								
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 42												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	43315	3552.5	43140	3555	43165	3557.5	43190	3560				
M	43340	3575	43340	3575	43340	3575	43340	3575				
H	43565	3597.5	43540	3595	43515	3592.5	43490	3590				
LTE Band 48												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560				
L	55810	3607	55815	3607.5	55820	3608	55830	3609				
M	56170	3643	56165	3642.5	56160	3642	56150	3641				
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690				

3.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information								
FCC	B94HNC09CTKR							
Equipment Name	Convertible PC							
Operating Frequency Range of each 5G NR transmission band	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz							
Channel Bandwidth	5G NR n2: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n5: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n7: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n12: 5MHz, 10MHz, 15MHz 5G NR n41: 20MHz, 40MHz, 50MHz, 60MHz, 80MHz, 90MHz, 100MHz 5G NR n66: 5MHz, 10MHz, 15MHz, 20MHz							
SCS	FDD: SCS15KHz, TDD: SCS30KHz							
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM QPSK / 16QAM / 64QAM / 256QAM							
A-MPR (Additional MPR) disabled for SAR Testing?	Yes							
LTE Anchor Bands for n2	LTE B5/12/13/30/48/66							
LTE Anchor Bands for n5	LTE B2/7/12/48/66							
LTE Anchor Bands for n7	LTE B5/12							
LTE Anchor Bands for n12	LTE B2/66							
LTE Anchor Bands for n41	LTE B2/25/26/66							
LTE Anchor Bands for n66	LTE B5/12/13/30/48/71							
Transmission (H, M, L) channel numbers and frequencies in each 5G NR band								
NR Band 2								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860
M	376000	1880	376000	1880	376000	1880	376000	1880
H	381500	1907.5	381000	1905	380500	1902.5	380000	1900
NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839
NR Band 7								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510
M	507000	2535	507000	2535	507000	2535	507000	2535
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560

NR Band 12														
	Bandwidth 5MHz				Bandwidth 10MHz				Bandwidth 15MHz					
	Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)			
L	140300		701.5		140800		704		141300		706.5			
M	141500		707.5		141500		707.5		141500		707.5			
H	142700		713.5		142200		711		141700		708.5			
NR Band 41														
	Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	501204	2506.02	503202	2516.01	504204	2521.02	505200	2526	507204	2536.02	508200	2541	509202	2546.01
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99
H	535998	2679.99	534000	2670	532998	2664.99	531996	2659.98	529998	2649.99	528996	2644.98	528000	2640
NR Band 66														
	Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz				
	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)			
L	342500	1712.5		343000	1715		343500	1717.5		344000	1720			
M	349000	1745		349000	1745		349000	1745		349000	1745			
H	355500	1777.5		355000	1775		354500	1772.5		354000	1770			

4. Sensor Detection Evaluated


4.1 Proximity Sensor

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

For the device is fully integrated, touch sensing capacitive sensor. It uses a charge transfer capacitive acquisition method that is capable of near range proximity detection. In this device offers a state of the art capacitive sensing engine with an embedded sampling capacitor and voltage regulator allowing the overall solution cost to be reduced and improving system immunity in noisy environments.

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed. The details are illustrated as following, and the shortest triggering distances were reported and used for SAR assessment.

In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.

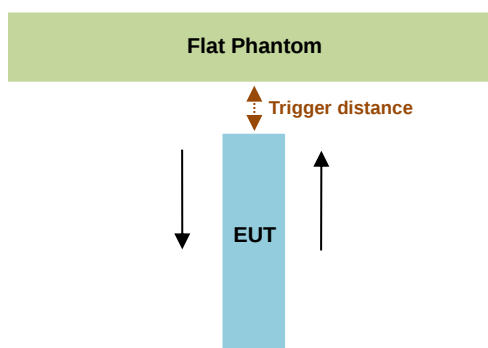


Proximity Sensor Trigger Distance (mm)						
Position	Bottom of Laptop		Bottom Face		Edge 1	
	moving toward	moving away	moving toward	moving away	moving toward	moving away
Minimum	18	16	25	18	28	23

<Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

Since the antenna and sensor are collocated and all of the peak SAR location is overlapping with the sensor pad for this device, therefore, According to KDB 616217 section6.3, these procedures do not apply and are not required for Moving towards and Moving away due to the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor on this device.

<Tablet Tilt angle influences to proximity sensor triggering (KDB 616217 D04 section 6.4)>:

The influence of table tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at above separation distance. Rotating the tablet around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ from the vertical position at 0° , and the maximum output power remains in the reduced mode.

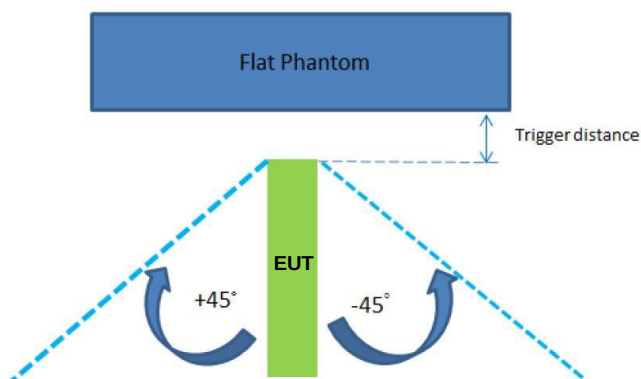



The Sensor Trigger Distance (mm)	
Position	Edge 1
Minimum	23



Proximity sensor power reduction



Exposure Position / wireless mode	Bottom face ⁽¹⁾ / Bottom of Laptop / Edge 1
WCDMA Band II Main	6.8 dB
WCDMA Band IV Main	6.9 dB
WCDMA Band V Main	2.7 dB
LTE Band 5 Main	2.7 dB
LTE Band 7 Main	8.1 dB
LTE Band 12 Main / 17 Main	3.5 dB
LTE Band 13 Main	2.7 dB
LTE Band 14 Main	3.7 dB
LTE Band 2 Main / 25 Main	7.3 dB
LTE Band 26 Main	2.7 dB
LTE Band 30 Main	6.1 dB
LTE Band 38 Main / 41 Main	5.1 dB
LTE Band 41_HPUE	6.5 dB
LTE Band 4 Main / 66 Main	6.4 dB
FR1 n2 Main	6.4 dB
FR1 n5 Main	2.2 dB
FR1 n12 Main	0.2 dB
FR1 n66 Main	6.3 dB

Remark:

- ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.
- The proximity sensor only applied at WWAN main antenna
- Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown as below
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a trigger distance -1 was performed:
 - Bottom Face: [17 mm](#)
 - Bottom of Laptop: [15 mm](#)
 - Edge1: [22 mm](#)

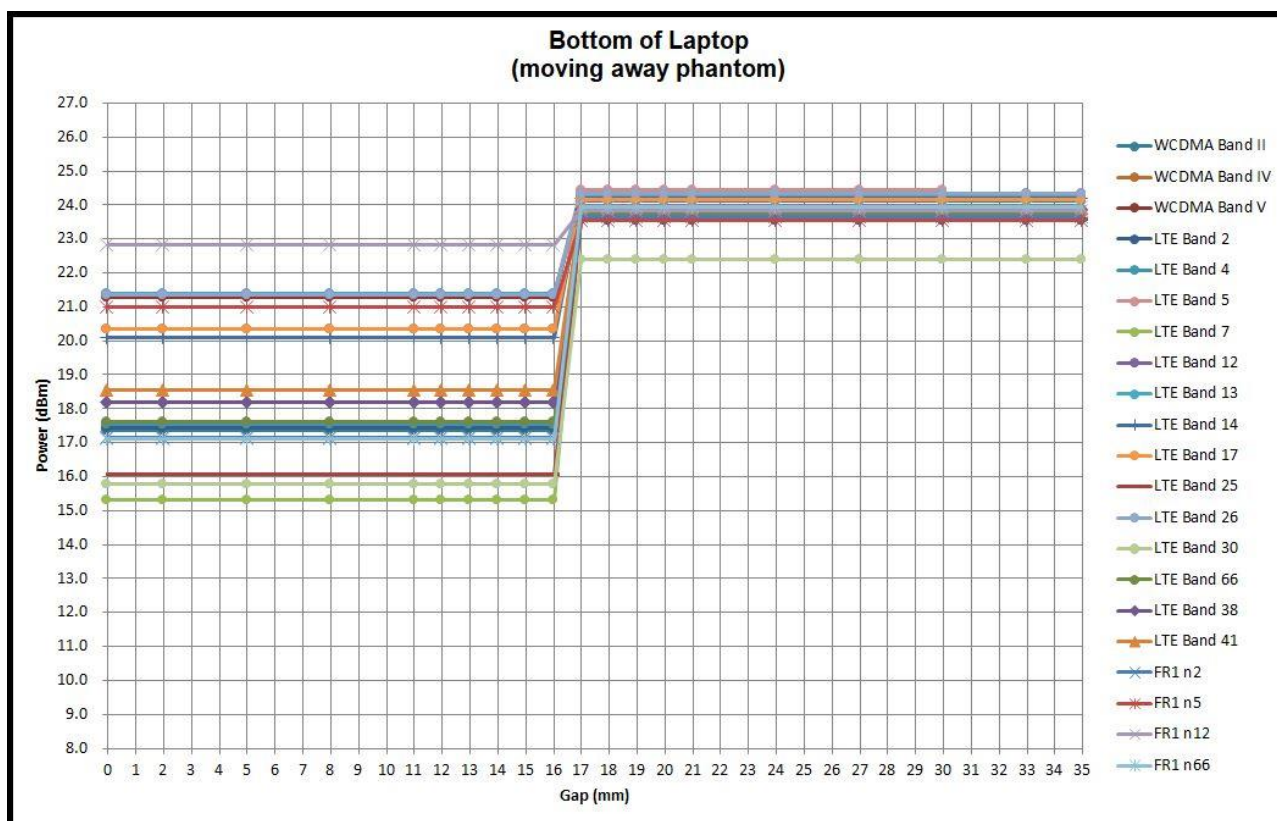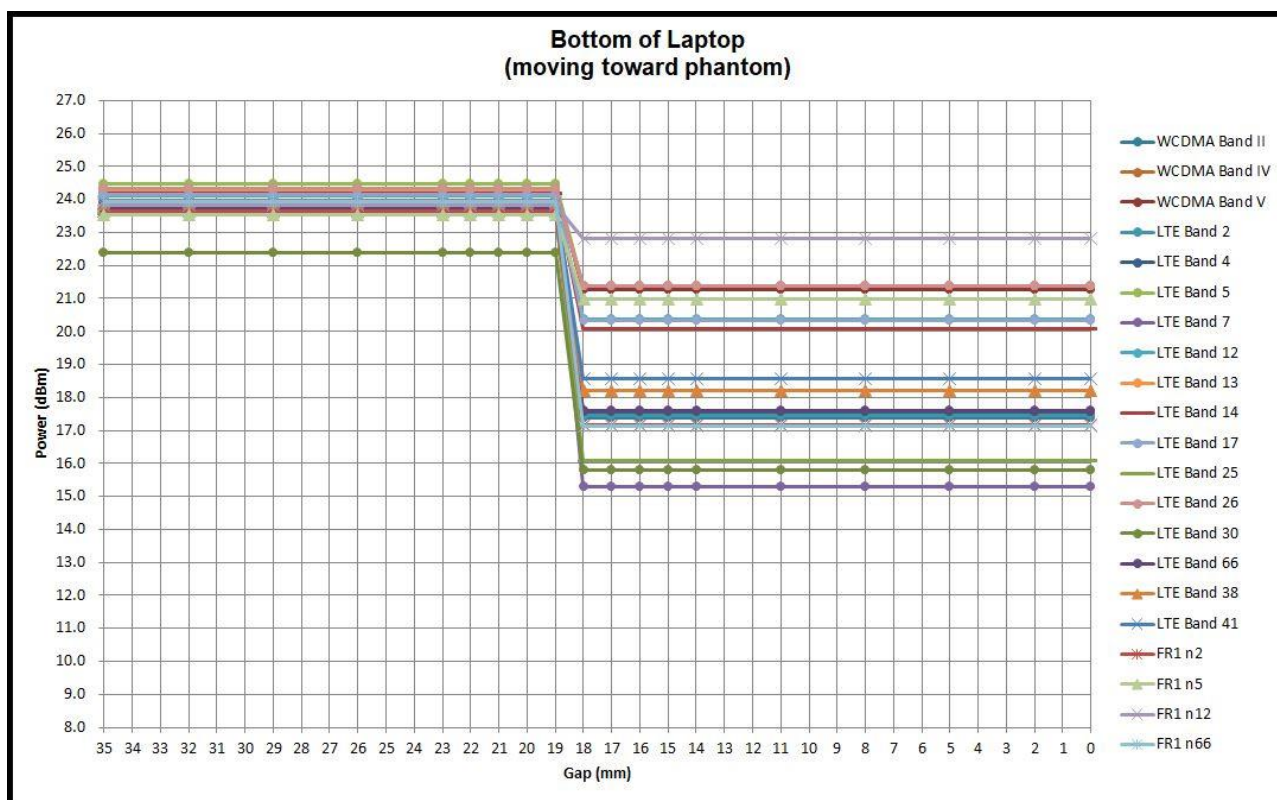Power Measurement during Sensor Trigger distance testing

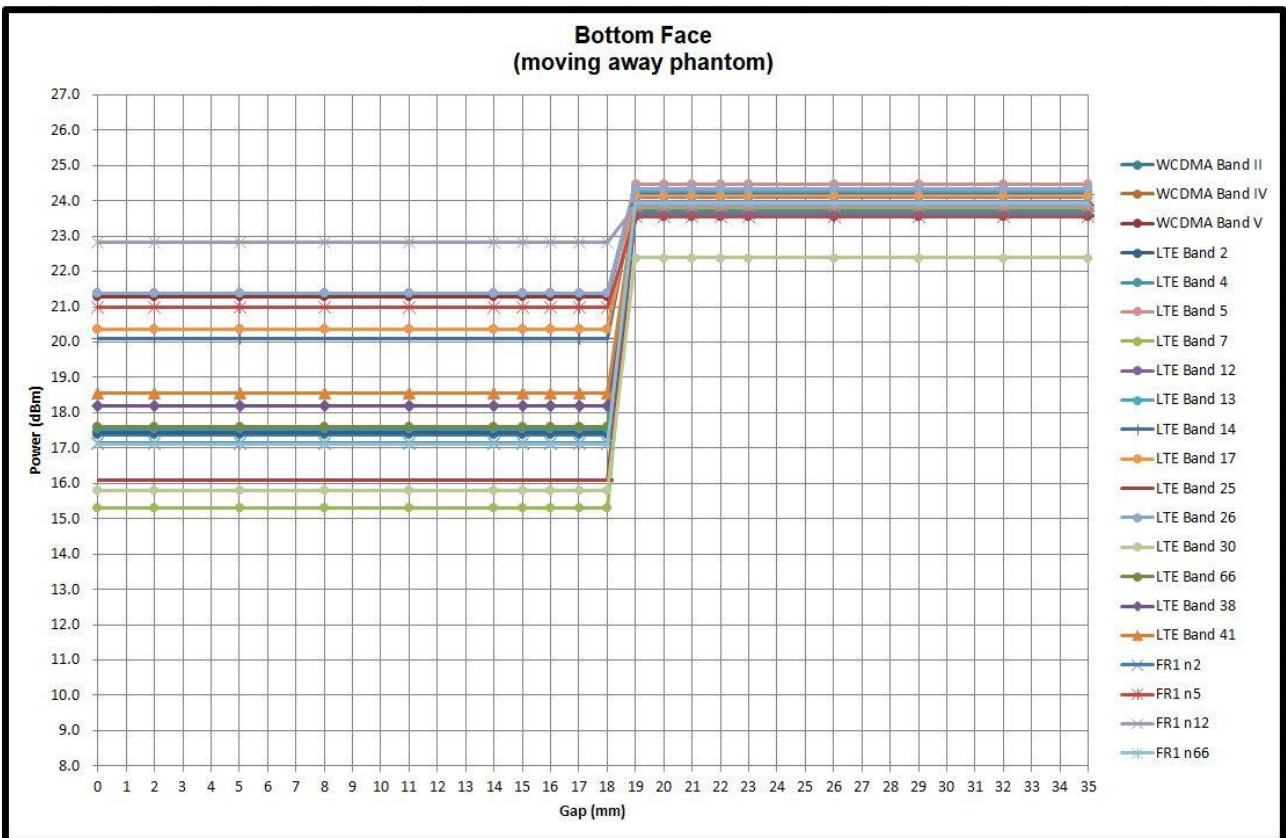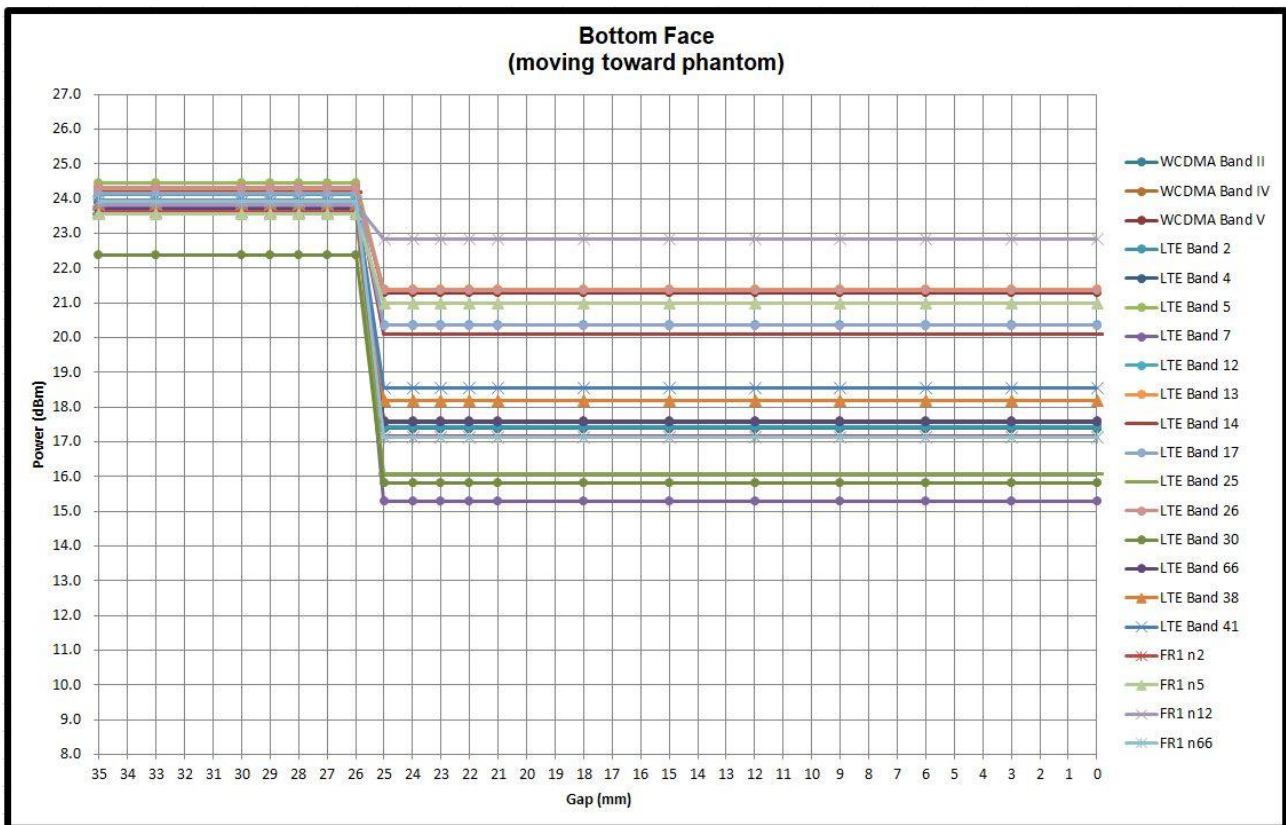

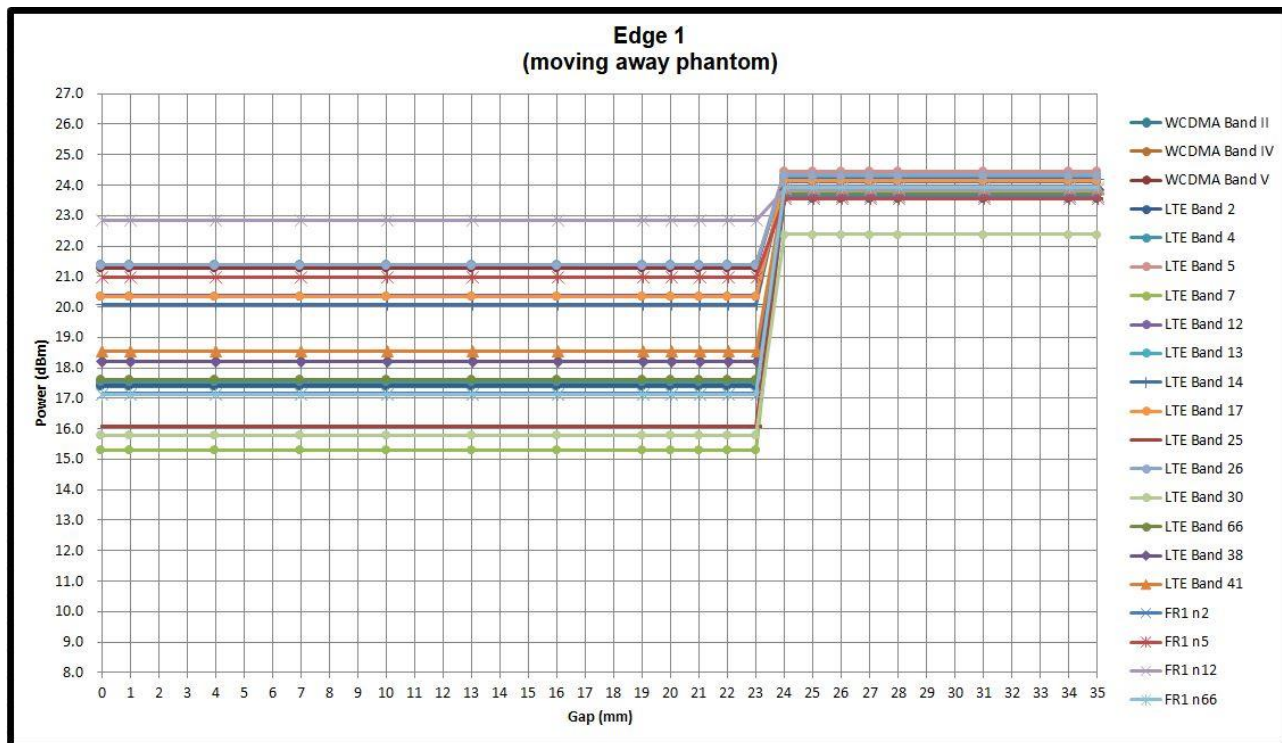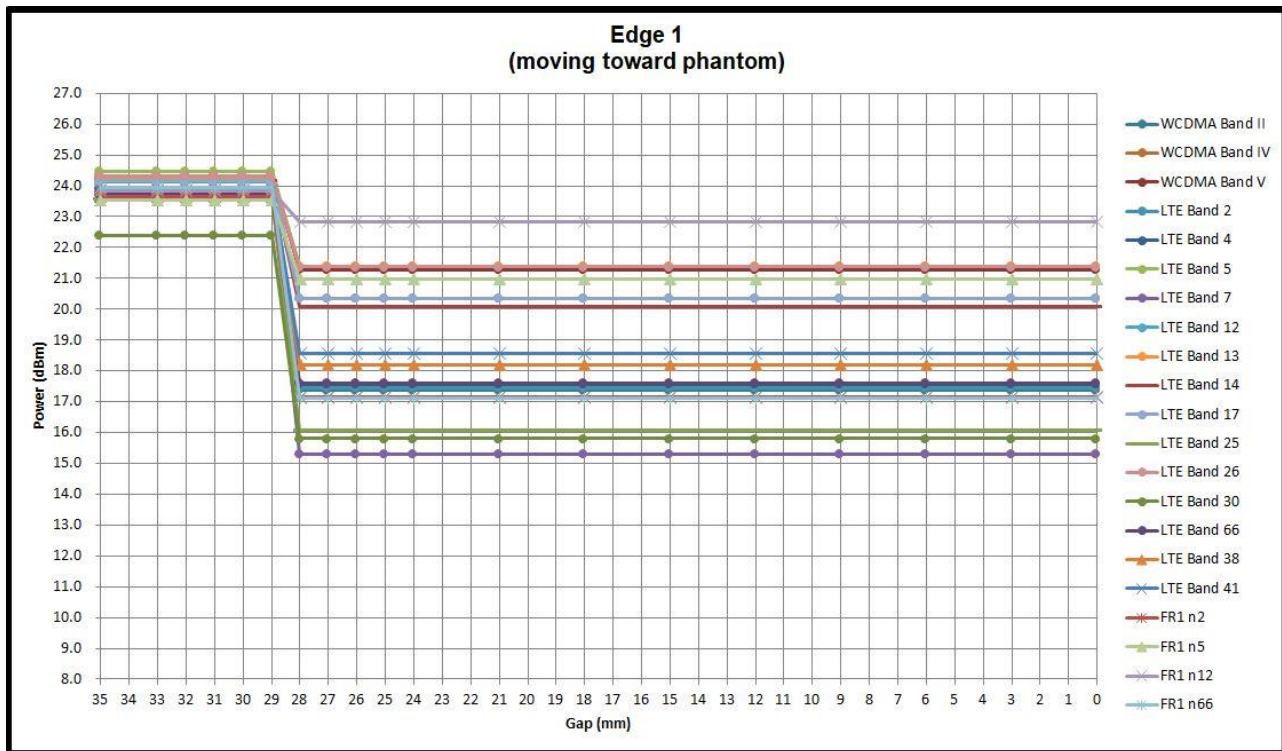


5. Smart Transmit feature for RF Exposure compliance

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target or PD_design_target, below the predefined time-averaged power limit (i.e., input.power.limit for 5G mmW NR), for each characterized technology and band (refer to RF exposure part0 report)

Smart Transmit allows the device to transmit at higher power instantaneously, as high as P_{max}, when needed, but enforces power limiting to maintain time-averaged transmit power to P_{limit}. Below table shows P_{limit} EFS settings and maximum tune up output power P_{max} configured for this EUT for various transmit conditions (Device State Index DSI).

<Terminologies in this report>

P _{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P _{max}	Maximum tune-up power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory power density limit to account for all device design related uncertainties.
SAR char	P _{limit} for all the technologies/bands for all applicable DSI

<SAR Characterization>

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at 6 GHz or below. It will then be used as input for Smart Transmit to control and manage RF exposure for f < 6 GHz.

<SAR design target and uncertainty>

Sensor	DSI	Antenna	SAR design target	W/kg
Sensor OFF	1	Main	1g SAR design target	0.95
Sensor ON	2	Main	1g SAR design target	0.95
NA	2	Aux	1g SAR design target	0.95

	Uncertainty dB (k=2)
Total uncertainty	1.0

To account for total uncertainty, SAR_design_target should be determined as:

$$SAR_{design_target} < SAR_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target, below the predefined time-averaged power limit, for each characterized technology and band.

Smart Transmit allows the device to transmit at higher power instantaneously, as high as Pmax, when needed, but enforces power limiting to maintain time-averaged transmit power to Plimit. Below table shows Plimit EFS settings and maximum tune up output power Pmax configured for this EUT for various transmit conditions (Device State Index DSI).

<P_{limit} for supported technologies and bands (P_{limit} in EFS file)>

Band	Antenna	P _{limit} *	P _{limit} *	P _{max} * (dBm)
		Sensor OFF DSI:1 (dBm)	Sensor ON DSI:2 (dBm)	
WCDMA II	Main	30.5	16.7	23.5
WCDMA IV	Main	29.5	16.6	23.5
WCDMA V	Main	34.2	20.8	23.5
LTE B2 & 25	Main	30.9	15.7	23.0
LTE B4 & 66	Main	29.0	16.6	23.0
LTE B5 & 26	Main	34.0	20.8	23.5
LTE B7	Main	28.1	14.9	23.0
LTE B12 & 17	Main	33.9	20.0	23.5
LTE B13	Main	36.1	20.8	23.5
LTE B14	Main	35.3	19.8	23.5
LTE B30	Main	25.0	15.9	22.0
LTE B38 & 41	Main	29.3	15.9	21.0
LTE B41 HPUE	Main	29.3	15.9	22.4
FR1 n2	Main	30.4	16.6	23.0
FR1 n5	Main	33.0	20.8	23.0
FR1 n12	Main	32.7	22.8	23.0
FR1 n66	Main	30.3	16.7	23.0

Band	Antenna	P _{limit} *	P _{max} * (dBm)
		DSI:2 (dBm)	
LTE B2	Aux	14.7	23.0
LTE B66	Aux	15.2	23.0
LTE B7	Aux	15.8	23.0
LTE B42 & 48	Aux	14.0	19.0
FR1 n2	Aux	15.5	23.0
FR1 n7	Aux	15.0	23.0
FR1 n41	Aux	14.8	23.0
FR1 n41 HPUE	Aux	14.8	26.0
FR1 n66	Aux	14.5	23.0

*P_{max} is used for RF tune up procedure. The maximum allowed output power is equal to P_{max} + 1dB uncertainty.

**All P_{limit} power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD & NR TDD).

The max allowed output power is the P_{limit} + 1dB device uncertainty, and if P_{limit} is higher than P_{max}, the device output power will be P_{max} instead.

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

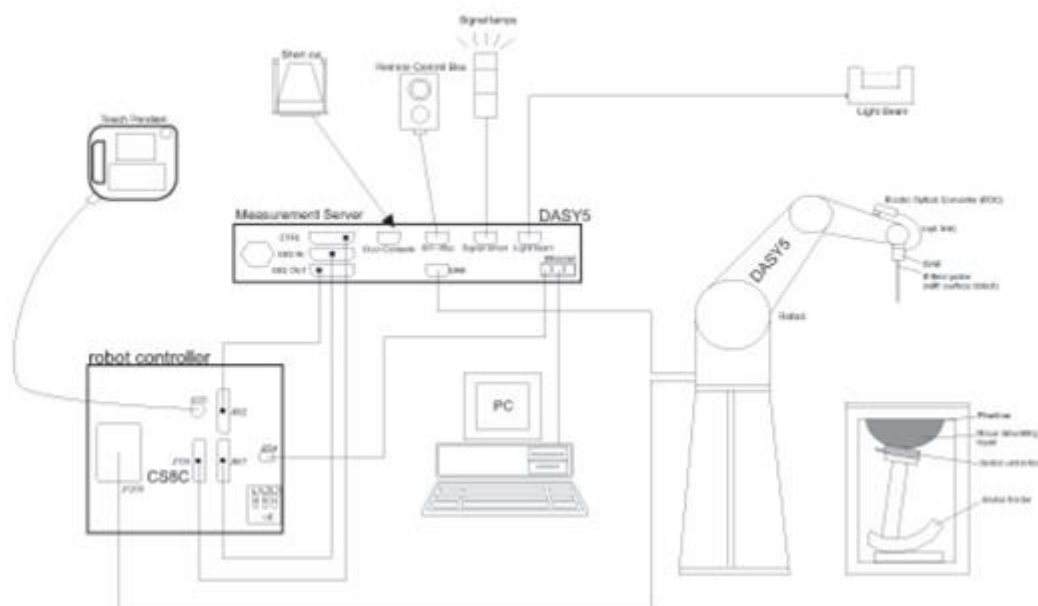

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 0007) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory			
Test Site Location	TW1190 No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, CHINESE TAIPEI		TW0007 No. 58, Aly. 75, Ln. 564, Wehnuia 3rd, Rd., Guishan Dist., Taoyuan City, CHINESE TAIPEI	
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY
	SAR06-HY	SAR10-HY		

8.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

8.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1107	Mar. 08, 2019	Mar. 06, 2021
SPEAG	835MHz System Validation Kit	D835V2	4d167	Nov. 25, 2019	Nov. 24, 2020
SPEAG	1750MHz System Validation Kit ⁽²⁾	D1750V2	1112	Mar. 07, 2019	Mar. 05, 2021
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d041	Sep. 11, 2018	Sep. 08, 2021
SPEAG	2300MHz System Validation Kit ⁽²⁾	D2300V2	1006	Jan. 28, 2019	Jan. 26, 2021
SPEAG	2600MHz System Validation Kit ⁽²⁾	D2600V2	1008	Aug. 31, 2018	Aug. 28, 2021
SPEAG	3500MHz System Validation Kit ⁽²⁾	D3500V2	1014	Jan. 29, 2019	Jan. 27, 2021
SPEAG	3700MHz System Validation Kit ⁽²⁾	D3700V2	1006	Mar. 05, 2019	Mar. 03, 2021
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 16, 2020	Sep. 15, 2021
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 23, 2020	Jul. 22, 2021
SPEAG	Data Acquisition Electronics	DAE4	1399	Feb. 18, 2020	Feb. 17, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	Sep. 24, 2020	Sep. 23, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 24, 2020	Jul. 23, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	7346	May. 20, 2020	May. 19, 2021
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2019	Nov. 11, 2020
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 10, 2020	Nov. 09, 2021
Anritsu	Radio Communication Analyzer	MT8820C	6201381766	Jun. 29, 2020	Jun. 28, 2021
Keysight	Wireless Communication Test Set	E5515C	MY50266977	May. 24, 2020	May. 23, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
R&S	Signal Generator	SMA100A	101091	Jul. 20, 2020	Jul. 19, 2021
Keysight	ENA Network Analyzer	E5071C	MY46101588	Jun. 10, 2020	Jun. 09, 2021
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 16, 2020	Sep. 15, 2021
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3252	Jun. 23, 2020	Jun. 22, 2021
Anritsu	Power Meter	ML2495A	1419002	Aug. 19, 2020	Aug. 18, 2021
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2020	Aug. 17, 2021
Anritsu	Power Meter	ML2495A	1240001	Sep. 01, 2020	Aug. 31, 2021
Anritsu	Power Sensor	MA2411B	1207349	Sep. 01, 2020	Aug. 31, 2021
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 30, 2020	Jun. 29, 2021
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Mar. 12, 2020	Mar. 11, 2021
Mini-Circuits	Power Amplifier	ZHL-42W+	321501827	Aug. 06, 2020	Aug. 05, 2021
Mini-Circuits	Power Amplifier	ZHL-42W+	715701915	May. 07, 2020	May. 06, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

11. System Verification

11.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.6	0.895	43.476	0.89	41.90	0.56	3.76	± 5	2020/10/22
750	22.5	0.898	42.686	0.89	41.90	0.90	1.88	± 5	2020/11/5
750	22.4	0.894	43.477	0.89	41.90	0.45	3.76	± 5	2020/11/10
750	22.3	0.903	41.950	0.89	41.90	1.46	0.12	± 5	2020/11/16
750	22.2	0.899	42.170	0.89	41.90	1.01	0.64	± 5	2020/11/20
835	22.5	0.933	42.390	0.90	41.50	3.67	2.14	± 5	2020/11/5
835	22.4	0.925	42.881	0.90	41.50	2.78	3.33	± 5	2020/11/10
835	22.3	0.908	43.289	0.90	41.50	0.89	4.31	± 5	2020/11/16
835	22.2	0.894	42.284	0.90	41.50	-0.67	1.89	± 5	2020/11/20
1750	22.6	1.365	39.943	1.37	40.10	-0.36	-0.39	± 5	2020/10/22
1750	22.5	1.370	40.633	1.37	40.10	0.00	1.33	± 5	2020/11/4
1750	22.5	1.367	40.634	1.37	40.10	-0.22	1.33	± 5	2020/11/13
1750	22.5	1.367	40.634	1.37	40.10	-0.22	1.33	± 5	2020/11/13
1750	22.4	1.369	40.623	1.37	40.10	-0.07	1.30	± 5	2020/11/17
1900	22.6	1.439	39.113	1.40	40.00	2.79	-2.22	± 5	2020/10/22
1900	22.5	1.385	40.380	1.40	40.00	-1.07	0.95	± 5	2020/11/4
1900	22.5	1.379	40.330	1.40	40.00	-1.50	0.82	± 5	2020/11/6
1900	22.5	1.379	40.330	1.40	40.00	-1.50	0.82	± 5	2020/11/6
1900	22.4	1.384	40.370	1.40	40.00	-1.14	0.92	± 5	2020/11/17
2300	22.5	1.665	39.705	1.67	39.50	-0.30	0.52	± 5	2020/11/4
2300	22.5	1.652	39.605	1.67	39.50	-1.08	0.27	± 5	2020/11/9
2600	22.3	1.969	38.151	1.96	39.00	0.46	-2.18	± 5	2020/10/23
2600	22.3	1.992	38.269	1.96	39.00	1.63	-1.87	± 5	2020/10/25
2600	22.5	1.985	38.671	1.96	39.00	1.28	-0.84	± 5	2020/11/4
2600	22.5	1.971	38.571	1.96	39.00	0.56	-1.10	± 5	2020/11/9
3500	22.6	2.921	37.852	2.91	37.90	0.38	-0.13	± 5	2020/11/12
3700	22.6	3.126	37.625	3.12	37.70	0.19	-0.20	± 5	2020/11/12

11.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/10/22	750	50	D750V3-1107	EX3DV4 - SN3925	DAE3 Sn577	0.393	8.32	7.86	-5.53
2020/11/5	750	250	D750V3-1107	EX3DV4 - SN7346	DAE4 Sn853	2.13	8.32	8.52	2.40
2020/11/10	750	250	D750V3-1107	EX3DV4 - SN7346	DAE4 Sn853	2.12	8.32	8.48	1.92
2020/11/16	750	250	D750V3-1107	EX3DV4 - SN7346	DAE4 Sn853	2.14	8.32	8.56	2.88
2020/11/20	750	250	D750V3-1107	EX3DV4 - SN7346	DAE4 Sn853	2.13	8.32	8.52	2.40
2020/11/5	835	250	D835V2-4d167	EX3DV4 - SN7346	DAE4 Sn853	2.51	9.55	10.04	5.13
2020/11/10	835	250	D835V2-4d167	EX3DV4 - SN7346	DAE4 Sn853	2.49	9.55	9.96	4.29
2020/11/16	835	250	D835V2-4d167	EX3DV4 - SN7346	DAE4 Sn853	2.44	9.55	9.76	2.20
2020/11/20	835	250	D835V2-4d167	EX3DV4 - SN7346	DAE4 Sn853	2.40	9.55	9.6	0.52
2020/10/22	1750	50	D1750V2-1112	EX3DV4 - SN3925	DAE3 Sn577	1.83	36.70	36.6	-0.27
2020/11/4	1750	250	D1750V2-1112	EX3DV4 - SN7346	DAE4 Sn853	8.88	36.70	35.52	-3.22
2020/11/13	1750	250	D1750V2-1112	EX3DV4 - SN7346	DAE4 Sn853	8.86	36.70	35.44	-3.43
2020/11/13	1750	50	D1750V2-1112	EX3DV4 - SN7306	DAE4 Sn1399	1.79	36.70	35.8	-2.45
2020/11/17	1750	250	D1750V2-1112	EX3DV4 - SN7346	DAE4 Sn853	8.87	36.70	35.48	-3.32
2020/10/22	1900	50	D1900V2-5d041	EX3DV4 - SN3925	DAE3 Sn577	2.00	40.20	40	-0.50
2020/11/4	1900	250	D1900V2-5d041	EX3DV4 - SN7346	DAE4 Sn853	9.23	40.20	36.92	-8.16
2020/11/6	1900	250	D1900V2-5d041	EX3DV4 - SN7346	DAE4 Sn853	9.20	40.20	36.8	-8.46
2020/11/6	1900	50	D1900V2-5d041	EX3DV4 - SN7306	DAE4 Sn1399	1.95	40.20	39	-2.99
2020/11/17	1900	250	D1900V2-5d041	EX3DV4 - SN7346	DAE4 Sn853	9.23	40.20	36.92	-8.16
2020/11/4	2300	250	D2300V2-1006	EX3DV4 - SN7346	DAE4 Sn853	11.70	48.70	46.8	-3.90
2020/11/9	2300	250	D2300V2-1006	EX3DV4 - SN7346	DAE4 Sn853	11.60	48.70	46.4	-4.72
2020/10/23	2600	50	D2600V2-1008	EX3DV4 - SN3925	DAE3 Sn577	2.67	56.40	53.4	-5.32
2020/10/25	2600	50	D2600V2-1008	EX3DV4 - SN3925	DAE3 Sn577	2.70	56.40	54	-4.26
2020/11/4	2600	250	D2600V2-1008	EX3DV4 - SN7346	DAE4 Sn853	14.60	56.40	58.4	3.55
2020/11/9	2600	250	D2600V2-1008	EX3DV4 - SN7346	DAE4 Sn853	14.50	56.40	58	2.84
2020/11/12	3500	100	D3500V2-1014	EX3DV4 - SN7346	DAE4 Sn853	6.22	67.90	62.2	-8.39
2020/11/12	3700	100	D3700V2-1006	EX3DV4 - SN7346	DAE4 Sn853	6.73	67.30	67.3	0.00

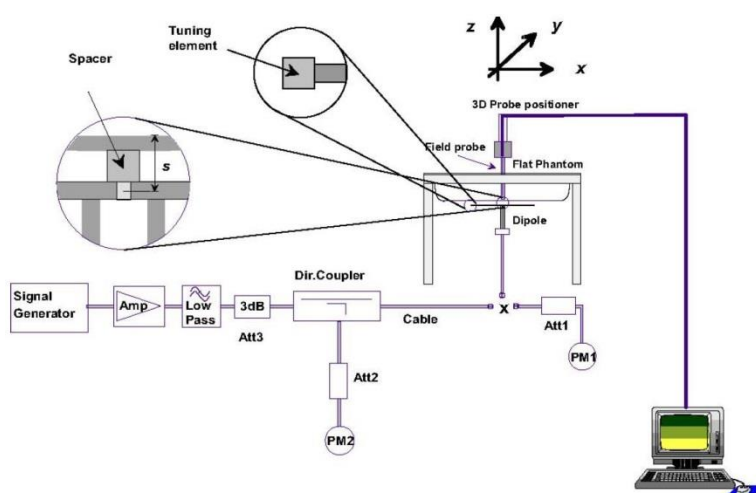


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo



12. RF Exposure Positions

12.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

13. UMTS/LTE Output Power (Unit: dBm)

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Cycle to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

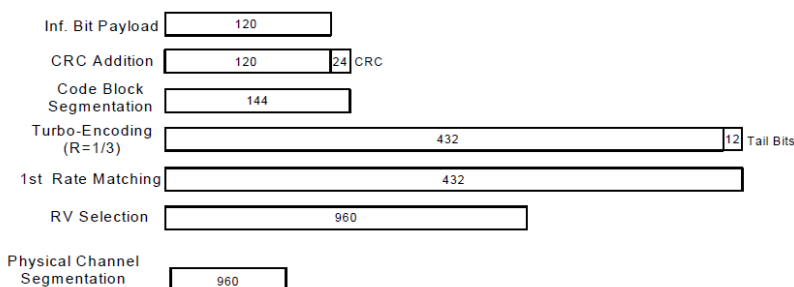
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

DSI 1

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	24.01	24.07	24.13	24.50	24.19	24.20	24.23	24.50	24.32	24.21	24.19	24.50
3GPP Rel 6	HSDPA Subtest-1	23.26	23.03	23.10	23.50	23.11	23.30	23.44	23.50	23.31	23.32	23.28	23.50
3GPP Rel 6	HSDPA Subtest-2	23.19	23.03	23.07	23.50	23.17	23.25	23.31	23.50	23.44	23.31	23.30	23.50
3GPP Rel 6	HSDPA Subtest-3	22.78	22.55	22.67	23.00	22.67	22.78	22.87	23.00	22.97	22.76	22.82	23.00
3GPP Rel 6	HSDPA Subtest-4	22.74	22.67	22.65	23.00	22.70	22.74	22.90	23.00	22.96	22.76	22.85	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	23.15	22.97	23.10	23.50	23.19	23.24	23.30	23.50	23.36	23.27	23.14	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	23.13	22.94	22.96	23.50	23.11	23.16	23.25	23.50	23.46	23.26	23.25	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	22.64	22.48	22.58	23.00	22.64	22.70	22.72	23.00	22.82	22.78	22.69	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	22.64	22.65	22.57	23.00	22.59	22.78	22.90	23.00	22.81	22.68	22.78	23.00
3GPP Rel 6	HSUPA Subtest-1	23.21	23.20	23.21	23.50	23.13	23.34	23.36	23.50	23.33	23.23	23.21	23.50
3GPP Rel 6	HSUPA Subtest-2	21.24	21.22	21.22	21.50	21.18	21.36	21.43	21.50	21.26	21.25	21.33	21.50
3GPP Rel 6	HSUPA Subtest-3	22.22	22.19	22.27	22.50	22.19	22.35	22.40	22.50	22.44	22.26	22.21	22.50
3GPP Rel 6	HSUPA Subtest-4	21.25	21.15	21.15	21.50	21.08	21.37	21.36	21.50	21.39	21.25	21.29	21.50
3GPP Rel 6	HSUPA Subtest-5	23.20	23.09	23.10	23.50	23.19	23.25	23.26	23.50	23.36	23.31	23.31	23.50


DSI 2

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	17.34	17.38	17.31	17.70	17.33	17.44	17.43	17.60	21.27	21.28	21.22	21.80
3GPP Rel 6	HSDPA Subtest-1	16.55	16.24	16.33	16.70	16.37	16.10	16.14	16.60	20.18	19.99	20.14	20.80
3GPP Rel 6	HSDPA Subtest-2	16.29	16.33	16.28	16.70	16.09	16.33	16.24	16.60	19.99	20.25	20.21	20.80
3GPP Rel 6	HSDPA Subtest-3	15.90	15.69	15.96	16.20	15.79	15.56	15.85	16.10	19.72	19.45	19.65	20.30
3GPP Rel 6	HSDPA Subtest-4	15.98	15.91	15.94	16.20	15.93	15.75	15.92	16.10	19.88	19.56	19.79	20.30
3GPP Rel 8	DC-HSDPA Subtest-1	16.43	16.13	16.33	16.70	16.39	16.05	16.15	16.60	20.23	19.90	20.06	20.80
3GPP Rel 8	DC-HSDPA Subtest-2	16.26	16.18	16.18	16.70	16.16	16.01	16.11	16.60	20.12	19.88	19.98	20.80
3GPP Rel 8	DC-HSDPA Subtest-3	15.77	15.72	15.77	16.20	15.66	15.60	15.67	16.10	19.61	19.48	19.58	20.30
3GPP Rel 8	DC-HSDPA Subtest-4	15.83	15.86	15.74	16.20	15.63	15.75	15.56	16.10	19.52	19.63	19.46	20.30
3GPP Rel 6	HSUPA Subtest-1	16.40	16.42	16.33	16.70	16.36	16.23	16.16	16.60	20.24	20.10	20.01	20.80
3GPP Rel 6	HSUPA Subtest-2	14.43	14.37	14.44	14.70	14.28	14.20	14.29	14.60	18.22	18.16	18.18	18.80
3GPP Rel 6	HSUPA Subtest-3	15.50	15.47	15.54	15.70	15.32	15.27	15.45	15.60	19.14	19.15	19.28	19.80
3GPP Rel 6	HSUPA Subtest-4	14.46	14.38	14.28	14.70	14.37	14.31	14.08	14.60	18.24	18.13	17.90	18.80
3GPP Rel 6	HSUPA Subtest-5	16.36	16.36	16.36	16.70	16.26	16.28	16.33	16.60	20.18	20.18	20.15	20.80


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B12/B17/B26/B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2/4/17/38/42 SAR test was covered by Band 25/66/12/41/48; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

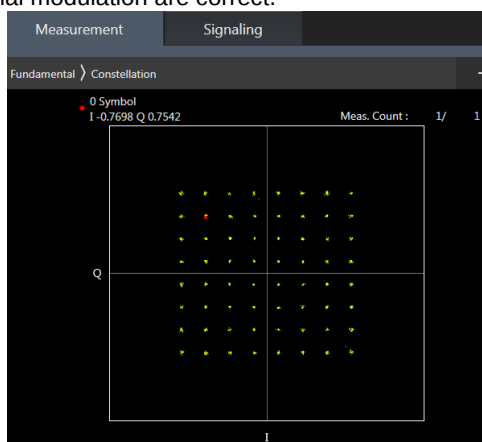

64QAM

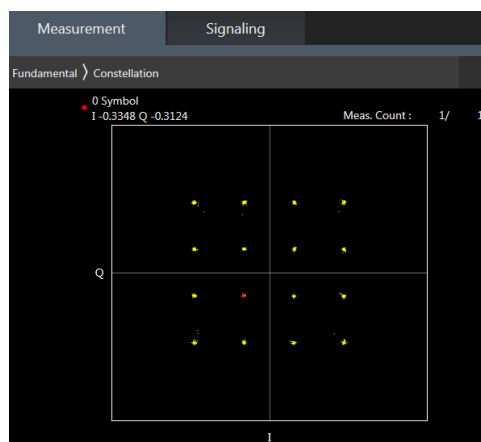

16QAM

DSI 1
<LTE Band 2 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.56	23.40	23.43	24	0
20	QPSK	1	49	23.43	23.32	23.42		
20	QPSK	1	99	23.42	23.37	23.50		
20	QPSK	50	0	22.61	22.40	22.50	23	1
20	QPSK	50	24	22.60	22.52	22.54		
20	QPSK	50	50	22.57	22.53	22.64		
20	QPSK	100	0	22.62	22.50	22.55	23	1
20	16QAM	1	0	22.85	22.69	22.81		
20	16QAM	1	49	22.77	22.67	22.82		
20	16QAM	1	99	22.76	22.69	22.87	22	2
20	16QAM	50	0	21.62	21.41	21.51		
20	16QAM	50	24	21.63	21.52	21.57		
20	16QAM	50	50	21.60	21.52	21.67	22	2
20	16QAM	100	0	21.61	21.49	21.53		
20	64QAM	1	0	21.70	21.51	21.60		
20	64QAM	1	49	21.68	21.54	21.32	22	2
20	64QAM	1	99	21.66	21.60	21.66		
20	64QAM	50	0	20.63	20.44	20.50		
20	64QAM	50	24	20.64	20.55	20.59	21	3
20	64QAM	50	50	20.61	20.54	20.68		
20	64QAM	100	0	20.61	20.52	20.55		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.51	23.31	23.39	24	0
15	QPSK	1	37	23.40	23.30	23.37		
15	QPSK	1	74	23.42	23.30	23.46		
15	QPSK	36	0	22.59	22.37	22.47	23	1
15	QPSK	36	20	22.56	22.50	22.49		
15	QPSK	36	39	22.49	22.44	22.63		
15	QPSK	75	0	22.59	22.46	22.45	23	1
15	16QAM	1	0	22.81	22.62	22.76		
15	16QAM	1	37	22.69	22.62	22.75		
15	16QAM	1	74	22.66	22.67	22.80	22	2
15	16QAM	36	0	21.58	21.36	21.44		
15	16QAM	36	20	21.57	21.44	21.52		
15	16QAM	36	39	21.50	21.49	21.67	22	2
15	16QAM	75	0	21.56	21.48	21.52		
15	64QAM	1	0	21.67	21.46	21.57		
15	64QAM	1	37	21.66	21.53	21.22	22	2
15	64QAM	1	74	21.60	21.59	21.57		
15	64QAM	36	0	20.61	20.36	20.46		
15	64QAM	36	20	20.63	20.48	20.53	21	3
15	64QAM	36	39	20.53	20.44	20.67		
15	64QAM	75	0	20.60	20.51	20.52		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.49	23.40	23.40	24	0
10	QPSK	1	25	23.34	23.27	23.40		
10	QPSK	1	49	23.38	23.35	23.44		
10	QPSK	25	0	22.61	22.39	22.41	23	1



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	12	22.50	22.50	22.45		
10	QPSK	25	25	22.48	22.46	22.62		
10	QPSK	50	0	22.52	22.47	22.48		
10	16QAM	1	0	22.79	22.67	22.81	23	1
10	16QAM	1	25	22.68	22.57	22.82		
10	16QAM	1	49	22.73	22.62	22.80		
10	16QAM	25	0	21.58	21.34	21.46	22	2
10	16QAM	25	12	21.58	21.45	21.55		
10	16QAM	25	25	21.52	21.47	21.67		
10	16QAM	50	0	21.55	21.45	21.44	22	2
10	64QAM	1	0	21.68	21.48	21.54		
10	64QAM	1	25	21.68	21.46	21.32		
10	64QAM	1	49	21.66	21.51	21.57	21	3
10	64QAM	25	0	20.61	20.39	20.45		
10	64QAM	25	12	20.63	20.48	20.49		
10	64QAM	25	25	20.60	20.45	20.58		
10	64QAM	50	0	20.51	20.45	20.45		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.53	23.32	23.38	24	0
5	QPSK	1	12	23.33	23.22	23.37		
5	QPSK	1	24	23.32	23.31	23.46		
5	QPSK	12	0	22.60	22.39	22.44	23	1
5	QPSK	12	7	22.51	22.44	22.52		
5	QPSK	12	13	22.52	22.53	22.55		
5	QPSK	25	0	22.57	22.44	22.46	23	1
5	16QAM	1	0	22.84	22.65	22.77		
5	16QAM	1	12	22.76	22.57	22.73		
5	16QAM	1	24	22.69	22.63	22.85	22	2
5	16QAM	12	0	21.59	21.33	21.44		
5	16QAM	12	7	21.56	21.45	21.50		
5	16QAM	12	13	21.58	21.51	21.67	22	2
5	16QAM	25	0	21.55	21.43	21.48		
5	64QAM	1	0	21.61	21.42	21.57		
5	64QAM	1	12	21.59	21.49	21.27	22	2
5	64QAM	1	24	21.57	21.60	21.61		
5	64QAM	12	0	20.53	20.41	20.43		
5	64QAM	12	7	20.62	20.48	20.57	21	3
5	64QAM	12	13	20.58	20.50	20.61		
5	64QAM	25	0	20.59	20.42	20.51		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.50	23.35	23.38	24	0
3	QPSK	1	8	23.41	23.23	23.35		
3	QPSK	1	14	23.42	23.37	23.50		
3	QPSK	8	0	22.59	22.31	22.50	23	1
3	QPSK	8	4	22.56	22.48	22.47		
3	QPSK	8	7	22.50	22.45	22.60		
3	QPSK	15	0	22.58	22.41	22.47	23	1
3	16QAM	1	0	22.75	22.59	22.71		
3	16QAM	1	8	22.75	22.57	22.82		
3	16QAM	1	14	22.76	22.62	22.85	22	2
3	16QAM	8	0	21.52	21.36	21.44		
3	16QAM	8	4	21.62	21.47	21.54		
3	16QAM	8	7	21.57	21.51	21.58	22	2
3	16QAM	15	0	21.51	21.40	21.43		



FCC SAR TEST REPORT

Report No. : FA082123-01

3	64QAM	1	0	21.69	21.47	21.51	22	2
3	64QAM	1	8	21.60	21.51	21.31		
3	64QAM	1	14	21.63	21.53	21.57		
3	64QAM	8	0	20.55	20.41	20.42	21	3
3	64QAM	8	4	20.59	20.53	20.51		
3	64QAM	8	7	20.54	20.50	20.60		
3	64QAM	15	0	20.60	20.50	20.50		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.53	23.32	23.33	24	0
1.4	QPSK	1	3	23.37	23.25	23.35		
1.4	QPSK	1	5	23.36	23.31	23.40		
1.4	QPSK	3	0	23.56	23.30	23.38		
1.4	QPSK	3	1	23.36	23.32	23.41		
1.4	QPSK	3	3	23.34	23.29	23.43		
1.4	QPSK	6	0	22.54	22.35	22.46	23	1
1.4	16QAM	1	0	22.54	22.42	22.50	23	1
1.4	16QAM	1	3	22.51	22.48	22.61		
1.4	16QAM	1	5	22.53	22.46	22.55		
1.4	16QAM	3	0	22.81	22.69	22.81		
1.4	16QAM	3	1	22.70	22.66	22.74		
1.4	16QAM	3	3	22.68	22.67	22.86		
1.4	16QAM	6	0	21.52	21.33	21.44	22	2
1.4	64QAM	1	0	21.62	21.52	21.56	22	2
1.4	64QAM	1	3	21.60	21.46	21.58		
1.4	64QAM	1	5	21.52	21.39	21.43		
1.4	64QAM	3	0	21.70	21.43	21.57		
1.4	64QAM	3	1	21.63	21.52	21.26		
1.4	64QAM	3	3	21.65	21.54	21.66		
1.4	64QAM	6	0	20.56	20.39	20.42	21	3

<LTE Band 4 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.86	23.84	23.90		
20	QPSK	1	49	23.70	23.67	23.70	24	0
20	QPSK	1	99	23.73	23.69	23.70		
20	QPSK	50	0	22.92	22.91	22.89		
20	QPSK	50	24	22.93	22.83	22.91	23	1
20	QPSK	50	50	22.87	22.85	22.85		
20	QPSK	100	0	22.93	22.86	22.91		
20	16QAM	1	0	22.89	22.93	22.93	23	1
20	16QAM	1	49	22.76	22.88	22.84		
20	16QAM	1	99	22.80	22.99	22.79		
20	16QAM	50	0	21.92	21.93	21.92	22	2
20	16QAM	50	24	21.95	21.85	21.91		
20	16QAM	50	50	21.89	21.84	21.87		
20	16QAM	100	0	21.92	21.85	21.91	22	2
20	64QAM	1	0	21.98	21.87	21.99		
20	64QAM	1	49	21.94	21.94	21.90		
20	64QAM	1	99	21.98	21.96	21.94	21	3
20	64QAM	50	0	20.96	20.95	20.94		
20	64QAM	50	24	20.98	20.89	20.95		
20	64QAM	50	50	20.91	20.87	20.89	21	3
20	64QAM	50	50	20.91	20.87	20.89		
20	64QAM	100	0	20.96	20.84	20.93		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.84	23.75	23.88		
15	QPSK	1	37	23.61	23.64	23.60	24	0
15	QPSK	1	74	23.72	23.62	23.63		
15	QPSK	36	0	22.87	22.91	22.82		
15	QPSK	36	20	22.87	22.80	22.83	23	1
15	QPSK	36	39	22.87	22.82	22.76		
15	QPSK	75	0	22.85	22.85	22.85		
15	16QAM	1	0	22.83	22.93	22.86	23	1
15	16QAM	1	37	22.73	22.86	22.78		
15	16QAM	1	74	22.71	22.92	22.70		
15	16QAM	36	0	21.86	21.85	21.83	22	2
15	16QAM	36	20	21.87	21.77	21.81		
15	16QAM	36	39	21.89	21.77	21.80		
15	16QAM	75	0	21.91	21.78	21.81	22	2
15	64QAM	1	0	21.90	21.78	21.89		
15	64QAM	1	37	21.85	21.87	21.81		
15	64QAM	1	74	21.91	21.86	21.90	21	3
15	64QAM	36	0	20.89	20.87	20.90		
15	64QAM	36	20	20.98	20.87	20.92		
15	64QAM	36	39	20.82	20.86	20.83	21	3
15	64QAM	36	39	20.82	20.86	20.83		
15	64QAM	75	0	20.87	20.80	20.93		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.78	23.81	23.87		
10	QPSK	1	25	23.62	23.61	23.60	24	0
10	QPSK	1	49	23.68	23.66	23.70		
10	QPSK	25	0	22.85	22.88	22.80		
10	QPSK	25	12	22.88	22.82	22.81	23	1



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	22.80	22.83	22.82		
10	QPSK	50	0	22.89	22.81	22.88		
10	16QAM	1	0	22.87	22.86	22.89		
10	16QAM	1	25	22.66	22.84	22.77	23	1
10	16QAM	1	49	22.74	22.99	22.74		
10	16QAM	25	0	21.89	21.91	21.88		
10	16QAM	25	12	21.89	21.80	21.83	22	2
10	16QAM	25	25	21.80	21.84	21.84		
10	16QAM	50	0	21.84	21.82	21.84		
10	64QAM	1	0	21.90	21.82	21.97	22	2
10	64QAM	1	25	21.91	21.94	21.84		
10	64QAM	1	49	21.88	21.92	21.94		
10	64QAM	25	0	20.96	20.90	20.89	21	3
10	64QAM	25	12	20.98	20.89	20.89		
10	64QAM	25	25	20.85	20.83	20.87		
10	64QAM	50	0	20.88	20.74	20.85		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.86	23.75	23.87	24	0
5	QPSK	1	12	23.62	23.61	23.64		
5	QPSK	1	24	23.66	23.66	23.61		
5	QPSK	12	0	22.92	22.90	22.85	23	1
5	QPSK	12	7	22.87	22.74	22.82		
5	QPSK	12	13	22.85	22.79	22.77		
5	QPSK	25	0	22.85	22.76	22.86	23	1
5	16QAM	1	0	22.80	22.85	22.83		
5	16QAM	1	12	22.75	22.83	22.78		
5	16QAM	1	24	22.72	22.94	22.69	22	2
5	16QAM	12	0	21.87	21.84	21.83		
5	16QAM	12	7	21.86	21.80	21.88		
5	16QAM	12	13	21.87	21.77	21.84	22	2
5	16QAM	25	0	21.83	21.75	21.90		
5	64QAM	1	0	21.98	21.78	21.92		
5	64QAM	1	12	21.86	21.89	21.87	22	2
5	64QAM	1	24	21.97	21.96	21.92		
5	64QAM	12	0	20.90	20.95	20.86		
5	64QAM	12	7	20.97	20.84	20.89	21	3
5	64QAM	12	13	20.86	20.84	20.81		
5	64QAM	25	0	20.95	20.79	20.92		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.86	23.78	23.84	24	0
3	QPSK	1	8	23.67	23.63	23.64		
3	QPSK	1	14	23.71	23.67	23.61		
3	QPSK	8	0	22.89	22.89	22.81	23	1
3	QPSK	8	4	22.90	22.81	22.91		
3	QPSK	8	7	22.81	22.75	22.81		
3	QPSK	15	0	22.88	22.85	22.90	23	1
3	16QAM	1	0	22.86	22.86	22.86		
3	16QAM	1	8	22.72	22.83	22.75		
3	16QAM	1	14	22.73	22.92	22.69	22	2
3	16QAM	8	0	21.87	21.88	21.85		
3	16QAM	8	4	21.93	21.81	21.82		
3	16QAM	8	7	21.85	21.84	21.81	22	2
3	16QAM	15	0	21.90	21.79	21.86		
3	64QAM	1	0	21.96	21.87	21.99	22	2



FCC SAR TEST REPORT

Report No. : FA082123-01

3	64QAM	1	8	21.91	21.94	21.89	21	3
3	64QAM	1	14	21.95	21.91	21.93		
3	64QAM	8	0	20.96	20.87	20.85		
3	64QAM	8	4	20.89	20.86	20.91		
3	64QAM	8	7	20.84	20.82	20.83		
3	64QAM	15	0	20.96	20.82	20.83		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.79	23.78	23.85	24	0
1.4	QPSK	1	3	23.69	23.65	23.68		
1.4	QPSK	1	5	23.70	23.63	23.62		
1.4	QPSK	3	0	23.84	23.84	23.87		
1.4	QPSK	3	1	23.62	23.62	23.67		
1.4	QPSK	3	3	23.71	23.59	23.62		
1.4	QPSK	6	0	22.90	22.84	22.79	23	1
1.4	16QAM	1	0	22.89	22.73	22.82	23	1
1.4	16QAM	1	3	22.77	22.75	22.77		
1.4	16QAM	1	5	22.89	22.77	22.88		
1.4	16QAM	3	0	22.84	22.89	22.84		
1.4	16QAM	3	1	22.71	22.87	22.80		
1.4	16QAM	3	3	22.76	22.91	22.79		
1.4	16QAM	6	0	21.85	21.86	21.91	22	2
1.4	64QAM	1	0	21.95	21.83	21.87	22	2
1.4	64QAM	1	3	21.89	21.79	21.78		
1.4	64QAM	1	5	21.84	21.83	21.81		
1.4	64QAM	3	0	21.89	21.85	21.97		
1.4	64QAM	3	1	21.94	21.87	21.82		
1.4	64QAM	3	3	21.94	21.89	21.86		
1.4	64QAM	6	0	20.89	20.95	20.90	21	3

<LTE Band 5 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	24.46	24.37	24.39	24.5	0
10	QPSK	1	25	24.41	24.33	24.28		
10	QPSK	1	49	24.43	24.34	24.32		
10	QPSK	25	0	23.48	23.48	23.42	23.5	1
10	QPSK	25	12	23.45	23.47	23.42		
10	QPSK	25	25	23.37	23.39	23.48		
10	QPSK	50	0	23.49	23.48	23.42	23.5	1
10	16QAM	1	0	23.41	23.40	23.44		
10	16QAM	1	25	23.48	23.36	23.41		
10	16QAM	1	49	23.44	23.47	23.43	22.5	2
10	16QAM	25	0	22.45	22.42	22.41		
10	16QAM	25	12	22.42	22.45	22.43		
10	16QAM	25	25	22.46	22.50	22.41	22.5	2
10	16QAM	50	0	22.42	22.40	22.40		
10	64QAM	1	0	22.33	22.38	22.37	22.5	2
10	64QAM	1	25	22.42	22.48	21.44		
10	64QAM	1	49	22.38	22.39	21.45		
10	64QAM	25	0	21.48	21.35	21.44	21.5	3
10	64QAM	25	12	21.45	21.33	21.46		
10	64QAM	25	25	21.35	21.43	21.48		
10	64QAM	50	0	21.38	21.40	21.41		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	24.45	24.27	24.29	24.5	0
5	QPSK	1	12	24.37	24.35	24.25		
5	QPSK	1	24	24.42	24.27	24.27		
5	QPSK	12	0	23.46	23.43	23.37	23.5	1
5	QPSK	12	7	23.45	23.47	23.40		
5	QPSK	12	13	23.30	23.29	23.48		
5	QPSK	25	0	23.49	23.44	23.34	23.5	1
5	16QAM	1	0	23.37	23.34	23.34		
5	16QAM	1	12	23.40	23.33	23.39		
5	16QAM	1	24	23.36	23.41	23.35	22.5	2
5	16QAM	12	0	22.38	22.42	22.37		
5	16QAM	12	7	22.33	22.41	22.36		
5	16QAM	12	13	22.45	22.46	22.32	22.5	2
5	16QAM	25	0	22.32	22.35	22.31		
5	64QAM	1	0	22.30	22.28	22.34		
5	64QAM	1	12	22.41	22.40	21.36	22.5	2
5	64QAM	1	24	22.34	22.32	21.42		
5	64QAM	12	0	21.44	21.25	21.39		
5	64QAM	12	7	21.44	21.33	21.44	21.5	3
5	64QAM	12	13	21.25	21.36	21.40		
5	64QAM	25	0	21.32	21.40	21.35		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	24.40	24.34	24.37	24.5	0
3	QPSK	1	8	24.33	24.31	24.23		
3	QPSK	1	14	24.35	24.34	24.30		
3	QPSK	8	0	23.48	23.43	23.36	23.5	1
3	QPSK	8	4	23.40	23.41	23.32		



FCC SAR TEST REPORT

Report No. : FA082123-01

3	QPSK	8	7	23.31	23.35	23.44		
3	QPSK	15	0	23.43	23.46	23.38		
3	16QAM	1	0	23.36	23.33	23.34		
3	16QAM	1	8	23.47	23.28	23.37	23.5	1
3	16QAM	1	14	23.36	23.37	23.42		
3	16QAM	8	0	22.42	22.32	22.33		
3	16QAM	8	4	22.38	22.41	22.37	22.5	2
3	16QAM	8	7	22.37	22.46	22.32		
3	16QAM	15	0	22.36	22.32	22.32		
3	64QAM	1	0	22.26	22.38	22.31	22.5	2
3	64QAM	1	8	22.35	22.43	21.39		
3	64QAM	1	14	22.38	22.38	21.38		
3	64QAM	8	0	21.42	21.30	21.35	21.5	3
3	64QAM	8	4	21.39	21.31	21.37		
3	64QAM	8	7	21.32	21.34	21.40		
3	64QAM	15	0	21.36	21.32	21.33		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	24.40	24.30	24.35	24.5	0
1.4	QPSK	1	3	24.33	24.35	24.23		
1.4	QPSK	1	5	24.42	24.25	24.27		
1.4	QPSK	3	0	24.37	24.27	24.31		
1.4	QPSK	3	1	24.39	24.28	24.28		
1.4	QPSK	3	3	24.37	24.25	24.26		
1.4	QPSK	6	0	23.45	23.41	23.41	23.5	1
1.4	16QAM	1	0	23.43	23.41	23.40	23.5	1
1.4	16QAM	1	3	23.33	23.36	23.46		
1.4	16QAM	1	5	23.44	23.44	23.35		
1.4	16QAM	3	0	23.33	23.36	23.41		
1.4	16QAM	3	1	23.38	23.35	23.33		
1.4	16QAM	3	3	23.37	23.39	23.35		
1.4	16QAM	6	0	22.40	22.39	22.39	22.5	2
1.4	64QAM	1	0	22.41	22.40	22.43	22.5	2
1.4	64QAM	1	3	22.36	22.43	22.36		
1.4	64QAM	1	5	22.40	22.31	22.34		
1.4	64QAM	3	0	22.24	22.29	22.29		
1.4	64QAM	3	1	22.40	22.48	21.35		
1.4	64QAM	3	3	22.28	22.35	21.38		
1.4	64QAM	6	0	21.40	21.35	21.38	21.5	3



<LTE Band 7 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.73	23.77	23.63		
20	QPSK	1	49	23.64	23.74	23.54	24	0
20	QPSK	1	99	23.54	23.65	23.53		
20	QPSK	50	0	22.68	22.85	22.69		
20	QPSK	50	24	22.80	22.75	22.72	23	1
20	QPSK	50	50	22.81	22.84	22.71		
20	QPSK	100	0	22.81	22.72	22.71		
20	16QAM	1	0	22.93	23.00	22.86	23	1
20	16QAM	1	49	22.90	22.93	22.92		
20	16QAM	1	99	22.92	22.97	22.98		
20	16QAM	50	0	21.69	21.74	21.70	22	2
20	16QAM	50	24	21.81	21.75	21.72		
20	16QAM	50	50	21.83	21.84	21.74		
20	16QAM	100	0	21.78	21.72	21.70	22	2
20	64QAM	1	0	21.74	21.81	21.80		
20	64QAM	1	49	21.86	21.57	21.76		
20	64QAM	1	99	21.96	21.98	21.88	21	3
20	64QAM	50	0	20.71	20.66	20.72		
20	64QAM	50	24	20.82	20.78	20.75		
20	64QAM	50	50	20.85	20.87	20.74	21	3
20	64QAM	50	50	20.85	20.87	20.74		
20	64QAM	100	0	20.80	20.76	20.73		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.48	23.75	23.51		
15	QPSK	1	37	23.56	23.60	23.47	24	0
15	QPSK	1	74	23.70	23.68	23.56		
15	QPSK	36	0	22.63	22.63	22.66		
15	QPSK	36	20	22.77	22.72	22.70	23	1
15	QPSK	36	39	22.72	22.76	22.68		
15	QPSK	75	0	22.80	22.63	22.71		
15	16QAM	1	0	22.83	22.96	22.77	23	1
15	16QAM	1	37	22.89	22.87	22.83		
15	16QAM	1	74	22.92	22.87	22.95		
15	16QAM	36	0	21.61	21.71	21.70	22	2
15	16QAM	36	20	21.81	21.70	21.65		
15	16QAM	36	39	21.79	21.82	21.66		
15	16QAM	75	0	21.77	21.62	21.64	22	2
15	64QAM	1	0	21.64	21.79	21.74		
15	64QAM	1	37	21.84	21.53	21.71		
15	64QAM	1	74	21.94	21.98	21.81	21	3
15	64QAM	36	0	20.66	20.61	20.69		
15	64QAM	36	20	20.78	20.70	20.74		
15	64QAM	36	39	20.81	20.79	20.72	21	3
15	64QAM	36	39	20.81	20.79	20.72		
15	64QAM	75	0	20.73	20.73	20.71		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.47	23.71	23.52		
10	QPSK	1	25	23.64	23.58	23.54	24	0
10	QPSK	1	49	23.71	23.71	23.55		
10	QPSK	25	0	22.68	22.68	22.68		
10	QPSK	25	12	22.76	22.71	22.67	23	1



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	22.75	22.74	22.62		
10	QPSK	50	0	22.73	22.63	22.70		
10	16QAM	1	0	22.84	22.91	22.76		
10	16QAM	1	25	22.87	22.91	22.85	23	1
10	16QAM	1	49	22.83	22.89	22.96		
10	16QAM	25	0	21.61	21.74	21.63		
10	16QAM	25	12	21.74	21.75	21.65	22	2
10	16QAM	25	25	21.82	21.84	21.65		
10	16QAM	50	0	21.77	21.63	21.70		
10	64QAM	1	0	21.70	21.76	21.75	22	2
10	64QAM	1	25	21.78	21.51	21.67		
10	64QAM	1	49	21.89	21.98	21.85		
10	64QAM	25	0	20.63	20.61	20.64	21	3
10	64QAM	25	12	20.75	20.73	20.71		
10	64QAM	25	25	20.76	20.83	20.70		
10	64QAM	50	0	20.78	20.72	20.63		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.49	23.75	23.51	24	0
5	QPSK	1	12	23.62	23.64	23.49		
5	QPSK	1	24	23.68	23.72	23.57		
5	QPSK	12	0	22.67	22.69	22.68	23	1
5	QPSK	12	7	22.73	22.72	22.64		
5	QPSK	12	13	22.80	22.82	22.62		
5	QPSK	25	0	22.74	22.65	22.71	23	1
5	16QAM	1	0	22.85	22.95	22.79		
5	16QAM	1	12	22.87	22.83	22.84		
5	16QAM	1	24	22.90	22.95	22.95	22	2
5	16QAM	12	0	21.63	21.65	21.69		
5	16QAM	12	7	21.81	21.72	21.69		
5	16QAM	12	13	21.81	21.74	21.66	22	2
5	16QAM	25	0	21.76	21.72	21.66		
5	64QAM	1	0	21.65	21.77	21.73		
5	64QAM	1	12	21.79	21.55	21.66	22	2
5	64QAM	1	24	21.94	21.97	21.82		
5	64QAM	12	0	20.65	20.59	20.72		
5	64QAM	12	7	20.82	20.72	20.68	21	3
5	64QAM	12	13	20.77	20.84	20.64		
5	64QAM	25	0	20.79	20.76	20.69		



<LTE Band 12 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	24.5	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.99	24.06	24.12		
10	QPSK	1	25	23.98	24.04	23.99	23.5	1
10	QPSK	1	49	24.08	23.98	23.95		
10	QPSK	25	0	23.09	23.17	23.10		
10	QPSK	25	12	23.15	23.12	23.11	23.5	1
10	QPSK	25	25	23.12	23.16	23.16		
10	QPSK	50	0	23.17	23.13	23.11		
10	16QAM	1	0	23.38	23.36	23.39	23.5	1
10	16QAM	1	25	23.36	23.38	23.38		
10	16QAM	1	49	23.46	23.43	23.42		
10	16QAM	25	0	22.10	22.17	22.12	22.5	2
10	16QAM	25	12	22.17	22.14	22.14		
10	16QAM	25	25	22.15	22.12	22.08		
10	16QAM	50	0	22.17	22.11	22.09	22.5	2
10	64QAM	1	0	22.21	22.22	22.23		
10	64QAM	1	25	22.29	22.31	22.33		
10	64QAM	1	49	22.38	22.37	22.31	21.5	3
10	64QAM	25	0	21.12	21.15	21.15		
10	64QAM	25	12	21.20	21.18	21.16		
10	64QAM	25	25	21.20	21.19	21.20	21.5	3
10	64QAM	50	0	21.20	21.16	21.11		
Channel				23035	23095	23155	24.5	0
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.92	23.82	24.07		
5	QPSK	1	12	23.94	23.96	23.89	23.5	1
5	QPSK	1	24	24.04	24.00	23.89		
5	QPSK	12	0	23.07	23.05	23.01		
5	QPSK	12	7	23.07	23.12	23.01	23.5	1
5	QPSK	12	13	23.02	23.06	23.10		
5	QPSK	25	0	23.08	23.07	23.02		
5	16QAM	1	0	23.29	23.26	23.31	23.5	1
5	16QAM	1	12	23.30	23.32	23.38		
5	16QAM	1	24	23.37	23.43	23.36		
5	16QAM	12	0	22.09	22.08	22.04	22.5	2
5	16QAM	12	7	22.17	22.11	22.07		
5	16QAM	12	13	22.08	22.12	22.05		
5	16QAM	25	0	22.08	22.08	22.06	22.5	2
5	64QAM	1	0	22.21	22.12	22.18		
5	64QAM	1	12	22.28	22.30	22.25		
5	64QAM	1	24	22.32	22.33	22.26	21.5	3
5	64QAM	12	0	21.10	21.12	21.15		
5	64QAM	12	7	21.20	21.13	21.09		
5	64QAM	12	13	21.15	21.13	21.15	21.5	3
5	64QAM	25	0	21.17	21.16	21.05		
Channel				23025	23095	23165	24.5	0
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.98	23.83	24.06		
3	QPSK	1	8	23.95	23.94	23.90	23.5	1
3	QPSK	1	14	24.07	24.03	23.95		
3	QPSK	8	0	23.07	23.11	23.03		
3	QPSK	8	4	23.14	23.12	23.02	23.5	1



FCC SAR TEST REPORT

Report No. : FA082123-01

3	QPSK	8	7	23.06	23.14	23.18		
3	QPSK	15	0	23.14	23.13	23.06		
3	16QAM	1	0	23.35	23.32	23.38		
3	16QAM	1	8	23.29	23.36	23.34	23.5	1
3	16QAM	1	14	23.46	23.41	23.35		
3	16QAM	8	0	22.00	22.08	22.12		
3	16QAM	8	4	22.17	22.04	22.10	22.5	2
3	16QAM	8	7	22.13	22.06	22.08		
3	16QAM	15	0	22.07	22.02	22.02		
3	64QAM	1	0	22.11	22.20	22.15	22.5	2
3	64QAM	1	8	22.28	22.22	22.29		
3	64QAM	1	14	22.30	22.29	22.24		
3	64QAM	8	0	21.06	21.14	21.08	21.5	3
3	64QAM	8	4	21.14	21.16	21.11		
3	64QAM	8	7	21.13	21.16	21.15		
3	64QAM	15	0	21.10	21.12	21.10		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.89	23.85	24.02	24.5	0
1.4	QPSK	1	3	23.96	24.00	23.93		
1.4	QPSK	1	5	23.98	24.01	23.92		
1.4	QPSK	3	0	23.97	23.91	24.10		
1.4	QPSK	3	1	23.96	24.01	23.93		
1.4	QPSK	3	3	23.98	23.99	23.97		
1.4	QPSK	6	0	23.08	23.01	23.10	23.5	1
1.4	16QAM	1	0	23.13	23.10	23.09	23.5	1
1.4	16QAM	1	3	23.05	23.11	23.12		
1.4	16QAM	1	5	23.09	23.09	23.07		
1.4	16QAM	3	0	23.37	23.27	23.39		
1.4	16QAM	3	1	23.34	23.28	23.28		
1.4	16QAM	3	3	23.36	23.43	23.35		
1.4	16QAM	6	0	22.08	22.12	22.02	22.5	2
1.4	64QAM	1	0	22.14	22.14	22.11	22.5	2
1.4	64QAM	1	3	22.09	22.09	21.99		
1.4	64QAM	1	5	22.11	22.02	22.09		
1.4	64QAM	3	0	22.13	22.20	22.16		
1.4	64QAM	3	1	22.28	22.26	22.29		
1.4	64QAM	3	3	22.31	22.36	22.21		
1.4	64QAM	6	0	21.08	21.14	21.14	21.5	3

<LTE Band 13 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		24.27		24.5	0
10	QPSK	1	25		24.16			
10	QPSK	1	49		24.14			
10	QPSK	25	0		23.27		23.5	1
10	QPSK	25	12		23.25			
10	QPSK	25	25		23.26			
10	QPSK	50	0		23.27		23.5	1
10	16QAM	1	0		23.48			
10	16QAM	1	25		23.42			
10	16QAM	1	49		23.45		22.5	2
10	16QAM	25	0		22.24			
10	16QAM	25	12		22.29			
10	16QAM	25	25		22.33		22.5	2
10	16QAM	50	0		22.29			
10	64QAM	1	0		22.49			
10	64QAM	1	25		22.46		22.5	2
10	64QAM	1	49		22.42			
10	64QAM	25	0		21.30			
10	64QAM	25	12		21.32		21.5	3
10	64QAM	25	25		21.37			
10	64QAM	50	0		21.29			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	24.20	24.19	24.25	24.5	0
5	QPSK	1	12	24.14	24.15	24.09		
5	QPSK	1	24	24.10	24.07	24.08		
5	QPSK	12	0	23.25	23.17	23.19	23.5	1
5	QPSK	12	7	23.20	23.19	23.20		
5	QPSK	12	13	23.24	23.19	23.20		
5	QPSK	25	0	23.26	23.26	23.24	23.5	1
5	16QAM	1	0	23.46	23.43	23.43		
5	16QAM	1	12	23.34	23.35	23.36		
5	16QAM	1	24	23.43	23.41	23.39	22.5	2
5	16QAM	12	0	22.21	22.18	22.17		
5	16QAM	12	7	22.23	22.24	22.27		
5	16QAM	12	13	22.24	22.25	22.25	22.5	2
5	16QAM	25	0	22.27	22.19	22.19		
5	64QAM	1	0	22.44	22.44	22.49		
5	64QAM	1	12	22.41	22.43	22.41	22.5	2
5	64QAM	1	24	22.33	22.32	22.33		
5	64QAM	12	0	21.25	21.26	21.24		
5	64QAM	12	7	21.32	21.32	21.27	21.5	3
5	64QAM	12	13	21.32	21.37	21.28		
5	64QAM	25	0	21.23	21.23	21.29		

<LTE Band 14 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0		24.18		24.5	0
10	QPSK	1	25		24.09			
10	QPSK	1	49		24.03			
10	QPSK	25	0		23.21		23.5	1
10	QPSK	25	12		23.15			
10	QPSK	25	25		23.20			
10	QPSK	50	0		23.13		23.5	1
10	16QAM	1	0		23.48			
10	16QAM	1	25		23.49			
10	16QAM	1	49		23.46		22.5	2
10	16QAM	25	0		22.11			
10	16QAM	25	12		22.17			
10	16QAM	25	25		22.19		22.5	2
10	16QAM	50	0		22.13			
10	64QAM	1	0		22.41			
10	64QAM	1	25		22.43		22.5	2
10	64QAM	1	49		22.36			
10	64QAM	25	0		21.17			
10	64QAM	25	12		21.20		21.5	3
10	64QAM	25	25		21.22			
10	64QAM	50	0		21.19			
Channel				23305	23330	23355	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				790.5	793	795.5		
5	QPSK	1	0	24.10	24.13	24.17	24.5	0
5	QPSK	1	12	24.08	23.99	24.04		
5	QPSK	1	24	24.03	24.03	24.01		
5	QPSK	12	0	23.04	23.13	23.13	23.5	1
5	QPSK	12	7	23.09	23.12	23.11		
5	QPSK	12	13	23.13	23.18	23.20		
5	QPSK	25	0	23.10	23.10	23.06	23.5	1
5	16QAM	1	0	23.38	23.43	23.39		
5	16QAM	1	12	23.42	23.44	23.48		
5	16QAM	1	24	23.39	23.37	23.38	22.5	2
5	16QAM	12	0	22.05	22.06	22.06		
5	16QAM	12	7	22.16	22.16	22.07		
5	16QAM	12	13	22.15	22.17	22.09	22.5	2
5	16QAM	25	0	22.07	22.10	22.13		
5	64QAM	1	0	22.39	22.36	22.40		
5	64QAM	1	12	22.35	22.36	22.33	22.5	2
5	64QAM	1	24	22.28	22.33	22.35		
5	64QAM	12	0	21.11	21.11	21.14		
5	64QAM	12	7	21.10	21.15	21.18	21.5	3
5	64QAM	12	13	21.17	21.16	21.12		
5	64QAM	25	0	21.18	21.14	21.15		

<LTE Band 17 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	24.5	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	24.15	23.91	23.88		
10	QPSK	1	25	23.96	23.92	23.97	23.5	1
10	QPSK	1	49	24.09	24.08	24.01		
10	QPSK	25	0	22.99	23.01	23.00		
10	QPSK	25	12	23.15	23.05	23.16	23.5	1
10	QPSK	25	25	23.18	23.16	23.17		
10	QPSK	50	0	23.16	23.13	23.13		
10	16QAM	1	0	23.35	23.26	23.28	23.5	1
10	16QAM	1	25	23.32	23.31	23.32		
10	16QAM	1	49	23.46	23.46	23.35		
10	16QAM	25	0	21.97	22.01	22.00	22.5	2
10	16QAM	25	12	22.16	22.07	22.14		
10	16QAM	25	25	22.14	22.08	22.18		
10	16QAM	50	0	22.16	22.10	22.11	22.5	2
10	64QAM	1	0	22.21	22.16	22.18		
10	64QAM	1	25	22.28	22.25	22.25		
10	64QAM	1	49	22.38	22.34	22.33	21.5	3
10	64QAM	25	0	21.07	21.02	21.04		
10	64QAM	25	12	21.17	21.11	21.18		
10	64QAM	25	25	21.20	21.21	21.18	21.5	3
10	64QAM	50	0	21.18	21.13	21.15		
Channel				23755	23790	23825	24.5	0
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	24.05	23.88	23.78		
5	QPSK	1	12	23.95	23.86	23.92	23.5	1
5	QPSK	1	24	24.03	24.01	24.00		
5	QPSK	12	0	22.94	22.99	22.98		
5	QPSK	12	7	23.11	22.98	23.06	23.5	1
5	QPSK	12	13	23.18	23.13	23.13		
5	QPSK	25	0	23.11	23.12	23.03		
5	16QAM	1	0	23.29	23.19	23.19	23.5	1
5	16QAM	1	12	23.25	23.28	23.30		
5	16QAM	1	24	23.37	23.41	23.31		
5	16QAM	12	0	21.87	21.97	21.96	22.5	2
5	16QAM	12	7	22.15	22.07	22.09		
5	16QAM	12	13	22.10	22.08	22.10		
5	16QAM	25	0	22.12	22.05	22.05	22.5	2
5	64QAM	1	0	22.13	22.16	22.13		
5	64QAM	1	12	22.21	22.19	22.16		
5	64QAM	1	24	22.35	22.30	22.33	21.5	3
5	64QAM	12	0	21.05	20.98	20.99		
5	64QAM	12	7	21.15	21.08	21.15		
5	64QAM	12	13	21.10	21.17	21.18	21.5	3
5	64QAM	25	0	21.15	21.07	21.07		

<LTE Band 25 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	23.57	23.42	23.47	24	0
20	QPSK	1	49	23.47	23.40	23.45		
20	QPSK	1	99	23.43	23.40	23.46		
20	QPSK	50	0	22.67	22.51	22.60	23	1
20	QPSK	50	24	22.65	22.47	22.55		
20	QPSK	50	50	22.56	22.46	22.54		
20	QPSK	100	0	22.66	22.51	22.53	23	1
20	16QAM	1	0	22.86	22.78	22.83		
20	16QAM	1	49	22.82	22.77	22.79		
20	16QAM	1	99	22.72	22.80	22.86	22	2
20	16QAM	50	0	21.66	21.47	21.55		
20	16QAM	50	24	21.66	21.48	21.57		
20	16QAM	50	50	21.60	21.53	21.63	22	2
20	16QAM	100	0	21.63	21.54	21.53		
20	64QAM	1	0	21.77	21.61	21.65		
20	64QAM	1	49	21.71	21.61	21.70	22	2
20	64QAM	1	99	21.68	21.64	21.69		
20	64QAM	50	0	20.69	20.48	20.55		
20	64QAM	50	24	20.67	20.50	20.57	21	3
20	64QAM	50	50	20.61	20.56	20.64		
20	64QAM	100	0	20.64	20.55	20.58		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	23.50	23.38	23.47	24	0
15	QPSK	1	37	23.45	23.36	23.45		
15	QPSK	1	74	23.39	23.31	23.37		
15	QPSK	36	0	22.57	22.39	22.51	23	1
15	QPSK	36	20	22.56	22.37	22.45		
15	QPSK	36	39	22.49	22.47	22.55		
15	QPSK	75	0	22.64	22.43	22.43	23	1
15	16QAM	1	0	22.79	22.77	22.79		
15	16QAM	1	37	22.73	22.68	22.78		
15	16QAM	1	74	22.64	22.80	22.80	22	2
15	16QAM	36	0	21.59	21.42	21.53		
15	16QAM	36	20	21.65	21.45	21.47		
15	16QAM	36	39	21.52	21.50	21.63	22	2
15	16QAM	75	0	21.57	21.54	21.51		
15	64QAM	1	0	21.72	21.58	21.65		
15	64QAM	1	37	21.71	21.59	21.67	22	2
15	64QAM	1	74	21.63	21.63	21.67		
15	64QAM	36	0	20.60	20.44	20.52		
15	64QAM	36	20	20.58	20.47	20.56	21	3
15	64QAM	36	39	20.58	20.47	20.57		
15	64QAM	75	0	20.56	20.49	20.49		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	23.54	23.36	23.38	24	0
10	QPSK	1	25	23.39	23.39	23.45		
10	QPSK	1	49	23.36	23.30	23.45		
10	QPSK	25	0	22.66	22.37	22.51	23	1
10	QPSK	25	12	22.61	22.39	22.46		



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	22.55	22.43	22.60		
10	QPSK	50	0	22.63	22.49	22.53		
10	16QAM	1	0	22.79	22.69	22.75		
10	16QAM	1	25	22.80	22.70	22.72	23	1
10	16QAM	1	49	22.62	22.75	22.77		
10	16QAM	25	0	21.64	21.38	21.49		
10	16QAM	25	12	21.63	21.39	21.52	22	2
10	16QAM	25	25	21.56	21.53	21.55		
10	16QAM	50	0	21.59	21.53	21.45		
10	64QAM	1	0	21.71	21.60	21.62	22	2
10	64QAM	1	25	21.61	21.52	21.60		
10	64QAM	1	49	21.67	21.57	21.61		
10	64QAM	25	0	20.59	20.42	20.50	21	3
10	64QAM	25	12	20.67	20.45	20.47		
10	64QAM	25	25	20.58	20.51	20.55		
10	64QAM	50	0	20.63	20.45	20.56		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	23.51	23.39	23.44	24	0
5	QPSK	1	12	23.46	23.30	23.37		
5	QPSK	1	24	23.41	23.35	23.37		
5	QPSK	12	0	22.66	22.40	22.42	23	1
5	QPSK	12	7	22.63	22.45	22.55		
5	QPSK	12	13	22.46	22.46	22.54		
5	QPSK	25	0	22.62	22.51	22.44		
5	16QAM	1	0	22.83	22.76	22.73	23	1
5	16QAM	1	12	22.74	22.77	22.77		
5	16QAM	1	24	22.71	22.79	22.76		
5	16QAM	12	0	21.57	21.37	21.53	22	2
5	16QAM	12	7	21.58	21.44	21.53		
5	16QAM	12	13	21.58	21.50	21.53		
5	16QAM	25	0	21.58	21.54	21.51		
5	64QAM	1	0	21.68	21.51	21.62	22	2
5	64QAM	1	12	21.71	21.55	21.62		
5	64QAM	1	24	21.61	21.61	21.64		
5	64QAM	12	0	20.63	20.38	20.46	21	3
5	64QAM	12	7	20.67	20.50	20.51		
5	64QAM	12	13	20.53	20.52	20.60		
5	64QAM	25	0	20.59	20.48	20.52		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	23.48	23.39	23.46	24	0
3	QPSK	1	8	23.44	23.36	23.45		
3	QPSK	1	14	23.40	23.32	23.36		
3	QPSK	8	0	22.62	22.43	22.49	23	1
3	QPSK	8	4	22.55	22.46	22.55		
3	QPSK	8	7	22.56	22.44	22.52		
3	QPSK	15	0	22.57	22.47	22.45		
3	16QAM	1	0	22.83	22.70	22.73	23	1
3	16QAM	1	8	22.79	22.68	22.75		
3	16QAM	1	14	22.67	22.76	22.79		
3	16QAM	8	0	21.65	21.46	21.54	22	2
3	16QAM	8	4	21.63	21.42	21.57		
3	16QAM	8	7	21.59	21.52	21.59		
3	16QAM	15	0	21.59	21.52	21.52		
3	64QAM	1	0	21.75	21.52	21.65	22	2



FCC SAR TEST REPORT

Report No. : FA082123-01

3	64QAM	1	8	21.63	21.53	21.61	21	3
3	64QAM	1	14	21.60	21.60	21.62		
3	64QAM	8	0	20.67	20.43	20.52		
3	64QAM	8	4	20.61	20.42	20.52		
3	64QAM	8	7	20.61	20.53	20.59		
3	64QAM	15	0	20.57	20.48	20.48		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	23.49	23.38	23.46	24	0
1.4	QPSK	1	3	23.38	23.37	23.39		
1.4	QPSK	1	5	23.43	23.32	23.39		
1.4	QPSK	3	0	23.54	23.33	23.43		
1.4	QPSK	3	1	23.39	23.33	23.38		
1.4	QPSK	3	3	23.41	23.36	23.36		
1.4	QPSK	6	0	22.59	22.38	22.49	23	1
1.4	16QAM	1	0	22.64	22.36	22.53	23	1
1.4	16QAM	1	3	22.50	22.45	22.56		
1.4	16QAM	1	5	22.62	22.41	22.47		
1.4	16QAM	3	0	22.83	22.69	22.75		
1.4	16QAM	3	1	22.78	22.76	22.77		
1.4	16QAM	3	3	22.63	22.77	22.85		
1.4	16QAM	6	0	21.64	21.40	21.54	22	2
1.4	64QAM	1	0	21.65	21.48	21.56	22	2
1.4	64QAM	1	3	21.50	21.45	21.56		
1.4	64QAM	1	5	21.60	21.50	21.43		
1.4	64QAM	3	0	21.72	21.61	21.55		
1.4	64QAM	3	1	21.67	21.58	21.64		
1.4	64QAM	3	3	21.62	21.54	21.59		
1.4	64QAM	6	0	20.65	20.43	20.45	21	3

<LTE Band 26 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	24.32	24.18	24.08		
15	QPSK	1	37	24.19	24.10	24.00	24.5	0
15	QPSK	1	74	24.15	24.08	23.97		
15	QPSK	36	0	23.41	23.30	23.15		
15	QPSK	36	20	23.40	23.29	23.19	23.5	1
15	QPSK	36	39	23.36	23.24	23.11		
15	QPSK	75	0	23.41	23.21	23.12		
15	16QAM	1	0	23.42	23.41	23.37	23.5	1
15	16QAM	1	37	23.50	23.43	23.35		
15	16QAM	1	74	23.48	23.42	23.22		
15	16QAM	36	0	22.33	22.23	22.16	22.5	2
15	16QAM	36	20	22.38	22.28	22.17		
15	16QAM	36	39	22.35	22.24	22.13		
15	16QAM	75	0	22.38	22.21	22.13	22.5	2
15	64QAM	1	0	22.37	22.37	22.30		
15	64QAM	1	37	22.39	22.38	22.26		
15	64QAM	1	74	22.31	22.29	21.45	21.5	3
15	64QAM	36	0	21.38	21.27	21.21		
15	64QAM	36	20	21.38	21.32	21.21		
15	64QAM	36	39	21.36	21.32	21.20	21.5	3
15	64QAM	75	0	21.37	21.22	21.15		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	24.29	24.16	24.02		
10	QPSK	1	25	24.09	24.07	23.99	24.5	0
10	QPSK	1	49	24.15	24.02	23.97		
10	QPSK	25	0	23.36	23.21	23.11		
10	QPSK	25	12	23.37	23.29	23.13	23.5	1
10	QPSK	25	25	23.28	23.21	23.08		
10	QPSK	50	0	23.36	23.15	23.03		
10	16QAM	1	0	23.32	23.36	23.35	23.5	1
10	16QAM	1	25	23.40	23.35	23.25		
10	16QAM	1	49	23.40	23.42	23.21		
10	16QAM	25	0	22.33	22.22	22.06	22.5	2
10	16QAM	25	12	22.32	22.25	22.15		
10	16QAM	25	25	22.25	22.22	22.07		
10	16QAM	50	0	22.29	22.16	22.10	22.5	2
10	64QAM	1	0	22.35	22.36	22.30		
10	64QAM	1	25	22.34	22.31	22.16		
10	64QAM	1	49	22.25	22.23	21.37	21.5	3
10	64QAM	25	0	21.35	21.26	21.21		
10	64QAM	25	12	21.37	21.24	21.16		
10	64QAM	25	25	21.29	21.25	21.16	21.5	3
10	64QAM	50	0	21.33	21.22	21.12		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	24.22	24.09	24.06		
5	QPSK	1	12	24.17	24.07	23.92	24.5	0
5	QPSK	1	24	24.09	24.04	23.93		
5	QPSK	12	0	23.29	23.23	23.12		
5	QPSK	12	7	23.34	23.21	23.19	23.5	1



FCC SAR TEST REPORT

Report No. : FA082123-01

5	QPSK	12	13	23.28	23.15	23.10		
5	QPSK	25	0	23.31	23.12	23.12		
5	16QAM	1	0	23.36	23.36	23.35		
5	16QAM	1	12	23.42	23.34	23.27	23.5	1
5	16QAM	1	24	23.48	23.42	23.20		
5	16QAM	12	0	22.29	22.18	22.12		
5	16QAM	12	7	22.33	22.25	22.10	22.5	2
5	16QAM	12	13	22.34	22.14	22.12		
5	16QAM	25	0	22.32	22.12	22.03		
5	64QAM	1	0	22.35	22.29	22.22	22.5	2
5	64QAM	1	12	22.32	22.32	22.16		
5	64QAM	1	24	22.25	22.20	21.36		
5	64QAM	12	0	21.28	21.23	21.21	21.5	3
5	64QAM	12	7	21.34	21.27	21.17		
5	64QAM	12	13	21.32	21.30	21.19		
5	64QAM	25	0	21.31	21.15	21.08		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	24.29	24.11	24.00	24.5	0
3	QPSK	1	8	24.18	24.01	23.98		
3	QPSK	1	14	24.06	24.02	23.92		
3	QPSK	8	0	23.37	23.23	23.06	23.5	1
3	QPSK	8	4	23.35	23.28	23.19		
3	QPSK	8	7	23.35	23.14	23.10		
3	QPSK	15	0	23.35	23.13	23.03	23.5	1
3	16QAM	1	0	23.35	23.33	23.34		
3	16QAM	1	8	23.42	23.40	23.32		
3	16QAM	1	14	23.47	23.37	23.12	22.5	2
3	16QAM	8	0	22.24	22.21	22.08		
3	16QAM	8	4	22.32	22.28	22.16		
3	16QAM	8	7	22.35	22.14	22.12	22.5	2
3	16QAM	15	0	22.31	22.17	22.04		
3	64QAM	1	0	22.36	22.29	22.20		
3	64QAM	1	8	22.30	22.34	22.16	22.5	2
3	64QAM	1	14	22.24	22.27	21.41		
3	64QAM	8	0	21.35	21.27	21.18		
3	64QAM	8	4	21.32	21.28	21.15	21.5	3
3	64QAM	8	7	21.29	21.27	21.14		
3	64QAM	15	0	21.29	21.13	21.14		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	24.29	24.17	24.05	24.5	0
1.4	QPSK	1	3	24.16	24.08	23.92		
1.4	QPSK	1	5	24.07	24.05	23.93		
1.4	QPSK	3	0	24.24	24.12	24.04		
1.4	QPSK	3	1	24.18	24.10	24.00		
1.4	QPSK	3	3	24.07	24.03	23.90		
1.4	QPSK	6	0	23.38	23.17	23.06	23.5	1
1.4	16QAM	1	0	23.32	23.21	23.14	23.5	1
1.4	16QAM	1	3	23.33	23.16	23.02		
1.4	16QAM	1	5	23.37	23.14	23.04		
1.4	16QAM	3	0	23.41	23.33	23.30		
1.4	16QAM	3	1	23.49	23.41	23.35		
1.4	16QAM	3	3	23.47	23.34	23.13		
1.4	16QAM	6	0	22.26	22.15	22.09	22.5	2
1.4	64QAM	1	0	22.32	22.21	22.08	22.5	2



FCC SAR TEST REPORT

Report No. : FA082123-01

1.4	64QAM	1	3	22.33	22.19	22.03		
1.4	64QAM	1	5	22.35	22.16	22.04		
1.4	64QAM	3	0	22.32	22.28	22.27		
1.4	64QAM	3	1	22.31	22.30	22.21		
1.4	64QAM	3	3	22.28	22.21	21.38		
1.4	64QAM	6	0	21.36	21.18	21.21	21.5	3

<LTE Band 30 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		22.38		23	0
10	QPSK	1	25		22.25			
10	QPSK	1	49		22.33			
10	QPSK	25	0		21.35		22	1
10	QPSK	25	12		21.31			
10	QPSK	25	25		21.22			
10	QPSK	50	0		21.31		22	1
10	16QAM	1	0		21.61			
10	16QAM	1	25		21.69			
10	16QAM	1	49		21.62		21	2
10	16QAM	25	0		20.30			
10	16QAM	25	12		20.31			
10	16QAM	25	25		20.42		21	2
10	16QAM	50	0		20.33			
10	64QAM	1	0		20.47			
10	64QAM	1	25		20.56		21	2
10	64QAM	1	49		20.59			
10	64QAM	25	0		19.32			
10	64QAM	25	12		19.36		20	3
10	64QAM	25	25		19.45			
10	64QAM	50	0		19.35			
Channel				27685	27710	27735	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	22.35	22.27	22.35	23	0
5	QPSK	1	12	22.23	22.23	22.25		
5	QPSK	1	24	22.24	22.31	22.33		
5	QPSK	12	0	21.23	21.22	21.22	22	1
5	QPSK	12	7	21.27	21.29	21.21		
5	QPSK	12	13	21.33	21.33	21.40		
5	QPSK	25	0	21.24	21.30	21.21	22	1
5	16QAM	1	0	21.52	21.52	21.55		
5	16QAM	1	12	21.59	21.60	21.61		
5	16QAM	1	24	21.61	21.60	21.58	21	2
5	16QAM	12	0	20.26	20.23	20.29		
5	16QAM	12	7	20.27	20.23	20.28		
5	16QAM	12	13	20.40	20.38	20.35	21	2
5	16QAM	25	0	20.30	20.30	20.29		
5	64QAM	1	0	20.45	20.42	20.42		
5	64QAM	1	12	20.51	20.55	20.51	21	2
5	64QAM	1	24	20.55	20.51	20.54		
5	64QAM	12	0	19.28	19.32	19.29		
5	64QAM	12	7	19.35	19.26	19.30	20	3
5	64QAM	12	13	19.43	19.38	19.44		
5	64QAM	25	0	19.25	19.32	19.33		



<LTE Band 66 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	23.71	23.70	23.64		
20	QPSK	1	49	23.64	23.60	23.55	24	0
20	QPSK	1	99	23.64	23.58	23.48		
20	QPSK	50	0	22.84	22.73	22.68		
20	QPSK	50	24	22.83	22.72	22.65	23	1
20	QPSK	50	50	22.78	22.76	22.69		
20	QPSK	100	0	22.80	22.75	22.62		
20	16QAM	1	0	22.96	22.94	22.99	23	1
20	16QAM	1	49	22.98	22.95	22.89		
20	16QAM	1	99	22.95	22.96	22.81		
20	16QAM	50	0	21.76	21.73	21.70	22	2
20	16QAM	50	24	21.82	21.73	21.66		
20	16QAM	50	50	21.78	21.76	21.69		
20	16QAM	100	0	21.79	21.77	21.65	22	2
20	64QAM	1	0	21.87	21.88	21.82		
20	64QAM	1	49	21.84	21.83	21.81		
20	64QAM	1	99	21.88	21.85	21.73	21	3
20	64QAM	50	0	20.78	20.78	20.72		
20	64QAM	50	24	20.86	20.74	20.69		
20	64QAM	50	50	20.82	20.78	20.71	21	3
20	64QAM	50	50	20.82	20.78	20.71		
20	64QAM	100	0	20.82	20.81	20.67		
Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	23.61	23.63	23.64		
15	QPSK	1	37	23.63	23.58	23.49	24	0
15	QPSK	1	74	23.64	23.56	23.38		
15	QPSK	36	0	22.74	22.63	22.66		
15	QPSK	36	20	22.77	22.62	22.59	23	1
15	QPSK	36	39	22.78	22.76	22.66		
15	QPSK	75	0	22.78	22.70	22.53		
15	16QAM	1	0	22.90	22.93	22.96	23	1
15	16QAM	1	37	22.90	22.85	22.87		
15	16QAM	1	74	22.89	22.90	22.71		
15	16QAM	36	0	21.73	21.64	21.70	22	2
15	16QAM	36	20	21.78	21.71	21.63		
15	16QAM	36	39	21.75	21.75	21.68		
15	16QAM	75	0	21.73	21.77	21.56	22	2
15	64QAM	1	0	21.86	21.80	21.74		
15	64QAM	1	37	21.76	21.77	21.74		
15	64QAM	1	74	21.84	21.83	21.71	21	3
15	64QAM	36	0	20.77	20.78	20.64		
15	64QAM	36	20	20.78	20.67	20.69		
15	64QAM	36	39	20.76	20.69	20.66	21	3
15	64QAM	36	39	20.76	20.69	20.66		
15	64QAM	75	0	20.72	20.71	20.66		
Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	23.67	23.69	23.62		
10	QPSK	1	25	23.61	23.52	23.55	24	0
10	QPSK	1	49	23.56	23.48	23.46		
10	QPSK	25	0	22.75	22.71	22.63		
10	QPSK	25	12	22.82	22.71	22.57	23	1



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	22.71	22.72	22.66		
10	QPSK	50	0	22.75	22.65	22.54		
10	16QAM	1	0	22.87	22.91	22.91		
10	16QAM	1	25	22.93	22.86	22.85	23	1
10	16QAM	1	49	22.85	22.96	22.81		
10	16QAM	25	0	21.66	21.66	21.68		
10	16QAM	25	12	21.77	21.70	21.58	22	2
10	16QAM	25	25	21.74	21.74	21.64		
10	16QAM	50	0	21.69	21.69	21.60		
10	64QAM	1	0	21.87	21.81	21.78	22	2
10	64QAM	1	25	21.84	21.79	21.81		
10	64QAM	1	49	21.83	21.80	21.72		
10	64QAM	25	0	20.73	20.69	20.71	21	3
10	64QAM	25	12	20.81	20.71	20.62		
10	64QAM	25	25	20.73	20.68	20.61		
10	64QAM	50	0	20.82	20.76	20.60		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	23.63	23.69	23.63	24	0
5	QPSK	1	12	23.54	23.52	23.50		
5	QPSK	1	24	23.64	23.54	23.46		
5	QPSK	12	0	22.76	22.66	22.67	23	1
5	QPSK	12	7	22.74	22.63	22.56		
5	QPSK	12	13	22.70	22.72	22.60		
5	QPSK	25	0	22.72	22.73	22.60	23	1
5	16QAM	1	0	22.88	22.88	22.99		
5	16QAM	1	12	22.90	22.90	22.89		
5	16QAM	1	24	22.85	22.96	22.81	22	2
5	16QAM	12	0	21.72	21.68	21.62		
5	16QAM	12	7	21.75	21.71	21.66		
5	16QAM	12	13	21.77	21.68	21.62	22	2
5	16QAM	25	0	21.70	21.67	21.59		
5	64QAM	1	0	21.82	21.87	21.79		
5	64QAM	1	12	21.76	21.80	21.79	22	2
5	64QAM	1	24	21.78	21.75	21.71		
5	64QAM	12	0	20.71	20.75	20.68		
5	64QAM	12	7	20.82	20.74	20.68	21	3
5	64QAM	12	13	20.77	20.71	20.71		
5	64QAM	25	0	20.73	20.72	20.67		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	23.67	23.69	23.59	24	0
3	QPSK	1	8	23.54	23.52	23.52		
3	QPSK	1	14	23.56	23.58	23.40		
3	QPSK	8	0	22.75	22.63	22.62	23	1
3	QPSK	8	4	22.78	22.70	22.63		
3	QPSK	8	7	22.74	22.69	22.65		
3	QPSK	15	0	22.80	22.67	22.60	23	1
3	16QAM	1	0	22.92	22.93	22.95		
3	16QAM	1	8	22.93	22.88	22.82		
3	16QAM	1	14	22.90	22.95	22.71	22	2
3	16QAM	8	0	21.71	21.72	21.64		
3	16QAM	8	4	21.78	21.71	21.57		
3	16QAM	8	7	21.74	21.74	21.61	22	2
3	16QAM	15	0	21.76	21.72	21.60		
3	64QAM	1	0	21.78	21.88	21.74	22	2



FCC SAR TEST REPORT

Report No. : FA082123-01

3	64QAM	1	8	21.75	21.76	21.80	21	3
3	64QAM	1	14	21.87	21.80	21.73		
3	64QAM	8	0	20.72	20.75	20.66		
3	64QAM	8	4	20.80	20.66	20.65		
3	64QAM	8	7	20.79	20.77	20.62		
3	64QAM	15	0	20.78	20.73	20.62		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	23.70	23.68	23.55	24	0
1.4	QPSK	1	3	23.57	23.56	23.52		
1.4	QPSK	1	5	23.55	23.52	23.44		
1.4	QPSK	3	0	23.70	23.68	23.60		
1.4	QPSK	3	1	23.59	23.53	23.48		
1.4	QPSK	3	3	23.60	23.48	23.44		
1.4	QPSK	6	0	22.73	22.66	22.60	23	1
1.4	16QAM	1	0	22.79	22.71	22.57	23	1
1.4	16QAM	1	3	22.68	22.70	22.65		
1.4	16QAM	1	5	22.76	22.72	22.57		
1.4	16QAM	3	0	22.92	22.85	22.92		
1.4	16QAM	3	1	22.92	22.87	22.79		
1.4	16QAM	3	3	22.94	22.92	22.79		
1.4	16QAM	6	0	21.70	21.72	21.67	22	2
1.4	64QAM	1	0	21.74	21.73	21.66	22	2
1.4	64QAM	1	3	21.71	21.76	21.67		
1.4	64QAM	1	5	21.78	21.67	21.55		
1.4	64QAM	3	0	21.80	21.82	21.77		
1.4	64QAM	3	1	21.78	21.80	21.72		
1.4	64QAM	3	3	21.84	21.78	21.67		
1.4	64QAM	6	0	20.76	20.78	20.66	21	3

DSI 2
<LTE Band 2 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	17.44	17.10	17.02	18	0
20	QPSK	1	49	17.09	16.73	16.64		
20	QPSK	1	99	16.65	17.09	16.81		
20	QPSK	50	0	16.70	16.74	16.86	18	0
20	QPSK	50	24	16.53	17.09	17.01		
20	QPSK	50	50	17.00	16.72	16.92		
20	QPSK	100	0	16.73	17.06	16.86	18	0
20	16QAM	1	0	16.66	16.50	16.96		
20	16QAM	1	49	16.61	16.63	16.82		
20	16QAM	1	99	16.79	16.94	16.90	18	0
20	16QAM	50	0	17.06	16.79	16.74		
20	16QAM	50	24	16.52	16.78	17.06		
20	16QAM	50	50	16.84	16.74	16.76	18	0
20	16QAM	100	0	16.60	16.82	16.97		
20	64QAM	1	0	17.09	17.00	16.59		
20	64QAM	1	49	16.95	17.02	16.69	18	0
20	64QAM	1	99	16.66	16.92	16.94		
20	64QAM	50	0	16.57	16.83	16.86		
20	64QAM	50	24	16.61	16.60	17.00	18	0
20	64QAM	50	50	16.96	16.89	16.61		
20	64QAM	100	0	16.78	17.04	17.03		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	16.51	17.08	16.63	18	0
15	QPSK	1	37	16.76	16.80	16.54		
15	QPSK	1	74	16.90	16.80	17.07		
15	QPSK	36	0	17.06	16.76	16.60	18	0
15	QPSK	36	20	16.86	16.85	16.93		
15	QPSK	36	39	16.81	17.05	16.50		
15	QPSK	75	0	16.92	16.88	16.64	18	0
15	16QAM	1	0	16.81	16.65	16.57		
15	16QAM	1	37	16.56	17.04	16.64		
15	16QAM	1	74	16.92	16.81	16.99	18	0
15	16QAM	36	0	16.91	16.63	16.98		
15	16QAM	36	20	16.50	16.67	17.10		
15	16QAM	36	39	16.59	16.77	16.52	18	0
15	16QAM	75	0	16.91	16.75	16.88		
15	64QAM	1	0	16.95	16.69	16.62		
15	64QAM	1	37	16.98	16.86	16.99	18	0
15	64QAM	1	74	16.91	16.55	16.86		
15	64QAM	36	0	16.90	17.06	16.87		
15	64QAM	36	20	16.83	16.81	16.96	18	0
15	64QAM	36	39	16.52	16.76	16.86		
15	64QAM	75	0	16.62	16.57	16.85		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	16.50	16.93	17.09	18	0
10	QPSK	1	25	16.62	16.86	17.05		
10	QPSK	1	49	16.92	16.52	16.86		
10	QPSK	25	0	17.09	16.73	16.73	18	0



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	12	16.86	16.69	16.55		
10	QPSK	25	25	16.64	16.81	16.76		
10	QPSK	50	0	16.64	17.02	16.69		
10	16QAM	1	0	16.65	16.70	16.66	18	0
10	16QAM	1	25	16.80	16.66	16.89		
10	16QAM	1	49	16.90	17.01	16.83		
10	16QAM	25	0	16.90	17.04	16.92	18	0
10	16QAM	25	12	16.58	17.10	16.65		
10	16QAM	25	25	16.73	16.98	16.75		
10	16QAM	50	0	17.02	16.57	16.97	18	0
10	64QAM	1	0	17.04	16.78	17.00		
10	64QAM	1	25	16.61	16.65	16.58		
10	64QAM	1	49	16.53	17.03	16.60	18	0
10	64QAM	25	0	16.85	17.00	16.71		
10	64QAM	25	12	16.66	16.52	16.69		
10	64QAM	25	25	16.71	16.54	16.70	18	0
10	64QAM	50	0	16.73	16.66	16.77		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	17.09	17.01	17.03	18	0
5	QPSK	1	12	16.53	17.09	16.95		
5	QPSK	1	24	16.78	16.58	16.95		
5	QPSK	12	0	17.03	16.77	16.92	18	0
5	QPSK	12	7	16.50	16.69	16.90		
5	QPSK	12	13	16.73	16.99	16.67		
5	QPSK	25	0	16.96	16.97	16.54	18	0
5	16QAM	1	0	17.01	16.73	17.05		
5	16QAM	1	12	16.58	16.81	16.80		
5	16QAM	1	24	16.75	16.93	16.96	18	0
5	16QAM	12	0	16.88	16.69	17.09		
5	16QAM	12	7	16.52	17.04	16.92		
5	16QAM	12	13	16.92	16.88	16.70	18	0
5	16QAM	25	0	17.05	16.60	16.54		
5	64QAM	1	0	17.06	16.96	16.57		
5	64QAM	1	12	17.04	16.85	16.62	18	0
5	64QAM	1	24	16.97	16.55	16.91		
5	64QAM	12	0	16.62	16.78	16.63		
5	64QAM	12	7	16.61	17.07	16.83	18	0
5	64QAM	12	13	16.97	16.82	17.03		
5	64QAM	25	0	16.87	16.89	17.09		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	16.82	17.06	16.59	18	0
3	QPSK	1	8	16.80	16.84	16.59		
3	QPSK	1	14	16.80	17.02	16.79		
3	QPSK	8	0	16.58	16.84	16.99	18	0
3	QPSK	8	4	16.76	17.05	16.96		
3	QPSK	8	7	16.72	16.90	16.98		
3	QPSK	15	0	16.59	17.10	16.69	18	0
3	16QAM	1	0	16.52	16.52	16.94		
3	16QAM	1	8	16.95	17.09	16.74		
3	16QAM	1	14	16.76	17.10	17.07	18	0
3	16QAM	8	0	16.90	16.85	16.62		
3	16QAM	8	4	17.05	16.61	16.56		
3	16QAM	8	7	17.10	16.73	17.09	18	0
3	16QAM	15	0	17.03	16.60	16.72		



FCC SAR TEST REPORT

Report No. : FA082123-01

3	64QAM	1	0	16.77	16.74	16.79	18	0
3	64QAM	1	8	16.94	17.09	16.88		
3	64QAM	1	14	16.73	17.08	16.75		
3	64QAM	8	0	16.83	16.64	16.61	18	0
3	64QAM	8	4	16.80	16.72	16.81		
3	64QAM	8	7	16.72	16.82	17.04		
3	64QAM	15	0	16.80	16.73	17.09		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	16.56	16.76	16.93	18	0
1.4	QPSK	1	3	16.70	16.66	16.68		
1.4	QPSK	1	5	17.03	16.53	16.80		
1.4	QPSK	3	0	16.65	16.67	16.72		
1.4	QPSK	3	1	16.67	16.75	16.57		
1.4	QPSK	3	3	16.86	16.64	17.10		
1.4	QPSK	6	0	16.65	16.70	16.74	18	0
1.4	16QAM	1	0	16.60	16.51	16.59	18	0
1.4	16QAM	1	3	16.53	16.86	16.80		
1.4	16QAM	1	5	16.72	16.66	16.99		
1.4	16QAM	3	0	16.97	16.78	16.78		
1.4	16QAM	3	1	16.76	16.80	16.54		
1.4	16QAM	3	3	16.93	16.77	16.98		
1.4	16QAM	6	0	16.71	16.81	16.88	18	0
1.4	64QAM	1	0	16.51	17.05	16.70	18	0
1.4	64QAM	1	3	16.76	16.87	16.94		
1.4	64QAM	1	5	16.62	16.56	16.97		
1.4	64QAM	3	0	16.83	16.67	16.77		
1.4	64QAM	3	1	16.55	16.68	16.64		
1.4	64QAM	3	3	16.97	16.68	16.73		
1.4	64QAM	6	0	16.72	16.56	17.08	18	0



<LTE Band 2 Aux>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	14.94	14.73	14.79	15.7	0
20	QPSK	1	49	14.54	14.40	14.55		
20	QPSK	1	99	14.59	14.56	14.47		
20	QPSK	50	0	14.60	14.56	14.59	15.7	0
20	QPSK	50	24	14.45	14.41	14.49		
20	QPSK	50	50	14.46	14.50	14.40		
20	QPSK	100	0	14.60	14.45	14.59	15.7	0
20	16QAM	1	0	14.44	14.51	14.41		
20	16QAM	1	49	14.48	14.47	14.41		
20	16QAM	1	99	14.52	14.49	14.51	15.7	0
20	16QAM	50	0	14.48	14.48	14.59		
20	16QAM	50	24	14.55	14.48	14.40		
20	16QAM	50	50	14.60	14.40	14.49	15.7	0
20	16QAM	100	0	14.56	14.58	14.53		
20	64QAM	1	0	14.52	14.56	14.52		
20	64QAM	1	49	14.41	14.41	14.43	15.7	0
20	64QAM	1	99	14.47	14.60	14.44		
20	64QAM	50	0	14.50	14.53	14.52		
20	64QAM	50	24	14.57	14.55	14.42	15.7	0
20	64QAM	50	50	14.52	14.50	14.57		
20	64QAM	100	0	14.59	14.58	14.57		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	14.42	14.59	14.53	15.7	0
15	QPSK	1	37	14.53	14.57	14.41		
15	QPSK	1	74	14.42	14.43	14.47		
15	QPSK	36	0	14.51	14.59	14.44	15.7	0
15	QPSK	36	20	14.46	14.58	14.58		
15	QPSK	36	39	14.52	14.43	14.42		
15	QPSK	75	0	14.43	14.40	14.54	15.7	0
15	16QAM	1	0	14.58	14.50	14.43		
15	16QAM	1	37	14.40	14.43	14.58		
15	16QAM	1	74	14.57	14.51	14.40	15.7	0
15	16QAM	36	0	14.44	14.59	14.55		
15	16QAM	36	20	14.45	14.51	14.40		
15	16QAM	36	39	14.41	14.54	14.59	15.7	0
15	16QAM	75	0	14.52	14.50	14.60		
15	64QAM	1	0	14.56	14.59	14.60		
15	64QAM	1	37	14.42	14.42	14.59	15.7	0
15	64QAM	1	74	14.45	14.59	14.43		
15	64QAM	36	0	14.47	14.44	14.55		
15	64QAM	36	20	14.48	14.56	14.46	15.7	0
15	64QAM	36	39	14.46	14.44	14.40		
15	64QAM	75	0	14.60	14.53	14.56		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	14.46	14.51	14.40	15.7	0
10	QPSK	1	25	14.58	14.58	14.56		
10	QPSK	1	49	14.42	14.58	14.56		
10	QPSK	25	0	14.46	14.49	14.45	15.7	0
10	QPSK	25	12	14.45	14.47	14.59		



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	14.48	14.40	14.42		
10	QPSK	50	0	14.60	14.56	14.58		
10	16QAM	1	0	14.52	14.40	14.56		
10	16QAM	1	25	14.50	14.52	14.50	15.7	0
10	16QAM	1	49	14.55	14.40	14.42		
10	16QAM	25	0	14.44	14.52	14.56		
10	16QAM	25	12	14.57	14.45	14.40	15.7	0
10	16QAM	25	25	14.48	14.46	14.58		
10	16QAM	50	0	14.50	14.50	14.55		
10	64QAM	1	0	14.48	14.48	14.41	15.7	0
10	64QAM	1	25	14.51	14.46	14.51		
10	64QAM	1	49	14.49	14.57	14.47		
10	64QAM	25	0	14.49	14.51	14.52	15.7	0
10	64QAM	25	12	14.41	14.42	14.46		
10	64QAM	25	25	14.41	14.41	14.49		
10	64QAM	50	0	14.41	14.44	14.51		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	14.52	14.52	14.47	15.7	0
5	QPSK	1	12	14.55	14.58	14.51		
5	QPSK	1	24	14.60	14.47	14.54		
5	QPSK	12	0	14.44	14.40	14.43	15.7	0
5	QPSK	12	7	14.51	14.43	14.53		
5	QPSK	12	13	14.50	14.56	14.54		
5	QPSK	25	0	14.50	14.59	14.49	15.7	0
5	16QAM	1	0	14.41	14.60	14.53		
5	16QAM	1	12	14.53	14.40	14.44		
5	16QAM	1	24	14.48	14.40	14.54	15.7	0
5	16QAM	12	0	14.57	14.60	14.46		
5	16QAM	12	7	14.53	14.54	14.53		
5	16QAM	12	13	14.59	14.41	14.57	15.7	0
5	16QAM	25	0	14.52	14.58	14.58		
5	64QAM	1	0	14.53	14.40	14.41		
5	64QAM	1	12	14.57	14.40	14.44	15.7	0
5	64QAM	1	24	14.57	14.52	14.59		
5	64QAM	12	0	14.45	14.49	14.42		
5	64QAM	12	7	14.42	14.56	14.48	15.7	0
5	64QAM	12	13	14.41	14.44	14.43		
5	64QAM	25	0	14.59	14.42	14.49		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	14.57	14.46	14.54	15.7	0
3	QPSK	1	8	14.53	14.44	14.47		
3	QPSK	1	14	14.44	14.59	14.55		
3	QPSK	8	0	14.51	14.55	14.47	15.7	0
3	QPSK	8	4	14.45	14.58	14.57		
3	QPSK	8	7	14.43	14.46	14.48		
3	QPSK	15	0	14.57	14.40	14.56	15.7	0
3	16QAM	1	0	14.60	14.59	14.51		
3	16QAM	1	8	14.52	14.52	14.45		
3	16QAM	1	14	14.48	14.55	14.44	15.7	0
3	16QAM	8	0	14.48	14.48	14.53		
3	16QAM	8	4	14.44	14.44	14.55		
3	16QAM	8	7	14.58	14.54	14.43	15.7	0
3	16QAM	15	0	14.46	14.47	14.49		
3	64QAM	1	0	14.58	14.41	14.49	15.7	0



FCC SAR TEST REPORT

Report No. : FA082123-01

3	64QAM	1	8	14.51	14.48	14.56	15.7	0
3	64QAM	1	14	14.60	14.59	14.56		
3	64QAM	8	0	14.48	14.59	14.50		
3	64QAM	8	4	14.53	14.43	14.60		
3	64QAM	8	7	14.60	14.54	14.55		
3	64QAM	15	0	14.40	14.44	14.60		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	14.59	14.60	14.47	15.7	0
1.4	QPSK	1	3	14.50	14.51	14.48		
1.4	QPSK	1	5	14.57	14.42	14.58		
1.4	QPSK	3	0	14.54	14.50	14.49		
1.4	QPSK	3	1	14.55	14.51	14.44		
1.4	QPSK	3	3	14.60	14.44	14.43		
1.4	QPSK	6	0	14.59	14.44	14.47	15.7	0
1.4	16QAM	1	0	14.50	14.47	14.46	15.7	0
1.4	16QAM	1	3	14.47	14.57	14.42		
1.4	16QAM	1	5	14.53	14.56	14.47		
1.4	16QAM	3	0	14.47	14.48	14.49		
1.4	16QAM	3	1	14.44	14.46	14.53		
1.4	16QAM	3	3	14.40	14.41	14.54		
1.4	16QAM	6	0	14.50	14.53	14.53	15.7	0
1.4	64QAM	1	0	14.60	14.42	14.51	15.7	0
1.4	64QAM	1	3	14.44	14.47	14.43		
1.4	64QAM	1	5	14.52	14.53	14.57		
1.4	64QAM	3	0	14.52	14.57	14.55		
1.4	64QAM	3	1	14.54	14.54	14.54		
1.4	64QAM	3	3	14.49	14.42	14.41		
1.4	64QAM	6	0	14.58	14.57	14.45	15.7	0

<LTE Band 4 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	17.43	17.49	17.55		
20	QPSK	1	49	17.37	17.29	17.21	18.2	0
20	QPSK	1	99	17.22	17.35	17.21		
20	QPSK	50	0	17.26	17.37	17.30		
20	QPSK	50	24	17.32	17.34	17.22	18.2	0
20	QPSK	50	50	17.24	17.25	17.38		
20	QPSK	100	0	17.28	17.33	17.26		
20	16QAM	1	0	17.27	17.34	17.25	18.2	0
20	16QAM	1	49	17.21	17.34	17.21		
20	16QAM	1	99	17.27	17.35	17.40		
20	16QAM	50	0	17.36	17.31	17.29	18.2	0
20	16QAM	50	24	17.30	17.33	17.30		
20	16QAM	50	50	17.20	17.24	17.29		
20	16QAM	100	0	17.39	17.32	17.22	18.2	0
20	64QAM	1	0	17.24	17.21	17.32		
20	64QAM	1	49	17.25	17.34	17.39		
20	64QAM	1	99	17.25	17.21	17.28	18.2	0
20	64QAM	50	0	17.39	17.38	17.24		
20	64QAM	50	24	17.34	17.33	17.40		
20	64QAM	50	50	17.38	17.24	17.20	18.2	0
20	64QAM	100	0	17.37	17.34	17.21		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	17.35	17.34	17.22		
15	QPSK	1	37	17.39	17.29	17.30	18.2	0
15	QPSK	1	74	17.20	17.24	17.39		
15	QPSK	36	0	17.24	17.38	17.34	18.2	0
15	QPSK	36	20	17.28	17.39	17.26		
15	QPSK	36	39	17.26	17.22	17.37		
15	QPSK	75	0	17.26	17.23	17.33	18.2	0
15	16QAM	1	0	17.30	17.25	17.24		
15	16QAM	1	37	17.23	17.30	17.40		
15	16QAM	1	74	17.25	17.25	17.38	18.2	0
15	16QAM	36	0	17.29	17.36	17.21		
15	16QAM	36	20	17.27	17.30	17.25		
15	16QAM	36	39	17.31	17.34	17.33	18.2	0
15	16QAM	75	0	17.37	17.32	17.24		
15	64QAM	1	0	17.31	17.33	17.29		
15	64QAM	1	37	17.39	17.38	17.29	18.2	0
15	64QAM	1	74	17.32	17.40	17.25		
15	64QAM	36	0	17.21	17.20	17.25		
15	64QAM	36	20	17.27	17.29	17.35	18.2	0
15	64QAM	36	39	17.36	17.24	17.22		
15	64QAM	75	0	17.34	17.40	17.31		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	17.37	17.40	17.30		
10	QPSK	1	25	17.21	17.36	17.29	18.2	0
10	QPSK	1	49	17.22	17.26	17.38		
10	QPSK	25	0	17.33	17.22	17.38		



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	12	17.21	17.38	17.29		
10	QPSK	25	25	17.30	17.21	17.31		
10	QPSK	50	0	17.20	17.35	17.22		
10	16QAM	1	0	17.33	17.26	17.34	18.2	0
10	16QAM	1	25	17.24	17.31	17.27		
10	16QAM	1	49	17.25	17.29	17.37		
10	16QAM	25	0	17.32	17.24	17.24	18.2	0
10	16QAM	25	12	17.40	17.31	17.37		
10	16QAM	25	25	17.22	17.21	17.20		
10	16QAM	50	0	17.30	17.35	17.39	18.2	0
10	64QAM	1	0	17.33	17.38	17.22		
10	64QAM	1	25	17.27	17.32	17.30		
10	64QAM	1	49	17.33	17.31	17.24	18.2	0
10	64QAM	25	0	17.32	17.27	17.30		
10	64QAM	25	12	17.39	17.39	17.26		
10	64QAM	25	25	17.35	17.23	17.20	18.2	0
10	64QAM	50	0	17.40	17.32	17.34		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	17.30	17.35	17.32	18.2	0
5	QPSK	1	12	17.32	17.38	17.33		
5	QPSK	1	24	17.39	17.23	17.28		
5	QPSK	12	0	17.28	17.38	17.25	18.2	0
5	QPSK	12	7	17.20	17.22	17.38		
5	QPSK	12	13	17.23	17.31	17.23		
5	QPSK	25	0	17.22	17.40	17.36	18.2	0
5	16QAM	1	0	17.35	17.21	17.20		
5	16QAM	1	12	17.32	17.30	17.31		
5	16QAM	1	24	17.27	17.23	17.37	18.2	0
5	16QAM	12	0	17.22	17.30	17.27		
5	16QAM	12	7	17.30	17.36	17.38		
5	16QAM	12	13	17.26	17.27	17.31	18.2	0
5	16QAM	25	0	17.34	17.37	17.22		
5	64QAM	1	0	17.32	17.38	17.34		
5	64QAM	1	12	17.30	17.38	17.35	18.2	0
5	64QAM	1	24	17.36	17.25	17.29		
5	64QAM	12	0	17.31	17.29	17.23		
5	64QAM	12	7	17.32	17.22	17.22	18.2	0
5	64QAM	12	13	17.23	17.24	17.24		
5	64QAM	25	0	17.39	17.31	17.38		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	17.22	17.29	17.35	18.2	0
3	QPSK	1	8	17.25	17.24	17.28		
3	QPSK	1	14	17.28	17.32	17.31		
3	QPSK	8	0	17.32	17.34	17.30	18.2	0
3	QPSK	8	4	17.25	17.31	17.40		
3	QPSK	8	7	17.24	17.26	17.40		
3	QPSK	15	0	17.33	17.34	17.32	18.2	0
3	16QAM	1	0	17.30	17.26	17.33		
3	16QAM	1	8	17.21	17.23	17.34		
3	16QAM	1	14	17.26	17.28	17.25	18.2	0
3	16QAM	8	0	17.26	17.34	17.21		
3	16QAM	8	4	17.39	17.25	17.34		
3	16QAM	8	7	17.32	17.21	17.30	18.2	0
3	16QAM	15	0	17.37	17.36	17.34		



FCC SAR TEST REPORT

Report No. : FA082123-01

3	64QAM	1	0	17.38	17.25	17.22	18.2	0
3	64QAM	1	8	17.36	17.24	17.34		
3	64QAM	1	14	17.40	17.36	17.21		
3	64QAM	8	0	17.33	17.30	17.22	18.2	0
3	64QAM	8	4	17.31	17.30	17.20		
3	64QAM	8	7	17.37	17.23	17.36		
3	64QAM	15	0	17.27	17.34	17.35		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	17.37	17.24	17.21	18.2	0
1.4	QPSK	1	3	17.21	17.33	17.22		
1.4	QPSK	1	5	17.21	17.38	17.24		
1.4	QPSK	3	0	17.38	17.22	17.21		
1.4	QPSK	3	1	17.28	17.31	17.40		
1.4	QPSK	3	3	17.21	17.40	17.26		
1.4	QPSK	6	0	17.30	17.20	17.21	18.2	0
1.4	16QAM	1	0	17.40	17.24	17.25	18.2	0
1.4	16QAM	1	3	17.20	17.35	17.31		
1.4	16QAM	1	5	17.33	17.22	17.40		
1.4	16QAM	3	0	17.24	17.32	17.38		
1.4	16QAM	3	1	17.24	17.34	17.25		
1.4	16QAM	3	3	17.31	17.30	17.39		
1.4	16QAM	6	0	17.22	17.28	17.34	18.2	0
1.4	64QAM	1	0	17.32	17.25	17.35	18.2	0
1.4	64QAM	1	3	17.27	17.38	17.37		
1.4	64QAM	1	5	17.35	17.29	17.21		
1.4	64QAM	3	0	17.35	17.39	17.24		
1.4	64QAM	3	1	17.27	17.28	17.25		
1.4	64QAM	3	3	17.38	17.20	17.38		
1.4	64QAM	6	0	17.29	17.37	17.20	18.2	0

<LTE Band 5 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.21	21.47	21.38	21.8	0
10	QPSK	1	25	20.86	21.15	20.76		
10	QPSK	1	49	20.93	21.21	20.71		
10	QPSK	25	0	20.73	21.39	21.08	21.8	0
10	QPSK	25	12	21.03	20.87	21.07		
10	QPSK	25	25	20.80	20.95	21.07		
10	QPSK	50	0	21.05	21.36	21.01	21.8	0
10	16QAM	1	0	21.03	20.89	20.79		
10	16QAM	1	25	20.95	20.82	20.87		
10	16QAM	1	49	20.77	20.90	20.97	21.8	0
10	16QAM	25	0	21.01	20.84	20.81		
10	16QAM	25	12	20.85	20.97	20.76		
10	16QAM	25	25	20.77	21.05	20.88	21.8	0
10	16QAM	50	0	20.70	21.02	20.72		
10	64QAM	1	0	21.04	21.05	20.76		
10	64QAM	1	25	20.71	20.86	20.83	21.8	0
10	64QAM	1	49	20.70	20.74	20.77		
10	64QAM	25	0	20.96	20.93	21.01		
10	64QAM	25	12	20.94	20.99	20.77	21.5	0.3
10	64QAM	25	25	20.95	21.01	20.75		
10	64QAM	50	0	20.85	20.70	20.91		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	20.87	20.73	20.99	21.8	0
5	QPSK	1	12	20.85	20.71	21.08		
5	QPSK	1	24	20.95	21.00	20.81		
5	QPSK	12	0	21.03	21.01	20.79	21.8	0
5	QPSK	12	7	20.80	20.70	20.89		
5	QPSK	12	13	20.91	20.93	20.89		
5	QPSK	25	0	20.84	21.00	20.89	21.8	0
5	16QAM	1	0	21.00	20.95	20.78		
5	16QAM	1	12	20.95	20.90	20.74		
5	16QAM	1	24	20.86	20.93	20.78	21.8	0
5	16QAM	12	0	20.79	20.87	20.77		
5	16QAM	12	7	20.77	21.08	20.95		
5	16QAM	12	13	20.74	20.88	21.04	21.8	0
5	16QAM	25	0	21.03	20.74	20.70		
5	64QAM	1	0	20.75	20.91	20.96		
5	64QAM	1	12	21.09	20.90	21.09	21.8	0
5	64QAM	1	24	20.72	21.03	20.92		
5	64QAM	12	0	21.07	21.07	20.80		
5	64QAM	12	7	21.00	20.98	20.87	21.5	0.3
5	64QAM	12	13	20.96	20.92	21.08		
5	64QAM	25	0	20.99	20.84	20.82		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	20.97	20.77	20.87	21.8	0
3	QPSK	1	8	20.75	20.77	21.09		
3	QPSK	1	14	21.05	21.09	20.77		
3	QPSK	8	0	20.82	20.81	21.07	21.8	0
3	QPSK	8	4	20.70	20.84	20.71		



FCC SAR TEST REPORT

Report No. : FA082123-01

3	QPSK	8	7	20.71	20.92	20.70		
3	QPSK	15	0	20.79	20.77	21.04		
3	16QAM	1	0	20.98	20.70	20.99		
3	16QAM	1	8	20.78	20.76	21.07	21.8	0
3	16QAM	1	14	21.06	21.08	20.90		
3	16QAM	8	0	20.91	20.73	20.99		
3	16QAM	8	4	21.08	20.89	20.94	21.8	0
3	16QAM	8	7	21.03	20.88	20.75		
3	16QAM	15	0	20.76	20.85	21.07		
3	64QAM	1	0	21.00	21.02	20.72	21.8	0
3	64QAM	1	8	20.75	20.91	20.91		
3	64QAM	1	14	20.74	21.01	20.78		
3	64QAM	8	0	20.79	20.98	20.91	21.5	0.3
3	64QAM	8	4	20.72	20.77	21.01		
3	64QAM	8	7	20.80	20.83	20.83		
3	64QAM	15	0	20.77	21.08	20.75		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	20.83	20.78	20.93	21.8	0
1.4	QPSK	1	3	20.74	21.03	20.80		
1.4	QPSK	1	5	20.87	21.05	20.94		
1.4	QPSK	3	0	20.79	20.71	21.01		
1.4	QPSK	3	1	20.83	20.76	20.70		
1.4	QPSK	3	3	20.84	21.04	20.87		
1.4	QPSK	6	0	20.71	21.02	20.99	21.8	0
1.4	16QAM	1	0	20.99	20.70	20.98	21.8	0
1.4	16QAM	1	3	20.90	21.09	21.00		
1.4	16QAM	1	5	20.79	20.73	21.08		
1.4	16QAM	3	0	20.82	20.76	20.76		
1.4	16QAM	3	1	21.10	21.00	21.07		
1.4	16QAM	3	3	21.06	20.94	20.92		
1.4	16QAM	6	0	20.97	20.71	20.84	21.8	0
1.4	64QAM	1	0	20.76	20.86	20.92	21.8	0
1.4	64QAM	1	3	20.92	21.00	21.09		
1.4	64QAM	1	5	20.82	20.70	21.07		
1.4	64QAM	3	0	20.88	20.72	20.71		
1.4	64QAM	3	1	20.89	20.97	20.80		
1.4	64QAM	3	3	20.94	20.76	21.10		
1.4	64QAM	6	0	20.90	20.76	20.73	21.5	0.3



<LTE Band 7 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350	15.9	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	15.28	15.25	15.30		
20	QPSK	1	49	15.20	15.03	15.04	15.9	0
20	QPSK	1	99	15.19	15.01	15.04		
20	QPSK	50	0	15.13	15.05	15.15		
20	QPSK	50	24	15.01	15.07	15.07	15.9	0
20	QPSK	50	50	15.13	15.00	15.13		
20	QPSK	100	0	15.18	15.06	15.19		
20	16QAM	1	0	15.07	15.18	15.04	15.9	0
20	16QAM	1	49	15.11	15.08	15.15		
20	16QAM	1	99	15.14	15.18	15.07		
20	16QAM	50	0	15.05	15.20	15.09	15.9	0
20	16QAM	50	24	15.20	15.02	15.12		
20	16QAM	50	50	15.18	15.06	15.13		
20	16QAM	100	0	15.20	15.18	15.05	15.9	0
20	64QAM	1	0	15.18	15.03	15.15		
20	64QAM	1	49	15.15	15.12	15.20		
20	64QAM	1	99	15.15	15.13	15.10	15.9	0
20	64QAM	50	0	15.17	15.16	15.11		
20	64QAM	50	24	15.01	15.00	15.07		
20	64QAM	50	50	15.00	15.04	15.10	15.9	0
20	64QAM	100	0	15.19	15.19	15.06		
Channel				20825	21100	21375	15.9	0
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	15.15	15.03	15.16		
15	QPSK	1	37	15.10	15.13	15.20	15.9	0
15	QPSK	1	74	15.05	15.04	15.14		
15	QPSK	36	0	15.10	15.16	15.12	15.9	0
15	QPSK	36	20	15.04	15.13	15.15		
15	QPSK	36	39	15.15	15.19	15.04		
15	QPSK	75	0	15.02	15.13	15.07	15.9	0
15	16QAM	1	0	15.02	15.14	15.11		
15	16QAM	1	37	15.18	15.07	15.14		
15	16QAM	1	74	15.06	15.14	15.12	15.9	0
15	16QAM	36	0	15.05	15.07	15.18		
15	16QAM	36	20	15.01	15.11	15.00		
15	16QAM	36	39	15.12	15.03	15.02	15.9	0
15	16QAM	75	0	15.18	15.13	15.07		
15	64QAM	1	0	15.04	15.13	15.06		
15	64QAM	1	37	15.03	15.00	15.04	15.9	0
15	64QAM	1	74	15.06	15.04	15.16		
15	64QAM	36	0	15.13	15.06	15.08		
15	64QAM	36	20	15.08	15.15	15.05	15.9	0
15	64QAM	36	39	15.20	15.01	15.02		
15	64QAM	75	0	15.08	15.14	15.17		
Channel				20800	21100	21400	15.9	0
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	15.05	15.11	15.06		
10	QPSK	1	25	15.16	15.12	15.03	15.9	0
10	QPSK	1	49	15.00	15.09	15.16		
10	QPSK	25	0	15.19	15.12	15.14	15.9	0
10	QPSK	25	12	15.09	15.20	15.20		



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	15.14	15.02	15.09		
10	QPSK	50	0	15.00	15.16	15.15		
10	16QAM	1	0	15.05	15.13	15.01		
10	16QAM	1	25	15.06	15.03	15.15	15.9	0
10	16QAM	1	49	15.05	15.14	15.06		
10	16QAM	25	0	15.04	15.13	15.09		
10	16QAM	25	12	15.14	15.03	15.10	15.9	0
10	16QAM	25	25	15.14	15.17	15.04		
10	16QAM	50	0	15.06	15.15	15.08		
10	64QAM	1	0	15.10	15.03	15.19	15.9	0
10	64QAM	1	25	15.00	15.18	15.10		
10	64QAM	1	49	15.07	15.07	15.07		
10	64QAM	25	0	15.18	15.19	15.11	15.9	0
10	64QAM	25	12	15.07	15.04	15.09		
10	64QAM	25	25	15.18	15.05	15.12		
10	64QAM	50	0	15.12	15.05	15.15		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	15.19	15.03	15.13	15.9	0
5	QPSK	1	12	15.11	15.17	15.07		
5	QPSK	1	24	15.02	15.15	15.03		
5	QPSK	12	0	15.12	15.09	15.00	15.9	0
5	QPSK	12	7	15.15	15.03	15.04		
5	QPSK	12	13	15.12	15.18	15.13		
5	QPSK	25	0	15.16	15.00	15.03		
5	16QAM	1	0	15.10	15.10	15.01	15.9	0
5	16QAM	1	12	15.20	15.02	15.19		
5	16QAM	1	24	15.12	15.12	15.16		
5	16QAM	12	0	15.09	15.14	15.05	15.9	0
5	16QAM	12	7	15.11	15.07	15.20		
5	16QAM	12	13	15.00	15.00	15.20		
5	16QAM	25	0	15.09	15.19	15.03		
5	64QAM	1	0	15.04	15.08	15.13	15.9	0
5	64QAM	1	12	15.14	15.09	15.04		
5	64QAM	1	24	15.06	15.17	15.07		
5	64QAM	12	0	15.08	15.10	15.05	15.9	0
5	64QAM	12	7	15.09	15.10	15.03		
5	64QAM	12	13	15.13	15.03	15.17		
5	64QAM	25	0	15.11	15.03	15.12		

<LTE Band 7 Aux>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350	16.8	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	16.31	16.30	16.26		
20	QPSK	1	49	16.00	16.04	15.98	16.8	0
20	QPSK	1	99	15.89	15.84	15.81		
20	QPSK	50	0	16.06	16.02	16.05		
20	QPSK	50	24	16.04	15.98	16.01	16.8	0
20	QPSK	50	50	16.03	16.05	16.05		
20	QPSK	100	0	16.03	16.00	15.97		
20	16QAM	1	0	15.88	16.02	15.90	16.8	0
20	16QAM	1	49	15.81	16.01	15.96		
20	16QAM	1	99	15.91	15.95	16.17		
20	16QAM	50	0	15.86	15.82	16.20	16.8	0
20	16QAM	50	24	16.07	16.00	16.00		
20	16QAM	50	50	16.07	15.94	15.86		
20	16QAM	100	0	16.10	16.11	16.04	16.8	0
20	64QAM	1	0	15.91	16.20	15.84		
20	64QAM	1	49	16.00	15.97	16.10		
20	64QAM	1	99	16.06	15.99	15.81	16.8	0
20	64QAM	50	0	16.11	16.01	16.07		
20	64QAM	50	24	15.91	16.04	16.11		
20	64QAM	50	50	16.17	16.18	16.05	16.8	0
20	64QAM	100	0	16.13	15.89	16.04		
Channel				20825	21100	21375	16.8	0
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	15.92	16.04	15.81		
15	QPSK	1	37	16.09	16.07	16.06	16.8	0
15	QPSK	1	74	15.85	16.20	16.05		
15	QPSK	36	0	16.09	16.07	16.14		
15	QPSK	36	20	16.02	16.18	15.90	16.8	0
15	QPSK	36	39	15.98	15.90	16.16		
15	QPSK	75	0	15.98	16.03	15.94		
15	16QAM	1	0	15.80	16.15	16.12	16.8	0
15	16QAM	1	37	15.87	16.20	15.95		
15	16QAM	1	74	16.02	16.04	15.91		
15	16QAM	36	0	16.11	15.88	16.10	16.8	0
15	16QAM	36	20	15.80	15.99	15.89		
15	16QAM	36	39	15.87	16.07	15.87		
15	16QAM	75	0	16.17	15.98	15.80	16.8	0
15	64QAM	1	0	15.89	16.02	16.13		
15	64QAM	1	37	16.17	15.91	15.86		
15	64QAM	1	74	16.07	15.96	16.15	16.8	0
15	64QAM	36	0	16.01	15.95	15.87		
15	64QAM	36	20	15.82	16.09	16.18		
15	64QAM	36	39	15.86	16.08	16.18	16.8	0
15	64QAM	75	0	16.00	16.20	15.85		
Channel				20800	21100	21400	16.8	0
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	16.13	15.99	16.07		
10	QPSK	1	25	16.02	15.96	15.93	16.8	0
10	QPSK	1	49	15.82	15.81	15.97		
10	QPSK	25	0	15.91	15.83	16.05		
10	QPSK	25	12	16.15	16.09	15.95	16.8	0



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	16.17	15.82	16.19		
10	QPSK	50	0	16.17	15.98	16.20		
10	16QAM	1	0	16.14	16.03	15.87		
10	16QAM	1	25	16.20	15.84	15.99	16.8	0
10	16QAM	1	49	16.05	16.17	16.08		
10	16QAM	25	0	16.01	16.01	16.04		
10	16QAM	25	12	16.15	16.00	15.83	16.8	0
10	16QAM	25	25	16.12	16.09	16.04		
10	16QAM	50	0	15.86	15.92	15.98		
10	64QAM	1	0	16.02	15.96	15.96	16.8	0
10	64QAM	1	25	16.07	16.02	16.01		
10	64QAM	1	49	16.07	16.06	15.82		
10	64QAM	25	0	15.82	16.05	15.83	16.8	0
10	64QAM	25	12	15.99	16.18	16.14		
10	64QAM	25	25	16.05	16.07	16.01		
10	64QAM	50	0	15.88	16.01	15.81		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	16.02	16.07	16.09	16.8	0
5	QPSK	1	12	15.81	15.96	16.07		
5	QPSK	1	24	15.83	16.10	15.82		
5	QPSK	12	0	16.19	15.83	16.17	16.8	0
5	QPSK	12	7	15.93	15.99	16.16		
5	QPSK	12	13	16.12	15.90	15.89		
5	QPSK	25	0	15.99	15.96	16.04	16.8	0
5	16QAM	1	0	15.98	15.83	16.10		
5	16QAM	1	12	16.17	16.00	16.02		
5	16QAM	1	24	16.19	15.92	16.03	16.8	0
5	16QAM	12	0	15.89	16.13	16.03		
5	16QAM	12	7	15.83	16.02	15.83		
5	16QAM	12	13	16.20	15.95	15.87	16.8	0
5	16QAM	25	0	15.90	16.17	16.13		
5	64QAM	1	0	16.08	16.01	16.16		
5	64QAM	1	12	15.97	15.86	15.88	16.8	0
5	64QAM	1	24	16.15	15.88	16.17		
5	64QAM	12	0	16.16	16.16	16.10		
5	64QAM	12	7	15.87	16.18	15.82	16.8	0
5	64QAM	12	13	15.80	16.18	15.80		
5	64QAM	25	0	15.99	15.98	15.85		

<LTE Band 12 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	21	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	20.31	20.36	20.30		
10	QPSK	1	25	20.25	20.14	20.18	21	0
10	QPSK	1	49	20.18	20.23	20.24		
10	QPSK	25	0	20.22	20.27	20.17		
10	QPSK	25	12	20.17	20.25	20.19	21	0
10	QPSK	25	25	20.08	20.17	20.13		
10	QPSK	50	0	20.19	20.06	20.09		
10	16QAM	1	0	20.13	20.18	20.20	21	0
10	16QAM	1	25	20.22	20.07	20.11		
10	16QAM	1	49	20.09	20.05	20.20		
10	16QAM	25	0	20.18	20.16	20.05	21	0
10	16QAM	25	12	20.07	20.22	20.21		
10	16QAM	25	25	20.23	20.05	20.10		
10	16QAM	50	0	20.07	20.23	20.25	21	0
10	64QAM	1	0	20.12	20.19	20.14		
10	64QAM	1	25	20.19	20.12	20.20		
10	64QAM	1	49	20.06	20.13	20.14	21	0
10	64QAM	25	0	20.06	20.13	20.25		
10	64QAM	25	12	20.13	20.22	20.17		
10	64QAM	25	25	20.11	20.17	20.16	21	0
10	64QAM	50	0	20.09	20.09	20.05		
Channel				23035	23095	23155	21	0
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	20.15	20.25	20.17		
5	QPSK	1	12	20.06	20.12	20.18	21	0
5	QPSK	1	24	20.13	20.06	20.12		
5	QPSK	12	0	20.12	20.23	20.14		
5	QPSK	12	7	20.15	20.12	20.07	21	0
5	QPSK	12	13	20.20	20.07	20.17		
5	QPSK	25	0	20.06	20.24	20.23		
5	16QAM	1	0	20.21	20.21	20.16	21	0
5	16QAM	1	12	20.09	20.11	20.23		
5	16QAM	1	24	20.13	20.18	20.08		
5	16QAM	12	0	20.05	20.23	20.07	21	0
5	16QAM	12	7	20.13	20.10	20.17		
5	16QAM	12	13	20.14	20.23	20.11		
5	16QAM	25	0	20.11	20.10	20.19	21	0
5	64QAM	1	0	20.06	20.18	20.09		
5	64QAM	1	12	20.17	20.06	20.07		
5	64QAM	1	24	20.06	20.14	20.17	21	0
5	64QAM	12	0	20.24	20.17	20.14		
5	64QAM	12	7	20.16	20.21	20.18		
5	64QAM	12	13	20.05	20.12	20.12	21	0
5	64QAM	25	0	20.11	20.13	20.18		
Channel				23025	23095	23165	21	0
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	20.17	20.12	20.21		
3	QPSK	1	8	20.25	20.20	20.08	21	0
3	QPSK	1	14	20.25	20.22	20.15		
3	QPSK	8	0	20.13	20.05	20.11		
3	QPSK	8	4	20.18	20.25	20.10	21	0



FCC SAR TEST REPORT

Report No. : FA082123-01

3	QPSK	8	7	20.21	20.16	20.06		
3	QPSK	15	0	20.08	20.06	20.15		
3	16QAM	1	0	20.24	20.23	20.08		
3	16QAM	1	8	20.20	20.18	20.17	21	0
3	16QAM	1	14	20.23	20.06	20.20		
3	16QAM	8	0	20.10	20.07	20.07		
3	16QAM	8	4	20.08	20.18	20.06	21	0
3	16QAM	8	7	20.08	20.24	20.10		
3	16QAM	15	0	20.11	20.13	20.18		
3	64QAM	1	0	20.21	20.11	20.06	21	0
3	64QAM	1	8	20.05	20.23	20.20		
3	64QAM	1	14	20.20	20.05	20.18		
3	64QAM	8	0	20.15	20.08	20.10	21	0
3	64QAM	8	4	20.16	20.24	20.15		
3	64QAM	8	7	20.10	20.11	20.08		
3	64QAM	15	0	20.11	20.16	20.08		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	20.25	20.11	20.19	21	0
1.4	QPSK	1	3	20.12	20.19	20.25		
1.4	QPSK	1	5	20.21	20.23	20.25		
1.4	QPSK	3	0	20.07	20.17	20.05		
1.4	QPSK	3	1	20.23	20.09	20.09		
1.4	QPSK	3	3	20.22	20.13	20.21		
1.4	QPSK	6	0	20.15	20.15	20.16	21	0
1.4	16QAM	1	0	20.17	20.06	20.14	21	0
1.4	16QAM	1	3	20.16	20.15	20.08		
1.4	16QAM	1	5	20.09	20.10	20.25		
1.4	16QAM	3	0	20.09	20.15	20.23		
1.4	16QAM	3	1	20.06	20.12	20.22		
1.4	16QAM	3	3	20.06	20.13	20.24		
1.4	16QAM	6	0	20.17	20.16	20.21	21	0
1.4	64QAM	1	0	20.06	20.11	20.12	21	0
1.4	64QAM	1	3	20.22	20.25	20.15		
1.4	64QAM	1	5	20.21	20.18	20.05		
1.4	64QAM	3	0	20.08	20.05	20.25		
1.4	64QAM	3	1	20.13	20.20	20.17		
1.4	64QAM	3	3	20.06	20.05	20.16		
1.4	64QAM	6	0	20.06	20.19	20.08	21	0

<LTE Band 13 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		21.38		21.8	0
10	QPSK	1	25		21.26			
10	QPSK	1	49		21.21			
10	QPSK	25	0		21.28		21.8	0
10	QPSK	25	12		21.22			
10	QPSK	25	25		21.25			
10	QPSK	50	0		21.20		21.8	0
10	16QAM	1	0		21.22			
10	16QAM	1	25		21.22			
10	16QAM	1	49		21.20		21.8	0
10	16QAM	25	0		21.30			
10	16QAM	25	12		21.20			
10	16QAM	25	25		21.26		21.8	0
10	16QAM	50	0		21.30			
10	64QAM	1	0		21.29			
10	64QAM	1	25		21.27			
10	64QAM	1	49		21.29			
10	64QAM	25	0		21.23		21.5	0.3
10	64QAM	25	12		21.25			
10	64QAM	25	25		21.29			
10	64QAM	50	0		21.25			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	21.00	20.92	20.91	21.8	0
5	QPSK	1	12	20.93	20.94	20.90		
5	QPSK	1	24	20.92	20.92	20.98		
5	QPSK	12	0	20.99	20.94	20.93	21.8	0
5	QPSK	12	7	20.91	20.98	20.92		
5	QPSK	12	13	20.97	20.99	20.97		
5	QPSK	25	0	20.98	20.96	20.96	21.8	0
5	16QAM	1	0	20.91	20.94	20.90		
5	16QAM	1	12	20.96	20.92	20.91		
5	16QAM	1	24	20.94	21.00	20.95	21.8	0
5	16QAM	12	0	20.91	20.92	20.92		
5	16QAM	12	7	20.98	20.95	20.92		
5	16QAM	12	13	20.92	20.99	20.99	21.8	0
5	16QAM	25	0	20.92	20.91	20.91		
5	64QAM	1	0	20.95	20.92	20.97		
5	64QAM	1	12	20.92	20.96	20.96	21.8	0
5	64QAM	1	24	20.91	20.90	20.91		
5	64QAM	12	0	20.94	20.94	21.00		
5	64QAM	12	7	20.90	20.97	20.95	21.5	0.3
5	64QAM	12	13	20.99	20.90	20.97		
5	64QAM	25	0	20.93	20.90	20.93		

<LTE Band 14 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0		20.09		20.8	0
10	QPSK	1	25		19.80			
10	QPSK	1	49		19.92			
10	QPSK	25	0		20.01		20.8	0
10	QPSK	25	12		20.00			
10	QPSK	25	25		19.98			
10	QPSK	50	0		19.85		20.8	0
10	16QAM	1	0		19.84			
10	16QAM	1	25		19.85			
10	16QAM	1	49		19.96		20.8	0
10	16QAM	25	0		19.99			
10	16QAM	25	12		19.85			
10	16QAM	25	25		19.89		20.8	0
10	16QAM	50	0		19.92			
10	64QAM	1	0		19.96		20.8	0
10	64QAM	1	25		19.98			
10	64QAM	1	49		19.96			
10	64QAM	25	0		19.94		20.8	0
10	64QAM	25	12		19.95			
10	64QAM	25	25		19.98			
10	64QAM	50	0		19.80			
Channel				23305	23330	23355	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				790.5	793	795.5		
5	QPSK	1	0	19.82	19.98	19.80	20.8	0
5	QPSK	1	12	19.95	19.87	19.83		
5	QPSK	1	24	19.84	19.85	19.86		
5	QPSK	12	0	20.00	19.95	19.82	20.8	0
5	QPSK	12	7	19.92	19.94	19.99		
5	QPSK	12	13	19.85	19.85	19.90		
5	QPSK	25	0	19.87	19.89	19.96	20.8	0
5	16QAM	1	0	19.88	19.98	19.84		
5	16QAM	1	12	19.80	19.99	19.94		
5	16QAM	1	24	19.94	19.84	19.87	20.8	0
5	16QAM	12	0	19.94	19.95	19.98		
5	16QAM	12	7	19.99	19.81	19.96		
5	16QAM	12	13	19.83	19.92	19.94	20.8	0
5	16QAM	25	0	19.90	19.82	19.90		
5	64QAM	1	0	19.82	19.96	19.99	20.8	0
5	64QAM	1	12	19.89	19.86	19.80		
5	64QAM	1	24	19.85	19.84	19.86		
5	64QAM	12	0	19.80	19.82	20.00	20.8	0
5	64QAM	12	7	19.96	19.81	19.88		
5	64QAM	12	13	19.97	19.82	19.89		
5	64QAM	25	0	19.82	20.00	19.83		

<LTE Band 17 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	20.31	20.35	20.33		
10	QPSK	1	25	20.16	20.15	20.26	21	0
10	QPSK	1	49	20.12	20.17	20.12		
10	QPSK	25	0	20.23	20.14	20.27		
10	QPSK	25	12	20.16	20.26	20.20	21	0
10	QPSK	25	25	20.24	20.18	20.15		
10	QPSK	50	0	20.14	20.27	20.16		
10	16QAM	1	0	20.29	20.19	20.19	21	0
10	16QAM	1	25	20.24	20.18	20.30		
10	16QAM	1	49	20.14	20.29	20.12		
10	16QAM	25	0	20.19	20.13	20.25	21	0
10	16QAM	25	12	20.22	20.10	20.18		
10	16QAM	25	25	20.10	20.10	20.14		
10	16QAM	50	0	20.15	20.14	20.30	21	0
10	64QAM	1	0	20.22	20.24	20.16		
10	64QAM	1	25	20.14	20.29	20.13		
10	64QAM	1	49	20.27	20.15	20.17	21	0
10	64QAM	25	0	20.17	20.19	20.22		
10	64QAM	25	12	20.25	20.16	20.21		
10	64QAM	25	25	20.16	20.10	20.15	21	0
10	64QAM	50	0	20.20	20.28	20.12		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	20.10	20.20	20.14		
5	QPSK	1	12	20.24	20.13	20.23	21	0
5	QPSK	1	24	20.25	20.23	20.19		
5	QPSK	12	0	20.25	20.23	20.11	21	0
5	QPSK	12	7	20.16	20.18	20.23		
5	QPSK	12	13	20.10	20.14	20.25		
5	QPSK	25	0	20.17	20.21	20.25	21	0
5	16QAM	1	0	20.21	20.27	20.29		
5	16QAM	1	12	20.30	20.26	20.17		
5	16QAM	1	24	20.23	20.21	20.14	21	0
5	16QAM	12	0	20.12	20.28	20.26		
5	16QAM	12	7	20.15	20.10	20.13		
5	16QAM	12	13	20.18	20.22	20.27	21	0
5	16QAM	25	0	20.22	20.25	20.17		
5	64QAM	1	0	20.19	20.28	20.21		
5	64QAM	1	12	20.17	20.12	20.16	21	0
5	64QAM	1	24	20.16	20.26	20.29		
5	64QAM	12	0	20.23	20.24	20.18		
5	64QAM	12	7	20.19	20.27	20.19	21	0
5	64QAM	12	13	20.18	20.11	20.10		
5	64QAM	25	0	20.12	20.11	20.17		

<LTE Band 25 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	16.08	15.95	15.92		
20	QPSK	1	49	15.72	15.74	15.78	16.7	0
20	QPSK	1	99	15.86	15.79	15.87		
20	QPSK	50	0	15.94	15.88	15.91		
20	QPSK	50	24	15.84	15.79	15.86	16.7	0
20	QPSK	50	50	15.82	15.78	15.74		
20	QPSK	100	0	15.92	15.91	15.85		
20	16QAM	1	0	15.79	15.88	15.74	16.7	0
20	16QAM	1	49	15.83	15.85	15.78		
20	16QAM	1	99	15.81	15.81	15.80		
20	16QAM	50	0	15.79	15.77	15.77	16.7	0
20	16QAM	50	24	15.91	15.88	15.90		
20	16QAM	50	50	15.71	15.79	15.83		
20	16QAM	100	0	15.83	15.90	15.76	16.7	0
20	64QAM	1	0	15.75	15.84	15.90		
20	64QAM	1	49	15.86	15.87	15.82		
20	64QAM	1	99	15.76	15.91	15.87	16.7	0
20	64QAM	50	0	15.76	15.76	15.83		
20	64QAM	50	24	15.81	15.73	15.77		
20	64QAM	50	50	15.81	15.73	15.82	16.7	0
20	64QAM	100	0	15.77	15.86	15.79		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	15.79	15.78	15.77		
15	QPSK	1	37	15.80	15.78	15.71	16.7	0
15	QPSK	1	74	15.76	15.81	15.84		
15	QPSK	36	0	15.86	15.85	15.88	16.7	0
15	QPSK	36	20	15.79	15.82	15.91		
15	QPSK	36	39	15.73	15.76	15.71		
15	QPSK	75	0	15.76	15.80	15.82	16.7	0
15	16QAM	1	0	15.90	15.91	15.89		
15	16QAM	1	37	15.77	15.84	15.73		
15	16QAM	1	74	15.91	15.84	15.90	16.7	0
15	16QAM	36	0	15.82	15.72	15.73		
15	16QAM	36	20	15.75	15.75	15.85		
15	16QAM	36	39	15.87	15.89	15.71	16.7	0
15	16QAM	75	0	15.86	15.75	15.77		
15	64QAM	1	0	15.73	15.77	15.80		
15	64QAM	1	37	15.83	15.88	15.91	16.7	0
15	64QAM	1	74	15.75	15.84	15.89		
15	64QAM	36	0	15.80	15.86	15.88		
15	64QAM	36	20	15.81	15.90	15.91	16.7	0
15	64QAM	36	39	15.90	15.80	15.75		
15	64QAM	75	0	15.71	15.71	15.89		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	15.82	15.76	15.74		
10	QPSK	1	25	15.71	15.85	15.71	16.7	0
10	QPSK	1	49	15.73	15.81	15.75		
10	QPSK	25	0	15.89	15.90	15.85	16.7	0
10	QPSK	25	12	15.72	15.72	15.74		



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	15.87	15.77	15.79		
10	QPSK	50	0	15.80	15.74	15.72		
10	16QAM	1	0	15.83	15.78	15.77		
10	16QAM	1	25	15.91	15.72	15.86	16.7	0
10	16QAM	1	49	15.83	15.86	15.73		
10	16QAM	25	0	15.72	15.87	15.91		
10	16QAM	25	12	15.77	15.90	15.85	16.7	0
10	16QAM	25	25	15.76	15.78	15.78		
10	16QAM	50	0	15.82	15.79	15.86		
10	64QAM	1	0	15.82	15.86	15.90	16.7	0
10	64QAM	1	25	15.84	15.76	15.91		
10	64QAM	1	49	15.73	15.80	15.74		
10	64QAM	25	0	15.79	15.86	15.86	16.7	0
10	64QAM	25	12	15.82	15.83	15.74		
10	64QAM	25	25	15.75	15.81	15.83		
10	64QAM	50	0	15.76	15.79	15.73		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	15.89	15.78	15.73	16.7	0
5	QPSK	1	12	15.84	15.76	15.73		
5	QPSK	1	24	15.86	15.86	15.71		
5	QPSK	12	0	15.88	15.89	15.90	16.7	0
5	QPSK	12	7	15.79	15.82	15.76		
5	QPSK	12	13	15.76	15.72	15.89		
5	QPSK	25	0	15.86	15.74	15.72	16.7	0
5	16QAM	1	0	15.89	15.75	15.89		
5	16QAM	1	12	15.83	15.78	15.78		
5	16QAM	1	24	15.79	15.72	15.74	16.7	0
5	16QAM	12	0	15.80	15.90	15.78		
5	16QAM	12	7	15.79	15.88	15.86		
5	16QAM	12	13	15.87	15.89	15.85	16.7	0
5	16QAM	25	0	15.77	15.84	15.90		
5	64QAM	1	0	15.75	15.80	15.80		
5	64QAM	1	12	15.81	15.83	15.76	16.7	0
5	64QAM	1	24	15.73	15.73	15.81		
5	64QAM	12	0	15.83	15.84	15.72		
5	64QAM	12	7	15.72	15.79	15.82	16.7	0
5	64QAM	12	13	15.78	15.89	15.72		
5	64QAM	25	0	15.80	15.74	15.84		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	15.78	15.89	15.91	16.7	0
3	QPSK	1	8	15.75	15.90	15.83		
3	QPSK	1	14	15.90	15.79	15.81		
3	QPSK	8	0	15.79	15.88	15.75	16.7	0
3	QPSK	8	4	15.77	15.86	15.82		
3	QPSK	8	7	15.76	15.87	15.79		
3	QPSK	15	0	15.91	15.90	15.73	16.7	0
3	16QAM	1	0	15.87	15.72	15.85		
3	16QAM	1	8	15.73	15.72	15.90		
3	16QAM	1	14	15.91	15.77	15.85	16.7	0
3	16QAM	8	0	15.78	15.79	15.73		
3	16QAM	8	4	15.79	15.86	15.77		
3	16QAM	8	7	15.79	15.76	15.75	16.7	0
3	16QAM	15	0	15.89	15.73	15.91		
3	64QAM	1	0	15.74	15.75	15.90	16.7	0



FCC SAR TEST REPORT

Report No. : FA082123-01

3	64QAM	1	8	15.87	15.72	15.79	16.7	0
3	64QAM	1	14	15.78	15.88	15.78		
3	64QAM	8	0	15.90	15.83	15.90		
3	64QAM	8	4	15.77	15.90	15.79		
3	64QAM	8	7	15.74	15.71	15.82		
3	64QAM	15	0	15.74	15.83	15.78		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	15.72	15.91	15.80	16.7	0
1.4	QPSK	1	3	15.88	15.81	15.73		
1.4	QPSK	1	5	15.76	15.84	15.77		
1.4	QPSK	3	0	15.91	15.86	15.75		
1.4	QPSK	3	1	15.77	15.81	15.74		
1.4	QPSK	3	3	15.88	15.90	15.88		
1.4	QPSK	6	0	15.91	15.90	15.86	16.7	0
1.4	16QAM	1	0	15.72	15.88	15.81	16.7	0
1.4	16QAM	1	3	15.84	15.82	15.72		
1.4	16QAM	1	5	15.79	15.77	15.81		
1.4	16QAM	3	0	15.91	15.87	15.77		
1.4	16QAM	3	1	15.80	15.84	15.88		
1.4	16QAM	3	3	15.80	15.86	15.74		
1.4	16QAM	6	0	15.80	15.87	15.73	16.7	0
1.4	64QAM	1	0	15.71	15.86	15.90	16.7	0
1.4	64QAM	1	3	15.88	15.79	15.77		
1.4	64QAM	1	5	15.76	15.89	15.81		
1.4	64QAM	3	0	15.80	15.81	15.74		
1.4	64QAM	3	1	15.84	15.81	15.73		
1.4	64QAM	3	3	15.82	15.88	15.82		
1.4	64QAM	6	0	15.82	15.85	15.81	16.7	0

<LTE Band 26 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965	21.8	0
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	21.47	21.37	21.36		
15	QPSK	1	37	21.14	21.14	21.16	21.8	0
15	QPSK	1	74	21.13	21.17	21.24		
15	QPSK	36	0	21.27	21.22	21.20		
15	QPSK	36	20	21.17	21.20	21.27	21.8	0
15	QPSK	36	39	21.18	21.11	21.18		
15	QPSK	75	0	21.28	21.11	21.16		
15	16QAM	1	0	21.23	21.10	21.24	21.8	0
15	16QAM	1	37	21.10	21.19	21.17		
15	16QAM	1	74	21.13	21.10	21.25		
15	16QAM	36	0	21.19	21.17	21.10	21.8	0
15	16QAM	36	20	21.29	21.22	21.24		
15	16QAM	36	39	21.23	21.28	21.14		
15	16QAM	75	0	21.27	21.12	21.14	21.8	0
15	64QAM	1	0	21.19	21.15	21.21		
15	64QAM	1	37	21.14	21.25	21.24		
15	64QAM	1	74	21.30	21.18	21.30	21.8	0
15	64QAM	36	0	21.24	21.12	21.28		
15	64QAM	36	20	21.15	21.26	21.23		
15	64QAM	36	39	21.28	21.26	21.14	21.8	0
15	64QAM	75	0	21.14	21.27	21.11		
Channel				26740	26865	26990	21.8	0
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	21.12	21.26	21.23		
10	QPSK	1	25	21.22	21.22	21.14	21.8	0
10	QPSK	1	49	21.27	21.19	21.12		
10	QPSK	25	0	21.25	21.19	21.25		
10	QPSK	25	12	21.11	21.10	21.28	21.8	0
10	QPSK	25	25	21.29	21.20	21.21		
10	QPSK	50	0	21.20	21.29	21.17		
10	16QAM	1	0	21.19	21.13	21.29	21.8	0
10	16QAM	1	25	21.10	21.22	21.22		
10	16QAM	1	49	21.21	21.12	21.27		
10	16QAM	25	0	21.16	21.25	21.27	21.8	0
10	16QAM	25	12	21.13	21.29	21.22		
10	16QAM	25	25	21.29	21.27	21.13		
10	16QAM	50	0	21.10	21.10	21.16	21.8	0
10	64QAM	1	0	21.16	21.24	21.10		
10	64QAM	1	25	21.25	21.19	21.13		
10	64QAM	1	49	21.20	21.14	21.17	21.8	0
10	64QAM	25	0	21.10	21.17	21.23		
10	64QAM	25	12	21.24	21.16	21.25		
10	64QAM	25	25	21.11	21.16	21.29	21.8	0
10	64QAM	50	0	21.25	21.15	21.26		
Channel				26715	26865	27015	21.8	0
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	21.14	21.26	21.14		
5	QPSK	1	12	21.29	21.21	21.16	21.8	0
5	QPSK	1	24	21.26	21.10	21.20		
5	QPSK	12	0	21.22	21.17	21.20		
5	QPSK	12	7	21.19	21.23	21.21	21.8	0



FCC SAR TEST REPORT

Report No. : FA082123-01

5	QPSK	12	13	21.30	21.23	21.30		
5	QPSK	25	0	21.10	21.22	21.24		
5	16QAM	1	0	21.22	21.21	21.10		
5	16QAM	1	12	21.15	21.10	21.23	21.8	0
5	16QAM	1	24	21.19	21.17	21.16		
5	16QAM	12	0	21.13	21.29	21.30		
5	16QAM	12	7	21.27	21.24	21.20	21.8	0
5	16QAM	12	13	21.11	21.29	21.23		
5	16QAM	25	0	21.15	21.14	21.20		
5	64QAM	1	0	21.11	21.28	21.24	21.8	0
5	64QAM	1	12	21.27	21.18	21.26		
5	64QAM	1	24	21.13	21.21	21.10		
5	64QAM	12	0	21.29	21.17	21.28	21.8	0
5	64QAM	12	7	21.10	21.11	21.25		
5	64QAM	12	13	21.12	21.27	21.11		
5	64QAM	25	0	21.10	21.14	21.20		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	21.24	21.16	21.28	21.8	0
3	QPSK	1	8	21.29	21.21	21.28		
3	QPSK	1	14	21.15	21.12	21.30		
3	QPSK	8	0	21.20	21.22	21.21	21.8	0
3	QPSK	8	4	21.22	21.23	21.20		
3	QPSK	8	7	21.25	21.24	21.21		
3	QPSK	15	0	21.29	21.11	21.15	21.8	0
3	16QAM	1	0	21.16	21.25	21.11		
3	16QAM	1	8	21.25	21.16	21.13		
3	16QAM	1	14	21.30	21.13	21.13	21.8	0
3	16QAM	8	0	21.17	21.23	21.27		
3	16QAM	8	4	21.24	21.17	21.21		
3	16QAM	8	7	21.19	21.23	21.15	21.8	0
3	16QAM	15	0	21.20	21.17	21.23		
3	64QAM	1	0	21.14	21.26	21.25		
3	64QAM	1	8	21.11	21.30	21.13	21.8	0
3	64QAM	1	14	21.23	21.22	21.12		
3	64QAM	8	0	21.24	21.30	21.30		
3	64QAM	8	4	21.20	21.10	21.27	21.8	0
3	64QAM	8	7	21.14	21.23	21.30		
3	64QAM	15	0	21.21	21.13	21.15		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	21.14	21.24	21.20	21.8	0
1.4	QPSK	1	3	21.27	21.29	21.11		
1.4	QPSK	1	5	21.14	21.10	21.27		
1.4	QPSK	3	0	21.22	21.16	21.19		
1.4	QPSK	3	1	21.28	21.26	21.23		
1.4	QPSK	3	3	21.24	21.13	21.22	21.8	0
1.4	QPSK	6	0	21.18	21.11	21.11		
1.4	16QAM	1	0	21.23	21.29	21.17	21.8	0
1.4	16QAM	1	3	21.11	21.29	21.11		
1.4	16QAM	1	5	21.17	21.20	21.15		
1.4	16QAM	3	0	21.15	21.27	21.15		
1.4	16QAM	3	1	21.29	21.28	21.27		
1.4	16QAM	3	3	21.29	21.19	21.19	21.8	0
1.4	16QAM	6	0	21.29	21.11	21.26		
1.4	64QAM	1	0	21.27	21.17	21.17	21.8	0



FCC SAR TEST REPORT

Report No. : FA082123-01

1.4	64QAM	1	3	21.11	21.23	21.20		
1.4	64QAM	1	5	21.20	21.30	21.30		
1.4	64QAM	3	0	21.29	21.13	21.13		
1.4	64QAM	3	1	21.24	21.24	21.24		
1.4	64QAM	3	3	21.30	21.24	21.18		
1.4	64QAM	6	0	21.21	21.20	21.25	21.8	0



<LTE Band 30 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		15.80		16.9	0
10	QPSK	1	25		15.75			
10	QPSK	1	49		15.80			
10	QPSK	25	0		15.75		16.9	0
10	QPSK	25	12		15.72			
10	QPSK	25	25		15.72			
10	QPSK	50	0		15.74		16.9	0
10	16QAM	1	0		15.73			
10	16QAM	1	25		15.75			
10	16QAM	1	49		15.75		16.9	0
10	16QAM	25	0		15.75			
10	16QAM	25	12		15.72			
10	16QAM	25	25		15.74		16.9	0
10	16QAM	50	0		15.70			
10	64QAM	1	0		15.80			
10	64QAM	1	25		15.77		16.9	0
10	64QAM	1	49		15.72			
10	64QAM	25	0		15.71			
10	64QAM	25	12		15.77		16.9	0
10	64QAM	25	25		15.80			
10	64QAM	50	0		15.74			
Channel				27685	27710	27735	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	15.77	15.79	15.71	16.9	0
5	QPSK	1	12	15.77	15.76	15.74		
5	QPSK	1	24	15.77	15.79	15.76		
5	QPSK	12	0	15.74	15.75	15.71	16.9	0
5	QPSK	12	7	15.74	15.71	15.76		
5	QPSK	12	13	15.77	15.80	15.70		
5	QPSK	25	0	15.72	15.78	15.78	16.9	0
5	16QAM	1	0	15.70	15.73	15.75		
5	16QAM	1	12	15.80	15.75	15.72		
5	16QAM	1	24	15.77	15.74	15.79	16.9	0
5	16QAM	12	0	15.80	15.72	15.72		
5	16QAM	12	7	15.72	15.80	15.80		
5	16QAM	12	13	15.79	15.79	15.78	16.9	0
5	16QAM	25	0	15.77	15.77	15.78		
5	64QAM	1	0	15.74	15.76	15.78		
5	64QAM	1	12	15.79	15.73	15.77	16.9	0
5	64QAM	1	24	15.79	15.70	15.77		
5	64QAM	12	0	15.70	15.74	15.71		
5	64QAM	12	7	15.70	15.80	15.80	16.9	0
5	64QAM	12	13	15.76	15.71	15.71		
5	64QAM	25	0	15.73	15.70	15.75		

<LTE Band 66 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	17.6	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	17.60	17.47	17.52		
20	QPSK	1	49	17.40	17.37	17.41	17.6	0
20	QPSK	1	99	17.43	17.44	17.42		
20	QPSK	50	0	17.36	17.43	17.40		
20	QPSK	50	24	17.36	17.38	17.35	17.6	0
20	QPSK	50	50	17.42	17.36	17.38		
20	QPSK	100	0	17.36	17.42	17.40		
20	16QAM	1	0	17.41	17.36	17.40	17.6	0
20	16QAM	1	49	17.37	17.38	17.40		
20	16QAM	1	99	17.40	17.37	17.45		
20	16QAM	50	0	17.40	17.42	17.38	17.6	0
20	16QAM	50	24	17.37	17.43	17.43		
20	16QAM	50	50	17.37	17.35	17.42		
20	16QAM	100	0	17.40	17.36	17.35	17.6	0
20	64QAM	1	0	17.37	17.38	17.35		
20	64QAM	1	49	17.44	17.42	17.45		
20	64QAM	1	99	17.38	17.39	17.45	17.6	0
20	64QAM	50	0	17.36	17.44	17.44		
20	64QAM	50	24	17.35	17.42	17.41		
20	64QAM	50	50	17.39	17.42	17.37	17.6	0
20	64QAM	100	0	17.39	17.42	17.36		
Channel				132047	132322	132597	17.6	0
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	17.43	17.36	17.40		
15	QPSK	1	37	17.40	17.36	17.40	17.6	0
15	QPSK	1	74	17.45	17.36	17.42		
15	QPSK	36	0	17.39	17.41	17.41	17.6	0
15	QPSK	36	20	17.45	17.35	17.41		
15	QPSK	36	39	17.45	17.42	17.40		
15	QPSK	75	0	17.45	17.41	17.35	17.6	0
15	16QAM	1	0	17.36	17.41	17.36		
15	16QAM	1	37	17.41	17.40	17.39		
15	16QAM	1	74	17.41	17.38	17.39	17.6	0
15	16QAM	36	0	17.43	17.45	17.35		
15	16QAM	36	20	17.39	17.39	17.37		
15	16QAM	36	39	17.36	17.42	17.41	17.6	0
15	16QAM	75	0	17.38	17.42	17.42		
15	64QAM	1	0	17.37	17.41	17.43		
15	64QAM	1	37	17.45	17.42	17.37	17.6	0
15	64QAM	1	74	17.36	17.41	17.38		
15	64QAM	36	0	17.36	17.36	17.35		
15	64QAM	36	20	17.43	17.40	17.39	17.6	0
15	64QAM	36	39	17.35	17.36	17.45		
15	64QAM	75	0	17.42	17.37	17.45		
Channel				132022	132322	132622	17.6	0
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	17.43	17.43	17.41		
10	QPSK	1	25	17.38	17.35	17.36	17.6	0
10	QPSK	1	49	17.45	17.41	17.39		
10	QPSK	25	0	17.44	17.42	17.43	17.6	0
10	QPSK	25	12	17.37	17.44	17.35		



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	17.37	17.45	17.37		
10	QPSK	50	0	17.39	17.42	17.40		
10	16QAM	1	0	17.40	17.36	17.39		
10	16QAM	1	25	17.45	17.43	17.37	17.6	0
10	16QAM	1	49	17.35	17.41	17.35		
10	16QAM	25	0	17.44	17.35	17.40		
10	16QAM	25	12	17.44	17.35	17.43	17.6	0
10	16QAM	25	25	17.40	17.39	17.40		
10	16QAM	50	0	17.41	17.36	17.38		
10	64QAM	1	0	17.39	17.38	17.42	17.6	0
10	64QAM	1	25	17.40	17.39	17.41		
10	64QAM	1	49	17.41	17.42	17.40		
10	64QAM	25	0	17.42	17.40	17.36	17.6	0
10	64QAM	25	12	17.40	17.35	17.45		
10	64QAM	25	25	17.44	17.38	17.37		
10	64QAM	50	0	17.39	17.40	17.39		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	17.40	17.40	17.35	17.6	0
5	QPSK	1	12	17.41	17.40	17.39		
5	QPSK	1	24	17.40	17.35	17.41		
5	QPSK	12	0	17.39	17.36	17.40	17.6	0
5	QPSK	12	7	17.43	17.42	17.41		
5	QPSK	12	13	17.44	17.39	17.40		
5	QPSK	25	0	17.45	17.45	17.41	17.6	0
5	16QAM	1	0	17.41	17.39	17.36		
5	16QAM	1	12	17.41	17.38	17.44		
5	16QAM	1	24	17.35	17.43	17.42	17.6	0
5	16QAM	12	0	17.42	17.35	17.35		
5	16QAM	12	7	17.38	17.39	17.39		
5	16QAM	12	13	17.37	17.36	17.40	17.6	0
5	16QAM	25	0	17.38	17.40	17.38		
5	64QAM	1	0	17.40	17.42	17.35		
5	64QAM	1	12	17.38	17.41	17.36	17.6	0
5	64QAM	1	24	17.44	17.42	17.36		
5	64QAM	12	0	17.36	17.42	17.35		
5	64QAM	12	7	17.44	17.36	17.44	17.6	0
5	64QAM	12	13	17.41	17.35	17.38		
5	64QAM	25	0	17.39	17.39	17.37		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	17.35	17.35	17.39	17.6	0
3	QPSK	1	8	17.37	17.38	17.45		
3	QPSK	1	14	17.45	17.43	17.38		
3	QPSK	8	0	17.36	17.36	17.39	17.6	0
3	QPSK	8	4	17.35	17.45	17.36		
3	QPSK	8	7	17.37	17.36	17.39		
3	QPSK	15	0	17.43	17.43	17.39	17.6	0
3	16QAM	1	0	17.41	17.45	17.41		
3	16QAM	1	8	17.44	17.36	17.43		
3	16QAM	1	14	17.36	17.37	17.41	17.6	0
3	16QAM	8	0	17.44	17.44	17.35		
3	16QAM	8	4	17.45	17.43	17.36		
3	16QAM	8	7	17.36	17.45	17.42	17.6	0
3	16QAM	15	0	17.41	17.38	17.35		
3	64QAM	1	0	17.45	17.38	17.39	17.6	0



FCC SAR TEST REPORT

Report No. : FA082123-01

3	64QAM	1	8	17.35	17.43	17.38	17.6	0
3	64QAM	1	14	17.35	17.38	17.38		
3	64QAM	8	0	17.41	17.42	17.40		
3	64QAM	8	4	17.36	17.35	17.36		
3	64QAM	8	7	17.44	17.41	17.44		
3	64QAM	15	0	17.42	17.43	17.44		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	17.41	17.45	17.43	17.6	0
1.4	QPSK	1	3	17.35	17.35	17.43		
1.4	QPSK	1	5	17.37	17.36	17.43		
1.4	QPSK	3	0	17.41	17.38	17.39		
1.4	QPSK	3	1	17.45	17.44	17.39		
1.4	QPSK	3	3	17.41	17.41	17.44		
1.4	QPSK	6	0	17.45	17.38	17.41	17.6	0
1.4	16QAM	1	0	17.43	17.45	17.39	17.6	0
1.4	16QAM	1	3	17.44	17.43	17.35		
1.4	16QAM	1	5	17.41	17.44	17.42		
1.4	16QAM	3	0	17.44	17.36	17.37		
1.4	16QAM	3	1	17.37	17.38	17.35		
1.4	16QAM	3	3	17.40	17.44	17.41		
1.4	16QAM	6	0	17.35	17.42	17.41	17.6	0
1.4	64QAM	1	0	17.35	17.41	17.39	17.6	0
1.4	64QAM	1	3	17.35	17.37	17.36		
1.4	64QAM	1	5	17.37	17.36	17.42		
1.4	64QAM	3	0	17.39	17.39	17.37		
1.4	64QAM	3	1	17.44	17.36	17.43		
1.4	64QAM	3	3	17.36	17.39	17.42		
1.4	64QAM	6	0	17.43	17.35	17.37	17.6	0

<LTE Band 66 Aux>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	16.2	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	15.35	15.41	15.37		
20	QPSK	1	49	15.32	15.28	15.26	16.2	0
20	QPSK	1	99	15.27	15.34	15.31		
20	QPSK	50	0	15.35	15.35	15.31		
20	QPSK	50	24	15.27	15.34	15.25	16.2	0
20	QPSK	50	50	15.26	15.26	15.27		
20	QPSK	100	0	15.25	15.32	15.31		
20	16QAM	1	0	15.28	15.34	15.33	16.2	0
20	16QAM	1	49	15.31	15.29	15.34		
20	16QAM	1	99	15.34	15.31	15.32		
20	16QAM	50	0	15.33	15.26	15.26	16.2	0
20	16QAM	50	24	15.29	15.35	15.26		
20	16QAM	50	50	15.29	15.29	15.35		
20	16QAM	100	0	15.29	15.30	15.33	16.2	0
20	64QAM	1	0	15.29	15.31	15.32		
20	64QAM	1	49	15.35	15.31	15.27		
20	64QAM	1	99	15.28	15.32	15.28	16.2	0
20	64QAM	50	0	15.25	15.32	15.25		
20	64QAM	50	24	15.33	15.27	15.33		
20	64QAM	50	50	15.25	15.25	15.32	16.2	0
20	64QAM	100	0	15.27	15.30	15.32		
Channel				132047	132322	132597	16.2	0
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	15.30	15.32	15.35		
15	QPSK	1	37	15.30	15.32	15.30	16.2	0
15	QPSK	1	74	15.31	15.33	15.35		
15	QPSK	36	0	15.25	15.25	15.30	16.2	0
15	QPSK	36	20	15.28	15.28	15.25		
15	QPSK	36	39	15.26	15.28	15.25		
15	QPSK	75	0	15.28	15.25	15.33	16.2	0
15	16QAM	1	0	15.26	15.29	15.25		
15	16QAM	1	37	15.33	15.33	15.25		
15	16QAM	1	74	15.30	15.28	15.34	16.2	0
15	16QAM	36	0	15.27	15.27	15.29		
15	16QAM	36	20	15.35	15.26	15.31		
15	16QAM	36	39	15.31	15.29	15.30	16.2	0
15	16QAM	75	0	15.32	15.26	15.34		
15	64QAM	1	0	15.29	15.33	15.28		
15	64QAM	1	37	15.26	15.32	15.31	16.2	0
15	64QAM	1	74	15.34	15.30	15.25		
15	64QAM	36	0	15.30	15.31	15.25		
15	64QAM	36	20	15.25	15.34	15.34	16.2	0
15	64QAM	36	39	15.28	15.33	15.35		
15	64QAM	75	0	15.28	15.25	15.28		
Channel				132022	132322	132622	16.2	0
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	15.31	15.25	15.26		
10	QPSK	1	25	15.35	15.31	15.32	16.2	0
10	QPSK	1	49	15.29	15.34	15.26		
10	QPSK	25	0	15.32	15.26	15.34	16.2	0
10	QPSK	25	12	15.25	15.26	15.28		



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	15.30	15.33	15.28		
10	QPSK	50	0	15.26	15.26	15.27		
10	16QAM	1	0	15.34	15.31	15.26		
10	16QAM	1	25	15.31	15.29	15.30	16.2	0
10	16QAM	1	49	15.35	15.35	15.29		
10	16QAM	25	0	15.35	15.26	15.27		
10	16QAM	25	12	15.26	15.27	15.34	16.2	0
10	16QAM	25	25	15.34	15.34	15.25		
10	16QAM	50	0	15.28	15.30	15.31		
10	64QAM	1	0	15.28	15.27	15.33	16.2	0
10	64QAM	1	25	15.34	15.32	15.28		
10	64QAM	1	49	15.35	15.27	15.29		
10	64QAM	25	0	15.35	15.29	15.33	16.2	0
10	64QAM	25	12	15.29	15.25	15.26		
10	64QAM	25	25	15.32	15.25	15.32		
10	64QAM	50	0	15.25	15.30	15.26		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	15.29	15.32	15.34	16.2	0
5	QPSK	1	12	15.29	15.32	15.34		
5	QPSK	1	24	15.32	15.30	15.29		
5	QPSK	12	0	15.26	15.30	15.35	16.2	0
5	QPSK	12	7	15.25	15.25	15.25		
5	QPSK	12	13	15.35	15.34	15.25		
5	QPSK	25	0	15.35	15.29	15.33		
5	16QAM	1	0	15.32	15.35	15.26	16.2	0
5	16QAM	1	12	15.29	15.27	15.35		
5	16QAM	1	24	15.35	15.29	15.30		
5	16QAM	12	0	15.30	15.31	15.33	16.2	0
5	16QAM	12	7	15.28	15.34	15.27		
5	16QAM	12	13	15.35	15.32	15.30		
5	16QAM	25	0	15.26	15.28	15.32		
5	64QAM	1	0	15.34	15.26	15.25	16.2	0
5	64QAM	1	12	15.27	15.30	15.30		
5	64QAM	1	24	15.30	15.25	15.27		
5	64QAM	12	0	15.33	15.32	15.26	16.2	0
5	64QAM	12	7	15.26	15.35	15.28		
5	64QAM	12	13	15.29	15.33	15.35		
5	64QAM	25	0	15.30	15.29	15.26		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	15.34	15.26	15.31	16.2	0
3	QPSK	1	8	15.35	15.25	15.25		
3	QPSK	1	14	15.25	15.33	15.35		
3	QPSK	8	0	15.31	15.26	15.28	16.2	0
3	QPSK	8	4	15.35	15.30	15.30		
3	QPSK	8	7	15.34	15.28	15.29		
3	QPSK	15	0	15.27	15.32	15.25		
3	16QAM	1	0	15.29	15.25	15.35	16.2	0
3	16QAM	1	8	15.31	15.30	15.32		
3	16QAM	1	14	15.35	15.33	15.32		
3	16QAM	8	0	15.27	15.35	15.27	16.2	0
3	16QAM	8	4	15.30	15.35	15.30		
3	16QAM	8	7	15.28	15.26	15.32		
3	16QAM	15	0	15.27	15.32	15.35		
3	64QAM	1	0	15.35	15.25	15.29	16.2	0



FCC SAR TEST REPORT

Report No. : FA082123-01

3	64QAM	1	8	15.30	15.35	15.27	16.2	0
3	64QAM	1	14	15.26	15.34	15.25		
3	64QAM	8	0	15.30	15.25	15.26		
3	64QAM	8	4	15.30	15.29	15.31		
3	64QAM	8	7	15.28	15.30	15.35		
3	64QAM	15	0	15.30	15.35	15.33		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	15.32	15.34	15.29	16.2	0
1.4	QPSK	1	3	15.27	15.32	15.30		
1.4	QPSK	1	5	15.33	15.27	15.27		
1.4	QPSK	3	0	15.28	15.34	15.25		
1.4	QPSK	3	1	15.28	15.28	15.26		
1.4	QPSK	3	3	15.28	15.32	15.32		
1.4	QPSK	6	0	15.27	15.27	15.29	16.2	0
1.4	16QAM	1	0	15.27	15.32	15.34	16.2	0
1.4	16QAM	1	3	15.35	15.27	15.26		
1.4	16QAM	1	5	15.33	15.27	15.30		
1.4	16QAM	3	0	15.27	15.33	15.26		
1.4	16QAM	3	1	15.32	15.28	15.33		
1.4	16QAM	3	3	15.34	15.28	15.31		
1.4	16QAM	6	0	15.30	15.30	15.27	16.2	0
1.4	64QAM	1	0	15.29	15.29	15.35	16.2	0
1.4	64QAM	1	3	15.30	15.27	15.33		
1.4	64QAM	1	5	15.33	15.30	15.27		
1.4	64QAM	3	0	15.35	15.31	15.33		
1.4	64QAM	3	1	15.31	15.25	15.27		
1.4	64QAM	3	3	15.30	15.34	15.26		
1.4	64QAM	6	0	15.32	15.28	15.30	16.2	0

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

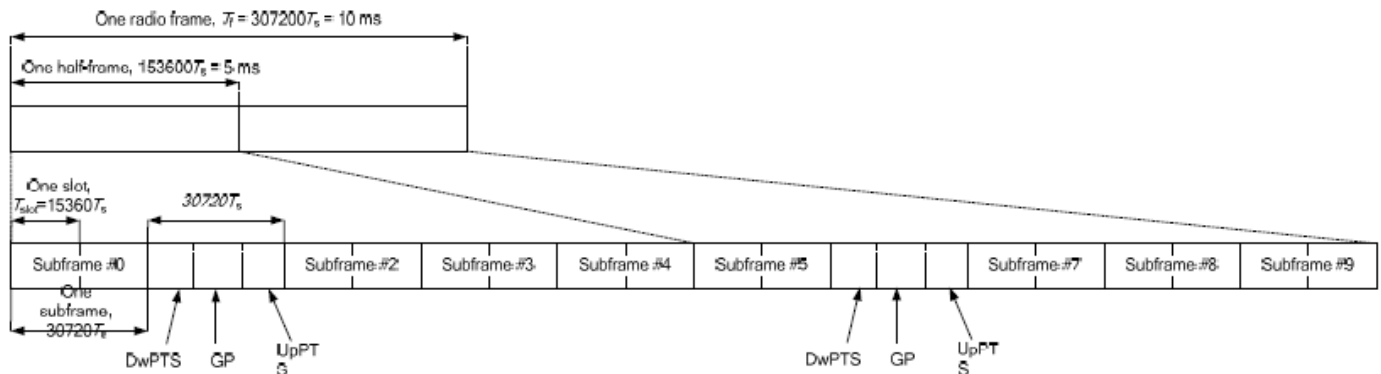


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- The device supports Power Class 3 uplink-downlink configurations 0 and 6, and Power Class 2 uplink-downlink configurations 1 to 5 operations for LTE Band 41.
- The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1, for Power Class 3 operation is 63.3% using UL-DL configuration 0. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR among all exposure condition.

DSI 1
<LTE Band 38 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	23.63	23.86	23.74	24	0
20	QPSK	1	49	23.68	23.78	23.70		
20	QPSK	1	99	23.75	23.77	23.68		
20	QPSK	50	0	22.78	22.90	22.83	23	1
20	QPSK	50	24	22.89	22.89	22.87		
20	QPSK	50	50	22.85	22.95	22.84		
20	QPSK	100	0	22.87	22.89	22.88	23	1
20	16QAM	1	0	22.81	22.86	22.86		
20	16QAM	1	49	22.73	22.89	22.77		
20	16QAM	1	99	22.87	22.85	22.79	22	2
20	16QAM	50	0	21.83	21.96	21.85		
20	16QAM	50	24	21.88	21.94	21.93		
20	16QAM	50	50	21.90	21.97	21.88	22	2
20	16QAM	100	0	21.89	21.91	21.90		
20	64QAM	1	0	21.52	21.55	21.55		
20	64QAM	1	49	21.49	21.62	21.56	22	2
20	64QAM	1	99	21.57	21.64	21.57		
20	64QAM	50	0	20.85	20.94	20.88		
20	64QAM	50	24	20.90	20.93	20.92	21	3
20	64QAM	50	50	20.90	21.00	20.87		
20	64QAM	100	0	20.90	20.91	20.91		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	23.57	23.80	23.73	24	0
15	QPSK	1	37	23.68	23.69	23.68		
15	QPSK	1	74	23.72	23.72	23.58		
15	QPSK	36	0	22.78	22.88	22.75	23	1
15	QPSK	36	20	22.89	22.81	22.81		
15	QPSK	36	39	22.84	22.89	22.82		
15	QPSK	75	0	22.86	22.89	22.83	23	1
15	16QAM	1	0	22.77	22.83	22.84		
15	16QAM	1	37	22.65	22.82	22.69		
15	16QAM	1	74	22.84	22.78	22.72	22	2
15	16QAM	36	0	21.80	21.96	21.78		
15	16QAM	36	20	21.82	21.85	21.92		
15	16QAM	36	39	21.89	21.95	21.88	22	2
15	16QAM	75	0	21.87	21.89	21.89		
15	64QAM	1	0	21.46	21.47	21.54		
15	64QAM	1	37	21.40	21.56	21.49	22	2
15	64QAM	1	74	21.47	21.61	21.54		
15	64QAM	36	0	20.77	20.94	20.79		
15	64QAM	36	20	20.80	20.85	20.88	21	3
15	64QAM	36	39	20.87	21.00	20.85		
15	64QAM	75	0	20.80	20.83	20.85		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	23.61	23.77	23.72	24	0
10	QPSK	1	25	23.62	23.72	23.60		
10	QPSK	1	49	23.72	23.70	23.63		
10	QPSK	25	0	22.77	22.84	22.75	23	1



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	12	22.85	22.85	22.80		
10	QPSK	25	25	22.77	22.90	22.84		
10	QPSK	50	0	22.80	22.85	22.84		
10	16QAM	1	0	22.77	22.77	22.85	23	1
10	16QAM	1	25	22.68	22.89	22.68		
10	16QAM	1	49	22.83	22.80	22.78		
10	16QAM	25	0	21.83	21.95	21.79	22	2
10	16QAM	25	12	21.86	21.94	21.84		
10	16QAM	25	25	21.83	21.94	21.78		
10	16QAM	50	0	21.84	21.81	21.90	22	2
10	64QAM	1	0	21.47	21.46	21.53		
10	64QAM	1	25	21.43	21.61	21.48		
10	64QAM	1	49	21.47	21.56	21.51	21	3
10	64QAM	25	0	20.75	20.91	20.79		
10	64QAM	25	12	20.85	20.92	20.85		
10	64QAM	25	25	20.88	20.93	20.85	21	3
10	64QAM	50	0	20.85	20.81	20.84		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	23.63	23.81	23.64	24	0
5	QPSK	1	12	23.58	23.68	23.65		
5	QPSK	1	24	23.75	23.75	23.60		
5	QPSK	12	0	22.71	22.81	22.73	23	1
5	QPSK	12	7	22.86	22.85	22.83		
5	QPSK	12	13	22.75	22.85	22.84		
5	QPSK	25	0	22.83	22.83	22.78	23	1
5	16QAM	1	0	22.74	22.86	22.85		
5	16QAM	1	12	22.71	22.87	22.72		
5	16QAM	1	24	22.87	22.84	22.73	22	2
5	16QAM	12	0	21.73	21.90	21.79		
5	16QAM	12	7	21.86	21.90	21.86		
5	16QAM	12	13	21.87	21.89	21.82	22	2
5	16QAM	25	0	21.79	21.82	21.85		
5	64QAM	1	0	21.42	21.55	21.53		
5	64QAM	1	12	21.39	21.61	21.48	22	2
5	64QAM	1	24	21.52	21.56	21.52		
5	64QAM	12	0	20.75	20.93	20.78		
5	64QAM	12	7	20.82	20.89	20.83	21	3
5	64QAM	12	13	20.80	20.92	20.83		
5	64QAM	25	0	20.89	20.88	20.87		



<LTE Band 41 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490	24	0
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	23.78	23.80	23.89	23.77	23.82		
20	QPSK	1	49	23.76	23.78	23.74	23.66	23.73	24	0
20	QPSK	1	99	23.75	23.78	23.82	23.75	23.75		
20	QPSK	50	0	22.85	22.87	22.96	22.87	22.85		
20	QPSK	50	24	22.93	22.95	22.94	22.83	22.80	23	1
20	QPSK	50	50	22.89	22.94	22.93	22.84	22.85		
20	QPSK	100	0	22.92	22.95	22.97	22.84	22.80		
20	16QAM	1	0	22.91	22.92	22.95	22.92	22.90	23	1
20	16QAM	1	49	22.77	22.85	22.87	22.77	22.81		
20	16QAM	1	99	22.86	22.90	22.94	22.83	22.83		
20	16QAM	50	0	21.89	21.90	21.92	21.89	21.86	22	2
20	16QAM	50	24	21.98	21.98	21.99	21.88	21.82		
20	16QAM	50	50	21.94	21.96	21.97	21.87	21.88		
20	16QAM	100	0	21.96	21.98	21.96	21.87	21.80	22	2
20	64QAM	1	0	21.65	21.68	21.67	21.60	21.52		
20	64QAM	1	49	21.57	21.64	21.59	21.56	21.50		
20	64QAM	1	99	21.65	21.72	21.67	21.58	21.47	21	3
20	64QAM	50	0	20.91	20.92	20.94	20.90	20.87		
20	64QAM	50	24	20.99	21.01	20.98	20.87	20.83		
20	64QAM	50	50	20.95	20.98	20.96	20.86	20.88	21	3
20	64QAM	100	0	20.97	21.00	20.98	20.87	20.83		
Channel				39725	40173	40620	41068	41515	24	0
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	23.75	23.79	23.84	23.75	23.75		
15	QPSK	1	37	23.74	23.64	23.70	23.56	23.65	24	0
15	QPSK	1	74	23.70	23.75	23.78	23.73	23.70		
15	QPSK	36	0	22.79	22.83	22.85	22.83	22.82	23	1
15	QPSK	36	20	22.86	22.91	22.94	22.83	22.71		
15	QPSK	36	39	22.86	22.86	22.90	22.75	22.75		
15	QPSK	75	0	22.90	22.92	22.93	22.81	22.76	23	1
15	16QAM	1	0	22.85	22.91	22.92	22.87	22.82		
15	16QAM	1	37	22.73	22.87	22.83	22.74	22.71		
15	16QAM	1	74	22.86	22.82	22.89	22.83	22.76	22	2
15	16QAM	36	0	21.81	21.90	21.84	21.83	21.85		
15	16QAM	36	20	21.90	21.91	21.90	21.79	21.74		
15	16QAM	36	39	21.90	21.97	21.88	21.78	21.78	22	2
15	16QAM	75	0	21.93	21.95	21.93	21.86	21.79		
15	64QAM	1	0	21.59	21.67	21.58	21.55	21.43		
15	64QAM	1	37	21.54	21.50	21.49	21.54	21.47	22	2
15	64QAM	1	74	21.63	21.61	21.64	21.48	21.43		
15	64QAM	36	0	20.83	20.93	20.90	20.87	20.87		
15	64QAM	36	20	20.91	20.93	20.89	20.80	20.82	21	3
15	64QAM	36	39	20.85	20.89	20.89	20.82	20.85		
15	64QAM	75	0	20.96	20.98	20.91	20.82	20.81		
Channel				39700	40160	40620	41080	41540	24	0
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	23.68	23.72	23.88	23.73	23.77		
10	QPSK	1	25	23.75	23.70	23.69	23.63	23.73	24	0
10	QPSK	1	49	23.67	23.72	23.72	23.71	23.71		
10	QPSK	25	0	22.84	22.85	22.83	22.86	22.85	23	1
10	QPSK	25	12	22.93	22.95	22.93	22.82	22.74		

10	QPSK	25	25	22.81	22.91	22.85	22.80	22.84		
10	QPSK	50	0	22.87	22.89	22.97	22.84	22.73		
10	16QAM	1	0	22.83	22.90	22.86	22.85	22.82	23	1
10	16QAM	1	25	22.77	22.85	22.81	22.75	22.79		
10	16QAM	1	49	22.79	22.89	22.94	22.83	22.80		
10	16QAM	25	0	21.81	21.90	21.92	21.88	21.84		
10	16QAM	25	12	21.93	21.92	21.95	21.88	21.75	22	2
10	16QAM	25	25	21.92	21.93	21.97	21.82	21.87		
10	16QAM	50	0	21.94	21.96	21.90	21.79	21.73		
10	64QAM	1	0	21.55	21.67	21.64	21.54	21.43		
10	64QAM	1	25	21.54	21.63	21.57	21.46	21.47	22	2
10	64QAM	1	49	21.65	21.70	21.63	21.57	21.37		
10	64QAM	25	0	20.84	20.87	20.93	20.83	20.86		
10	64QAM	25	12	20.93	20.93	20.92	20.79	20.80		
10	64QAM	25	25	20.91	20.94	20.86	20.84	20.84	21	3
10	64QAM	50	0	20.87	20.97	20.92	20.77	20.82		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	23.78	23.71	23.80	23.74	23.79	24	0
5	QPSK	1	12	23.66	23.68	23.67	23.60	23.67		
5	QPSK	1	24	23.69	23.69	23.82	23.65	23.75		
5	QPSK	12	0	22.85	22.81	22.80	22.77	22.75		
5	QPSK	12	7	22.84	22.93	22.93	22.80	22.80	23	1
5	QPSK	12	13	22.89	22.89	22.87	22.78	22.85		
5	QPSK	25	0	22.91	22.92	22.87	22.78	22.72		
5	16QAM	1	0	22.90	22.85	22.88	22.85	22.84		
5	16QAM	1	12	22.69	22.77	22.86	22.73	22.71	23	1
5	16QAM	1	24	22.81	22.80	22.85	22.82	22.77		
5	16QAM	12	0	21.82	21.87	21.86	21.86	21.77		
5	16QAM	12	7	21.96	21.98	21.93	21.80	21.82		
5	16QAM	12	13	21.90	21.86	21.96	21.83	21.87	22	2
5	16QAM	25	0	21.96	21.89	21.95	21.83	21.74		
5	64QAM	1	0	21.58	21.62	21.60	21.52	21.44		
5	64QAM	1	12	21.47	21.62	21.49	21.52	21.47		
5	64QAM	1	24	21.64	21.63	21.64	21.57	21.38	22	2
5	64QAM	12	0	20.91	20.85	20.90	20.89	20.87		
5	64QAM	12	7	20.89	21.00	20.91	20.77	20.83		
5	64QAM	12	13	20.85	20.89	20.93	20.78	20.87		
5	64QAM	25	0	20.96	20.90	20.91	20.80	20.78	21	3



<LTE Band 41 HPUE Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490	27	0
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	26.58	26.59	26.69	26.49	26.61		
20	QPSK	1	49	26.55	26.50	26.47	26.36	26.51	26	1
20	QPSK	1	99	26.49	26.49	26.52	26.53	26.52		
20	QPSK	50	0	25.57	25.64	25.72	25.62	25.62		
20	QPSK	50	24	25.69	25.72	25.64	25.63	25.56	26	1
20	QPSK	50	50	25.66	25.65	25.67	25.57	25.57		
20	QPSK	100	0	25.72	25.66	25.70	25.59	25.60		
20	16QAM	1	0	25.65	25.63	25.69	25.67	25.62	26	1
20	16QAM	1	49	25.52	25.60	25.62	25.50	25.51		
20	16QAM	1	99	25.63	25.67	25.72	25.56	25.53		
20	16QAM	50	0	24.64	24.66	24.63	24.67	24.58	25	2
20	16QAM	50	24	24.69	24.71	24.72	24.64	24.56		
20	16QAM	50	50	24.73	24.66	24.72	24.67	24.58		
20	16QAM	100	0	24.75	24.74	24.67	24.59	24.58	25	2
20	64QAM	1	0	24.44	24.48	24.38	24.33	24.32		
20	64QAM	1	49	24.29	24.40	24.35	24.32	24.23		
20	64QAM	1	99	24.39	24.47	24.44	24.37	24.26	24	3
20	64QAM	50	0	23.68	23.66	23.70	23.62	23.65		
20	64QAM	50	24	23.73	23.79	23.74	23.58	23.56		
20	64QAM	50	50	23.69	23.70	23.68	23.65	23.59	24	3
20	64QAM	100	0	23.67	23.70	23.75	23.65	23.62		
Channel				39725	40173	40620	41068	41515	27	0
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	26.55	26.57	26.64	26.54	26.61		
15	QPSK	1	37	26.55	26.53	26.46	26.36	26.52	26	1
15	QPSK	1	74	26.49	26.56	26.52	26.45	26.50		
15	QPSK	36	0	25.64	25.63	25.67	25.58	25.61		
15	QPSK	36	20	25.68	25.69	25.65	25.58	25.50	26	1
15	QPSK	36	39	25.60	25.66	25.64	25.54	25.59		
15	QPSK	75	0	25.68	25.68	25.73	25.55	25.56		
15	16QAM	1	0	25.62	25.64	25.71	25.72	25.68	26	1
15	16QAM	1	37	25.49	25.64	25.64	25.48	25.56		
15	16QAM	1	74	25.57	25.68	25.72	25.61	25.55		
15	16QAM	36	0	24.68	24.69	24.71	24.67	24.58	25	2
15	16QAM	36	20	24.76	24.68	24.73	24.67	24.60		
15	16QAM	36	39	24.73	24.67	24.69	24.62	24.58		
15	16QAM	75	0	24.70	24.68	24.70	24.62	24.51	25	2
15	64QAM	1	0	24.40	24.41	24.39	24.36	24.24		
15	64QAM	1	37	24.37	24.35	24.38	24.29	24.26		
15	64QAM	1	74	24.38	24.44	24.39	24.37	24.22	24	3
15	64QAM	36	0	23.71	23.70	23.65	23.66	23.60		
15	64QAM	36	20	23.76	23.79	23.76	23.57	23.56		
15	64QAM	36	39	23.72	23.69	23.71	23.57	23.58	24	3
15	64QAM	75	0	23.69	23.73	23.78	23.62	23.55		
Channel				39700	40160	40620	41080	41540	27	0
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	26.50	26.50	26.61	26.57	26.57		
10	QPSK	1	25	26.55	26.53	26.47	26.37	26.45	26	1
10	QPSK	1	49	26.54	26.55	26.52	26.55	26.45		
10	QPSK	25	0	25.62	25.61	25.75	25.63	25.59		
10	QPSK	25	12	25.73	25.70	25.67	25.59	25.59	26	1



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	25.59	25.73	25.72	25.62	25.62		
10	QPSK	50	0	25.68	25.66	25.71	25.56	25.57		
10	16QAM	1	0	25.70	25.67	25.69	25.64	25.61		
10	16QAM	1	25	25.49	25.62	25.65	25.53	25.60	26	1
10	16QAM	1	49	25.56	25.65	25.73	25.54	25.58		
10	16QAM	25	0	24.64	24.70	24.64	24.68	24.58		
10	16QAM	25	12	24.75	24.69	24.69	24.59	24.55	25	2
10	16QAM	25	25	24.68	24.67	24.72	24.65	24.66		
10	16QAM	50	0	24.75	24.68	24.71	24.57	24.58		
10	64QAM	1	0	24.35	24.42	24.39	24.39	24.29	25	2
10	64QAM	1	25	24.37	24.37	24.36	24.36	24.27		
10	64QAM	1	49	24.35	24.44	24.38	24.34	24.24		
10	64QAM	25	0	23.65	23.63	23.69	23.65	23.67	24	3
10	64QAM	25	12	23.71	23.74	23.77	23.64	23.54		
10	64QAM	25	25	23.72	23.70	23.73	23.57	23.65		
10	64QAM	50	0	23.67	23.80	23.71	23.63	23.60		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	26.53	26.55	26.65	26.50	26.57	27	0
5	QPSK	1	12	26.53	26.56	26.50	26.44	26.53		
5	QPSK	1	24	26.46	26.51	26.55	26.51	26.54		
5	QPSK	12	0	25.60	25.67	25.72	25.61	25.60	26	1
5	QPSK	12	7	25.65	25.73	25.64	25.61	25.56		
5	QPSK	12	13	25.59	25.72	25.70	25.57	25.63		
5	QPSK	25	0	25.62	25.74	25.67	25.57	25.52		
5	16QAM	1	0	25.65	25.69	25.72	25.69	25.66	26	1
5	16QAM	1	12	25.51	25.62	25.57	25.56	25.56		
5	16QAM	1	24	25.64	25.66	25.65	25.55	25.63		
5	16QAM	12	0	24.69	24.66	24.64	24.61	24.63	25	2
5	16QAM	12	7	24.71	24.77	24.75	24.66	24.57		
5	16QAM	12	13	24.65	24.69	24.72	24.64	24.64		
5	16QAM	25	0	24.67	24.77	24.69	24.64	24.51		
5	64QAM	1	0	24.36	24.43	24.44	24.40	24.23	25	2
5	64QAM	1	12	24.35	24.44	24.30	24.33	24.24		
5	64QAM	1	24	24.37	24.48	24.37	24.30	24.19		
5	64QAM	12	0	23.62	23.63	23.64	23.62	23.63	24	3
5	64QAM	12	7	23.73	23.78	23.71	23.59	23.60		
5	64QAM	12	13	23.71	23.78	23.67	23.62	23.60		
5	64QAM	25	0	23.77	23.73	23.77	23.65	23.60		

DSI 2
<LTE Band 38 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	18.19	18.20	18.12	18.9	0
20	QPSK	1	49	18.09	18.00	18.01		
20	QPSK	1	99	18.02	18.03	18.01		
20	QPSK	50	0	18.10	18.02	18.02	18.9	0
20	QPSK	50	24	18.05	18.06	18.02		
20	QPSK	50	50	18.09	18.07	18.09		
20	QPSK	100	0	18.04	18.00	18.09	18.9	0
20	16QAM	1	0	18.05	18.07	18.09		
20	16QAM	1	49	18.05	18.08	18.01		
20	16QAM	1	99	18.02	18.02	18.01	18.9	0
20	16QAM	50	0	18.09	18.10	18.03		
20	16QAM	50	24	18.03	18.05	18.06		
20	16QAM	50	50	18.06	18.09	18.10	18.9	0
20	16QAM	100	0	18.04	18.08	18.10		
20	64QAM	1	0	18.01	18.01	18.04		
20	64QAM	1	49	18.01	18.04	18.01	18.9	0
20	64QAM	1	99	18.06	18.07	18.05		
20	64QAM	50	0	18.02	18.02	18.10		
20	64QAM	50	24	18.01	18.03	18.01	18.9	0
20	64QAM	50	50	18.05	18.01	18.05		
20	64QAM	100	0	18.05	18.03	18.04		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	18.10	18.10	18.02	18.9	0
15	QPSK	1	37	18.05	18.10	18.02		
15	QPSK	1	74	18.05	18.08	18.08		
15	QPSK	36	0	18.09	18.00	18.10	18.9	0
15	QPSK	36	20	18.09	18.10	18.03		
15	QPSK	36	39	18.04	18.02	18.01		
15	QPSK	75	0	18.03	18.04	18.07	18.9	0
15	16QAM	1	0	18.07	18.08	18.06		
15	16QAM	1	37	18.08	18.01	18.01		
15	16QAM	1	74	18.09	18.06	18.00	18.9	0
15	16QAM	36	0	18.08	18.05	18.01		
15	16QAM	36	20	18.05	18.10	18.01		
15	16QAM	36	39	18.02	18.00	18.06	18.9	0
15	16QAM	75	0	18.02	18.00	18.01		
15	64QAM	1	0	18.02	18.05	18.04		
15	64QAM	1	37	18.10	18.01	18.05	18.9	0
15	64QAM	1	74	18.06	18.10	18.00		
15	64QAM	36	0	18.09	18.08	18.10		
15	64QAM	36	20	18.05	18.09	18.10	18.9	0
15	64QAM	36	39	18.05	18.08	18.08		
15	64QAM	75	0	18.01	18.03	18.01		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	18.02	18.10	18.04	18.9	0
10	QPSK	1	25	18.06	18.02	18.00		
10	QPSK	1	49	18.04	18.06	18.04		
10	QPSK	25	0	18.08	18.00	18.07	18.9	0



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	12	18.03	18.03	18.02		
10	QPSK	25	25	18.02	18.01	18.07		
10	QPSK	50	0	18.07	18.02	18.06		
10	16QAM	1	0	18.04	18.07	18.00	18.9	0
10	16QAM	1	25	18.06	18.00	18.03		
10	16QAM	1	49	18.03	18.03	18.05		
10	16QAM	25	0	18.03	18.02	18.10	18.9	0
10	16QAM	25	12	18.07	18.08	18.10		
10	16QAM	25	25	18.01	18.04	18.08		
10	16QAM	50	0	18.07	18.02	18.02	18.9	0
10	64QAM	1	0	18.07	18.08	18.03		
10	64QAM	1	25	18.01	18.04	18.00		
10	64QAM	1	49	18.01	18.03	18.02	18.9	0
10	64QAM	25	0	18.01	18.01	18.01		
10	64QAM	25	12	18.07	18.00	18.03		
10	64QAM	25	25	18.05	18.10	18.06	18.9	0
10	64QAM	50	0	18.06	18.07	18.00		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	18.04	18.09	18.05	18.9	0
5	QPSK	1	12	18.05	18.01	18.08		
5	QPSK	1	24	18.02	18.02	18.09		
5	QPSK	12	0	18.03	18.02	18.00	18.9	0
5	QPSK	12	7	18.01	18.03	18.06		
5	QPSK	12	13	18.09	18.07	18.03		
5	QPSK	25	0	18.05	18.00	18.00	18.9	0
5	16QAM	1	0	18.02	18.08	18.02		
5	16QAM	1	12	18.03	18.09	18.05		
5	16QAM	1	24	18.04	18.06	18.03	18.9	0
5	16QAM	12	0	18.06	18.10	18.01		
5	16QAM	12	7	18.04	18.00	18.05		
5	16QAM	12	13	18.10	18.09	18.04	18.9	0
5	16QAM	25	0	18.00	18.10	18.02		
5	64QAM	1	0	18.08	18.02	18.02		
5	64QAM	1	12	18.02	18.00	18.00	18.9	0
5	64QAM	1	24	18.06	18.09	18.00		
5	64QAM	12	0	18.00	18.07	18.06		
5	64QAM	12	7	18.05	18.03	18.01	18.9	0
5	64QAM	12	13	18.01	18.04	18.06		
5	64QAM	25	0	18.05	18.00	18.01		



<LTE Band 41 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490	18.9	0
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	18.56	18.47	18.45	18.37	18.37		
20	QPSK	1	49	18.27	18.31	18.25	18.25	18.44	18.9	0
20	QPSK	1	99	18.28	18.28	18.26	18.30	18.50		
20	QPSK	50	0	18.36	18.33	18.32	18.35	18.35		
20	QPSK	50	24	18.31	18.31	18.34	18.25	18.29	18.9	0
20	QPSK	50	50	18.25	18.28	18.31	18.27	18.22		
20	QPSK	100	0	18.33	18.26	18.31	18.27	18.31		
20	16QAM	1	0	18.26	18.26	18.27	18.29	18.44	18.9	0
20	16QAM	1	49	18.26	18.27	18.32	18.26	18.50		
20	16QAM	1	99	18.32	18.35	18.33	18.34	18.51		
20	16QAM	50	0	18.25	18.31	18.35	18.25	18.44	18.9	0
20	16QAM	50	24	18.32	18.32	18.35	18.32	18.45		
20	16QAM	50	50	18.33	18.29	18.26	18.35	18.47		
20	16QAM	100	0	18.27	18.30	18.32	18.32	18.48	18.9	0
20	64QAM	1	0	18.33	18.26	18.34	18.35	18.51		
20	64QAM	1	49	18.26	18.27	18.33	18.29	18.45		
20	64QAM	1	99	18.25	18.35	18.30	18.27	18.50	18.9	0
20	64QAM	50	0	18.26	18.25	18.33	18.28	18.53		
20	64QAM	50	24	18.26	18.32	18.26	18.26	18.52		
20	64QAM	50	50	18.34	18.28	18.33	18.33	18.46	18.9	0
20	64QAM	100	0	18.26	18.26	18.34	18.35	18.49		
Channel				39725	40173	40620	41068	41515	18.9	0
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	18.05	18.10	18.06	18.01	18.06		
15	QPSK	1	37	18.04	18.05	18.09	18.08	18.05	18.9	0
15	QPSK	1	74	18.01	18.02	18.01	18.08	18.01		
15	QPSK	36	0	18.03	18.05	18.06	18.09	18.04	18.9	0
15	QPSK	36	20	18.06	18.06	18.06	18.01	18.02		
15	QPSK	36	39	18.08	18.02	18.04	18.00	18.07		
15	QPSK	75	0	18.09	18.09	18.05	18.07	18.09	18.9	0
15	16QAM	1	0	18.10	18.09	18.07	18.09	18.00		
15	16QAM	1	37	18.09	18.05	18.00	18.02	18.02		
15	16QAM	1	74	18.06	18.09	18.04	18.05	18.03	18.9	0
15	16QAM	36	0	18.02	18.06	18.04	18.05	18.07		
15	16QAM	36	20	18.01	18.00	18.01	18.06	18.09		
15	16QAM	36	39	18.01	18.03	18.10	18.08	18.04	18.9	0
15	16QAM	75	0	18.06	18.05	18.02	18.04	18.08		
15	64QAM	1	0	18.08	18.09	18.06	18.04	18.10		
15	64QAM	1	37	18.00	18.08	18.09	18.10	18.07	18.9	0
15	64QAM	1	74	18.02	18.06	18.06	18.03	18.04		
15	64QAM	36	0	18.04	18.08	18.10	18.10	18.09		
15	64QAM	36	20	18.01	18.00	18.03	18.05	18.09	18.9	0
15	64QAM	36	39	18.04	18.00	18.07	18.01	18.03		
15	64QAM	75	0	18.00	18.03	18.02	18.04	18.00		
Channel				39700	40160	40620	41080	41540	18.9	0
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	18.03	18.10	18.01	18.03	18.06		
10	QPSK	1	25	18.08	18.09	18.07	18.07	18.00	18.9	0
10	QPSK	1	49	18.08	18.07	18.07	18.01	18.01		
10	QPSK	25	0	18.02	18.08	18.08	18.04	18.09	18.9	0
10	QPSK	25	12	18.02	18.07	18.06	18.00	18.03		



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	18.05	18.03	18.01	18.00	18.04	18.9	0
10	QPSK	50	0	18.08	18.02	18.02	18.08	18.00		
10	16QAM	1	0	18.02	18.06	18.04	18.06	18.08		
10	16QAM	1	25	18.02	18.07	18.02	18.06	18.10	18.9	0
10	16QAM	1	49	18.08	18.03	18.02	18.07	18.06		
10	16QAM	25	0	18.08	18.06	18.02	18.05	18.06		
10	16QAM	25	12	18.05	18.02	18.02	18.05	18.01	18.9	0
10	16QAM	25	25	18.05	18.09	18.08	18.03	18.08		
10	16QAM	50	0	18.02	18.06	18.04	18.03	18.03		
10	64QAM	1	0	18.10	18.07	18.03	18.07	18.04	18.9	0
10	64QAM	1	25	18.05	18.10	18.10	18.05	18.08		
10	64QAM	1	49	18.06	18.02	18.07	18.03	18.00		
10	64QAM	25	0	18.08	18.01	18.10	18.06	18.06	18.9	0
10	64QAM	25	12	18.09	18.01	18.07	18.01	18.06		
10	64QAM	25	25	18.08	18.07	18.02	18.10	18.10		
10	64QAM	50	0	18.00	18.08	18.05	18.04	18.10	Tune-up limit (dBm)	MPR (dB)
Channel				39675	40148	40620	41093	41565		
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	18.07	18.05	18.10	18.07	18.03	18.9	0
5	QPSK	1	12	18.10	18.01	18.09	18.01	18.06		
5	QPSK	1	24	18.01	18.07	18.09	18.05	18.02		
5	QPSK	12	0	18.06	18.00	18.08	18.03	18.01	18.9	0
5	QPSK	12	7	18.00	18.02	18.05	18.04	18.05		
5	QPSK	12	13	18.06	18.10	18.04	18.06	18.10		
5	QPSK	25	0	18.03	18.06	18.06	18.01	18.07	18.9	0
5	16QAM	1	0	18.07	18.08	18.07	18.05	18.07		
5	16QAM	1	12	18.05	18.10	18.02	18.09	18.00		
5	16QAM	1	24	18.02	18.00	18.00	18.03	18.02	18.9	0
5	16QAM	12	0	18.10	18.02	18.05	18.05	18.05		
5	16QAM	12	7	18.03	18.07	18.05	18.03	18.07		
5	16QAM	12	13	18.02	18.03	18.09	18.08	18.08	18.9	0
5	16QAM	25	0	18.09	18.01	18.01	18.07	18.07		
5	64QAM	1	0	18.07	18.07	18.01	18.03	18.06		
5	64QAM	1	12	18.10	18.10	18.00	18.03	18.03	18.9	0
5	64QAM	1	24	18.09	18.05	18.07	18.01	18.10		
5	64QAM	12	0	18.08	18.06	18.00	18.08	18.00		
5	64QAM	12	7	18.04	18.04	18.06	18.00	18.06	18.9	0
5	64QAM	12	13	18.00	18.04	18.09	18.08	18.09		
5	64QAM	25	0	18.01	18.02	18.02	18.01	18.10		



<LTE Band 41 HPUE Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490	20.5	0
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	20.00	20.04	19.91	19.86	19.82		
20	QPSK	1	49	19.75	19.81	19.68	19.68	19.94	20.5	0
20	QPSK	1	99	19.76	19.70	19.70	19.78	20.00		
20	QPSK	50	0	19.78	19.77	19.73	19.76	19.79		
20	QPSK	50	24	19.80	19.75	19.75	19.71	19.77	20.5	0
20	QPSK	50	50	19.75	19.76	19.79	19.74	19.64		
20	QPSK	100	0	19.82	19.75	19.72	19.74	19.76		
20	16QAM	1	0	19.72	19.74	19.73	19.79	19.92	20.5	0
20	16QAM	1	49	19.75	19.69	19.82	19.69	19.92		
20	16QAM	1	99	19.74	19.85	19.80	19.84	19.92		
20	16QAM	50	0	19.73	19.81	19.76	19.72	19.87	20.5	0
20	16QAM	50	24	19.73	19.80	19.79	19.76	19.92		
20	16QAM	50	50	19.74	19.71	19.69	19.79	19.92		
20	16QAM	100	0	19.68	19.72	19.77	19.77	19.93	20.5	0
20	64QAM	1	0	19.80	19.70	19.80	19.83	19.99		
20	64QAM	1	49	19.73	19.76	19.80	19.77	19.87		
20	64QAM	1	99	19.72	19.77	19.75	19.70	19.92	20.5	0
20	64QAM	50	0	19.70	19.73	19.75	19.77	20.01		
20	64QAM	50	24	19.68	19.81	19.73	19.69	19.99		
20	64QAM	50	50	19.75	19.71	19.79	19.81	19.90	20.5	0
20	64QAM	100	0	19.71	19.70	19.81	19.82	19.92		
Channel				39725	40173	40620	41068	41515	20.5	0
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	19.50	19.51	19.56	19.49	19.47		
15	QPSK	1	37	19.54	19.53	19.55	19.51	19.49	20.5	0
15	QPSK	1	74	19.49	19.52	19.46	19.52	19.49		
15	QPSK	36	0	19.51	19.50	19.47	19.52	19.54	20.5	0
15	QPSK	36	20	19.56	19.48	19.47	19.46	19.45		
15	QPSK	36	39	19.56	19.48	19.54	19.49	19.53		
15	QPSK	75	0	19.53	19.55	19.47	19.50	19.55	20.5	0
15	16QAM	1	0	19.59	19.50	19.55	19.55	19.50		
15	16QAM	1	37	19.51	19.46	19.49	19.48	19.49		
15	16QAM	1	74	19.56	19.51	19.49	19.50	19.44	20.5	0
15	16QAM	36	0	19.50	19.47	19.45	19.46	19.53		
15	16QAM	36	20	19.50	19.47	19.47	19.49	19.51		
15	16QAM	36	39	19.50	19.52	19.58	19.52	19.50	20.5	0
15	16QAM	75	0	19.50	19.54	19.43	19.45	19.51		
15	64QAM	1	0	19.55	19.56	19.54	19.50	19.54		
15	64QAM	1	37	19.48	19.52	19.59	19.53	19.57	20.5	0
15	64QAM	1	74	19.52	19.50	19.47	19.52	19.52		
15	64QAM	36	0	19.51	19.52	19.53	19.58	19.55		
15	64QAM	36	20	19.45	19.49	19.47	19.50	19.59	20.5	0
15	64QAM	36	39	19.45	19.48	19.52	19.43	19.53		
15	64QAM	75	0	19.42	19.45	19.46	19.54	19.48		
Channel				39700	40160	40620	41080	41540	20.5	0
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	19.50	19.54	19.42	19.48	19.55		
10	QPSK	1	25	19.49	19.55	19.48	19.50	19.46	20.5	0
10	QPSK	1	49	19.58	19.48	19.50	19.47	19.45		
10	QPSK	25	0	19.43	19.51	19.51	19.47	19.56	20.5	0
10	QPSK	25	12	19.46	19.49	19.52	19.48	19.46		



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	19.52	19.44	19.44	19.47	19.54		
10	QPSK	50	0	19.49	19.43	19.43	19.55	19.49		
10	16QAM	1	0	19.52	19.52	19.54	19.52	19.50	20.5	0
10	16QAM	1	25	19.45	19.52	19.44	19.47	19.58		
10	16QAM	1	49	19.50	19.50	19.44	19.49	19.54		
10	16QAM	25	0	19.51	19.50	19.46	19.51	19.48	20.5	0
10	16QAM	25	12	19.55	19.48	19.43	19.50	19.48		
10	16QAM	25	25	19.46	19.51	19.51	19.45	19.53		
10	16QAM	50	0	19.48	19.53	19.54	19.49	19.49		
10	64QAM	1	0	19.56	19.51	19.44	19.49	19.52	20.5	0
10	64QAM	1	25	19.52	19.56	19.57	19.50	19.54		
10	64QAM	1	49	19.56	19.47	19.52	19.46	19.49		
10	64QAM	25	0	19.54	19.47	19.60	19.52	19.54	20.5	0
10	64QAM	25	12	19.51	19.51	19.52	19.46	19.54		
10	64QAM	25	25	19.51	19.48	19.44	19.56	19.58		
10	64QAM	50	0	19.43	19.53	19.53	19.48	19.53		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	19.51	19.54	19.54	19.54	19.52	20.5	0
5	QPSK	1	12	19.56	19.51	19.54	19.45	19.52		
5	QPSK	1	24	19.44	19.50	19.50	19.48	19.44		
5	QPSK	12	0	19.53	19.47	19.58	19.45	19.42	20.5	0
5	QPSK	12	7	19.48	19.50	19.54	19.45	19.55		
5	QPSK	12	13	19.48	19.59	19.48	19.47	19.59		
5	QPSK	25	0	19.47	19.52	19.50	19.50	19.52		
5	16QAM	1	0	19.57	19.53	19.49	19.48	19.54	20.5	0
5	16QAM	1	12	19.50	19.54	19.48	19.59	19.45		
5	16QAM	1	24	19.45	19.45	19.42	19.51	19.51		
5	16QAM	12	0	19.53	19.52	19.49	19.49	19.47	20.5	0
5	16QAM	12	7	19.47	19.57	19.46	19.48	19.55		
5	16QAM	12	13	19.49	19.46	19.52	19.49	19.57		
5	16QAM	25	0	19.50	19.43	19.48	19.55	19.55		
5	64QAM	1	0	19.50	19.53	19.49	19.48	19.56	20.5	0
5	64QAM	1	12	19.59	19.59	19.44	19.47	19.53		
5	64QAM	1	24	19.57	19.54	19.54	19.45	19.53		
5	64QAM	12	0	19.56	19.50	19.43	19.53	19.46	20.5	0
5	64QAM	12	7	19.54	19.50	19.52	19.47	19.47		
5	64QAM	12	13	19.41	19.45	19.52	19.54	19.58		
5	64QAM	25	0	19.43	19.44	19.50	19.45	19.56		

<LTE Band 42 Aux>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				43190	43340	43490		
Frequency (MHz)				3560	3575	3590		
20	QPSK	1	0	16.73	16.88	16.89		
20	QPSK	1	49	16.60	16.39	16.68	17	0
20	QPSK	1	99	16.48	16.61	16.32		
20	QPSK	50	0	16.63	16.51	16.77		
20	QPSK	50	24	16.47	16.82	16.70	17	0
20	QPSK	50	50	16.69	16.37	16.30		
20	QPSK	100	0	16.79	16.40	16.61		
20	16QAM	1	0	16.86	16.35	16.88	17	0
20	16QAM	1	49	16.41	16.37	16.76		
20	16QAM	1	99	16.58	16.44	16.61		
20	16QAM	50	0	16.33	16.42	16.86	17	0
20	16QAM	50	24	16.60	16.60	16.78		
20	16QAM	50	50	16.84	16.43	16.42		
20	16QAM	100	0	16.78	16.82	16.52	17	0
20	64QAM	1	0	16.35	16.77	16.79		
20	64QAM	1	49	16.35	16.43	16.33		
20	64QAM	1	99	16.41	16.28	16.84	17	0
20	64QAM	50	0	16.67	16.82	16.38		
20	64QAM	50	24	16.44	16.85	16.31		
20	64QAM	50	50	16.88	16.35	16.67	17	0
20	64QAM	100	0	16.43	16.39	16.28		
Channel				43165	43340	43515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				3557.5	3575	3592.5		
15	QPSK	1	0	16.32	16.49	16.50		
15	QPSK	1	37	16.35	16.64	16.70	17	0
15	QPSK	1	74	16.81	16.82	16.66		
15	QPSK	36	0	16.80	16.70	16.84	17	0
15	QPSK	36	20	16.70	16.44	16.74		
15	QPSK	36	39	16.77	16.62	16.54		
15	QPSK	75	0	16.63	16.33	16.86	17	0
15	16QAM	1	0	16.49	16.80	16.69		
15	16QAM	1	37	16.43	16.81	16.44		
15	16QAM	1	74	16.75	16.32	16.39	17	0
15	16QAM	36	0	16.37	16.58	16.68		
15	16QAM	36	20	16.68	16.42	16.37		
15	16QAM	36	39	16.72	16.39	16.52	17	0
15	16QAM	75	0	16.82	16.71	16.73		
15	64QAM	1	0	16.72	16.65	16.40		
15	64QAM	1	37	16.46	16.62	16.36	17	0
15	64QAM	1	74	16.37	16.56	16.42		
15	64QAM	36	0	16.61	16.61	16.70		
15	64QAM	36	20	16.49	16.40	16.41	17	0
15	64QAM	36	39	16.56	16.48	16.86		
15	64QAM	75	0	16.30	16.32	16.54		
Channel				43140	43340	43540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				3555	3575	3595		
10	QPSK	1	0	16.50	16.50	16.65		
10	QPSK	1	25	16.30	16.88	16.72	17	0
10	QPSK	1	49	16.57	16.49	16.39		
10	QPSK	25	0	16.40	16.70	16.66	17	0
10	QPSK	25	12	16.83	16.69	16.72		



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	16.39	16.79	16.66		
10	QPSK	50	0	16.53	16.53	16.83		
10	16QAM	1	0	16.35	16.41	16.34		
10	16QAM	1	25	16.85	16.46	16.37	17	0
10	16QAM	1	49	16.31	16.85	16.88		
10	16QAM	25	0	16.41	16.39	16.57		
10	16QAM	25	12	16.33	16.34	16.42	17	0
10	16QAM	25	25	16.36	16.38	16.36		
10	16QAM	50	0	16.28	16.44	16.57		
10	64QAM	1	0	16.74	16.73	16.38	17	0
10	64QAM	1	25	16.67	16.84	16.68		
10	64QAM	1	49	16.86	16.33	16.78		
10	64QAM	25	0	16.80	16.79	16.45	17	0
10	64QAM	25	12	16.66	16.75	16.34		
10	64QAM	25	25	16.29	16.75	16.45		
10	64QAM	50	0	16.52	16.45	16.33		
Channel				43115	43340	43565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				3552.5	3575	3597.5		
5	QPSK	1	0	16.59	16.51	16.52	17	0
5	QPSK	1	12	16.80	16.48	16.71		
5	QPSK	1	24	16.74	16.62	16.83		
5	QPSK	12	0	16.59	16.36	16.34	17	0
5	QPSK	12	7	16.87	16.36	16.37		
5	QPSK	12	13	16.86	16.36	16.56		
5	QPSK	25	0	16.53	16.70	16.45	17	0
5	16QAM	1	0	16.59	16.56	16.76		
5	16QAM	1	12	16.52	16.62	16.70		
5	16QAM	1	24	16.53	16.75	16.60	17	0
5	16QAM	12	0	16.39	16.85	16.50		
5	16QAM	12	7	16.73	16.88	16.28		
5	16QAM	12	13	16.73	16.45	16.70	17	0
5	16QAM	25	0	16.39	16.50	16.48		
5	64QAM	1	0	16.45	16.67	16.51		
5	64QAM	1	12	16.43	16.80	16.67	17	0
5	64QAM	1	24	16.59	16.77	16.46		
5	64QAM	12	0	16.57	16.60	16.56		
5	64QAM	12	7	16.29	16.82	16.39	17	0
5	64QAM	12	13	16.50	16.69	16.64		
5	64QAM	25	0	16.83	16.64	16.64		

<LTE Band 48 Aux>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				55340	55830	56150	56640	17	0
Frequency (MHz)				3560	3609	3641	3690		
20	QPSK	1	0	16.03	15.98	16.02	15.98	17	0
20	QPSK	1	49	15.97	15.96	15.95	15.98		
20	QPSK	1	99	15.92	15.88	15.96	15.88		
20	QPSK	50	0	15.99	15.90	15.89	15.90	17	0
20	QPSK	50	24	15.92	15.90	15.96	15.88		
20	QPSK	50	50	15.90	15.96	15.92	15.94		
20	QPSK	100	0	15.91	15.88	15.88	15.90		
20	16QAM	1	0	15.92	15.95	15.98	15.97	17	0
20	16QAM	1	49	15.89	15.91	15.98	15.95		
20	16QAM	1	99	15.96	15.92	15.90	15.94		
20	16QAM	50	0	15.93	15.98	15.97	15.98	17	0
20	16QAM	50	24	15.91	15.96	15.94	15.91		
20	16QAM	50	50	15.88	15.93	15.96	15.95		
20	16QAM	100	0	15.96	15.92	15.92	15.89		
20	64QAM	1	0	15.94	15.90	15.94	15.92	17	0
20	64QAM	1	49	15.91	15.96	15.95	15.93		
20	64QAM	1	99	15.93	15.94	15.97	15.98		
20	64QAM	50	0	15.94	15.94	15.96	15.96	17	0
20	64QAM	50	24	15.90	15.94	15.88	15.94		
20	64QAM	50	50	15.93	15.90	15.88	15.98		
20	64QAM	100	0	15.96	15.94	15.90	15.94		
Channel				55315	55820	56160	56665	17	0
Frequency (MHz)				3557.5	3608	3642	3692.5		
15	QPSK	1	0	15.98	15.93	15.96	15.89	17	0
15	QPSK	1	37	15.92	15.95	15.91	15.90		
15	QPSK	1	74	15.90	15.92	15.89	15.93		
15	QPSK	36	0	15.96	15.95	15.97	15.90	17	0
15	QPSK	36	20	15.91	15.97	15.98	15.92		
15	QPSK	36	39	15.93	15.98	15.97	15.93		
15	QPSK	75	0	15.97	15.90	15.94	15.98		
15	16QAM	1	0	15.92	15.96	15.95	15.95	17	0
15	16QAM	1	37	15.94	15.97	15.88	15.91		
15	16QAM	1	74	15.93	15.98	15.96	15.93		
15	16QAM	36	0	15.96	15.89	15.94	15.98	17	0
15	16QAM	36	20	15.98	15.98	15.89	15.88		
15	16QAM	36	39	15.89	15.89	15.91	15.96		
15	16QAM	75	0	15.92	15.93	15.90	15.91		
15	64QAM	1	0	15.93	15.97	15.92	15.96	17	0
15	64QAM	1	37	15.94	15.92	15.93	15.95		
15	64QAM	1	74	15.91	15.90	15.90	15.92		
15	64QAM	36	0	15.98	15.94	15.94	15.98	17	0
15	64QAM	36	20	15.95	15.89	15.90	15.92		
15	64QAM	36	39	15.93	15.89	15.94	15.93		
15	64QAM	75	0	15.91	15.93	15.95	15.91		
Channel				55290	55815	56165	56690	17	0
Frequency (MHz)				3555	3607.5	3642.5	3695		
10	QPSK	1	0	15.91	15.98	15.93	15.97	17	0
10	QPSK	1	25	15.92	15.94	15.88	15.91		
10	QPSK	1	49	15.92	15.98	15.94	15.94		
10	QPSK	25	0	15.95	15.91	15.88	15.89	17	0
10	QPSK	25	12	15.95	15.88	15.98	15.94		



FCC SAR TEST REPORT

Report No. : FA082123-01

10	QPSK	25	25	15.96	15.89	15.98	15.98		
10	QPSK	50	0	15.91	15.88	15.98	15.89		
10	16QAM	1	0	15.93	15.97	15.92	15.96		
10	16QAM	1	25	15.89	15.89	15.94	15.90	17	0
10	16QAM	1	49	15.94	15.88	15.97	15.95		
10	16QAM	25	0	15.89	15.93	15.92	15.93		
10	16QAM	25	12	15.92	15.89	15.95	15.90	17	0
10	16QAM	25	25	15.88	15.89	15.92	15.96		
10	16QAM	50	0	15.92	15.95	15.98	15.89		
10	64QAM	1	0	15.96	15.91	15.92	15.89	17	0
10	64QAM	1	25	15.95	15.94	15.98	15.88		
10	64QAM	1	49	15.94	15.96	15.98	15.92		
10	64QAM	25	0	15.90	15.94	15.98	15.96	17	0
10	64QAM	25	12	15.89	15.90	15.93	15.95		
10	64QAM	25	25	15.97	15.90	15.89	15.96		
10	64QAM	50	0	15.96	15.92	15.94	15.96		
Channel				55265	55810	56170	56715	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				3552.5	3607	3643	3697.5		
5	QPSK	1	0	15.88	15.89	15.89	15.98	17	0
5	QPSK	1	12	15.88	15.93	15.89	15.94		
5	QPSK	1	24	15.90	15.97	15.93	15.98		
5	QPSK	12	0	15.94	15.88	15.96	15.94	17	0
5	QPSK	12	7	15.94	15.92	15.92	15.93		
5	QPSK	12	13	15.90	15.90	15.97	15.92		
5	QPSK	25	0	15.95	15.92	15.96	15.95	17	0
5	16QAM	1	0	15.96	15.92	15.91	15.90		
5	16QAM	1	12	15.89	15.93	15.95	15.88		
5	16QAM	1	24	15.92	15.91	15.89	15.91	17	0
5	16QAM	12	0	15.90	15.97	15.98	15.95		
5	16QAM	12	7	15.92	15.97	15.94	15.88		
5	16QAM	12	13	15.94	15.90	15.93	15.91	17	0
5	16QAM	25	0	15.94	15.88	15.97	15.92		
5	64QAM	1	0	15.89	15.98	15.89	15.96		
5	64QAM	1	12	15.96	15.95	15.92	15.93	17	0
5	64QAM	1	24	15.90	15.92	15.98	15.93		
5	64QAM	12	0	15.96	15.91	15.98	15.94		
5	64QAM	12	7	15.90	15.89	15.94	15.90	17	0
5	64QAM	12	13	15.93	15.96	15.94	15.93		
5	64QAM	25	0	15.88	15.91	15.97	15.89		

<LTE Carrier Aggregation combinations>
General Note:

1. This device supports Carrier Aggregation on downlink only for inter and intra band. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

2CC Downlink Carrier Aggregation			3CC Downlink Carrier Aggregation			4CC Downlink Carrier Aggregation			5CC Downlink Carrier Aggregation		
Number	Combination	Covered by Measurement Superset	Number	Combination	Covered by Measurement Superset	Number	Combination	Covered by Measurement Superset	Covered by Measurement Superset	Combination	Covered by Measurement Superset
1	12A-12A	3CC-87	69	12A-30A-66A	4CC-191	191	12A-30A-66A-66A	5CC-338	329	13A-48A-48C-66A	
2	12A-25A		70	12A-66A-66A	4CC-192	192	12B-66A-66A	5CC-402	330	13A-48A-48D	
3	12A-30A	3CC-69	71	12A-66C	4CC-210	193	13A-48A-48A-66A	5CC-339	331	13A-48C-48C	
4	12A-66A	3CC-70	72	12B-66A	4CC-192	194	13A-48A-48C	5CC-329	332	13A-48C-66B	
5	12B	3CC-72	73	13A-48A-48A	4CC-194	195	13A-48A-66B		333	13A-48C-66C	
6	13A-48A	3CC-73	74	13A-48A-66A	4CC-196	196	13A-48A-66C		334	13A-48D-66A	
7	13A-66A	3CC-76	75	13A-48C	4CC-197	197	13A-48C-66A	5CC-341	335	13A-48E	5CC-407
8	14A-30A	3CC-79	76	13A-66A-66A	4CC-199	198	13A-48D	5CC-334	336	25A-25A-41D	
9	14A-66A	3CC-80	77	13A-66B	4CC-195	199	13A-66A-66A-66A		337	25A-41E	
10	25A-25A	3CC-81	78	13A-66C	4CC-196	200	13A-66A-66B	5CC-343	338	2A-12A-30A-66A-66A	
11	25A-26A	3CC-82	79	14A-30A-66A	4CC-203	201	13A-66A-66C	5CC-344	339	2A-13A-48A-48A-66A	
12	25A-41A	3CC-83	80	14A-66A-66A	4CC-204	202	13A-66D	5CC-345	340	2A-13A-48A-48C	
13	26A-41A	3CC-86	81	25A-25A-25A		203	14A-30A-66A-66A	5CC-346	341	2A-13A-48C-66A	
14	2A-12A	3CC-87	82	25A-25A-26A		204	14A-66A-66A-66A	5CC-347	342	2A-13A-48D	
15	2A-13A	3CC-91	83	25A-25A-41A		205	25A-25A-41C		343	2A-13A-66A-66B	
16	2A-14A	3CC-93	84	25A-26A-41A		206	25A-26A-41C		344	2A-13A-66A-66C	
17	2A-2A	3CC-95	85	25A-41C	4CC-205	207	25A-41D	5CC-336	345	2A-13A-66D	
18	2A-30A	3CC-98	86	26A-41C	4CC-206	208	2A-12A-30A-66A	5CC-338	346	2A-14A-30A-66A-66A	
19	2A-48A	3CC-105	87	2A-12A-12A	4CC-219	209	2A-12A-66A-66A	5CC-349	347	2A-14A-66A-66A-66A	
20	2A-4A	3CC-108	88	2A-12A-30A	4CC-220	210	2A-12A-66C		348	2A-2A-12A-30A-66A	
21	2A-5A	3CC-115	89	2A-12A-66A	4CC-210	211	2A-13A-48A-48A	5CC-339	349	2A-2A-12A-66A-66A	
22	2A-66A	3CC-120	90	2A-12B	4CC-222	212	2A-13A-48A-66A	5CC-339	350	2A-2A-12B-66A	
23	2A-71A	3CC-102	91	2A-13A-48A	4CC-211	213	2A-13A-48C	5CC-341	351	2A-2A-13A-66A-66A	
24	2A-7A	3CC-126	92	2A-13A-66A	4CC-214	214	2A-13A-66A-66A	5CC-351	352	2A-2A-13A-66B	
25	2C	3CC-128	93	2A-14A-30A	4CC-217	215	2A-13A-66B	5CC-352	353	2A-2A-14A-30A-66A	
26	30A-66A	3CC-132	94	2A-14A-66A	4CC-218	216	2A-13A-66C	5CC-344	354	2A-2A-14A-66A-66A	
27	38A-40A	3CC-133	95	2A-2A-12A	4CC-219	217	2A-14A-30A-66A	5CC-346	355	2A-2A-5A-30A-66A	
28	38C		96	2A-2A-13A	4CC-223	218	2A-14A-66A-66A	5CC-347	356	2A-2A-5A-66A-66A	
29	41A-41A	3CC-134	97	2A-2A-14A	4CC-224	219	2A-2A-12A-12A		357	2A-2A-5A-66B	
30	41A-42A	3CC-137	98	2A-2A-30A	4CC-226	220	2A-2A-12A-30A	5CC-348	358	2A-2A-5A-66C	
31	41A-48A		99	2A-2A-4A	4CC-228	221	2A-2A-12A-66A	5CC-349	359	2A-2A-5B-66A	
32	41C	5CC-380	100	2A-2A-5A	4CC-231	222	2A-2A-12B	5CC-350	360	2A-2A-66A-66B	
33	42A-42A	3CC-136	101	2A-2A-66A	4CC-234	223	2A-2A-13A-66A	5CC-351	361	2A-2A-66A-66C	
34	42C	5CC-379	102	2A-2A-71A	4CC-235	224	2A-2A-14A-30A	5CC-353	362	2A-2A-7A-12A-66A	
35	48A-48A	3CC-142	103	2A-2A-7A	4CC-238	225	2A-2A-14A-66A	5CC-354	363	2A-48A-48C-66A	
36	48A-66A	3CC-142	104	2A-30A-66A	4CC-226	226	2A-2A-30A-66A	5CC-355	364	2A-48A-48D	
37	48A-71A	3CC-149	105	2A-48A-48A	4CC-240	227	2A-2A-4A-12A		365	2A-48C-48C	
38	48C	3CC-107	106	2A-48A-66A	4CC-240	228	2A-2A-4A-4A		366	2A-48D-66A	
39	4A-12A	3CC-108	107	2A-48C	4CC-242	229	2A-2A-4A-5A		367	2A-48E	5CC-405
40	4A-13A	3CC-109	108	2A-4A-12A	4CC-244	230	2A-2A-4A-71A		368	2A-4A-5B-30A	
41	4A-30A	3CC-110	109	2A-4A-13A		231	2A-2A-5A-30A	5CC-355	369	2A-5A-30A-66A-66A	
42	4A-48A		110	2A-4A-30A	4CC-249	232	2A-2A-5A-66A	5CC-356	370	2A-5A-48A-48A-66A	
43	4A-4A	3CC-111	111	2A-4A-4A	4CC-247	233	2A-2A-5B	5CC-359	371	2A-5A-48A-48C	



FCC SAR TEST REPORT

Report No. : FA082123-01

44	4A-5A	3CC-112	112	2A-4A-5A	4CC-249	234	2A-2A-66A-66A		372	2A-5A-48C-66A	
45	4A-71A	3CC-113	113	2A-4A-71A	4CC-230	235	2A-2A-66A-71A		373	2A-5A-48D	
46	4A-7A	3CC-114	114	2A-4A-7A	4CC-251	236	2A-2A-66B	5CC-360	374	2A-5B-30A-66A	
47	5A-25A		115	2A-5A-30A	4CC-254	237	2A-2A-66C	5CC-361	375	2A-5B-66A-66A	
48	5A-30A	3CC-115	116	2A-5A-48A	4CC-255	238	2A-2A-7A-66A	5CC-362	376	2A-5B-66B	
49	5A-38A		117	2A-5A-66A	4CC-256	239	2A-30A-66A-66A	5CC-338	377	2A-5B-66C	
50	5A-40A	3CC-166	118	2A-5A-7A		240	2A-48A-48A-66A	5CC-370	378	2A-7A-12B-66A	
51	5A-41A		119	2A-5B	4CC-233	241	2A-48A-48C	5CC-363	379	2C-5B-30A	
52	5A-48A	3CC-116	120	2A-66A-66A	4CC-234	242	2A-48C-66A	5CC-363	380	41A-42C-42C	
53	5A-5A	3CC-169	121	2A-66A-71A	4CC-235	243	2A-48D	5CC-366	381	41C-41D	
54	5A-66A	3CC-170	122	2A-66B	4CC-236	244	2A-4A-12A-12A		382	41C-42A-42C	
55	5A-7A	3CC-173	123	2A-66C	4CC-237	245	2A-4A-12A-30A		383	41D-42C	
56	5B	3CC-119	124	2A-7A-12A	4CC-251	246	2A-4A-12B		384	48A-48C-66B	
57	66A-66A	3CC-132	125	2A-7A-66A	4CC-238	247	2A-4A-4A-12A		385	48A-48C-66C	
58	66A-71A	3CC-121	126	2A-7A-7A	4CC-252	248	2A-4A-4A-5A		386	48A-48D-66A	
59	66B	3CC-145	127	2A-7C	4CC-253	249	2A-4A-5A-30A		387	48C-48C-66A	
60	66C	3CC-146	128	2C-12A	4CC-272	250	2A-4A-5B	5CC-368	388	48C-48D	
61	7A-12A	3CC-124	129	2C-30A	4CC-261	251	2A-4A-7A-12A		389	48C-66A-66A-66A	
62	7A-42A		130	2C-5A	4CC-273	252	2A-4A-7A-7A		390	48E-66A	
63	7A-66A	3CC-125	131	2C-66A	4CC-274	253	2A-4A-7C		391	48F	
64	7A-7A	3CC-126	132	30A-66A-66A	4CC-239	254	2A-5A-30A-66A	5CC-369	392	4A-48E	
65	7B		133	41A-41A-41A	4CC-275	255	2A-5A-48A-48A	5CC-370	393	4A-4A-5B-30A	
66	7C	3CC-127	134	41A-41C	4CC-275	256	2A-5A-48A-66A	5CC-370	394	5A-48A-48C-66A	
67	4A-17A		135	41A-42A-42A	4CC-277	257	2A-5A-48C	5CC-372	395	5A-48C-48C	
68	2A-17A		136	41A-42C	4CC-277	258	2A-5A-66A-66A	5CC-356	396	5A-48E	
			137	41C-42A	4CC-280	259	2A-5A-66B	5CC-357	397	5B-30A-66A-66A	
			138	41D	4CC-276	260	2A-5A-66C	5CC-358	398	5B-66A-66B	
			139	42A-42C	4CC-277	261	2A-5B-30A	5CC-374	399	5B-66A-66C	
			140	42D	4CC-278	262	2A-5B-66A	5CC-375	400	5A-48A-48D	
			141	48A-48A-66A	4CC-286	263	2A-66A-66A-66A	5CC-347	401	5A-48D-66A	
			142	48A-48A-71A		264	2A-66A-66A-71A		402	2A-12B-66A-66A	
			143	48A-48C	4CC-289	265	2A-66A-66B	5CC-360	403	2A-7C-66A-66A	
			144	48A-66A-66A	4CC-286	266	2A-66A-66C	5CC-361	404	2A-7A-7A-66A-66A	
			145	48A-66B	4CC-287	267	2A-66C-71A				
			146	48A-66C	4CC-288	268	2A-66D	5CC-345			
			147	48C-66A	4CC-289	269	2A-7A-12A-66A	5CC-362	6CC Downlink Carrier Aggregation		
			148	48C-71A		270	2A-7A-12B	5CC-378	Number	Combination	Covered by
			149	48D	4CC-290	271	2A-7A-66A-66A	5CC-404	405	2A-48E-66A	
			150	4A-12A-12A	4CC-299	272	2C-12A-30A		406	41C-42C-42C	
			151	4A-12A-30A	4CC-300	273	2C-5A-30A		407	13A-48E-66A	
			152	4A-12B	4CC-301	274	2C-66A-66A				
			153	4A-48C		275	41A-41A-41C				
			154	4A-4A-12A	4CC-299	276	41A-41D				
			155	4A-4A-13A		277	41A-42A-42C				
			156	4A-4A-30A	4CC-300	278	41A-42D				
			157	4A-4A-5A	4CC-303	279	41C-41C				
			158	4A-4A-71A		280	41C-42C	5CC-382			
			159	4A-4A-7A		281	41D-42A				
			160	4A-5A-30A	4CC-302	282	41E	5CC-337			
			161	4A-5B	4CC-303	283	42A-42D				
			162	4A-7A-12A	4CC-251	284	42C-42C	5CC-380			
			163	4A-7A-7A	4CC-252	285	42E				
			164	4A-7C	4CC-253	286	48A-48A-66A-66A				
			165	5A-30A-66A	4CC-305	287	48A-48A-66B				
			166	5A-48A-48A	4CC-306	288	48A-48A-66C				
			167	5A-48A-66A	4CC-306	289	48A-48C-66A	5CC-394			



FCC SAR TEST REPORT

Report No. : FA082123-01

			168	5A-48C	4CC-308	290	48A-48D	5CC-400			
			169	5A-5A-66A	4CC-310	291	48A-66A-66A-66A				
			170	5A-66A-66A	4CC-310	292	48C-48C	5CC-395			
			171	5A-66B	4CC-311	293	48C-66A-66A				
			172	5A-66C	4CC-312	294	48C-66B	5CC-384			
			173	5A-7A-7A		295	48C-66C	5CC-385			
			174	5A-7C		296	48D-66A	5CC-401			
			175	5B-30A	4CC-316	297	48E	5CC-396			
			176	5B-66A	4CC-317	298	4A-48D				
			177	66A-66A-66A	4CC-263	299	4A-4A-12A-12A				
			178	66A-66A-71A	4CC-264	300	4A-4A-12A-30A				
			179	66A-66B	4CC-313	301	4A-4A-12B				
			180	66A-66C	4CC-314	302	4A-4A-5A-30A				
			181	66C-71A	4CC-267	303	4A-4A-5B	5CC-393			
			182	66D	4CC-268	304	4A-5B-30A	5CC-393			
			183	7A-12A-66A	4CC-269	305	5A-30A-66A-66A	5CC-369			
			184	7A-12B	4CC-320	306	5A-48A-48A-66A	5CC-370			
			185	7A-66A-66A	4CC-326	307	5A-48A-48C	5CC-371			
			186	7C-66A	4CC-321	308	5A-48C-66A	5CC-372			
			187	2A-48A-66A	4CC-325	309	5A-48D	5CC-373			
			188	48A-66B	4CC-195	310	5A-5A-66A-66A				
			189	7A-7A-66A	4CC-326	311	5A-5A-66B				
			190	7A-7A-13A	4CC-328	312	5A-5A-66C				
						313	5A-66A-66B				
						314	5A-66A-66C				
						315	5A-66D				
						316	5B-30A-66A	5CC-397			
						317	5B-66A-66A	5CC-397			
						318	5B-66B	5CC-376			
						319	5B-66C	5CC-377			
						320	7A-12B-66A	5CC-378			
						321	7C-66A-66A	5CC-403			
						322	2A-12B-66A	5CC-350			
						323	2A-7A-7A-66A	5CC-404			
						324	2A-7C-66A	5CC-403			
						325	2A-48A-66A-66A				
						326	7A-7A-66A-66A	5CC-404			
						327	2A-2A-7A-12A	5CC-362			
						328	2A-7A-7A-13A				

<Power verification when LTE Carrier Aggregation Active>
General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure		PCC						SCC				Power		
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		2	20	1860	18700	QPSK	1	0	17	10	740	5790	23.49	23.56
		4	20	1745	20300	QPSK	1	0	17	10	740	5790	23.83	23.90
		4	20	1745	20300	QPSK	1	0	48	20	3609	55830	23.81	23.90
		5	10	844	20600	QPSK	1	0	25	20	1960	8340	24.38	24.46
		5	10	844	20600	QPSK	1	0	38	20	2595	38000	24.37	24.46
		5	10	844	20600	QPSK	1	0	41	20	2593	40620	24.37	24.46
		7	20	2560	21350	QPSK	1	0	42	20	3575	43340	23.71	23.77
		12	10	704	23060	QPSK	1	0	25	20	1960	8340	24.04	24.12
		41	20	2506	39750	QPSK	1	0	48	20	3609	55830	23.76	23.89
Intra-Band	Contiguous	7	15	2535	21100	QPSK	1	37	7	5	2664.30	3193	23.65	23.75
		38	20	2595	38000	QPSK	1	0	38	20	2614.80	38198	23.84	23.86

<Three Carrier power verification>

Configure	PCC							SCC1				SCC2				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	13	10	751	5230	23.51	23.56
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	7	20	2655	3100	23.46	23.56
	4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	7	20	2655	3100	23.88	23.90
	4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	13	10	751	5230	23.78	23.90
	4	20	1745	20300	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	23.82	23.90
	5	10	844	20600	QPSK	1	0	7	20	2655	3100	7	5	2687.5	3425	24.42	24.46
	5	10	844	20600	QPSK	1	0	7	20	2655	3100	7	20	2674.8	3298	24.40	24.46
	25	20	1860	26140	QPSK	1	0	25	5	1992.5	8665	25	20	1985	8590	23.50	23.57
	25	20	1860	26140	QPSK	1	0	25	5	1992.5	8665	26	15	876.5	8865	23.50	23.57
	25	20	1860	26140	QPSK	1	0	25	5	1992.5	8665	41	20	2593	40620	23.51	23.57
	25	20	1860	26140	QPSK	1	0	26	15	876.5	8865	41	20	2593	40620	23.49	23.57

<Four Carrier power verification>

Configure	PCC							SCC1				SCC2				SCC3				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	4	20	2132.5	2175	12	10	737.5	5095	23.44	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	4	20	2132.5	2175	4	5	2112.5	1975	23.36	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	4	20	2132.5	2175	5	10	881.5	2525	23.38	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	12	5	737.5	5095	12	5	743.5	5155	23.53	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	66	20	2155	66886	66	5	2197.5	67311	23.45	23.56
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	4	5	2112.5	1975	5	10	881.5	2525	23.50	23.56
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	4	5	2112.5	1975	12	10	737.5	5095	23.38	23.56
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	5	10	881.5	2525	30	10	2355	9820	23.48	23.56
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	7	20	2655	3100	7	5	2687.5	3425	23.41	23.56
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	7	20	2655	3100	12	10	737.5	5095	23.47	23.56
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	7	20	2655	3100	7	20	2674.8	3298	23.44	23.56
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	12	5	737.5	5095	12	5	743.5	5155	23.45	23.56
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	12	10	737.5	5095	30	10	2355	9820	23.48	23.56
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	12	5	737.5	5095	12	10	744.7	5167	23.51	23.56
	2	20	1860	18700	QPSK	1	0	12	10	737.5	5095	66	20	2155	66886	66	20	2174.8	67084	23.47	23.56
	2	20	1860	18700	QPSK	1	0	7	20	2655	3100	7	5	2687.5	3425	13	10	751	5230	23.45	23.56
	2	20	1860	18700	QPSK	1	0	48	20	3609	55830	66	20	2155	66886	66	5	2197.5	67311	23.38	23.56
	2	20	1860	18700	QPSK	1	0	2	20	1959.8	898	5	10	881.5	2525	30	10	2355	9820	23.42	23.56
	2	20	1860	18700	QPSK	1	0	2	20	1959.8	898	12	10	737.5	5095	30	10	2355	9820	23.36	23.56
	2	20	1860	18700	QPSK	1	0	2	20	1959.8	898	66	20	2155	66886	66	5	2197.5	67311	23.44	23.56
	4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	5	10	881.5	2525	30	10	2355	9820	23.71	23.90
	4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	12	5	737.5	5095	12	5	743.5	5155	23.79	23.90
	4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	12	10	737.5	5095	30	10	2355	9820	23.78	23.90
	4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	12	5	737.5	5095	12	10	744.7	5167	23.78	23.90
	4	20	1745	20300	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	23.81	23.90
	5	10	844	20600	QPSK	1	0	5	5	871.5	2425	66	20	2155	66886	66	5	2197.5	67311	24.26	24.46
	5	10	844	20600	QPSK	1	0	5	5	871.5	2425	66	15	2155	66886	66	5	2164.3	66979	24.30	24.46
	5	10	844	20600	QPSK	1	0	5	5	871.5	2425	66	20	2155	66886	66	20	2174.8	67084	24.37	24.46
	5	10	844	20600	QPSK	1	0	66	20	2155	66886	66	5	2197.5	67311	66	15	2206.8	67404	24.26	24.46
	5	10	844	20600	QPSK	1	0	66	20	2155	66886	66	5	2197.5	67311	66	20	2209.2	67428	24.40	24.46
	5	10	844	20600	QPSK	1	0	66	20	2155	66886	66	20	2174.8	67084	66	20	2194.6	67282	24.33	24.46
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	66	15	2155	66886	66	5	2164.3	66979	24.10	24.27
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	66	20	2155	66886	66	20	2174.8	67084	24.09	24.27
	13	10	782	23230	QPSK	1	0	66	20	2155	66886	66	5	2197.5	67311	66	20	2120	66536	24.12	24.27
	25	20	1860	26140	QPSK	1	0	25	5	1992.5	8665	41	20	2593	40620	41	20	2612.8	40818	23.46	23.57



FCC SAR TEST REPORT

Report No. : FA082123-01

	25	20	1860	26140	QPSK	1	0	26	15	876.5	8865	41	20	2593	40620	41	20	2612.8	40818	23.45	23.57
	41	20	2506	39750	QPSK	1	0	41	5	2687.5	41565	41	20	2506	39750	41	20	2525.8	39948	23.77	23.89
	41	20	2506	39750	QPSK	1	0	41	5	2687.5	41565	41	20	2699.2	41682	41	20	2719	41880	23.78	23.89
	41	20	2506	39750	QPSK	1	0	42	20	3575	43340	42	5	3597.5	43565	42	20	3609.2	43682	23.83	23.89
	41	20	2506	39750	QPSK	1	0	42	20	3575	43340	42	20	3594.8	43538	42	20	3614.6	43736	23.86	23.89
	41	20	2506	39750	QPSK	1	0	41	20	2525.8	39948	41	5	2687.5	41565	41	20	2675.8	41448	23.76	23.89
	41	20	2506	39750	QPSK	1	0	41	20	2525.8	39948	41	20	2545.6	40146	42	20	3575	43340	23.81	23.89
	42	20	3590	43490	QPSK	1	0	42	5	3552.5	43115	42	20	3564.2	43232	42	20	3584	43430	23.75	23.80
	42	20	3590	43490	QPSK	1	0	42	20	3609.8	43688	42	20	3629.6	43886	42	20	3649.4	44084	23.78	23.80
	48	20	3560	55340	QPSK	1	0	48	5	3697.5	56715	66	20	2155	66886	66	5	2197.5	67311	21.58	21.73
	48	20	3560	55340	QPSK	1	0	48	5	3697.5	56715	66	15	2155	66886	66	5	2164.3	66979	21.53	21.73
	48	20	3560	55340	QPSK	1	0	48	5	3697.5	56715	66	20	2155	66886	66	20	2174.8	67084	21.68	21.73
	48	20	3560	55340	QPSK	1	0	66	20	2155	66886	66	5	2197.5	67311	66	20	2120	66536	21.66	21.73
	48	20	3560	55340	QPSK	1	0	48	20	3579.8	55538	66	20	2155	66886	66	5	2197.5	67311	21.71	21.73

<Five Carrier power verification>

Configure	PCC							SCC1				SCC2				SCC3				SCC4				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	12	10	737.5	5095	30	10	2355	9820	66	20	2155	66886	23.44	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	12	10	737.5	5095	66	20	2155	66886	66	5	2197.5	67311	23.52	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	12	5	737.5	5095	12	10	744.7	5167	66	20	2155	66886	23.46	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	13	10	751	5230	66	20	2155	66886	66	5	2197.5	67311	23.37	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	13	10	751	5230	66	15	2155	66886	66	5	2164.3	66979	23.41	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	14	10	763	5330	30	10	2355	9820	66	20	2155	66886	23.46	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	14	10	763	5330	66	20	2155	66886	66	5	2197.5	67311	23.37	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	5	10	881.5	2525	30	10	2355	9820	66	20	2155	66886	23.42	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	5	10	881.5	2525	66	20	2155	66886	66	5	2197.5	67311	23.38	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	5	10	881.5	2525	66	15	2155	66886	66	5	2164.3	66979	23.47	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	5	10	881.5	2525	66	20	2155	66886	66	20	2174.8	67084	23.37	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	5	10	881.5	2525	5	10	891.4	2624	66	20	2155	66886	23.46	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	66	20	2155	66886	66	5	2197.5	67311	66	15	2206.8	67404	23.48	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	66	20	2155	66886	66	5	2197.5	67311	66	20	2209.2	67428	23.45	23.56
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	7	20	2655	3100	12	10	737.5	5095	66	20	2155	66886	23.55	23.56
	2	20	1860	18700	QPSK	1	0	2	20	1959.8	898	5	10	881.5	2525	5	10	891.4	2624	30	10	2355	9820	23.36	23.56
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	5	10	881.5	2525	5	10	891.4	2624	30	10	2355	9820	23.44	23.56
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	30	10	2355	9820	66	20	2155	66886	66	5	2197.5	67311	23.41	23.56
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	48	20	3609	55830	48	5	3697.5	56715	66	20	2155	66886	23.50	23.56
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	23.47	23.56
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	48	20	3609	55830	48	20	3628.8	56028	66	20	2155	66886	23.47	23.56
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.7	56227	23.48	23.56
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	5	10	891.4	2624	30	10	2355	9820	66	20	2155	66886	23.41	23.56
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	5	10	891.4	2624	66	20	2155	66886	66	5	2197.5	67311	23.50	23.56
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	5	10	891.4	2624	66	15	2155	66886	66	5	2164.3	66979	23.47	23.56
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	5	10	891.4	2624	66	20	2155	66886	66	20	2174.8	67084	23.37	23.56
	2	20	1860	18700	QPSK	1	0	7	20	2655	3100	12	5	737.5	5095	12	10	744.7	5167	66	20	2155	66886	23.42	23.56
	2	20	1860	18700	QPSK	1	0	7	20	2655	3100	7	20	2674.8	3298	66	20	2155	66886	66	5	2197.5	67311	23.38	23.56
	2	20	1860	18700	QPSK	1	0	7	20	2655	3100	7	5	2687.5	3425	66	20	2155	66886	66	5	2197.5	67311	23.53	23.56
	2	20	1860	18700	QPSK	1	0	12	5	737.5	5095	12	10	744.7	5167	66	20	2155	66886	66	5	2197.5	67311	23.47	23.56
	2	20	1860	18700	QPSK	1	0	12	10	737.5	5095	30	10	2355	9820	66	20	2155	66886	66	5	2197.5	67311	23.51	23.56
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	48	20	3609	55830	48	5	3697.5	56715	66	20	2155	66886	23.49	23.56
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	23.42	23.56
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	48	20	3609	55830	48	20	3628.8	56028	66	20	2155	66886	23.45	23.56
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	23.48	23.56



FCC SAR TEST REPORT

Report No. : FA082123-01

	2	20	1860	18700	QPSK	1	0	13	10	751	5230	66	20	2155	66886	66	5	2197.5	67311	66	15	2206.8	67404	23.45	23.56
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	66	20	2155	66886	66	5	2197.5	67311	66	20	2209.2	67428	23.37	23.56
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	66	20	2155	66886	66	20	2174.8	67084	66	20	2194.6	67282	23.37	23.56
	2	20	1860	18700	QPSK	1	0	14	10	763	5330	30	10	2355	9820	66	20	2155	66886	66	5	2197.5	67311	23.45	23.56
	2	20	1860	18700	QPSK	1	0	14	10	763	5330	66	20	2155	66886	66	5	2197.5	67311	66	20	2120	66536	23.43	23.56
	2	20	1860	18700	QPSK	1	0	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	66	20	2155	66886	23.44	23.56
	2	20	1860	18700	QPSK	1	0	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	48	20	3729	57030	23.36	23.56
	2	20	1860	18700	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	5	3697.5	56715	48	20	3709.2	56832	23.47	23.56
	2	20	1860	18700	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	66	20	2155	66886	23.42	23.56
	4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	5	10	881.5	2525	5	10	891.4	2624	30	10	2355	9820	23.70	23.90
	4	20	1745	20300	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	48	20	3668.4	56424	23.72	23.90
	5	10	844	20600	QPSK	1	0	5	10	853.9	20699	66	20	2155	66886	66	5	2197.5	67311	66	15	2206.8	67404	24.32	24.46
	5	10	844	20600	QPSK	1	0	5	10	853.9	20699	66	20	2155	66886	66	5	2197.5	67311	66	20	2209.2	67428	24.39	24.46
	5	10	844	20600	QPSK	1	0	5	10	853.9	20699	30	10	2355	9820	66	20	2155	66886	66	5	2197.5	67311	24.37	24.46
	5	10	844	20600	QPSK	1	0	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	66	20	2155	66886	24.42	24.46
	5	10	844	20600	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	5	3697.5	56715	48	20	3709.2	56832	24.42	24.46
	5	10	844	20600	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	48	20	3668.4	56424	24.33	24.46
	5	10	844	20600	QPSK	1	0	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	48	20	3729	57030	24.38	24.46
	5	10	844	20600	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	66	20	2155	66886	24.35	24.46
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	66	20	2155	66886	24.20	24.27
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	48	20	3729	57030	24.24	24.27
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	5	3697.5	56715	48	20	3709.2	56832	24.17	24.27
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	66	15	2155	66886	66	5	2164.3	66979	24.12	24.27
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	66	20	2155	66886	66	20	2174.8	67084	24.08	24.27
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	66	20	2155	66886	24.16	24.27
	25	20	1860	26140	QPSK	1	0	25	5	1992.5	8665	41	20	2593	40620	41	20	2612.8	40818	41	20	2632.6	41016	23.46	23.57
	25	20	1860	26140	QPSK	1	0	41	20	2593	40620	41	20	2612.8	40818	41	20	2632.6	41016	41	20	2652.4	41214	23.55	23.57
	41	20	2506	39750	QPSK	1	0	41	20	2525.8	39948	41	5	2498.5	39675	41	20	2478.7	39477	41	20	2458.9	39279	23.79	23.89
	41	20	2506	39750	QPSK	1	0	41	20	2525.8	39948	42	20	3575	43340	42	5	3597.5	43565	42	20	3609.2	43682	23.78	23.89
	41	20	2506	39750	QPSK	1	0	41	20	2525.8	39948	41	20	2545.6	40146	42	20	3575	43340	42	20	3594.8	43538	23.75	23.89
	41	20	2506	39750	QPSK	1	0	42	20	3575	43340	42	20	3594.8	43538	42	5	3597.5	43565	42	20	3609.2	43682	23.72	23.89
	48	20	3560	55340	QPSK	1	0	48	5	3697.5	56715	48	20	3709.2	56832	66	15	2155	66886	66	5	2164.3	66979	21.69	21.73
	48	20	3560	55340	QPSK	1	0	48	5	3697.5	56715	48	20	3709.2	56832	66	20	2155	66886	66	20	2174.8	67084	21.69	21.73
	48	20	3560	55340	QPSK	1	0	48	5	3697.5	56715	48	20	3709.2	56832	48	20	3729	57030	66	20	2155	66886	21.66	21.73
	48	20	3560	55340	QPSK	1	0	48	20	3579.8	55538	48	5	3697.5	56715	48	20	3709.2	56832	66	20	2155	66886	21.54	21.73
	48	20	3560	55340	QPSK	1	0	48	20	3579.8	55538	48	5	3697.5	56715	48	20	3709.2	56832	48	20	3729	57030	21.53	21.73
	48	20	3560	55340	QPSK	1	0	48	20	3579.8	55538	66	20	2155	66886	66	5	2197.5	67311	66	20	2120	66536	21.62	21.73
	48	20	3560	55340	QPSK	1	0	48	20	3579.8	55538	48	20	3599.6	55736	48	20	3619.4	55934	66	20	2155	66886	21.63	21.73
	48	20	3560	55340	QPSK	1	0	48	20	3579.8	55538	48	20	3599.6	55736	48	20	3619.4	55934	48	20	3639.2	56132	21.56	21.73

<Six Carrier power verification>

Configure	PCC							SCC1				SCC2				SCC3				SCC4				SCC5				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1860	18700	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	48	20	3668.4	56424	66	20	2155	66886	23.45	23.56
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	48	20	3668.4	56424	66	20	2155	66886	24.24	24.27
	41	20	2506	39750	QPSK	1	0	41	20	2525.8	39948	42	20	3575	43340	42	20	3594.8	43538	42	5	3597.5	43565	42	20	3609.2	43682	23.71	23.89

<LTE Uplink carrier aggregation>

2CC Uplink Carrier Aggregation	
Number	Combination
1	5B
2	7C
3	66B
4	66C
5	38C
6	41C
7	48C

<Intra-band>

General Note:

- The device supports intra-band uplink carrier aggregation for LTE B5/7/66/38/41/48 with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- The device supports uplink carrier aggregation with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- Additional SAR measurement for LTE UL CA whit other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

<Full power>

CA_5B										
Combination 10MHz+10MHz (50RB+50RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20450	20549	QPSK	1	0	0	0	1	0	23.98	24.5
20575	20476	QPSK	1	0	1	49	2	0	24.09	24.5
20600	20501	QPSK	1	0	1	49	2	0	23.85	24.5

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	23.75	24
21100	20902	QPSK	1	0	1	99	2	0	23.63	24
21350	21152	QPSK	1	0	1	99	2	0	23.52	24

CA_66B										
Combination 15MHz+5MHz (75RB+25RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
132047	132140	QPSK	1	0	0	0	1	0	23.59	24
132322	132229	QPSK	1	0	1	24	2	0	23.66	24
132597	132504	QPSK	1	0	1	24	2	0	23.51	24

CA_66C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
132072	132270	QPSK	1	0	0	0	1	0	23.38	24
132322	132124	QPSK	1	0	1	99	2	0	23.34	24
132572	132374	QPSK	1	0	1	99	2	0	23.53	24

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	0	0	0	1	0	23.55	24
37901	38099	QPSK	1	0	0	0	1	0	23.61	24
38150	37952	QPSK	1	0	1	99	2	0	23.51	24

CA_41C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	23.51	24
40185	39987	QPSK	1	0	1	99	2	0	23.32	24
40620	40422	QPSK	1	0	1	99	2	0	23.74	24

CA_48C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
55340	55538	QPSK	1	0	0	0	1	0	15.84	17
55830	55632	QPSK	1	0	1	99	2	0	15.88	17
56150	55952	QPSK	1	0	1	99	2	0	15.72	17

<Reduced Power >

CA_5B										
Combination 10MHz+10MHz (50RB+50RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20450	20549	QPSK	1	0	0	0	1	0	21.35	21.8
20575	20476	QPSK	1	0	1	49	2	0	21.47	21.8
20600	20501	QPSK	1	0	1	49	2	0	21.24	21.8

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	15.74	15.9
21100	20902	QPSK	1	0	1	99	2	0	15.65	15.9
21350	21152	QPSK	1	0	1	99	2	0	15.61	15.9

CA_66B										
Combination 15MHz+5MHz (75RB+25RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
132047	132140	QPSK	1	0	0	0	1	0	17.34	17.6
132322	132229	QPSK	1	0	1	24	2	0	17.48	17.6
132597	132504	QPSK	1	0	1	24	2	0	17.28	17.6

CA_66C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
132072	132270	QPSK	1	0	0	0	1	0	17.26	17.6
132322	132124	QPSK	1	0	1	99	2	0	17.18	17.6
132572	132374	QPSK	1	0	1	99	2	0	17.41	17.6

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm) Typ. target power with tolerance: +1dbm
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	0	0	0	1	0	18.54	18.9
37901	38099	QPSK	1	0	0	0	1	0	18.76	18.9
38150	37952	QPSK	1	0	1	99	2	0	18.49	18.9

CA_41C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	18.44	18.9
40185	39987	QPSK	1	0	1	99	2	0	18.29	18.9
40620	40422	QPSK	1	0	1	99	2	0	18.71	18.9

14. 5G NR Output Power (Unit: dBm)

General Note:

General Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-QPSK and the reported SAR for the DFT-QPSK configuration is ≤ 1.45 W/kg; CP-OFDM measurement is unnecessary.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class 3, full measurement on Pi/2 BPSK and QPSK, for 16QAM/64QAM/256QAM spot check 1RB 1offset configuration to ensure the output power will not ½ dB higher than Pi/2 BPSK and QPSK, for smaller bandwidth output power will spot check 1RB 1offset configuration at Pi/2 BPSK to ensure output power will not ½ dB higher than largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for Pi/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - d. 50% RB allocation for Pi/2 BPSK SAR testing follows 1RB Pi/2 BPSK allocation procedure
 - e. Pi/2 BPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - f. QPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in Pi/2 BPSK, also reported SAR for the Pi/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
2. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission.

<3GPP 38.101 MPR for EN-DC>

Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5 ¹	≤ 1.2 ¹	≤ 0.2 ¹
		≤ 0.5 ²	≤ 0.5 ²	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM	≤ 2.5		
CP-OFDM	256 QAM	≤ 4.5		
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5	≤ 2.5	
	256 QAM	≤ 4.5		
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

DSI 1
<n2 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				372000	376000	380000		
Frequency (MHz)				1860	1880	1900		
20	PI/2 BPSK	1	1	23.57	23.64	23.47	24.0	0.0
20	PI/2 BPSK	1	53	23.38	23.39	23.44		
20	PI/2 BPSK	1	104	23.34	23.36	23.32		
20	PI/2 BPSK	50	0	22.76	22.69	22.75	24.0	0.0
20	PI/2 BPSK	50	28	23.33	23.38	23.37		
20	PI/2 BPSK	50	56	22.83	22.78	22.79		
20	PI/2 BPSK	100	0	22.78	22.74	22.76	23.5	0.5
20	QPSK	1	1	23.16	23.18	23.21	24.0	0.0
20	QPSK	1	53	23.55	23.47	23.49		
20	QPSK	1	104	23.30	23.36	23.27		
20	QPSK	50	0	22.31	22.29	22.34	24.0	0.0
20	QPSK	50	28	23.47	23.42	23.49		
20	QPSK	50	56	22.40	22.34	22.33		
20	QPSK	100	0	22.27	22.25	22.18	23.0	1.0
20	16QAM	1	1	22.36	22.32	22.38	23.0	1.0
20	64QAM	1	1	21.19	21.18	21.26	21.5	2.5
20	256QAM	1	1	18.67	18.63	18.55	19.5	4.5
Channel				371500	376000	380500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	PI/2 BPSK	1	1	23.51	23.61	23.45	24.0	0.0
Channel				371000	376000	381000	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	PI/2 BPSK	1	1	23.41	23.56	23.41	24.0	0.0
Channel				370500	376000	381500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	PI/2 BPSK	1	1	23.32	23.56	23.34	24.0	0.0

<n5 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				166800	167300	167800	24.0	0.0
Frequency (MHz)				834	836.5	839		
20	PI/2 BPSK	1	1	23.36	23.55	23.28		
20	PI/2 BPSK	1	53	22.74	22.65	22.72	24.0	0.0
20	PI/2 BPSK	1	104	23.06	23.00	22.93		
20	PI/2 BPSK	50	0	22.86	22.86	22.89		
20	PI/2 BPSK	50	28	22.92	22.85	22.78	24.0	0.0
20	PI/2 BPSK	50	56	23.50	23.45	23.38		
20	PI/2 BPSK	100	0	22.95	22.94	22.93		
20	QPSK	1	1	23.32	23.27	23.20	24.0	0.0
20	QPSK	1	53	22.28	22.18	22.21		
20	QPSK	1	104	22.33	22.43	22.40		
20	QPSK	50	0	22.46	22.39	22.29	24.0	0.0
20	QPSK	50	28	22.51	22.56	22.47		
20	QPSK	50	56	23.20	23.12	23.05		
20	QPSK	100	0	21.72	21.78	21.72	23.0	1.0
20	16QAM	1	1	21.35	21.30	21.37	23.0	1.0
20	64QAM	1	1	20.77	20.80	20.88	21.5	2.5
20	256QAM	1	1	18.83	18.79	18.77	19.5	4.5
Channel				166300	167300	168300	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				831.5	836.5	841.5		
15	PI/2 BPSK	1	1	23.26	23.48	23.19	24.0	0.0
Channel				165800	167300	168800	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				829	836.5	844		
10	PI/2 BPSK	1	1	23.20	23.43	23.19	24.0	0.0
Channel				165300	167300	169300	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	PI/2 BPSK	1	1	23.15	23.39	23.12	24.0	0.0

<n12 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				141300	141500	141700		
Frequency (MHz)				706.5	707.5	708.5		
15	PI/2 BPSK	1	1	23.77	23.84	23.80	24.0	0.0
15	PI/2 BPSK	1	40	23.46	23.54	23.51		
15	PI/2 BPSK	1	77	23.36	23.35	23.27		
15	PI/2 BPSK	36	0	23.03	23.13	23.15	24.0	0.0
15	PI/2 BPSK	36	22	23.41	23.50	23.52		
15	PI/2 BPSK	36	43	22.99	23.00	22.90		
15	PI/2 BPSK	75	0	23.05	23.05	23.02	23.5	0.5
15	QPSK	1	1	23.64	23.63	23.69	24.0	0.0
15	QPSK	1	40	23.55	23.51	23.50		
15	QPSK	1	77	23.38	23.40	23.31		
15	QPSK	36	0	22.70	22.60	22.53	24.0	0.0
15	QPSK	36	22	23.50	23.52	23.45		
15	QPSK	36	43	22.57	22.54	22.63		
15	QPSK	75	0	22.60	22.56	22.61	23.0	1.0
15	16QAM	1	1	22.80	22.90	22.84	23.0	1.0
15	64QAM	1	1	21.45	21.47	21.47	21.5	2.5
15	256QAM	1	1	19.21	19.28	19.20	19.5	4.5
Channel				140800	141500	142200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				704	707.5	711		
10	PI/2 BPSK	1	1	23.77	23.77	23.79	24.0	0.0
Channel				140300	141500	142700	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	PI/2 BPSK	1	1	23.75	23.76	23.69	24.0	0.0



<n66 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				344000	349000	354000		
Frequency (MHz)				1720	1745	1770		
20	PI/2 BPSK	1	1	23.69	23.94	23.59	24.0	0.0
20	PI/2 BPSK	1	53	23.60	23.50	23.46		
20	PI/2 BPSK	1	104	23.63	23.71	23.76		
20	PI/2 BPSK	50	0	23.62	23.77	23.45	24.0	0.0
20	PI/2 BPSK	50	28	23.45	23.53	23.51		
20	PI/2 BPSK	50	56	23.21	23.17	23.07		
20	PI/2 BPSK	100	0	23.30	23.24	23.33	23.5	0.5
20	QPSK	1	1	23.82	23.83	23.84	24.0	0.0
20	QPSK	1	53	23.84	23.91	23.89		
20	QPSK	1	104	23.76	23.85	23.84		
20	QPSK	50	0	22.69	22.74	22.72	24.0	0.0
20	QPSK	50	28	23.50	23.53	23.46		
20	QPSK	50	56	22.56	22.64	22.61		
20	QPSK	100	0	22.82	22.73	22.71	23.0	1.0
20	16QAM	1	1	22.88	22.91	22.90	23.0	1.0
20	64QAM	1	1	21.37	21.49	21.40	21.5	2.5
20	256QAM	1	1	19.34	19.32	19.43	19.5	4.5
Channel				343500	349000	354500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	PI/2 BPSK	1	1	23.60	23.80	23.52	24.0	0.0
Channel				343000	349000	355000	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	PI/2 BPSK	1	1	23.51	23.76	23.44	24.0	0.0
Channel				342500	349000	355500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	PI/2 BPSK	1	1	23.41	23.75	23.39	24.0	0.0

DSI 2
<n2 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				372000	376000	380000		
Frequency (MHz)				1860	1880	1900		
20	PI/2 BPSK	1	1	17.14	17.15	17.10	17.6	0.0
20	PI/2 BPSK	1	53	17.10	17.10	16.96		
20	PI/2 BPSK	1	104	16.91	16.87	16.93		
20	PI/2 BPSK	50	0	17.11	17.12	17.08	17.6	0.0
20	PI/2 BPSK	50	28	17.09	17.03	16.93		
20	PI/2 BPSK	50	56	16.81	16.78	16.89		
20	PI/2 BPSK	100	0	17.06	17.09	17.06	17.6	0.0
20	QPSK	1	1	17.05	17.07	16.86	17.6	0.0
20	QPSK	1	53	16.85	16.80	16.84		
20	QPSK	1	104	17.09	17.03	17.01		
20	QPSK	50	0	17.04	16.95	16.84	17.6	0.0
20	QPSK	50	28	16.81	16.73	16.88		
20	QPSK	50	56	17.01	17.05	17.00		
20	QPSK	100	0	16.99	16.98	16.87	17.6	0.0
20	16QAM	1	1	16.72	16.70	16.79	17.6	0.0
20	64QAM	1	1	17.03	17.00	16.77	17.6	0.0
20	256QAM	1	1	16.98	16.97	16.74	17.6	0.0
Channel				371500	376000	380500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	PI/2 BPSK	1	1	17.06	17.01	17.04	17.6	0.0
Channel				371000	376000	381000	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	PI/2 BPSK	1	1	17.08	17.10	16.97	17.6	0.0
Channel				370500	376000	381500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	PI/2 BPSK	1	1	17.10	17.10	17.02	17.6	0.0

<n2 Aux>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				372000	376000	380000		
Frequency (MHz)				1860	1880	1900		
20	PI/2 BPSK	1	1	16.01	16.04	15.97	16.5	0.0
20	PI/2 BPSK	1	53	15.97	16.02	15.87		
20	PI/2 BPSK	1	104	15.78	15.79	15.84		
20	PI/2 BPSK	50	0	15.98	15.99	15.94	16.5	0.0
20	PI/2 BPSK	50	28	15.96	15.95	15.84		
20	PI/2 BPSK	50	56	15.68	15.70	15.80		
20	PI/2 BPSK	100	0	15.93	15.94	15.91	16.5	0.0
20	QPSK	1	1	15.92	16.01	15.77	16.5	0.0
20	QPSK	1	53	15.72	15.72	15.75		
20	QPSK	1	104	15.96	15.95	15.92		
20	QPSK	50	0	15.91	15.87	15.75	16.5	0.0
20	QPSK	50	28	15.68	15.65	15.79		
20	QPSK	50	56	15.88	15.97	15.91		
20	QPSK	100	0	15.86	15.90	15.78	16.5	0.0
20	16QAM	1	1	15.59	15.62	15.70	16.5	0.0
20	64QAM	1	1	15.90	15.92	15.68	16.5	0.0
20	256QAM	1	1	15.85	15.89	15.65	16.5	0.0
Channel				371500	376000	380500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	PI/2 BPSK	1	1	15.93	15.93	15.95	16.5	0.0
Channel				371000	376000	381000	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	PI/2 BPSK	1	1	15.95	16.02	15.88	16.5	0.0
Channel				370500	376000	381500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	PI/2 BPSK	1	1	16.01	16.02	15.93	16.5	0.0

<n5 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				166800	167300	167800	21.8	0.0
Frequency (MHz)				834	836.5	839		
20	PI/2 BPSK	1	1	20.86	20.99	20.88	21.8	0.0
20	PI/2 BPSK	1	53	20.82	20.87	20.80		
20	PI/2 BPSK	1	104	20.82	20.93	20.86		
20	PI/2 BPSK	50	0	20.81	20.93	20.83	21.8	0.0
20	PI/2 BPSK	50	28	20.80	20.93	20.80		
20	PI/2 BPSK	50	56	20.75	20.79	20.75		
20	PI/2 BPSK	100	0	20.75	20.91	20.78	21.8	0.0
20	QPSK	1	1	20.75	20.76	20.68	21.8	0.0
20	QPSK	1	53	20.76	20.94	20.83		
20	QPSK	1	104	20.72	20.77	20.74		
20	QPSK	50	0	20.77	20.83	20.84	21.8	0.0
20	QPSK	50	28	20.78	20.70	20.66		
20	QPSK	50	56	20.75	20.78	20.79		
20	QPSK	100	0	20.74	20.89	20.77	21.8	0.0
20	16QAM	1	1	20.76	20.78	20.66	21.8	0.0
20	64QAM	1	1	20.77	20.80	20.88	21.5	0.3
20	256QAM	1	1	18.83	18.79	18.77	19.5	2.3
Channel				166300	167300	168300	21.8	0.0
Frequency (MHz)				831.5	836.5	841.5		
15	PI/2 BPSK	1	1	20.81	20.89	20.85	21.8	0.0
Channel				165800	167300	168800	21.8	0.0
Frequency (MHz)				829	836.5	844		
10	PI/2 BPSK	1	1	20.77	20.94	20.83	21.8	0.0
Channel				165300	167300	169300	21.8	0.0
Frequency (MHz)				826.5	836.5	846.5		
5	PI/2 BPSK	1	1	20.85	20.98	20.79	21.8	0.0

<n7 Aux>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				502000	507000	512000	16.0	0.0
Frequency (MHz)				2510	2535	2560		
20	PI/2 BPSK	1	1	14.91	14.94	14.87	16.0	0.0
20	PI/2 BPSK	1	53	14.88	14.91	14.77		
20	PI/2 BPSK	1	104	14.67	14.55	14.59		
20	PI/2 BPSK	50	0	14.82	14.93	14.81	16.0	0.0
20	PI/2 BPSK	50	28	14.86	14.85	14.72		
20	PI/2 BPSK	50	56	14.63	14.46	14.53		
20	PI/2 BPSK	100	0	14.87	14.88	14.87	16.0	0.0
20	QPSK	1	1	14.86	14.91	14.80	16.0	0.0
20	QPSK	1	53	14.81	14.91	14.69		
20	QPSK	1	104	14.64	14.50	14.51		
20	QPSK	50	0	14.79	14.91	14.74	16.0	0.0
20	QPSK	50	28	14.76	14.80	14.62		
20	QPSK	50	56	14.56	14.39	14.53		
20	QPSK	100	0	14.84	14.82	14.80	16.0	0.0
20	16QAM	1	1	14.82	14.82	14.74	16.0	0.0
20	64QAM	1	1	14.81	14.88	14.78	16.0	0.0
20	256QAM	1	1	14.62	14.42	14.48	16.0	0.0
Channel				501500	507000	512500	16.0	0.0
Frequency (MHz)				2507.5	2535	2562.5		
15	PI/2 BPSK	1	1	14.82	14.84	14.86	16.0	0.0
Channel				501001	507001	513001	16.0	0.0
Frequency (MHz)				2506.17	2536.06	2566.04		
10	PI/2 BPSK	1	1	14.89	14.93	14.79	16.0	0.0
Channel				500500	507000	513500	16.0	0.0
Frequency (MHz)				2502.5	2535	2567.5		
5	PI/2 BPSK	1	1	14.85	14.85	14.86	16.0	0.0

<n12 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				141300	141500	141700		
Frequency (MHz)				706.5	707.5	708.5		
15	PI/2 BPSK	1	1	22.76	22.83	22.80	23.8	0.0
15	PI/2 BPSK	1	40	22.46	22.54	22.51		
15	PI/2 BPSK	1	77	22.36	22.35	22.47		
15	PI/2 BPSK	36	0	22.53	22.42	22.45	23.8	0.0
15	PI/2 BPSK	36	22	22.41	22.40	22.52		
15	PI/2 BPSK	36	43	22.44	22.40	22.35		
15	PI/2 BPSK	75	0	22.34	22.47	22.42	23.5	0.3
15	QPSK	1	1	22.73	22.81	22.70	23.8	0.0
15	QPSK	1	40	22.38	22.50	22.46		
15	QPSK	1	77	22.33	22.25	22.40		
15	QPSK	36	0	22.52	22.41	22.36	23.8	0.0
15	QPSK	36	22	22.41	22.50	22.42		
15	QPSK	36	43	22.44	22.32	22.35		
15	QPSK	75	0	22.35	22.41	22.46	23.0	0.8
15	16QAM	1	1	22.37	22.47	22.43	23.0	0.8
15	64QAM	1	1	21.45	21.47	21.47	21.5	2.3
15	256QAM	1	1	19.21	19.28	19.20	19.5	4.3
Channel				140800	141500	142200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				704	707.5	711		
10	PI/2 BPSK	1	1	22.66	22.79	22.73	23.8	0.0
Channel				140300	141500	142700	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	PI/2 BPSK	1	1	22.73	22.80	22.77	23.8	0.0

<n41 Aux>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000		
Frequency (MHz)				2546.01	2592.99	2640		
100	PI/2 BPSK	1	1	14.93	14.94	14.82	15.8	0.0
100	PI/2 BPSK	1	137	14.85	14.87	14.79		
100	PI/2 BPSK	1	271	14.67	14.66	14.77		
100	PI/2 BPSK	135	0	14.68	14.87	14.77	15.8	0.0
100	PI/2 BPSK	135	69	14.65	14.73	14.79		
100	PI/2 BPSK	135	138	14.56	14.71	14.73		
100	PI/2 BPSK	270	0	14.83	14.74	14.78	15.8	0.0
100	QPSK	1	1	14.46	14.44	14.58	15.8	0.0
100	QPSK	1	137	14.83	14.77	14.64		
100	QPSK	1	271	14.70	14.70	14.79		
100	QPSK	135	0	14.60	14.81	14.80	15.8	0.0
100	QPSK	135	69	14.67	14.87	14.72		
100	QPSK	135	138	14.82	14.71	14.64		
100	QPSK	270	0	14.67	14.77	14.74	15.8	0.0
100	16QAM	1	1	14.60	14.61	14.80	15.8	0.0
100	64QAM	1	1	14.62	14.73	14.70	15.8	0.0
100	256QAM	1	1	14.63	14.65	14.71	15.8	0.0
Channel				508200	518598	528996	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2541	2592.99	2644.98		
90	PI/2 BPSK	1	1	14.86	14.85	14.79	15.8	0.0
Channel				507204	518598	529998	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2536.02	2592.99	2649.99		
80	PI/2 BPSK	1	1	14.91	14.92	14.81	15.8	0.0
Channel				505200	518598	531996	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2526	2592.99	2659.98		
60	PI/2 BPSK	1	1	14.85	14.84	14.80	15.8	0.0
Channel				504204	518598	532998	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2521.02	2592.99	2664.99		
50	PI/2 BPSK	1	1	14.85	14.90	14.76	15.8	0.0
Channel				503202	518598	534000	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2516.01	2592.99	2670		
40	PI/2 BPSK	1	1	14.92	14.88	14.79	15.8	0.0
Channel				501204	518598	535998	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2506.02	2592.99	2679.99		
20	PI/2 BPSK	1	1	14.91	14.91	14.80	15.8	0.0



<n66 Main>


BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				344000	349000	354000		
Frequency (MHz)				1720	1745	1770		
20	PI/2 BPSK	1	1	17.12	17.09	16.98	17.7	0.0
20	PI/2 BPSK	1	53	16.99	16.96	16.91		
20	PI/2 BPSK	1	104	17.00	16.94	16.98		
20	PI/2 BPSK	50	0	17.03	16.99	16.98	17.7	0.0
20	PI/2 BPSK	50	28	16.92	16.94	16.91		
20	PI/2 BPSK	50	56	16.93	16.86	16.98		
20	PI/2 BPSK	100	0	16.93	16.92	16.90	17.7	0.0
20	QPSK	1	1	16.99	16.98	16.90	17.7	0.0
20	QPSK	1	53	16.98	16.94	16.86		
20	QPSK	1	104	16.90	16.85	16.91		
20	QPSK	50	0	16.93	16.92	16.95	17.7	0.0
20	QPSK	50	28	16.85	16.85	16.91		
20	QPSK	50	56	16.92	16.82	16.84		
20	QPSK	100	0	16.93	16.92	16.80	17.7	0.0
20	16QAM	1	1	16.90	16.91	16.77	17.7	0.0
20	64QAM	1	1	16.87	16.90	16.91	17.7	0.0
20	256QAM	1	1	16.83	16.88	16.88	17.7	0.0
Channel				343500	349000	354500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	PI/2 BPSK	1	1	17.01	17.00	16.92	17.7	0.0
Channel				343000	349000	355000	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	PI/2 BPSK	1	1	17.05	17.00	16.93	17.7	0.0
Channel				342500	349000	355500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	PI/2 BPSK	1	1	16.99	16.97	16.98	17.7	0.0

<n66 Aux>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				344000	349000	354000	15.5	0.0
Frequency (MHz)				1720	1745	1770		
20	PI/2 BPSK	1	1	15.18	15.10	15.13	15.5	0.0
20	PI/2 BPSK	1	53	14.93	14.88	14.86		
20	PI/2 BPSK	1	104	15.00	14.88	14.89		
20	PI/2 BPSK	50	0	15.07	14.98	15.02	15.5	0.0
20	PI/2 BPSK	50	28	14.91	14.91	14.89		
20	PI/2 BPSK	50	56	14.89	14.83	14.96		
20	PI/2 BPSK	100	0	14.85	14.84	14.82	15.5	0.0
20	QPSK	1	1	14.99	14.96	14.80	15.5	0.0
20	QPSK	1	53	14.94	14.92	14.84		
20	QPSK	1	104	14.88	14.78	14.85		
20	QPSK	50	0	14.86	14.88	14.92	15.5	0.0
20	QPSK	50	28	14.85	14.82	14.81		
20	QPSK	50	56	14.93	14.78	14.79		
20	QPSK	100	0	14.86	14.88	14.73	15.5	0.0
20	16QAM	1	1	14.82	14.86	14.73	15.5	0.0
20	64QAM	1	1	14.79	14.82	14.88	15.5	0.0
20	256QAM	1	1	14.79	14.80	14.80	15.5	0.0
Channel				343500	349000	354500	15.5	0.0
Frequency (MHz)				1717.5	1745	1772.5		
15	PI/2 BPSK	1	1	15.10	15.00	15.09	15.5	0.0
Channel				343000	349000	355000	15.5	0.0
Frequency (MHz)				1715	1745	1775		
10	PI/2 BPSK	1	1	14.93	14.76	14.78	15.5	0.0
Channel				342500	349000	355500	15.5	0.0
Frequency (MHz)				1712.5	1745	1777.5		
5	PI/2 BPSK	1	1	14.87	14.83	14.88	15.5	0.0

15. Antenna Location


For Tablet

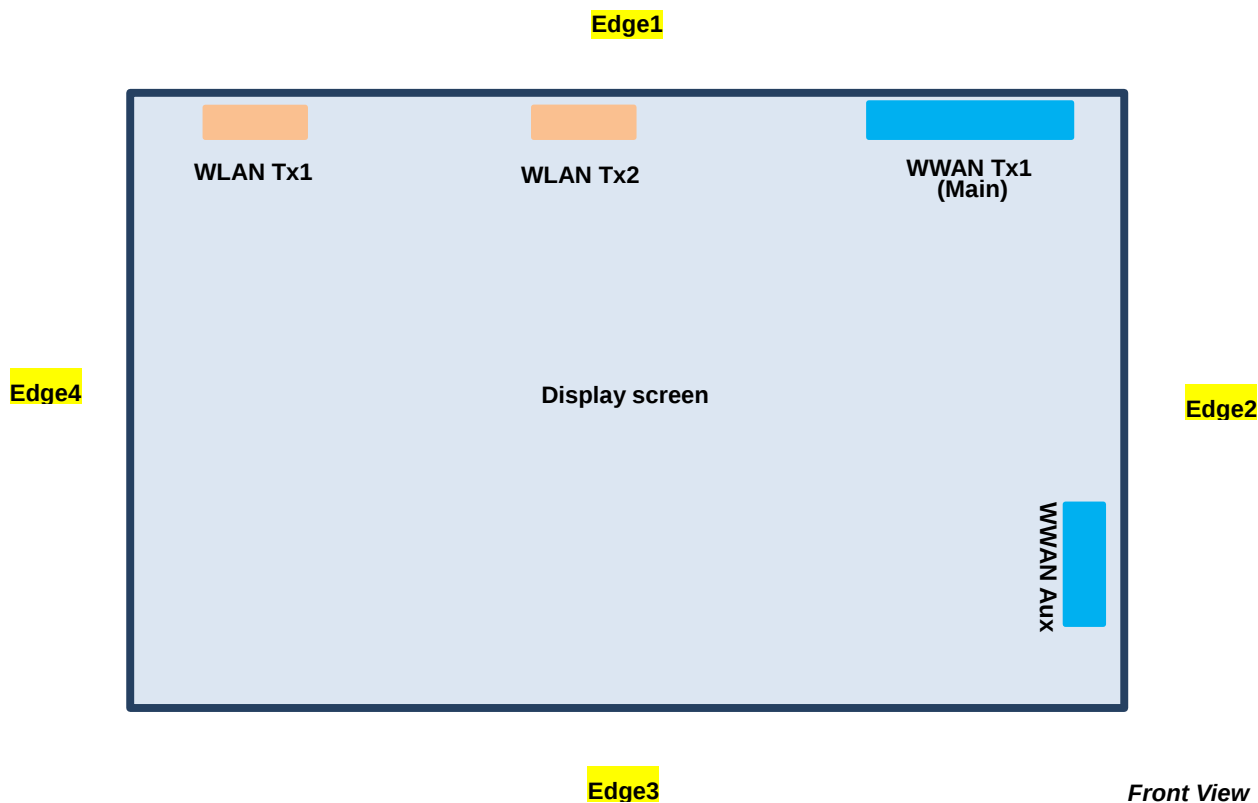

The separation distance for antenna to edge :

Antenna	To Edge1 (mm)	To Edge2 (mm)	To Edge 3 (mm)	To Edge4 (mm)
WWAN Tx1(Main)	<5	46.61	219.51	176.61
WWAN Aux	100	<5	43.92	251.6
WLAN Tx 1	<5	237.61	219.51	46.61
WLAN Tx 2	<5	151.61	219.51	132.61

For Laptop

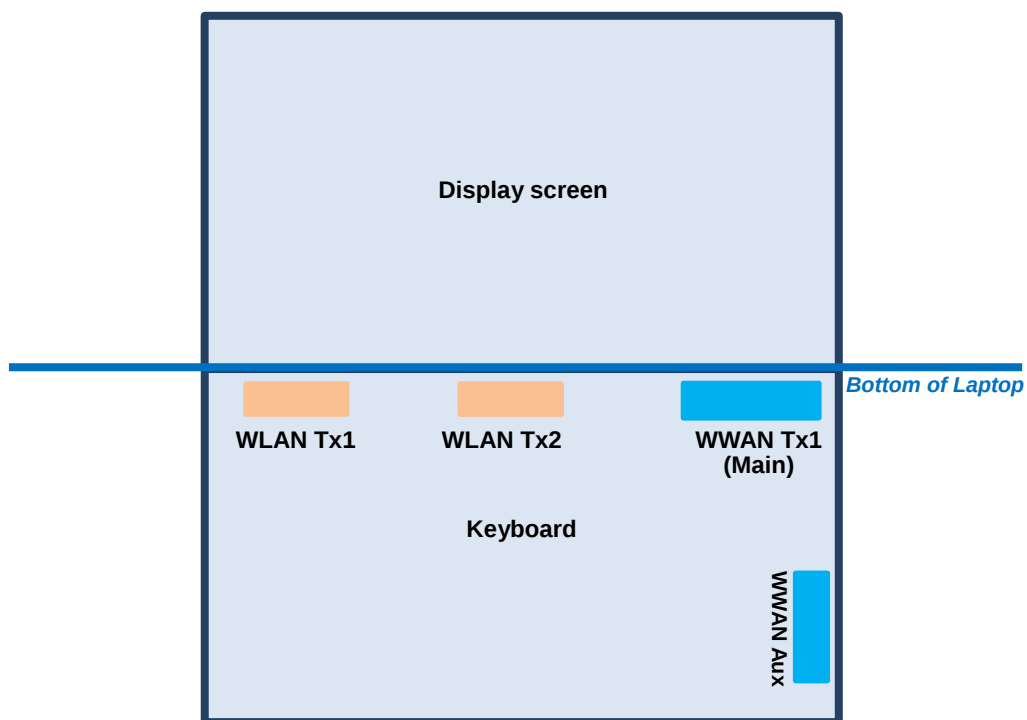

The separation distance for antenna to edge :

Antenna	To Bottom of Laptop (mm)
WWAN Tx1(Main)	1.21
WWAN Aux	7.08
WLAN Tx 1	1.21
WLAN Tx 2	1.21

<SAR test exclusion table>
General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Main Antenna

Exposure Position	Wireless Interface	WCDMA Band V	WCDMA Band IV	WCDMA Band II	LTE Band 12/17/n12	LTE Band 14	LTE Band 13	LTE Band 5/n5	LTE Band 26	LTE Band 4/66/n66	LTE Band 2/25/n2	LTE Band 30	LTE Band 7	LTE Band 38/41
	Calculated Frequency	846MHz	1750MHz	1907MHz	715MHz	795MHz	784MHz	848MHz	848MHz	1754MHz	1909MHz	2312MHz	2567MHz	2687MHz
	Maximum power (dBm)	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24	24	23	24	24
	Maximum rated power(mW)	282.0	282.0	282.0	282.0	282.0	282.0	282.0	282.0	251.0	251.0	200.0	251.0	251.0
Bottom Face	Separation distance(mm)	5.0												
	exclusion threshold	51.9	74.6	77.9	47.7	50.3	49.9	51.9	51.9	66.5	69.4	60.8	80.4	82.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5.0												
	exclusion threshold	51.9	74.6	77.9	47.7	50.3	49.9	51.9	51.9	66.5	69.4	60.8	80.4	82.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	46.61												
	exclusion threshold	5.6	8.0	8.4	5.1	5.4	5.4	5.6	5.6	7.1	7.4	6.5	8.6	8.8
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 3	Separation distance(mm)	219.51												
	exclusion threshold	1119.0	1808.0	1804.0	985.0	1067.0	1055.0	1121.0	1121.0	1808.0	1804.0	1794.0	1789.0	1787.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No
Edge 4	Separation distance(mm)	176.61												
	exclusion threshold	877.0	1379.0	1375.0	781.0	839.0	831.0	879.0	879.0	1379.0	1375.0	1365.0	1360.0	1358.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No
Bottom of Laptop	Separation distance(mm)	5.0												
	exclusion threshold	51.9	74.6	77.9	47.7	50.3	49.9	51.9	51.9	66.5	69.4	60.8	80.4	82.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Aux Antenna

Exposure Position	Wireless Interface	LTE Band 66	LTE Band 2	LTE Band 7	LTE Band 42	LTE Band 48	LTE Band n2	LTE Band n7	LTE Band n 41	LTE Band n66
	Calculated Frequency	1779MHz	1909MHz	2567MHz	3597MHz	3697MHz	1909MHz	2567MHz	2687MHz	1779MHz
	Maximum power (dBm)	16.2	15.7	16.8	17	17	16.5	16	15.8	16.2
	Maximum rated power(mW)	42.0	37.0	48.0	50.0	50.0	45.0	40.0	38.0	42.0
Bottom Face	Separation distance(mm)	5.0								
	exclusion threshold	11.2	10.2	15.4	19.0	16.4	12.4	12.8	12.5	11.2
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	100.0								
	exclusion threshold	612.0	609.0	594.0	579.0	592.0	609.0	594.0	592.0	612.0
	Testing required?	No	No	No	No	No	No	No	No	No
Edge 2	Separation distance(mm)	5.0								
	exclusion threshold	11.2	10.2	15.4	19.0	16.4	12.4	12.8	12.5	11.2
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 3	Separation distance(mm)	43.92								
	exclusion threshold	1.3	1.2	1.8	2.2	1.9	1.2	1.5	1.4	1.3
	Testing required?	No	No	No	No	No	No	No	No	No
Edge 4	Separation distance(mm)	251.6								
	exclusion threshold	2128.0	2125.0	2110.0	2095.0	2108.0	2509.0	2110.0	2108.0	2128.0
	Testing required?	No	No	No	No	No	No	No	No	No
Bottom of Laptop	Separation distance(mm)	5.0								
	exclusion threshold	11.2	10.2	15.4	19.0	16.4	12.4	12.8	12.5	11.2
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

16. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B12/B17/B26/B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 2/4/17/38/42 SAR test was covered by Band 25/66/12/41/48; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

5G NR Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. SAR testing start with the largest channel bandwidth and measure SAR for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - b. 50% RB allocation for PI/2 BPSK SAR testing follows 1RB PI/2 BPSK allocation procedure
 - c. PI/2 BPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. QPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - e. Smaller bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - f. For 5G FR1 n5/n12/n41 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**16.1 Body SAR****<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Configure	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	Laptop	ON	9400	1880	17.38	17.70	1.076	0	0.765	0.823
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	Laptop	ON	9262	1852.4	17.34	17.70	1.086	0.02	0.745	0.809
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	Laptop	ON	9538	1907.6	17.31	17.70	1.094	0	0.809	0.885
	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	Tablet	ON	9400	1880	17.38	17.70	1.076	0.03	1.100	1.184
	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	Tablet	ON	9262	1852.4	17.34	17.70	1.086	0.05	1.050	1.141
	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	Tablet	ON	9538	1907.6	17.31	17.70	1.094	0.02	1.050	1.149
	WCDMA II	RMC 12.2Kbps	Edge 1	0mm	Tablet	ON	9400	1880	17.38	17.70	1.076	0.05	1.040	1.120
	WCDMA II	RMC 12.2Kbps	Edge 1	0mm	Tablet	ON	9262	1852.4	17.34	17.70	1.086	0.11	1.040	1.130
	WCDMA II	RMC 12.2Kbps	Edge 1	0mm	Tablet	ON	9538	1907.6	17.31	17.70	1.094	-0.12	1.080	1.181
	WCDMA II	RMC 12.2Kbps	Edge 2	0mm	Tablet	OFF	9538	1907.6	24.13	24.50	1.089	-0.11	0.232	0.253
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	15mm	Laptop	OFF	9538	1907.6	24.13	24.50	1.089	-0.03	0.291	0.317
	WCDMA II	RMC 12.2Kbps	Bottom Face	17mm	Tablet	OFF	9538	1907.6	24.13	24.50	1.089	-0.09	0.377	0.411
02	WCDMA II	RMC 12.2Kbps	Edge 1	22mm	Tablet	OFF	9538	1907.6	24.13	24.50	1.089	-0.07	0.356	0.388
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	Laptop	ON	1413	1732.6	17.44	17.60	1.038	0	0.828	0.859
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	Laptop	ON	1312	1712.4	17.33	17.60	1.064	-0.08	0.825	0.878
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	Laptop	ON	1513	1752.6	17.43	17.60	1.040	-0.12	0.923	0.960
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0mm	Tablet	ON	1413	1732.6	17.44	17.60	1.038	-0.13	0.952	0.988
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0mm	Tablet	ON	1312	1712.4	17.33	17.60	1.064	-0.11	0.944	1.005
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0mm	Tablet	ON	1513	1752.6	17.43	17.60	1.040	-0.17	0.956	0.994
	WCDMA IV	RMC 12.2Kbps	Edge 1	0mm	Tablet	ON	1413	1732.6	17.44	17.60	1.038	0	1.090	1.131
	WCDMA IV	RMC 12.2Kbps	Edge 1	0mm	Tablet	ON	1312	1712.4	17.33	17.60	1.064	0.03	0.992	1.056
	WCDMA IV	RMC 12.2Kbps	Edge 1	0mm	Tablet	ON	1513	1752.6	17.43	17.60	1.040	0.14	0.985	1.024
	WCDMA IV	RMC 12.2Kbps	Edge 2	0mm	Tablet	OFF	1513	1752.6	24.23	24.50	1.064	-0.09	0.186	0.198
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	15mm	Laptop	OFF	1513	1752.6	24.23	24.50	1.064	-0.14	0.285	0.303
03	WCDMA IV	RMC 12.2Kbps	Bottom Face	17mm	Tablet	OFF	1513	1752.6	24.23	24.50	1.064	-0.06	0.356	0.379
	WCDMA IV	RMC 12.2Kbps	Edge 1	22mm	Tablet	OFF	1513	1752.6	24.23	24.50	1.064	-0.14	0.229	0.244
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	Laptop	ON	4182	836.4	21.28	21.80	1.127	-0.06	0.395	0.445
	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	Tablet	ON	4182	836.4	21.28	21.80	1.127	0.03	0.787	0.887
	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	Tablet	ON	4132	826.4	21.27	21.80	1.130	0.06	0.759	0.858
	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	Tablet	ON	4233	846.6	21.22	21.80	1.143	0.14	0.749	0.856
	WCDMA V	RMC 12.2Kbps	Edge 1	0mm	Tablet	ON	4182	836.4	21.28	21.80	1.127	-0.01	0.997	1.124
	WCDMA V	RMC 12.2Kbps	Edge 1	0mm	Tablet	ON	4132	826.4	21.27	21.80	1.130	-0.03	1.060	1.198
	WCDMA V	RMC 12.2Kbps	Edge 1	0mm	Tablet	ON	4233	846.6	21.22	21.80	1.143	0	1.010	1.154
	WCDMA V	RMC 12.2Kbps	Edge 2	0mm	Tablet	OFF	4132	826.4	24.32	24.50	1.042	-0.05	0.058	0.060
	WCDMA V	RMC 12.2Kbps	Edge 4	0mm	Tablet	OFF	4132	826.4	24.32	24.50	1.042	-0.04	0.011	0.011
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	15mm	Laptop	OFF	4132	826.4	24.32	24.50	1.042	-0.09	0.201	0.210
03	WCDMA V	RMC 12.2Kbps	Bottom Face	17mm	Tablet	OFF	4132	826.4	24.32	24.50	1.042	-0.19	0.167	0.174
	WCDMA V	RMC 12.2Kbps	Edge 1	22mm	Tablet	OFF	4132	826.4	24.32	24.50	1.042	-0.1	0.116	0.121



FCC SAR TEST REPORT

Report No. : FA082123-01

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Configure	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Aux	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop		18700	1860	14.94	15.70	1.191	0	0.500	0.596
	LTE Band 2_Aux	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop		18700	1860	14.60	15.70	1.288	0.12	0.485	0.625
	LTE Band 2_Aux	20M	QPSK	1	0	Bottom Face	0mm	Tablet		18700	1860	14.94	15.70	1.191	0.13	0.562	0.669
	LTE Band 2_Aux	20M	QPSK	50	0	Bottom Face	0mm	Tablet		18700	1860	14.60	15.70	1.288	0.05	0.525	0.676
04	LTE Band 2_Aux	20M	QPSK	1	0	Edge 2	0mm	Tablet		18700	1860	14.94	15.70	1.191	-0.03	0.949	1.130
	LTE Band 2_Aux	20M	QPSK	1	0	Edge 2	0mm	Tablet		18900	1880	14.73	15.70	1.250	0.15	0.898	1.123
	LTE Band 2_Aux	20M	QPSK	1	0	Edge 2	0mm	Tablet		19100	1900	14.79	15.70	1.233	0.02	0.858	1.058
	LTE Band 2_Aux	20M	QPSK	50	0	Edge 2	0mm	Tablet		18700	1860	14.60	15.70	1.288	0.12	0.725	0.934
	LTE Band 2_Aux	20M	QPSK	50	0	Edge 2	0mm	Tablet		18900	1880	14.56	15.70	1.300	0.13	0.685	0.891
	LTE Band 2_Aux	20M	QPSK	50	0	Edge 2	0mm	Tablet		19100	1900	14.59	15.70	1.291	-0.08	0.652	0.842
	LTE Band 2_Aux	20M	QPSK	100	0	Edge 2	0mm	Tablet		18700	1860	14.60	15.70	1.288	0.19	0.713	0.919
	LTE Band 5	10M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	20525	836.5	21.47	21.80	1.079	0	0.373	0.402
	LTE Band 5	10M	QPSK	25	0	Bottom of Laptop	0mm	Laptop	ON	20525	836.5	21.39	21.80	1.099	-0.07	0.361	0.397
	LTE Band 5	10M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	20525	836.5	21.47	21.80	1.079	0.04	0.966	1.042
	LTE Band 5	10M	QPSK	25	0	Bottom Face	0mm	Tablet	ON	20525	836.5	21.39	21.80	1.099	-0.1	0.960	1.055
	LTE Band 5	10M	QPSK	50	0	Bottom Face	0mm	Tablet	ON	20525	836.5	21.36	21.80	1.107	-0.08	0.954	1.056
	LTE Band 5	10M	QPSK	1	0	Edge 1	0mm	Tablet	ON	20525	836.5	21.47	21.80	1.079	0.14	0.942	1.016
	LTE Band 5	10M	QPSK	25	0	Edge 1	0mm	Tablet	ON	20525	836.5	21.39	21.80	1.099	0.09	1.010	1.110
05	LTE Band 5	10M	QPSK	50	0	Edge 1	0mm	Tablet	ON	20525	836.5	21.36	21.80	1.107	0.17	1.040	1.151
	LTE Band 5	10M	QPSK	1	0	Edge 2	0mm	Tablet	OFF	20525	836.5	24.37	24.50	1.030	-0.12	0.060	0.062
	LTE Band 5	10M	QPSK	25	0	Edge 2	0mm	Tablet	OFF	20525	836.5	23.48	23.50	1.005	-0.06	0.057	0.057
	LTE Band 5	10M	QPSK	1	0	Edge 4	0mm	Tablet	OFF	20525	836.5	24.37	24.50	1.030	0.15	0.025	0.026
	LTE Band 5	10M	QPSK	25	0	Edge 4	0mm	Tablet	OFF	20525	836.5	23.48	23.50	1.005	-0.01	0.030	0.030
	LTE Band 5	10M	QPSK	1	0	Bottom of Laptop	15mm	Laptop	OFF	20525	836.5	24.37	24.50	1.030	-0.04	0.166	0.171
	LTE Band 5	10M	QPSK	25	0	Bottom of Laptop	15mm	Laptop	OFF	20525	836.5	23.48	23.50	1.005	-0.07	0.095	0.095
	LTE Band 5	10M	QPSK	1	0	Bottom Face	17mm	Tablet	OFF	20525	836.5	24.37	24.50	1.030	-0.16	0.158	0.163
	LTE Band 5	10M	QPSK	25	0	Bottom Face	17mm	Tablet	OFF	20525	836.5	23.48	23.50	1.005	-0.19	0.152	0.153
	LTE Band 5	10M	QPSK	1	0	Edge 1	22mm	Tablet	OFF	20525	836.5	24.37	24.50	1.030	-0.18	0.086	0.089
	LTE Band 5	10M	QPSK	25	0	Edge 1	22mm	Tablet	OFF	20525	836.5	23.48	23.50	1.005	-0.06	0.074	0.074
	LTE Band 5B	10M	QPSK	1	0	Edge 1	0mm	Tablet	ON	20575	836.5	21.47	21.80	1.079	0.02	1.000	1.079
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	21350	2560	15.30	15.90	1.148	0	0.568	0.652
	LTE Band 7	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	21350	2560	15.15	15.90	1.189	0	0.606	0.720
	LTE Band 7	20M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	21350	2560	15.30	15.90	1.148	-0.15	0.639	0.734
	LTE Band 7	20M	QPSK	50	0	Bottom Face	0mm	Tablet	ON	21350	2560	15.15	15.90	1.189	-0.03	0.643	0.764
06	LTE Band 7	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	21350	2560	15.30	15.90	1.148	0.01	1.040	1.194
	LTE Band 7	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	20850	2510	15.28	15.90	1.153	0.15	0.951	1.097
	LTE Band 7	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	21350	2560	15.25	15.90	1.161	0.17	0.874	1.015
	LTE Band 7	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	21100	2535	15.15	15.90	1.189	-0.12	0.775	0.921
	LTE Band 7	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	20850	2510	15.13	15.90	1.194	-0.06	0.773	0.923
	LTE Band 7	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	21350	2560	15.05	15.90	1.216	0.13	0.675	0.821
	LTE Band 7	20M	QPSK	100	0	Edge 1	0mm	Tablet	ON	21100	2535	15.19	15.90	1.178	-0.16	0.727	0.856
	LTE Band 7	20M	QPSK	1	0	Edge 2	0mm	Tablet	OFF	21100	2535	23.77	24.00	1.054	0.14	0.182	0.192
	LTE Band 7	20M	QPSK	50	0	Edge 2	0mm	Tablet	OFF	21100	2535	22.85	23.00	1.035	0.12	0.224	0.232
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	15mm	Laptop	OFF	21100	2535	23.77	24.00	1.054	-0.09	0.289	0.305
	LTE Band 7	20M	QPSK	50	0	Bottom of Laptop	15mm	Laptop	OFF	21100	2535	22.85	23.00	1.035	-0.06	0.226	0.234
	LTE Band 7	20M	QPSK	1	0	Bottom Face	17mm	Tablet	OFF	21100	2535	23.77	24.00	1.054	-0.12	0.166	0.175
	LTE Band 7	20M	QPSK	50	0	Bottom Face	17mm	Tablet	OFF	21100	2535	22.85	23.00	1.035	-0.11	0.129	0.134
	LTE Band 7	20M	QPSK	1	0	Edge 1	22mm	Tablet	OFF	21100	2535	23.77	24.00	1.054	0.01	0.362	0.382
	LTE Band 7	20M	QPSK	50	0	Edge 1	22mm	Tablet	OFF	21100	2535	22.85	23.00	1.035	-0.1	0.289	0.299
	LTE Band 7C	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	20850	2510	15.74	15.90	1.038	-0.18	0.984	1.021
	LTE Band 7_Aux	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop		20850	2510	16.31	16.80	1.119	0.02	0.594	0.665
	LTE Band 7_Aux	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop		20850	2510	16.06	16.80	1.186	0.06	0.577	0.684
	LTE Band 7_Aux	20M	QPSK	1	0	Bottom Face	0mm	Tablet		20850	2510	16.31	16.80	1.119	-0.04	0.390	0.437
	LTE Band 7_Aux	20M	QPSK	50	0	Bottom Face	0mm	Tablet		20850	2510	16.06	16.80	1.186	-0.02	0.352	0.417
	LTE Band 7_Aux	20M	QPSK	1	0	Edge 2	0mm	Tablet		20850	2510	16.31	16.80	1.119	0.15	0.846	0.947
	LTE Band 7_Aux	20M	QPSK	1	0	Edge 2	0mm	Tablet		21100	2535	16.30	16.80	1.122	0.12	0.914	1.026
	LTE Band 7_Aux	20M	QPSK	1	0	Edge 2	0mm	Tablet		21350	2560	16.26	16.80	1.132	0.17	1.040	1.178
	LTE Band 7_Aux	20M	QPSK	50	0	Edge 2	0mm	Tablet		20850	2510	16.06	16.80	1.186	0.02	0.815	0.966
	LTE Band 7_Aux	20M	QPSK	50	0	Edge 2	0mm	Tablet		21100	2535	16.02	16.80	1.197	-0.04	0.889	1.064
	LTE Band 7_Aux	20M	QPSK	50	0	Edge 2	0mm	Tablet		21350	2560	16.05	16.80	1.189	0.09	0.935	1.111
	LTE Band 7_Aux	20M	QPSK	100	0	Edge 2	0mm	Tablet		20850	2510	16.03	16.80	1.194	0.15	0.827	0.987



FCC SAR TEST REPORT

Report No. : FA082123-01

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Configure	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
07	LTE Band 12	10M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	23095	707.5	20.36	21.00	1.159	-0.06	0.504	0.584
	LTE Band 12	10M	QPSK	25	0	Bottom of Laptop	0mm	Laptop	ON	23095	707.5	20.27	21.00	1.183	-0.04	0.419	0.496
	LTE Band 12	10M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	23095	707.5	20.36	21.00	1.159	0.17	0.412	0.477
	LTE Band 12	10M	QPSK	25	0	Bottom Face	0mm	Tablet	ON	23095	707.5	20.27	21.00	1.183	-0.06	0.342	0.405
	LTE Band 12	10M	QPSK	1	0	Edge 1	0mm	Tablet	ON	23095	707.5	20.36	21.00	1.159	0.12	0.946	1.096
	LTE Band 12	10M	QPSK	25	0	Edge 1	0mm	Tablet	ON	23095	707.5	20.27	21.00	1.183	0.19	0.726	0.859
	LTE Band 12	10M	QPSK	50	0	Edge 1	0mm	Tablet	ON	23095	707.5	20.06	21.00	1.242	0.16	0.771	0.957
	LTE Band 12	10M	QPSK	1	0	Edge 2	0mm	Tablet	OFF	23095	707.5	24.06	24.50	1.107	0	0.044	0.049
	LTE Band 12	10M	QPSK	25	0	Edge 2	0mm	Tablet	OFF	23095	707.5	23.17	23.50	1.079	0	0.034	0.037
	LTE Band 12	10M	QPSK	1	0	Edge 4	0mm	Tablet	OFF	23095	707.5	24.06	24.50	1.107	-0.12	0.010	0.011
	LTE Band 12	10M	QPSK	25	0	Edge 4	0mm	Tablet	OFF	23095	707.5	23.17	23.50	1.079	-0.11	0.009	0.010
	LTE Band 12	10M	QPSK	1	0	Bottom of Laptop	15mm	Laptop	OFF	23095	707.5	24.06	24.50	1.107	-0.06	0.077	0.085
08	LTE Band 12	10M	QPSK	25	0	Bottom of Laptop	15mm	Laptop	OFF	23095	707.5	23.17	23.50	1.079	-0.06	0.063	0.068
	LTE Band 12	10M	QPSK	1	0	Bottom Face	17mm	Tablet	OFF	23095	707.5	24.06	24.50	1.107	-0.11	0.044	0.049
	LTE Band 12	10M	QPSK	25	0	Bottom Face	17mm	Tablet	OFF	23095	707.5	23.17	23.50	1.079	-0.14	0.037	0.040
	LTE Band 12	10M	QPSK	1	0	Edge 1	22mm	Tablet	OFF	23095	707.5	24.06	24.50	1.107	-0.04	0.022	0.024
	LTE Band 12	10M	QPSK	25	0	Edge 1	22mm	Tablet	OFF	23095	707.5	23.17	23.50	1.079	-0.08	0.017	0.018
	LTE Band 13	10M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	23230	782	21.38	21.80	1.102	0	0.504	0.555
	LTE Band 13	10M	QPSK	25	0	Bottom of Laptop	0mm	Laptop	ON	23230	782	21.28	21.80	1.127	-0.09	0.552	0.622
	LTE Band 13	10M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	23230	782	21.38	21.80	1.102	0.02	0.611	0.673
	LTE Band 13	10M	QPSK	25	0	Bottom Face	0mm	Tablet	ON	23230	782	21.28	21.80	1.127	-0.06	0.598	0.674
	LTE Band 13	10M	QPSK	1	0	Edge 1	0mm	Tablet	ON	23230	782	21.38	21.80	1.102	0.07	1.060	1.168
	LTE Band 13	10M	QPSK	25	0	Edge 1	0mm	Tablet	ON	23230	782	21.28	21.80	1.127	-0.02	0.933	1.052
	LTE Band 13	10M	QPSK	50	0	Edge 1	0mm	Tablet	ON	23230	782	21.20	21.80	1.148	-0.08	0.948	1.088
09	LTE Band 13	10M	QPSK	1	0	Edge 2	0mm	Tablet	OFF	23230	782	24.27	24.50	1.054	0.11	0.046	0.049
	LTE Band 13	10M	QPSK	25	0	Edge 2	0mm	Tablet	OFF	23230	782	23.27	23.50	1.054	0.08	0.037	0.039
	LTE Band 13	10M	QPSK	1	0	Edge 4	0mm	Tablet	OFF	23230	782	24.27	24.50	1.054	-0.12	0.011	0.012
	LTE Band 13	10M	QPSK	25	0	Edge 4	0mm	Tablet	OFF	23230	782	23.27	23.50	1.054	-0.15	0.010	0.010
	LTE Band 13	10M	QPSK	1	0	Bottom of Laptop	15mm	Laptop	OFF	23230	782	24.27	24.50	1.054	-0.08	0.135	0.142
	LTE Band 13	10M	QPSK	25	0	Bottom of Laptop	15mm	Laptop	OFF	23230	782	23.27	23.50	1.054	-0.12	0.114	0.120
	LTE Band 13	10M	QPSK	1	0	Bottom Face	17mm	Tablet	OFF	23230	782	24.27	24.50	1.054	-0.11	0.090	0.095
	LTE Band 13	10M	QPSK	25	0	Bottom Face	17mm	Tablet	OFF	23230	782	23.27	23.50	1.054	0	0.070	0.074
	LTE Band 13	10M	QPSK	1	0	Edge 1	22mm	Tablet	OFF	23230	782	24.27	24.50	1.054	-0.03	0.034	0.036
	LTE Band 13	10M	QPSK	25	0	Edge 1	22mm	Tablet	OFF	23230	782	23.27	23.50	1.054	-0.04	0.032	0.034
	LTE Band 14	10M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	23330	793	20.09	20.80	1.178	-0.06	0.667	0.785
	LTE Band 14	10M	QPSK	25	0	Bottom of Laptop	0mm	Laptop	ON	23330	793	20.01	20.80	1.199	0.06	0.616	0.739
09	LTE Band 14	10M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	23330	793	20.09	20.80	1.178	-0.08	0.914	1.076
	LTE Band 14	10M	QPSK	25	0	Bottom Face	0mm	Tablet	ON	23330	793	20.01	20.80	1.199	-0.09	0.886	1.063
	LTE Band 14	10M	QPSK	50	0	Bottom Face	0mm	Tablet	ON	23330	793	19.85	20.80	1.245	-0.08	0.888	1.105
	LTE Band 14	10M	QPSK	1	0	Edge 1	0mm	Tablet	ON	23330	793	20.09	20.80	1.178	-0.08	1.000	1.178
	LTE Band 14	10M	QPSK	25	0	Edge 1	0mm	Tablet	ON	23330	793	20.01	20.80	1.199	-0.19	0.892	1.070
	LTE Band 14	10M	QPSK	50	0	Edge 1	0mm	Tablet	ON	23330	793	19.85	20.80	1.245	0.02	0.861	1.072
	LTE Band 14	10M	QPSK	1	0	Edge 2	0mm	Tablet	OFF	23330	793	24.18	24.50	1.076	-0.13	0.049	0.053
	LTE Band 14	10M	QPSK	25	0	Edge 2	0mm	Tablet	OFF	23330	793	23.21	23.50	1.069	-0.13	0.038	0.041
	LTE Band 14	10M	QPSK	1	0	Edge 4	0mm	Tablet	OFF	23330	793	24.18	24.50	1.076	-0.02	0.011	0.012
	LTE Band 14	10M	QPSK	25	0	Edge 4	0mm	Tablet	OFF	23330	793	23.21	23.50	1.069	-0.15	0.010	0.011
	LTE Band 14	10M	QPSK	1	0	Bottom of Laptop	15mm	Laptop	OFF	23330	793	24.18	24.50	1.076	-0.02	0.140	0.151
	LTE Band 14	10M	QPSK	25	0	Bottom of Laptop	15mm	Laptop	OFF	23330	793	23.21	23.50	1.069	-0.18	0.119	0.127
09	LTE Band 14	10M	QPSK	1	0	Bottom Face	17mm	Tablet	OFF	23330	793	24.18	24.50	1.076	-0.12	0.097	0.104
	LTE Band 14	10M	QPSK	25	0	Bottom Face	17mm	Tablet	OFF	23330	793	23.21	23.50	1.069	-0.09	0.080	0.086
	LTE Band 14	10M	QPSK	1	0	Edge 1	22mm	Tablet	OFF	23330	793	24.18	24.50	1.076	-0.05	0.041	0.044
	LTE Band 14	10M	QPSK	25	0	Edge 1	22mm	Tablet	OFF	23330	793	23.21	23.50	1.069	-0.03	0.033	0.035



FCC SAR TEST REPORT

Report No. : FA082123-01

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Configure	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	26140	1860	16.08	16.70	1.153	0.06	0.920	1.061
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	26340	1880	15.95	16.70	1.189	0.11	0.876	1.041
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	26590	1905	15.92	16.70	1.197	-0.03	0.914	1.094
	LTE Band 25	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	26140	1860	15.94	16.70	1.191	0.05	0.915	1.090
	LTE Band 25	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	26340	1880	15.88	16.70	1.208	0.09	0.874	1.056
	LTE Band 25	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	26590	1905	15.91	16.70	1.199	-0.03	0.915	1.098
	LTE Band 25	20M	QPSK	100	0	Bottom of Laptop	0mm	Laptop	ON	26140	1860	15.92	16.70	1.197	0	0.917	1.097
	LTE Band 25	20M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	26140	1860	16.08	16.70	1.153	-0.08	0.891	1.028
	LTE Band 25	20M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	26340	1880	15.95	16.70	1.189	-0.03	0.945	1.123
	LTE Band 25	20M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	26340	1880	15.92	16.70	1.197	-0.07	0.965	1.155
	LTE Band 25	20M	QPSK	50	0	Bottom Face	0mm	Tablet	ON	26140	1860	15.94	16.70	1.191	-0.01	0.898	1.070
10	LTE Band 25	20M	QPSK	50	0	Bottom Face	0mm	Tablet	ON	26340	1880	15.88	16.70	1.208	-0.17	0.965	1.166
	LTE Band 25	20M	QPSK	50	0	Bottom Face	0mm	Tablet	ON	26590	1905	15.91	16.70	1.199	-0.01	0.966	1.159
	LTE Band 25	20M	QPSK	100	0	Bottom Face	0mm	Tablet	ON	26140	1860	15.92	16.70	1.197	-0.04	0.886	1.060
	LTE Band 25	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	26140	1860	16.08	16.70	1.153	-0.02	0.748	0.863
	LTE Band 25	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	26340	1880	15.95	16.70	1.189	0.09	0.740	0.879
	LTE Band 25	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	26590	1905	15.92	16.70	1.197	-0.03	0.780	0.933
	LTE Band 25	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	26140	1860	15.94	16.70	1.191	-0.04	0.758	0.903
	LTE Band 25	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	26340	1880	15.88	16.70	1.208	-0.02	0.749	0.905
	LTE Band 25	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	26590	1905	15.91	16.70	1.199	0.02	0.794	0.952
	LTE Band 25	20M	QPSK	100	0	Edge 1	0mm	Tablet	ON	26140	1860	15.92	16.70	1.197	-0.08	0.746	0.893
	LTE Band 25	20M	QPSK	1	0	Edge 2	0mm	Tablet	OFF	26140	1860	23.57	24.00	1.104	-0.01	0.221	0.244
	LTE Band 25	20M	QPSK	50	0	Edge 2	0mm	Tablet	OFF	26140	1860	22.67	23.00	1.079	-0.01	0.212	0.229
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	15mm	Laptop	OFF	26140	1860	23.57	24.00	1.104	-0.07	0.237	0.262
	LTE Band 25	20M	QPSK	50	0	Bottom of Laptop	15mm	Laptop	OFF	26140	1860	22.67	23.00	1.079	-0.18	0.191	0.206
	LTE Band 25	20M	QPSK	1	0	Bottom Face	17mm	Tablet	OFF	26140	1860	23.57	24.00	1.104	-0.17	0.234	0.258
	LTE Band 25	20M	QPSK	50	0	Bottom Face	17mm	Tablet	OFF	26140	1860	22.67	23.00	1.079	-0.1	0.189	0.204
	LTE Band 25	20M	QPSK	1	0	Edge 1	22mm	Tablet	OFF	26140	1860	23.57	24.00	1.104	-0.17	0.181	0.200
	LTE Band 25	20M	QPSK	50	0	Edge 1	22mm	Tablet	OFF	26140	1860	22.67	23.00	1.079	-0.14	0.144	0.155
	LTE Band 26	15M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	26865	831.5	21.37	21.80	1.104	0	0.375	0.414
	LTE Band 26	15M	QPSK	36	0	Bottom of Laptop	0mm	Laptop	ON	26865	831.5	21.22	21.80	1.143	-0.11	0.354	0.405
	LTE Band 26	15M	QPSK	75	0	Bottom Face	0mm	Tablet	ON	26865	831.5	21.37	21.80	1.104	-0.08	0.969	1.070
	LTE Band 26	15M	QPSK	36	0	Bottom Face	0mm	Tablet	ON	26865	831.5	21.22	21.80	1.143	-0.02	0.962	1.099
	LTE Band 26	15M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	26865v	831.5	21.11	21.80	1.172	-0.02	0.950	1.114
	LTE Band 26	15M	QPSK	1	0	Edge 1	0mm	Tablet	ON	26865	831.5	21.37	21.80	1.104	0.15	1.000	1.104
	LTE Band 26	15M	QPSK	36	0	Edge 1	0mm	Tablet	ON	26865	831.5	21.22	21.80	1.143	0.14	0.949	1.085
11	LTE Band 26	15M	QPSK	75	0	Edge 1	0mm	Tablet	ON	26865	831.5	21.11	21.80	1.172	0.07	0.974	1.142
	LTE Band 26	15M	QPSK	1	0	Edge 2	0mm	Tablet	OFF	26865	831.5	24.18	24.50	1.076	-0.05	0.059	0.064
	LTE Band 26	15M	QPSK	36	0	Edge 2	0mm	Tablet	OFF	26865	831.5	23.30	23.50	1.047	0.11	0.053	0.055
	LTE Band 26	15M	QPSK	1	0	Edge 4	0mm	Tablet	OFF	26865	831.5	24.18	24.50	1.076	0.15	0.025	0.027
	LTE Band 26	15M	QPSK	36	0	Edge 4	0mm	Tablet	OFF	26865	831.5	23.30	23.50	1.047	-0.01	0.030	0.031
	LTE Band 26	15M	QPSK	1	0	Bottom of Laptop	15mm	Laptop	OFF	26865	831.5	24.18	24.50	1.076	-0.05	0.168	0.181
	LTE Band 26	15M	QPSK	36	0	Bottom of Laptop	15mm	Laptop	OFF	26865	831.5	23.30	23.50	1.047	-0.11	0.128	0.134
	LTE Band 26	15M	QPSK	1	0	Bottom Face	17mm	Tablet	OFF	26865	831.5	24.18	24.50	1.076	-0.16	0.157	0.169
	LTE Band 26	15M	QPSK	36	0	Bottom Face	17mm	Tablet	OFF	26865	831.5	23.30	23.50	1.047	-0.19	0.152	0.159
	LTE Band 26	15M	QPSK	1	0	Edge 1	22mm	Tablet	OFF	26865	831.5	24.18	24.50	1.076	-0.02	0.083	0.089
	LTE Band 26	15M	QPSK	36	0	Edge 1	22mm	Tablet	OFF	26865	831.5	23.30	23.50	1.047	-0.03	0.071	0.074



FCC SAR TEST REPORT

Report No. : FA082123-01

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Configure	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 30	10M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	27710	2310	15.80	16.90	1.288	0	0.707	0.911
	LTE Band 30	10M	QPSK	25	0	Bottom of Laptop	0mm	Laptop	ON	27710	2310	15.75	16.90	1.303	-0.06	0.626	0.816
	LTE Band 30	10M	QPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	27710	2310	15.74	16.90	1.306	-0.13	0.633	0.827
	LTE Band 30	10M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	27710	2310	15.80	16.90	1.288	-0.17	0.726	0.935
	LTE Band 30	10M	QPSK	25	0	Bottom Face	0mm	Tablet	ON	27710	2310	15.75	16.90	1.303	-0.13	0.631	0.822
	LTE Band 30	10M	QPSK	50	0	Bottom Face	0mm	Tablet	ON	27710	2310	15.74	16.90	1.306	-0.03	0.607	0.793
12	LTE Band 30	10M	QPSK	1	0	Edge 1	0mm	Tablet	ON	27710	2310	15.80	16.90	1.288	-0.08	0.915	1.179
	LTE Band 30	10M	QPSK	25	0	Edge 1	0mm	Tablet	ON	27710	2310	15.75	16.90	1.303	-0.08	0.814	1.061
	LTE Band 30	10M	QPSK	50	0	Edge 1	0mm	Tablet	ON	27710	2310	15.74	16.90	1.306	0.1	0.826	1.079
	LTE Band 30	10M	QPSK	1	0	Edge 2	0mm	Tablet	OFF	27710	2310	22.38	23.00	1.153	-0.07	0.090	0.104
	LTE Band 30	10M	QPSK	25	0	Edge 2	0mm	Tablet	OFF	27710	2310	21.35	22.00	1.161	0.09	0.089	0.103
	LTE Band 30	10M	QPSK	1	0	Bottom of Laptop	15mm	Laptop	OFF	27710	2310	22.38	23.00	1.153	-0.06	0.250	0.288
	LTE Band 30	10M	QPSK	25	0	Bottom of Laptop	15mm	Laptop	OFF	27710	2310	21.35	22.00	1.161	-0.15	0.187	0.217
	LTE Band 30	10M	QPSK	1	0	Bottom Face	17mm	Tablet	OFF	27710	2310	22.38	23.00	1.153	-0.17	0.208	0.240
	LTE Band 30	10M	QPSK	25	0	Bottom Face	17mm	Tablet	OFF	27710	2310	21.35	22.00	1.161	-0.13	0.163	0.189
	LTE Band 30	10M	QPSK	1	0	Edge 1	22mm	Tablet	OFF	27710	2310	22.38	23.00	1.153	0.18	0.341	0.393
	LTE Band 30	10M	QPSK	25	0	Edge 1	22mm	Tablet	OFF	27710	2310	21.35	22.00	1.161	-0.04	0.265	0.308
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	132072	1720	17.60	17.60	1.000	0	0.993	0.993
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	132322	1745	17.47	17.60	1.030	0.02	1.010	1.041
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	132572	1770	17.52	17.60	1.019	-0.09	1.020	1.039
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	132322	1745	17.43	17.60	1.040	-0.1	0.983	1.022
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	132072	1720	17.36	17.60	1.057	-0.05	0.954	1.008
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	132572	1770	17.40	17.60	1.047	-0.04	0.919	0.962
	LTE Band 66	20M	QPSK	100	0	Bottom of Laptop	0mm	Laptop	ON	132322	1745	17.42	17.60	1.042	0.08	0.917	0.956
	LTE Band 66	20M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	132072	1720	17.60	17.60	1.000	-0.16	0.959	0.959
	LTE Band 66	20M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	132322	1745	17.47	17.60	1.030	-0.17	0.984	1.014
	LTE Band 66	20M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	132572	1770	17.52	17.60	1.019	-0.13	0.970	0.988
	LTE Band 66	20M	QPSK	50	0	Bottom Face	0mm	Tablet	ON	132322	1745	17.43	17.60	1.040	-0.02	0.912	0.948
	LTE Band 66	20M	QPSK	50	0	Bottom Face	0mm	Tablet	ON	132072	1720	17.36	17.60	1.057	-0.05	0.895	0.946
	LTE Band 66	20M	QPSK	50	0	Bottom Face	0mm	Tablet	ON	132572	1770	17.40	17.60	1.047	-0.17	0.971	1.017
	LTE Band 66	20M	QPSK	100	0	Bottom Face	0mm	Tablet	ON	132322	1745	17.42	17.60	1.042	-0.18	0.901	0.939
	LTE Band 66	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	132072	1720	17.60	17.60	1.000	0.12	1.070	1.070
	LTE Band 66	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	132322	1745	17.47	17.60	1.030	0.03	1.090	1.123
	LTE Band 66	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	132572	1770	17.52	17.60	1.019	0.13	1.050	1.070
	LTE Band 66	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	132322	1745	17.43	17.60	1.040	0.18	1.090	1.134
	LTE Band 66	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	132072	1720	17.36	17.60	1.057	-0.02	1.090	1.152
	LTE Band 66	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	132572	1770	17.40	17.60	1.047	-0.07	1.040	1.089
	LTE Band 66	20M	QPSK	100	0	Edge 1	0mm	Tablet	ON	132322	1745	17.42	17.60	1.042	-0.08	1.070	1.115
	LTE Band 66	20M	QPSK	1	0	Edge 2	0mm	Tablet	OFF	132072	1720	23.71	24.00	1.069	-0.08	0.148	0.158
	LTE Band 66	20M	QPSK	50	0	Edge 2	0mm	Tablet	OFF	132072	1720	22.84	23.00	1.038	-0.09	0.180	0.187
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	15mm	Laptop	OFF	132072	1720	23.71	24.00	1.069	-0.12	0.273	0.292
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	15mm	Laptop	OFF	132072	1720	22.84	23.00	1.038	-0.12	0.222	0.230
	LTE Band 66	20M	QPSK	1	0	Bottom Face	17mm	Tablet	OFF	132072	1720	23.71	24.00	1.069	-0.19	0.381	0.407
	LTE Band 66	20M	QPSK	50	0	Bottom Face	17mm	Tablet	OFF	132072	1720	22.84	23.00	1.038	-0.06	0.302	0.313
	LTE Band 66	20M	QPSK	1	0	Edge 1	22mm	Tablet	OFF	132072	1720	23.71	24.00	1.069	-0.08	0.228	0.244
	LTE Band 66	20M	QPSK	50	0	Edge 1	22mm	Tablet	OFF	132072	1720	22.84	23.00	1.038	-0.13	0.183	0.190
	LTE Band 66B	15M	QPSK	1	0	Edge 1	0mm	Tablet	ON	132322	1745	17.48	17.60	1.028	0.1	1.000	1.028
	LTE Band 66C	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	132572	1770	17.41	17.60	1.045	-0.04	1.020	1.066
	LTE Band 66_Aux	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop		132322	1745	15.41	16.20	1.199	0.12	0.489	0.587
	LTE Band 66_Aux	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop		132322	1745	15.35	16.20	1.216	0.05	0.458	0.557
	LTE Band 66_Aux	20M	QPSK	1	0	Bottom Face	0mm	Tablet		132322	1745	15.41	16.20	1.199	-0.02	0.512	0.614
	LTE Band 66_Aux	20M	QPSK	50	0	Bottom Face	0mm	Tablet		132322	1745	15.35	16.20	1.216	0.15	0.492	0.598
	LTE Band 66_Aux	20M	QPSK	1	0	Edge 2	0mm	Tablet		132322	1745	15.41	16.20	1.199	-0.17	0.972	1.166
	LTE Band 66_Aux	20M	QPSK	1	0	Edge 2	0mm	Tablet		132072	1720	15.35	16.20	1.216	0.08	0.952	1.158
13	LTE Band 66_Aux	20M	QPSK	1	0	Edge 2	0mm	Tablet		132572	1770	15.37	16.20	1.211	-0.06	0.988	1.196
	LTE Band 66_Aux	20M	QPSK	50	0	Edge 2	0mm	Tablet		132322	1745	15.35	16.20	1.216	0.12	0.952	1.158
	LTE Band 66_Aux	20M	QPSK	50	0	Edge 2	0mm	Tablet		132072	1720	15.35	16.20	1.216	0.08	0.942	1.146
	LTE Band 66_Aux	20M	QPSK	50	0	Edge 2	0mm	Tablet		132572	1770	15.31	16.20	1.227	-0.06	0.968	1.188
	LTE Band 66_Aux	20M	QPSK	100	0	Edge 2	0mm	Tablet		132322	1745	15.32	16.20	1.225	-0.18	0.925	1.133



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Configure	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	ON	39750	2506	18.56	18.90	1.081	62.9	1.006	0.12	0.498	0.542
	LTE Band 41	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	39750	2506	18.36	18.90	1.132	62.9	1.006	0.05	0.442	0.504
	LTE Band 41	20M	QPSK	1	0	Bottom Face	0mm	Tablet	ON	39750	2506	18.56	18.90	1.081	62.9	1.006	-0.07	0.521	0.567
	LTE Band 41	20M	QPSK	50	0	Bottom Face	0mm	Tablet	ON	39750	2506	18.36	18.90	1.132	62.9	1.006	-0.18	0.416	0.474
	LTE Band 41	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	39750	2506	18.56	18.90	1.081	62.9	1.006	0.13	1.080	1.175
	LTE Band 41	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	40185	2549.5	18.47	18.90	1.104	62.9	1.006	-0.1	1.010	1.122
	LTE Band 41	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	40620	2593	18.45	18.90	1.109	62.9	1.006	-0.13	1.050	1.172
14	LTE Band 41	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	41055	2636.5	18.37	18.90	1.130	62.9	1.006	-0.11	1.050	1.193
	LTE Band 41	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	41490	2680	18.37	18.90	1.130	62.9	1.006	0.01	0.951	1.081
	LTE Band 41	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	39750	2506	18.36	18.90	1.132	62.9	1.006	-0.11	1.030	1.173
	LTE Band 41	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	40185	2549.5	18.33	18.90	1.140	62.9	1.006	-0.13	1.030	1.182
	LTE Band 41	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	40620	2593	18.32	18.90	1.143	62.9	1.006	-0.17	0.894	1.028
	LTE Band 41	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	41055	2636.5	18.35	18.90	1.135	62.9	1.006	-0.14	0.927	1.058
	LTE Band 41	20M	QPSK	50	0	Edge 1	0mm	Tablet	ON	41490	2680	18.35	18.90	1.135	62.9	1.006	-0.18	1.000	1.142
	LTE Band 41	20M	QPSK	100	0	Edge 1	0mm	Tablet	ON	40620	2593	18.33	18.90	1.140	62.9	1.006	-0.18	0.969	1.112
	LTE Band 41	20M	QPSK	1	0	Edge 2	0mm	Tablet	OFF	40620	2593	23.89	24.00	1.026	62.9	1.006	0	0.139	0.143
	LTE Band 41	20M	QPSK	50	0	Edge 2	0mm	Tablet	OFF	40620	2593	22.96	23.00	1.009	62.9	1.006	-0.1	0.107	0.109
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	15mm	Laptop	OFF	40620	2593	23.89	24.00	1.026	62.9	1.006	-0.17	0.105	0.108
	LTE Band 41	20M	QPSK	50	0	Bottom of Laptop	15mm	Laptop	OFF	40620	2593	22.96	23.00	1.009	62.9	1.006	-0.13	0.081	0.082
	LTE Band 41	20M	QPSK	1	0	Bottom Face	17mm	Tablet	OFF	40620	2593	23.89	24.00	1.026	62.9	1.006	-0.14	0.096	0.099
	LTE Band 41	20M	QPSK	50	0	Bottom Face	17mm	Tablet	OFF	40620	2593	22.96	23.00	1.009	62.9	1.006	-0.19	0.076	0.077
	LTE Band 41	20M	QPSK	1	0	Edge 1	22mm	Tablet	OFF	40620	2593	23.89	24.00	1.026	62.9	1.006	-0.14	0.187	0.193
	LTE Band 41	20M	QPSK	50	0	Edge 1	22mm	Tablet	OFF	40620	2593	22.96	23.00	1.009	62.9	1.006	-0.15	0.148	0.150
	LTE Band 41_HPUE	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	40185	2549.5	20.04	20.50	1.112	42.9	1.009	-0.11	1.010	1.133
	LTE Band 41C	20M	QPSK	1	0	Edge 1	0mm	Tablet	ON	40620	2593	18.71	18.90	1.045	62.9	1.006	0.18	1.040	1.093



FCC SAR TEST REPORT

Report No. : FA082123-01

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Configure	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
15	LTE Band 48_Aux	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	55340	3560	16.03	17.00	1.250	62.9	1.006	0.06	0.730	0.918
	LTE Band 48_Aux	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	55830	3609	15.98	17.00	1.265	62.9	1.006	0.01	0.934	1.188
	LTE Band 48_Aux	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	56150	3641	16.02	17.00	1.253	62.9	1.006	0.11	0.888	1.119
	LTE Band 48_Aux	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	56640	3690	15.98	17.00	1.265	62.9	1.006	0.15	0.725	0.922
	LTE Band 48_Aux	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop	55340	3560	15.99	17.00	1.262	62.9	1.006	-0.02	0.808	1.026
	LTE Band 48_Aux	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop	55830	3609	15.90	17.00	1.288	62.9	1.006	-0.03	0.830	1.076
	LTE Band 48_Aux	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop	56150	3641	15.89	17.00	1.291	62.9	1.006	0.1	0.858	1.115
	LTE Band 48_Aux	20M	QPSK	50	0	Bottom of Laptop	0mm	Laptop	56640	3690	15.90	17.00	1.288	62.9	1.006	0.06	0.859	1.113
	LTE Band 48_Aux	20M	QPSK	100	0	Bottom of Laptop	0mm	Laptop	55340	3560	15.91	17.00	1.285	62.9	1.006	0.01	0.768	0.993
	LTE Band 48_Aux	20M	QPSK	1	0	Bottom Face	0mm	Tablet	55340	3560	16.03	17.00	1.250	62.9	1.006	-0.01	0.525	0.660
	LTE Band 48_Aux	20M	QPSK	1	0	Bottom Face	0mm	Tablet	55830	3609	15.98	17.00	1.265	62.9	1.006	-0.04	0.692	0.880
	LTE Band 48_Aux	20M	QPSK	1	0	Bottom Face	0mm	Tablet	56150	3641	16.02	17.00	1.253	62.9	1.006	0	0.477	0.601
	LTE Band 48_Aux	20M	QPSK	1	0	Bottom Face	0mm	Tablet	56640	3690	15.98	17.00	1.265	62.9	1.006	0.02	0.440	0.560
	LTE Band 48_Aux	20M	QPSK	50	0	Bottom Face	0mm	Tablet	55340	3560	15.99	17.00	1.262	62.9	1.006	0	0.184	0.234
	LTE Band 48_Aux	20M	QPSK	100	0	Bottom Face	0mm	Tablet	55340	3560	15.91	17.00	1.285	62.9	1.006	-0.12	0.183	0.237
	LTE Band 48_Aux	20M	QPSK	1	0	Edge 2	0mm	Tablet	55340	3560	16.03	17.00	1.250	62.9	1.006	0.08	0.786	0.989
	LTE Band 48_Aux	20M	QPSK	1	0	Edge 2	0mm	Tablet	55830	3609	15.98	17.00	1.265	62.9	1.006	0.15	0.872	1.109
	LTE Band 48_Aux	20M	QPSK	1	0	Edge 2	0mm	Tablet	56150	3641	16.02	17.00	1.253	62.9	1.006	0.12	0.490	0.618
	LTE Band 48_Aux	20M	QPSK	1	0	Edge 2	0mm	Tablet	56640	3690	15.98	17.00	1.265	62.9	1.006	-0.11	0.508	0.646
	LTE Band 48_Aux	20M	QPSK	50	0	Edge 2	0mm	Tablet	55340	3560	15.99	17.00	1.262	62.9	1.006	0.12	0.666	0.845
	LTE Band 48_Aux	20M	QPSK	50	0	Edge 2	0mm	Tablet	55830	3609	15.90	17.00	1.288	62.9	1.006	-0.19	0.686	0.889
	LTE Band 48_Aux	20M	QPSK	50	0	Edge 2	0mm	Tablet	56150	3641	15.89	17.00	1.291	62.9	1.006	-0.16	0.653	0.848
	LTE Band 48_Aux	20M	QPSK	50	0	Edge 2	0mm	Tablet	56640	3690	15.90	17.00	1.288	62.9	1.006	-0.17	0.573	0.743
	LTE Band 48_Aux	20M	QPSK	100	0	Edge 2	0mm	Tablet	55340	3560	15.91	17.00	1.285	62.9	1.006	-0.19	0.663	0.857
	LTE Band 48C_Aux	20M	QPSK	1	0	Bottom of Laptop	0mm	Laptop	55830	3609	15.88	17.00	1.294	62.9	1.006	0.01	0.910	1.185

**<5G NR SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Configure	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n2	20M	BPSK	1	1	Bottom of Laptop	0mm	Laptop	ON	376000	1880	17.15	17.60	1.109	0	1.000	1.109
	FR1 n2	20M	BPSK	1	1	Bottom of Laptop	0mm	Laptop	ON	372000	1860	17.14	17.60	1.112	0.1	1.040	1.156
	FR1 n2	20M	BPSK	1	1	Bottom of Laptop	0mm	Laptop	ON	380000	1900	17.10	17.60	1.122	-0.06	1.050	1.178
	FR1 n2	20M	BPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	376000	1880	17.12	17.60	1.117	0	0.930	1.039
	FR1 n2	20M	BPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	372000	1860	17.11	17.60	1.119	-0.01	0.944	1.057
	FR1 n2	20M	BPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	380000	1900	17.08	17.60	1.127	-0.11	1.020	1.150
	FR1 n2	20M	BPSK	100	0	Bottom of Laptop	0mm	Laptop	ON	380000	1900	17.09	17.60	1.125	0.05	0.982	1.104
	FR1 n2	20M	BPSK	1	1	Bottom Face	0mm	Tablet	ON	376000	1880	17.15	17.60	1.109	0.01	0.647	0.718
	FR1 n2	20M	BPSK	50	0	Bottom Face	0mm	Tablet	ON	376000	1880	17.12	17.60	1.117	0.03	0.653	0.729
16	FR1 n2	20M	BPSK	1	1	Edge 1	0mm	Tablet	ON	376000	1880	17.15	17.60	1.109	-0.03	1.070	1.187
	FR1 n2	20M	BPSK	1	1	Edge 1	0mm	Tablet	ON	372000	1860	17.14	17.60	1.112	-0.19	1.040	1.156
	FR1 n2	20M	BPSK	1	1	Edge 1	0mm	Tablet	ON	380000	1900	17.10	17.60	1.122	-0.07	1.040	1.167
	FR1 n2	20M	BPSK	50	0	Edge 1	0mm	Tablet	ON	376000	1880	17.12	17.60	1.117	0.12	1.020	1.139
	FR1 n2	20M	BPSK	50	0	Edge 1	0mm	Tablet	ON	372000	1860	17.11	17.60	1.119	0.16	0.999	1.118
	FR1 n2	20M	BPSK	50	0	Edge 1	0mm	Tablet	ON	380000	1900	17.08	17.60	1.127	0.13	1.050	1.184
	FR1 n2	20M	BPSK	100	0	Edge 1	0mm	Tablet	ON	376000	1880	17.09	17.60	1.125	-0.11	1.030	1.158
	FR1 n2	20M	BPSK	1	1	Edge 2	0mm	Tablet	OFF	376000	1880	23.64	24.00	1.086	0.12	0.152	0.165
	FR1 n2	20M	BPSK	50	28	Edge 2	0mm	Tablet	OFF	376000	1880	23.38	23.50	1.028	0.08	0.138	0.142
	FR1 n2	20M	BPSK	1	1	Bottom of Laptop	15mm	Laptop	OFF	376000	1880	23.64	24.00	1.086	-0.07	0.196	0.213
	FR1 n2	20M	BPSK	50	28	Bottom of Laptop	15mm	Laptop	OFF	376000	1880	23.38	23.50	1.028	-0.16	0.233	0.240
	FR1 n2	20M	BPSK	1	1	Bottom Face	17mm	Tablet	OFF	376000	1880	23.64	24.00	1.086	-0.08	0.164	0.178
	FR1 n2	20M	BPSK	50	28	Bottom Face	17mm	Tablet	OFF	376000	1880	23.38	23.50	1.028	0.08	0.122	0.125
	FR1 n2	20M	BPSK	1	1	Edge 1	22mm	Tablet	OFF	376000	1880	23.64	24.00	1.086	-0.07	0.206	0.224
	FR1 n2	20M	BPSK	50	28	Edge 1	22mm	Tablet	OFF	376000	1880	23.38	23.50	1.028	-0.16	0.367	0.377
	FR1 n2_Aux	20M	BPSK	1	1	Bottom of Laptop	0mm	Laptop		376000	1880	16.04	16.50	1.112	0.08	0.245	0.273
	FR1 n2_Aux	20M	BPSK	50	0	Bottom of Laptop	0mm	Laptop		376000	1880	15.99	16.50	1.125	0.11	0.235	0.264
	FR1 n2_Aux	20M	BPSK	1	1	Bottom Face	0mm	Tablet		376000	1880	16.04	16.50	1.112	0.09	0.303	0.337
	FR1 n2_Aux	20M	BPSK	50	0	Bottom Face	0mm	Tablet		376000	1880	15.99	16.50	1.125	0.13	0.291	0.327
	FR1 n2_Aux	20M	BPSK	1	1	Edge 2	0mm	Tablet		376000	1880	16.04	16.50	1.112	-0.12	0.859	0.955
	FR1 n2_Aux	20M	BPSK	1	1	Edge 2	0mm	Tablet		372000	1860	16.01	16.50	1.119	-0.18	0.842	0.943
	FR1 n2_Aux	20M	BPSK	1	1	Edge 2	0mm	Tablet		380000	1900	15.97	16.50	1.130	0.01	1.030	1.164
	FR1 n2_Aux	20M	BPSK	50	0	Edge 2	0mm	Tablet		376000	1880	15.99	16.50	1.125	-0.16	0.859	0.966
	FR1 n2_Aux	20M	BPSK	50	0	Edge 2	0mm	Tablet		372000	1860	15.98	16.50	1.127	-0.13	0.838	0.945
	FR1 n2_Aux	20M	BPSK	50	0	Edge 2	0mm	Tablet		380000	1900	15.94	16.50	1.138	-0.15	0.874	0.994
	FR1 n2_Aux	20M	BPSK	100	0	Edge 2	0mm	Tablet		376000	1880	15.94	16.50	1.138	-0.13	0.869	0.989
	FR1 n5	20M	BPSK	1	1	Bottom of Laptop	0mm	Laptop	ON	167300	836.5	20.99	21.80	1.205	-0.16	0.358	0.431
	FR1 n5	20M	BPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	167300	836.5	20.93	21.80	1.222	-0.01	0.360	0.440
	FR1 n5	20M	BPSK	1	1	Bottom Face	0mm	Tablet	ON	167300	836.5	20.99	21.80	1.205	-0.08	0.725	0.874
	FR1 n5	20M	BPSK	50	0	Bottom Face	0mm	Tablet	ON	167300	836.5	20.93	21.80	1.222	-0.18	0.666	0.814
	FR1 n5	20M	BPSK	100	0	Bottom Face	0mm	Tablet	ON	167300	836.5	20.91	21.80	1.227	-0.15	0.637	0.782
17	FR1 n5	20M	BPSK	1	1	Edge 1	0mm	Tablet	ON	167300	836.5	20.99	21.80	1.205	0.17	0.885	1.066
	FR1 n5	20M	BPSK	50	0	Edge 1	0mm	Tablet	ON	167300	836.5	20.93	21.80	1.222	-0.16	0.836	1.021
	FR1 n5	20M	BPSK	100	0	Edge 1	0mm	Tablet	ON	167300	836.5	20.91	21.80	1.227	0	0.805	0.988
	FR1 n5	20M	BPSK	1	1	Edge 2	0mm	Tablet	OFF	167300	836.5	23.55	24.00	1.109	-0.04	0.138	0.153
	FR1 n5	20M	BPSK	50	56	Edge 2	0mm	Tablet	OFF	167300	836.5	23.45	24.00	1.135	0.02	0.117	0.133
	FR1 n5	20M	BPSK	1	1	Edge 4	0mm	Tablet	OFF	167300	836.5	23.55	24.00	1.109	0.09	0.012	0.013
	FR1 n5	20M	BPSK	50	56	Edge 4	0mm	Tablet	OFF	167300	836.5	23.45	24.00	1.135	-0.04	0.010	0.011
	FR1 n5	20M	BPSK	1	1	Bottom of Laptop	15mm	Laptop	OFF	167300	836.5	23.55	24.00	1.109	0.1	0.146	0.162
	FR1 n5	20M	BPSK	50	56	Bottom of Laptop	15mm	Laptop	OFF	167300	836.5	23.45	24.00	1.135	-0.04	0.149	0.169
	FR1 n5	20M	BPSK	1	1	Bottom Face	17mm	Tablet	OFF	167300	836.5	23.55	24.00	1.109	-0.08	0.112	0.124
	FR1 n5	20M	BPSK	50	56	Bottom Face	17mm	Tablet	OFF	167300	836.5	23.45	24.00	1.135	0.03	0.113	0.128
	FR1 n5	20M	BPSK	1	1	Edge 1	22mm	Tablet	OFF	167300	836.5	23.55	24.00	1.109	0.04	0.106	0.118
	FR1 n5	20M	BPSK	50	56	Edge 1	22mm	Tablet	OFF	167300	836.5	23.45	24.00	1.135	-0.17	0.091	0.103
	FR1 n7_Aux	20M	BPSK	1	1	Bottom of Laptop	0mm	Laptop		507000	2535	14.94	16.00	1.276	0.07	0.276	0.352
	FR1 n7_Aux	20M	BPSK	50	0	Bottom of Laptop	0mm	Laptop		507000	2535	14.93	16.00	1.279	0.11	0.264	0.338
	FR1 n7_Aux	20M	BPSK	1	1	Bottom Face	0mm	Tablet		507000	2535	14.94	16.00	1.276	0.01	0.233	0.298
	FR1 n7_Aux	20M	BPSK	50	0	Bottom Face	0mm	Tablet		507000	2535	14.93	16.00	1.279	0.09	0.229	0.293
	FR1 n7_Aux	20M	BPSK	1	1	Edge 2	0mm	Tablet		507000	2535	14.94	16.00	1.276	0.12	0.619	0.790
	FR1 n7_Aux	20M	BPSK	1	1	Edge 2	0mm	Tablet		502000	2510	14.91	16.00	1.285	0.05	0.751	0.965
18	FR1 n7_Aux	20M	BPSK	1	1	Edge 2	0mm	Tablet		512000	2560	14.87	16.00	1.297	-0.07	0.910	1.180
	FR1 n7_Aux	20M	BPSK	50	0	Edge 2	0mm	Tablet		507000	2535	14.93	16.00	1.279	0.01	0.582	0.745
	FR1 n7_Aux	20M	BPSK	50	0	Edge 2	0mm	Tablet		502000	2510	14.82	16.00	1.312	0.12	0.669	0.878
	FR1 n7_Aux	20M	BPSK	50	0	Edge 2	0mm	Tablet		512000	2560	14.81	16.00	1.315	-0.13	0.856	1.126
	FR1 n7_Aux	20M	BPSK	100	0	Edge 2	0mm	Tablet		507000	2535	14.88	16.00	1.294	0.08	0.853	1.104



FCC SAR TEST REPORT

Report No. : FA082123-01

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Configure	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
19	FR1 n12	15M	BPSK	1	1	Bottom of Laptop	0mm	Laptop	ON	141500	707.5	22.83	23.80	1.250	-0.09	0.390	0.488
	FR1 n12	15M	BPSK	36	0	Bottom of Laptop	0mm	Laptop	ON	141500	707.5	22.42	23.80	1.374	0.15	0.386	0.530
	FR1 n12	15M	BPSK	1	1	Bottom Face	0mm	Tablet	ON	141500	707.5	22.83	23.80	1.250	-0.08	0.449	0.561
	FR1 n12	15M	BPSK	36	0	Bottom Face	0mm	Tablet	ON	141500	707.5	22.42	23.80	1.374	-0.15	0.441	0.606
	FR1 n12	15M	BPSK	1	1	Edge 1	0mm	Tablet	ON	141500	707.5	22.83	23.80	1.250	-0.09	0.916	1.145
	FR1 n12	15M	BPSK	36	0	Edge 1	0mm	Tablet	ON	141500	707.5	22.42	23.80	1.374	-0.08	0.727	0.999
	FR1 n12	15M	BPSK	75	0	Edge 1	0mm	Tablet	ON	141500	707.5	22.47	23.80	1.358	-0.15	0.728	0.989
	FR1 n12	15M	BPSK	1	1	Edge 2	0mm	Tablet	OFF	141500	707.5	23.84	24.00	1.038	-0.04	0.023	0.024
	FR1 n12	15M	BPSK	36	22	Edge 2	0mm	Tablet	OFF	141500	707.5	23.50	24.00	1.122	0.01	0.012	0.013
	FR1 n12	15M	BPSK	1	1	Edge 4	0mm	Tablet	OFF	141500	707.5	23.84	24.00	1.038	0.05	0.006	0.006
	FR1 n12	15M	BPSK	36	22	Edge 4	0mm	Tablet	OFF	141500	707.5	23.50	24.00	1.122	-0.02	0.004	0.004
	FR1 n12	15M	BPSK	1	1	Bottom of Laptop	15mm	Laptop	OFF	141500	707.5	23.84	24.00	1.038	-0.1	0.086	0.089
	FR1 n12	15M	BPSK	36	22	Bottom of Laptop	15mm	Laptop	OFF	141500	707.5	23.50	24.00	1.122	-0.09	0.072	0.081
	FR1 n12	15M	BPSK	1	1	Bottom Face	17mm	Tablet	OFF	141500	707.5	23.84	24.00	1.038	-0.01	0.036	0.037
	FR1 n12	15M	BPSK	36	22	Bottom Face	17mm	Tablet	OFF	141500	707.5	23.50	24.00	1.122	-0.1	0.036	0.040
	FR1 n12	15M	BPSK	1	1	Edge 1	22mm	Tablet	OFF	141500	707.5	23.84	24.00	1.038	0.08	0.052	0.054
	FR1 n12	15M	BPSK	36	22	Edge 1	22mm	Tablet	OFF	141500	707.5	23.50	24.00	1.122	0.12	0.042	0.047
	FR1 n41_Aux	100M	BPSK	1	1	Bottom of Laptop	0mm	Laptop		518598	2592.99	14.94	15.80	1.219	-0.08	0.521	0.635
20	FR1 n41_Aux	100M	BPSK	135	0	Bottom of Laptop	0mm	Laptop		518598	2592.99	14.87	15.80	1.239	0.06	0.508	0.629
	FR1 n41_Aux	100M	BPSK	1	1	Bottom Face	0mm	Tablet		518598	2592.99	14.94	15.80	1.219	-0.08	0.451	0.549
	FR1 n41_Aux	100M	BPSK	135	0	Bottom Face	0mm	Tablet		518598	2592.99	14.87	15.80	1.239	-0.13	0.413	0.512
	FR1 n41_Aux	100M	BPSK	1	1	Edge 2	0mm	Tablet		518598	2592.99	14.94	15.80	1.219	-0.05	0.976	1.190
	FR1 n41_Aux	100M	BPSK	135	0	Edge 2	0mm	Tablet		518598	2592.99	14.87	15.80	1.239	0.02	0.899	1.114
	FR1 n66	20M	BPSK	1	1	Bottom of Laptop	0mm	Laptop	ON	344000	1720	17.12	17.70	1.143	-0.12	0.975	1.114
	FR1 n66	20M	BPSK	1	1	Bottom of Laptop	0mm	Laptop	ON	349000	1745	17.09	17.70	1.151	0.04	0.982	1.130
	FR1 n66	20M	BPSK	1	1	Bottom of Laptop	0mm	Laptop	ON	354000	1770	16.98	17.70	1.180	-0.03	1.010	1.192
	FR1 n66	20M	BPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	344000	1720	17.03	17.70	1.167	-0.02	0.964	1.125
	FR1 n66	20M	BPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	349000	1745	16.99	17.70	1.178	-0.17	0.986	1.161
	FR1 n66	20M	BPSK	50	0	Bottom of Laptop	0mm	Laptop	ON	354000	1770	16.98	17.70	1.180	0.02	0.993	1.172
	FR1 n66	20M	BPSK	100	0	Bottom of Laptop	0mm	Laptop	ON	344000	1720	16.93	17.70	1.194	-0.08	0.992	1.184
	FR1 n66	20M	BPSK	1	1	Bottom Face	0mm	Laptop	ON	344000	1720	17.12	17.70	1.143	0.02	0.968	1.106
	FR1 n66	20M	BPSK	1	1	Bottom Face	0mm	Tablet	ON	349000	1745	17.09	17.70	1.151	-0.03	1.040	1.197
	FR1 n66	20M	BPSK	1	1	Bottom Face	0mm	Tablet	ON	354000	1770	16.98	17.70	1.180	0.09	0.985	1.163
	FR1 n66	20M	BPSK	50	0	Bottom Face	0mm	Tablet	ON	344000	1720	17.03	17.70	1.167	0.07	0.958	1.118
	FR1 n66	20M	BPSK	50	0	Bottom Face	0mm	Tablet	ON	349000	1745	16.99	17.70	1.178	0.06	0.981	1.155
21	FR1 n66	20M	BPSK	50	0	Bottom Face	0mm	Tablet	ON	354000	1770	16.98	17.70	1.180	0.08	0.960	1.133
	FR1 n66	20M	BPSK	100	0	Bottom Face	0mm	Tablet	ON	344000	1720	16.93	17.70	1.194	-0.06	0.971	1.159
	FR1 n66	20M	BPSK	1	1	Edge 1	0mm	Tablet	ON	344000	1720	17.12	17.70	1.143	-0.18	0.936	1.070
	FR1 n66	20M	BPSK	1	1	Edge 1	0mm	Tablet	ON	349000	1745	17.09	17.70	1.151	-0.09	1.020	1.174
	FR1 n66	20M	BPSK	1	1	Edge 1	0mm	Tablet	ON	354000	1770	16.98	17.70	1.180	-0.12	0.999	1.179
	FR1 n66	20M	BPSK	50	0	Edge 1	0mm	Tablet	ON	344000	1720	17.03	17.70	1.167	-0.19	0.941	1.098
	FR1 n66	20M	BPSK	50	0	Edge 1	0mm	Tablet	ON	349000	1745	16.99	17.70	1.178	-0.12	0.968	1.140
	FR1 n66	20M	BPSK	50	0	Edge 1	0mm	Tablet	ON	354000	1770	16.98	17.70	1.180	-0.19	1.000	1.180
	FR1 n66	20M	BPSK	100	0	Edge 1	0mm	Tablet	ON	344000	1720	16.93	17.70	1.194	-0.1	0.972	1.161
	FR1 n66	20M	BPSK	1	1	Edge 2	0mm	Tablet	OFF	349000	1745	23.94	24.00	1.014	0.02	0.170	0.172
	FR1 n66	20M	BPSK	50	0	Edge 2	0mm	Tablet	OFF	349000	1745	23.77	24.00	1.054	-0.18	0.168	0.177
	FR1 n66	20M	BPSK	1	1	Bottom of Laptop	15mm	Laptop	OFF	349000	1745	23.94	24.00	1.014	-0.02	0.219	0.222
	FR1 n66	20M	BPSK	50	0	Bottom of Laptop	15mm	Laptop	OFF	349000	1745	23.77	24.00	1.054	-0.1	0.195	0.206
	FR1 n66	20M	BPSK	1	1	Bottom Face	17mm	Tablet	OFF	349000	1745	23.94	24.00	1.014	-0.08	0.194	0.197
	FR1 n66	20M	BPSK	50	0	Bottom Face	17mm	Tablet	OFF	349000	1745	23.77	24.00	1.054	-0.15	0.205	0.216
	FR1 n66	20M	BPSK	1	1	Edge 1	22mm	Tablet	OFF	349000	1745	23.94	24.00	1.014	0.09	0.216	0.219
	FR1 n66	20M	BPSK	50	0	Edge 1	22mm	Tablet	OFF	349000	1745	23.77	24.00	1.054	-0.14	0.201	0.212
	FR1 n66_Aux	20M	BPSK	1	1	Bottom of Laptop	0mm	Laptop		344000	1720	15.18	15.50	1.076	0.03	0.522	0.562
22	FR1 n66_Aux	20M	BPSK	50	0	Bottom of Laptop	0mm	Laptop		344000	1720	15.07	15.50	1.104	0.07	0.502	0.554
	FR1 n66_Aux	20M	BPSK	1	1	Bottom Face	0mm	Tablet		344000	1720	15.18	15.50	1.076	0.1	0.599	0.645
	FR1 n66_Aux	20M	BPSK	50	0	Bottom Face	0mm	Tablet		344000	1720	15.07	15.50	1.104	0.05	0.571	0.630
	FR1 n66_Aux	20M	BPSK	1	1	Edge 2	0mm	Tablet		344000	1720	15.18	15.50	1.076	-0.06	1.080	1.163
	FR1 n66_Aux	20M	BPSK	1	1	Edge 2	0mm	Tablet		349000	1745	15.10	15.50	1.096	0.01	1.040	1.140
	FR1 n66_Aux	20M	BPSK	1	1	Edge 2	0mm	Tablet		352000	1760	15.13	15.50	1.089	-0.11	1.090	1.187
	FR1 n66_Aux	20M	BPSK	50	0	Edge 2	0mm	Tablet		344000	1720	15.07	15.50	1.104	-0.1	1.050	1.159
	FR1 n66_Aux	20M	BPSK	50	0	Edge 2	0mm	Tablet		349000	1745	14.98	15.50	1.127	0.12	1.020	1.150
	FR1 n66_Aux	20M	BPSK	50	0	Edge 2	0mm	Tablet		352000	1760	15.02	15.50	1.117	0.05	1.040	1.162
	FR1 n66_Aux	20M	BPSK	100	0	Edge 2	0mm	Tablet		344000	1720	14.85	15.50	1.161	-0.12	0.995	1.156

16.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Configure	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	Tablet	ON	9400	1880	17.38	17.70	1.076			0.03	1.100		1.184
2nd	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	Tablet	ON	9400	1880	17.38	17.70	1.076			0.06	1.040	1.06	1.120
1st	WCDMA V	RMC 12.2Kbps	Edge 1	0mm	Tablet	ON	4132	826.4	21.27	21.80	1.130			-0.03	1.060		1.198
2nd	WCDMA V	RMC 12.2Kbps	Edge 1	0mm	Tablet	ON	4132	826.4	21.27	21.80	1.130			-0.03	0.994	1.07	1.123
1st	LTE Band 13	10M_QPSK_1_0	Edge 1	0mm	Tablet	ON	23230	782	21.38	21.80	1.102			0.07	1.060		1.168
2nd	LTE Band 13	10M_QPSK_1_0	Edge 1	0mm	Tablet	ON	23230	782	21.38	21.80	1.102			0.02	1.010	1.05	1.113
1st	LTE Band 30	10M_QPSK_1_0	Edge 1	0mm	Tablet	ON	27710	2310	15.80	16.90	1.288			-0.08	0.915		1.179
2nd	LTE Band 30	10M_QPSK_1_0	Edge 1	0mm	Tablet	ON	27710	2310	15.80	16.90	1.288			0.15	0.904	1.01	1.165
1st	LTE Band 41	20M_QPSK_1_0	Edge 1	0mm	Tablet	ON	39750	2506	18.56	18.90	1.081	62.9	1.006	0.13	1.080		1.175
2nd	LTE Band 41	20M_QPSK_1_0	Edge 1	0mm	Tablet	ON	39750	2506	18.56	18.90	1.081	62.9	1.006	0.12	1.040	1.04	1.131
1st	LTE Band 48_Aux	20M_QPSK_1_0	Bottom of Laptop	0mm	Laptop		55830	3609	15.98	17.00	1.265	62.9	1.006	0.01	0.934		1.188
2nd	LTE Band 48_Aux	20M_QPSK_1_0	Bottom of Laptop	0mm	Laptop		55830	3609	15.98	17.00	1.265	62.9	1.006	0.01	0.922	1.01	1.173
1st	FR1 n66_Aux	20M_BPSK_1_0	Edge 2	0mm	Tablet		352000	1760	15.13	15.50	1.089			-0.11	1.090		1.187
2nd	FR1 n66_Aux	20M_BPSK_1_0	Edge 2	0mm	Tablet		352000	1760	15.13	15.50	1.089			0.08	1.070	1.02	1.165

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16.3 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device support Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1. Per FCC Guidance based on the device behavior, all SAR tests were performed using Power Class 3. Power Class 2 is tested using the highest SAR test configuration in Power Class 3 for each LTE configuration and exposure condition combination, according to the highest time averaged power for all applicable uplink-downlink configurations in Power Class 2. When the reported SAR vs. output power is linearly scaled with $< 10\%$ discrepancy between power classes and all reported SAR are < 1.4 W/kg, Separate SAR testing for Power Class 2 is not required

	LTE Band 41 (Power Class 3)	LTE Band 41 (Power Class 2)
Maximum Tune up Power (dBm)	18.9	20.5
Reported 1g SAR (W/kg)	1.193	1.133
Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	49.14	48.58
Linearity SAR(W/kg)	1.18	
% deviation from expected linearity		-3.95%

17. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WWAN + WLAN2.4GHz Ant 1 + WLAN 2.4GHz Ant 2 + FR1	Yes
2.	WWAN + WLAN2.4GHz Ant 2 + Bluetooth Ant 1 + FR1	Yes
3.	WWAN + WLAN5GHz Ant 1 + WLAN5GHz Ant 2 + Bluetooth Ant 1 + FR1	Yes

General Note:

1. For Murata LBEE58D1VF, the 2.4GHz/5 GHz WLAN and Bluetooth SAR results are referenced from SAR report, report number: FA001919 (FCC ID: B94-C09CWLM) and these SAR results are also used to perform simultaneous transmission analysis.
2. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 17.3

17.1 5G NR + LTE + WLAN + BT Sim-Tx analysis

In 5G NR + LTE + WLAN + BT simultaneous transmission, 5G NR and LTE transmission are managed and controlled by Qualcomm® Smart Transmit, while the RF exposure from WLAN and BT radios is managed using legacy approach, i.e., through a fixed power back-off if needed.

Since WLAN and BT do not employ time-averaging, 1gSAR and 10gSAR measurement for WLAN and BT need to be conducted at their corresponding rated power following current FCC test procedures to determine reported SAR values.

Smart Transmit current implementation assumes hotspots from 5G NR and LTE are collocated. Therefore, for a total of 100% exposure margin, if LTE uses x%, then the exposure margin left for 5G NR is capped to (100-x)%. Thus, the compliance equation for LTE + 5G NR is

$$x\% * A + (100-x)\% * B \leq 1.0,$$

Where, A is normalized reported time-averaged SAR exposure ratio from LTE, and $A \leq 1.0$; B is normalized reported time-averaged exposure ratio from 5G NR (i.e., PD exposure for 5G FR2 or SAR exposure for 5G FR1), and $B \leq 1.0$.

Let C = normalized reported SAR exposure ratio from WLAN+BT, then for compliance,

$$x\% * A + (100-x)\% * B + C \leq 1.0 \quad (1)$$

$$x\% * A + (100-x)\% * B \leq x\% * \max(A, B) + (100-x)\% * \max(A, B) \leq \max(A, B)$$

$$x\% * A + (100-x)\% * B + C \leq \max(A, B) + C \leq 1.0 \quad (2)$$

if $A + C \leq 1.0$ and $B + C \leq 1.0$ can be proven, then " $x\% * A + (100-x)\% * B + C \leq 1.0$ ". Therefore simultaneous transmission analysis for 5G NR + LTE + WLAN + BT can be performed in two steps

Step 1: Prove total exposure ratio (TER) of LTE + WLAN + BT < 1

Step 2: Prove total exposure ratio (TER) of 5G NR + WLAN + BT < 1

**17.2 Body Exposure Conditions**


WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+3+6 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)	SPLSR	Case No
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 1 1g SAR (W/kg)	2.4GHz WLAN Ant 2 1g SAR (W/kg)	5GHz WLAN Ant 1 1g SAR (W/kg)	5GHz WLAN Ant 2 1g SAR (W/kg)	Bluetooth Ant 1 1g SAR (W/kg)					
WCDMA II	Bottom of Laptop at 0mm	0.885	0.169	0.052	0.423	0.163	0.001	1.106	0.938	1.472		
	Bottom Face at 0mm	1.184	0.155	0.001	0.359	0.166	0.001	1.340	1.186	1.710	0.02	Case 1
	Edge 1 at 0mm	1.181	0.940	0.445	1.110	0.323	0.001	2.566	1.627	2.615	0.02	Case 2
	Edge 2 at 0mm	0.253						0.253	0.253	0.253		
WCDMA IV	Bottom of Laptop at 0mm	0.960	0.169	0.052	0.423	0.163	0.001	1.181	1.013	1.547		
	Bottom Face at 0mm	1.005	0.155	0.001	0.359	0.166	0.001	1.161	1.007	1.531		
	Edge 1 at 0mm	1.131	0.940	0.445	1.110	0.323	0.001	2.516	1.577	2.565	0.02	Case 3
	Edge 2 at 0mm	0.198						0.198	0.198	0.198		
WCDMA V	Bottom of Laptop at 0mm	0.445	0.169	0.052	0.423	0.163	0.001	0.666	0.498	1.032		
	Bottom Face at 0mm	0.887	0.155	0.001	0.359	0.166	0.001	1.043	0.889	1.413		
	Edge 1 at 0mm	1.198	0.940	0.445	1.110	0.323	0.001	2.583	1.644	2.632	0.04	Case 4
	Edge 2 at 0mm	0.060						0.060	0.060	0.060		
LTE Band 2	Bottom of Laptop at 0mm	0.625	0.169	0.052	0.423	0.163	0.001	0.846	0.678	1.212		
	Bottom Face at 0mm	0.676	0.155	0.001	0.359	0.166	0.001	0.832	0.678	1.202		
	Edge 2 at 0mm	1.130						1.130	1.130	1.130		
	Edge 4 at 0mm	0.030						0.030	0.030	0.030		
LTE Band 5	Bottom of Laptop at 0mm	0.402	0.169	0.052	0.423	0.163	0.001	0.623	0.455	0.989		
	Bottom Face at 0mm	1.056	0.155	0.001	0.359	0.166	0.001	1.212	1.058	1.582		
	Edge 1 at 0mm	1.151	0.940	0.445	1.110	0.323	0.001	2.536	1.597	2.585	0.02	Case 5
	Edge 2 at 0mm	0.062						0.062	0.062	0.062		
LTE Band 7	Bottom of Laptop at 0mm	0.720	0.169	0.052	0.423	0.163	0.001	0.941	0.773	1.307		
	Bottom Face at 0mm	0.764	0.155	0.001	0.359	0.166	0.001	0.920	0.766	1.290		
	Edge 1 at 0mm	1.194	0.940	0.445	1.110	0.323	0.001	2.579	1.640	2.628	0.02	Case 6
	Edge 2 at 0mm	0.232						0.232	0.232	0.232		
LTE Band 7_Aux	Bottom of Laptop at 0mm	0.684	0.169	0.052	0.423	0.163	0.001	0.905	0.737	1.271		
	Bottom Face at 0mm	0.437	0.155	0.001	0.359	0.166	0.001	0.593	0.439	0.963		
	Edge 2 at 0mm	1.178						1.178	1.178	1.178		
	Edge 4 at 0mm	0.011						0.011	0.011	0.011		
LTE Band 12	Bottom of Laptop at 0mm	0.584	0.169	0.052	0.423	0.163	0.001	0.805	0.637	1.171		
	Bottom Face at 0mm	0.477	0.155	0.001	0.359	0.166	0.001	0.633	0.479	1.003		
	Edge 1 at 0mm	1.096	0.940	0.445	1.110	0.323	0.001	2.481	1.542	2.530	0.02	Case 7
	Edge 2 at 0mm	0.049						0.049	0.049	0.049		
LTE Band 13	Bottom of Laptop at 0mm	0.622	0.169	0.052	0.423	0.163	0.001	0.843	0.675	1.209		
	Bottom Face at 0mm	0.674	0.155	0.001	0.359	0.166	0.001	0.830	0.676	1.200		
	Edge 1 at 0mm	1.168	0.940	0.445	1.110	0.323	0.001	2.553	1.614	2.602	0.03	Case 8
	Edge 2 at 0mm	0.049						0.049	0.049	0.049		
LTE Band 14	Bottom of Laptop at 0mm	0.785	0.169	0.052	0.423	0.163	0.001	1.006	0.838	1.372		
	Bottom Face at 0mm	1.105	0.155	0.001	0.359	0.166	0.001	1.261	1.107	1.631	0.02	Case 9
	Edge 1 at 0mm	1.178	0.940	0.445	1.110	0.323	0.001	2.563	1.624	2.612	0.02	Case 10
	Edge 2 at 0mm	0.053						0.053	0.053	0.053		
LTE Band 25	Bottom of Laptop at 0mm	1.098	0.169	0.052	0.423	0.163	0.001	1.319	1.151	1.685	0.02	Case 11
	Bottom Face at 0mm	1.166	0.155	0.001	0.359	0.166	0.001	1.322	1.168	1.692	0.02	Case 12
	Edge 1 at 0mm	0.952	0.940	0.445	1.110	0.323	0.001	2.337	1.398	2.386	0.02	Case 13
	Edge 2 at 0mm	0.244						0.244	0.244	0.244		
LTE Band 26	Bottom of Laptop at 0mm	0.414	0.169	0.052	0.423	0.163	0.001	0.635	0.467	1.001		
	Bottom Face at 0mm	1.114	0.155	0.001	0.359	0.166	0.001	1.270	1.116	1.640	0.02	Case 14
	Edge 1 at 0mm	1.142	0.940	0.445	1.110	0.323	0.001	2.527	1.588	2.576	0.02	Case 15
	Edge 2 at 0mm	0.064						0.064	0.064	0.064		
LTE Band 30	Bottom of Laptop at 0mm	0.911	0.169	0.052	0.423	0.163	0.001	1.132	0.964	1.498		
	Bottom Face at 0mm	0.935	0.155	0.001	0.359	0.166	0.001	1.091	0.937	1.461		
	Edge 1 at 0mm	1.179	0.940	0.445	1.110	0.323	0.001	2.564	1.625	2.613	0.02	Case 16
	Edge 2 at 0mm	0.104						0.104	0.104	0.104		
LTE Band 66	Bottom of Laptop at 0mm	1.041	0.169	0.052	0.423	0.163	0.001	1.262	1.094	1.628	0.01	Case 17
	Bottom Face at 0mm	1.017	0.155	0.001	0.359	0.166	0.001	1.173	1.019	1.543		
	Edge 1 at 0mm	1.152	0.940	0.445	1.110	0.323	0.001	2.537	1.598	2.586	0.02	Case 18
	Edge 2 at 0mm	0.187						0.187	0.187	0.187		
LTE Band 66_Aux	Bottom of Laptop at 0mm	0.587	0.169	0.052	0.423	0.163	0.001	0.808	0.640	1.174		
	Bottom Face at 0mm	0.614	0.155	0.001	0.359	0.166	0.001	0.770	0.616	1.140		
	Edge 2 at 0mm	1.196						1.196	1.196	1.196		
	Edge 4 at 0mm	0.031						0.031	0.031	0.031		
LTE Band 41	Bottom of Laptop at 0mm	0.542	0.169	0.052	0.423	0.163	0.001	0.763	0.595	1.129		
	Bottom Face at 0mm	0.567	0.155	0.001	0.359	0.166	0.001	0.723	0.569	1.093		
	Edge 1 at 0mm	1.193	0.940	0.445	1.110	0.323	0.001	2.578	1.639	2.627	0.03	Case 19
	Edge 2 at 0mm	0.143						0.143	0.143	0.143		
LTE Band 48_Aux	Bottom of Laptop at 0mm	1.188	0.169	0.052	0.423	0.163	0.001	1.409	1.241	1.775	0.01	Case 20
	Bottom Face at 0mm	0.880	0.155	0.001	0.359	0.166	0.001	1.036	0.882	1.406		
	Edge 2 at 0mm	1.109						1.109	1.109	1.109		
	Edge 4 at 0mm	0.012						0.012	0.012	0.012		


WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+3+6 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)	SPLSR	Case No
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1					
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
FR1 n2	Bottom of Laptop at 0mm	1.178	0.169	0.052	0.423	0.163	0.001	1.399	1.231	1.765	0.02	Case 21
	Bottom Face at 0mm	0.729	0.155	0.001	0.359	0.166	0.001	0.885	0.731	1.255		
	Edge 1 at 0mm	1.187	0.940	0.445	1.110	0.323	0.001	2.572	1.633	2.621	0.02	Case 22
	Edge 2 at 0mm	0.165						0.165	0.165	0.165		
FR1 n2_Aux	Bottom of Laptop at 0mm	0.273	0.169	0.052	0.423	0.163	0.001	0.494	0.326	0.860		
	Bottom Face at 0mm	0.337	0.155	0.001	0.359	0.166	0.001	0.493	0.339	0.863		
	Edge 2 at 0mm	1.164						1.164	1.164	1.164		
FR1 n5	Bottom of Laptop at 0mm	0.440	0.169	0.052	0.423	0.163	0.001	0.661	0.493	1.027		
	Bottom Face at 0mm	0.874	0.155	0.001	0.359	0.166	0.001	1.030	0.876	1.400		
	Edge 1 at 0mm	1.066	0.940	0.445	1.110	0.323	0.001	2.451	1.512	2.500	0.04	Case 23
	Edge 2 at 0mm	0.153						0.153	0.153	0.153		
	Edge 4 at 0mm	0.013						0.013	0.013	0.013		
FR1 n7_Aux	Bottom of Laptop at 0mm	0.352	0.169	0.052	0.423	0.163	0.001	0.573	0.405	0.939		
	Bottom Face at 0mm	0.298	0.155	0.001	0.359	0.166	0.001	0.454	0.300	0.824		
	Edge 2 at 0mm	1.180						1.180	1.180	1.180		
FR1 n12	Bottom of Laptop at 0mm	0.530	0.169	0.052	0.423	0.163	0.001	0.751	0.583	1.117		
	Bottom Face at 0mm	0.606	0.155	0.001	0.359	0.166	0.001	0.762	0.608	1.132		
	Edge 1 at 0mm	1.145	0.940	0.445	1.110	0.323	0.001	2.530	1.591	2.579	0.02	Case 24
	Edge 2 at 0mm	0.024						0.024	0.024	0.024		
	Edge 4 at 0mm	0.006						0.006	0.006	0.006		
FR1 n41_Aux	Bottom of Laptop at 0mm	0.635	0.169	0.052	0.423	0.163	0.001	0.856	0.688	1.222		
	Bottom Face at 0mm	0.549	0.155	0.001	0.359	0.166	0.001	0.705	0.551	1.075		
	Edge 2 at 0mm	1.190						1.190	1.190	1.190		
FR1 n66	Bottom of Laptop at 0mm	1.192	0.169	0.052	0.423	0.163	0.001	1.413	1.245	1.779	0.02	Case 25
	Bottom Face at 0mm	1.197	0.155	0.001	0.359	0.166	0.001	1.353	1.199	1.723	0.02	Case 26
	Edge 1 at 0mm	1.180	0.940	0.445	1.110	0.323	0.001	2.565	1.626	2.614	0.02	Case 27
	Edge 2 at 0mm	0.177						0.177	0.177	0.177		
FR1 n66_Aux	Bottom of Laptop at 0mm	0.562	0.169	0.052	0.423	0.163	0.001	0.783	0.615	1.149		
	Bottom Face at 0mm	0.645	0.155	0.001	0.359	0.166	0.001	0.801	0.647	1.171		
	Edge 2 at 0mm	1.187						1.187	1.187	1.187		


17.3 SPLSR Evaluation and Analysis

General Note:

1. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary
2. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

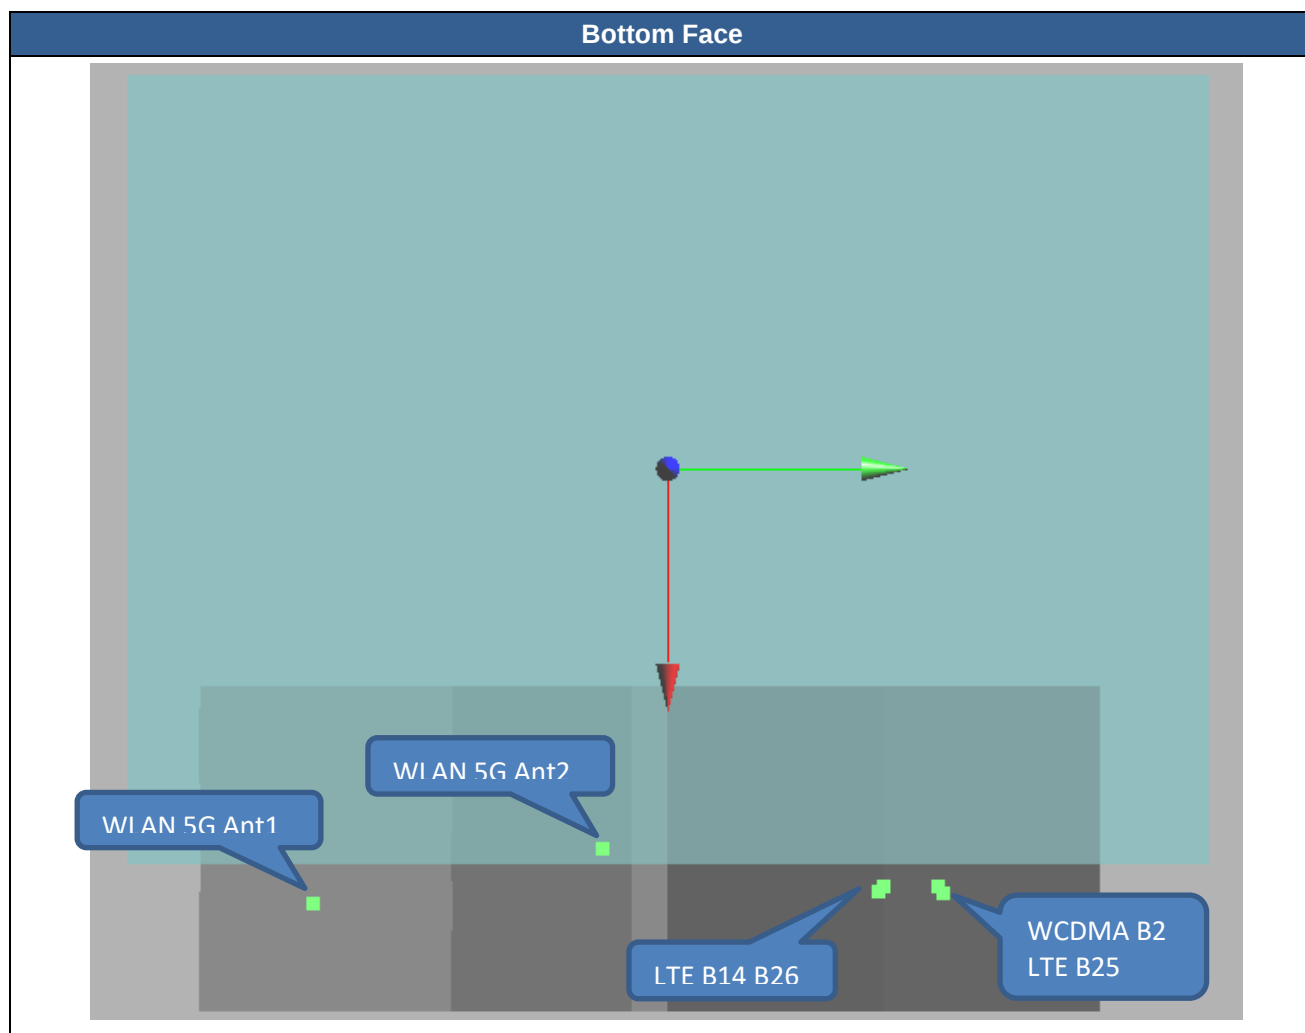

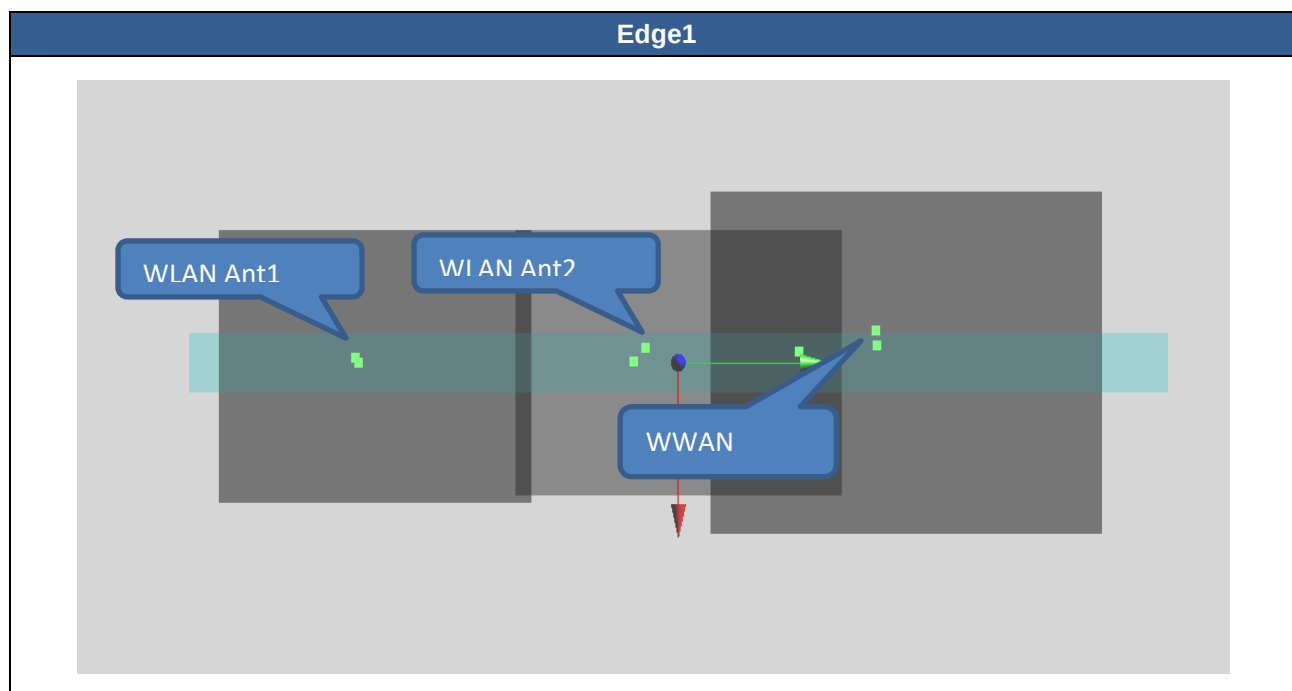

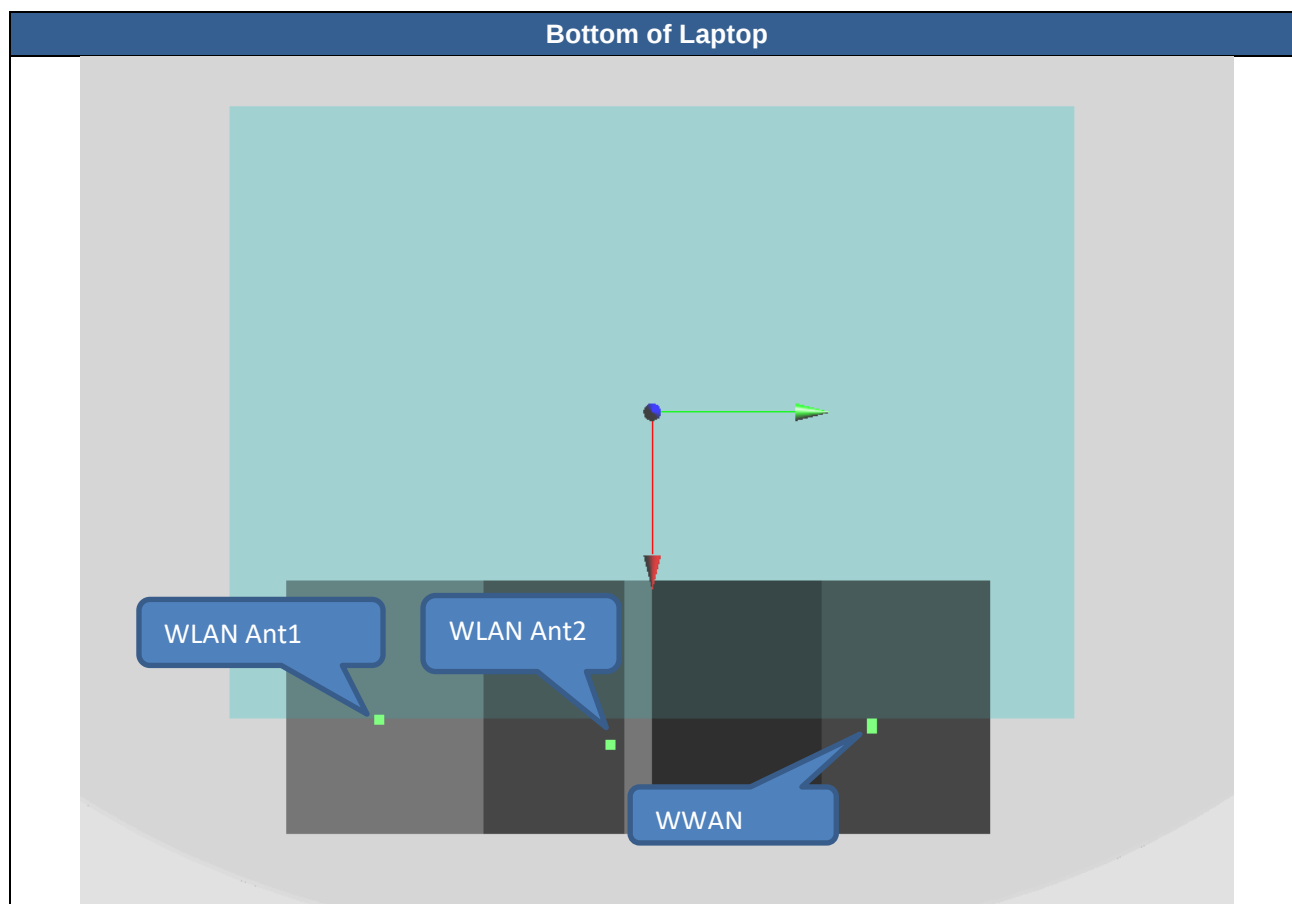

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 1	WCDMA II	Bottom Face	1.184	0	117.06	74.89	0.38	173.4	1.54	0.01	Not required
	WLAN5G_Ant 1 + BT Ant 1		0.36	0	118.4	-98.49	-3.78				
	WCDMA II	Bottom Face	1.184	0	117.06	74.89	0.38	89.2	1.35	0.02	Not required
	WLAN5G_Ant 2		0.166	0	103.44	-13.2	-3.75				
	WLAN5G_Ant 1 + BT Ant 1	Bottom Face	0.36	0	118.4	-98.49	-3.78	86.6	0.53	0.00	Not required
	WLAN5G_Ant 2		0.166	0	103.44	-13.2	-3.75				
Case 2	WCDMA II	Edge 1	1.181	0	-1.45	88.51	-2.87	187.5	2.12	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	WCDMA II	Edge 1	1.181	0	-1.45	88.51	-2.87	97.3	1.63	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WCDMA II	Edge 1	1.181	0	-1.45	88.51	-2.87	184.1	2.29	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	WCDMA II	Edge 1	1.181	0	-1.45	88.51	-2.87	102.5	1.50	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN2.4G_Ant 2	Edge 1	0.445	0	4.86	-8.61	-1.32	87.2	0.45	0.00	Not required
	BT Ant 1		0.001	0	-0.78	-95.61	-2.49				
Case 3	WCDMA IV	Edge 1	1.131	0	-6.07	90.1	-3.27	189.2	2.07	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	WCDMA IV	Edge 1	1.131	0	-6.07	90.1	-3.27	99.3	1.58	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WCDMA IV	Edge 1	1.131	0	-6.07	90.1	-3.27	185.8	2.24	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	WCDMA IV	Edge 1	1.131	0	-6.07	90.1	-3.27	104.3	1.45	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
Case 4	WCDMA V	Edge 1	1.198	0	0.07	37.95	-3.15	137.0	2.14	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	WCDMA V	Edge 1	1.198	0	0.07	37.95	-3.15	46.8	1.64	0.04	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WCDMA V	Edge 1	1.198	0	0.07	37.95	-3.15	133.6	2.31	0.03	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	WCDMA V	Edge 1	1.198	0	0.07	37.95	-3.15	52.0	1.52	0.04	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN2.4G_Ant 2	Edge 1	0.445	0	4.86	-8.61	-1.32	87.2	0.45	0.00	Not required
	BT Ant 1		0.001	0	-0.78	-95.61	-2.49				

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 5	LTE Band 5	Edge 1	1.151	0	-4.81	76.2	-2.81	175.3	2.09	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	LTE Band 5	Edge 1	1.151	0	-4.81	76.2	-2.81	85.4	1.60	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	LTE Band 5	Edge 1	1.151	0	-4.81	76.2	-2.81	171.9	2.26	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	LTE Band 5	Edge 1	1.151	0	-4.81	76.2	-2.81	90.3	1.47	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN2.4G_Ant 2	Edge 1	0.445	0	4.86	-8.61	-1.32	87.2	0.45	0.00	Not required
	BT Ant 1		0.001	0	-0.78	-95.61	-2.49				
	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 6	LTE Band 7	Edge 1	1.194	0	-4.57	87.41	-6.71	186.5	2.13	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	LTE Band 7	Edge 1	1.194	0	-4.57	87.41	-6.71	96.6	1.64	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	LTE Band 7	Edge 1	1.194	0	-4.57	87.41	-6.71	183.1	2.31	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	LTE Band 7	Edge 1	1.194	0	-4.57	87.41	-6.71	101.5	1.52	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN2.4G_Ant 2	Edge 1	0.445	0	4.86	-8.61	-1.32	87.2	0.45	0.00	Not required
	BT Ant 1		0.001	0	-0.78	-95.61	-2.49				
	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 7	LTE Band 12	Edge 1	1.096	0	-4.85	79.01	-3.25	178.1	2.04	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	LTE Band 12	Edge 1	1.096	0	-4.85	79.01	-3.25	88.2	1.54	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	LTE Band 12	Edge 1	1.096	0	-4.85	79.01	-3.25	174.7	2.21	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	LTE Band 12	Edge 1	1.096	0	-4.85	79.01	-3.25	93.1	1.42	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 8	LTE Band 13	Edge 1	1.168	0	-0.09	58.3	-3.26	157.3	2.11	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	LTE Band 13	Edge 1	1.168	0	-0.09	58.3	-3.26	67.1	1.61	0.03	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	LTE Band 13	Edge 1	1.168	0	-0.09	58.3	-3.26	153.9	2.28	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				

	LTE Band 13	Edge 1	1.168	0	-0.09	58.3	-3.26	72.3	1.49	0.03	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN2.4G_Ant 2	Edge 1	0.445	0	4.86	-8.61	-1.32	87.2	0.45	0.00	Not required
	BT Ant 1		0.001	0	-0.78	-95.61	-2.49				
Case 9	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B14	Bottom Face	1.105	0	115.53	59.99	-0.76	158.5	1.47	0.01	Not required
	WLAN5G_Ant 1 + BT Ant 1		0.36	0	118.4	-98.49	-3.78				
	LTE B14	Bottom Face	1.105	0	115.53	59.99	-0.76	74.2	1.27	0.02	Not required
	WLAN5G_Ant 2		0.166	0	103.44	-13.2	-3.75				
	WLAN5G_Ant 1 + BT Ant 1	Bottom Face	0.36	0	118.4	-98.49	-3.78	86.6	0.53	0.00	Not required
	WLAN5G_Ant 2		0.166	0	103.44	-13.2	-3.75				
Case 10	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 14	Edge 1	1.178	0	-4.85	77.51	-3.26	176.6	2.12	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	LTE Band 14	Edge 1	1.178	0	-4.85	77.51	-3.26	86.7	1.62	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	LTE Band 14	Edge 1	1.178	0	-4.85	77.51	-3.26	173.2	2.29	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	LTE Band 14	Edge 1	1.178	0	-4.85	77.51	-3.26	91.6	1.50	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN2.4G_Ant 2	Edge 1	0.445	0	4.86	-8.61	-1.32	87.2	0.45	0.00	Not required
	BT Ant 1		0.001	0	-0.78	-95.61	-2.49				
Case 11	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B25	Bottom of Laptop	1.098	0	111.03	73.18	-1.1	171.8	1.52	0.01	Not required
	WLAN5G_Ant 1 + BT Ant 1		0.424	0	111.14	-98.59	-3.63				
	LTE B25	Bottom of Laptop	1.098	0	111.03	73.18	-1.1	88.2	1.26	0.02	Not required
	WLAN5G_Ant 2		0.163	0	112.16	-15	-3.81				
	WLAN5G_Ant 1 + BT Ant 1	Bottom of Laptop	0.424	0	111.14	-98.59	-3.63	83.6	0.59	0.01	Not required
	WLAN5G_Ant 2		0.163	0	112.16	-15	-3.81				
Case 12	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B25	Bottom Face	1.166	0	113.93	74.98	-0.79	173.6	1.53	0.01	Not required
	WLAN5G_Ant 1 + BT Ant 1		0.36	0	118.4	-98.49	-3.78				
	LTE B25	Bottom Face	1.166	0	113.93	74.98	-0.79	88.9	1.33	0.02	Not required
	WLAN5G_Ant 2		0.166	0	103.44	-13.2	-3.75				
	WLAN5G_Ant 1 + BT Ant 1	Bottom Face	0.36	0	118.4	-98.49	-3.78	86.6	0.53	0.00	Not required
	WLAN5G_Ant 2		0.166	0	103.44	-13.2	-3.75				
Case 13	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 25	Edge 1	0.952	0	-4.46	85.5	-2.46	184.6	1.89	0.01	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	LTE Band 25	Edge 1	0.952	0	-4.46	85.5	-2.46	94.6	1.40	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	LTE Band 25	Edge 1	0.952	0	-4.46	85.5	-2.46	181.1	2.06	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				

	LTE Band 25	Edge 1	0.952	0	-4.46	85.5	-2.46	99.6	1.28	0.01	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN2.4G_Ant 2	Edge 1	0.445	0	4.86	-8.61	-1.32	87.2	0.45	0.00	Not required
	BT Ant 1		0.001	0	-0.78	-95.61	-2.49				
Case 14	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B26	Bottom Face	1.114	0	113.83	64.9	-0.83	163.5	1.47	0.01	Not required
	WLAN5G_Ant 1 + BT Ant 1		0.36	0	118.4	-98.49	-3.78				
	LTE B26	Bottom Face	1.114	0	113.83	64.9	-0.83	78.8	1.28	0.02	Not required
	WLAN5G_Ant 2		0.166	0	103.44	-13.2	-3.75				
	WLAN5G_Ant 1 + BT Ant 1	Bottom Face	0.36	0	118.4	-98.49	-3.78	86.6	0.53	0.00	Not required
	WLAN5G_Ant 2		0.166	0	103.44	-13.2	-3.75				
Case 15	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 26	Edge 1	1.142	0	-4.83	76	-2.85	175.1	2.08	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	LTE Band 26	Edge 1	1.142	0	-4.83	76	-2.85	85.2	1.59	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	LTE Band 26	Edge 1	1.142	0	-4.83	76	-2.85	171.7	2.25	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	LTE Band 26	Edge 1	1.142	0	-4.83	76	-2.85	90.1	1.47	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN2.4G_Ant 2	Edge 1	0.445	0	4.86	-8.61	-1.32	87.2	0.45	0.00	Not required
	BT Ant 1		0.001	0	-0.78	-95.61	-2.49				
Case 16	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 30	Edge 1	1.179	0	2.18	89.4	-6.29	188.5	2.12	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	LTE Band 30	Edge 1	1.179	0	2.18	89.4	-6.29	98.2	1.62	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	LTE Band 30	Edge 1	1.179	0	2.18	89.4	-6.29	185.1	2.29	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	LTE Band 30	Edge 1	1.179	0	2.18	89.4	-6.29	103.4	1.50	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN2.4G_Ant 2	Edge 1	0.445	0	4.86	-8.61	-1.32	87.2	0.45	0.00	Not required
	BT Ant 1		0.001	0	-0.78	-95.61	-2.49				
Case 17	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B66	Bottom of Laptop	1.041	0	112.51	73.19	-1.71	171.8	1.47	0.01	Not required
	WLAN5G_Ant 1 + BT Ant 1		0.424	0	111.14	-98.59	-3.63				
	LTE B66	Bottom of Laptop	1.041	0	112.51	73.19	-1.71	88.2	1.20	0.01	Not required
	WLAN5G_Ant 2		0.163	0	112.16	-15	-3.81				
	WLAN5G_Ant 1 + BT Ant 1	Bottom of Laptop	0.424	0	111.14	-98.59	-3.63	83.6	0.59	0.01	Not required
	WLAN5G_Ant 2		0.163	0	112.16	-15	-3.81				

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 18	LTE Band 66	Edge 1	1.152	0	-5.94	90.41	-2.84	189.5	2.09	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	LTE Band 66	Edge 1	1.152	0	-5.94	90.41	-2.84	99.6	1.60	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	LTE Band 66	Edge 1	1.152	0	-5.94	90.41	-2.84	186.1	2.26	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	LTE Band 66	Edge 1	1.152	0	-5.94	90.41	-2.84	104.6	1.48	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
Case 19	WLAN2.4G_Ant 2	Edge 1	0.445	0	4.86	-8.61	-1.32	87.2	0.45	0.00	Not required
	BT Ant 1		0.001	0	-0.78	-95.61	-2.49				
	LTE Band 41	Edge 1	1.193	0	-11.57	60.21	-2.89	159.6	2.13	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	LTE Band 41	Edge 1	1.193	0	-11.57	60.21	-2.89	70.8	1.64	0.03	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	LTE Band 41	Edge 1	1.193	0	-11.57	60.21	-2.89	156.2	2.30	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	LTE Band 41	Edge 1	1.193	0	-11.57	60.21	-2.89	75.1	1.52	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
Case 20	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN2.4G_Ant 2	Edge 1	0.445	0	4.86	-8.61	-1.32	87.2	0.45	0.00	Not required
	BT Ant 1		0.001	0	-0.78	-95.61	-2.49				
	LTE B48_Aux	Bottom of Laptop	1.188	0	-43.78	139.2	-0.64	283.8	1.61	0.01	Not required
	WLAN5G_Ant 1 + BT Ant 1		0.424	0	111.14	-98.59	-3.63				
	LTE B48_Aux	Bottom of Laptop	1.188	0	-43.78	139.2	-0.64	219.3	1.35	0.01	Not required
	WLAN5G_Ant 2		0.163	0	112.16	-15	-3.81				
	WLAN5G_Ant 1 + BT Ant 1	Bottom of Laptop	0.424	0	111.14	-98.59	-3.63	83.6	0.59	0.01	Not required
	WLAN5G_Ant 2		0.163	0	112.16	-15	-3.81				

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 21	FR1 n2	Bottom of Laptop	1.178	0	117.07	79.6	-1.73	178.3	1.60	0.01	Not required
	WLAN5G_Ant 1 + BT Ant 1		0.424	0	111.14	-98.59	-3.63				
	FR1 n2	Bottom of Laptop	1.178	0	117.07	79.6	-1.73	94.8	1.34	0.02	Not required
	WLAN5G_Ant 2		0.163	0	112.16	-15	-3.81				
	WLAN5G_Ant 1 + BT Ant 1	Bottom of Laptop	0.424	0	111.14	-98.59	-3.63	83.6	0.59	0.01	Not required
	WLAN5G_Ant 2		0.163	0	112.16	-15	-3.81				
Case 22	FR1 n2	Edge 1	1.187	0	-4.45	85.5	-3.15	184.6	2.13	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	FR1 n2	Edge 1	1.187	0	-4.45	85.5	-3.15	94.6	1.63	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	FR1 n2	Edge 1	1.187	0	-4.45	85.5	-3.15	181.1	2.30	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	FR1 n2	Edge 1	1.187	0	-4.45	85.5	-3.15	99.6	1.51	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN2.4G_Ant 2	Edge 1	0.445	0	4.86	-8.61	-1.32	87.2	0.45	0.00	Not required
	BT Ant 1		0.001	0	-0.78	-95.61	-2.49				
Case 23	FR1 n5	Edge 1	1.066	0	-1.57	32.11	-3.82	131.1	2.01	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	FR1 n5	Edge 1	1.066	0	-1.57	32.11	-3.82	41.3	1.51	0.04	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	FR1 n5	Edge 1	1.066	0	-1.57	32.11	-3.82	127.7	2.18	0.03	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	FR1 n5	Edge 1	1.066	0	-1.57	32.11	-3.82	46.1	1.39	0.04	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
Case 24	FR1 n12	Edge 1	1.145	0	1.58	66.51	-3.51	165.6	2.09	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	FR1 n12	Edge 1	1.145	0	1.58	66.51	-3.51	75.2	1.59	0.03	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	FR1 n12	Edge 1	1.145	0	1.58	66.51	-3.51	162.1	2.26	0.02	Not required
	WLAN5G_Ant 1		1.11	0	-0.78	-95.61	-2.49				
	FR1 n12	Edge 1	1.145	0	1.58	66.51	-3.51	80.5	1.47	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
Case 25	FR1 n66	Bottom of Laptop	1.192	0	115.53	83.99	-1.73	182.6	1.62	0.01	Not required
	WLAN5G_Ant 1 + BT Ant 1		0.424	0	111.14	-98.59	-3.63				

	FR1 n66	Bottom of Laptop	1.192	0	115.53	83.99	-1.73	99.1	1.36	0.02	Not required
	WLAN5G_Ant 2		0.163	0	112.16	-15	-3.81				
	WLAN5G_Ant 1 + BT Ant 1	Bottom of Laptop	0.424	0	111.14	-98.59	-3.63	83.6	0.59	0.01	Not required
	WLAN5G_Ant 2		0.163	0	112.16	-15	-3.81				
Case 26	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	FR1 n66	Bottom Face	1.197	0	114.04	84	-1.41	182.6	1.56	0.01	Not required
	WLAN5G_Ant 1 + BT Ant 1		0.36	0	118.4	-98.49	-3.78				
	FR1 n66	Bottom Face	1.197	0	114.04	84	-1.41	97.8	1.36	0.02	Not required
	WLAN5G_Ant 2		0.166	0	103.44	-13.2	-3.75				
	WLAN5G_Ant 1 + BT Ant 1	Bottom Face	0.36	0	118.4	-98.49	-3.78	86.6	0.53	0.00	Not required
	WLAN5G_Ant 2		0.166	0	103.44	-13.2	-3.75				
Case 27	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	FR1 n66	Edge 1	1.18	0	-4.57	88.61	-3.48	187.7	2.12	0.02	Not required
	WLAN2.4G_Ant 1		0.94	0	-1.38	-99.03	-4.02				
	FR1 n66	Edge 1	1.18	0	-4.57	88.61	-3.48	97.7	1.63	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	WLAN2.4G_Ant 1	Edge 1	0.94	0	-1.38	-99.03	-4.02	90.7	1.39	0.02	Not required
	WLAN2.4G_Ant 2		0.445	0	4.86	-8.61	-1.32				
	FR1 n66	Edge 1	1.18	0	-4.57	88.61	-3.48	184.3	2.29	0.02	Not required
	WLAN5G_Ant 1 + BT Ant 1		1.111	0	-0.78	-95.61	-2.49				
	FR1 n66	Edge 1	1.18	0	-4.57	88.61	-3.48	102.7	1.50	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN5G_Ant 1 + BT Ant 1	Edge 1	1.111	0	-0.78	-95.61	-2.49	81.6	1.43	0.02	Not required
	WLAN5G_Ant 2		0.323	0	0.04	-14	-4.06				
	WLAN2.4G_Ant 2	Edge 1	0.445	0	4.86	-8.61	-1.32	87.2	0.45	0.00	Not required
	BT Ant 1		0.001	0	-0.78	-95.61	-2.49				

Test Engineer : Thomas Wang, Lemon Su, Sing Lim, Brian Wang and Willie Huang

18. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

19. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [6] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [7] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [8] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [9] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.