


File name: J021512C.RES
Date: 16. Mar 05 12:52

Scan Settings (2 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	AUTO LN	OFF
1M	30M	10k	9k	QP+AV	20ms	AUTO LN	OFF

Transducer No.	Start	Stop	Name
3	100k	30M	COND_CF

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 30dB

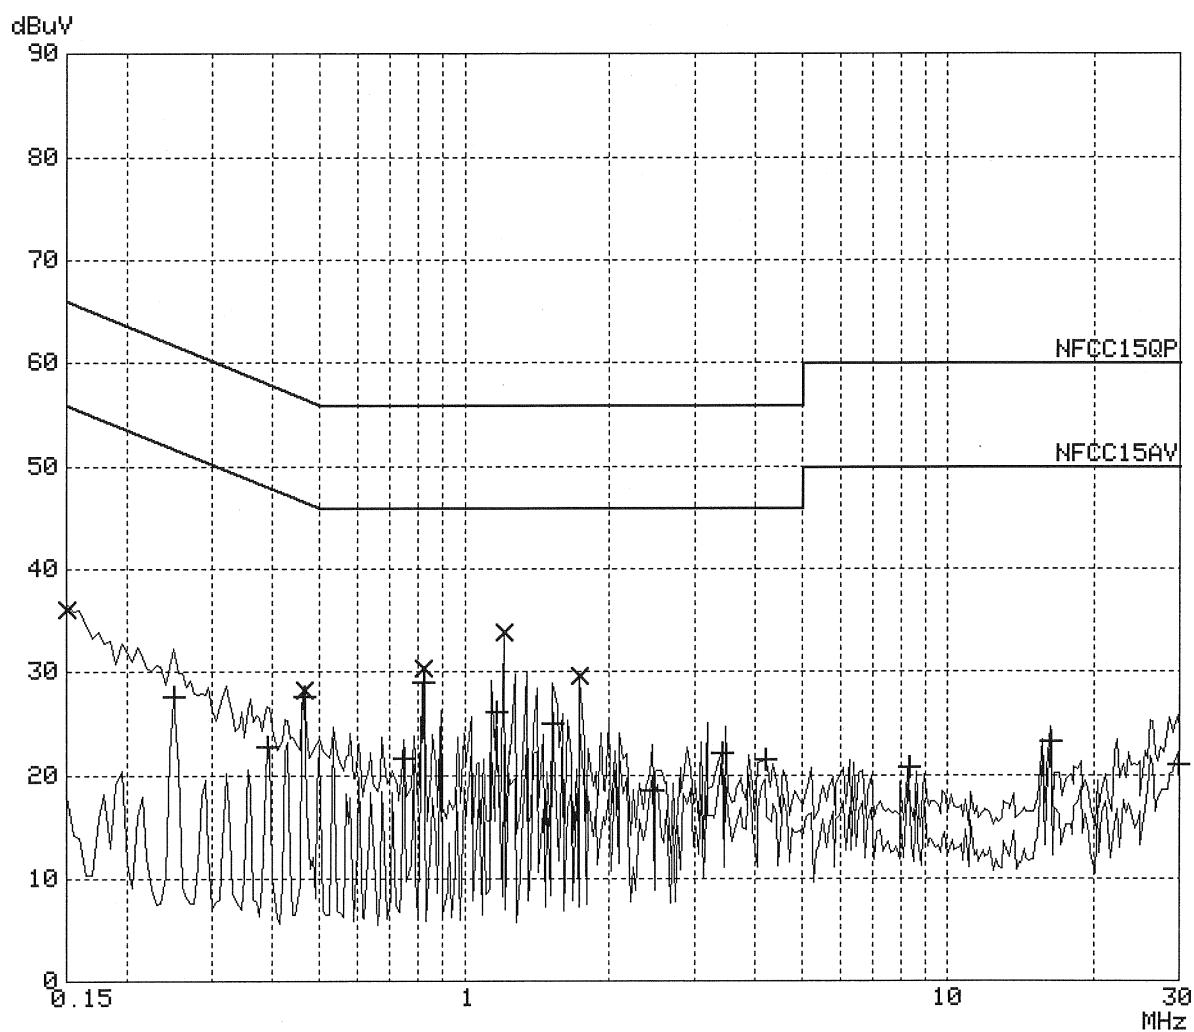

File name: J021512C.RES
Date: 16. Mar 05 12:52

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase -	PE -
0.15000	36.1	-29.9	L1	gnd
0.46500	28.3	-28.3	L1	gnd
0.82000	30.4	-25.5	L1	gnd
1.21000	33.8	-22.1	L1	gnd
1.74000	29.7	-26.2	L1	gnd

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase -	PE -
0.25000	27.6	-24.1	L1	gnd
0.39000	22.8	-25.2	L1	gnd
0.46500	27.7	-18.9	L1	gnd
0.75000	21.7	-24.2	L1	gnd
0.82000	29.1	-16.8	L1	gnd
1.17000	26.2	-19.7	L1	gnd
1.53000	25.1	-20.8	L1	gnd
2.45000	18.6	-27.3	L1	gnd
3.41000	22.2	-23.7	N	gnd
4.19000	21.5	-24.4	N	gnd
8.30000	20.8	-29.1	N	gnd
16.28000	23.3	-26.6	N	gnd
29.97000	21.1	-28.8	L1	gnd

* limit exceeded