

**CFR 47 FCC PART 15 SUBPART C**

**TEST REPORT**

*For*

**Smart Ceiling insert Fan**

**MODEL NUMBER: BF1112, BF1112\*\*\*\***

**REPORT NUMBER: 4791253455-1-RF-2**

**ISSUE DATE: April 19, 2024**

**FCC ID: 2AB2Q-BF1112**

*Prepared for*

**LEEDARSON LIGHTING CO., LTD**

**Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**

## Revision History

Rev.	Issue Date	Revisions	Revised By
V0	April 19, 2024	Initial Issue	

### Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC 15.203	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013 Clause 6.2	FCC Part 15.207	Pass
Conducted Output Power	ANSI C63.10-2013 Clause 7.8.5	FCC 15.247 (b) (1)	Pass
20 dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013 Clause 6.9.2	FCC 15.247 (a) (1)	Pass
Carrier Hopping Channel Separation	ANSI C63.10-2013 Clause 7.8.2	FCC 15.247 (a) (1)	Pass
Number of Hopping Frequency	ANSI C63.10-2013 Clause 7.8.3	15.247 (a) (1) III	Pass
Time of Occupancy (Dwell Time)	ANSI C63.10-2013 Clause 7.8.4	15.247 (a) (1) III	Pass
Conducted Bandedge and Spurious Emission	ANSI C63.10-2013 Clause 6.10.4 & Clause 7.8.8	FCC 15.247 (d)	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013 Clause 6.3 & 6.5 & 6.6	FCC 15.247 (d) FCC 15.209 FCC 15.205	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

\*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C> when <Simple Acceptance> decision rule is applied.

## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>6</b>
<b>2. TEST METHODOLOGY</b> .....	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	8
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	8
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>9</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	9
5.2. <i>CHANNEL LIST</i> .....	9
5.3. <i>MAXIMUM POWER</i> .....	9
5.4. <i>TEST CHANNEL CONFIGURATION</i> .....	10
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i> .....	10
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	11
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST</i> .....	12
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED</b> .....	<b>13</b>
<b>7. ANTENNA PORT TEST RESULTS</b> .....	<b>16</b>
7.1. <i>CONDUCTED OUTPUT POWER</i> .....	16
7.2. <i>20 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH</i> .....	17
7.3. <i>CARRIER HOPPING CHANNEL SEPARATION</i> .....	19
7.4. <i>NUMBER OF HOPPING FREQUENCY</i> .....	21
7.5. <i>TIME OF OCCUPANCY (DWELL TIME)</i> .....	23
7.6. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSION</i> .....	25
7.7. <i>DUTY CYCLE</i> .....	27
<b>8. RADIATED TEST RESULTS</b> .....	<b>28</b>
8.1. <i>RESTRICTED BANDEDGE</i> .....	36
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)</i> .....	45
8.3. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)</i> .....	51
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i> .....	63
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i> .....	66
8.6. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i> .....	68
8.7. <i>SPURIOUS EMISSIONS FOR SIMULTANEOUS TRANSMISSION</i> .....	70
<b>9. ANTENNA REQUIREMENT</b> .....	<b>78</b>
<b>10. AC POWER LINE CONDUCTED EMISSION</b> .....	<b>79</b>

<b>11.</b>	<b>TEST DATA .....</b>	<b>83</b>
11.1.	<i>APPENDIX A: 20DB EMISSION BANDWIDTH.....</i>	83
11.1.1.	Test Result.....	83
11.1.2.	Test Graphs .....	84
11.2.	<i>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....</i>	86
11.2.1.	Test Result.....	86
11.2.2.	Test Graphs .....	87
11.3.	<i>APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER .....</i>	89
11.3.1.	Test Result.....	89
11.4.	<i>APPENDIX D: CARRIER FREQUENCY SEPARATION.....</i>	90
11.4.1.	Test Result.....	90
11.4.2.	Test Graphs .....	91
11.5.	<i>APPENDIX E: TIME OF OCCUPANCY .....</i>	92
11.5.1.	Test Result.....	92
11.5.2.	Test Graphs .....	93
11.6.	<i>APPENDIX F: NUMBER OF HOPPING CHANNELS .....</i>	95
11.6.1.	Test Result.....	95
11.6.2.	Test Graphs .....	96
11.7.	<i>APPENDIX G: BAND EDGE MEASUREMENTS .....</i>	97
11.7.1.	Test Result.....	97
11.7.2.	Test Graphs .....	98
11.8.	<i>APPENDIX H: CONDUCTED SPURIOUS EMISSION.....</i>	101
11.8.1.	Test Result.....	101
11.8.2.	Test Graphs .....	102
11.9.	<i>APPENDIX I: DUTY CYCLE.....</i>	108
11.9.1.	Test Result.....	108
11.9.2.	Test Graphs .....	109

# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: LEEDARSON LIGHTING CO., LTD  
 Address: Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China

## Manufacturer Information


Company Name: LEEDARSON LIGHTING CO., LTD  
 Address: Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China

## EUT Information

EUT Name: Smart Ceiling insert Fan  
 Model: BF1112  
 Series Model: BF1112\*\*\*\*  
 Model Difference: "\*" in the model represents any letter or number, representing different colors, surface treatment processes, sales channels  
 Brand: COMMERCIAL ELECTRIC  
 Sample Received Date: March 28, 2024  
 Sample Status: Normal  
 Sample ID: 7065254  
 Date of Tested: March 28, 2024 to April 19, 2024

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	Pass

Prepared By:



Fanny Huang  
 Engineer Project Associate

Checked By:



Denny Huang  
 Senior Project Engineer

Approved By:



Stephen Guo  
 Operations Manager

## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C , KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2,ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155</p>
---------------------------	--

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People’s Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
20dB Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Carrier Frequency Separation	±1.9%
Maximum Conducted Output Power	±0.743 dB
Number of Hopping Channel	±1.9%
Time of Occupancy	±0.028%
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	Smart Ceiling insert Fan
Model	BF1112
Series Model	BF1112****
Model Difference	“**” in the model represents any letter or number, representing different colors, surface treatment processes, sales channels.

Frequency Range:	2402 MHz to 2480 MHz
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Type of Modulation:	GFSK, $\Pi$ /4DQPSK
Normal Test Voltage:	AC 120 V, 60 Hz

### 5.2. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

### 5.3. MAXIMUM POWER

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
GFSK	2402 ~ 2480	0-78[79]	1.43	5.69
$\Pi$ /4DQPSK	2402 ~ 2480	0-78[79]	1.96	6.22

## 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK-DH5	CH 00(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
Π/4DQPSK - 2DH5	CH 00(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
GFSK-DH5	Hopping	
Π/4DQPSK - 2DH5	Hopping	

## PACKET TYPE CONFIGURATION

Test Mode	Packet Type	Setting (Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
Π/4-DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679

## 5.5. THE WORSE CASE POWER SETTING PARAMETER

### WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate (Mbps)
BR	FHSS	GFSK	1Mbit/s
EDR	FHSS	Π/4DQPSK	3Mbit/s

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		FCC_assist_1.0.2.2		
Modulation Type	Transmit Antenna Number	Test Software setting value		
		CH 00	CH 39	CH 78
GFSK	1	10	10	10
Π/4DQPSK	1	10	10	10

## 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	Internal antenna	4.26

Test Mode	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
Π/4DQPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note:

1.BT&BLE&WIFI 2.4G can transmit simultaneously. (declared by client)

## 5.7. SUPPORT UNITS FOR SYSTEM TEST

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E42-80	/
2	UART	/	/	/

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

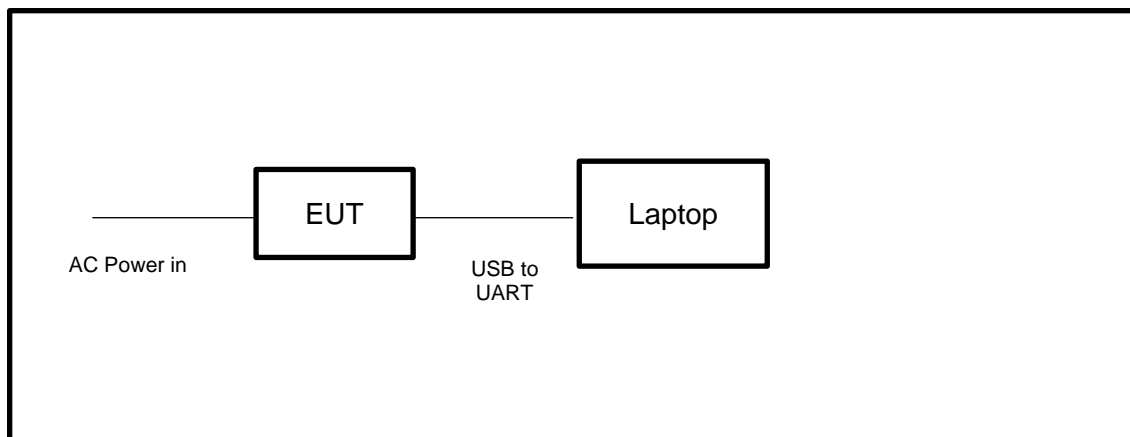

## 6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.25,2024	Mar.24,2025
Vector Signal Generator	R&S	SMBV100A	261637	Oct.12, 2023	Oct.11, 2024
Signal Generator	R&S	SMB100A	178553	Oct.12, 2023	Oct.11, 2024
Signal Analyzer	R&S	FSV40	101118	Oct.12, 2023	Oct.11, 2024
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.12, 2023	Oct.11, 2024
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.25, 2023	Sep.24, 2024
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.12, 2023	Oct.11, 2024
DC power supply	Keysight	E3642A	MY55159130	Oct.12, 2023	Oct.11, 2024
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.12, 2023	Oct.11, 2024
Attenuator	Aglient	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024
RF Control Unit	Tonscend	JS0806-2	23B80620666	Mar.25,2024	Mar.24,2025
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.13, 2023	Oct.12, 2024
Two-Line V-Network	R&S	ENV216	101983	Oct.13, 2023	Oct.12, 2024
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.13, 2023	Oct.12, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.12, 2023	Oct.11, 2024
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.12, 2023	Oct.11, 2024
EMI Measurement Receiver	R&S	ESR26	101377	Oct.12, 2023	Oct.11, 2024
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.12, 2023	Oct.11, 2024
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.12, 2023	Oct.11, 2024
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.12, 2023	Oct.11, 2024
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.12, 2023	Oct.11, 2024
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.12, 2023	Oct.11, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

<b>Other Instrument</b>					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.21, 2023	Oct.20, 2024
Barometer	Yiyi	Baro	N/A	Oct.19, 2023	Oct.18, 2024
Attenuator	Agilent	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024

## 7. ANTENNA PORT TEST RESULTS

### 7.1. CONDUCTED OUTPUT POWER

#### LIMITS


CFR 47 FCC Part15 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30 dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel: 125 mW or 21 dBm	2400-2483.5

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	54%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

#### TEST DATE / ENGINEER

Test Date	April 10, 2024	Test By	Walker Yuan
-----------	----------------	---------	-------------

#### TEST RESULTS

Please refer to section "Test Data" - Appendix C



## 7.2. 20 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

CFR 47FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1)	20 dB Bandwidth	None; for reporting purposes only.	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 6.9.2.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Bandwidth: approximately 3×RBW For 99 % Occupied Bandwidth: ≥ 3×RBW
Span	Approximately 2 to 3 times the 20dB bandwidth
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99 % occupied bandwidth and 20 dB Bandwidth.

### TEST SETUP

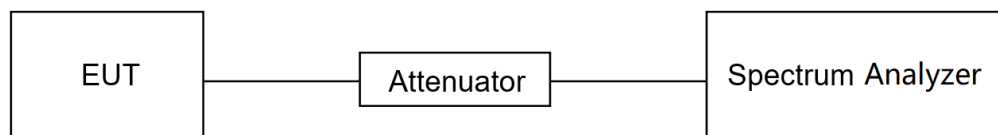

**TEST ENVIRONMENT**

Temperature	23.2°C	Relative Humidity	54%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

**TEST DATE / ENGINEER**

Test Date	April 10, 2024	Test By	Walker Yuan
-----------	----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix A&B

### 7.3. CARRIER HOPPING CHANNEL SEPARATION

#### LIMITS

CFR 47 FCC Part15 (15.247)			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1)	Carrier Frequency Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5

#### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	$\geq$ RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

#### TEST SETUP

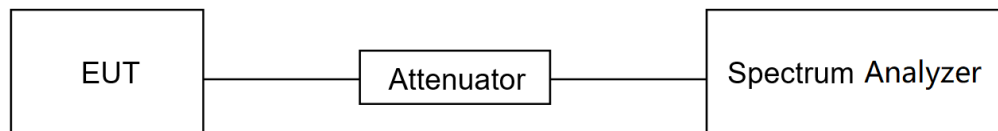

**TEST ENVIRONMENT**

Temperature	23.2°C	Relative Humidity	54%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

**TEST DATE / ENGINEER**

Test Date	April 10, 2024	Test By	Walker Yuan
-----------	----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix D

## 7.4. NUMBER OF HOPPING FREQUENCY

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III	Number of Hopping Frequency	at least 15 hopping channels

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 7.8.3.

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	$\geq$ RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

### TEST SETUP

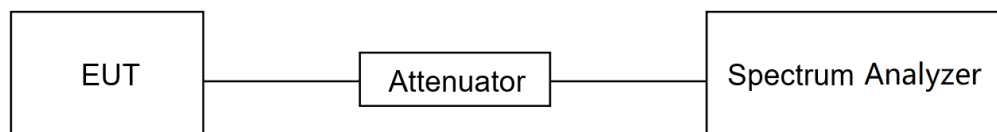

**TEST ENVIRONMENT**

Temperature	23.2°C	Relative Humidity	54%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

**TEST DATE / ENGINEER**

Test Date	April 10, 2024	Test By	Fanny Huang
-----------	----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix F

## 7.5. TIME OF OCCUPANCY (DWELL TIME)

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.4.

Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	≥RBW
Span	Zero span, centered on a hopping channel
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel

Use the marker-delta function to determine the transmit time per hop (Burst Width). If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

For FHSS Mode (79 Channel):

DH1/3DH1 Dwell Time:  $\text{Burst Width} * (1600/2) * 31.6 / (\text{channel number})$

DH3/3DH3 Dwell Time:  $\text{Burst Width} * (1600/4) * 31.6 / (\text{channel number})$

DH5/3DH5 Dwell Time:  $\text{Burst Width} * (1600/6) * 31.6 / (\text{channel number})$


For AFHSS Mode (20 Channel):

DH1/3DH1 Dwell Time:  $\text{Burst Width} * (800/2) * 8 / (\text{channel number})$

DH3/3DH3 Dwell Time:  $\text{Burst Width} * (800/4) * 8 / (\text{channel number})$

DH5/3DH5 Dwell Time:  $\text{Burst Width} * (800/6) * 8 / (\text{channel number})$

### TEST SETUP

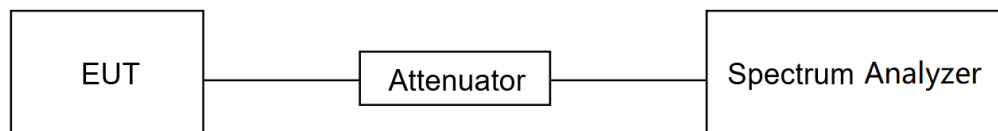

**TEST ENVIRONMENT**

Temperature	23.2°C	Relative Humidity	54%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

**TEST DATE / ENGINEER**

Test Date	April 10, 2024	Test By	Walker Yuan
-----------	----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix E



## 7.6. CONDUCTED BANDEGE AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.6 and 7.8.8.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum

### TEST SETUP

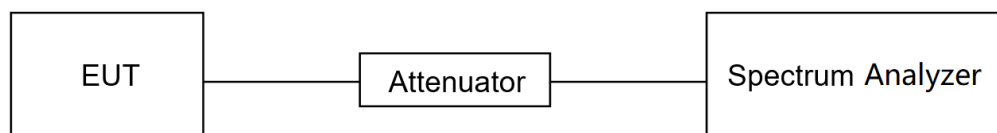

**TEST ENVIRONMENT**

Temperature	23.2°C	Relative Humidity	54%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

**TEST DATE / ENGINEER**

Test Date	April 10, 2024	Test By	Walker Yuan
-----------	----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix G&H

## 7.7. DUTY CYCLE


### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

### TEST SETUP

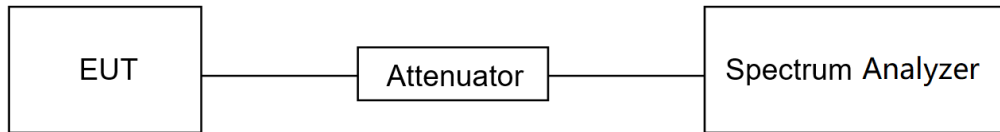

### TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	54%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

### TEST DATE / ENGINEER

Test Date	April 10, 2024	Test By	Walker Yuan
-----------	----------------	---------	-------------

### TEST RESULTS

Please refer to section "Test Data" - Appendix I

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## **TEST PROCEDURE**

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made

to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.7. ON TIME AND DUTY CYCLE.

Note 1: The manufacturer has recommended that the EUT only be used in the desktop (horizontal) orientation; therefore, all radiated testing was performed in desktop orientation.



For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5.  $\text{dBuA/m} = \text{dBuV/m} - 20\text{Log}_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


### TEST SETUP

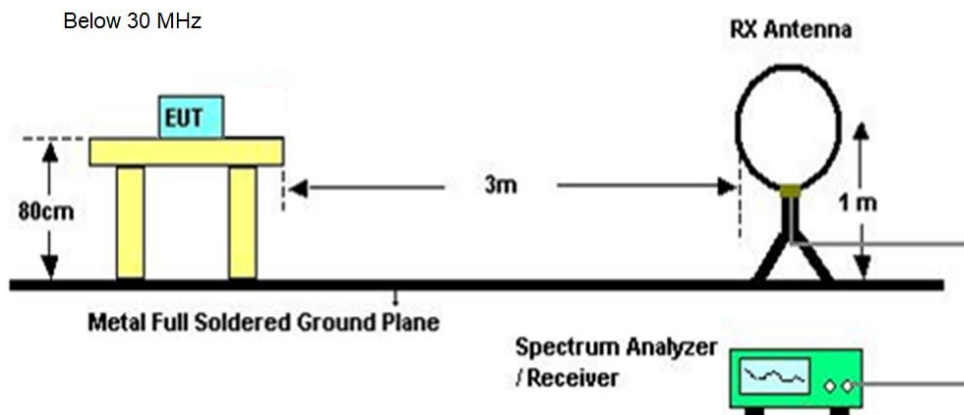

Below 1 GHz and above 30 MHz

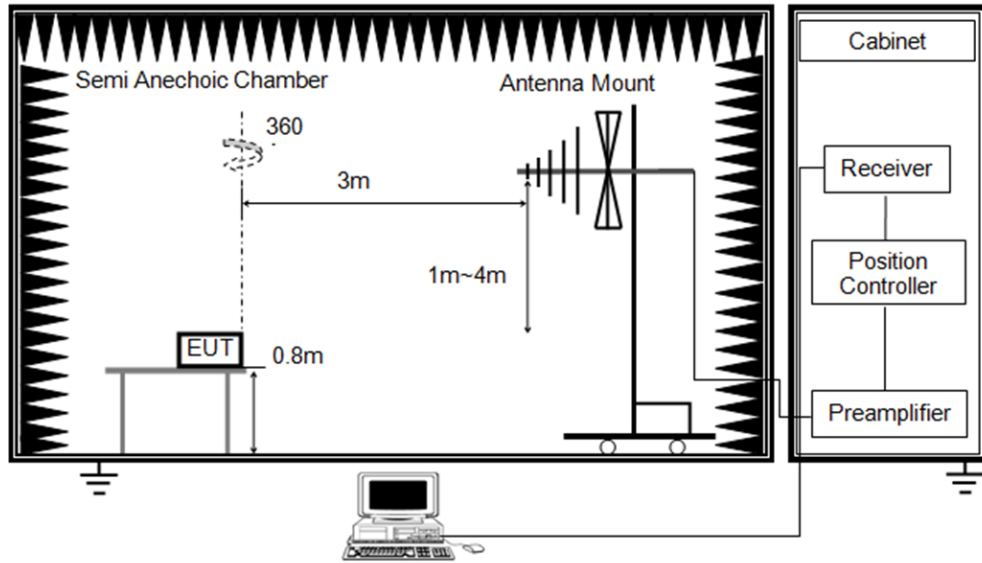

Above 1 GHz

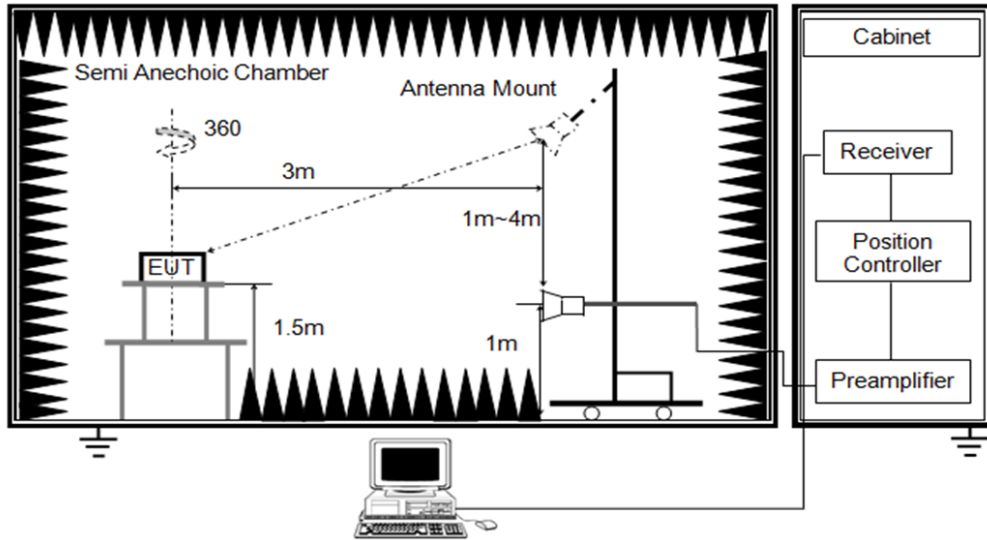

**TEST ENVIRONMENT**

Temperature	23.5°C	Relative Humidity	55%
Atmosphere Pressure	101kPa	Test Voltage	


**TEST DATE / ENGINEER**

Test Date	April 17, 2024	Test By	Mason Wang
-----------	----------------	---------	------------

**TEST RESULTS**


### 8.1. RESTRICTED BANDEDGE

Test Mode:	GFSK PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

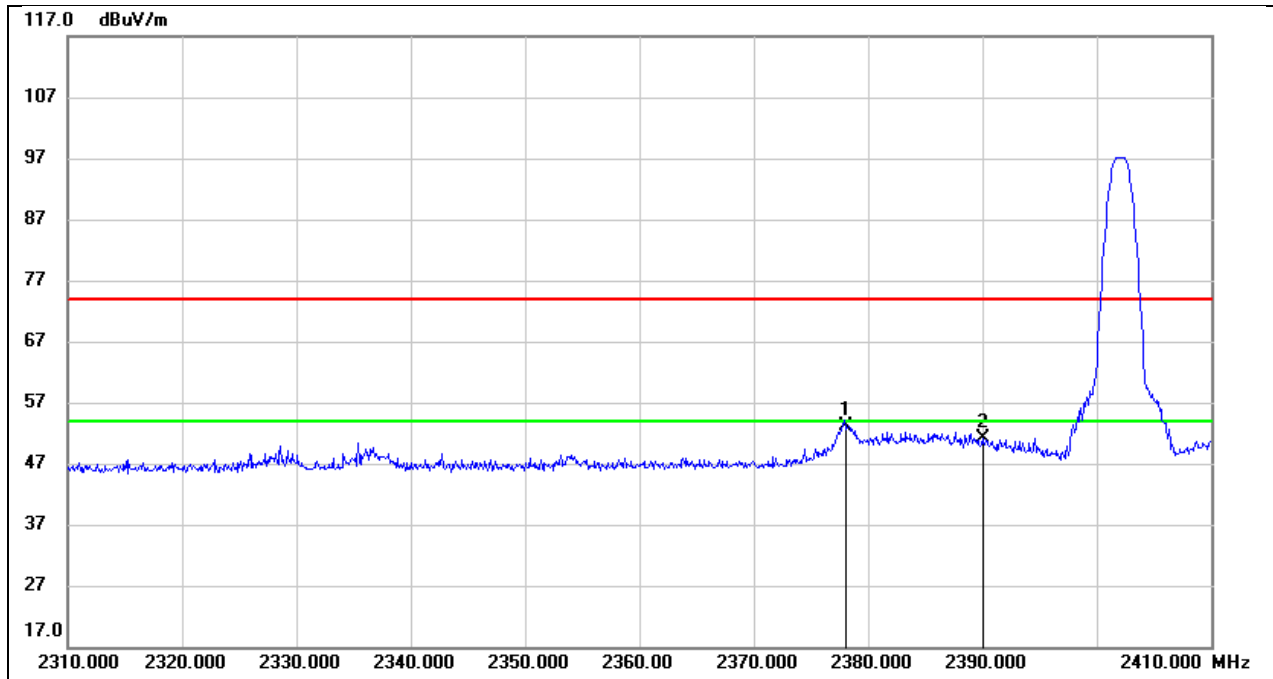


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.000	20.32	32.86	53.18	74.00	-20.82	peak
2	2390.000	18.13	32.92	51.05	74.00	-22.95	peak

Test Mode:	GFSK AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

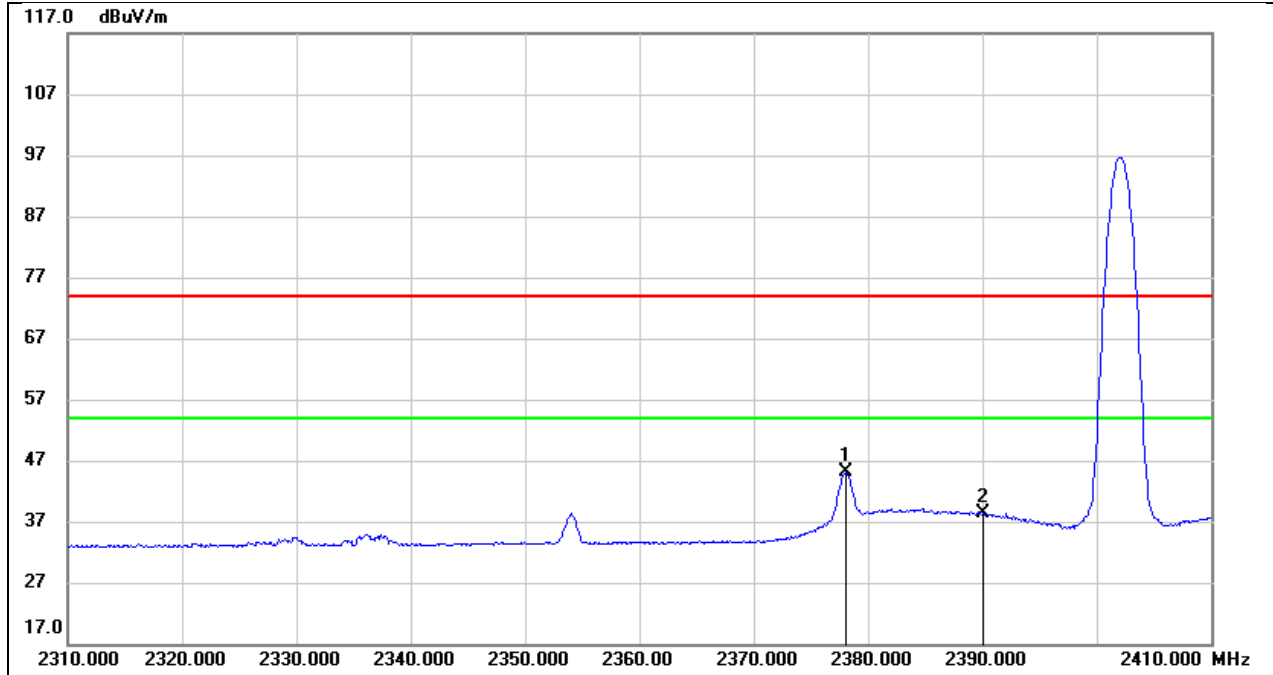


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.000	12.22	32.86	45.08	54.00	-8.92	AVG
2	2390.000	5.48	32.92	38.40	54.00	-15.60	AVG

Test Mode:	GFSK PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

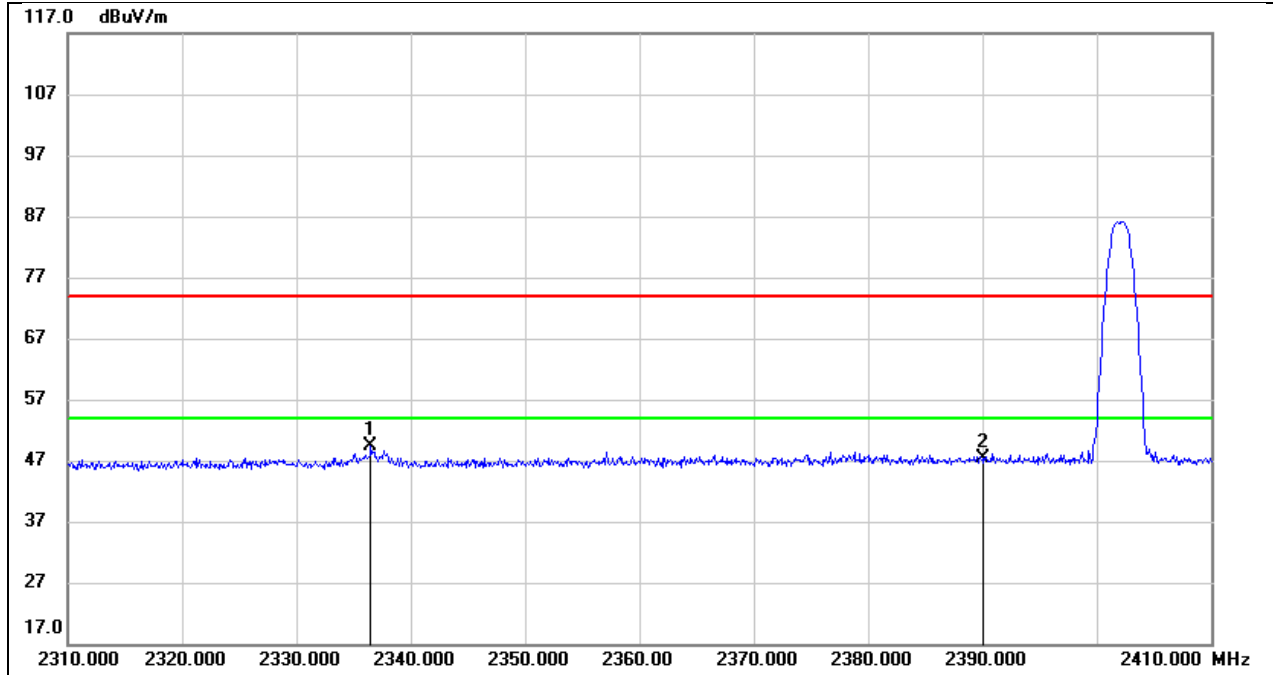


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2336.500	16.74	32.63	49.37	74.00	-24.63	peak
2	2390.000	14.53	32.92	47.45	74.00	-26.55	peak

Test Mode:	GFSK PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

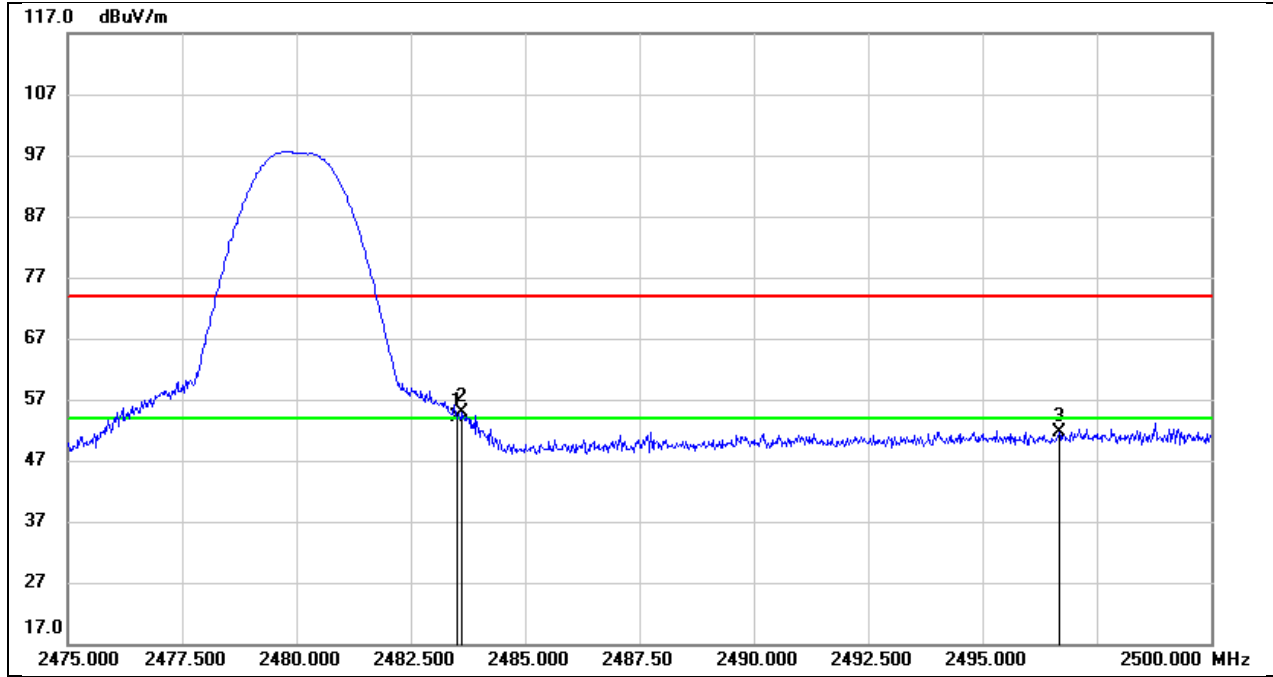

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	21.14	32.94	54.08	74.00	-19.92	peak
2	2483.625	22.02	32.94	54.96	74.00	-19.04	peak
3	2496.675	18.78	32.93	51.71	74.00	-22.29	peak


Test Mode:	GFSK AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

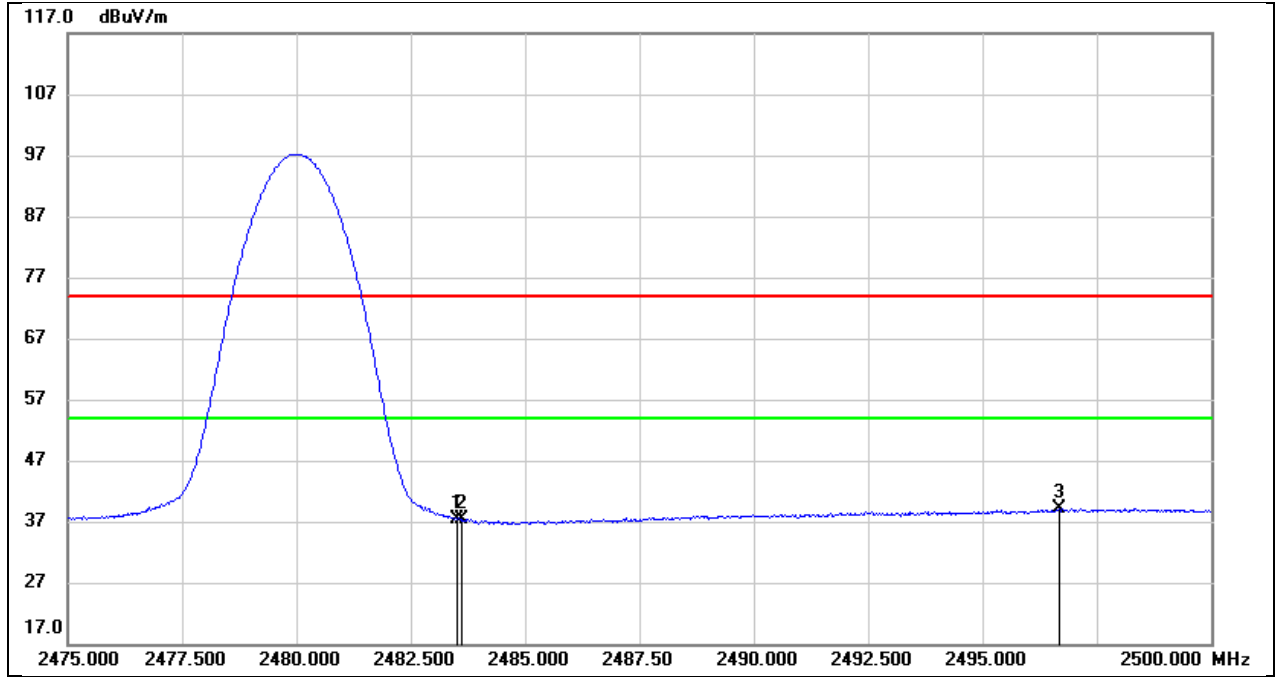

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	4.37	32.94	37.31	54.00	-16.69	AVG
2	2483.625	4.38	32.94	37.32	54.00	-16.68	AVG
3	2496.675	6.17	32.93	39.10	54.00	-14.90	AVG




Test Mode:	Π/4DQPSK PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

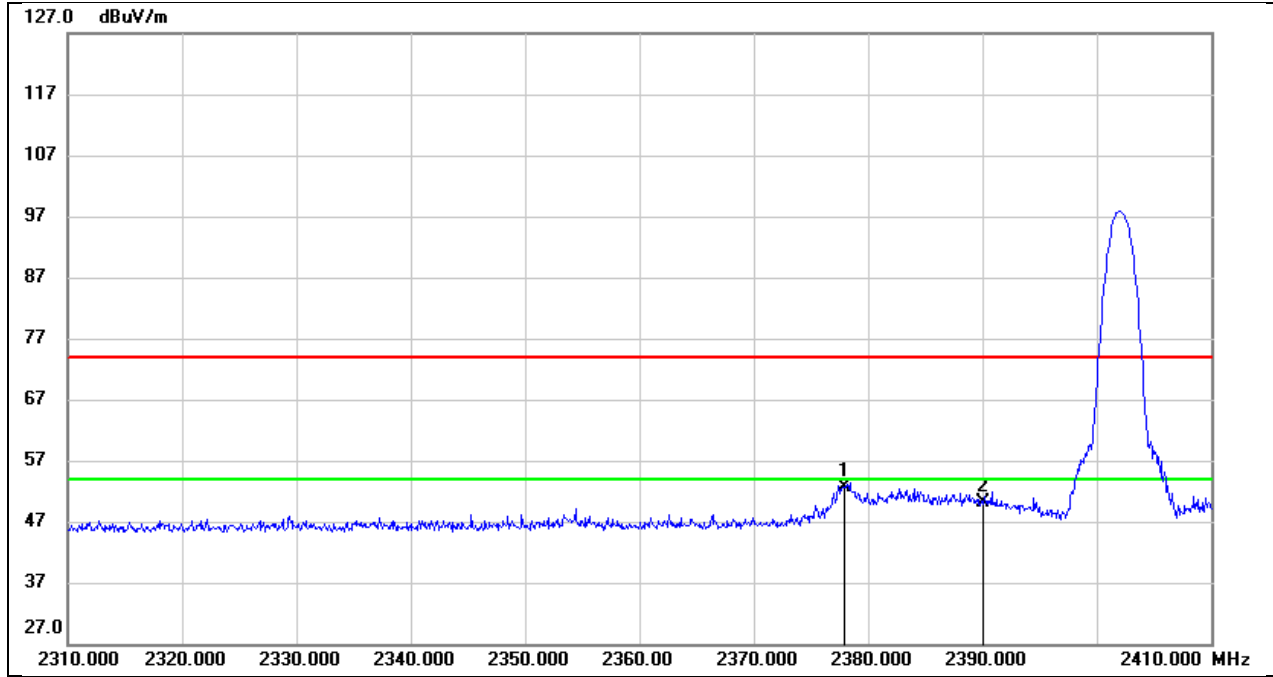


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.900	19.86	32.86	52.72	74.00	-21.28	peak
2	2390.000	17.31	32.92	50.23	74.00	-23.77	peak

Test Mode:	Π/4DQPSK AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

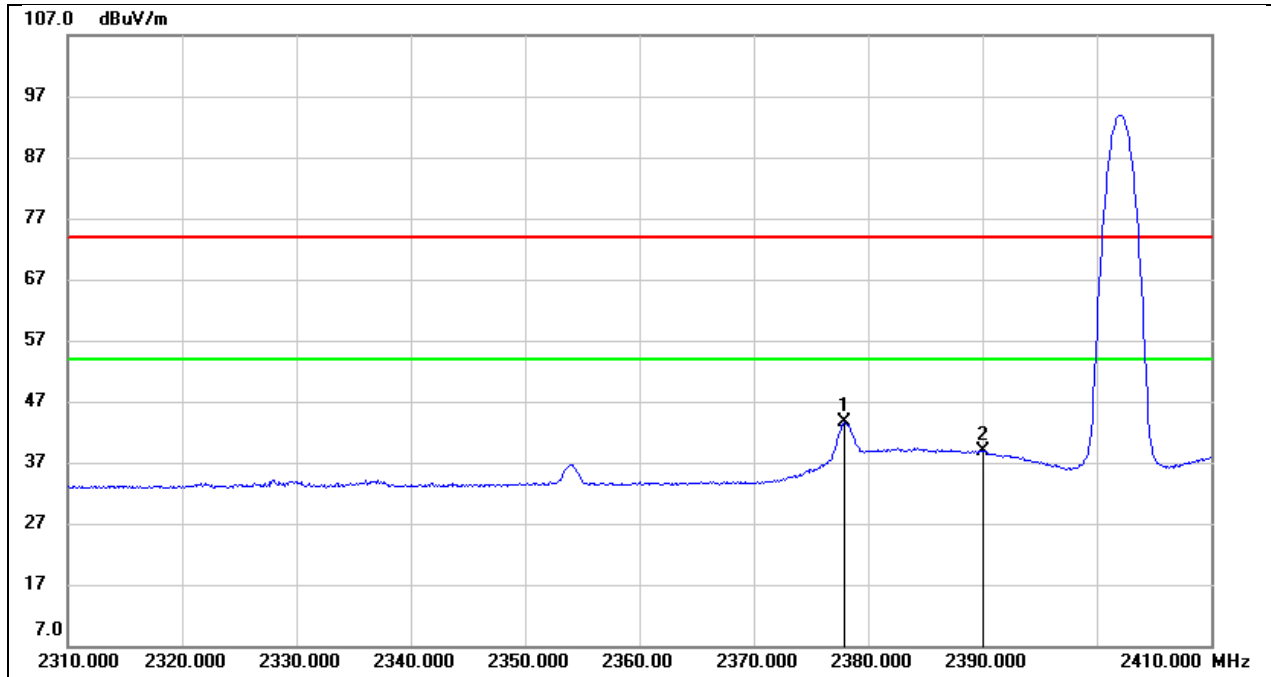


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.900	10.65	32.86	43.51	54.00	-10.49	AVG
2	2390.000	6.03	32.92	38.95	54.00	-15.05	AVG

Test Mode:	$\Pi/4$ DQPSK PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

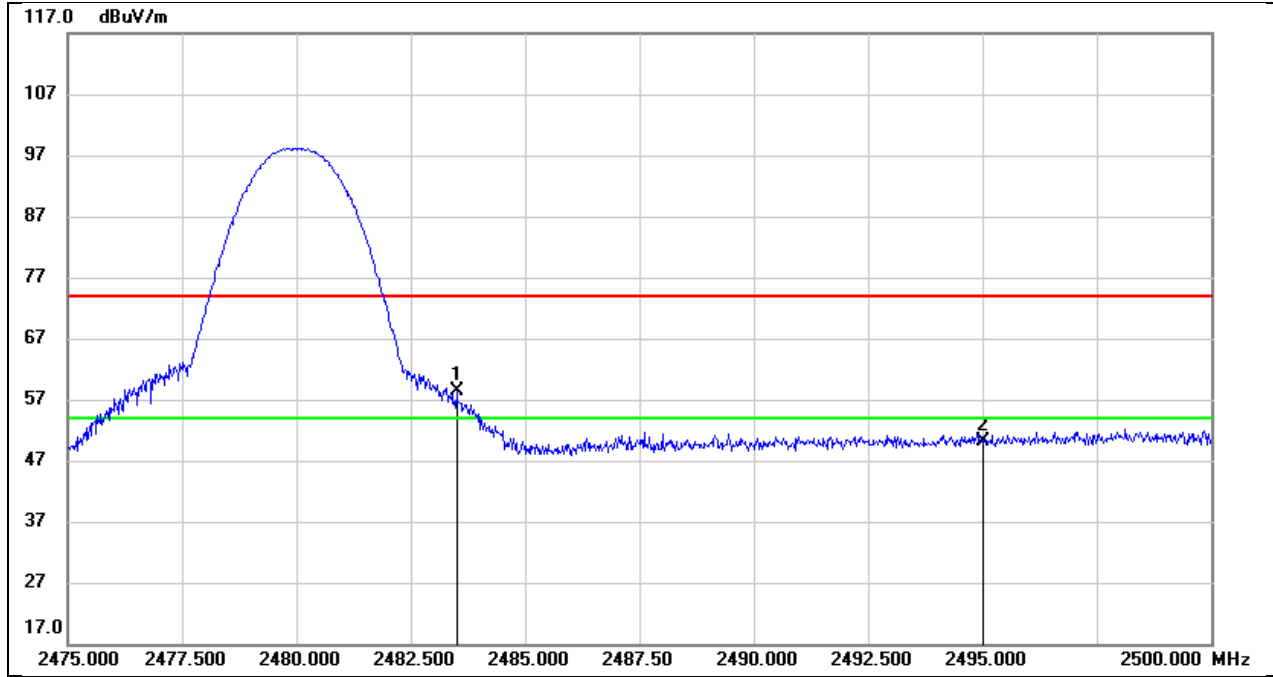

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	25.43	32.94	58.37	74.00	-15.63	peak
2	2495.025	17.31	32.94	50.25	74.00	-23.75	peak


Test Mode:	$\Pi/4$ DQPSK PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

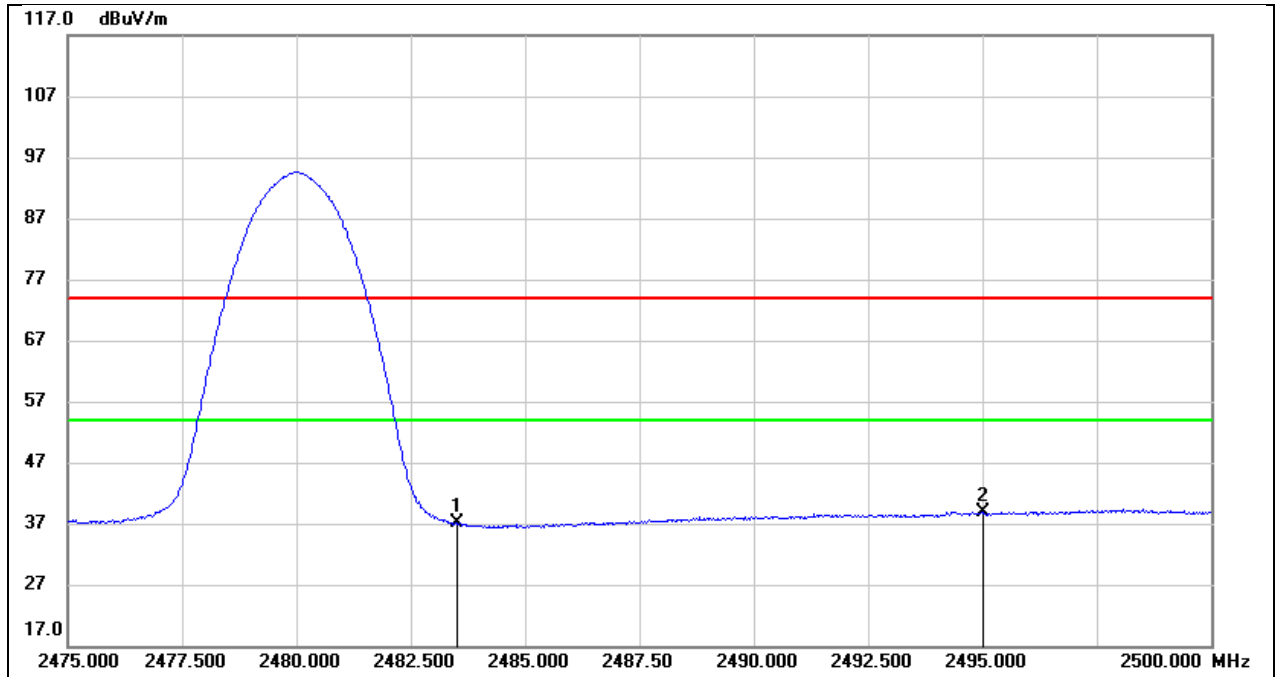

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	4.12	32.94	37.06	54.00	-16.94	AVG
2	2495.025	6.02	32.94	38.96	54.00	-15.04	AVG


## 8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

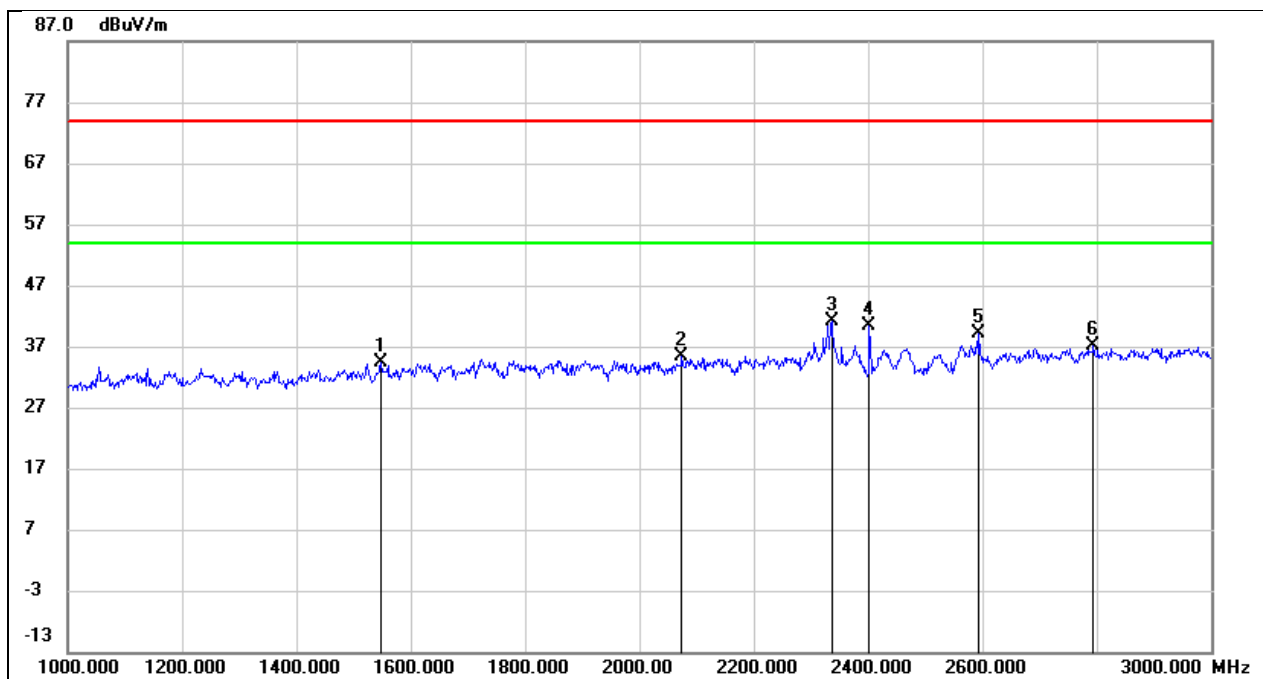


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1548.000	45.79	-11.46	34.33	74.00	-39.67	peak
2	2074.000	44.98	-9.66	35.32	74.00	-38.68	peak
3	2336.000	49.10	-7.87	41.23	74.00	-32.77	peak
4	2402.000	47.73	-7.40	40.33	/	/	fundamental
5	2594.000	46.80	-7.66	39.14	74.00	-34.86	peak
6	2794.000	44.04	-6.82	37.22	74.00	-36.78	peak

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

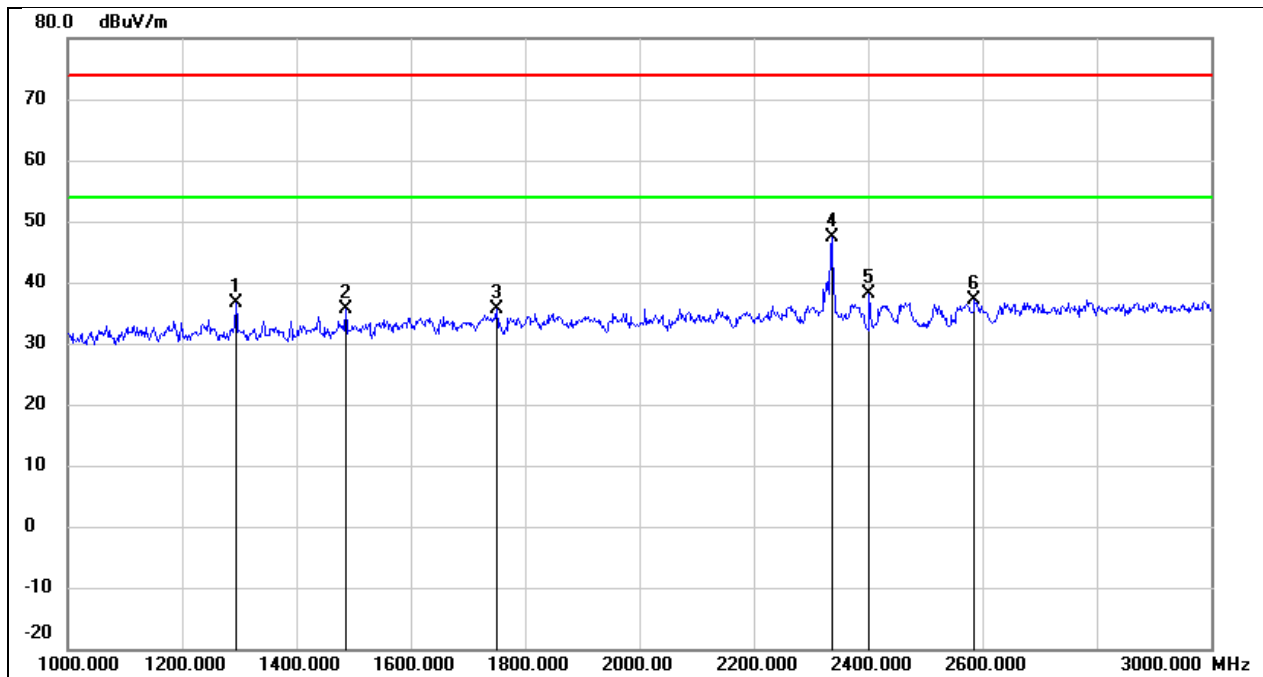


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1294.000	49.19	-12.53	36.66	74.00	-37.34	peak
2	1486.000	47.36	-11.84	35.52	74.00	-38.48	peak
3	1750.000	46.20	-10.47	35.73	74.00	-38.27	peak
4	2336.000	55.30	-7.87	47.43	74.00	-26.57	peak
5	2402.000	45.58	-7.40	38.18	/	/	fundamental
6	2586.000	44.72	-7.66	37.06	74.00	-36.94	peak

Test Mode:	GFSK	Frequency(MHz):	2441
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

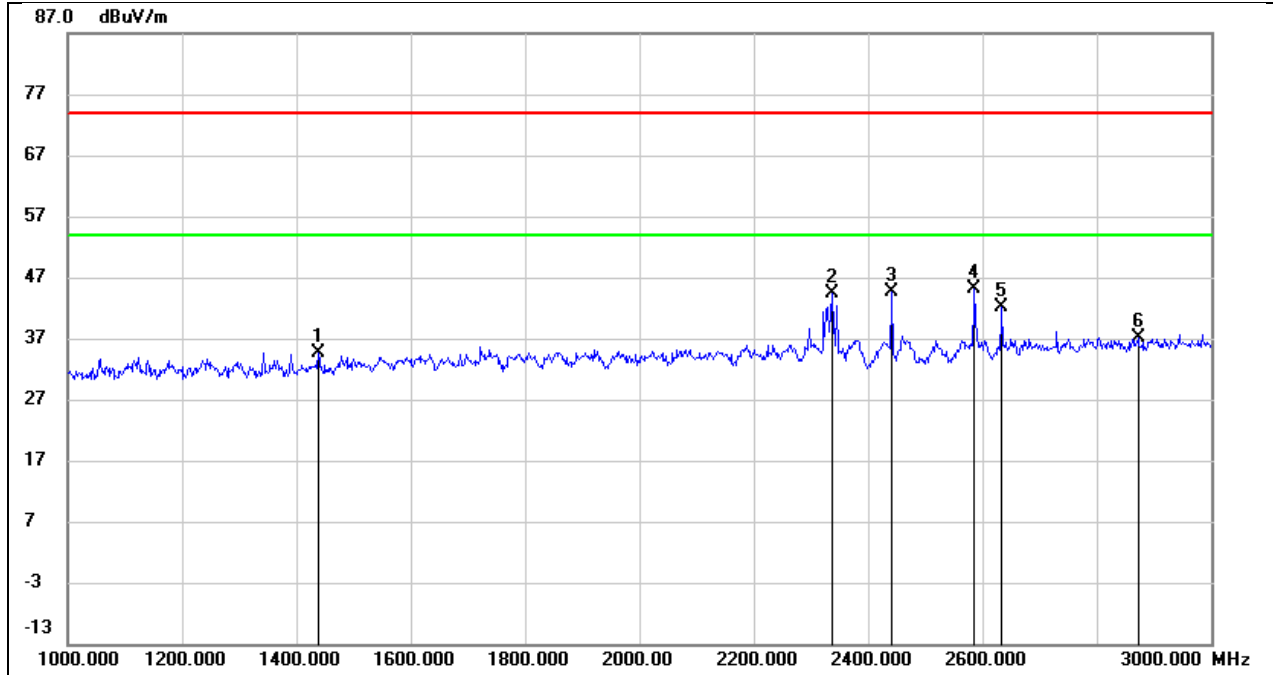

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1438.000	46.79	-12.15	34.64	74.00	-39.36	peak
2	2336.000	52.19	-7.87	44.32	74.00	-29.68	peak
3	2441.000	51.96	-7.44	44.52	/	/	fundamental
4	2586.000	52.71	-7.66	45.05	74.00	-28.95	peak
5	2634.000	49.76	-7.54	42.22	74.00	-31.78	peak
6	2872.000	43.64	-6.47	37.17	74.00	-36.83	peak


Test Mode:	GFSK	Frequency(MHz):	2441
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

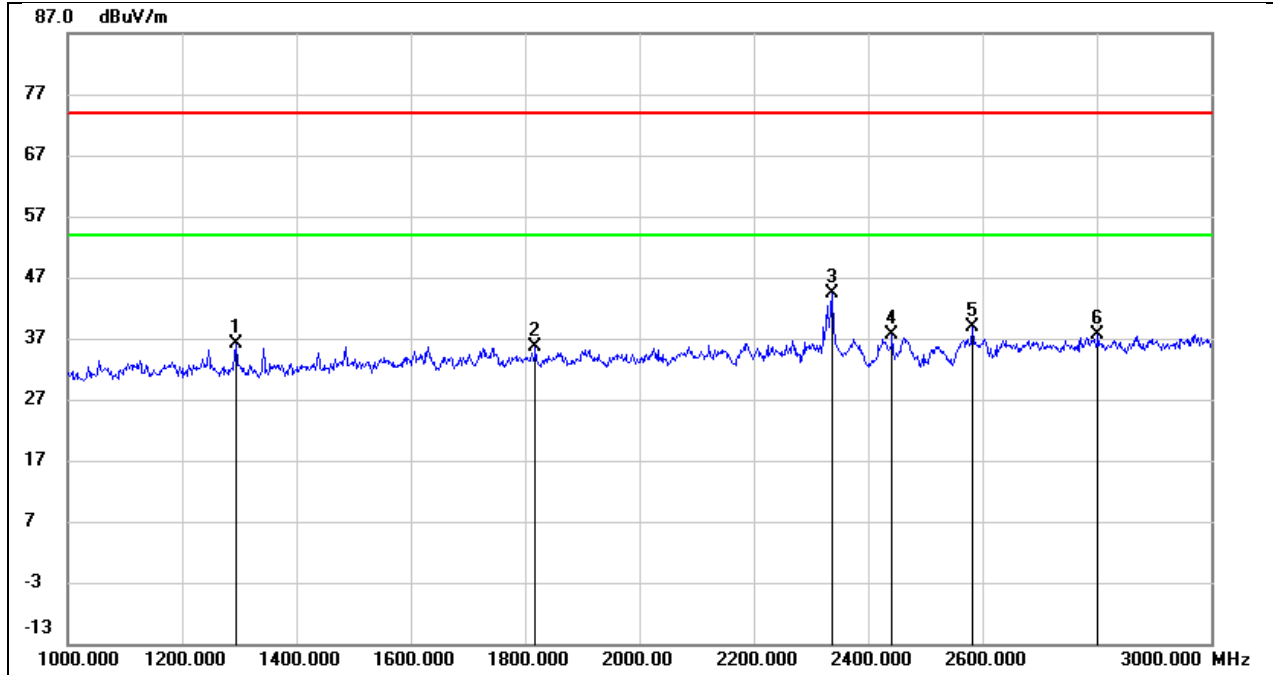

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1294.000	48.65	-12.53	36.12	74.00	-37.88	peak
2	1818.000	45.97	-10.23	35.74	74.00	-38.26	peak
3	2336.000	52.32	-7.87	44.45	74.00	-29.55	peak
4	2441.000	44.99	-7.44	37.55	/	/	fundamental
5	2582.000	46.45	-7.64	38.81	74.00	-35.19	peak
6	2802.000	44.35	-6.80	37.55	74.00	-36.45	peak




Test Mode:	GFSK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

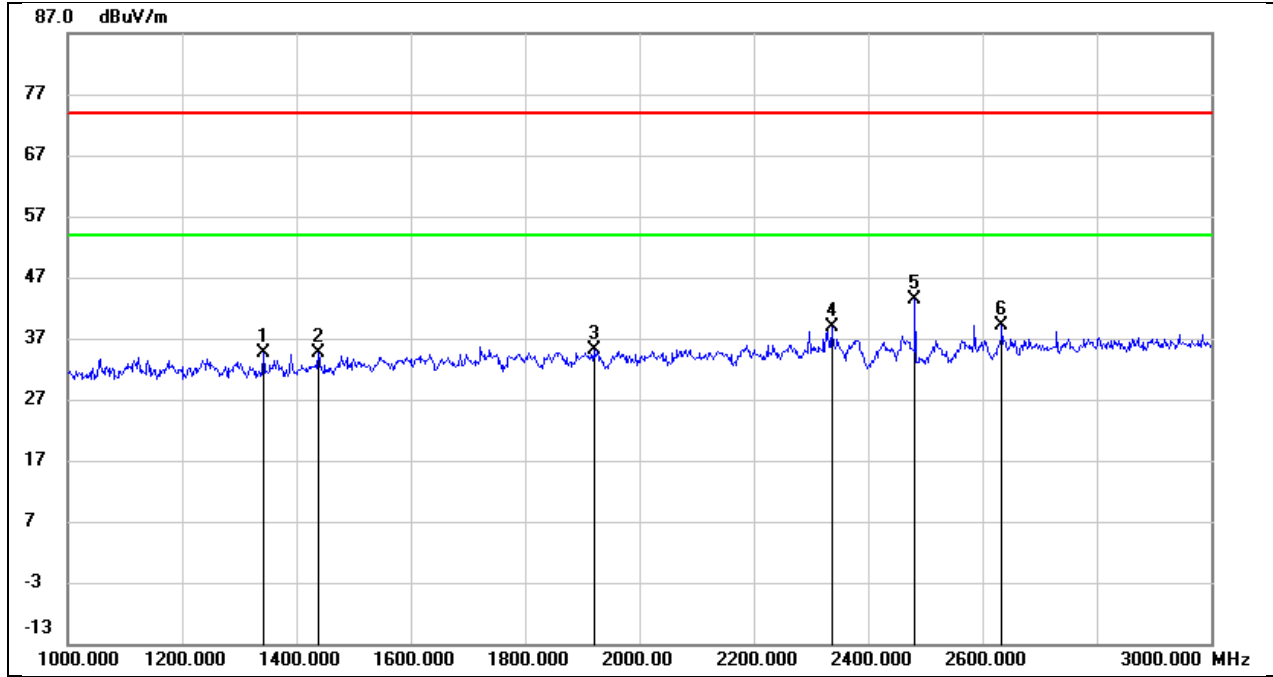

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1342.000	47.18	-12.48	34.70	74.00	-39.30	peak
2	1438.000	46.79	-12.15	34.64	74.00	-39.36	peak
3	1920.000	45.24	-10.16	35.08	74.00	-38.92	peak
4	2336.000	46.69	-7.87	38.82	74.00	-35.18	peak
5	2480.000	50.81	-7.47	43.34	/	/	fundamental
6	2634.000	46.76	-7.54	39.22	74.00	-34.78	peak


Test Mode:	GFSK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

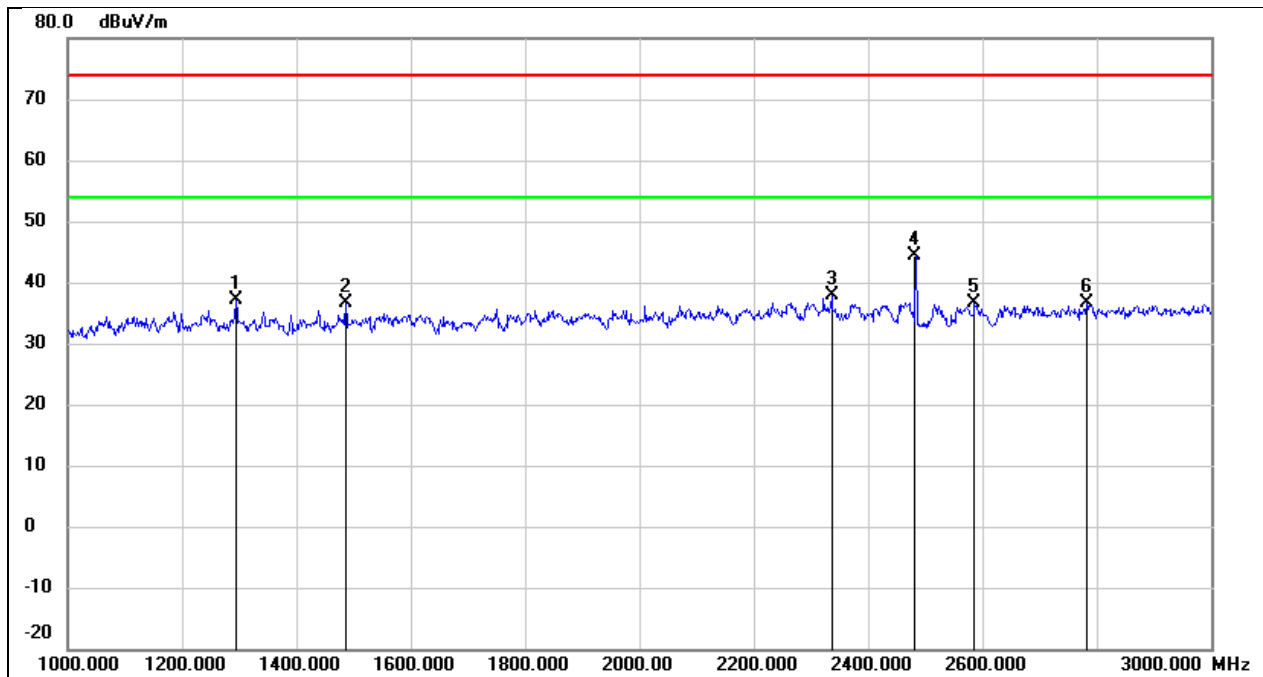

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1294.000	49.69	-12.53	37.16	74.00	-36.84	peak
2	1486.000	48.36	-11.84	36.52	74.00	-37.48	peak
3	2336.000	45.80	-7.87	37.93	74.00	-36.07	peak
4	2480.000	51.73	-7.47	44.26	/	/	fundamental
5	2586.000	44.22	-7.66	36.56	74.00	-37.44	peak
6	2782.000	43.41	-6.87	36.54	74.00	-37.46	peak


### 8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

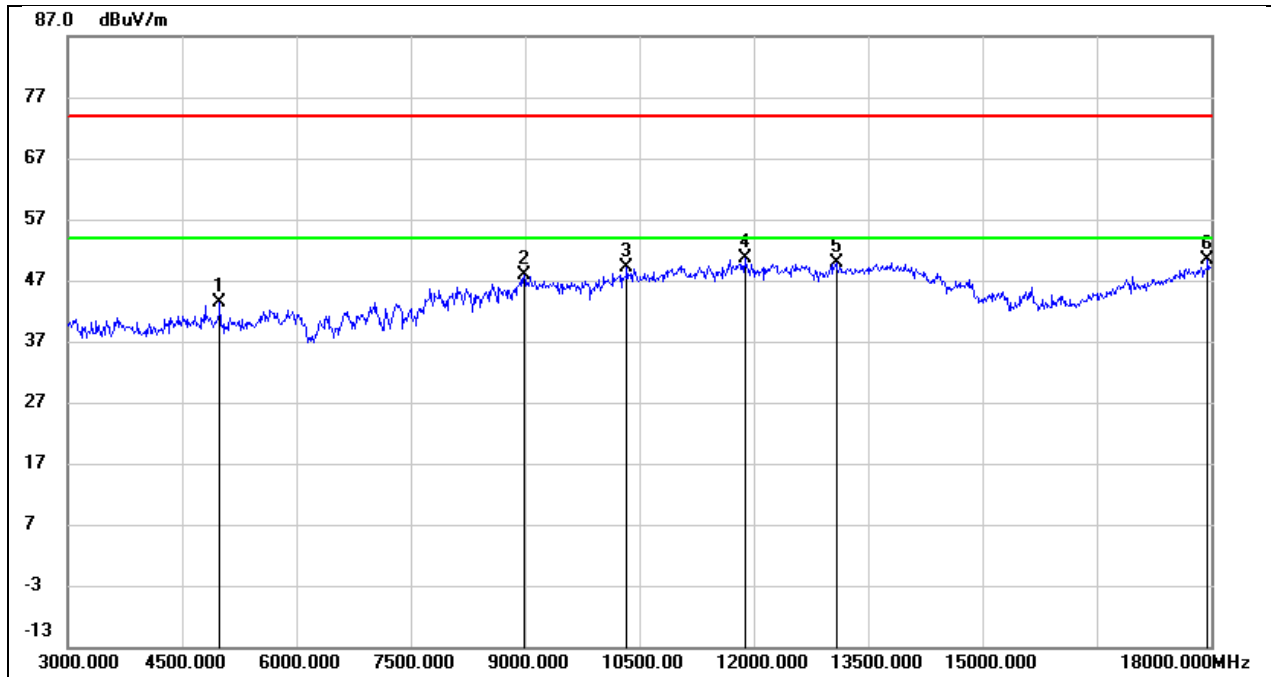


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4995.000	42.53	0.83	43.36	74.00	-30.64	peak
2	8985.000	37.03	10.97	48.00	74.00	-26.00	peak
3	10335.000	35.96	13.14	49.10	74.00	-24.90	peak
4	11880.000	32.63	17.97	50.60	74.00	-23.40	peak
5	13080.000	30.37	19.50	49.87	74.00	-24.13	peak
6	17955.000	23.70	26.66	50.36	74.00	-23.64	peak

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

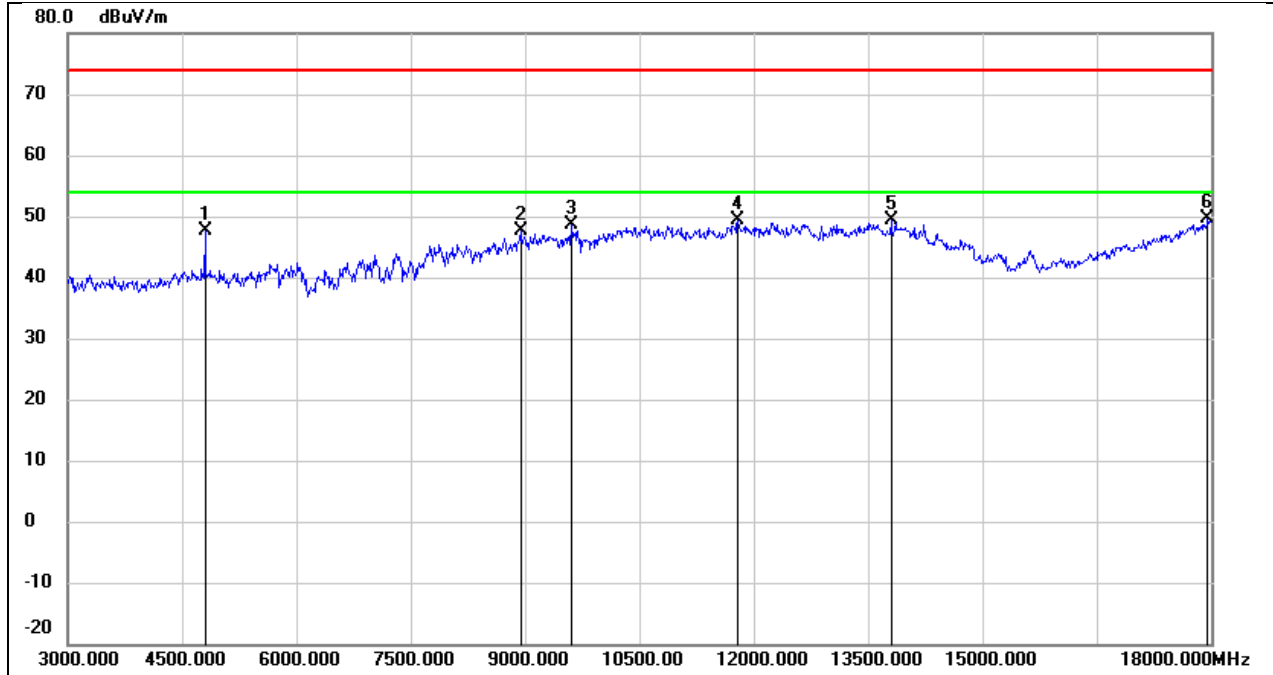


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	47.16	0.46	47.62	74.00	-26.38	peak
2	8940.000	37.28	10.35	47.63	74.00	-26.37	peak
3	9600.000	37.61	11.06	48.67	74.00	-25.33	peak
4	11790.000	31.84	17.60	49.44	74.00	-24.56	peak
5	13800.000	26.64	22.64	49.28	74.00	-24.72	peak
6	17955.000	23.05	26.66	49.71	74.00	-24.29	peak

Test Mode:	GFSK	Frequency(MHz):	2441
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

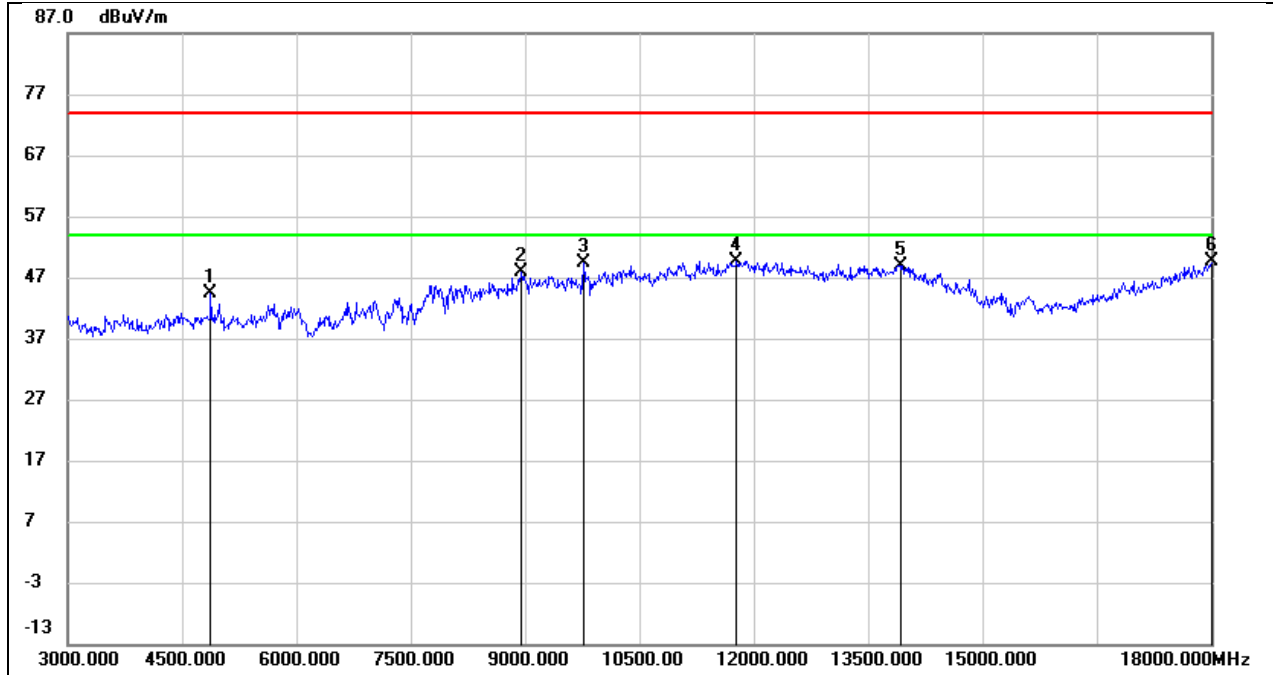


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.83	0.61	44.44	74.00	-29.56	peak
2	8955.000	37.40	10.56	47.96	74.00	-26.04	peak
3	9765.000	37.95	11.44	49.39	74.00	-24.61	peak
4	11775.000	32.19	17.56	49.75	74.00	-24.25	peak
5	13920.000	26.25	22.71	48.96	74.00	-25.04	peak
6	18000.000	22.79	26.83	49.62	74.00	-24.38	peak

Test Mode:	GFSK	Frequency(MHz):	2441
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

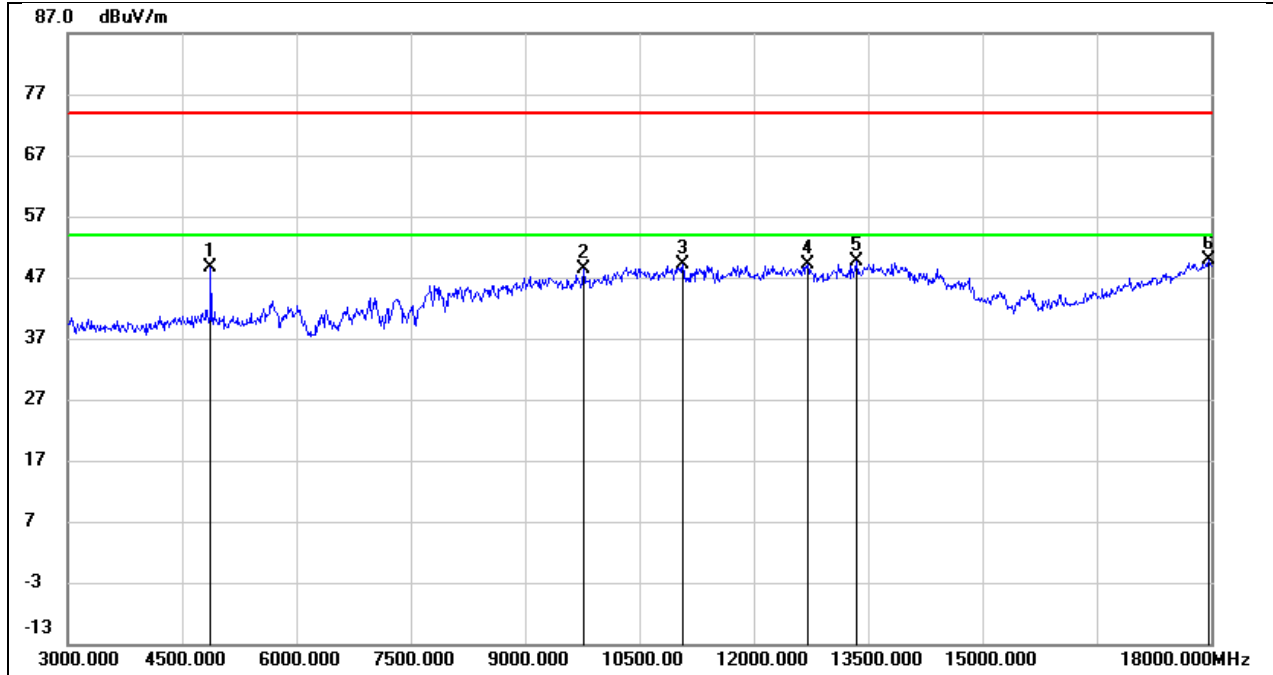


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	48.10	0.61	48.71	74.00	-25.29	peak
2	9765.000	36.90	11.44	48.34	74.00	-25.66	peak
3	11070.000	33.96	15.08	49.04	74.00	-24.96	peak
4	12705.000	30.43	18.66	49.09	74.00	-24.91	peak
5	13350.000	28.41	21.12	49.53	74.00	-24.47	peak
6	17970.000	23.06	26.72	49.78	74.00	-24.22	peak

Test Mode:	GFSK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

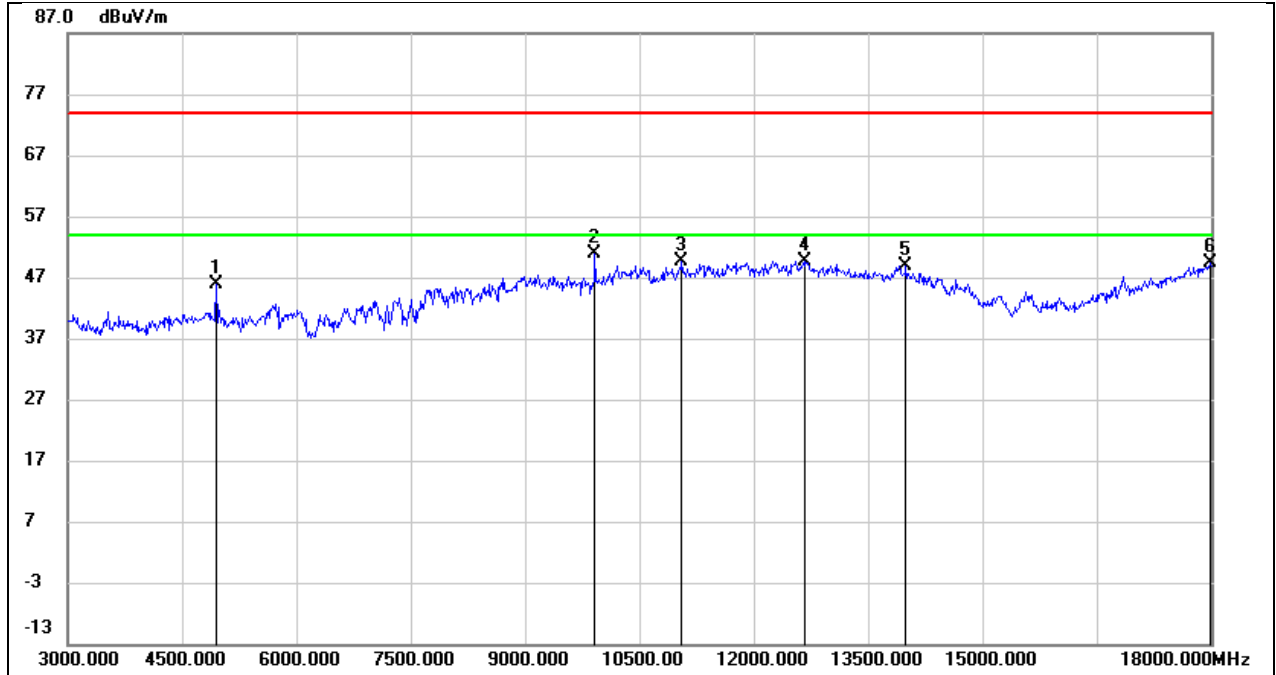

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	45.13	0.74	45.87	74.00	-28.13	peak
2	9915.000	38.76	12.08	50.84	74.00	-23.16	peak
3	11055.000	34.69	15.04	49.73	74.00	-24.27	peak
4	12660.000	31.22	18.49	49.71	74.00	-24.29	peak
5	13995.000	26.06	22.76	48.82	74.00	-25.18	peak
6	17985.000	22.50	26.77	49.27	74.00	-24.73	peak


Test Mode:	GFSK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

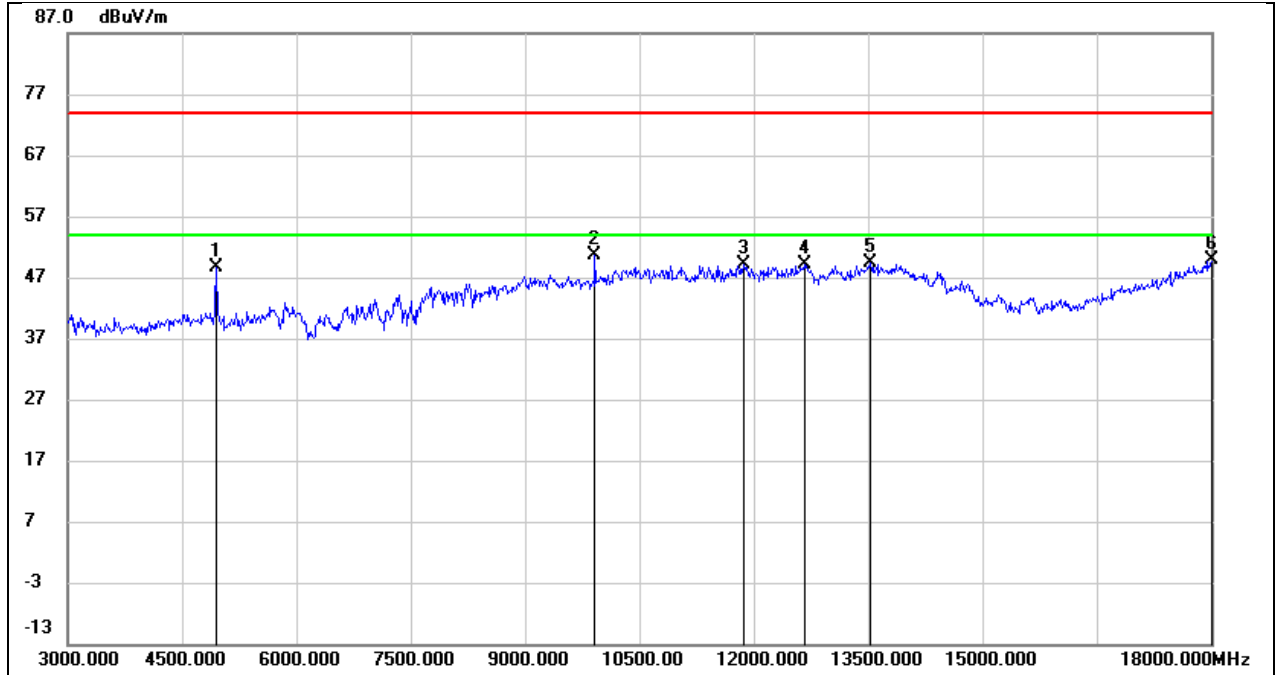

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	47.94	0.74	48.68	74.00	-25.32	peak
2	9915.000	38.59	12.08	50.67	74.00	-23.33	peak
3	11865.000	31.23	17.91	49.14	74.00	-24.86	peak
4	12660.000	30.59	18.49	49.08	74.00	-24.92	peak
5	13530.000	27.65	21.68	49.33	74.00	-24.67	peak
6	18000.000	22.99	26.83	49.82	74.00	-24.18	peak




Test Mode:	Π/4DQPSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

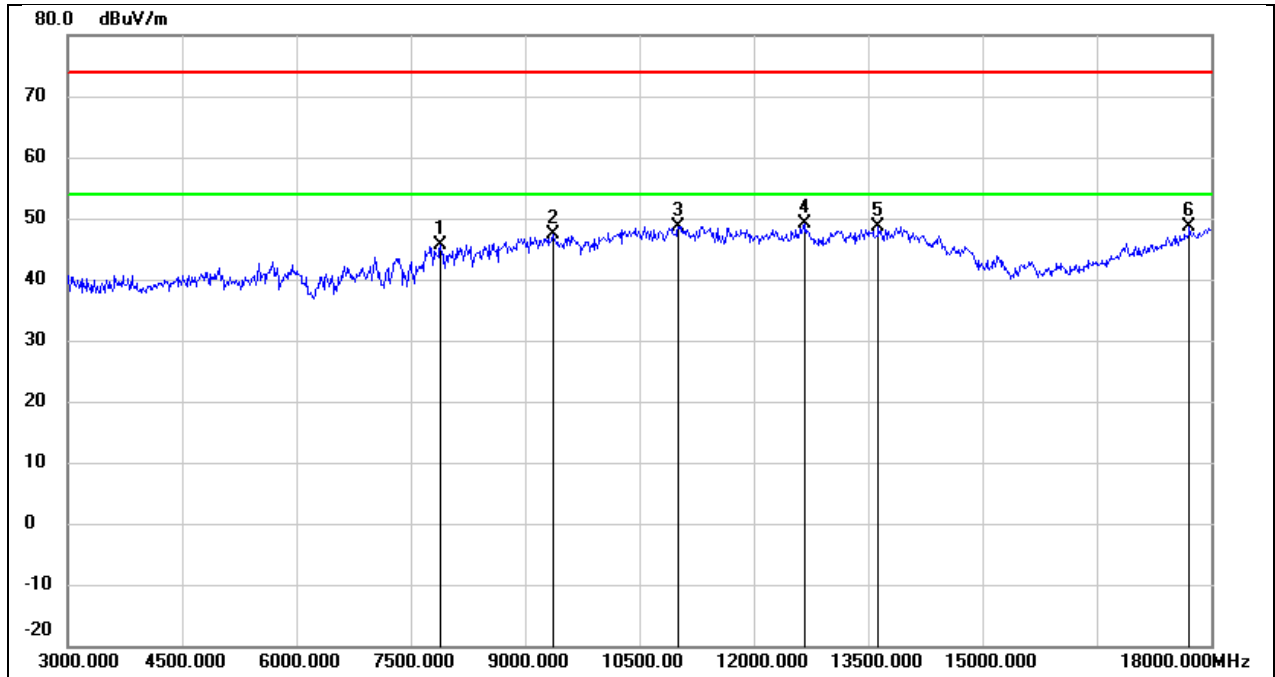


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7890.000	38.34	7.29	45.63	74.00	-28.37	peak
2	9360.000	36.98	10.36	47.34	74.00	-26.66	peak
3	11010.000	33.68	14.94	48.62	74.00	-25.38	peak
4	12675.000	30.54	18.54	49.08	74.00	-24.92	peak
5	13635.000	26.79	21.83	48.62	74.00	-25.38	peak
6	17715.000	23.33	25.31	48.64	74.00	-25.36	peak

Test Mode:	Π/4DQPSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

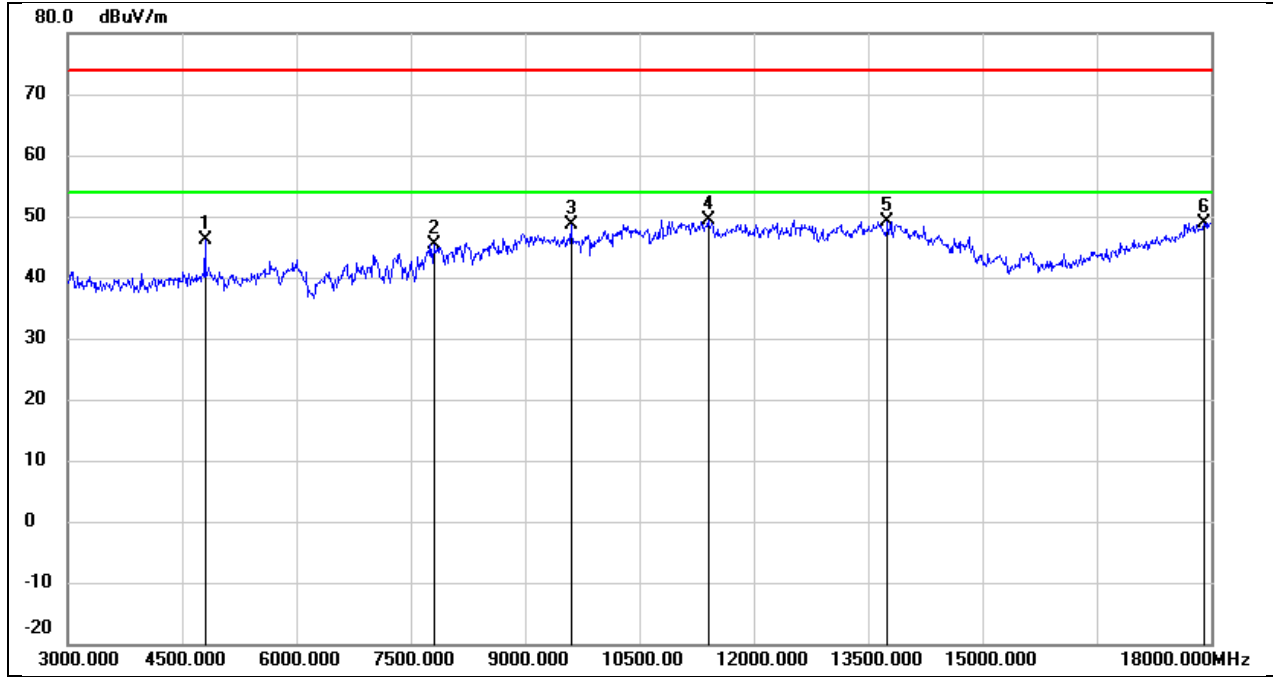


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	45.62	0.46	46.08	74.00	-27.92	peak
2	7800.000	37.90	7.54	45.44	74.00	-28.56	peak
3	9600.000	37.52	11.06	48.58	74.00	-25.42	peak
4	11400.000	32.88	16.54	49.42	74.00	-24.58	peak
5	13755.000	26.79	22.42	49.21	74.00	-24.79	peak
6	17910.000	22.50	26.50	49.00	74.00	-25.00	peak

Test Mode:	Π/4DQPSK	Frequency(MHz):	2441
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

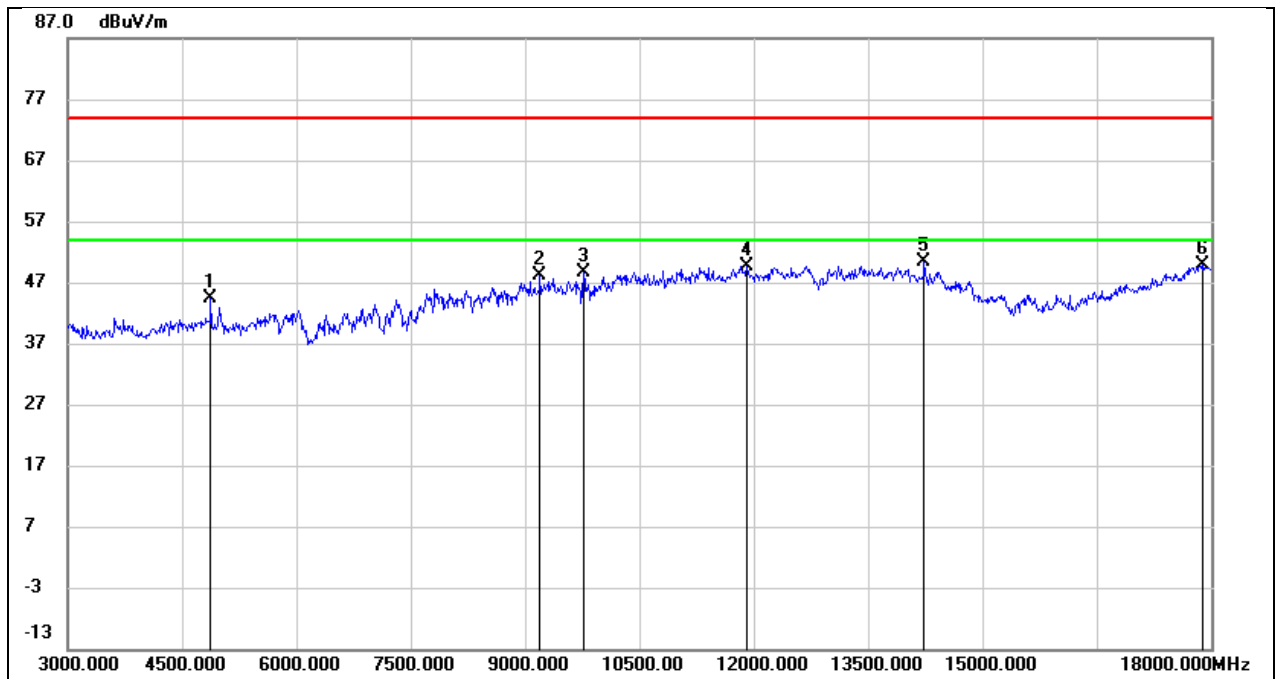


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.74	0.61	44.35	74.00	-29.65	peak
2	9195.000	38.18	10.03	48.21	74.00	-25.79	peak
3	9765.000	37.22	11.44	48.66	74.00	-25.34	peak
4	11910.000	31.62	18.11	49.73	74.00	-24.27	peak
5	14235.000	28.42	21.95	50.37	74.00	-23.63	peak
6	17895.000	23.41	26.44	49.85	74.00	-24.15	peak

Test Mode:	Π/4DQPSK	Frequency(MHz):	2441
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

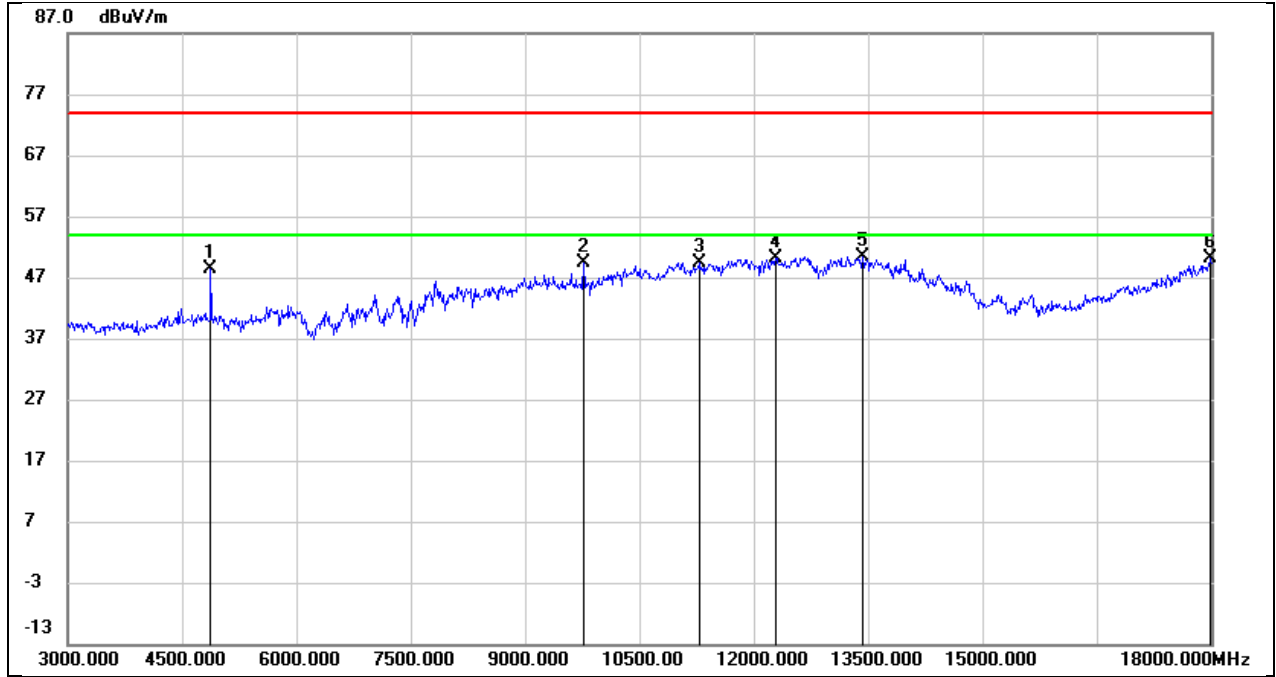


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	47.67	0.61	48.28	74.00	-25.72	peak
2	9765.000	37.94	11.44	49.38	74.00	-24.62	peak
3	11280.000	33.61	15.84	49.45	74.00	-24.55	peak
4	12285.000	31.43	18.60	50.03	74.00	-23.97	peak
5	13425.000	28.77	21.52	50.29	74.00	-23.71	peak
6	17985.000	23.32	26.77	50.09	74.00	-23.91	peak

Test Mode:	Π/4DQPSK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

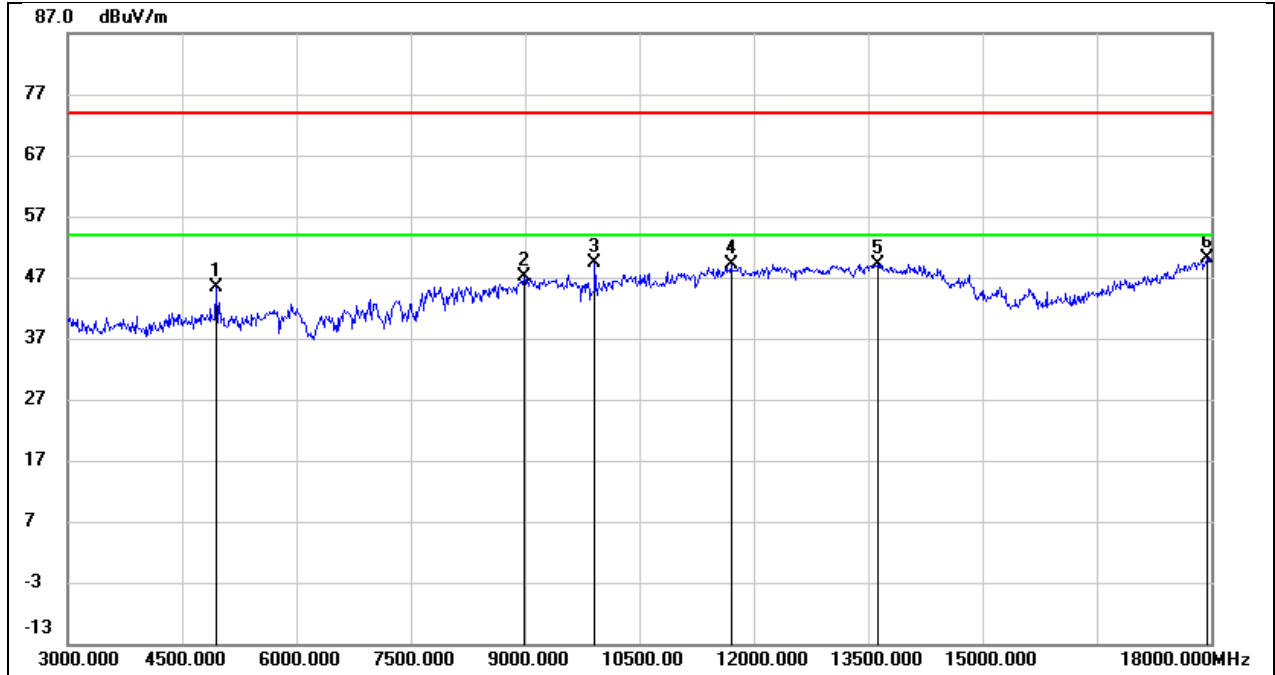

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	44.65	0.74	45.39	74.00	-28.61	peak
2	8985.000	36.09	10.97	47.06	74.00	-26.94	peak
3	9915.000	37.33	12.08	49.41	74.00	-24.59	peak
4	11700.000	31.70	17.32	49.02	74.00	-24.98	peak
5	13635.000	27.41	21.83	49.24	74.00	-24.76	peak
6	17955.000	23.45	26.66	50.11	74.00	-23.89	peak


Test Mode:	Π/4DQPSK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

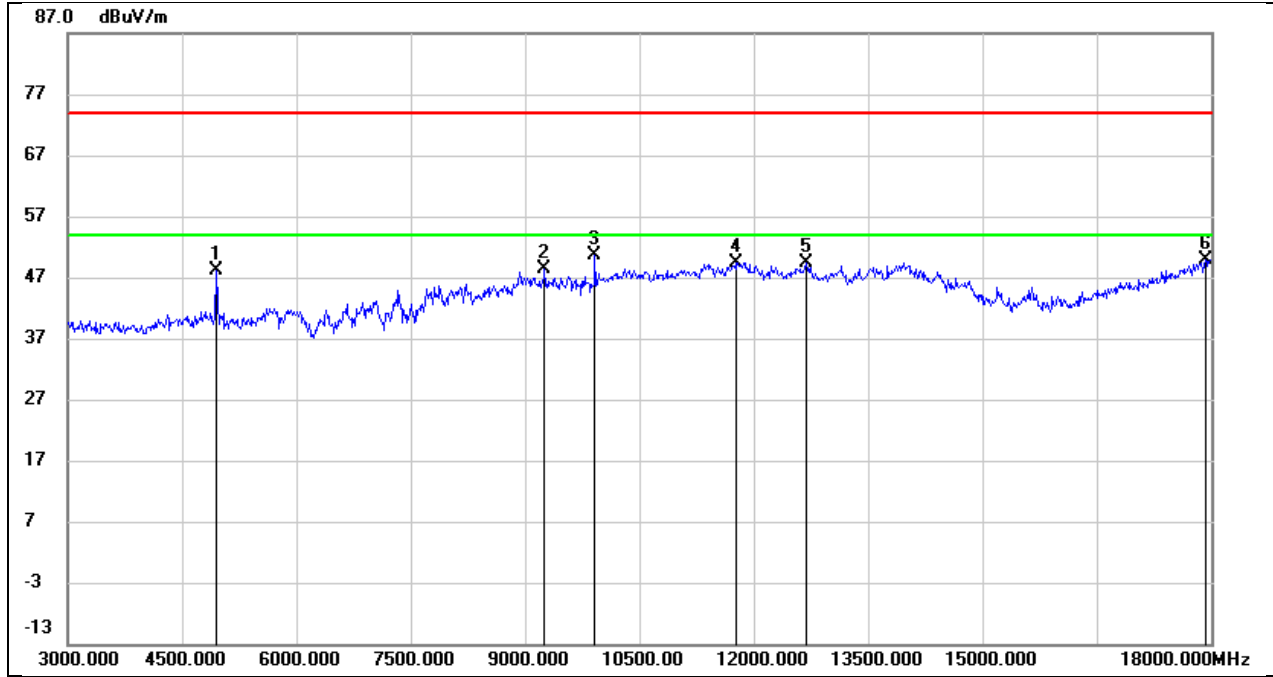

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	47.35	0.74	48.09	74.00	-25.91	peak
2	9255.000	38.21	10.14	48.35	74.00	-25.65	peak
3	9915.000	38.44	12.08	50.52	74.00	-23.48	peak
4	11760.000	31.97	17.51	49.48	74.00	-24.52	peak
5	12690.000	30.85	18.60	49.45	74.00	-24.55	peak
6	17925.000	23.31	26.55	49.86	74.00	-24.14	peak


### 8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

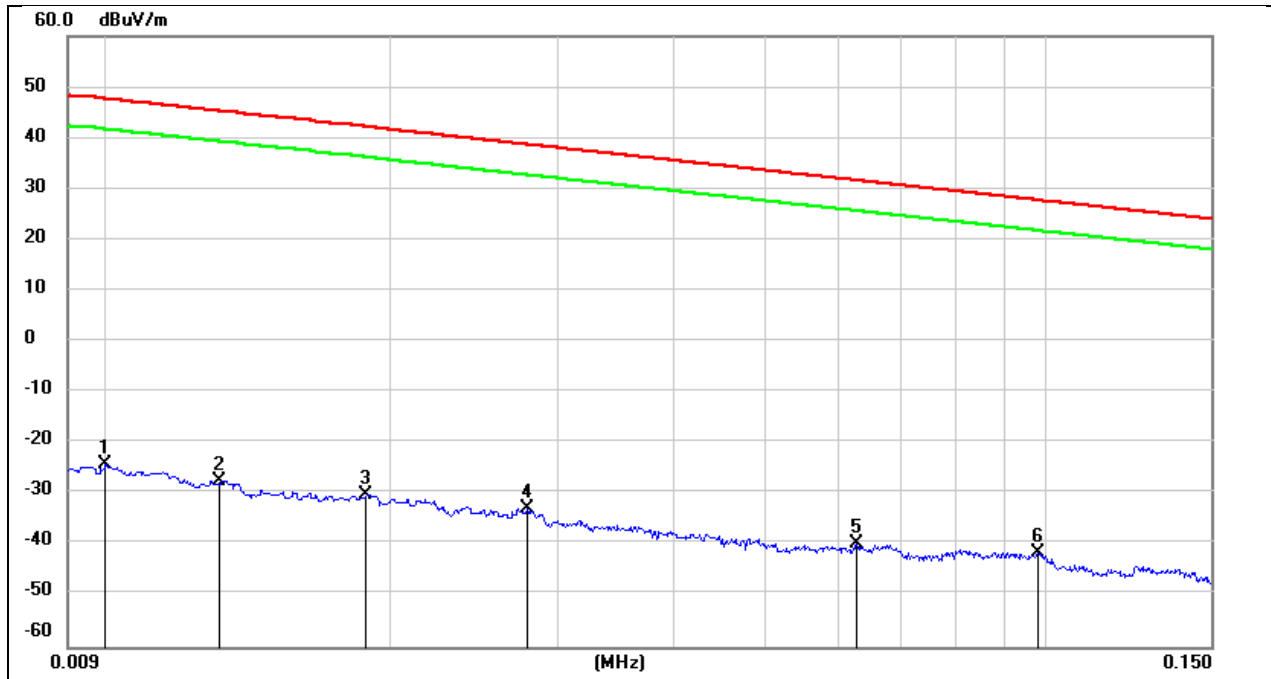

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	77.22	-101.40	-24.18	47.60	-75.68	-3.90	-71.78	peak
2	0.0131	73.97	-101.38	-27.41	45.25	-78.91	-6.25	-72.66	peak
3	0.0188	71.14	-101.35	-30.21	42.12	-81.71	-9.38	-72.33	peak
4	0.0279	68.67	-101.38	-32.71	38.69	-84.21	-12.81	-71.40	peak
5	0.0627	61.65	-101.53	-39.88	31.66	-91.38	-19.84	-71.54	peak
6	0.0981	60.27	-101.78	-41.51	27.77	-93.01	-23.73	-69.28	peak


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

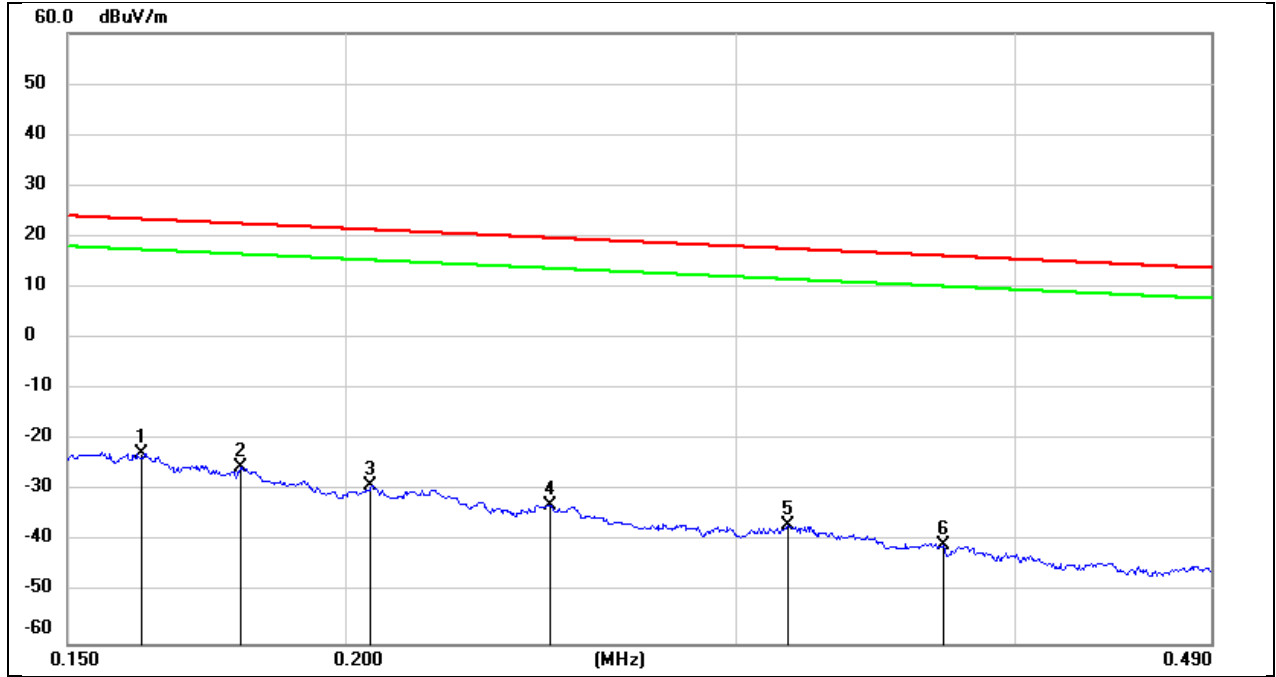

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1621	78.92	-101.65	-22.73	23.41	-74.23	-28.09	-46.14	peak
2	0.1794	76.27	-101.68	-25.41	22.53	-76.91	-28.97	-47.94	peak
3	0.2053	72.79	-101.73	-28.94	21.35	-80.44	-30.15	-50.29	peak
4	0.2472	68.95	-101.80	-32.85	19.74	-84.35	-31.76	-52.59	peak
5	0.3163	65.20	-101.87	-36.67	17.60	-88.17	-33.90	-54.27	peak
6	0.3714	61.28	-101.93	-40.65	16.20	-92.15	-35.30	-56.85	peak




Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

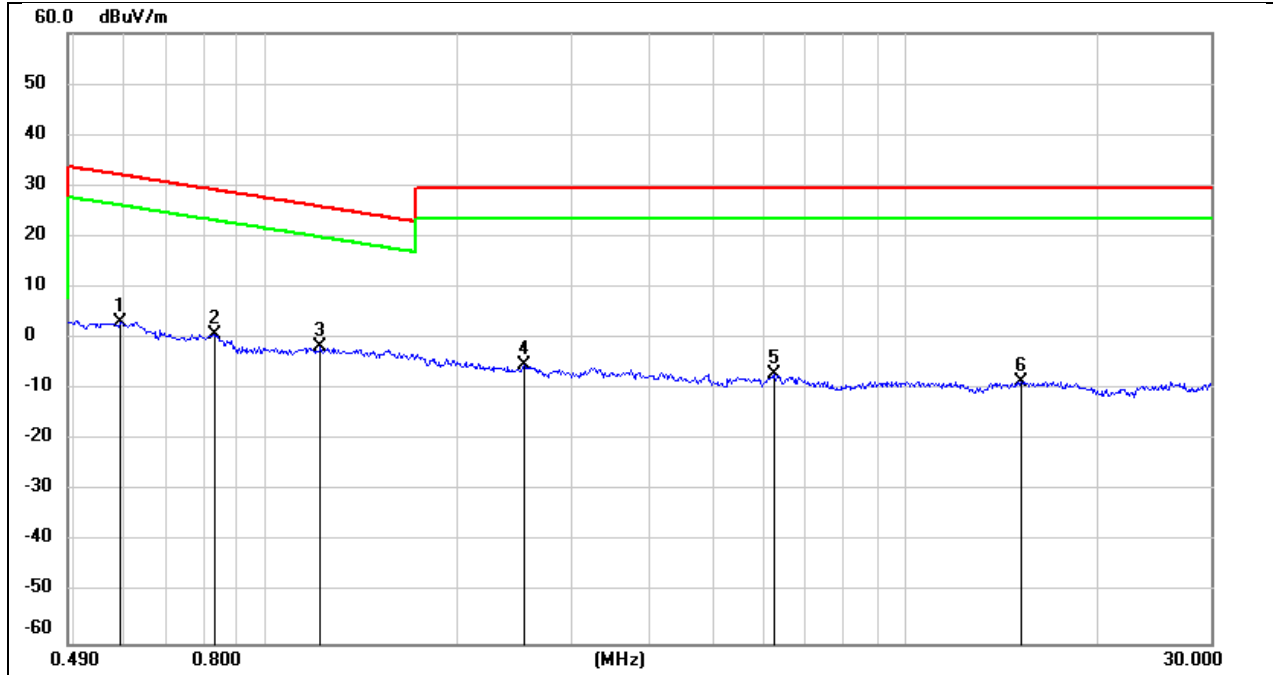

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5917	65.24	-62.08	3.16	32.16	-48.34	-19.34	-29.00	peak
2	0.8296	62.94	-62.17	0.77	29.23	-50.73	-22.27	-28.46	peak
3	1.2157	60.47	-62.17	-1.70	25.91	-53.20	-25.59	-27.61	peak
4	2.5301	56.32	-61.69	-5.37	29.54	-56.87	-21.96	-34.91	peak
5	6.2445	54.13	-61.32	-7.19	29.54	-58.69	-21.96	-36.73	peak
6	15.1859	52.55	-61.01	-8.46	29.54	-59.96	-21.96	-38.00	peak


### 8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

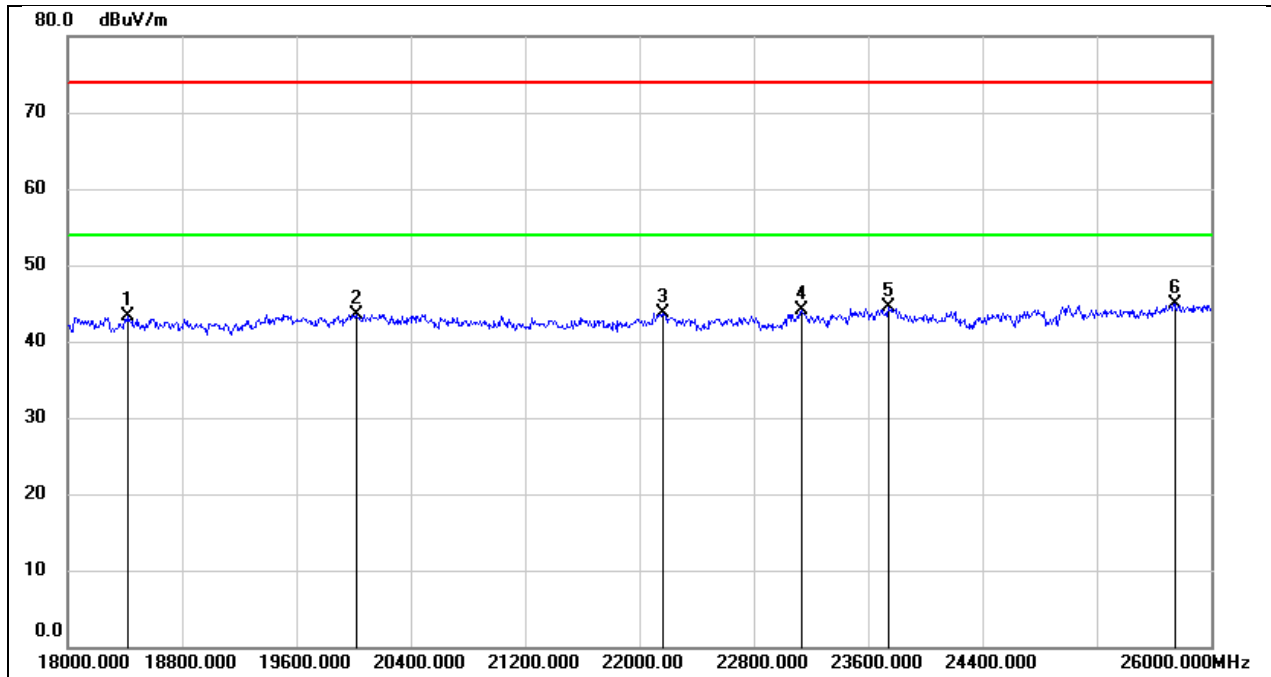

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18416.000	48.73	-5.35	43.38	74.00	-30.62	peak
2	20016.000	49.06	-5.47	43.59	74.00	-30.41	peak
3	22160.000	48.08	-4.31	43.77	74.00	-30.23	peak
4	23136.000	47.43	-3.40	44.03	74.00	-29.97	peak
5	23744.000	47.65	-3.20	44.45	74.00	-29.55	peak
6	25744.000	45.50	-0.64	44.86	74.00	-29.14	peak


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

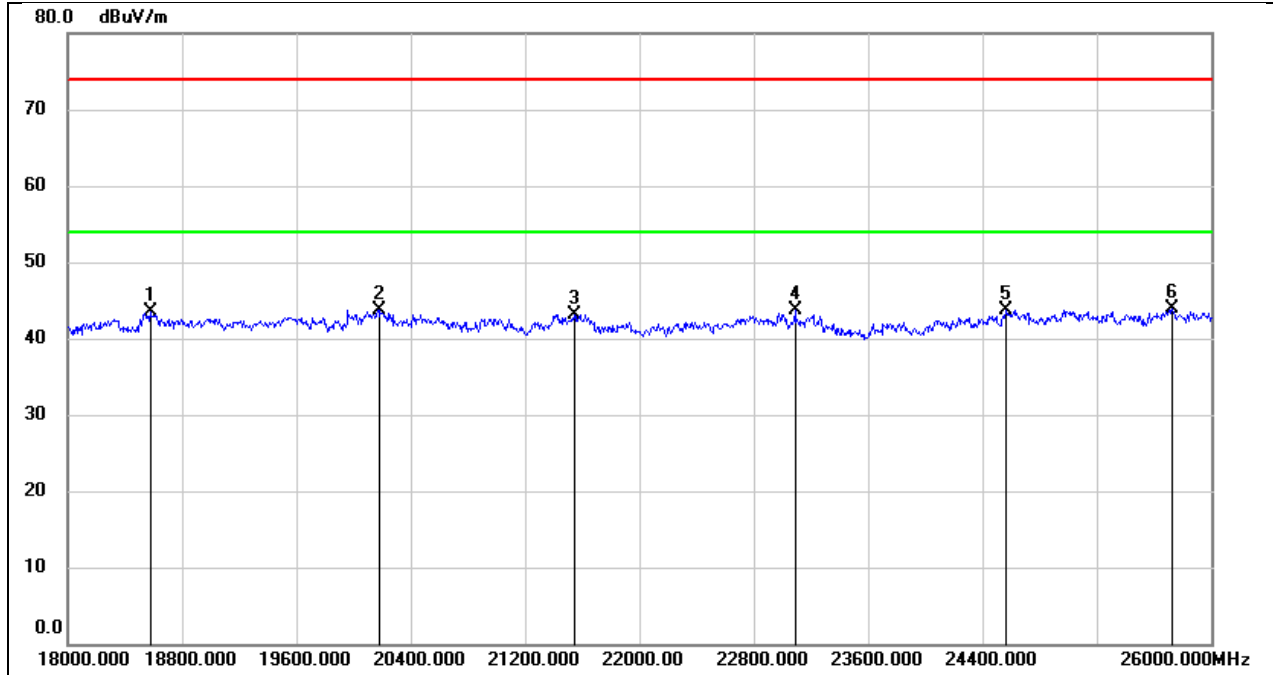

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18576.000	48.79	-5.30	43.49	74.00	-30.51	peak
2	20176.000	49.21	-5.56	43.65	74.00	-30.35	peak
3	21544.000	47.76	-4.63	43.13	74.00	-30.87	peak
4	23088.000	47.02	-3.41	43.61	74.00	-30.39	peak
5	24568.000	46.10	-2.33	43.77	74.00	-30.23	peak
6	25728.000	44.61	-0.72	43.89	74.00	-30.11	peak


### 8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

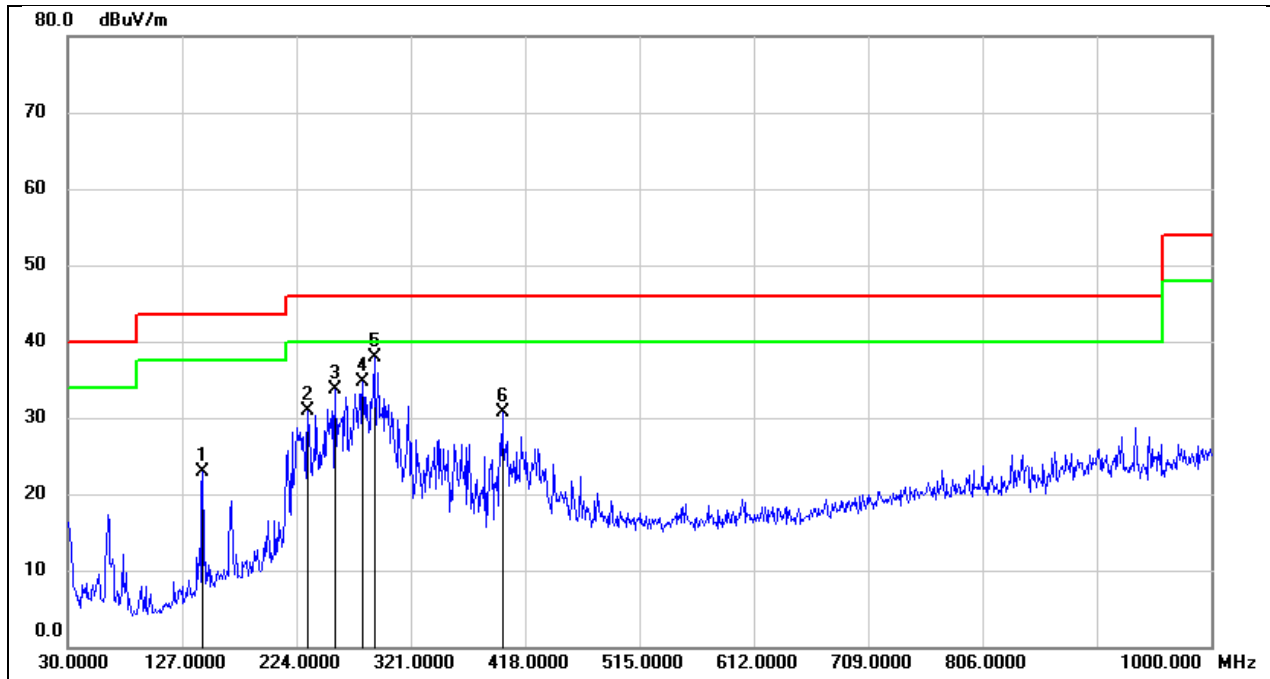

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	144.4600	36.79	-13.84	22.95	43.50	-20.55	QP
2	233.7000	44.62	-13.76	30.86	46.00	-15.14	QP
3	256.9800	48.06	-14.36	33.70	46.00	-12.30	QP
4	280.2600	47.60	-12.93	34.67	46.00	-11.33	QP
5	289.9600	50.25	-12.31	37.94	46.00	-8.06	QP
6	398.6000	40.46	-9.72	30.74	46.00	-15.26	QP

Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

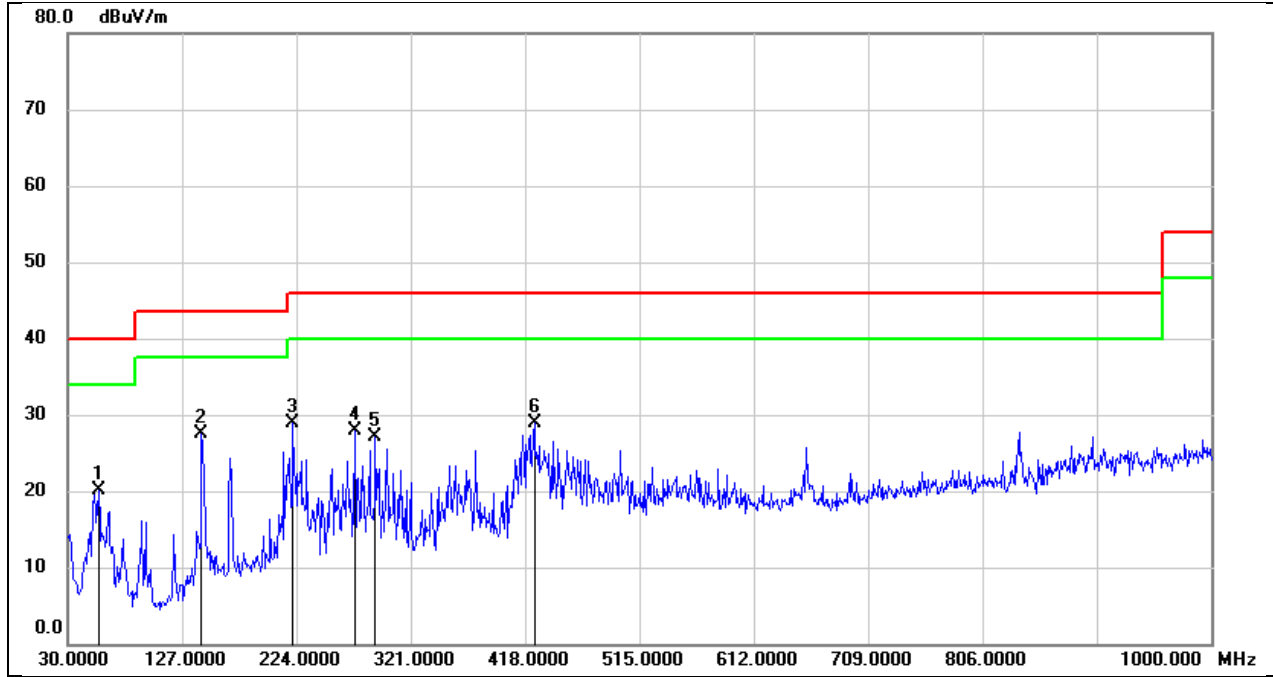


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	56.1900	35.49	-15.38	20.11	40.00	-19.89	QP
2	143.4900	41.43	-13.89	27.54	43.50	-15.96	QP
3	221.0900	42.12	-13.14	28.98	46.00	-17.02	QP
4	273.4700	41.19	-13.33	27.86	46.00	-18.14	QP
5	290.9300	39.41	-12.26	27.15	46.00	-18.85	QP
6	425.7600	38.04	-9.22	28.82	46.00	-17.18	QP

## 8.7. SPURIOUS EMISSIONS FOR SIMULTANEOUS TRANSMISSION

### SPURIOUS EMISSIONS (802.11n HT20 2.4GHz LOW CHANNEL & BLE 1M LOW CHANNEL & BT GFSK LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)


#### 1-3 GHz

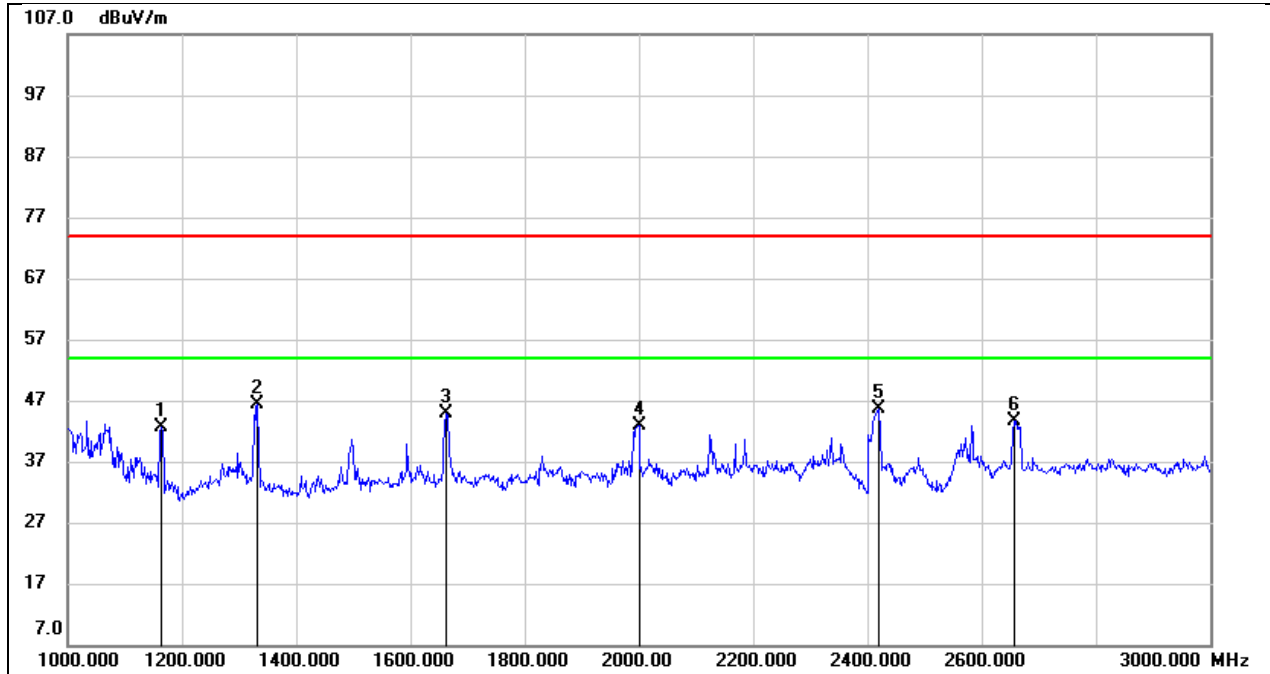

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1164.000	55.70	-12.96	42.74	74.00	-31.26	peak
2	1332.000	58.88	-12.49	46.39	74.00	-27.61	peak
3	1662.000	55.69	-10.88	44.81	74.00	-29.19	peak
4	2000.000	53.02	-10.11	42.91	74.00	-31.09	peak
5	2412.000	53.14	-7.43	45.71	/	/	fundamental
6	2656.000	51.18	-7.43	43.75	74.00	-30.25	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.7.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### 3-18 GHz

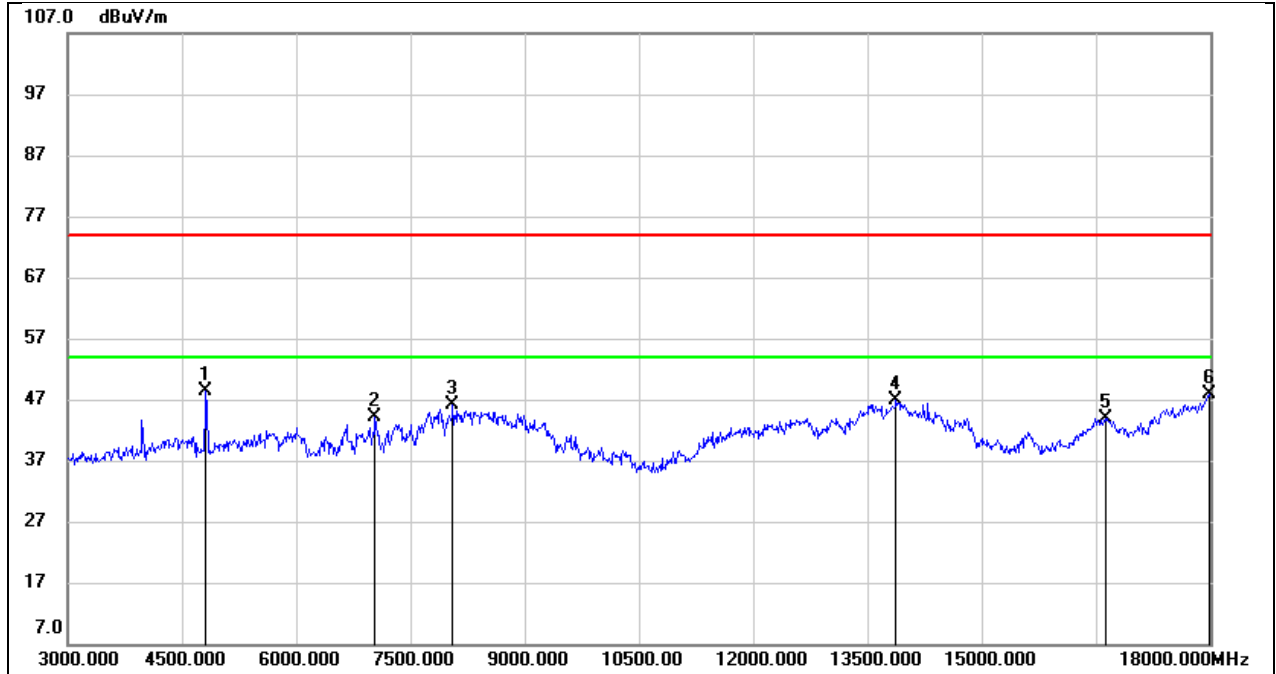


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	47.82	0.49	48.31	74.00	-25.69	peak
2	7035.000	36.82	7.28	44.10	74.00	-29.90	peak
3	8055.000	38.51	7.51	46.02	74.00	-27.98	peak
4	13875.000	24.09	22.68	46.77	74.00	-27.23	peak
5	16635.000	23.43	20.45	43.88	74.00	-30.12	peak
6	17985.000	21.18	26.77	47.95	74.00	-26.05	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.5.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**SPURIOUS EMISSIONS (802.11n HT20 2.4GHz LOW CHANNEL & BLE 1M LOW CHANNEL & BT GFSK LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

**1-3 GHz**

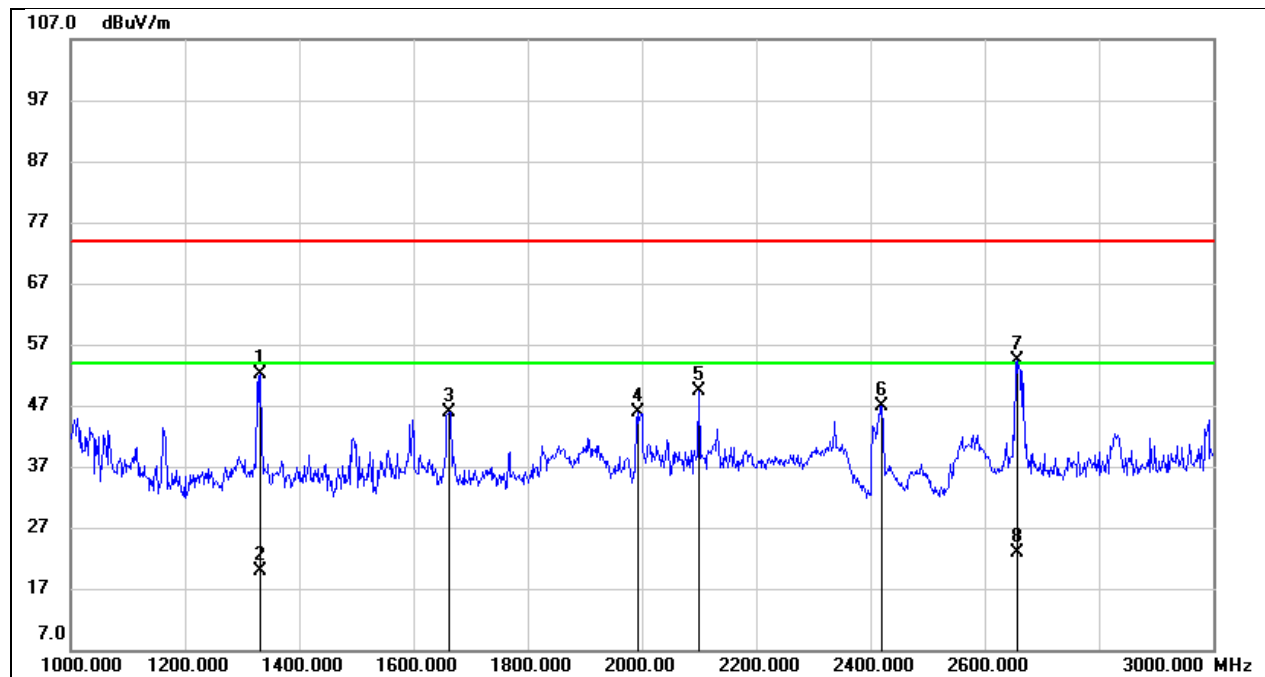


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1332.000	64.65	-12.49	52.16	74.00	-21.84	peak
2	1332.000	32.49	-12.49	20.00	54.00	-34.00	AVG
3	1662.000	56.85	-10.88	45.97	74.00	-28.03	peak
4	1992.000	55.92	-10.12	45.80	74.00	-28.20	peak
5	2100.000	58.96	-9.50	49.46	74.00	-24.54	peak
6	2412.000	54.36	-7.43	46.93	/	/	fundamental
7	2656.000	61.91	-7.43	54.48	74.00	-19.52	peak
8	2656.000	30.33	-7.43	22.90	54.00	-31.10	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.5.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 3-18 GHz

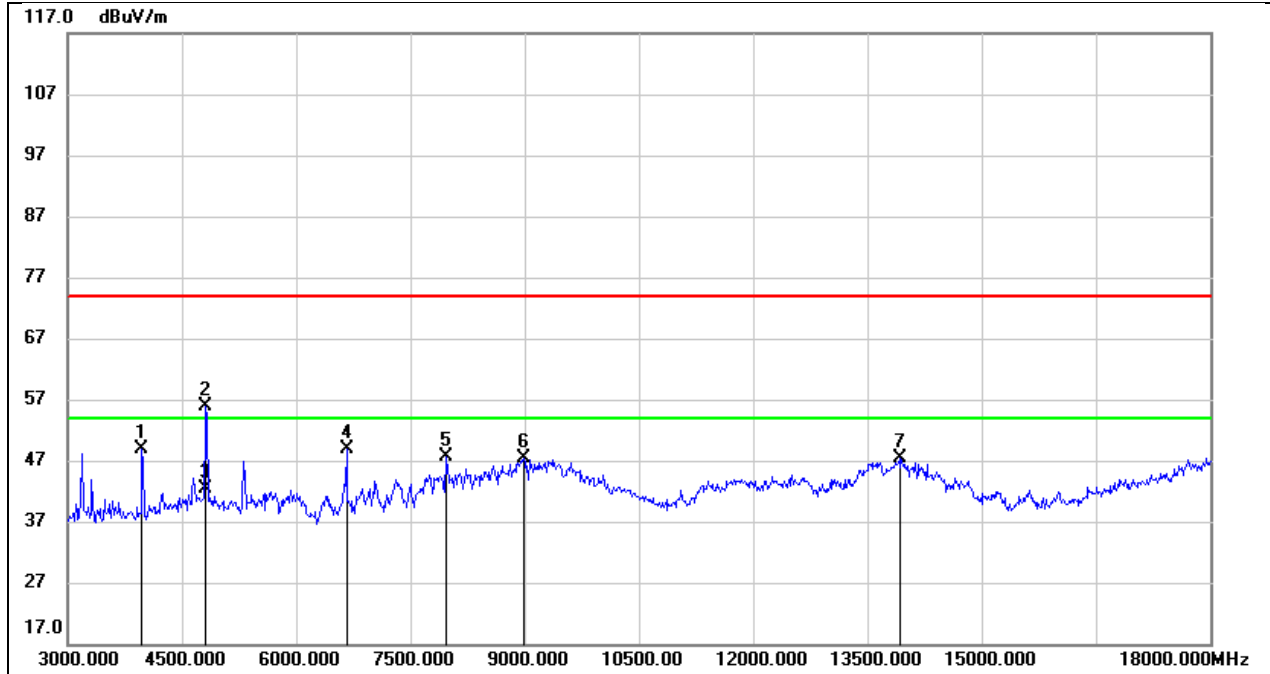


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3975.000	51.57	-2.79	48.78	74.00	-25.22	peak
2	4815.000	55.51	0.49	56.00	74.00	-18.00	peak
3	4815.000	41.81	0.49	42.30	54.00	-11.70	AVG
4	6660.000	44.01	4.95	48.96	74.00	-25.04	peak
5	7965.000	40.63	7.08	47.71	74.00	-26.29	peak
6	8985.000	36.34	10.97	47.31	74.00	-26.69	peak
7	13920.000	24.72	22.71	47.43	74.00	-26.57	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.5.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**RESTRICTED BANDEDGE (802.11n HT20 2.4GHz LOW CHANNEL & BLE 1M LOW CHANNEL & BT GFSK LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)**

**Peak**

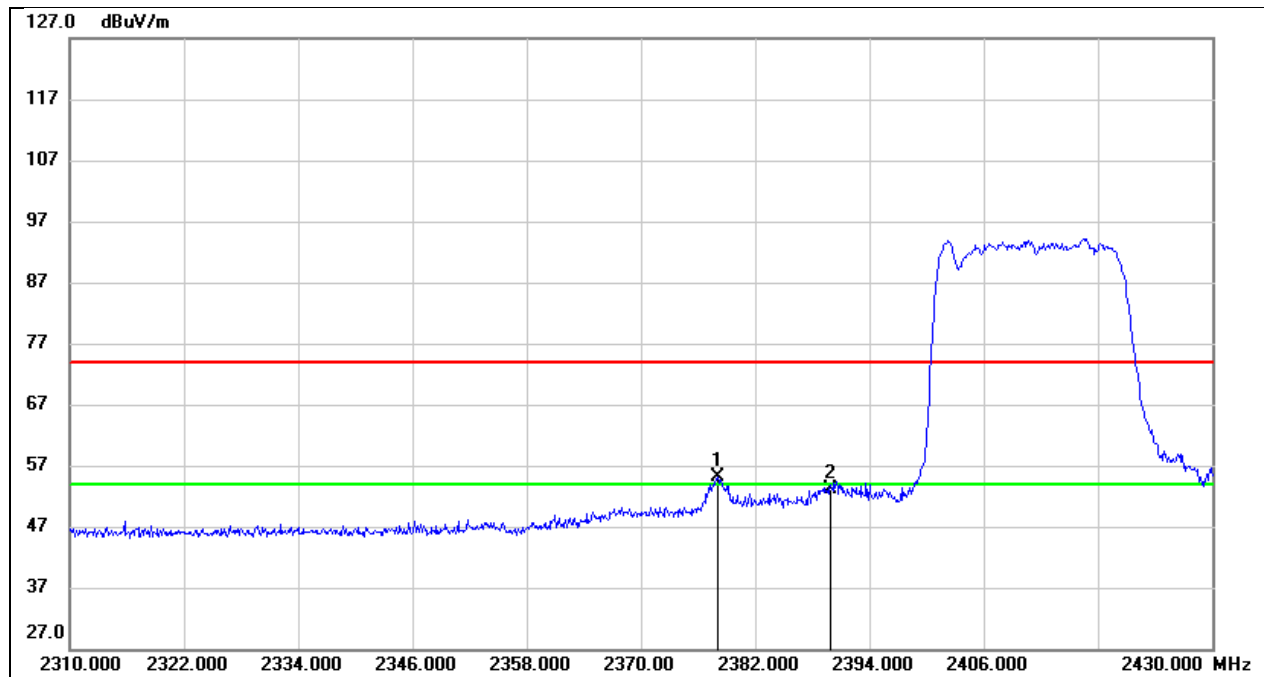


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.040	22.36	32.86	55.22	74.00	-18.78	peak
2	2390.000	20.32	32.92	53.24	74.00	-20.76	peak

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

### AVG

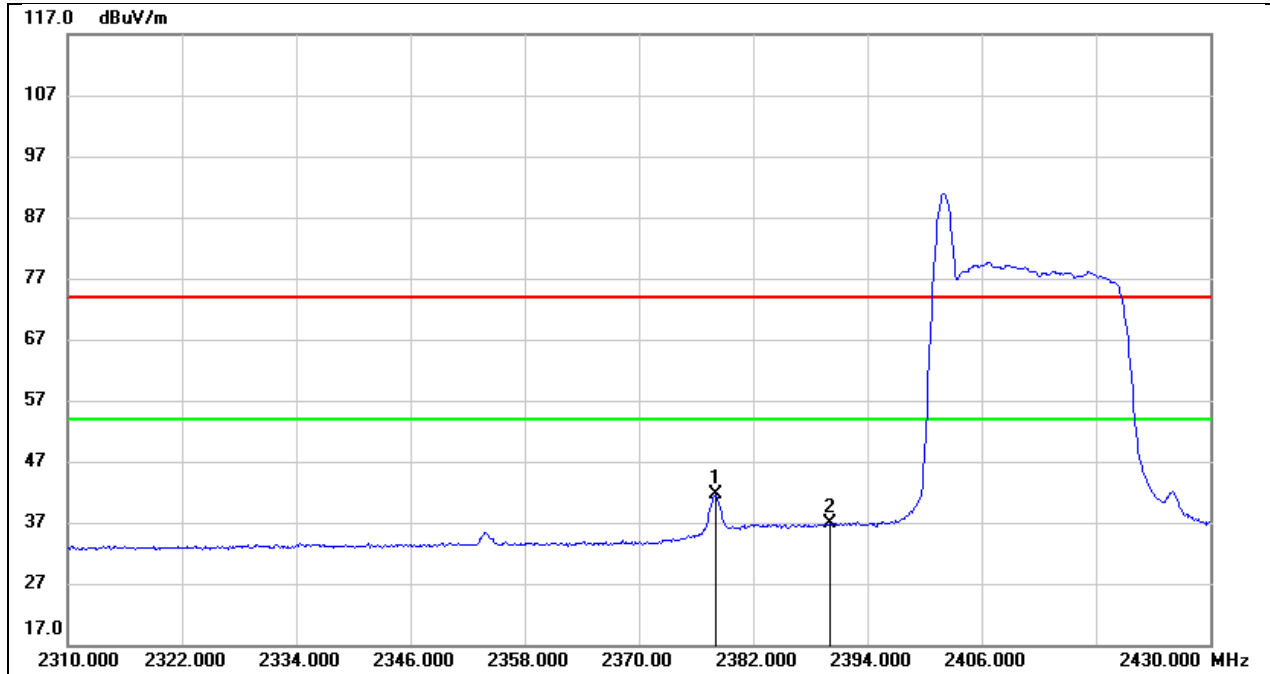


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.040	8.71	32.86	41.57	54.00	-12.43	AVG
2	2390.000	3.96	32.92	36.88	54.00	-17.12	AVG

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

**RESTRICTED BANDEDGE (802.11n HT20 2.4GHz LOW CHANNEL & BLE 1M LOW CHANNEL & BT GFSK LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

**Peak**

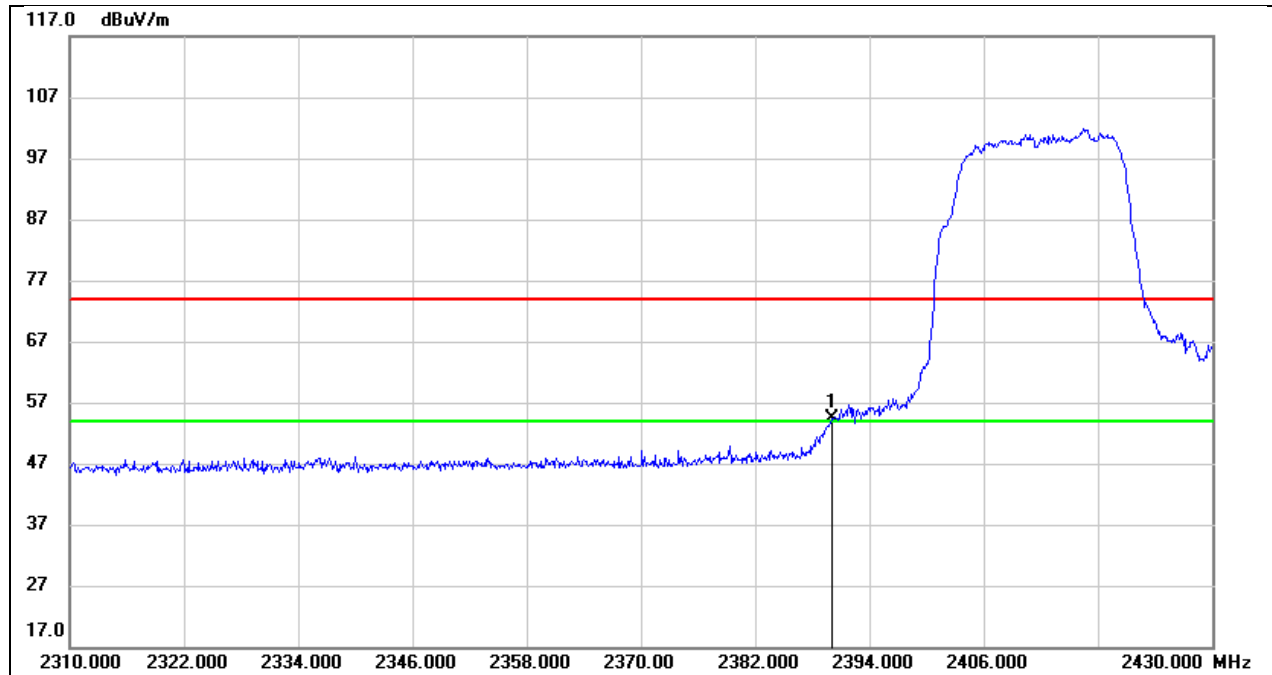


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	21.52	32.92	54.44	74.00	-19.56	peak

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

### AVG

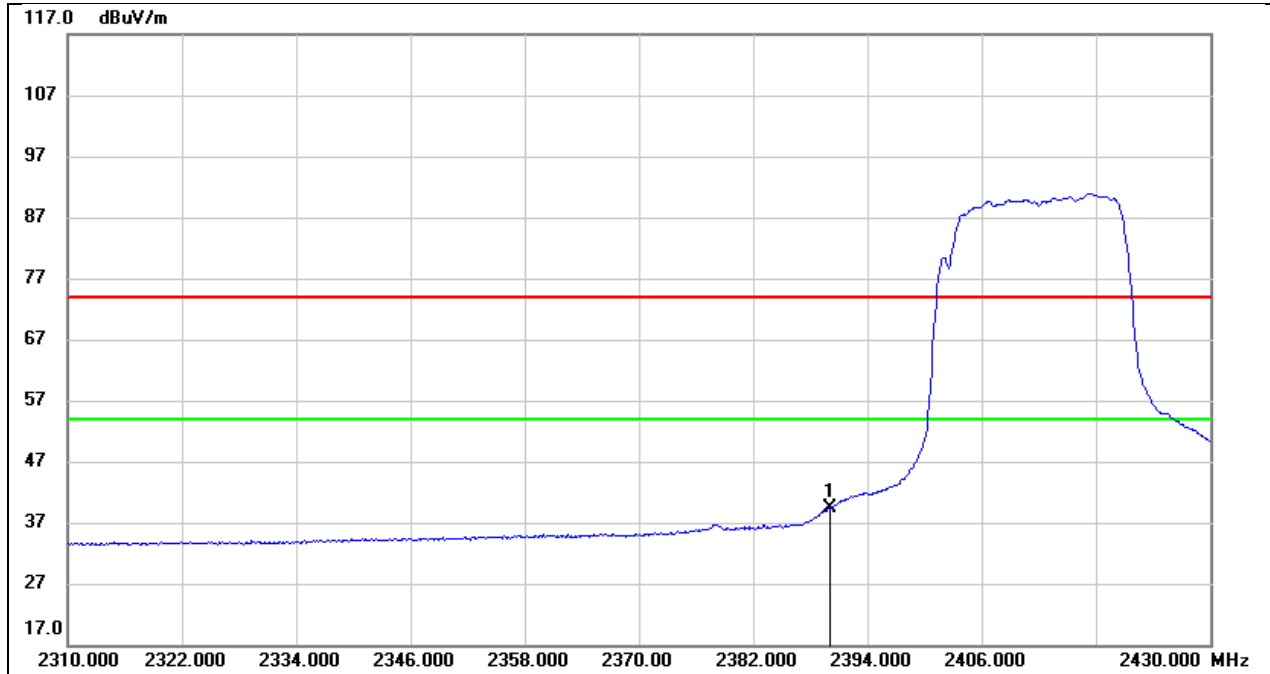

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	6.45	32.92	39.37	54.00	-14.63	AVG

**Note:**

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

## 9. ANTENNA REQUIREMENT

### REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DESCRIPTION

Pass

## 10. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST SETUP

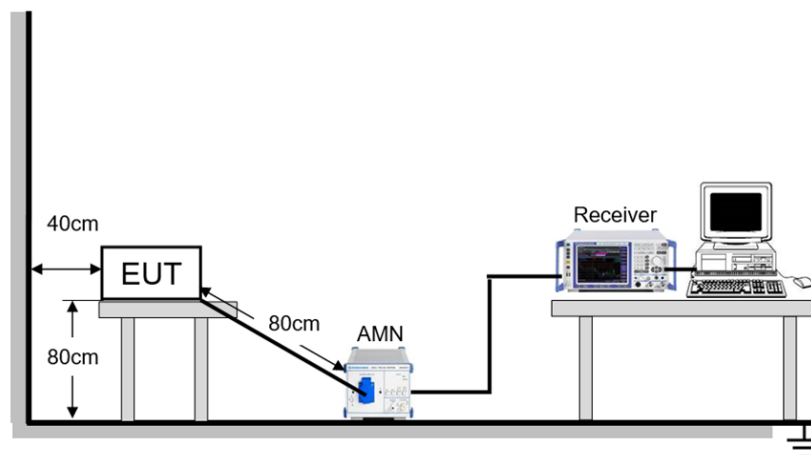

**TEST ENVIRONMENT**

Temperature	24.6°C	Relative Humidity	57%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz


**TEST DATE / ENGINEER**

Test Date	April 18, 2024	Test By	Wite Chen
-----------	----------------	---------	-----------



**TEST RESULTS**

Test Mode:	GFSK	Frequency(MHz):	2402
Line:	Line		

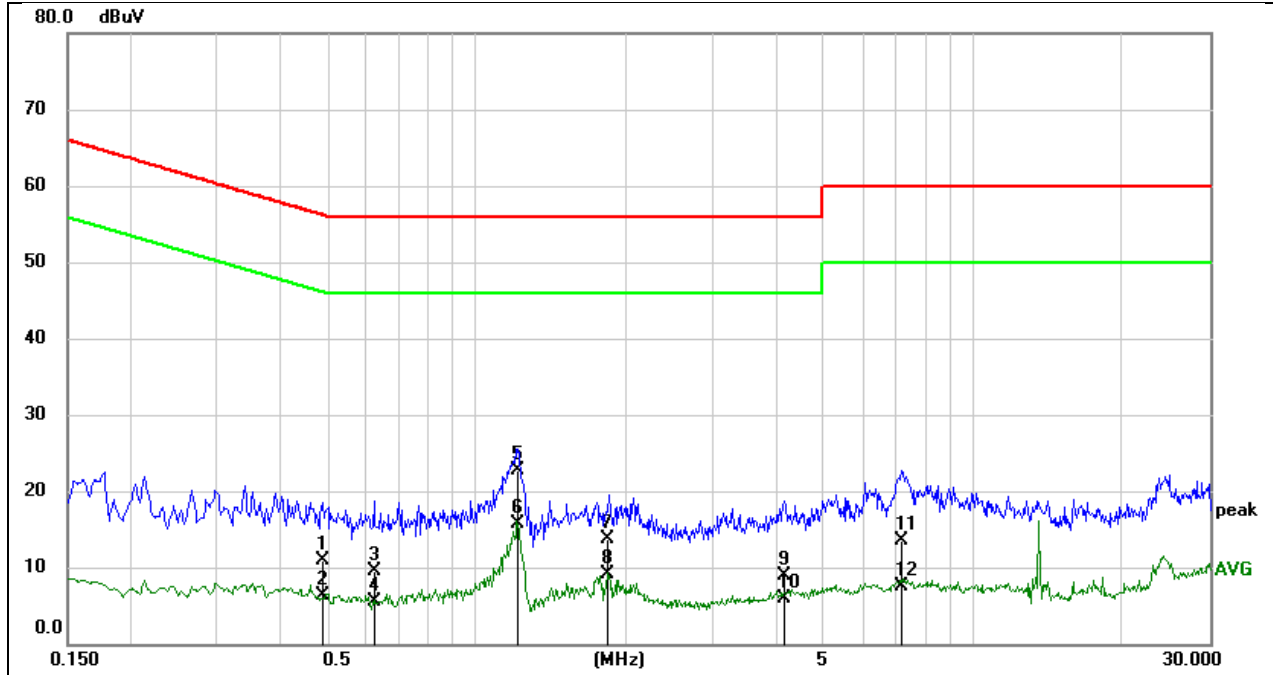


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4937	0.77	10.04	10.81	56.11	-45.30	QP
2	0.4937	-3.75	10.04	6.29	46.11	-39.82	AVG
3	0.6258	-0.57	10.03	9.46	56.00	-46.54	QP
4	0.6258	-4.53	10.03	5.50	46.00	-40.50	AVG
5	1.2086	12.83	9.87	22.70	56.00	-33.30	QP
6	1.2086	5.83	9.87	15.70	46.00	-30.30	AVG
7	1.8307	3.75	10.01	13.76	56.00	-42.24	QP
8	1.8307	-0.88	10.01	9.13	46.00	-36.87	AVG
9	4.1479	-1.43	10.33	8.90	56.00	-47.10	QP
10	4.1479	-4.34	10.33	5.99	46.00	-40.01	AVG
11	7.1889	3.02	10.43	13.45	60.00	-46.55	QP
12	7.1889	-2.85	10.43	7.58	50.00	-42.42	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	GFSK	Frequency(MHz):	2402
Line:	Neutral		

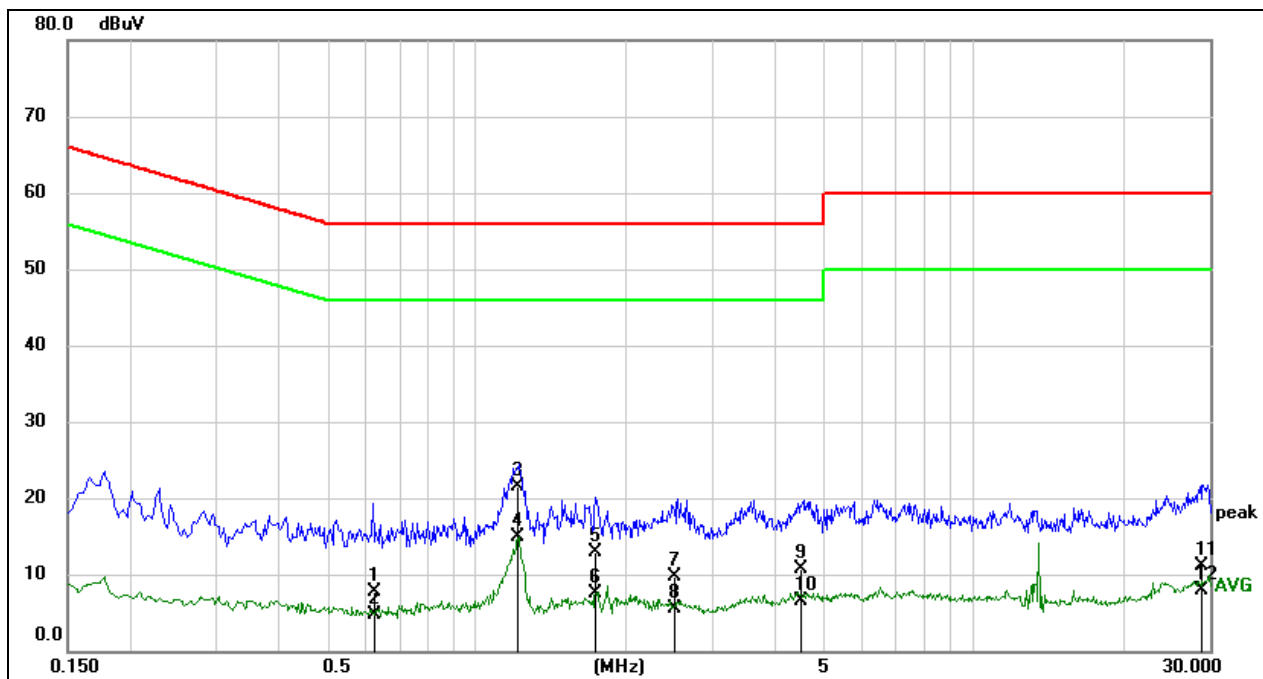

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.6221	-2.30	10.03	7.73	56.00	-48.27	QP
2	0.6221	-5.37	10.03	4.66	46.00	-41.34	AVG
3	1.2074	11.68	9.87	21.55	56.00	-34.45	QP
4	1.2074	4.99	9.87	14.86	46.00	-31.14	AVG
5	1.7448	2.87	9.99	12.86	56.00	-43.14	QP
6	1.7448	-2.48	9.99	7.51	46.00	-38.49	AVG
7	2.5215	-0.32	10.12	9.80	56.00	-46.20	QP
8	2.5215	-4.55	10.12	5.57	46.00	-40.43	AVG
9	4.4987	0.26	10.35	10.61	56.00	-45.39	QP
10	4.4987	-3.82	10.35	6.53	46.00	-39.47	AVG
11	28.9482	0.04	11.12	11.16	60.00	-48.84	QP
12	28.9482	-3.23	11.12	7.89	50.00	-42.11	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.


## 11. TEST DATA


### 11.1. APPENDIX A: 20DB EMISSION BANDWIDTH

#### 11.1.1. Test Result


Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	1.03	2401.49	2402.52	PASS
		2441	1.03	2440.49	2441.52	PASS
		2480	1.03	2479.49	2480.52	PASS
2DH5	Ant1	2402	1.30	2401.36	2402.67	PASS
		2441	1.32	2440.35	2441.67	PASS
		2480	1.32	2479.35	2480.67	PASS

### 11.1.2. Test Graphs

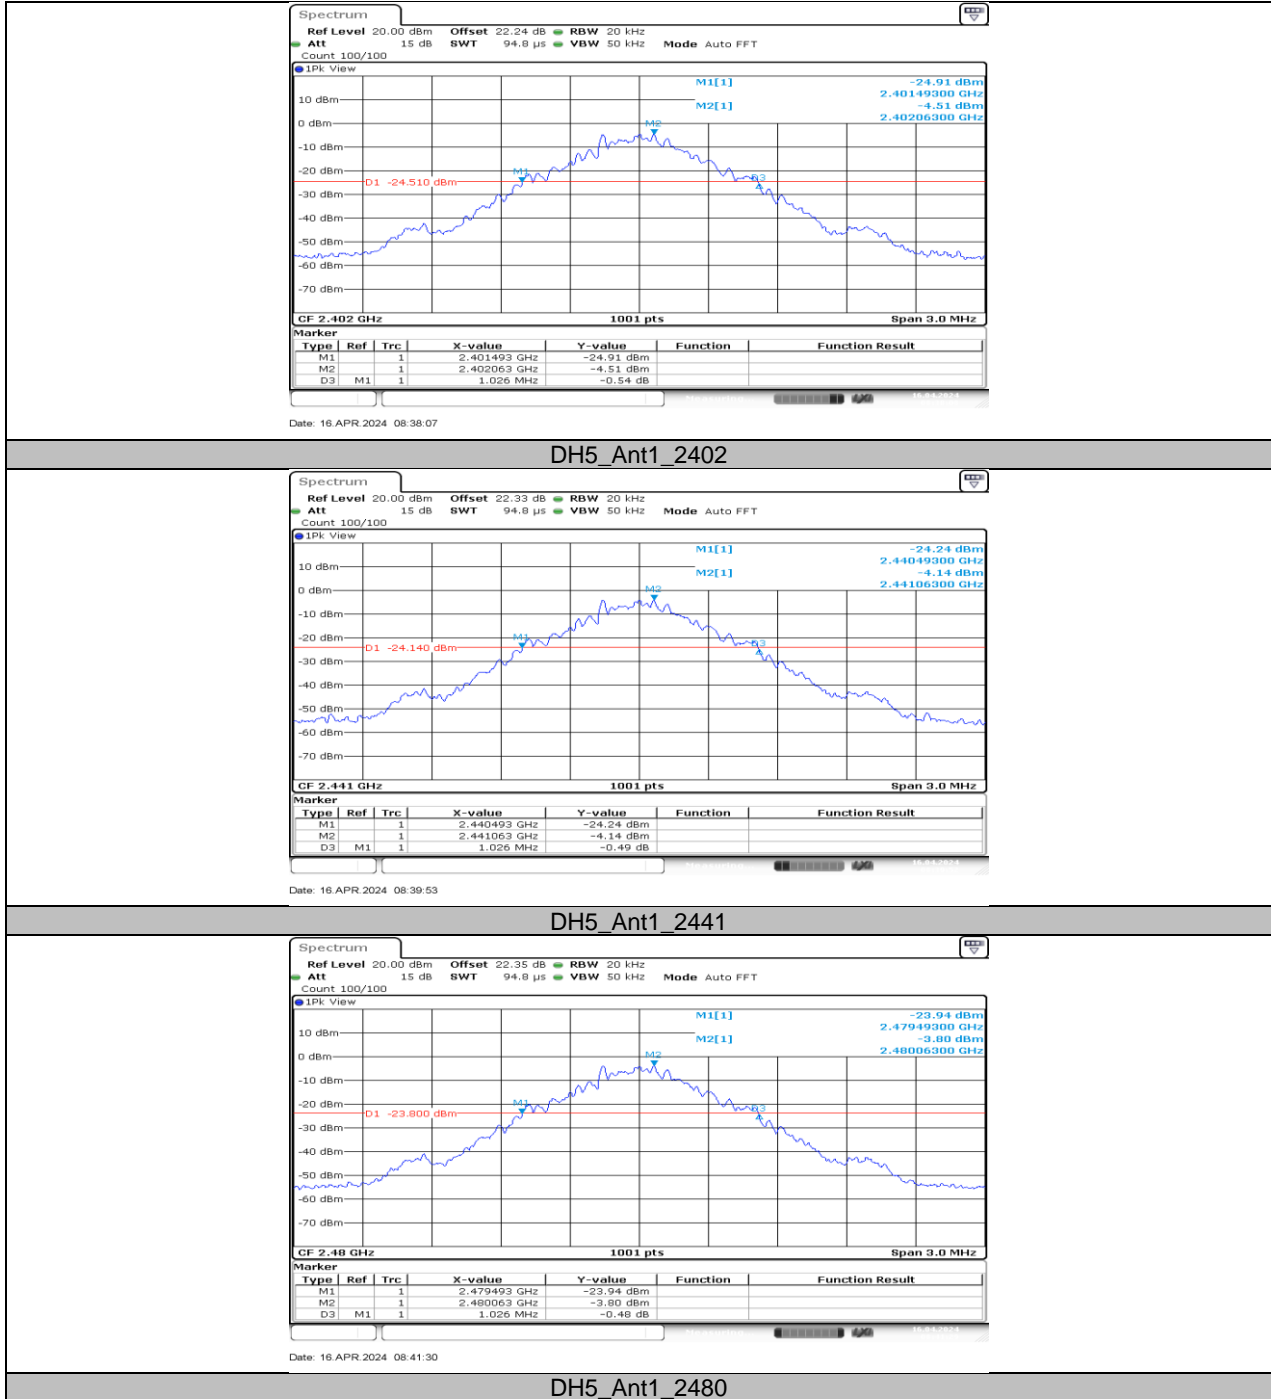


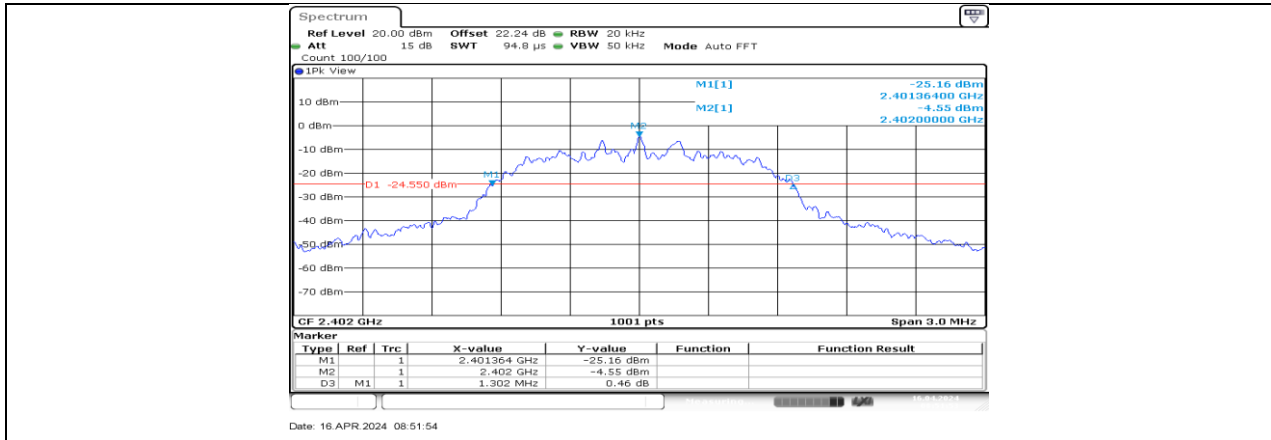

2DH5\_Ant1\_2402

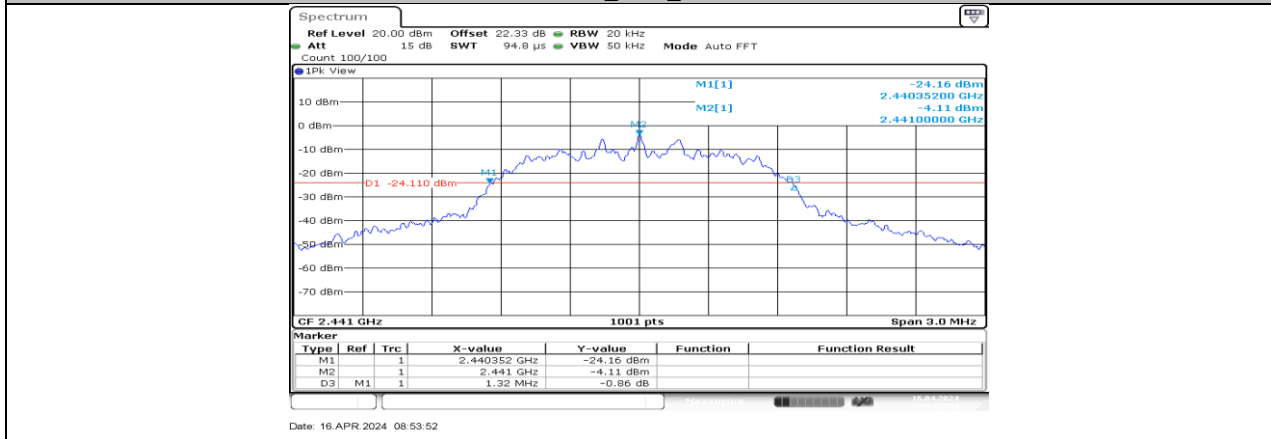

2DH5\_Ant1\_2441

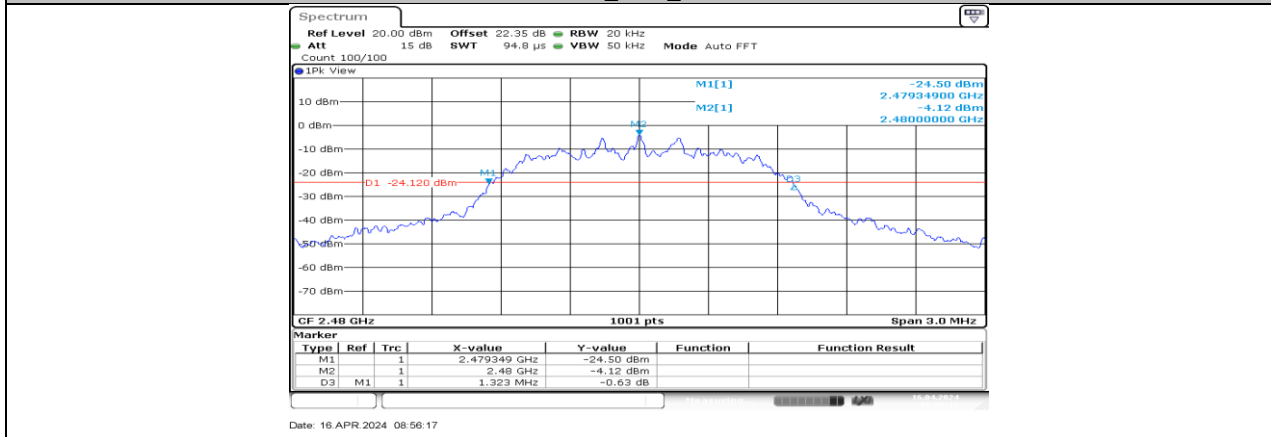

2DH5\_Ant1\_2480


## 11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH

### 11.2.1. Test Result


Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	0.941	2401.5295	2402.4705	PASS
		2441	0.947	2440.5265	2441.4735	PASS
		2480	0.947	2479.5265	2480.4735	PASS
2DH5	Ant1	2402	1.211	2401.4066	2402.6174	PASS
		2441	1.214	2440.4066	2441.6204	PASS
		2480	1.214	2479.4036	2480.6174	PASS

### 11.2.2. Test Graphs




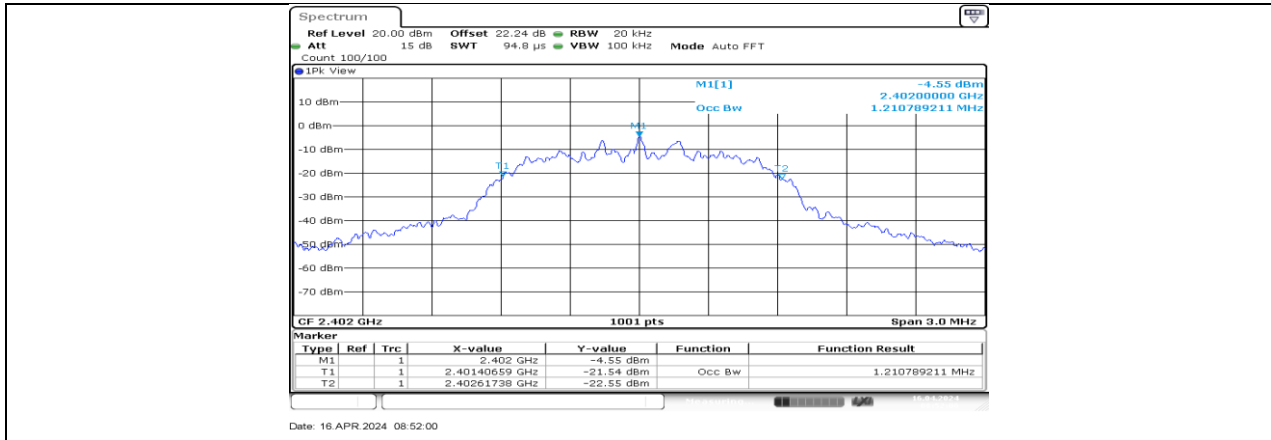

2DH5\_Ant1\_2402

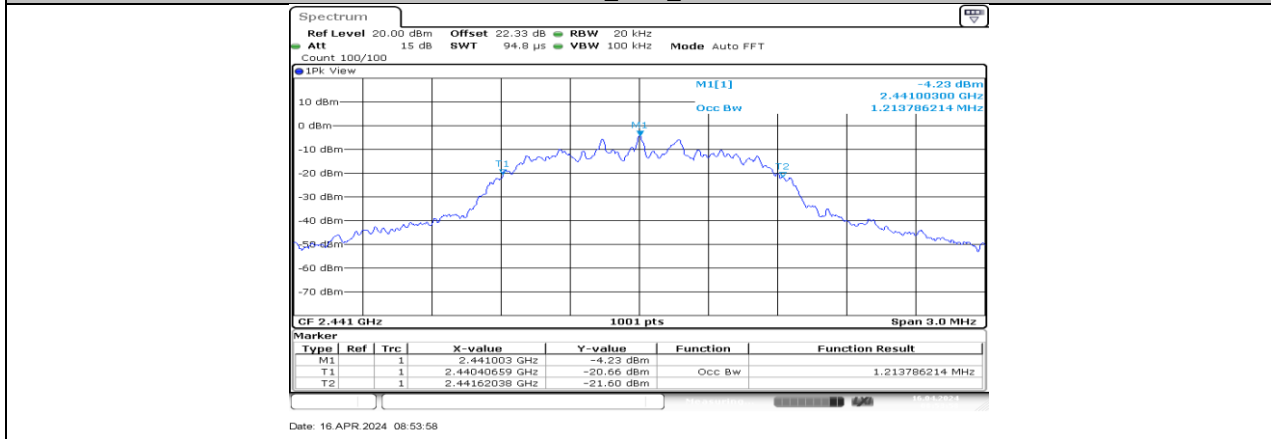

2DH5\_Ant1\_2441

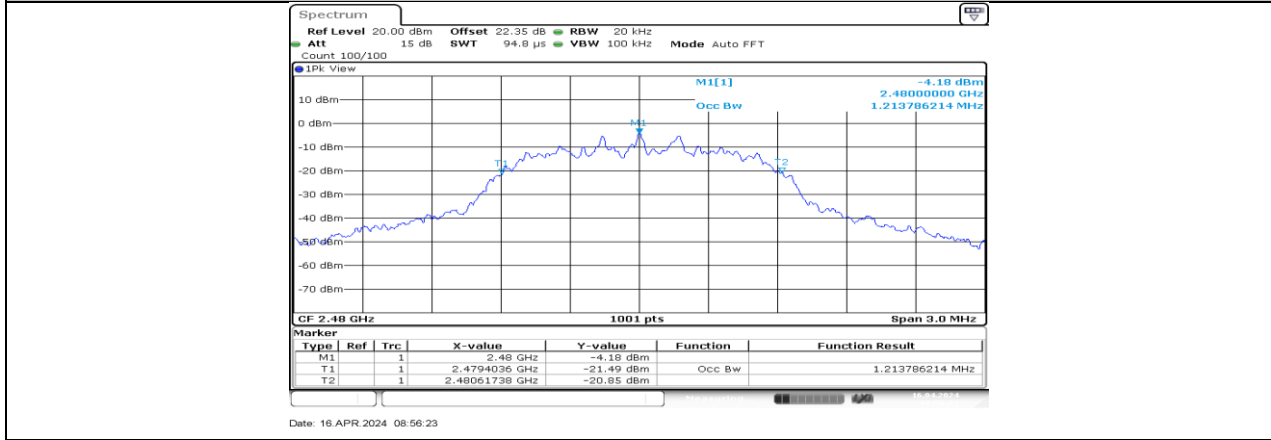

2DH5\_Ant1\_2480



### 11.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER

#### 11.3.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	0.81	≤20.97	PASS
		2441	1.33	≤20.97	PASS
		2480	1.43	≤20.97	PASS
2DH5	Ant1	2402	1.36	≤20.97	PASS
		2441	1.61	≤20.97	PASS
		2480	1.96	≤20.97	PASS

## 11.4. APPENDIX D: CARRIER FREQUENCY SEPARATION

### 11.4.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.084	$\geq 1.030$	PASS
2DH5	Ant1	Hop	1.136	$\geq 0.880$	PASS

### 11.4.2. Test Graphs




## 11.5. APPENDIX E: TIME OF OCCUPANCY


### 11.5.1. Test Result

FHSS Mode						
TestMode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.371	0.119	<=0.4	PASS
DH3	Ant1	Hop	1.62	0.259	<=0.4	PASS
DH5	Ant1	Hop	2.86	0.305	<=0.4	PASS
2DH1	Ant1	Hop	0.38	0.122	<=0.4	PASS
2DH3	Ant1	Hop	1.625	0.260	<=0.4	PASS
2DH5	Ant1	Hop	2.865	0.306	<=0.4	PASS


AFHSS Mode						
TestMode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.371	0.059	<=0.4	PASS
DH3	Ant1	Hop	1.62	0.130	<=0.4	PASS
DH5	Ant1	Hop	2.86	0.153	<=0.4	PASS
2DH1	Ant1	Hop	0.38	0.061	<=0.4	PASS
2DH3	Ant1	Hop	1.625	0.130	<=0.4	PASS
2DH5	Ant1	Hop	2.865	0.153	<=0.4	PASS

### 11.5.2. Test Graphs

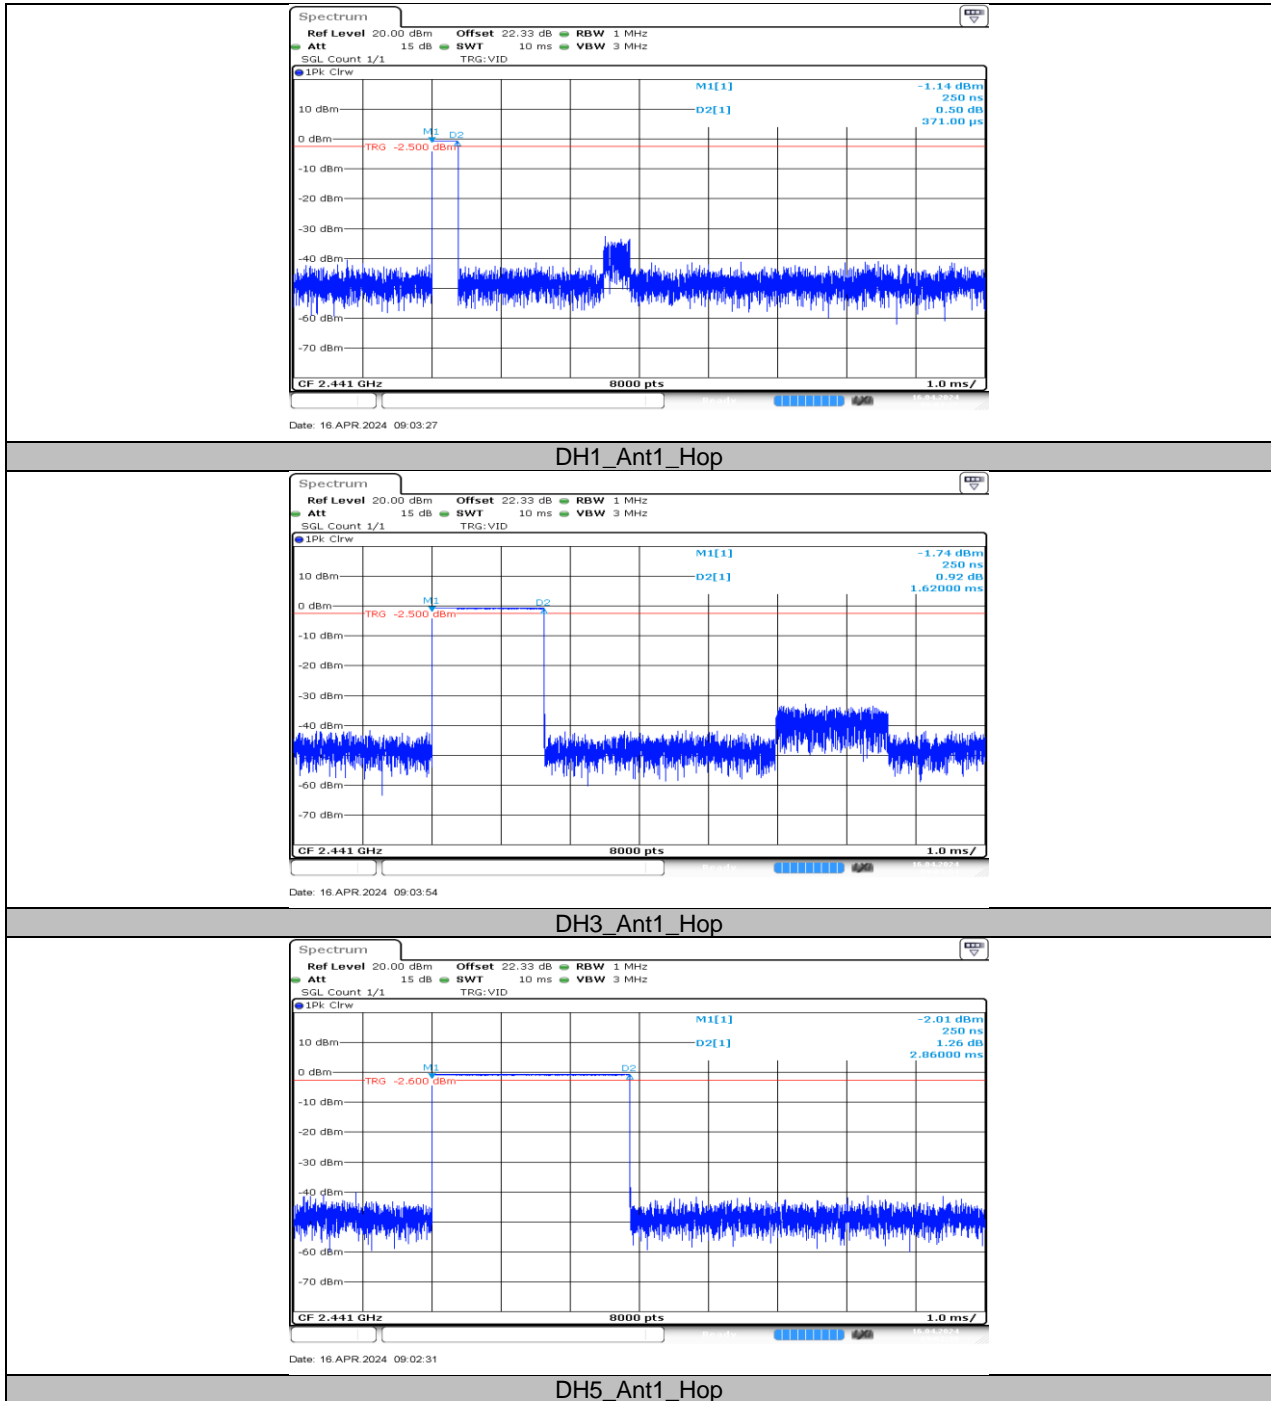


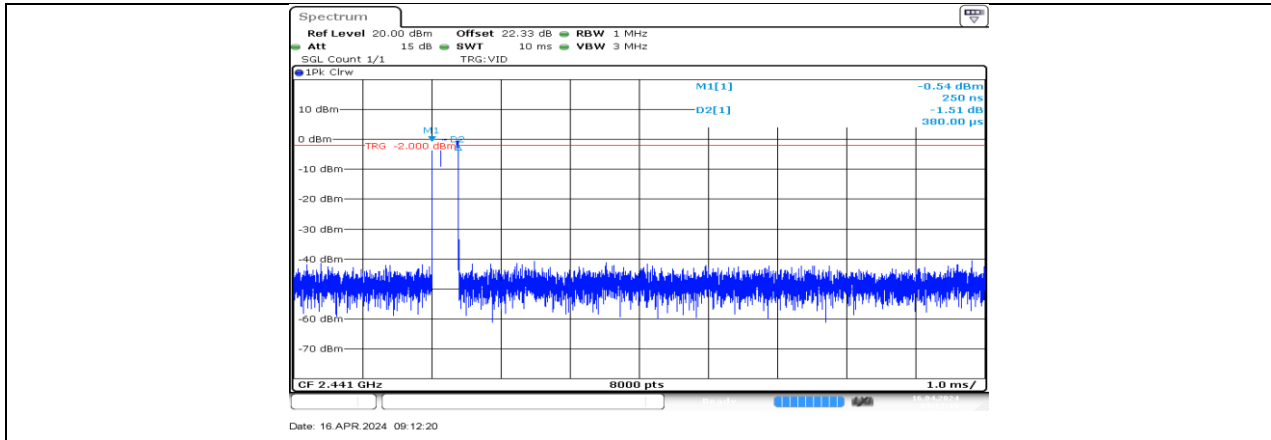

2DH1\_Ant1\_Hop

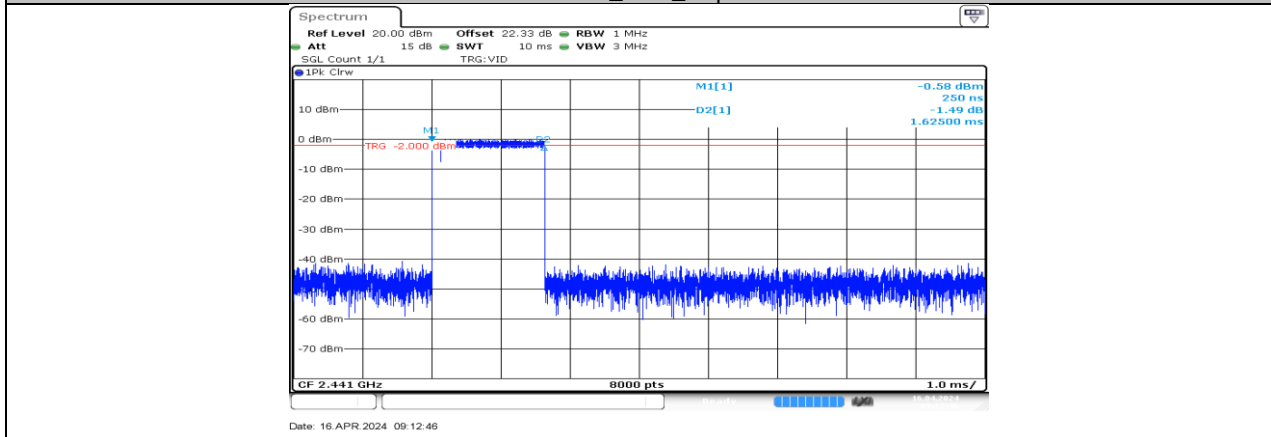

2DH3\_Ant1\_Hop

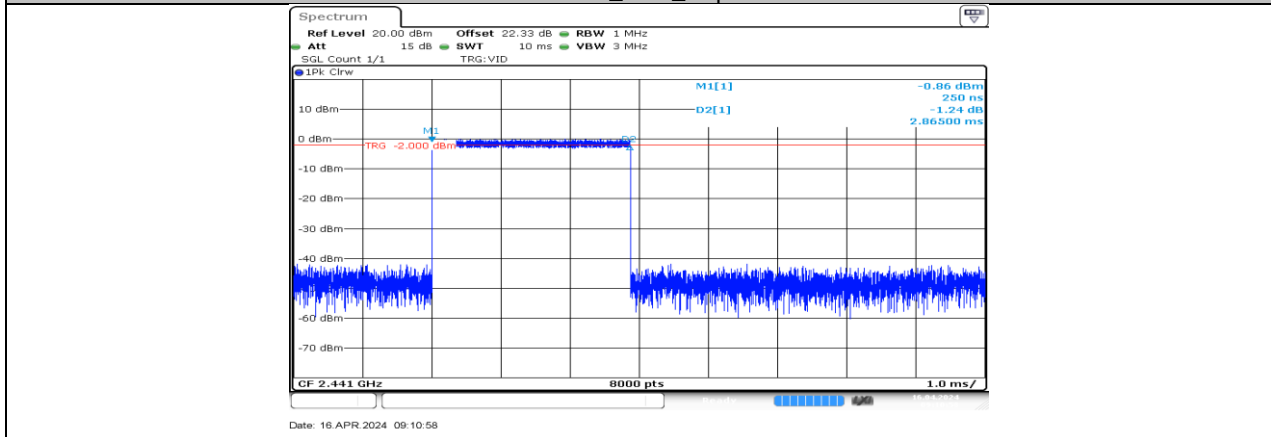


2DH5\_Ant1\_Hop

## 11.6. APPENDIX F: NUMBER OF HOPPING CHANNELS

### 11.6.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS

### 11.6.2. Test Graphs

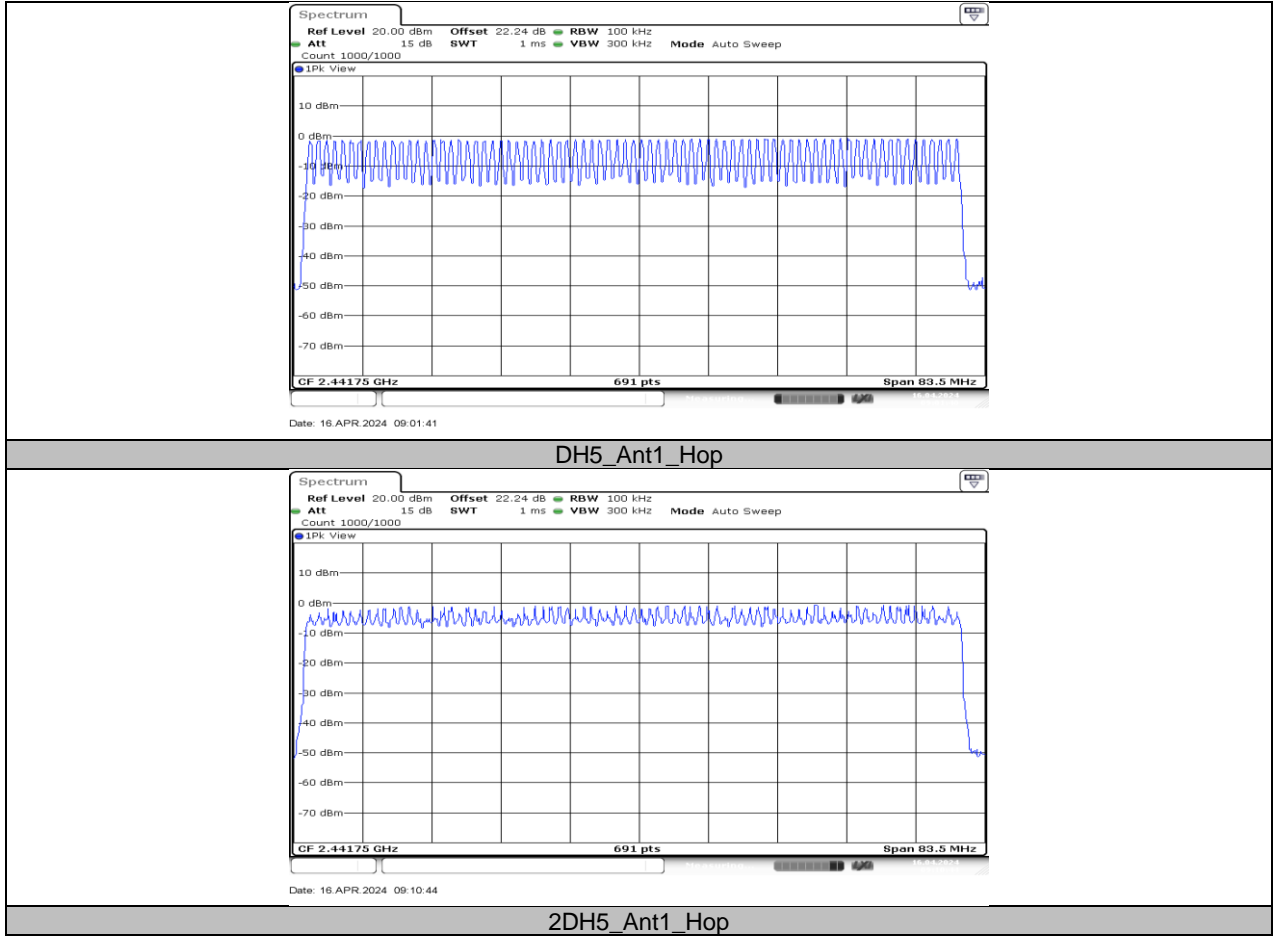




## 11.7. APPENDIX G: BAND EDGE MEASUREMENTS


### 11.7.1. Test Result

Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-1.42	-48.86	≤-21.42	PASS
		High	2480	-0.67	-46.98	≤-20.67	PASS
		Low	Hop_2402	-1.93	-47.47	≤-21.93	PASS
		High	Hop_2480	-0.92	-46.92	≤-20.92	PASS
2DH5	Ant1	Low	2402	-1.28	-48.94	≤-21.28	PASS
		High	2480	-0.55	-47.15	≤-20.55	PASS
		Low	Hop_2402	-2.07	-49.14	≤-22.07	PASS
		High	Hop_2480	-0.61	-48.3	≤-20.61	PASS


### 11.7.2. Test Graphs

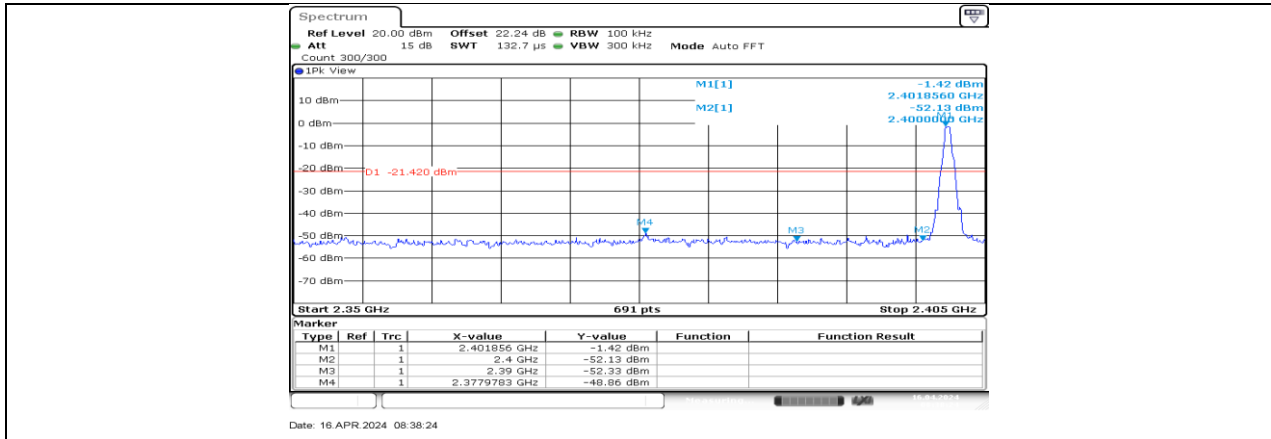


DH5\_Ant1\_Low\_2402

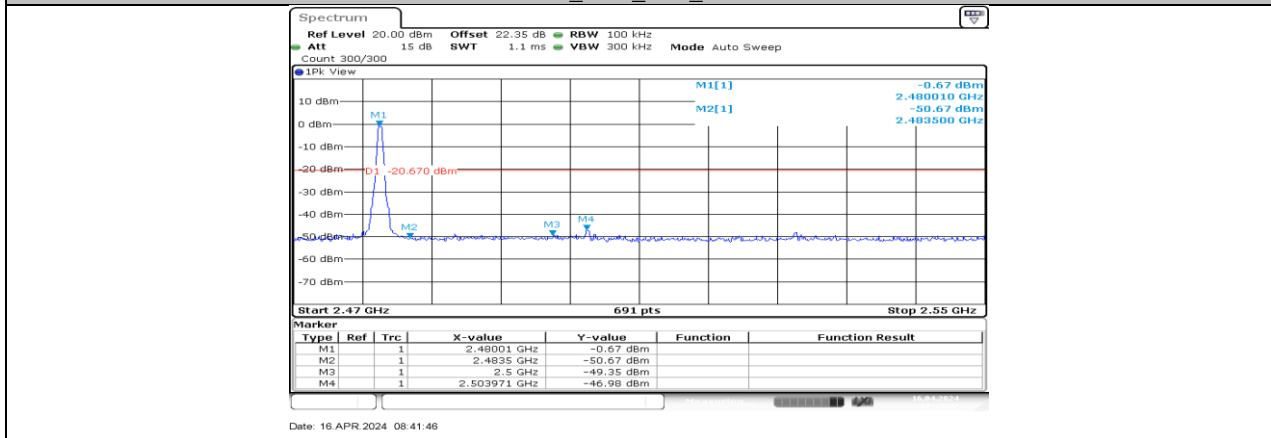


DH5\_Ant1\_High\_2480

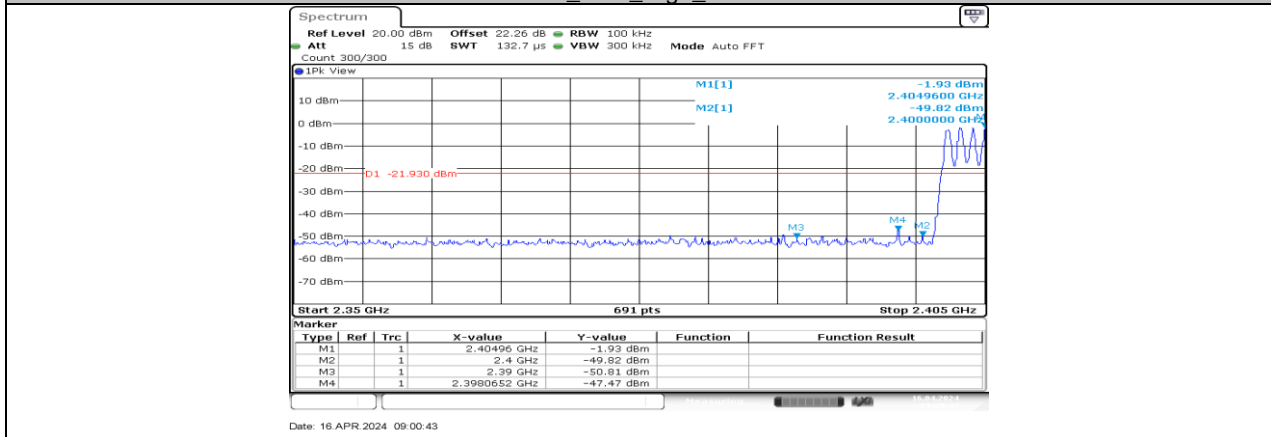


DH5\_Ant1\_Low\_Hop\_2402

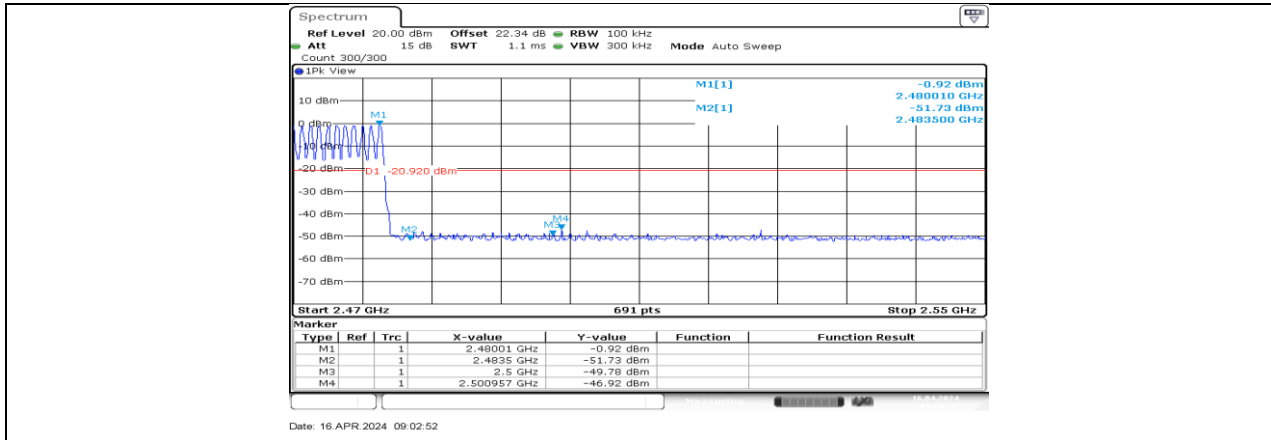


DH5\_Ant1\_High\_Hop\_2480

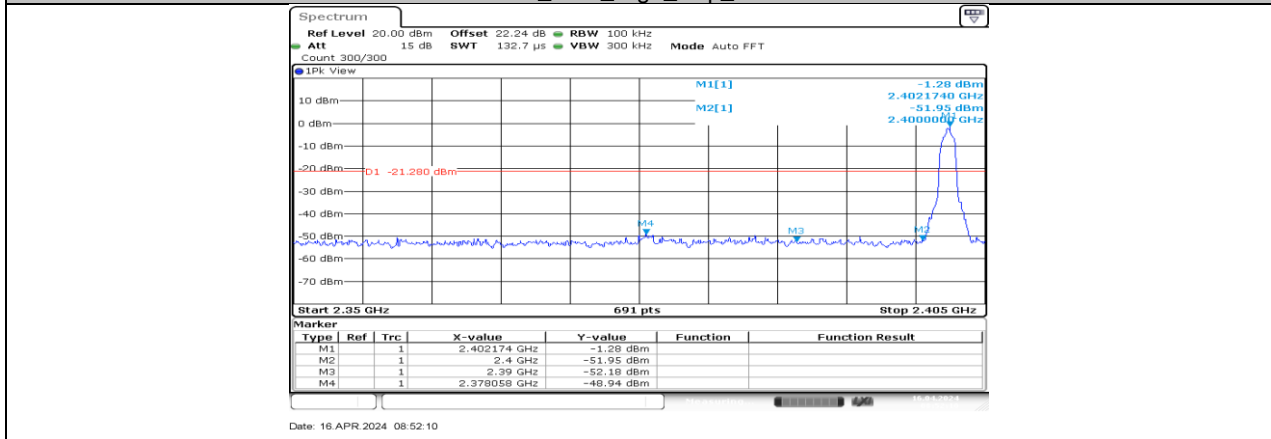


2DH5\_Ant1\_Low\_2402

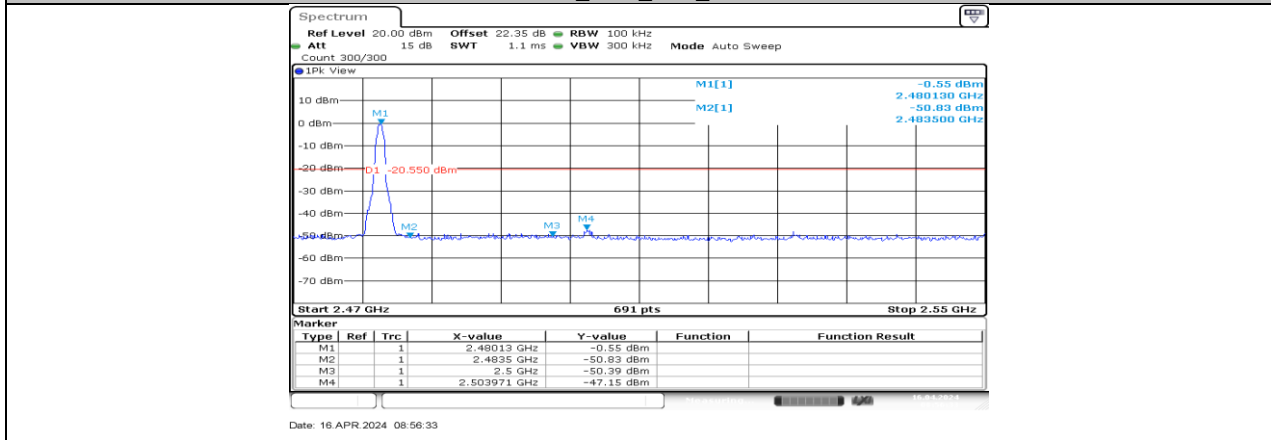

2DH5\_Ant1\_High\_2480

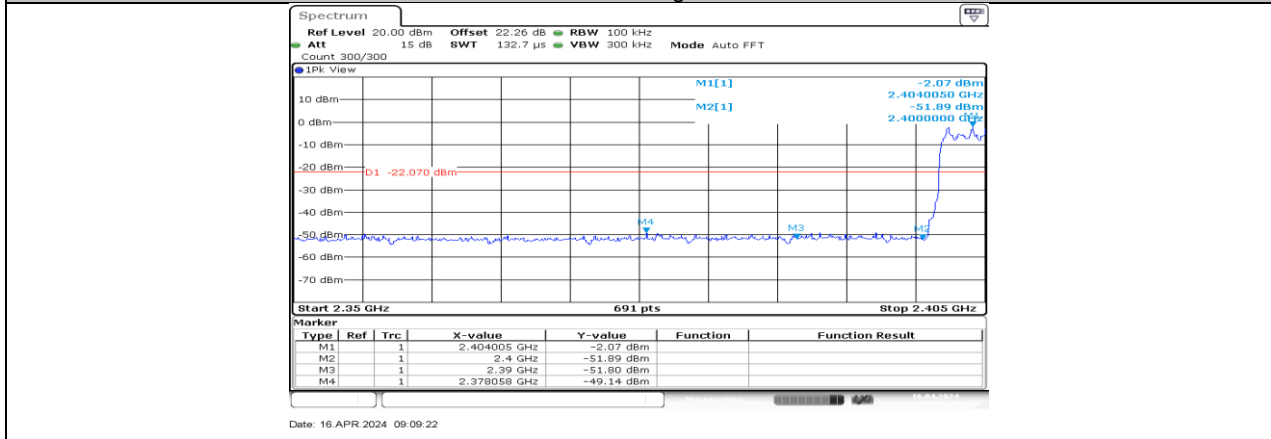

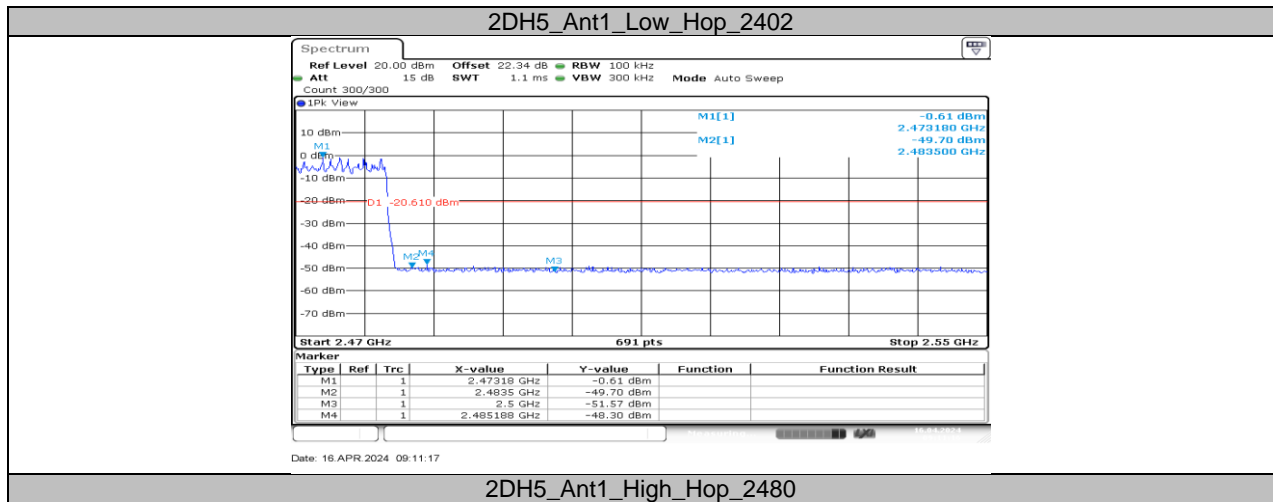


2DH5\_Ant1\_High\_Hop\_2480


## 11.8. APPENDIX H: CONDUCTED SPURIOUS EMISSION

### 11.8.1. Test Result


Test Mode	Antenna	Frequency[MHz]	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-1.28	---	PASS
			30~1000	-39.07	≤-21.28	PASS
			1000~26500	-39.93	≤-21.28	PASS
		2441	Reference	-0.88	---	PASS
			30~1000	-38.75	≤-20.88	PASS
			1000~26500	-39.19	≤-20.88	PASS
		2480	Reference	-0.68	---	PASS
			30~1000	-39.46	≤-20.68	PASS
			1000~26500	-40.23	≤-20.68	PASS
2DH5	Ant1	2402	Reference	-1.23	---	PASS
			30~1000	-39.57	≤-21.23	PASS
			1000~26500	-39.77	≤-21.23	PASS
		2441	Reference	-0.80	---	PASS
			30~1000	-39.22	≤-20.8	PASS
			1000~26500	-40.25	≤-20.8	PASS
		2480	Reference	-0.60	---	PASS
			30~1000	-38.73	≤-20.6	PASS
			1000~26500	-39.41	≤-20.6	PASS

### 11.8.2. Test Graphs

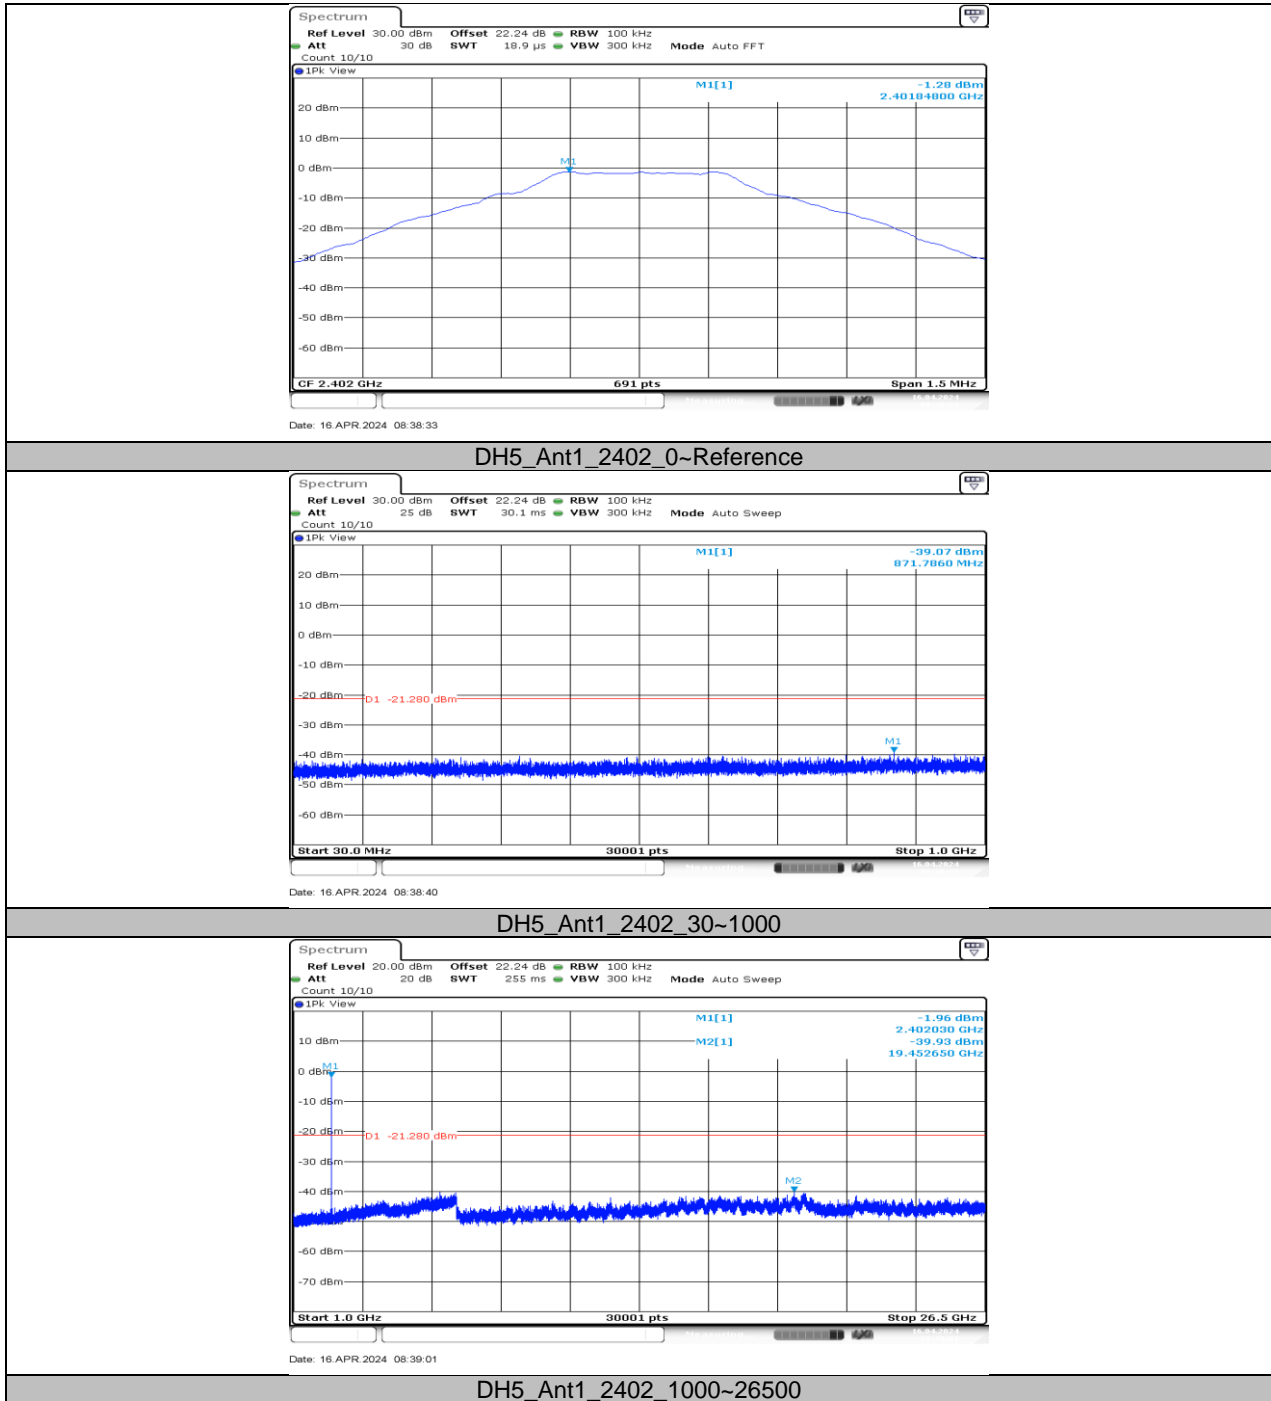


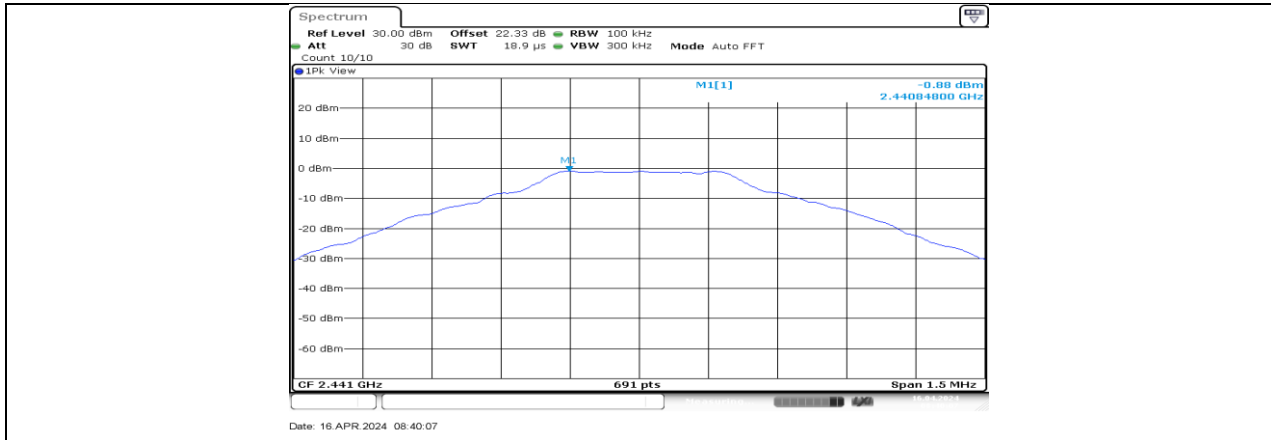


DH5\_Ant1\_2441\_0~Reference

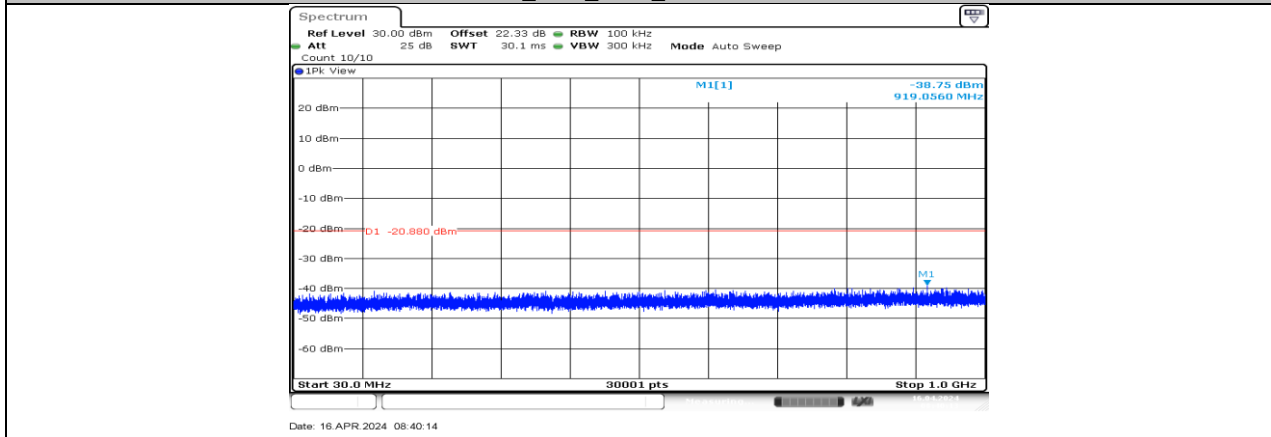


DH5\_Ant1\_2441\_30~1000

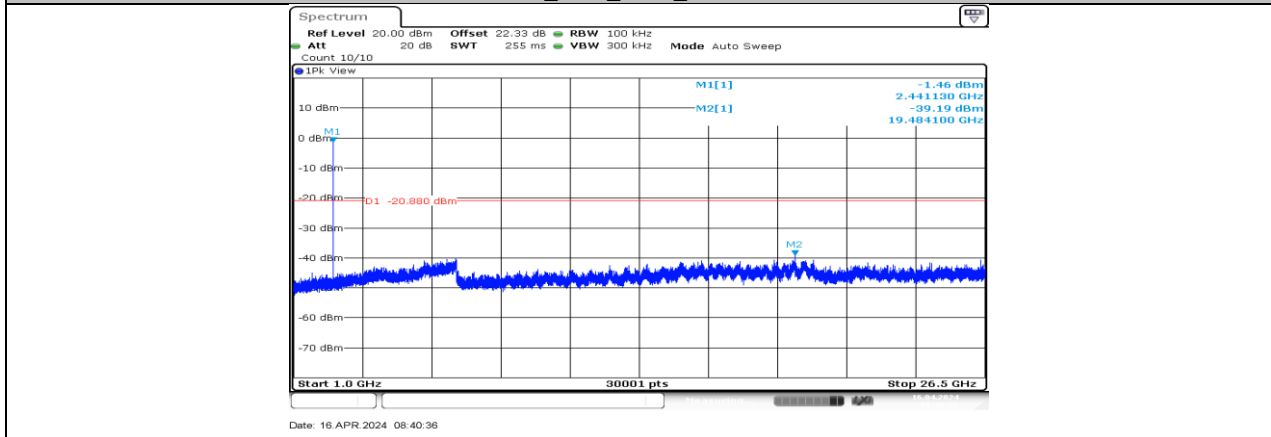


DH5\_Ant1\_2441\_1000~26500

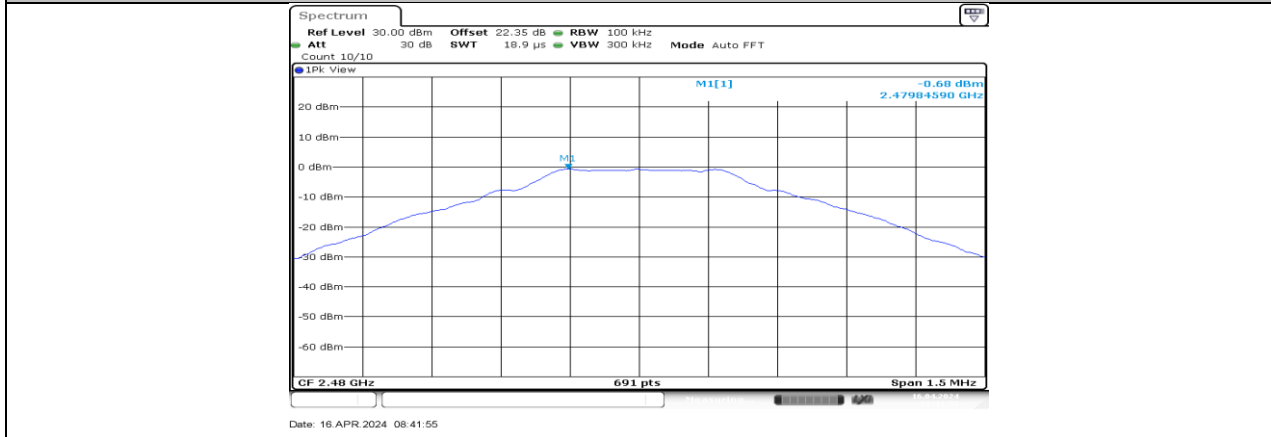


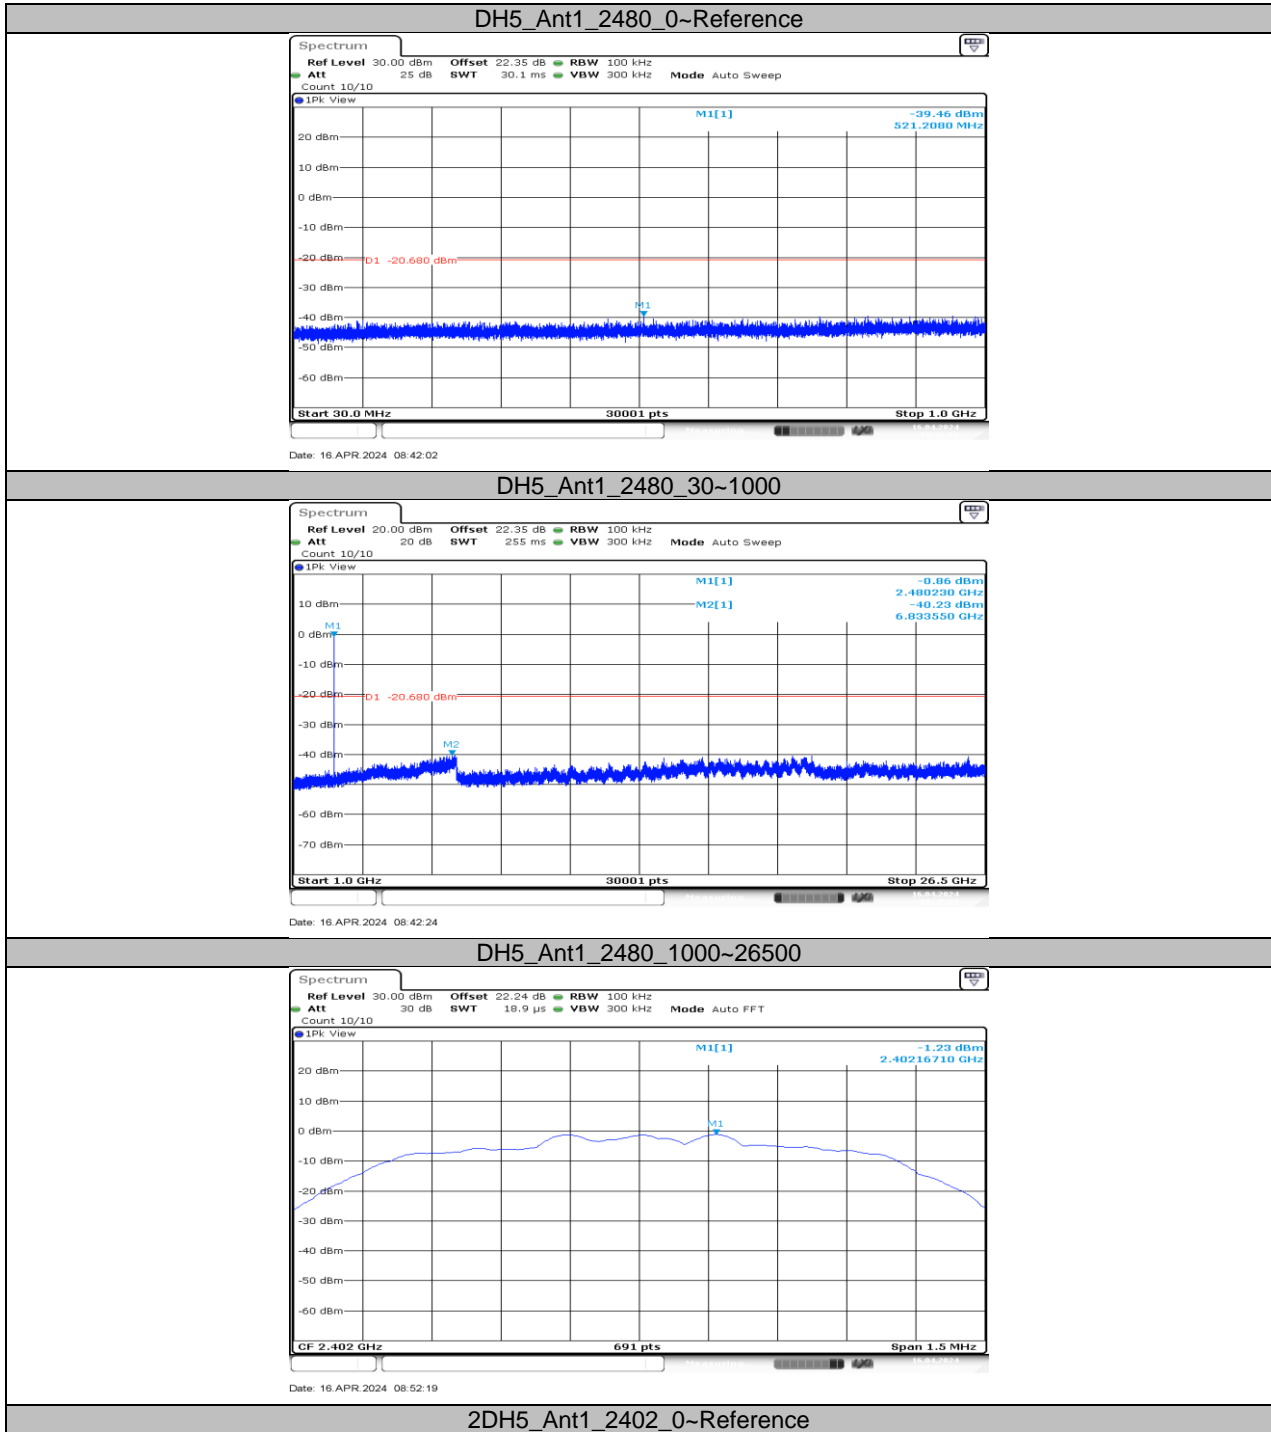




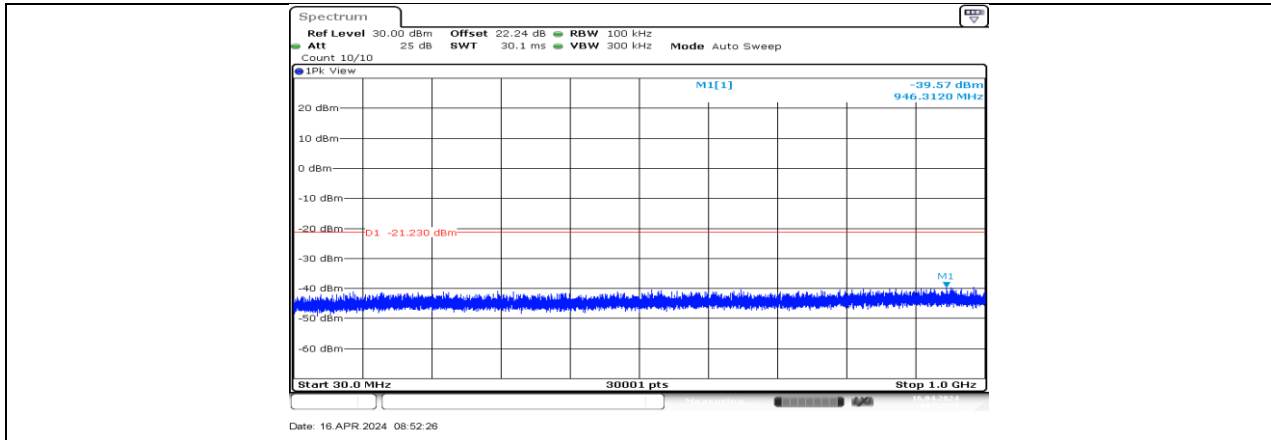


2DH5\_Ant1\_2402\_30~1000

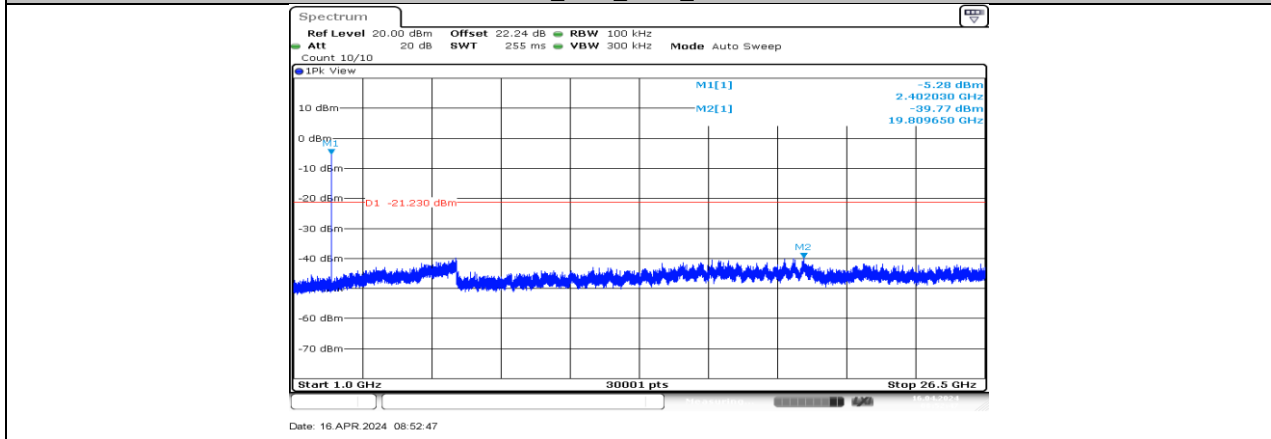



2DH5\_Ant1\_2402\_1000~26500

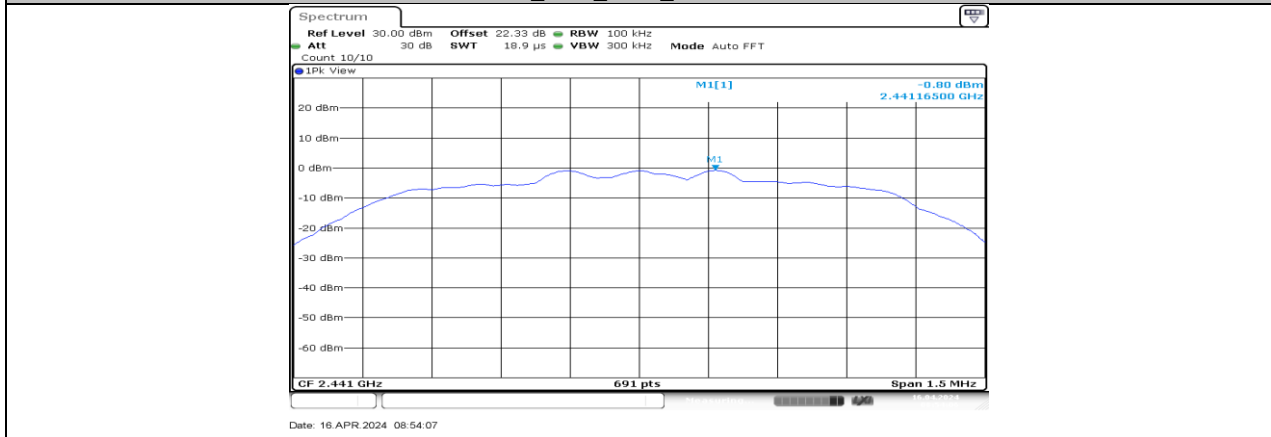

2DH5\_Ant1\_2441\_0~Reference

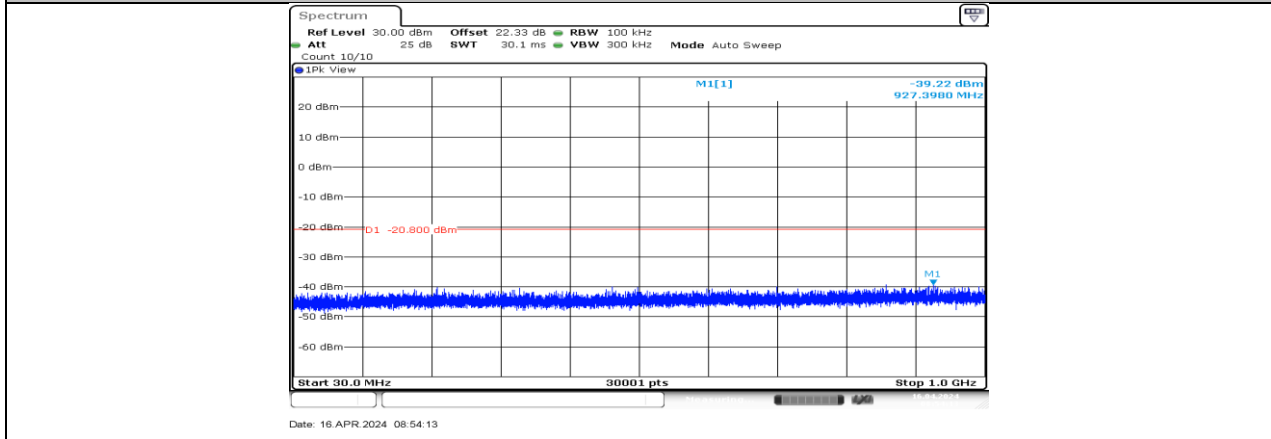

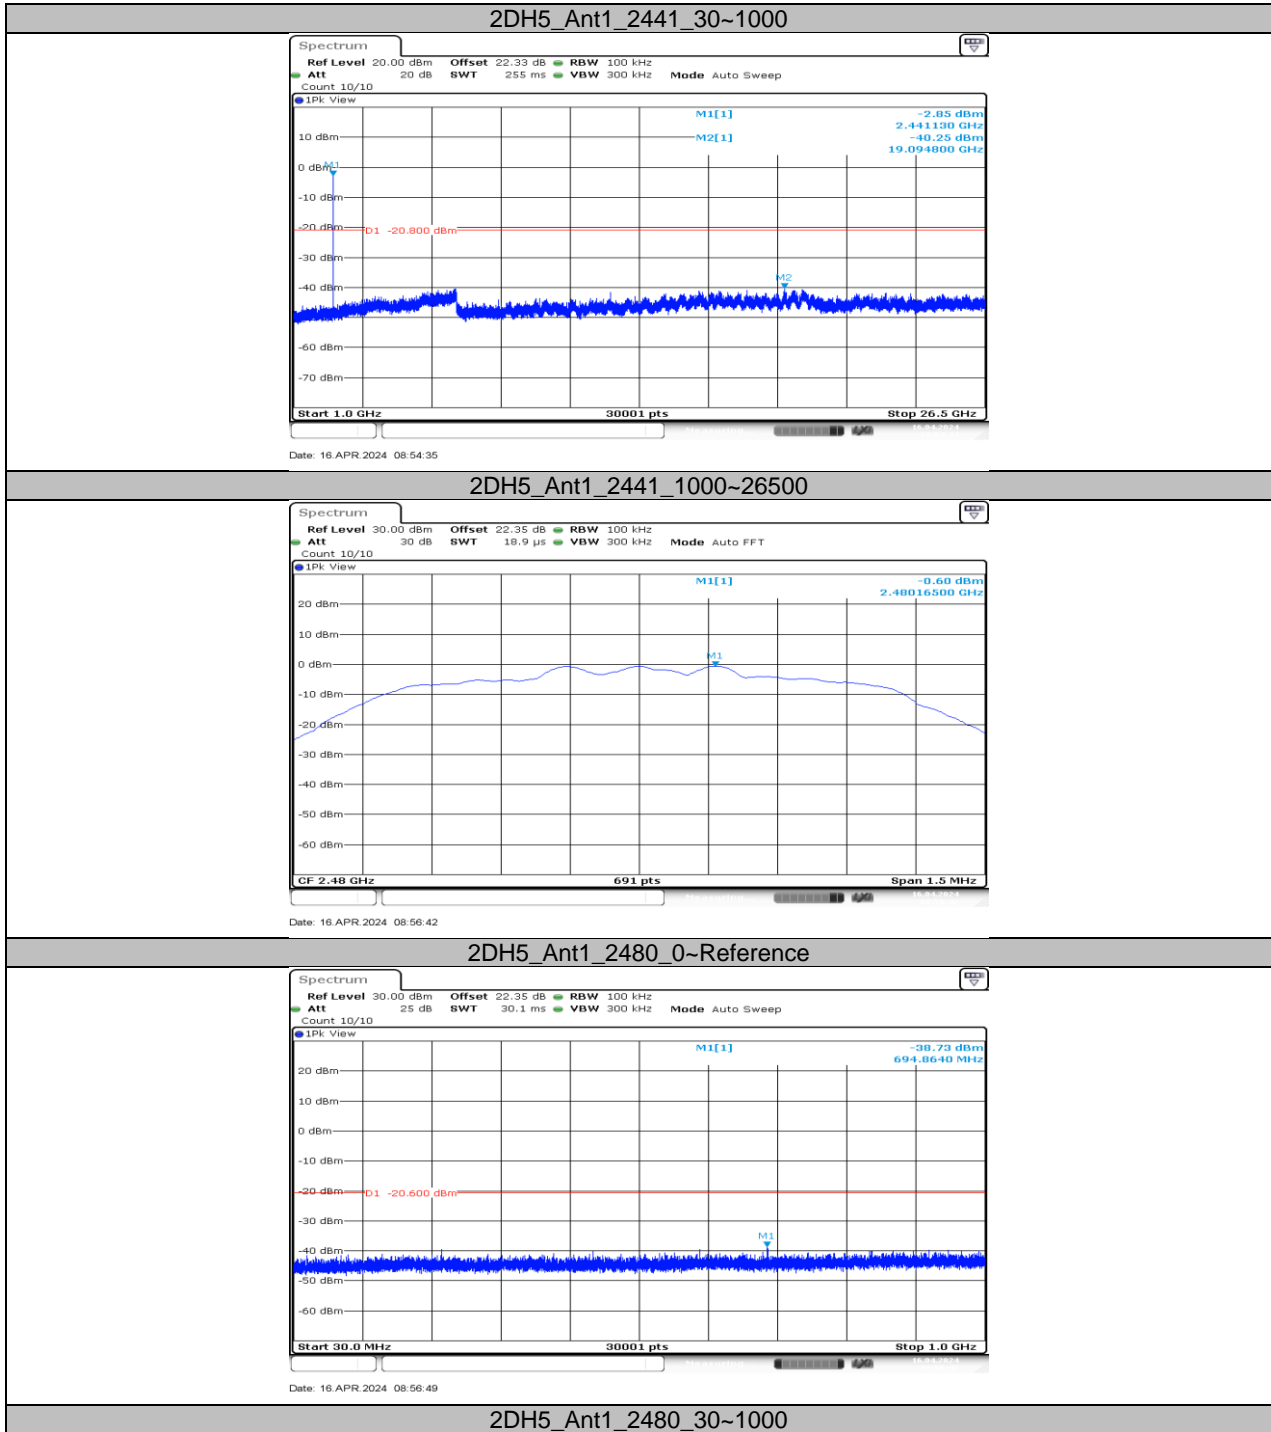

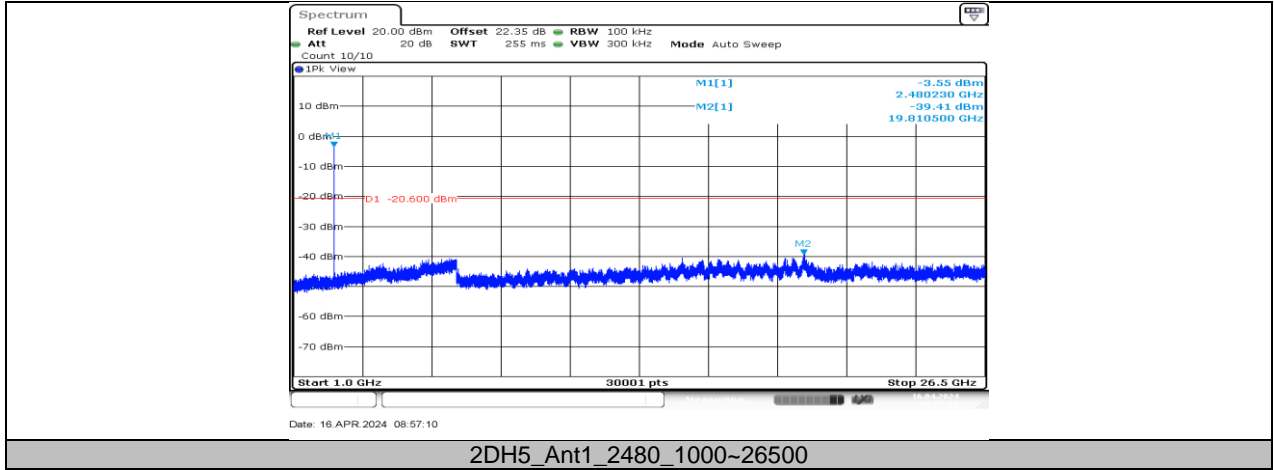

## 11.9. APPENDIX I: DUTY CYCLE

### 11.9.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
DH5	2.88	3.75	0.7680	76.80	1.15	0.35	1
2DH5	2.9	3.76	0.7713	77.13	1.13	0.34	1

Note:


Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)


Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

### 11.9.2. Test Graphs

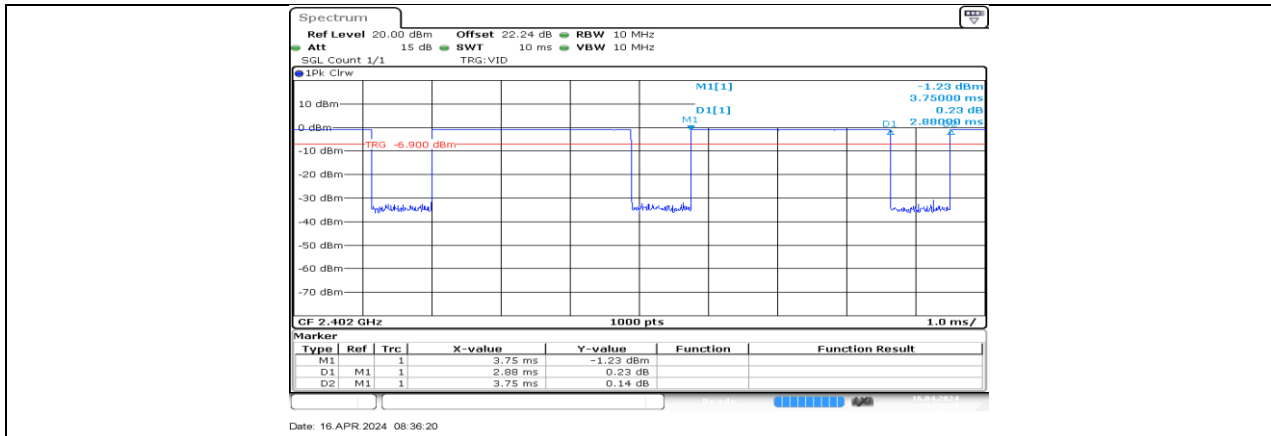

DH5\_Ant1\_2402

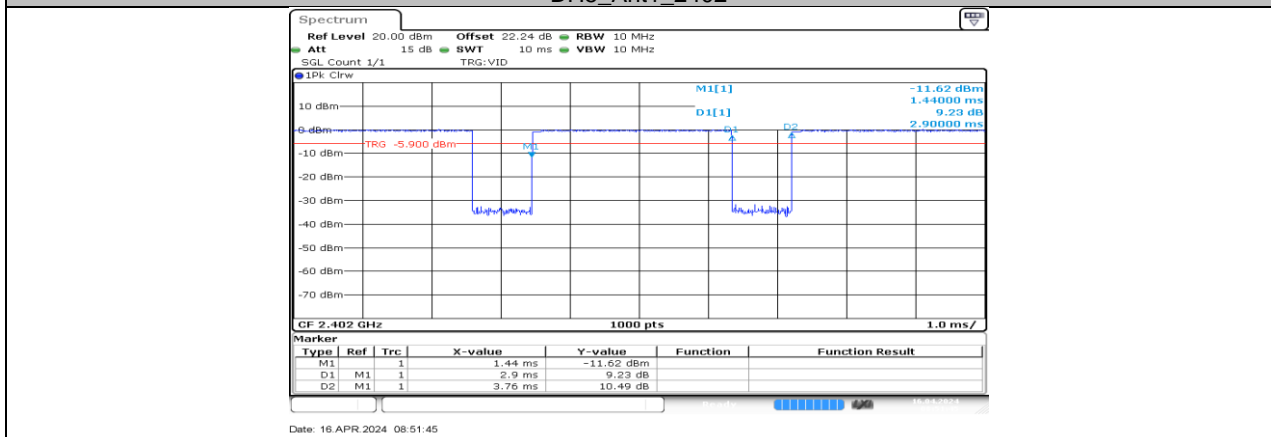

2DH5\_Ant1\_2402

**END OF REPORT**