



# FCC TEST REPORT

## FCC ID: 2ANYC-NT-1200

Product	:	barcode scanner
Model Name	:	NT-1200
Additional model	:	NT-1202, NT-1202W, NT-1203, NT-1203L, NT-1205, NT-1205BT, NT-1208, NT-1209, NT-1900, NT-1920, NT-1950, NT-1970, NT-1980, NT-1990, NT-2023
Brand	:	NETUM,NTEUMM,NetumScan
Report No.	:	PTC24031909801E-FC03
<b>Prepared for</b>		
Guangzhou NETUM Electronic Technology Co., Ltd.		
Building 1, No. 51 Xiangshan Avenue, Ningxi Street, Zengcheng District, Guangzhou, China		
<b>Prepared by</b>		
Precise Testing & Certification Co., Ltd.		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



## 1 TEST RESULT CERTIFICATION

Applicant's name : Guangzhou NETUM Electronic Technology Co., Ltd.  
Address : Building 1, No. 51 Xiangshan Avenue, Ningxi Street, Zengcheng District,  
: Guangzhou, China  
Manufacture's name : Guangzhou NETUM Electronic Technology Co., Ltd.  
Address : Building 1, No. 51 Xiangshan Avenue, Ningxi Street, Zengcheng District,  
: Guangzhou, China  
Product name : barcode scanner  
Model name : NT-1200, NT-1202, NT-1202W, NT-1203, NT-1203L, NT-1205, NT-  
: 1205BT, NT-1208, NT-1209, NT-1900, NT-1920, NT-1950, NT-1970,  
: NT-1980, NT-1990, NT-2023  
Standards : FCC Part15 Subpart C, Paragraph 15.249  
Test procedure : ANSI C63.10: 2013  
Test Date : Apr. 07, 2024 to Apr. 24, 2024  
Date of Issue : Apr. 26, 2024  
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink, appearing to read 'Jack Zhou'.

Jack Zhou / Engineer

Technical Manager:

A handwritten signature in black ink, appearing to read 'Simon Pu'.

Simon Pu / Manager



## Contents

	<b>Page</b>
<b>1 TEST RESULT CERTIFICATION .....</b>	<b>2</b>
<b>2 TEST SUMMARY .....</b>	<b>5</b>
2.1 TEST SITE .....	6
<b>3 GENERAL INFORMATION .....</b>	<b>7</b>
3.1 GENERAL DESCRIPTION OF E.U.T. ....	7
3.2 CHANNEL LIST .....	8
<b>4 EQUIPMENT DURING TEST .....</b>	<b>9</b>
4.1 EQUIPMENTS LIST .....	9
4.2 MEASUREMENT UNCERTAINTY .....	11
4.3 DESCRIPTION OF SUPPORT UNITS .....	11
<b>5 CONDUCTED EMISSION .....</b>	<b>12</b>
5.1 E.U.T. OPERATION .....	12
5.2 EUT SETUP .....	12
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	13
5.4 MEASUREMENT PROCEDURE .....	13
5.5 CONDUCTED EMISSION LIMIT .....	13
5.6 MEASUREMENT DESCRIPTION .....	13
5.7 CONDUCTED EMISSION TEST RESULT .....	13
<b>6 RADIATED EMISSION AND BAND EDGE .....</b>	<b>16</b>
6.1 TEST STANDARD AND LIMIT .....	16
6.2 TEST SETUP .....	17
6.3 TEST PROCEDURE .....	18
6.4 TEST DATA .....	19
<b>7 20DB BANDWIDTH TEST .....</b>	<b>26</b>
7.1 TEST STANDARD AND LIMIT .....	26
7.2 TEST SETUP .....	26
7.3 TEST PROCEDURE .....	26
7.4 TEST DATA .....	27
<b>8 ANTENNA REQUIREMENT .....</b>	<b>29</b>
8.1 TEST STANDARD AND REQUIREMENT .....	29
8.2 ANTENNA CONNECTED CONSTRUCTION .....	29



**9 TEST SETUP..... 30**

**10 EUT PHOTOS.....32**



## 2 Test Summary

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	N/A
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(d)	Band Edge	PASS
<b>Remark:</b> "N/A" is an abbreviation for Not Applicable.		

Remark:N/A



## 2.1 Test Site

Precise Testing & Certification Co., Ltd.

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A

FCC Designation Number: CN1219



### 3 General Information

#### 3.1 General Description of E.U.T.

Product Name	:	barcode scanner
Model Name	:	NT-1200
Additional model	:	NT-1202, NT-1202W, NT-1203, NT-1203L, NT-1205, NT-1205BT, NT-1208, NT-1209, NT-1900, NT-1920, NT-1950, NT-1970, NT-1980, NT-1990, NT-2023
Operation Frequency	:	2407-2478MHz
Modulation	:	GFSK
Number of Channels	:	60
Antenna installation	:	Internal Antenna
Antenna Gain	:	2.66 dBi
Power supply	:	N/A



### 3.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2407	16	2425	31	2443	46	2461
2	2408	17	2426	32	2444	47	2462
3	2409	18	2427	33	2445	48	2466
4	2410	19	2428	34	2446	49	2467
5	2411	20	2429	35	2450	50	2468
6	2412	21	2430	36	2451	51	2469
7	2413	22	2434	37	2452	52	2470
8	2414	23	2435	38	2453	53	2471
9	2418	24	2436	39	2454	54	2472
10	2419	25	2437	40	2455	55	2473
11	2420	26	2438	41	2456	56	2474
12	2421	27	2439	42	2457	57	2475
13	2422	28	2440	43	2458	58	2476
14	2423	29	2441	44	2459	59	2477
15	2424	30	2442	45	2460	60	2478

Note:

1. Test of channel was included the lowest 2407MHz, middle 2440MHz and highest frequency 2478MHz in highest data rate and to perform the test, then record on this report.
2. EUT used the new batteries during test.





## 4 Equipment During Test

### 4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-26.5GHz	Aug.17, 2023	1 Year
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug.17, 2023	1 Year
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug.17, 2023	1 Year
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug.17, 2023	1 Year
Test S/W	Tonscend	JS1120-3	/	/	/	/

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESPI7	101671	9KHz-7GHz	Aug. 17,2023	1 Year
Loop Antenna	Schwarzbeck	FMZB 1519	192	9 KHz -30MHz	Aug. 17,2023	1 Year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 17,2023	1 Year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 17,2023	1 Year
Cable	IMRO	AK-9515E(9m)	Cable-L	9KHz-3GHz	Aug. 17,2023	1 Year
Spectrum Analyzer	Rohde&Schwarz	FSV40	6625-01-588-5515	9KHz-40GHz	Aug. 17,2023	1 Year
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 17,2023	1 Year
Power Amplifier	ZHINAN	ZN3380C	15002	1GHz-26.5GHz	Aug. 17,2023	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-1066	15GHz-40GHz	Jul. 19, 2023	1 Year
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Jul. 19, 2023	1 Year



Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 17,2023	1 Year
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 17,2023	1 Year
Test S/W	Tonscend	TS+	/	/	/	/

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Date	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 17, 2023	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 17, 2023	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 17, 2023	1 Year
Limiter	R&S	ESH3-Z2	0357.8810.54-102808-NB	0Hz-30MHz	Aug. 16,2023	1 Year
RF Switch	DIAMOND ANTENNA	CX-210	/	9kHz-6GHz	Mar. 22,2024	1 Year
Test S/W	Tonscend	JS32-CE	/	/	/	/



## 4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Radiated Emission(9KHz~30MHz)	±3.15dB

## 4.3 Description of Support Units

Equipment	Model No.	Series No.
Adapter	KSAS0501800300M2	N/A
Notebook	TPN-C126	N/A

## 5 Conducted Emission

Test Requirement	:	FCC CFR 47 Part 15 Section 15.207
Test Method	:	ANSI C63.10: 2013
Test Result	:	PASS
Frequency Range	:	150kHz to 30MHz
Class/Severity	:	Class B


### 5.1 E.U.T. Operation

Operating Environment :


Temperature	:	25.5 °C
Humidity	:	51 % RH
Atmospheric Pressure	:	101.2kPa

### 5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

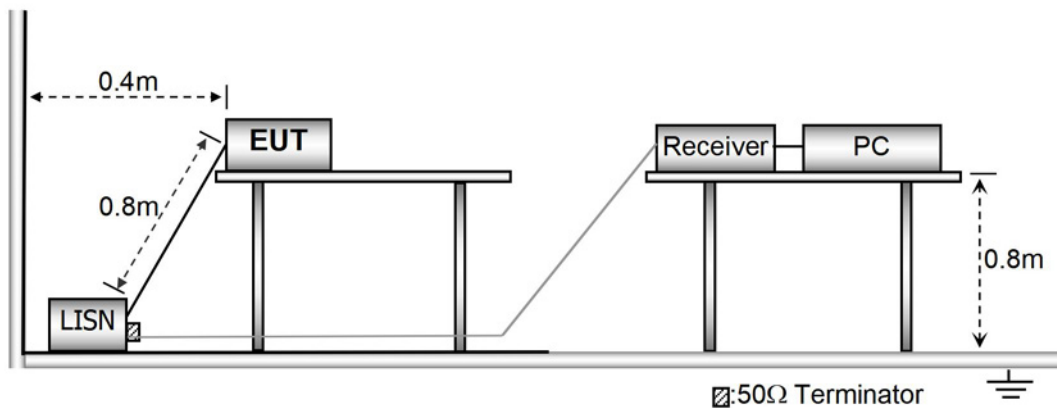

### 5.3 Test SET-UP (Block Diagram of Configuration)

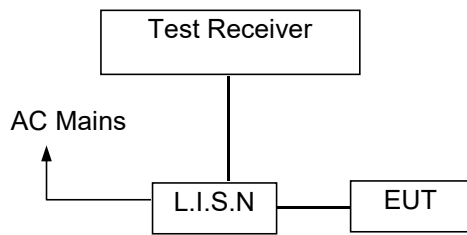

### 5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 5.5 Conducted Emission Limit

Conducted Emission Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

**Note:**

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


### 5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 5.7 Conducted Emission Test Result




Line-AC 120V/60Hz

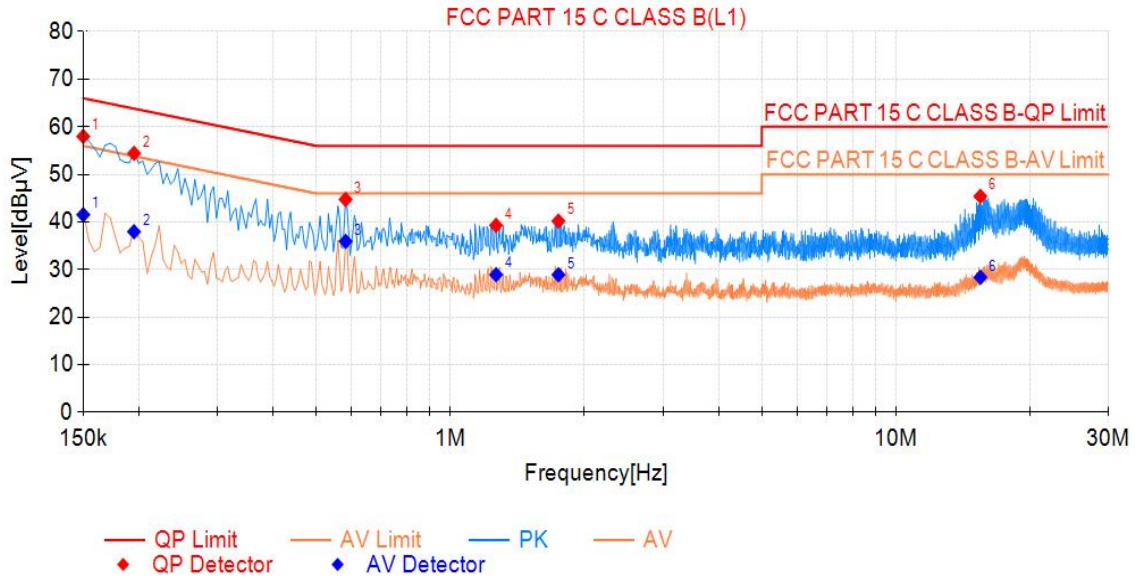

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.150	19.22	57.98	66.00	8.02	41.53	56.00	14.47	PASS
2	0.195	19.16	54.44	63.82	9.38	37.96	53.82	15.86	PASS
3	0.582	19.26	44.75	56.00	11.25	35.94	46.00	10.06	PASS
4	1.266	19.29	39.30	56.00	16.70	28.93	46.00	17.07	PASS
5	1.748	19.32	40.19	56.00	15.81	28.91	46.00	17.09	PASS
6	15.473	20.12	45.40	60.00	14.60	28.38	50.00	21.62	PASS



Neutral-AC 120V/60Hz

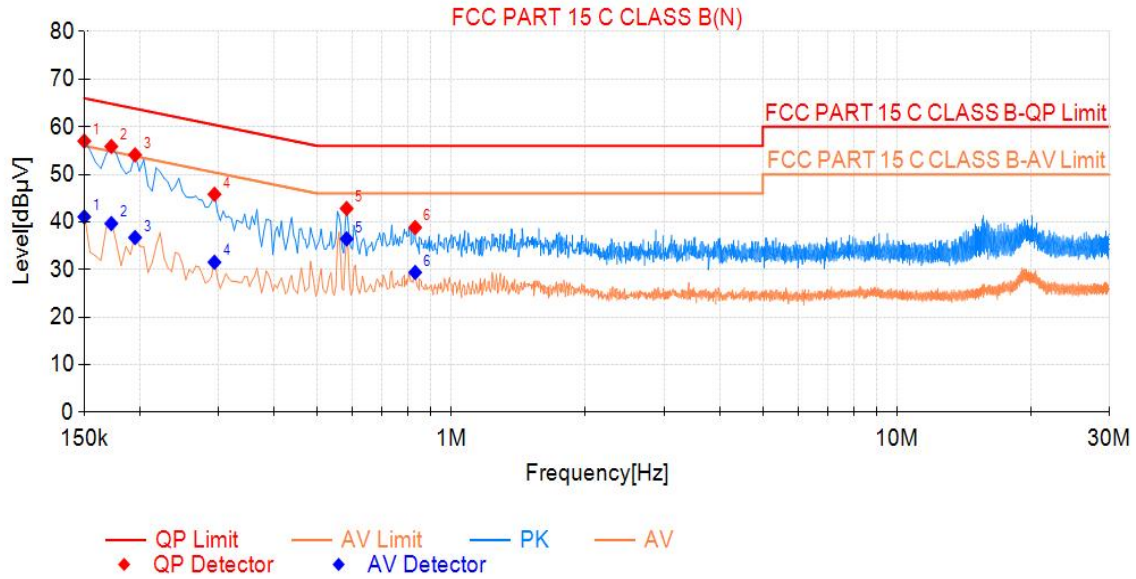

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.150	18.99	57.00	66.00	9.00	41.08	56.00	14.92	PASS
2	0.173	19.08	55.87	64.84	8.97	39.67	54.84	15.17	PASS
3	0.195	19.08	54.10	63.82	9.72	36.74	53.82	17.08	PASS
4	0.294	19.14	45.83	60.41	14.58	31.54	50.41	18.87	PASS
5	0.582	19.19	42.83	56.00	13.17	36.46	46.00	9.54	PASS
6	0.830	19.25	38.84	56.00	17.16	29.40	46.00	16.60	PASS

Note:QP Margin[dB]= QP Limit[dBµV]- QP Value[dBµV], AV Margin[dB]= AV Limit[dBµV]- AV Value[dBµV].



## 6 Radiated Emission and Band Edge

### 6.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	2400~2483.5	50	-	114.0	Peak	3
	2400~2483.5	50	-	94.0	Average	3
	2400~2483.5	-	500	74.0	Peak	3
	2400~2483.5	-	500	54.0	Average	3

**Remark:**

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



## 6.2 Test Setup

Figure 1. Below 30MHz

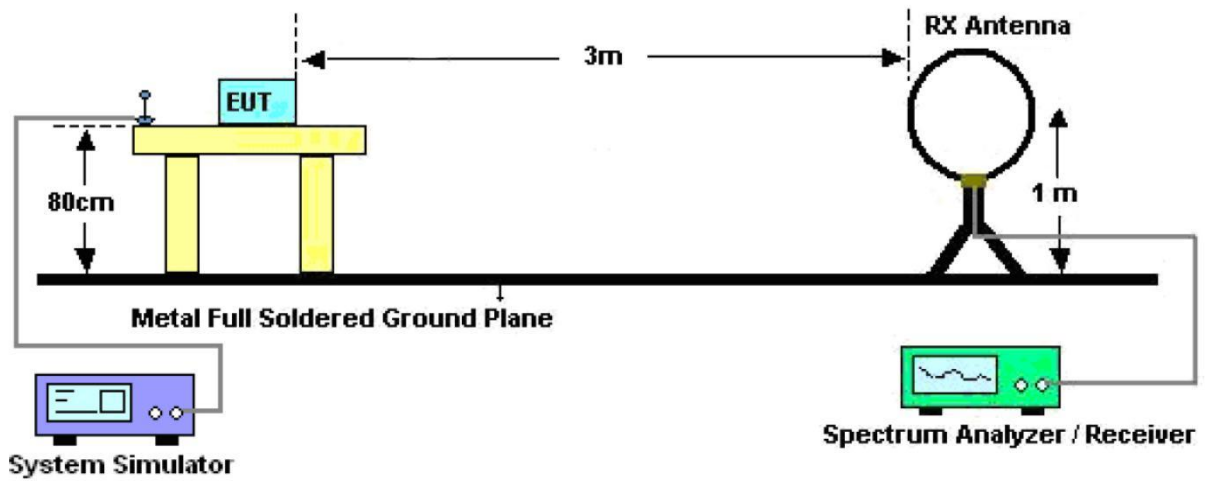


Figure 2. 30MHz to 1GHz


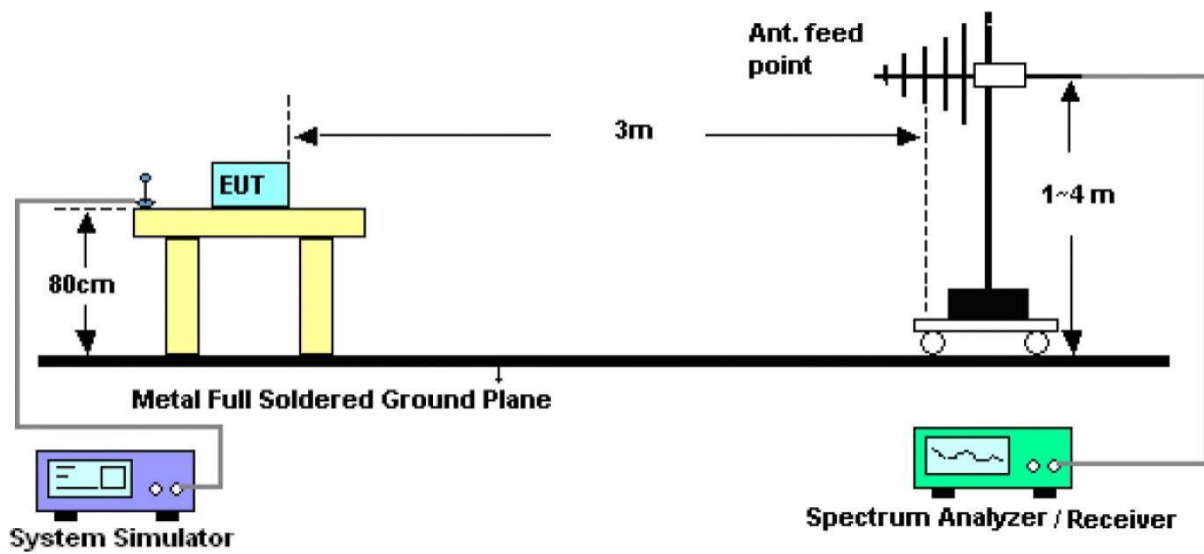


Figure 3. Above 1 GHz

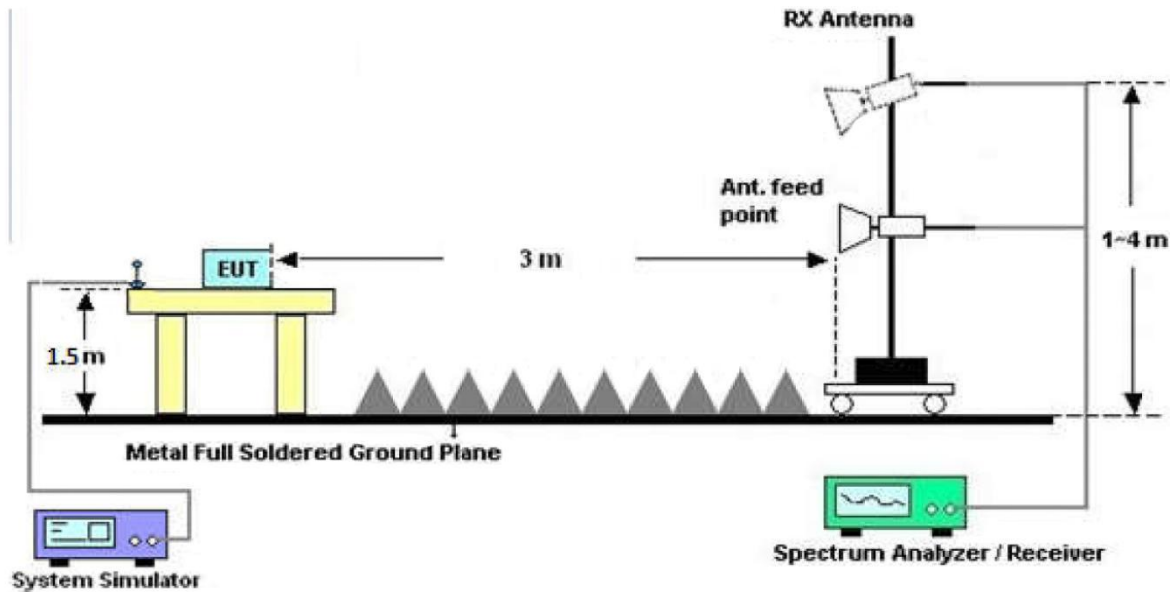

### 6.3 Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.



For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

## 6.4 Test Data

### PASS


During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all the modes, and found the Middle channel which is the worst case, only the worst case is recorded in the report



Test plot for Horizontal

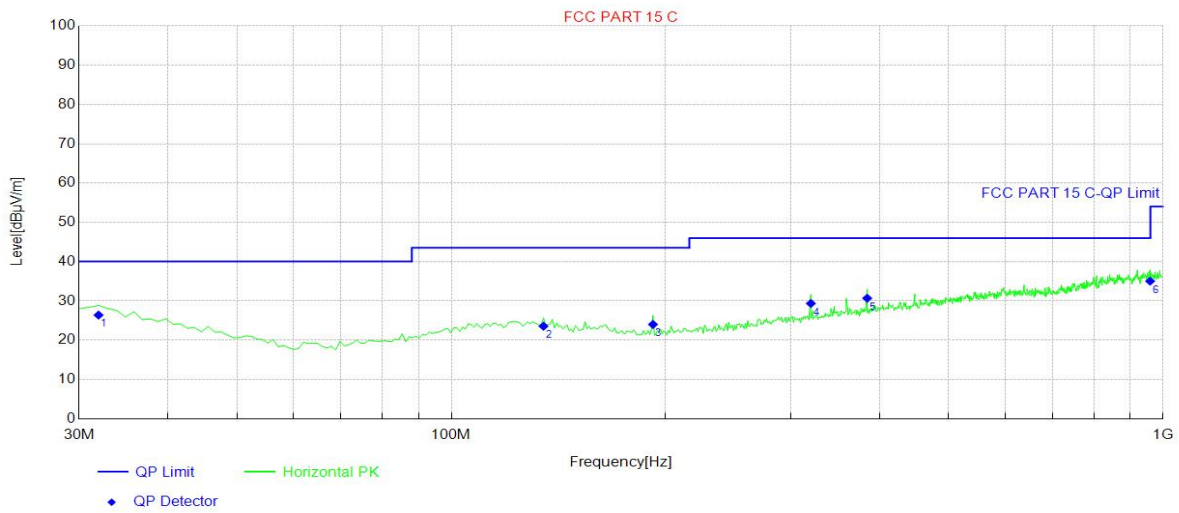


Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBµV]	Factor [dB/m]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Polarity	Verdict
1	31.94	38.97	-12.59	26.38	40.00	13.62	Horizontal	PASS
2	134.76	40.15	-16.60	23.55	43.50	19.95	Horizontal	PASS
3	191.99	43.03	-19.03	24.00	43.50	19.50	Horizontal	PASS
4	320.03	44.15	-14.81	29.34	46.00	16.66	Horizontal	PASS
5	384.05	44.21	-13.54	30.67	46.00	15.33	Horizontal	PASS
6	959.26	40.09	-5.07	35.02	46.00	10.98	Horizontal	PASS

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Test plot for Vertical

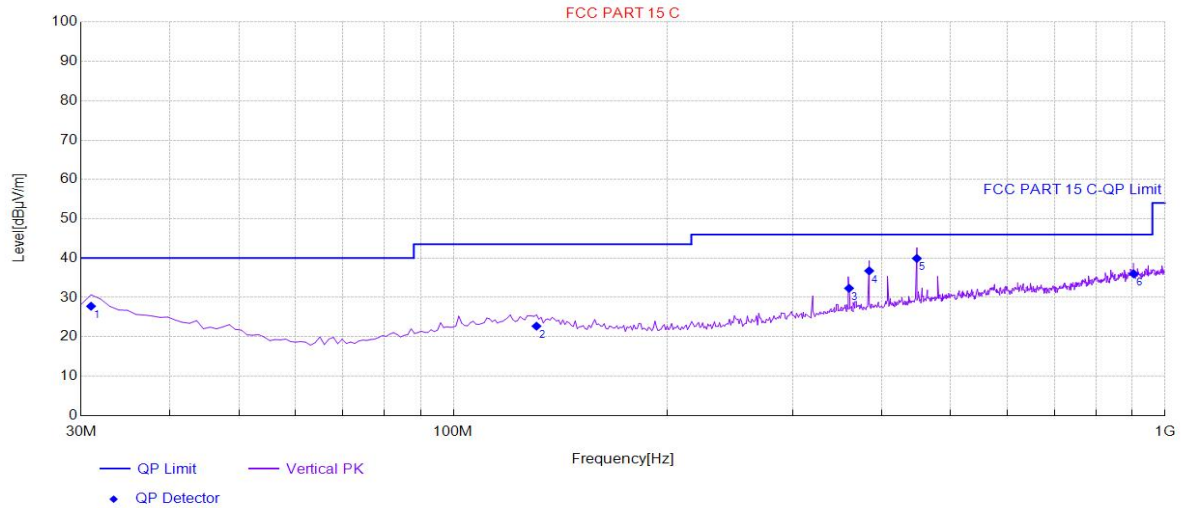

Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBµV]	Factor [dB/m]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Polarity	Verdict
1	30.97	39.94	-12.17	27.77	40.00	12.23	Vertical	PASS
2	130.88	39.05	-16.35	22.70	43.50	20.80	Vertical	PASS
3	359.80	46.42	-14.09	32.33	46.00	13.67	Vertical	PASS
4	384.05	50.30	-13.54	36.76	46.00	9.24	Vertical	PASS
5	448.07	51.81	-11.89	39.92	46.00	6.08	Vertical	PASS
6	903.97	41.76	-5.77	35.99	46.00	10.01	Vertical	PASS

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



**Test Frequency 1GHz-25GHz**

Test Mode: 2407MHz (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2407.0000	94.03	31.12	2.18	35.33	92.00	114	-22.00	V	Peak
2407.0000	82.14	31.12	2.18	35.33	80.51	94	-13.49	V	AVG
4814.0000	49.87	34.01	2.58	34.65	51.81	74	-22.19	V	Peak
4814.0000	37.83	34.01	2.58	34.65	40.16	54	-13.84	V	AVG
7221.0000	47.80	36.16	2.97	35.07	51.86	74	-22.14	V	Peak
7221.0000	36.46	36.16	2.97	35.07	37.55	54	-16.45	V	AVG
2407.0000	95.65	31.12	2.18	35.33	93.62	114	-20.38	H	Peak
2407.0000	82.18	31.12	2.18	35.33	80.55	94	-13.45	H	AVG
4814.0000	48.67	34.01	2.58	34.65	50.61	74	-23.39	H	Peak
4814.0000	36.46	34.01	2.58	34.65	38.79	54	-15.21	H	AVG
7221.0000	47.74	36.16	2.97	35.07	51.80	74	-22.20	H	Peak
7221.0000	36.80	36.16	2.97	35.07	37.89	54	-16.11	H	AVG



Test Mode: 2440MHz (Middle channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2440.0000	93.17	31.12	2.2	34.51	91.98	114	-22.02	V	Peak
2440.0000	81.81	31.22	2.2	34.51	80.72	94	-13.28	V	AVG
4880.0000	48.71	34.98	2.49	34.14	52.04	74	-21.96	V	Peak
4880.0000	36.10	34.98	2.49	34.14	39.43	54	-14.57	V	AVG
7320.0000	47.15	36.01	3.01	34.56	51.61	74	-22.39	V	Peak
7320.0000	36.58	36.01	3.01	34.56	41.04	54	-12.96	V	AVG
2440.0000	92.60	31.12	2.2	34.51	91.41	114	-22.59	H	Peak
2440.0000	84.40	31.12	2.2	34.51	83.21	94	-10.79	H	AVG
4880.0000	48.39	34.98	2.49	34.14	51.72	74	-22.28	H	Peak
4880.0000	36.54	34.98	2.49	34.14	39.87	54	-14.13	H	AVG
7320.0000	46.44	36.01	3.01	34.56	50.90	74	-23.10	H	Peak
7320.0000	35.41	36.01	3.01	34.56	39.87	54	-14.13	H	AVG



Test Mode:2478MHz (High channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2478.0000	95.51	31.65	2.23	36.07	93.32	114	-20.68	V	Peak
2478.0000	84.27	31.65	2.23	36.07	82.08	94	-11.92	V	AVG
4956.0000	49.31	35.06	2.6	34.93	52.04	74	-21.96	V	Peak
4956.0000	36.71	35.06	2.6	34.93	39.44	54	-14.56	V	AVG
7434.0000	47.72	36.19	3.12	35.11	51.92	74	-22.08	V	Peak
7434.0000	35.85	36.19	3.12	35.11	40.05	54	-13.95	V	AVG
2478.0000	95.00	31.65	2.23	36.07	92.81	114	-21.19	H	Peak
2478.0000	84.63	31.65	2.23	36.07	82.44	94	-11.56	H	AVG
4956.0000	48.96	35.06	2.6	34.93	51.69	74	-22.31	H	Peak
4956.0000	37.32	35.06	2.6	34.93	40.05	54	-13.95	H	AVG
7434.0000	47.10	36.19	3.12	35.11	51.30	74	-22.70	H	Peak
7434.0000	35.10	36.19	3.12	35.11	39.30	54	-14.70	H	AVG

Note: 1. The testing has been conformed to 10\*2407MHz=24070MHz. 10\*2440MHz=24400MHz.  
10\*2478MHz=24780MHz.

- 2. All other emissions more than 30dB below the limit.
- 3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
Emission Level = Reading + Factor  
Margin=Emission Level-Limit





**Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz**

Test Mode: Low Channel 2407MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2390.00	40.08	29.15	3.41	34.01	38.63	74	-35.37	H	Peak
2400.00	58.10	29.16	3.43	34.01	56.68	74	-17.32	H	Peak
2390.00	41.00	29.15	3.41	34.01	39.55	74	-34.45	V	Peak
2400.00	56.99	29.16	3.43	34.01	55.57	74	-18.43	V	Peak
2390.00	34.79	29.15	3.41	34.01	33.34	54	-20.66	H	AV
2400.00	40.45	29.16	3.43	34.01	39.03	54	-14.97	H	AV
2390.00	35.10	29.15	3.41	34.01	33.65	54	-20.35	V	AV
2400.00	43.55	29.16	3.43	34.01	42.13	54	-11.87	V	AV


Test Mode: High Channel 2478MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2483.50	47.22	29.28	3.53	34.03	46.00	74	-28.00	H	Peak
2500.00	40.31	29.30	3.56	34.03	39.14	74	-34.86	H	Peak
2483.50	48.42	29.28	3.53	34.03	47.20	74	-26.80	V	Peak
2500.00	41.73	29.30	3.56	34.03	40.56	74	-33.44	V	Peak
2483.50	38.51	29.28	3.53	34.03	37.29	54	-16.71	H	AV
2500.00	34.06	29.30	3.56	34.03	32.89	54	-21.11	H	AV
2483.50	38.50	29.28	3.53	34.03	37.28	54	-16.72	V	AV
2500.00	32.04	29.30	3.56	34.03	30.87	54	-23.13	V	AV

## 7 20dB Bandwidth Test

### 7.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

### 7.2 Test Setup

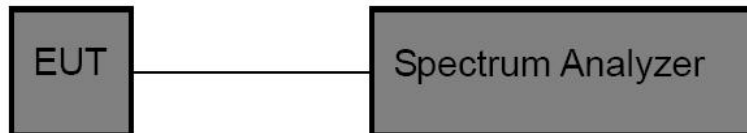

### 7.3 Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:  
RBW = 30kHz, VBW $\geq$ 3\*RBW =100kHz,  
Detector= Average  
Trace mode= Max hold.  
Sweep- auto couple.
4. Mark the peak frequency and  $-20$ dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.



**7.4 Test Data**

Test Item	: 20dB Bandwidth	Test Mode	: TX
Test Voltage	: DC 3.7V	Temperature	: 22.4°C
Test Result	: PASS	Humidity	: 55%RH

Frequency (MHz)	Bandwidth (kHz)	Result
2407MHZ	458.7	PASS
2440MHZ	457.5	PASS
2478MHZ	460.7	PASS






Test Mode: Low



Test Mode: Middle

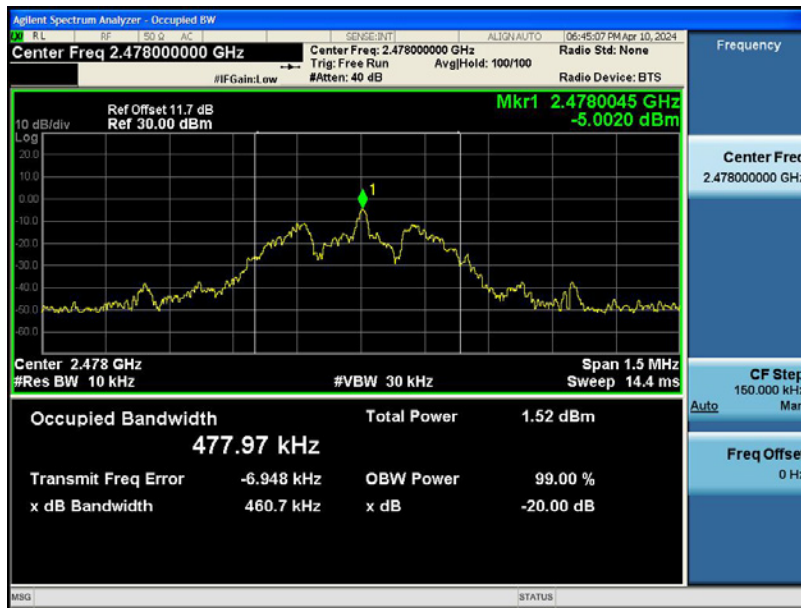

Test Mode: High



## 8 Antenna Requirement

### 8.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 8.2 Antenna Connected Construction

The antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.


## 9 Test Setup

### CONDUCTED EMISSION TEST




### RADIATED EMISSION TEST

Test Frequency From Below 30MHz

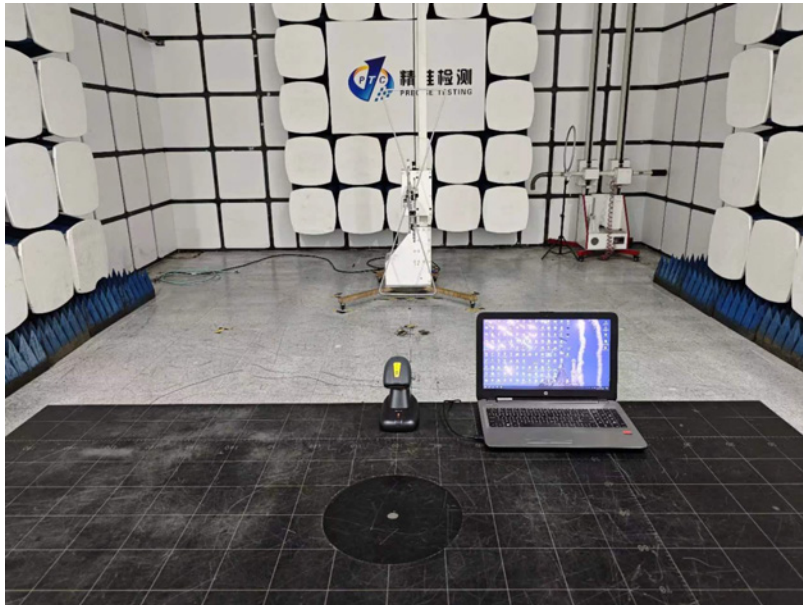




Test frequency from Above 1GHz

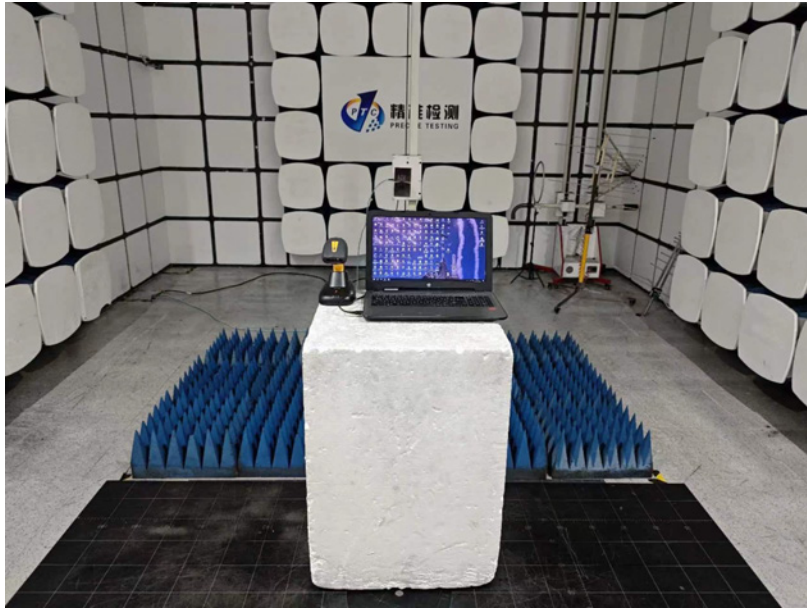



## 10 EUT Photos

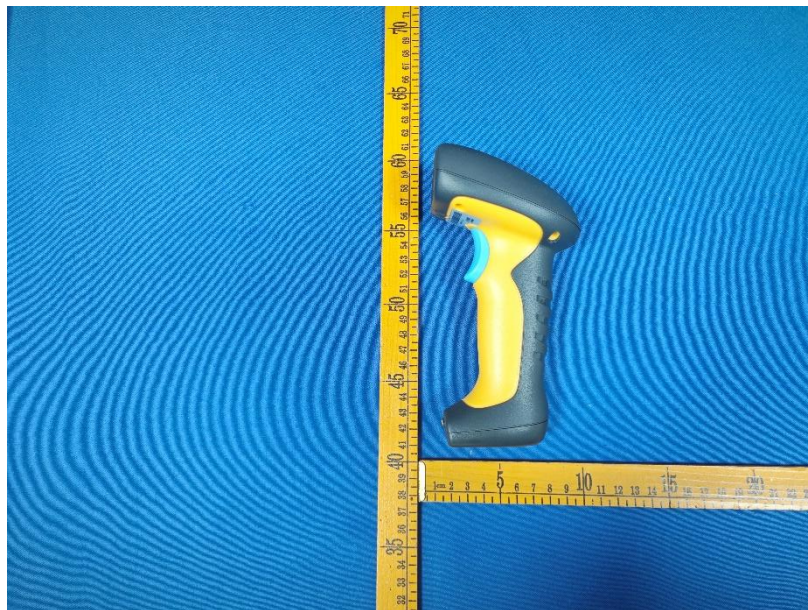
















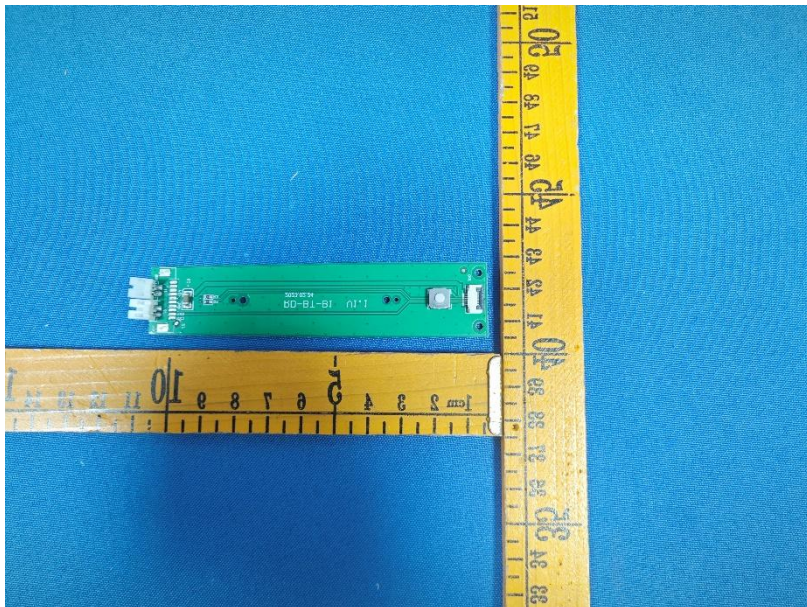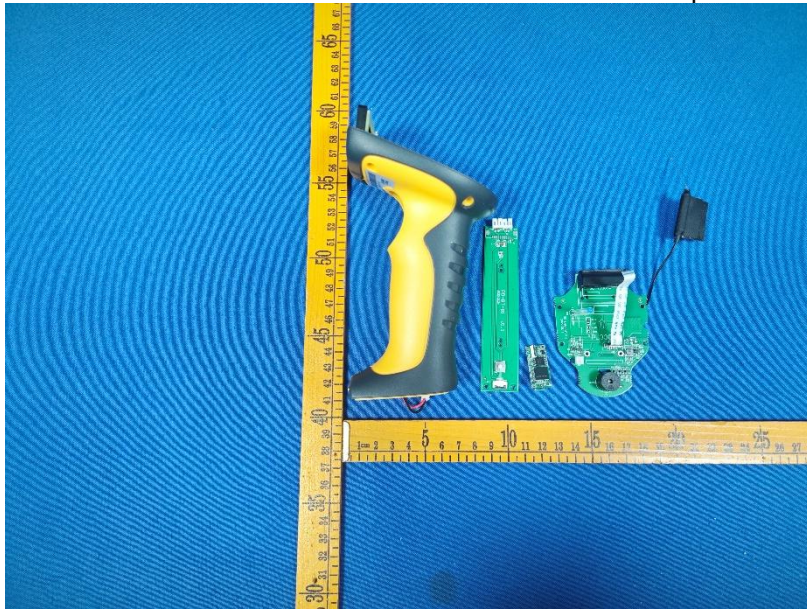





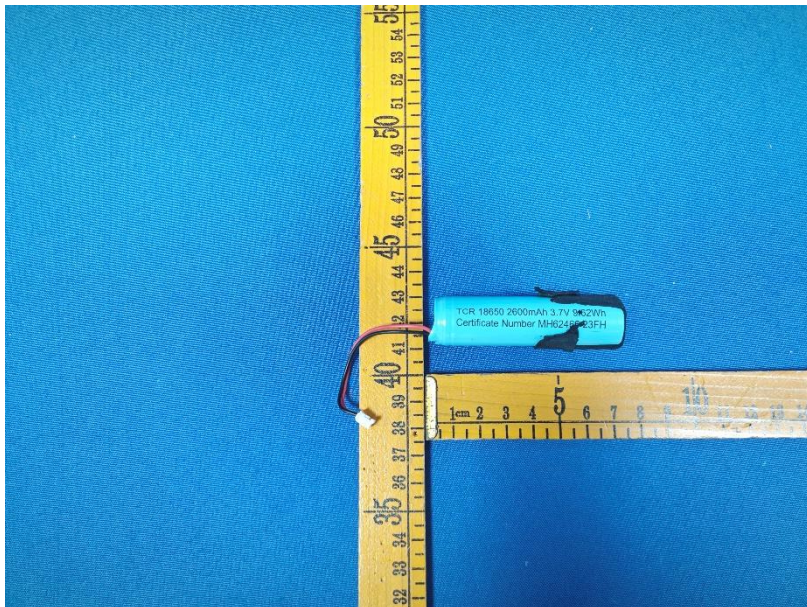





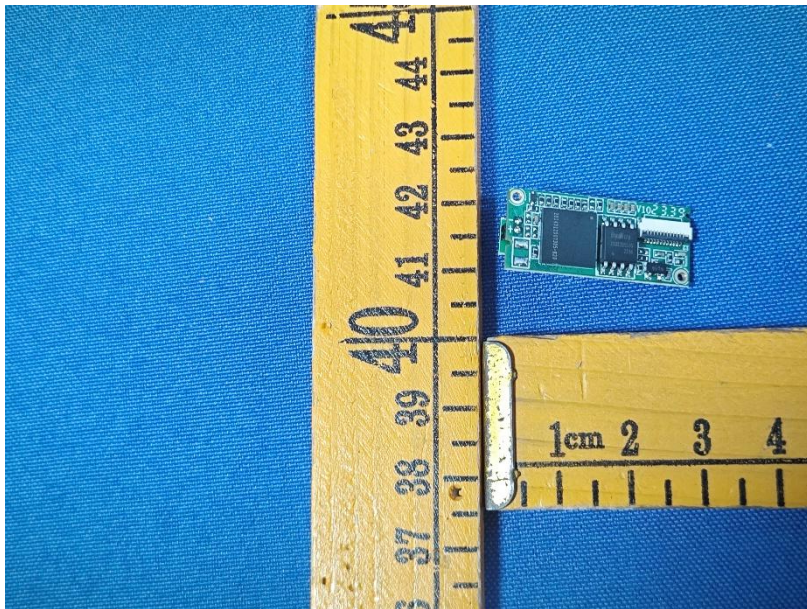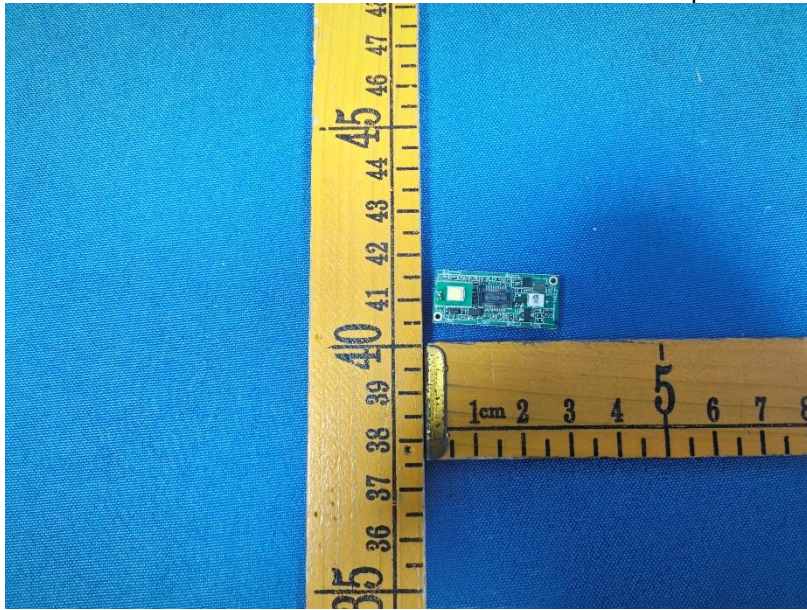





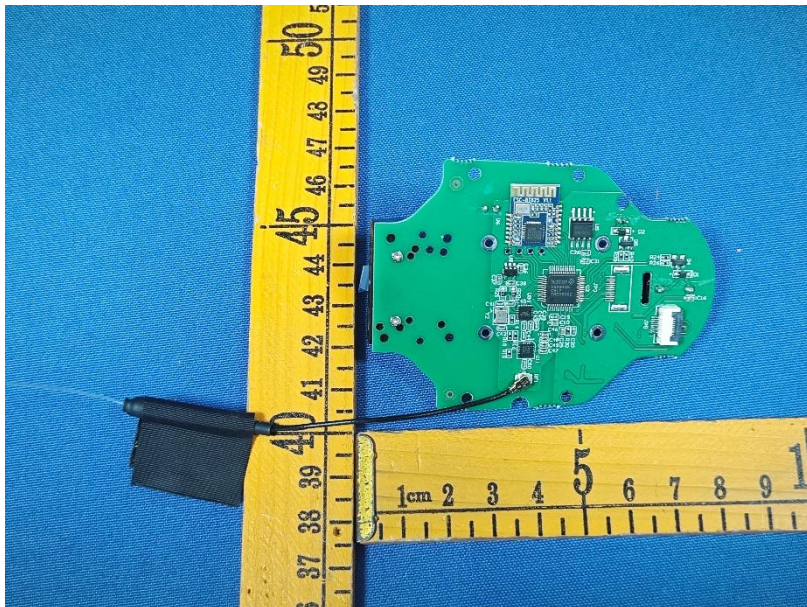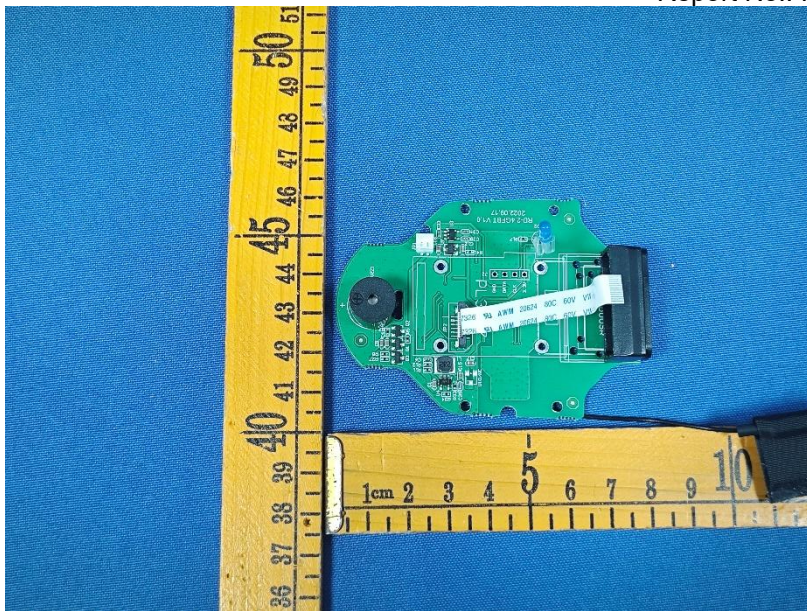



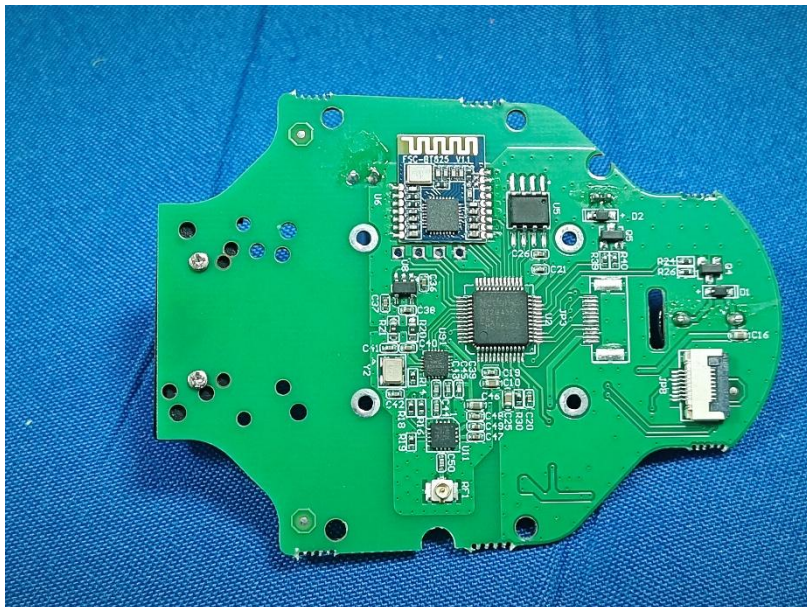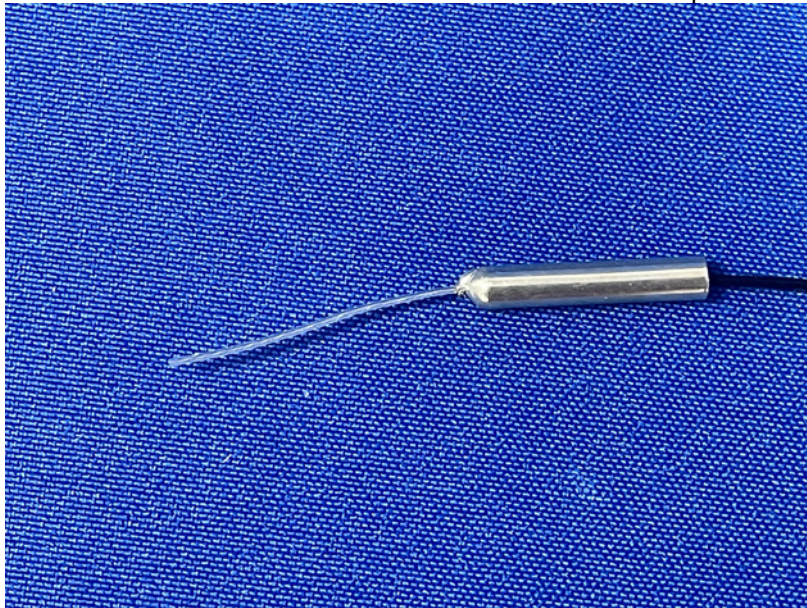



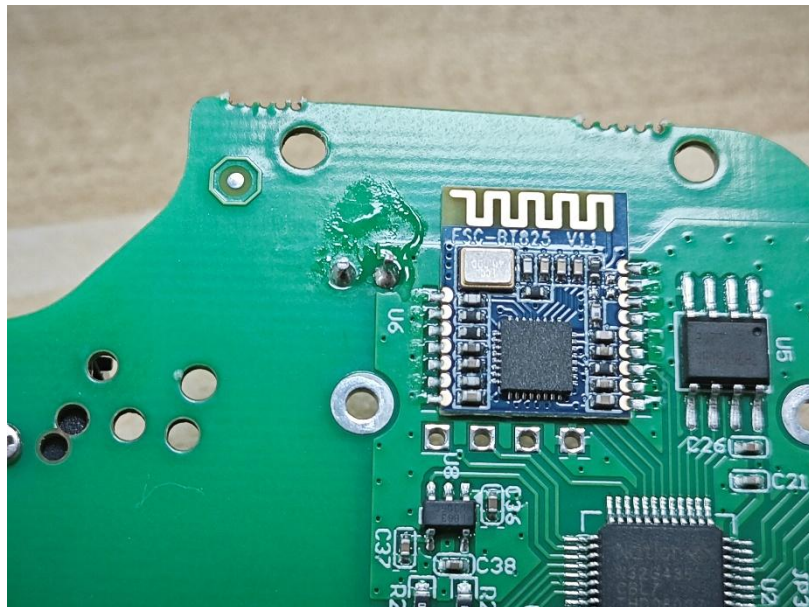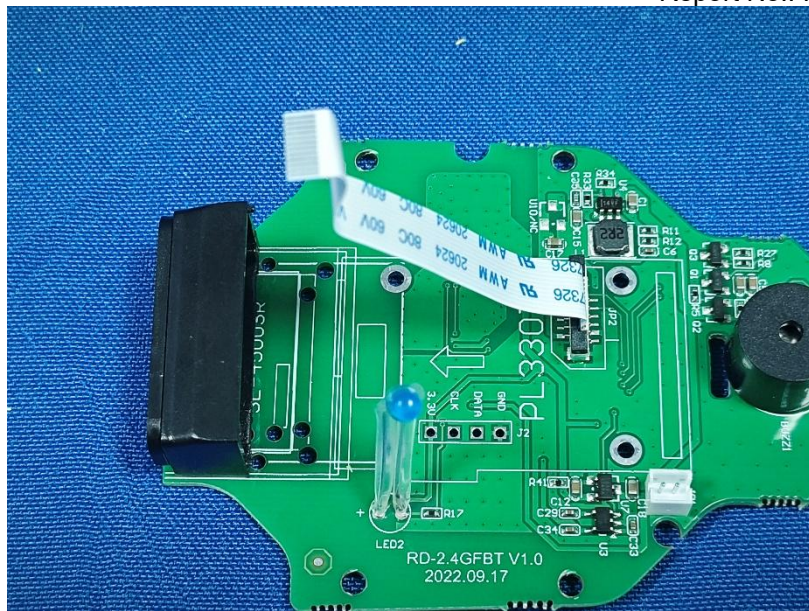

\*\*\*\*\*THE END REPORT\*\*\*\*\*