



中山市博安通通信技术有限公司

ZHONGSHAN B&T TECHNOLOGY Co., Ltd

零件规格承认书

Approval Specification

正式 / 条件

类型: Type: 2.4 / 5.8G 内置天线

范例 R3 代码: R3 Code: 850292109

范例图号: Part Number: TX-DM500BD113B63M

发行日期 Issued Date: 2024.04.03

文件编号 Document No.: _____

Contact person for sales: Longmingguo	MB:18576042661	E-mail: longmg@tech-now.com
Contact person for technical Liulihua	MB:13590104459	E-mail: liulh@tech-now
Contact person for Quality: zenglong	MB:18188400229	E-mail: zengkl@tech-now.com

Project :Y202104090061

Date. 2024.04.03

REV: A3

Antenna SPEC

Customer name: 广东长虹

Customer project: 长虹电视系

Part Number: 850292409

B&T P/N: AG-041533-2220

Spec. : 2.4 / 5.8G Internal antenna(shrapnel 30 × 11 × 5.2)-Black
line 1.13-terminal, see line length 485mm


Contact information of B&T:

Contact person for sales: Longmingguo	MB:18576042661	E-mail: longmg@tech-now.com
Contact person for technical: Liulihua	MB:13590104459	E-mail: liulh@tech-now
Contact person for Quality: zengkang	MB:18188400229	E-mail: zengk@tech-now.com

Contents

1、 Cover	1
2、 Index of specification	3
3、 Product drawing	4
4、 Electrical Parameter	5
5、 Electrical test report	6-8
6、 Packing Specification	9
7、 Antenna photo	10

3、Product drawing

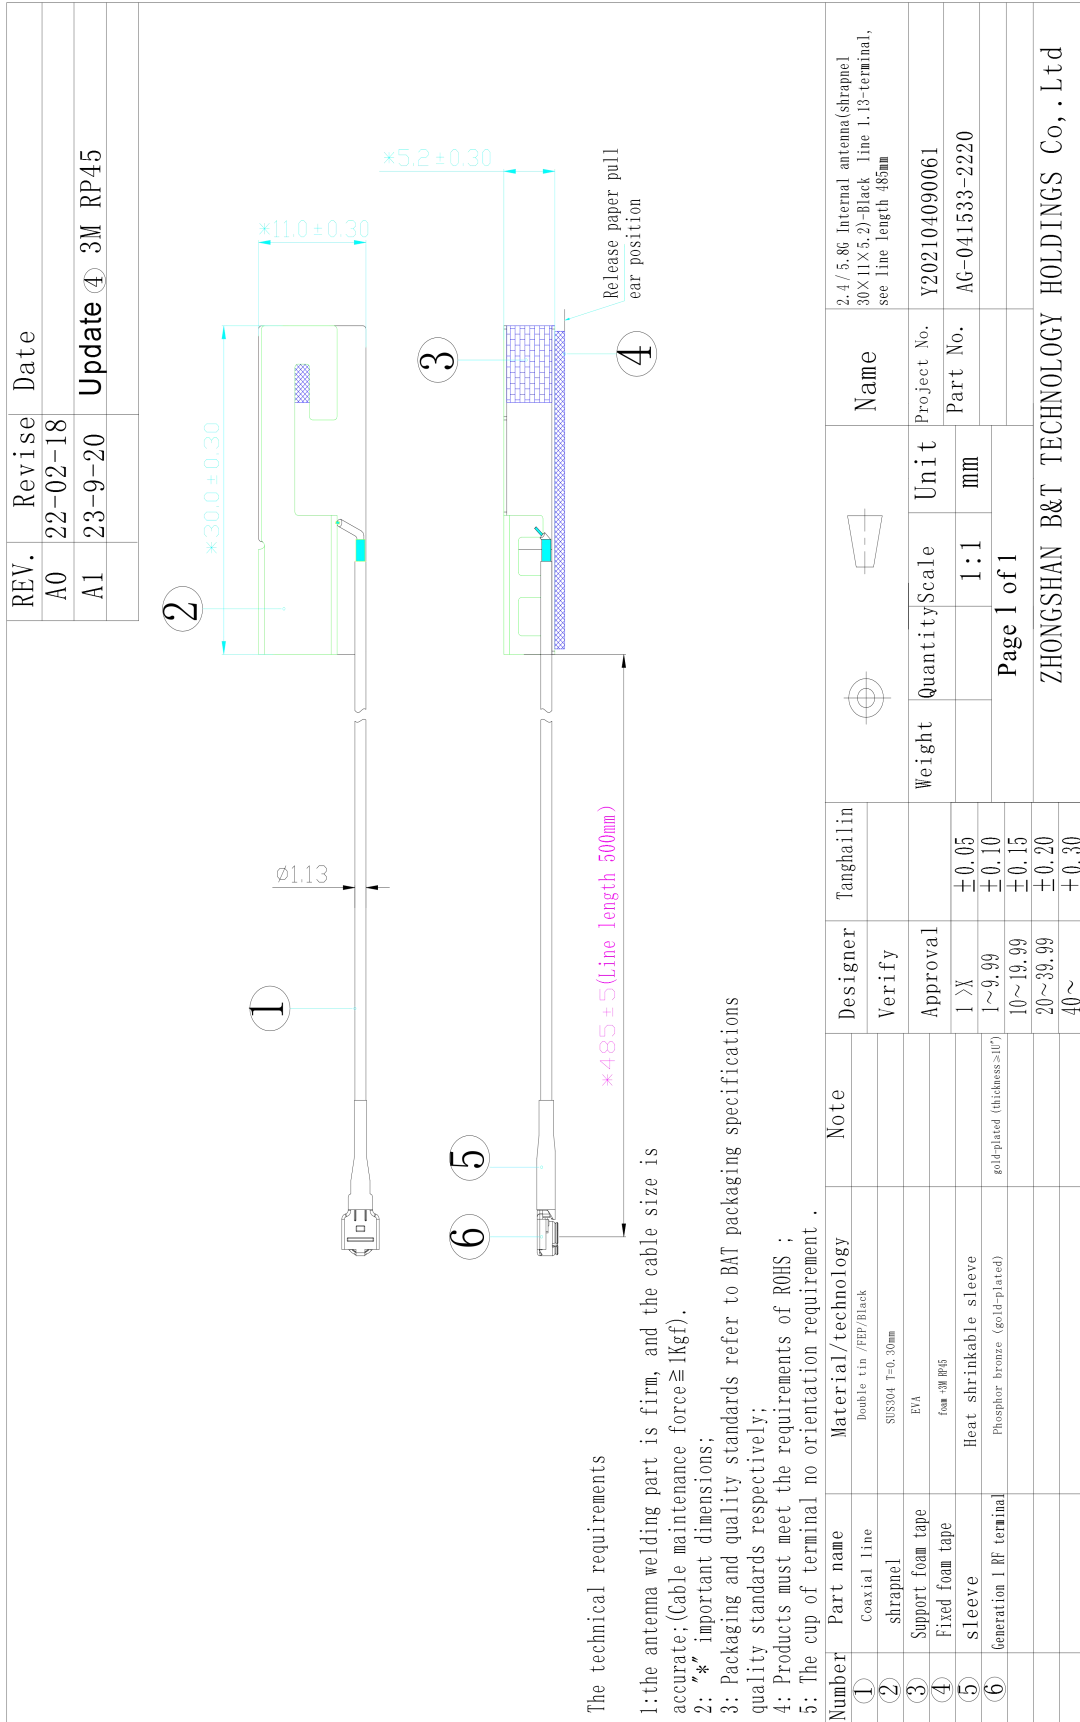


4、 Properties & parameter

Electrical Parameter		
Freq Range	2400~2500MHz/5150-5850MHz	
Characteristic Impedance	50 Ω	
VSWR	sample of reference project	
Max gain	2.4G	0.46dBi
	5.8G	1.48dBi
The Max input power	<10w	
Polarization mode	Polar linearization	
Radiation mode	Omni directional	
Antenna Type	PIFA	
Connector style	IPEX terminal	
Mechanics Properties		
Length	See line length 485 ± 5mm/Bus line length 500 ± 5mm	
Maintain the force	≥ 1Kgf	
Coaxial cable	Black 1.13 double tin wire	
Salt spray test	24H	
Environment parameter		
Operating Temp	-30℃~65℃	

5、Electrical test report

S11 Parameter

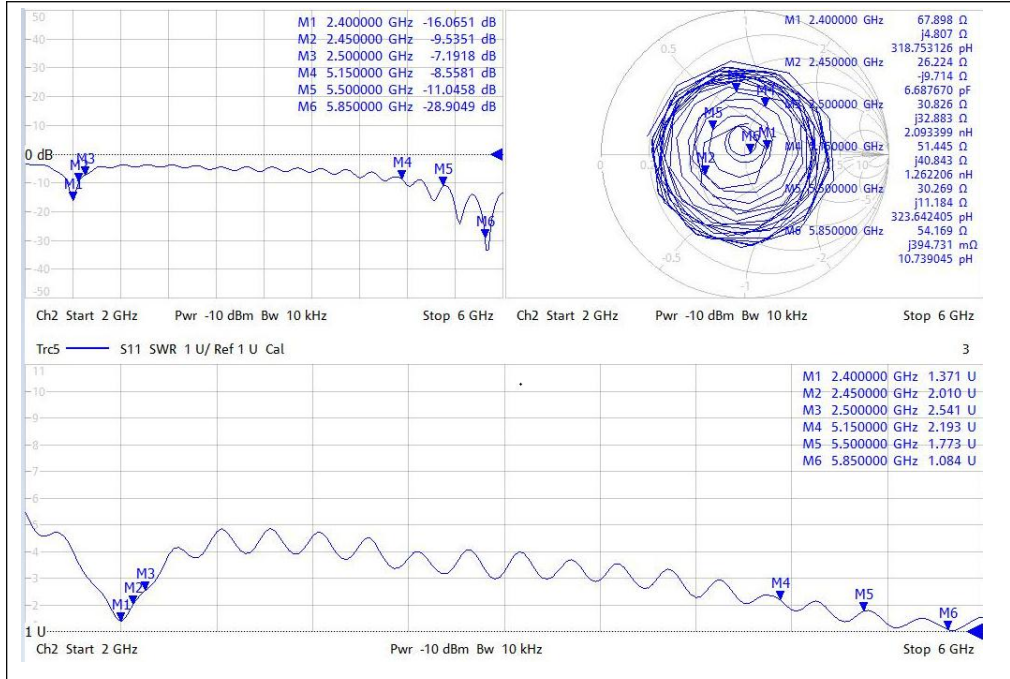

Electrical Performance Test Parameter Table

Freq/MHz	2400MHz	2450MHz	2500MHz	5150MHz	5550MHz	5850MHz
VSWR	1.37	2.01	2.54	2.19	1.77	1.08

Efficiency & Gain


Frequency (MHz)	Efficiency (dBi)	Gain (dBi)	Efficiency (%)
2400.0	-3.93	0.46	40.47
2410.0	-3.99	0.44	39.93
2420.0	-4.09	0.25	38.96
2430.0	-4.28	0.03	37.32
2440.0	-4.58	-0.26	34.83
2450.0	-4.86	-0.56	32.66
2460.0	-5.06	-0.88	31.20
2470.0	-5.23	-1.15	30.02
2480.0	-5.43	-1.44	28.67
2490.0	-5.98	-1.96	25.25
2500.0	-6.13	-2.10	24.37

Frequency (MHz)	Efficiency (dBi)	Gain (dBi)	Efficiency (%)
5150.0	-8.11	-2.40	15.47
5250.0	-7.04	-1.12	19.76
5350.0	-6.82	-1.58	20.78
5450.0	-5.72	0.19	26.77
5550.0	-5.49	0.20	28.27
5650.0	-5.04	1.15	31.34
5750.0	-5.14	1.48	30.59
5850.0	-4.77	1.41	33.37

Radiation pattern

ANT-2.4G-1-2D-3D

2400MHz

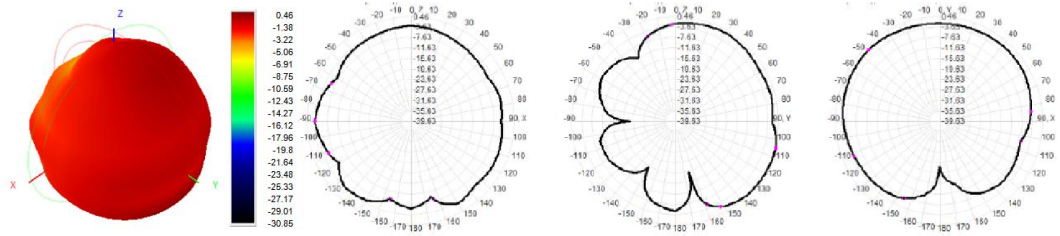

PACKING CRITERION

P/N: AG-041533-2220

Spec.: 2.4 / 5.8G Internal antenna(shrapnel 30×11×5.2)-Black line 1.13-terminal, see line length 485mm



包装承认书多项物
料20220629.doc

Packing requirement

7、 Antenna photo

