

# SPECIFICATION

## SHEET FOR APPROVAL


(Revision: L: 01)

CUSTOMER(客户名称 )	Tonly
CS P/N(客户机种 )	Florence-base
PART NAME(品名 )	R-antenna product
FREQUENCY(频率 )	MHz
ZTX NO.(物料编号 )	
DATE(日期 )	2024-1-25

CUSTOMER			
QA CHECKED	ME CHECKED	RF CHECKED	MANAGER CHECKED



## RF

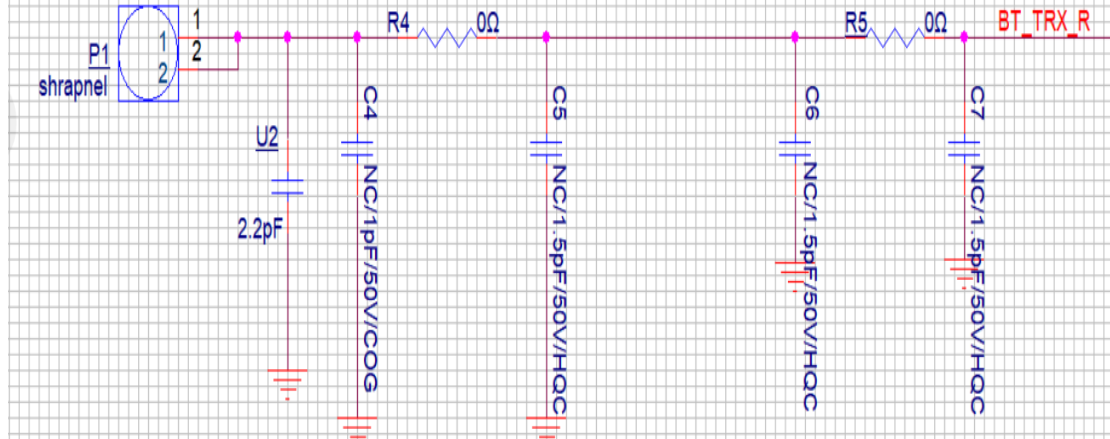


### 3. Antenna Performance

R-Head			
Freq	Efficiency (dB)	Efficiency (%)	Gain
2400	-11.69	6.78	-5.05
2410	-11.4	7.25	-4.67
2420	-11.14	7.69	-4.35
2430	-10.98	7.98	-4.28
2440	-10.54	8.82	-3.82
2450	-10.2	9.55	-3.65
2460	-10.23	9.5	-3.65
2470	-10.39	9.14	-3.71
2480	-10.73	8.46	-3.93
2490	-10.92	8.08	-4.08
2500	-11.15	7.68	-4.22


R-Head		
channel	TRP	TIS
0	-0.88	-84.14
39	-0.5	-84.33
78	-0.81	-84.17

#### 4. Antenna S11

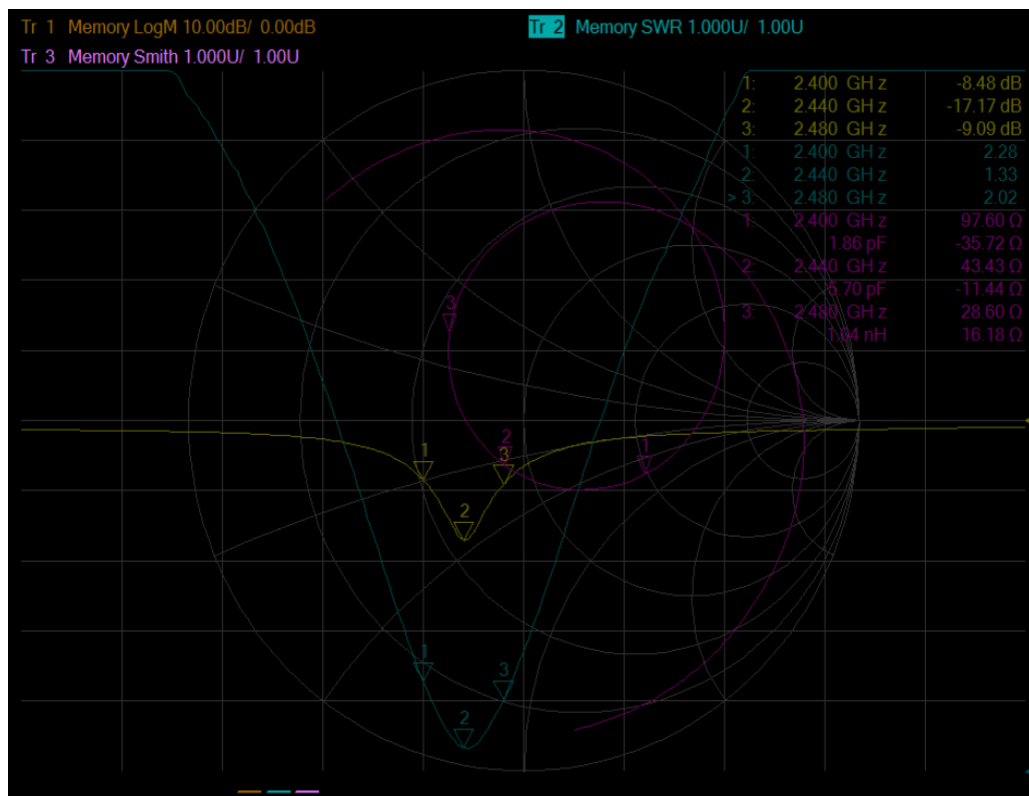


#### 5. Radiation Pattern

2440mhz

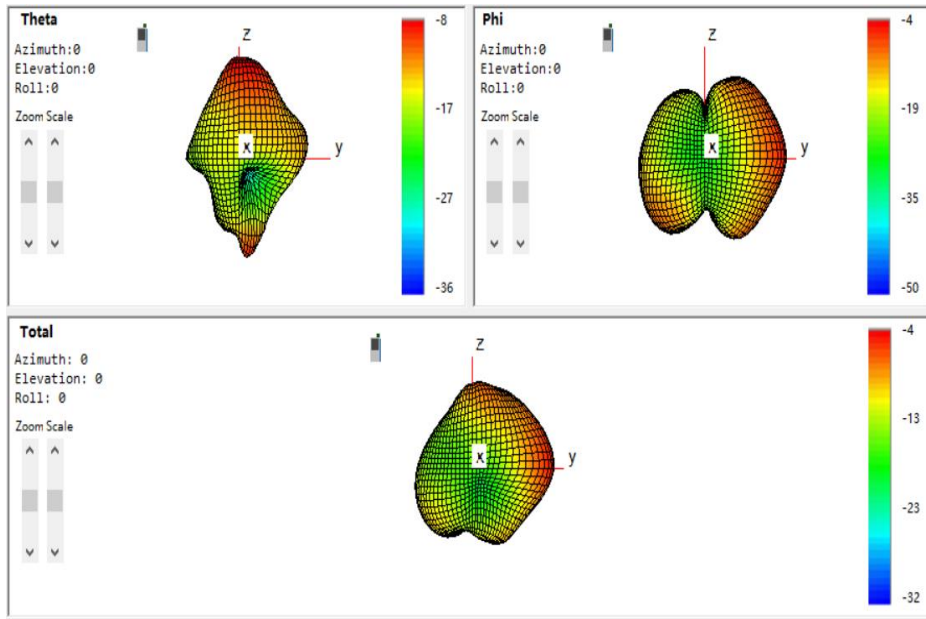


2440mhz

XOY



YOZ



XOZ

