



FCC Radio Test Report

FCC ID: XDQG25-01

This report concerns: Original Grant

Project No. : 2403G125
Equipment : POS Terminal
Brand Name : NEXGO
Test Model : G25
Series Model : N/A
Applicant : Shenzhen Xinguodu Technology Co., Ltd.
Address : 17B JinSong Mansion, Terra Industrial & Trade Park Chegongmiao, Futian District, Shenzhen, China
Manufacturer : Shenzhen Xinguodu Technology Co., Ltd.
Address : 17B JinSong Mansion, Terra Industrial & Trade Park Chegongmiao, Futian District, Shenzhen, China
Factory : Shenzhen Xinguodu Technology Co., Ltd. Manufacture Branch
Address : Building C, Dagang Industrial Park, Changzhen Community, Gongming Office, Guangming New District, Shenzhen, Guangdong, China.
Date of Receipt : Mar. 25, 2024
Date of Test : Mar. 25, 2024 ~ Apr. 05, 2024
Issued Date : Apr. 24, 2024
Report Version : R01
Test Sample : Engineering Sample No.: SSL2024032562 for radiated, SSL2024032565 for conducted.
Standard(s) : 47 CFR FCC Part 24 Subpart E
47 CFR FCC Part 2

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by :

Abel Cao

Abel Cao

Approved by :

Steven Lu

Steven Lu

Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . APPLICABLE STANDARDS	6
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
2.3 TEST ENVIRONMENT CONDITIONS	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.4 DESCRIPTION OF SUPPORT UNITS	13
4 . TEST RESULT	14
4.1 OUTPUT POWER MEASUREMENT	14
4.1.1 LIMIT	14
4.1.2 TEST PROCEDURE	14
4.1.3 TEST SETUP LAYOUT	14
4.1.4 TEST DEVIATION	14
4.1.5 TEST RESULTS	14
4.2 OCCUPIED BANDWIDTH MEASUREMENT	15
4.2.1 TEST PROCEDURE	15
4.2.2 TEST SETUP LAYOUT	15
4.2.3 TEST DEVIATION	15
4.2.4 TEST RESULTS	15
4.3 CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	16
4.3.1 LIMIT	16
4.3.2 TEST PROCEDURES	16
4.3.3 TEST SETUP LAYOUT	16
4.3.4 TEST DEVIATION	16
4.3.5 TEST RESULTS	16
4.4 RADIATED SPURIOUS EMISSIONS MEASUREMENT	17
4.4.1 LIMIT	17
4.4.2 TEST PROCEDURES	17
4.4.3 TEST SETUP LAYOUT	17
4.4.4 TEST DEVIATION	18
4.4.5 TEST RESULTS (9KHZ TO 30MHZ)	18
4.4.6 TEST RESULTS (30MHZ TO 1000MHZ)	18
4.4.7 TEST RESULTS (ABOVE 1000MHZ)	18
4.5 BAND EDGE MEASUREMENT	19
4.5.1 LIMIT	19

Table of Contents	Page
4.5.2 TEST PROCEDURES	19
4.5.3 TEST SETUP LAYOUT	19
4.5.4 TEST DEVIATION	19
4.5.5 TEST RESULTS	19
4.6 PEAK TO AVERAGE RATIO MEASUREMENT	20
4.6.1 LIMIT	20
4.6.2 TEST PROCEDURES	20
4.6.3 TEST SETUP LAYOUT	20
4.6.4 TEST DEVIATION	20
4.6.5 TEST RESULTS	20
4.7 FREQUENCY STABILITY MEASUREMENT	21
4.7.1 LIMIT	21
4.7.2 TEST PROCEDURES	21
4.7.3 TEST SETUP LAYOUT	21
4.7.4 TEST DEVIATION	21
4.7.5 TEST RESULTS	21
4. LIST OF MEASUREMENT EQUIPMENTS	22
APPENDIX A - OUTPUT POWER	24
APPENDIX B - OCCUPIED BANDWIDTH	33
APPENDIX C - CONDUCTED SPURIOUS EMISSIONS	42
APPENDIX D - RADIATED SPURIOUS EMISSIONS (9KHZ TO 30MHZ)	46
APPENDIX E - RADIATED SPURIOUS EMISSIONS (30MHZ TO 1000MHZ)	48
APPENDIX F - RADIATED SPURIOUS EMISSIONS (ABOVE 1000MHZ)	52
APPENDIX G - BAND EDGE	59
APPENDIX H - PEAK TO AVERAGE RATIO	68
APPENDIX I - FREQUENCY STABILITY	77

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2403G125	R00	Original Report.	Apr. 19, 2024	Invalid
BTL-FCCP-2-2403G125	R01	Removed the EUT test photo.	Apr. 24, 2024	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.26-2015

The following reference test guidance is not within the scope of accreditation of A2LA:

FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 24 Subpart E & Part 2			
Standard(s) Section	Test Item	Judgment	Remark
2.1046 24.232(c)	Equivalent Isotropic Radiated Power	PASS	-----
2.1049	Occupied Bandwidth	PASS	-----
2.1051 24.238(a)	Conducted Spurious Emissions	PASS	-----
2.1053 24.238(a)	Radiated Spurious Emissions	PASS	-----
24.238(a)	Band Edge Measurements	PASS	-----
24.232(d)	Peak To Average Ratio	PASS	-----
2.1055 24.235	Frequency Stability	PASS	-----

Note:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

For Radiated 9kHz-30MHz items:

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan City, Guangdong People's Republic of China.

For other items:

The test facilities used to collect the test data in this report is at the location of Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

The BTL measurement uncertainty as below table:

A. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	U ,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U ,(dB)
SSL-CB01	CISPR	30MHz ~ 200MHz	V	4.70
		30MHz ~ 200MHz	H	3.56
		200MHz ~ 1,000MHz	V	4.92
		200MHz ~ 1,000MHz	H	4.54
		1GHz ~ 6GHz	-	4.56
		6GHz ~ 18GHz	-	5.14
		18GHz ~ 26.5 GHz	-	3.30

B. Other Measurement:

Parameter	Uncertainty
Spectrum Bandwidth	± 3.8 %
Maximum Output Power	± 0.95 dB
Frequency Stability	± 0.16 dB
Temperature	± 0.08 °C
Time	± 0.58 %
Supply voltages	± 0.3 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
Output Power & EIRP	22°C	52%	DC 3.6V	Gavin Ge	Mar. 25, 2024 - Apr. 02, 2024
Occupied Bandwidth	22°C	52%	DC 3.6V	Gavin Ge	Mar. 25, 2024 - Apr. 02, 2024
Conducted Spurious Emissions	22°C	52%	DC 3.6V	Gavin Ge	Mar. 25, 2024 - Apr. 02, 2024
Radiated Spurious Emissions (9 kHz to 30 MHz)	24°C	54%	AC 120V/60Hz	Hayden Chen	Apr. 03, 2024
Radiated Spurious Emissions (30 MHz to 1000 MHz)	23°C	50-55%	AC 120V/60Hz	Max Wang	Apr. 03, 2024
Radiated Spurious Emissions (Above 1000 MHz)	23°C	46-50%	AC 120V/60Hz	Max Wang	Mar. 31, 2024 - Apr. 03, 2024
Band Edge	22°C	52%	DC 3.6V	Gavin Ge	Mar. 25, 2024 - Apr. 02, 2024
Peak to Average Ratio	22°C	52%	DC 3.6V	Gavin Ge	Mar. 25, 2024 - Apr. 02, 2024
Frequency Stability	Normal & Extreme	52%	Normal & Extreme	Gavin Ge	Mar. 25, 2024 - Apr. 02, 2024

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	POS Terminal					
Brand Name	NEXGO					
Test Model	G25					
Series Model	N/A					
Model Difference(s)	N/A					
Hardware Version	V1.0					
Software Version	BF.00.16_231228					
Power Source	1) DC Voltage supplied from AC adapter. 1# Brand / Model: RUIJING / RJ49-W050100US (US plug) 2# Brand / Model: RUIJING / RJ49-W050100EU (EU plug) 3# Brand / Model: HONOR / ADS-6MA-06 05050EPG (EU plug) 4# Brand / Model: HONOR / ADS-6MA-06 05050EPCU (US plug) 2) Supplied from battery. Model: G2-18650					
Power Rating	1) 1# I/P: 100-240V~ 50/60Hz 250mA O/P: 5.0V---1000mA 2# I/P: 100-240V~ 50/60Hz 250mA O/P: 5.0V---1.0A 5.0W 3# I/P: 100-240V~ 50/60Hz Max. 0.3A O/P: 5.0V---1.0A 5.0W 4# I/P: 100-240V~ 50/60Hz Max. 0.3A O/P: 5V---1.0A 2) DC 3.6V, 2600mAh, 9.36Wh					
IMEI No.	Radiated	866496070492148				
	Conducted	865235057366193				
Modulation Type	GPRS		GMSK			
	EDGE		GMSK, 8PSK			
	WCDMA/HSDPA/HSUPA		UL: QPSK,16QAM DL: QPSK,16QAM,64QAM			
	LTE		UL: QPSK,16QAM DL: QPSK,16QAM,64QAM			
Max. EIRP	GPRS 1900		GMSK	31.06	dBm	
	EDGE 1900		8PSK	29.19	dBm	
	WCDMA Band II		QPSK	23.78	dBm	
	HSDPA Band II		QPSK	23.55	dBm	
	HSUPA Band II		QPSK	23.75	dBm	
	LTE		Channel Bandwidth (MHz)	QPSK (dBm)	16QAM (dBm)	64QAM (dBm)
	Band 2		1.4	25.27	24.29	24.14
			3	25.19	24.00	24.42
			5	25.36	24.37	23.98
			10	25.28	24.14	24.60
15			25.42	24.33	24.56	
		20	25.16	24.46	24.22	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- There are two kinds of configuration products: RF is the same and NFC/WIFI/2G/3G/4G has only one module or module.
 Configuration 1: LTE(Latin America)+WIFI + non-connection + professional scanning head + ESIM (ESMI-ESMI is the SIM card of the patch, the POS machine is a dual card, one of the card slots is affixed with ESIM, the other card slots is reserved for the ordinary SIM card) + single SIM.
 Configuration 2: LTE(Latin America)+WIFI + non-connect (contactless IC card) + fingerprint + dual SIM.

3. Channel List:

PCS 1900				
Test Frequency ID	UARFCN	Frequency of Uplink (MHz)	UARFCN	Frequency of Downlink (MHz)
Low Range	512	1850.2	528	1930.2
Mid Range	661	1880	677	1960
High Range	810	1909.8	826	1989.8

WCDMA Band II				
Test Frequency ID	UARFCN	Frequency of Uplink (MHz)	UARFCN	Frequency of Downlink (MHz)
Low Range	9262	1852.4	9662	1932.4
Mid Range	9400	1880.0	9800	1960.0
High Range	9538	1907.6	9938	1987.6

LTE Band 2					
Test Frequency ID	Bandwidth (MHz)	N _{UL}	Frequency of Uplink (MHz)	N _{DL}	Frequency of Downlink (MHz)
Low Range	1.4	18607	1850.7	607	1930.7
	3	18615	1851.5	615	1931.5
	5	18625	1852.5	625	1932.5
	10	18650	1855	650	1935
	15	18675	1857.5	675	1937.5
	20	18700	1860	700	1940
Mid Range	1.4/3/5/10/15/20	18900	1880	900	1960
High Range	1.4	19193	1909.3	1193	1989.3
	3	19185	1908.5	1185	1988.5
	5	19175	1907.5	1175	1987.5
	10	19150	1905	1150	1985
	15	19125	1902.5	1125	1982.5
	20	19100	1900	1100	1980

4. Table for Filed Antenna:

Manufacturer	P/N	Antenna Type	Connector	Gain (dBi)	Note
Shenzhen Bogesi Communication Technology Co., Ltd	XGD-215	FPC	weld	0.47	PCS 1900
				0.47	WCDMA Band II
				0.47	LTE Band 2

Note: The antenna gain is provided by the manufacturer.

3.2 DESCRIPTION OF TEST MODES

Following mode(s) is (were) found to be the worst case(s) and selected for the final test.

GSM MODE			
Test Item	Available Channel	Tested Channel	Mode
Output Power & EIRP	512 to 810	512, 661, 810	GPRS, EDGE
Occupied Bandwidth	512 to 810	512, 661, 810	EDGE
Conducted Spurious Emissions	512 to 810	661	EDGE
Radiated Spurious Emissions	512 to 810	661	EDGE
Band Edge	512 to 810	512, 810	EDGE
Peak to Average Ratio	512 to 810	512, 661, 810	EDGE
Frequency Stability	512 to 810	512, 810	EDGE


WCDMA BAND II MODE			
Test Item	Available Channel	Tested Channel	Mode
Output Power & EIRP	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA, HSUPA
Occupied Bandwidth	9262 to 9538	9262, 9400, 9538	WCDMA
Conducted Spurious Emissions	9262 to 9538	9400	WCDMA
Radiated Spurious Emissions	9262 to 9538	9400	WCDMA
Band Edge	9262 to 9538	9262, 9538	WCDMA
Peak To Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA
Frequency Stability	9262 to 9538	9262, 9538	WCDMA

LTE BAND 2 MODE					
Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
Output Power & EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK, 16QAM, 64QAM	1RB/3RB/6RB
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK, 16QAM, 64QAM	1RB/8RB/15RB
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK, 16QAM, 64QAM	1RB/12RB/25RB
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK, 16QAM, 64QAM	1RB/25RB/50RB
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK, 16QAM, 64QAM	1RB/36RB/75RB
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK, 16QAM, 64QAM	1RB/50RB/100RB
Occupied Bandwidth	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK, 16QAM, 64QAM	6RB
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK, 16QAM, 64QAM	15RB
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK, 16QAM, 64QAM	25RB
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK, 16QAM, 64QAM	50RB
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK, 16QAM, 64QAM	75RB
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK, 16QAM, 64QAM	100RB
Conducted Spurious Emissions	18607 to 19193	18900	1.4 MHz	QPSK	1RB
	18625 to 19175	18900	5MHz	QPSK	1RB
	18700 to 19100	18900	20MHz	QPSK	1RB
Radiated Spurious Emissions	18607 to 19193	18900	1.4 MHz	QPSK	1RB
	18625 to 19175	18900	5MHz	QPSK	1RB
	18700 to 19100	18900	20MHz	QPSK	1RB
Band Edge	18607 to 19193	18607, 19193	1.4MHz	QPSK	1RB/6RB
	18615 to 19185	18615, 19185	3MHz	QPSK	1RB/15RB
	18625 to 19175	18625, 19175	5MHz	QPSK	1RB/25RB
	18650 to 19150	18650, 19150	10MHz	QPSK	1RB/50RB
	18675 to 19125	18675, 19125	15MHz	QPSK	1RB/75RB
	18700 to 19100	18700, 19100	20MHz	QPSK	1RB/100RB
Peak To Average Ratio	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK, 16QAM, 64QAM	1RB
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK, 16QAM, 64QAM	1RB
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK, 16QAM, 64QAM	1RB
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK, 16QAM, 64QAM	1RB
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK, 16QAM, 64QAM	1RB
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK, 16QAM, 64QAM	1RB
Frequency Stability	18700 to 19100	18700, 19100	20MHz	QPSK	100RB

Note:

1. Evaluated two kinds of configurations products, the worst case is Configuration 2 and recorded in this report.
2. For radiated spurious emissions test: All adapters had been pre-tested, found the worst case was tested with adapter: ADS-6MA-06 05050EPG and recorded in this report.

3.3 BLOCKDIGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED

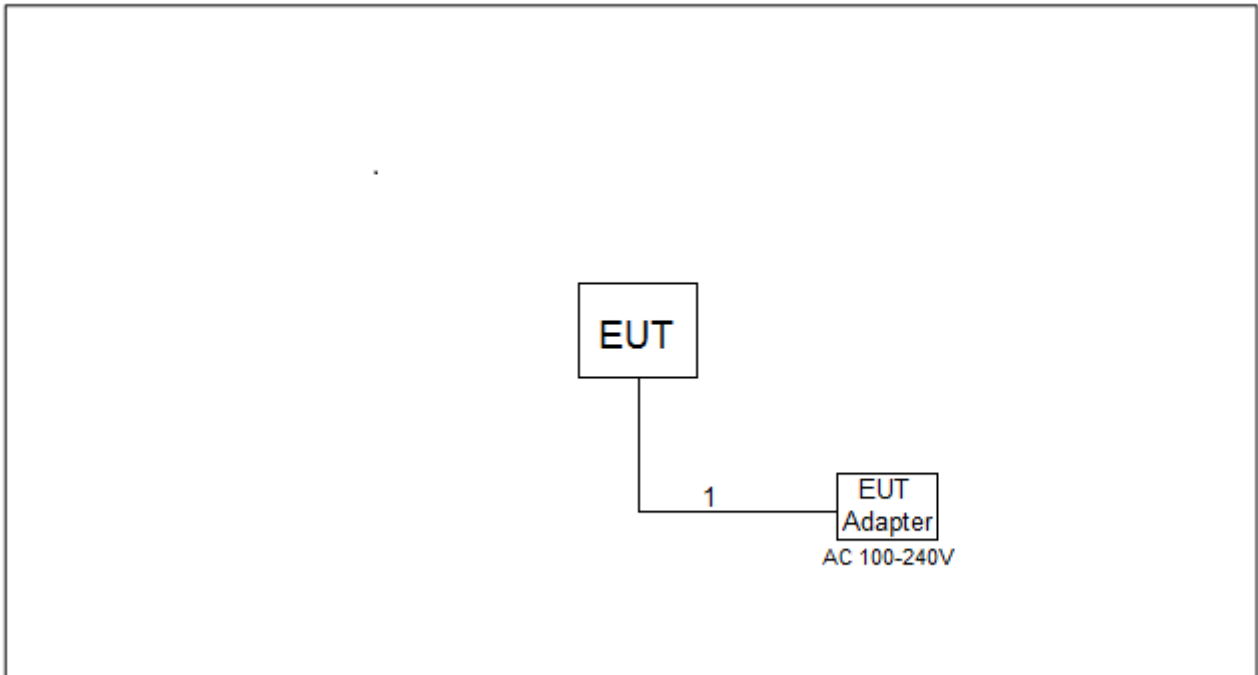

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m

4. TEST RESULT

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMIT

Mobile / Portable stations are limited to 2 watts e.i.r.p.

4.1.2 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 5 or ANSI C63.26-2015 Section 5.2.

EIRP:

$EIRP = \text{Output Power} + \text{Antenan gain}$

Output Power:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TEST SETUP LAYOUT

Output Power Measurement



4.1.4 TEST DEVIATION

No deviation.

4.1.5 TEST RESULTS

Please refer to the APPENDIX A.


4.2 OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 4 or ANSI C63.26-2015 Section 5.4.

1. The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth and 26dB bandwidth.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. $RBW = (1\% \sim 5\%) * EBW$
 $VBW \geq 3 * RBW$
4. Set spectrum analyzer with Peak detector.

4.2.2 TEST SETUP LAYOUT

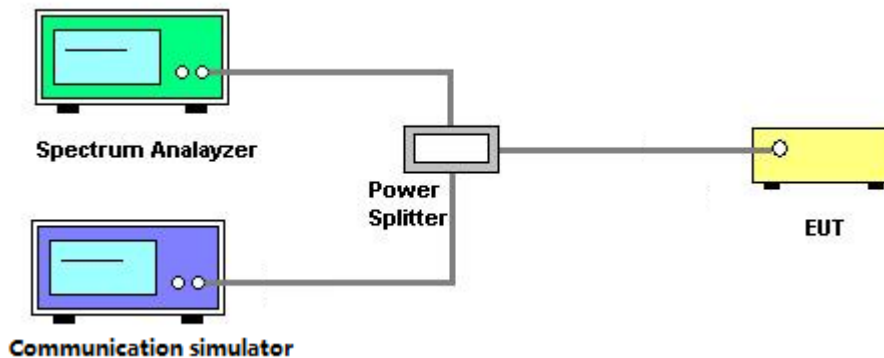

4.2.3 TEST DEVIATION

No deviation.

4.2.4 TEST RESULTS

Please refer to the APPENDIX B.

4.3 CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

4.3.1 LIMIT


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

4.3.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6 or ANSI C63.26-2015 Section 5.7.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
3. Set spectrum analyzer with Peak or RMS detector.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

4.3.3 TEST SETUP LAYOUT

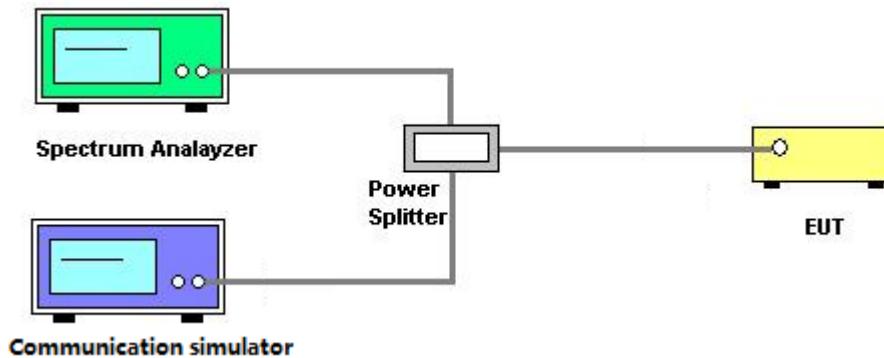

4.3.4 TEST DEVIATION

No deviation.

4.3.5 TEST RESULTS

Please refer to the APPENDIX C.

4.4 RADIATED SPURIOUS EMISSIONS MEASUREMENT

4.4.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.


4.4.2 TEST PROCEDURES



The testing follows FCC KDB 971168 v03r01 Section 6.2 or ANSI C63.26-2015 Section 5.5.

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
4. Start the test, rotate the table 360° to find the worst Angle, maintain the worst Angle, raise the antenna to 1-4m to find the worst height, maintain the worst height, then rotate the table to determine the final worst Angle, grab the spectrum diagram.
5. EUT shall be placed in accordance with X,Y,Z as required by Figure 5 in ANSI C63.26. Repeat Step 5 above to find the worst placement. Test all bands according to the worst placement.
6. Then EIRP is then converted to field strength as follows in Equation
7. $E \text{ (dBuV/m)} = \text{EIRP (dBm)} - 20\log(D) + 104.8$; where D is the measurement distance (in the far field region) in m. The emission limit equal to 82.26dBuV/m.

4.4.3 TEST SETUP LAYOUT

Below 30MHz

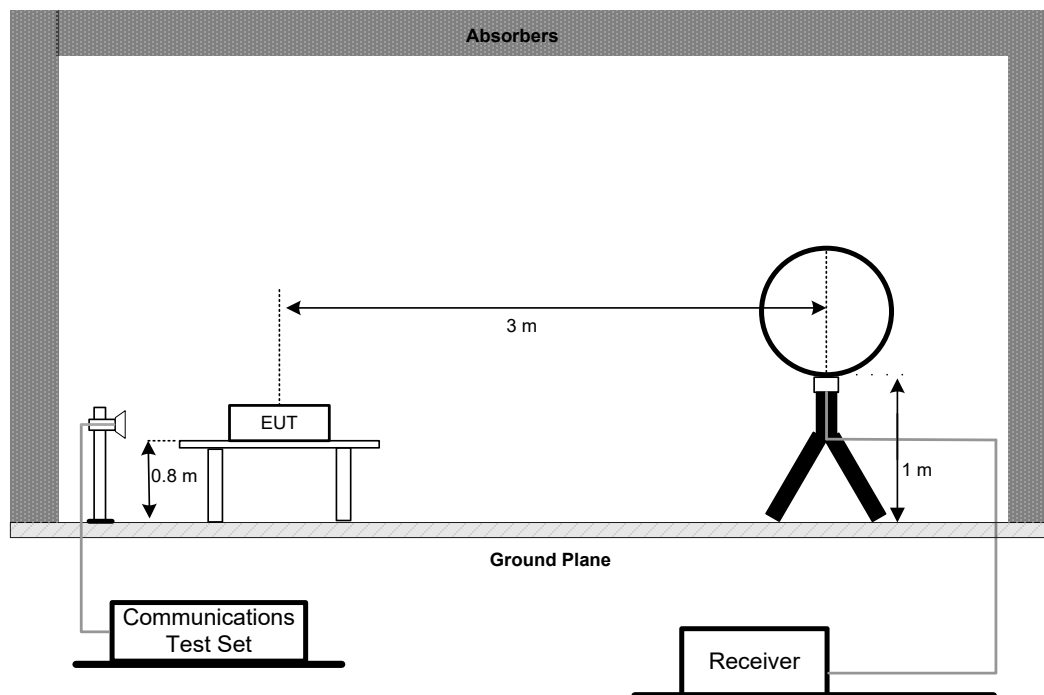

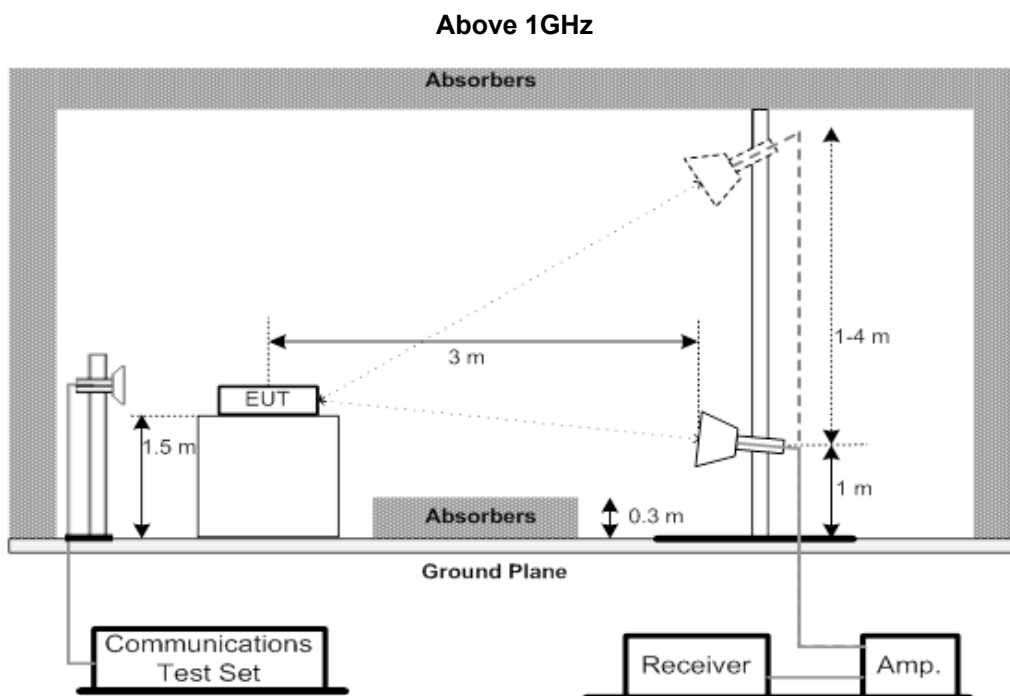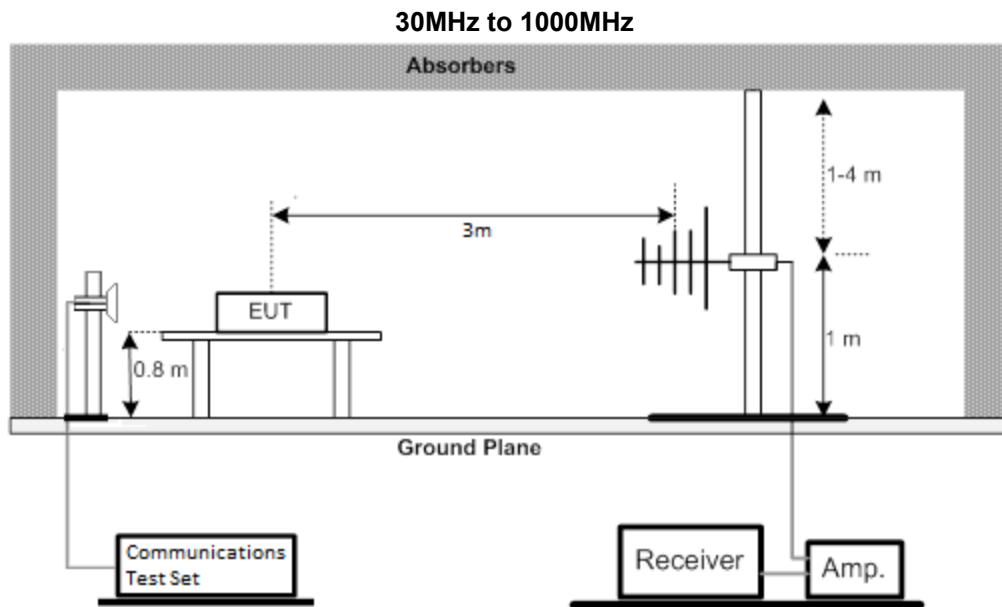

4.4.4 TEST DEVIATION

No deviation.

4.4.5 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the APPENDIX D.

4.4.6 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the APPENDIX E.

4.4.7 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the APPENDIX F.

4.5 BAND EDGE MEASUREMENT

4.5.1 LIMIT


A Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.5.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6 or ANSI C63.26-2015 Section 5.7.

1. All measurements were done at low and high operational frequency range.
2. Record the max trace plot into the test report.

4.5.3 TEST SETUP LAYOUT

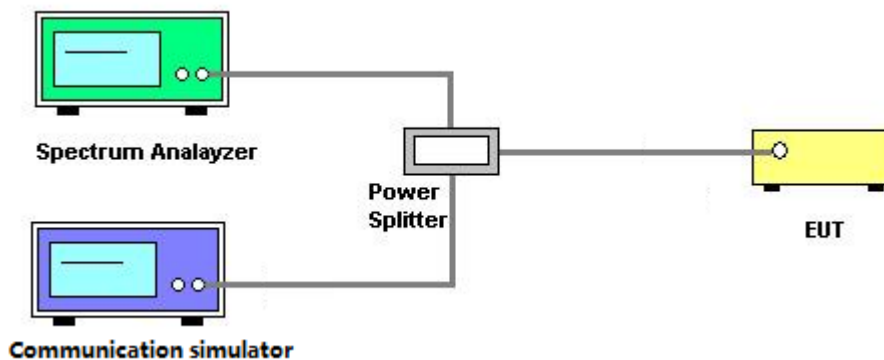

4.5.4 TEST DEVIATION

No deviation.

4.5.5 TEST RESULTS

Please refer to the APPENDIX G.

4.6 PEAK TO AVERAGE RATIO MEASUREMENT

4.6.1 LIMIT


In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 5.7 or ANSI C63.26-2015 Section 5.2.6.

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.6.3 TEST SETUP LAYOUT

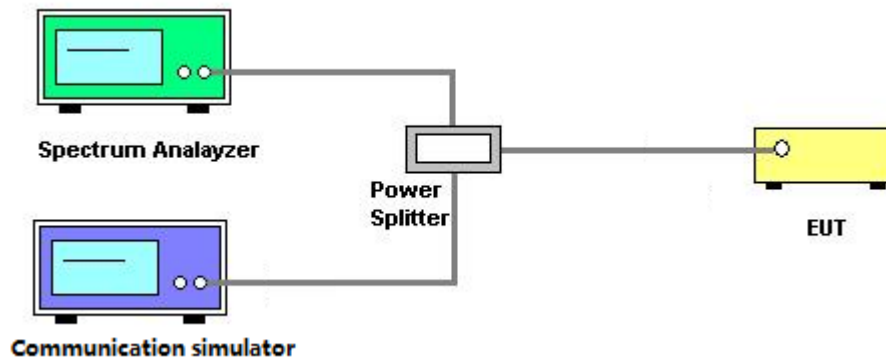

4.6.4 TEST DEVIATION

No deviation.

4.6.5 TEST RESULTS

Please refer to the APPENDIX H.

4.7 FREQUENCY STABILITY MEASUREMENT

4.7.1 LIMIT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.7.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 9 or ANSI C63.26-2015 Section 5.6.

1. A reference point shall be established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwantedemissions specification of the applicable regulatory standard. These reference points measuredusing the lowest and highest channel of operation shall be identified as f L and f H respectively. The worst-case frequency offset determined in the above methods shall be added or subtracted from the values of f L and f H and the resulting frequencies must remain within the band.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

4.7.3 TEST SETUP LAYOUT

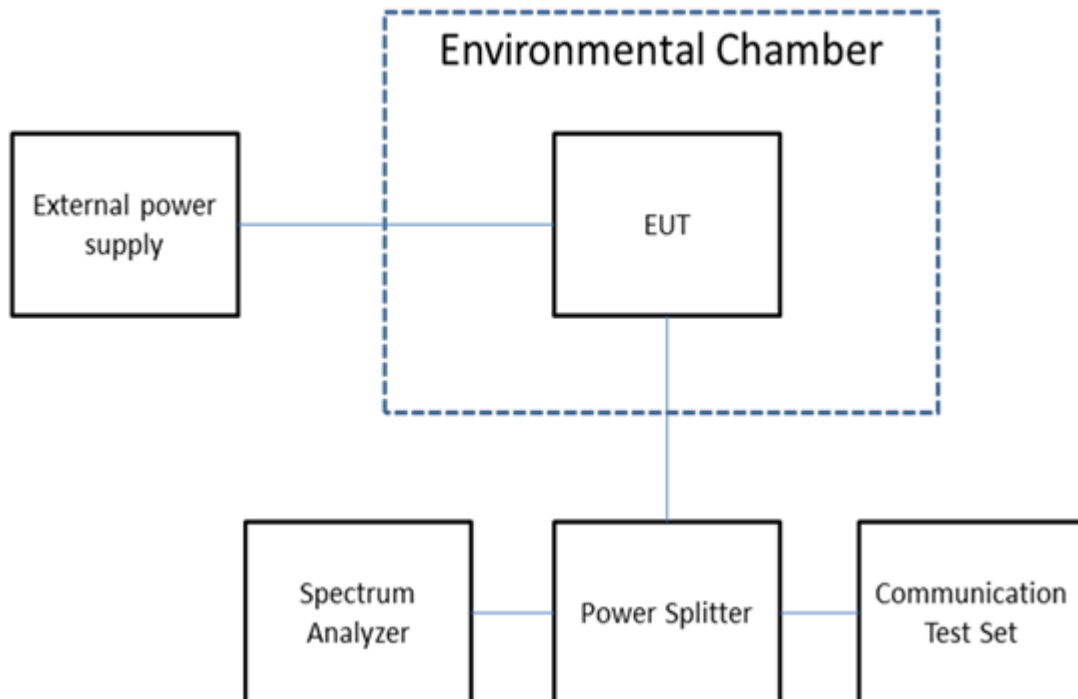

4.7.4 TEST DEVIATION

No deviation.

4.7.5 TEST RESULTS

Please refer to the APPENDIX I.

4. LIST OF MEASUREMENT EQUIPMENTS

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	25	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 22, 2024
3	Cable	N/A	RW2350-3.8A-NMB M-1.5M	N/A	Jun. 10, 2024
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chamber room	ETS	9*6*6	N/A	Jul. 11, 2024

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	01269	May 15, 2024
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AN-N0697	May 15, 2024
3	Preamplifier	EMC INSTRUMENT	EMC001330	980825	Jan. 19, 2025
4	Cable	EMC INSTRUMENT	EMCCFD400-NM-N M-2500	N/A	Jun. 08, 2024
5	Cable	EMC INSTRUMENT	EMCCFD400-NM-N M-7000	N/A	Jun. 08, 2024
6	Cable	EMC INSTRUMENT	EMCCFD400-NM-N M-3000	N/A	Jun. 08, 2024
7	MXE EMI Receiver	KEYSIGHT	N9038A	MY59050118	Sep. 26, 2024
8	Positioning Controller	MF	MF-7802BS	N/A	N/A
9	Max-Full Antenna Corp	MF	MFA-560BSN	N/A	N/A
10	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
11	966 Chamber room	Tai He	9*6*6 (NSA&VSWR)	N/A	Jun. 07, 2024

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
2	MXE EMI Receiver	Keysight	N9038A	MY59050118	Sep. 26, 2024
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980739	Jan. 19, 2025
5	Cable	EMC INSTRUMENT	EMC104-SM-SM-1 0000	N/A	Jun. 08, 2024
6	Cable	EMC INSTRUMENT	EMC104-SM-SM-3 000	N/A	Jun. 08, 2024
7	Cable	EMC INSTRUMENT	EMC104-SM-SM-8 00	N/A	Jun. 08, 2024
8	Double Ridged Broadband Horn Antenna	RF SPIN	DRH18-E	210106A18E	Jul. 04, 2024
9	Preamplifier	EMC INSTRUMENT	EMC184045SE	980793	Jan. 19, 2025
10	Cable	EMC INSTRUMENT	EMC101G-KM-KM- 800	N/A	Aug. 13, 2024
11	Cable	EMC INSTRUMENT	EMC101G-KM-KM- 6000	N/A	Aug. 13, 2024
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1046	Jul. 05, 2024
13	Band Reject Filter	COM-MW	ZHPF6-C3000-180 00-174	07213126	Jul. 07, 2024
14	Band Reject Filter	COM-MW	ZHPF6-M6500-180 00-547	07213124	Jul. 07, 2024
15	966 Chamber room	Tai He	9*6*6 (NSA&VSWR)	N/A	Jun. 07, 2024

Conducted Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wideband Radio Communication Tester	R&S	CWM 500	131463	Jan. 19, 2025
2	Signal Analyzer	R&S	FSV 40	100948	Jul. 07, 2024
3	Temperature Chamber	ESPEC	SU-242	93018777	Jul. 07, 2024
4	MXA Signal Analyzer	Agilent Technologies	N9020A	MY49100060	Jul. 07, 2024

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

APPENDIX A - OUTPUT POWER

Output Power (dBm)

PCS1900		512CH	661CH	810CH
		1850.2MHz	1880MHz	1909.8MHz
GPRS/EDGE (GMSK)	1 Tx Slot	30.49	30.58	30.36
	2 Tx Slot	30.47	30.59	30.37
	3 Tx Slot	29.2	29.36	29.14
	4 Tx Slot	27.38	27.55	27.25
EDGE (8PSK)	1 Tx Slot	28.11	28.05	28.72
	2 Tx Slot	28.14	27.59	28.71
	3 Tx Slot	26.46	26.11	26.25
	4 Tx Slot	24.26	23.86	24.78

Modulation	Band	WCDMA Band II		
	Tx Channel	9262CH	9400CH	9538CH
	Frequency	1852.4MHz	1880MHz	1907.6MHz
QPSK	RMC 12.2K	23.31	22.77	22.91
	RMC 64K	23.3	22.73	22.86
	RMC 144K	23.26	22.67	22.87
	RMC 384K	23.24	22.71	22.87
	HSDPA Subtest-1	23.08	22.41	22.44
	HSDPA Subtest-2	22.41	21.92	21.95
	HSDPA Subtest-3	21.89	21.3	21.47
	HSDPA Subtest-4	21.88	21.28	21.45
	HSUPA Subtest-1	22.11	21.58	21.78
	HSUPA Subtest-2	20.98	20.49	20.64
	HSUPA Subtest-3	21.24	20.74	20.82
	HSUPA Subtest-4	20.67	20.12	20.35
	HSUPA Subtest-5	23.28	22.76	22.97

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				18607CH	18900CH	19193CH
				1850.7MHz	1880MHz	1909.3MHz
2 / 1.4MHz	QPSK	1	0	24.80	23.33	23.51
		1	2	24.63	23.21	23.47
		1	5	24.74	23.31	23.62
		3	0	24.62	23.20	23.53
		3	1	24.68	23.22	23.54
		3	2	24.68	23.22	23.56
	16QAM	6	0	23.70	22.23	22.60
		1	0	23.82	22.57	22.41
		1	2	23.68	22.47	22.38
		1	5	23.76	22.48	22.55
		3	0	23.69	22.28	22.57
		3	1	23.72	22.33	22.59
	64QAM	3	2	23.72	22.29	22.63
		6	0	22.89	21.09	21.58
		1	0	23.54	22.09	22.26
		1	2	23.37	21.99	22.18
		1	5	23.53	22.10	22.37
		3	0	23.63	21.86	22.24
		3	1	23.67	21.88	22.28
		3	2	23.63	21.87	22.28
		6	0	22.54	21.03	21.18

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				18615CH	18900CH	19185CH
				1851.5MHz	1880MHz	1908.5MHz
2 / 3MHz	QPSK	1	0	24.49	23.08	23.28
		1	7	24.64	23.19	23.36
		1	14	24.72	23.16	23.48
		8	0	23.74	22.14	22.45
		8	4	23.84	22.18	22.48
		8	7	23.86	22.25	22.56
		15	0	23.78	22.24	22.46
	16QAM	1	0	23.44	22.29	22.17
		1	7	23.48	22.40	22.28
		1	14	23.53	22.38	22.36
		8	0	22.77	21.23	21.36
		8	4	22.87	21.27	21.44
		8	7	22.89	21.26	21.44
		15	0	22.83	21.19	21.36
	64QAM	1	0	23.82	21.85	22.00
		1	7	23.91	22.01	22.10
		1	14	23.95	21.94	22.21
		8	0	22.64	20.95	21.18
		8	4	22.75	21.00	21.26
		8	7	22.78	21.00	21.27
		15	0	22.56	20.99	21.20

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				18625CH	18900CH	19175CH
				1852.5MHz	1880MHz	1907.5MHz
2 / 5MHz	QPSK	1	0	24.63	23.04	23.37
		1	13	24.84	23.20	23.40
		1	24	24.89	23.24	23.55
		12	0	23.79	22.12	22.36
		12	6	23.85	22.23	22.49
		12	11	23.90	22.24	22.46
	16QAM	25	0	23.83	22.17	22.45
		1	0	23.65	22.33	22.28
		1	13	23.84	22.55	22.33
		1	24	23.90	22.56	22.47
		12	0	22.78	21.19	21.33
		12	6	22.92	21.30	21.38
	64QAM	12	11	22.97	21.31	21.40
		25	0	22.84	21.18	21.26
		1	0	23.22	21.95	22.05
		1	13	23.45	22.13	22.12
		1	24	23.51	22.19	22.22
		12	0	22.52	20.91	21.01
		12	6	22.67	21.01	21.11
		12	11	22.67	21.03	21.13
		25	0	22.66	20.92	21.15

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				18650CH	18900CH	19150CH
				1855MHz	1880MHz	1905MHz
2 / 10MHz	QPSK	1	0	24.48	23.02	23.95
		1	25	24.81	23.21	23.32
		1	49	24.67	23.52	23.31
		25	0	23.75	21.99	22.70
		25	13	23.97	22.17	22.48
		25	25	23.94	22.20	22.30
		50	0	23.84	22.10	22.53
	16QAM	1	0	23.31	22.13	22.82
		1	25	23.67	22.37	22.20
		1	49	23.48	22.72	22.20
		25	0	22.72	20.97	21.60
		25	13	22.97	21.15	21.45
		25	25	22.90	21.19	21.24
		50	0	22.80	21.08	21.41
	64QAM	1	0	23.75	21.66	22.64
		1	25	24.13	21.94	21.99
		1	49	23.82	22.26	21.99
		25	0	22.53	20.77	21.34
		25	13	22.81	20.97	21.17
		25	25	22.70	21.04	20.94
		50	0	22.66	20.86	21.18

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				18675CH	18900CH	19125CH
				1857.5MHz	1880MHz	1902.5MHz
2 / 15MHz	QPSK	1	0	24.61	23.12	24.84
		1	38	24.95	23.22	23.80
		1	74	24.22	24.04	23.52
		36	0	23.94	22.13	23.48
		36	18	24.10	22.24	23.02
		36	39	23.74	22.54	22.51
		75	0	23.81	22.32	23.03
	16QAM	1	0	23.44	22.22	23.86
		1	38	23.69	22.32	22.84
		1	74	22.96	23.13	22.56
		36	0	22.84	21.04	22.28
		36	18	22.97	21.16	21.79
		36	39	22.65	21.48	21.23
		75	0	22.75	21.21	21.78
	64QAM	1	0	23.82	21.78	23.71
		1	38	24.09	21.95	22.66
		1	74	23.31	22.80	22.39
		36	0	22.67	20.85	22.12
		36	18	22.75	20.98	21.61
		36	39	22.41	21.30	21.08
		75	0	22.52	21.05	21.60

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				18700CH	18900CH	19100CH
				1860MHz	1880MHz	1900MHz
2 / 20MHz	QPSK	1	0	24.60	23.21	24.54
		1	50	24.69	23.16	24.01
		1	99	23.45	24.35	23.28
		50	0	23.94	22.10	23.72
		50	25	23.82	22.26	23.23
		50	50	23.20	22.65	22.53
		100	0	23.48	22.36	23.07
	16QAM	1	0	23.92	22.36	23.74
		1	50	23.99	22.37	23.25
		1	99	22.67	23.51	22.49
		50	0	22.75	20.96	22.54
		50	25	22.68	21.14	22.10
		50	50	22.05	21.53	21.36
		100	0	22.36	21.23	21.97
	64QAM	1	0	23.56	22.01	23.75
		1	50	23.66	22.00	23.25
		1	99	22.30	23.18	22.46
		50	0	22.59	20.77	22.37
		50	25	22.44	20.98	21.95
		50	50	21.86	21.36	21.20
		100	0	22.12	21.10	21.81

EIRP (dBm)

PCS1900		512CH	661CH	810CH
		1850.2MHz	1880MHz	1909.8MHz
GPRS/EDGE (GMSK)	1 Tx Slot	30.96	31.05	30.83
	2 Tx Slot	30.94	31.06	30.84
	3 Tx Slot	29.67	29.83	29.61
	4 Tx Slot	27.85	28.02	27.72
EDGE (8PSK)	1 Tx Slot	28.58	28.52	29.19
	2 Tx Slot	28.61	28.06	29.18
	3 Tx Slot	26.93	26.58	26.72
	4 Tx Slot	24.73	24.33	25.25

Modulation	Band	WCDMA Band II		
	Tx Channel	9262CH	9400CH	9538CH
	Frequency	1852.4MHz	1880MHz	1907.6MHz
QPSK	RMC 12.2K	23.78	23.24	23.38
	RMC 64K	23.77	23.20	23.33
	RMC 144K	23.73	23.14	23.34
	RMC 384K	23.71	23.18	23.34
	HSDPA Subtest-1	23.55	22.88	22.91
	HSDPA Subtest-2	22.88	22.39	22.42
	HSDPA Subtest-3	22.36	21.77	21.94
	HSDPA Subtest-4	22.35	21.75	21.92
	HSUPA Subtest-1	22.58	22.05	22.25
	HSUPA Subtest-2	21.45	20.96	21.11
	HSUPA Subtest-3	21.71	21.21	21.29
	HSUPA Subtest-4	21.14	20.59	20.82
	HSUPA Subtest-5	23.75	23.23	23.44

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				18607CH	18900CH	19193CH
				1850.7MHz	1880MHz	1909.3MHz
2 / 1.4MHz	QPSK	1	0	25.27	23.80	23.98
		1	2	25.10	23.68	23.94
		1	5	25.21	23.78	24.09
		3	0	25.09	23.67	24.00
		3	1	25.15	23.69	24.01
		3	2	25.15	23.69	24.03
	16QAM	1	0	24.29	23.04	22.88
		1	2	24.15	22.94	22.85
		1	5	24.23	22.95	23.02
		3	0	24.16	22.75	23.04
		3	1	24.19	22.80	23.06
		3	2	24.19	22.76	23.10
	64QAM	6	0	23.36	21.56	22.05
		1	0	24.01	22.56	22.73
		1	2	23.84	22.46	22.65
		1	5	24.00	22.57	22.84
		3	0	24.10	22.33	22.71
		3	1	24.14	22.35	22.75
		3	2	24.10	22.34	22.75
		6	0	23.01	21.50	21.65

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				18615CH	18900CH	19185CH
				1851.5MHz	1880MHz	1908.5MHz
2 / 3MHz	QPSK	1	0	24.96	23.55	23.75
		1	7	25.11	23.66	23.83
		1	14	25.19	23.63	23.95
		8	0	24.21	22.61	22.92
		8	4	24.31	22.65	22.95
		8	7	24.33	22.72	23.03
		15	0	24.25	22.71	22.93
	16QAM	1	0	23.91	22.76	22.64
		1	7	23.95	22.87	22.75
		1	14	24.00	22.85	22.83
		8	0	23.24	21.70	21.83
		8	4	23.34	21.74	21.91
		8	7	23.36	21.73	21.91
		15	0	23.30	21.66	21.83
	64QAM	1	0	24.29	22.32	22.47
		1	7	24.38	22.48	22.57
		1	14	24.42	22.41	22.68
		8	0	23.11	21.42	21.65
		8	4	23.22	21.47	21.73
		8	7	23.25	21.47	21.74
		15	0	23.03	21.46	21.67

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				18625CH	18900CH	19175CH
				1852.5MHz	1880MHz	1907.5MHz
2 / 5MHz	QPSK	1	0	25.10	23.51	23.84
		1	13	25.31	23.67	23.87
		1	24	25.36	23.71	24.02
		12	0	24.26	22.59	22.83
		12	6	24.32	22.70	22.96
		12	11	24.37	22.71	22.93
		25	0	24.30	22.64	22.92
	16QAM	1	0	24.12	22.80	22.75
		1	13	24.31	23.02	22.80
		1	24	24.37	23.03	22.94
		12	0	23.25	21.66	21.80
		12	6	23.39	21.77	21.85
		12	11	23.44	21.78	21.87
		25	0	23.31	21.65	21.73
	64QAM	1	0	23.69	22.42	22.52
		1	13	23.92	22.60	22.59
		1	24	23.98	22.66	22.69
		12	0	22.99	21.38	21.48
		12	6	23.14	21.48	21.58
		12	11	23.14	21.50	21.60
		25	0	23.13	21.39	21.62


LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				18650CH	18900CH	19150CH
				1855MHz	1880MHz	1905MHz
2 / 10MHz	QPSK	1	0	24.95	23.49	24.42
		1	25	25.28	23.68	23.79
		1	49	25.14	23.99	23.78
		25	0	24.22	22.46	23.17
		25	13	24.44	22.64	22.95
		25	25	24.41	22.67	22.77
		50	0	24.31	22.57	23.00
	16QAM	1	0	23.78	22.60	23.29
		1	25	24.14	22.84	22.67
		1	49	23.95	23.19	22.67
		25	0	23.19	21.44	22.07
		25	13	23.44	21.62	21.92
		25	25	23.37	21.66	21.71
		50	0	23.27	21.55	21.88
	64QAM	1	0	24.22	22.13	23.11
		1	25	24.60	22.41	22.46
		1	49	24.29	22.73	22.46
		25	0	23.00	21.24	21.81
		25	13	23.28	21.44	21.64
		25	25	23.17	21.51	21.41
		50	0	23.13	21.33	21.65

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				18675CH	18900CH	19125CH
				1857.5MHz	1880MHz	1902.5MHz
2 / 15MHz	QPSK	1	0	25.08	23.59	25.31
		1	38	25.42	23.69	24.27
		1	74	24.69	24.51	23.99
		36	0	24.41	22.60	23.95
		36	18	24.57	22.71	23.49
		36	39	24.21	23.01	22.98
		75	0	24.28	22.79	23.50
	16QAM	1	0	23.91	22.69	24.33
		1	38	24.16	22.79	23.31
		1	74	23.43	23.60	23.03
		36	0	23.31	21.51	22.75
		36	18	23.44	21.63	22.26
		36	39	23.12	21.95	21.70
		75	0	23.22	21.68	22.25
	64QAM	1	0	24.29	22.25	24.18
		1	38	24.56	22.42	23.13
		1	74	23.78	23.27	22.86
		36	0	23.14	21.32	22.59
		36	18	23.22	21.45	22.08
		36	39	22.88	21.77	21.55
		75	0	22.99	21.52	22.07


LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				18700CH	18900CH	19100CH
				1860MHz	1880MHz	1900MHz
2 / 20MHz	QPSK	1	0	25.07	23.68	25.01
		1	50	25.16	23.63	24.48
		1	99	23.92	24.82	23.75
		50	0	24.41	22.57	24.19
		50	25	24.29	22.73	23.70
		50	50	23.67	23.12	23.00
		100	0	23.95	22.83	23.54
	16QAM	1	0	24.39	22.83	24.21
		1	50	24.46	22.84	23.72
		1	99	23.14	23.98	22.96
		50	0	23.22	21.43	23.01
		50	25	23.15	21.61	22.57
		50	50	22.52	22.00	21.83
		100	0	22.83	21.70	22.44
	64QAM	1	0	24.03	22.48	24.22
		1	50	24.13	22.47	23.72
		1	99	22.77	23.65	22.93
		50	0	23.06	21.24	22.84
		50	25	22.91	21.45	22.42
		50	50	22.33	21.83	21.67
		100	0	22.59	21.57	22.28

APPENDIX B - OCCUPIED BANDWIDTH


PCS1900_EDGE			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
		QPSK	QPSK
512	1850.2	0.3419	0.4693
661	1880	0.3399	0.4675
810	1909.8	0.3398	0.4657

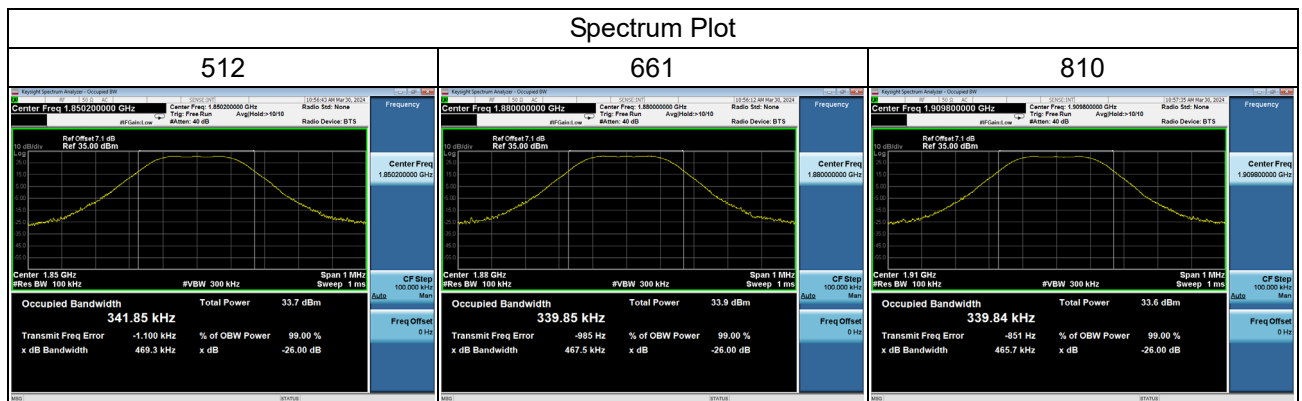


WCDMA Band II_WCDMA			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
		QPSK	QPSK
9262	1852.4	4.1629	4.7250
9400	1880	4.1521	4.7210
9538	1907.6	4.1653	4.7340

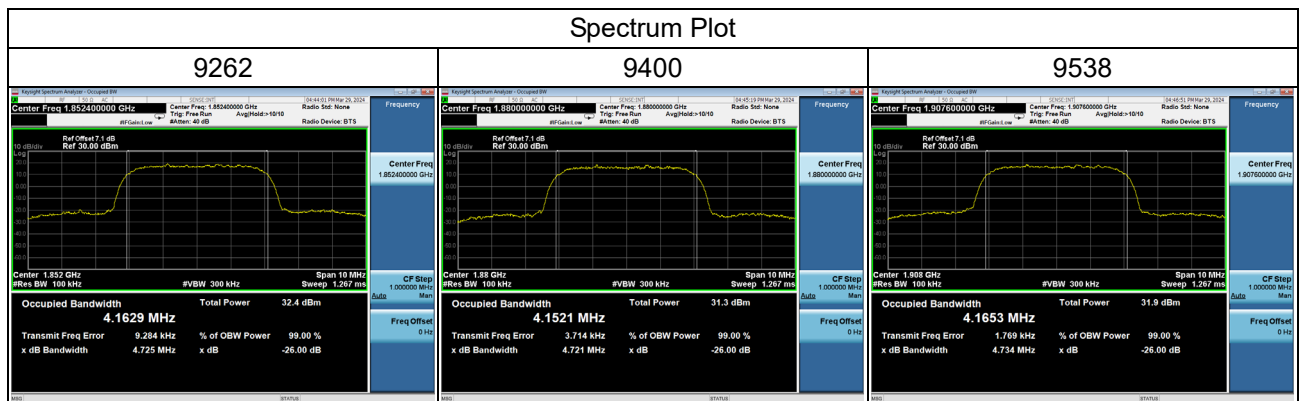


LTE Band 2_1.4MHz							
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)			26dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18607	1850.7	1.0949	1.1008	1.1029	1.2610	1.2570	1.2620
18900	1880	1.1000	1.0921	1.0933	1.2580	1.2660	1.2640
19193	1909.3	1.1066	1.1004	1.1011	1.2770	1.2680	1.2660

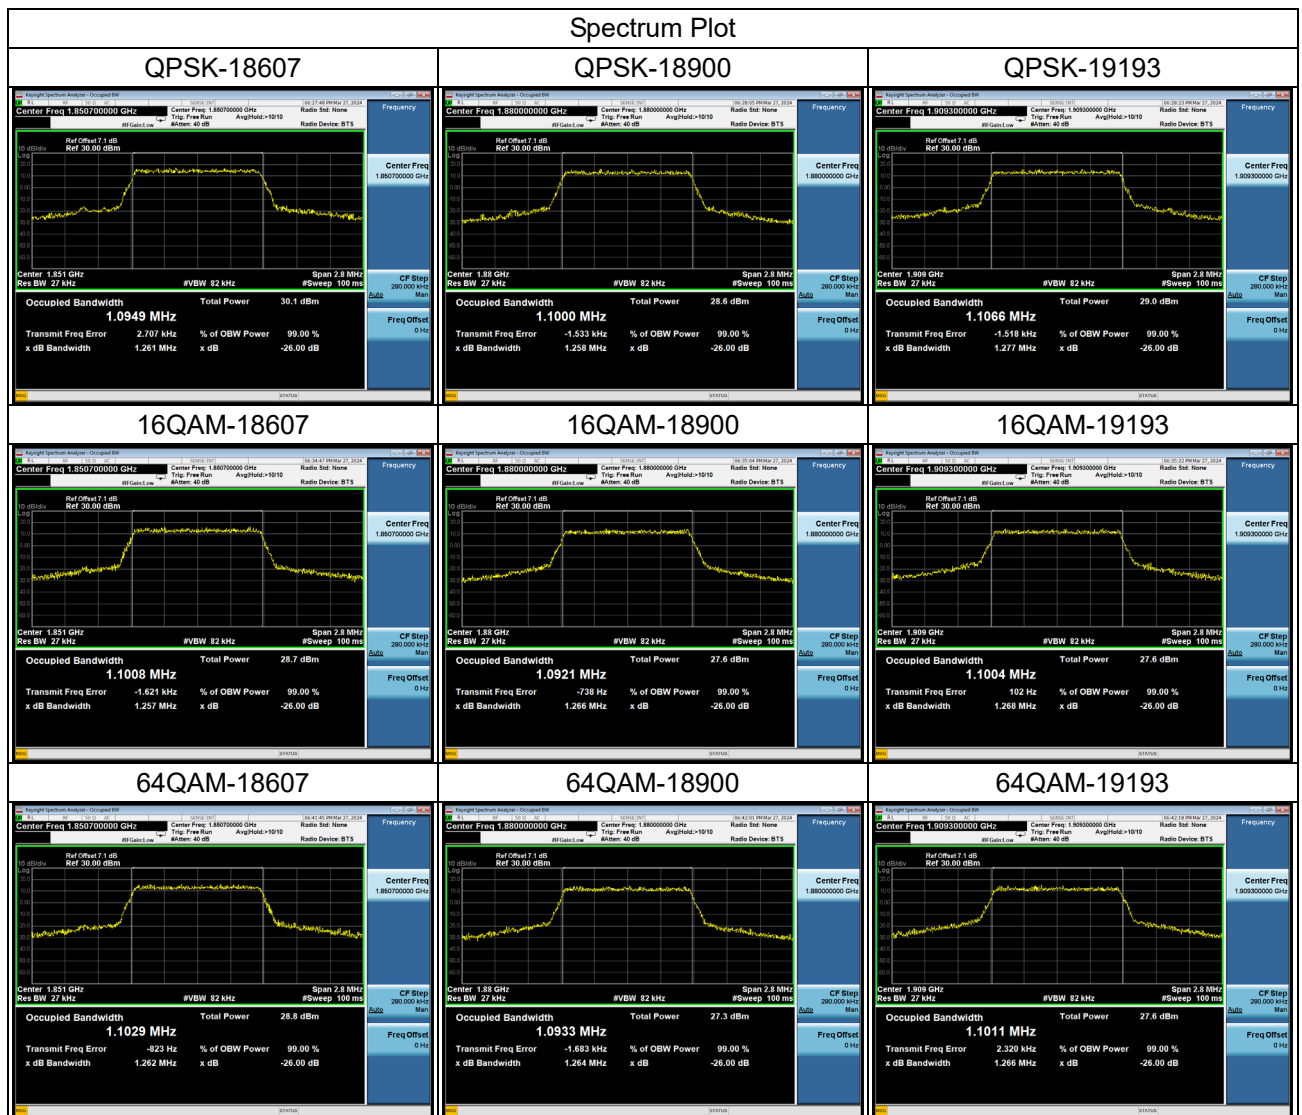

LTE Band 2_3MHz							
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)			26dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18615	1851.5	2.6918	2.6967	2.6971	2.9190	2.9190	2.9110
18900	1880	2.7007	2.6954	2.6919	2.9170	2.9280	2.9160
19185	1908.5	2.6973	2.6968	2.6970	2.9200	2.9300	2.9210

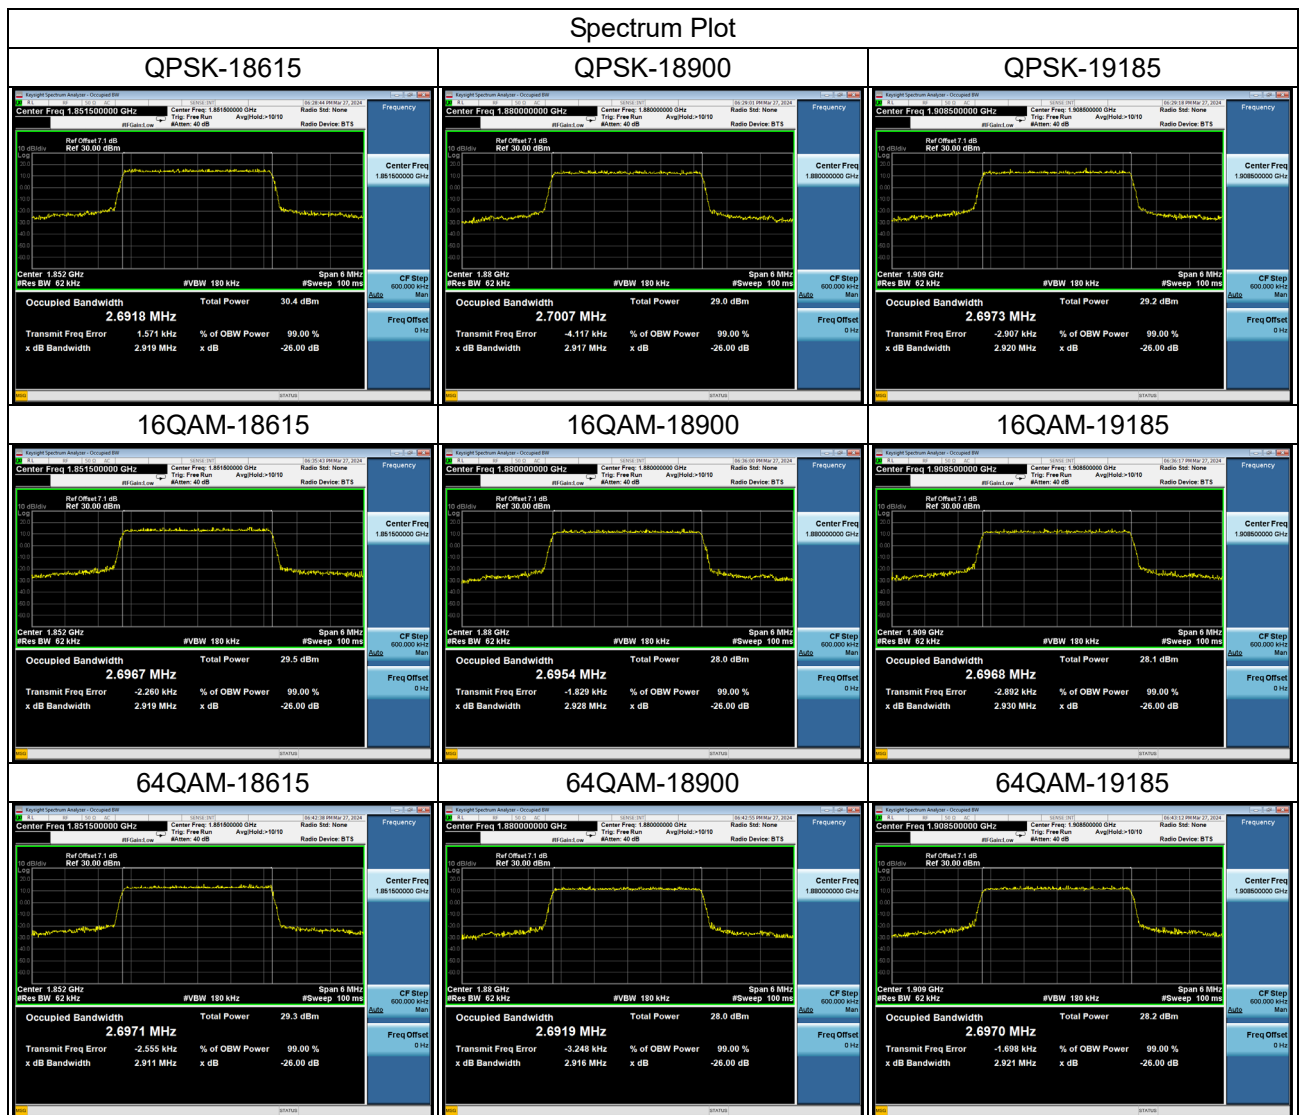

LTE Band 2_5MHz							
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)			26dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18625	1852.5	4.5031	4.5003	4.4961	4.8460	4.8670	4.8510
18900	1880	4.4991	4.4976	4.4973	4.8340	4.8590	4.8460
19175	1907.5	4.5031	4.4894	4.4852	4.8250	4.8390	4.8500

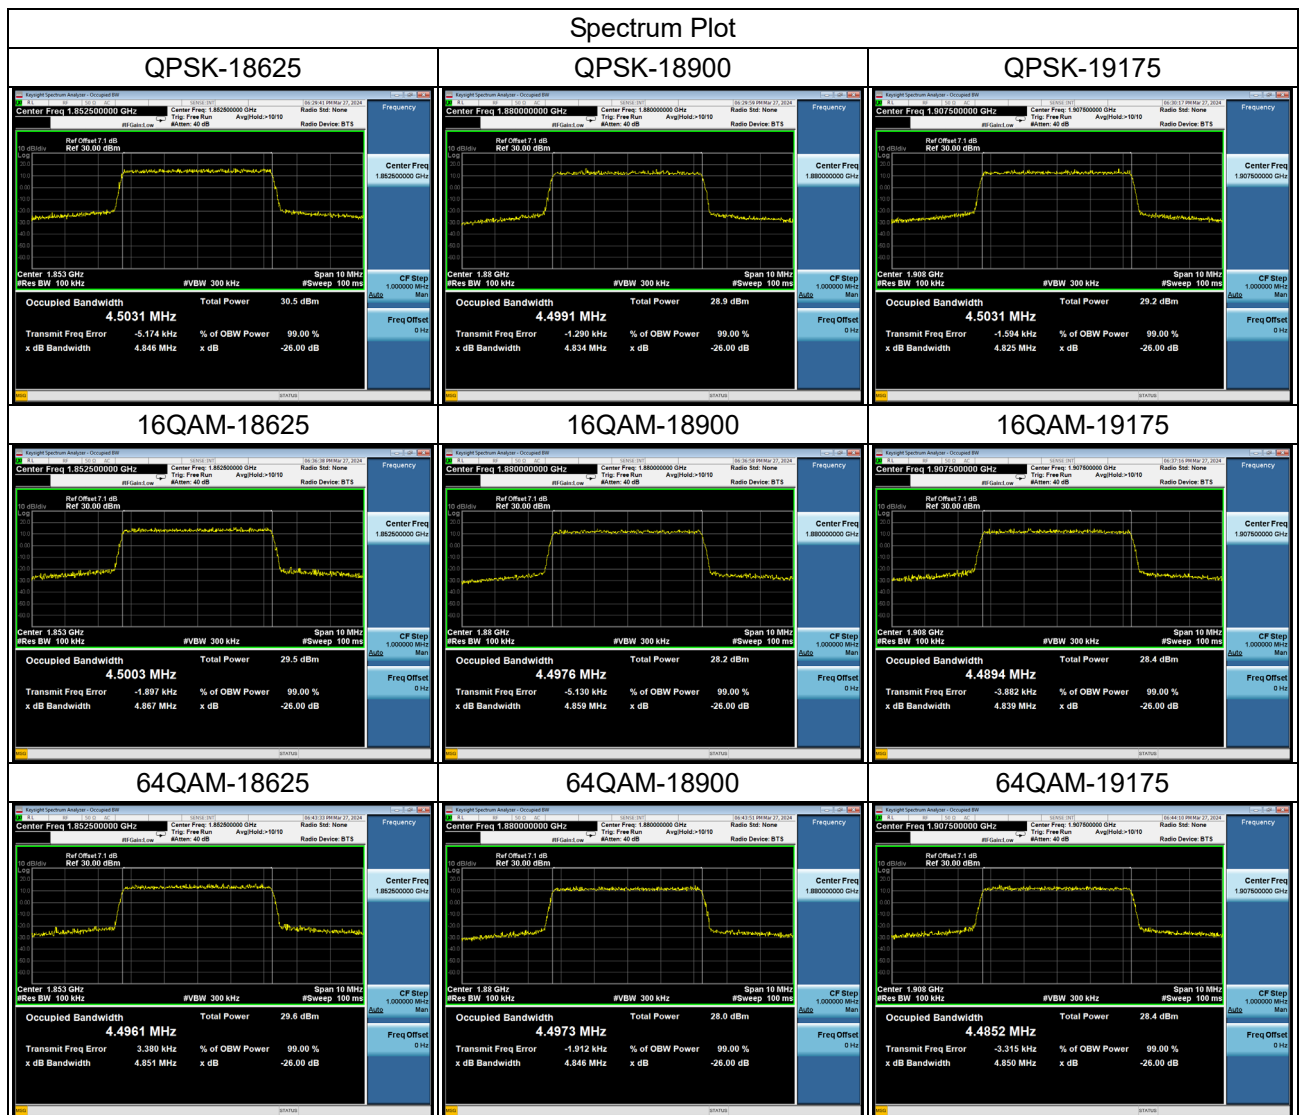

LTE Band 2_10MHz							
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)			26dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
18650	1855	8.9481	8.9477	8.9517	9.6950	9.6750	9.6280
18900	1880	8.9734	8.9464	8.9664	9.6510	9.6290	9.6330
19150	1905	8.9759	8.9951	8.9751	9.6640	9.6190	9.6480

