RSE Co-location Result			
Operating Mode	1	**Polarization**	Horizontal
Operating Function	Normal Link		

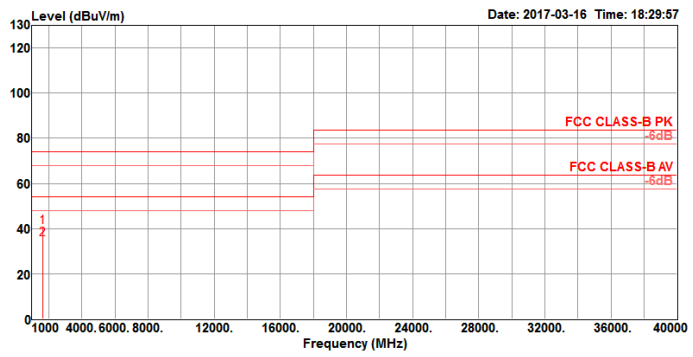

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1641.22	40.80	74.00	-33.20	45.15	4.99	25.52	34.86	151	131	Peak	HORIZONTAL
2	1641.26	35.42	54.00	-18.58	39.77	4.99	25.52	34.86	151	131	Average	HORIZONTAL

RSE Co-location Result			
Operating Mode	1	**Power Phase**	Vertical
Operating Function	Normal Link		

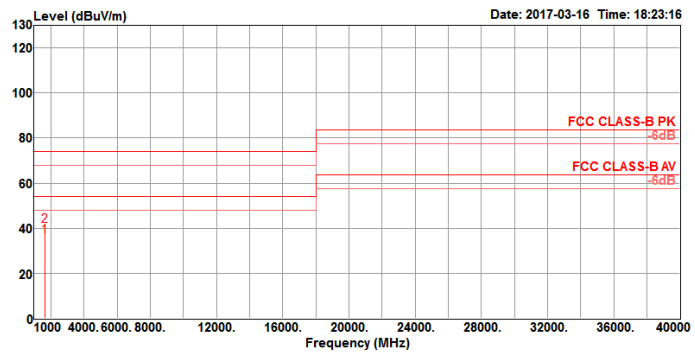

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1641.30	36.53	54.00	-17.47	40.88	4.99	25.52	34.86	150	132	Average	VERTICAL
2	1641.38	41.20	74.00	-32.80	45.55	4.99	25.52	34.86	150	132	Peak	VERTICAL