RSE Co-location Result			
Operating Mode	2	**Polarization**	Horizontal
Operating Function	Normal Link		

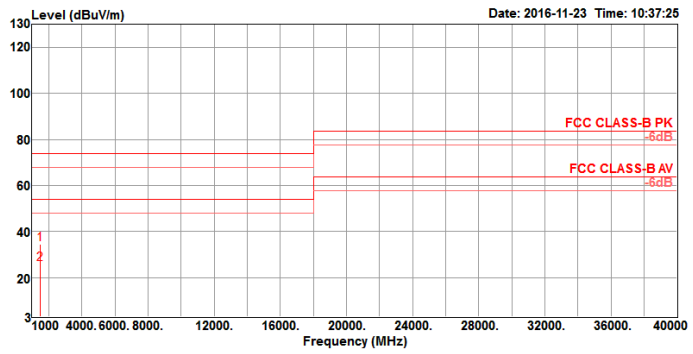

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1500.33	34.48	74.00	-39.52	39.75	4.47	25.30	35.04	132	233	Peak	HORIZONTAL
2	1501.45	25.81	54.00	-28.19	31.06	4.48	25.31	35.04	132	233	Average	HORIZONTAL

RSE Co-location Result			
Operating Mode	2	**Power Phase**	Vertical
Operating Function	Normal Link		

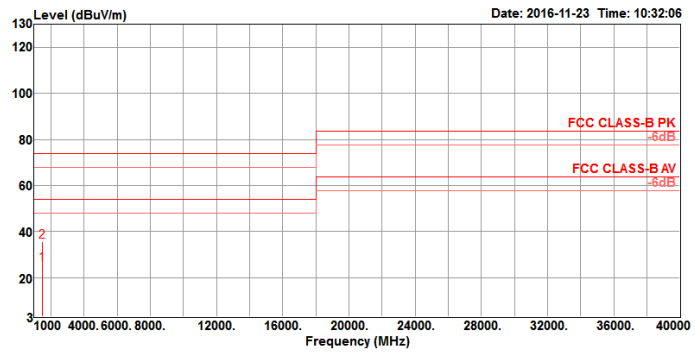

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1503.56	25.94	54.00	-28.06	31.19	4.48	25.31	35.04	196	111	Average	VERTICAL
2	1503.63	35.60	74.00	-38.40	40.85	4.48	25.31	35.04	196	111	Peak	VERTICAL