

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5825MHz	Pass	6.84	7.37	7.75	10.48	29.16	17.32	36.00
802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.84	4.01	4.20	7.08	10.16	13.92	17.00
5200MHz	Pass	6.84	6.72	7.03	9.78	10.16	16.62	17.00
5240MHz	Pass	6.84	6.68	6.89	9.68	10.16	16.52	17.00
5260MHz	Pass	6.84	6.40	6.43	9.43	10.16	16.27	17.00
5300MHz	Pass	6.84	6.49	6.41	9.38	10.16	16.22	17.00
5320MHz	Pass	6.84	3.74	3.57	6.60	10.16	13.44	17.00
5500MHz	Pass	6.84	3.00	3.23	6.10	10.16	12.94	17.00
5580MHz	Pass	6.84	6.45	6.59	9.48	10.16	16.32	17.00
5700MHz	Pass	6.84	-0.22	0.28	3.01	10.16	9.85	17.00
5745MHz	Pass	6.84	7.55	8.20	10.80	29.16	17.64	36.00
5785MHz	Pass	6.84	7.35	7.96	10.61	29.16	17.45	36.00
5825MHz	Pass	6.84	7.60	8.08	10.79	29.16	17.63	36.00
802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.84	3.92	4.45	7.19	10.16	14.03	17.00
5200MHz	Pass	6.84	6.77	7.04	9.83	10.16	16.67	17.00
5240MHz	Pass	6.84	6.79	6.83	9.80	10.16	16.64	17.00
5260MHz	Pass	6.84	6.61	6.53	9.53	10.16	16.37	17.00
5300MHz	Pass	6.84	6.54	6.33	9.44	10.16	16.28	17.00
5320MHz	Pass	6.84	3.98	3.65	6.77	10.16	13.61	17.00
5500MHz	Pass	6.84	3.16	3.21	6.19	10.16	13.03	17.00
5580MHz	Pass	6.84	6.61	6.58	9.55	10.16	16.39	17.00
5700MHz	Pass	6.84	-0.07	0.41	3.16	10.16	10.00	17.00
5745MHz	Pass	6.84	7.65	8.26	10.89	29.16	17.73	36.00
5785MHz	Pass	6.84	7.66	8.30	10.83	29.16	17.67	36.00
5825MHz	Pass	6.84	7.74	8.01	10.80	29.16	17.64	36.00
802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.84	4.23	4.46	7.30	10.16	14.14	17.00
5200MHz	Pass	6.84	6.71	6.90	9.77	10.16	16.61	17.00
5240MHz	Pass	6.84	6.77	6.82	9.75	10.16	16.59	17.00
5260MHz	Pass	6.84	6.54	6.53	9.46	10.16	16.30	17.00
5300MHz	Pass	6.84	6.62	6.19	9.37	10.16	16.21	17.00
5320MHz	Pass	6.84	3.96	3.63	6.75	10.16	13.59	17.00
5500MHz	Pass	6.84	3.15	3.20	6.06	10.16	12.90	17.00
5580MHz	Pass	6.84	6.61	6.53	9.47	10.16	16.31	17.00
5700MHz	Pass	6.84	0.16	0.24	3.19	10.16	10.03	17.00
5745MHz	Pass	6.84	7.67	8.01	10.77	29.16	17.61	36.00
5785MHz	Pass	6.84	7.63	7.77	10.69	29.16	17.53	36.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5825MHz	Pass	6.84	7.73	8.07	10.81	29.16	17.65	36.00
802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.84	4.35	4.50	7.34	10.16	14.18	17.00
5200MHz	Pass	6.84	6.63	6.92	9.70	10.16	16.54	17.00
5240MHz	Pass	6.84	6.62	6.76	9.68	10.16	16.52	17.00
5260MHz	Pass	6.84	6.46	6.34	9.38	10.16	16.22	17.00
5300MHz	Pass	6.84	6.53	6.34	9.41	10.16	16.25	17.00
5320MHz	Pass	6.84	4.01	3.94	6.87	10.16	13.71	17.00
5500MHz	Pass	6.84	3.31	3.24	6.21	10.16	13.05	17.00
5580MHz	Pass	6.84	6.61	6.49	9.50	10.16	16.34	17.00
5700MHz	Pass	6.84	0.02	0.22	3.09	10.16	9.93	17.00
5745MHz	Pass	6.84	7.87	7.96	10.86	29.16	17.70	36.00
5785MHz	Pass	6.84	7.81	7.83	10.78	29.16	17.62	36.00
5825MHz	Pass	6.84	7.31	7.81	10.53	29.16	17.37	36.00
802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.84	4.37	4.50	7.40	10.16	14.24	17.00
5200MHz	Pass	6.84	6.64	6.86	9.70	10.16	16.54	17.00
5240MHz	Pass	6.84	6.72	6.74	9.68	10.16	16.52	17.00
5260MHz	Pass	6.84	6.54	6.34	9.38	10.16	16.22	17.00
5300MHz	Pass	6.84	6.65	6.31	9.38	10.16	16.22	17.00
5320MHz	Pass	6.84	4.03	3.91	6.95	10.16	13.79	17.00
5500MHz	Pass	6.84	3.37	3.26	6.22	10.16	13.06	17.00
5580MHz	Pass	6.84	6.63	6.46	9.49	10.16	16.33	17.00
5700MHz	Pass	6.84	0.04	0.20	3.10	10.16	9.94	17.00
5745MHz	Pass	6.84	7.80	8.10	10.87	29.16	17.71	36.00
5785MHz	Pass	6.84	7.79	7.95	10.88	29.16	17.72	36.00
5825MHz	Pass	6.84	7.62	7.77	10.65	29.16	17.49	36.00
802.11ax HEW40_RU26_Index0_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.84	-1.26	-1.02	1.85	10.16	8.69	17.00
5230MHz	Pass	6.84	3.06	3.19	6.08	10.16	12.92	17.00
5270MHz	Pass	6.84	2.94	3.07	6.01	10.16	12.85	17.00
5310MHz	Pass	6.84	-1.47	-1.24	1.66	10.16	8.50	17.00
5510MHz	Pass	6.84	-3.32	-3.25	-0.34	10.16	6.50	17.00
5590MHz	Pass	6.84	3.87	4.16	6.90	10.16	13.74	17.00
5670MHz	Pass	6.84	0.28	0.15	3.20	10.16	10.04	17.00
5755MHz	Pass	6.84	3.61	3.97	6.78	29.16	13.62	36.00
5795MHz	Pass	6.84	4.22	4.72	7.39	29.16	14.23	36.00
802.11ax HEW40_RU26_Index12_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.84	-0.81	-0.59	2.23	10.16	9.07	17.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5230MHz	Pass	6.84	3.95	4.01	6.98	10.16	13.82	17.00
5270MHz	Pass	6.84	3.83	4.11	6.97	10.16	13.81	17.00
5310MHz	Pass	6.84	-1.00	-0.97	1.96	10.16	8.80	17.00
5510MHz	Pass	6.84	-2.59	-2.28	0.54	10.16	7.38	17.00
5590MHz	Pass	6.84	4.26	4.74	7.47	10.16	14.31	17.00
5670MHz	Pass	6.84	0.76	1.07	3.90	10.16	10.74	17.00
5755MHz	Pass	6.84	4.14	4.21	7.10	29.16	13.94	36.00
5795MHz	Pass	6.84	5.53	5.73	8.59	29.16	15.43	36.00
802.11ax HEW40_RU26_Index17_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.84	-1.32	-0.96	1.84	10.16	8.68	17.00
5230MHz	Pass	6.84	3.22	3.22	6.23	10.16	13.07	17.00
5270MHz	Pass	6.84	2.92	3.04	5.97	10.16	12.81	17.00
5310MHz	Pass	6.84	-1.80	-1.69	1.24	10.16	8.08	17.00
5510MHz	Pass	6.84	-3.03	-3.25	-0.19	10.16	6.65	17.00
5590MHz	Pass	6.84	3.72	4.15	6.95	10.16	13.79	17.00
5670MHz	Pass	6.84	0.24	0.29	3.26	10.16	10.10	17.00
5755MHz	Pass	6.84	3.86	3.74	6.81	29.16	13.65	36.00
5795MHz	Pass	6.84	4.41	4.62	7.44	29.16	14.28	36.00
802.11ax HEW40_RU52_Index37_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.84	-1.10	-1.05	1.88	10.16	8.72	17.00
5230MHz	Pass	6.84	3.00	3.27	6.10	10.16	12.94	17.00
5270MHz	Pass	6.84	3.34	3.21	6.28	10.16	13.12	17.00
5310MHz	Pass	6.84	-1.71	-1.54	1.29	10.16	8.13	17.00
5510MHz	Pass	6.84	-3.46	-2.77	-0.14	10.16	6.70	17.00
5590MHz	Pass	6.84	4.01	3.87	6.90	10.16	13.74	17.00
5670MHz	Pass	6.84	-0.01	0.13	3.00	10.16	9.84	17.00
5755MHz	Pass	6.84	3.42	3.41	6.42	29.16	13.26	36.00
5795MHz	Pass	6.84	4.42	4.85	7.61	29.16	14.45	36.00
802.11ax HEW40_RU52_Index42_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.84	-0.91	-0.76	2.15	10.16	8.99	17.00
5230MHz	Pass	6.84	3.79	4.07	6.89	10.16	13.73	17.00
5270MHz	Pass	6.84	4.06	3.91	6.95	10.16	13.79	17.00
5310MHz	Pass	6.84	-1.30	-1.01	1.81	10.16	8.65	17.00
5510MHz	Pass	6.84	-2.61	-2.23	0.53	10.16	7.37	17.00
5590MHz	Pass	6.84	4.33	4.72	7.48	10.16	14.32	17.00
5670MHz	Pass	6.84	0.73	1.02	3.85	10.16	10.69	17.00
5755MHz	Pass	6.84	3.83	4.04	6.95	29.16	13.79	36.00
5795MHz	Pass	6.84	5.40	5.71	8.49	29.16	15.33	36.00
802.11ax HEW40_RU52_Index44_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5190MHz	Pass	6.84	-1.40	-1.23	1.67	10.16	8.51	17.00
5230MHz	Pass	6.84	3.15	3.49	6.30	10.16	13.14	17.00
5270MHz	Pass	6.84	3.59	3.17	6.38	10.16	13.22	17.00
5310MHz	Pass	6.84	-1.92	-2.00	0.96	10.16	7.80	17.00
5510MHz	Pass	6.84	-3.16	-3.07	-0.15	10.16	6.69	17.00
5590MHz	Pass	6.84	3.97	3.85	6.83	10.16	13.67	17.00
5670MHz	Pass	6.84	-0.10	0.06	2.94	10.16	9.78	17.00
5755MHz	Pass	6.84	3.38	3.55	6.48	29.16	13.32	36.00
5795MHz	Pass	6.84	4.62	4.78	7.64	29.16	14.48	36.00
802.11ax HEW40_RU106_Index53_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.84	-1.58	-1.03	1.67	10.16	8.51	17.00
5230MHz	Pass	6.84	3.63	3.53	6.50	10.16	13.34	17.00
5270MHz	Pass	6.84	3.73	3.62	6.58	10.16	13.42	17.00
5310MHz	Pass	6.84	-1.49	-1.60	1.47	10.16	8.31	17.00
5510MHz	Pass	6.84	-2.71	-2.68	0.26	10.16	7.10	17.00
5590MHz	Pass	6.84	4.01	4.21	7.09	10.16	13.93	17.00
5670MHz	Pass	6.84	0.93	0.68	3.74	10.16	10.58	17.00
5755MHz	Pass	6.84	3.53	3.61	6.50	29.16	13.34	36.00
5795MHz	Pass	6.84	4.67	5.04	7.83	29.16	14.67	36.00
802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.84	-1.07	-0.48	2.19	10.16	9.03	17.00
5230MHz	Pass	6.84	4.10	3.99	6.97	10.16	13.81	17.00
5270MHz	Pass	6.84	4.07	3.94	6.97	10.16	13.81	17.00
5310MHz	Pass	6.84	-1.11	-1.10	1.83	10.16	8.67	17.00
5510MHz	Pass	6.84	-2.29	-2.34	0.60	10.16	7.44	17.00
5590MHz	Pass	6.84	4.43	4.50	7.40	10.16	14.24	17.00
5670MHz	Pass	6.84	1.01	1.12	4.00	10.16	10.84	17.00
5755MHz	Pass	6.84	3.95	4.00	6.87	29.16	13.71	36.00
5795MHz	Pass	6.84	5.42	5.62	8.49	29.16	15.33	36.00
802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.84	-1.70	-0.93	1.71	10.16	8.55	17.00
5230MHz	Pass	6.84	3.71	3.63	6.68	10.16	13.52	17.00
5270MHz	Pass	6.84	3.68	3.68	6.62	10.16	13.46	17.00
5310MHz	Pass	6.84	-1.72	-1.77	1.27	10.16	8.11	17.00
5510MHz	Pass	6.84	-2.80	-2.64	0.25	10.16	7.09	17.00
5590MHz	Pass	6.84	4.27	4.22	7.23	10.16	14.07	17.00
5670MHz	Pass	6.84	0.88	0.81	3.83	10.16	10.67	17.00
5755MHz	Pass	6.84	3.55	3.68	6.63	29.16	13.47	36.00
5795MHz	Pass	6.84	4.85	5.19	7.97	29.16	14.81	36.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.84	-0.88	-0.78	2.15	10.16	8.99	17.00
5230MHz	Pass	6.84	3.85	3.81	6.80	10.16	13.64	17.00
5270MHz	Pass	6.84	4.03	3.74	6.84	10.16	13.68	17.00
5310MHz	Pass	6.84	-1.08	-1.16	1.82	10.16	8.66	17.00
5510MHz	Pass	6.84	-2.46	-2.45	0.50	10.16	7.34	17.00
5590MHz	Pass	6.84	4.48	4.34	7.40	10.16	14.24	17.00
5670MHz	Pass	6.84	0.98	0.89	3.87	10.16	10.71	17.00
5755MHz	Pass	6.84	4.06	3.93	6.92	29.16	13.76	36.00
5795MHz	Pass	6.84	5.65	5.65	8.59	29.16	15.43	36.00
802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.84	-1.18	-0.78	1.97	10.16	8.81	17.00
5230MHz	Pass	6.84	3.72	3.86	6.70	10.16	13.54	17.00
5270MHz	Pass	6.84	3.95	3.79	6.80	10.16	13.64	17.00
5310MHz	Pass	6.84	-1.30	-1.27	1.61	10.16	8.45	17.00
5510MHz	Pass	6.84	-2.44	-2.51	0.52	10.16	7.36	17.00
5590MHz	Pass	6.84	4.52	4.53	7.48	10.16	14.32	17.00
5670MHz	Pass	6.84	0.90	0.96	3.92	10.16	10.76	17.00
5755MHz	Pass	6.84	3.77	3.90	6.81	29.16	13.65	36.00
5795MHz	Pass	6.84	5.38	5.47	8.39	29.16	15.23	36.00
802.11ax HEW80_RU26_Index0_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.84	-5.51	-5.58	-2.55	10.16	4.29	17.00
5290MHz	Pass	6.84	-4.17	-4.06	-1.10	10.16	5.74	17.00
5530MHz	Pass	6.84	-6.25	-5.83	-3.06	10.16	3.78	17.00
5610MHz	Pass	6.84	-0.65	-0.11	2.64	10.16	9.48	17.00
5775MHz	Pass	6.84	-1.85	-2.09	1.04	29.16	7.88	36.00
802.11ax HEW80_RU26_Index21_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.84	-5.45	-5.22	-2.32	10.16	4.52	17.00
5290MHz	Pass	6.84	-4.26	-3.91	-1.08	10.16	5.76	17.00
5530MHz	Pass	6.84	-5.91	-5.81	-2.93	10.16	3.91	17.00
5610MHz	Pass	6.84	-0.21	0.07	2.91	10.16	9.75	17.00
5775MHz	Pass	6.84	-1.98	-1.93	1.06	29.16	7.90	36.00
802.11ax HEW80_RU26_Index36_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.84	-5.77	-5.68	-2.79	10.16	4.05	17.00
5290MHz	Pass	6.84	-4.62	-4.48	-1.61	10.16	5.23	17.00
5530MHz	Pass	6.84	-6.74	-6.80	-3.83	10.16	3.01	17.00
5610MHz	Pass	6.84	-0.85	-0.50	2.30	10.16	9.14	17.00
5775MHz	Pass	6.84	-1.94	-2.21	0.94	29.16	7.78	36.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11ax HEW80_RU52_Index37_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.84	-5.58	-5.31	-2.46	10.16	4.38	17.00
5290MHz	Pass	6.84	-4.25	-4.08	-1.19	10.16	5.65	17.00
5530MHz	Pass	6.84	-5.91	-5.94	-2.93	10.16	3.91	17.00
5610MHz	Pass	6.84	-0.52	-0.28	2.61	10.16	9.45	17.00
5775MHz	Pass	6.84	-2.04	-1.57	1.18	29.16	8.02	36.00
802.11ax HEW80_RU52_Index50_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.84	-5.60	-4.92	-2.30	10.16	4.54	17.00
5290MHz	Pass	6.84	-4.31	-4.15	-1.22	10.16	5.62	17.00
5530MHz	Pass	6.84	-6.25	-5.50	-2.87	10.16	3.97	17.00
5610MHz	Pass	6.84	-0.43	0.32	2.83	10.16	9.67	17.00
5775MHz	Pass	6.84	-1.90	-1.60	1.21	29.16	8.05	36.00
802.11ax HEW80_RU52_Index52_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.84	-5.70	-5.53	-2.62	10.16	4.22	17.00
5290MHz	Pass	6.84	-4.66	-4.45	-1.56	10.16	5.28	17.00
5530MHz	Pass	6.84	-6.62	-6.14	-3.41	10.16	3.43	17.00
5610MHz	Pass	6.84	-0.99	-0.44	2.29	10.16	9.13	17.00
5775MHz	Pass	6.84	-2.19	-2.05	0.89	29.16	7.73	36.00
802.11ax HEW80_RU106_Index53_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.84	-5.81	-5.56	-2.71	10.16	4.13	17.00
5290MHz	Pass	6.84	-4.29	-4.14	-1.24	10.16	5.60	17.00
5530MHz	Pass	6.84	-5.90	-5.75	-2.84	10.16	4.00	17.00
5610MHz	Pass	6.84	-0.44	-0.48	2.50	10.16	9.34	17.00
5775MHz	Pass	6.84	-2.06	-1.64	1.03	29.16	7.87	36.00
802.11ax HEW80_RU106_Index58_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.84	-5.37	-5.12	-2.30	10.16	4.54	17.00
5290MHz	Pass	6.84	-4.30	-3.87	-1.12	10.16	5.72	17.00
5530MHz	Pass	6.84	-5.96	-5.71	-2.85	10.16	3.99	17.00
5610MHz	Pass	6.84	-0.39	-0.27	2.68	10.16	9.52	17.00
5775MHz	Pass	6.84	-1.94	-1.57	1.20	29.16	8.04	36.00
802.11ax HEW80_RU106_Index60_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.84	-6.30	-5.90	-3.10	10.16	3.74	17.00
5290MHz	Pass	6.84	-4.81	-4.32	-1.59	10.16	5.25	17.00
5530MHz	Pass	6.84	-6.60	-5.86	-3.23	10.16	3.61	17.00
5610MHz	Pass	6.84	-0.73	-0.77	2.15	10.16	8.99	17.00
5775MHz	Pass	6.84	-2.06	-1.96	0.97	29.16	7.81	36.00
802.11ax HEW80_RU242_Index61_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5210MHz	Pass	6.84	-5.66	-5.52	-2.64	10.16	4.20	17.00
5290MHz	Pass	6.84	-4.31	-4.47	-1.38	10.16	5.46	17.00
5530MHz	Pass	6.84	-6.22	-5.65	-2.93	10.16	3.91	17.00
5610MHz	Pass	6.84	-0.46	-0.35	2.51	10.16	9.35	17.00
5775MHz	Pass	6.84	-2.49	-2.40	0.49	29.16	7.33	36.00
802.11ax HEW80_RU242_Index62_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.84	-5.49	-5.20	-2.41	10.16	4.43	17.00
5290MHz	Pass	6.84	-4.17	-4.15	-1.23	10.16	5.61	17.00
5530MHz	Pass	6.84	-6.05	-5.82	-2.99	10.16	3.85	17.00
5610MHz	Pass	6.84	-0.01	-0.34	2.81	10.16	9.65	17.00
5775MHz	Pass	6.84	-1.67	-1.99	1.09	29.16	7.93	36.00
802.11ax HEW80_RU242_Index64_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.84	-5.86	-5.87	-2.91	10.16	3.93	17.00
5290MHz	Pass	6.84	-4.76	-4.81	-1.90	10.16	4.94	17.00
5530MHz	Pass	6.84	-6.50	-5.96	-3.24	10.16	3.60	17.00
5610MHz	Pass	6.84	-0.43	-0.62	2.48	10.16	9.32	17.00
5775MHz	Pass	6.84	-2.75	-2.40	0.34	29.16	7.18	36.00
802.11ax HEW80_RU484_Index65_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.84	-5.48	-4.94	-2.31	10.16	4.53	17.00
5290MHz	Pass	6.84	-4.15	-3.82	-0.98	10.16	5.86	17.00
5530MHz	Pass	6.84	-5.55	-5.73	-2.77	10.16	4.07	17.00
5610MHz	Pass	6.84	0.02	-0.63	2.69	10.16	9.53	17.00
5775MHz	Pass	6.84	-1.88	-1.95	1.05	29.16	7.89	36.00
802.11ax HEW80_RU484_Index66_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.84	-5.31	-5.13	-2.36	10.16	4.48	17.00
5290MHz	Pass	6.84	-4.31	-4.04	-1.20	10.16	5.64	17.00
5530MHz	Pass	6.84	-5.80	-5.56	-2.73	10.16	4.11	17.00
5610MHz	Pass	6.84	-0.10	-0.31	2.78	10.16	9.62	17.00
5775MHz	Pass	6.84	-2.00	-1.67	1.09	29.16	7.93	36.00

DG = Directional Gain = $10 * \log((10^{3.84/20} + 10^{3.82/20})^2 / 2) = 6.84$ dBi

For 5.15 ~ 5.25 GHz / 5.25 ~ 5.35 GHz / 5.47 ~ 5.725 GHz

Limit shall be reduced to 11 dBm – (6.84 dBi – 6 dBi) = 10.16 dBm

For 5.725 ~ 5.85 GHz

Limit shall be reduced to 30 dBm – (6.84 dBi – 6 dBi) = 29.16 dBm


RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5180MHz

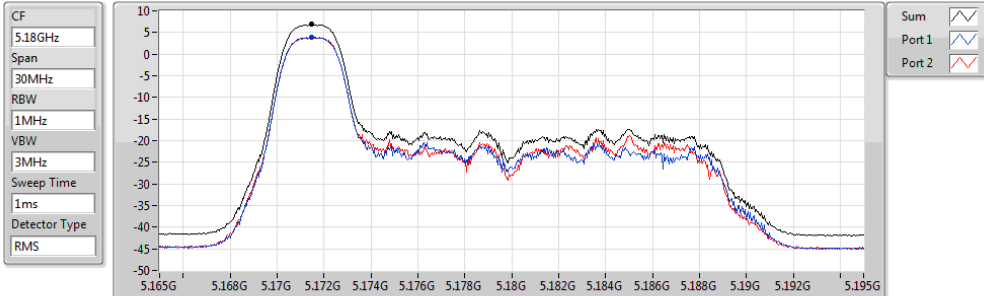


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.87	6.87	3.90	3.82

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5200MHz

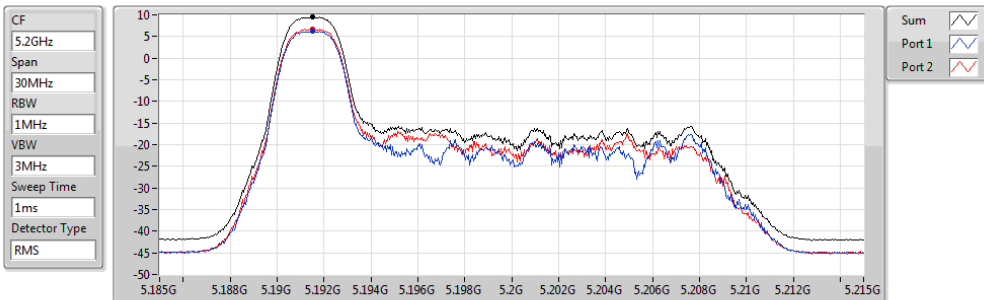


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.49	9.49	6.23	6.71

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5240MHz

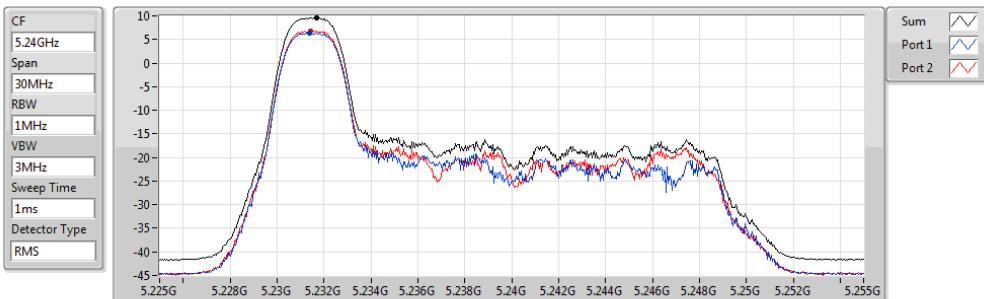


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.54	9.54	6.38	6.77

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5260MHz

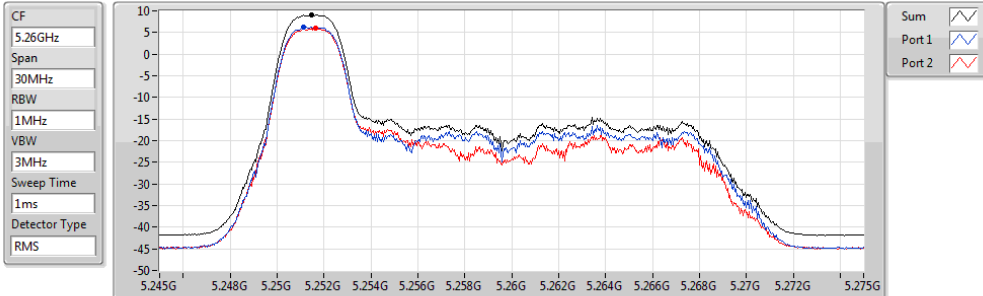


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.07	9.07	6.31	5.93

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5300MHz

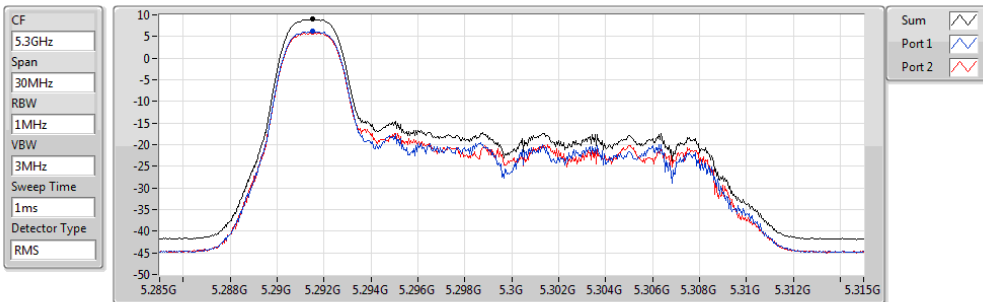


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.09	9.09	6.18	5.97

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5320MHz

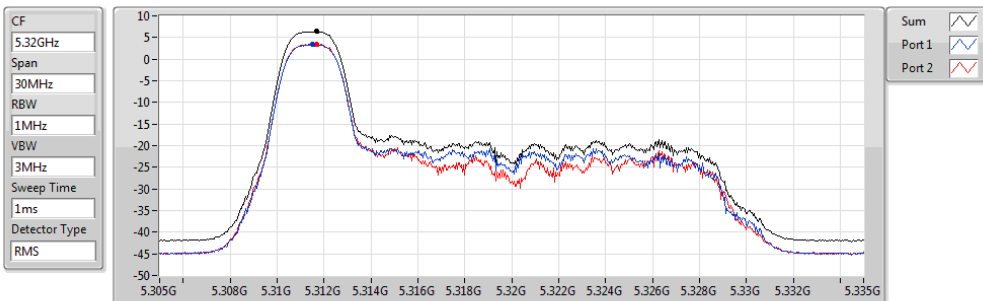


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.37	6.37	3.40	3.39

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5500MHz

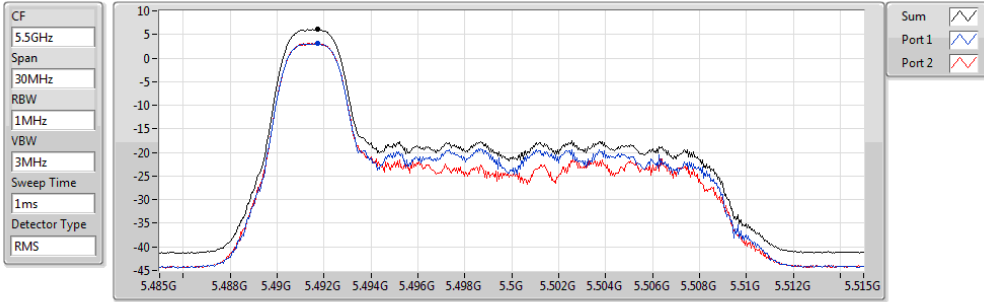


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.10	6.10	3.05	3.13

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5580MHz

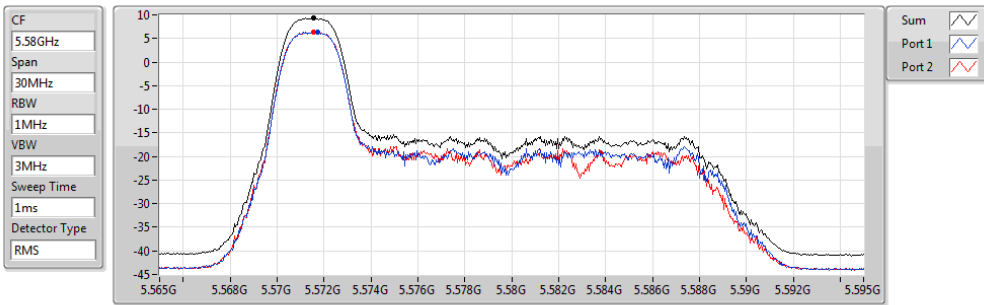


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.28	9.28	6.34	6.39

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5700MHz

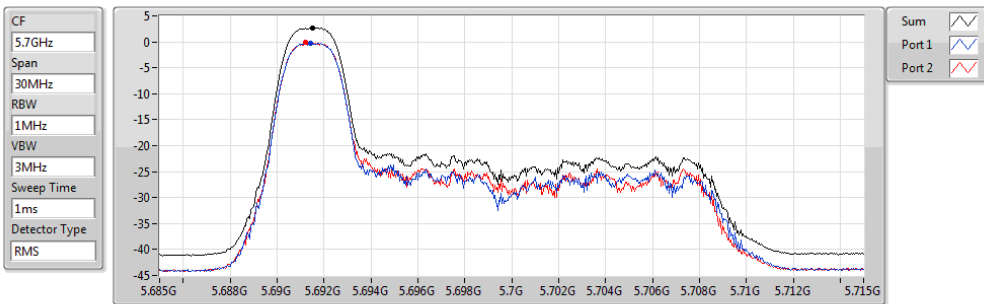


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.75	2.75	-0.22	-0.16

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5745MHz

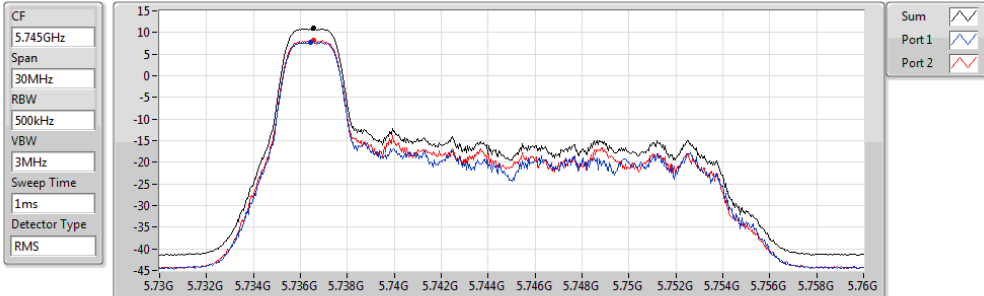


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.91	10.91	7.70	8.14

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5785MHz

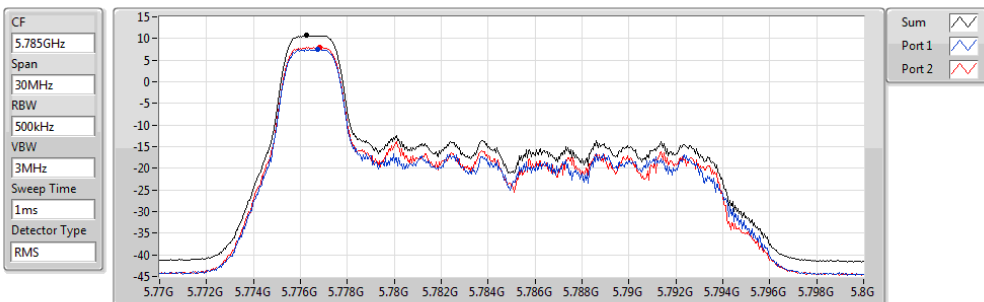


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.67	10.67	7.48	8.00

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5825MHz

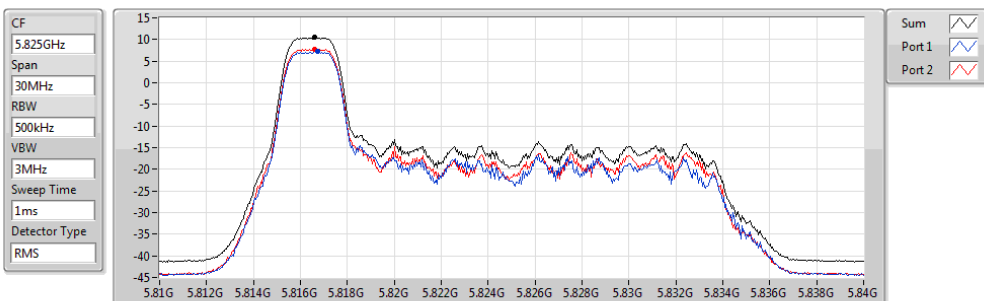


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.48	10.48	7.20	7.76

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5180MHz

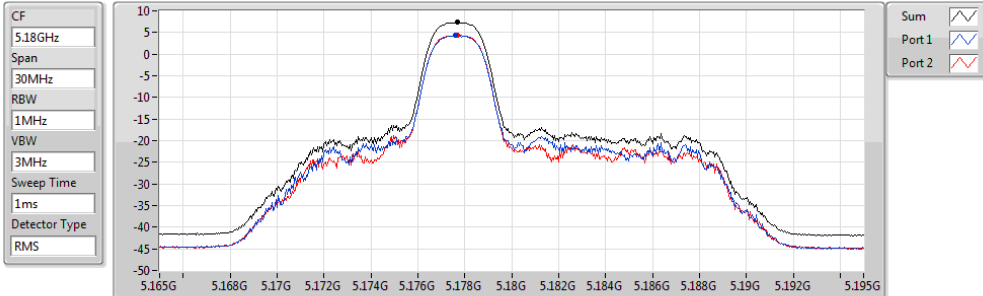


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.32	7.32	4.31	4.41

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5200MHz

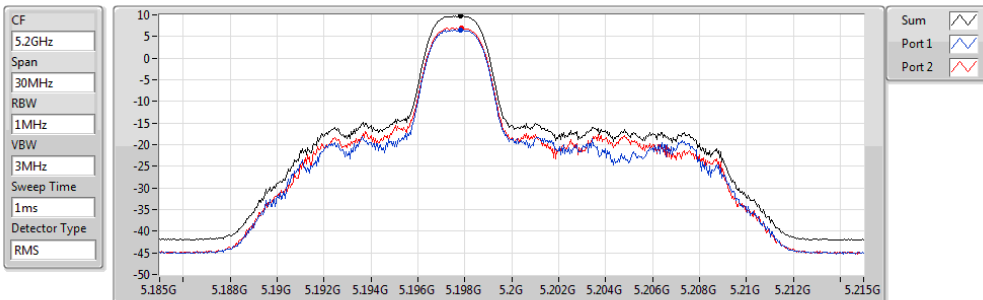


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.72	9.72	6.52	7.01

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5240MHz

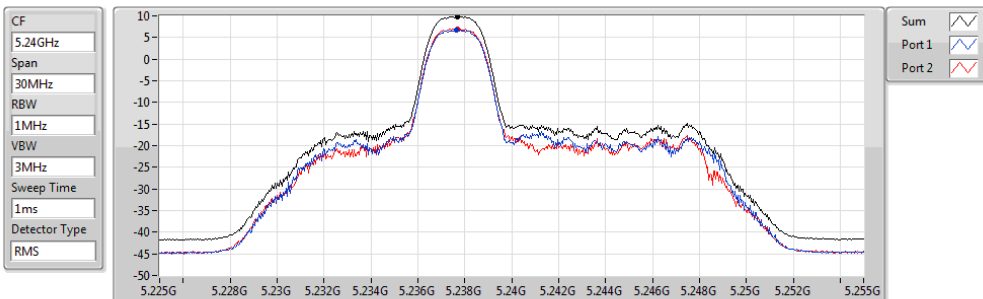


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.84	9.84	6.65	7.03

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5260MHz

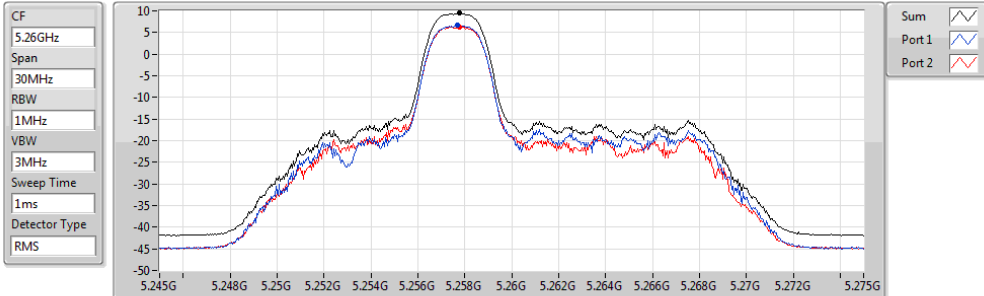


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.42	9.42	6.66	6.29

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5300MHz

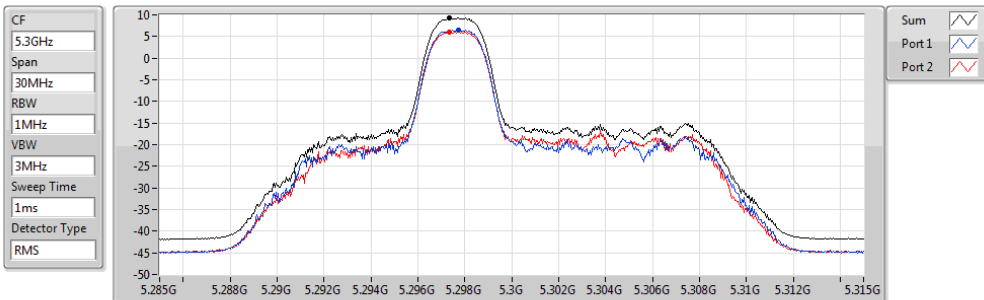


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.26	9.26	6.54	6.12

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5320MHz

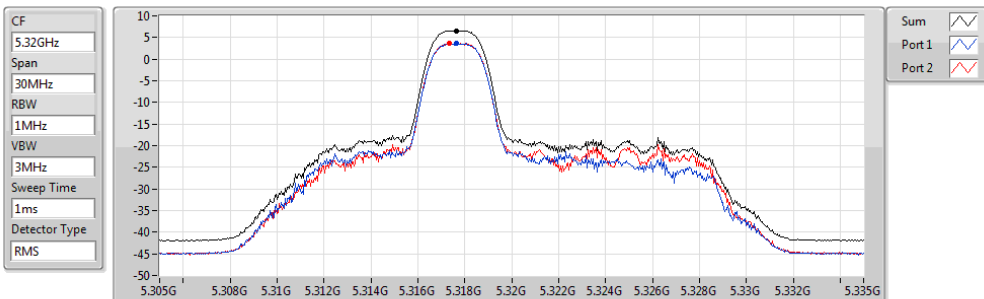


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.60	6.60	3.59	3.71

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5500MHz

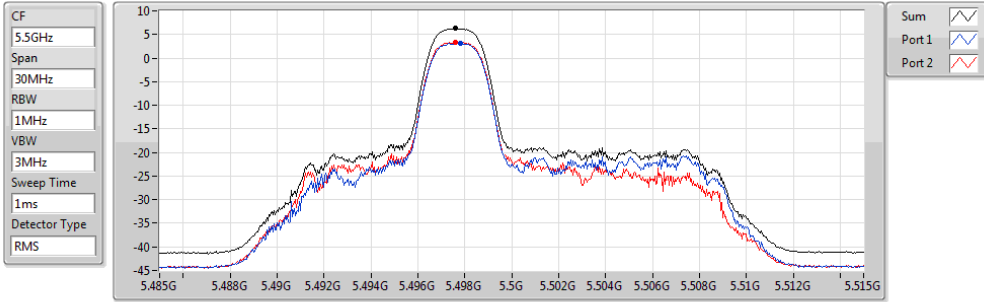


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.25	6.25	3.12	3.38

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5580MHz

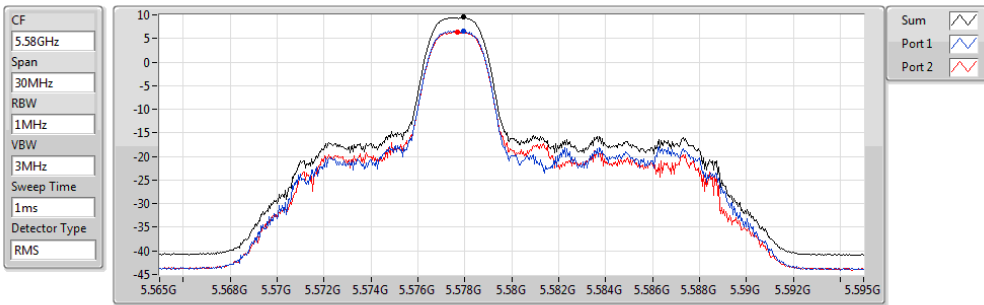


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.47	9.47	6.59	6.38

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5700MHz

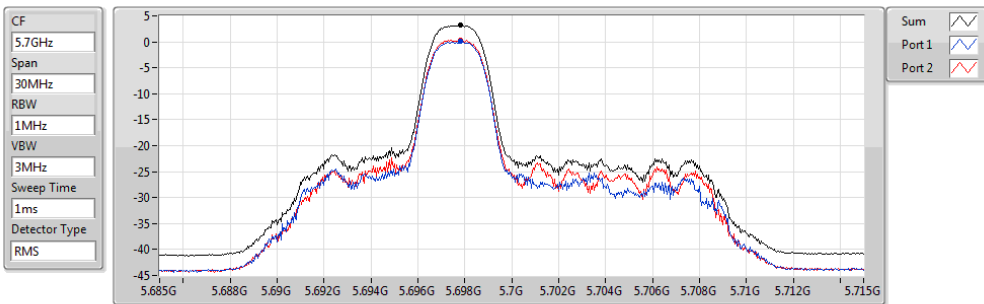


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.20	3.20	0.02	0.36

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5745MHz

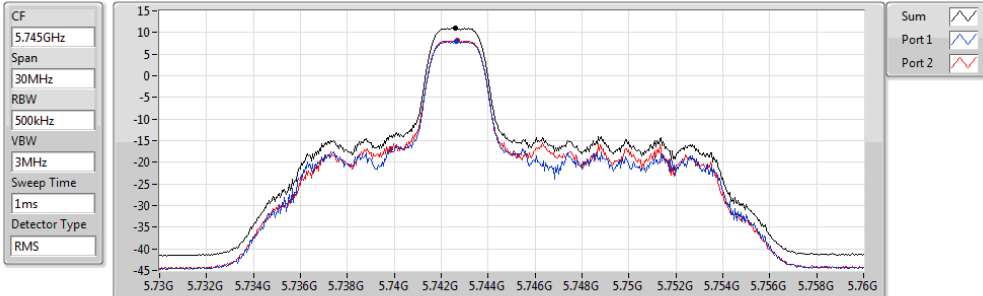


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.00	11.00	7.90	8.10

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5785MHz

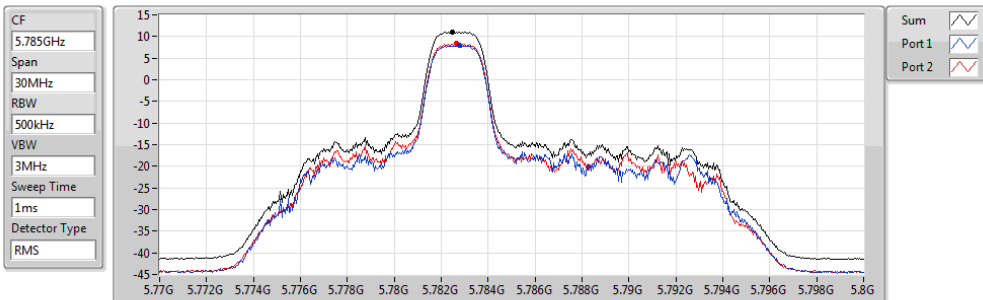


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.03	11.03	7.87	8.33

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5825MHz

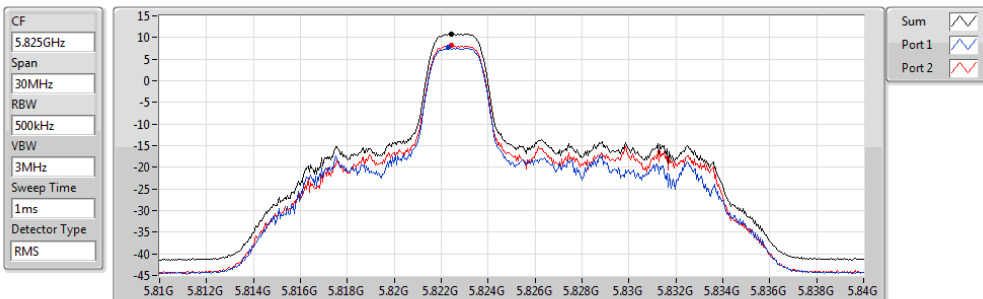


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.78	10.78	7.67	8.13

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5180MHz

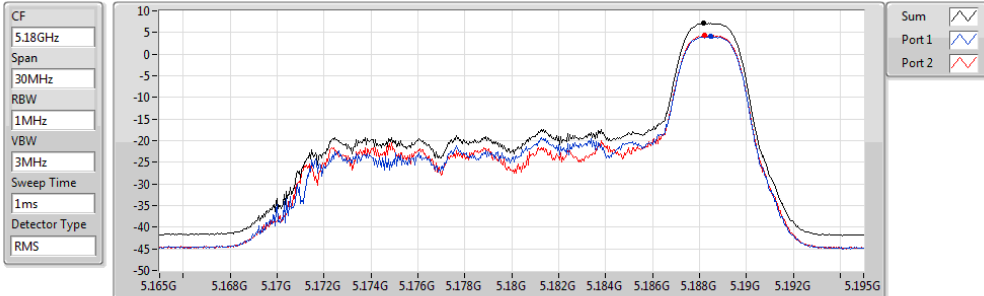


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.11	7.11	4.04	4.37

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5200MHz

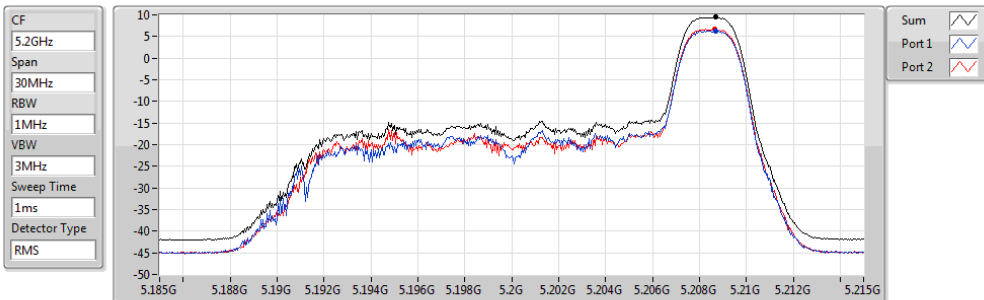


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.42	9.42	6.30	6.64

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5240MHz

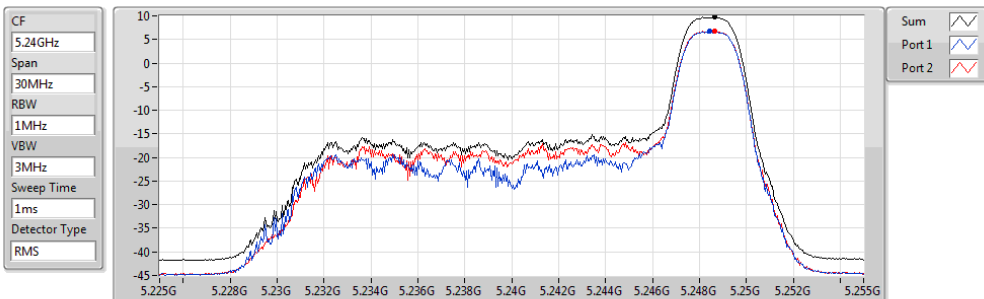


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.73	9.73	6.71	6.86

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5260MHz

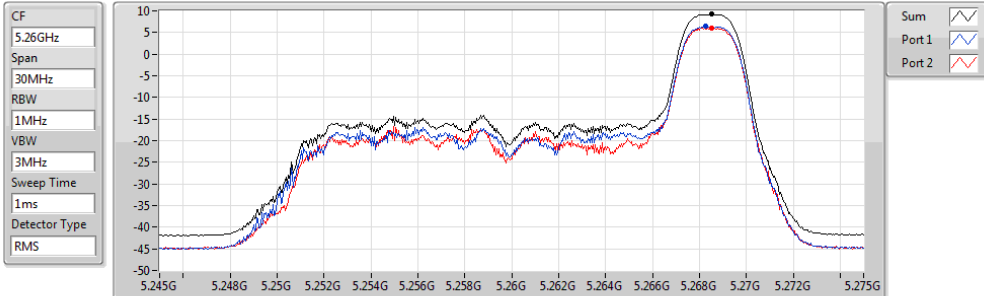


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.19	9.19	6.40	6.01

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5300MHz

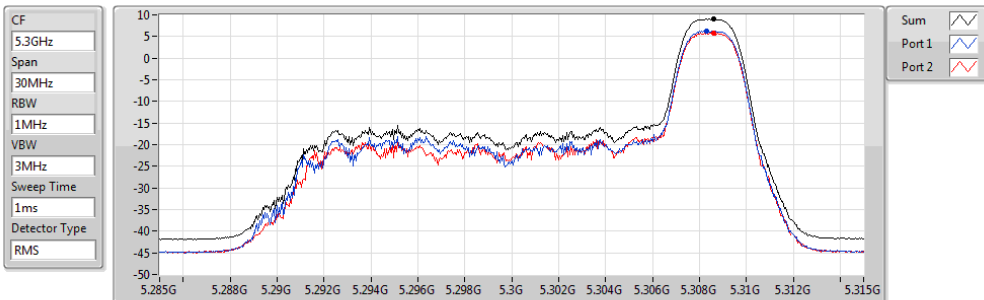


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.05	9.05	6.31	5.84

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5320MHz

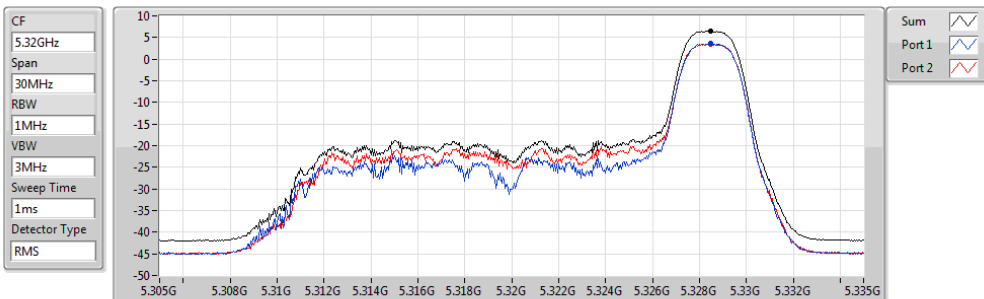


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.56	6.56	3.57	3.52

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5500MHz

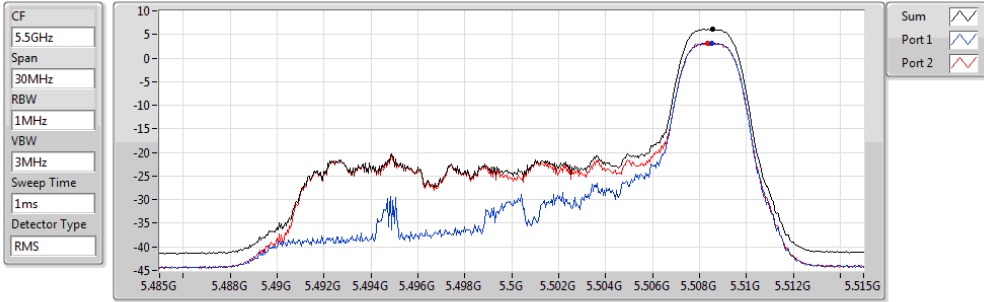


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.12	6.12	3.17	3.08

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5580MHz

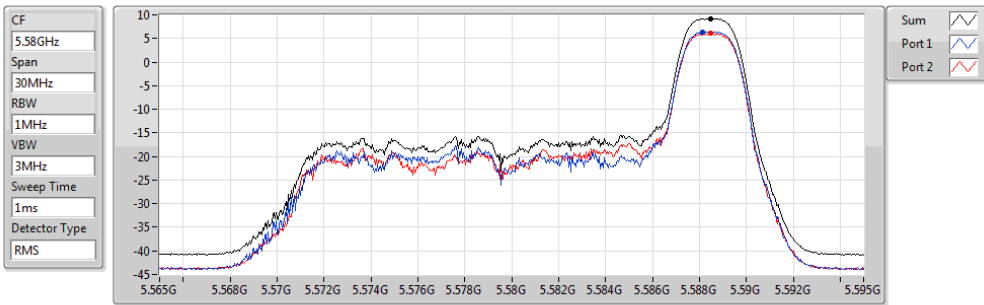


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.22	9.22	6.43	6.03

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5700MHz

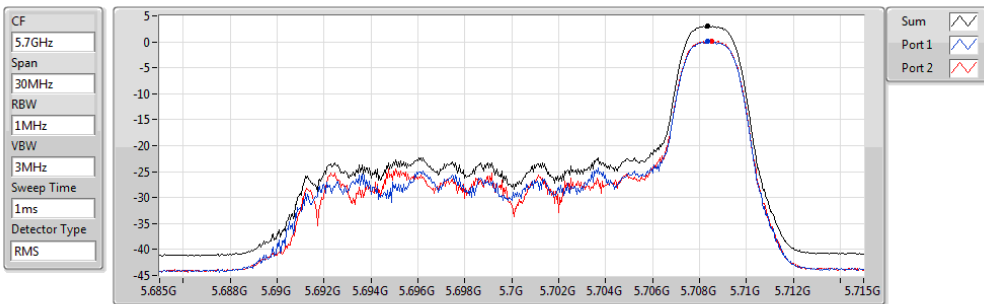


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.09	3.09	0.05	0.17

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5745MHz

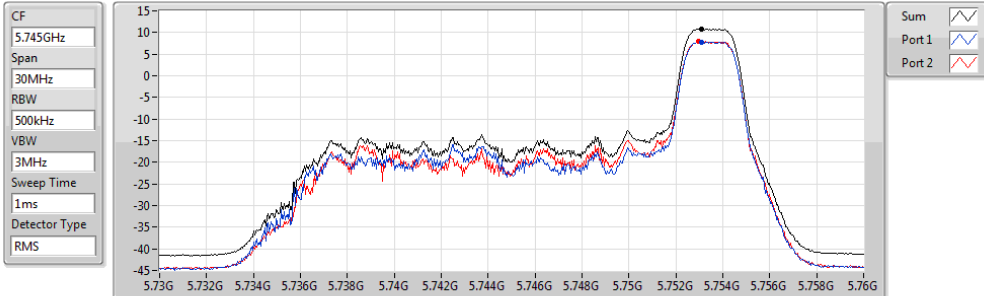


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.85	10.85	7.84	7.89

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5785MHz

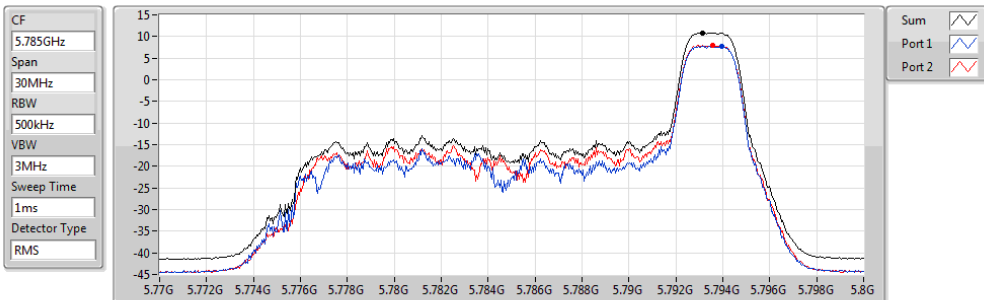


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.81	10.81	7.77	7.94

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5825MHz

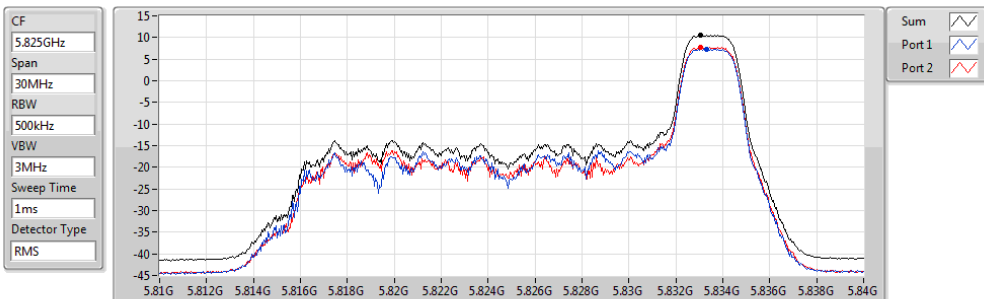


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.48	10.48	7.37	7.75

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5180MHz

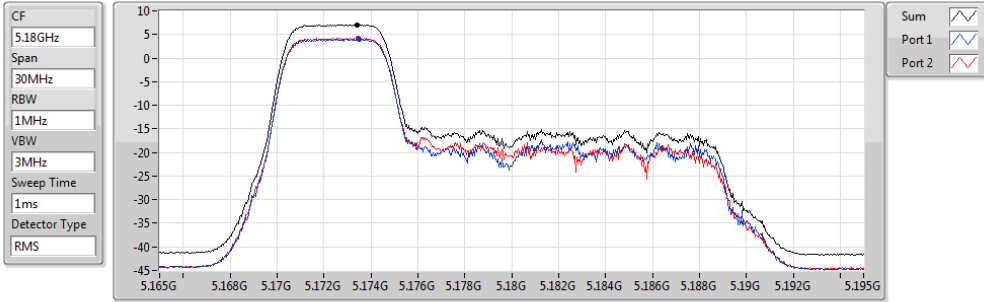


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.08	7.08	4.01	4.20

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5200MHz

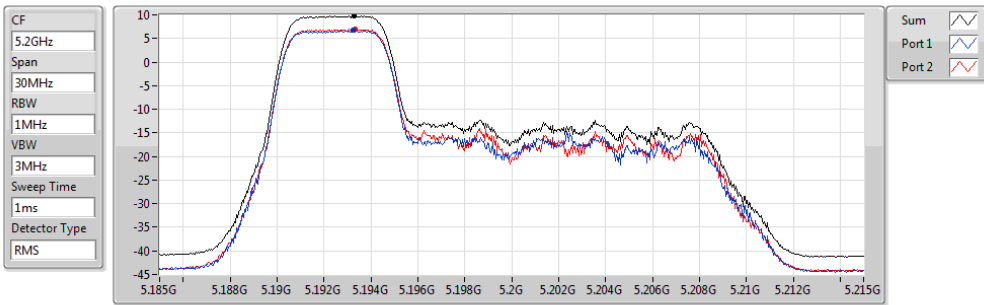


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.78	9.78	6.72	7.03

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5240MHz

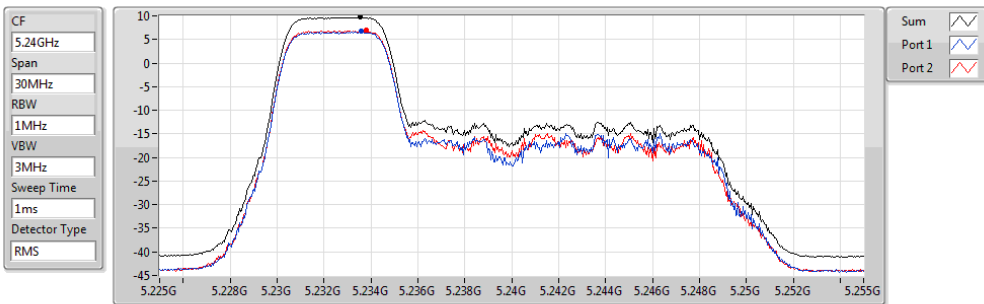


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.68	9.68	6.68	6.89

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5260MHz

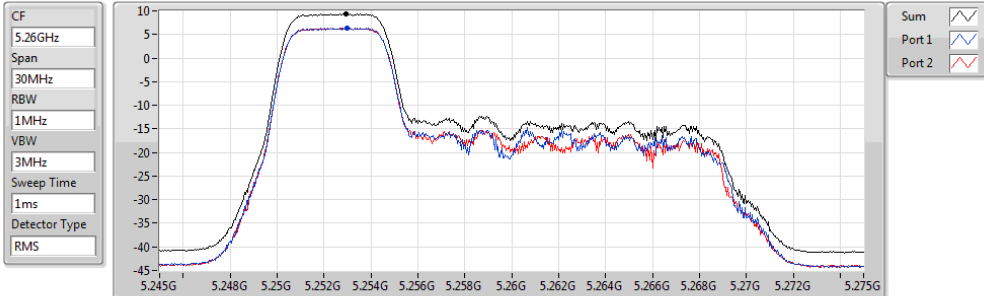


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.43	9.43	6.40	6.43

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5300MHz

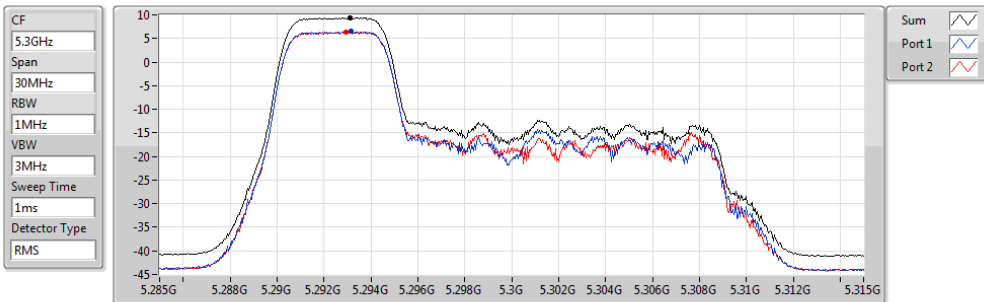


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.38	9.38	6.49	6.41

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5320MHz

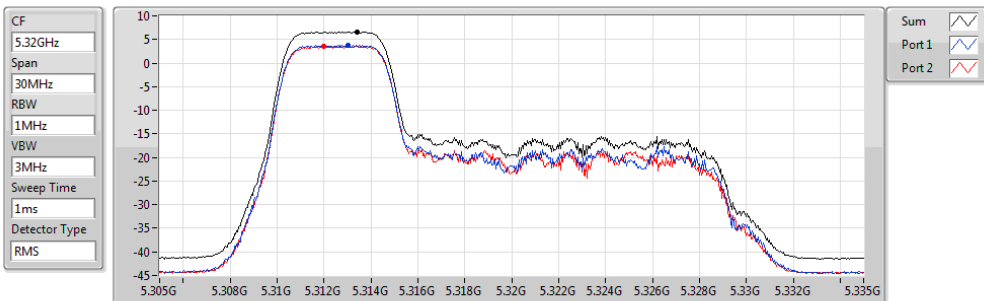


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.60	6.60	3.74	3.57

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5500MHz

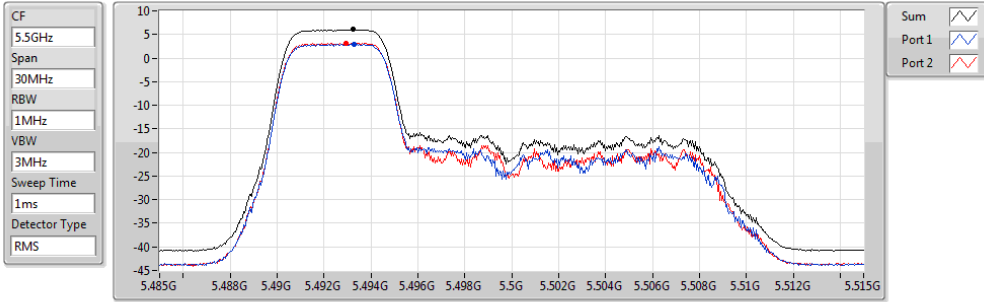


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.10	6.10	3.00	3.23

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5580MHz

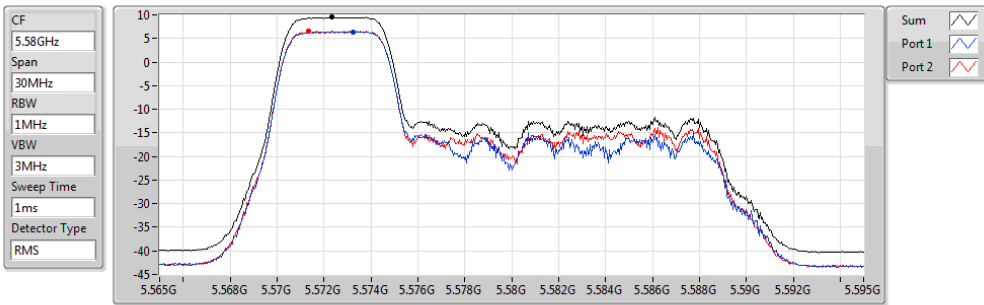


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.48	9.48	6.45	6.59

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5700MHz

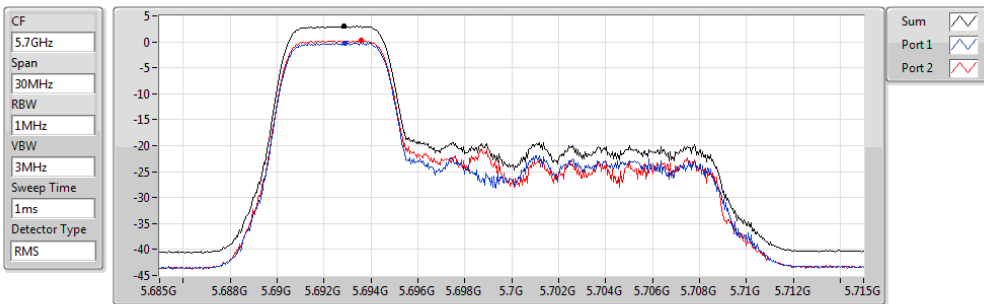


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.01	3.01	-0.22	0.28

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5745MHz

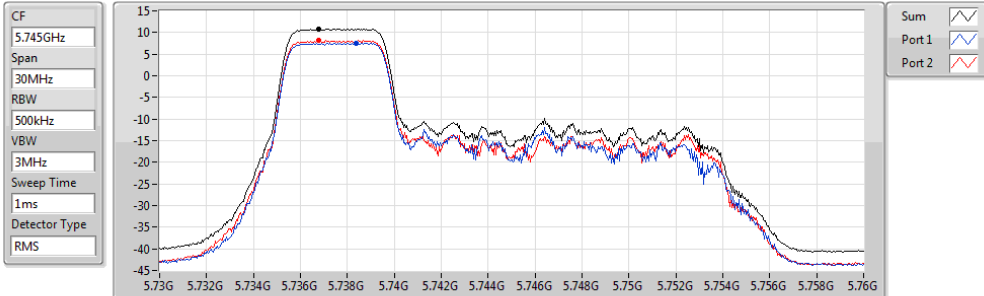


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
10.80	10.80	7.55	8.20

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5785MHz

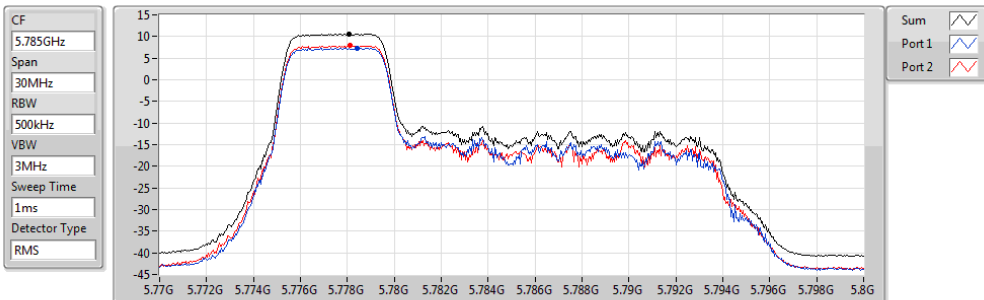


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
10.61	10.61	7.35	7.96

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5825MHz

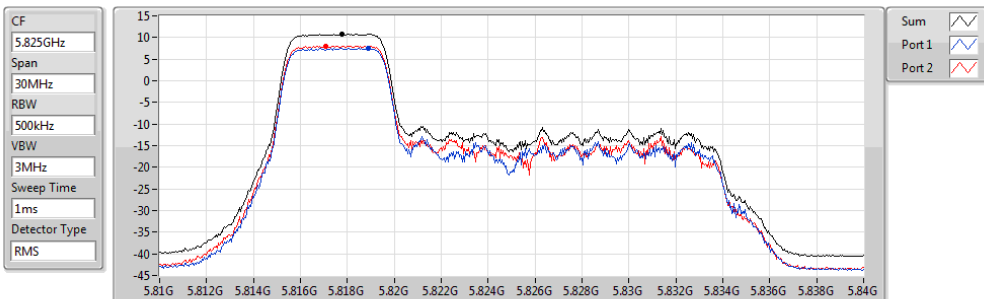


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
10.79	10.79	7.60	8.08

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5180MHz

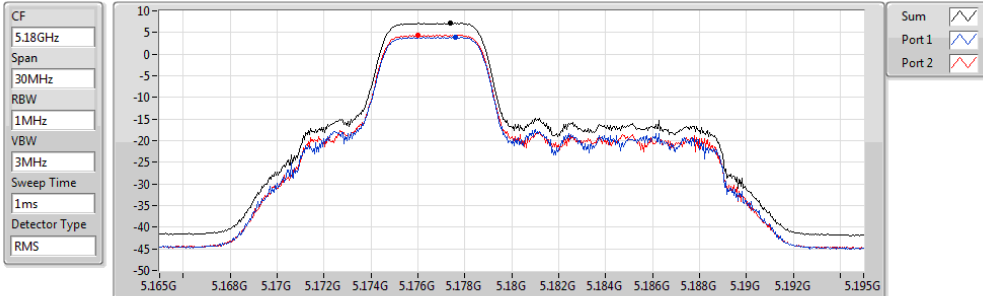


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.19	7.19	3.92	4.45

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5200MHz

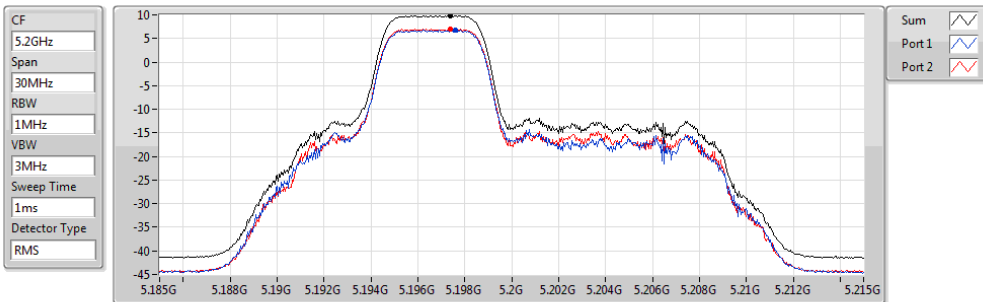


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.83	9.83	6.77	7.04

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5240MHz

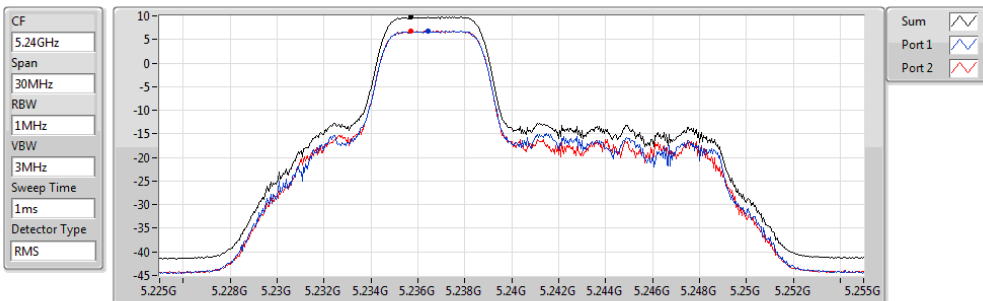


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.80	9.80	6.79	6.83

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5260MHz

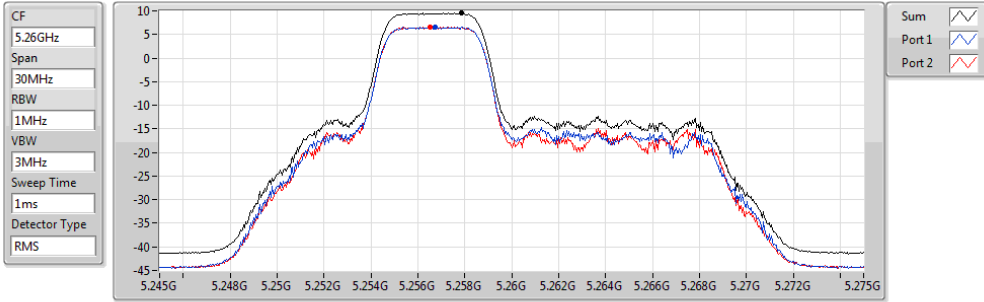


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.53	9.53	6.61	6.53

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5300MHz

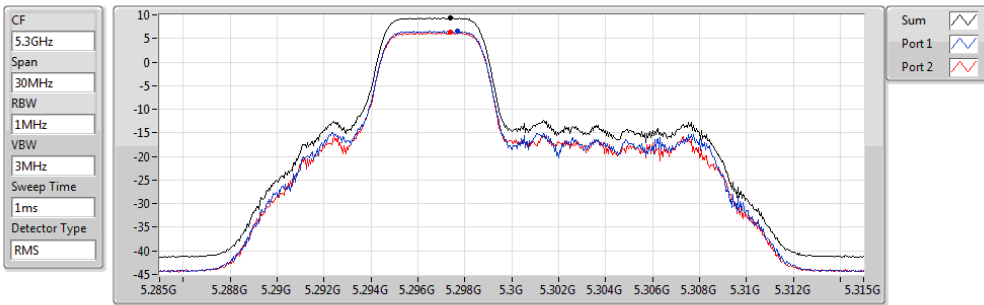


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.44	9.44	6.54	6.33

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5320MHz

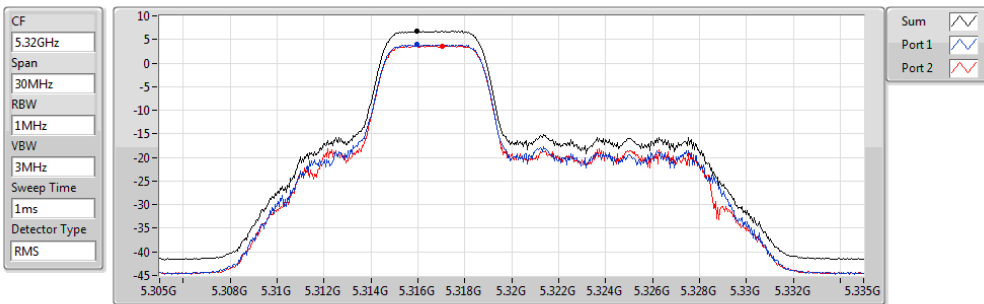


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.77	6.77	3.98	3.65

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5500MHz

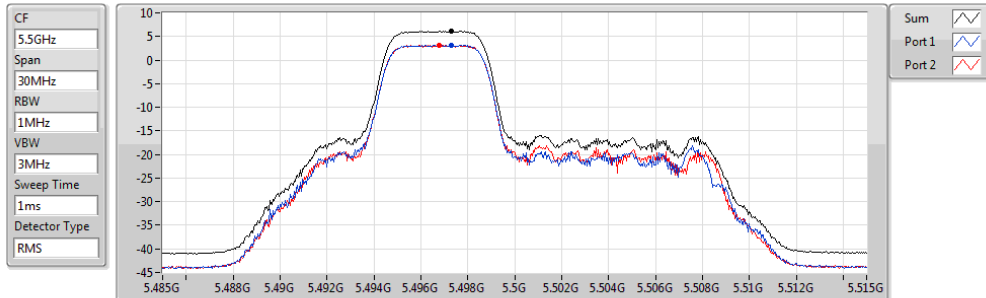


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.19	6.19	3.16	3.21

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5580MHz

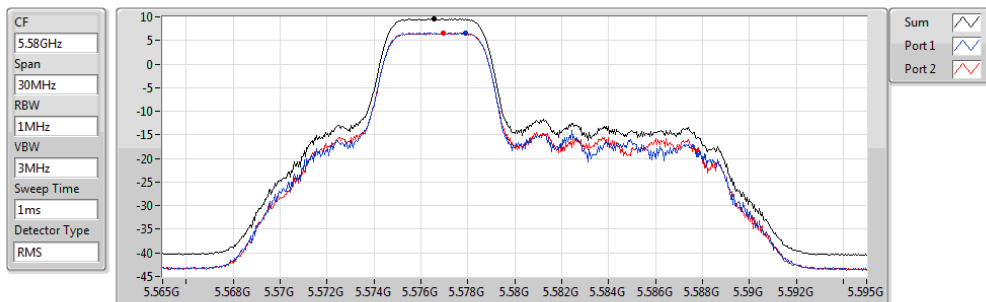


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.55	9.55	6.61	6.58

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5700MHz

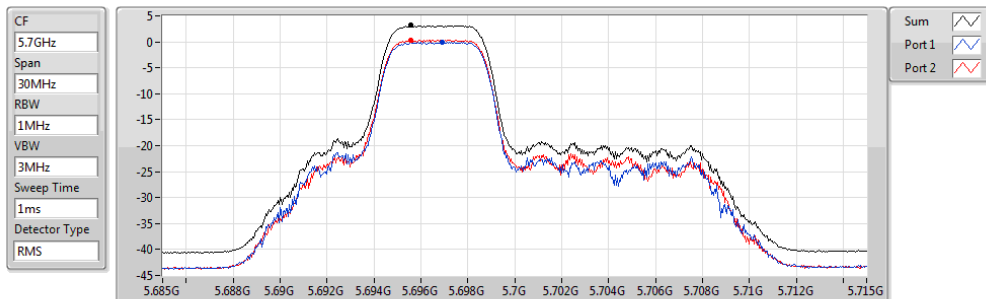


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.16	3.16	-0.07	0.41

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5745MHz

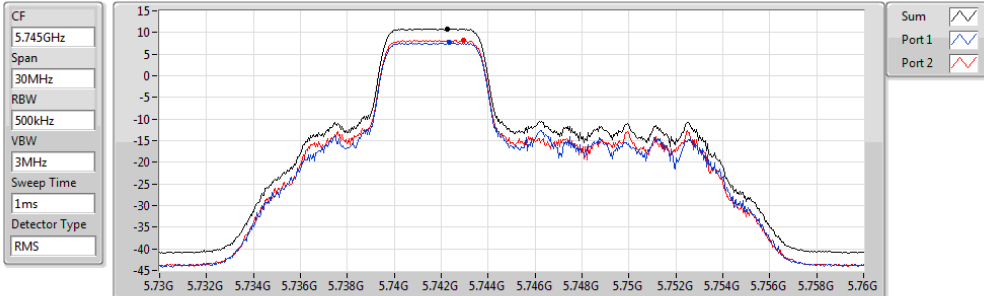


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
10.89	10.89	7.65	8.26

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5785MHz

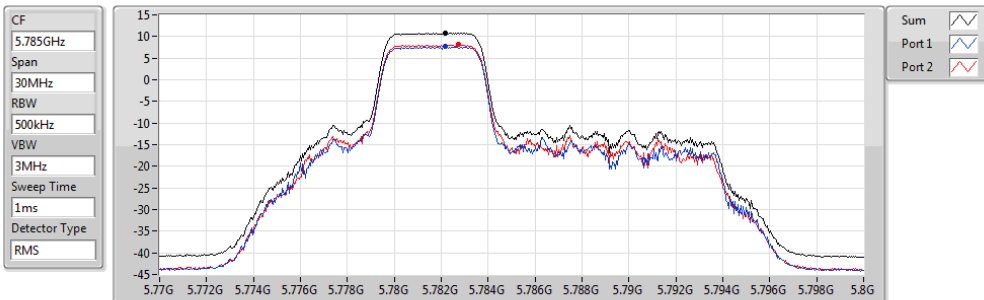


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
10.83	10.83	7.66	8.30

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5825MHz

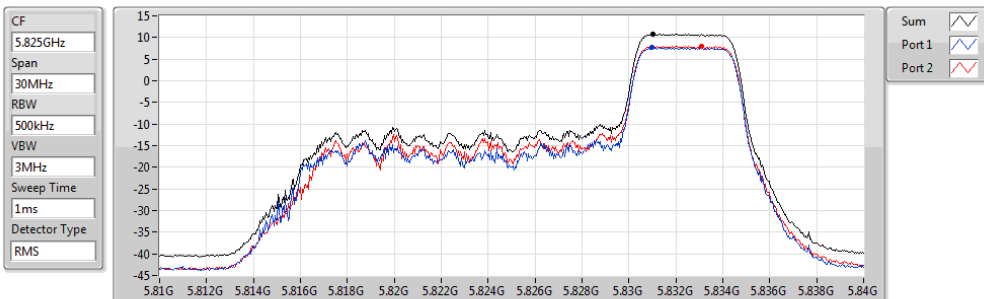


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
10.80	10.80	7.74	8.01

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5180MHz

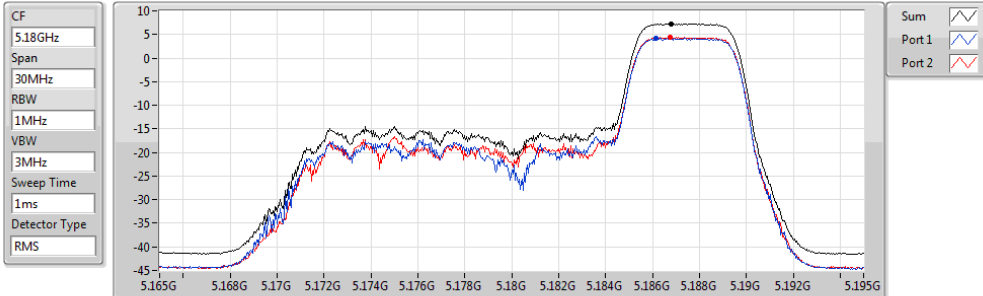


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.30	7.30	4.23	4.46

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5200MHz

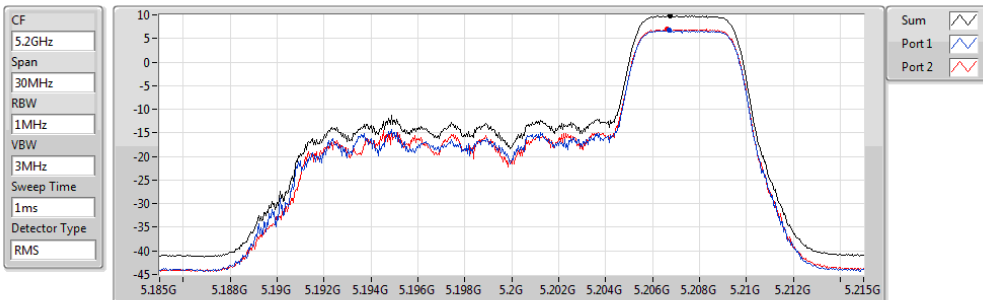


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.77	9.77	6.71	6.90

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5240MHz

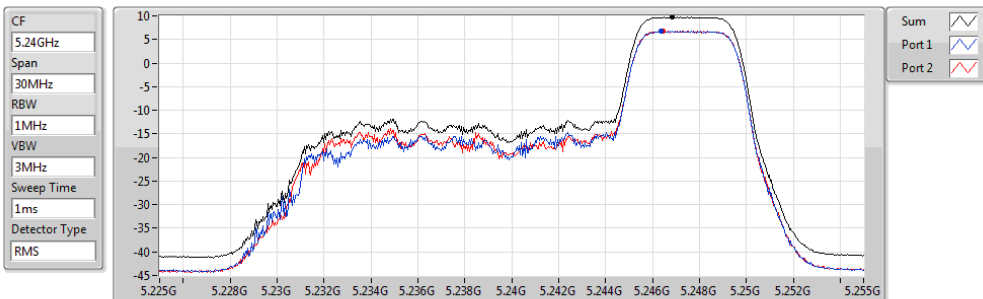


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.75	9.75	6.77	6.82

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5260MHz

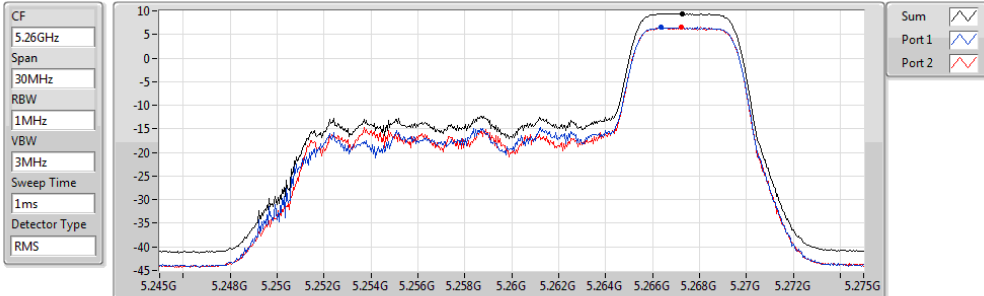


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.46	9.46	6.54	6.53

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5300MHz

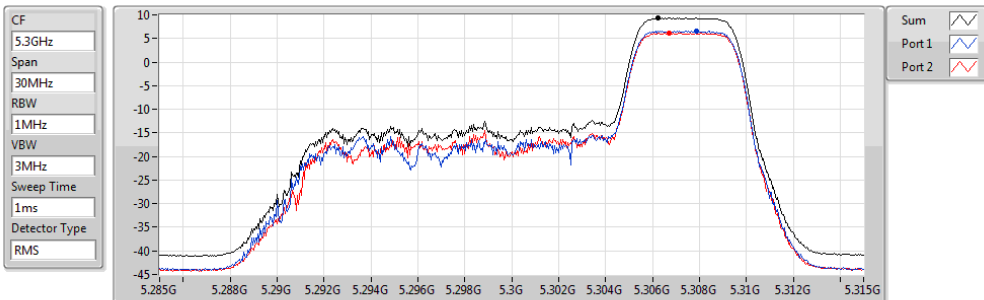


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.37	9.37	6.62	6.19

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5320MHz

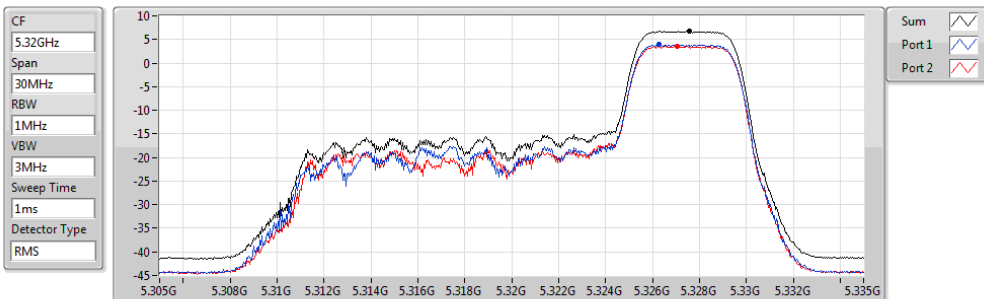


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.75	6.75	3.96	3.63

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5500MHz

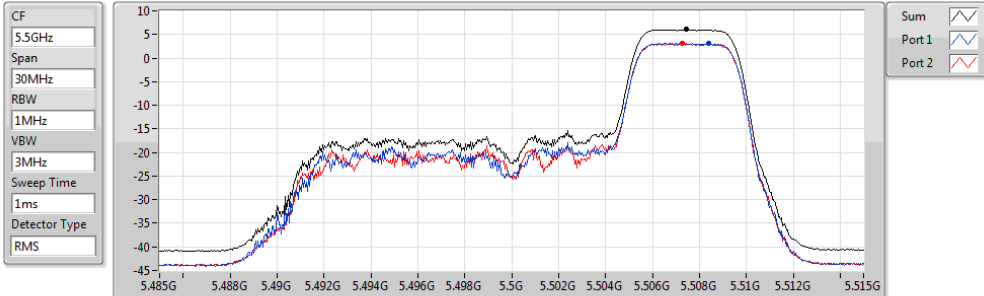


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
6.06	6.06	3.15	3.20

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5580MHz

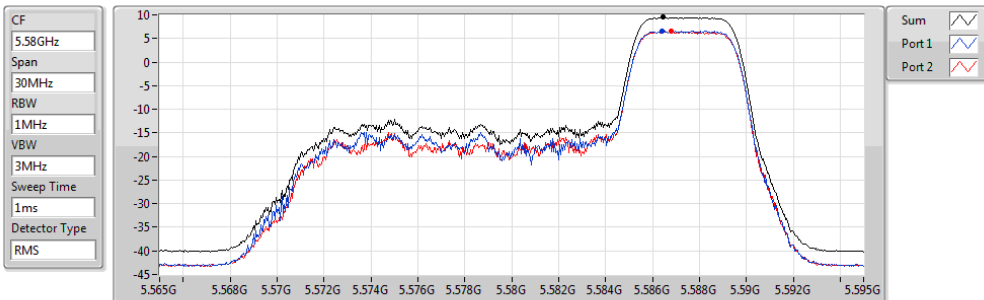


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
9.47	9.47	6.61	6.53

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5700MHz

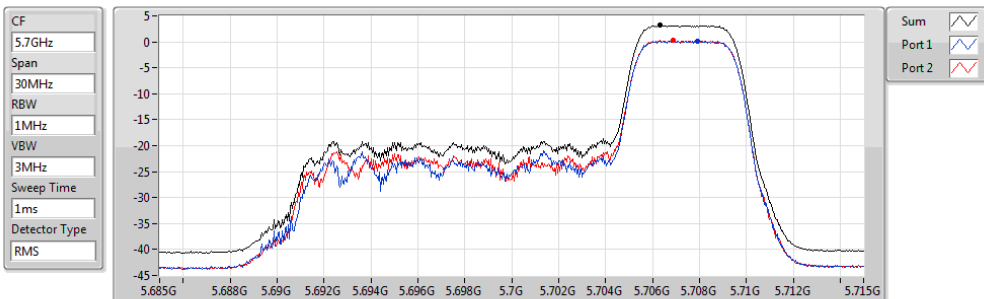


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
3.19	3.19	0.16	0.24

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5745MHz

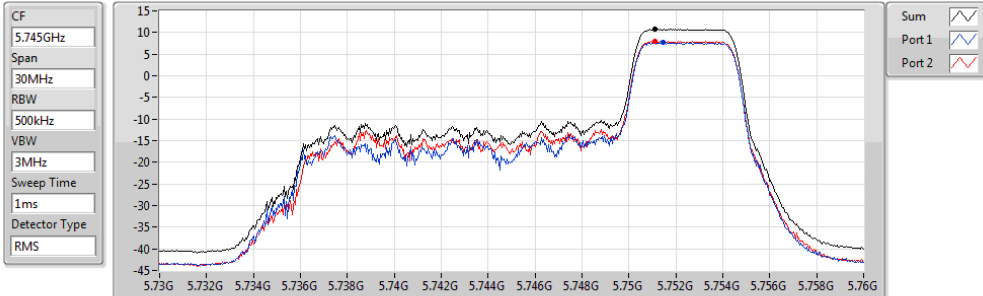


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.77	10.77	7.67	8.01

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5785MHz

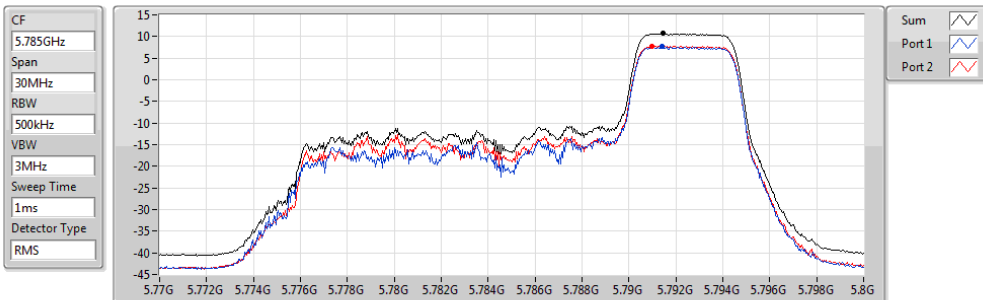


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.69	10.69	7.63	7.77

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5825MHz

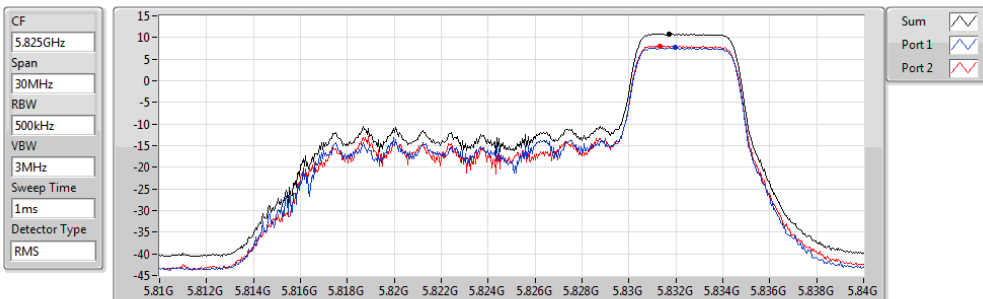


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.81	10.81	7.73	8.07

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5180MHz

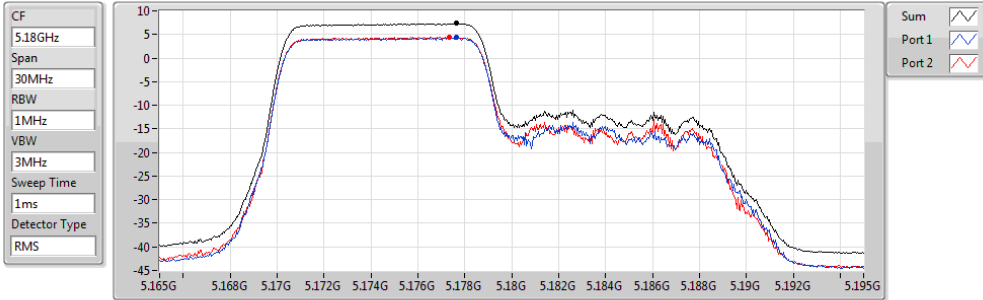


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.34	7.34	4.35	4.50

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5200MHz

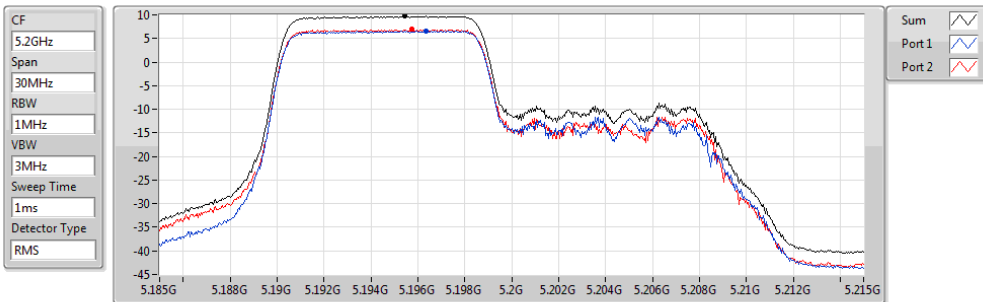


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.70	9.70	6.63	6.92

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5240MHz

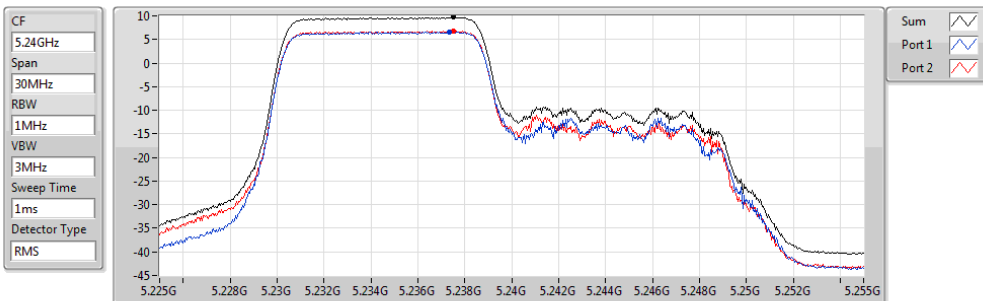


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.68	9.68	6.62	6.76

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5260MHz

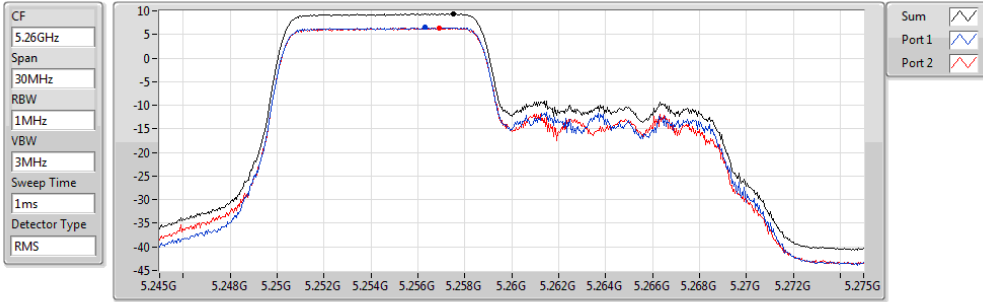


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.38	9.38	6.46	6.34

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5300MHz

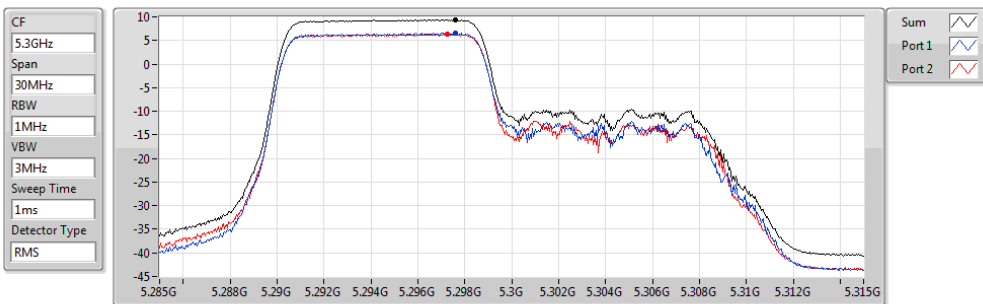


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.41	9.41	6.53	6.34

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5320MHz

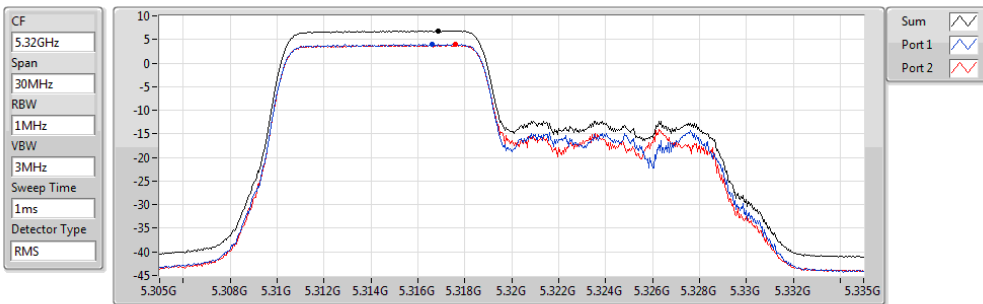


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.87	6.87	4.01	3.94

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5500MHz

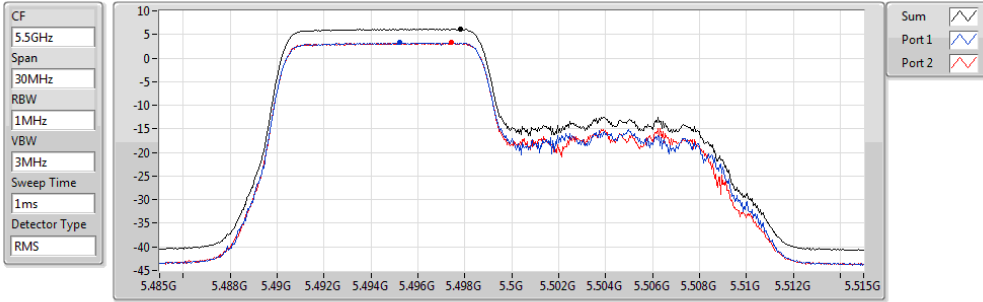


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.21	6.21	3.31	3.24

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5580MHz

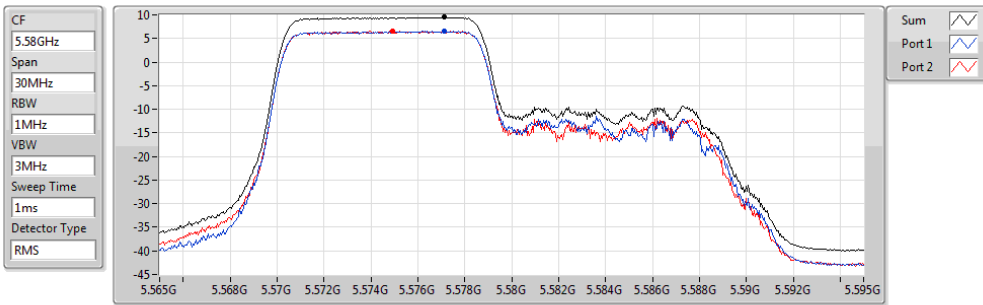


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.50	9.50	6.61	6.49

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5700MHz

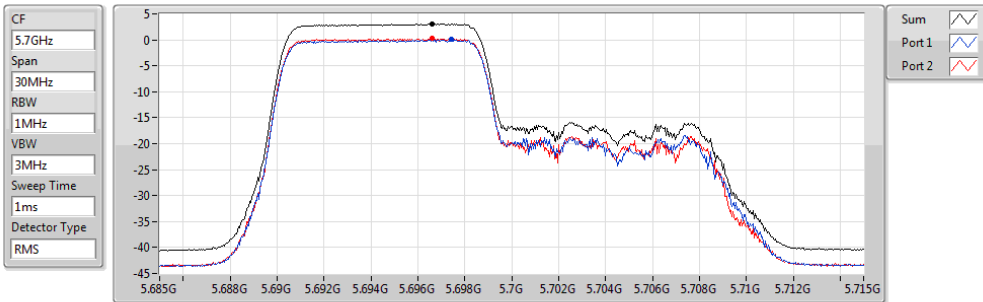


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.09	3.09	0.02	0.22

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5745MHz

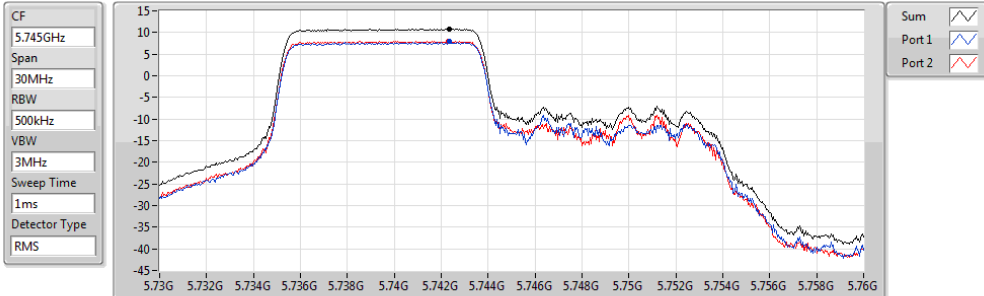


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.86	10.86	7.87	7.96

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5785MHz

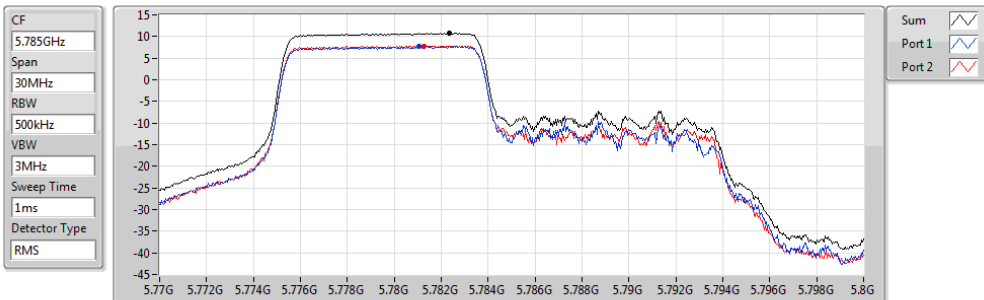


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.78	10.78	7.81	7.83

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5825MHz

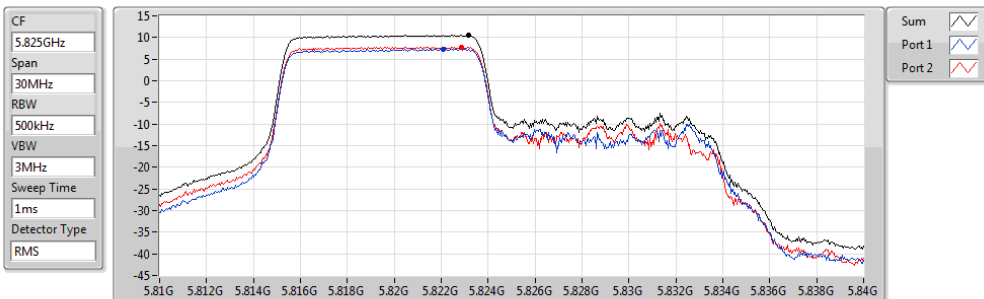


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.53	10.53	7.31	7.81

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5180MHz

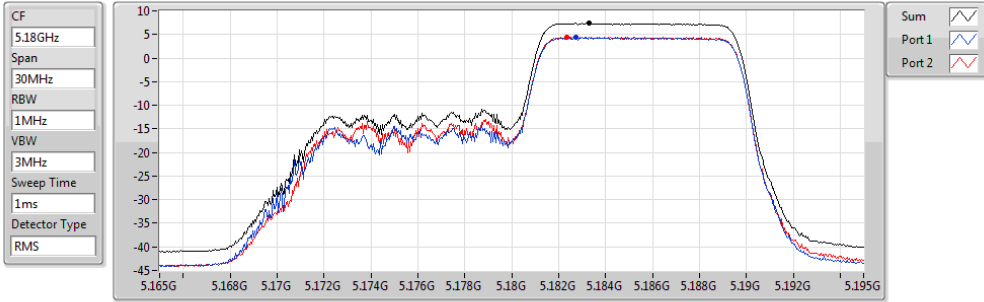


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.40	7.40	4.37	4.50

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5200MHz

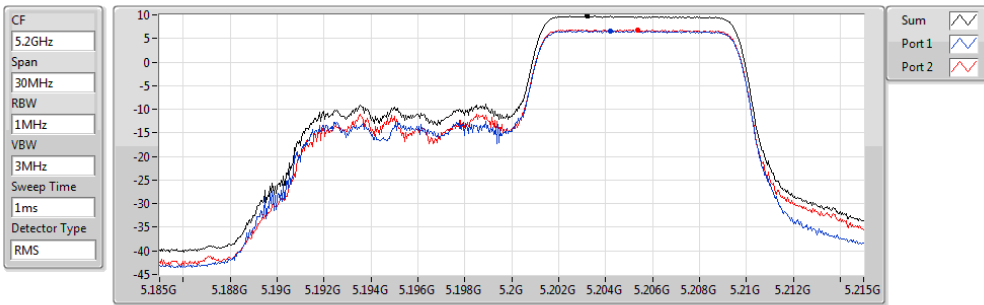


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.70	9.70	6.64	6.86

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5240MHz

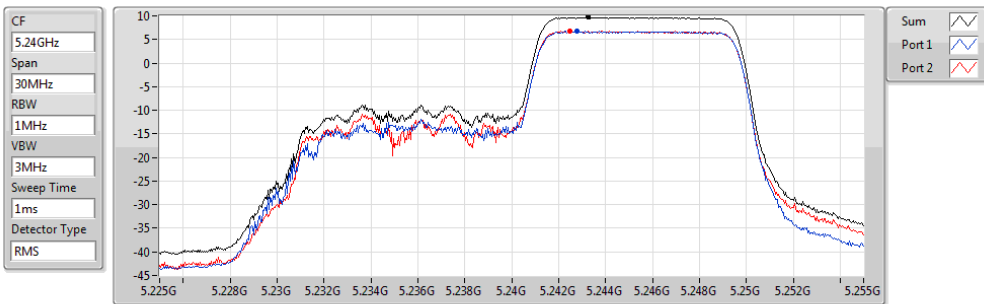


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.68	9.68	6.72	6.74

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5260MHz

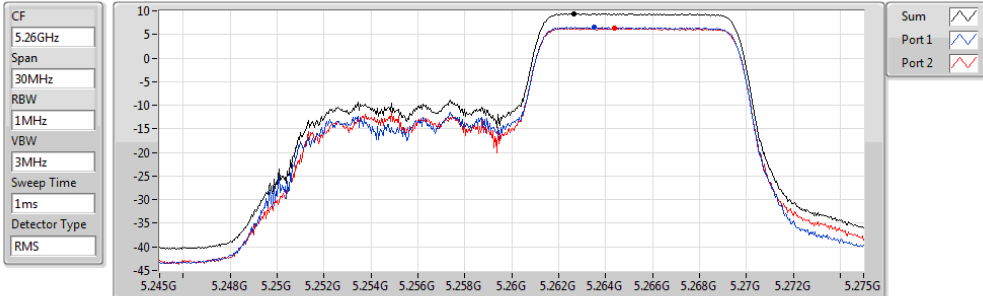


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.38	9.38	6.54	6.34

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5300MHz

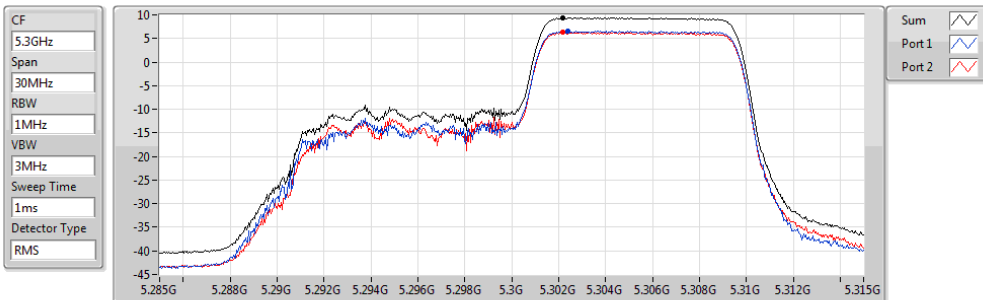


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.38	9.38	6.65	6.31

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5320MHz

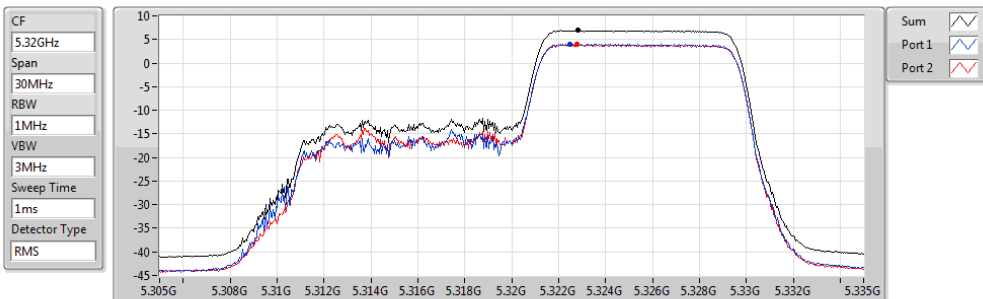


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.95	6.95	4.03	3.91

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5500MHz

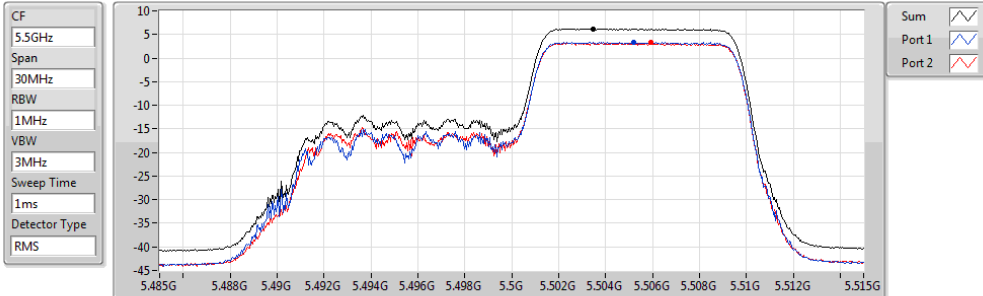


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
6.22	6.22	3.37	3.26

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5580MHz

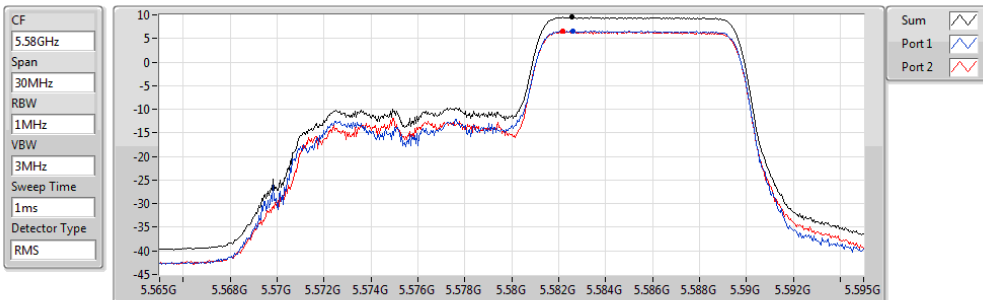


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
9.49	9.49	6.63	6.46

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5700MHz

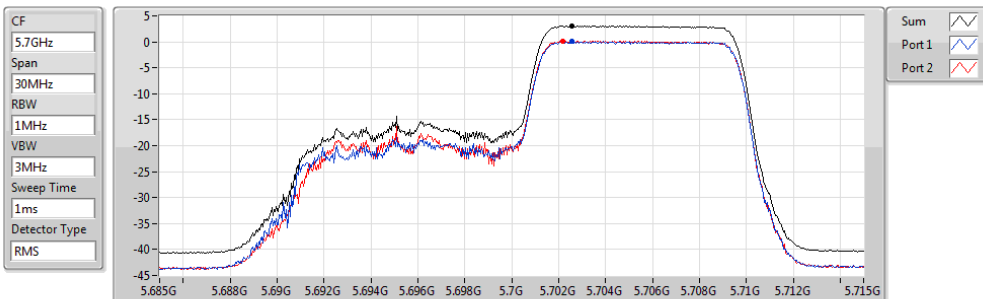


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
3.10	3.10	0.04	0.20

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5745MHz

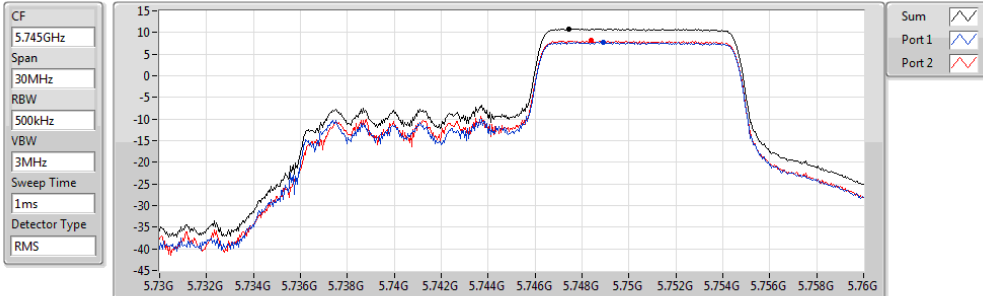


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.87	10.87	7.80	8.10

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5785MHz

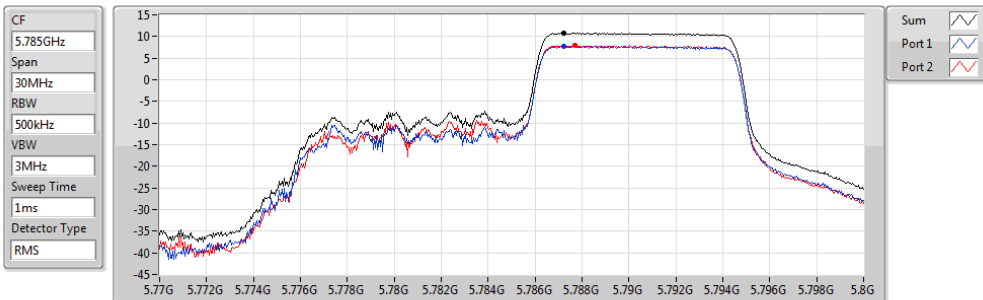


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.88	10.88	7.79	7.95

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5825MHz

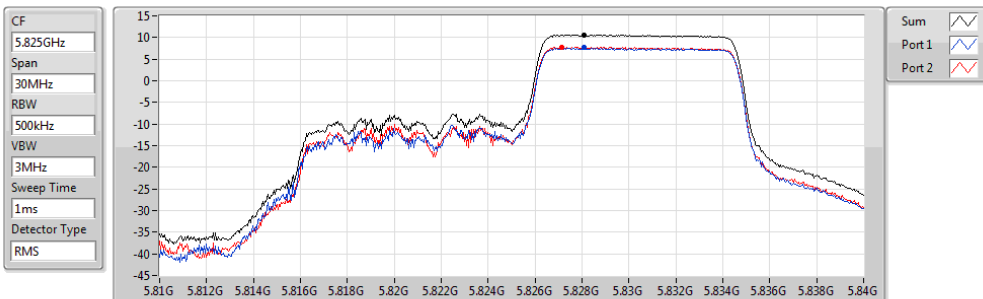


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.65	10.65	7.62	7.77

802.11ax HEW40_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5190MHz

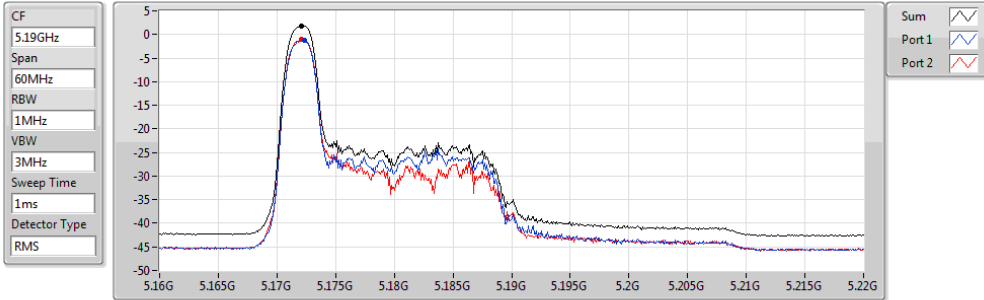


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.85	1.85	-1.26	-1.02

802.11ax HEW40_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5230MHz

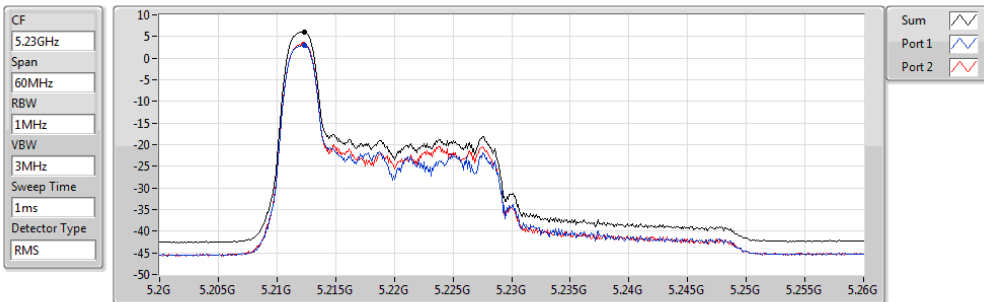


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.08	6.08	3.06	3.19

802.11ax HEW40_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5270MHz

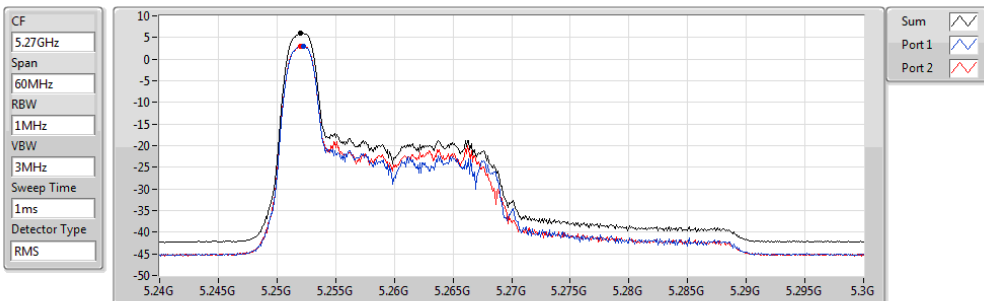


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.01	6.01	2.94	3.07

802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5190MHz

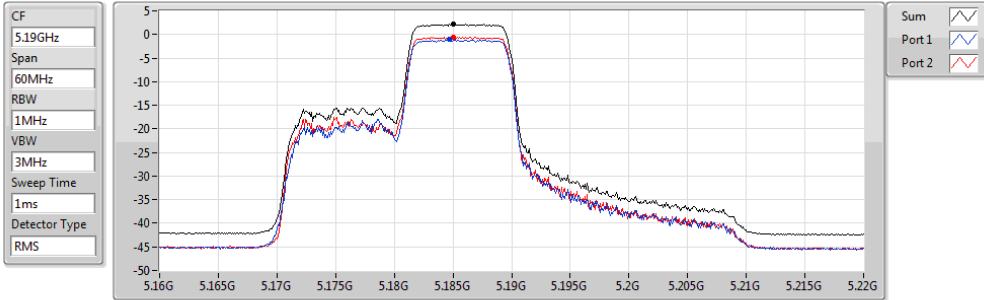


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.19	2.19	-1.07	-0.48

802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5230MHz

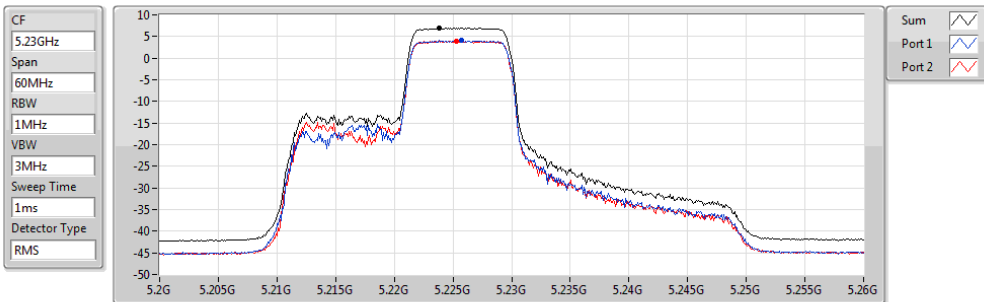


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.97	6.97	4.10	3.99

802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5270MHz

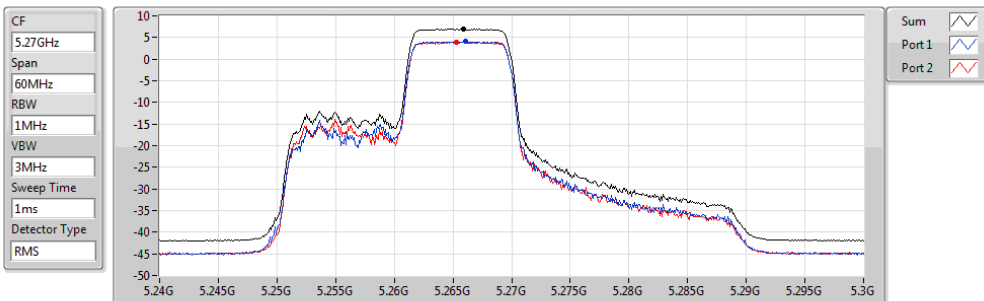


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.97	6.97	4.07	3.94

802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5310MHz

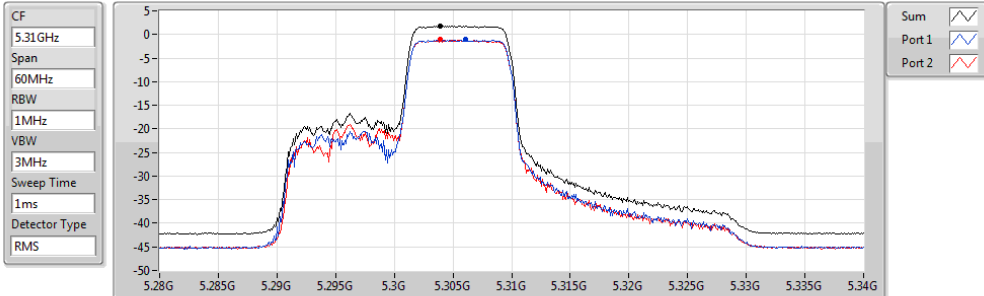


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.83	1.83	-1.11	-1.10

802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5510MHz

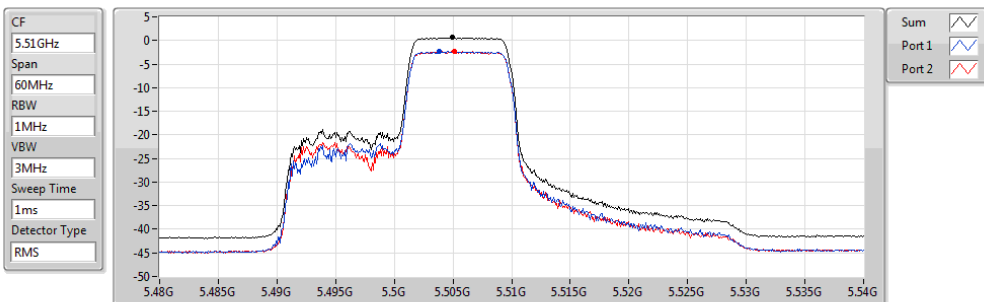


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.60	0.60	-2.29	-2.34

802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5590MHz

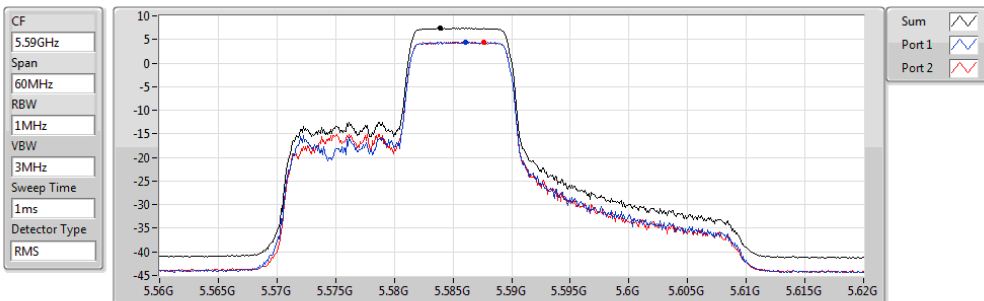


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.40	7.40	4.43	4.50

802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX

PSD


5670MHz

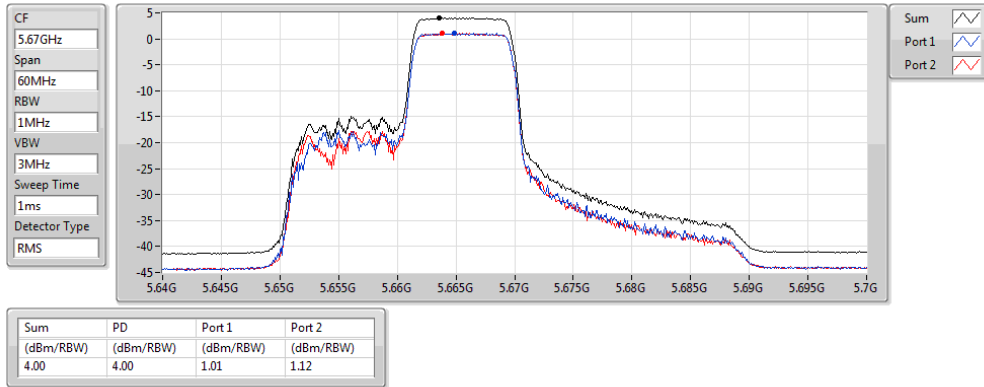

802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX

PSD


5755MHz

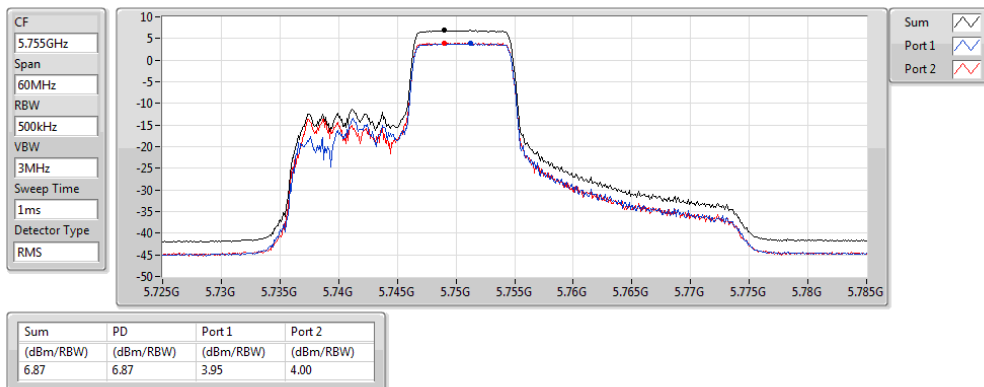

802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX

PSD


5795MHz

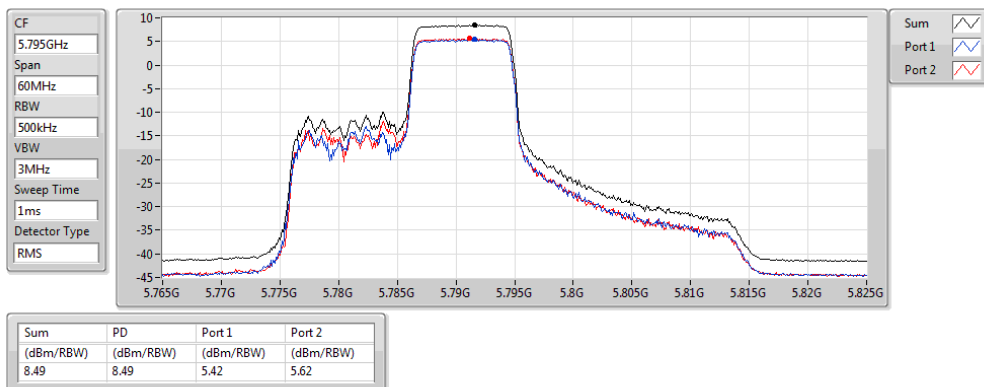

802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX

PSD

5190MHz

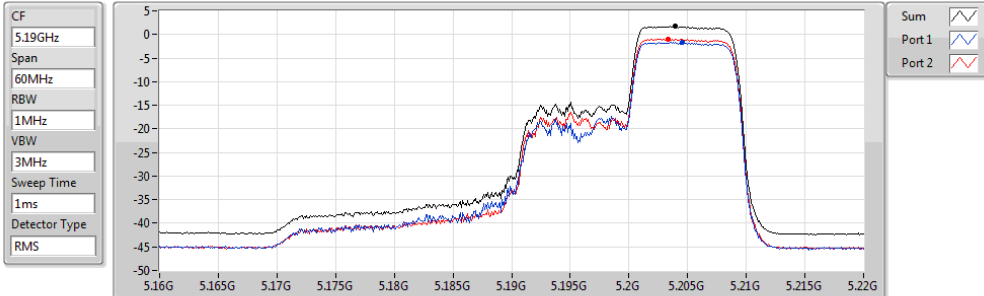


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.71	1.71	-1.70	-0.93

802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX

PSD

5230MHz

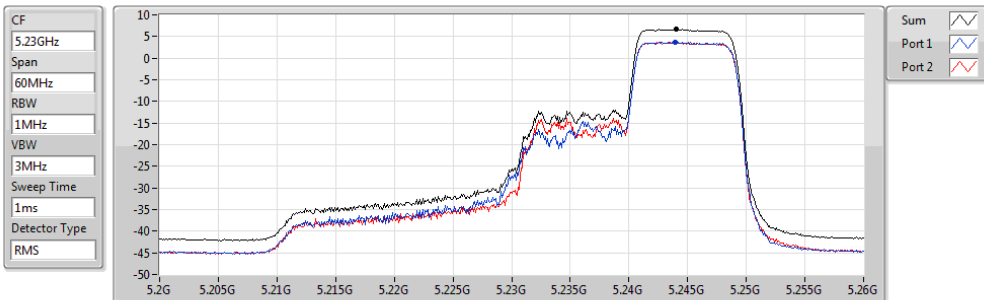


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.68	6.68	3.71	3.63

802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX

PSD

5270MHz

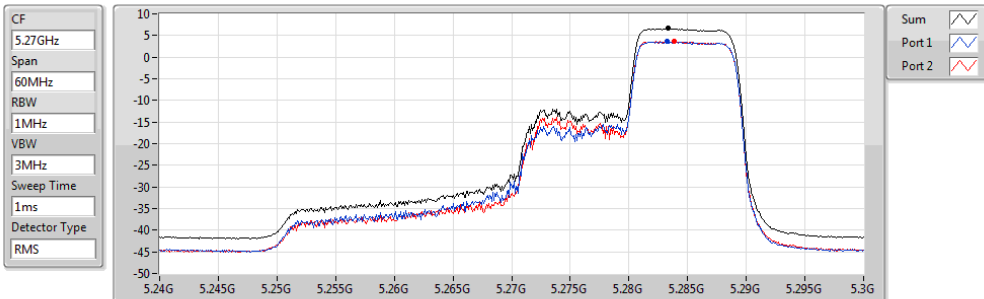


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.62	6.62	3.68	3.68

802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX

PSD

5310MHz

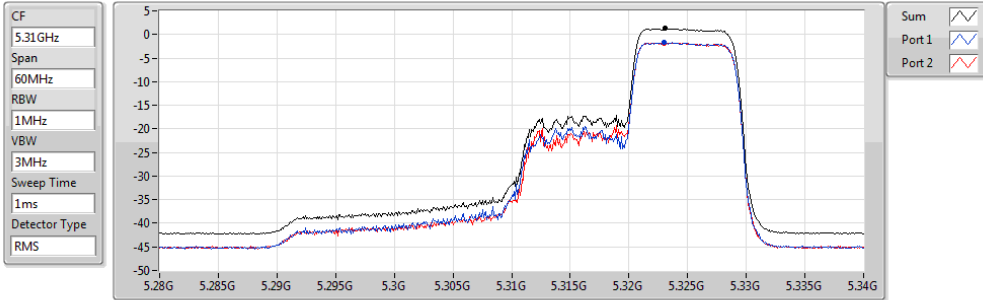


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.27	1.27	-1.72	-1.77

802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX

PSD

5510MHz

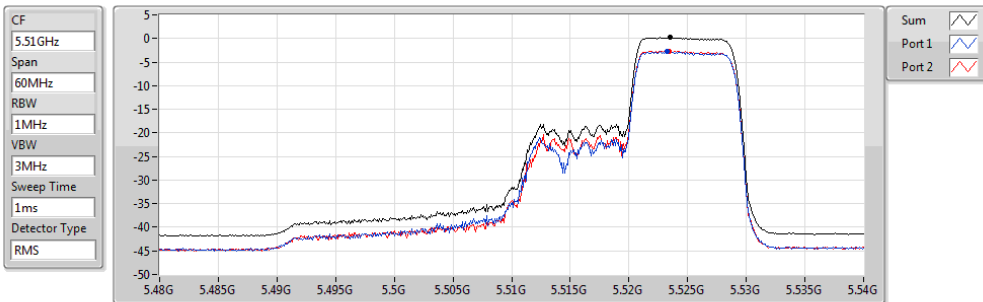


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.25	0.25	-2.80	-2.64

802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX

PSD

5590MHz

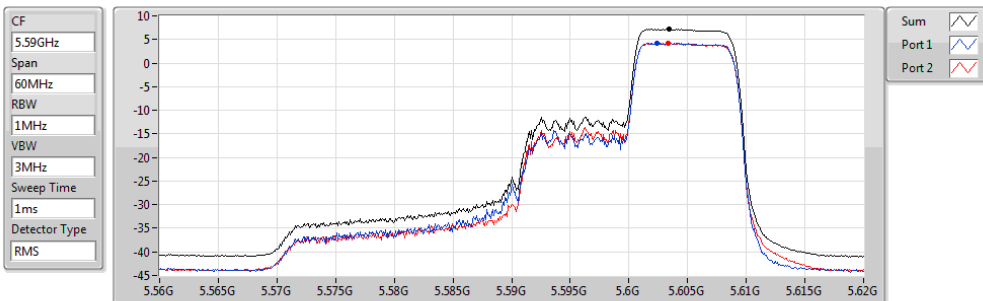


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.23	7.23	4.27	4.22

802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX

PSD

5670MHz

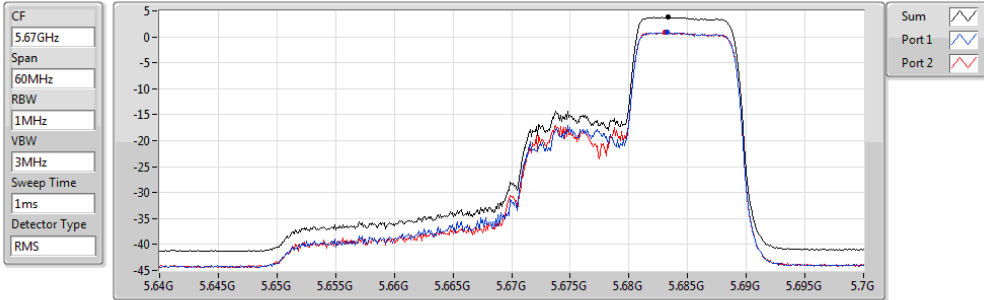


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.83	3.83	0.88	0.81

802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX

PSD

5755MHz

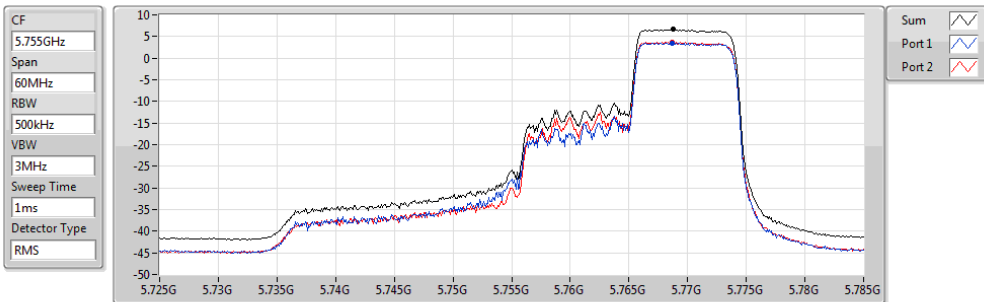


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.63	6.63	3.55	3.68

802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX

PSD

5795MHz

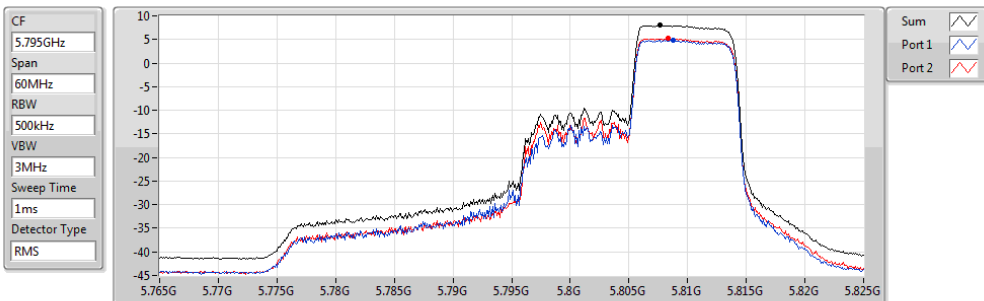


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.97	7.97	4.85	5.19

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5190MHz

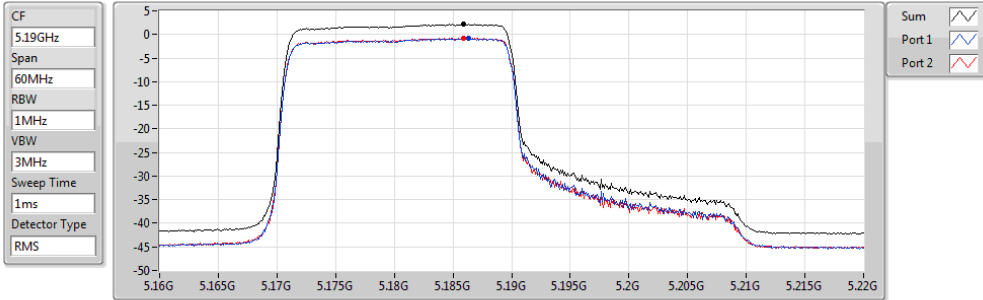


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.15	2.15	-0.88	-0.78

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5230MHz

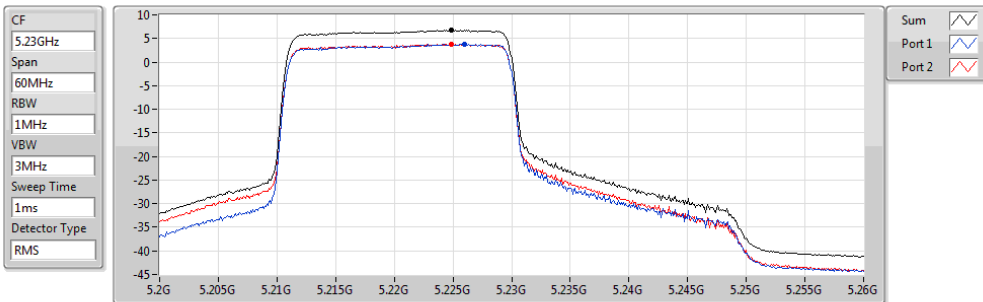


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.80	6.80	3.85	3.81

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5270MHz

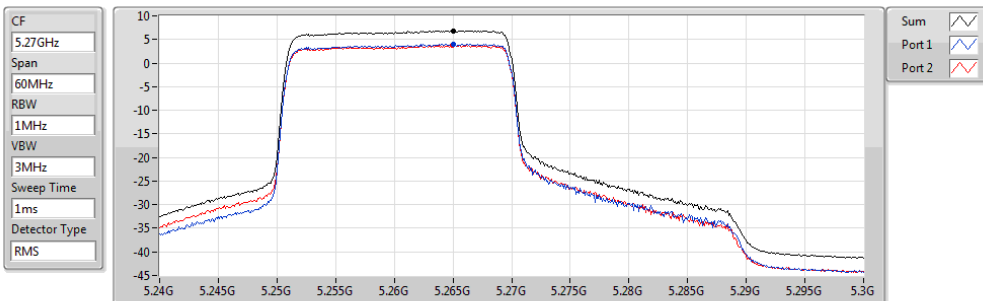


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.84	6.84	4.03	3.74

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5310MHz

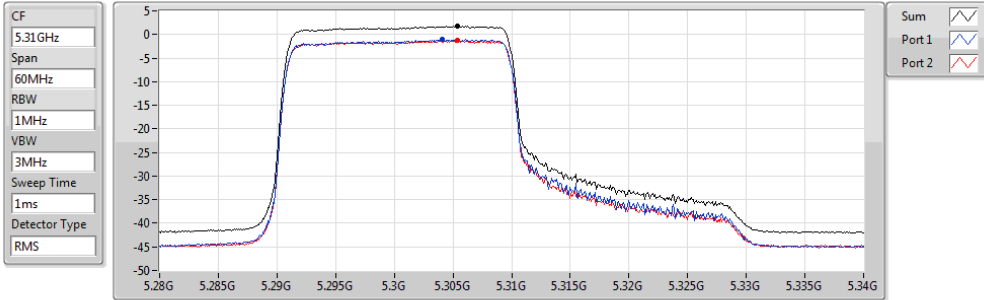


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.82	1.82	-1.08	-1.16

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5510MHz

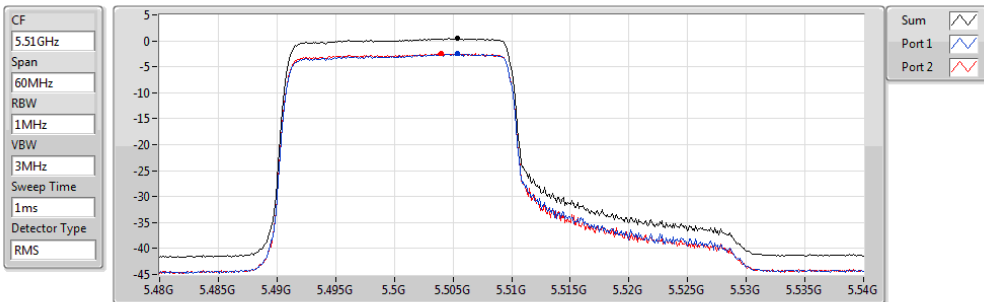


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.50	0.50	-2.46	-2.45

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5590MHz

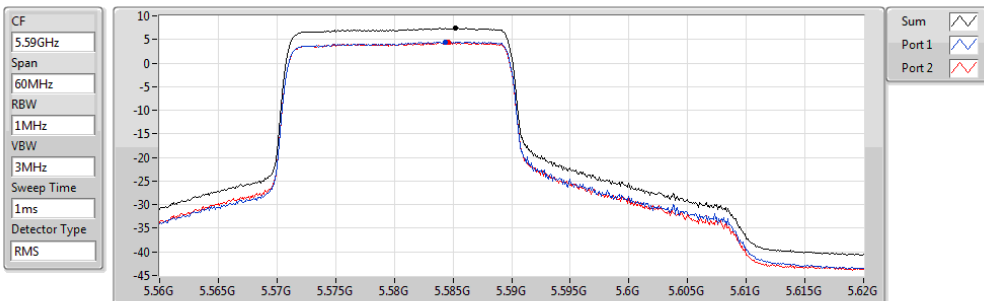


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.40	7.40	4.48	4.34

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5670MHz

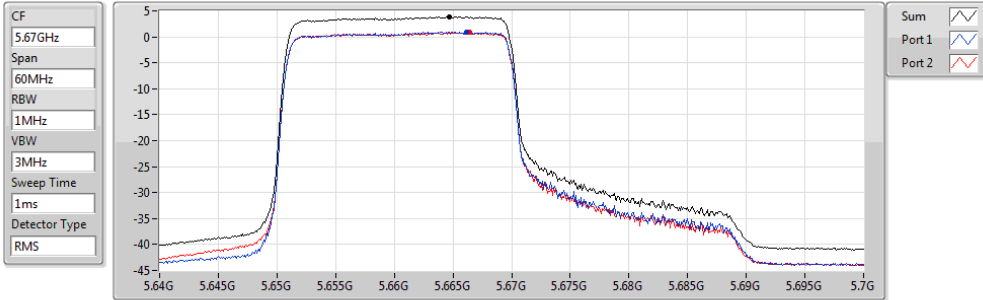


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.87	3.87	0.98	0.89

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5755MHz

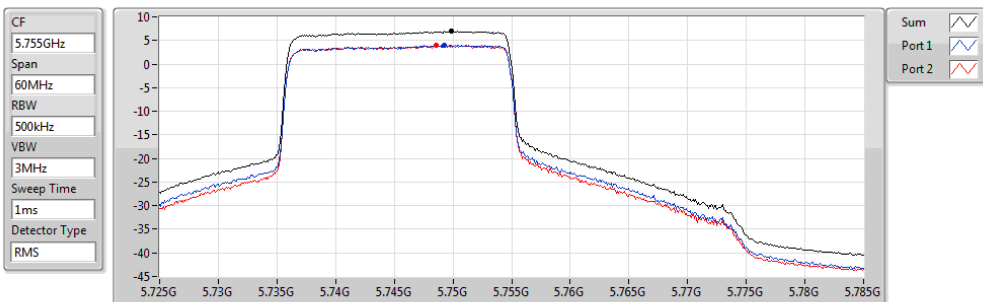


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.92	6.92	4.06	3.93

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5795MHz

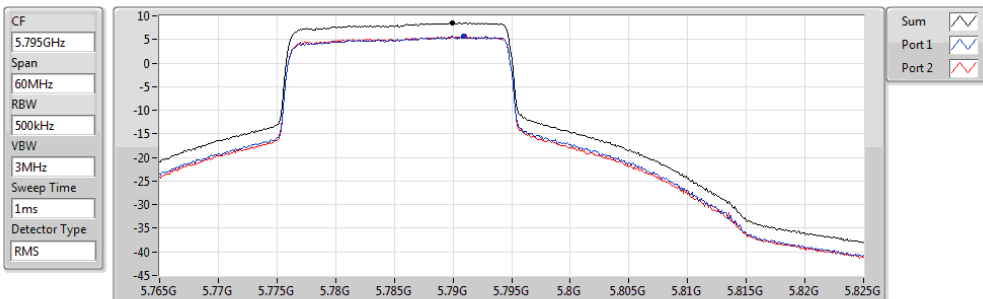


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.59	8.59	5.65	5.65

802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5190MHz

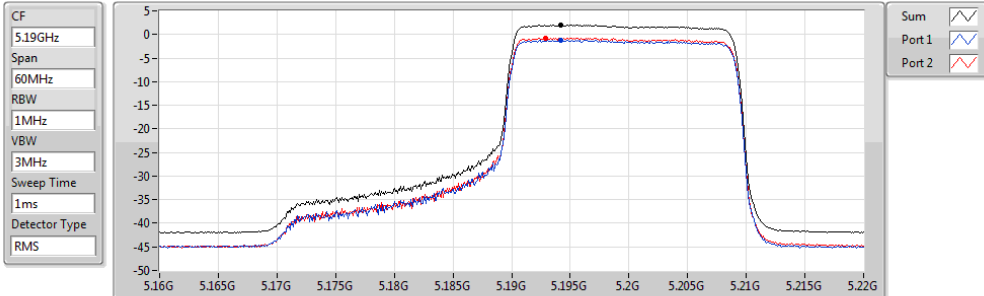


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.97	1.97	-1.18	-0.78

802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5230MHz

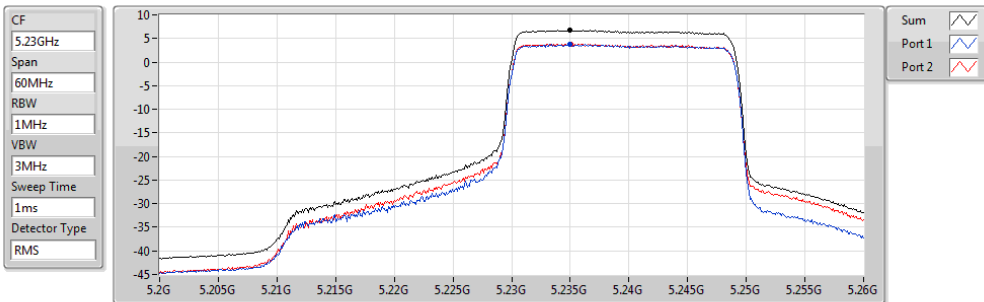


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.70	6.70	3.72	3.86

802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5270MHz

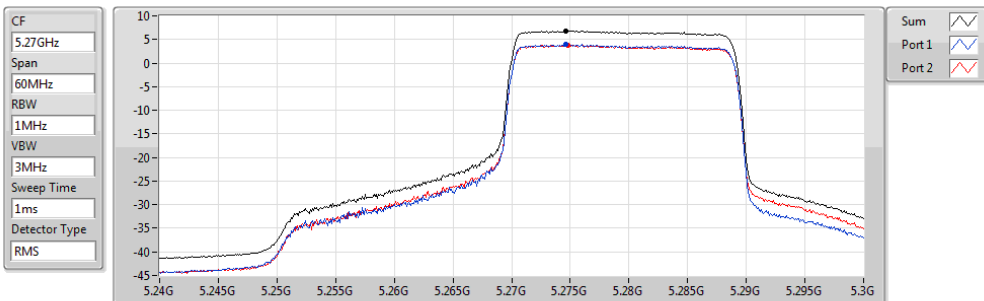


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.80	6.80	3.95	3.79

802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5310MHz

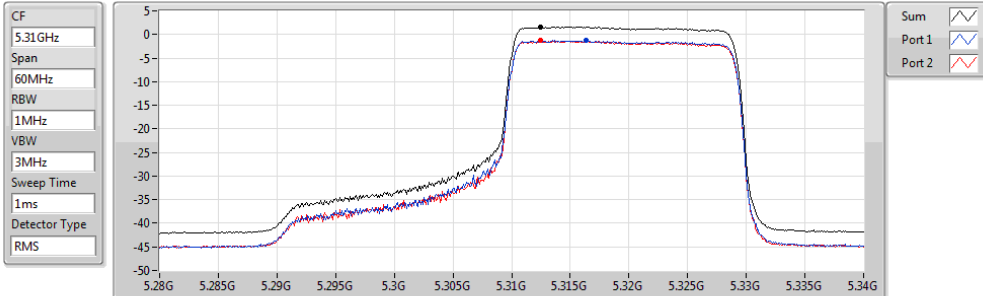


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.61	1.61	-1.30	-1.27

802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5510MHz

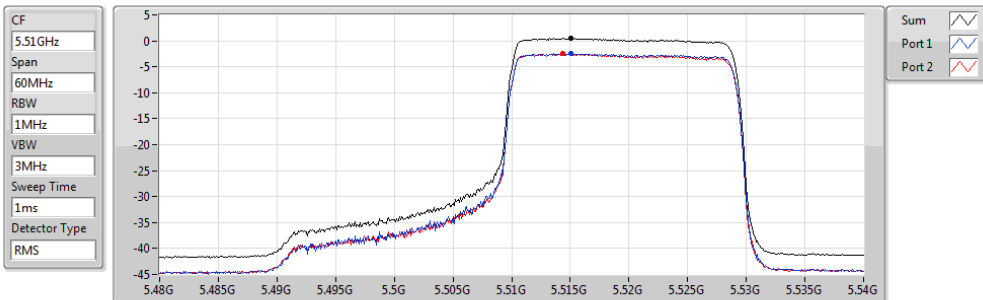


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.52	0.52	-2.44	-2.51

802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5590MHz

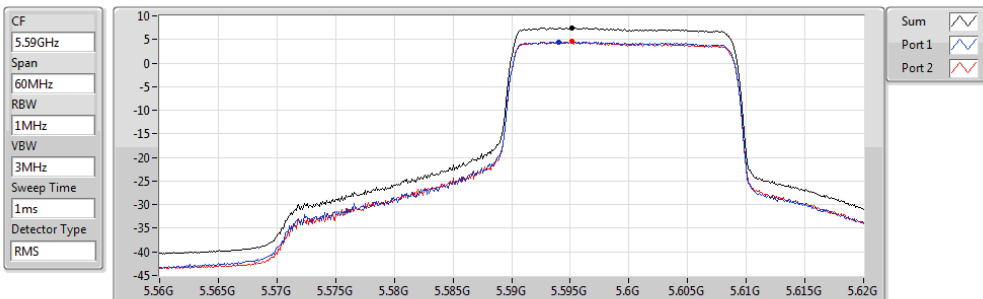


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.48	7.48	4.52	4.53

802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5670MHz

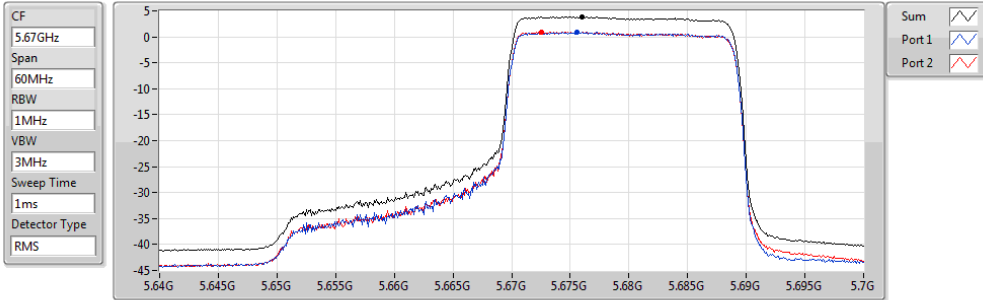


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.92	3.92	0.90	0.96

802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5755MHz

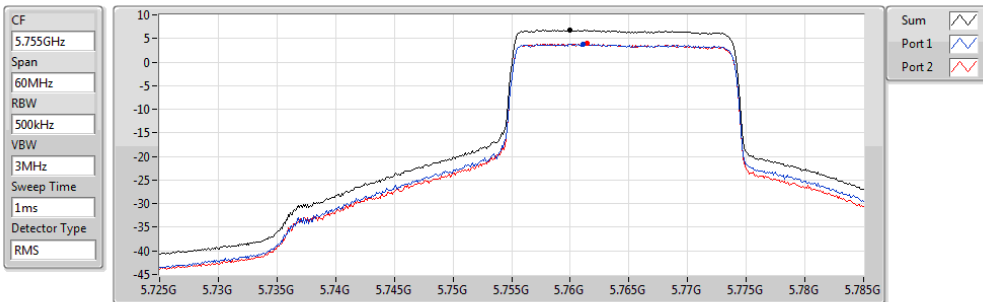


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.81	6.81	3.77	3.90

802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5795MHz

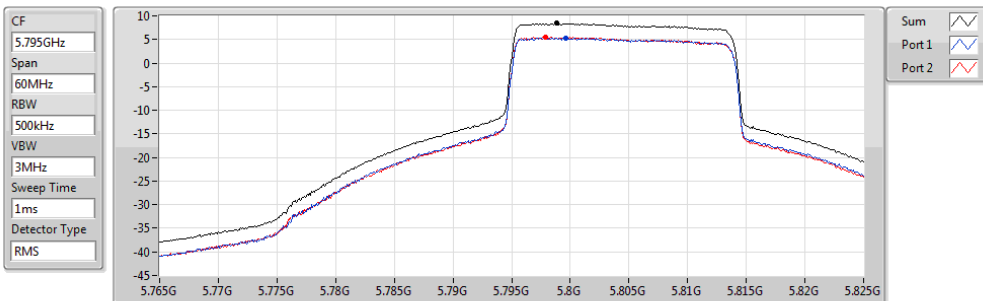


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.39	8.39	5.38	5.47

802.11ax HEW80_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5210MHz

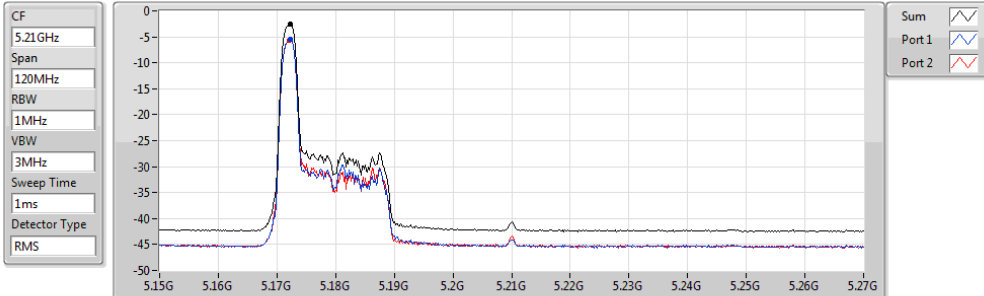


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.55	-2.55	-5.51	-5.58

802.11ax HEW80_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5290MHz

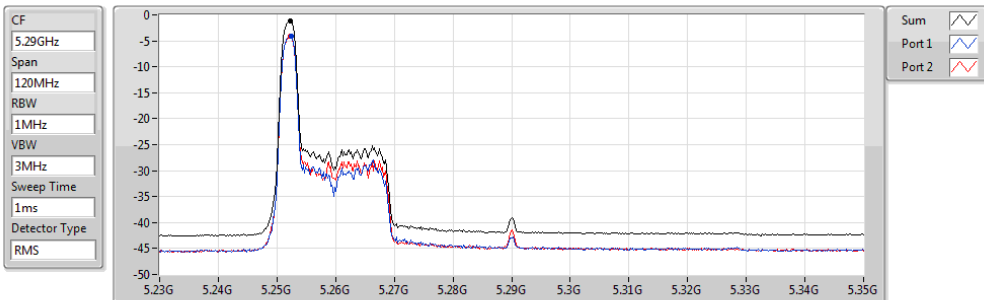


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.10	-1.10	-4.17	-4.06

802.11ax HEW80_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5530MHz

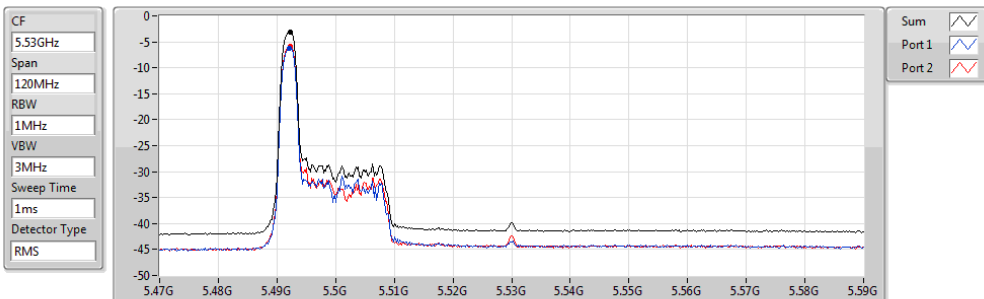


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.06	-3.06	-6.25	-5.83

802.11ax HEW80_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5610MHz

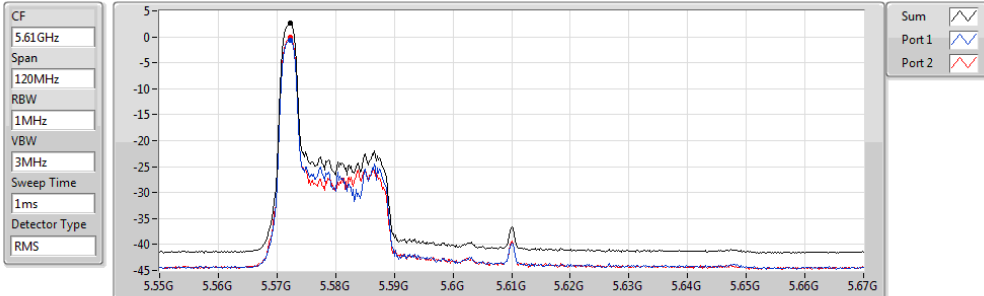


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
2.64	2.64	-0.65	-0.11

802.11ax HEW80_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5775MHz

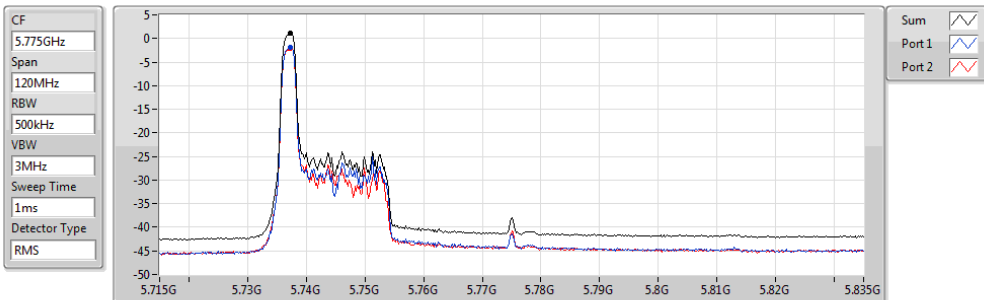


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
1.04	1.04	-1.85	-2.09

802.11ax HEW80_RU26_Index21_Nss1,(MCS0)_2TX

PSD

5210MHz

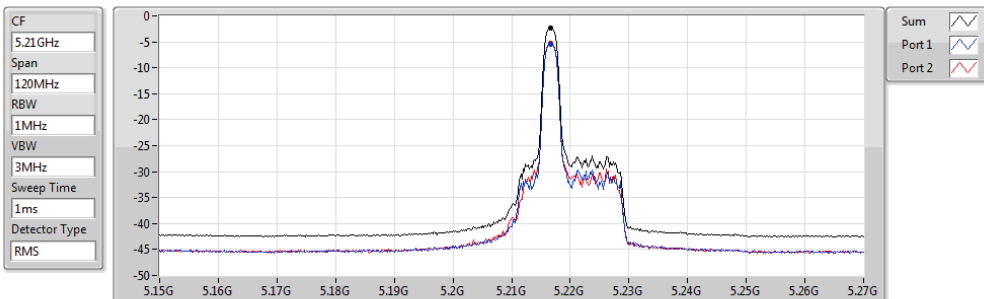


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
-2.32	-2.32	-5.45	-5.22

802.11ax HEW80_RU26_Index21_Nss1,(MCS0)_2TX

PSD

5290MHz

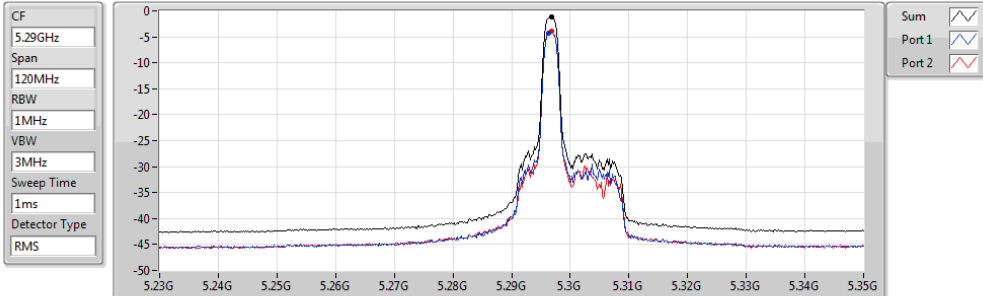


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.08	-1.08	-4.26	-3.91

802.11ax HEW80_RU26_Index21_Nss1,(MCS0)_2TX

PSD

5530MHz

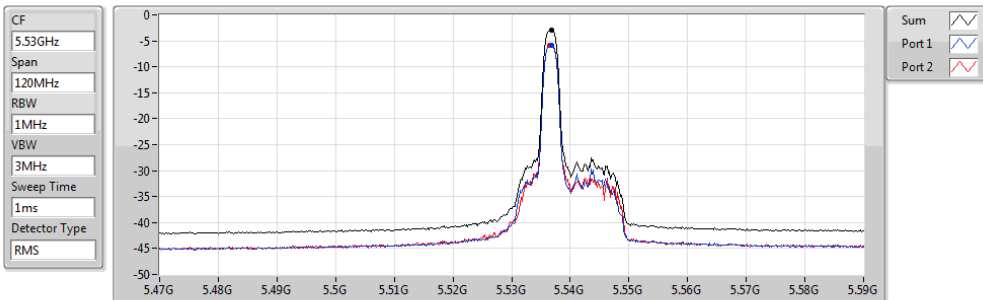


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.93	-2.93	-5.91	-5.81

802.11ax HEW80_RU26_Index21_Nss1,(MCS0)_2TX

PSD

5610MHz

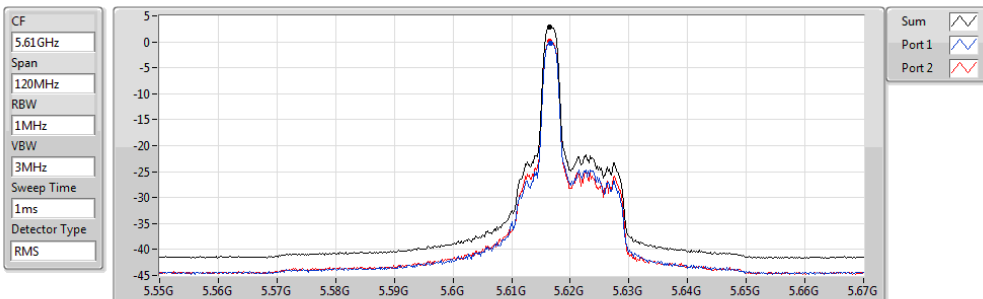


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.91	2.91	-0.21	0.07

802.11ax HEW80_RU26_Index21_Nss1,(MCS0)_2TX

PSD

5775MHz

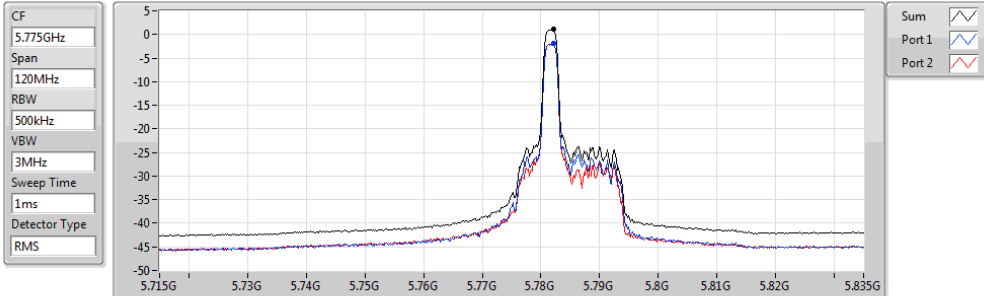


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.06	1.06	-1.98	-1.93

802.11ax HEW80_RU26_Index36_Nss1,(MCS0)_2TX

PSD

5210MHz

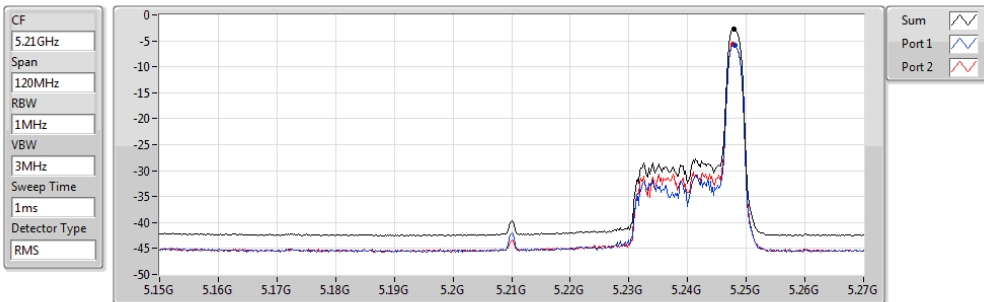


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.79	-2.79	-5.77	-5.68

802.11ax HEW80_RU26_Index36_Nss1,(MCS0)_2TX

PSD

5290MHz

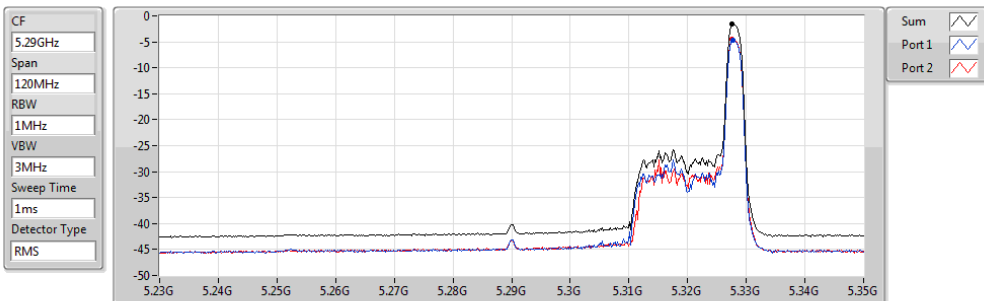


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.61	-1.61	-4.62	-4.48

802.11ax HEW80_RU26_Index36_Nss1,(MCS0)_2TX

PSD

5530MHz

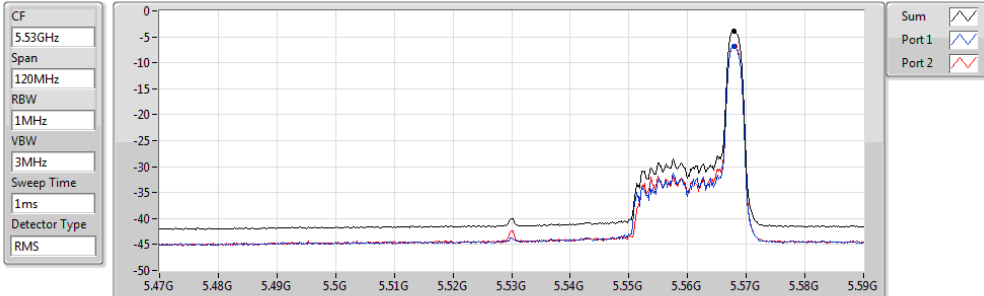


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.83	-3.83	-6.74	-6.80

802.11ax HEW80_RU26_Index36_Nss1,(MCS0)_2TX

PSD

5610MHz

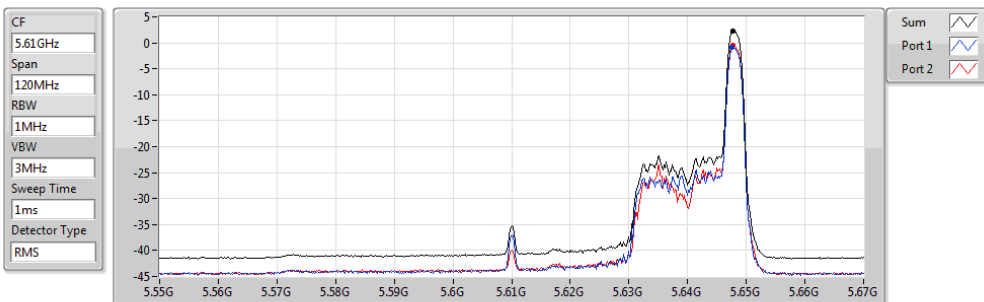


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.30	2.30	-0.85	-0.50

802.11ax HEW80_RU26_Index36_Nss1,(MCS0)_2TX

PSD

5775MHz

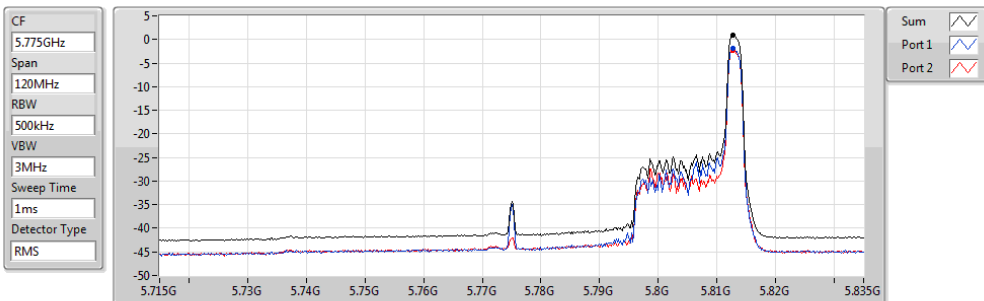


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.94	0.94	-1.94	-2.21

802.11ax HEW80_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5210MHz

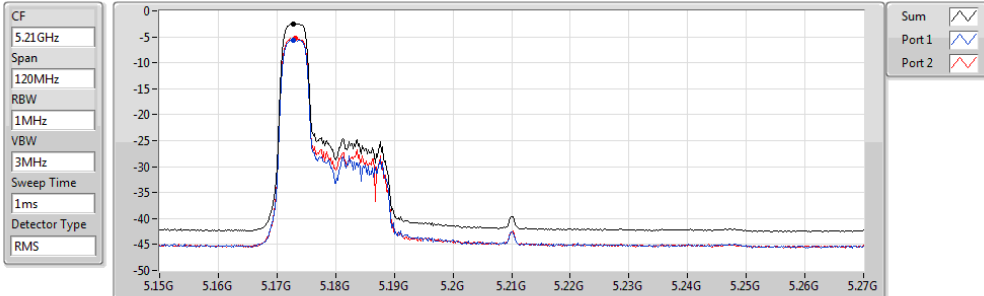


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.46	-2.46	-5.58	-5.31

802.11ax HEW80_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5290MHz

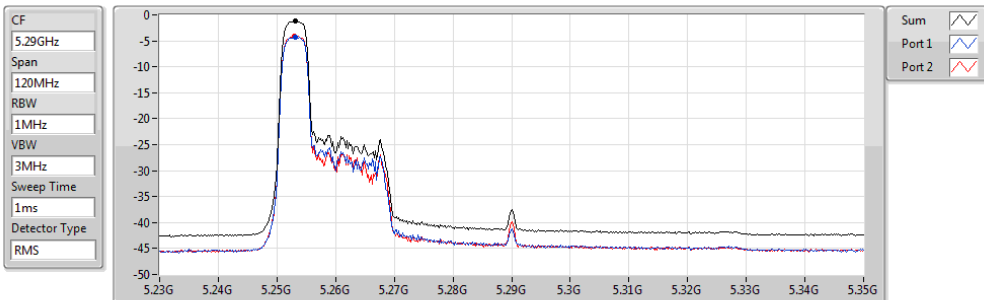


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.19	-1.19	-4.25	-4.08

802.11ax HEW80_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5530MHz

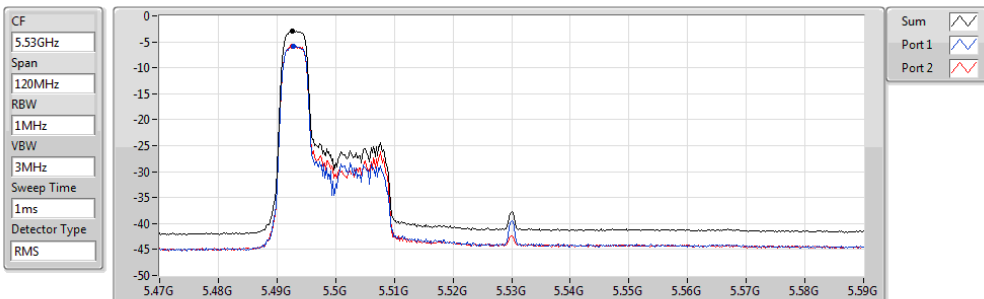


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.93	-2.93	-5.91	-5.94

802.11ax HEW80_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5610MHz

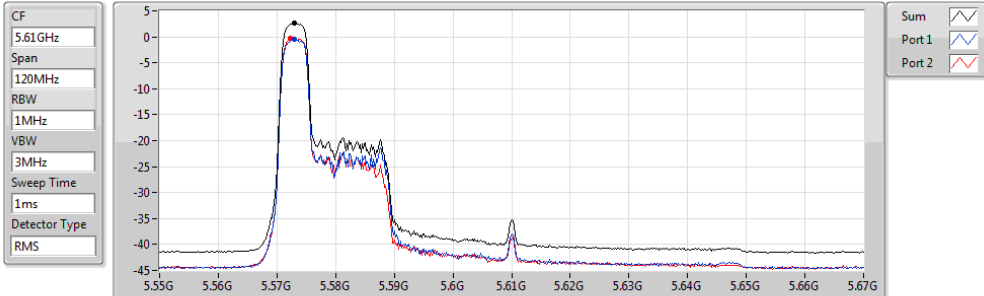


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.61	2.61	-0.52	-0.28

802.11ax HEW80_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5775MHz

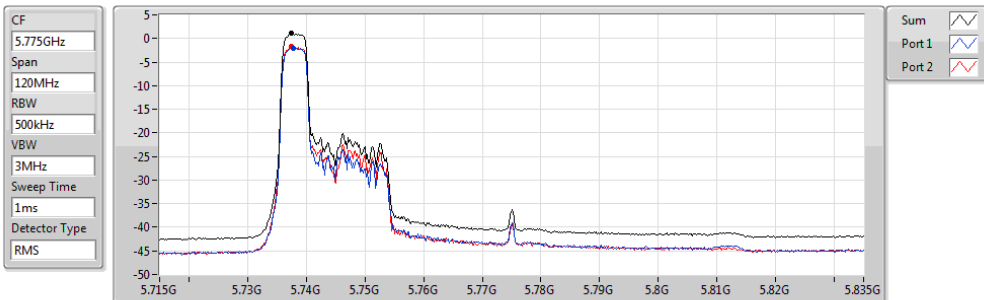


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.18	1.18	-2.04	-1.57

802.11ax HEW80_RU52_Index50_Nss1,(MCS0)_2TX

PSD

5210MHz

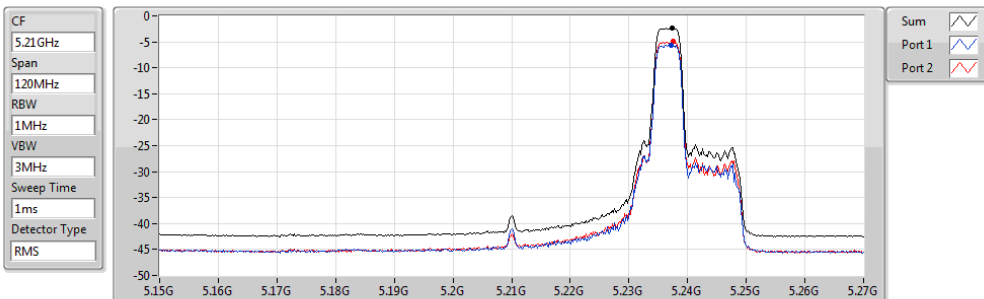


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.30	-2.30	-5.60	-4.92

802.11ax HEW80_RU52_Index50_Nss1,(MCS0)_2TX

PSD

5290MHz

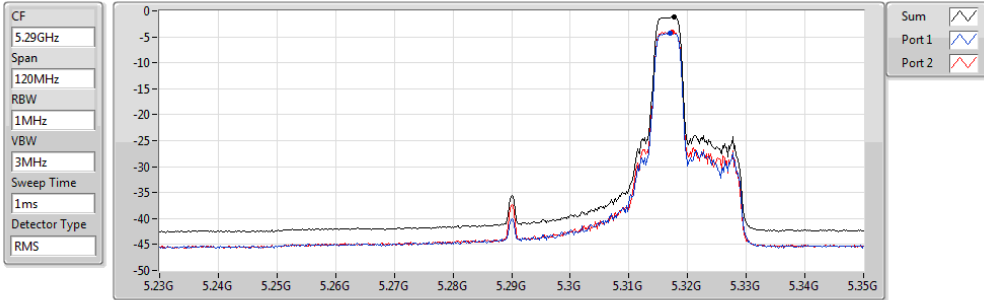


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.22	-1.22	-4.31	-4.15

802.11ax HEW80_RU52_Index50_Nss1,(MCS0)_2TX

PSD

5530MHz

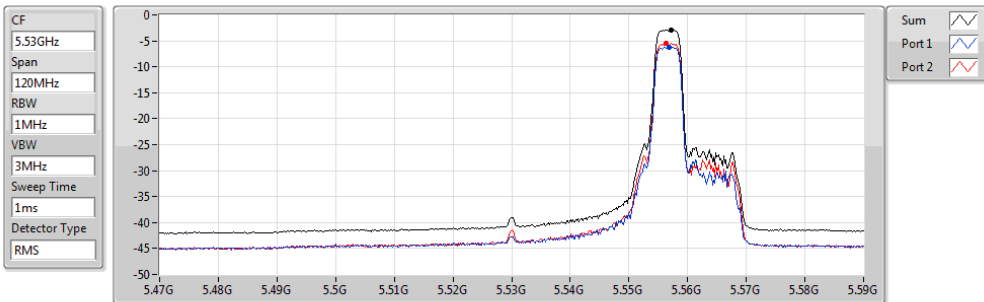


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.87	-2.87	-6.25	-5.50

802.11ax HEW80_RU52_Index50_Nss1,(MCS0)_2TX

PSD

5610MHz

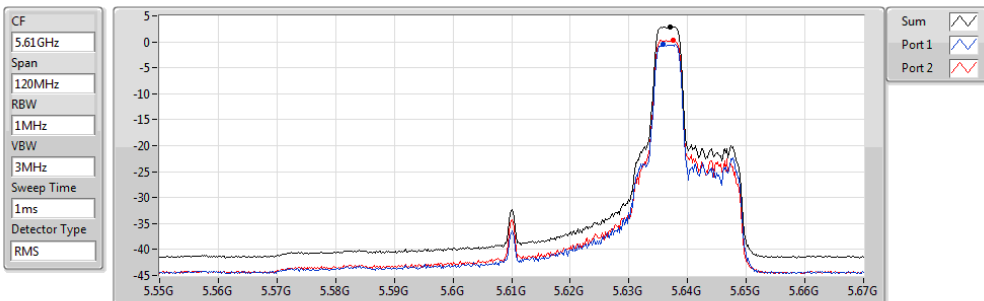


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.83	2.83	-0.43	0.32

802.11ax HEW80_RU52_Index50_Nss1,(MCS0)_2TX

PSD

5775MHz

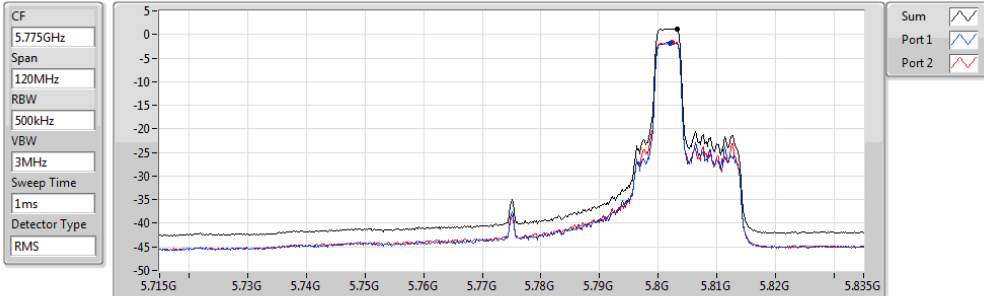


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.21	1.21	-1.90	-1.60

802.11ax HEW80_RU52_Index52_Nss1,(MCS0)_2TX

PSD

5210MHz

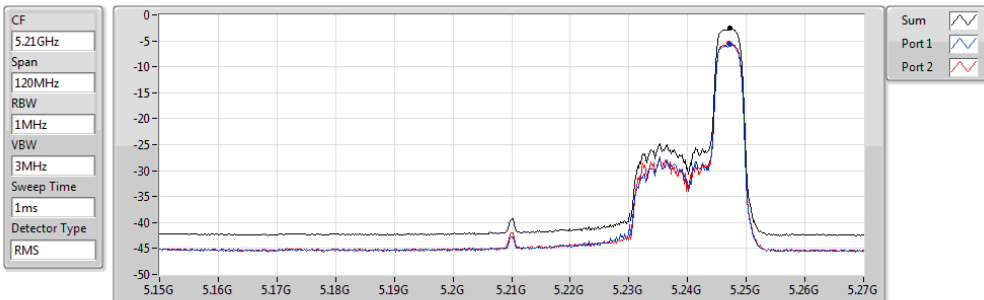


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.62	-2.62	-5.70	-5.53

802.11ax HEW80_RU52_Index52_Nss1,(MCS0)_2TX

PSD

5290MHz

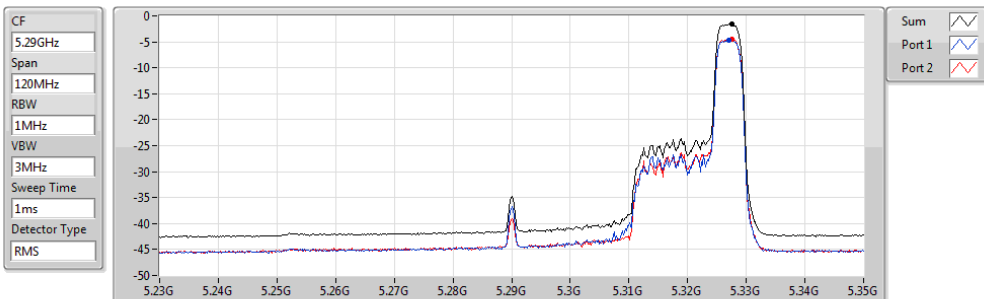


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.56	-1.56	-4.66	-4.45

802.11ax HEW80_RU52_Index52_Nss1,(MCS0)_2TX

PSD

5530MHz

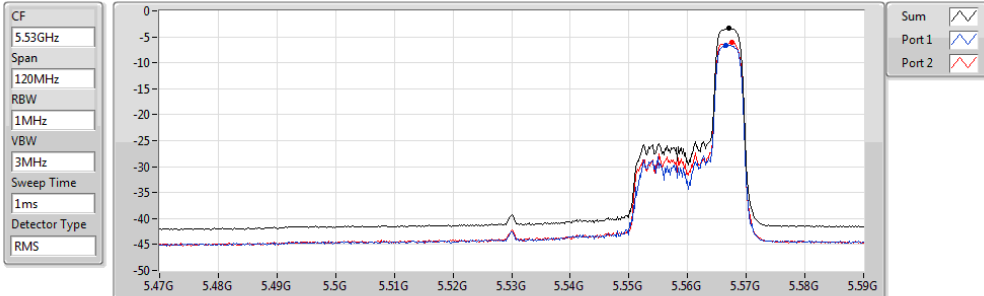


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.41	-3.41	-6.62	-6.14

802.11ax HEW80_RU52_Index52_Nss1,(MCS0)_2TX

PSD

5610MHz

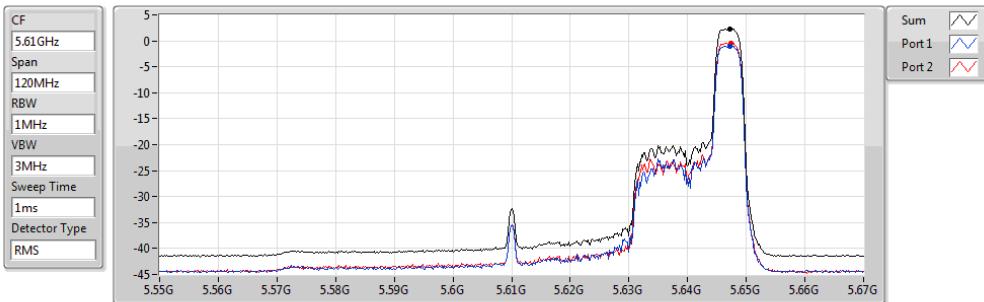


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.29	2.29	-0.99	-0.44

802.11ax HEW80_RU52_Index52_Nss1,(MCS0)_2TX

PSD

5775MHz

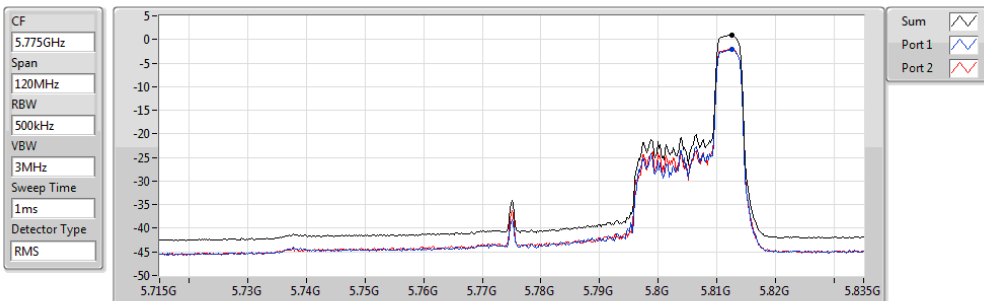


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.89	0.89	-2.19	-2.05

802.11ax HEW80_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5210MHz

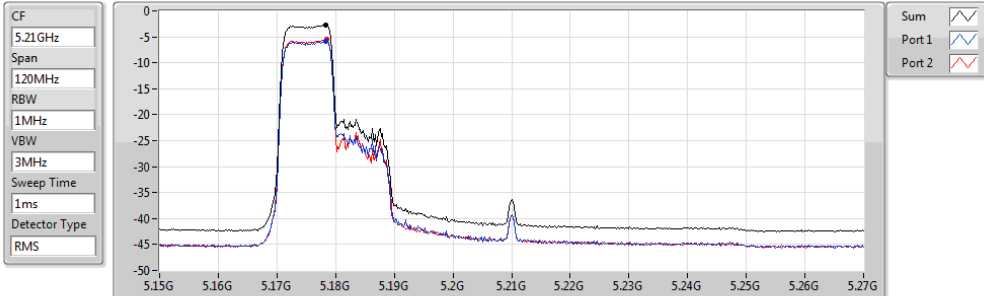


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.71	-2.71	-5.81	-5.56

802.11ax HEW80_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5290MHz

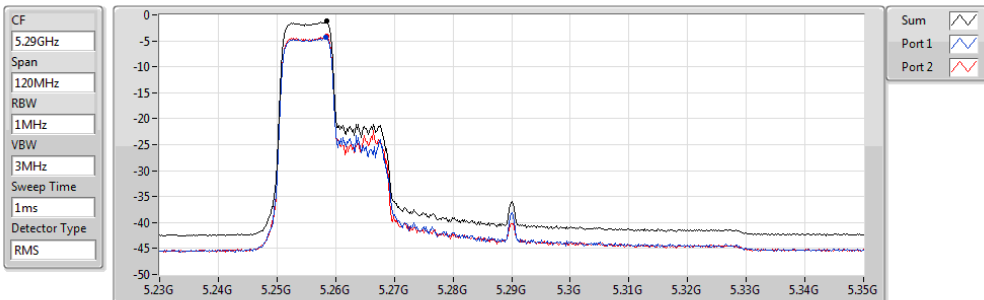


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.24	-1.24	-4.29	-4.14

802.11ax HEW80_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5530MHz

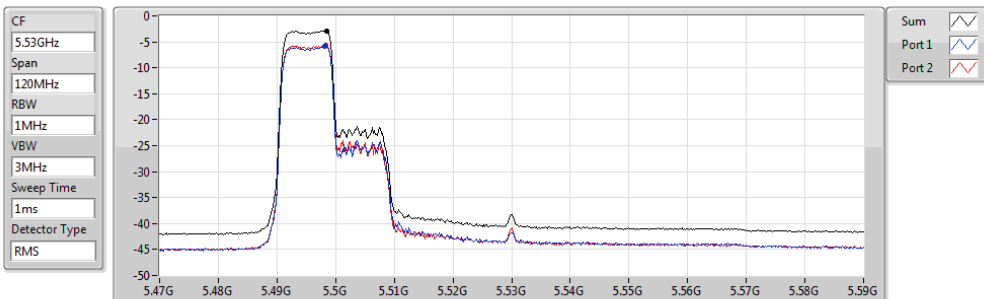


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.84	-2.84	-5.90	-5.75

802.11ax HEW80_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5610MHz

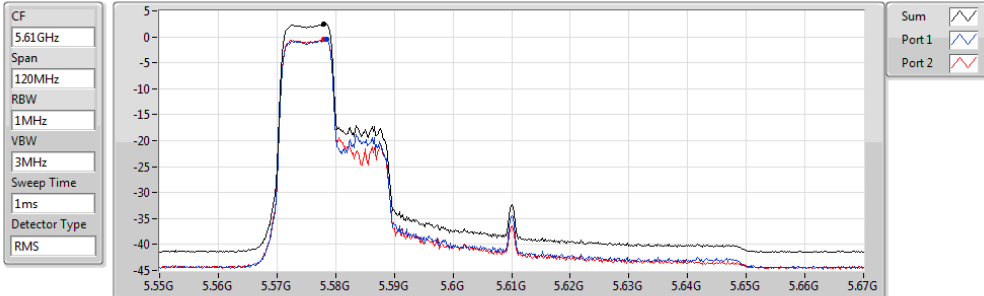


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.50	2.50	-0.44	-0.48

802.11ax HEW80_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5775MHz

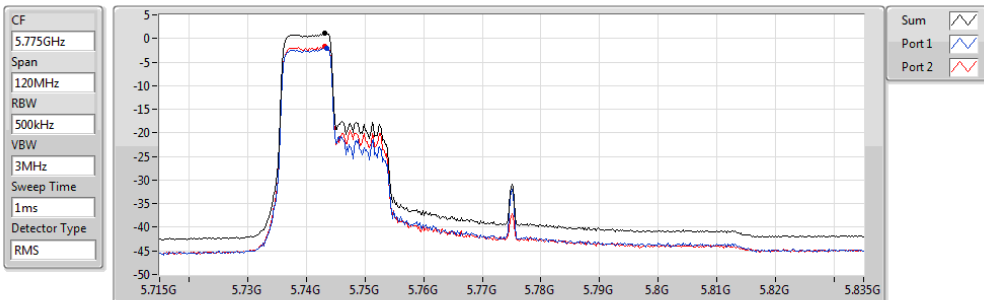


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.03	1.03	-2.06	-1.64

802.11ax HEW80_RU106_Index58_Nss1,(MCS0)_2TX

PSD

5210MHz

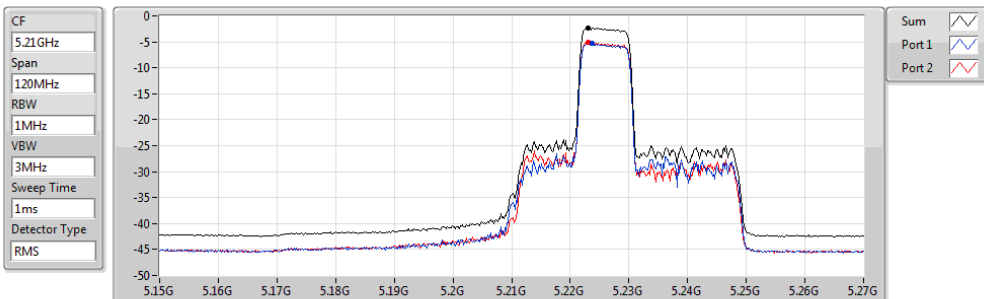


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.30	-2.30	-5.37	-5.12

802.11ax HEW80_RU106_Index58_Nss1,(MCS0)_2TX

PSD

5290MHz

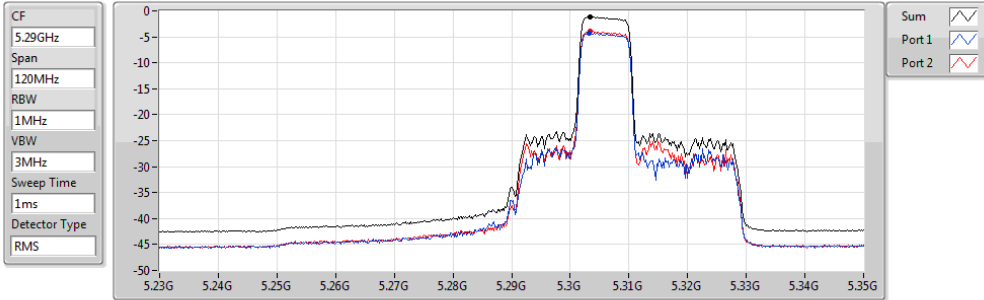


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.12	-1.12	-4.30	-3.87

802.11ax HEW80_RU106_Index58_Nss1,(MCS0)_2TX

PSD

5530MHz

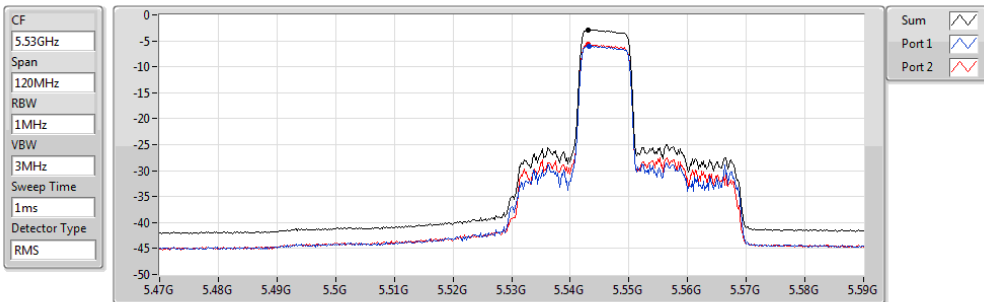


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.85	-2.85	-5.96	-5.71

802.11ax HEW80_RU106_Index58_Nss1,(MCS0)_2TX

PSD

5610MHz

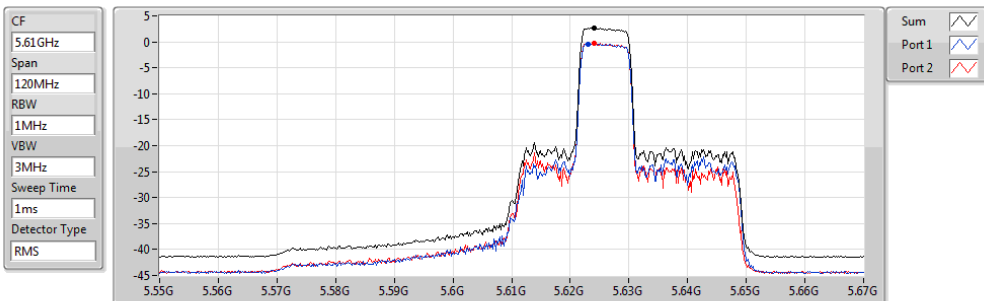


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.68	2.68	-0.39	-0.27

802.11ax HEW80_RU106_Index58_Nss1,(MCS0)_2TX

PSD

5775MHz

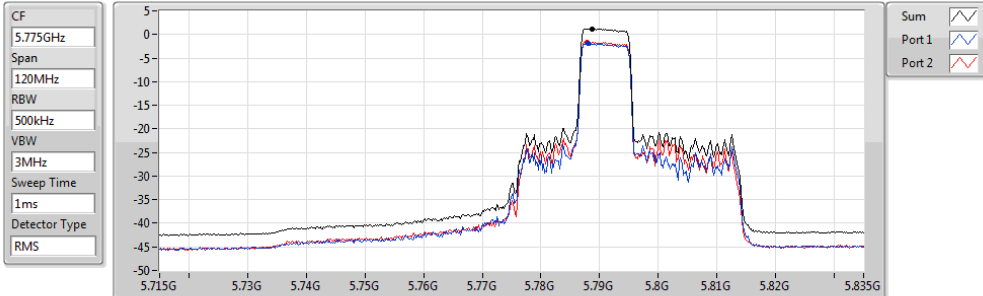


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.20	1.20	-1.94	-1.57

802.11ax HEW80_RU106_Index60_Nss1,(MCS0)_2TX

PSD

5210MHz

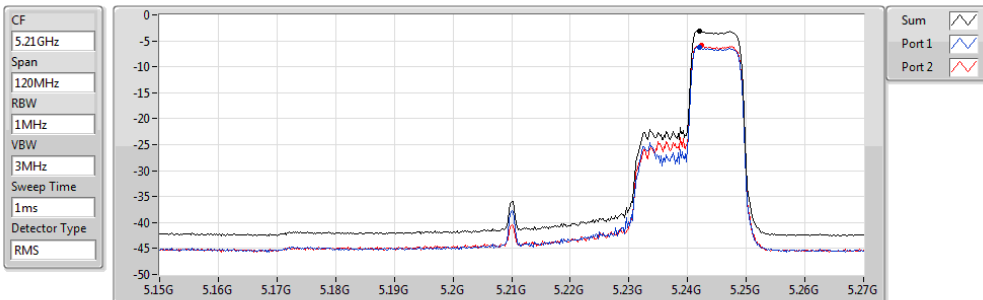


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.10	-3.10	-6.30	-5.90

802.11ax HEW80_RU106_Index60_Nss1,(MCS0)_2TX

PSD

5290MHz

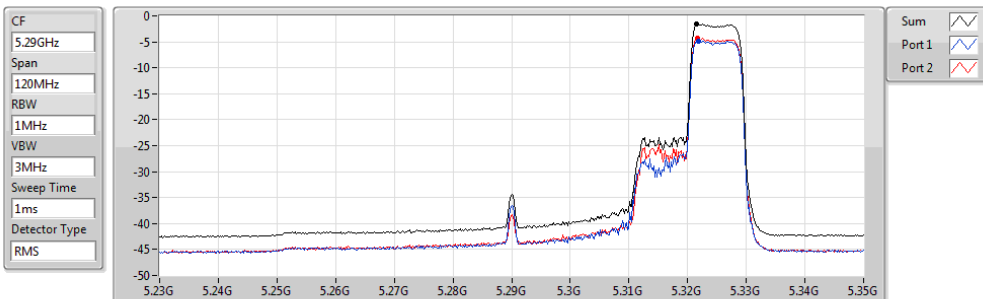


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.59	-1.59	-4.81	-4.32

802.11ax HEW80_RU106_Index60_Nss1,(MCS0)_2TX

PSD

5530MHz

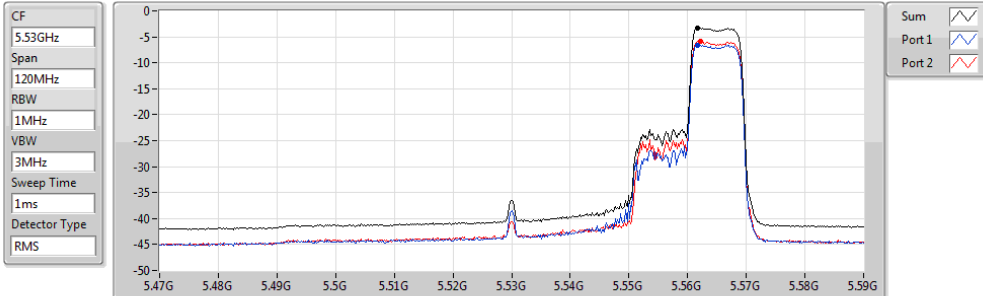


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.23	-3.23	-6.60	-5.86

802.11ax HEW80_RU106_Index60_Nss1,(MCS0)_2TX

PSD

5610MHz

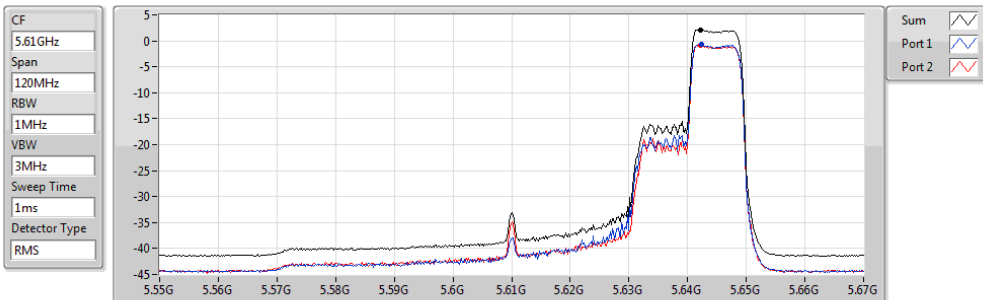


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.15	2.15	-0.73	-0.77

802.11ax HEW80_RU106_Index60_Nss1,(MCS0)_2TX

PSD

5775MHz

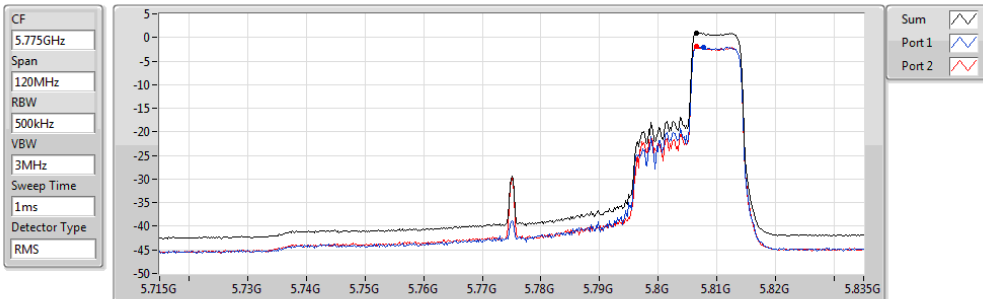


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.97	0.97	-2.06	-1.96

802.11ax HEW80_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5210MHz

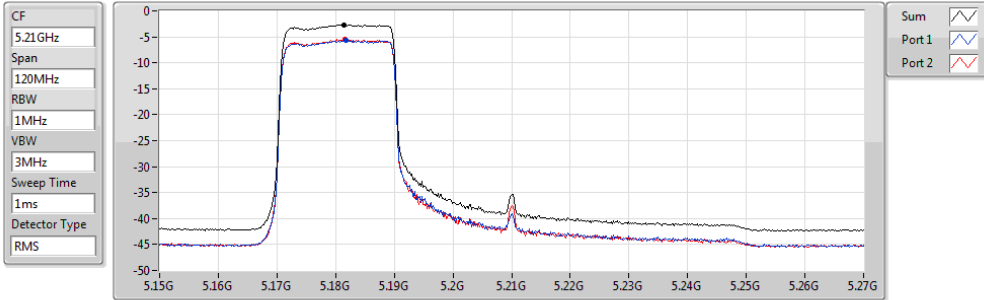


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.64	-2.64	-5.66	-5.52

802.11ax HEW80_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5290MHz

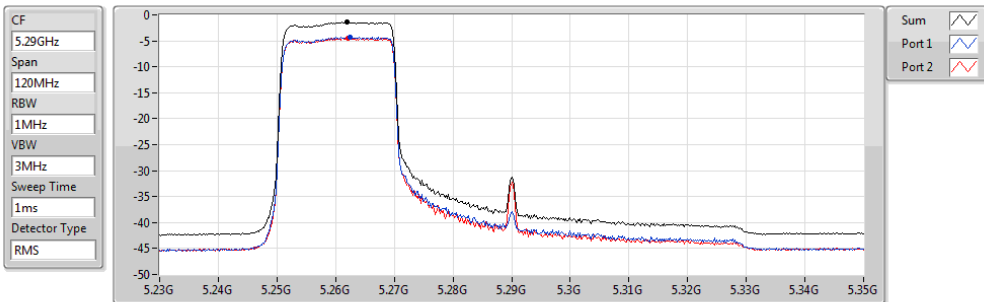


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.38	-1.38	-4.31	-4.47

802.11ax HEW80_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5530MHz

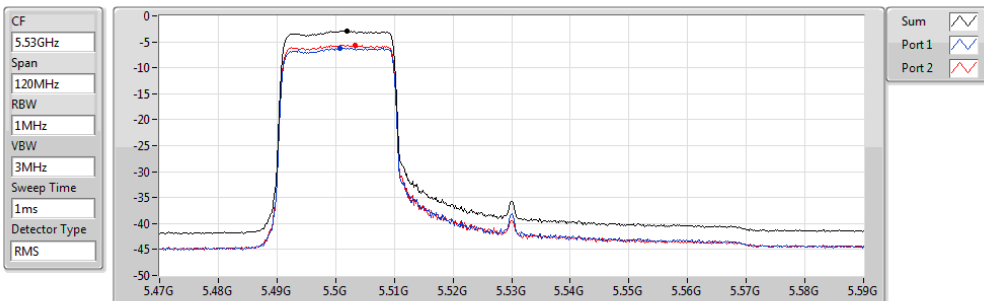


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.93	-2.93	-6.22	-5.65

802.11ax HEW80_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5610MHz

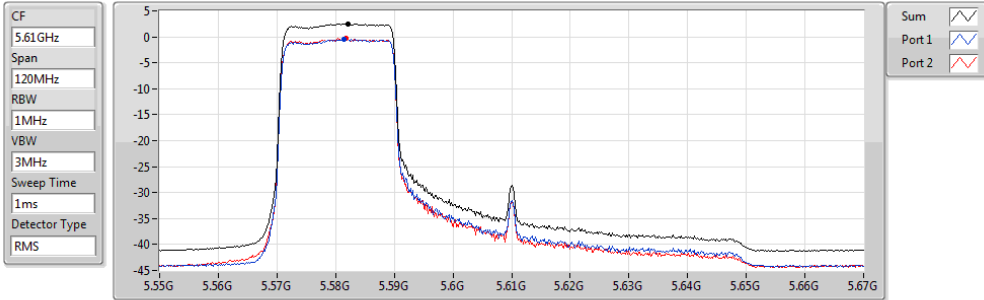


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
2.51	2.51	-0.46	-0.35

802.11ax HEW80_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5775MHz

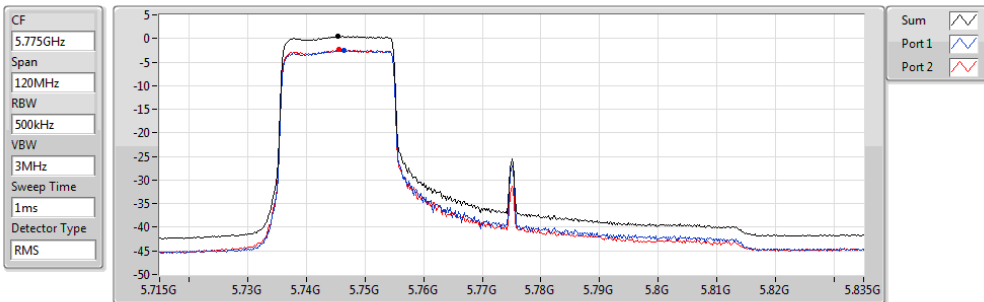


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
0.49	0.49	-2.49	-2.40

802.11ax HEW80_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5210MHz

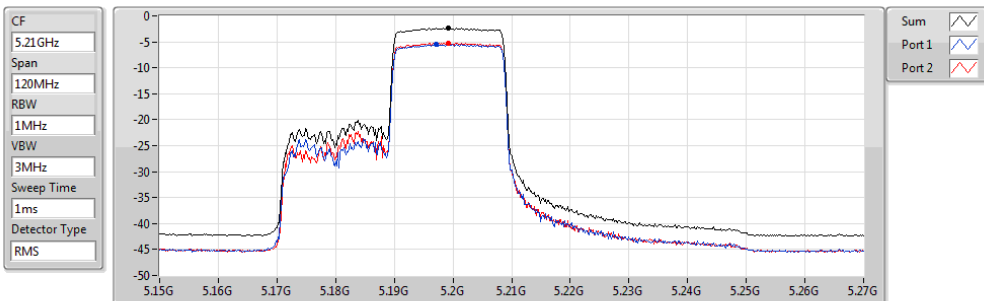


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
-2.41	-2.41	-5.49	-5.20

802.11ax HEW80_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5290MHz

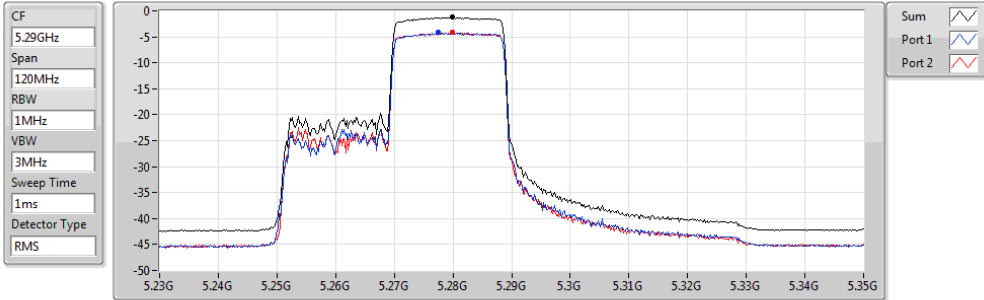


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.23	-1.23	-4.17	-4.15

802.11ax HEW80_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5530MHz

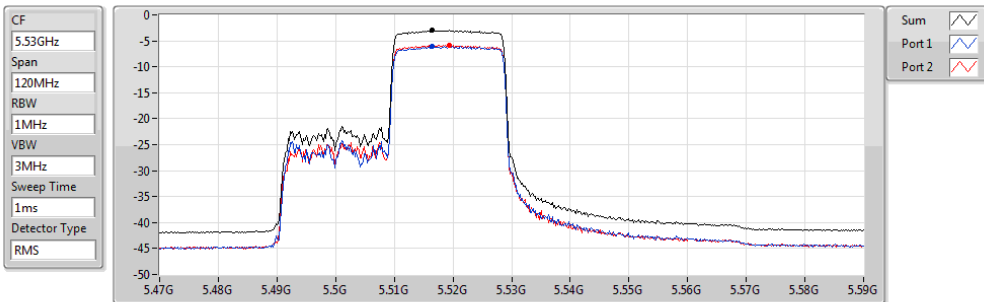


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.99	-2.99	-6.05	-5.82

802.11ax HEW80_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5610MHz

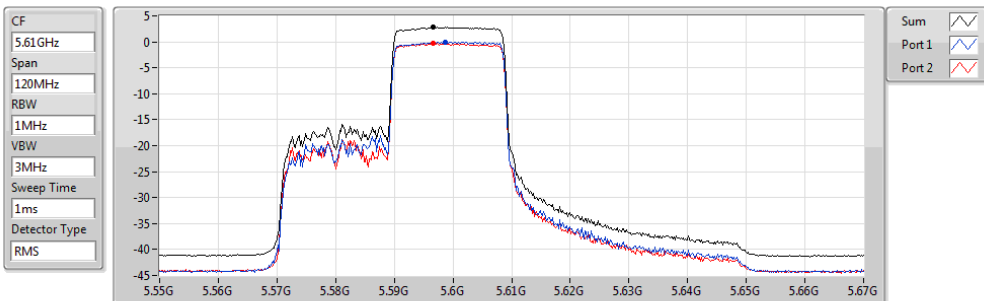


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.81	2.81	-0.01	-0.34

802.11ax HEW80_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5775MHz

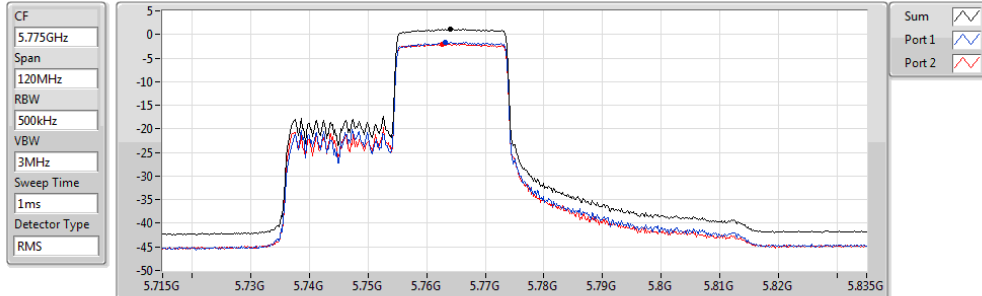


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.09	1.09	-1.67	-1.99

802.11ax HEW80_RU242_Index64_Nss1,(MCS0)_2TX

PSD

5210MHz

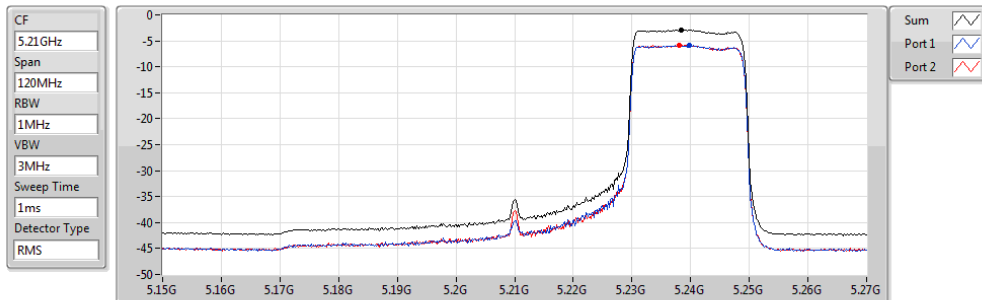


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.91	-2.91	-5.86	-5.87

802.11ax HEW80_RU242_Index64_Nss1,(MCS0)_2TX

PSD

5290MHz

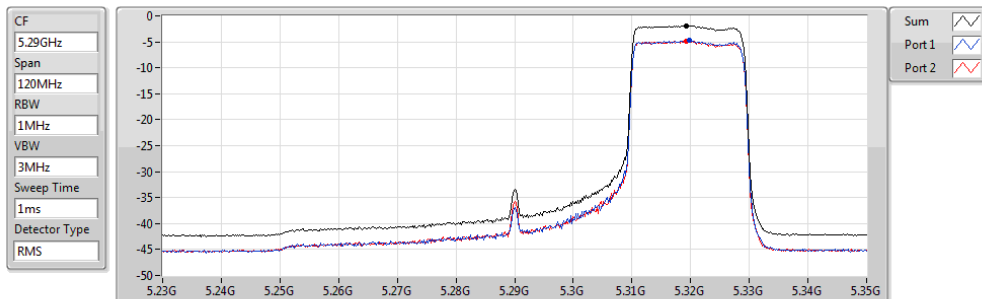


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.90	-1.90	-4.76	-4.81

802.11ax HEW80_RU242_Index64_Nss1,(MCS0)_2TX

PSD

5530MHz

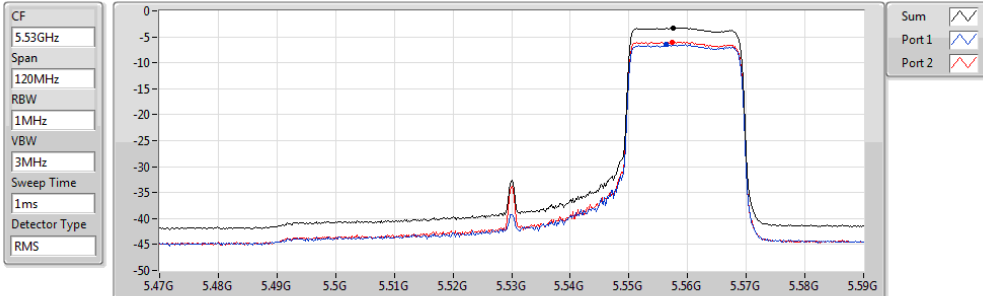


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.24	-3.24	-6.50	-5.96

802.11ax HEW80_RU242_Index64_Nss1,(MCS0)_2TX

PSD

5610MHz

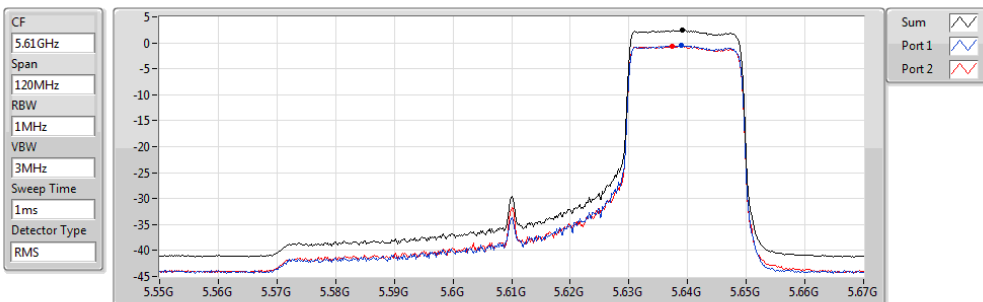


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.48	2.48	-0.43	-0.62

802.11ax HEW80_RU242_Index64_Nss1,(MCS0)_2TX

PSD

5775MHz

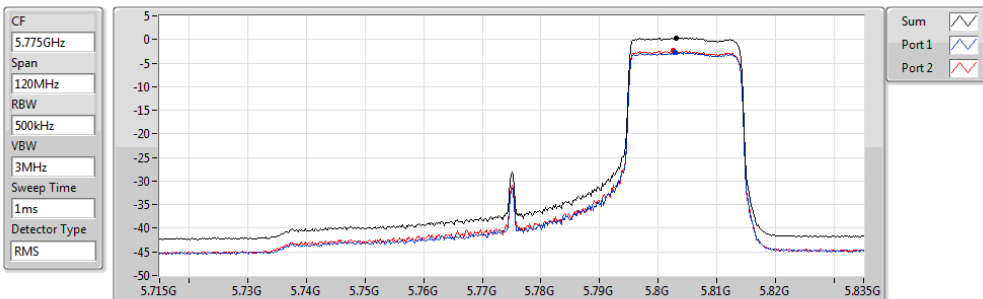


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.34	0.34	-2.75	-2.40

802.11ax HEW80_RU484_Index65_Nss1,(MCS0)_2TX

PSD

5210MHz

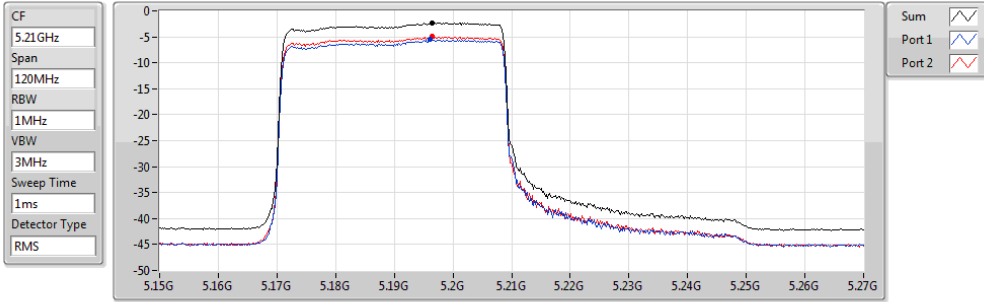


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.31	-2.31	-5.48	-4.94

802.11ax HEW80_RU484_Index65_Nss1,(MCS0)_2TX

PSD

5290MHz

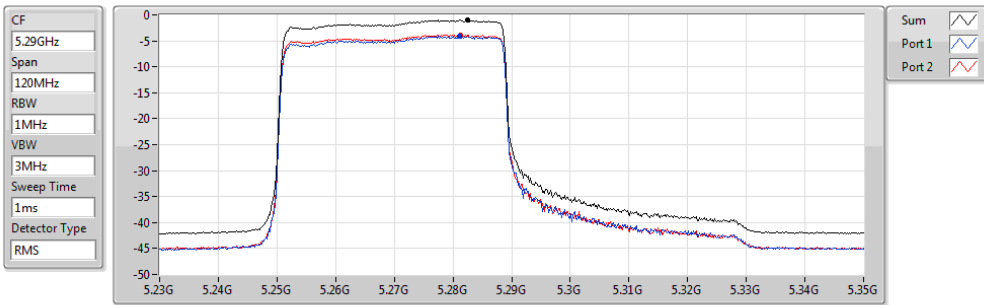


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.98	-0.98	-4.15	-3.82

802.11ax HEW80_RU484_Index65_Nss1,(MCS0)_2TX

PSD

5530MHz

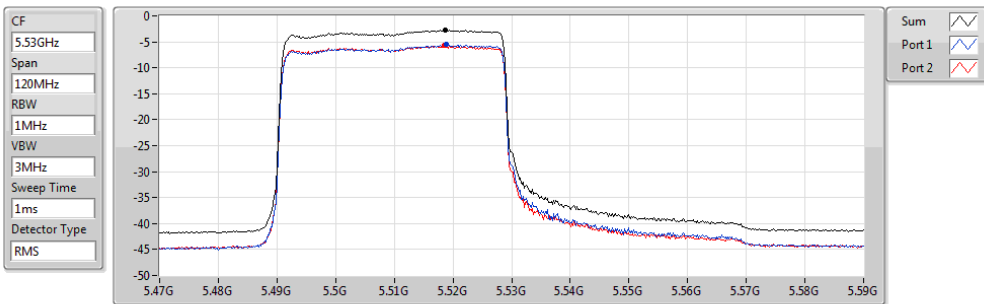


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.77	-2.77	-5.55	-5.73

802.11ax HEW80_RU484_Index65_Nss1,(MCS0)_2TX

PSD

5610MHz

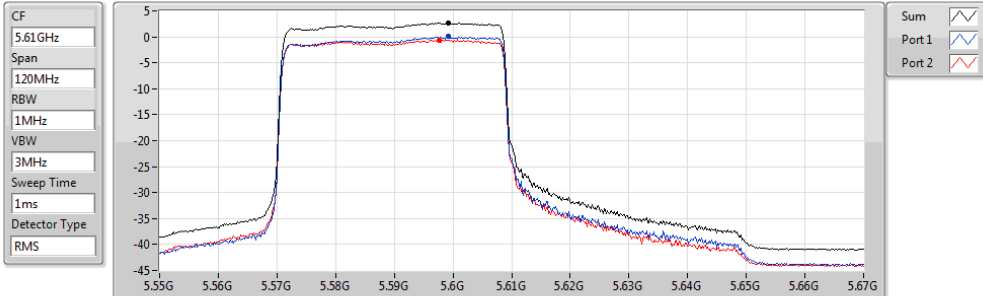


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.69	2.69	0.02	-0.63

802.11ax HEW80_RU484_Index65_Nss1,(MCS0)_2TX

PSD

5775MHz

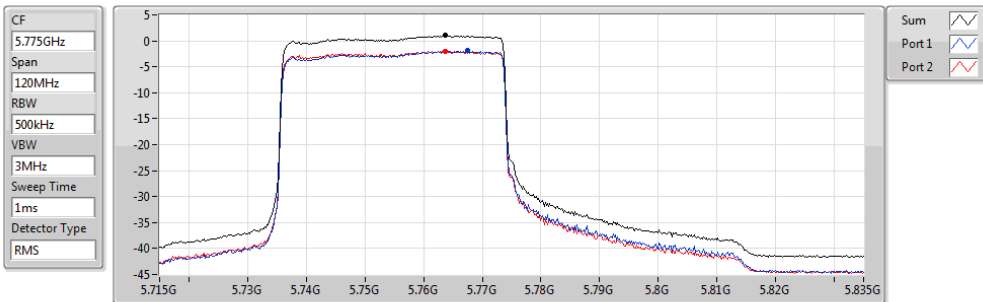


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.05	1.05	-1.88	-1.95

802.11ax HEW80_RU484_Index66_Nss1,(MCS0)_2TX

PSD

5210MHz

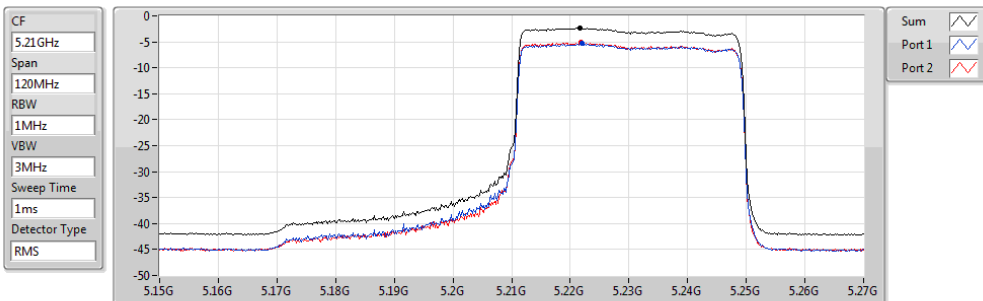


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.36	-2.36	-5.31	-5.13

802.11ax HEW80_RU484_Index66_Nss1,(MCS0)_2TX

PSD

5290MHz

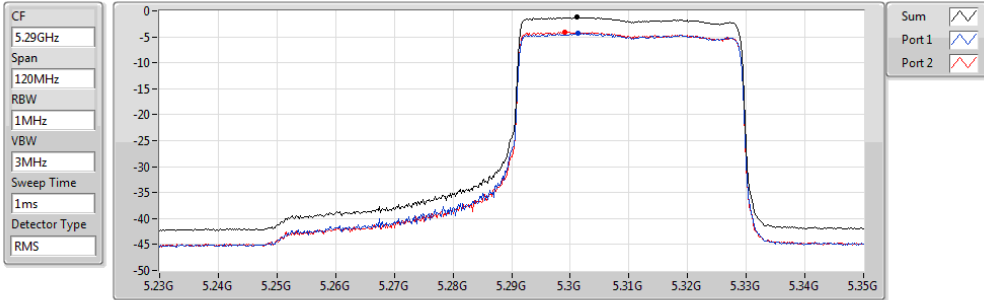


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.20	-1.20	-4.31	-4.04

802.11ax HEW80_RU484_Index66_Nss1,(MCS0)_2TX

PSD

5530MHz

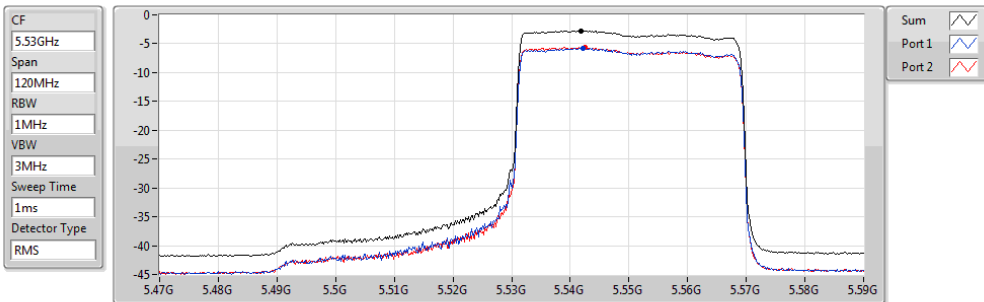


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.73	-2.73	-5.80	-5.56

802.11ax HEW80_RU484_Index66_Nss1,(MCS0)_2TX

PSD

5610MHz

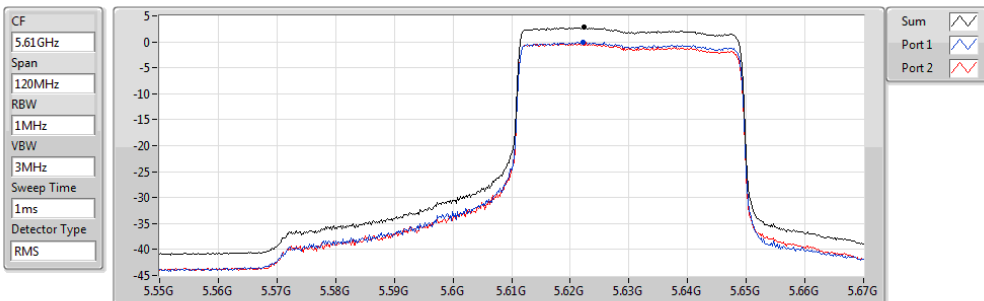


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.78	2.78	-0.10	-0.31

802.11ax HEW80_RU484_Index66_Nss1,(MCS0)_2TX

PSD

5775MHz

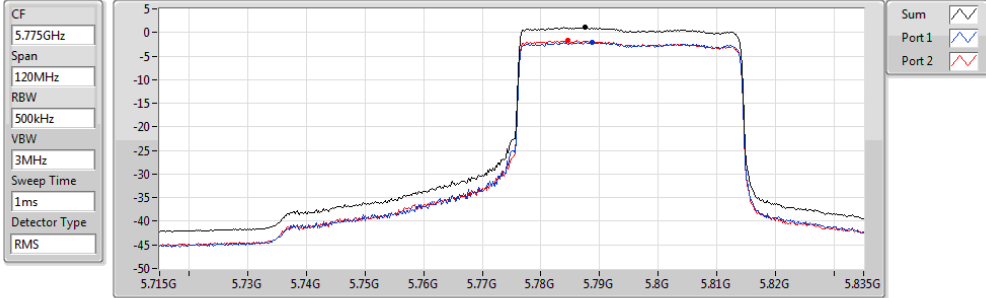

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.09	1.09	-2.00	-1.67

Ambient Condition	24°C / 66%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

**Straddle channels
Summary**

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.47-5.725GHz	-	-
802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX	9.40	16.24
802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX	9.63	16.47
802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX	-13.29	-6.45
802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX	9.38	16.22
802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX	9.63	16.47
802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX	-2.46	4.38
802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX	9.50	16.34
802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX	9.41	16.25
802.11ax HEW40_RU26_Index0_Nss1,(MCS0)_2TX	7.08	13.92
802.11ax HEW40_RU26_Index12_Nss1,(MCS0)_2TX	7.33	14.17
802.11ax HEW40_RU26_Index17_Nss1,(MCS0)_2TX	-18.63	-11.79
802.11ax HEW40_RU52_Index37_Nss1,(MCS0)_2TX	6.72	13.56
802.11ax HEW40_RU52_Index42_Nss1,(MCS0)_2TX	7.16	14.00
802.11ax HEW40_RU52_Index44_Nss1,(MCS0)_2TX	2.46	9.30
802.11ax HEW40_RU106_Index53_Nss1,(MCS0)_2TX	6.88	13.72
802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX	7.36	14.20
802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX	6.88	13.72
802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX	7.23	14.07
802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX	7.13	13.97
802.11ax HEW80_RU26_Index0_Nss1,(MCS0)_2TX	4.00	10.84
802.11ax HEW80_RU26_Index21_Nss1,(MCS0)_2TX	4.19	11.03
802.11ax HEW80_RU26_Index36_Nss1,(MCS0)_2TX	-21.45	-14.61
802.11ax HEW80_RU52_Index37_Nss1,(MCS0)_2TX	3.58	10.42
802.11ax HEW80_RU52_Index50_Nss1,(MCS0)_2TX	4.16	11.00
802.11ax HEW80_RU52_Index52_Nss1,(MCS0)_2TX	-4.82	2.02
802.11ax HEW80_RU106_Index53_Nss1,(MCS0)_2TX	3.74	10.58
802.11ax HEW80_RU106_Index58_Nss1,(MCS0)_2TX	4.17	11.01
802.11ax HEW80_RU106_Index60_Nss1,(MCS0)_2TX	3.54	10.38
802.11ax HEW80_RU242_Index61_Nss1,(MCS0)_2TX	3.75	10.59
802.11ax HEW80_RU242_Index62_Nss1,(MCS0)_2TX	4.01	10.85
802.11ax HEW80_RU242_Index64_Nss1,(MCS0)_2TX	3.47	10.31
802.11ax HEW80_RU484_Index65_Nss1,(MCS0)_2TX	4.09	10.93
802.11ax HEW80_RU484_Index66_Nss1,(MCS0)_2TX	4.14	10.98
5.725-5.85GHz	-	-
802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX	-16.41	-9.57
802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX	-17.40	-10.56

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX	7.71	14.55
802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX	-14.89	-8.05
802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX	-13.79	-6.95
802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX	7.67	14.51
802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX	-10.90	-4.06
802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX	7.84	14.68
802.11ax HEW40_RU26_Index0_Nss1,(MCS0)_2TX	-40.25	-33.41
802.11ax HEW40_RU26_Index12_Nss1,(MCS0)_2TX	-19.55	-12.71
802.11ax HEW40_RU26_Index17_Nss1,(MCS0)_2TX	5.22	12.06
802.11ax HEW40_RU52_Index37_Nss1,(MCS0)_2TX	-38.03	-31.19
802.11ax HEW40_RU52_Index42_Nss1,(MCS0)_2TX	-16.86	-10.02
802.11ax HEW40_RU52_Index44_Nss1,(MCS0)_2TX	5.32	12.16
802.11ax HEW40_RU106_Index53_Nss1,(MCS0)_2TX	-35.38	-28.54
802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX	-33.61	-26.77
802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX	5.17	12.01
802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX	-30.85	-24.01
802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX	5.18	12.02
802.11ax HEW80_RU26_Index0_Nss1,(MCS0)_2TX	-42.90	-36.06
802.11ax HEW80_RU26_Index21_Nss1,(MCS0)_2TX	-42.33	-35.49
802.11ax HEW80_RU26_Index36_Nss1,(MCS0)_2TX	1.33	8.17
802.11ax HEW80_RU52_Index37_Nss1,(MCS0)_2TX	-42.54	-35.70
802.11ax HEW80_RU52_Index50_Nss1,(MCS0)_2TX	-19.62	-12.78
802.11ax HEW80_RU52_Index52_Nss1,(MCS0)_2TX	1.49	8.33
802.11ax HEW80_RU106_Index53_Nss1,(MCS0)_2TX	-41.48	-34.64
802.11ax HEW80_RU106_Index58_Nss1,(MCS0)_2TX	-19.57	-12.73
802.11ax HEW80_RU106_Index60_Nss1,(MCS0)_2TX	1.40	8.24
802.11ax HEW80_RU242_Index61_Nss1,(MCS0)_2TX	-39.92	-33.08
802.11ax HEW80_RU242_Index62_Nss1,(MCS0)_2TX	-39.66	-32.82
802.11ax HEW80_RU242_Index64_Nss1,(MCS0)_2TX	1.53	8.37
802.11ax HEW80_RU484_Index65_Nss1,(MCS0)_2TX	-37.73	-30.89
802.11ax HEW80_RU484_Index66_Nss1,(MCS0)_2TX	1.48	8.32

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5720MHz Straddle 5.47-5.725GHz	Pass	6.84	6.32	6.60	9.40	10.16	16.24	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	6.84	-19.51	-18.76	-16.41	29.16	-9.57	36.00
802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5720MHz Straddle 5.47-5.725GHz	Pass	6.84	6.45	6.79	9.63	10.16	16.47	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	6.84	-20.51	-19.10	-17.40	29.16	-10.56	36.00
802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5720MHz Straddle 5.47-5.725GHz	Pass	6.84	-17.19	-15.30	-13.29	10.16	-6.45	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	6.84	4.67	4.88	7.71	29.16	14.55	36.00
802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5720MHz Straddle 5.47-5.725GHz	Pass	6.84	6.28	6.57	9.38	10.16	16.22	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	6.84	-17.70	-16.96	-14.89	29.16	-8.05	36.00
802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5720MHz Straddle 5.47-5.725GHz	Pass	6.84	6.56	6.82	9.63	10.16	16.47	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	6.84	-17.36	-16.21	-13.79	29.16	-6.95	36.00
802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5720MHz Straddle 5.47-5.725GHz	Pass	6.84	-5.65	-5.30	-2.46	10.16	4.38	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	6.84	4.61	4.85	7.67	29.16	14.51	36.00
802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5720MHz Straddle 5.47-5.725GHz	Pass	6.84	6.37	6.73	9.50	10.16	16.34	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	6.84	-13.27	-12.93	-10.90	29.16	-4.06	36.00
802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5720MHz Straddle 5.47-5.725GHz	Pass	6.84	6.32	6.54	9.41	10.16	16.25	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	6.84	4.79	5.01	7.84	29.16	14.68	36.00
802.11ax HEW40_RU26_Index0_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	6.84	4.13	4.01	7.08	10.16	13.92	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	6.84	-43.05	-43.25	-40.25	29.16	-33.41	36.00
802.11ax HEW40_RU26_Index12_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	6.84	4.22	4.48	7.33	10.16	14.17	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	6.84	-23.77	-21.40	-19.55	29.16	-12.71	36.00
802.11ax HEW40_RU26_Index17_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	6.84	-20.63	-21.69	-18.63	10.16	-11.79	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	6.84	2.20	2.21	5.22	29.16	12.06	36.00
802.11ax HEW40_RU52_Index37_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	6.84	3.62	3.87	6.72	10.16	13.56	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	6.84	-40.55	-41.06	-38.03	29.16	-31.19	36.00
802.11ax HEW40_RU52_Index42_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	6.84	4.15	4.20	7.16	10.16	14.00	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	6.84	-19.68	-19.46	-16.86	29.16	-10.02	36.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11ax HEW40_RU52_Index44_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	6.84	-0.58	-0.53	2.46	10.16	9.30	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	6.84	2.28	2.40	5.32	29.16	12.16	36.00
802.11ax HEW40_RU106_Index53_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	6.84	3.83	3.97	6.88	10.16	13.72	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	6.84	-38.03	-38.35	-35.38	29.16	-28.54	36.00
802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	6.84	4.37	4.36	7.36	10.16	14.20	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	6.84	-36.72	-35.92	-33.61	29.16	-26.77	36.00
802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	6.84	3.82	3.93	6.88	10.16	13.72	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	6.84	2.16	2.35	5.17	29.16	12.01	36.00
802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	6.84	4.29	4.25	7.23	10.16	14.07	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	6.84	-32.94	-33.77	-30.85	29.16	-24.01	36.00
802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	6.84	4.08	4.21	7.13	10.16	13.97	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	6.84	2.17	2.18	5.18	29.16	12.02	36.00
802.11ax HEW80_RU26_Index0_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	0.89	1.08	4.00	10.16	10.84	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-45.51	-46.21	-42.90	29.16	-36.06	36.00
802.11ax HEW80_RU26_Index21_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	0.93	1.42	4.19	10.16	11.03	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-45.29	-45.21	-42.33	29.16	-35.49	36.00
802.11ax HEW80_RU26_Index36_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	-24.64	-24.28	-21.45	10.16	-14.61	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-1.96	-1.41	1.33	29.16	8.17	36.00
802.11ax HEW80_RU52_Index37_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	0.37	0.77	3.58	10.16	10.42	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-45.25	-45.63	-42.54	29.16	-35.70	36.00
802.11ax HEW80_RU52_Index50_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	0.69	1.60	4.16	10.16	11.00	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-22.04	-22.91	-19.62	29.16	-12.78	36.00
802.11ax HEW80_RU52_Index52_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	-8.03	-7.64	-4.82	10.16	2.02	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-1.62	-1.39	1.49	29.16	8.33	36.00
802.11ax HEW80_RU106_Index53_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	0.75	0.75	3.74	10.16	10.58	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-43.90	-44.92	-41.48	29.16	-34.64	36.00
802.11ax HEW80_RU106_Index58_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	1.12	1.22	4.17	10.16	11.01	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-22.87	-21.69	-19.57	29.16	-12.73	36.00
802.11ax HEW80_RU106_Index60_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	0.56	0.54	3.54	10.16	10.38	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-1.62	-1.50	1.40	29.16	8.24	36.00
802.11ax HEW80_RU242_Index61_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	0.78	0.73	3.75	10.16	10.59	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-42.36	-43.25	-39.92	29.16	-33.08	36.00
802.11ax HEW80_RU242_Index62_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	1.25	0.81	4.01	10.16	10.85	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-42.13	-42.55	-39.66	29.16	-32.82	36.00
802.11ax HEW80_RU242_Index64_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	0.46	0.45	3.47	10.16	10.31	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-1.51	-1.44	1.53	29.16	8.37	36.00
802.11ax HEW80_RU484_Index65_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	1.29	0.87	4.09	10.16	10.93	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-39.62	-41.02	-37.73	29.16	-30.89	36.00
802.11ax HEW80_RU484_Index66_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	6.84	1.23	1.10	4.14	10.16	10.98	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	6.84	-1.33	-1.63	1.48	29.16	8.32	36.00

DG = Directional Gain= $10 * \log((10^{3.84/20} + 10^{3.82/20})^2 / 2) = 6.84$ dBi

For 5.47 ~ 5.725 GHz

Limit shall be reduced to 11 dBm – (6.84 dBi – 6 dBi) = 10.16 dBm

For 5.725 ~ 5.85 GHz

Limit shall be reduced to 30 dBm – (6.84 dBi – 6 dBi) = 29.16 dBm


RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

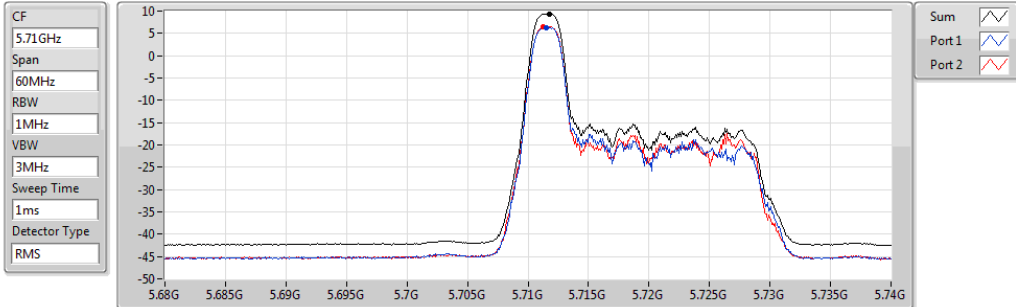


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.40	9.40	6.32	6.60

802.11ax HEW20_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

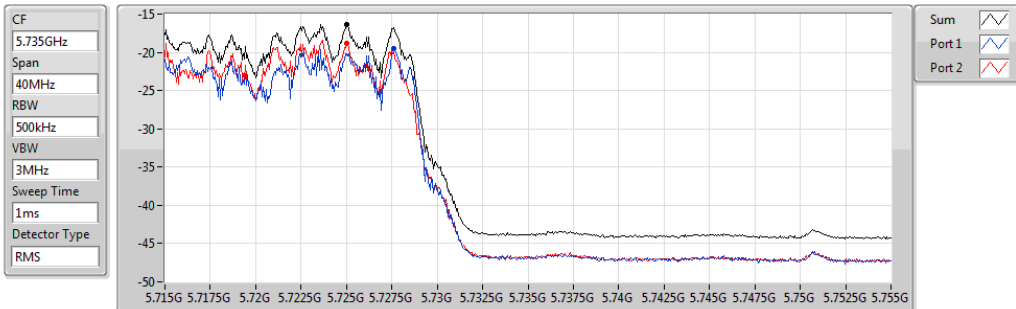


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-16.41	-16.41	-19.51	-18.76

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

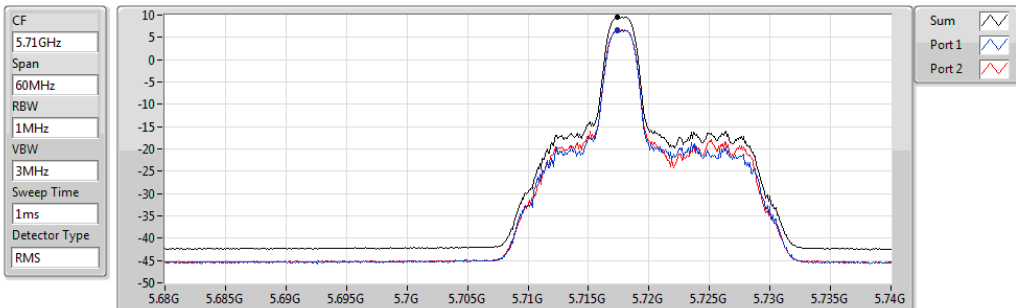


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.63	9.63	6.45	6.79

802.11ax HEW20_RU26_Index3_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

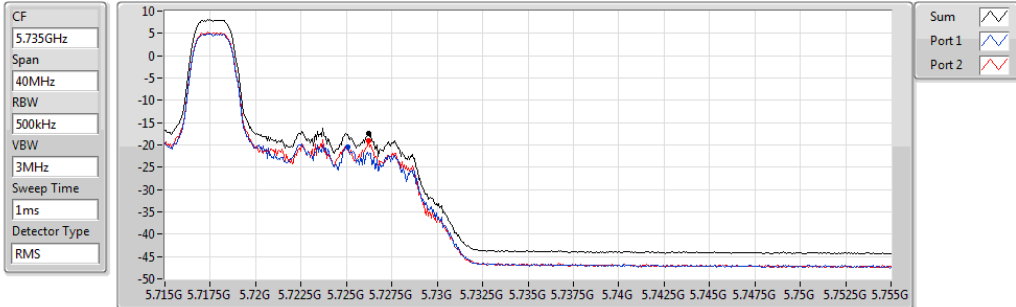


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-17.40	-17.40	-20.51	-19.10

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

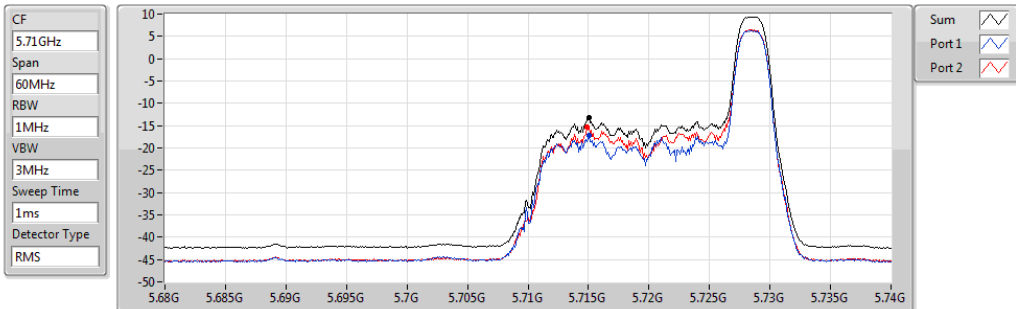


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.29	-13.29	-17.19	-15.30

802.11ax HEW20_RU26_Index8_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

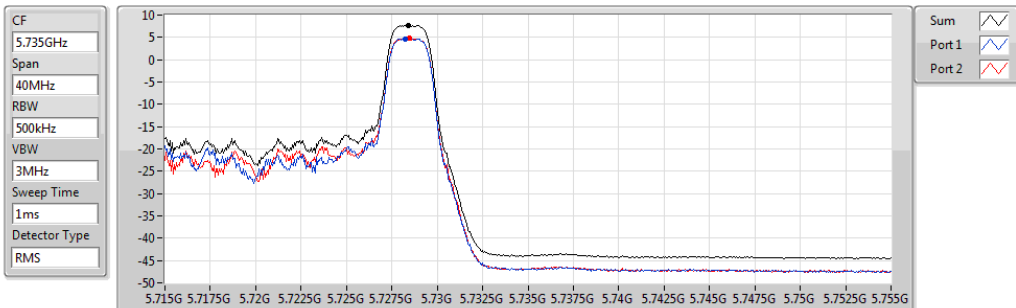


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.71	7.71	4.67	4.88

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

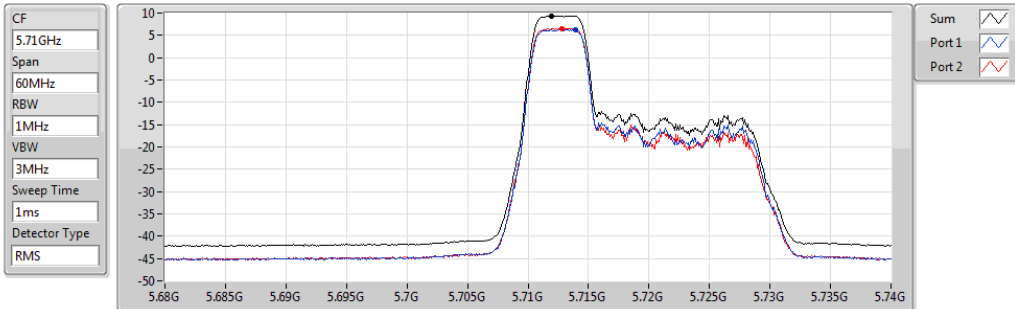


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.38	9.38	6.28	6.57

802.11ax HEW20_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

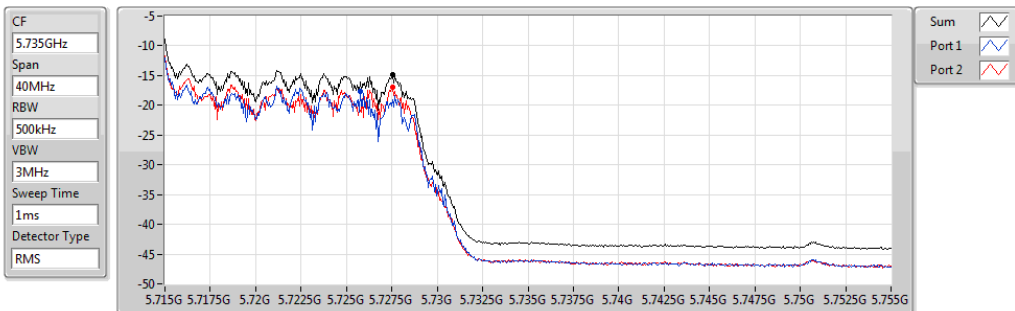


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-14.89	-14.89	-17.70	-16.96

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

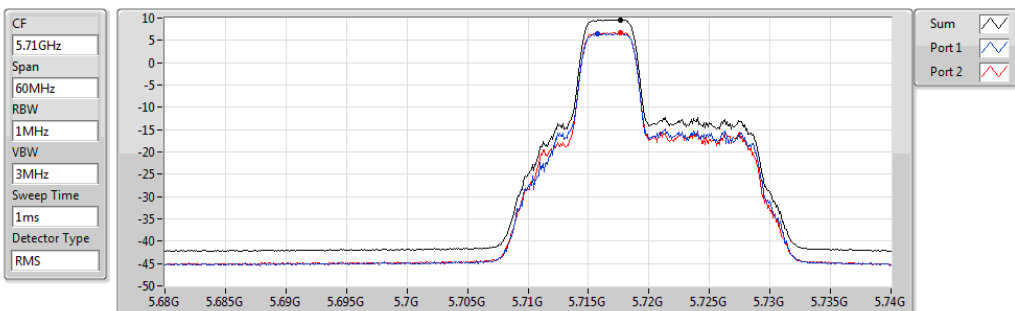


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.63	9.63	6.56	6.82

802.11ax HEW20_RU52_Index38_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

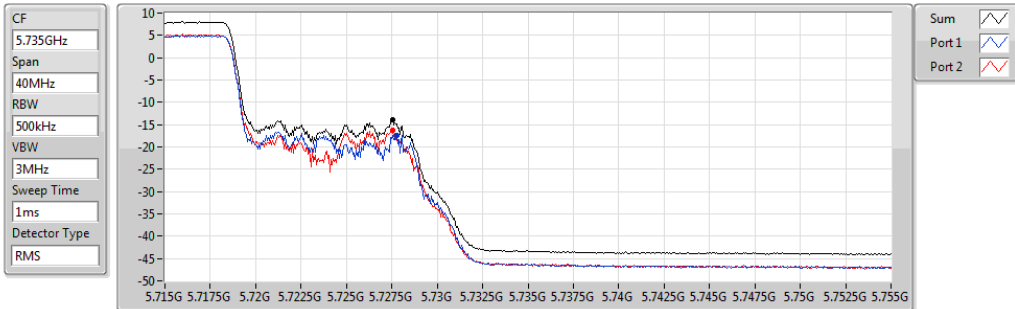


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.79	-13.79	-17.36	-16.21

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

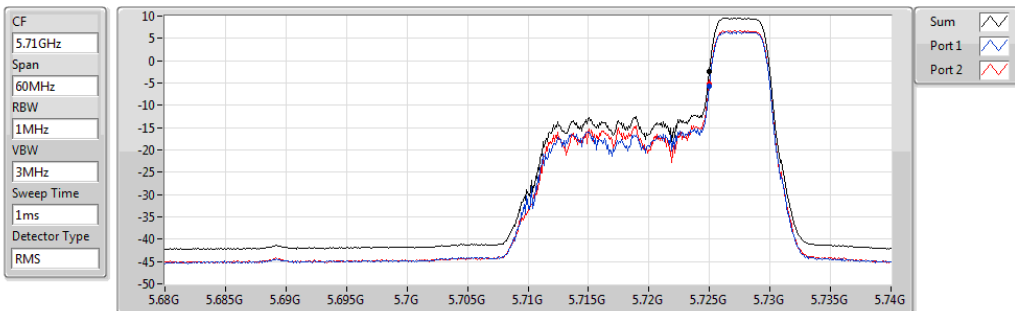


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.46	-2.46	-5.65	-5.30

802.11ax HEW20_RU52_Index40_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

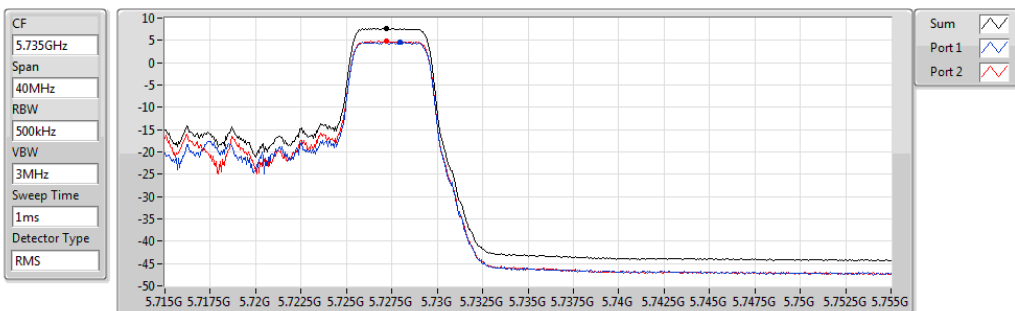


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.67	7.67	4.61	4.85

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

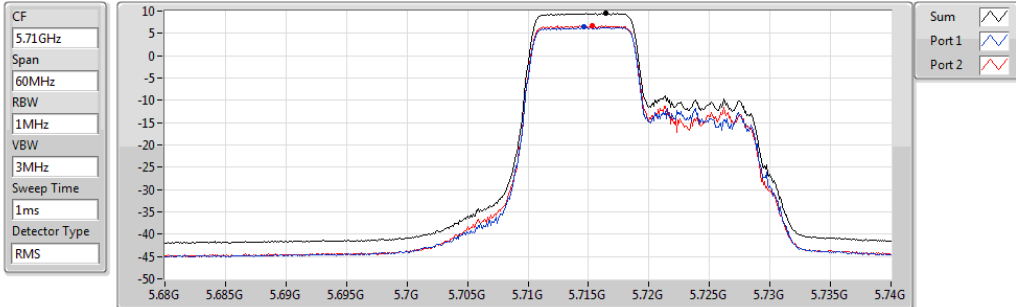


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.50	9.50	6.37	6.73

802.11ax HEW20_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

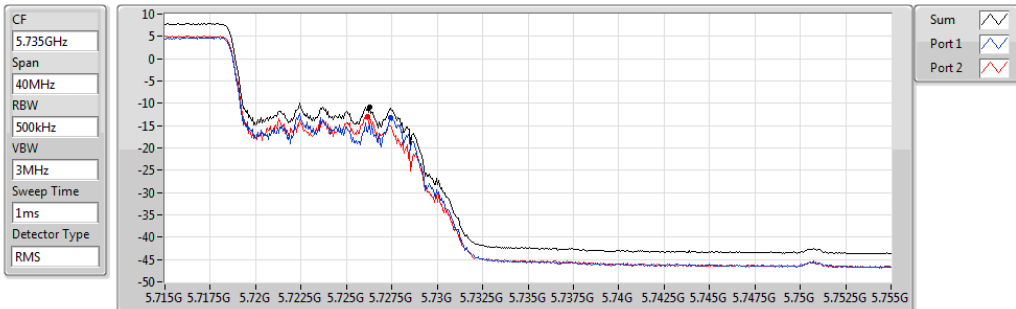


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.90	-10.90	-13.27	-12.93

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

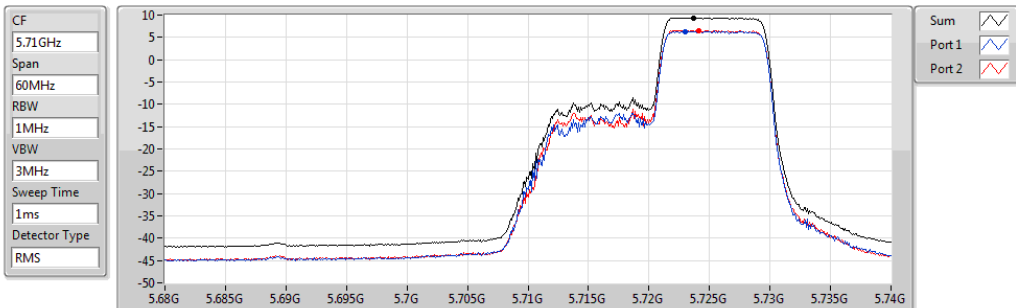


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.41	9.41	6.32	6.54

802.11ax HEW20_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

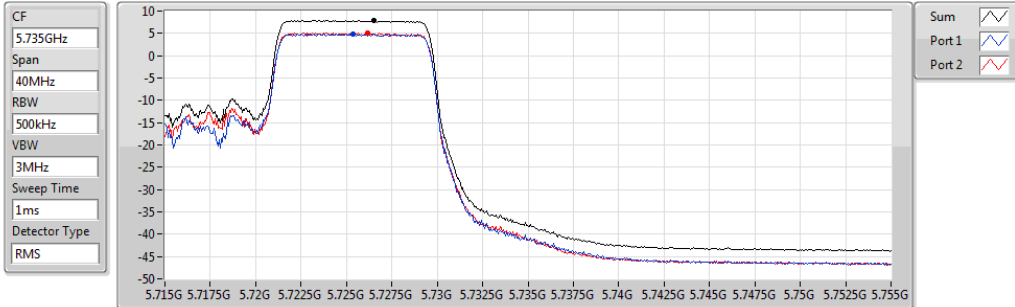


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.84	7.84	4.79	5.01

802.11ax HEW40_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

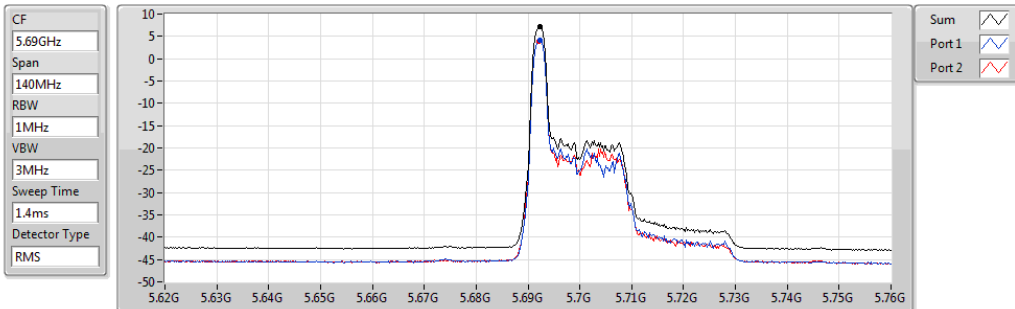


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.08	7.08	4.13	4.01

802.11ax HEW40_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

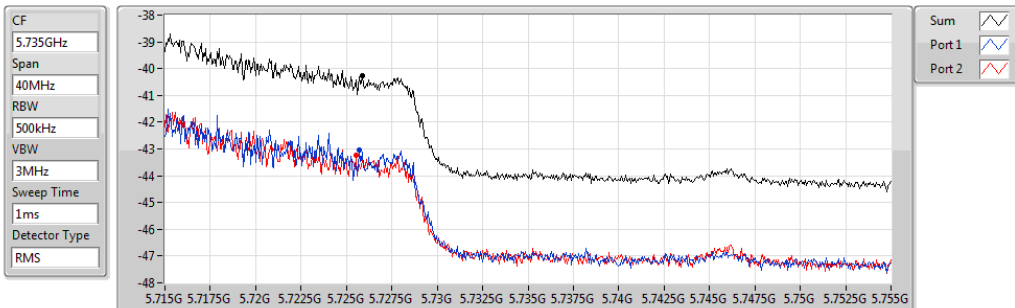


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-40.25	-40.25	-43.05	-43.25

802.11ax HEW40_RU26_Index12_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

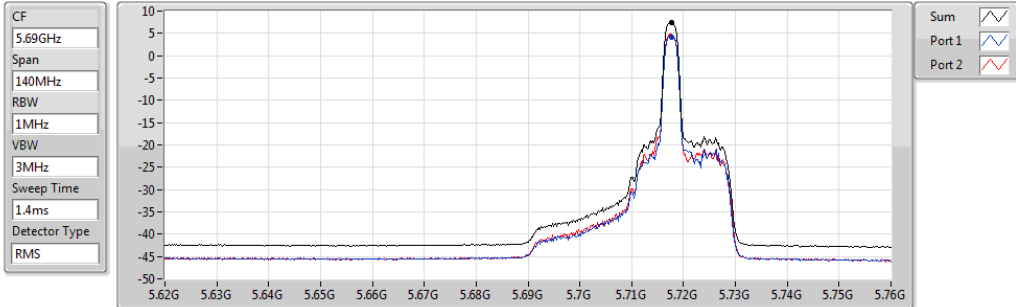


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.33	7.33	4.22	4.48

802.11ax HEW40_RU26_Index12_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

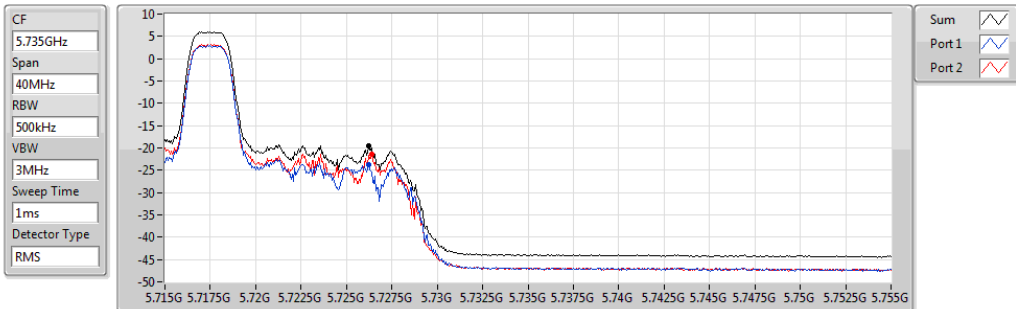


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-19.55	-19.55	-23.77	-21.40

802.11ax HEW40_RU26_Index17_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

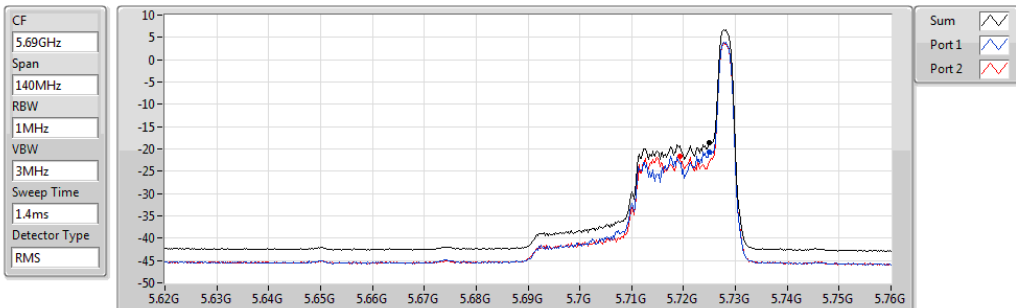


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-18.63	-18.63	-20.63	-21.69

802.11ax HEW40_RU26_Index17_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

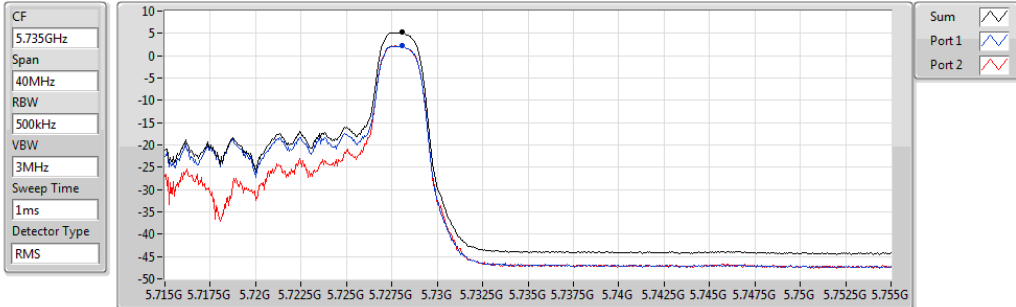


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.22	5.22	2.20	2.21

802.11ax HEW40_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

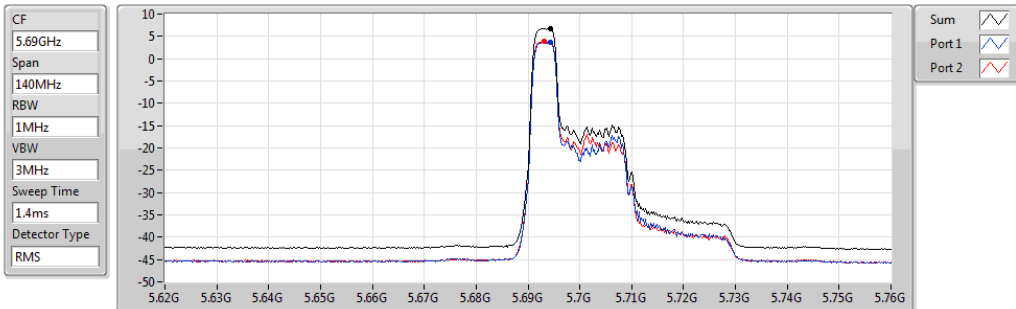


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.72	6.72	3.62	3.87

802.11ax HEW40_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

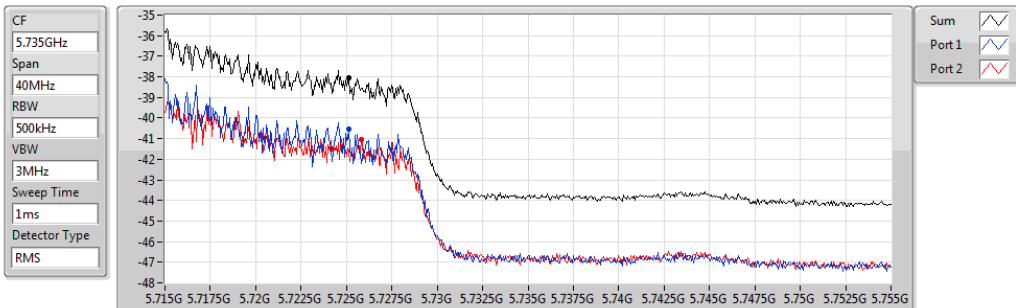


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-38.03	-38.03	-40.55	-41.06

802.11ax HEW40_RU52_Index42_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

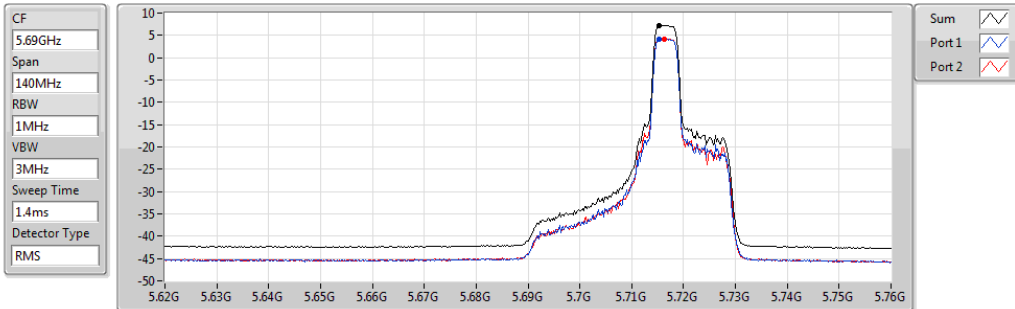


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.16	7.16	4.15	4.20

802.11ax HEW40_RU52_Index42_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

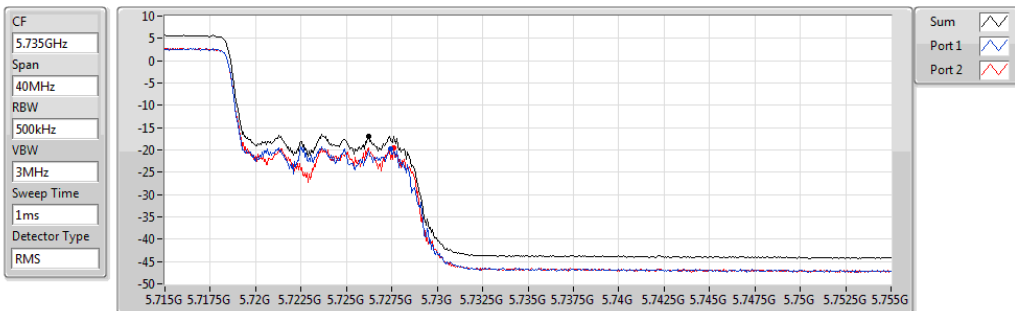


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-16.86	-16.86	-19.68	-19.46

802.11ax HEW40_RU52_Index44_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

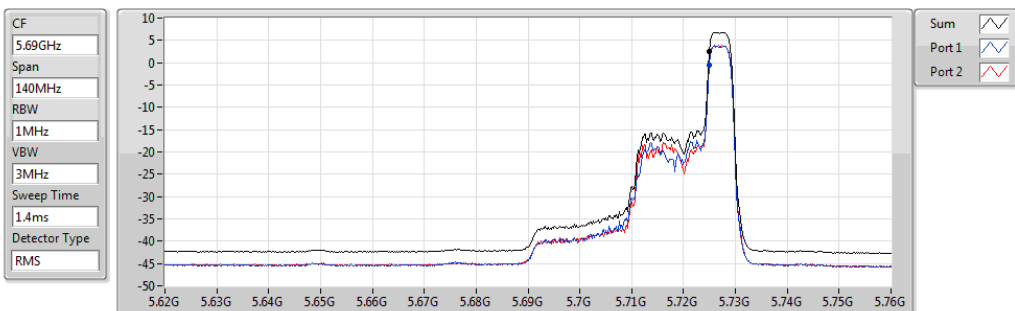


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.46	2.46	-0.58	-0.53

802.11ax HEW40_RU52_Index44_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

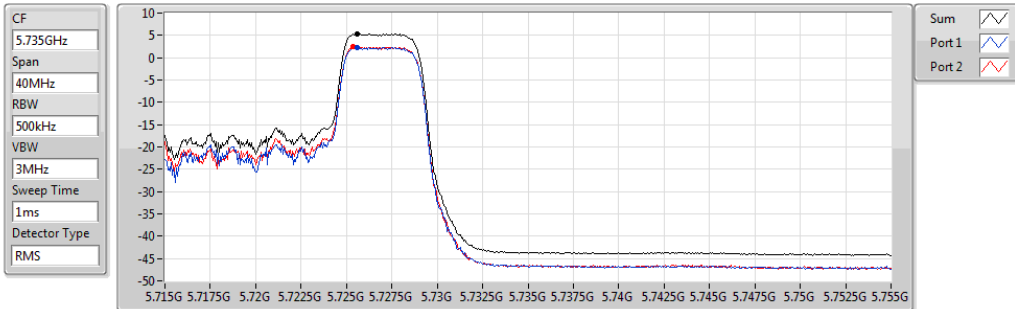


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.32	5.32	2.28	2.40

802.11ax HEW40_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

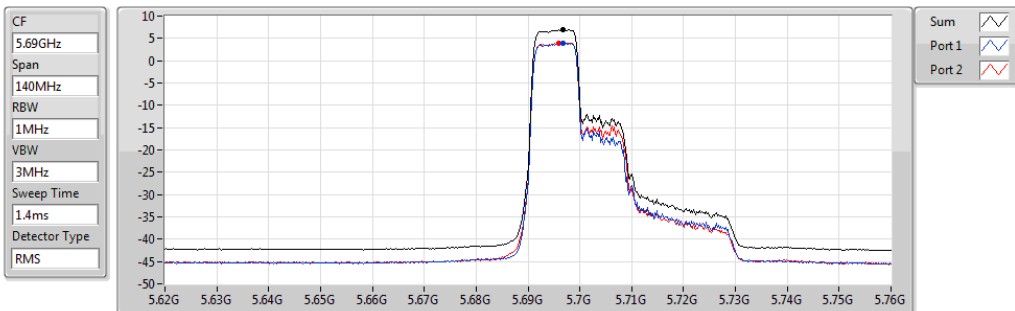


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.88	6.88	3.83	3.97

802.11ax HEW40_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

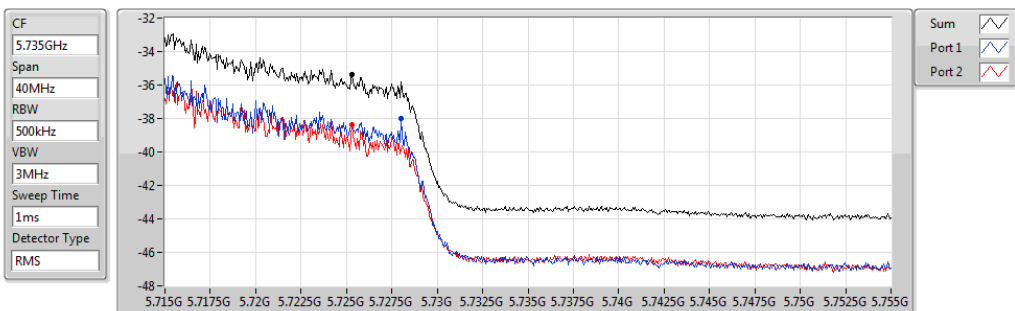


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-35.38	-35.38	-38.03	-38.35

802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

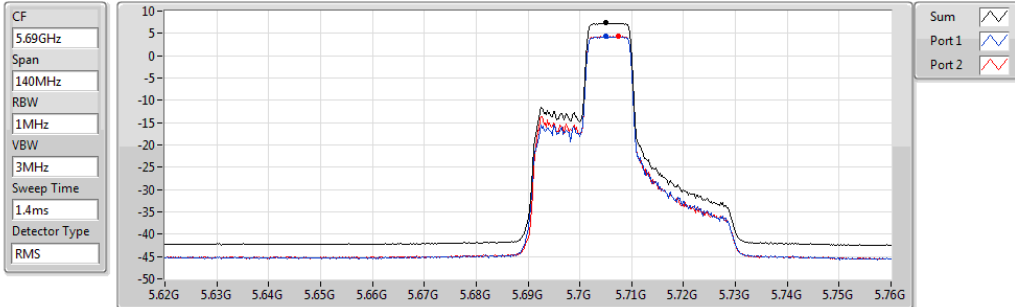


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.36	7.36	4.37	4.36

802.11ax HEW40_RU106_Index54_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

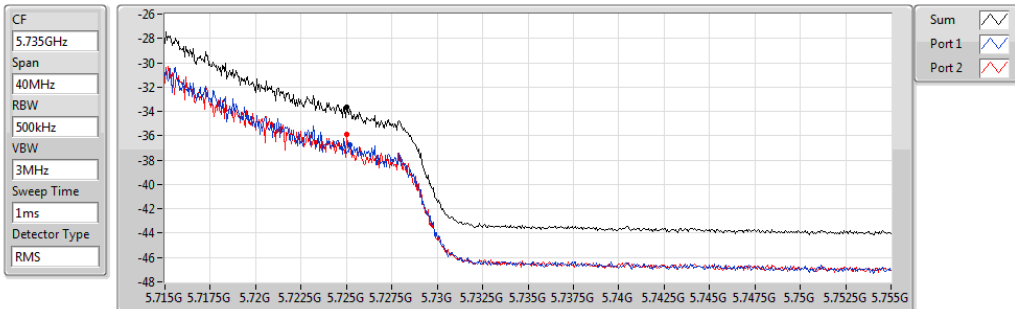


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-33.61	-33.61	-36.72	-35.92

802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

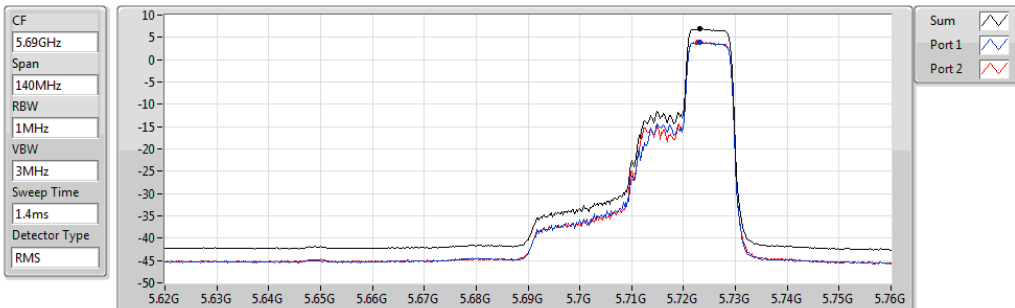


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.88	6.88	3.82	3.93

802.11ax HEW40_RU106_Index56_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

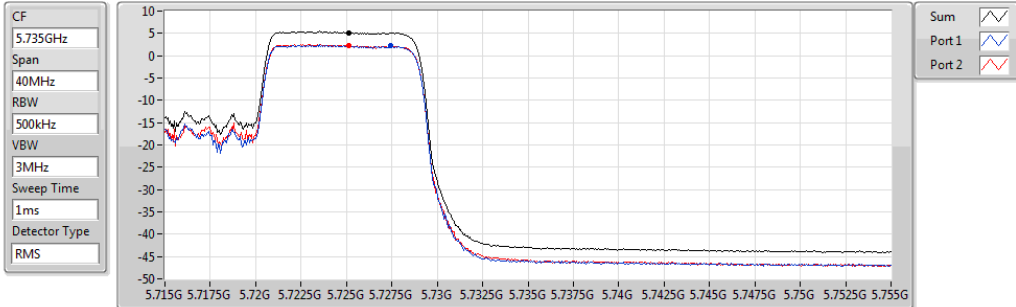


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.17	5.17	2.16	2.35

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

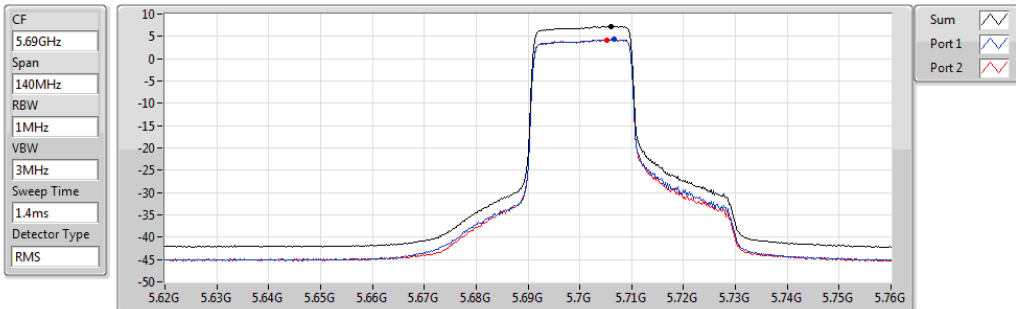


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.23	7.23	4.29	4.25

802.11ax HEW40_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

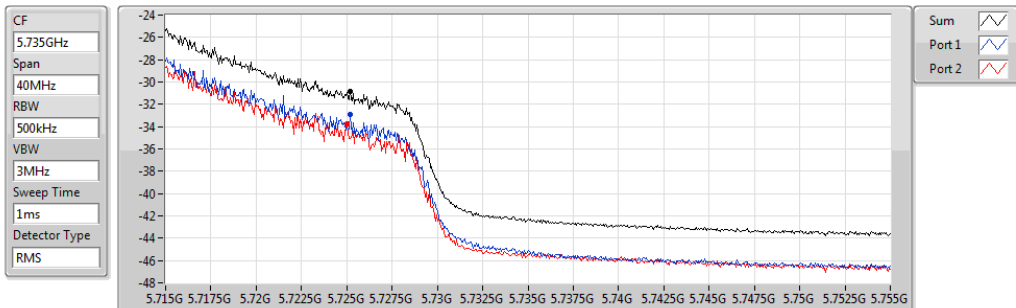


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-30.85	-30.85	-32.94	-33.77

802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

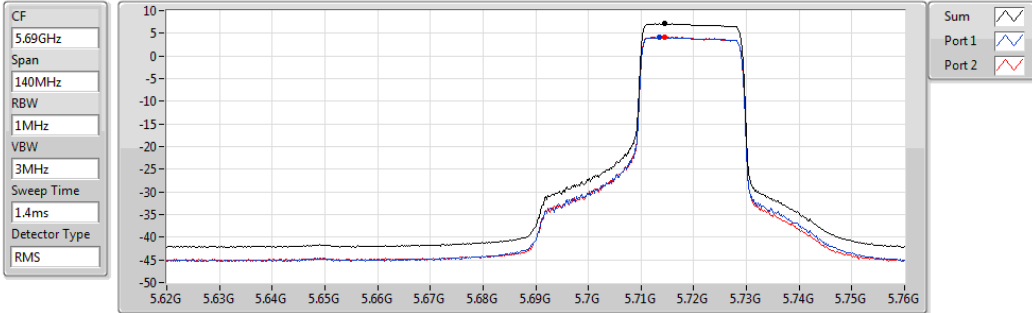


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.13	7.13	4.08	4.21

802.11ax HEW40_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

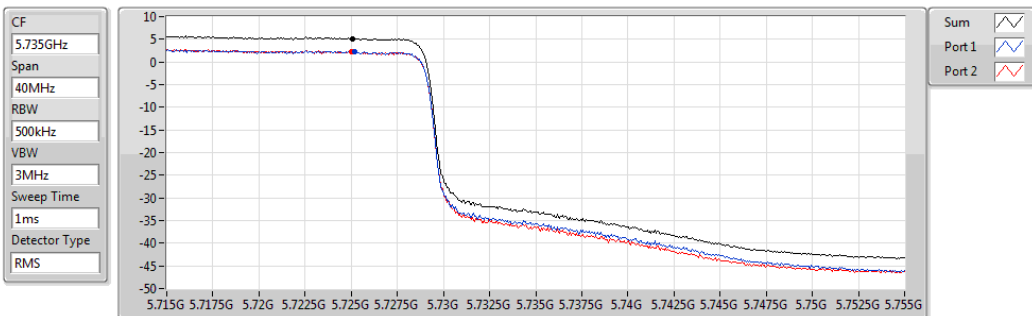


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.18	5.18	2.17	2.18

802.11ax HEW80_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

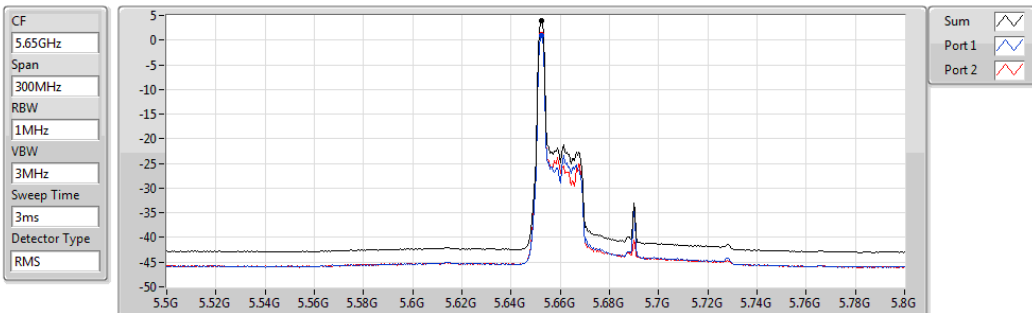


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.00	4.00	0.89	1.08

802.11ax HEW80_RU26_Index0_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

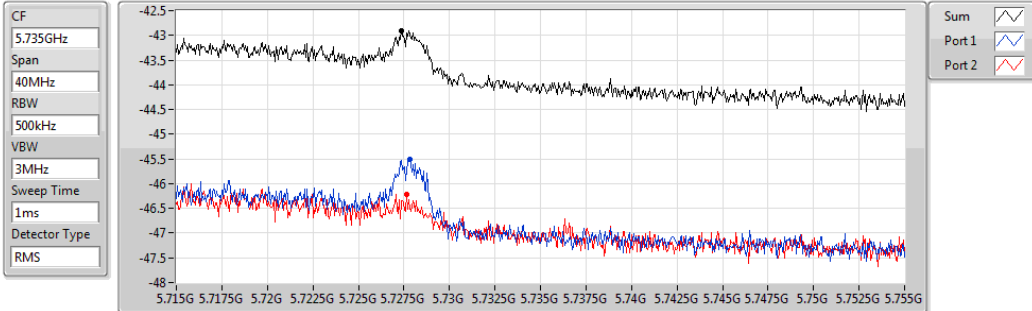


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-42.90	-42.90	-45.51	-46.21

802.11ax HEW80_RU26_Index21_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

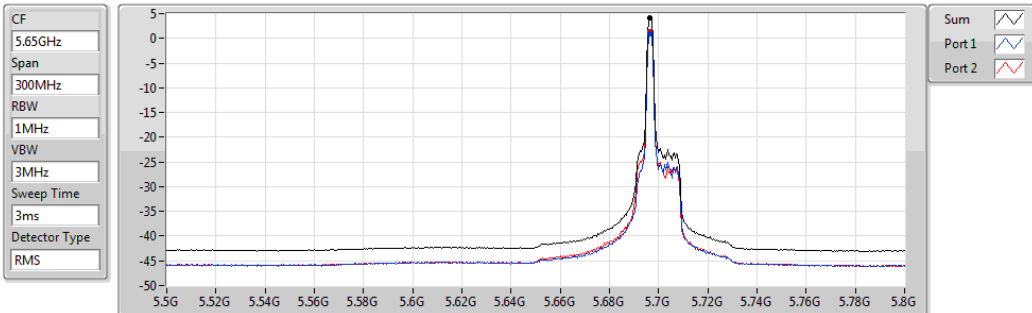


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.19	4.19	0.93	1.42

802.11ax HEW80_RU26_Index21_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

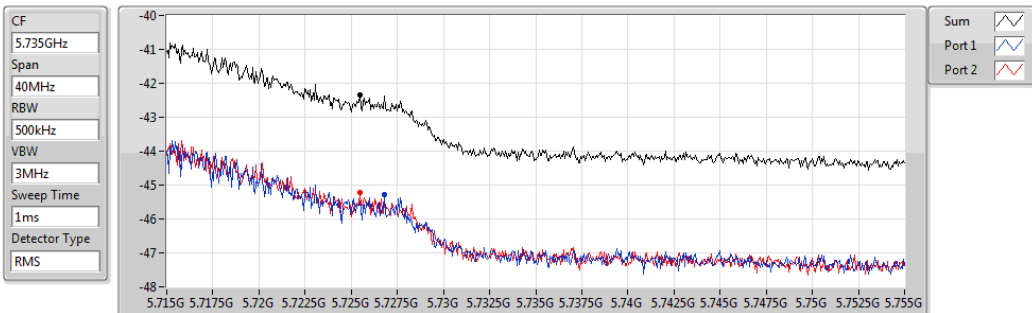


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-42.33	-42.33	-45.29	-45.21

802.11ax HEW80_RU26_Index36_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

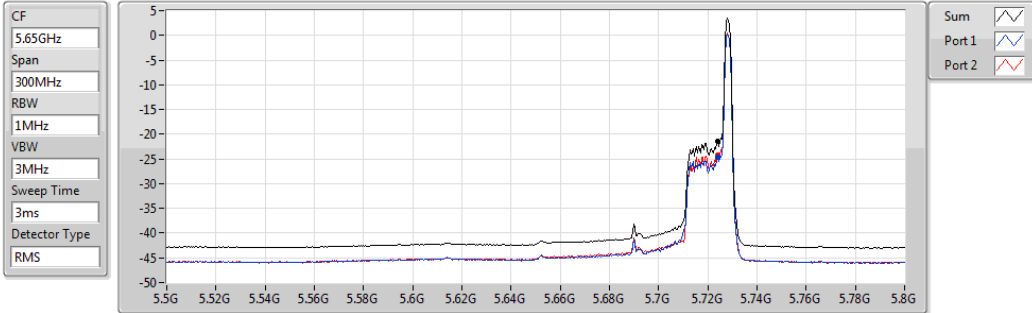


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-21.45	-21.45	-24.64	-24.28

802.11ax HEW80_RU26_Index36_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

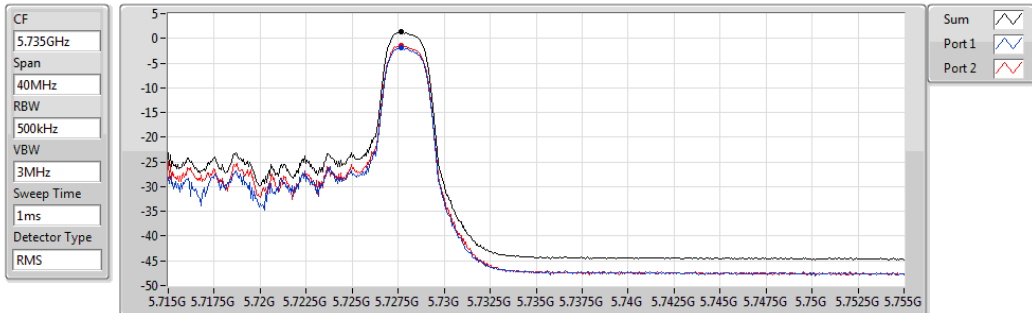


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.33	1.33	-1.96	-1.41

802.11ax HEW80_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

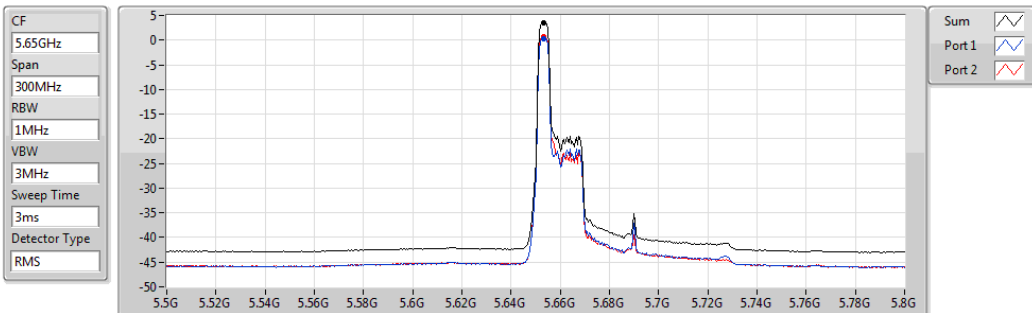


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.58	3.58	0.37	0.77

802.11ax HEW80_RU52_Index37_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

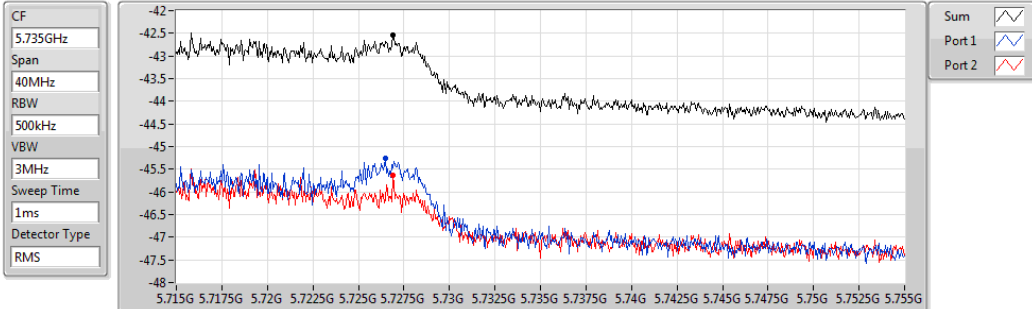


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-42.54	-42.54	-45.25	-45.63

802.11ax HEW80_RU52_Index50_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

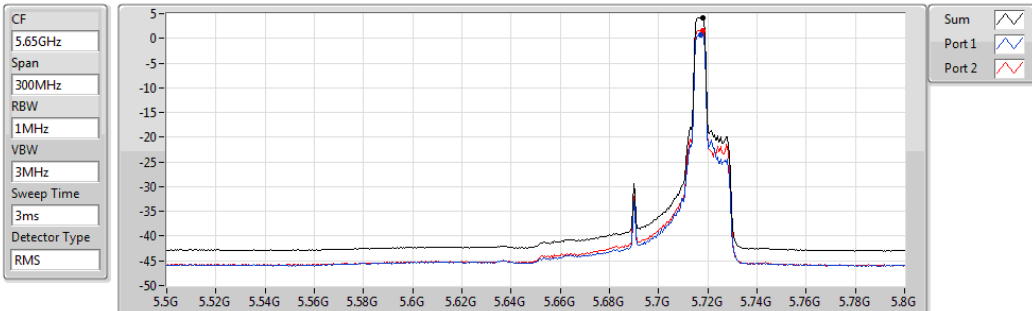


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.16	4.16	0.69	1.60

802.11ax HEW80_RU52_Index50_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

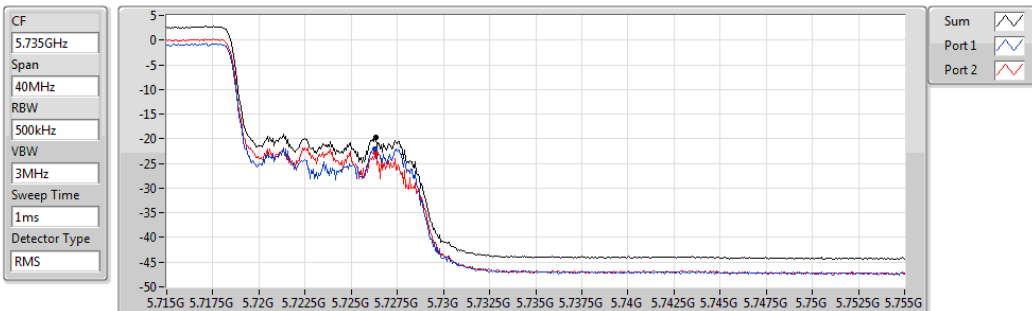


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-19.62	-19.62	-22.04	-22.91

802.11ax HEW80_RU52_Index52_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

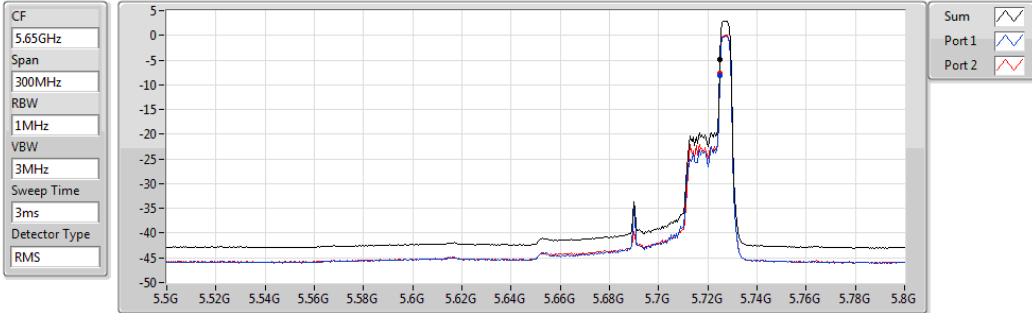


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.82	-4.82	-8.03	-7.64

802.11ax HEW80_RU52_Index52_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

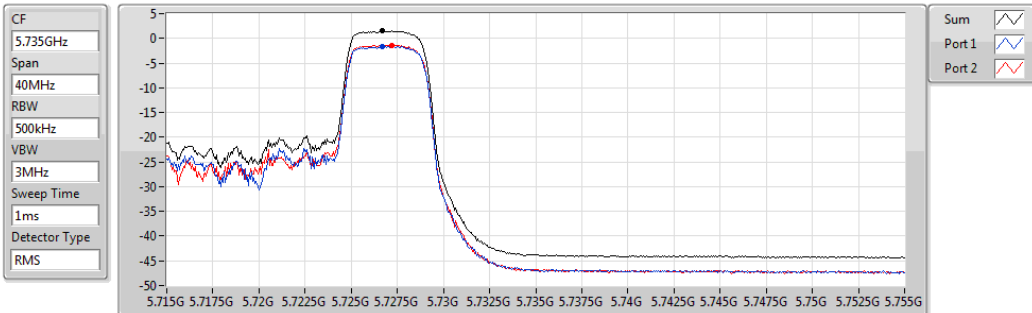


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.49	1.49	-1.62	-1.39

802.11ax HEW80_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

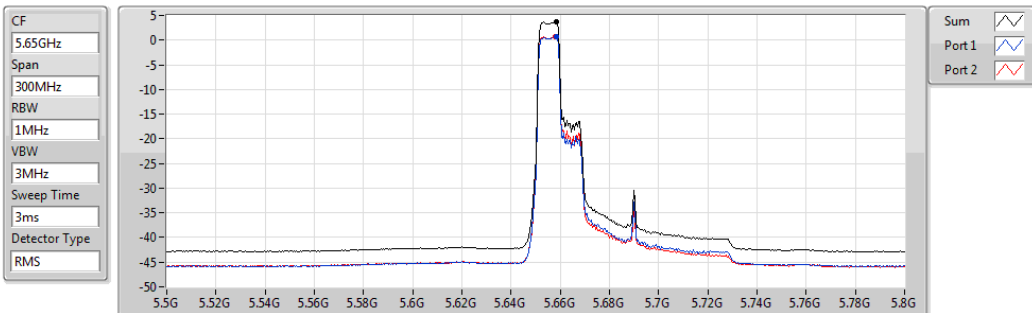


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.74	3.74	0.75	0.75

802.11ax HEW80_RU106_Index53_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

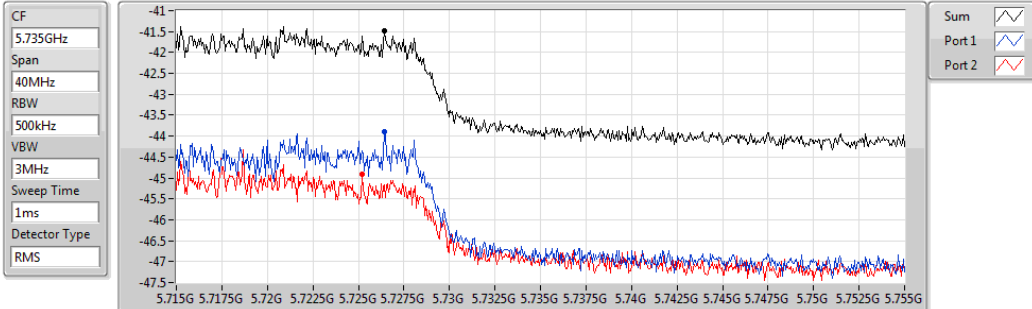


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-41.48	-41.48	-43.90	-44.92

802.11ax HEW80_RU106_Index58_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

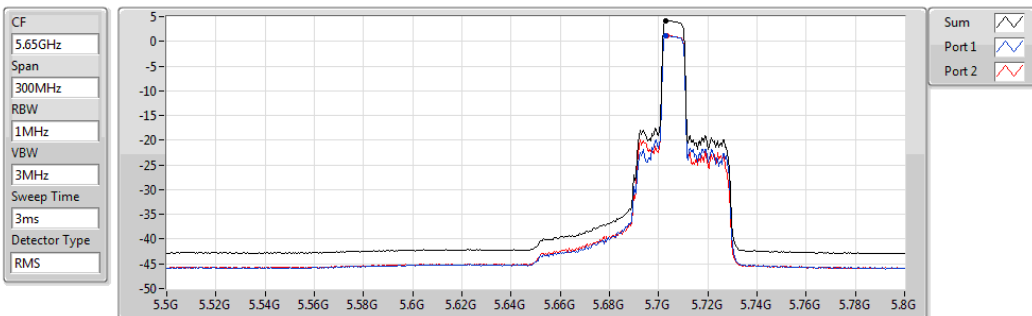


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.17	4.17	1.12	1.22

802.11ax HEW80_RU106_Index58_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

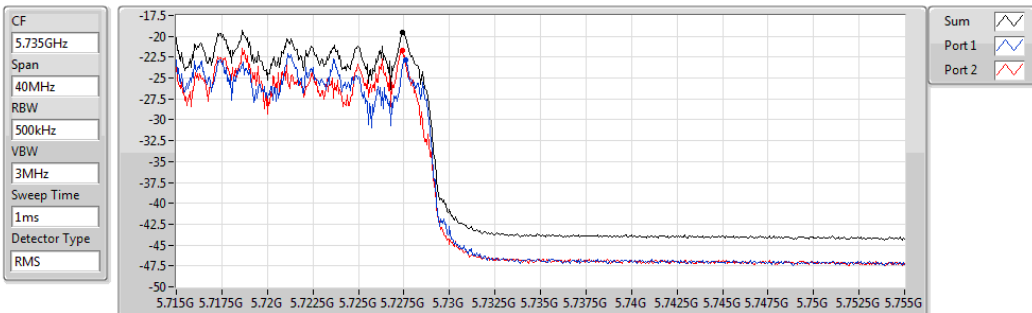


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-19.57	-19.57	-22.87	-21.69

802.11ax HEW80_RU106_Index60_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

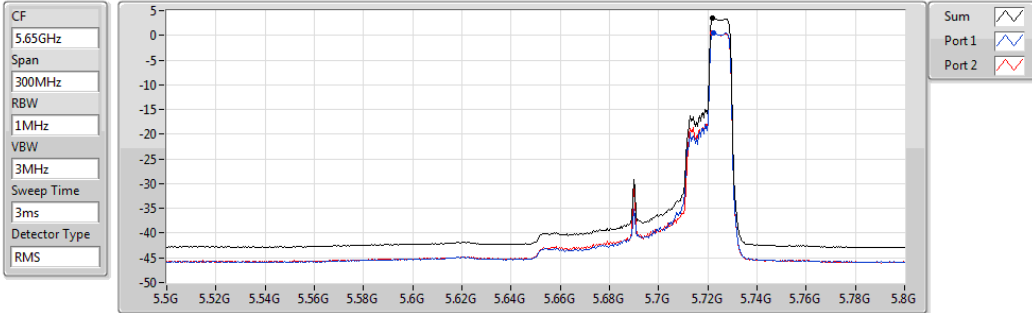


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.54	3.54	0.56	0.54

802.11ax HEW80_RU106_Index60_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

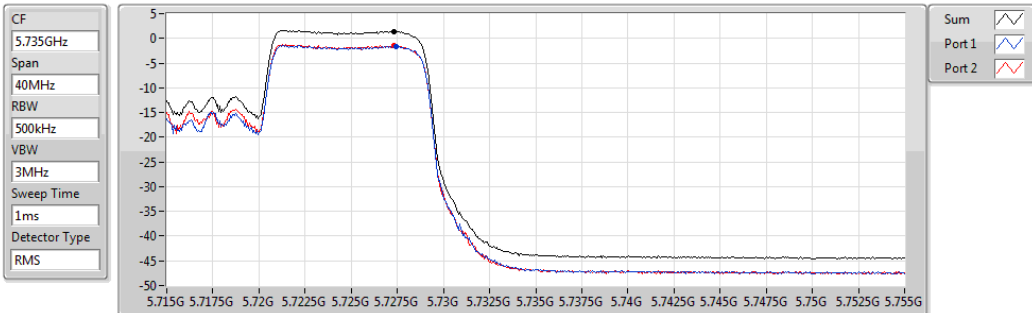


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.40	1.40	-1.62	-1.50

802.11ax HEW80_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

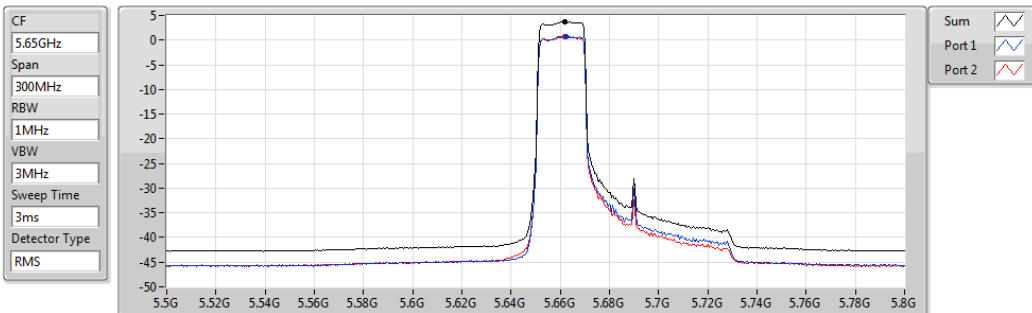


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.75	3.75	0.78	0.73

802.11ax HEW80_RU242_Index61_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

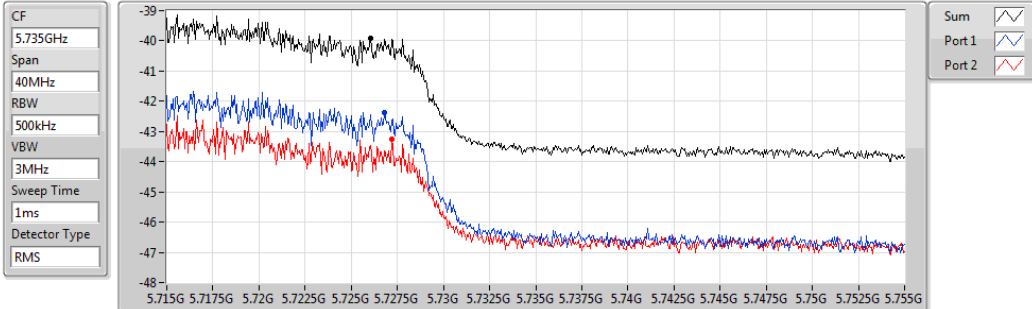


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-39.92	-39.92	-42.36	-43.25

802.11ax HEW80_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

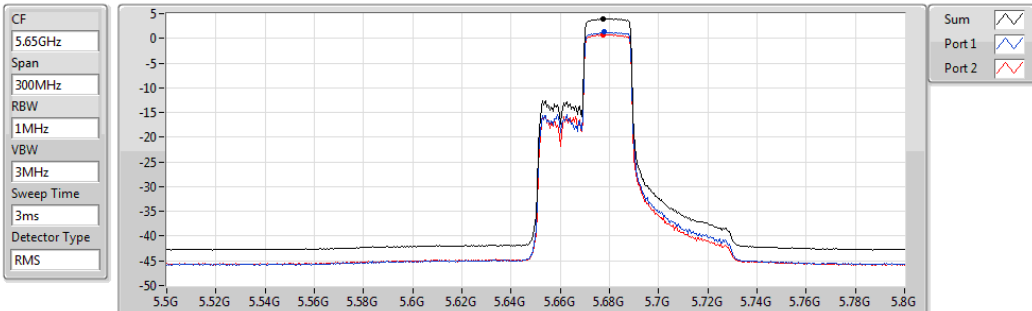


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.01	4.01	1.25	0.81

802.11ax HEW80_RU242_Index62_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

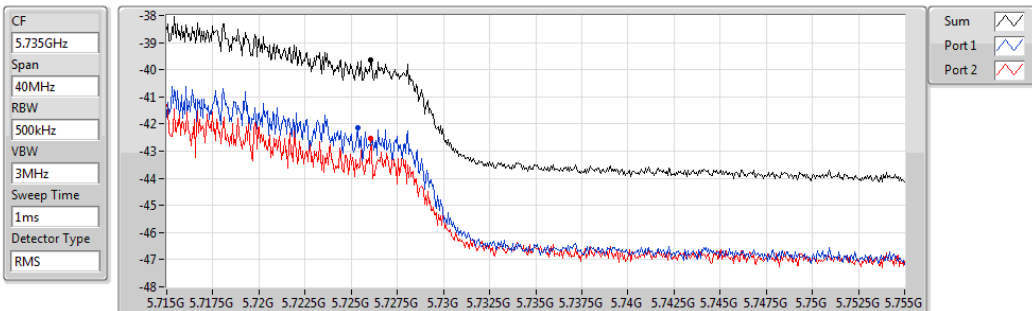


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-39.66	-39.66	-42.13	-42.55

802.11ax HEW80_RU242_Index64_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

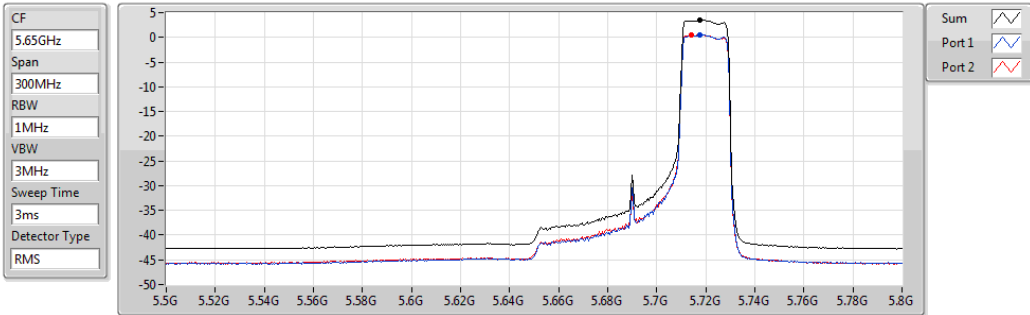


Sum	PD	Port 1	Port 2
(dBm/1MHz)	(dBm/1MHz)	(dBm/1MHz)	(dBm/1MHz)
3.47	3.47	0.46	0.45

802.11ax HEW80_RU242_Index64_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

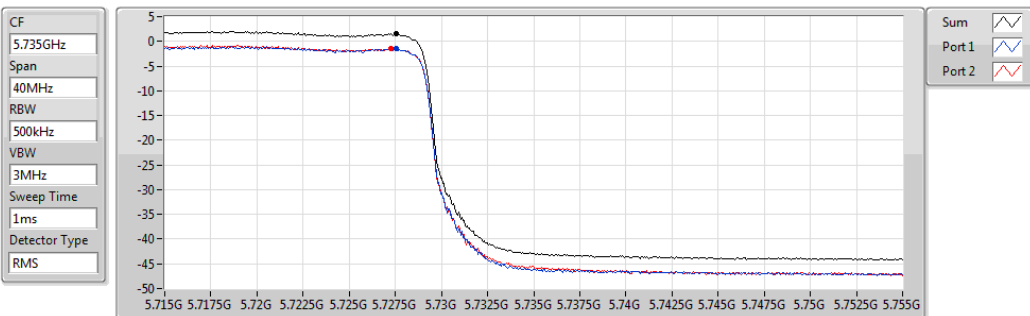


Sum	PD	Port 1	Port 2
(dBm/1MHz)	(dBm/1MHz)	(dBm/1MHz)	(dBm/1MHz)
1.53	1.53	-1.51	-1.44

802.11ax HEW80_RU484_Index65_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

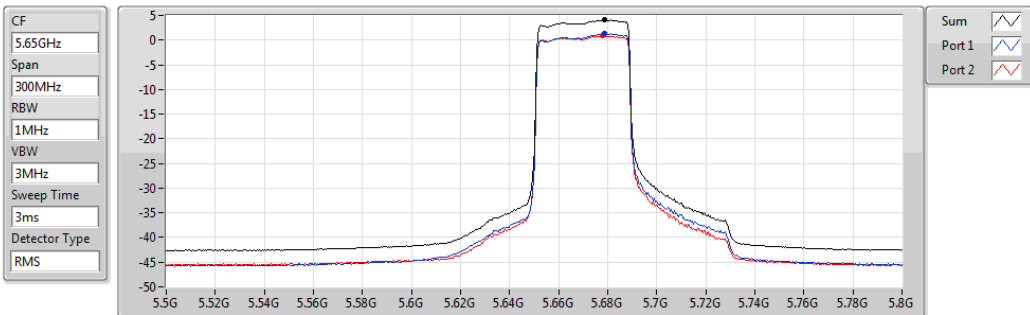


Sum	PD	Port 1	Port 2
(dBm/1MHz)	(dBm/1MHz)	(dBm/1MHz)	(dBm/1MHz)
4.09	4.09	1.29	0.87

802.11ax HEW80_RU484_Index65_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

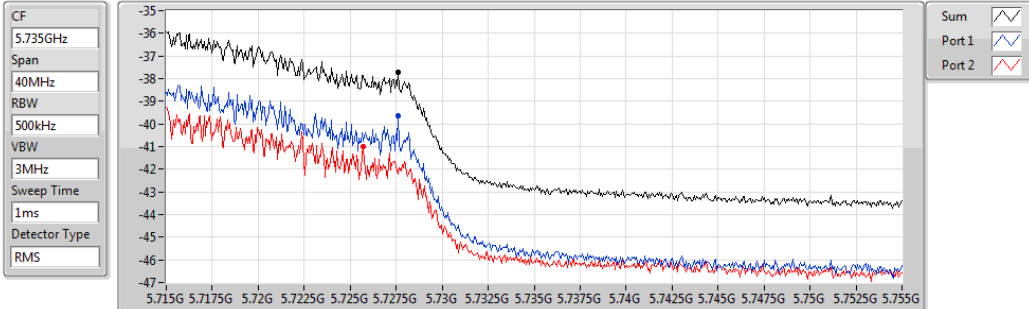


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-37.73	-37.73	-39.62	-41.02

802.11ax HEW80_RU484_Index66_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

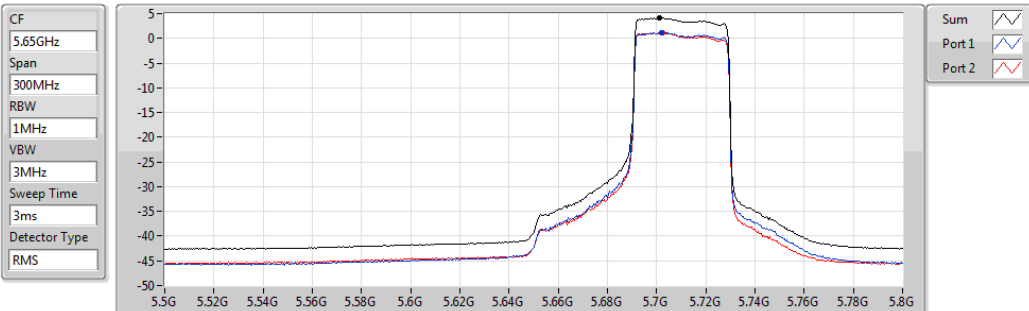


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.14	4.14	1.23	1.10

802.11ax HEW80_RU484_Index66_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

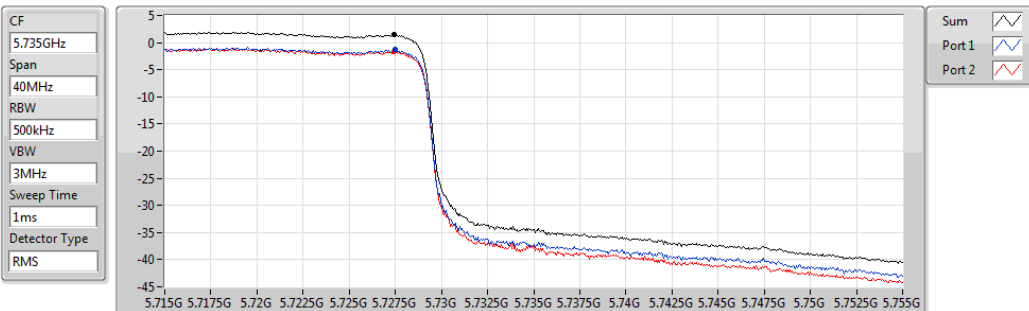

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.48	1.48	-1.33	-1.63

3.5 Transmitter Radiated and Band Edge Emissions

3.5.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup


Radiated Emissions below 1 GHz

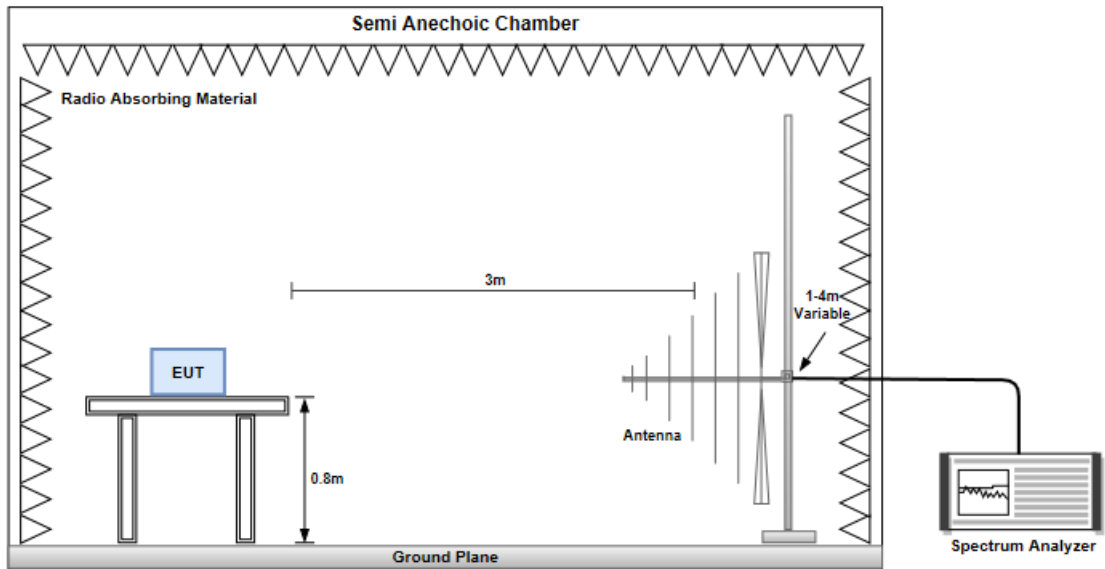

Radiated Emissions above 1 GHz

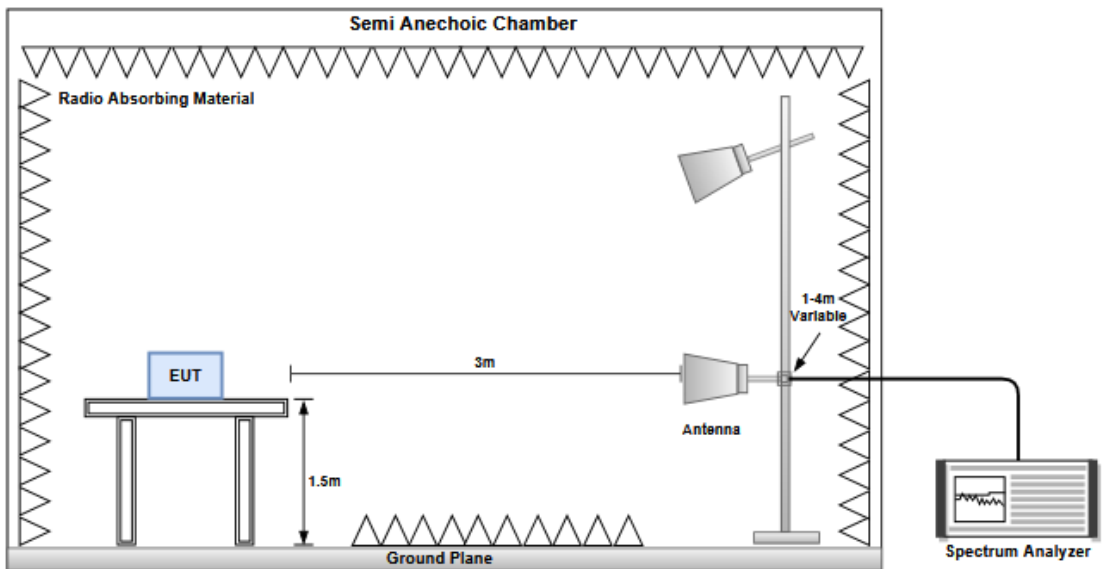


3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

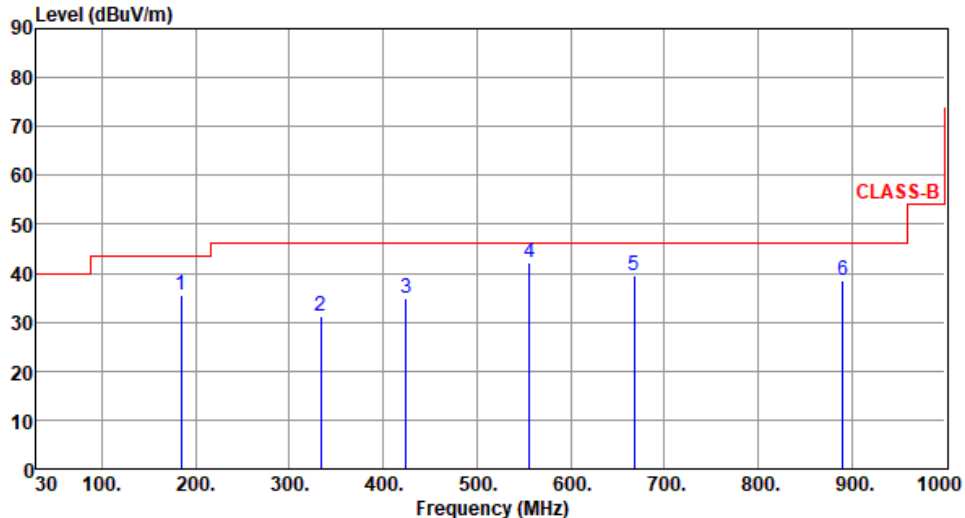Modulation	ax HE40	Test Freq. (MHz)	5590																																																																																																																										
Polarization	Horizontal	Test Configuration	1																																																																																																																										
Test By : Akun Chung Temperature(°C):22 Humidity(%):65																																																																																																																													
																																																																																																																													
	<table border="1"> <thead> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> </tr> </thead> <tbody> <tr> <td>184.23</td> <td>333.61</td> <td>424.79</td> <td>555.74</td> <td>668.26</td> <td>890.39</td> </tr> <tr> <td>35.63</td> <td>31.17</td> <td>34.78</td> <td>42.04</td> <td>39.42</td> <td>38.57</td> </tr> <tr> <td>43.50</td> <td>46.00</td> <td>46.00</td> <td>46.00</td> <td>46.00</td> <td>46.00</td> </tr> <tr> <td>-7.87</td> <td>-14.83</td> <td>-11.22</td> <td>-3.96</td> <td>-6.58</td> <td>-7.43</td> </tr> <tr> <td>46.42</td> <td>38.28</td> <td>39.81</td> <td>44.25</td> <td>39.58</td> <td>34.95</td> </tr> <tr> <td>-10.79</td> <td>-7.11</td> <td>-5.03</td> <td>-2.21</td> <td>-0.16</td> <td>3.62</td> </tr> <tr> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> </tr> <tr> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> </tr> <tr> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	1	2	3	4	5	6	184.23	333.61	424.79	555.74	668.26	890.39	35.63	31.17	34.78	42.04	39.42	38.57	43.50	46.00	46.00	46.00	46.00	46.00	-7.87	-14.83	-11.22	-3.96	-6.58	-7.43	46.42	38.28	39.81	44.25	39.58	34.95	-10.79	-7.11	-5.03	-2.21	-0.16	3.62	Peak	Peak	Peak	Peak	Peak	Peak	---	---	---	---	---	---	---	---	---	---	---	---	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>184.23</td> <td>35.63</td> <td>43.50</td> <td>-7.87</td> <td>46.42</td> <td>-10.79</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>333.61</td> <td>31.17</td> <td>46.00</td> <td>-14.83</td> <td>38.28</td> <td>-7.11</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>424.79</td> <td>34.78</td> <td>46.00</td> <td>-11.22</td> <td>39.81</td> <td>-5.03</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>555.74</td> <td>42.04</td> <td>46.00</td> <td>-3.96</td> <td>44.25</td> <td>-2.21</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>668.26</td> <td>39.42</td> <td>46.00</td> <td>-6.58</td> <td>39.58</td> <td>-0.16</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>890.39</td> <td>38.57</td> <td>46.00</td> <td>-7.43</td> <td>34.95</td> <td>3.62</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	184.23	35.63	43.50	-7.87	46.42	-10.79	Peak	---	---	333.61	31.17	46.00	-14.83	38.28	-7.11	Peak	---	---	424.79	34.78	46.00	-11.22	39.81	-5.03	Peak	---	---	555.74	42.04	46.00	-3.96	44.25	-2.21	Peak	---	---	668.26	39.42	46.00	-6.58	39.58	-0.16	Peak	---	---	890.39	38.57	46.00	-7.43	34.95	3.62	Peak	---	---
1	2	3	4	5	6																																																																																																																								
184.23	333.61	424.79	555.74	668.26	890.39																																																																																																																								
35.63	31.17	34.78	42.04	39.42	38.57																																																																																																																								
43.50	46.00	46.00	46.00	46.00	46.00																																																																																																																								
-7.87	-14.83	-11.22	-3.96	-6.58	-7.43																																																																																																																								
46.42	38.28	39.81	44.25	39.58	34.95																																																																																																																								
-10.79	-7.11	-5.03	-2.21	-0.16	3.62																																																																																																																								
Peak	Peak	Peak	Peak	Peak	Peak																																																																																																																								
---	---	---	---	---	---																																																																																																																								
---	---	---	---	---	---																																																																																																																								
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																					
184.23	35.63	43.50	-7.87	46.42	-10.79	Peak	---	---																																																																																																																					
333.61	31.17	46.00	-14.83	38.28	-7.11	Peak	---	---																																																																																																																					
424.79	34.78	46.00	-11.22	39.81	-5.03	Peak	---	---																																																																																																																					
555.74	42.04	46.00	-3.96	44.25	-2.21	Peak	---	---																																																																																																																					
668.26	39.42	46.00	-6.58	39.58	-0.16	Peak	---	---																																																																																																																					
890.39	38.57	46.00	-7.43	34.95	3.62	Peak	---	---																																																																																																																					
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																																													

Modulation	ax HE40	Test Freq. (MHz)	5590
Polarization	Vertical	Test Configuration	1

Test By :Akun Chung Temperature(°C):22 Humidity(%):65

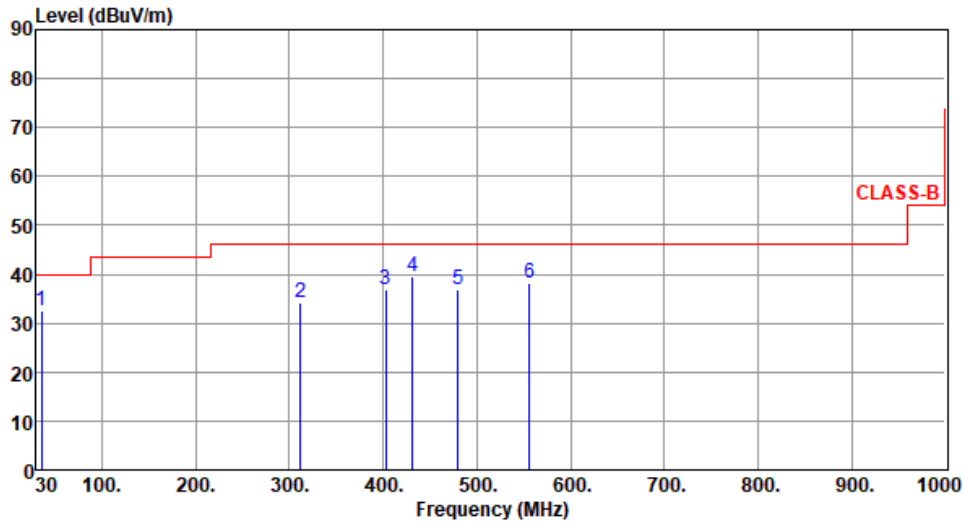

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	35.82	32.70	40.00	-7.30	41.92	-9.22	Peak	---	---
2	312.27	34.25	46.00	-11.75	41.91	-7.66	Peak	---	---
3	402.48	36.84	46.00	-9.16	42.58	-5.74	Peak	---	---
4	431.58	39.48	46.00	-6.52	44.24	-4.76	Peak	---	---
5	480.08	37.00	46.00	-9.00	40.65	-3.65	Peak	---	---
6	555.74	38.12	46.00	-7.88	40.33	-2.21	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	ax HE20	Test Freq. (MHz)	5745
Polarization	Horizontal	Test Configuration	1

Test By :Akun Chung Temperature(°C):22 Humidity(%):65

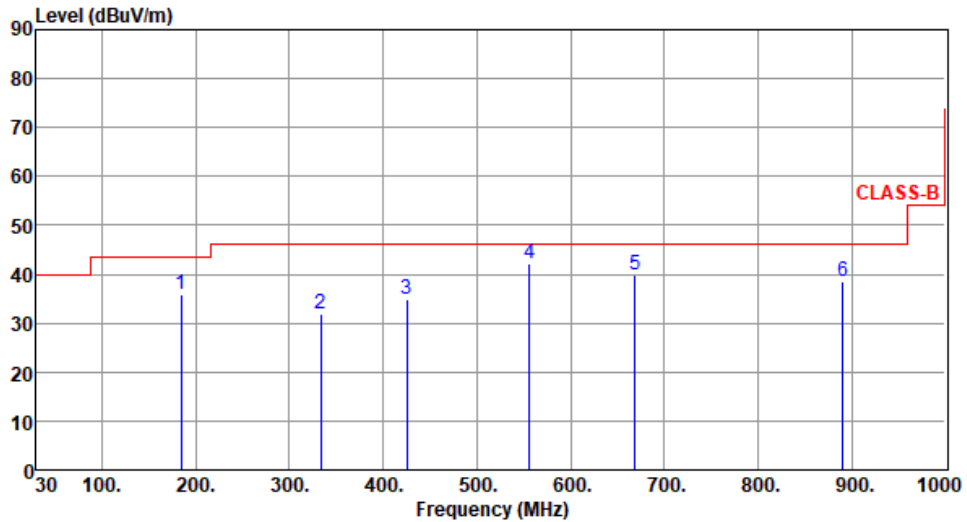

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	184.33	35.85	43.50	-7.65	46.65	-10.80	Peak	---	---
2	333.85	31.98	46.00	-14.02	39.08	-7.10	Peak	---	---
3	424.95	34.95	46.00	-11.05	39.97	-5.02	Peak	---	---
4	555.98	42.33	46.00	-3.67	44.53	-2.20	Peak	---	---
5	668.52	39.71	46.00	-6.29	39.87	-0.16	Peak	---	---
6	890.54	38.69	46.00	-7.31	35.06	3.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	ax HE20	Test Freq. (MHz)	5745
Polarization	Vertical	Test Configuration	1

Test By :Akun Chung Temperature(°C):22 Humidity(%):65

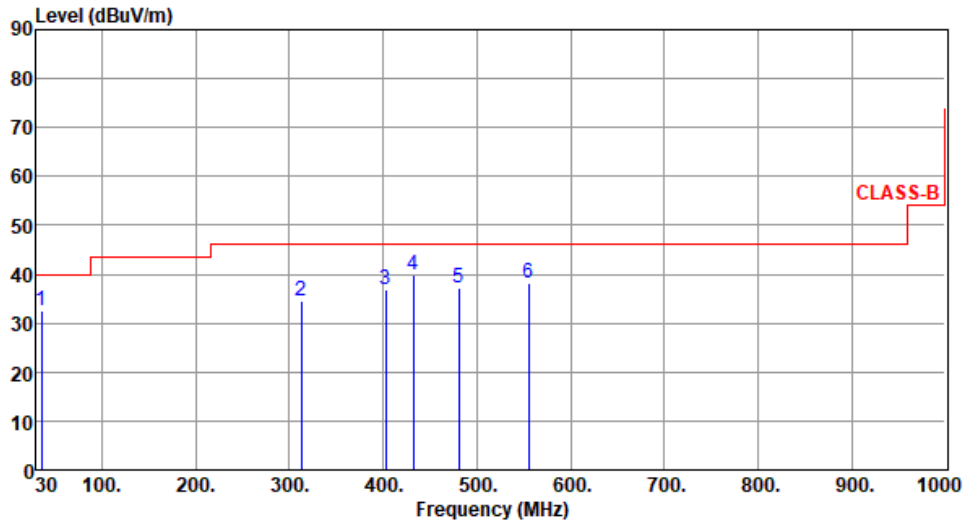

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	35.77	32.54	40.00	-7.46	41.75	-9.21	Peak	---	---
2	313.15	34.39	46.00	-11.61	42.01	-7.62	Peak	---	---
3	402.85	36.95	46.00	-9.05	42.68	-5.73	Peak	---	---
4	431.85	39.83	46.00	-6.17	44.58	-4.75	Peak	---	---
5	481.20	37.33	46.00	-8.67	40.98	-3.65	Peak	---	---
6	555.62	38.32	46.00	-7.68	40.53	-2.21	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	ax HE40	Test Freq. (MHz)	5590
Polarization	Horizontal	Test Configuration	2

Test By : Akun Chung Temperature(°C): 22 Humidity(%): 65

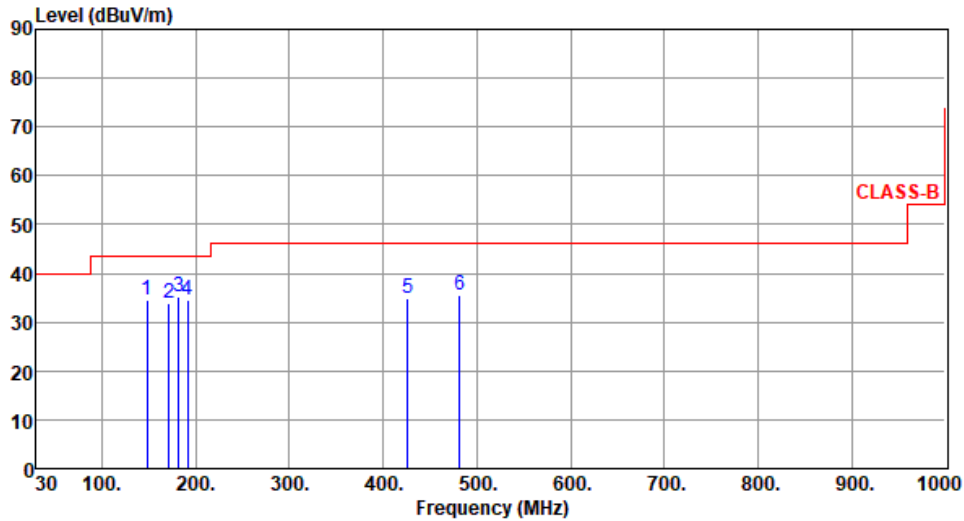

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	147.85	34.54	43.50	-8.96	43.39	-8.85	Peak	---	---
2	171.54	33.95	43.50	-9.55	43.30	-9.35	Peak	---	---
3	182.11	35.22	43.50	-8.28	45.80	-10.58	Peak	---	---
4	191.82	34.68	43.50	-8.82	46.31	-11.63	Peak	---	---
5	425.87	34.87	46.00	-11.13	39.86	-4.99	Peak	---	---
6	481.57	35.59	46.00	-10.41	39.24	-3.65	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	ax HE40	Test Freq. (MHz)	5590
Polarization	Vertical	Test Configuration	2

Test By :Akun Chung Temperature(°C):22 Humidity(%):65

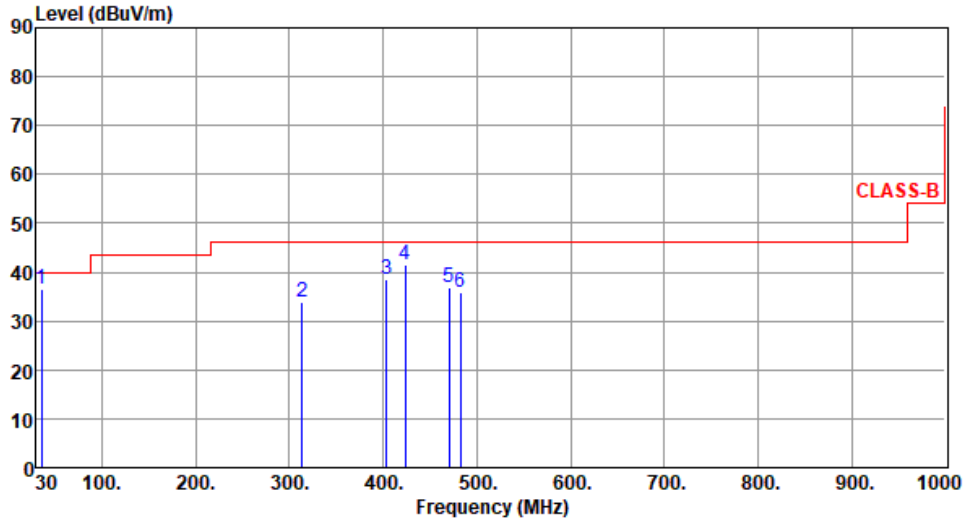

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	35.71	36.44	40.00	-3.56	45.64	-9.20	Peak	---	---
2	313.55	33.91	46.00	-12.09	41.51	-7.60	Peak	---	---
3	403.66	38.67	46.00	-7.33	44.39	-5.72	Peak	---	---
4	423.58	41.36	46.00	-4.64	46.44	-5.08	Peak	---	---
5	470.55	36.97	46.00	-9.03	40.83	-3.86	Peak	---	---
6	482.77	35.88	46.00	-10.12	39.53	-3.65	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	ax HE20	Test Freq. (MHz)	5745
Polarization	Horizontal	Test Configuration	2

Test By :Akun Chung Temperature(°C):22 Humidity(%):65

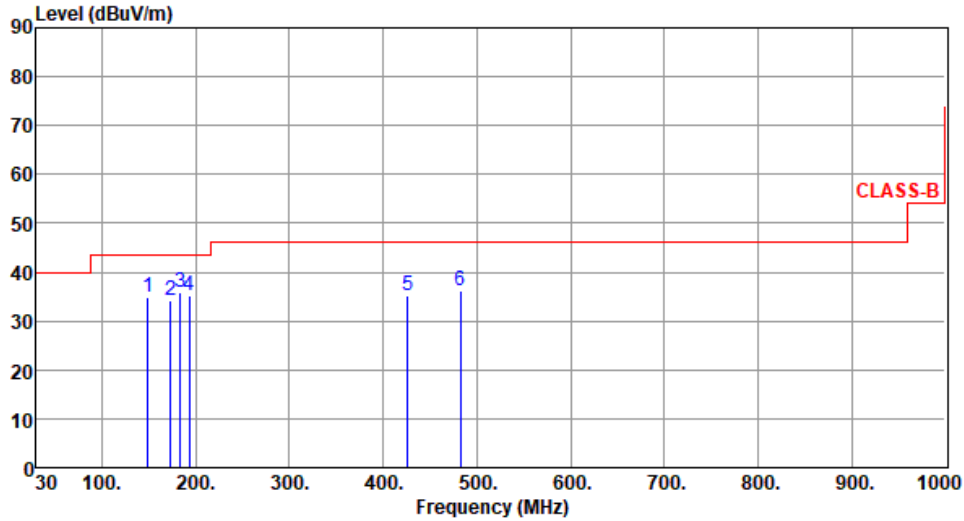

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	149.05	35.03	43.50	-8.47	44.08	-9.05	Peak	---	---
2	173.11	34.08	43.50	-9.42	43.60	-9.52	Peak	---	---
3	183.32	35.87	43.50	-7.63	46.57	-10.70	Peak	---	---
4	193.05	35.17	43.50	-8.33	46.82	-11.65	Peak	---	---
5	426.44	35.22	46.00	-10.78	40.18	-4.96	Peak	---	---
6	482.74	36.06	46.00	-9.94	39.71	-3.65	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	ax HE20	Test Freq. (MHz)	5745
Polarization	Vertical	Test Configuration	2

Test By :Akun Chung Temperature(°C):22 Humidity(%):65

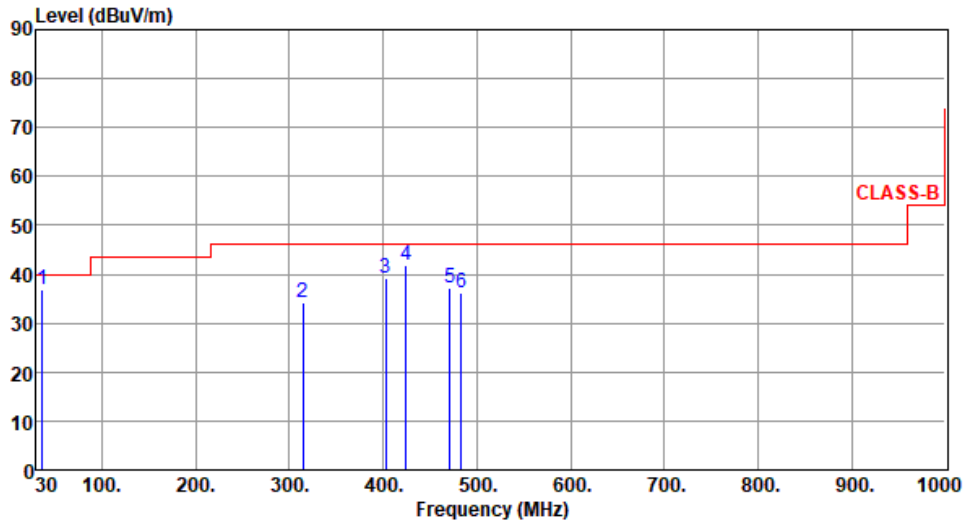

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	36.05	36.75	40.00	-3.25	45.99	-9.24	Peak	---	---
2	314.58	34.22	46.00	-11.78	41.78	-7.56	Peak	---	---
3	402.85	39.18	46.00	-6.82	44.91	-5.73	Peak	---	---
4	424.55	41.82	46.00	-4.18	46.86	-5.04	Peak	---	---
5	471.66	37.23	46.00	-8.77	41.07	-3.84	Peak	---	---
6	483.54	36.23	46.00	-9.77	39.88	-3.65	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

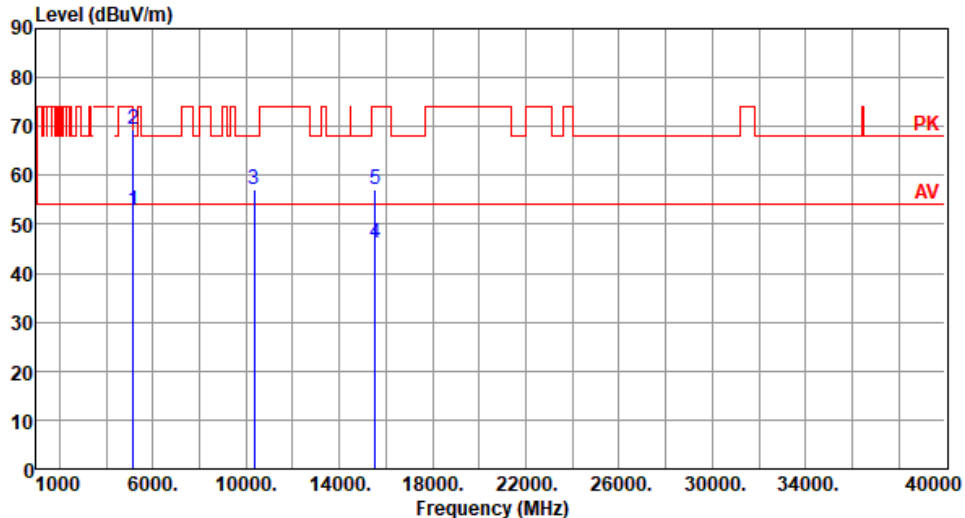Modulation	11a	Test Freq. (MHz)	5180																																																							
Polarization	Horizontal																																																									
Test By : Akun Chung Temperature(°C):24 Humidity(%):67																																																										
																																																										
	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>52.73</td> <td>54.00</td> <td>-1.27</td> <td>48.35</td> <td>4.38</td> <td>Average</td> <td>100 20</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>69.26</td> <td>74.00</td> <td>-4.74</td> <td>64.88</td> <td>4.38</td> <td>Peak</td> <td>100 20</td> </tr> <tr> <td>3</td> <td>10360.00</td> <td>57.07</td> <td>68.20</td> <td>-11.13</td> <td>42.65</td> <td>14.42</td> <td>Peak</td> <td>100 107</td> </tr> <tr> <td>4</td> <td>15540.00</td> <td>46.31</td> <td>54.00</td> <td>-7.69</td> <td>31.66</td> <td>14.65</td> <td>Average</td> <td>100 102</td> </tr> <tr> <td>5</td> <td>15540.00</td> <td>57.23</td> <td>74.00</td> <td>-16.77</td> <td>42.58</td> <td>14.65</td> <td>Peak</td> <td>100 102</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	52.73	54.00	-1.27	48.35	4.38	Average	100 20	2	5150.00	69.26	74.00	-4.74	64.88	4.38	Peak	100 20	3	10360.00	57.07	68.20	-11.13	42.65	14.42	Peak	100 107	4	15540.00	46.31	54.00	-7.69	31.66	14.65	Average	100 102	5	15540.00	57.23	74.00	-16.77	42.58	14.65	Peak	100 102			
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	5150.00	52.73	54.00	-1.27	48.35	4.38	Average	100 20																																																		
2	5150.00	69.26	74.00	-4.74	64.88	4.38	Peak	100 20																																																		
3	10360.00	57.07	68.20	-11.13	42.65	14.42	Peak	100 107																																																		
4	15540.00	46.31	54.00	-7.69	31.66	14.65	Average	100 102																																																		
5	15540.00	57.23	74.00	-16.77	42.58	14.65	Peak	100 102																																																		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																										

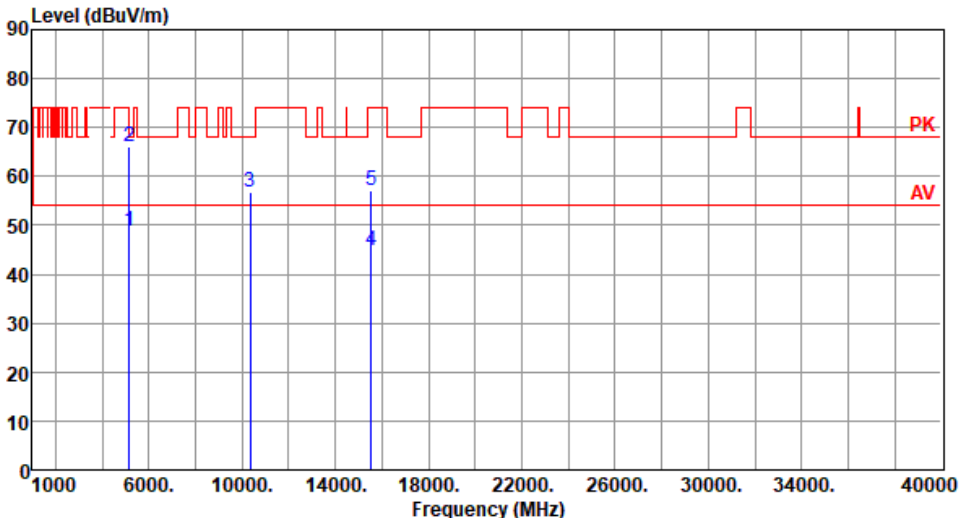Modulation	11a	Test Freq. (MHz)	5180						
Polarization	Vertical								
Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	48.93	54.00	-5.07	44.55	4.38	Average	353	291
2	5150.00	65.94	74.00	-8.06	61.56	4.38	Peak	353	291
3	10360.00	56.92	68.20	-11.28	42.50	14.42	Peak	100	256
4	15540.00	44.92	54.00	-9.08	30.27	14.65	Average	100	251
5	15540.00	57.16	74.00	-16.84	42.51	14.65	Peak	100	251
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

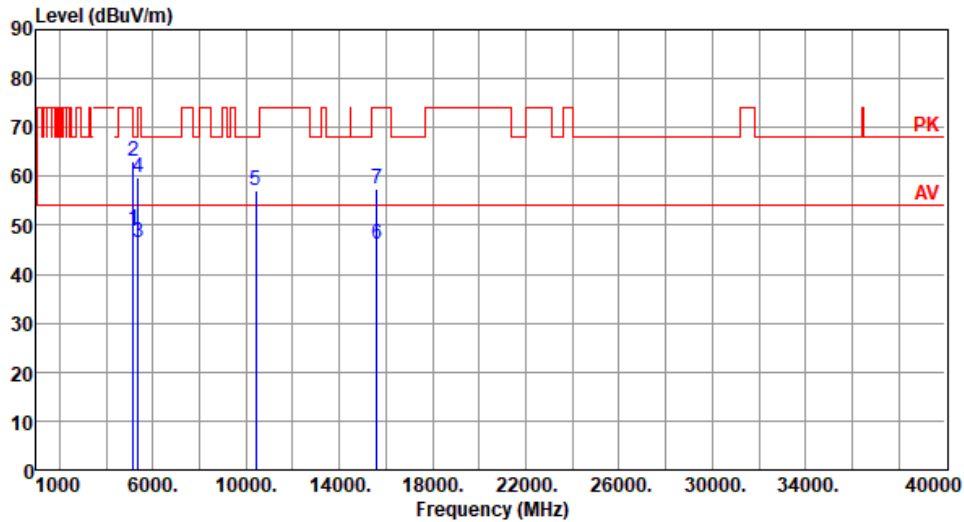

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	49.04	54.00	-4.96	44.66	4.38	Average	100	24
2	5150.00	63.23	74.00	-10.77	58.85	4.38	Peak	100	24
3	5350.00	46.63	54.00	-7.37	42.66	3.97	Average	100	24
4	5350.00	59.86	74.00	-14.14	55.89	3.97	Peak	100	24
5	10400.00	57.15	68.20	-11.05	42.66	14.49	Peak	100	108
6	15600.00	46.18	54.00	-7.82	31.66	14.52	Average	100	105
7	15600.00	57.30	74.00	-16.70	42.78	14.52	Peak	100	105


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

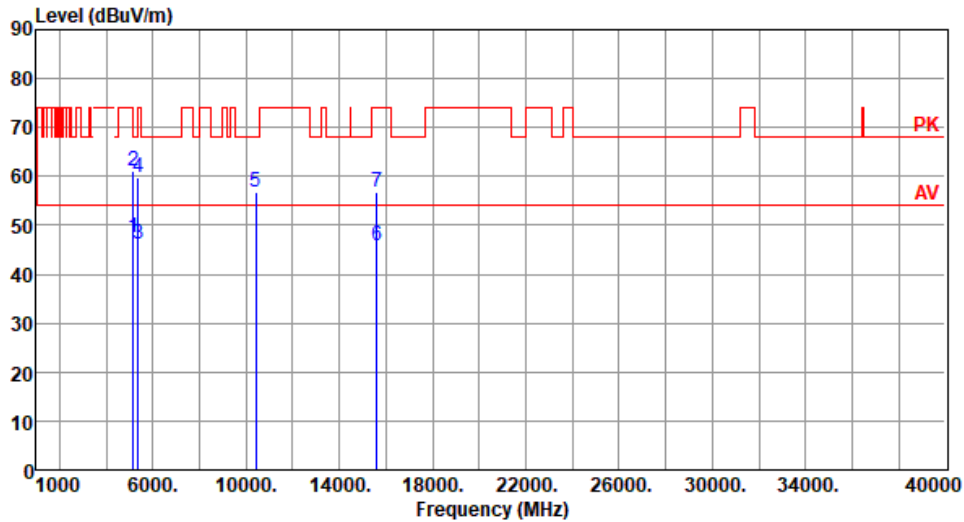

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	47.63	54.00	-6.37	43.25	4.38	Average	100	223
2	5150.00	61.23	74.00	-12.77	56.85	4.38	Peak	100	223
3	5350.00	46.18	54.00	-7.82	42.21	3.97	Average	100	223
4	5350.00	59.92	74.00	-14.08	55.95	3.97	Peak	100	223
5	10400.00	56.74	68.20	-11.46	42.25	14.49	Peak	100	250
6	15600.00	45.85	54.00	-8.15	31.33	14.52	Average	100	251
7	15600.00	56.86	74.00	-17.14	42.34	14.52	Peak	100	251


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

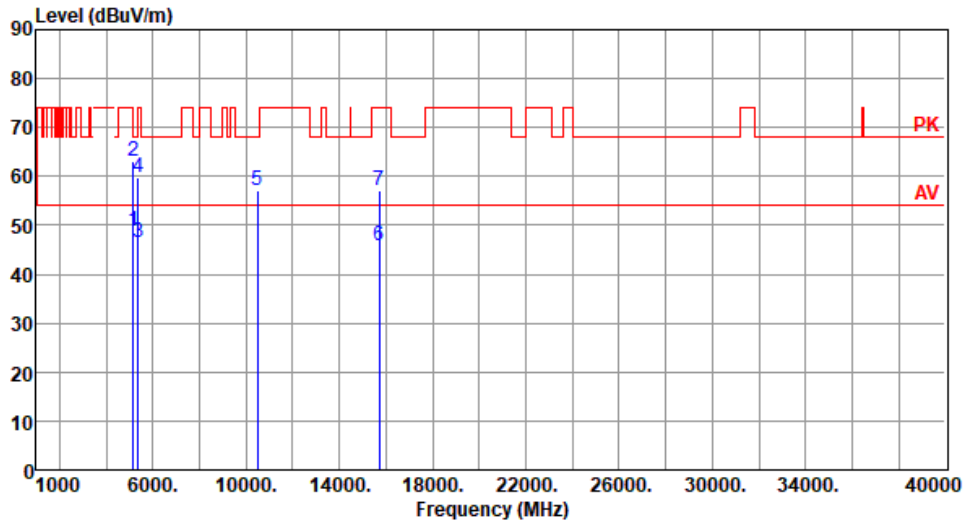

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	48.89	54.00	-5.11	44.51	4.38	Average	100	23
2	5150.00	63.15	74.00	-10.85	58.77	4.38	Peak	100	23
3	5350.00	46.55	54.00	-7.45	42.58	3.97	Average	100	23
4	5350.00	59.72	74.00	-14.28	55.75	3.97	Peak	100	23
5	10480.00	57.13	68.20	-11.07	42.58	14.55	Peak	100	107
6	15720.00	45.95	54.00	-8.05	31.59	14.36	Average	100	103
7	15720.00	57.03	74.00	-16.97	42.67	14.36	Peak	100	103


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

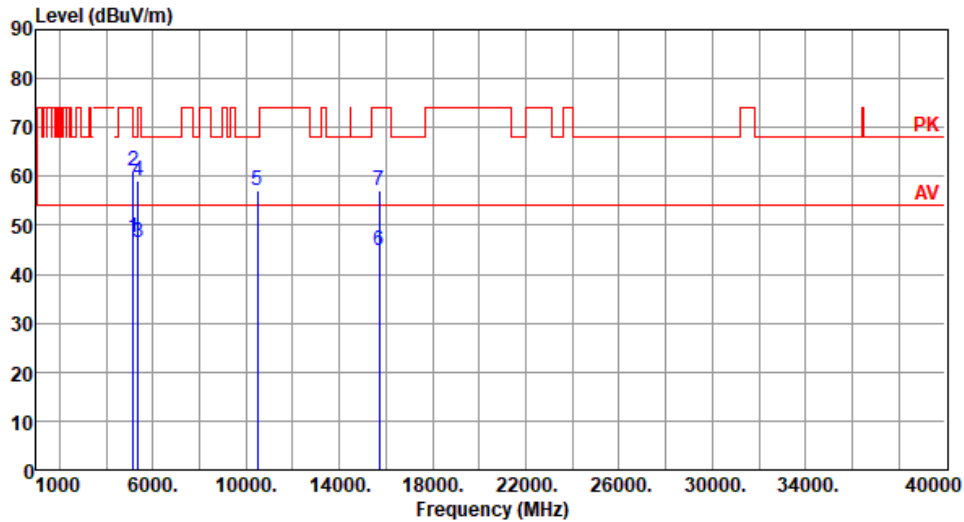

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	47.63	54.00	-6.37	43.25	4.38	Average	100	240
2	5150.00	61.25	74.00	-12.75	56.87	4.38	Peak	100	240
3	5350.00	46.39	54.00	-7.61	42.42	3.97	Average	100	240
4	5350.00	59.23	74.00	-14.77	55.26	3.97	Peak	100	240
5	10480.00	57.12	68.20	-11.08	42.57	14.55	Peak	100	243
6	15720.00	44.94	54.00	-9.06	30.58	14.36	Average	100	258
7	15720.00	56.97	74.00	-17.03	42.61	14.36	Peak	100	258


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

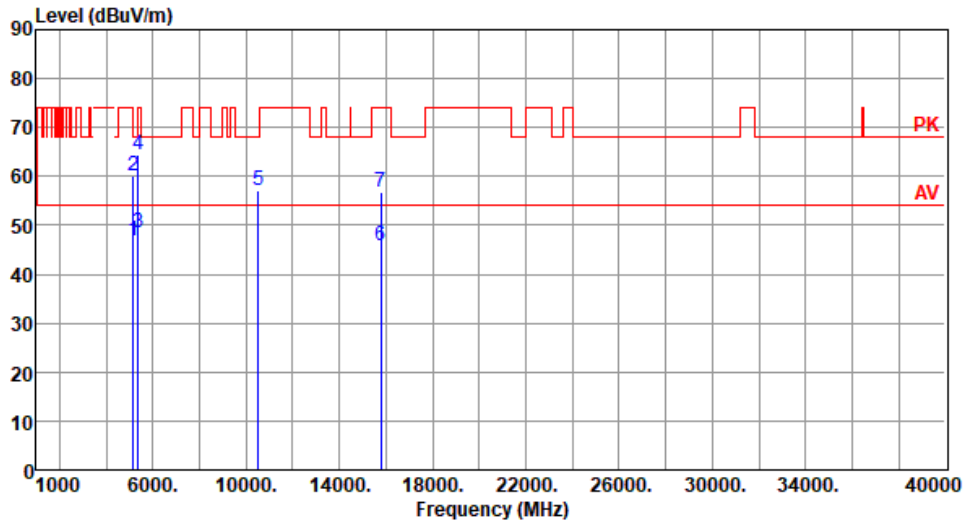

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	46.96	54.00	-7.04	42.58	4.38	Average	100	20
2	5150.00	60.07	74.00	-13.93	55.69	4.38	Peak	100	20
3	5350.00	48.60	54.00	-5.40	44.63	3.97	Average	100	20
4	5350.00	64.45	74.00	-9.55	60.48	3.97	Peak	100	20
5	10520.00	57.20	68.20	-11.00	42.63	14.57	Peak	100	109
6	15780.00	45.84	54.00	-8.16	31.65	14.19	Average	100	108
7	15780.00	56.87	74.00	-17.13	42.68	14.19	Peak	100	108


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Vertical		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

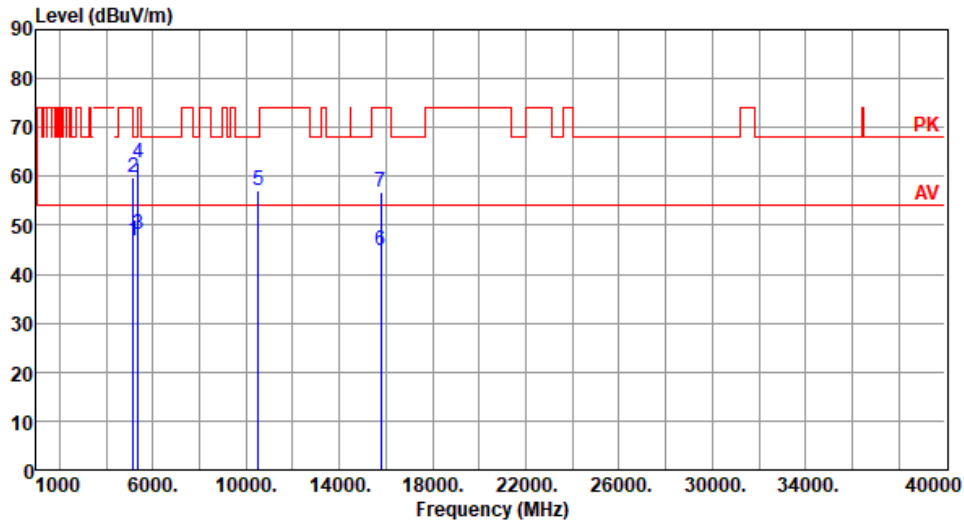

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	46.75	54.00	-7.25	42.37	4.38	Average	100	235
2	5150.00	59.92	74.00	-14.08	55.54	4.38	Peak	100	235
3	5350.00	48.22	54.00	-5.78	44.25	3.97	Average	100	235
4	5350.00	62.93	74.00	-11.07	58.96	3.97	Peak	100	235
5	10520.00	56.99	68.20	-11.21	42.42	14.57	Peak	100	253
6	15780.00	44.67	54.00	-9.33	30.48	14.19	Average	100	259
7	15780.00	56.66	74.00	-17.34	42.47	14.19	Peak	100	259


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Horizontal		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

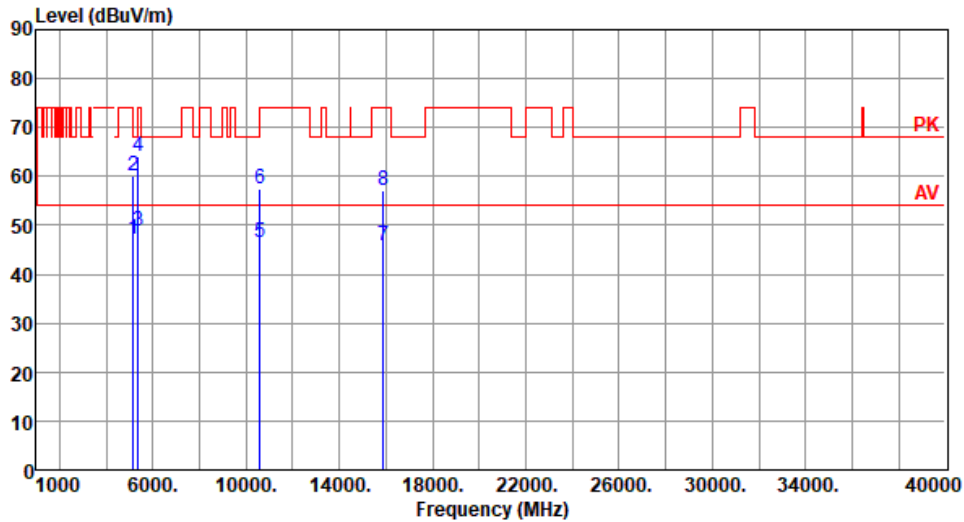

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	47.04	54.00	-6.96	42.66	4.38	Average	100	18
2	5150.00	60.14	74.00	-13.86	55.76	4.38	Peak	100	18
3	5350.00	48.67	54.00	-5.33	44.70	3.97	Average	100	18
4	5350.00	64.10	74.00	-9.90	60.13	3.97	Peak	100	18
5	10600.00	46.42	54.00	-7.58	31.85	14.57	Average	100	107
6	10600.00	57.45	74.00	-16.55	42.88	14.57	Peak	100	107
7	15900.00	45.99	54.00	-8.01	31.76	14.23	Average	100	103
8	15900.00	57.02	74.00	-16.98	42.79	14.23	Peak	100	103

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5300
-------------------	-----	-------------------------	------

Polarization	Vertical
---------------------	----------

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

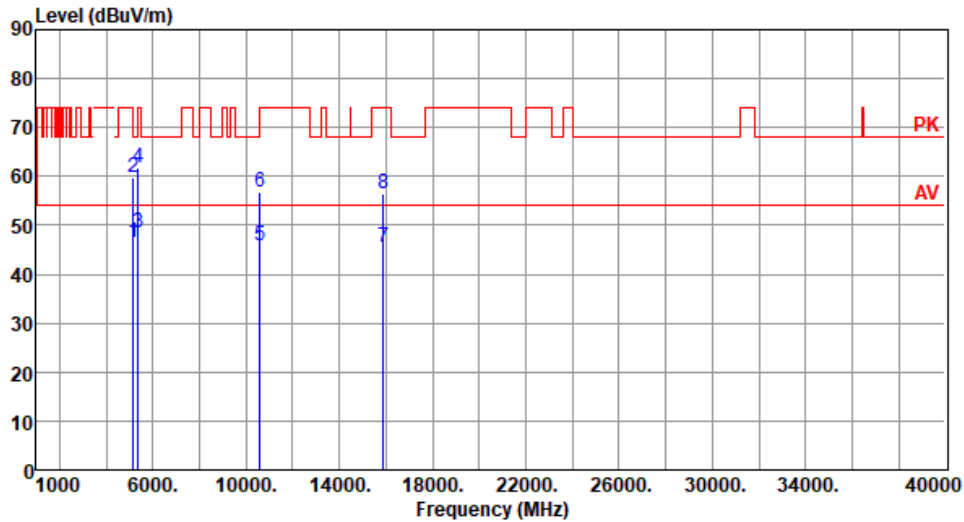

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	46.63	54.00	-7.37	42.25	4.38	Average	100	244
2	5150.00	59.70	74.00	-14.30	55.32	4.38	Peak	100	244
3	5350.00	48.34	54.00	-5.66	44.37	3.97	Average	100	244
4	5350.00	61.82	74.00	-12.18	57.85	3.97	Peak	100	244
5	10600.00	45.82	54.00	-8.18	31.25	14.57	Average	100	257
6	10600.00	56.90	74.00	-17.10	42.33	14.57	Peak	100	257
7	15900.00	45.49	54.00	-8.51	31.26	14.23	Average	100	255
8	15900.00	56.51	74.00	-17.49	42.28	14.23	Peak	100	255


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):24 Humidity(%):67

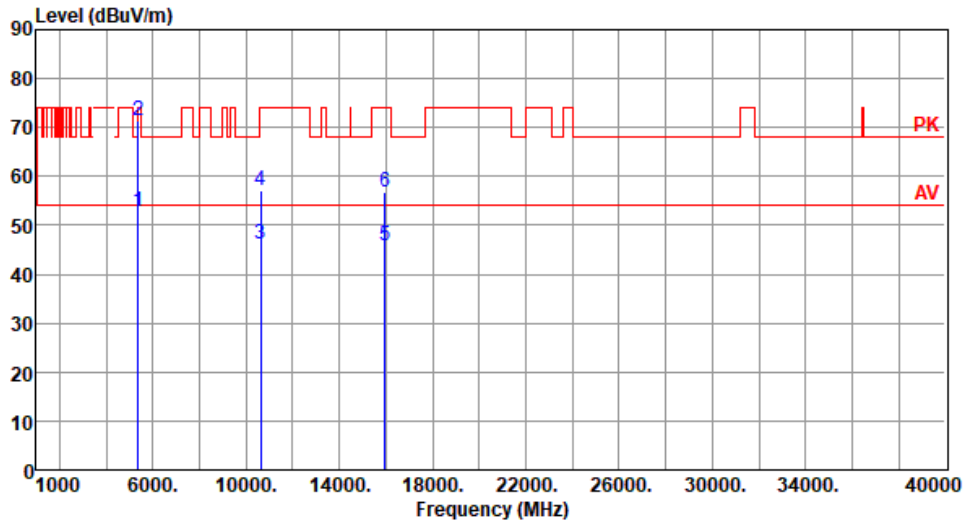

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	52.67	54.00	-1.33	48.70	3.97	Average	100	22
2	5350.00	71.37	74.00	-2.63	67.40	3.97	Peak	100	22
3	10640.00	46.23	54.00	-7.77	31.67	14.56	Average	100	102
4	10640.00	57.15	74.00	-16.85	42.59	14.56	Peak	100	102
5	15960.00	45.89	54.00	-8.11	31.61	14.28	Average	100	101
6	15960.00	56.93	74.00	-17.07	42.65	14.28	Peak	100	101


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):24 Humidity(%):67

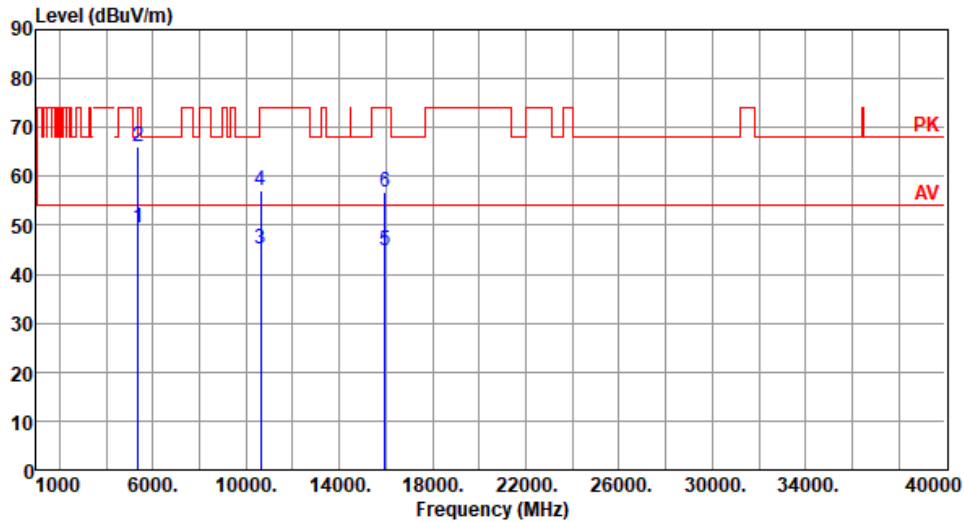



	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5350.00	49.55	54.00	-4.45	45.58	3.97	Average	352	280
2	5350.00	66.22	74.00	-7.78	62.25	3.97	Peak	352	280
3	10640.00	45.12	54.00	-8.88	30.56	14.56	Average	100	245
4	10640.00	57.08	74.00	-16.92	42.52	14.56	Peak	100	245
5	15960.00	44.82	54.00	-9.18	30.54	14.28	Average	100	257
6	15960.00	56.84	74.00	-17.16	42.56	14.28	Peak	100	257


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

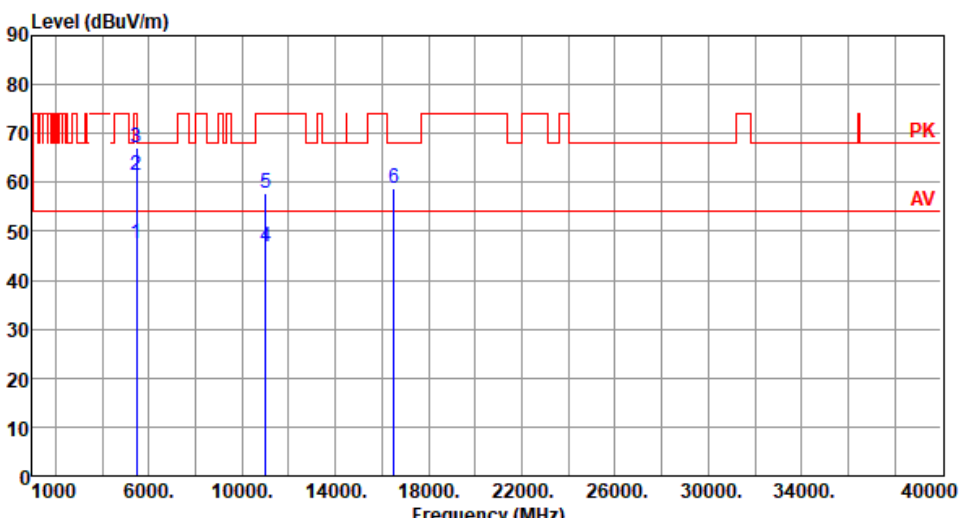
Modulation	11a	Test Freq. (MHz)	5500						
Polarization	Horizontal								
Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	47.34	54.00	-6.66	42.97	4.37	Average	101	12
2	5460.00	61.35	74.00	-12.65	56.98	4.37	Peak	101	12
3	5470.00	67.11	68.20	-1.09	62.72	4.39	Peak	101	12
4	11000.00	46.81	54.00	-7.19	31.65	15.16	Average	100	101
5	11000.00	57.76	74.00	-16.24	42.60	15.16	Peak	100	101
6	16500.00	58.93	68.20	-9.27	42.58	16.35	Peak	100	100
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

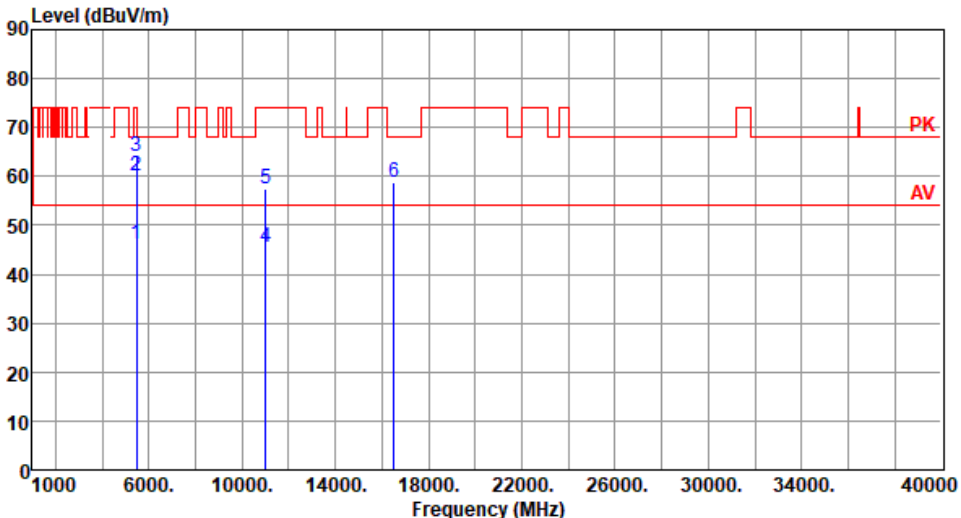Modulation	11a	Test Freq. (MHz)	5500						
Polarization	Vertical								
Test By : Akun Chung		Temperature(°C): 24	Humidity(%): 67						
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	46.18	54.00	-7.82	41.81	4.37	Average	351	279
2	5460.00	60.03	74.00	-13.97	55.66	4.37	Peak	351	279
3	5470.00	64.16	68.20	-4.04	59.77	4.39	Peak	351	279
4	11000.00	45.63	54.00	-8.37	30.47	15.16	Average	100	246
5	11000.00	57.61	74.00	-16.39	42.45	15.16	Peak	100	246
6	16500.00	58.79	68.20	-9.41	42.44	16.35	Peak	100	243
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

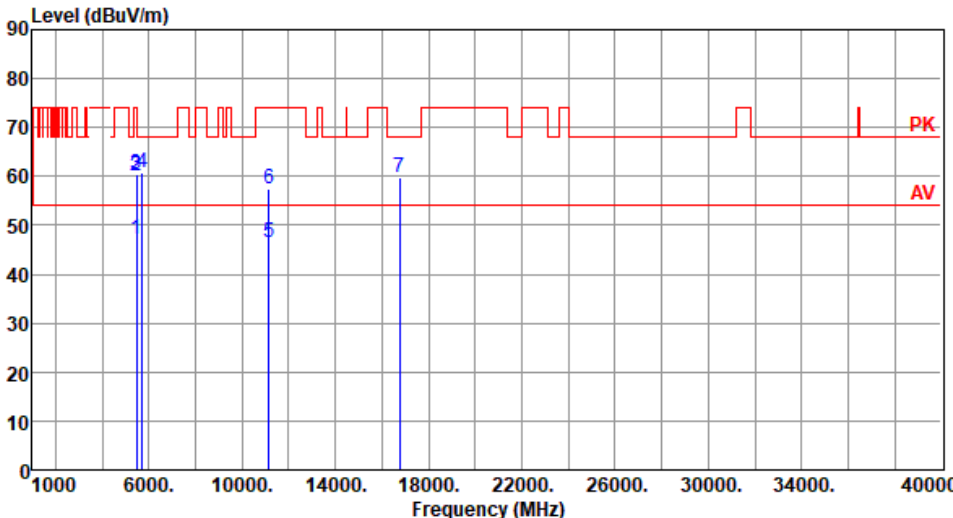Modulation	11a	Test Freq. (MHz)	5580						
Polarization	Horizontal								
Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	47.03	54.00	-6.97	42.66	4.37	Average	100	5
2	5460.00	60.22	74.00	-13.78	55.85	4.37	Peak	100	5
3	5470.00	60.38	68.20	-7.82	55.99	4.39	Peak	100	5
4	5725.00	60.71	68.20	-7.49	55.90	4.81	Peak	100	5
5	11160.00	46.47	54.00	-7.53	31.85	14.62	Average	100	105
6	11160.00	57.42	74.00	-16.58	42.80	14.62	Peak	100	105
7	16740.00	59.78	68.20	-8.42	42.70	17.08	Peak	100	103
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

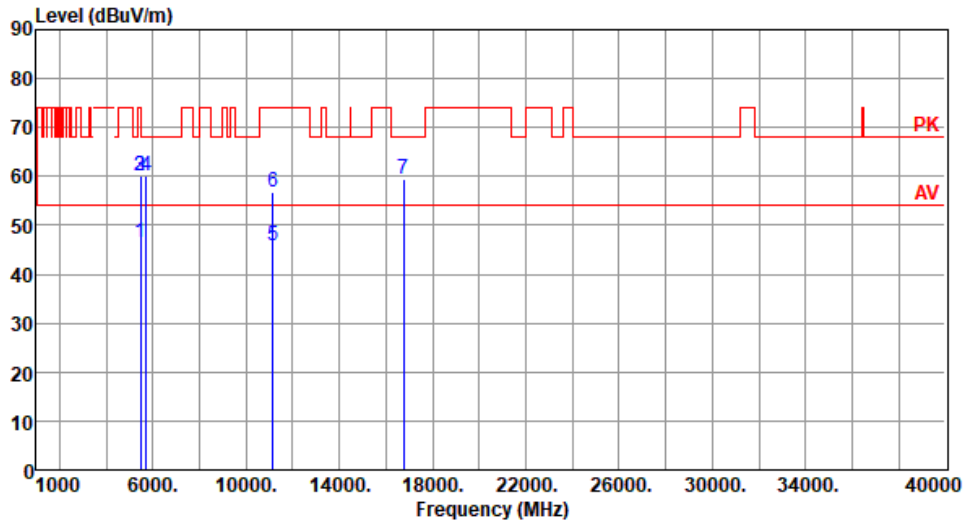

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	46.65	54.00	-7.35	42.28	4.37	Average	100	107
2	5460.00	60.14	74.00	-13.86	55.77	4.37	Peak	100	107
3	5470.00	60.09	68.20	-8.11	55.70	4.39	Peak	100	107
4	5725.00	60.14	68.20	-8.06	55.33	4.81	Peak	100	107
5	11160.00	45.87	54.00	-8.13	31.25	14.62	Average	100	252
6	11160.00	56.92	74.00	-17.08	42.30	14.62	Peak	100	252
7	16740.00	59.36	68.20	-8.84	42.28	17.08	Peak	100	255


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

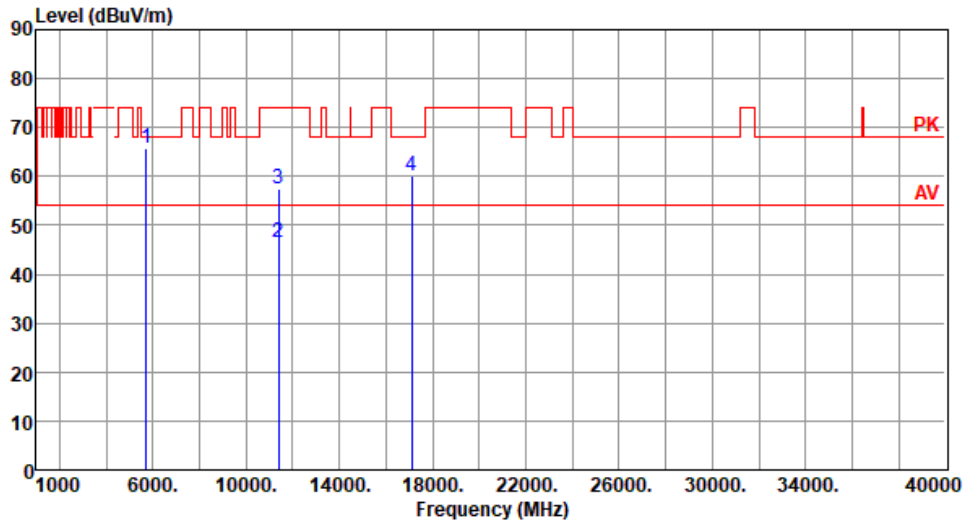

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	65.81	68.20	-2.39	61.00	4.81	Peak	100	1
2	11400.00	46.48	54.00	-7.52	31.63	14.85	Average	100	101
3	11400.00	57.50	74.00	-16.50	42.65	14.85	Peak	100	101
4	17100.00	59.96	68.20	-8.24	42.59	17.37	Peak	100	108


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):24 Humidity(%):67

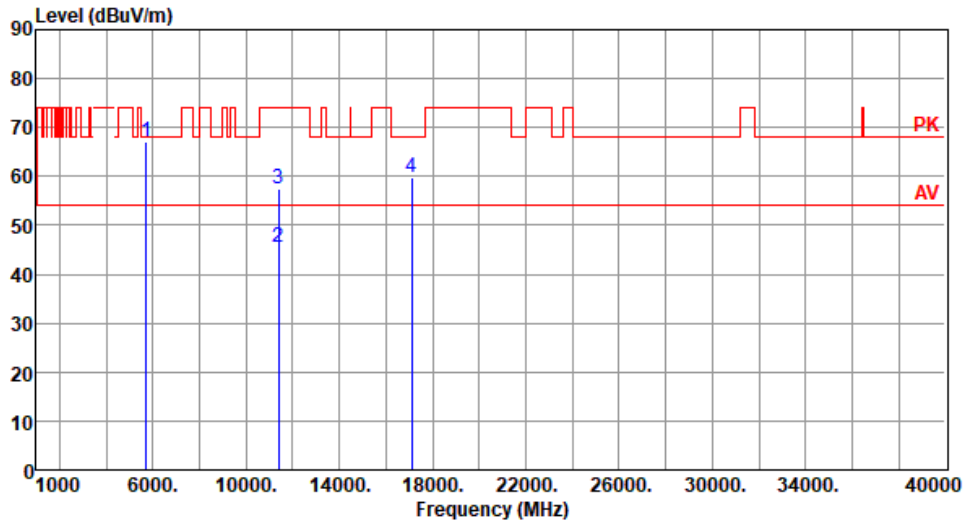

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5725.00	67.01	68.20	-1.19	62.20	4.81	Peak	100	108
2	11400.00	45.42	54.00	-8.58	30.57	14.85	Average	100	255
3	11400.00	57.35	74.00	-16.65	42.50	14.85	Peak	100	255
4	17100.00	59.91	68.20	-8.29	42.54	17.37	Peak	100	248


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):62

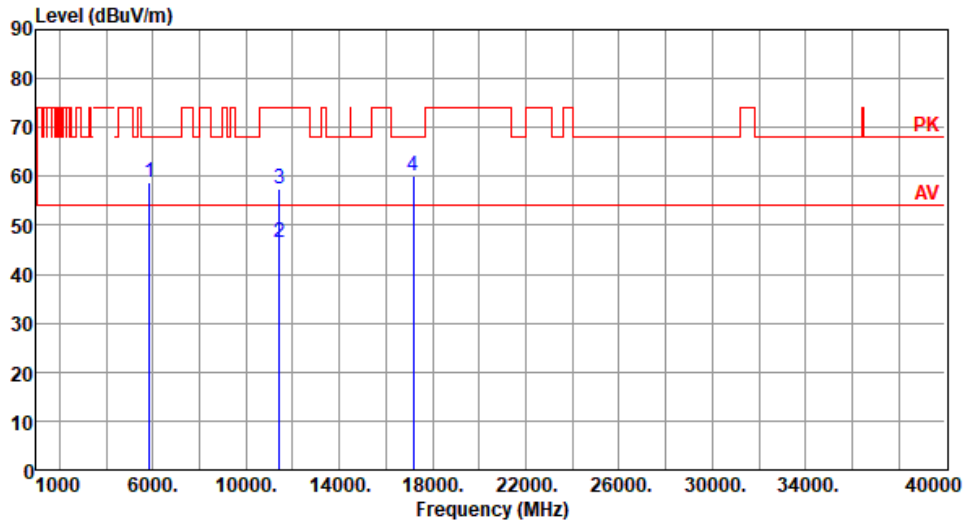


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5850.00	58.73	68.20	-9.47	53.55	5.18	Peak	100	10
2	11440.00	46.35	54.00	-7.65	31.54	14.81	Average	100	110
3	11440.00	57.61	74.00	-16.39	42.80	14.81	Peak	100	110
4	17160.00	60.20	68.20	-8.00	42.78	17.42	Peak	100	105

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

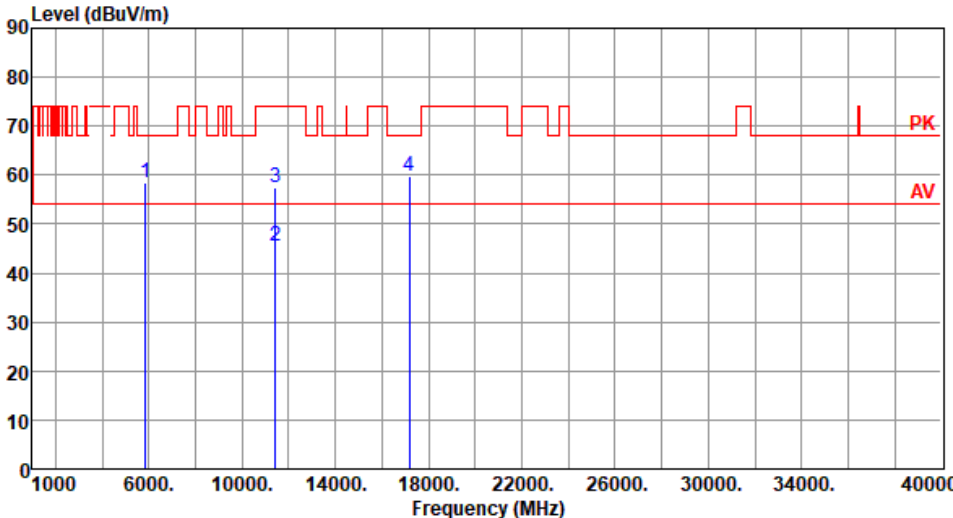Modulation	11a	Test Freq. (MHz)	5720						
Polarization	Vertical								
Test By : Roger Lu		Temperature(°C): 24	Humidity(%): 62						
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5850.00	58.39	68.20	-9.81	53.21	5.18	Peak	100	103
2	11440.00	45.45	54.00	-8.55	30.64	14.81	Average	100	258
3	11440.00	57.39	74.00	-16.61	42.58	14.81	Peak	100	258
4	17160.00	59.91	68.20	-8.29	42.49	17.42	Peak	100	80
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

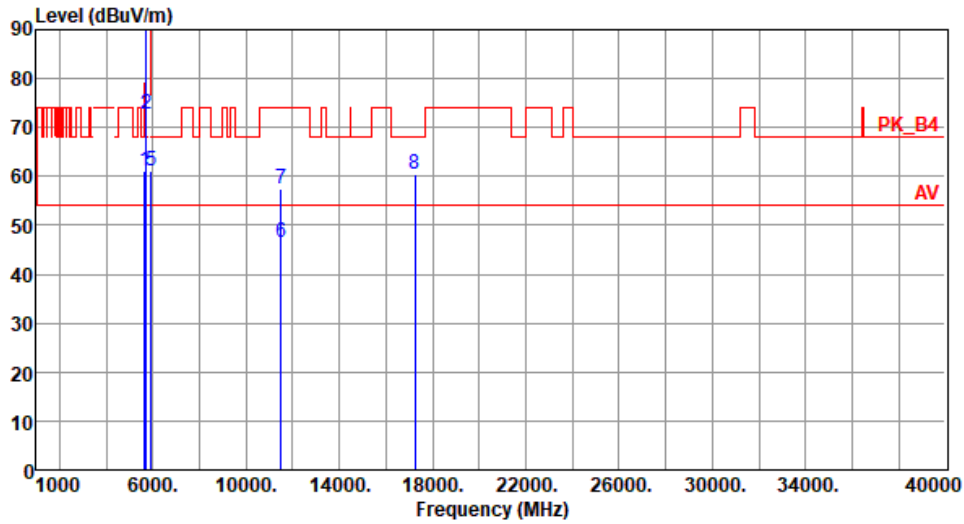

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	61.27	68.20	-6.93	56.82	4.45	Peak	100	6
2	5700.00	72.89	105.20	-32.31	68.20	4.69	Peak	100	6
3	5720.00	89.77	110.80	-21.03	84.98	4.79	Peak	100	6
4	5725.00	99.45	122.20	-22.75	94.64	4.81	Peak	100	6
5	5925.00	60.98	68.20	-7.22	55.60	5.38	Peak	100	6
6	11490.00	46.39	54.00	-7.61	31.63	14.76	Average	100	99
7	11490.00	57.42	74.00	-16.58	42.66	14.76	Peak	100	99
8	17235.00	60.40	68.20	-7.80	42.85	17.55	Peak	100	100


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

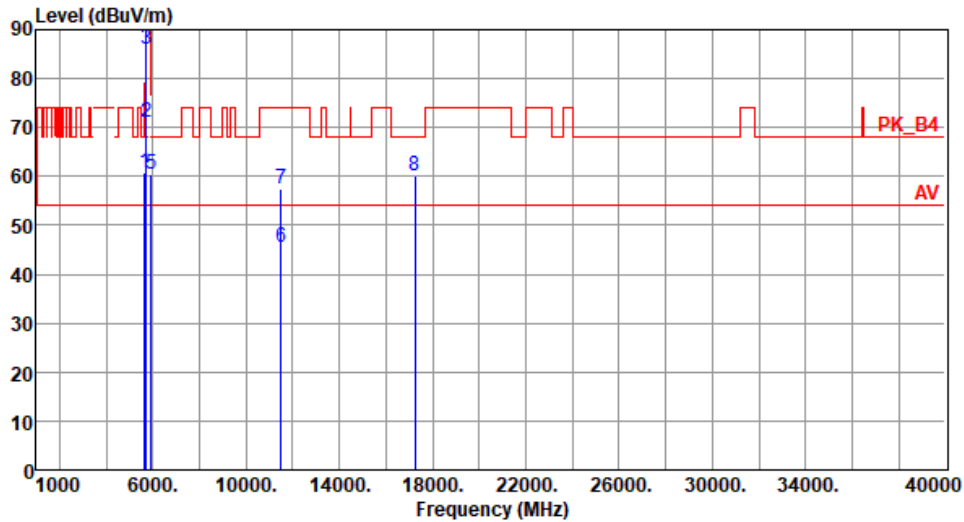


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	60.67	68.20	-7.53	56.22	4.45	Peak	100	107
2	5700.00	70.94	105.20	-34.26	66.25	4.69	Peak	100	107
3	5720.00	86.04	110.80	-24.76	81.25	4.79	Peak	100	107
4	5725.00	95.69	122.20	-26.51	90.88	4.81	Peak	100	107
5	5925.00	60.60	68.20	-7.60	55.22	5.38	Peak	100	107
6	11490.00	45.34	54.00	-8.66	30.58	14.76	Average	100	249
7	11490.00	57.33	74.00	-16.67	42.57	14.76	Peak	100	249
8	17235.00	60.09	68.20	-8.11	42.54	17.55	Peak	100	263

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

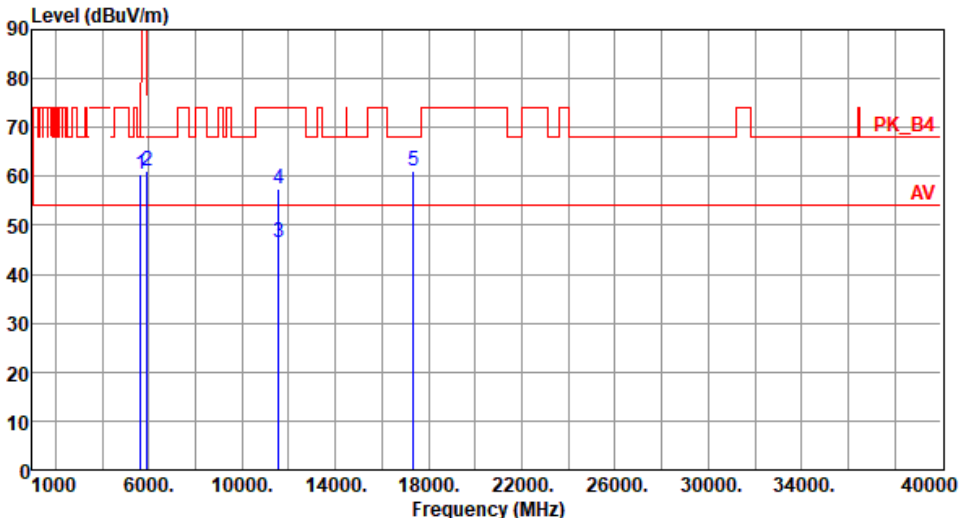Modulation	11a	Test Freq. (MHz)	5785						
Polarization	Horizontal								
Test By : Akun Chung		Temperature(°C): 24	Humidity(%): 67						
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5650.00	60.34	68.20	-7.86	55.89	4.45	Peak	100	5
2	5925.00	61.27	68.20	-6.93	55.89	5.38	Peak	100	5
3	11570.00	46.56	54.00	-7.44	31.88	14.68	Average	100	100
4	11570.00	57.53	74.00	-16.47	42.85	14.68	Peak	100	100
5	17355.00	60.97	68.20	-7.23	42.86	18.11	Peak	100	106
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Vertical		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

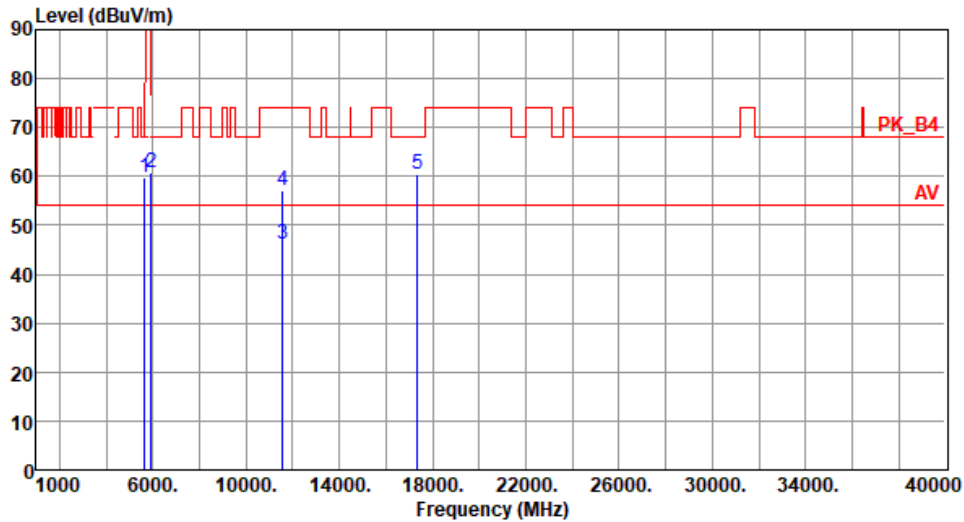

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	59.70	68.20	-8.50	55.25	4.45	Peak	100	113
2	5925.00	60.71	68.20	-7.49	55.33	5.38	Peak	100	113
3	11570.00	46.12	54.00	-7.88	31.44	14.68	Average	100	259
4	11570.00	57.12	74.00	-16.88	42.44	14.68	Peak	100	259
5	17355.00	60.51	68.20	-7.69	42.40	18.11	Peak	100	255


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

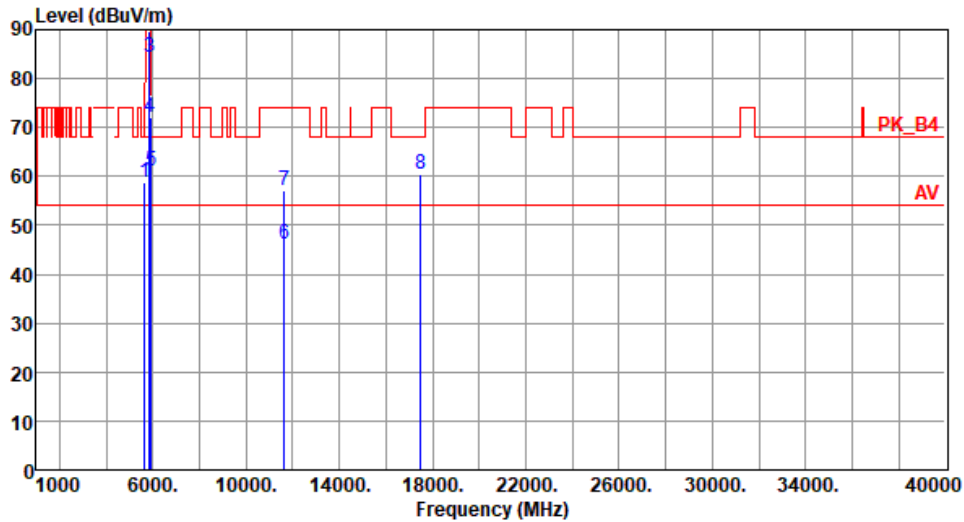

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	58.78	68.20	-9.42	54.33	4.45	Peak	100	2
2	5850.00	89.81	122.20	-32.39	84.63	5.18	Peak	100	2
3	5855.00	84.28	110.80	-26.52	79.09	5.19	Peak	100	2
4	5875.00	72.16	105.20	-33.04	66.88	5.28	Peak	100	2
5	5925.00	61.26	68.20	-6.94	55.88	5.38	Peak	100	2
6	11650.00	46.08	54.00	-7.92	31.63	14.45	Average	100	108
7	11650.00	57.15	74.00	-16.85	42.70	14.45	Peak	100	108
8	17475.00	60.53	68.20	-7.67	41.69	18.84	Peak	100	105


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 67

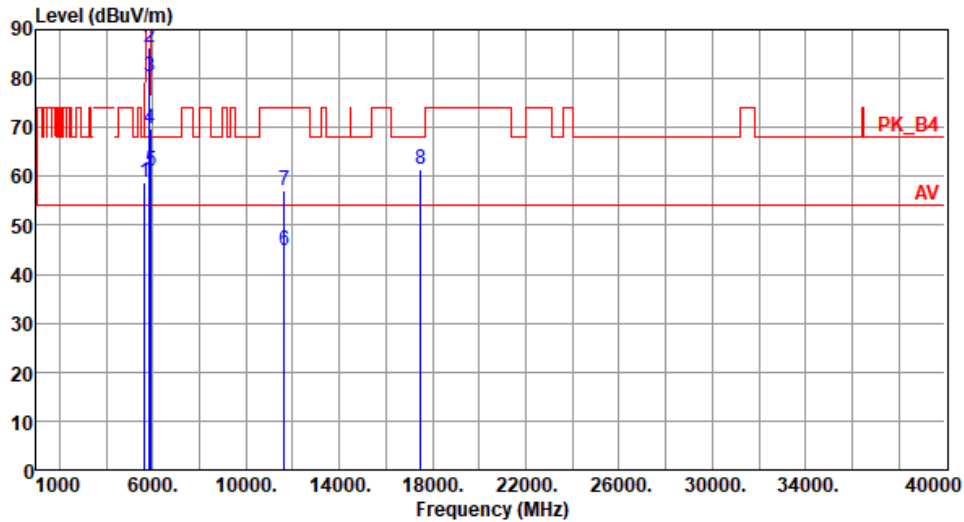


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	58.63	68.20	-9.57	54.18	4.45	Peak	100	110
2	5850.00	86.50	122.20	-35.70	81.32	5.18	Peak	100	110
3	5855.00	80.40	110.80	-30.40	75.21	5.19	Peak	100	110
4	5875.00	69.86	105.20	-35.34	64.58	5.28	Peak	100	110
5	5925.00	61.09	68.20	-7.11	55.71	5.38	Peak	100	110
6	11650.00	44.99	54.00	-9.01	30.54	14.45	Average	100	249
7	11650.00	56.98	74.00	-17.02	42.53	14.45	Peak	100	249
8	17475.00	61.42	68.20	-6.78	42.58	18.84	Peak	100	251

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for ax HE20

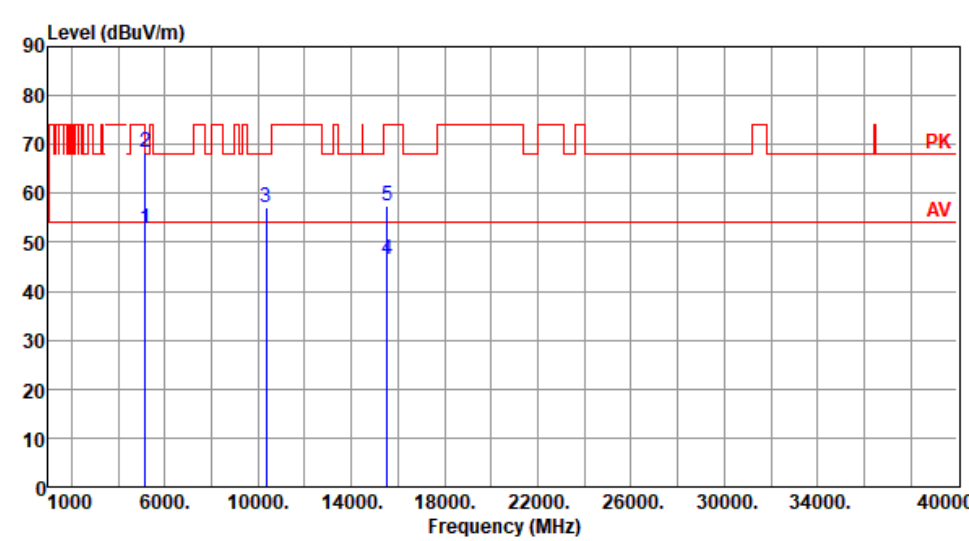Modulation	ax HE20		Test Freq. (MHz)	5180					
Polarization	Horizontal								
Test By : Akun Chung		Temperature(°C): 24		Humidity(%): 64					
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.93	54.00	-1.07	48.55	4.38	Average	100	18
2	5150.00	68.50	74.00	-5.50	64.12	4.38	Peak	100	18
3	10360.00	57.10	68.20	-11.10	42.68	14.42	Peak	100	107
4	15540.00	46.43	54.00	-7.57	31.78	14.65	Average	100	105
5	15540.00	57.52	74.00	-16.48	42.87	14.65	Peak	100	105
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

Modulation	ax HE20	Test Freq. (MHz)	5180
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):24 Humidity(%):64

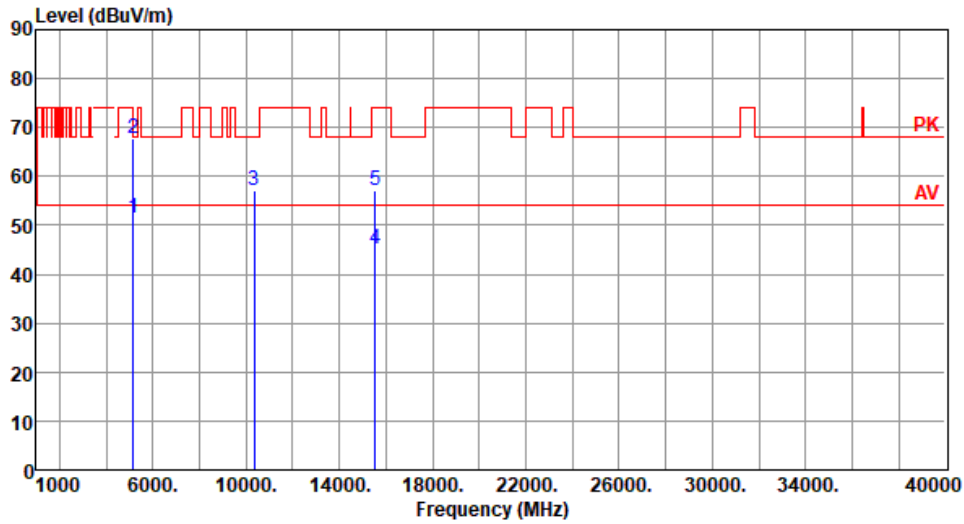

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	51.63	54.00	-2.37	47.25	4.38	Average	100	239
2	5150.00	67.60	74.00	-6.40	63.22	4.38	Peak	100	239
3	10360.00	56.97	68.20	-11.23	42.55	14.42	Peak	100	254
4	15540.00	45.12	54.00	-8.88	30.47	14.65	Average	100	243
5	15540.00	57.10	74.00	-16.90	42.45	14.65	Peak	100	243


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	ax HE20	Test Freq. (MHz)	5200
Polarization	Horizontal		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 64

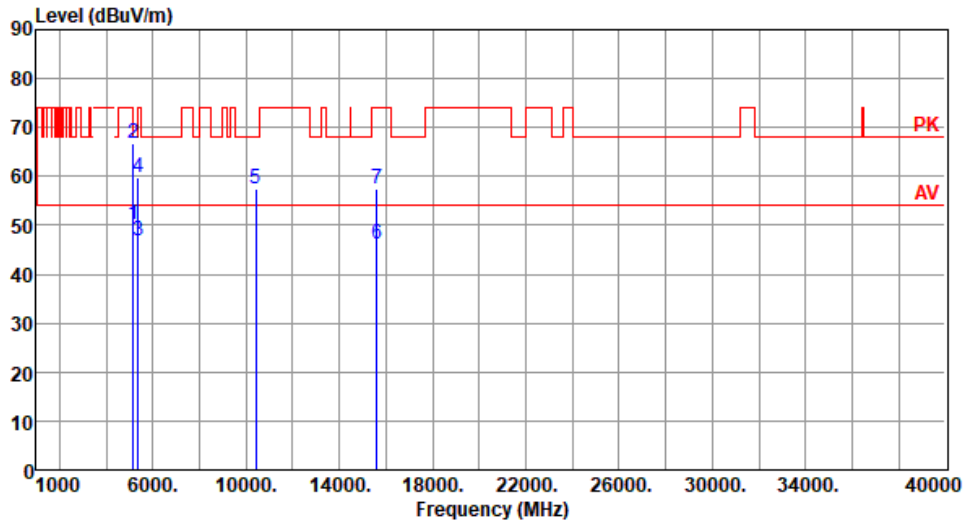

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.14	54.00	-3.86	45.76	4.38	Average	100	17
2	5150.00	66.71	74.00	-7.29	62.33	4.38	Peak	100	17
3	5350.00	46.79	54.00	-7.21	42.82	3.97	Average	100	17
4	5350.00	59.82	74.00	-14.18	55.85	3.97	Peak	100	17
5	10400.00	57.34	68.20	-10.86	42.85	14.49	Peak	100	103
6	15600.00	46.31	54.00	-7.69	31.79	14.52	Average	100	107
7	15600.00	57.42	74.00	-16.58	42.90	14.52	Peak	100	107


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	ax HE20	Test Freq. (MHz)	5200
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):24 Humidity(%):64

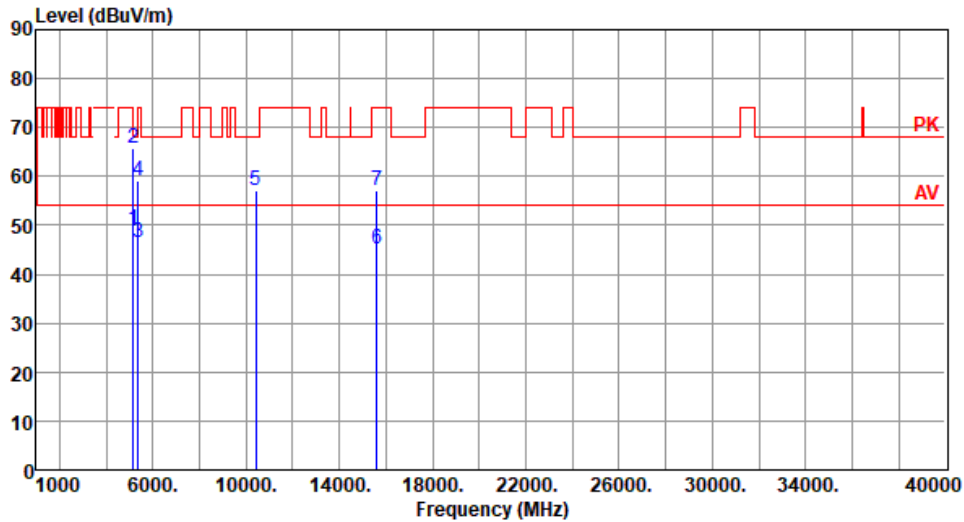

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	49.23	54.00	-4.77	44.85	4.38	Average	100	232
2	5150.00	65.63	74.00	-8.37	61.25	4.38	Peak	100	232
3	5350.00	46.42	54.00	-7.58	42.45	3.97	Average	100	232
4	5350.00	59.22	74.00	-14.78	55.25	3.97	Peak	100	232
5	10400.00	56.98	68.20	-11.22	42.49	14.49	Peak	100	253
6	15600.00	45.06	54.00	-8.94	30.54	14.52	Average	100	256
7	15600.00	57.04	74.00	-16.96	42.52	14.52	Peak	100	256


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	ax HE20	Test Freq. (MHz)	5240
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):24 Humidity(%):64

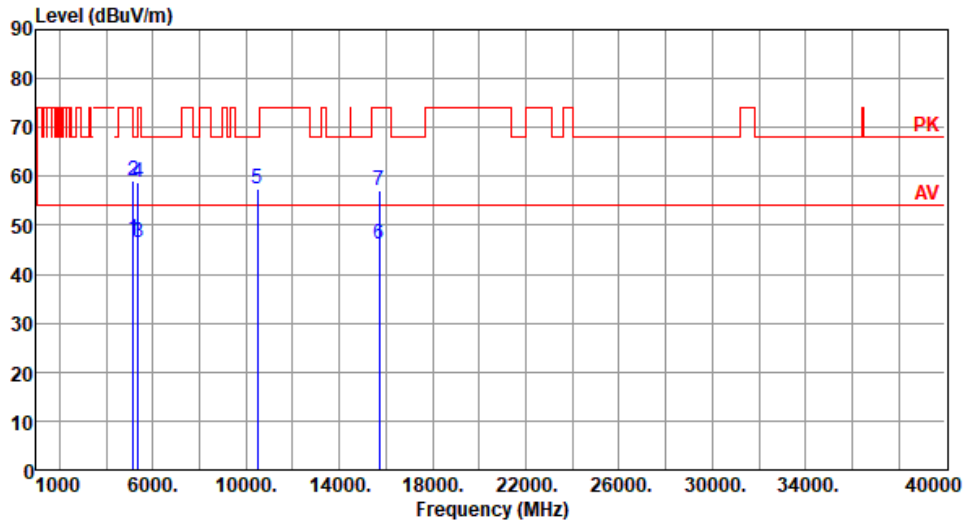

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	47.06	54.00	-6.94	42.68	4.38	Average	100	16
2	5150.00	59.04	74.00	-14.96	54.66	4.38	Peak	100	16
3	5350.00	46.65	54.00	-7.35	42.68	3.97	Average	100	16
4	5350.00	58.65	74.00	-15.35	54.68	3.97	Peak	100	16
5	10480.00	57.41	68.20	-10.79	42.86	14.55	Peak	100	101
6	15720.00	46.22	54.00	-7.78	31.86	14.36	Average	100	100
7	15720.00	57.20	74.00	-16.80	42.84	14.36	Peak	100	100


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	ax HE20	Test Freq. (MHz)	5240
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):24 Humidity(%):64

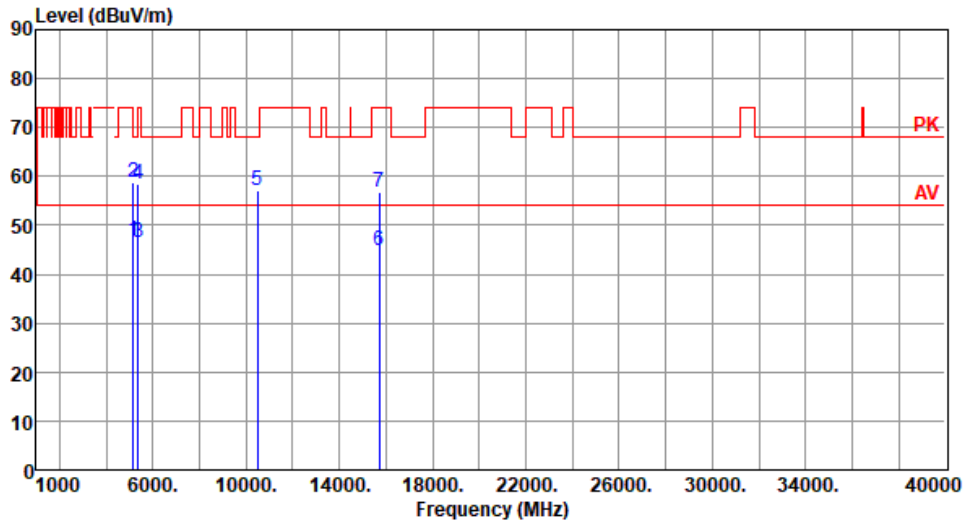

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	46.93	54.00	-7.07	42.55	4.38	Average	100	238
2	5150.00	58.90	74.00	-15.10	54.52	4.38	Peak	100	238
3	5350.00	46.42	54.00	-7.58	42.45	3.97	Average	100	238
4	5350.00	58.52	74.00	-15.48	54.55	3.97	Peak	100	238
5	10480.00	57.04	68.20	-11.16	42.49	14.55	Peak	100	250
6	15720.00	44.89	54.00	-9.11	30.53	14.36	Average	100	247
7	15720.00	56.90	74.00	-17.10	42.54	14.36	Peak	100	247


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	ax HE20	Test Freq. (MHz)	5260
Polarization	Horizontal		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 64

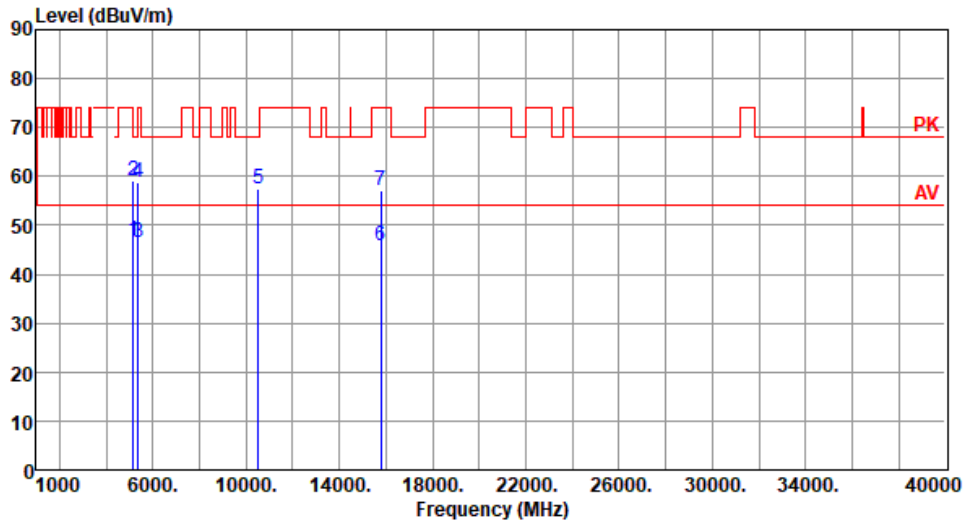

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	46.95	54.00	-7.05	42.57	4.38	Average	100	23
2	5150.00	58.96	74.00	-15.04	54.58	4.38	Peak	100	23
3	5350.00	46.57	54.00	-7.43	42.60	3.97	Average	100	23
4	5350.00	58.62	74.00	-15.38	54.65	3.97	Peak	100	23
5	10520.00	57.47	68.20	-10.73	42.90	14.57	Peak	100	108
6	15780.00	45.97	54.00	-8.03	31.78	14.19	Average	100	103
7	15780.00	57.04	74.00	-16.96	42.85	14.19	Peak	100	103


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	ax HE20	Test Freq. (MHz)	5260
Polarization	Vertical		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 64

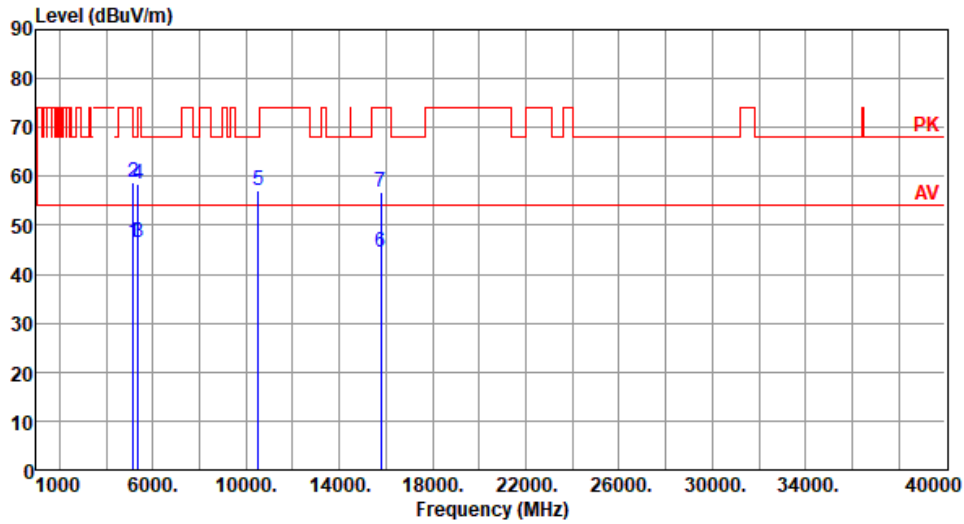

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	46.63	54.00	-7.37	42.25	4.38	Average	100	223
2	5150.00	58.80	74.00	-15.20	54.42	4.38	Peak	100	223
3	5350.00	46.51	54.00	-7.49	42.54	3.97	Average	100	223
4	5350.00	58.33	74.00	-15.67	54.36	3.97	Peak	100	223
5	10520.00	57.05	68.20	-11.15	42.48	14.57	Peak	100	262
6	15780.00	44.61	54.00	-9.39	30.42	14.19	Average	100	259
7	15780.00	56.70	74.00	-17.30	42.51	14.19	Peak	100	259


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	ax HE20	Test Freq. (MHz)	5300
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):24 Humidity(%):64

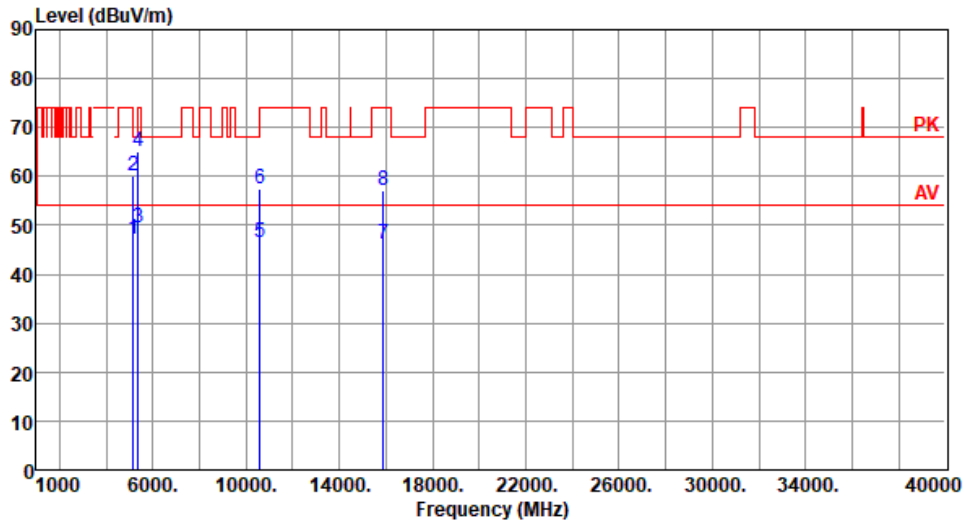

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	47.15	54.00	-6.85	42.77	4.38	Average	100	20
2	5150.00	60.26	74.00	-13.74	55.88	4.38	Peak	100	20
3	5350.00	49.62	54.00	-4.38	45.65	3.97	Average	100	20
4	5350.00	65.14	74.00	-8.86	61.17	3.97	Peak	100	20
5	10600.00	46.45	54.00	-7.55	31.88	14.57	Average	100	107
6	10600.00	57.39	74.00	-16.61	42.82	14.57	Peak	100	107
7	15900.00	46.08	54.00	-7.92	31.85	14.23	Average	100	105
8	15900.00	56.99	74.00	-17.01	42.76	14.23	Peak	100	105


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	ax HE20	Test Freq. (MHz)	5300
Polarization	Vertical		

Test By : Akun Chung Temperature(°C): 24 Humidity(%): 64

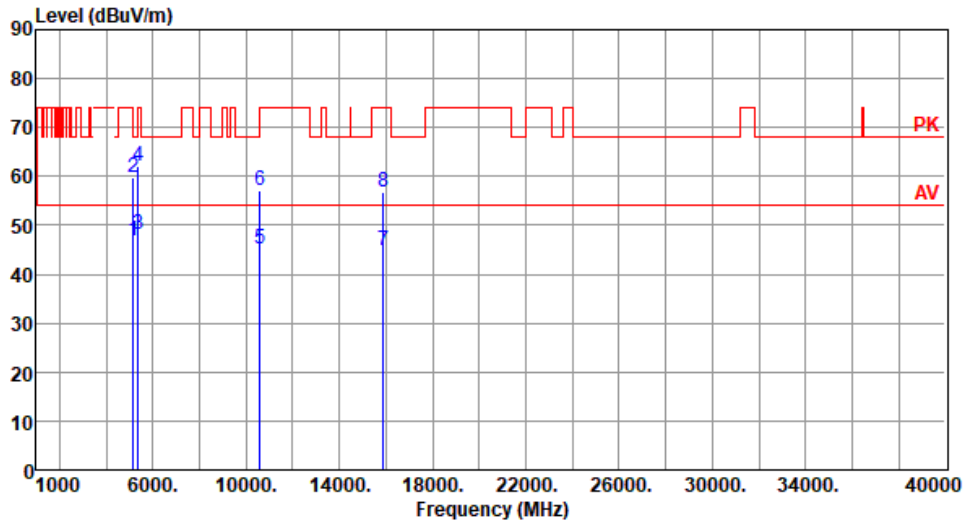

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	46.92	54.00	-7.08	42.54	4.38	Average	100	234
2	5150.00	59.83	74.00	-14.17	55.45	4.38	Peak	100	234
3	5350.00	48.00	54.00	-6.00	44.03	3.97	Average	100	234
4	5350.00	62.05	74.00	-11.95	58.08	3.97	Peak	100	234
5	10600.00	45.13	54.00	-8.87	30.56	14.57	Average	100	254
6	10600.00	57.12	74.00	-16.88	42.55	14.57	Peak	100	254
7	15900.00	44.69	54.00	-9.31	30.46	14.23	Average	100	257
8	15900.00	56.80	74.00	-17.20	42.57	14.23	Peak	100	257

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).