

7.7 AC Power Conducted Emissions


Mode B

| | | | |
|----------------------|-----------------|--|---------------------------------------|
| RF Mode | 802.11ax (HE20) | Channel | CH 144 : 5720 MHz |
| Frequency Range | 150kHz ~ 30MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 67% RH |
| Tested By | Tom Yang | | |

| Phase Of Power : Line (L) | | | | | | | | | | |
|---------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) | | Emission Level (dBuV) | | Limit (dBuV) | | Margin (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15000 | 9.96 | 34.47 | 15.84 | 44.43 | 25.80 | 66.00 | 56.00 | -21.57 | -30.20 |
| 2 | 0.21641 | 9.96 | 23.95 | 6.29 | 33.91 | 16.25 | 62.96 | 52.96 | -29.05 | -36.71 |
| 3 | 0.39219 | 9.97 | 18.49 | 11.66 | 28.46 | 21.63 | 58.02 | 48.02 | -29.56 | -26.39 |
| 4 | 0.94688 | 10.00 | 3.14 | -2.72 | 13.14 | 7.28 | 56.00 | 46.00 | -42.86 | -38.72 |
| 5 | 3.73047 | 10.14 | 7.04 | -2.89 | 17.18 | 7.25 | 56.00 | 46.00 | -38.82 | -38.75 |
| 6 | 27.47266 | 11.22 | 24.44 | 23.89 | 35.66 | 35.11 | 60.00 | 50.00 | -24.34 | -14.89 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

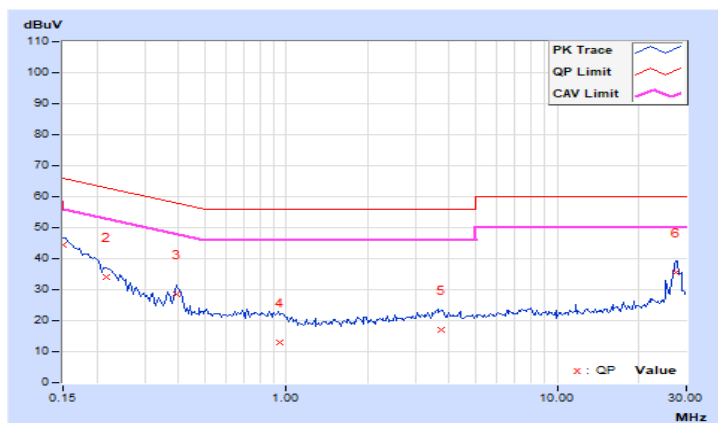


| | | | |
|----------------------|-----------------|--|---------------------------------------|
| RF Mode | 802.11ax (HE20) | Channel | CH 144 : 5720 MHz |
| Frequency Range | 150kHz ~ 30MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 25°C, 67% RH |
| Tested By | Tom Yang | | |

| Phase Of Power : Neutral (N) | | | | | | | | | | |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) | | Emission Level (dBuV) | | Limit (dBuV) | | Margin (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15391 | 9.93 | 32.41 | 12.75 | 42.34 | 22.68 | 65.79 | 55.79 | -23.45 | -33.11 |
| 2 | 0.20859 | 9.94 | 26.11 | 8.05 | 36.05 | 17.99 | 63.26 | 53.26 | -27.21 | -35.27 |
| 3 | 0.40391 | 9.94 | 16.51 | 5.68 | 26.45 | 15.62 | 57.77 | 47.77 | -31.32 | -32.15 |
| 4 | 0.94688 | 9.97 | 2.60 | -3.10 | 12.57 | 6.87 | 56.00 | 46.00 | -43.43 | -39.13 |
| 5 | 3.71484 | 10.09 | 6.60 | -4.27 | 16.69 | 5.82 | 56.00 | 46.00 | -39.31 | -40.18 |
| 6 | 27.96484 | 10.87 | 27.43 | 26.61 | 38.30 | 37.48 | 60.00 | 50.00 | -21.70 | -12.52 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

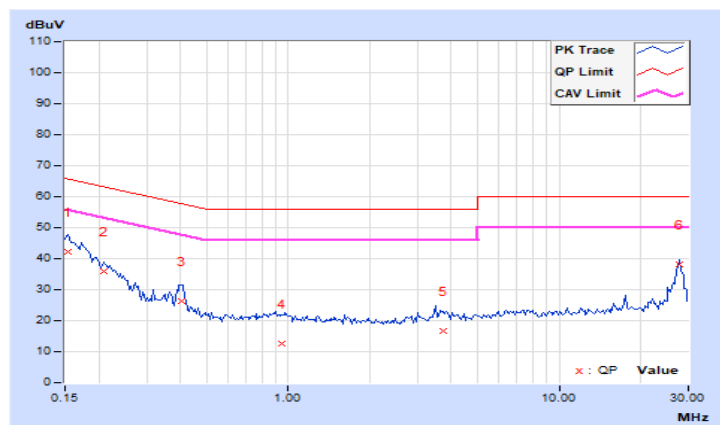

7.8 Unwanted Emissions below 1 GHz

Radiated versus Conducted Measurement

For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation)

For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

Conducted Emission Convert Formula

a. $\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$

d = measurement distance in 3 meters.

b. $\text{EIRP Level (dBm)} = \text{Raw Value(dBm)} + \text{Correction Factor(dB)}$

c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal

For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.

For the band edge the gain for the specific band may have been used.

Notes:

1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection:

For $f = 30 - 1000$ MHz, add 4.7 dB.

Offset = 10 dB + 1.5 dB(cable loss) + 4.7 dB

2. The conducted emission test was considered some factor to compute test result.

Mode A


802.11ax (HE20) - Channel 144

Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 35.45 | 32.71 | 40 | -7.29 | -68.37 | 5.825 | -62.55 |
| 2 | 154.52 | 31.56 | 43.5 | -11.94 | -69.52 | 5.825 | -63.70 |
| 3 | 393.38 | 32.62 | 46 | -13.38 | -68.46 | 5.825 | -62.64 |
| 4 | 573.32 | 34.89 | 46 | -11.11 | -66.19 | 5.825 | -60.37 |
| 5 | 611.15 | 34.52 | 46 | -11.48 | -66.56 | 5.825 | -60.74 |
| 6 | 893.3 | 33.44 | 46 | -12.56 | -67.64 | 5.825 | -61.82 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

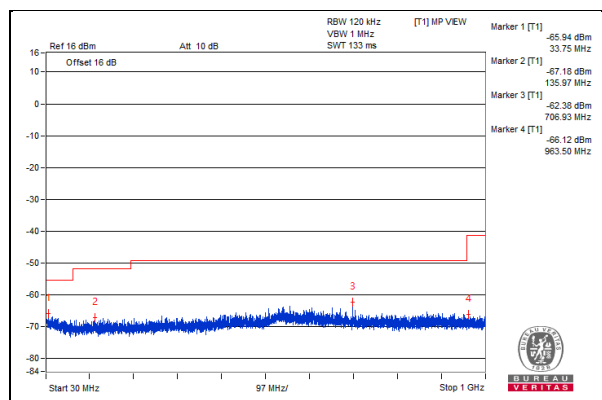


Mode B

| | | | |
|-----------------------------|-----------------|--|-------------------|
| RF Mode | 802.11ax (HE20) | Channel | CH 144 : 5720 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | (QP) RB = 120kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 67% RH |
| Tested By | Tom Yang | | |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 66.04 | 26.1 QP | 40.0 | -13.9 | 3.00 H | 62 | 40.1 | -14.0 |
| 2 | 146.30 | 24.3 QP | 43.5 | -19.2 | 2.00 H | 232 | 36.3 | -12.0 |
| 3 | 203.27 | 27.5 QP | 43.5 | -16.0 | 2.00 H | 224 | 42.6 | -15.1 |
| 4 | 294.35 | 28.9 QP | 46.0 | -17.1 | 1.50 H | 359 | 40.0 | -11.1 |
| 5 | 363.49 | 35.5 QP | 46.0 | -10.5 | 1.00 H | 344 | 44.5 | -9.0 |
| 6 | 524.97 | 29.4 QP | 46.0 | -16.6 | 2.00 H | 355 | 33.8 | -4.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

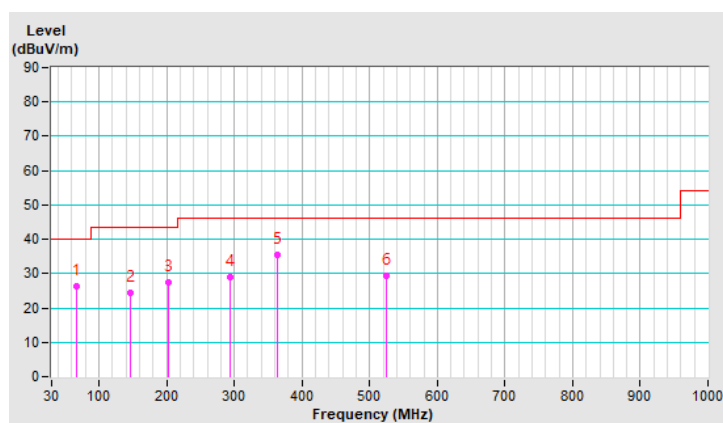


| | | | |
|-----------------------------|-----------------|--|-------------------|
| RF Mode | 802.11ax (HE20) | Channel | CH 144 : 5720 MHz |
| Frequency Range | 30 MHz ~ 1 GHz | Detector Function & Bandwidth | (QP) RB = 120kHz |
| Input Power (System) | 120 Vac, 60 Hz | Environmental Conditions | 23°C, 67% RH |
| Tested By | Tom Yang | | |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 62.62 | 30.9 QP | 40.0 | -9.1 | 1.00 V | 214 | 44.3 | -13.4 |
| 2 | 103.87 | 30.6 QP | 43.5 | -12.9 | 1.00 V | 273 | 46.4 | -15.8 |
| 3 | 241.87 | 25.6 QP | 46.0 | -20.4 | 1.00 V | 53 | 38.8 | -13.2 |
| 4 | 350.56 | 29.0 QP | 46.0 | -17.0 | 1.00 V | 122 | 38.5 | -9.5 |
| 5 | 400.01 | 32.3 QP | 46.0 | -13.7 | 3.00 V | 116 | 40.2 | -7.9 |
| 6 | 600.00 | 35.9 QP | 46.0 | -10.1 | 1.00 V | 270 | 38.3 | -2.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

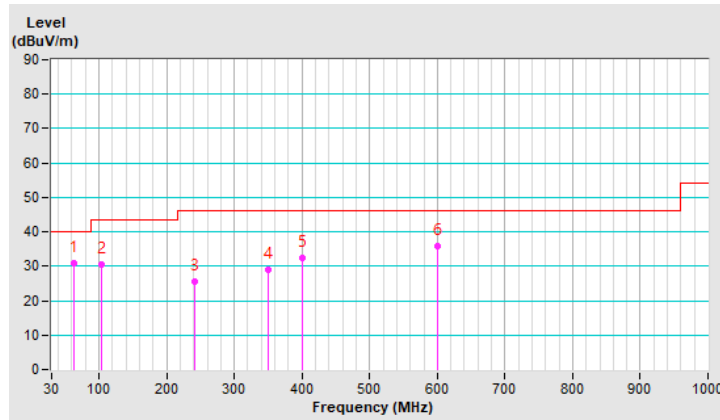

7.9 Unwanted Emissions above 1 GHz

Radiated versus Conducted Measurement

For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation)

For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

Conducted Emission Convert Formula

a. $\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$

d = measurement distance in 3 meters.

b. $\text{EIRP Level (dBm)} = \text{Raw Value(dBm)} + \text{Correction Factor(dB)}$

c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal

For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.

For the band edge the gain for the specific band may have been used.

Notes:

1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection:

For $f = 30 - 1000$ MHz, add 4.7 dB.

Offset = 10 dB + 1.5(cable loss) + 3.85(gain) for UNII-3 band edge

2. The conducted emission test was considered some factor to compute test result.







Mode A
802.11a - Channel 36

Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | #3456.25 | 47.96 PK | 68.2 | -20.24 | -53.12 | 5.825 | -47.30 |
| 2 | #6912.5 | 49.83 PK | 68.2 | -18.37 | -51.25 | 5.825 | -45.43 |
| 3 | #10359.37 | 54.71 PK | 68.2 | -13.49 | -46.37 | 5.825 | -40.55 |
| 4 | 15538.37 | 41.54 PK | 74 | -32.46 | -59.54 | 5.825 | -53.72 |
| 5 | 15542.68 | 30.4 AV | 54 | -23.6 | -70.68 | 5.825 | -64.86 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

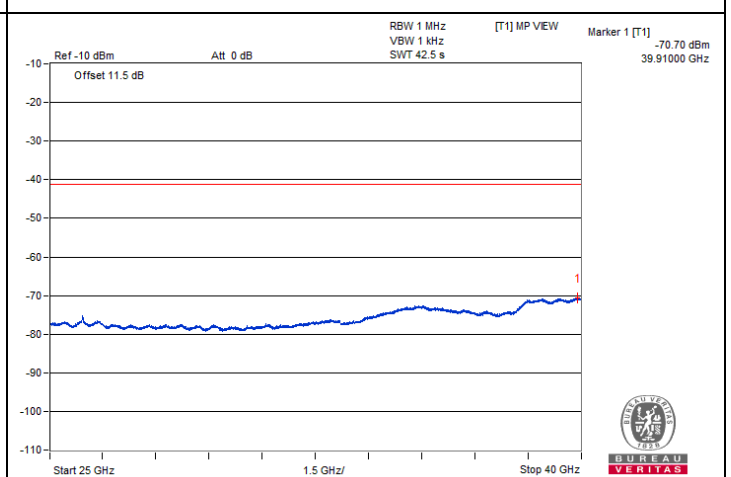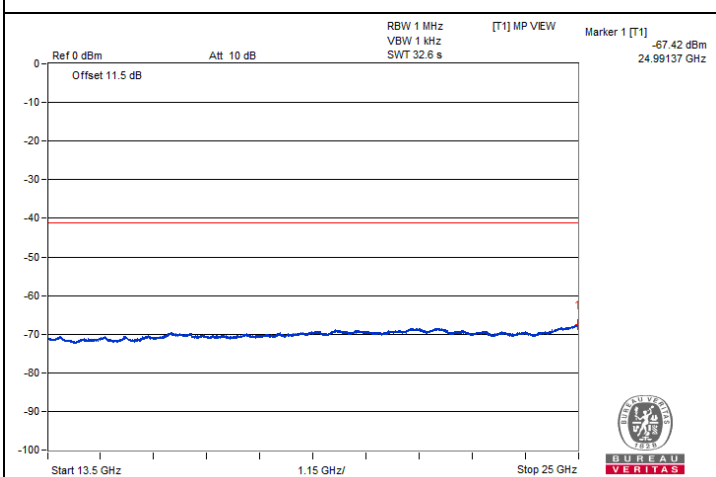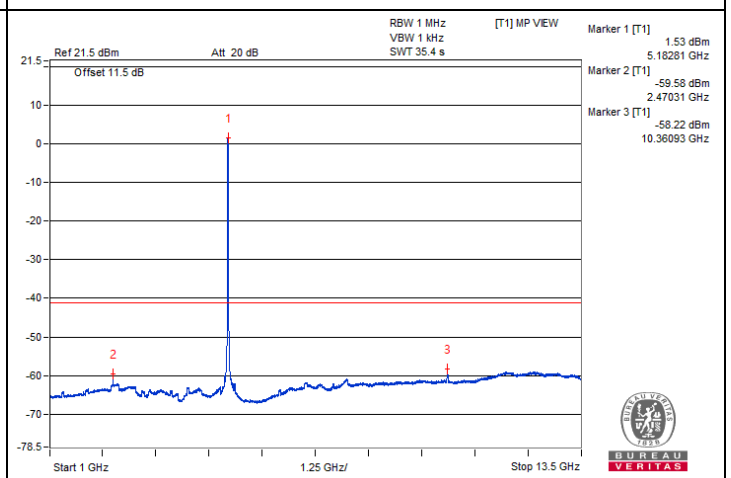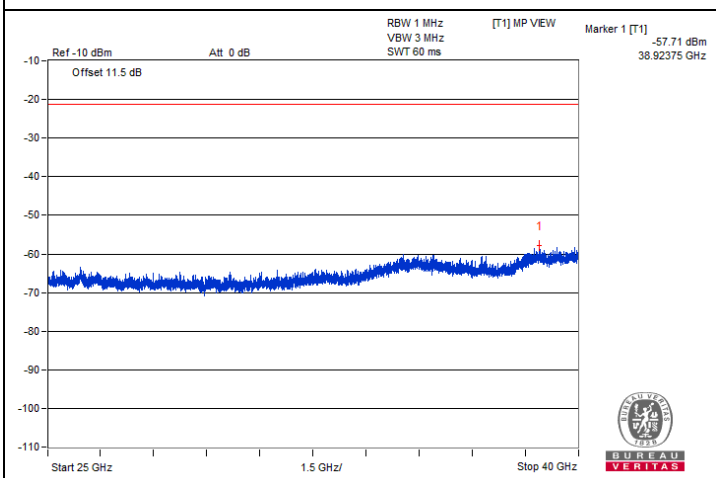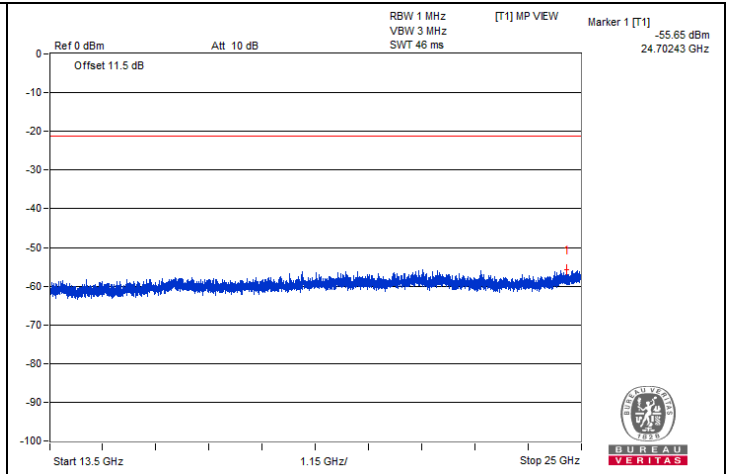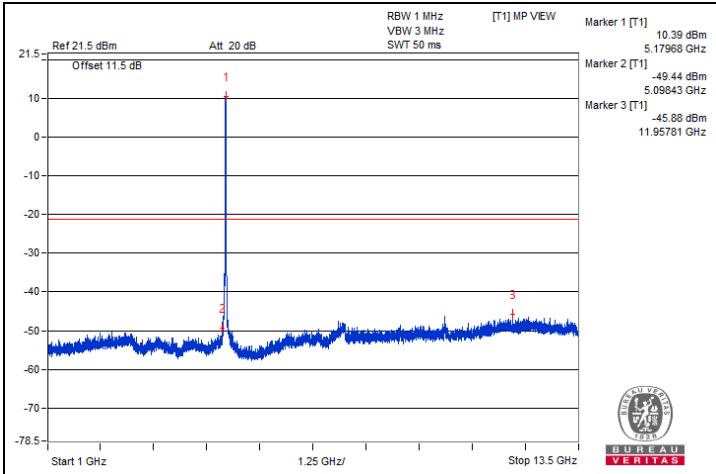


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5144.72 | 62.71 PK | 74 | -11.29 | -35.7 | 3.15 | -32.55 |
| 2 | 5149 | 47.26 AV | 54 | -6.74 | -51.15 | 3.15 | -48.00 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

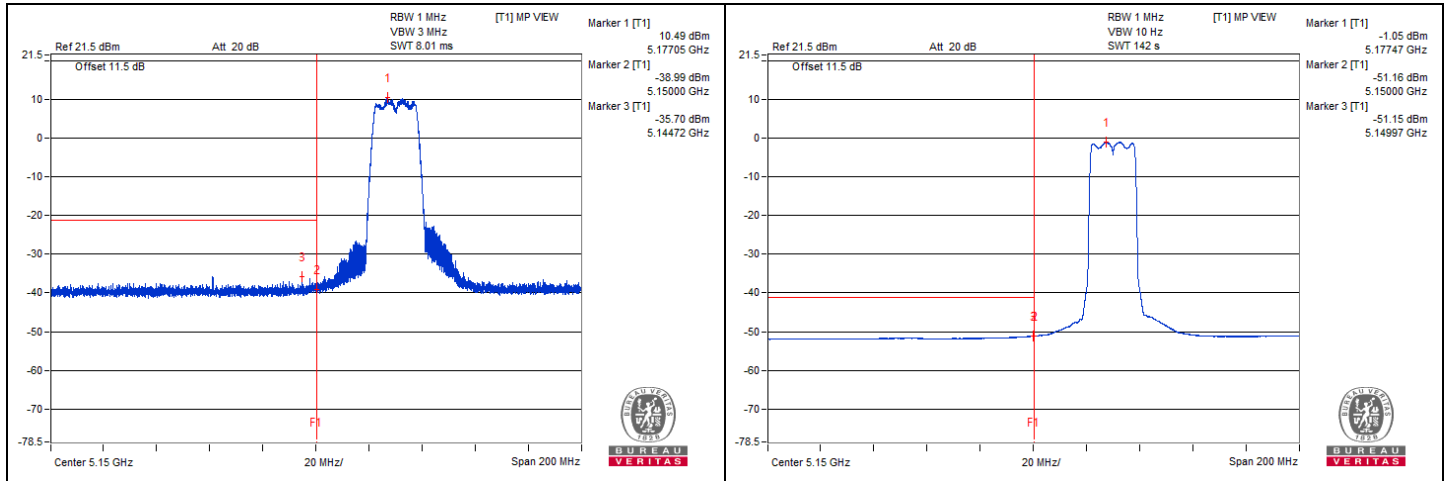







802.11a - Channel 40

Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | #3460.93 | 48.8 PK | 68.2 | -19.4 | -52.28 | 5.825 | -46.46 |
| 2 | #6925 | 49.59 PK | 68.2 | -18.61 | -51.49 | 5.825 | -45.67 |
| 3 | #10404.68 | 55.04 PK | 68.2 | -13.16 | -46.04 | 5.825 | -40.22 |
| 4 | 15600.18 | 41.76 PK | 74 | -32.24 | -59.32 | 5.825 | -53.50 |
| 5 | 15608.81 | 30.49 AV | 54 | -23.51 | -70.59 | 5.825 | -64.77 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

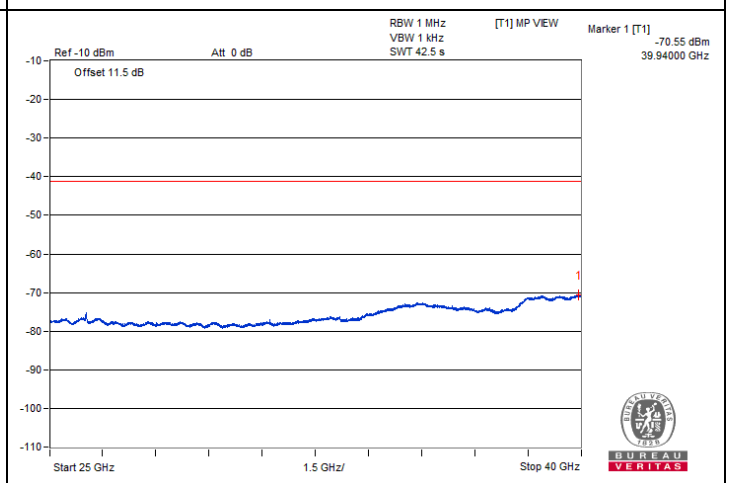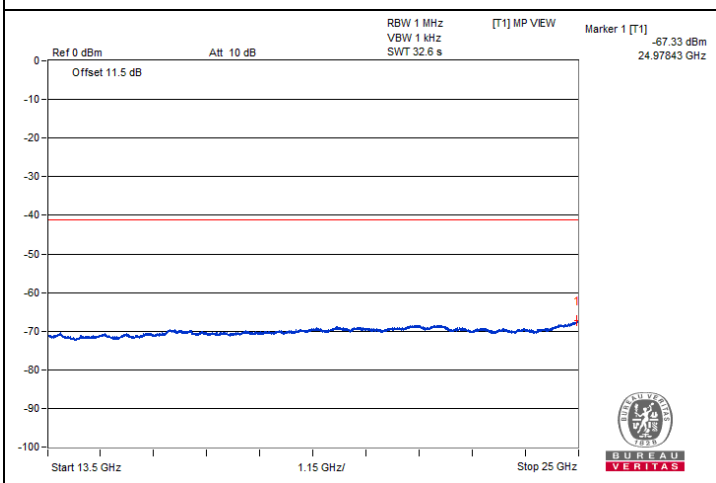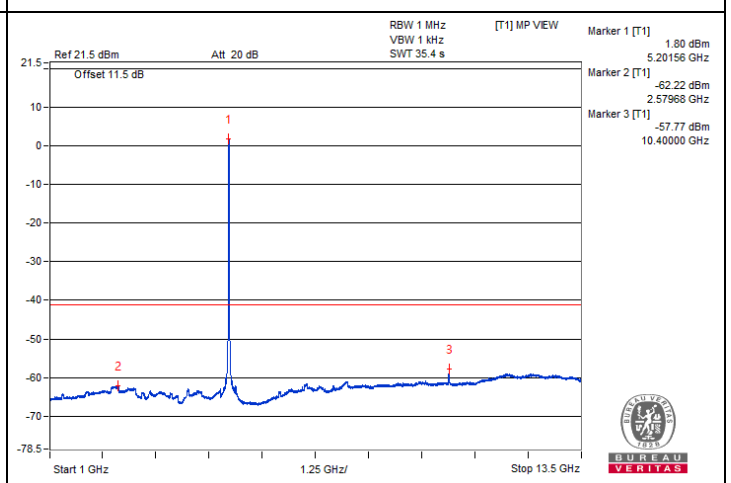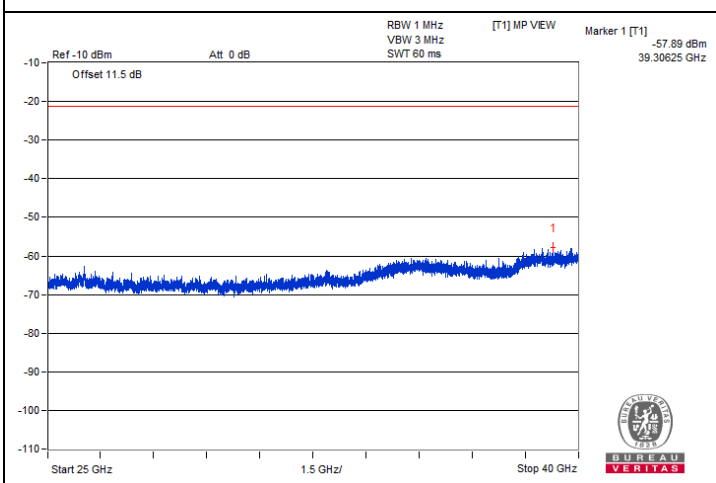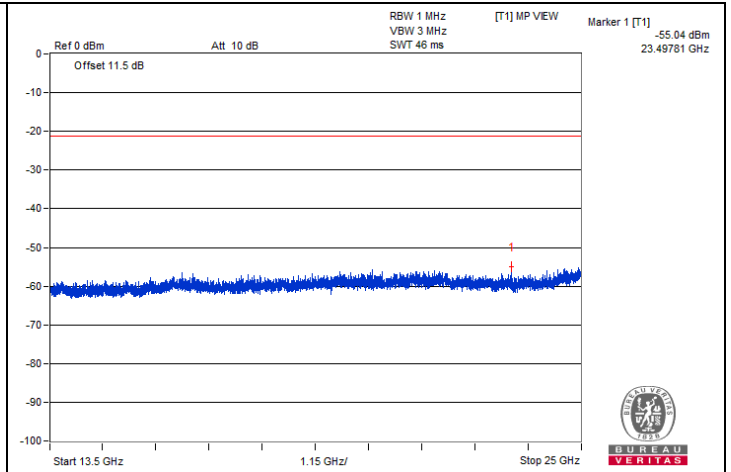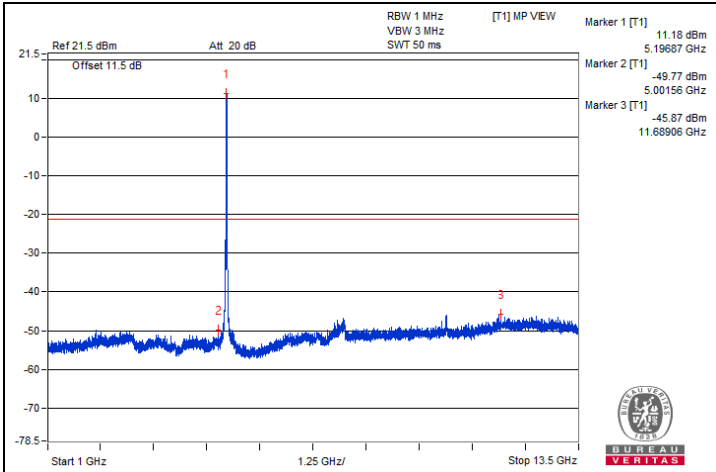


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5126.1 | 61.66 PK | 74 | -12.34 | -36.75 | 3.15 | -33.60 |
| 2 | 5119.97 | 46.77 AV | 54 | -7.23 | -51.64 | 3.15 | -48.49 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

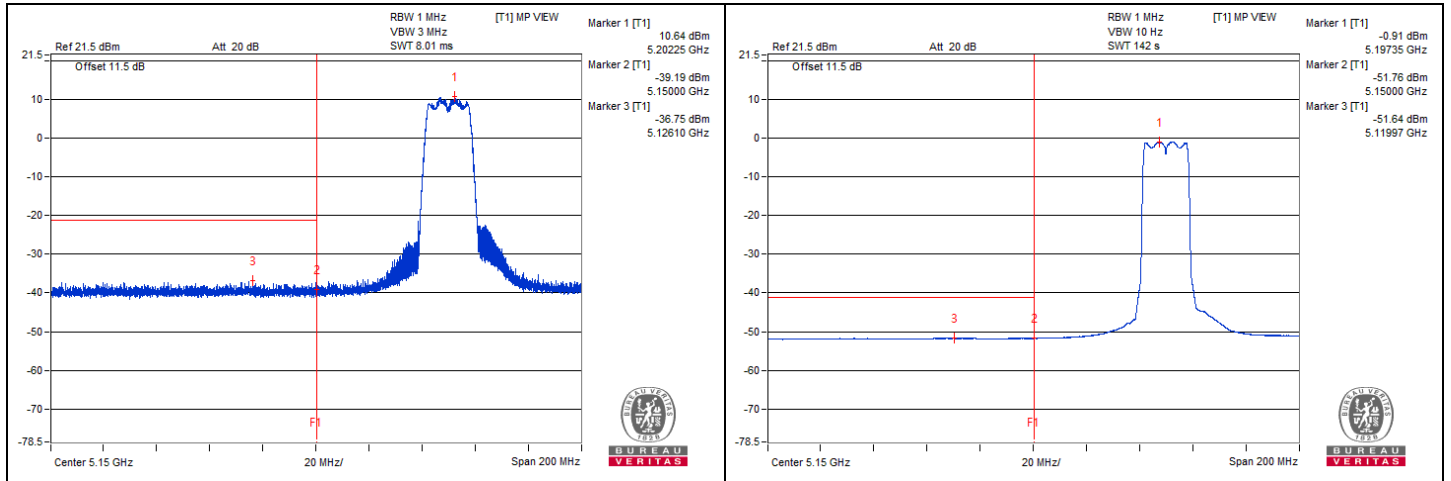







802.11a - Channel 48

Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3503.12 | 48.23 PK | 74 | -25.77 | -52.85 | 5.825 | -47.03 |
| 2 | 3504.68 | 36.97 AV | 54 | -17.03 | -64.11 | 5.825 | -58.29 |
| 3 | #6987.5 | 50.78 PK | 68.2 | -17.42 | -50.3 | 5.825 | -44.48 |
| 4 | #10475 | 53.92 PK | 68.2 | -14.28 | -47.16 | 5.825 | -41.34 |
| 5 | 15702.25 | 42.08 PK | 74 | -31.92 | -59 | 5.825 | -53.18 |
| 6 | 15725.25 | 30.78 AV | 54 | -23.22 | -70.3 | 5.825 | -64.48 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

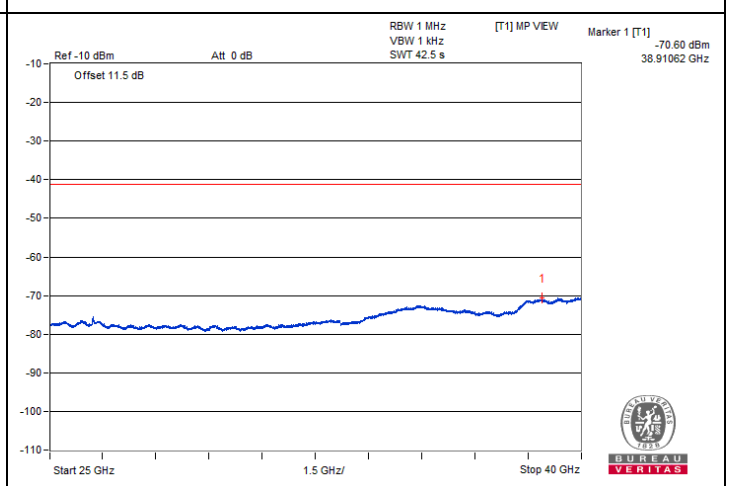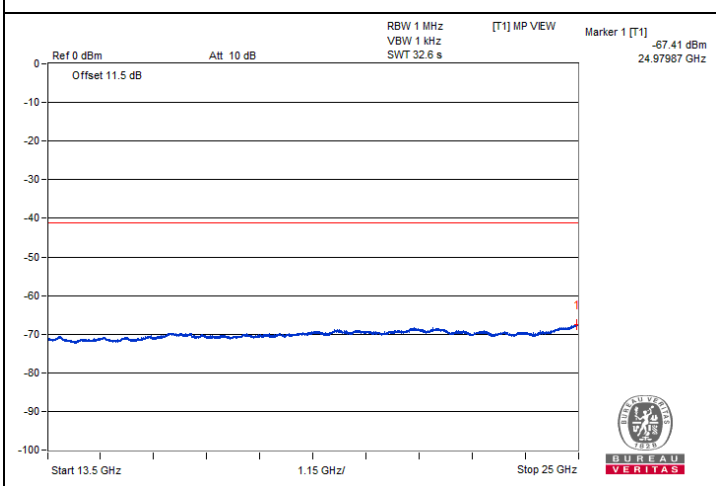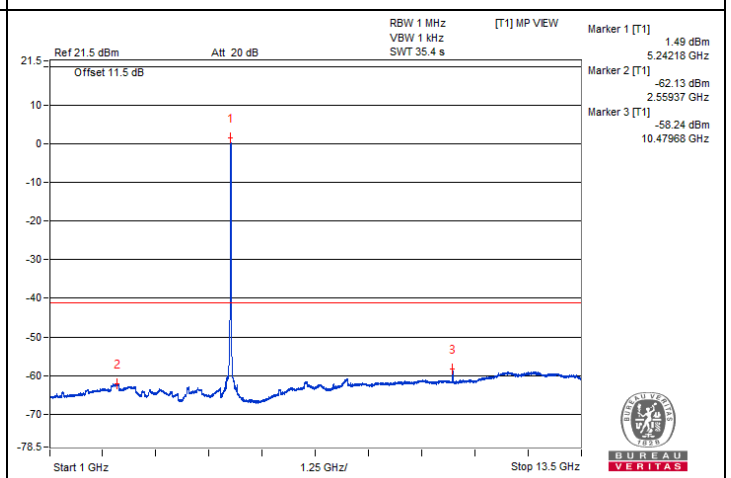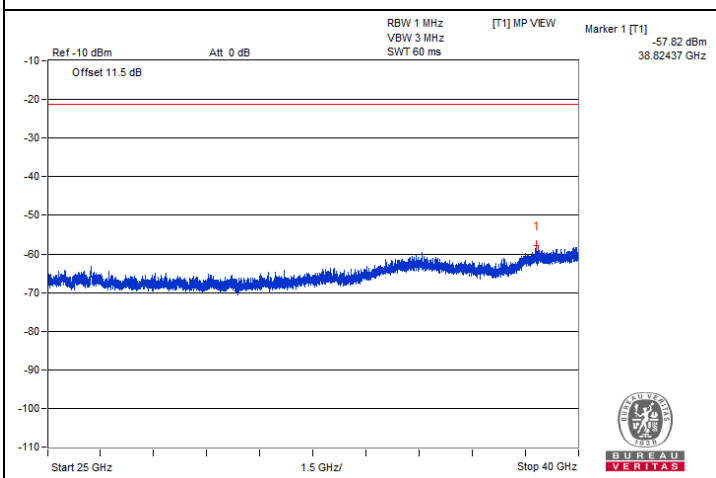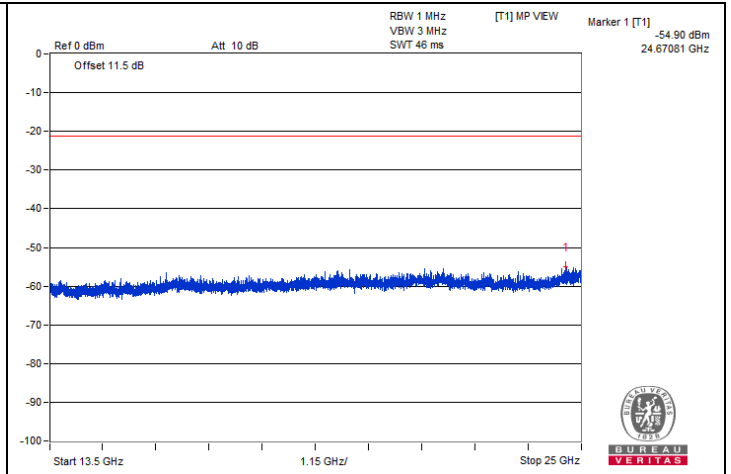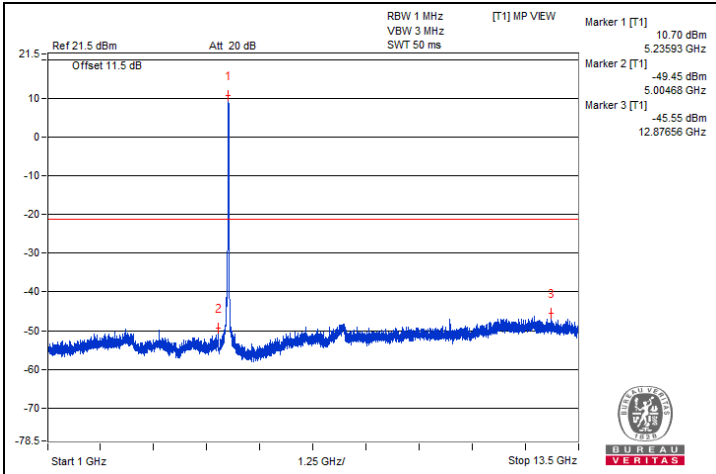


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5055.27 | 61.69 PK | 74 | -12.31 | -36.72 | 3.15 | -33.57 |
| 2 | 5119.97 | 46.64 AV | 54 | -7.36 | -51.77 | 3.15 | -48.62 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

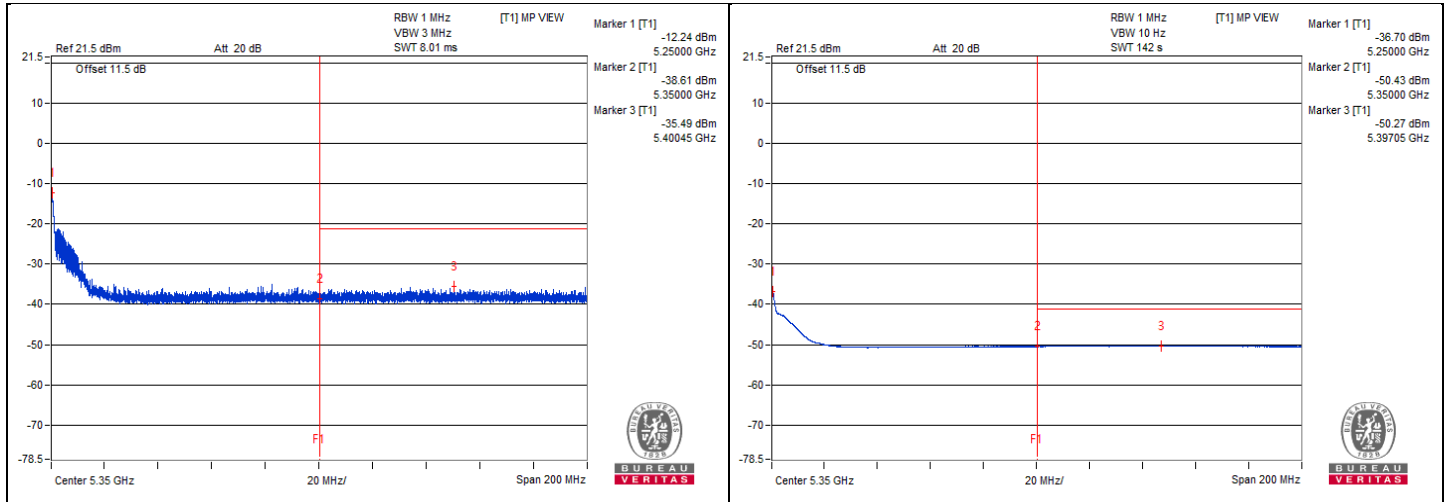







802.11a - Channel 52

Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3523.43 | 48.43 PK | 74 | -25.57 | -52.65 | 5.825 | -46.83 |
| 2 | 3512.5 | 37.2 AV | 54 | -16.8 | -63.88 | 5.825 | -58.06 |
| 3 | #7007.81 | 50.28 PK | 68.2 | -17.92 | -50.8 | 5.825 | -44.98 |
| 4 | #10517.18 | 54.31 PK | 68.2 | -13.89 | -46.77 | 5.825 | -40.95 |
| 5 | 15769.81 | 42.08 PK | 74 | -31.92 | -59 | 5.825 | -53.18 |
| 6 | 15792.81 | 30.34 AV | 54 | -23.66 | -70.74 | 5.825 | -64.92 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

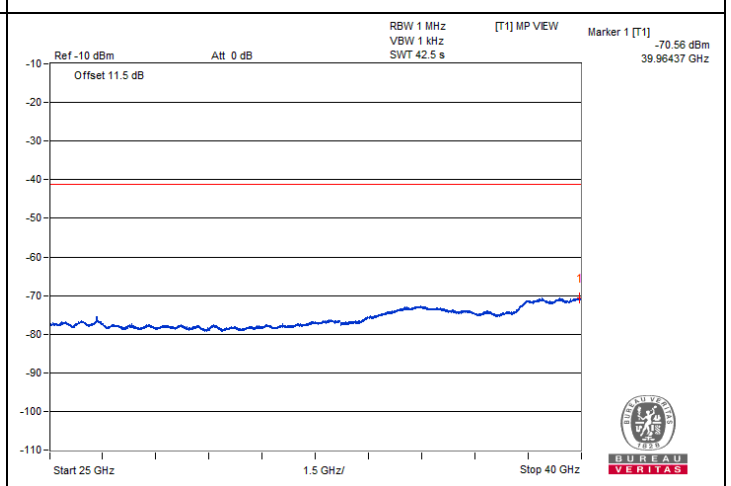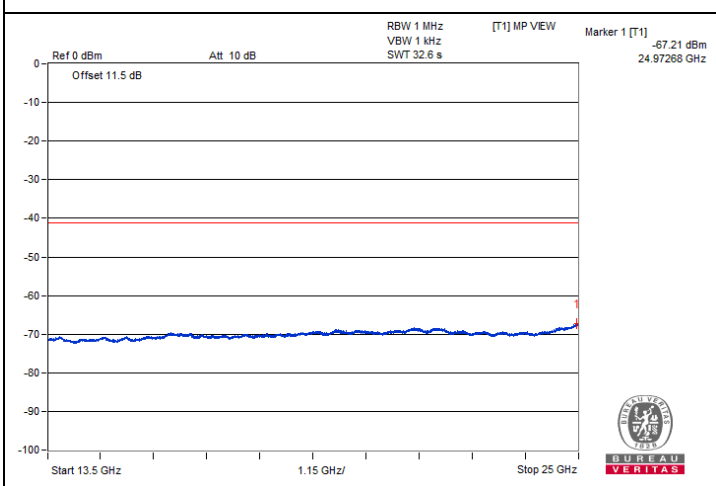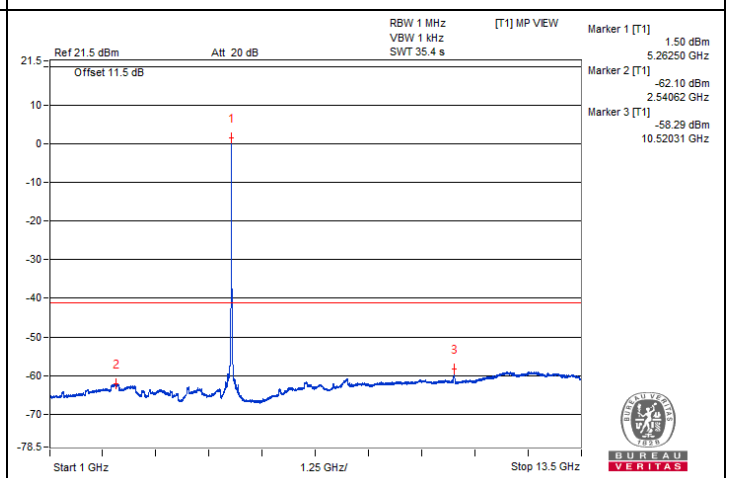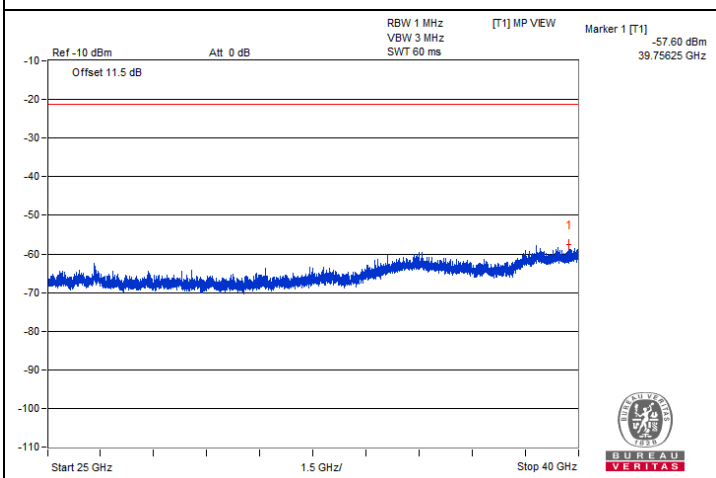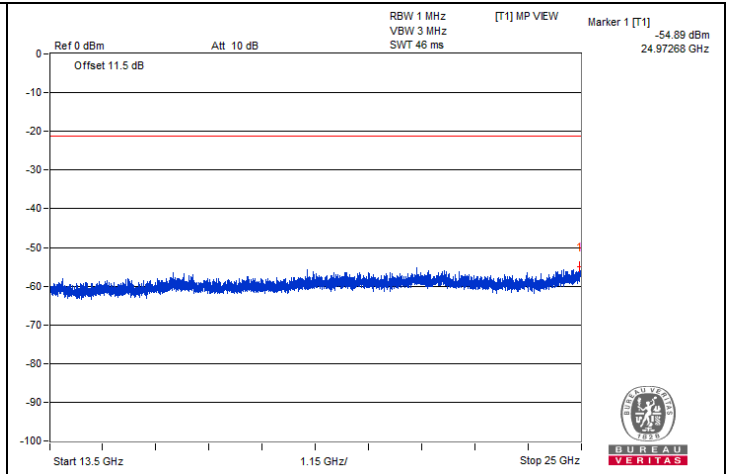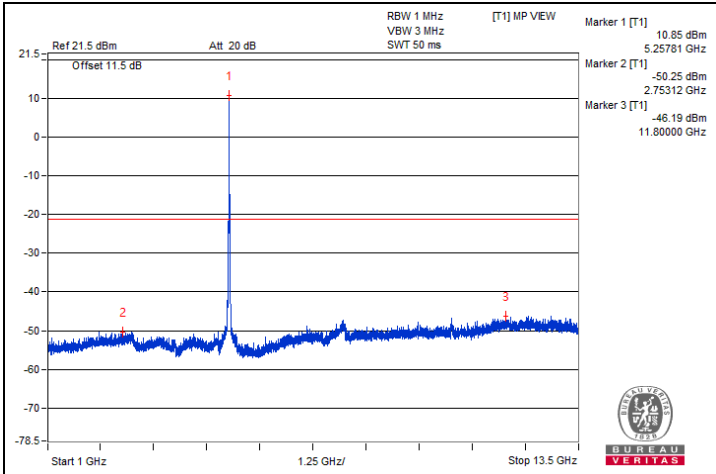


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5371.65 | 63.1 PK | 74 | -10.9 | -34.91 | 2.75 | -32.16 |
| 2 | 5417.27 | 47.73 AV | 54 | -6.27 | -50.28 | 2.75 | -47.53 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

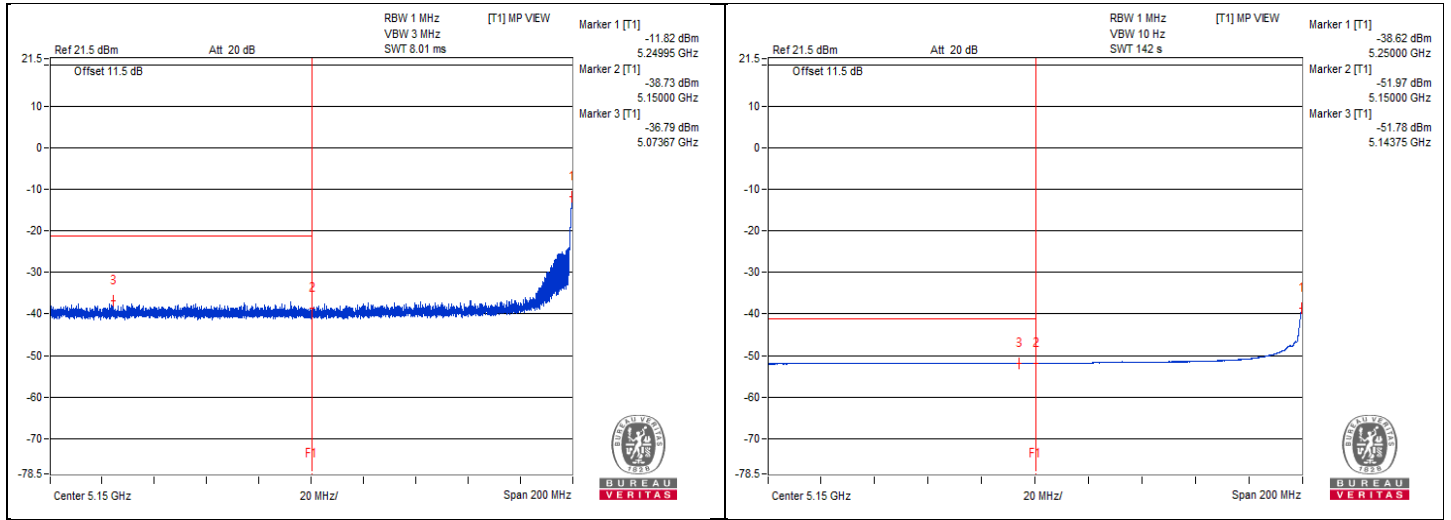







802.11a - Channel 60

Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3542.18 | 48.49 PK | 74 | -25.51 | -52.59 | 5.825 | -46.77 |
| 2 | 3550 | 37.4 AV | 54 | -16.6 | -63.68 | 5.825 | -57.86 |
| 3 | #7068.75 | 50.11 PK | 68.2 | -18.09 | -50.97 | 5.825 | -45.15 |
| 4 | #10592.18 | 52.9 PK | 68.2 | -15.3 | -48.18 | 5.825 | -42.36 |
| 5 | 10601.56 | 42.6 AV | 54 | -11.4 | -58.48 | 5.825 | -52.66 |
| 6 | 15915 | 41.67 PK | 74 | -32.33 | -59.41 | 5.825 | -53.59 |
| 7 | 15897.75 | 30.55 AV | 54 | -23.45 | -70.53 | 5.825 | -64.71 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

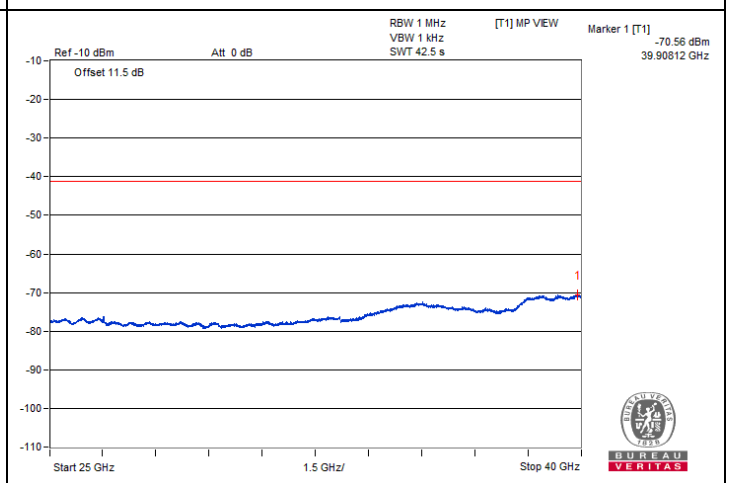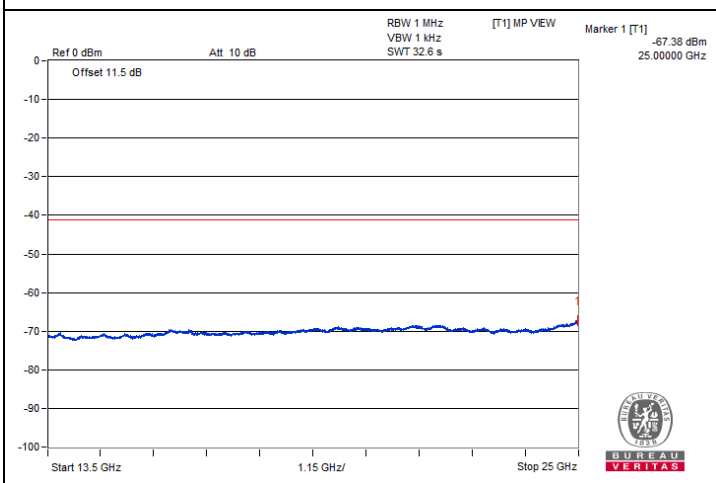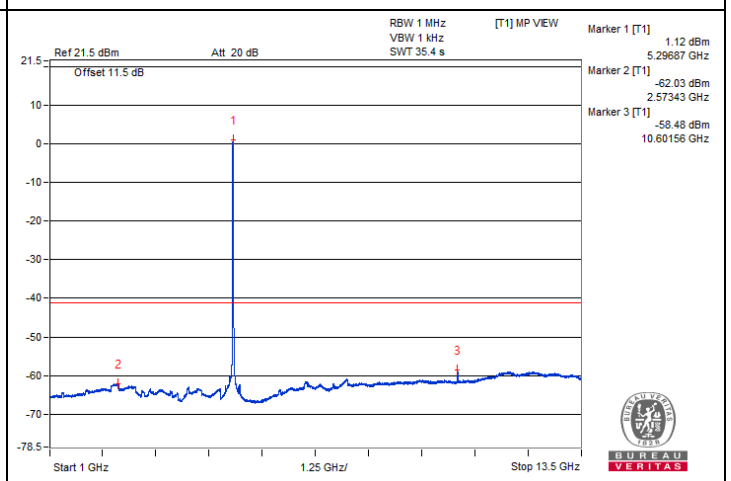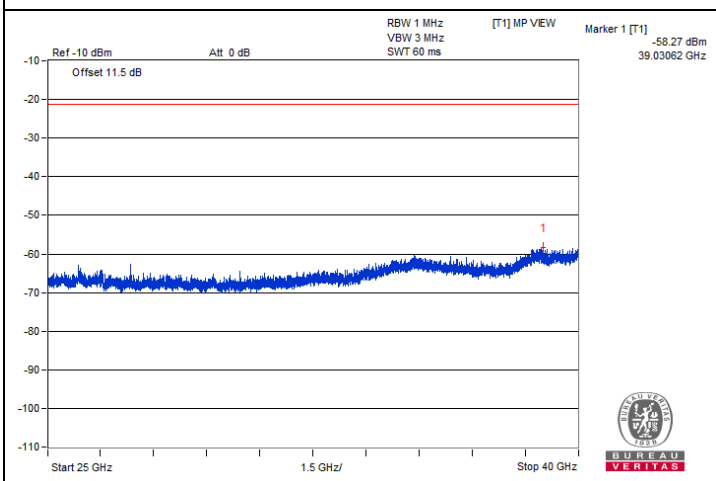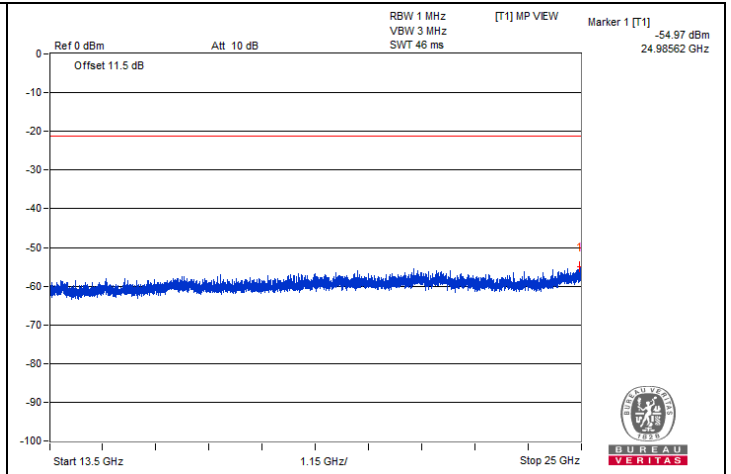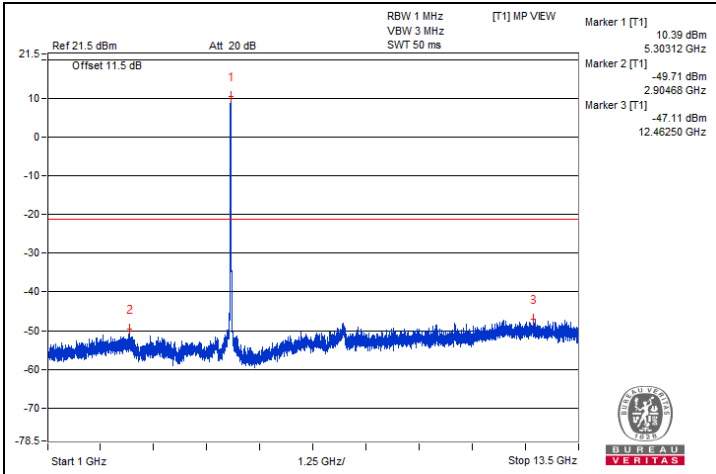


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5411.25 | 62.57 PK | 74 | -11.43 | -35.44 | 2.75 | -32.69 |
| 2 | 5382.15 | 47.75 AV | 54 | -6.25 | -50.26 | 2.75 | -47.51 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

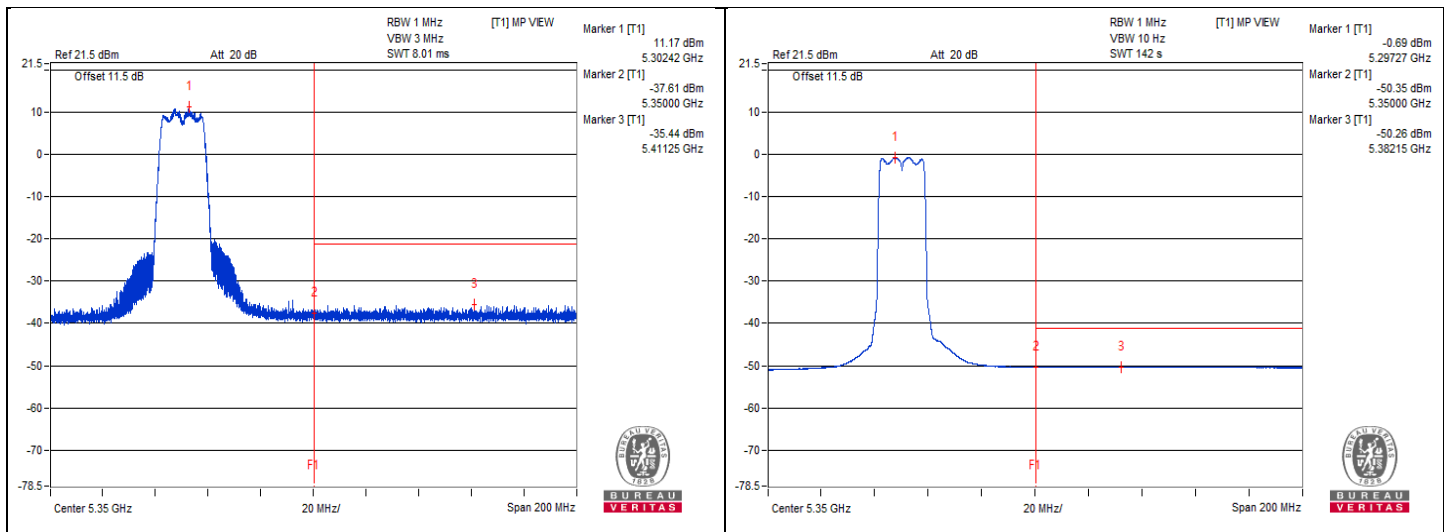







802.11a - Channel 64

Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3554.68 | 49.27 PK | 74 | -24.73 | -51.81 | 5.825 | -45.99 |
| 2 | 3542.18 | 37.21 AV | 54 | -16.79 | -63.87 | 5.825 | -58.05 |
| 3 | #7082.81 | 50.78 PK | 68.2 | -17.42 | -50.3 | 5.825 | -44.48 |
| 4 | 10646.87 | 54 PK | 74 | -20 | -47.08 | 5.825 | -41.26 |
| 5 | 10640.62 | 42.47 AV | 54 | -11.53 | -58.61 | 5.825 | -52.79 |
| 6 | 15948.06 | 42.17 PK | 74 | -31.83 | -58.91 | 5.825 | -53.09 |
| 7 | 15976.81 | 30.48 AV | 54 | -23.52 | -70.6 | 5.825 | -64.78 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

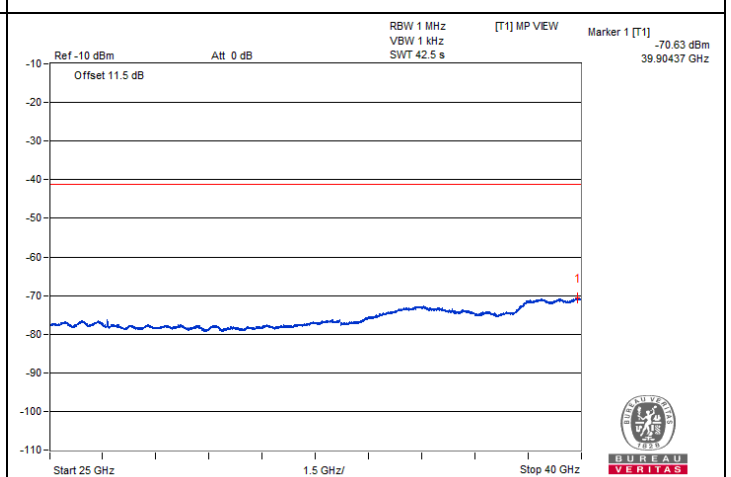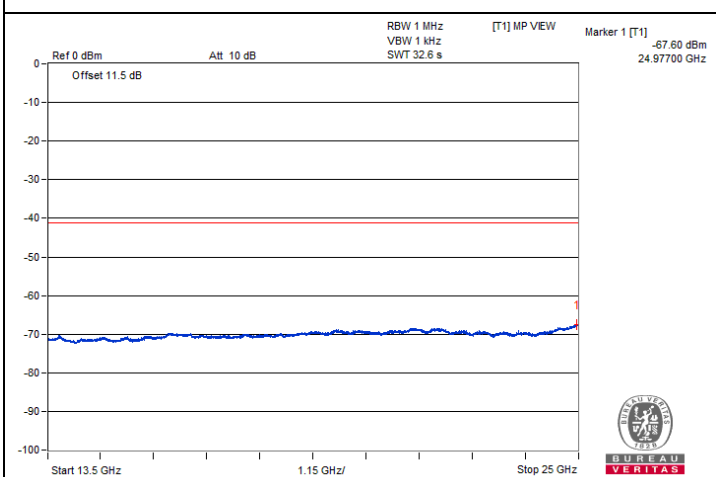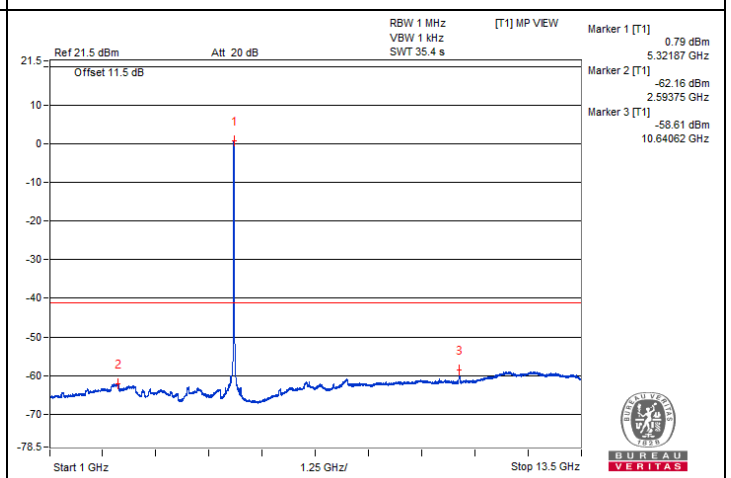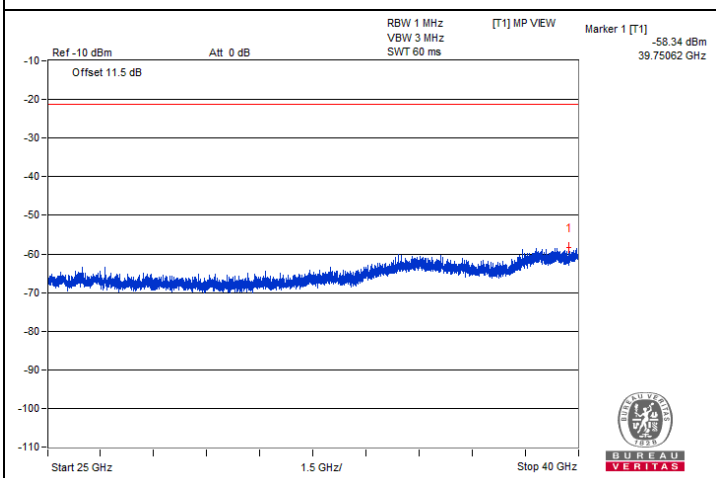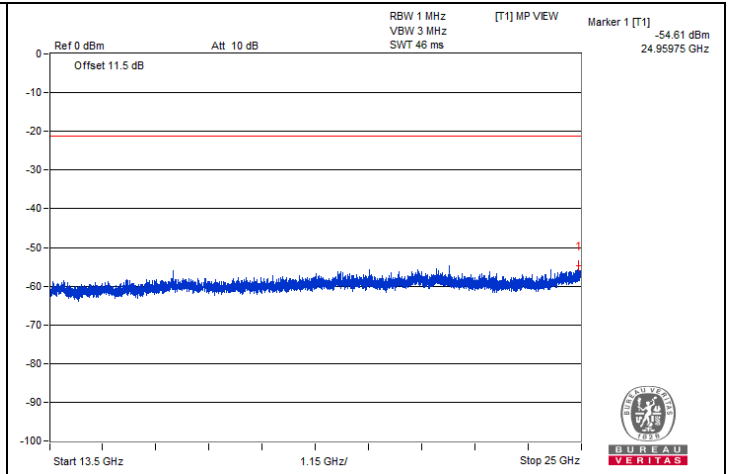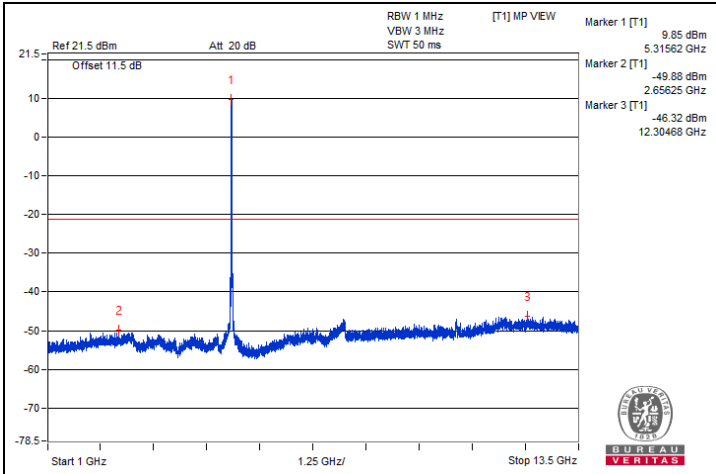


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5352.15 | 63.61 PK | 74 | -10.39 | -34.4 | 2.75 | -31.65 |
| 2 | 5350 | 48.12 AV | 54 | -5.88 | -49.89 | 2.75 | -47.14 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

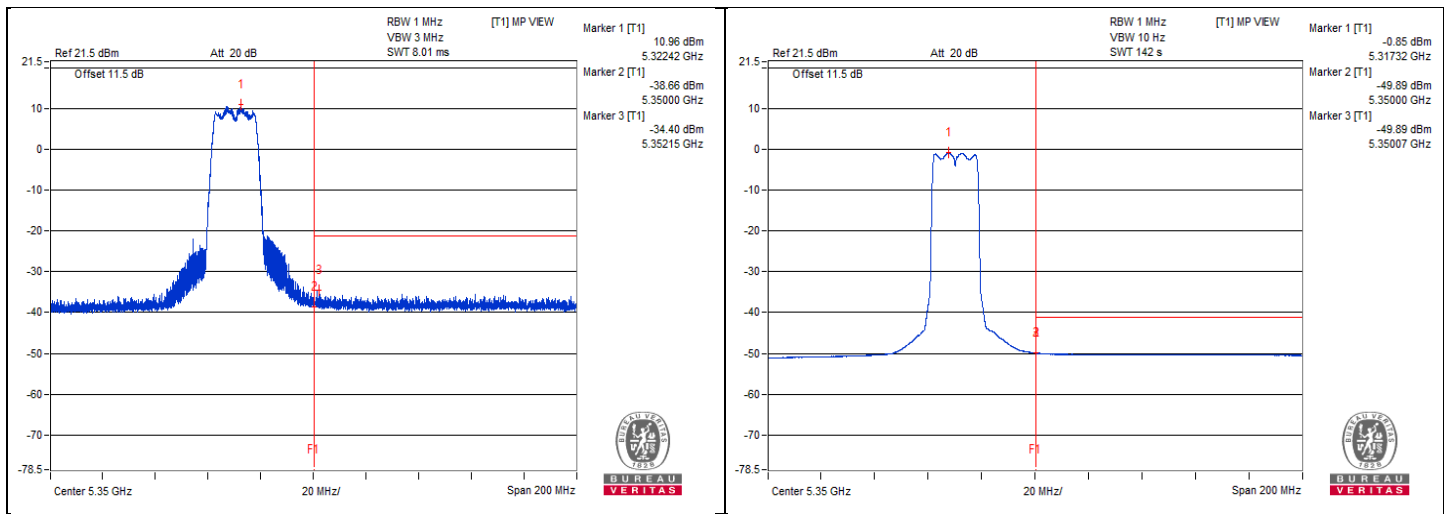







802.11a - Channel 100

Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3659.37 | 48.6 PK | 74 | -25.4 | -52.48 | 5.825 | -46.66 |
| 2 | 3651.56 | 37.11 AV | 54 | -16.89 | -63.97 | 5.825 | -58.15 |
| 3 | 7348.43 | 50.93 PK | 74 | -23.07 | -50.15 | 5.825 | -44.33 |
| 4 | 7332.81 | 39.43 AV | 54 | -14.57 | -61.65 | 5.825 | -55.83 |
| 5 | 11000 | 55.47 PK | 74 | -18.53 | -45.61 | 5.825 | -39.79 |
| 6 | 11001.56 | 42.6 AV | 54 | -11.4 | -58.48 | 5.825 | -52.66 |
| 7 | #16487.12 | 42.28 PK | 68.2 | -25.92 | -58.8 | 5.825 | -52.98 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

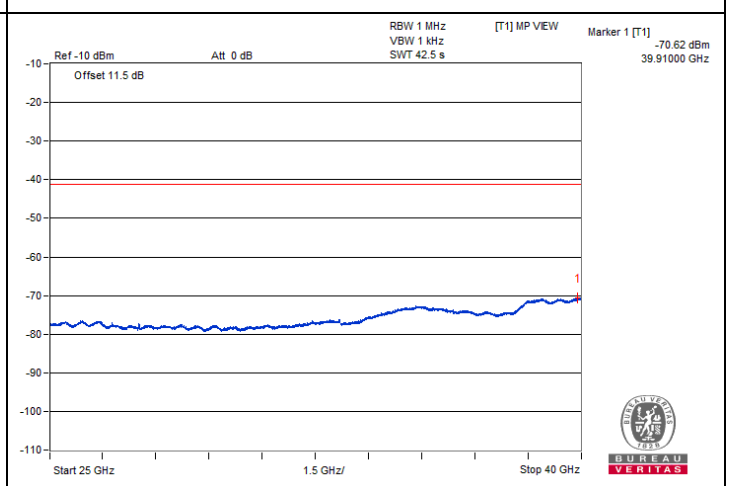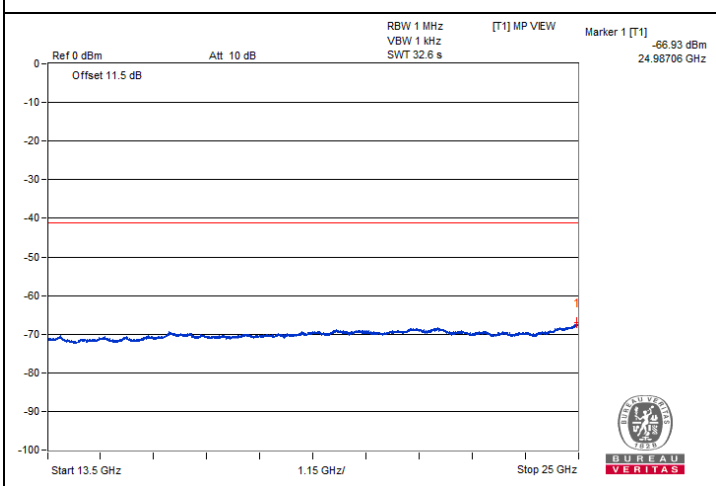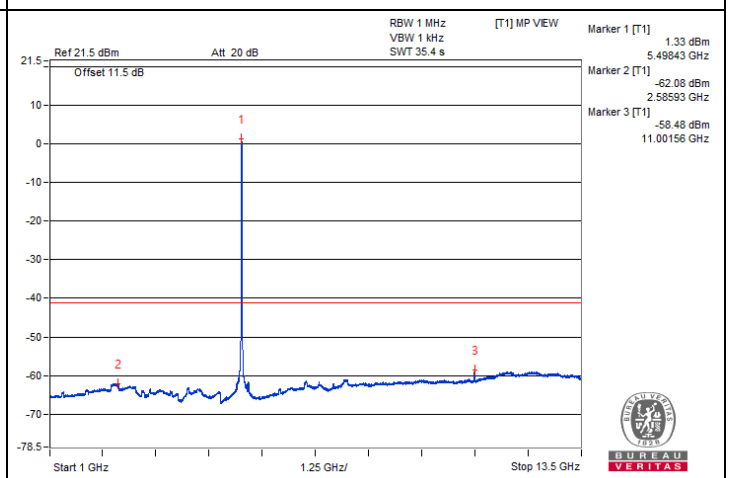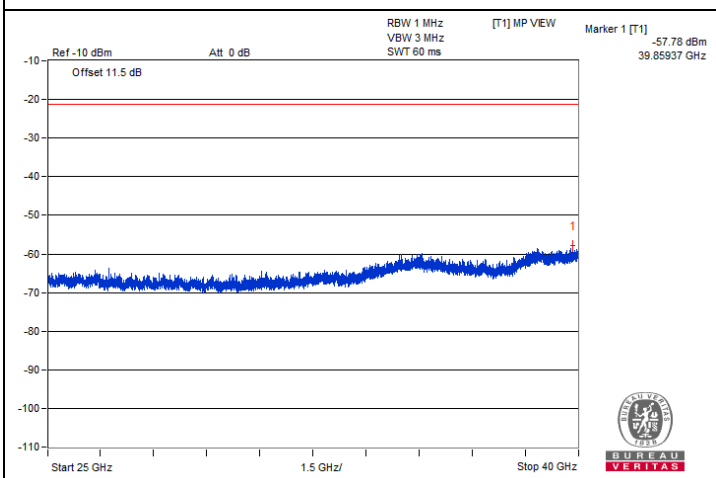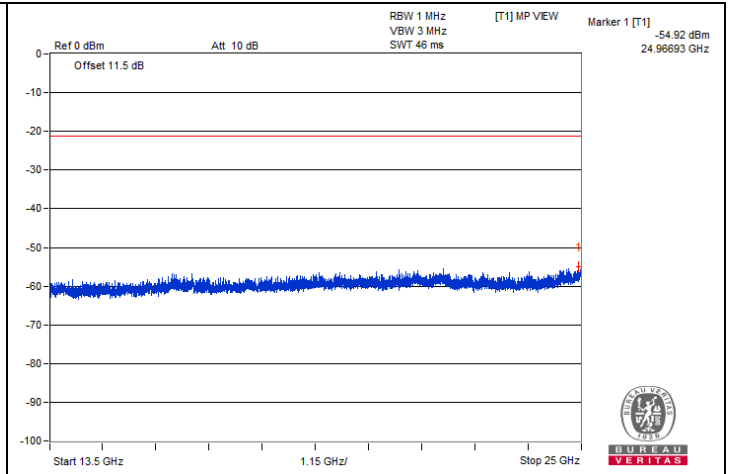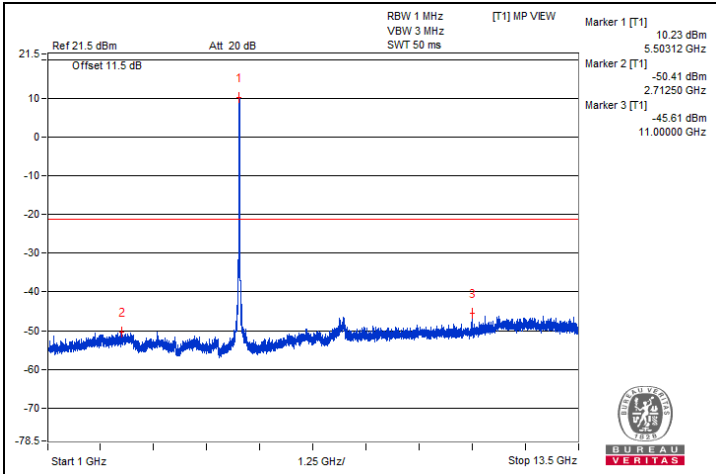


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5371 | 64.13 PK | 74 | -9.87 | -35.38 | 4.25 | -31.13 |
| 2 | 5459.06 | 49.39 AV | 54 | -4.61 | -50.12 | 4.25 | -45.87 |
| 3 | #5467.53 | 63.91 PK | 68.2 | -4.29 | -35.6 | 4.25 | -31.35 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.






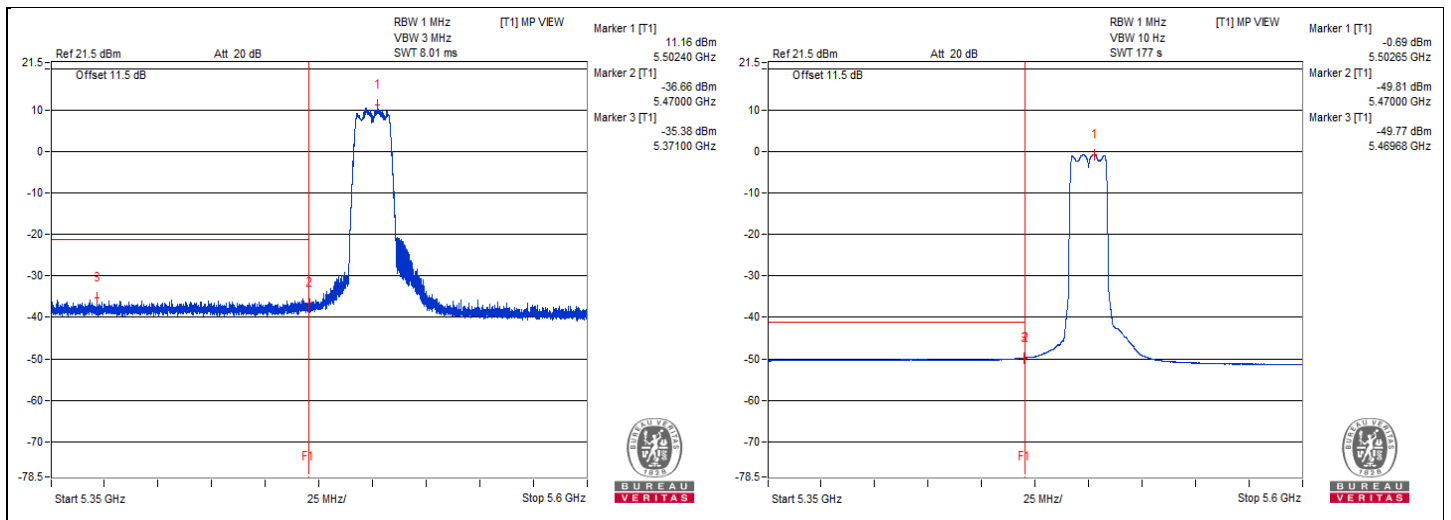


802.11a - Channel 116
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3725 | 48.47 PK | 74 | -25.53 | -52.61 | 5.825 | -46.79 |
| 2 | 3703.12 | 36.65 AV | 54 | -17.35 | -64.43 | 5.825 | -58.61 |
| 3 | 7442.18 | 50.9 PK | 74 | -23.1 | -50.18 | 5.825 | -44.36 |
| 4 | 7440.62 | 38.21 AV | 54 | -15.79 | -62.87 | 5.825 | -57.05 |
| 5 | 11168.75 | 54.23 PK | 74 | -19.77 | -46.85 | 5.825 | -41.03 |
| 6 | 11159.37 | 42.85 AV | 54 | -11.15 | -58.23 | 5.825 | -52.41 |
| 7 | #16750.18 | 43.21 PK | 68.2 | -24.99 | -57.87 | 5.825 | -52.05 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

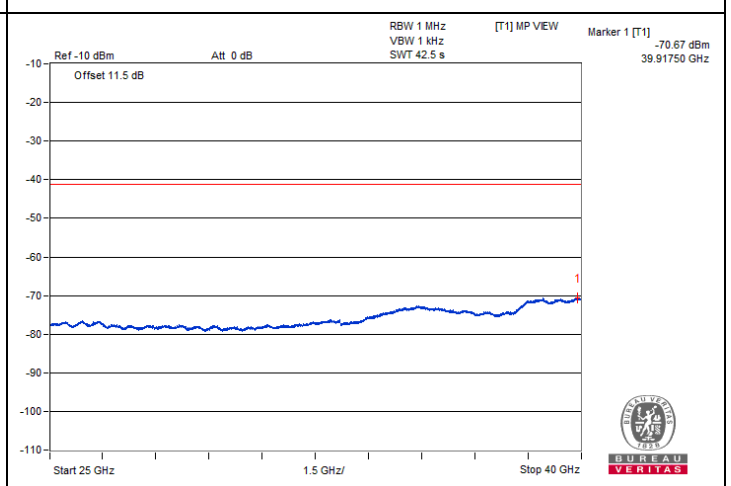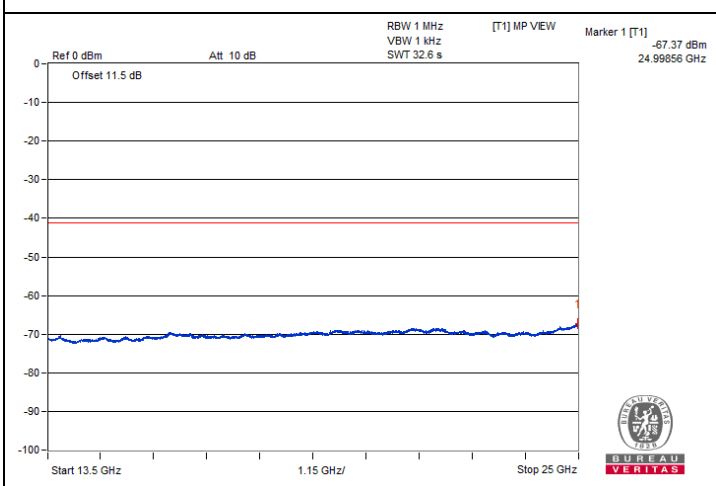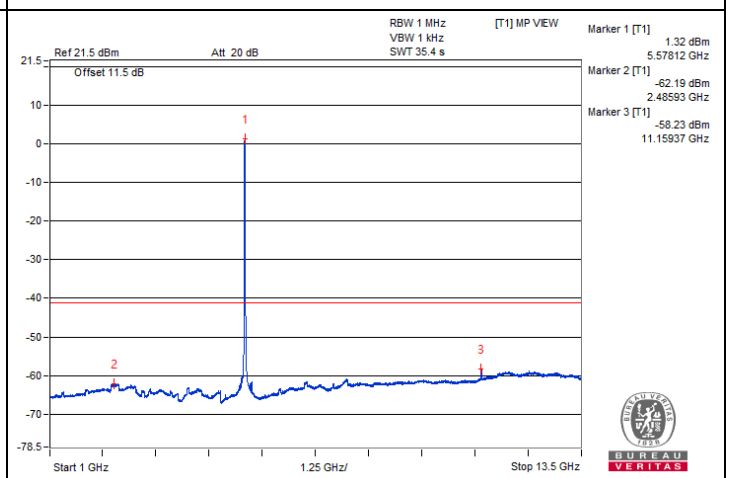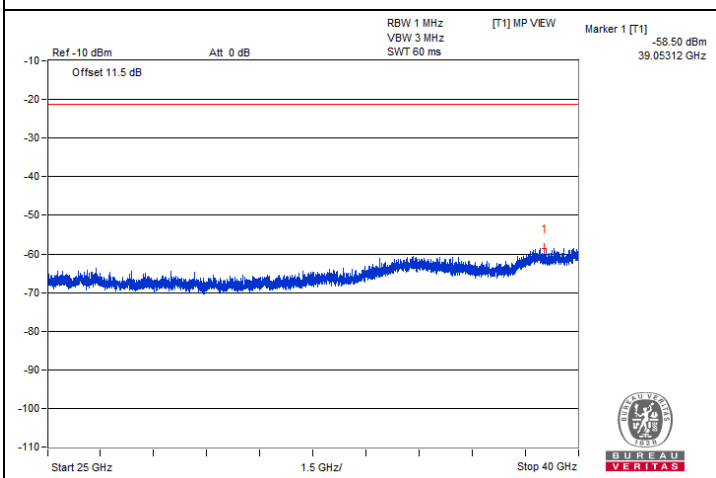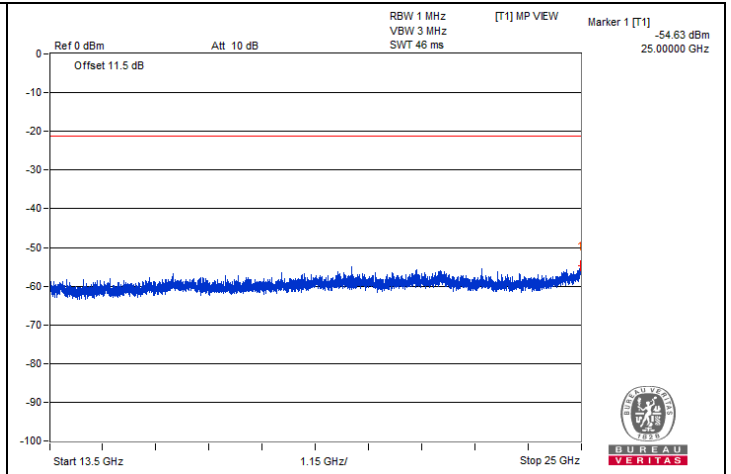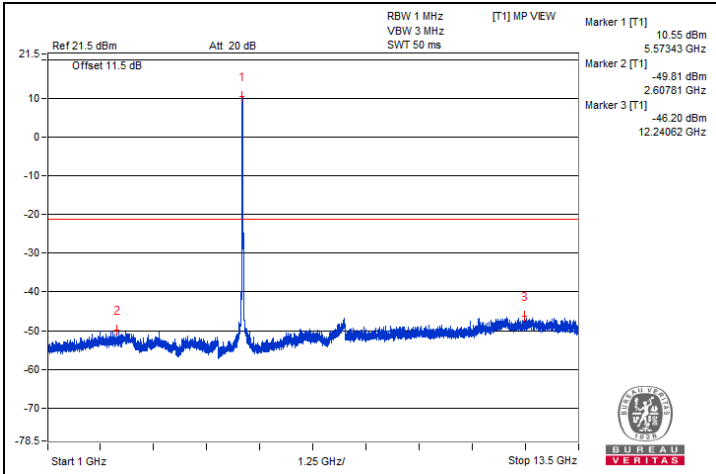


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5399.62 | 64.56 PK | 74 | -9.44 | -34.95 | 4.25 | -30.70 |
| 2 | 5409.34 | 49.22 AV | 54 | -4.78 | -50.29 | 4.25 | -46.04 |
| 3 | #5467.4 | 64.06 PK | 68.2 | -4.14 | -35.45 | 4.25 | -31.20 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

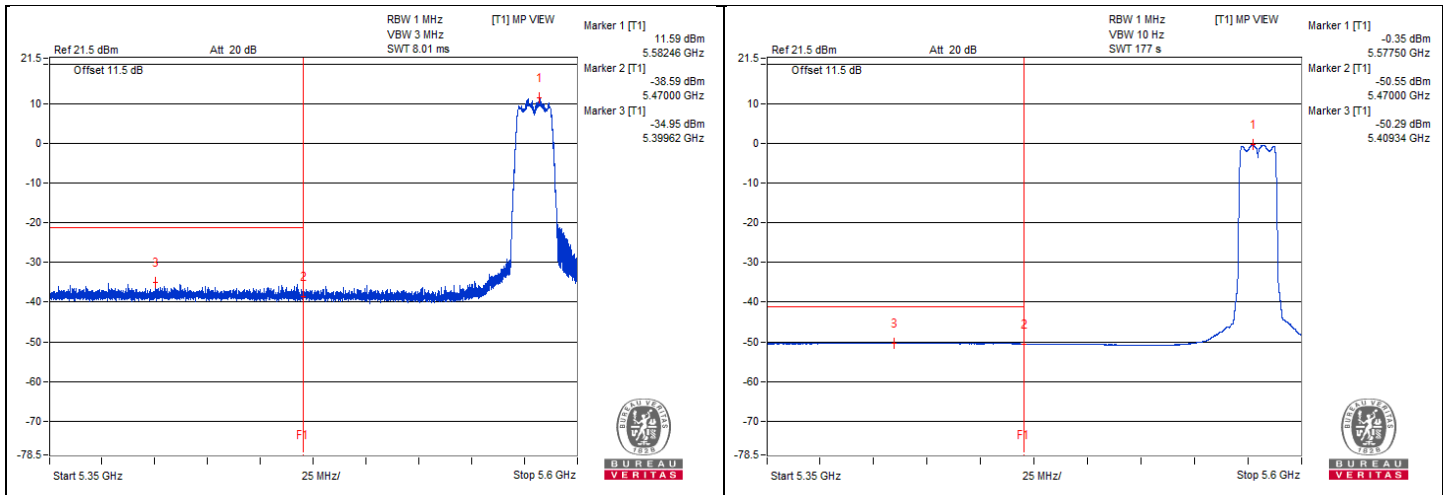







802.11a - Channel 140

Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3812.5 | 48.04 PK | 74 | -25.96 | -53.04 | 5.825 | -47.22 |
| 2 | 3810.93 | 36.99 AV | 54 | -17.01 | -64.09 | 5.825 | -58.27 |
| 3 | 7610.93 | 49.82 PK | 74 | -24.18 | -51.26 | 5.825 | -45.44 |
| 4 | 7615.62 | 37.84 AV | 54 | -16.16 | -63.24 | 5.825 | -57.42 |
| 5 | 11400 | 55.92 PK | 74 | -18.08 | -45.16 | 5.825 | -39.34 |
| 6 | 11401.56 | 43.15 AV | 54 | -10.85 | -57.93 | 5.825 | -52.11 |
| 7 | #17080.81 | 42.35 PK | 68.2 | -25.85 | -58.73 | 5.825 | -52.91 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

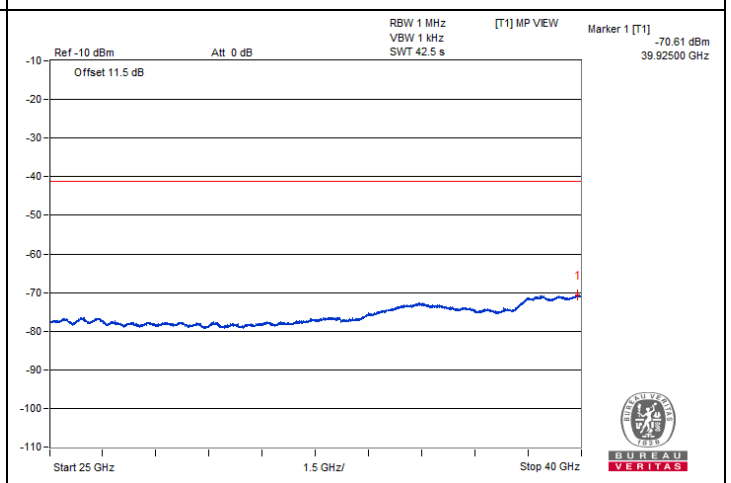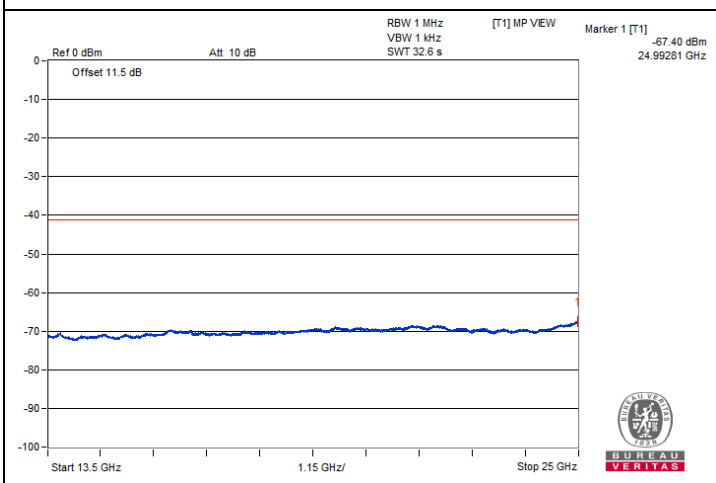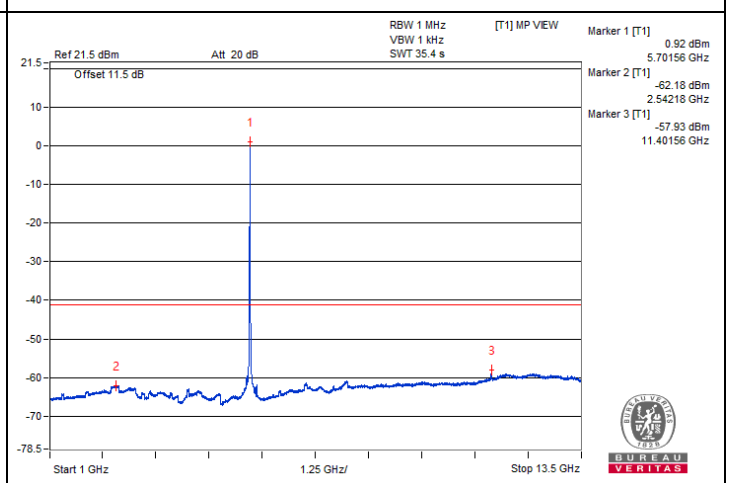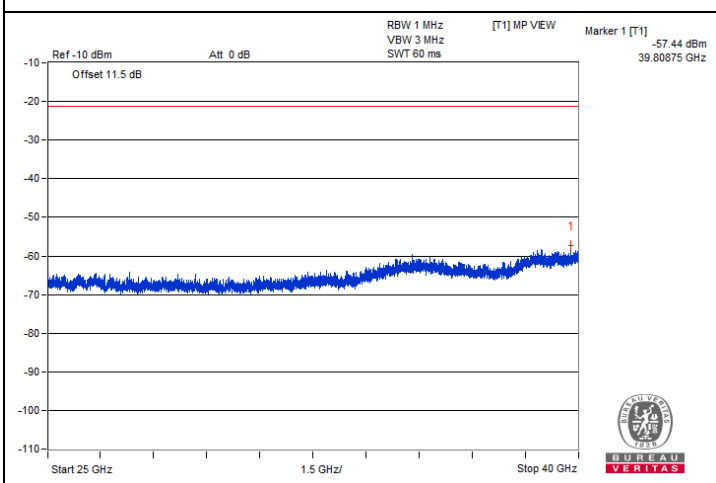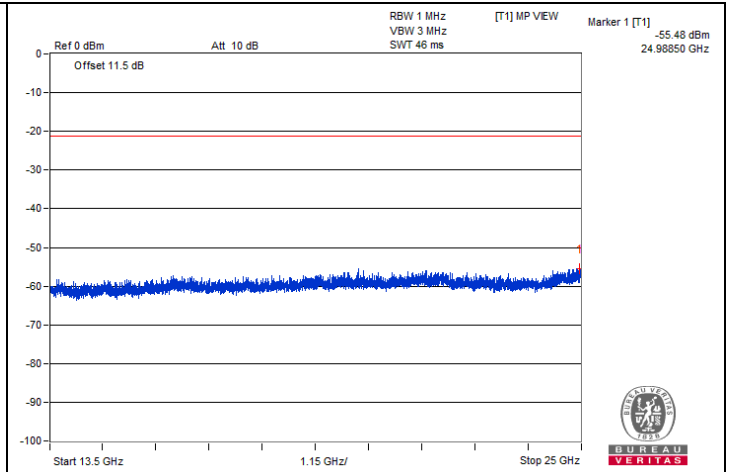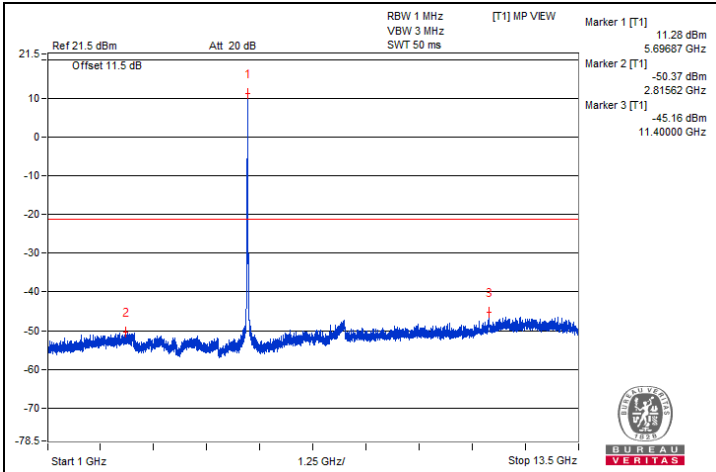


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | #5726.7 | 64.03 PK | 68.2 | -4.17 | -35.48 | 4.25 | -31.23 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.






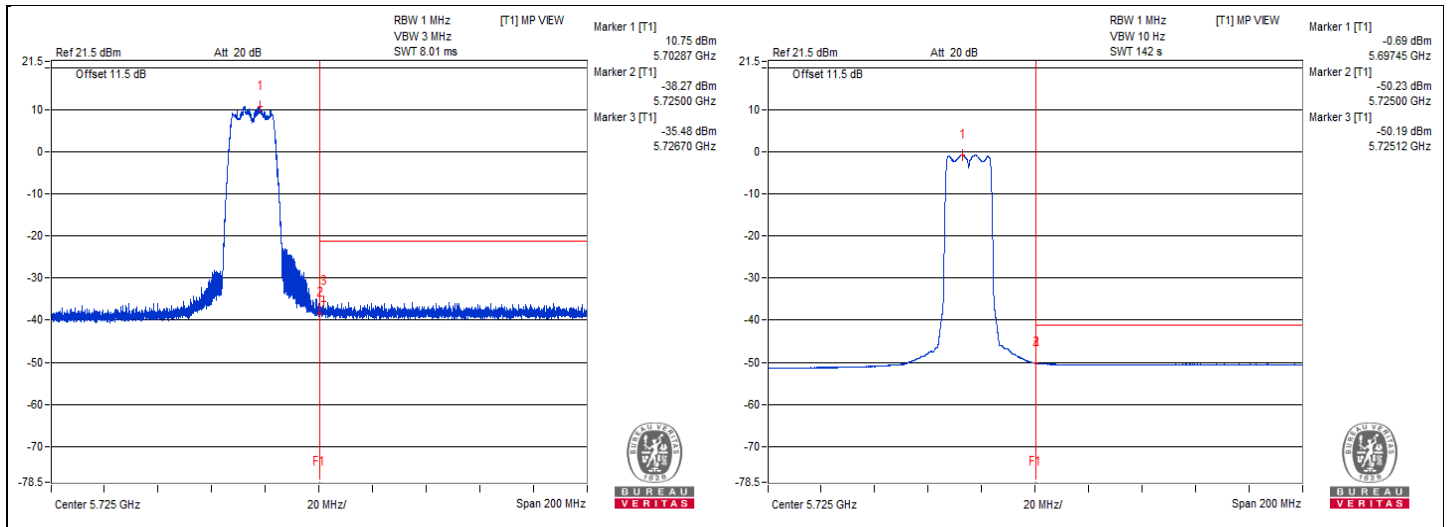


802.11a - Channel 144
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3810.93 | 49.93 PK | 74 | -24.07 | -51.15 | 5.825 | -45.33 |
| 2 | 3809.37 | 37.06 AV | 54 | -16.94 | -64.02 | 5.825 | -58.20 |
| 3 | 7639.06 | 50.61 PK | 74 | -23.39 | -50.47 | 5.825 | -44.65 |
| 4 | 7639.06 | 37.9 AV | 54 | -16.1 | -63.18 | 5.825 | -57.36 |
| 5 | 11440.62 | 56.58 PK | 74 | -17.42 | -44.5 | 5.825 | -38.68 |
| 6 | 11440.62 | 43.33 AV | 54 | -10.67 | -57.75 | 5.825 | -51.93 |
| 7 | #17178.56 | 42.23 PK | 68.2 | -25.97 | -58.85 | 5.825 | -53.03 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

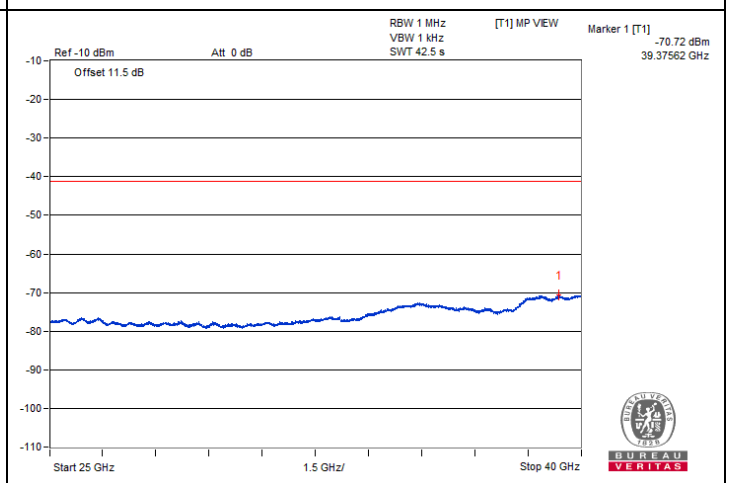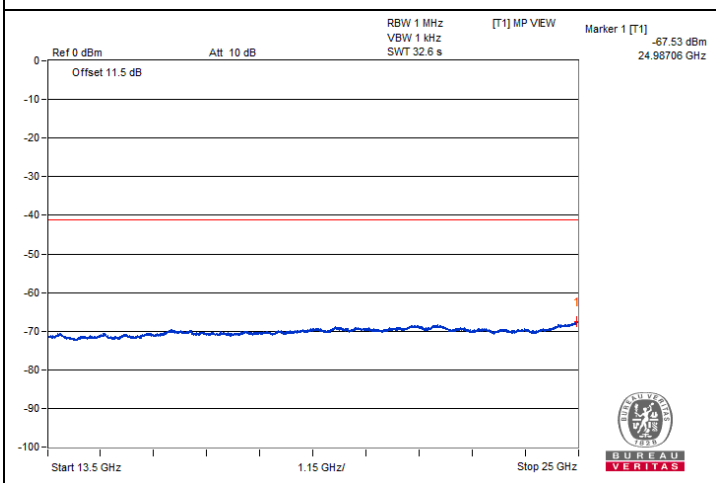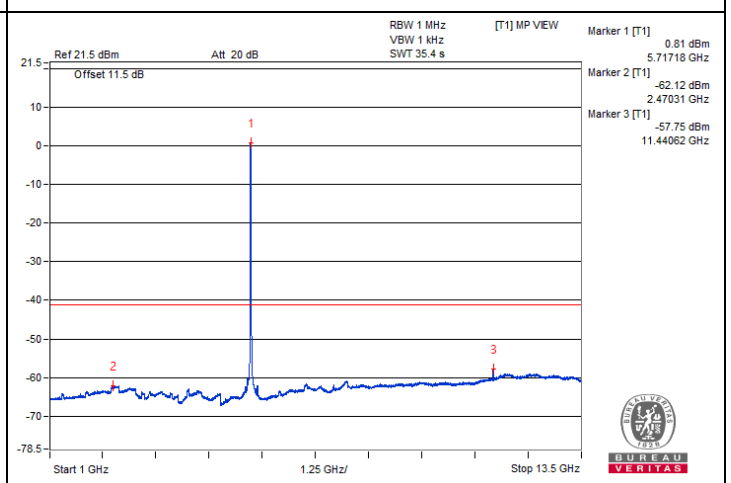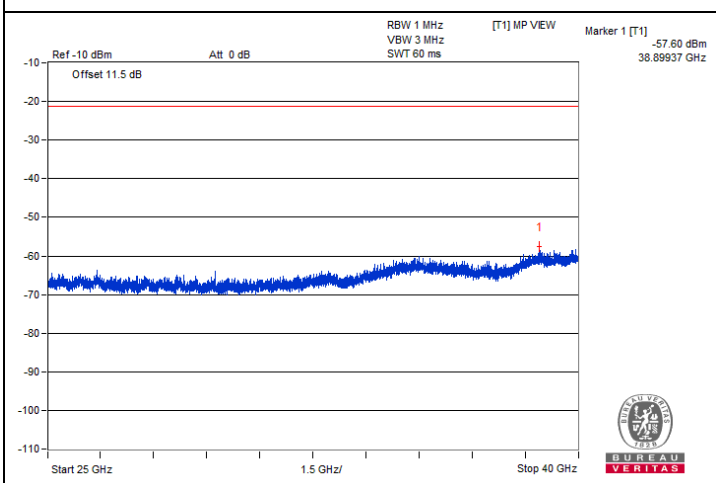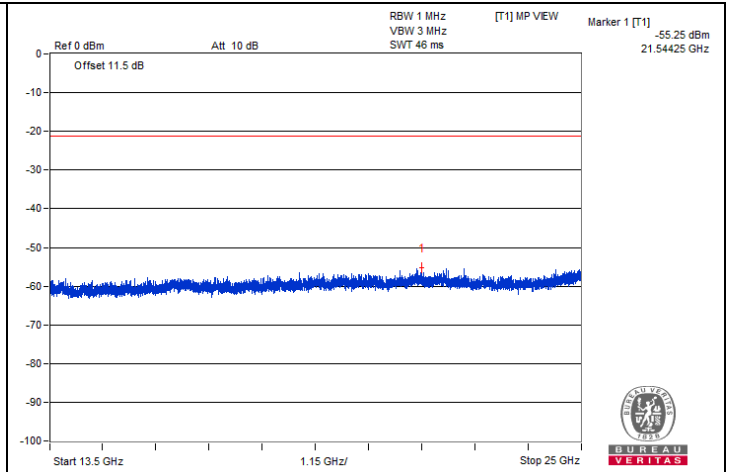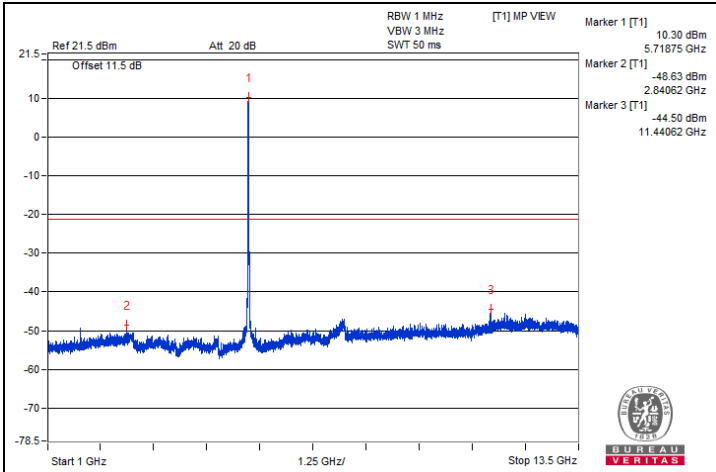


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | #5894.08 | 64.24 PK | 68.2 | -3.96 | -35.27 | 4.25 | -31.02 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

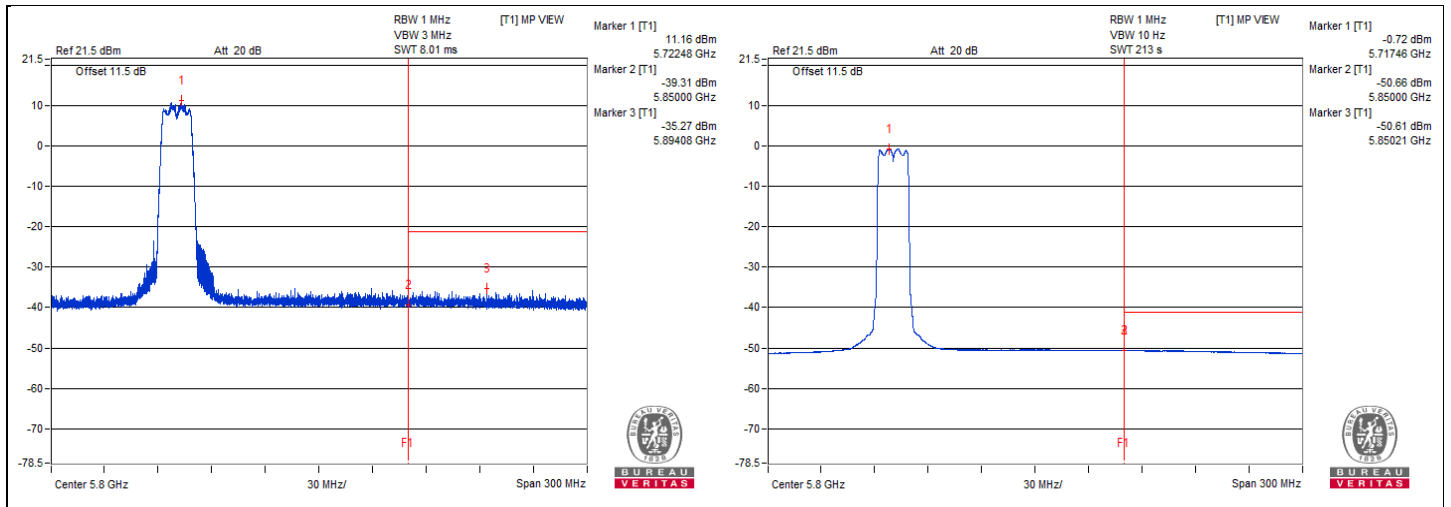







802.11a - Channel 149

Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3820.31 | 49.76 PK | 74 | -24.24 | -51.32 | 5.825 | -45.50 |
| 2 | 3839.06 | 27.31 AV | 54 | -26.69 | -73.77 | 5.825 | -67.95 |
| 3 | 7679.68 | 50.84 PK | 74 | -23.16 | -50.24 | 5.825 | -44.42 |
| 4 | 7659.37 | 29.48 AV | 54 | -24.52 | -71.6 | 5.825 | -65.78 |
| 5 | 11492.18 | 55.79 PK | 74 | -18.21 | -45.29 | 5.825 | -39.47 |
| 6 | 11490.62 | 40.24 AV | 54 | -13.76 | -60.84 | 5.825 | -55.02 |
| 7 | #17241.81 | 45.61 PK | 68.2 | -22.59 | -55.47 | 5.825 | -49.65 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

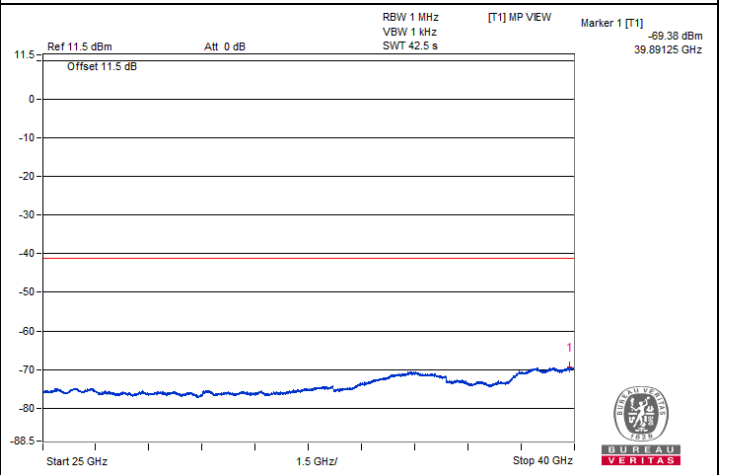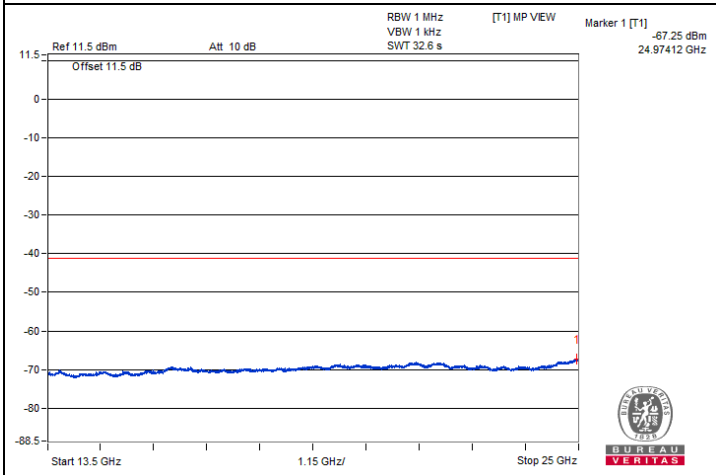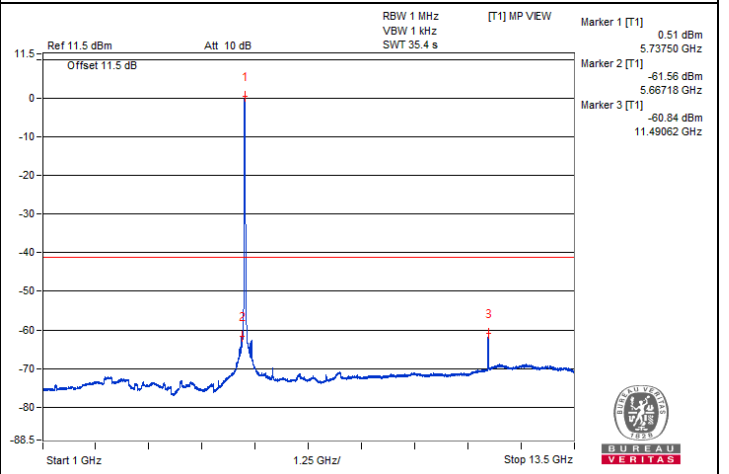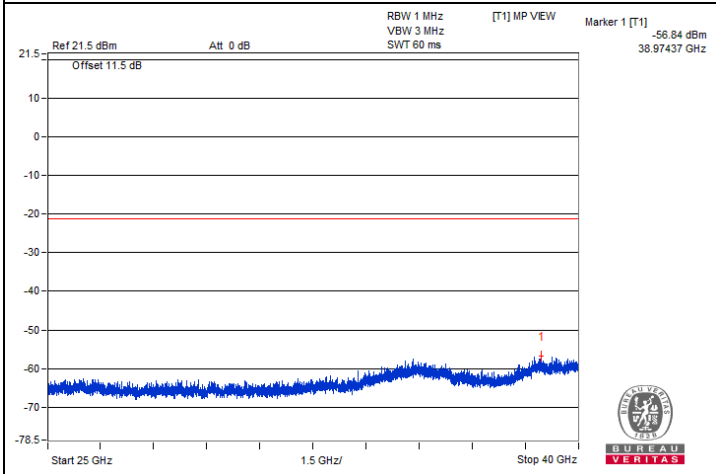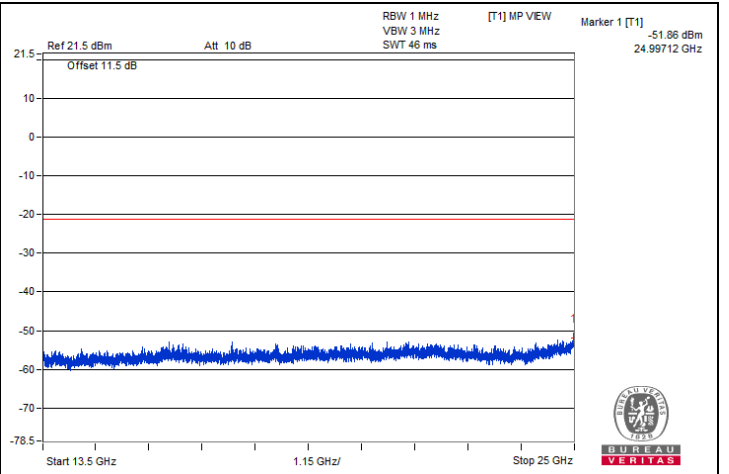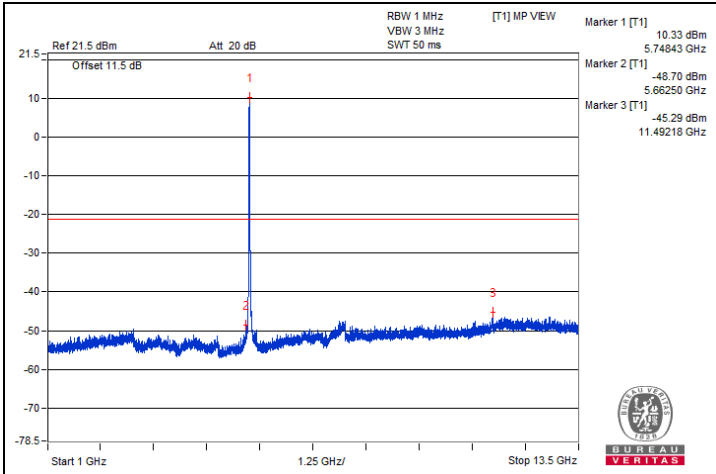

Bandedge table

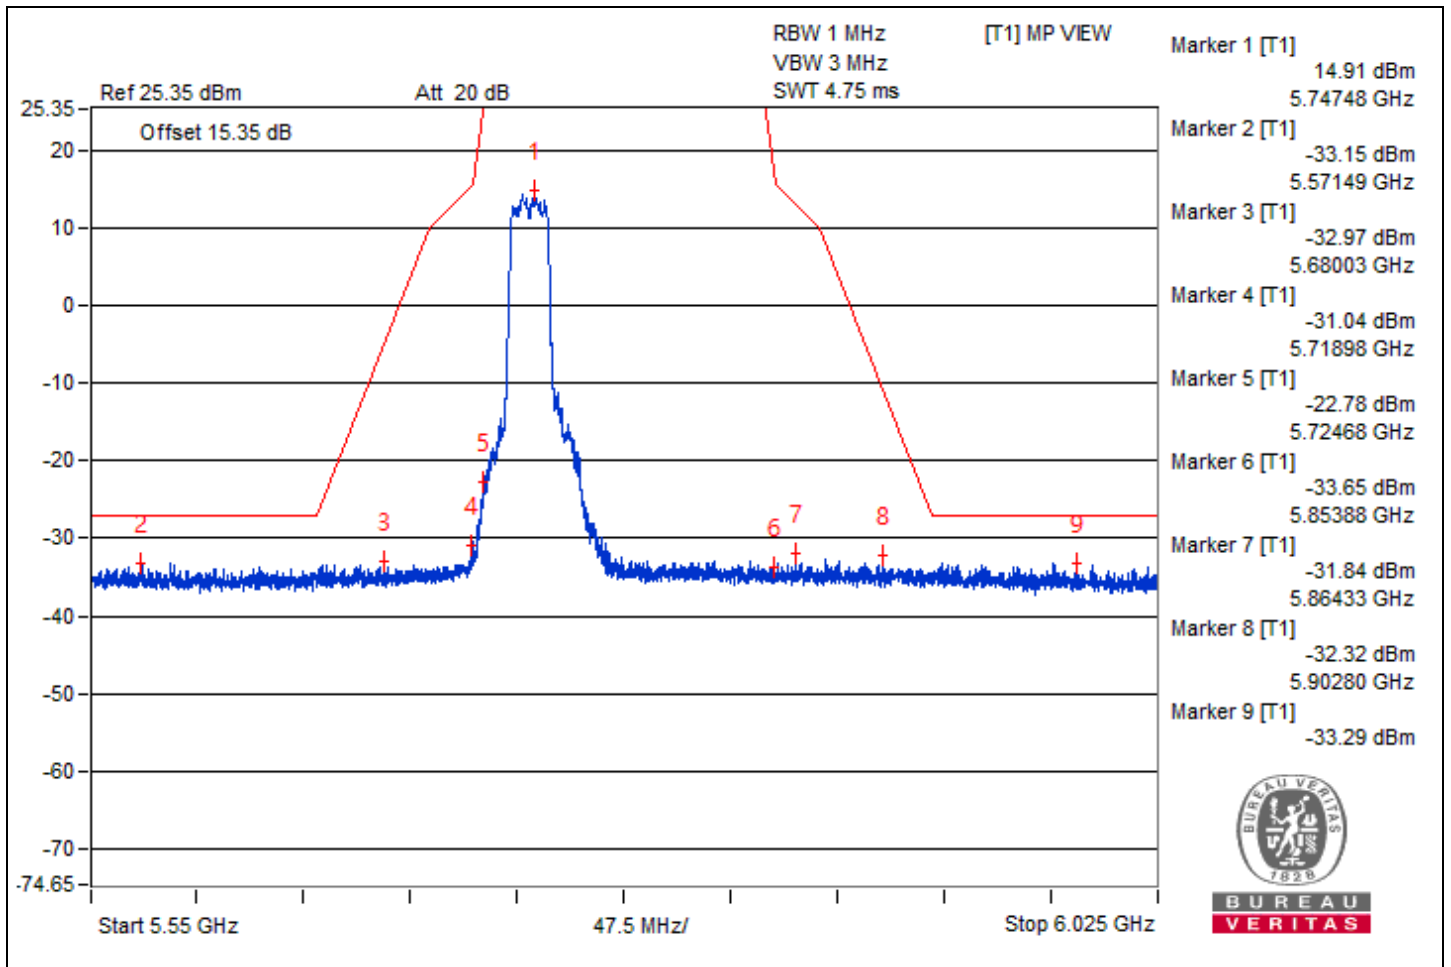







802.11a - Channel 157

Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3862.5 | 47.55 PK | 74 | -26.45 | -53.53 | 5.825 | -47.71 |
| 2 | 3839.06 | 27.28 AV | 54 | -26.72 | -73.8 | 5.825 | -67.98 |
| 3 | 7732.81 | 51.24 PK | 74 | -22.76 | -49.84 | 5.825 | -44.02 |
| 4 | 7698.43 | 28.29 AV | 54 | -25.71 | -72.79 | 5.825 | -66.97 |
| 5 | 11589.06 | 53.78 PK | 74 | -20.22 | -47.3 | 5.825 | -41.48 |
| 6 | 11581.25 | 31.38 AV | 54 | -22.62 | -69.7 | 5.825 | -63.88 |
| 7 | #17371.18 | 46.07 PK | 68.2 | -22.13 | -55.01 | 5.825 | -49.19 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

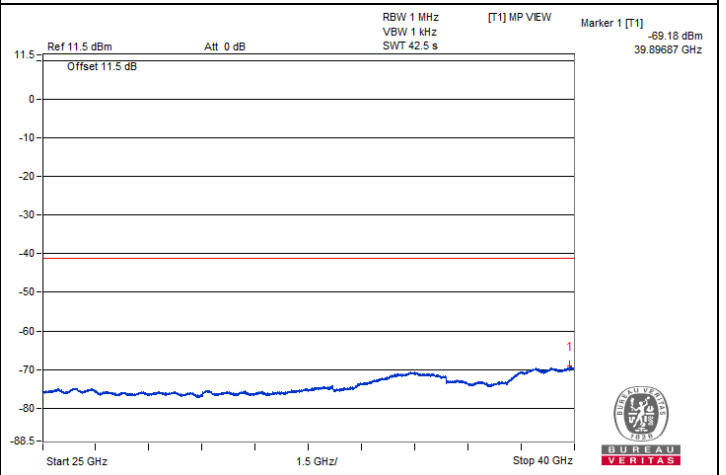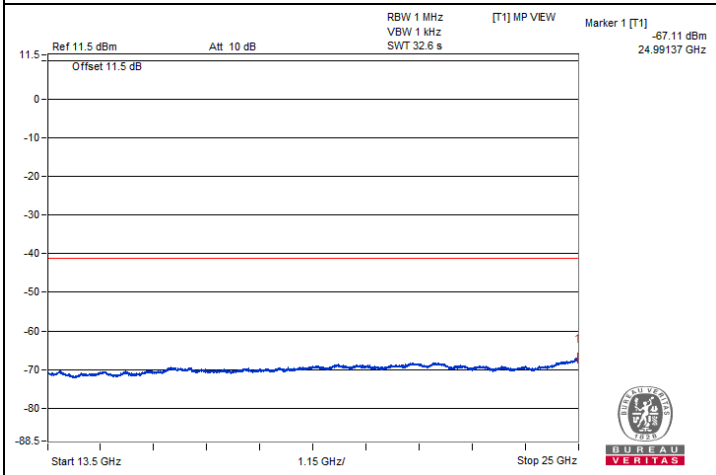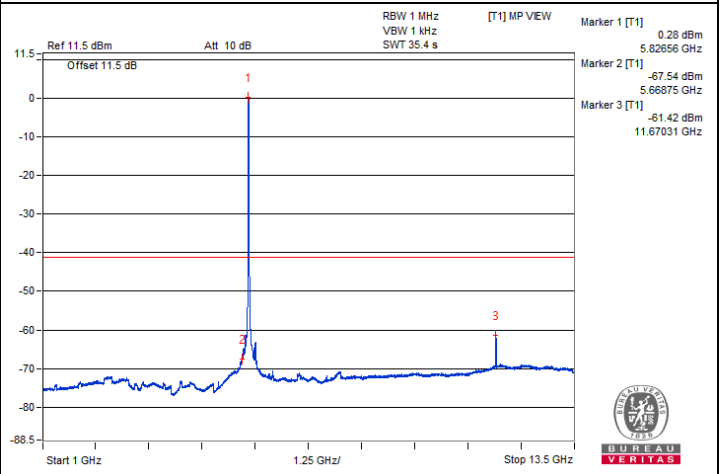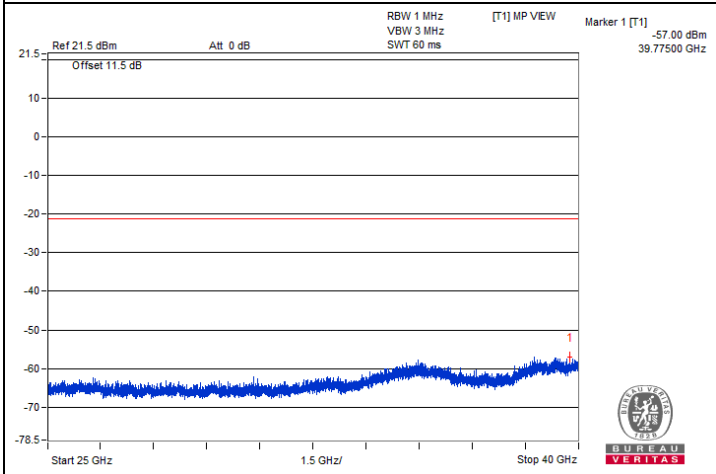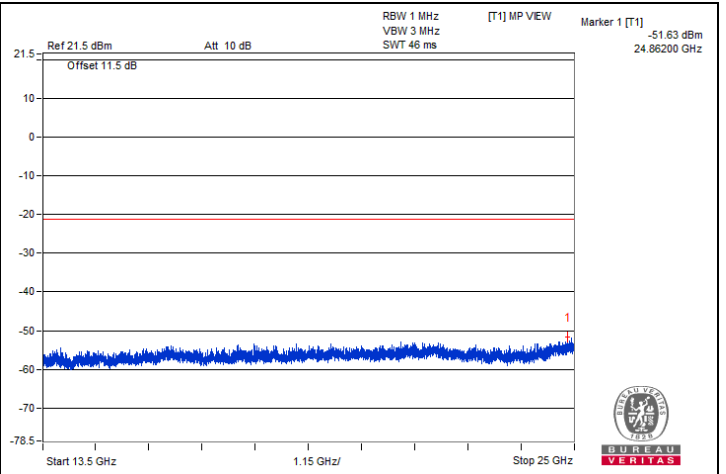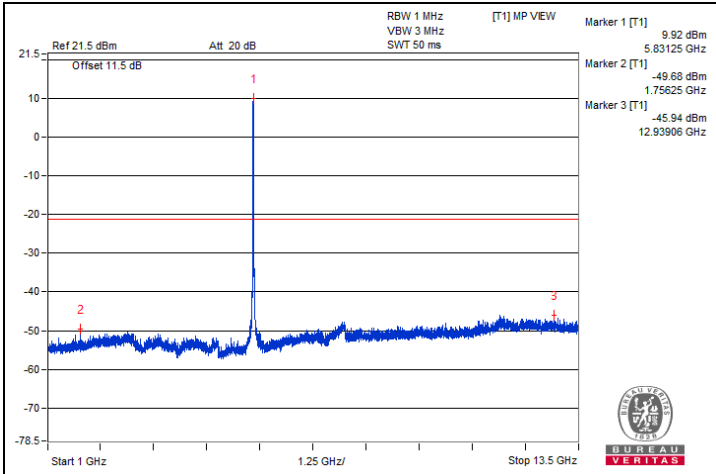

Bandedge table

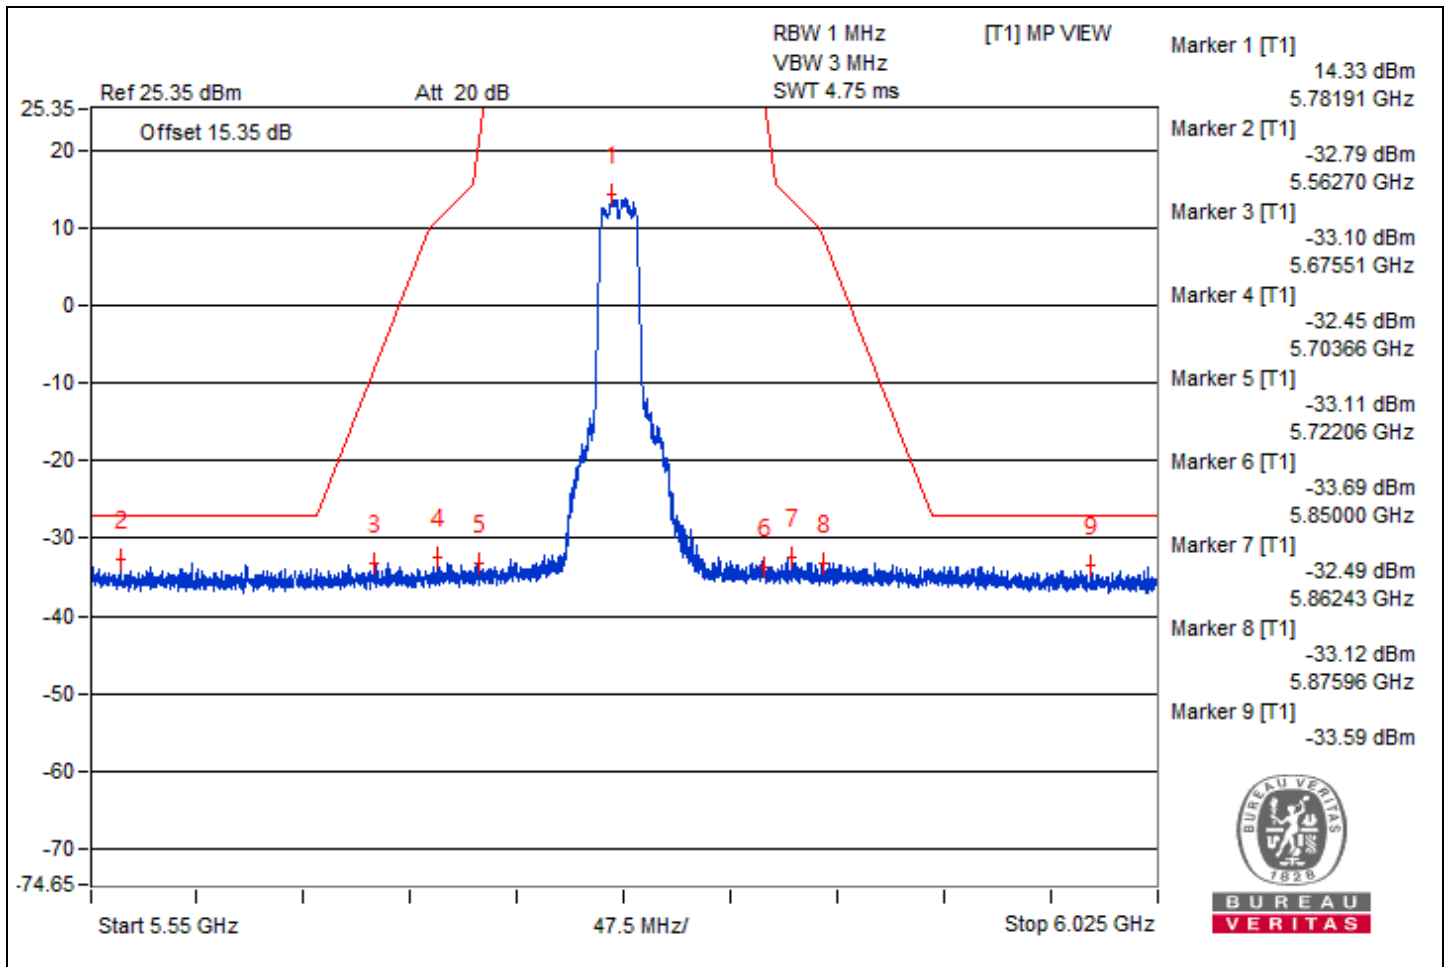







802.11a - Channel 165

Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3865.62 | 48.1 PK | 74 | -25.9 | -52.98 | 5.825 | -47.16 |
| 2 | 3868.75 | 26.83 AV | 54 | -27.17 | -74.25 | 5.825 | -68.43 |
| 3 | #7785.93 | 52.33 PK | 68.2 | -15.87 | -48.75 | 5.825 | -42.93 |
| 4 | 11665.62 | 55.02 PK | 74 | -18.98 | -46.06 | 5.825 | -40.24 |
| 5 | 11651.56 | 39.96 AV | 54 | -14.04 | -61.12 | 5.825 | -55.30 |
| 6 | #17461.75 | 44.85 PK | 68.2 | -23.35 | -56.23 | 5.825 | -50.41 |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

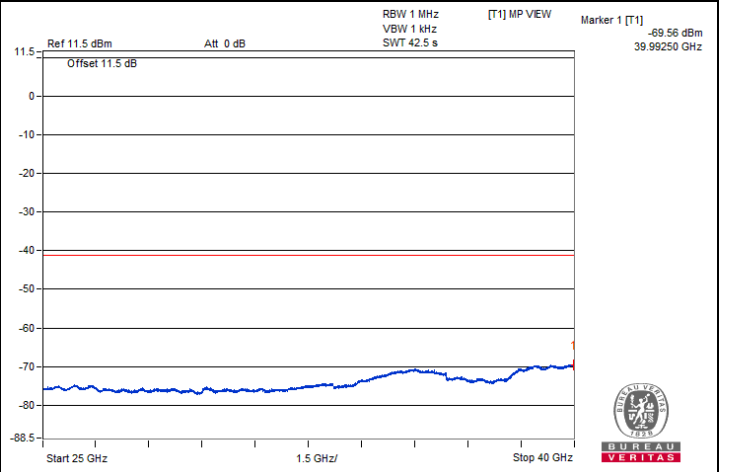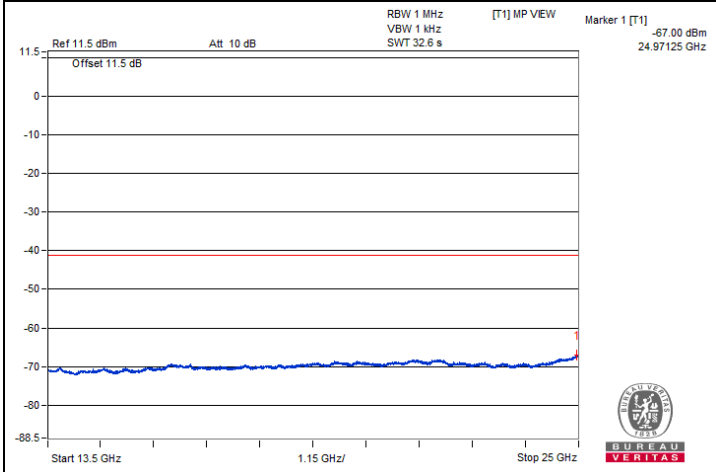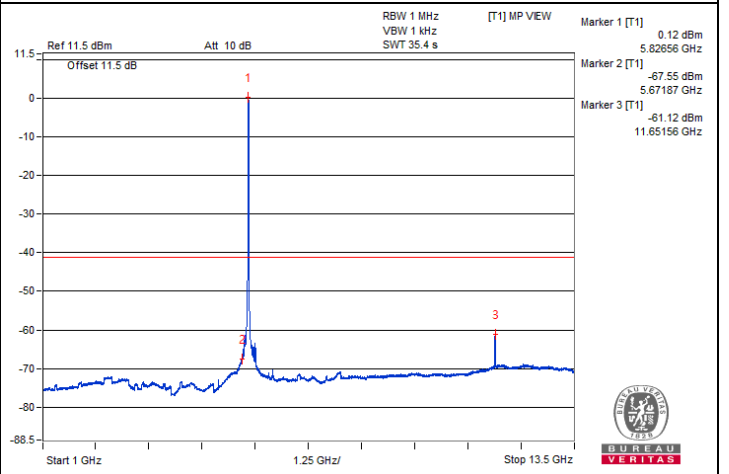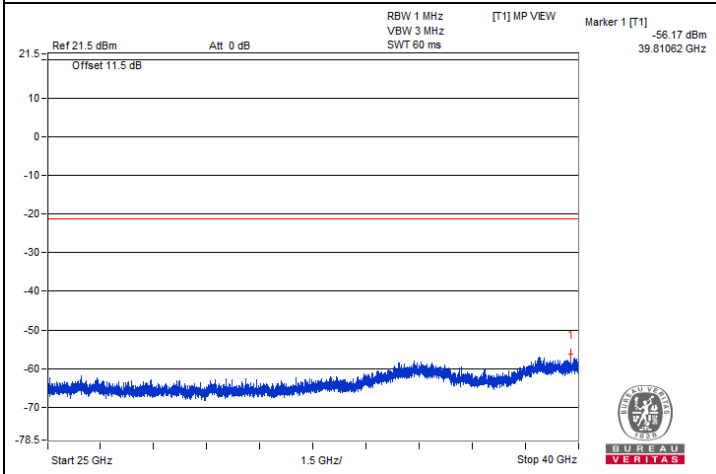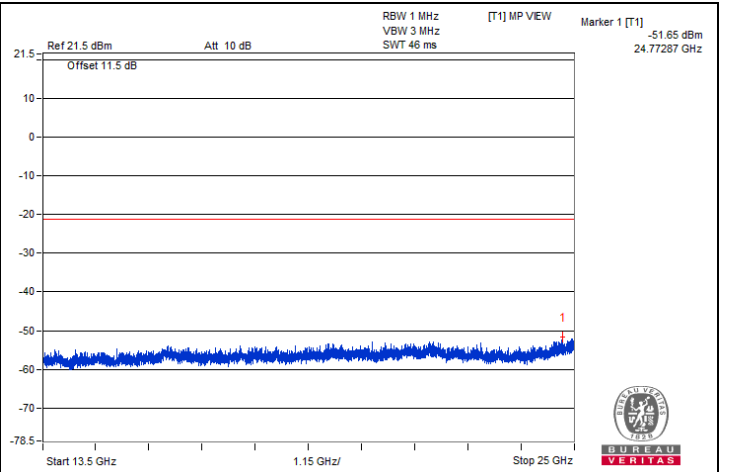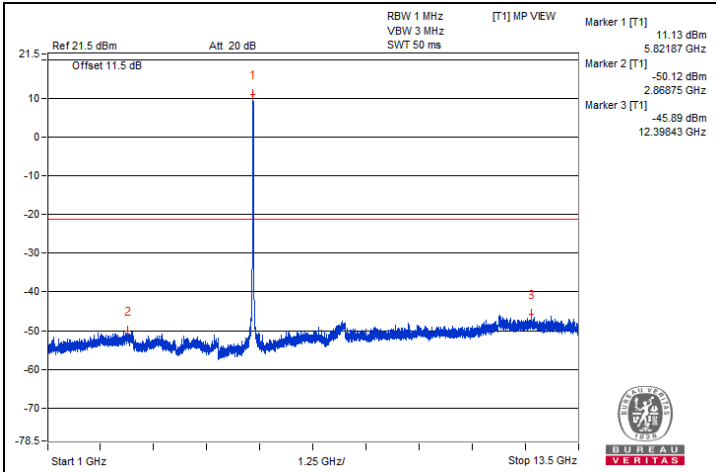



Bandedge table






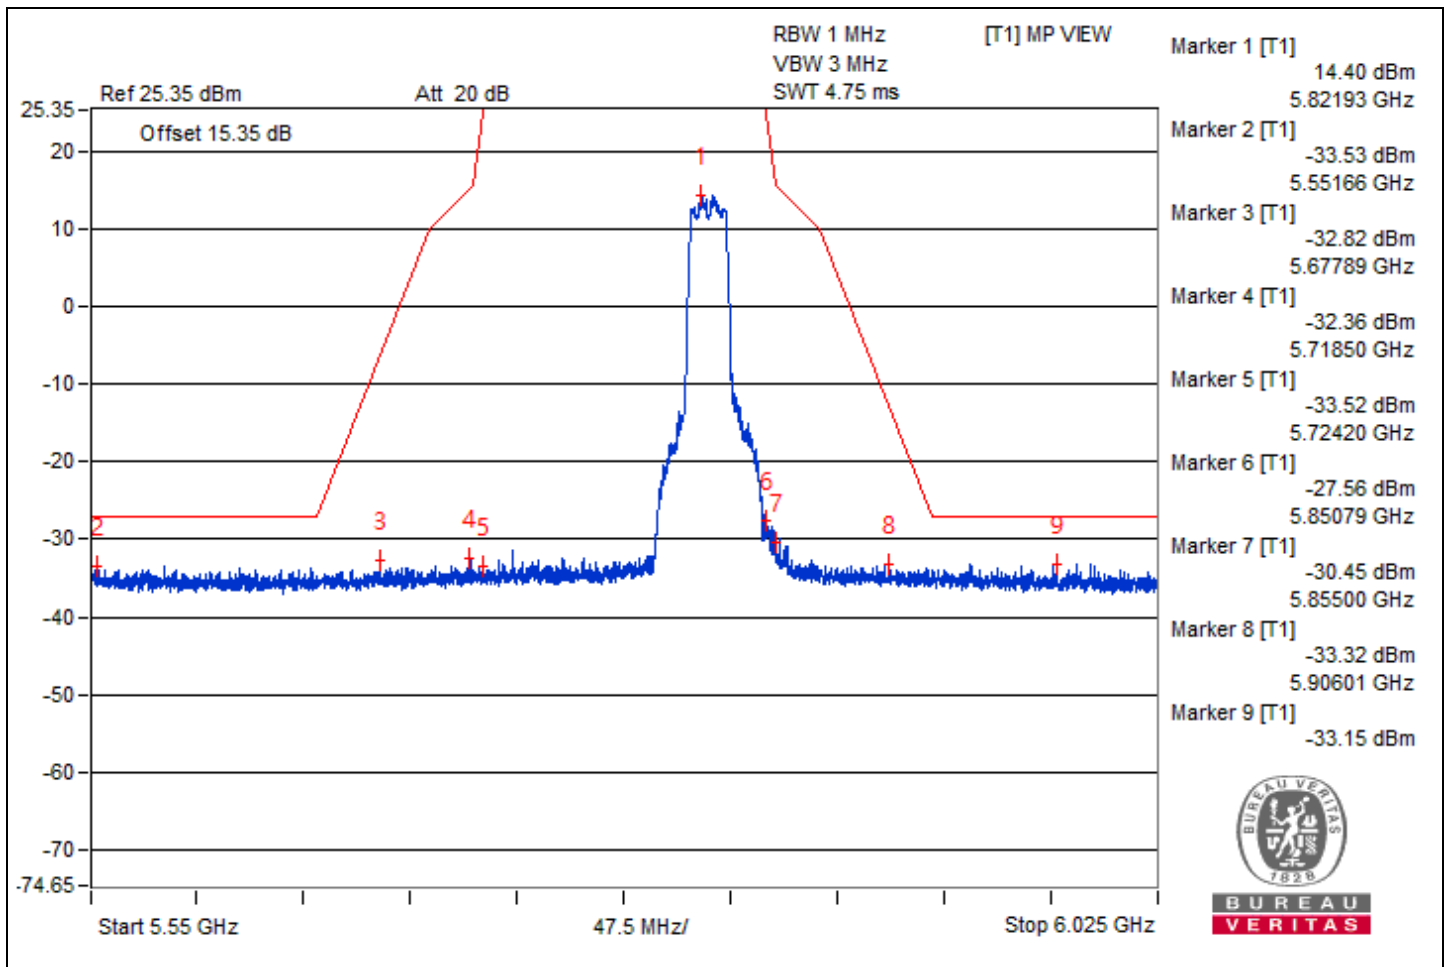


802.11ax (HE20) - Channel 36
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | #3465.62 | 49 PK | 68.2 | -19.2 | -52.08 | 5.825 | -46.26 |
| 2 | #6893.75 | 50.22 PK | 68.2 | -17.98 | -50.86 | 5.825 | -45.04 |
| 3 | #10359.37 | 55.66 PK | 68.2 | -12.54 | -45.42 | 5.825 | -39.60 |
| 4 | 15524 | 41.35 PK | 74 | -32.65 | -59.73 | 5.825 | -53.91 |
| 5 | 15532.62 | 30.77 AV | 54 | -23.23 | -70.31 | 5.825 | -64.49 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

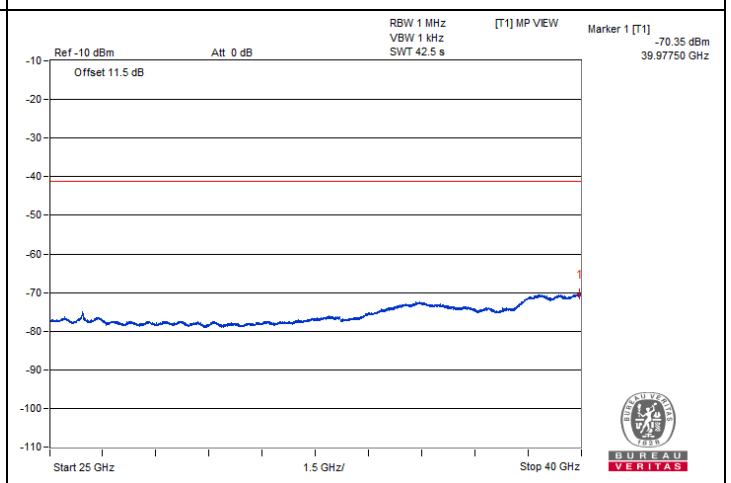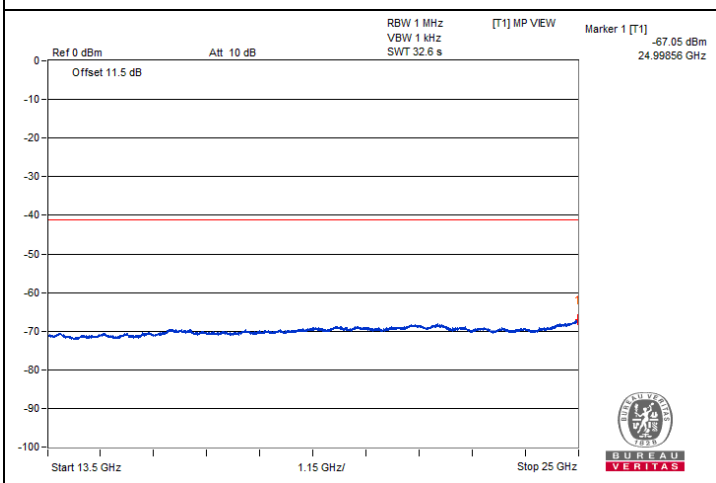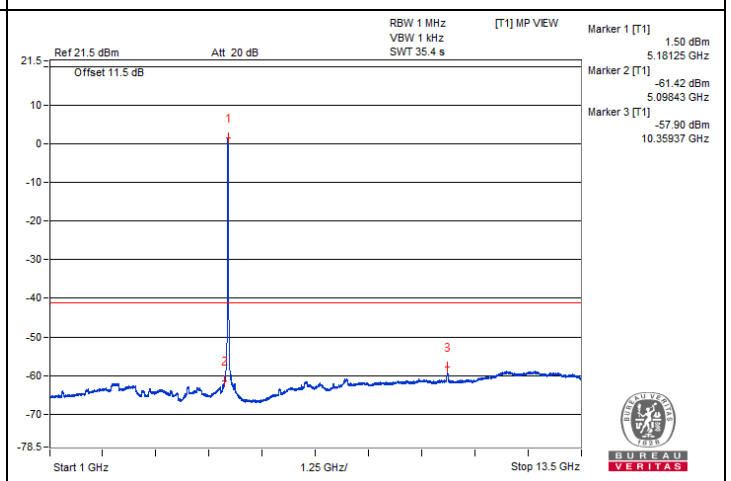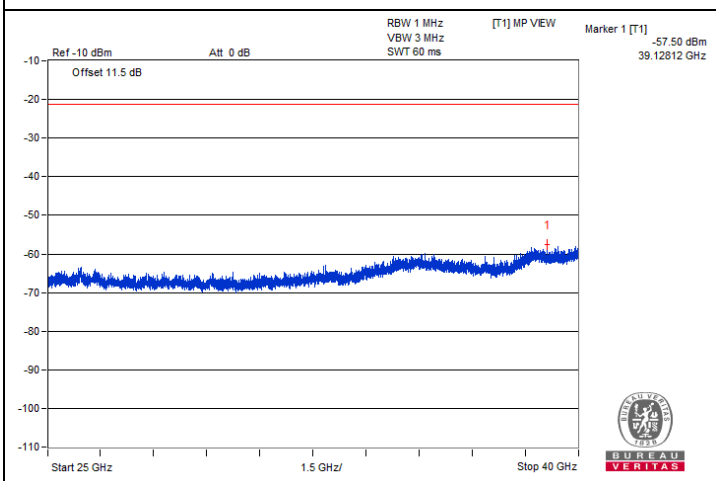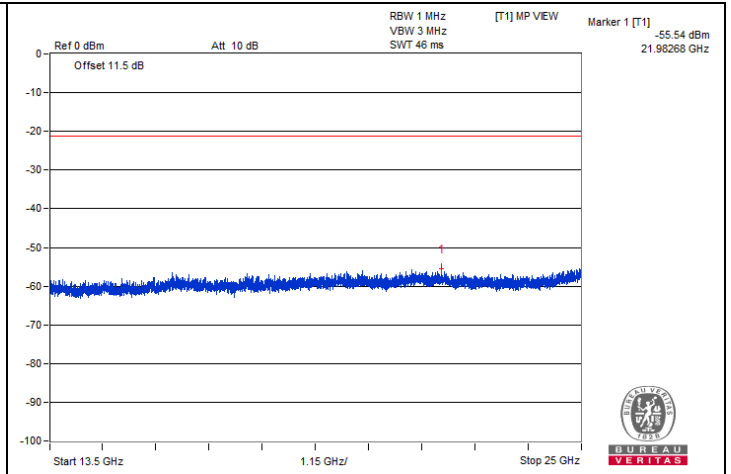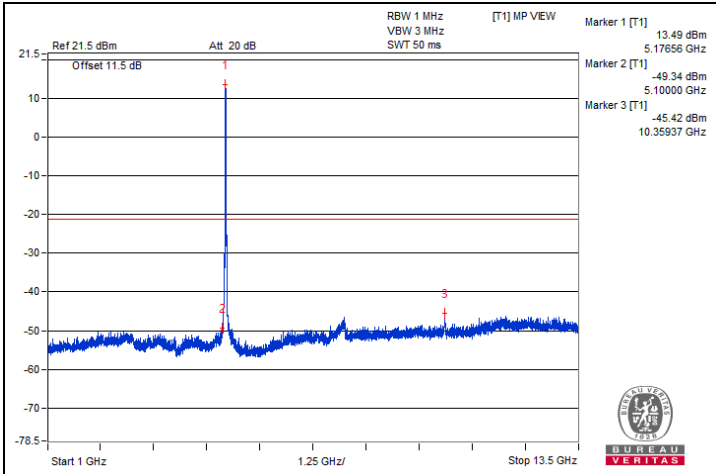


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5145.37 | 68.33 PK | 74 | -5.67 | -30.08 | 3.15 | -26.93 |
| 2 | 5149.92 | 48.37 AV | 54 | -5.63 | -50.04 | 3.15 | -46.89 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.






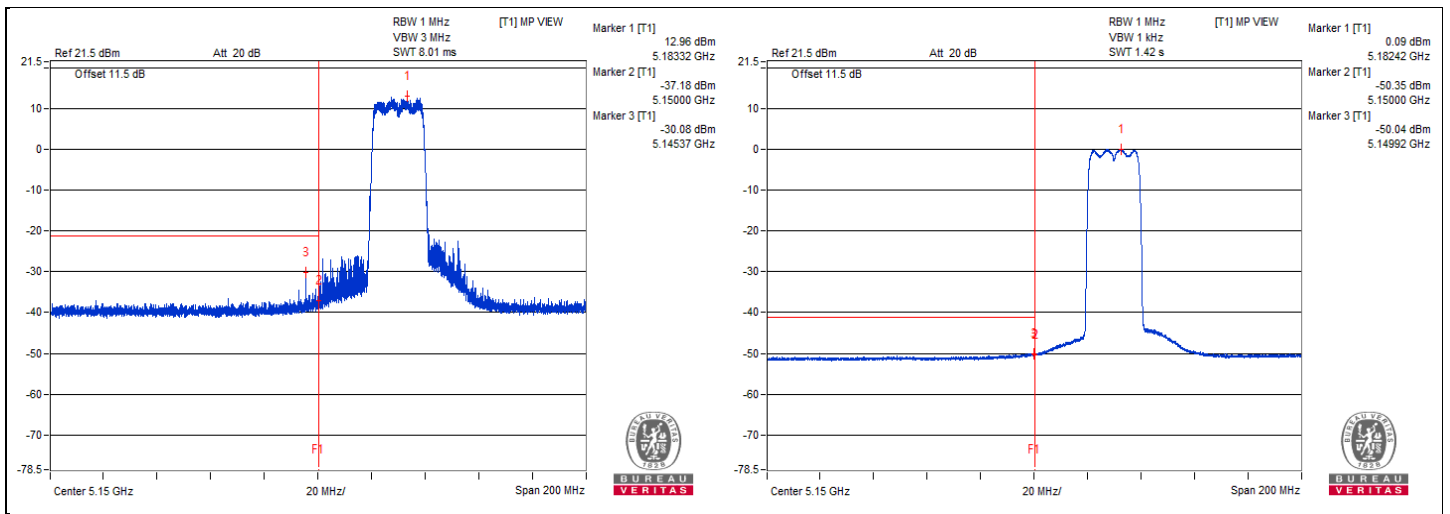


802.11ax (HE20) - Channel 40
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | #3479.68 | 48.4 PK | 68.2 | -19.8 | -52.68 | 5.825 | -46.86 |
| 2 | #6928.12 | 49.44 PK | 68.2 | -18.76 | -51.64 | 5.825 | -45.82 |
| 3 | #10392.18 | 54.52 PK | 68.2 | -13.68 | -46.56 | 5.825 | -40.74 |
| 4 | 15608.81 | 42.23 PK | 74 | -31.77 | -58.85 | 5.825 | -53.03 |
| 5 | 15601.62 | 30.73 AV | 54 | -23.27 | -70.35 | 5.825 | -64.53 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

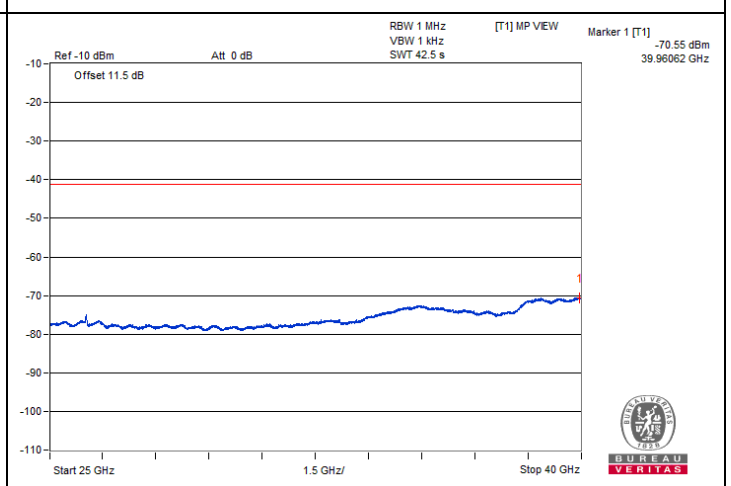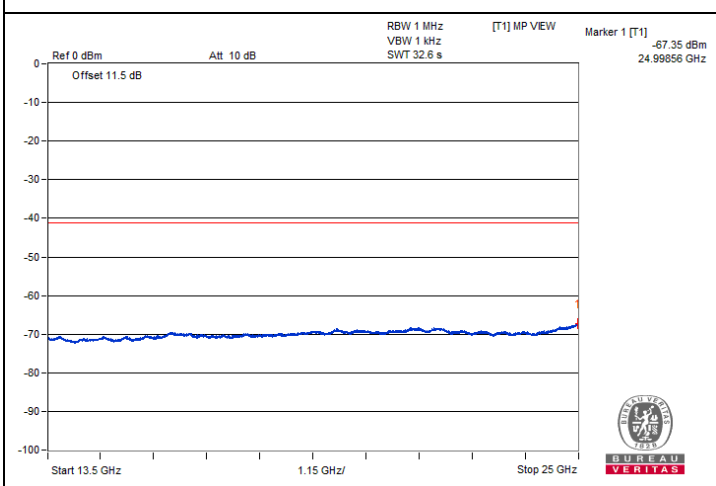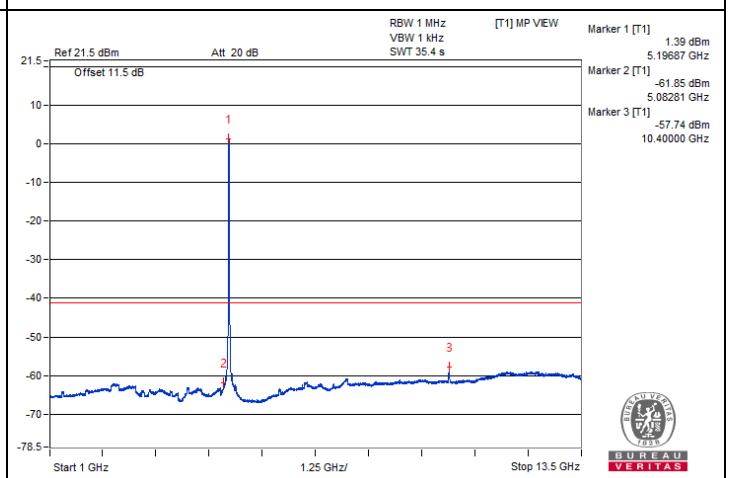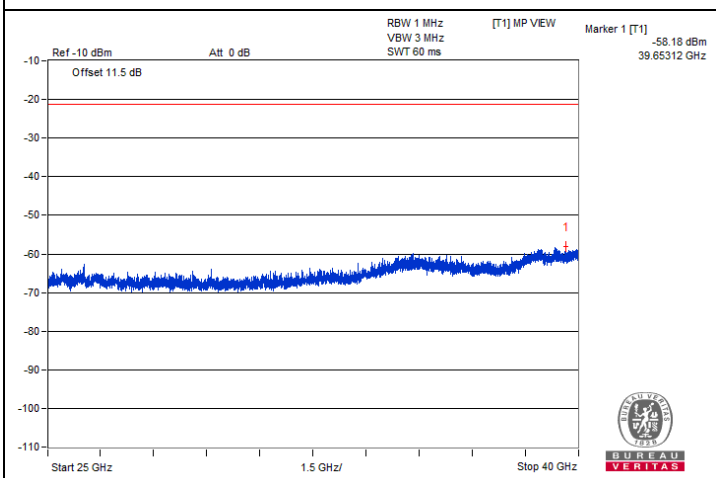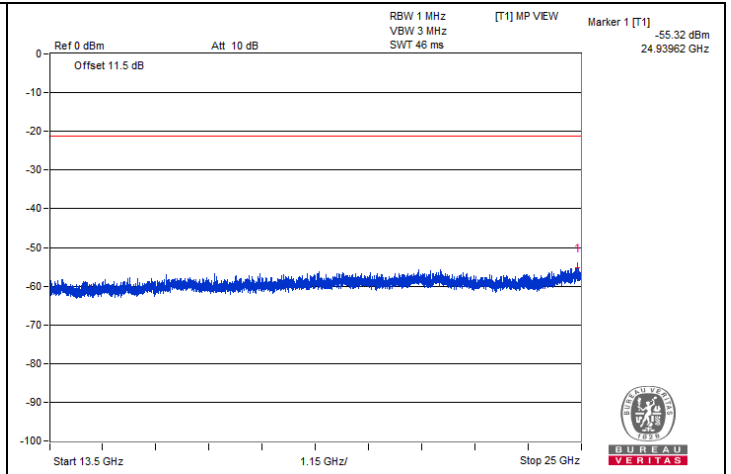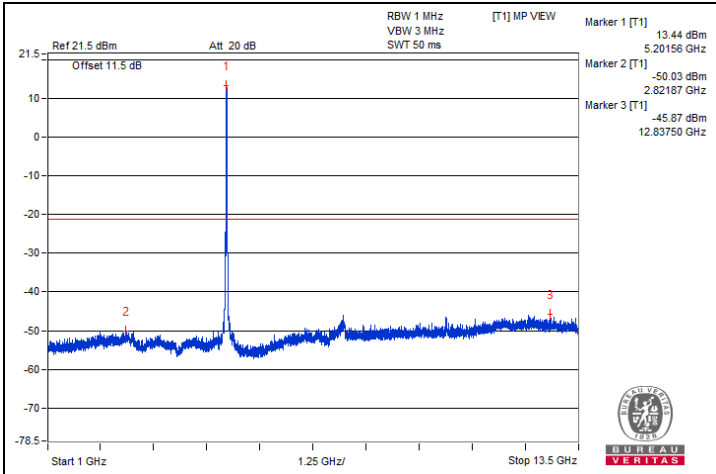


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5141.35 | 60.98 PK | 74 | -13.02 | -37.43 | 3.15 | -34.28 |
| 2 | 5141.55 | 47.71 AV | 54 | -6.29 | -50.7 | 3.15 | -47.55 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.






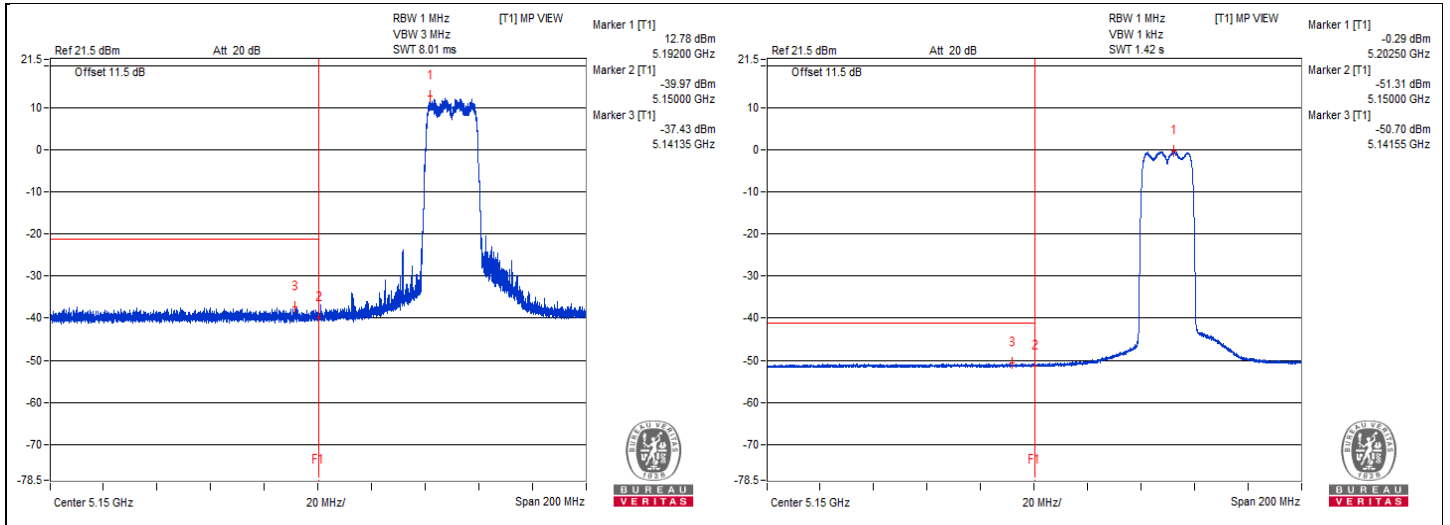


802.11ax (HE20) - Channel 48
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3507.81 | 48.46 PK | 74 | -25.54 | -52.62 | 5.825 | -46.80 |
| 2 | 3503.12 | 36.87 AV | 54 | -17.13 | -64.21 | 5.825 | -58.39 |
| 3 | #6976.56 | 50.95 PK | 68.2 | -17.25 | -50.13 | 5.825 | -44.31 |
| 4 | #10487.5 | 54.66 PK | 68.2 | -13.54 | -46.42 | 5.825 | -40.60 |
| 5 | 15708 | 42.09 PK | 74 | -31.91 | -58.99 | 5.825 | -53.17 |
| 6 | 15718.06 | 30.72 AV | 54 | -23.28 | -70.36 | 5.825 | -64.54 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

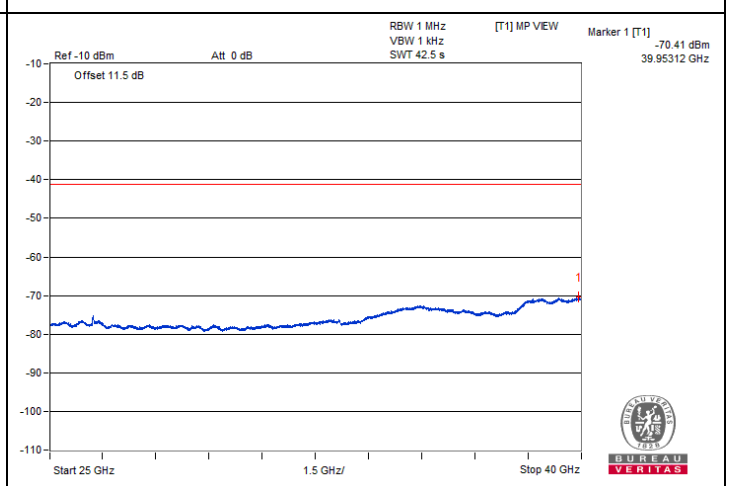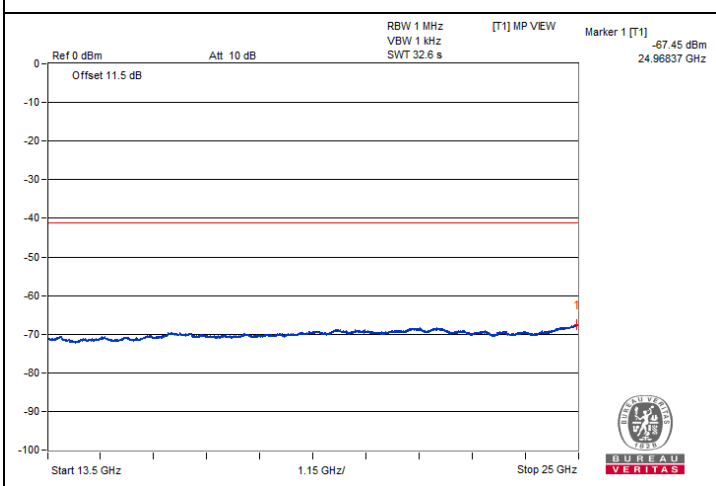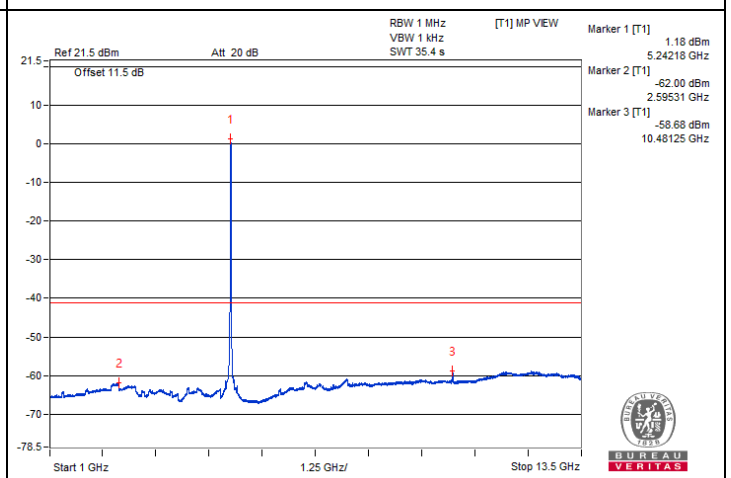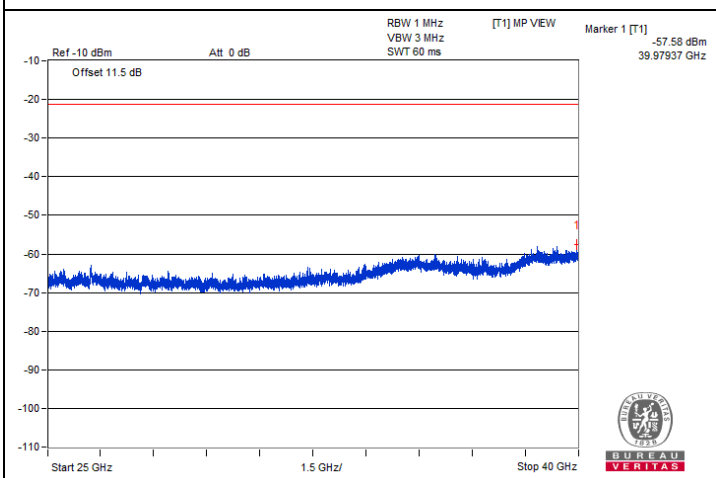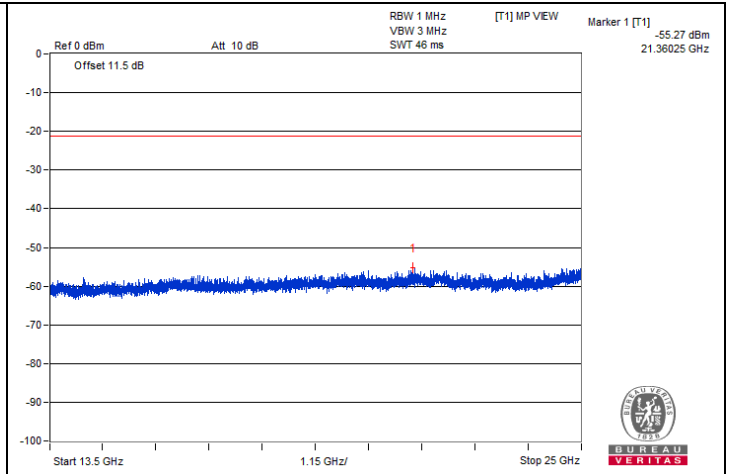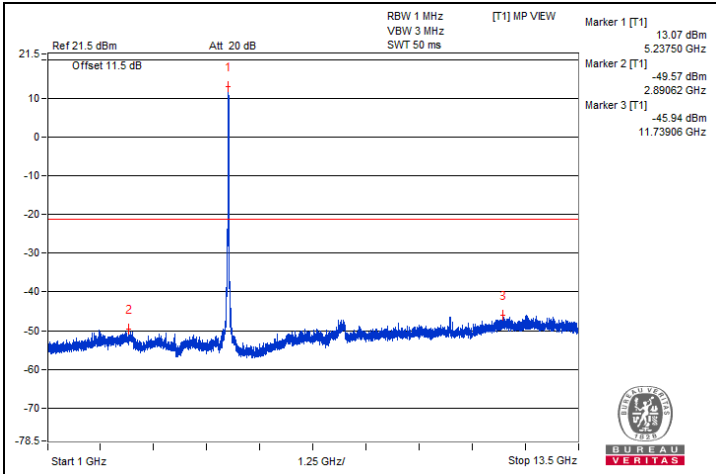


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5085.15 | 61.26 PK | 74 | -12.74 | -37.15 | 3.15 | -34.00 |
| 2 | 5127.55 | 47.54 AV | 54 | -6.46 | -50.87 | 3.15 | -47.72 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.






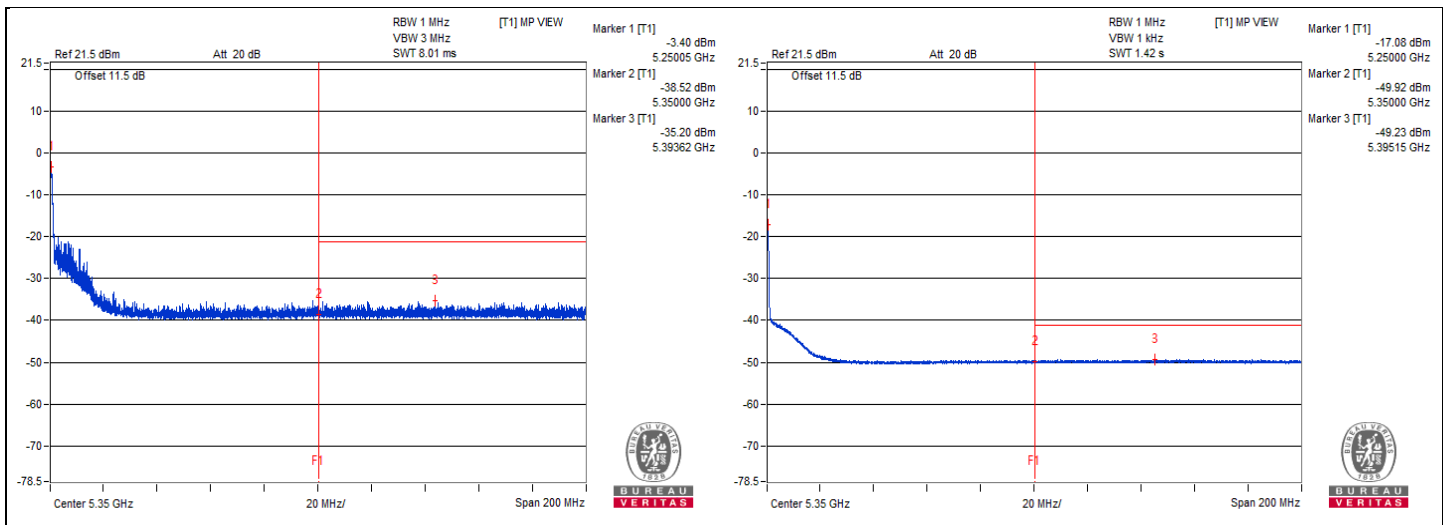


802.11ax (HE20) - Channel 52
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | #3493.75 | 48.36 PK | 68.2 | -19.84 | -52.72 | 5.825 | -46.90 |
| 2 | 3523.43 | 37.04 AV | 54 | -16.96 | -64.04 | 5.825 | -58.22 |
| 3 | #7029.68 | 50.98 PK | 68.2 | -17.22 | -50.1 | 5.825 | -44.28 |
| 4 | #10520.31 | 54.73 PK | 68.2 | -13.47 | -46.35 | 5.825 | -40.53 |
| 5 | 15777 | 42.84 PK | 74 | -31.16 | -58.24 | 5.825 | -52.42 |
| 6 | 15781.31 | 30.46 AV | 54 | -23.54 | -70.62 | 5.825 | -64.80 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

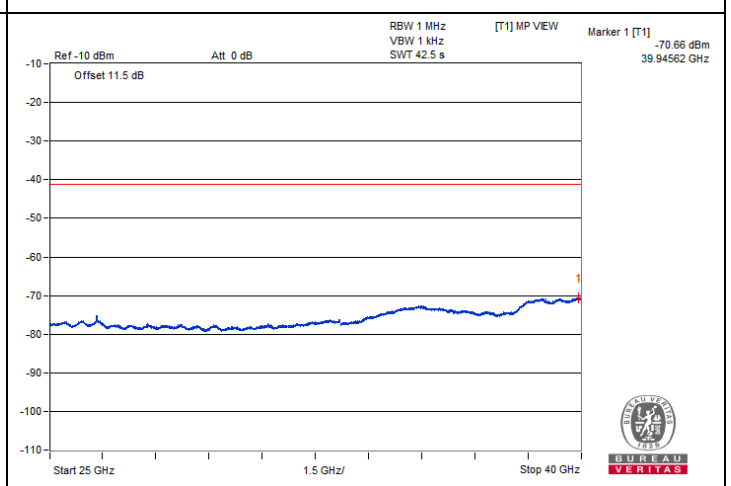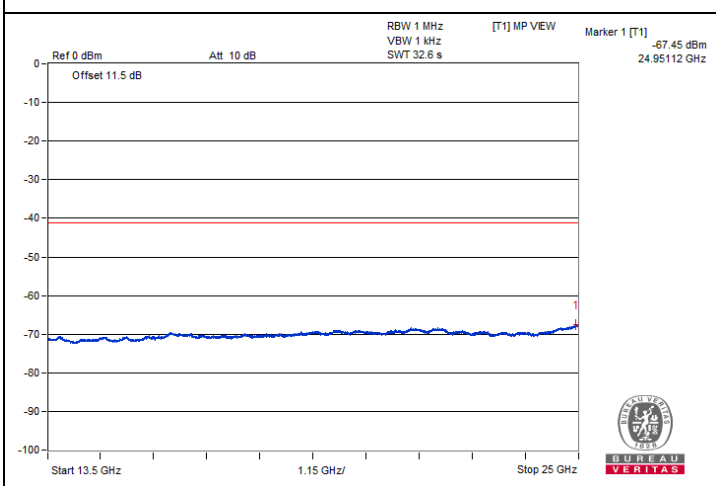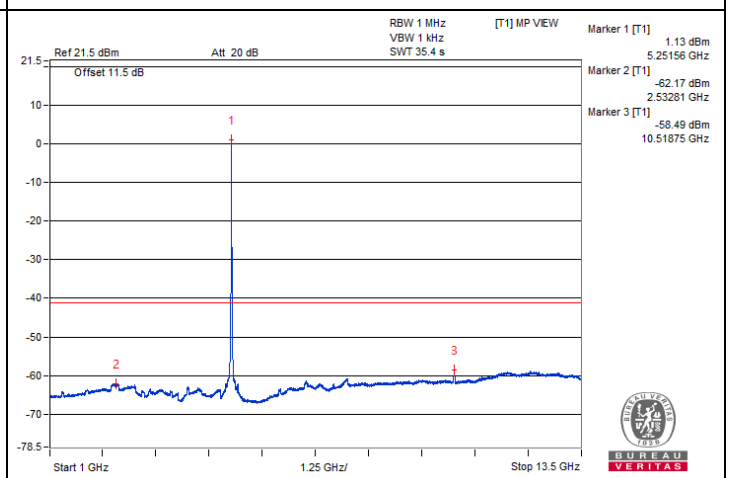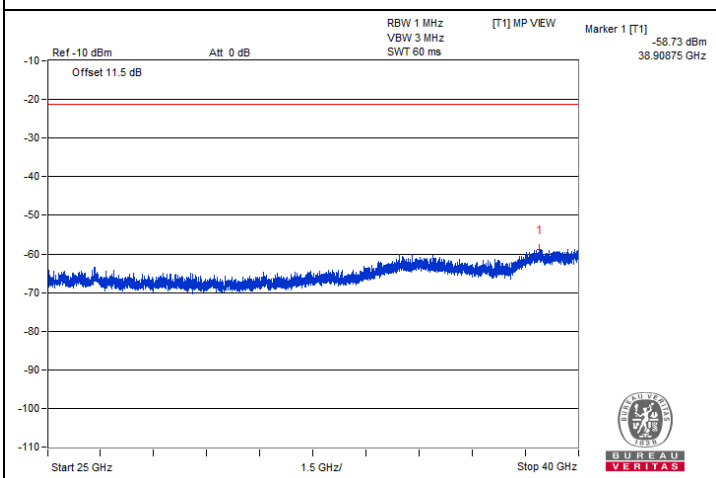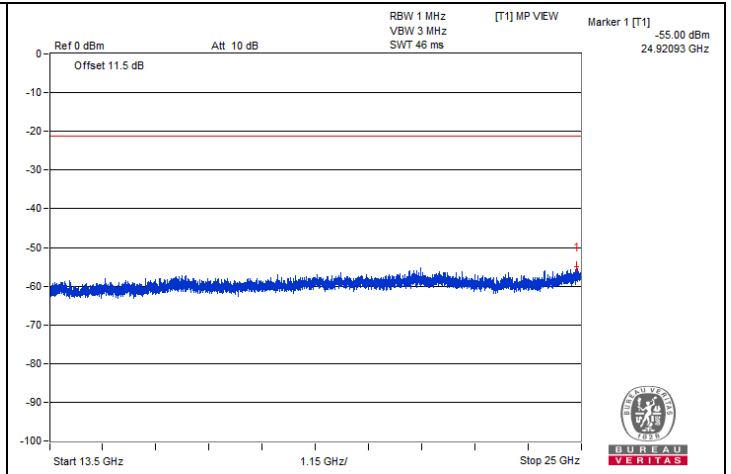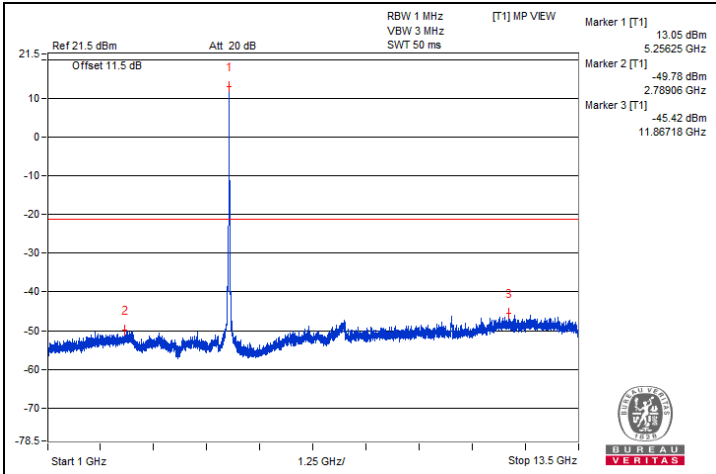


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5425.45 | 62.83 PK | 74 | -11.17 | -35.18 | 2.75 | -32.43 |
| 2 | 5378.2 | 48.74 AV | 54 | -5.26 | -49.27 | 2.75 | -46.52 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.






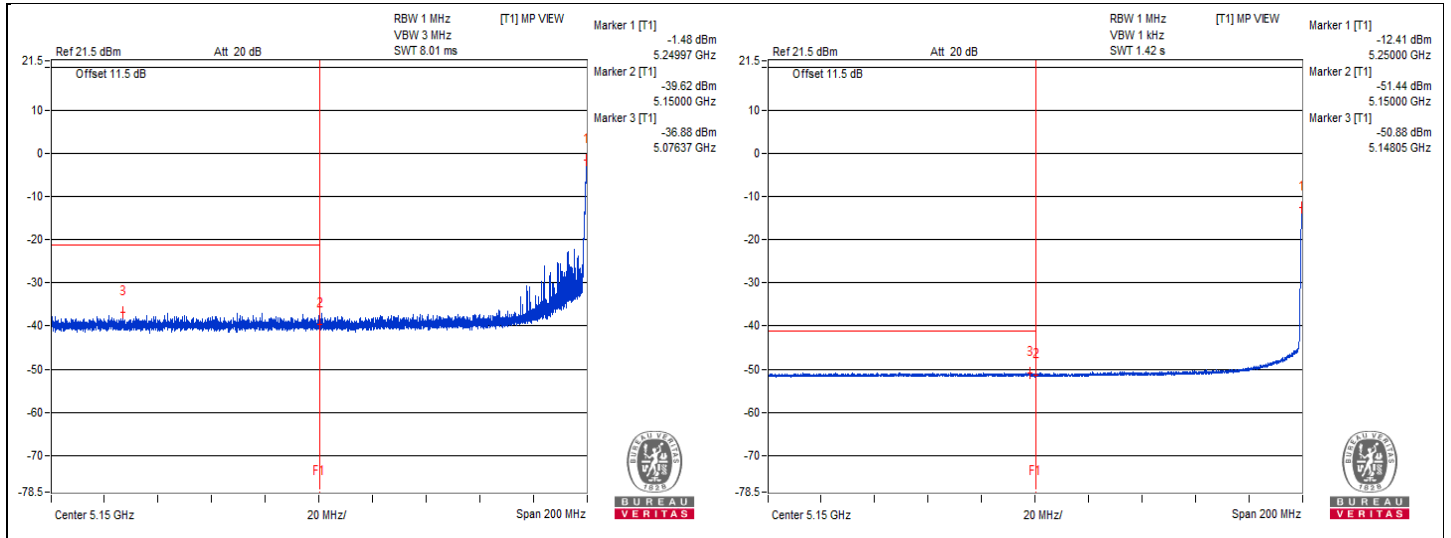


802.11ax (HE20) - Channel 60
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3537.5 | 49.57 PK | 74 | -24.43 | -51.51 | 5.825 | -45.69 |
| 2 | 3534.37 | 37.24 AV | 54 | -16.76 | -63.84 | 5.825 | -58.02 |
| 3 | #7064.06 | 51.69 PK | 68.2 | -16.51 | -49.39 | 5.825 | -43.57 |
| 4 | 10601.56 | 54.32 PK | 74 | -19.68 | -46.76 | 5.825 | -40.94 |
| 5 | 10601.56 | 42.47 AV | 54 | -11.53 | -58.61 | 5.825 | -52.79 |
| 6 | 15907.81 | 42.4 PK | 74 | -31.6 | -58.68 | 5.825 | -52.86 |
| 7 | 15896.31 | 30.64 AV | 54 | -23.36 | -70.44 | 5.825 | -64.62 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

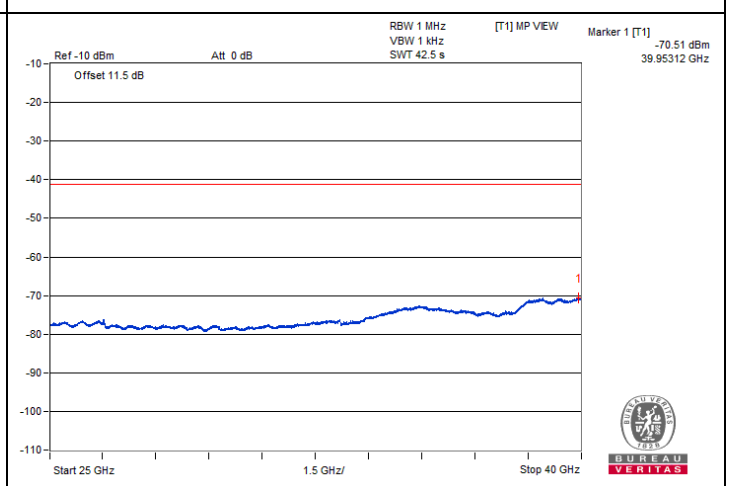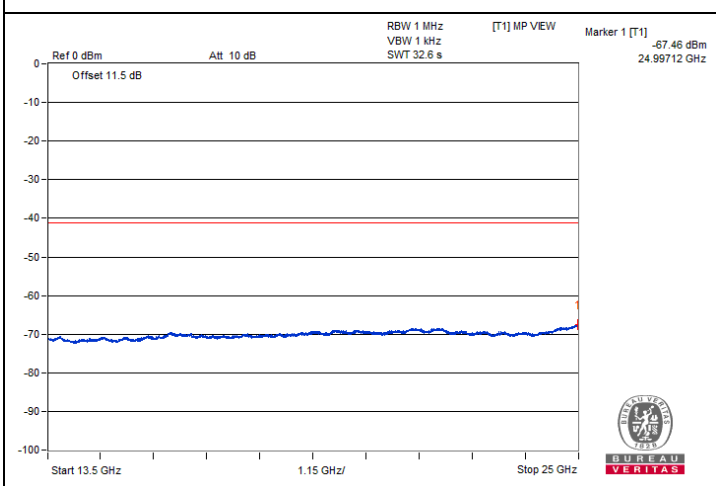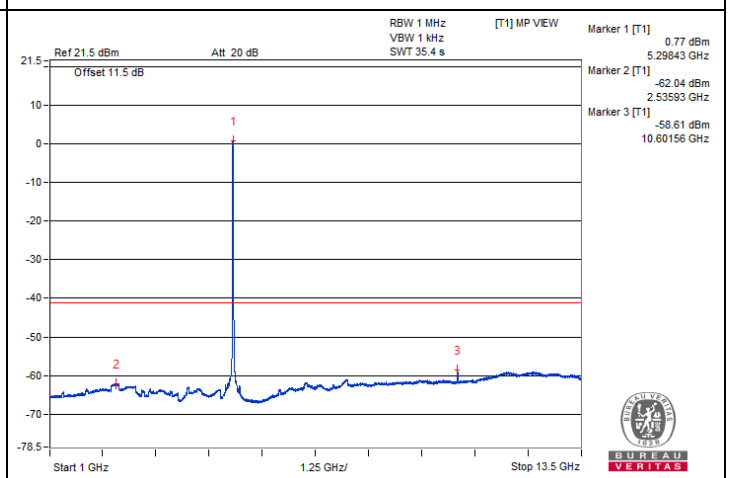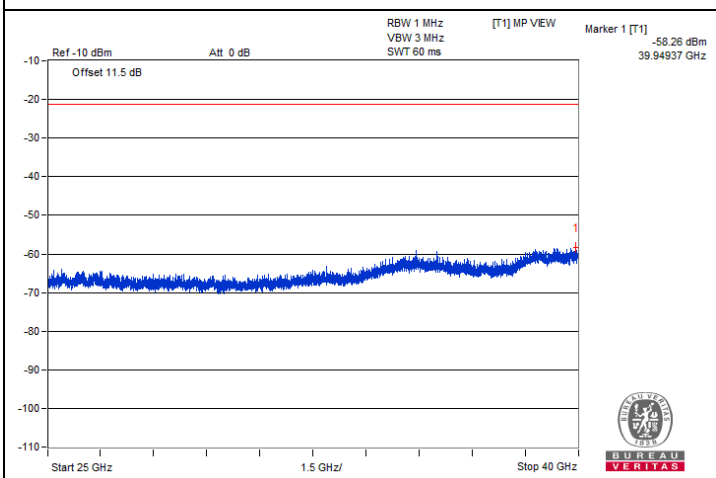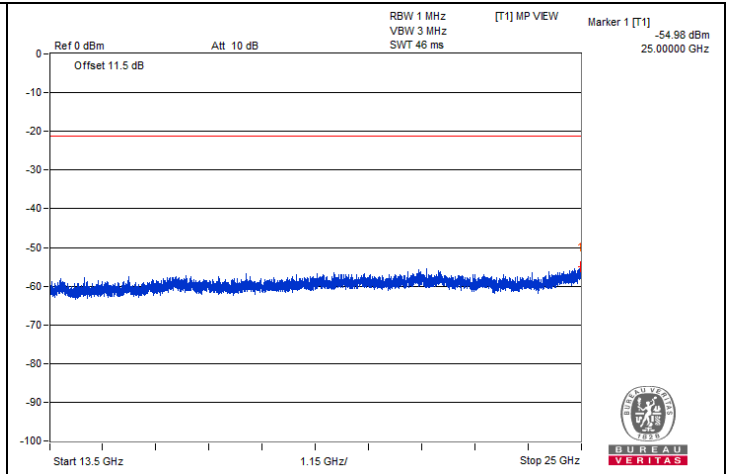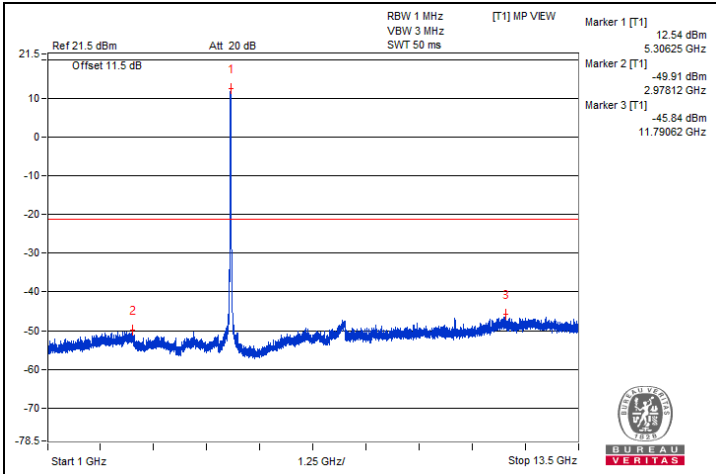


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5389.97 | 62.82 PK | 74 | -11.18 | -35.19 | 2.75 | -32.44 |
| 2 | 5408.17 | 48.68 AV | 54 | -5.32 | -49.33 | 2.75 | -46.58 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.






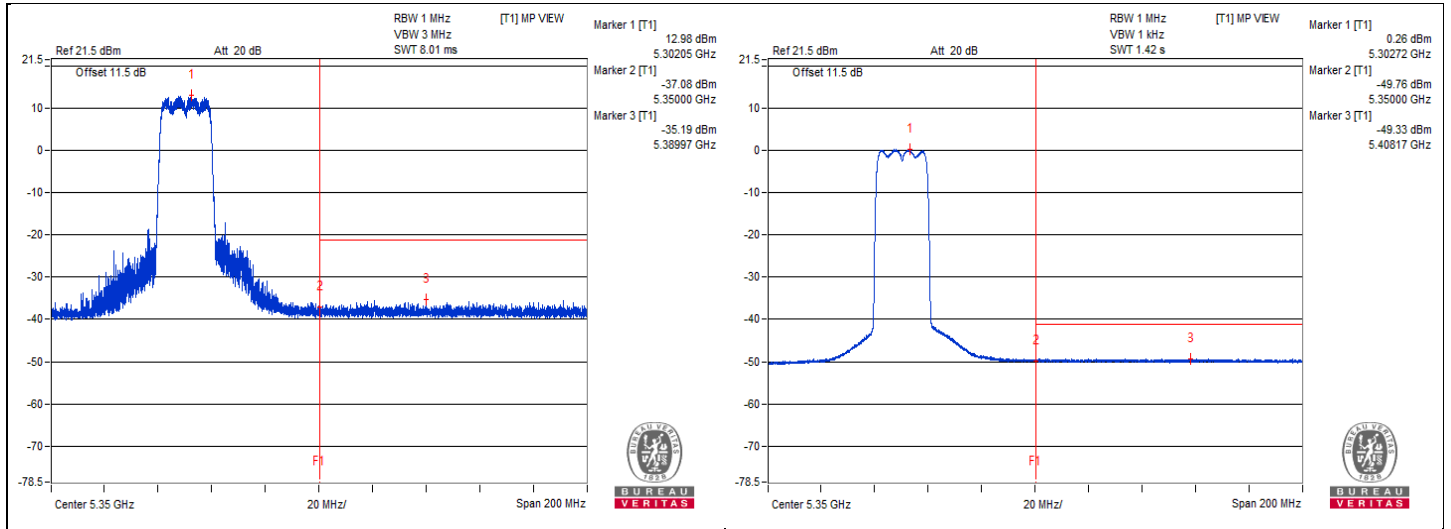


802.11ax (HE20) - Channel 64
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3560.93 | 49.25 PK | 74 | -24.75 | -51.83 | 5.825 | -46.01 |
| 2 | 3551.56 | 37.28 AV | 54 | -16.72 | -63.8 | 5.825 | -57.98 |
| 3 | #7106.25 | 51.35 PK | 68.2 | -16.85 | -49.73 | 5.825 | -43.91 |
| 4 | 10639.06 | 54.05 PK | 74 | -19.95 | -47.03 | 5.825 | -41.21 |
| 5 | 10640.62 | 42.14 AV | 54 | -11.86 | -58.94 | 5.825 | -53.12 |
| 6 | 15953.81 | 42.17 PK | 74 | -31.83 | -58.91 | 5.825 | -53.09 |
| 7 | 15955.25 | 30.59 AV | 54 | -23.41 | -70.49 | 5.825 | -64.67 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

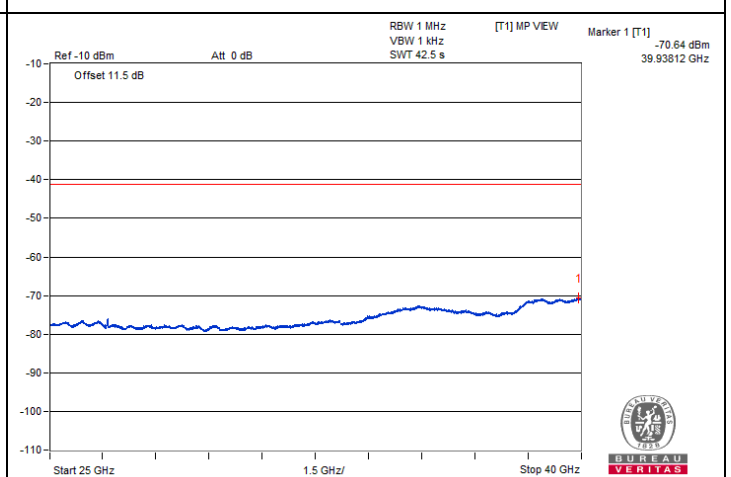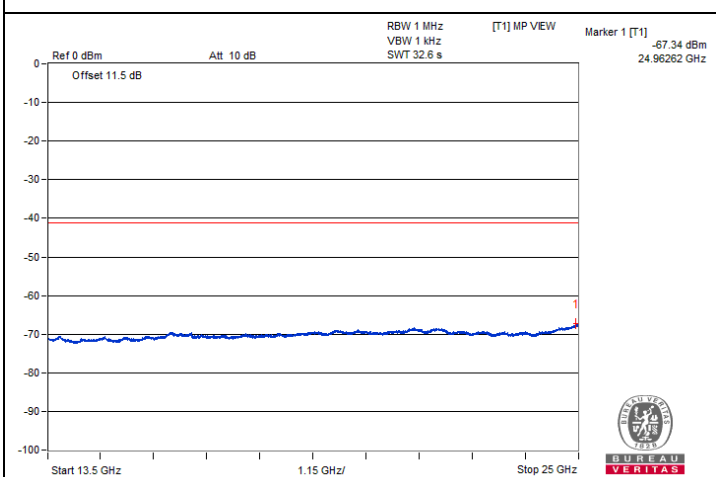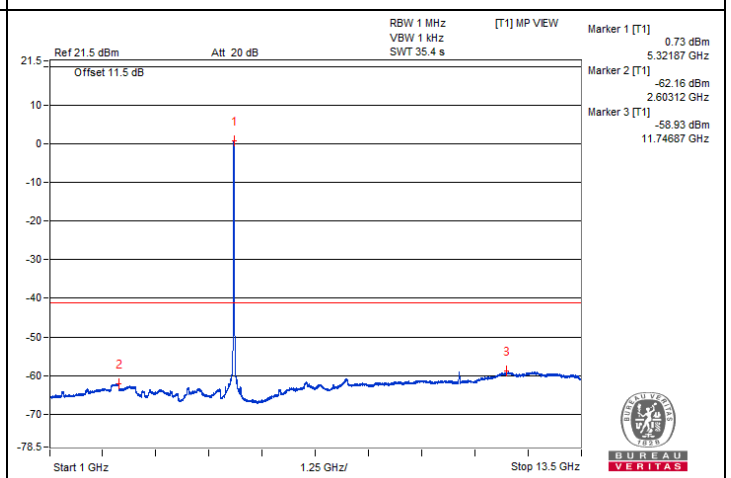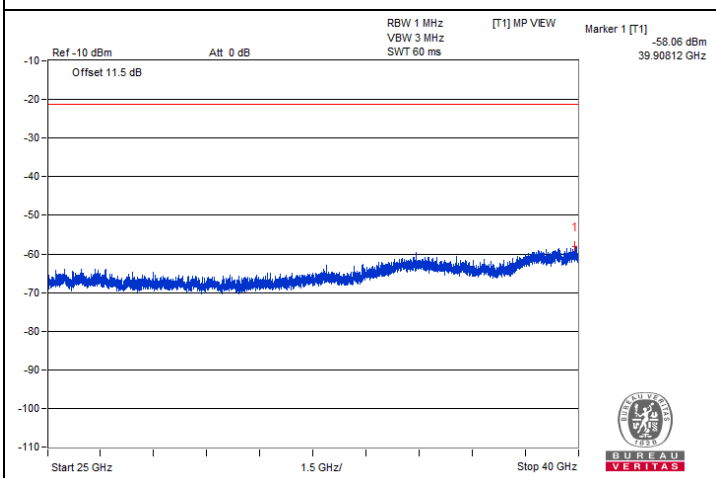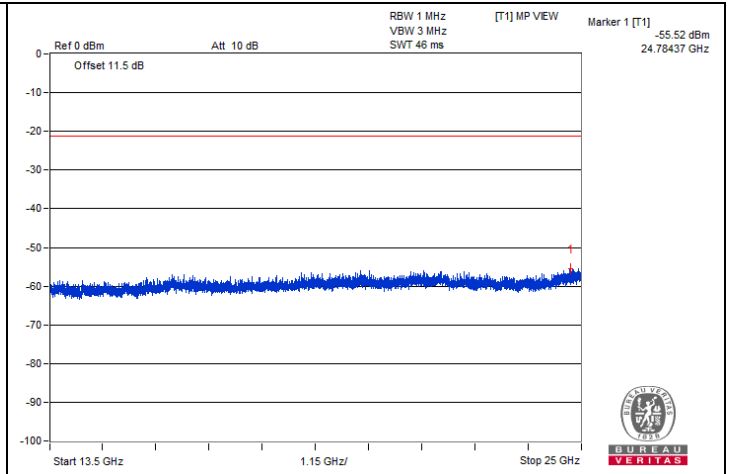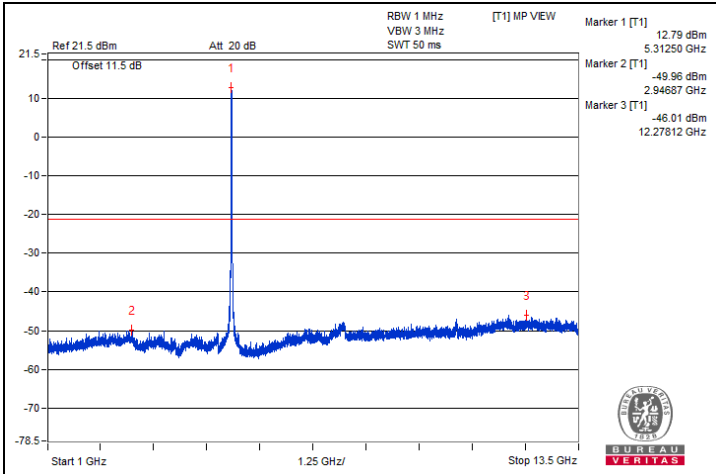


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5350.52 | 67.27 PK | 74 | -6.73 | -30.74 | 2.75 | -27.99 |
| 2 | 5351 | 49.19 AV | 54 | -4.81 | -48.82 | 2.75 | -46.07 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.






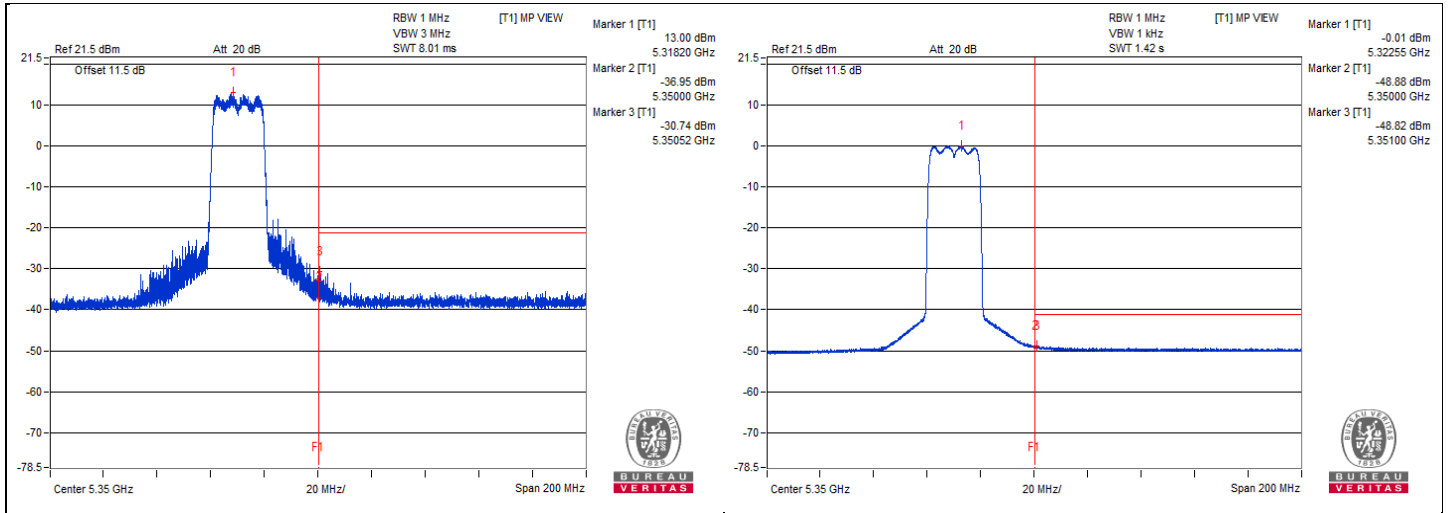


802.11ax (HE20) - Channel 100
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3650 | 49.8 PK | 74 | -24.2 | -51.28 | 5.825 | -45.46 |
| 2 | 3646.87 | 37.1 AV | 54 | -16.9 | -63.98 | 5.825 | -58.16 |
| 3 | 7337.5 | 51.16 PK | 74 | -22.84 | -49.92 | 5.825 | -44.10 |
| 4 | 7332.81 | 38.99 AV | 54 | -15.01 | -62.09 | 5.825 | -56.27 |
| 5 | 11010.93 | 53.86 PK | 74 | -20.14 | -47.22 | 5.825 | -41.40 |
| 6 | 11001.56 | 42.56 AV | 54 | -11.44 | -58.52 | 5.825 | -52.70 |
| 7 | #16508.68 | 42.46 PK | 68.2 | -25.74 | -58.62 | 5.825 | -52.80 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

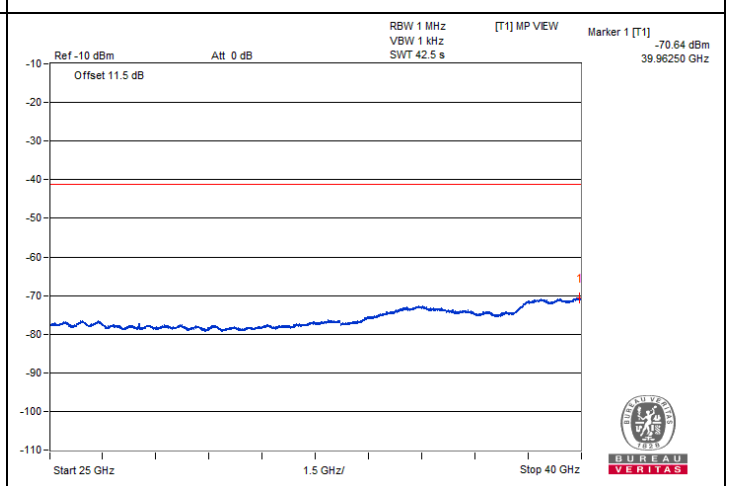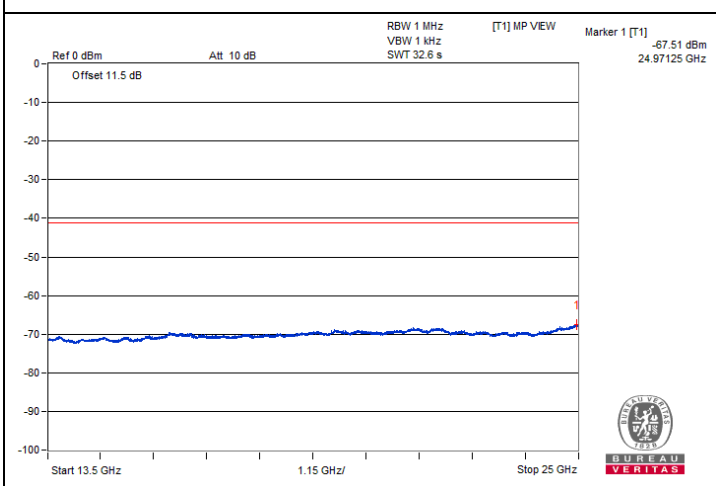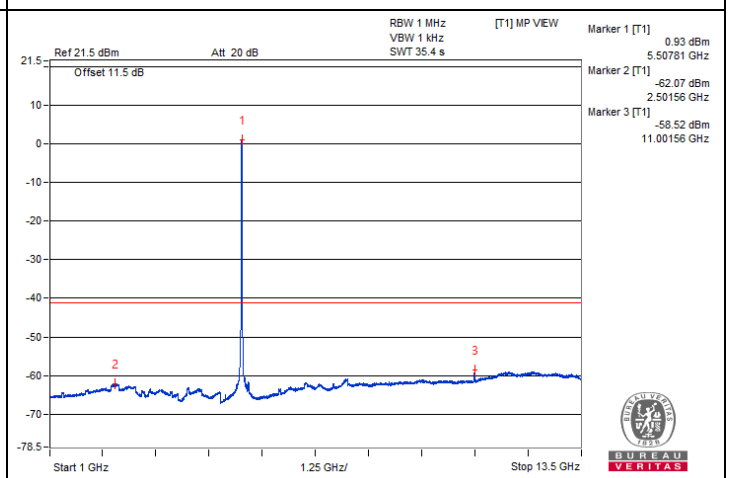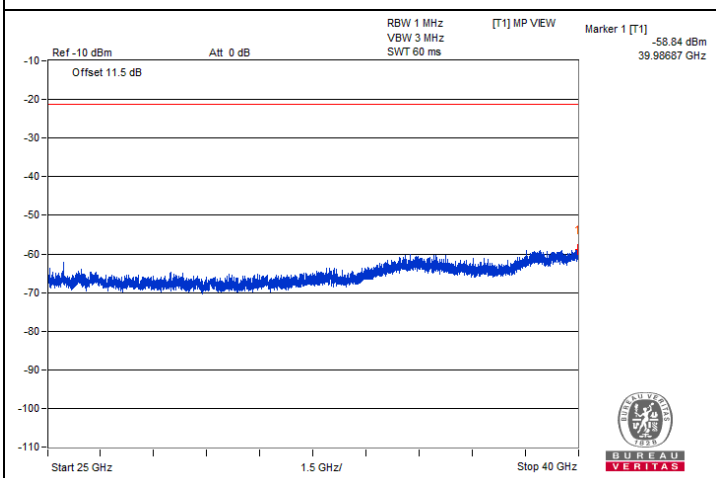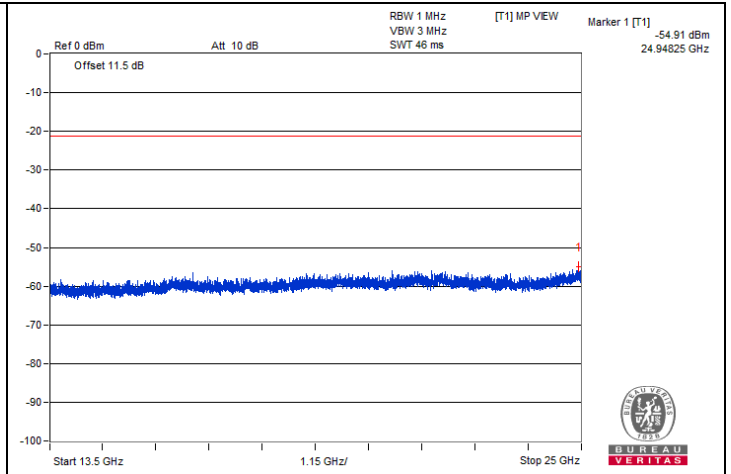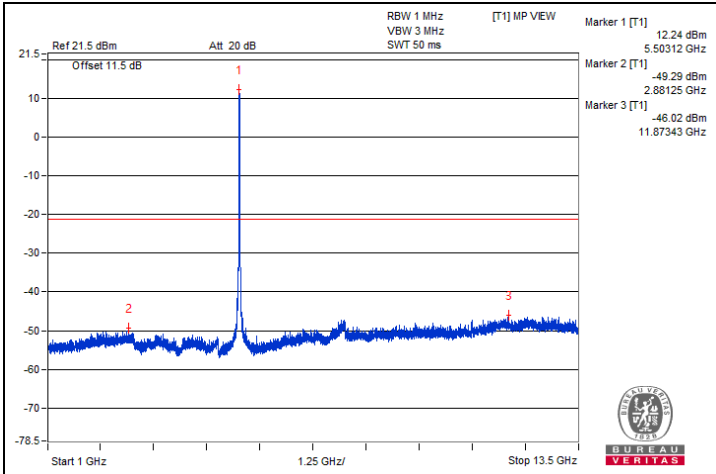


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5455.31 | 64.84 PK | 74 | -9.16 | -34.67 | 4.25 | -30.42 |
| 2 | 5451.53 | 50.52 AV | 54 | -3.48 | -48.99 | 4.25 | -44.74 |
| 3 | #5465.09 | 66.36 PK | 68.2 | -1.84 | -33.15 | 4.25 | -28.90 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.






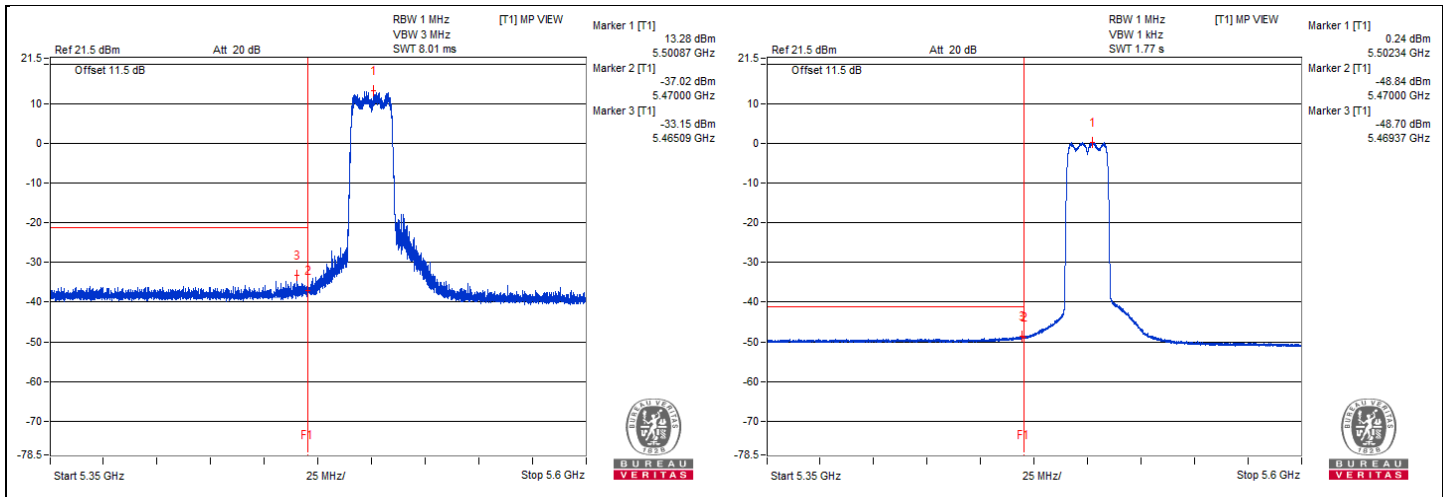


802.11ax (HE20) - Channel 116
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3723.43 | 48.27 PK | 74 | -25.73 | -52.81 | 5.825 | -46.99 |
| 2 | 3714.06 | 36.7 AV | 54 | -17.3 | -64.38 | 5.825 | -58.56 |
| 3 | 7420.31 | 52.15 PK | 74 | -21.85 | -48.93 | 5.825 | -43.11 |
| 4 | 7431.25 | 38.23 AV | 54 | -15.77 | -62.85 | 5.825 | -57.03 |
| 5 | 11167.18 | 54.98 PK | 74 | -19.02 | -46.1 | 5.825 | -40.28 |
| 6 | 11160.93 | 42.53 AV | 54 | -11.47 | -58.55 | 5.825 | -52.73 |
| 7 | #16721.43 | 44.63 PK | 68.2 | -23.57 | -56.45 | 5.825 | -50.63 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

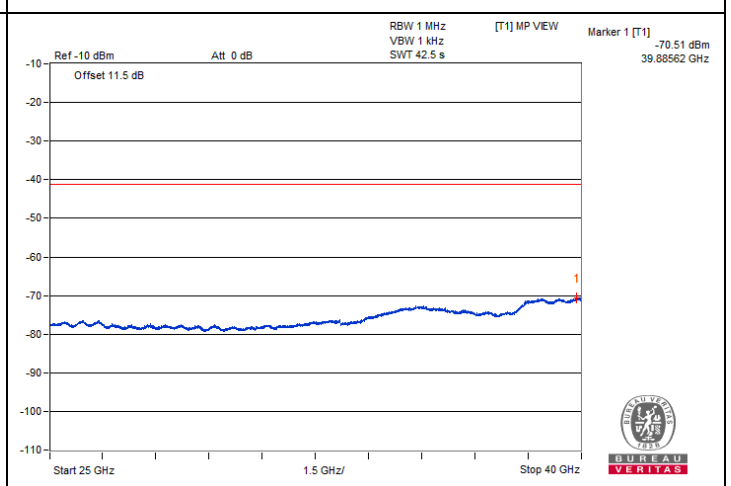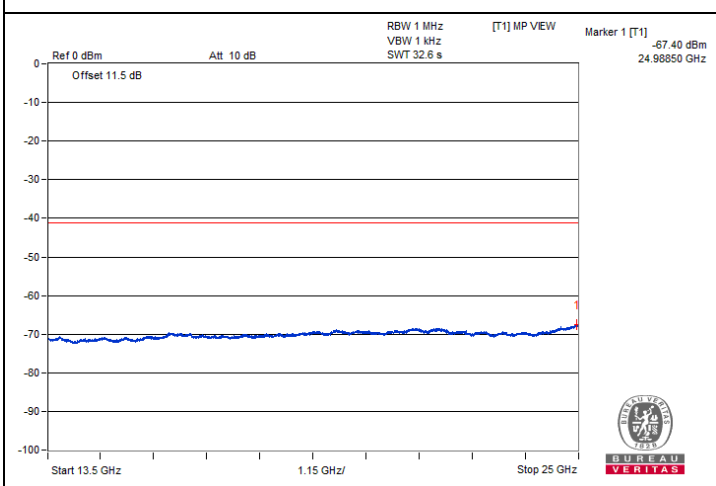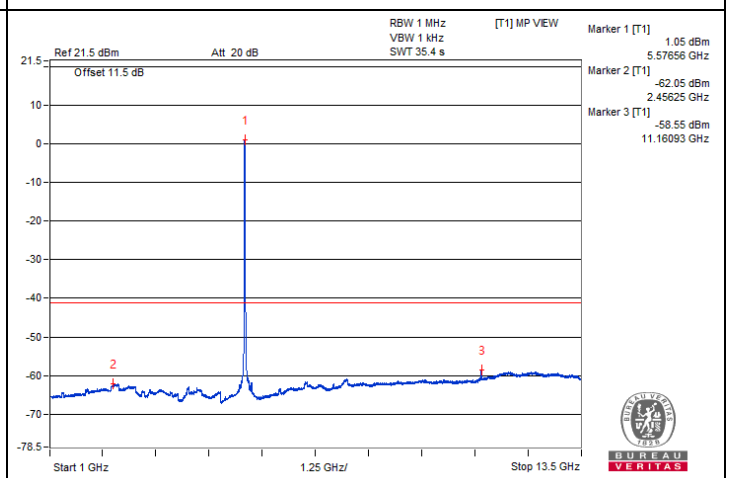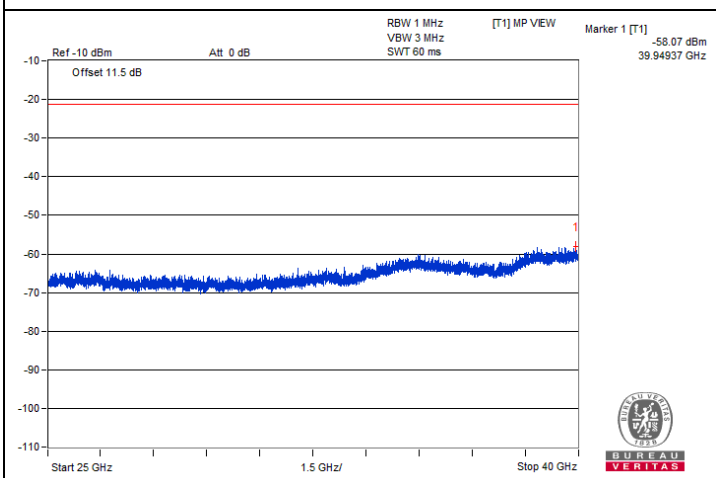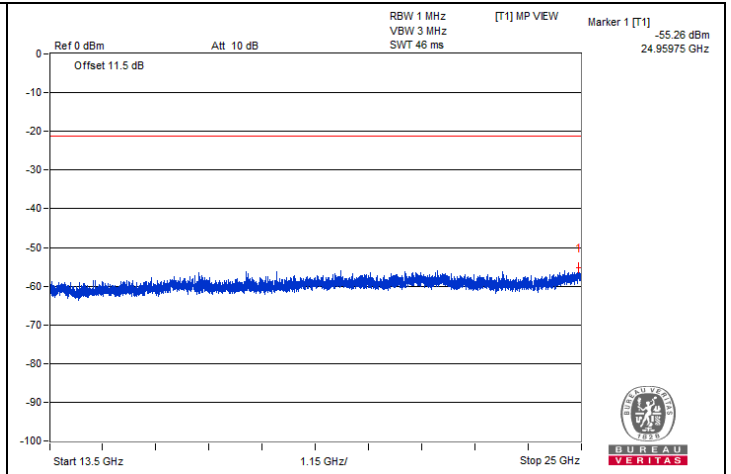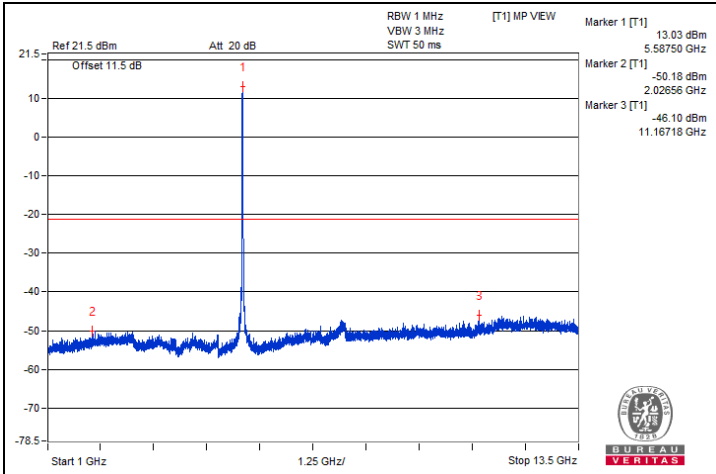


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5445.5 | 63.98 PK | 74 | -10.02 | -35.53 | 4.25 | -31.28 |
| 2 | 5407.09 | 50.19 AV | 54 | -3.81 | -49.32 | 4.25 | -45.07 |
| 3 | #5466.59 | 63.64 PK | 68.2 | -4.56 | -35.87 | 4.25 | -31.62 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.






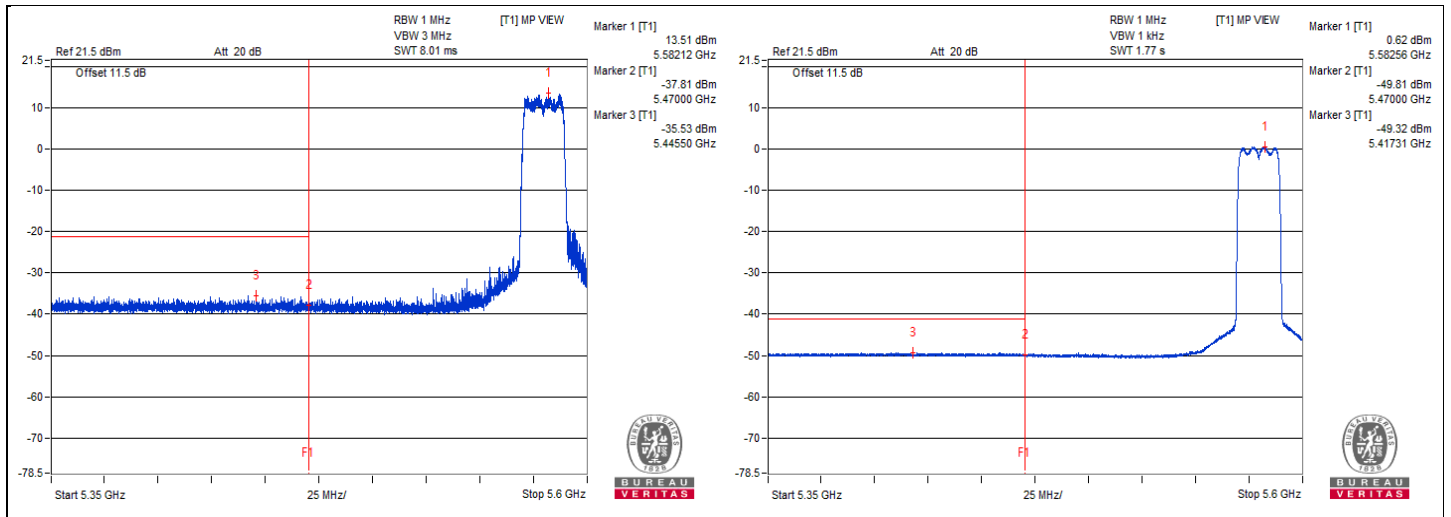


802.11ax (HE20) - Channel 140
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3815.62 | 49.79 PK | 74 | -24.21 | -51.29 | 5.825 | -45.47 |
| 2 | 3818.75 | 36.92 AV | 54 | -17.08 | -64.16 | 5.825 | -58.34 |
| 3 | 7614.06 | 50.4 PK | 74 | -23.6 | -50.68 | 5.825 | -44.86 |
| 4 | 7584.37 | 37.76 AV | 54 | -16.24 | -63.32 | 5.825 | -57.50 |
| 5 | 11395.31 | 54.89 PK | 74 | -19.11 | -46.19 | 5.825 | -40.37 |
| 6 | 11400 | 42.93 AV | 54 | -11.07 | -58.15 | 5.825 | -52.33 |
| 7 | #17109.56 | 42.03 PK | 68.2 | -26.17 | -59.05 | 5.825 | -53.23 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

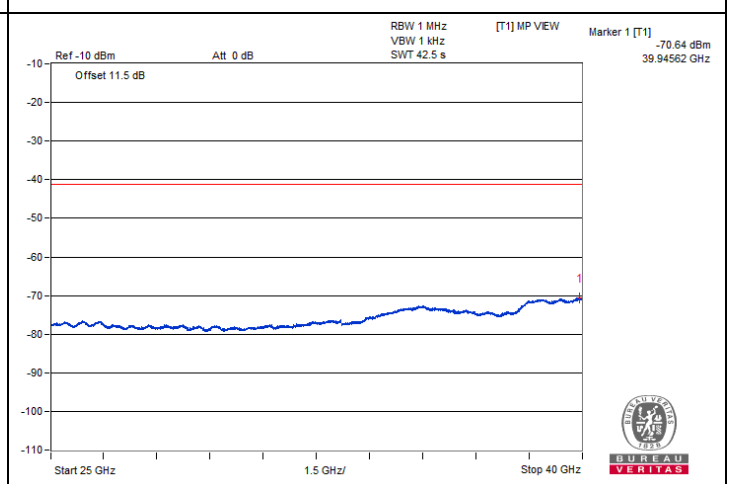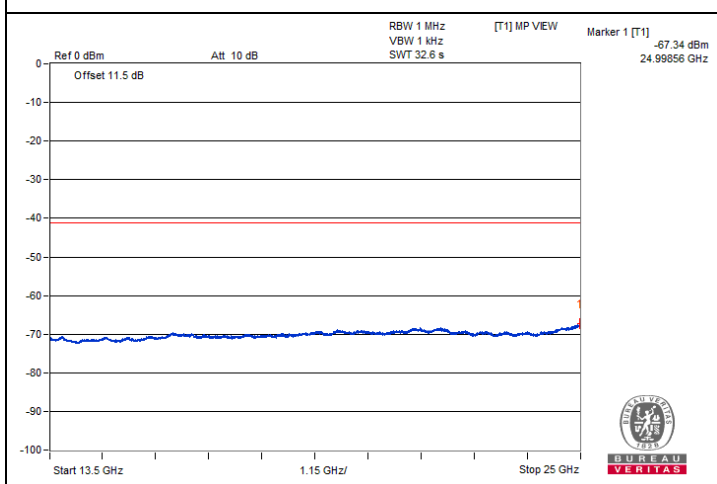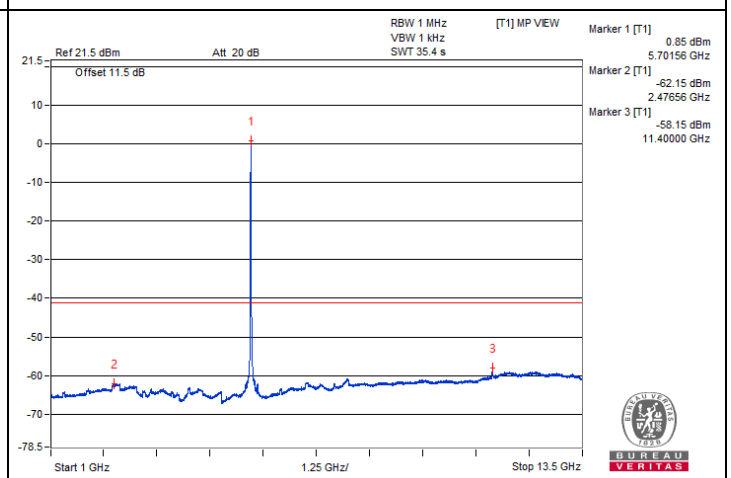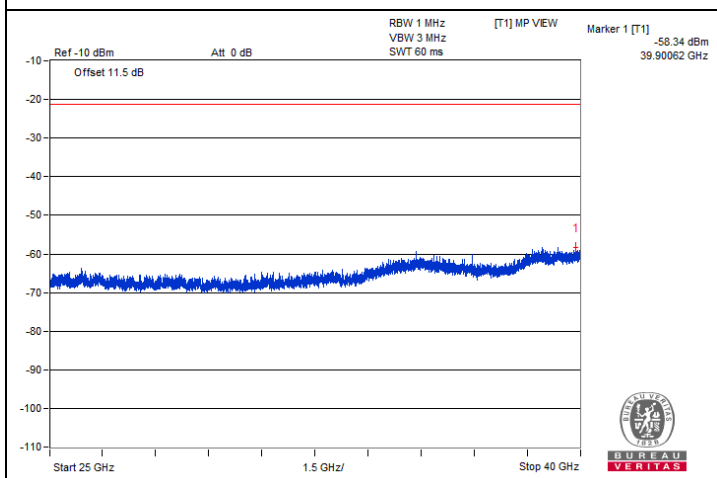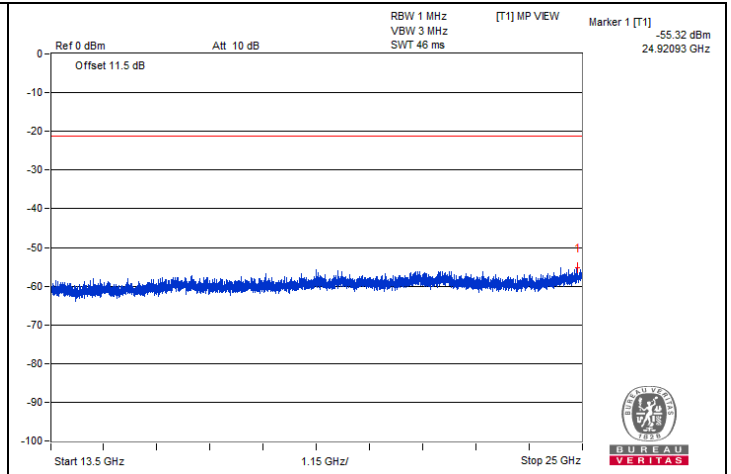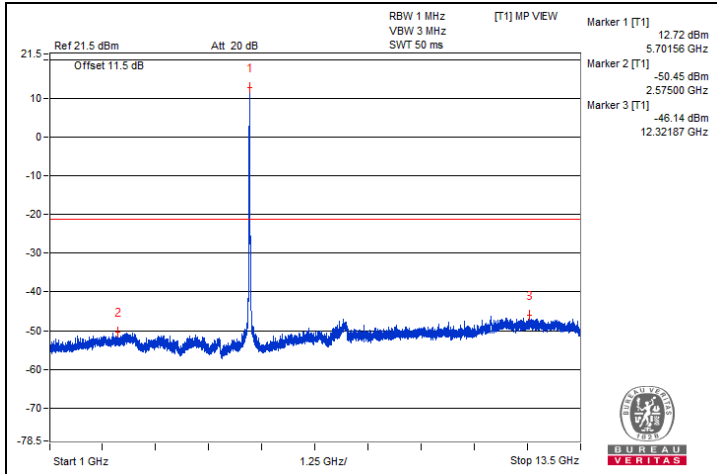


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | #5726.6 | 66.04 PK | 68.2 | -2.16 | -33.47 | 4.25 | -29.22 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.






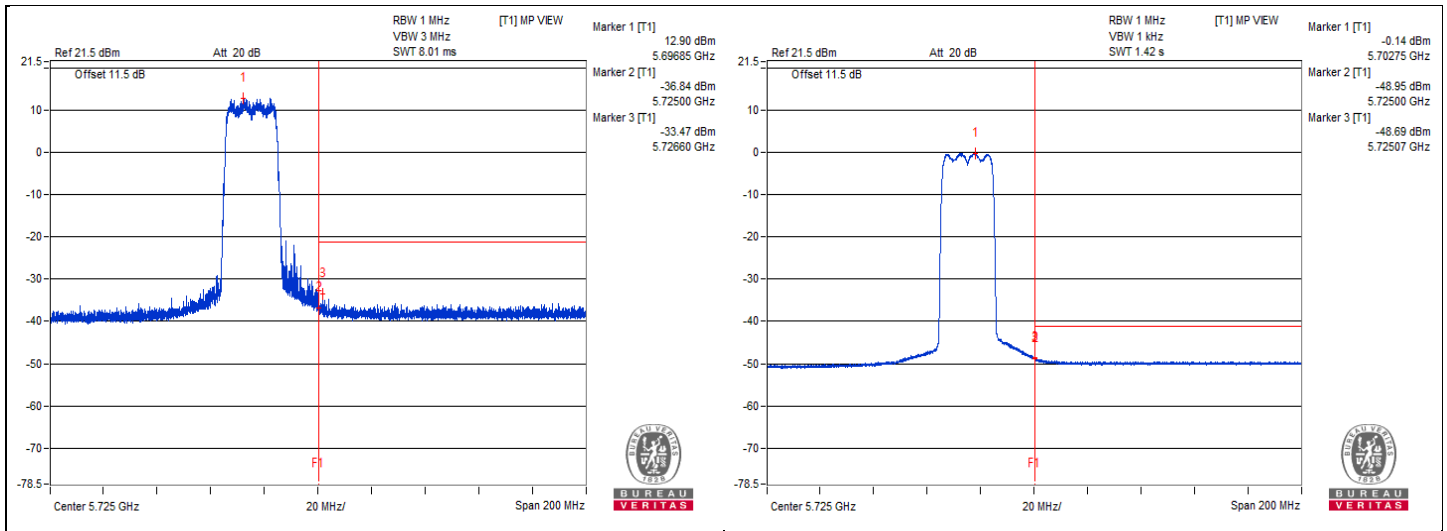


802.11ax (HE20) - Channel 144
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3798.43 | 48.09 PK | 74 | -25.91 | -52.99 | 5.825 | -47.17 |
| 2 | 3821.87 | 37.1 AV | 54 | -16.9 | -63.98 | 5.825 | -58.16 |
| 3 | 7632.81 | 50.16 PK | 74 | -23.84 | -50.92 | 5.825 | -45.10 |
| 4 | 7640.62 | 38.01 AV | 54 | -15.99 | -63.07 | 5.825 | -57.25 |
| 5 | 11443.75 | 55.24 PK | 74 | -18.76 | -45.84 | 5.825 | -40.02 |
| 6 | 11440.62 | 43.38 AV | 54 | -10.62 | -57.7 | 5.825 | -51.88 |
| 7 | #17145.5 | 41.72 PK | 68.2 | -26.48 | -59.36 | 5.825 | -53.54 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

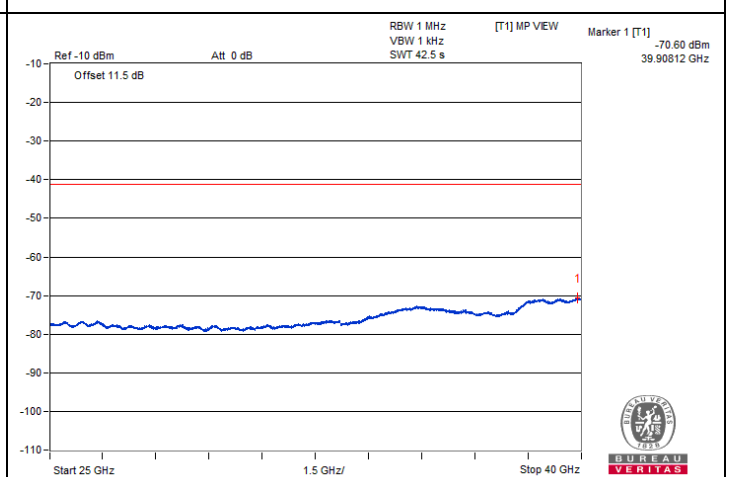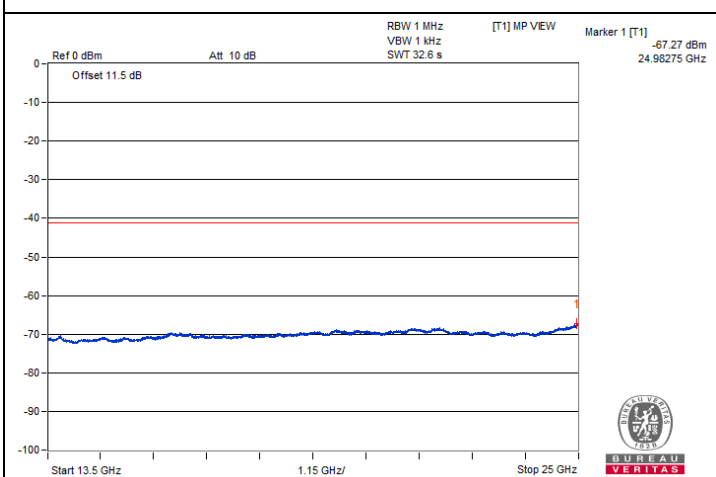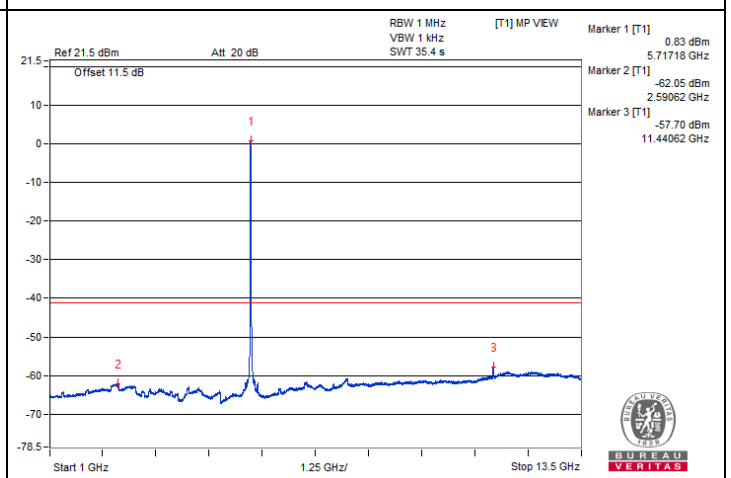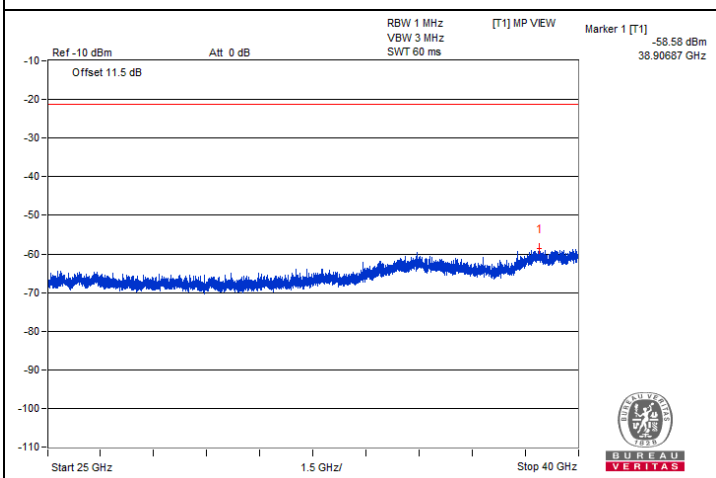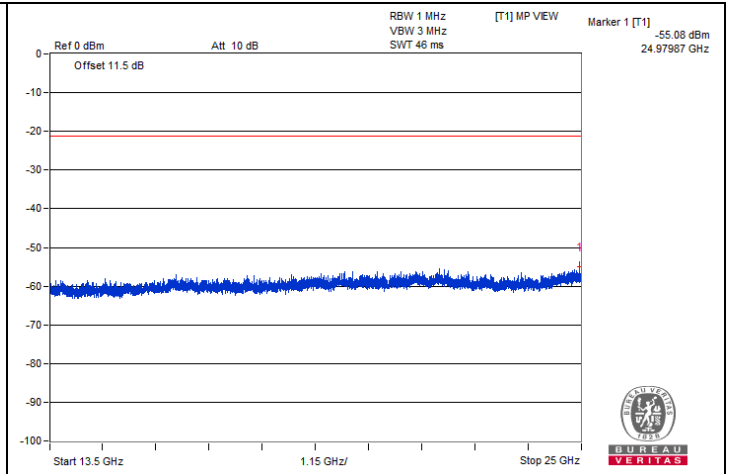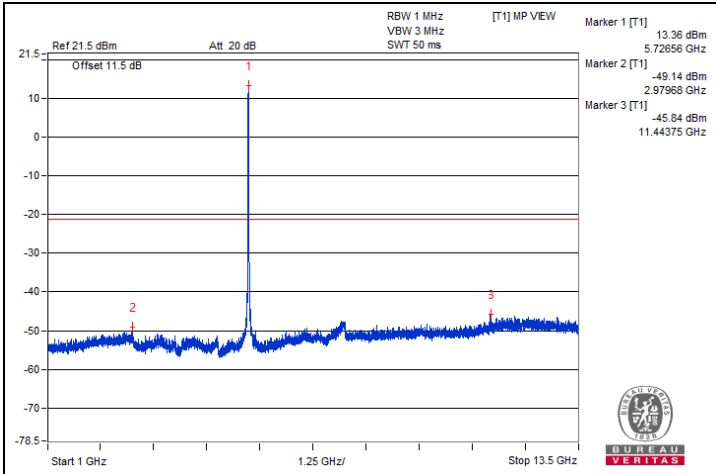


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | #5871.13 | 63.36 PK | 68.2 | -4.84 | -36.15 | 4.25 | -31.90 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.






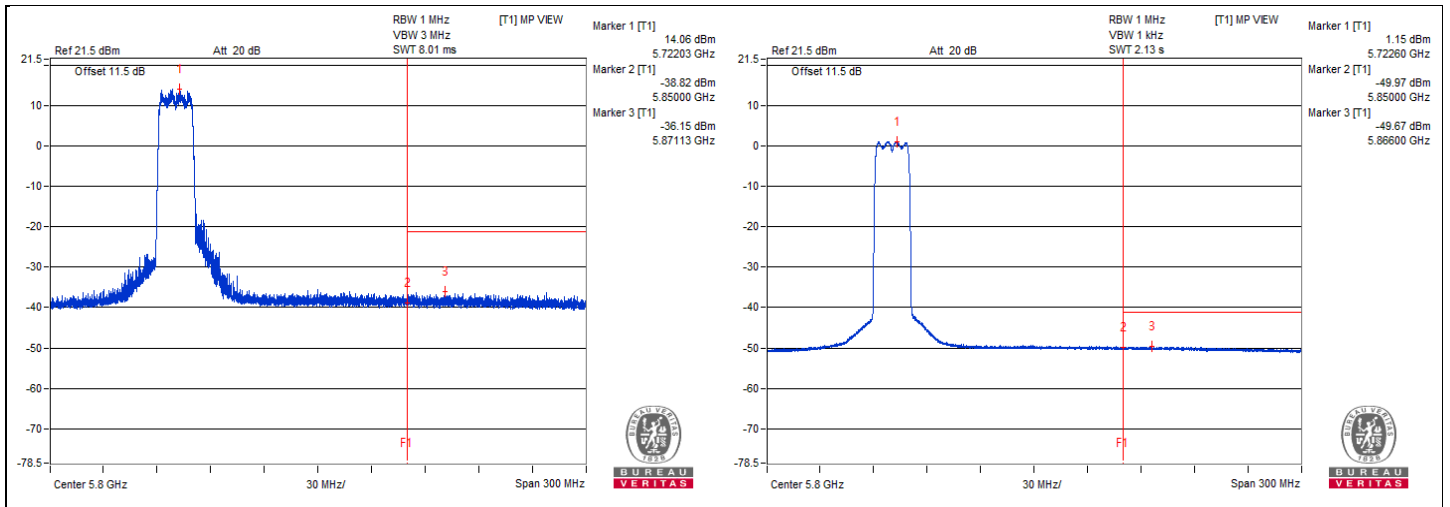


802.11ax (HE20) - Channel 149
Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3850 | 48.29 PK | 74 | -25.71 | -52.79 | 5.825 | -46.97 |
| 2 | 3810.93 | 27.11 AV | 54 | -26.89 | -73.97 | 5.825 | -68.15 |
| 3 | 7651.56 | 51.07 PK | 74 | -22.93 | -50.01 | 5.825 | -44.19 |
| 4 | 7659.37 | 29.25 AV | 54 | -24.75 | -71.83 | 5.825 | -66.01 |
| 5 | 11498.43 | 55.02 PK | 74 | -18.98 | -46.06 | 5.825 | -40.24 |
| 6 | 11492.18 | 39.86 AV | 54 | -14.14 | -61.22 | 5.825 | -55.40 |
| 7 | #17226 | 46.21 PK | 68.2 | -21.99 | -54.87 | 5.825 | -49.05 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

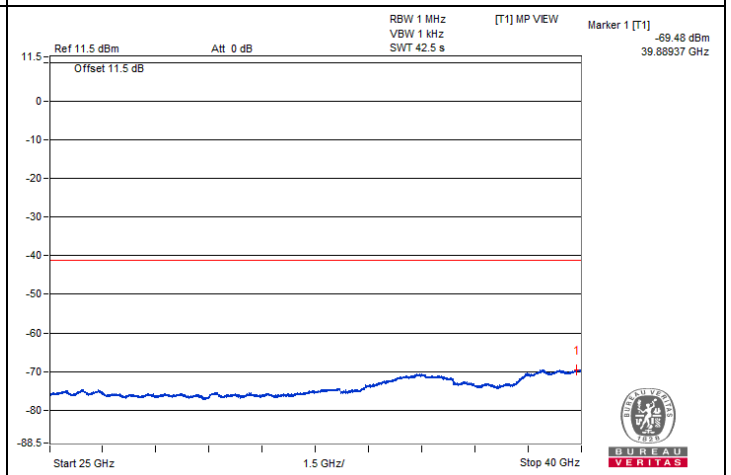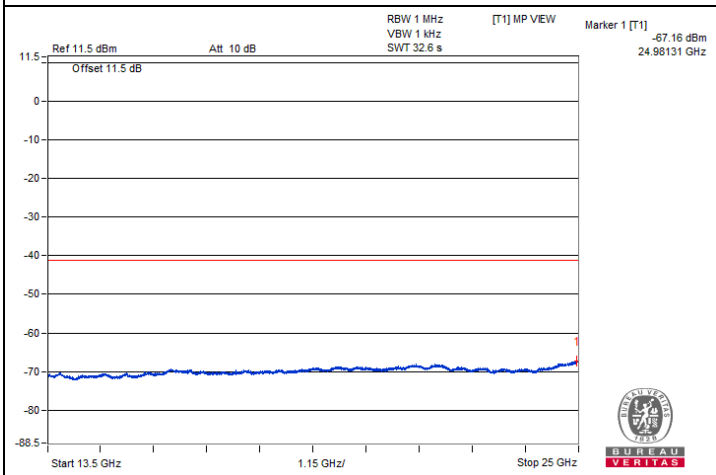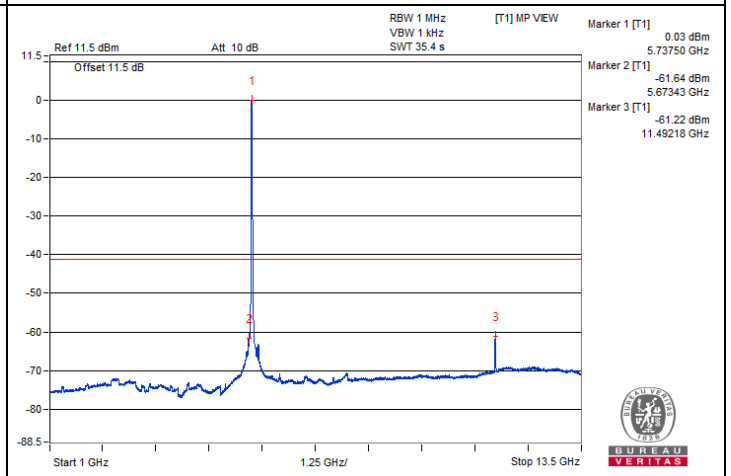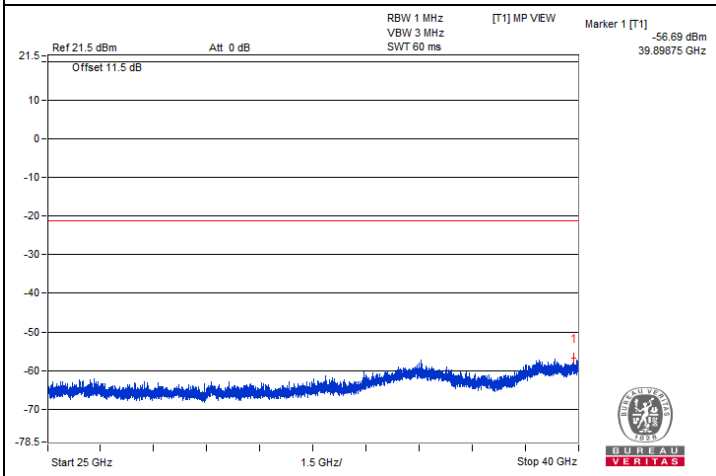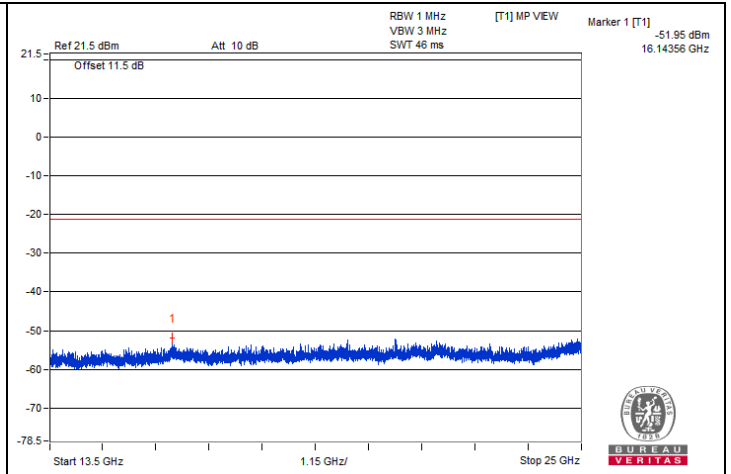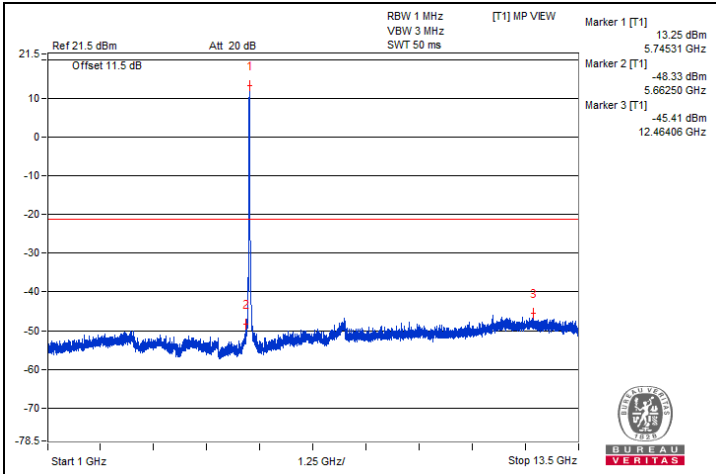

Bandedge table






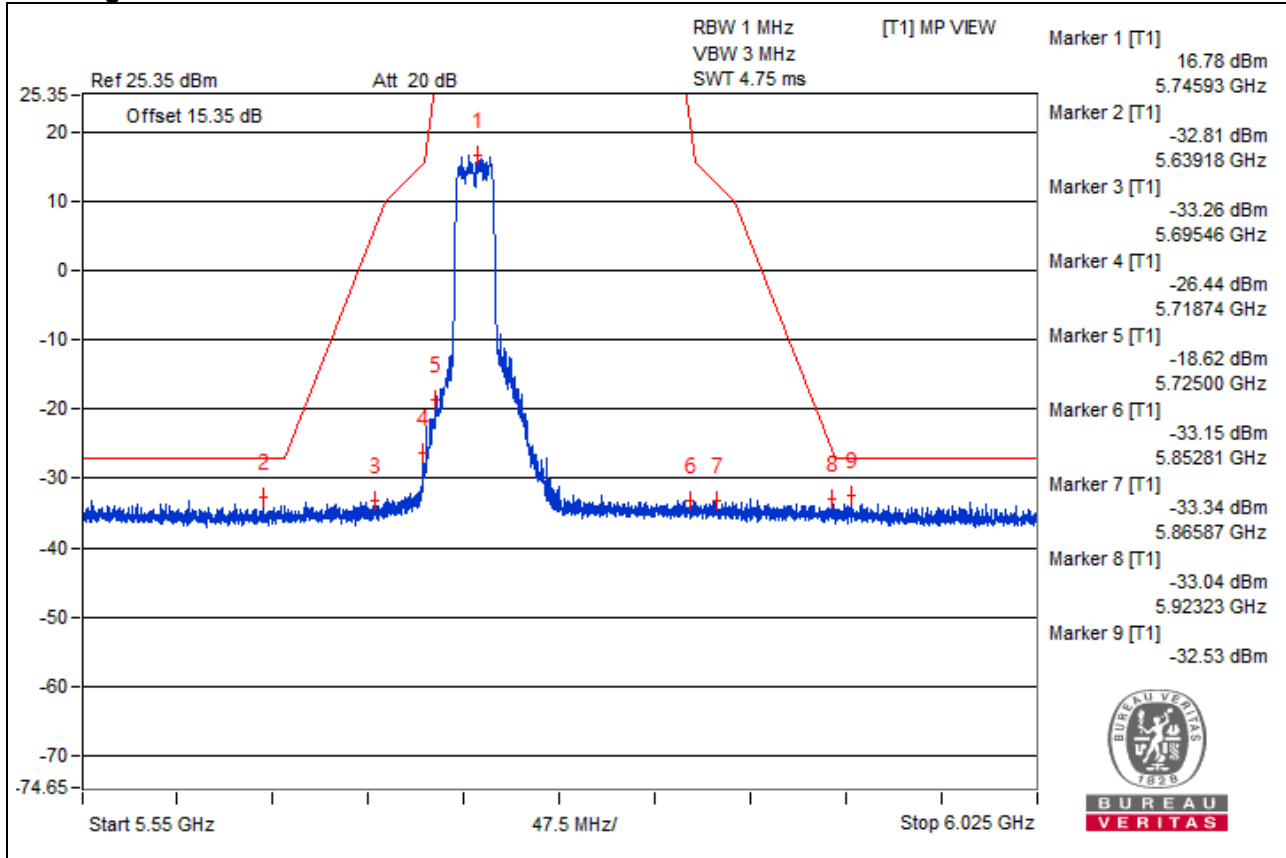


802.11ax (HE20) - Channel 157
Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3864.06 | 48.23 PK | 74 | -25.77 | -52.85 | 5.825 | -47.03 |
| 2 | 3839.06 | 27.17 AV | 54 | -26.83 | -73.91 | 5.825 | -68.09 |
| 3 | 7725 | 52.38 PK | 74 | -21.62 | -48.7 | 5.825 | -42.88 |
| 4 | 7704.68 | 28.24 AV | 54 | -25.76 | -72.84 | 5.825 | -67.02 |
| 5 | 11573.43 | 55.07 PK | 74 | -18.93 | -46.01 | 5.825 | -40.19 |
| 6 | 11570.31 | 40.69 AV | 54 | -13.31 | -60.39 | 5.825 | -54.57 |
| 7 | #17336.68 | 47.65 PK | 68.2 | -20.55 | -53.43 | 5.825 | -47.61 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

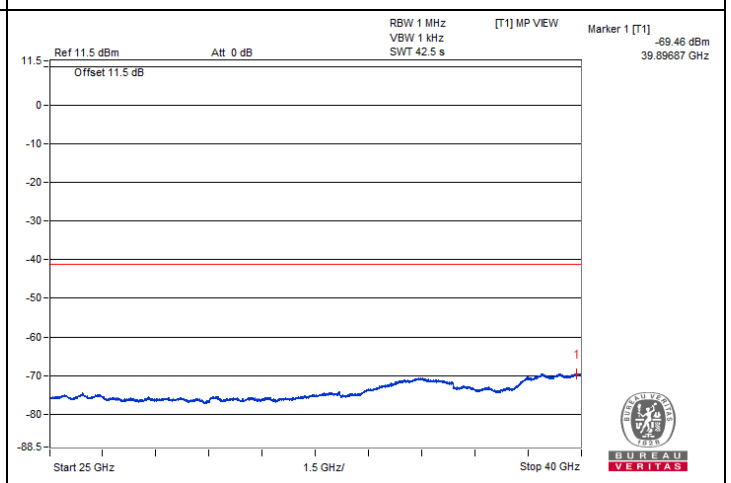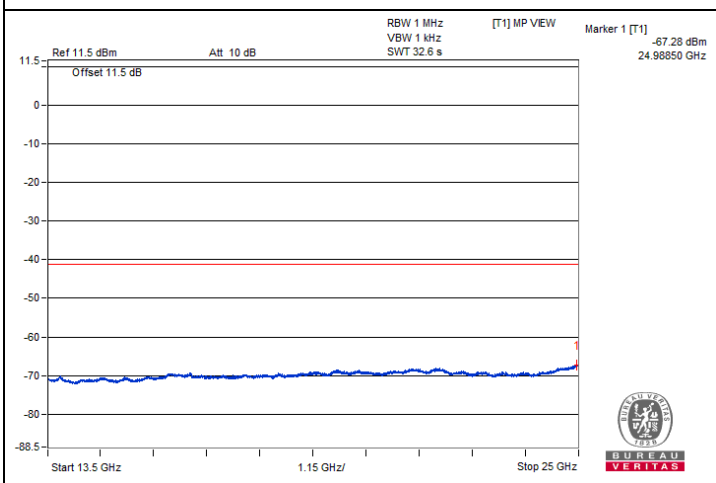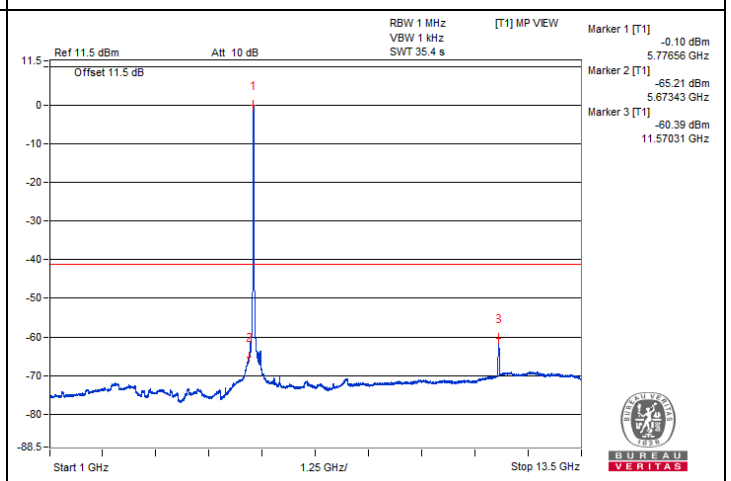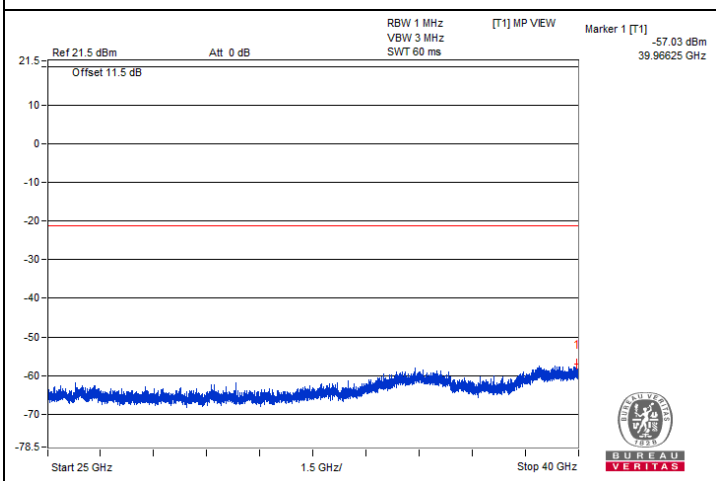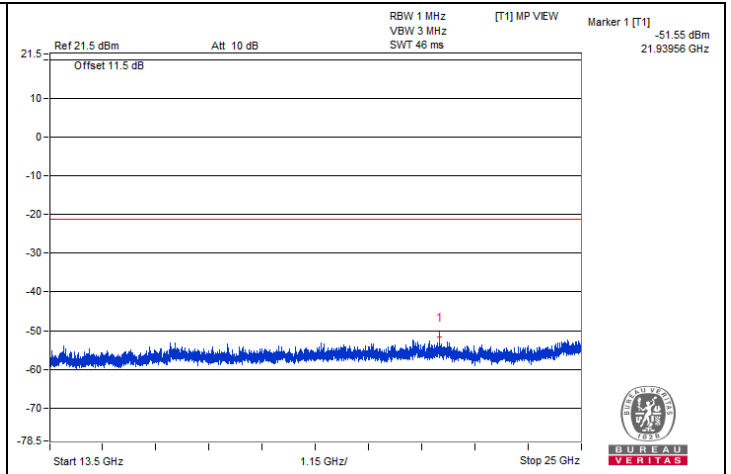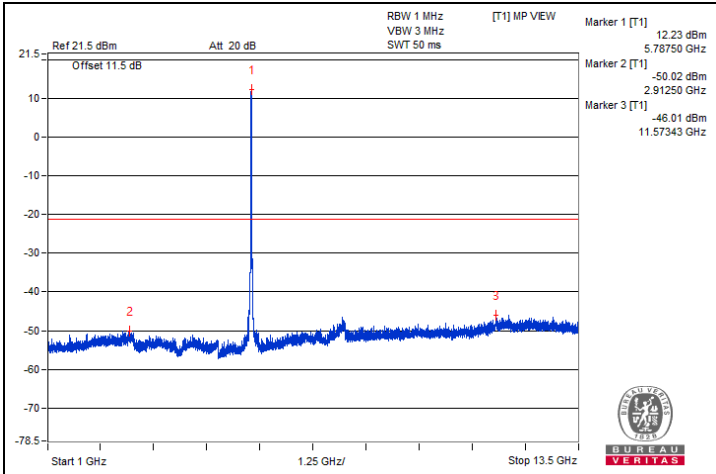

Bandedge table






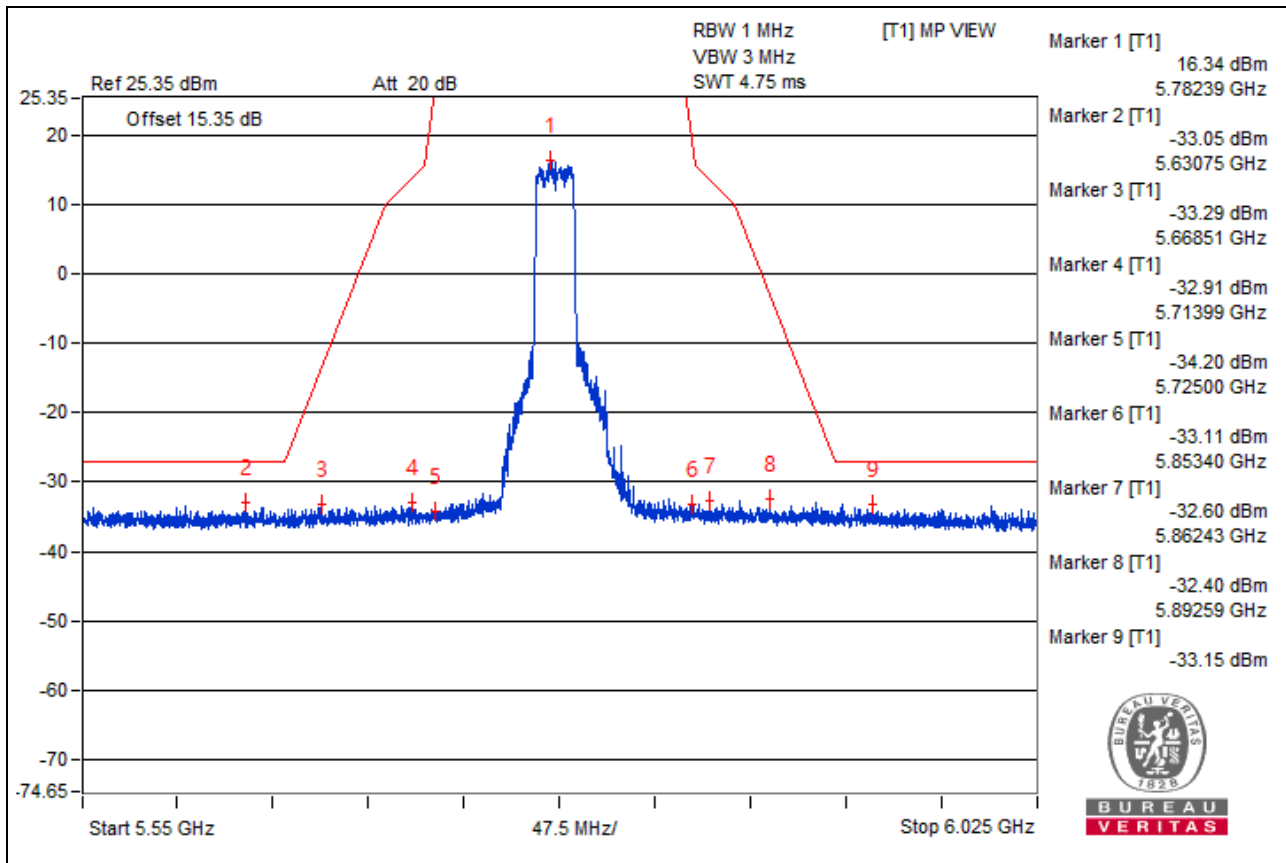


802.11ax (HE20) - Channel 165
Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3879.68 | 48.04 PK | 74 | -25.96 | -53.04 | 5.825 | -47.22 |
| 2 | 3867.18 | 26.72 AV | 54 | -27.28 | -74.36 | 5.825 | -68.54 |
| 3 | #7757.81 | 52.28 PK | 68.2 | -15.92 | -48.8 | 5.825 | -42.98 |
| 4 | 7750 | 28.34 AV | 54 | -25.66 | -72.74 | 5.825 | -66.92 |
| 5 | 11639.06 | 55.01 PK | 74 | -18.99 | -46.07 | 5.825 | -40.25 |
| 6 | 11651.56 | 39.74 AV | 54 | -14.26 | -61.34 | 5.825 | -55.52 |
| 7 | #17476.12 | 45.99 PK | 68.2 | -22.21 | -55.09 | 5.825 | -49.27 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

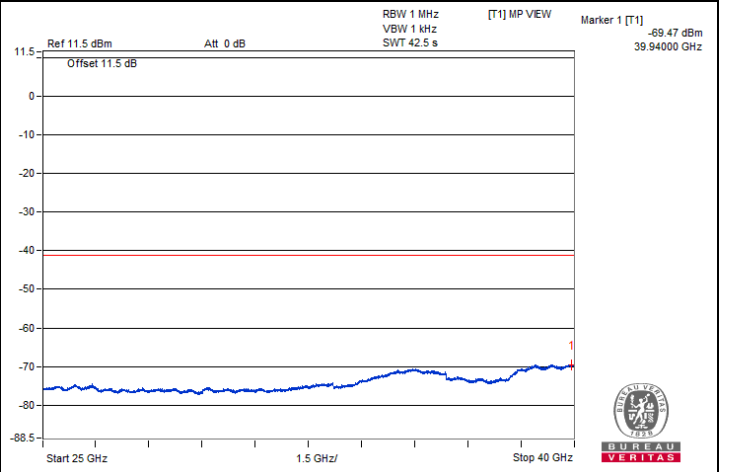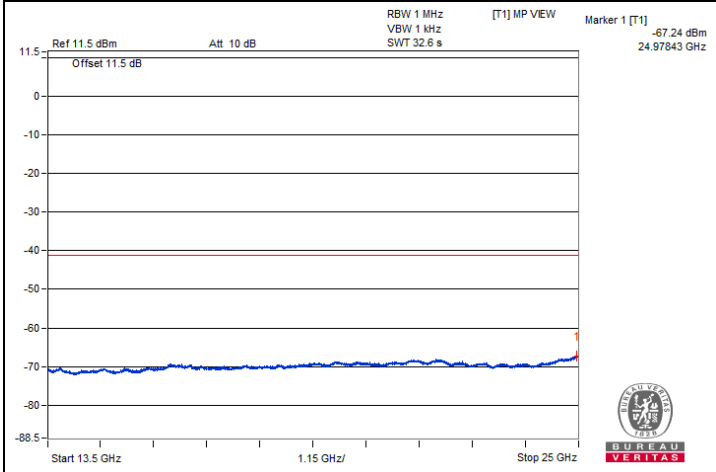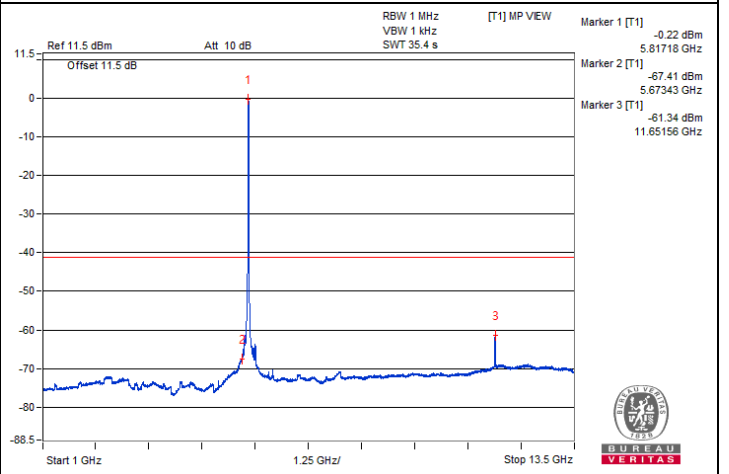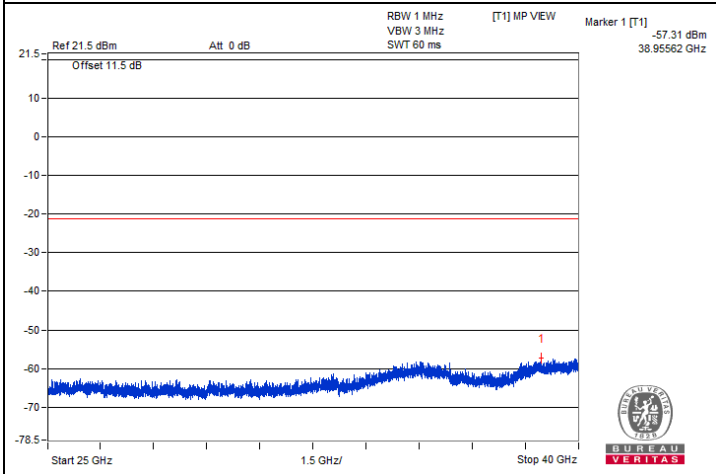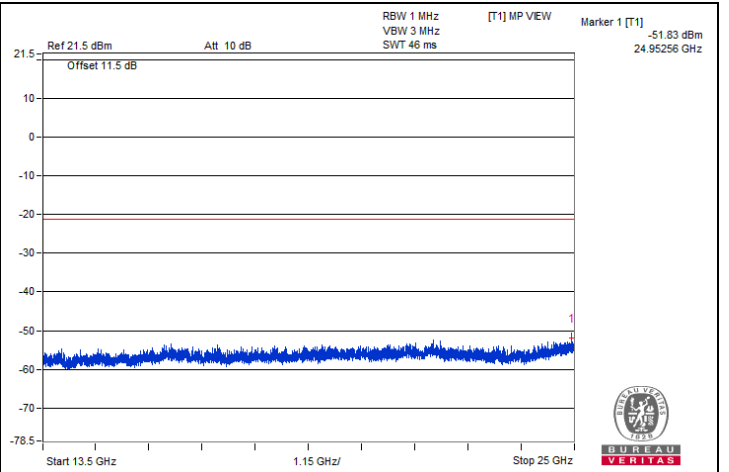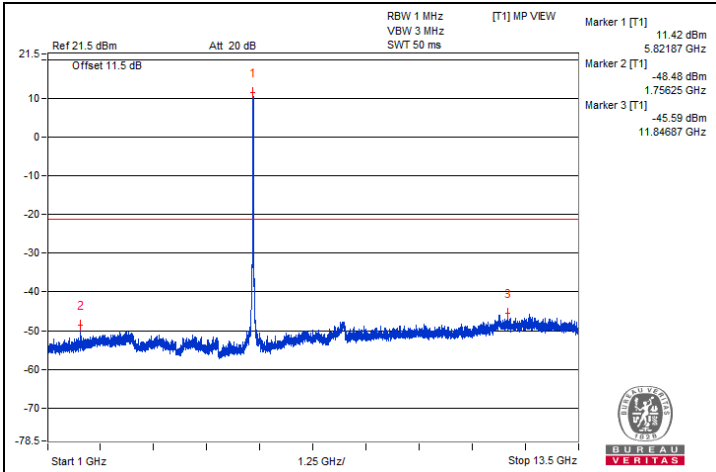

Bandedge table

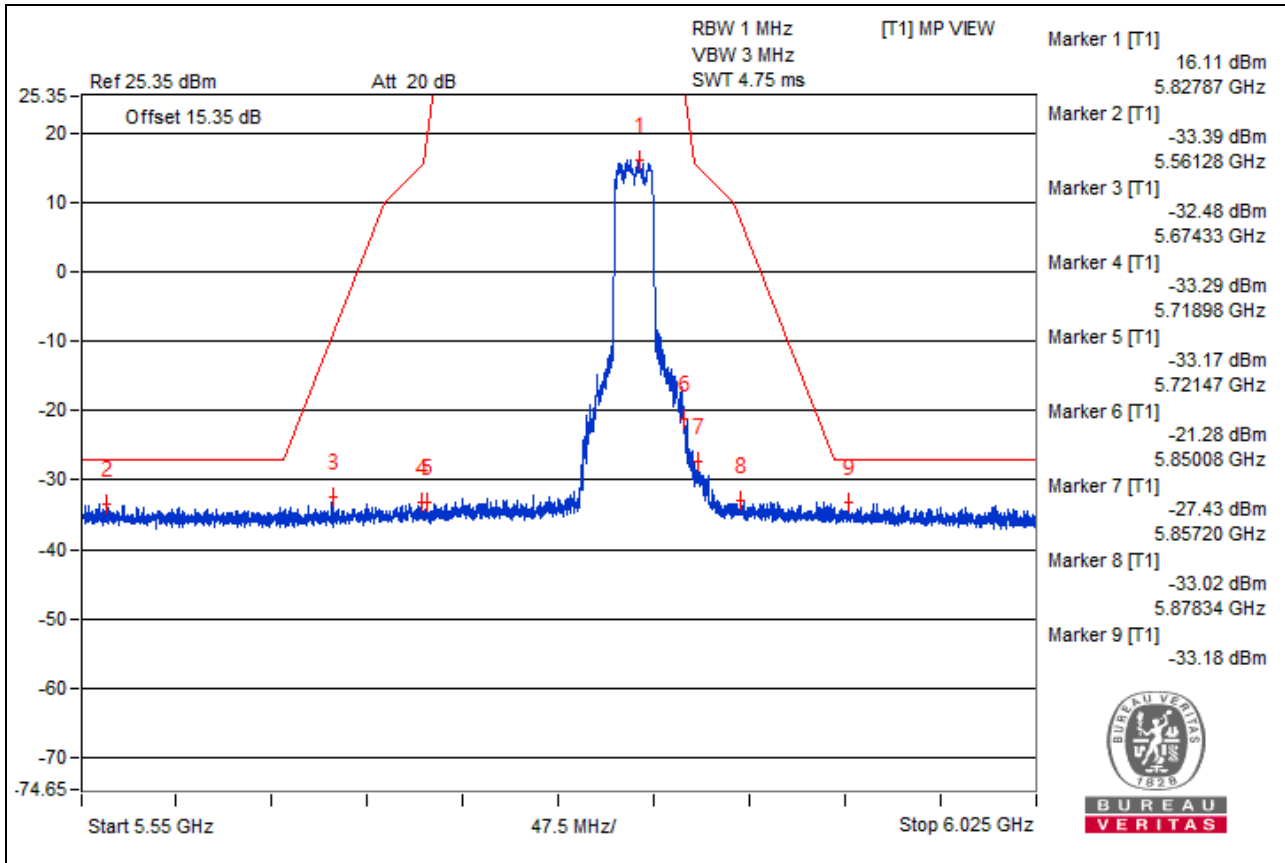







802.11ax (HE40) - Channel 38

Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | #3476.56 | 47.02 PK | 68.2 | -21.18 | -52.49 | 5.825 | -46.67 |
| 2 | #6929.68 | 49.16 PK | 68.2 | -19.04 | -50.35 | 5.825 | -44.53 |
| 3 | #10379.68 | 51.34 PK | 68.2 | -16.86 | -48.17 | 5.825 | -42.35 |
| 4 | 15570 | 41.15 PK | 74 | -32.85 | -58.36 | 5.825 | -52.54 |
| 5 | 15570 | 29.22 AV | 54 | -24.78 | -70.29 | 5.825 | -64.47 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

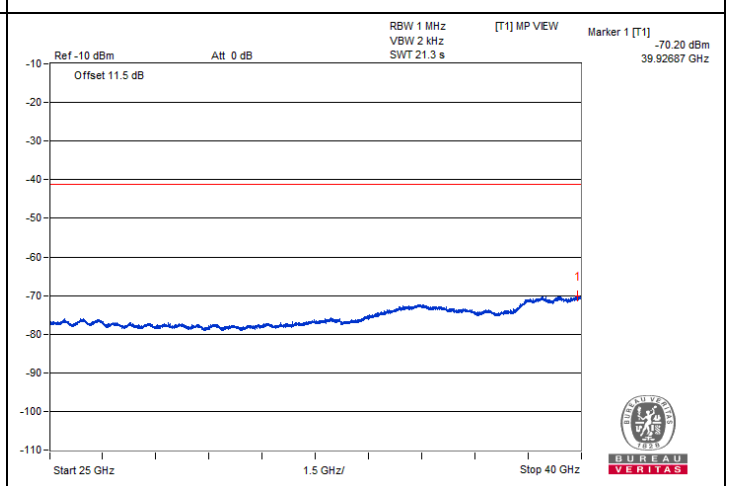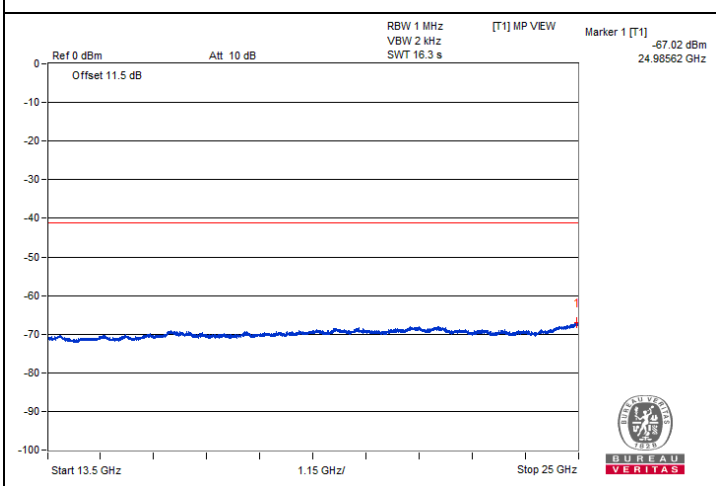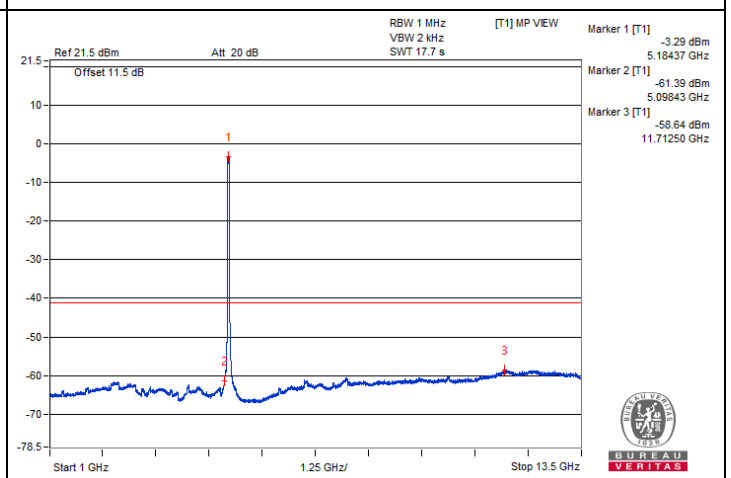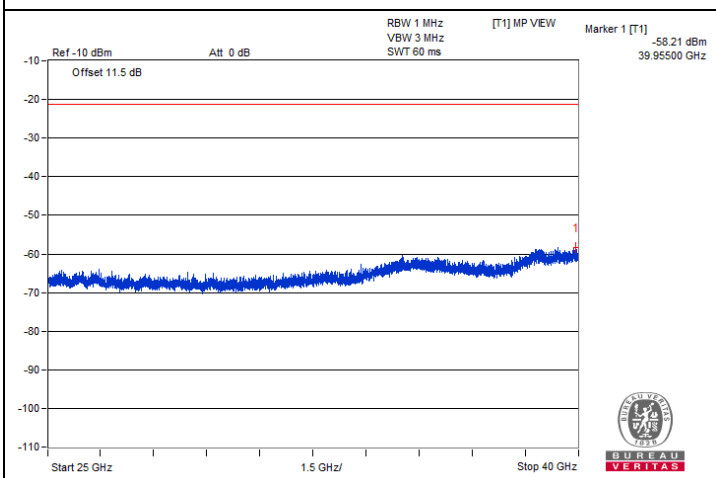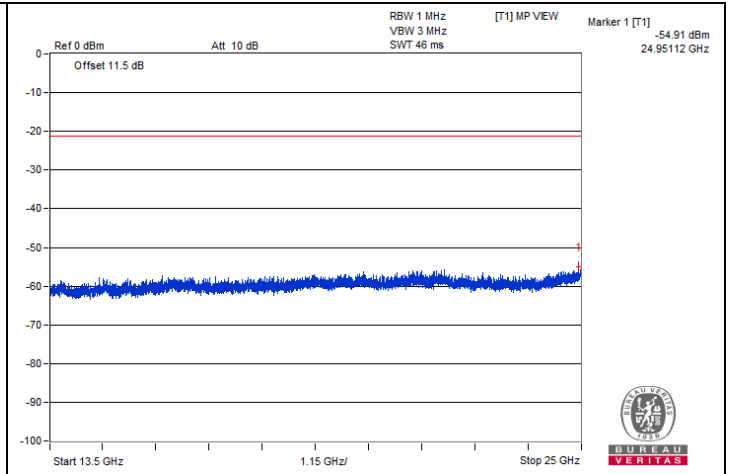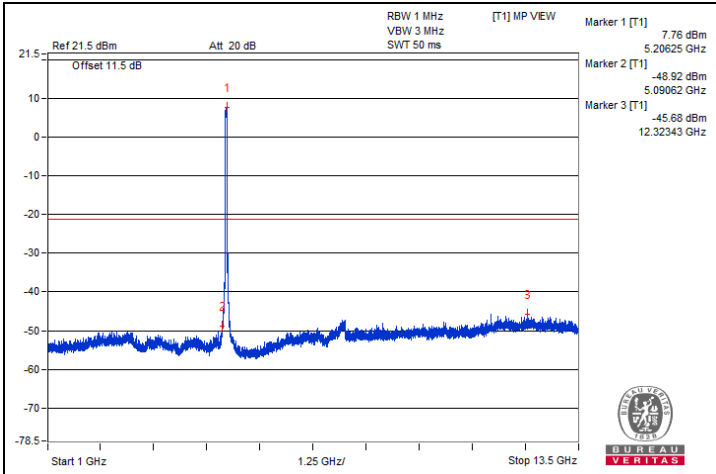


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5148.37 | 63.44 PK | 74 | -10.56 | -34.97 | 3.15 | -31.82 |
| 2 | 5149.87 | 49.44 AV | 54 | -4.56 | -48.97 | 3.15 | -45.82 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.






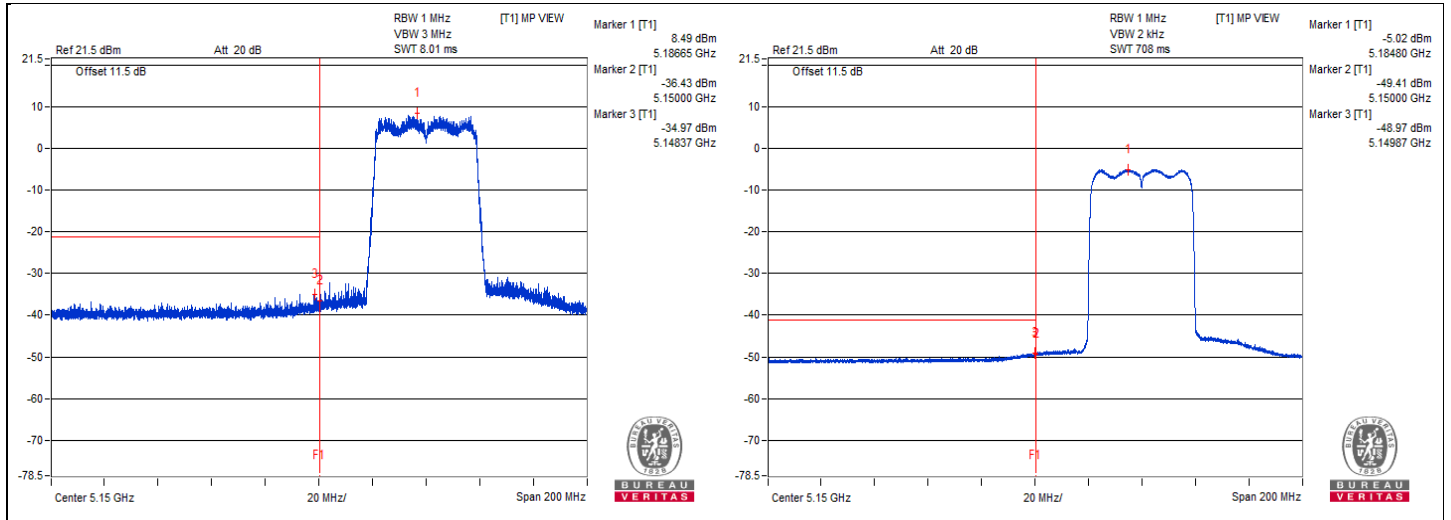


802.11ax (HE40) - Channel 46
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3504.68 | 49.24 PK | 74 | -24.76 | -51.84 | 5.825 | -46.02 |
| 2 | #6989.06 | 50.16 PK | 68.2 | -18.04 | -50.92 | 5.825 | -45.10 |
| 3 | #10471.87 | 52.55 PK | 68.2 | -15.65 | -48.53 | 5.825 | -42.71 |
| 4 | 15670.62 | 42.21 PK | 74 | -31.79 | -58.87 | 5.825 | -53.05 |
| 5 | 15693.62 | 30.87 AV | 54 | -23.13 | -70.21 | 5.825 | -64.39 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

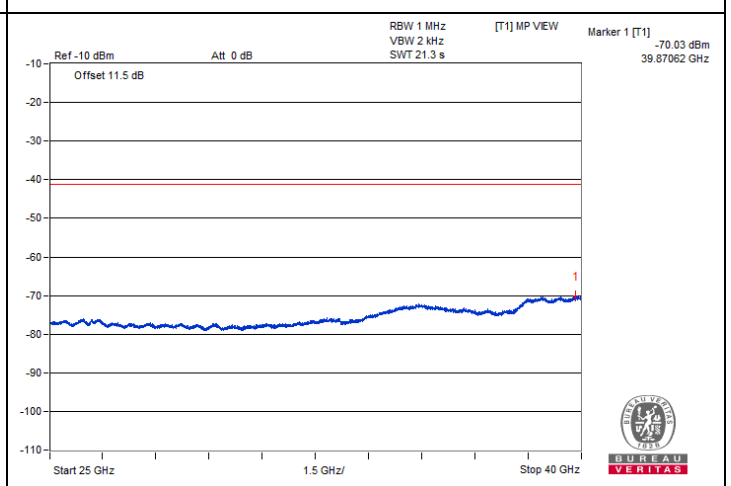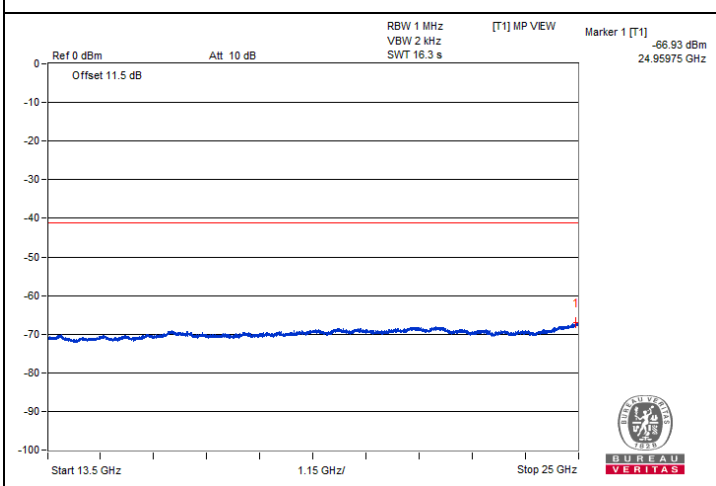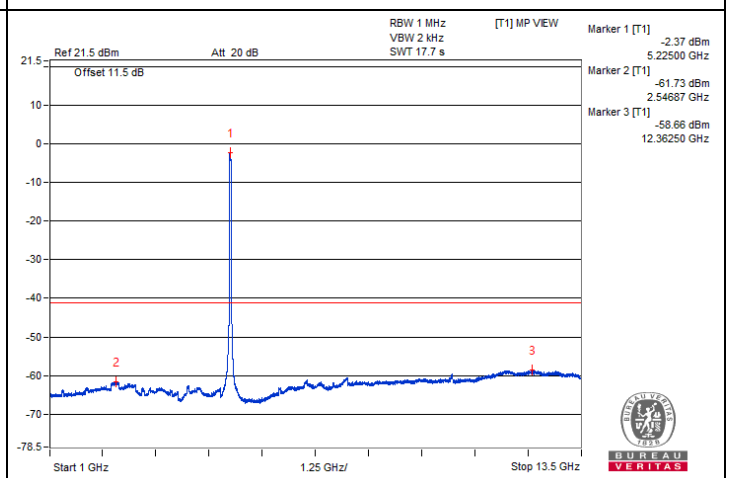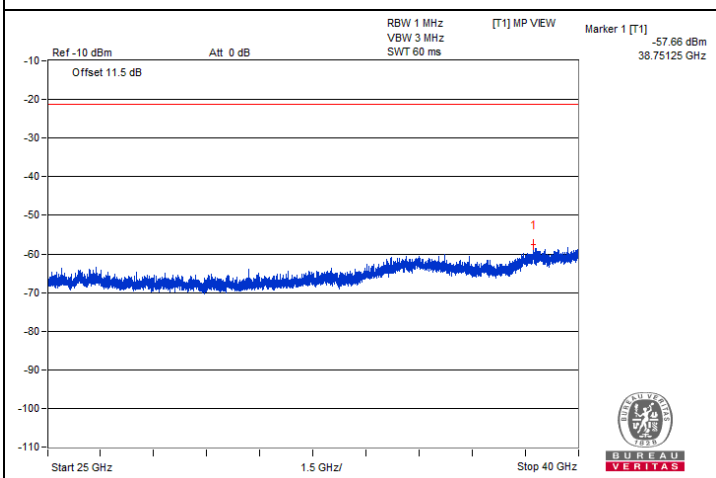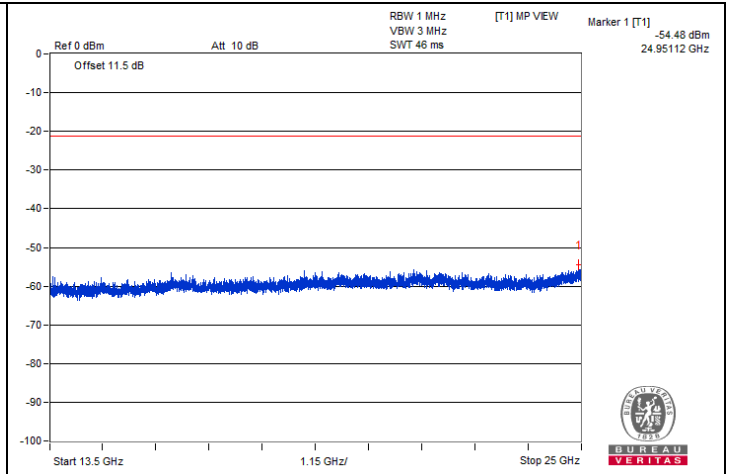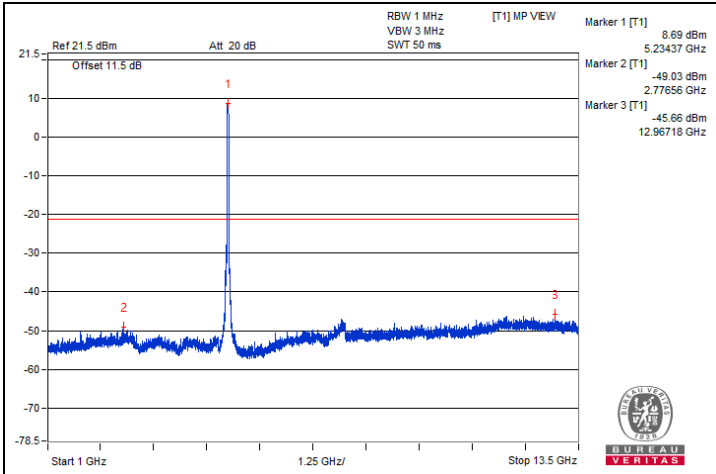


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5147.47 | 61.18 PK | 74 | -12.82 | -37.23 | 3.15 | -34.08 |
| 2 | 5077.35 | 48.12 AV | 54 | -5.88 | -50.29 | 3.15 | -47.14 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

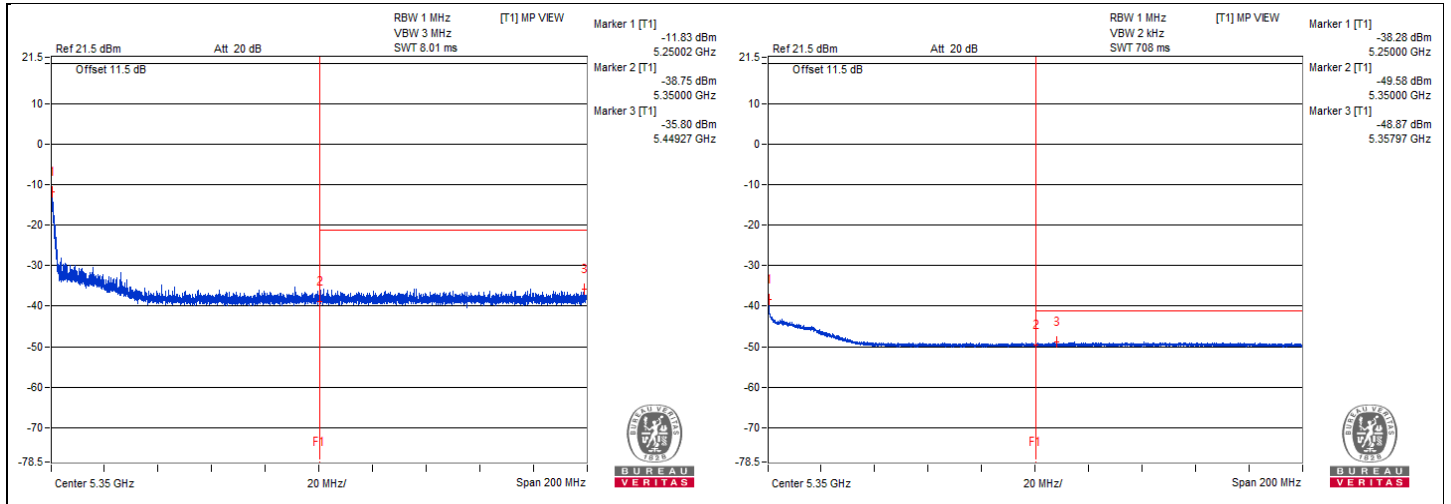







802.11ax (HE40) - Channel 54

Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3529.68 | 49.66 PK | 74 | -24.34 | -51.42 | 5.825 | -45.60 |
| 2 | 3523.43 | 37.54 AV | 54 | -16.46 | -63.54 | 5.825 | -57.72 |
| 3 | #7045.31 | 50.87 PK | 68.2 | -17.33 | -50.21 | 5.825 | -44.39 |
| 4 | #10546.87 | 52.21 PK | 68.2 | -15.99 | -48.87 | 5.825 | -43.05 |
| 5 | 15824.43 | 42.25 PK | 74 | -31.75 | -58.83 | 5.825 | -53.01 |
| 6 | 15805.75 | 30.78 AV | 54 | -23.22 | -70.3 | 5.825 | -64.48 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

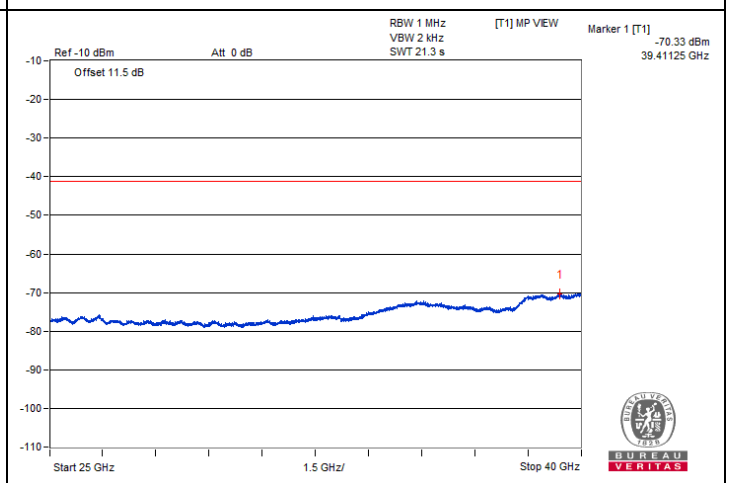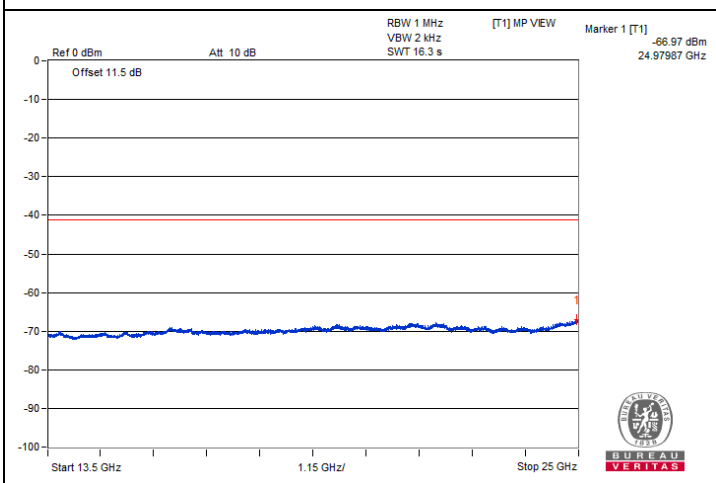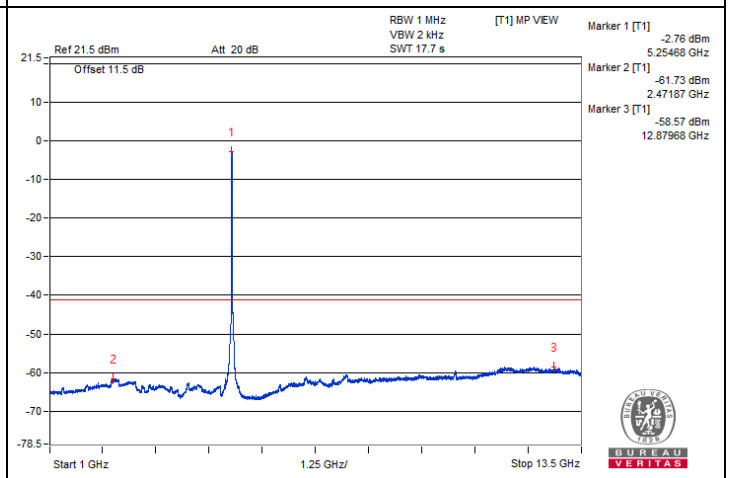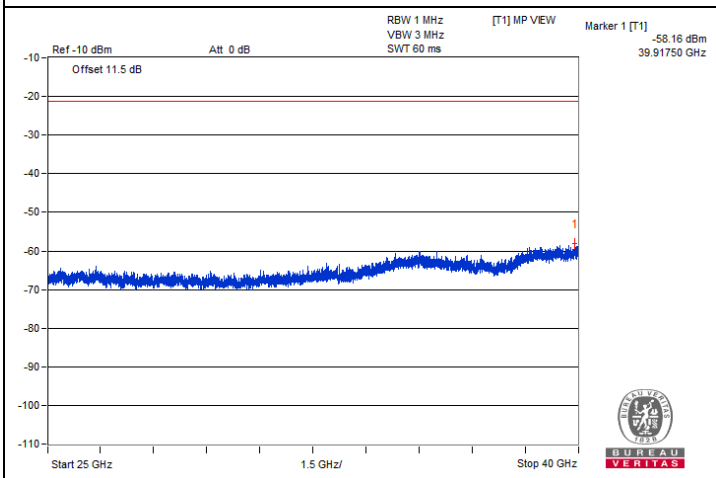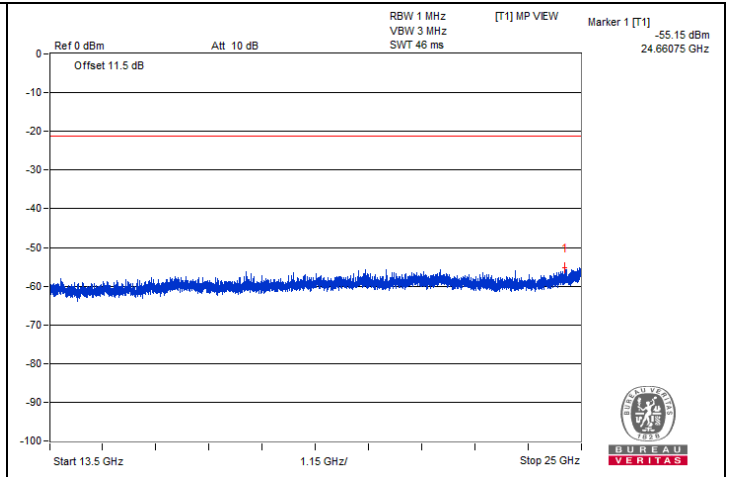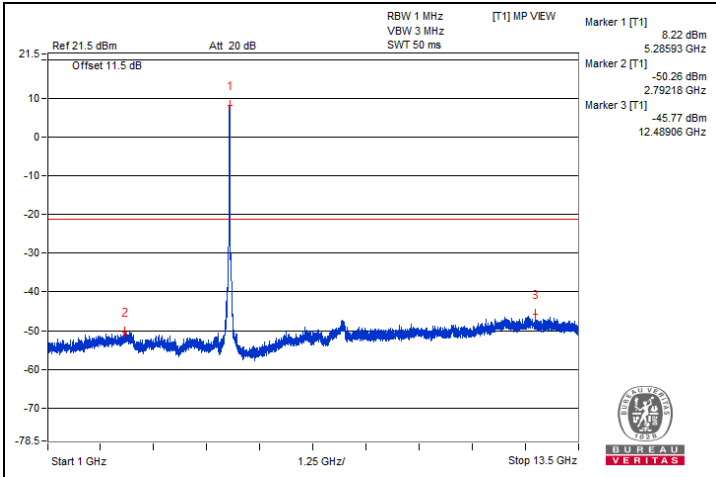


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5434.17 | 62.48 PK | 74 | -11.52 | -35.53 | 2.75 | -32.78 |
| 2 | 5359.22 | 49.42 AV | 54 | -4.58 | -48.59 | 2.75 | -45.84 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

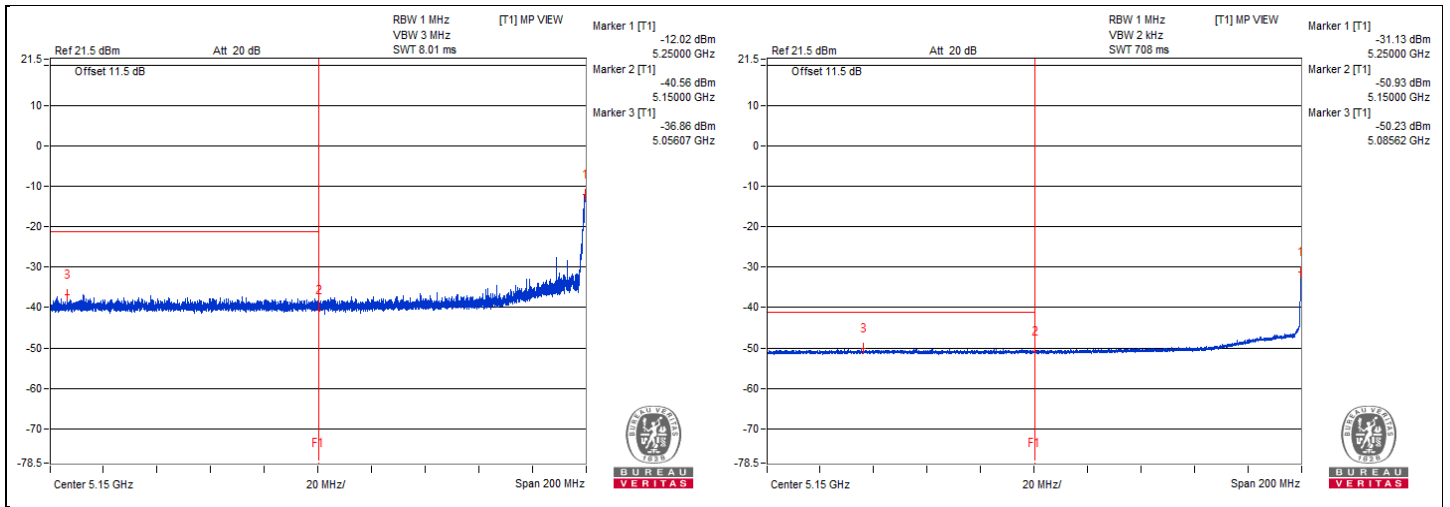







802.11ax (HE40) - Channel 62

Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3532.81 | 50.04 PK | 74 | -23.96 | -51.04 | 5.825 | -45.22 |
| 2 | 3545.31 | 37.71 AV | 54 | -16.29 | -63.37 | 5.825 | -57.55 |
| 3 | #7084.37 | 50.71 PK | 68.2 | -17.49 | -50.37 | 5.825 | -44.55 |
| 4 | 10623.43 | 52.41 PK | 74 | -21.59 | -48.67 | 5.825 | -42.85 |
| 5 | 10621.87 | 40.97 AV | 54 | -13.03 | -60.11 | 5.825 | -54.29 |
| 6 | 15927.93 | 42.45 PK | 74 | -31.55 | -58.63 | 5.825 | -52.81 |
| 7 | 15910.68 | 30.92 AV | 54 | -23.08 | -70.16 | 5.825 | -64.34 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

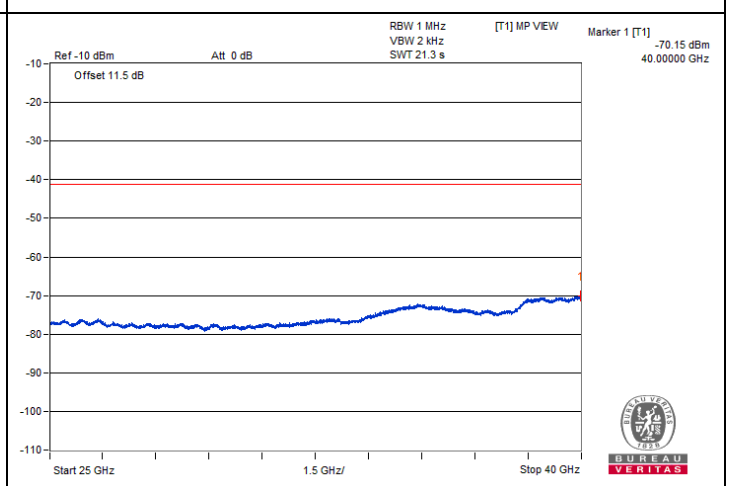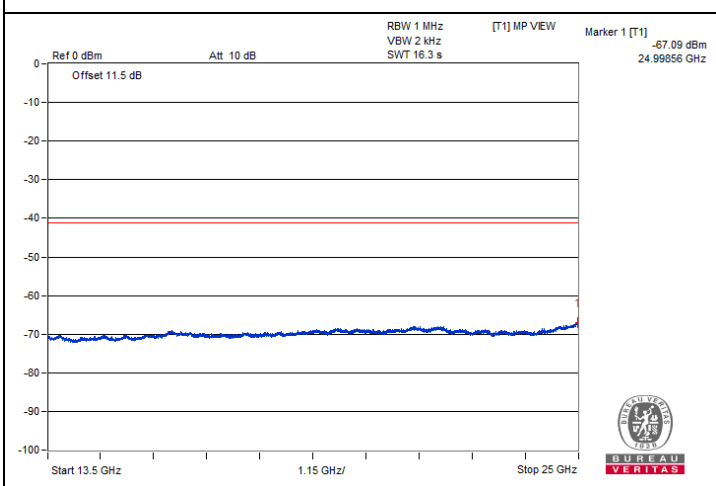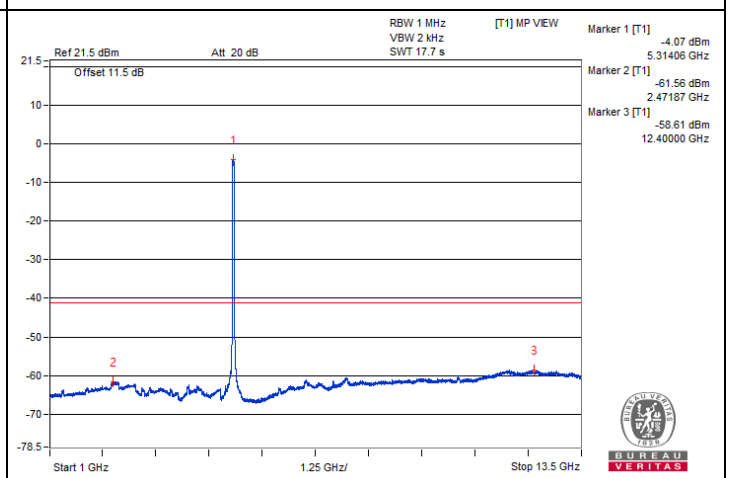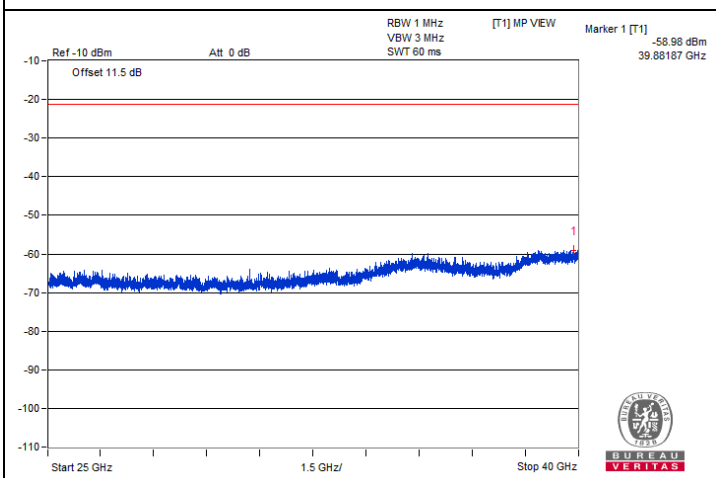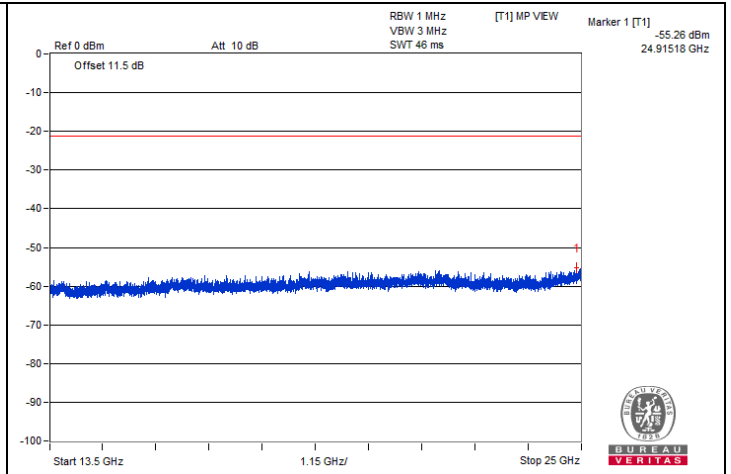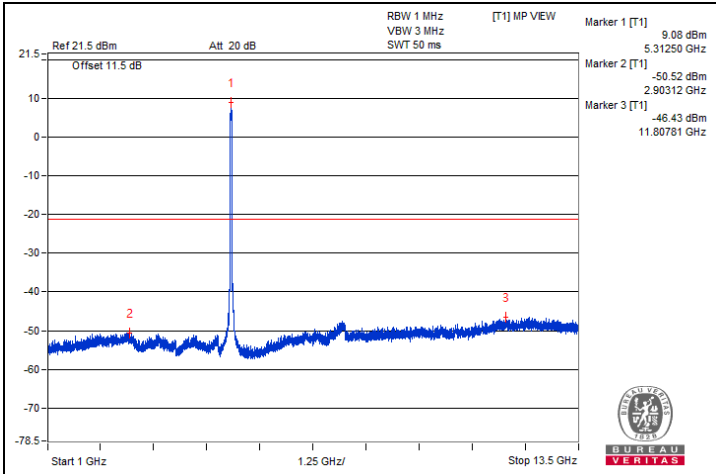


Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 5350.07 | 64.79 PK | 74 | -9.21 | -33.22 | 2.75 | -30.47 |
| 2 | 5350.07 | 50.47 AV | 54 | -3.53 | -47.54 | 2.75 | -44.79 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

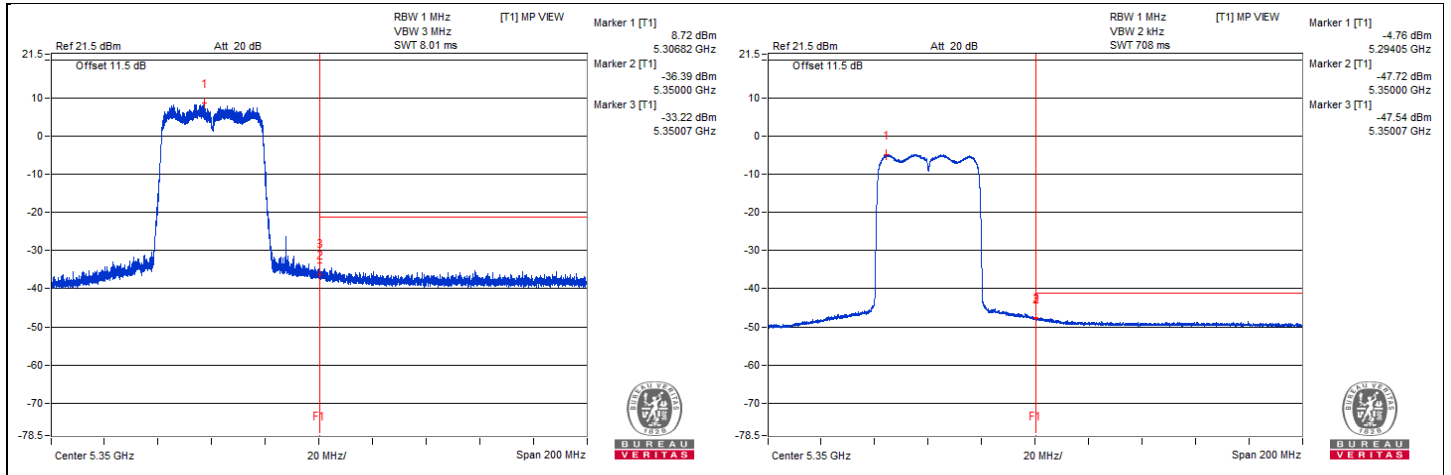

802.11ax (HE40) - Channel 102
Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|------------------------|------------------|
| 1 | 3685.93 | 49.2 PK | 74 | -24.8 | -51.88 | 5.825 | -46.06 |
| 2 | 3668.75 | 37.56 AV | 54 | -16.44 | -63.52 | 5.825 | -57.70 |
| 3 | 7346.87 | 50.58 PK | 74 | -23.42 | -50.5 | 5.825 | -44.68 |
| 4 | 7357.81 | 39.28 AV | 54 | -14.72 | -61.8 | 5.825 | -55.98 |
| 5 | 11021.87 | 52.22 PK | 74 | -21.78 | -48.86 | 5.825 | -43.04 |
| 6 | 11020.31 | 40.99 AV | 54 | -13.01 | -60.09 | 5.825 | -54.27 |
| 7 | #16524.5 | 42.85 PK | 68.2 | -25.35 | -58.23 | 5.825 | -52.41 |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

