



10. Radiated Emission Band Edge Measurement

10.1 Test Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) of FCC part 15.

10.2 Test Standard

ANSI C63.10-2013 Section 6.10.5

10.3 Test Procedure

Peak Field Strength Measurements:

Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

7. RBW=As specified in Table 1
8. VBW=3×RBW
9. Detector=Peak
10. Trace mode=Max hold
11. Sweep time=Auto couple
12. Allow the trace to stabilize

Table 1-RBW as a function of frequency

Frequency	RBW
9 ~ 150kHz	200 ~ 300Hz
0.15 ~ 30MHz	9 ~ 10kHz
30 ~ 1000MHz	100 ~ 120kHz
> 1000MHz	1MHz




AVE Field Strength Measurements:

Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

7. RBW= 1MHz
8. VBW $\geq$ 1/T
9. Detector=Peak
10. Trace mode=Max hold
11. Sweep time=Auto couple
12. Allow max hold to run for at least 50 times(1/duty cycle) trace

Do as an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode


10.4 Test Setup Layout

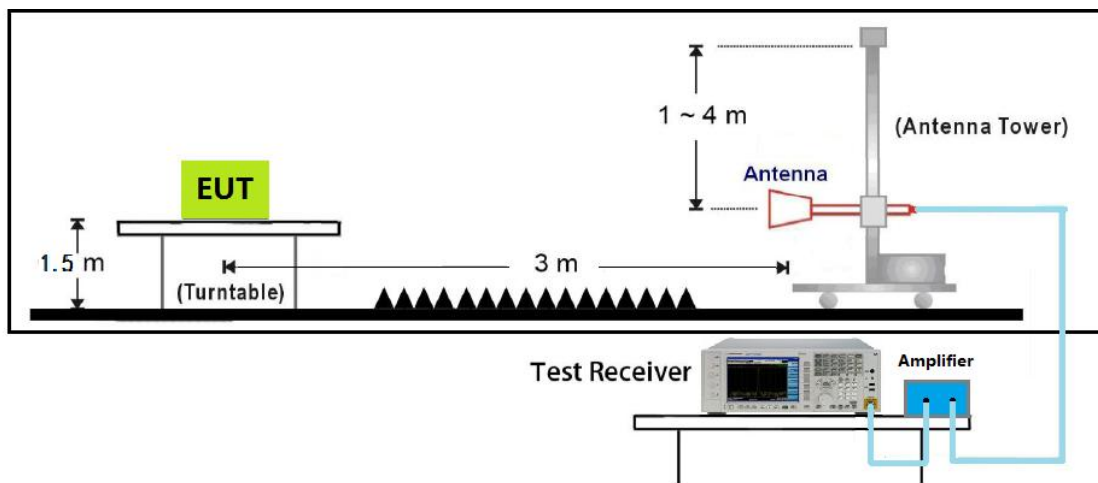



10.5 Test Result

Site: AC102	Time: 2016/09/03 - 10:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2412MHz Ant 1	

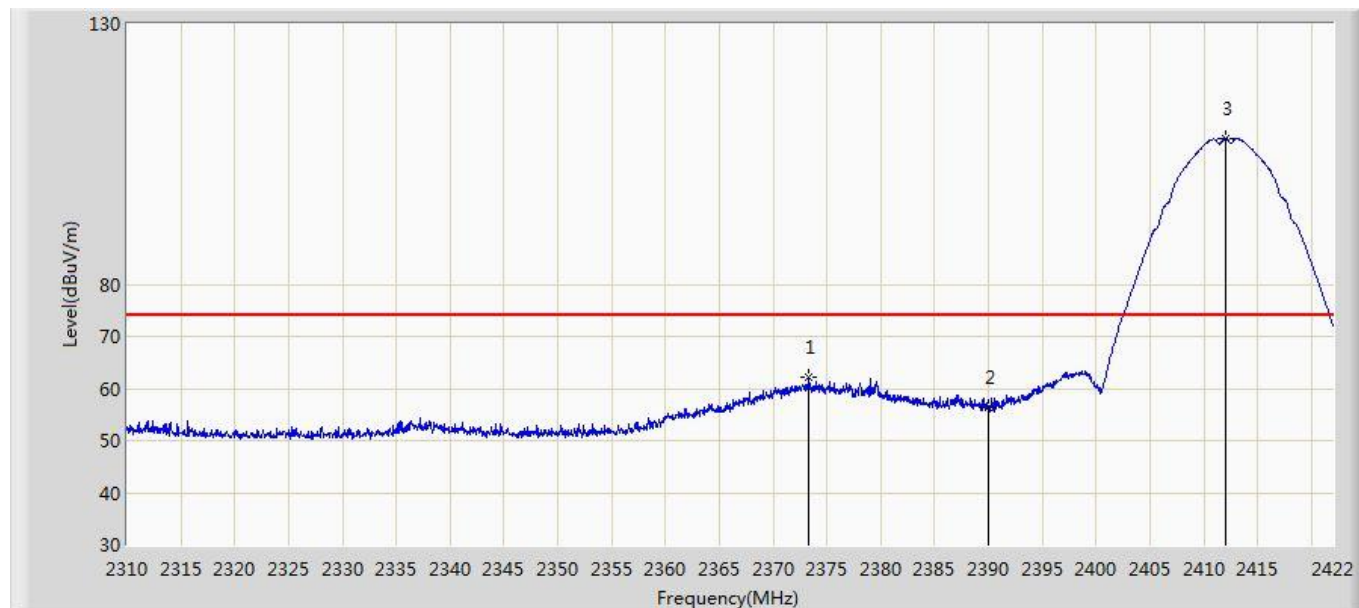


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2373.336	62.071	72.584	-11.929	74.000	-10.513	PK
2		2390.000	56.477	66.916	-17.523	74.000	-10.439	PK
3	*	2411.976	108.082	118.422	N/A	N/A	-10.340	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 10:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2412MHz Ant 1	

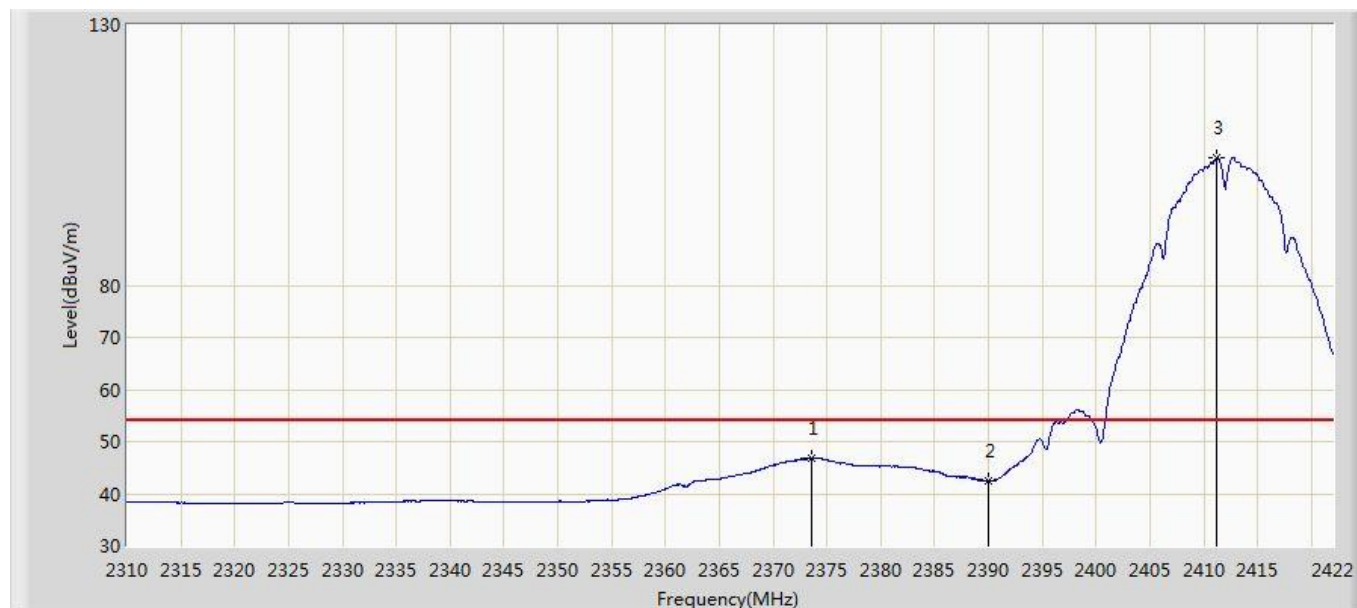


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2373.560	46.778	57.290	-7.222	54.000	-10.512	AV
2		2390.000	42.350	52.789	-11.650	54.000	-10.439	AV
3	*	2411.248	104.442	114.786	N/A	N/A	-10.344	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 10:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2412MHz Ant 1	

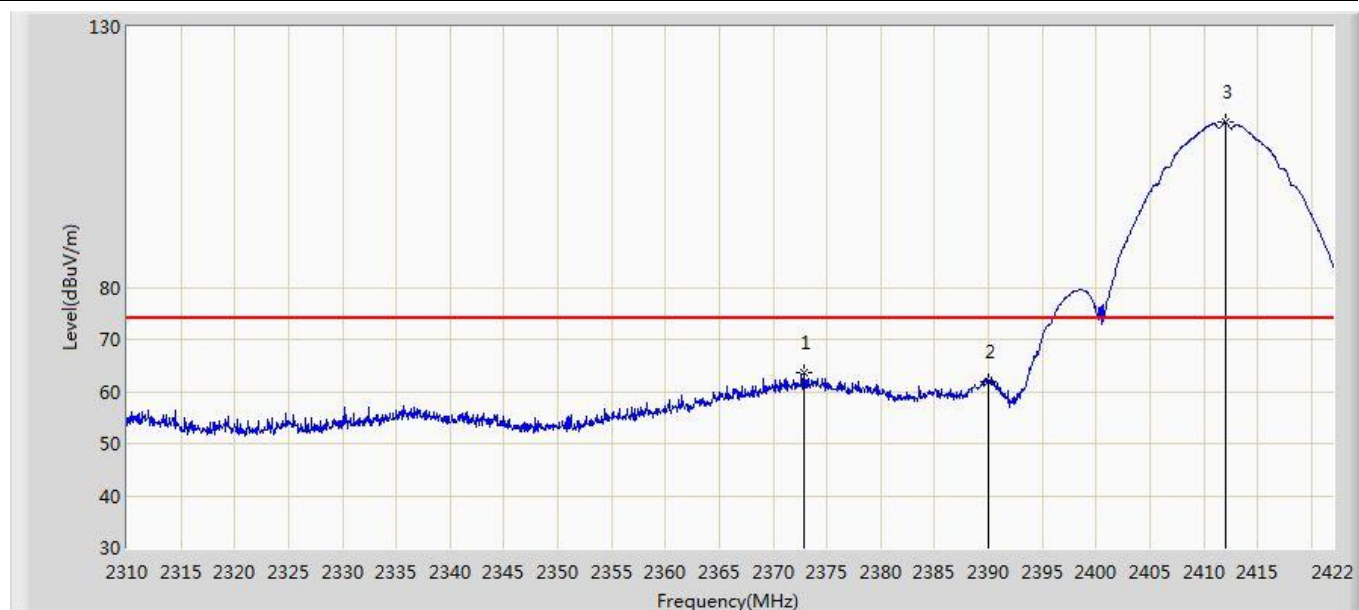

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2372.832	63.726	74.241	-10.274	74.000	-10.515	PK
2		2390.000	62.005	72.444	-11.995	74.000	-10.439	PK
3	*	2411.976	111.640	121.980	N/A	N/A	-10.340	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 10:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2412MHz Ant 1	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2389.184	53.169	63.611	-0.831	54.000	-10.442	AV
2		2390.000	49.861	60.300	-4.139	54.000	-10.439	AV
3	*	2411.192	108.123	118.467	N/A	N/A	-10.344	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 10:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2462MHz Ant 1	

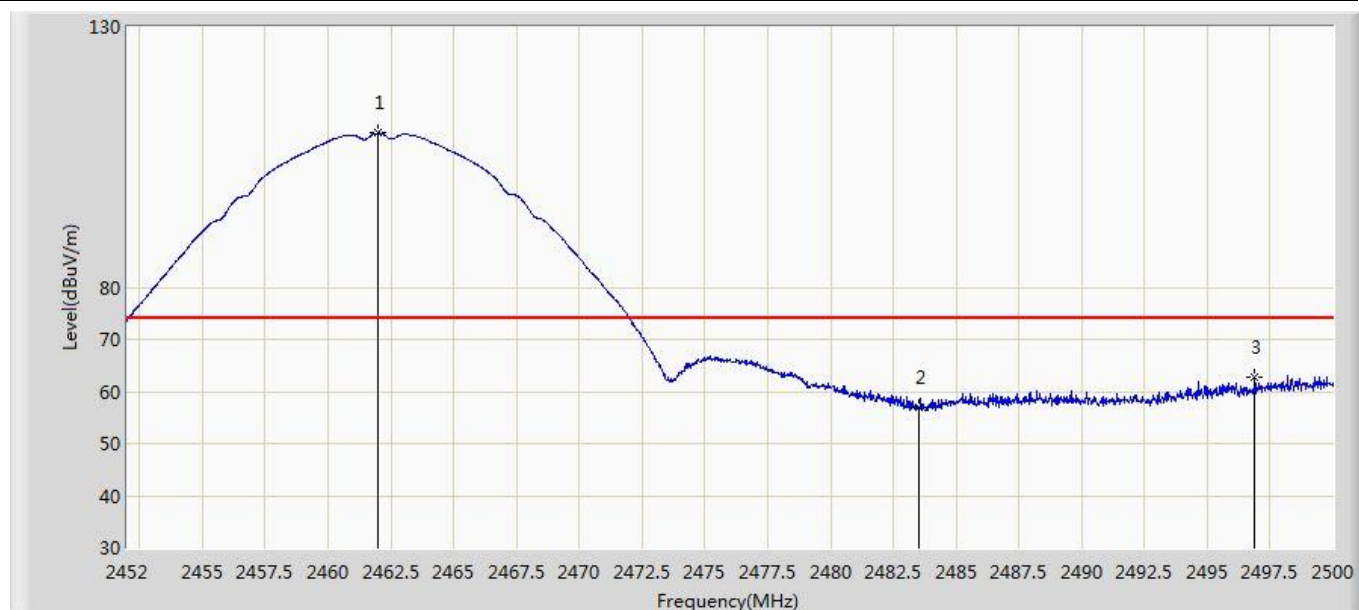

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2461.960	109.574	119.693	N/A	N/A	-10.119	PK
2		2483.500	56.904	66.927	-17.096	74.000	-10.023	PK
3		2496.880	62.805	72.772	-11.195	74.000	-9.967	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2462MHz Ant 1	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.800	105.965	116.080	N/A	N/A	-10.115	AV
2		2483.500	44.066	54.089	-9.934	54.000	-10.023	AV
3		2499.904	48.827	58.782	-5.173	54.000	-9.955	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2462MHz Ant 1	

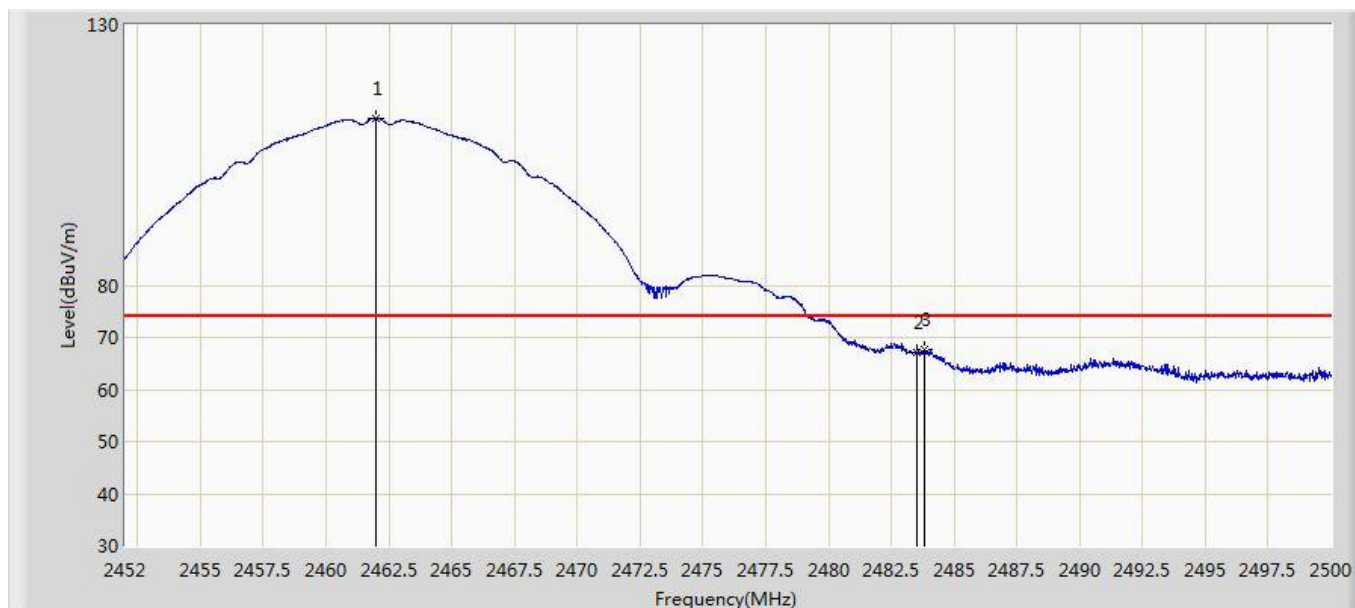

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2461.960	112.102	122.221	N/A	N/A	-10.119	PK
2		2483.500	66.984	77.007	-7.016	74.000	-10.023	PK
3		2483.848	67.544	77.565	-6.456	74.000	-10.021	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2462MHz Ant 1	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.800	108.230	118.345	N/A	N/A	-10.115	AV
2		2483.500	46.483	56.506	-7.517	54.000	-10.023	AV
3		2490.928	50.696	60.687	-3.304	54.000	-9.991	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2412MHz Ant 1	

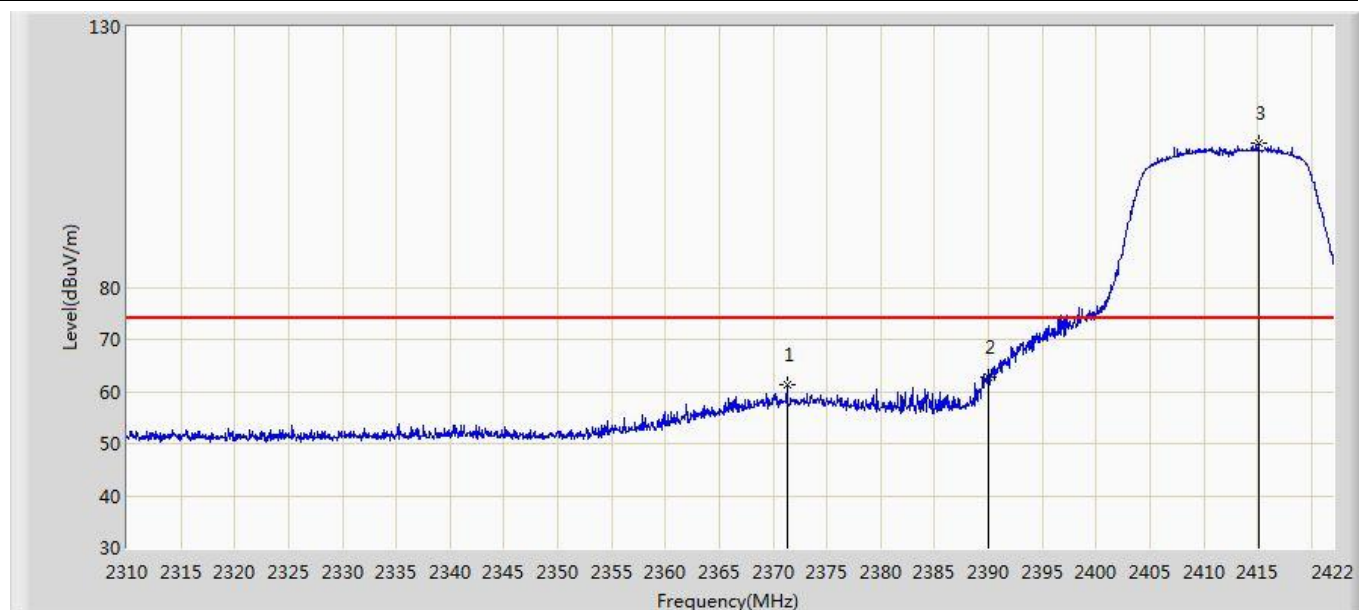


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2371.264	61.423	71.945	-12.577	74.000	-10.522	PK
2		2390.000	62.691	73.130	-11.309	74.000	-10.439	PK
3	*	2415.056	107.824	118.151	N/A	N/A	-10.327	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2412MHz Ant 1	

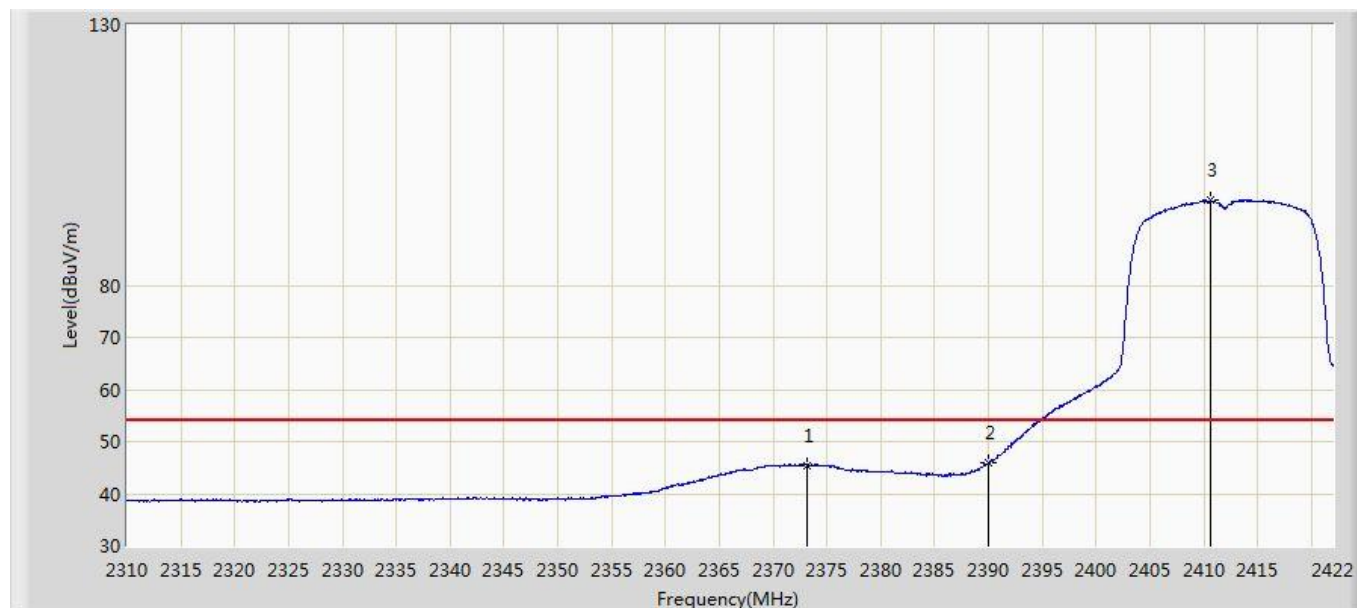


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2373.224	45.478	55.991	-8.522	54.000	-10.513	AV
2		2390.000	45.924	56.363	-8.076	54.000	-10.439	AV
3	*	2410.576	96.316	106.663	N/A	N/A	-10.347	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2412MHz Ant 1	

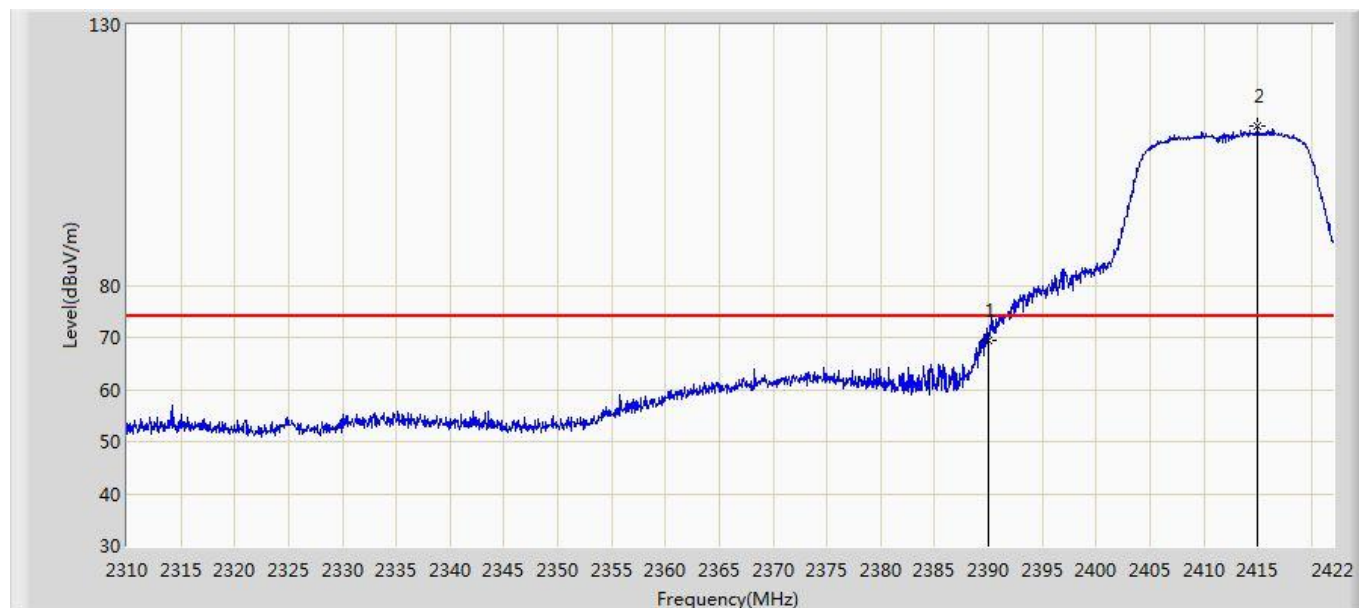


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	69.443	79.882	-4.557	74.000	-10.439	PK
2	*	2415.000	110.488	120.815	N/A	N/A	-10.327	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2412MHz Ant 1	

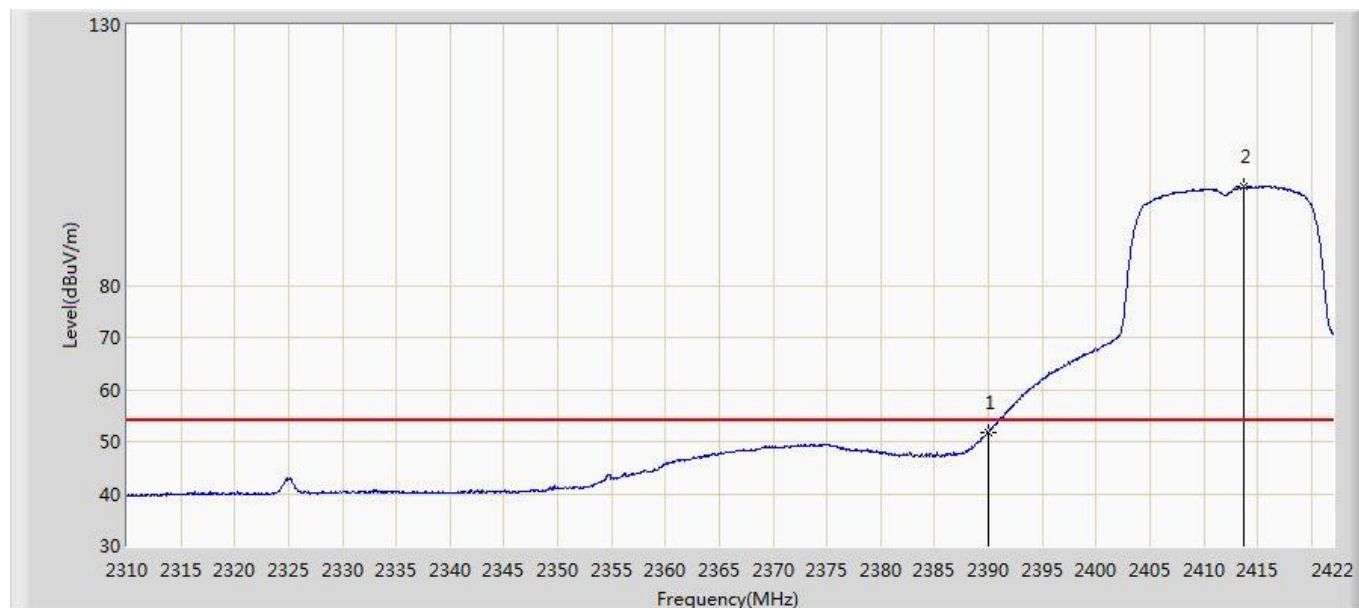


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.828	62.267	-2.172	54.000	-10.439	AV
2	*	2413.768	98.859	109.191	N/A	N/A	-10.332	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2462MHz Ant 1	

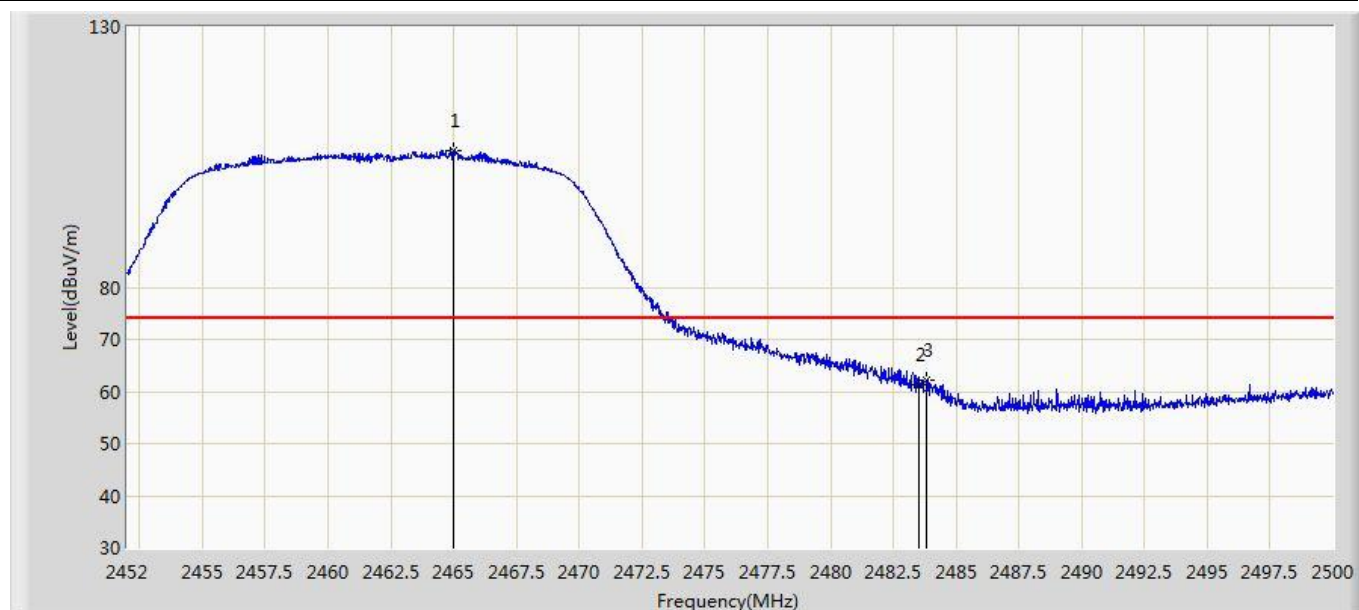


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2464.984	106.312	116.417	N/A	N/A	-10.105	PK
2		2483.500	61.173	71.196	-12.827	74.000	-10.023	PK
3		2483.824	62.210	72.232	-11.790	74.000	-10.022	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2462MHz Ant 1	

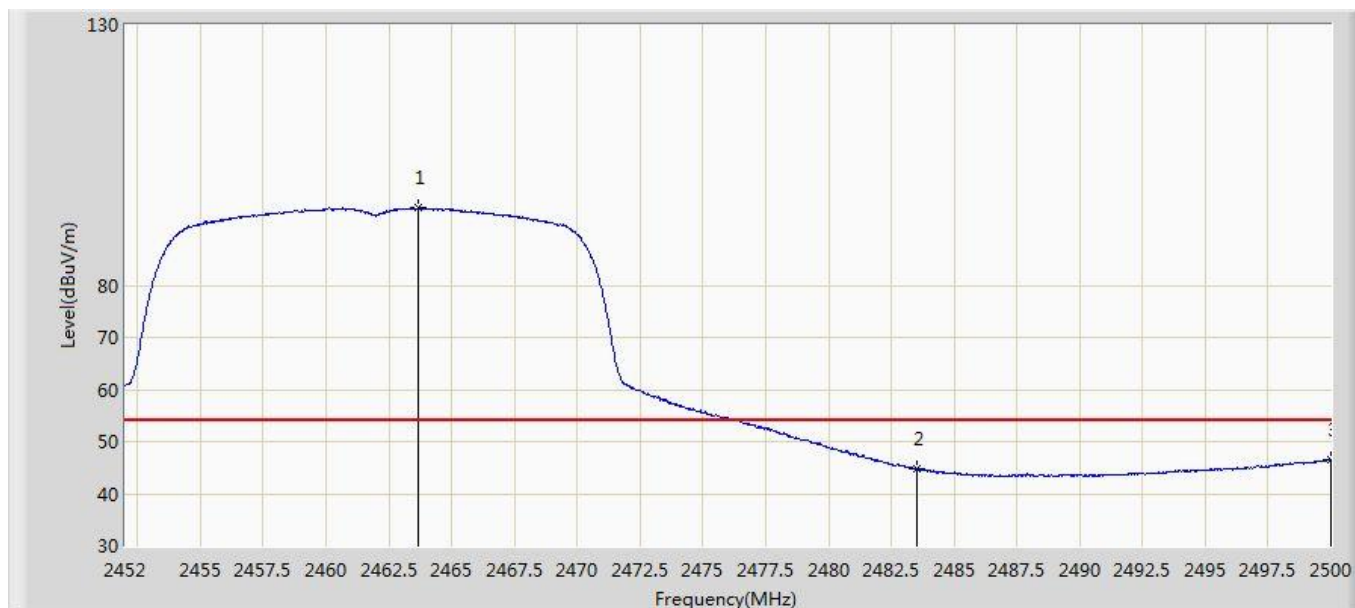


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.688	94.846	104.957	N/A	N/A	-10.111	AV
2		2483.500	44.844	54.867	-9.156	54.000	-10.023	AV
3		2499.976	46.423	56.377	-7.577	54.000	-9.954	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2462MHz Ant 1	

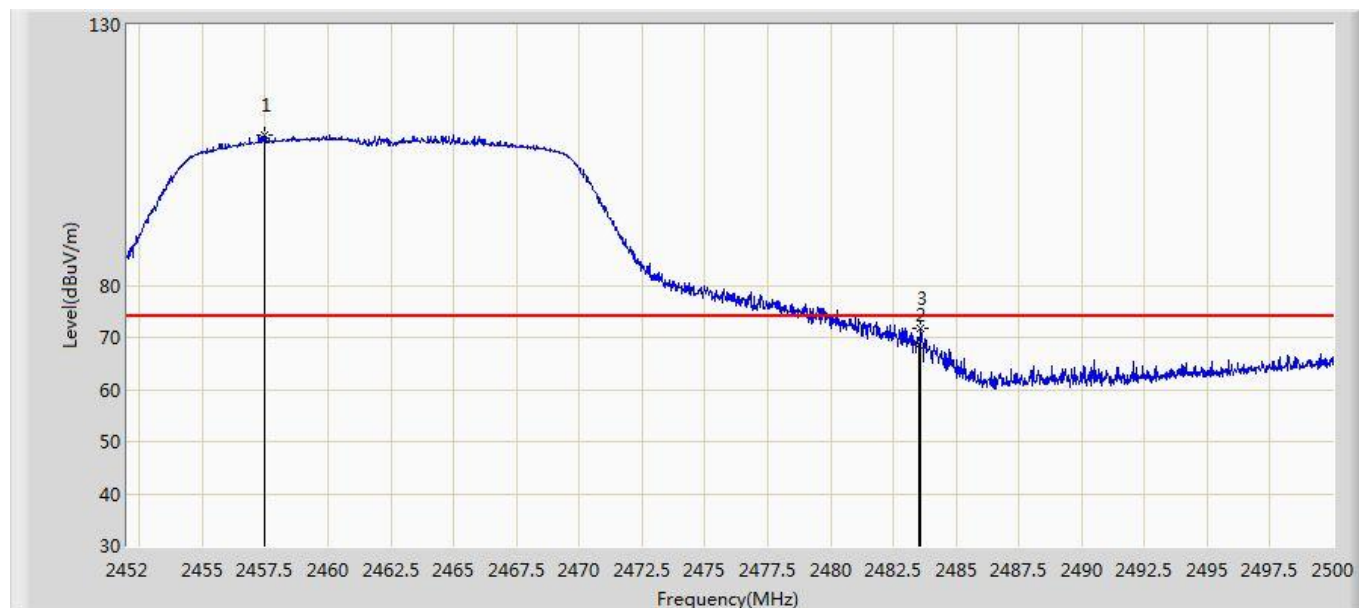


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2457.448	108.947	119.086	N/A	N/A	-10.139	PK
2		2483.500	68.608	78.631	-5.392	74.000	-10.023	PK
3		2483.608	71.630	81.652	-2.370	74.000	-10.022	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2462MHz Ant 1	

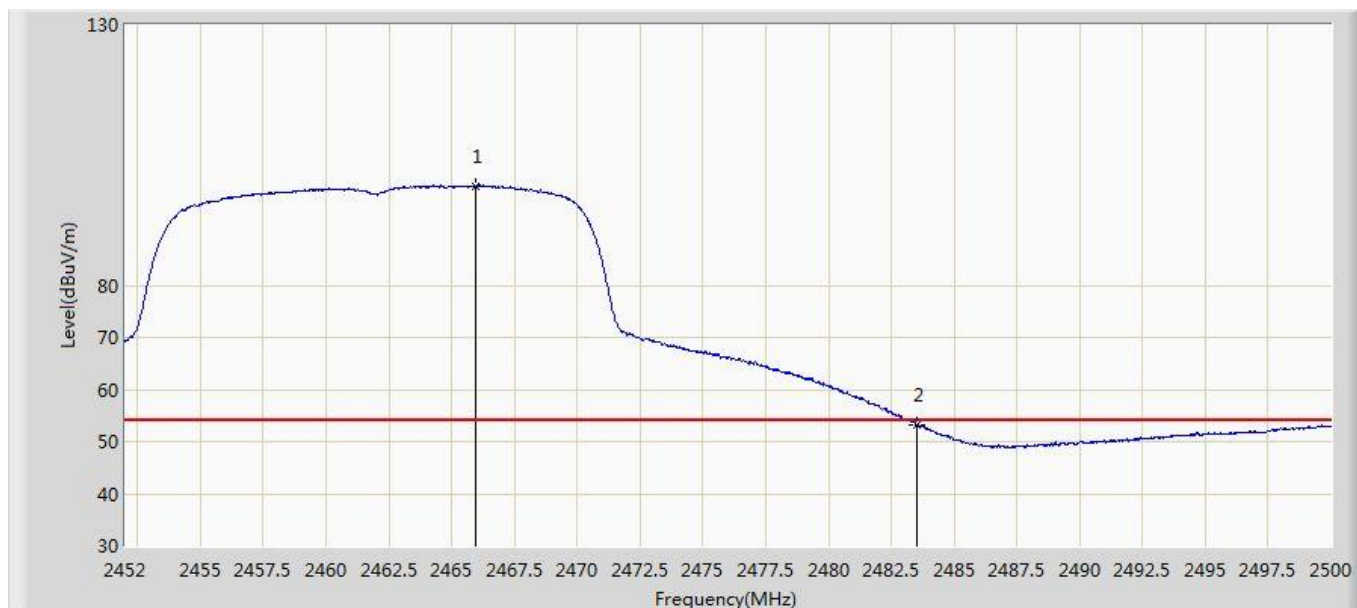


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2465.944	99.120	109.221	N/A	N/A	-10.101	AV
2		2483.500	53.244	63.267	-0.756	54.000	-10.023	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2412MHz Ant 1	

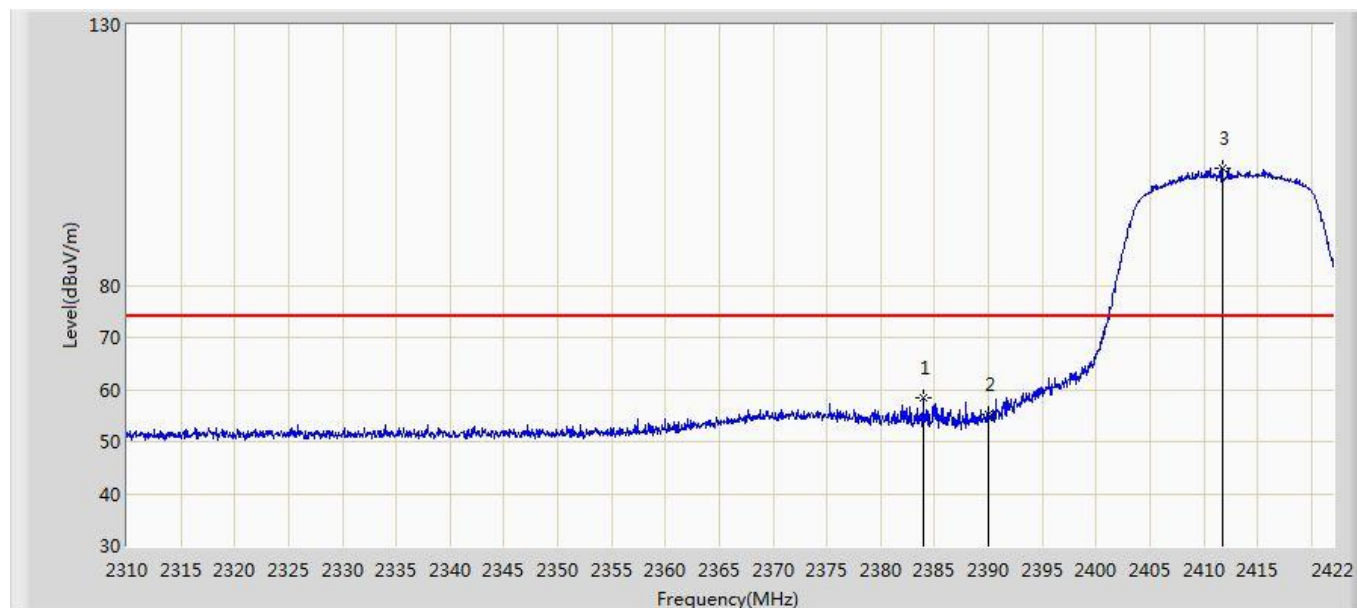


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2383.920	58.396	68.862	-15.604	74.000	-10.466	PK
2		2390.000	55.163	65.602	-18.837	74.000	-10.439	PK
3	*	2411.696	102.591	112.933	N/A	N/A	-10.342	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2412MHz Ant 1	

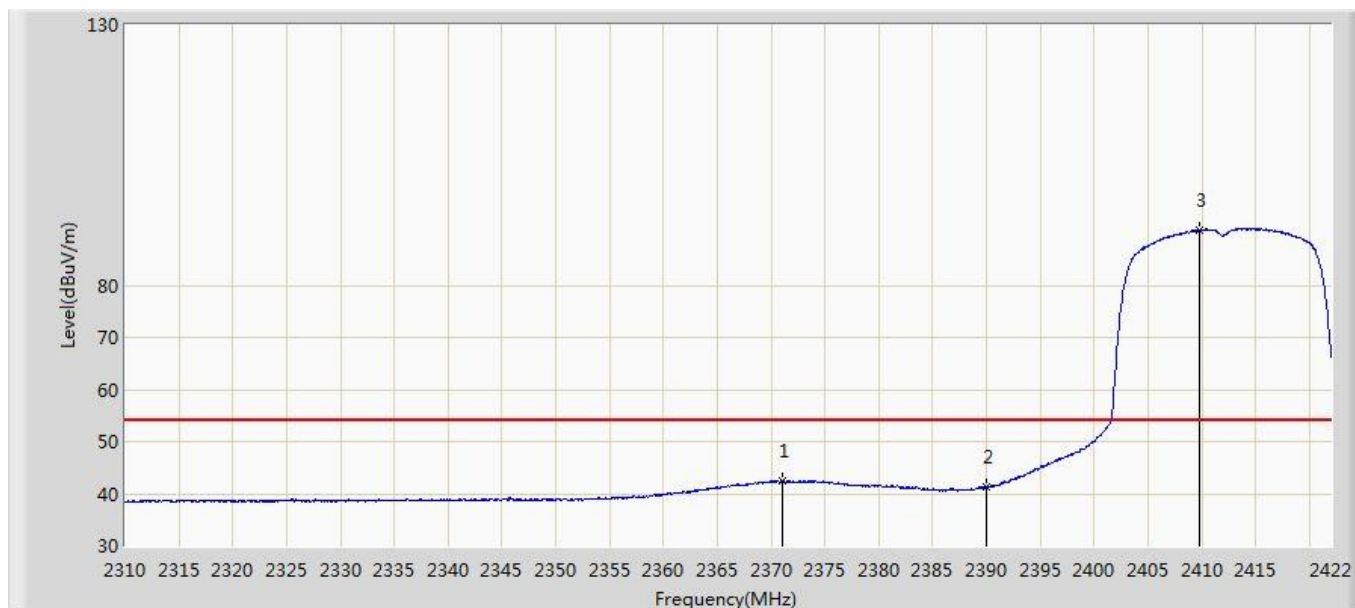


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2371.096	42.588	53.111	-11.412	54.000	-10.523	AV
2		2390.000	41.168	51.607	-12.832	54.000	-10.439	AV
3	*	2409.736	90.719	101.069	N/A	N/A	-10.350	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2412MHz Ant 1	

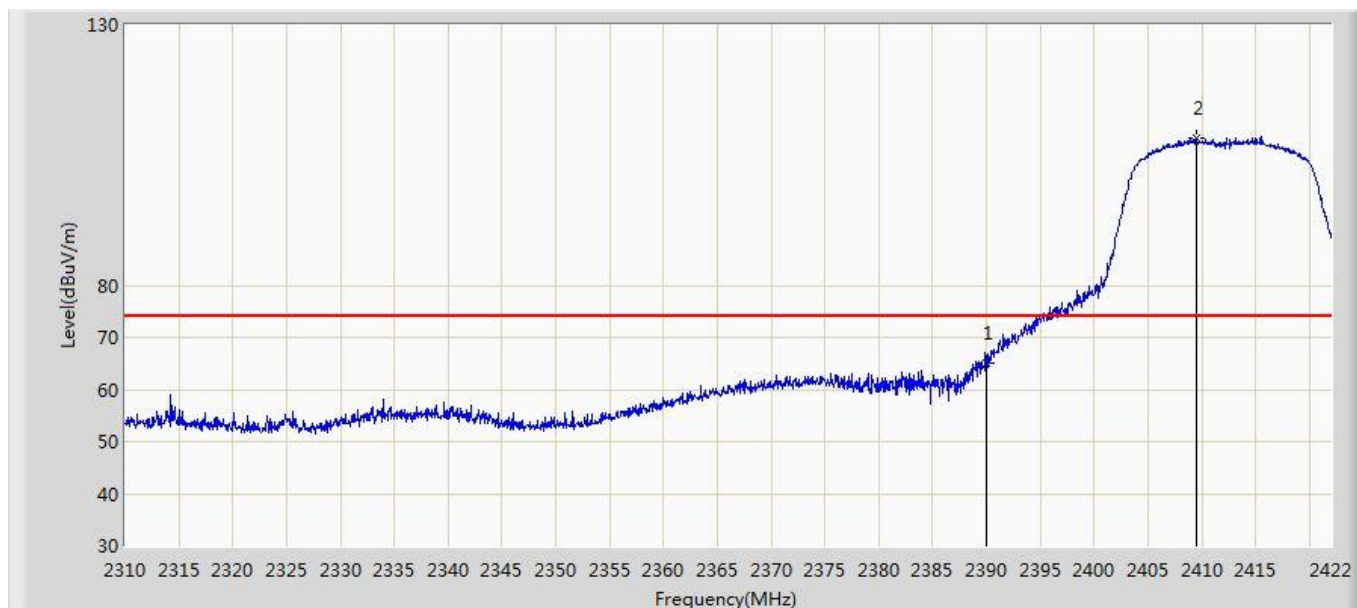


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	65.199	75.638	-8.801	74.000	-10.439	PK
2	*	2409.456	108.152	118.504	N/A	N/A	-10.352	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2412MHz Ant 1	

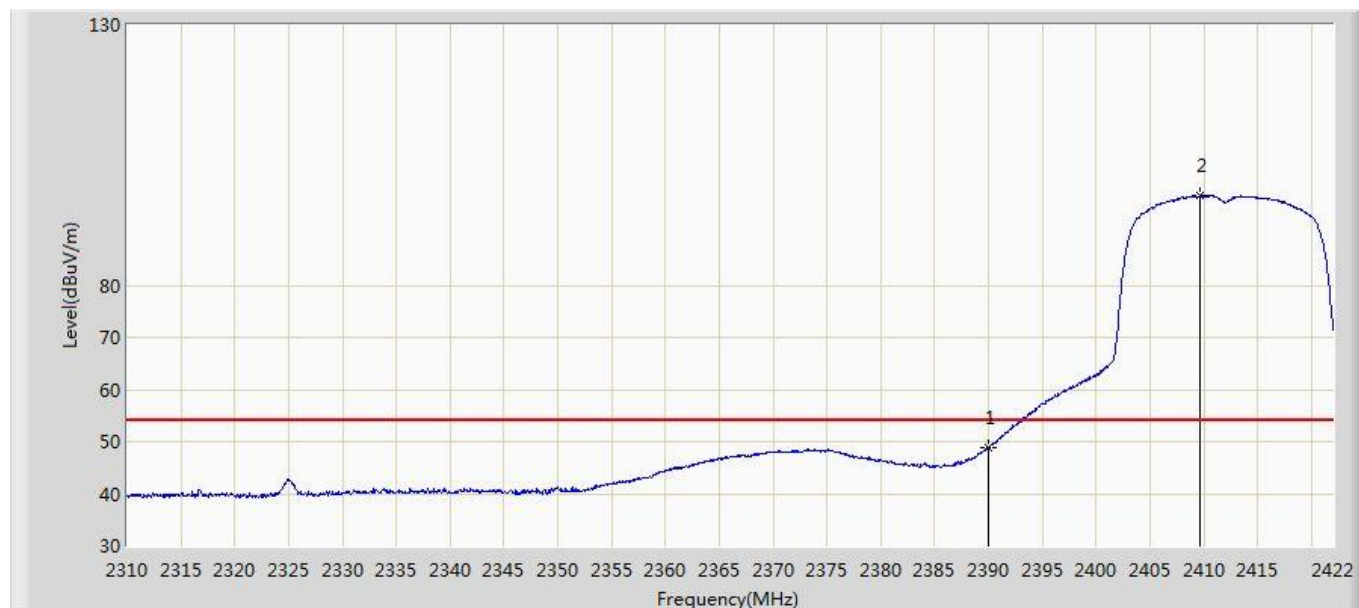


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	48.915	59.354	-5.085	54.000	-10.439	AV
2	*	2409.680	97.295	107.646	N/A	N/A	-10.351	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2462MHz Ant 1	

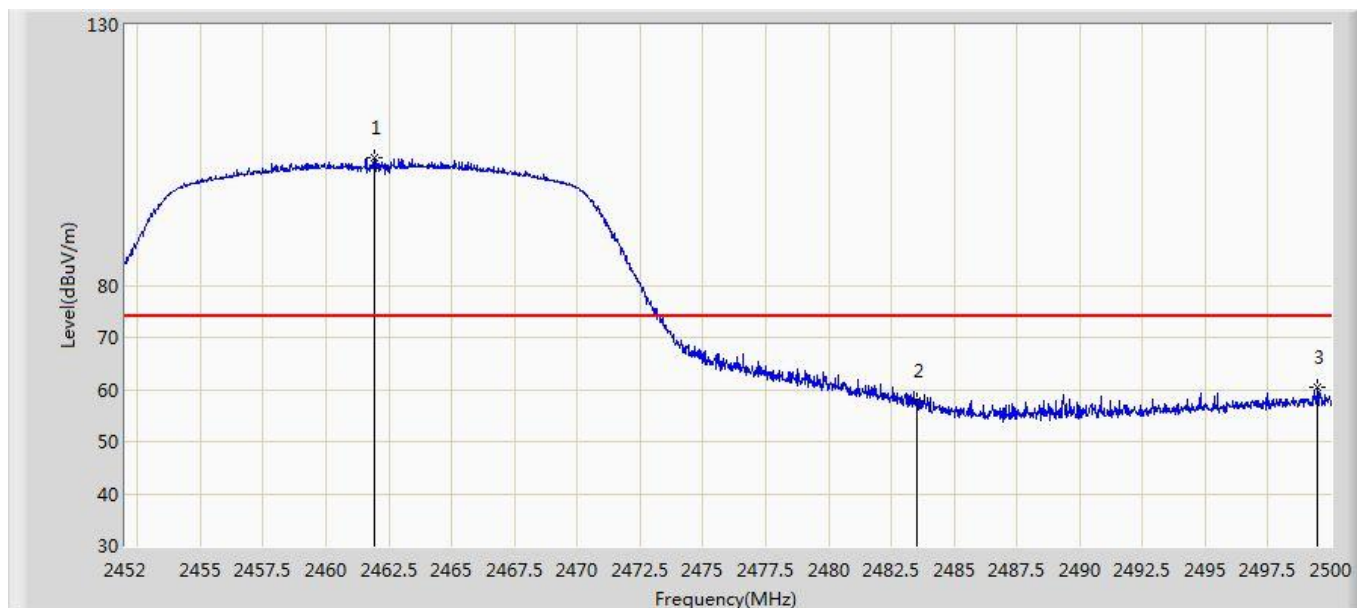


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2461.936	104.580	114.699	N/A	N/A	-10.119	PK
2		2483.500	57.684	67.707	-16.316	74.000	-10.023	PK
3		2499.472	60.520	70.476	-13.480	74.000	-9.956	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2462MHz Ant 1	

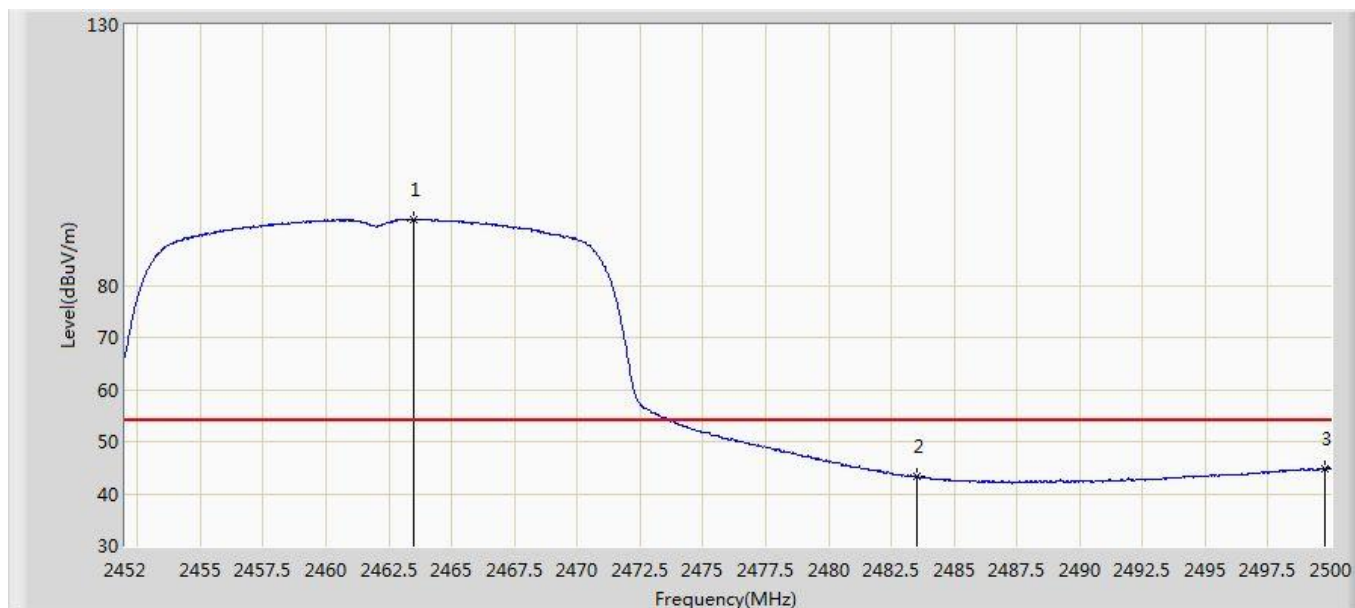


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.472	92.644	102.756	N/A	N/A	-10.112	AV
2		2483.500	43.209	53.232	-10.791	54.000	-10.023	AV
3		2499.760	44.772	54.727	-9.228	54.000	-9.955	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2462MHz Ant 1	

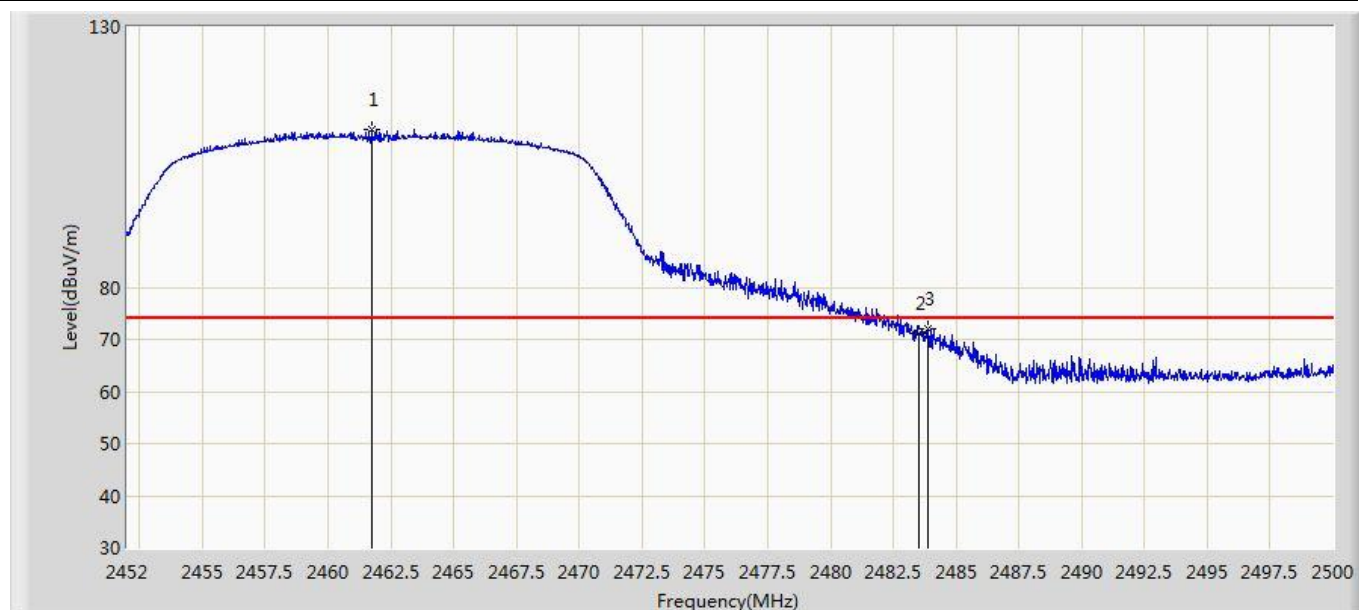


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2461.720	110.166	120.286	N/A	N/A	-10.120	PK
2		2483.500	71.044	81.067	-2.956	74.000	-10.023	PK
3		2483.896	72.146	82.167	-1.854	74.000	-10.021	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2462MHz Ant 1	

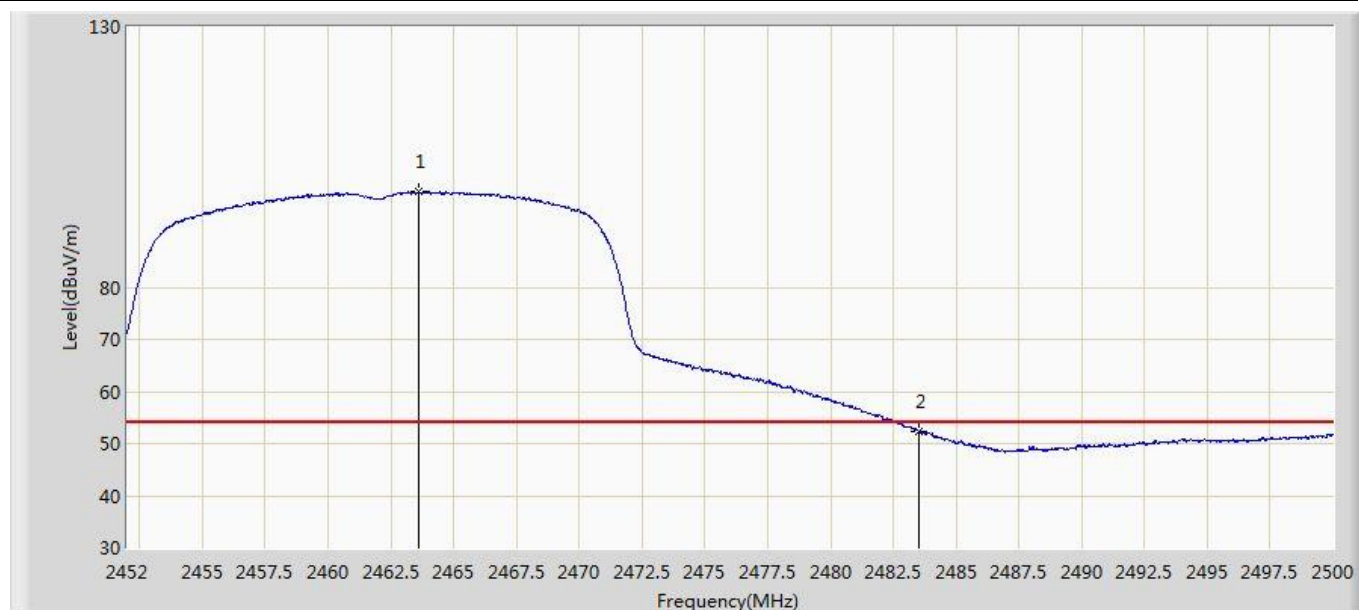


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.616	98.293	108.404	N/A	N/A	-10.111	AV
2		2483.500	52.433	62.456	-1.567	54.000	-10.023	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 11:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2422MHz Ant 1	

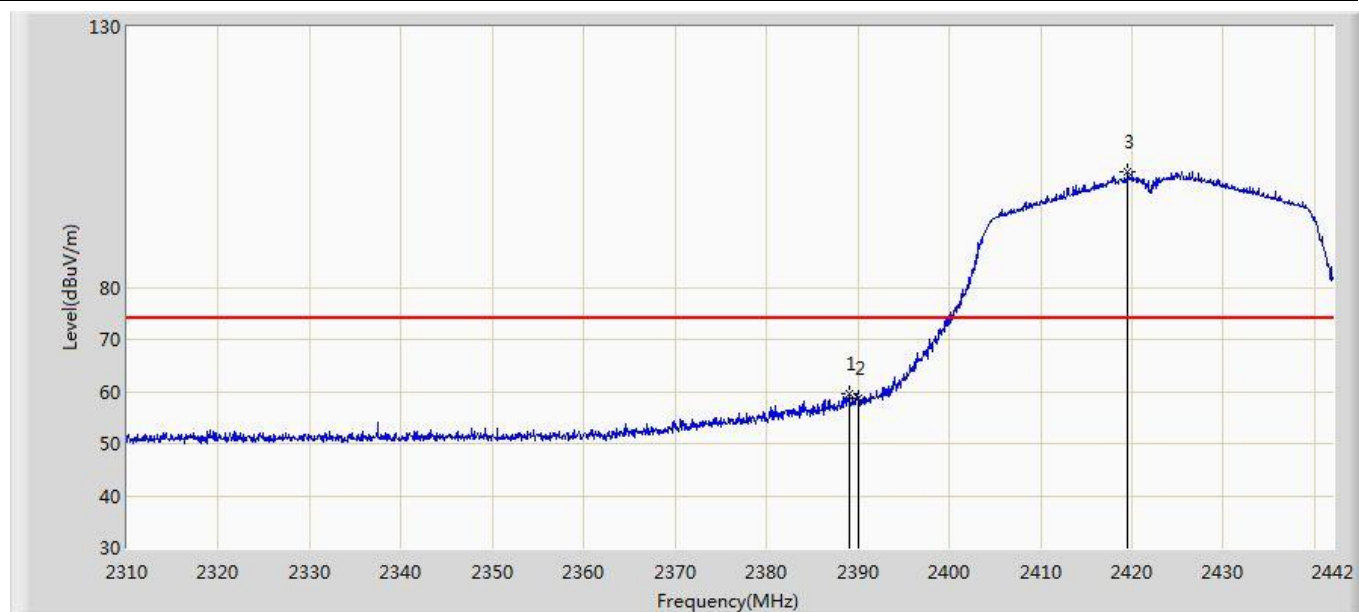


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2389.002	59.675	70.118	-14.325	74.000	-10.443	PK
2		2390.000	58.629	69.068	-15.371	74.000	-10.439	PK
3	*	2419.560	102.115	112.422	N/A	N/A	-10.307	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2422MHz Ant 1	

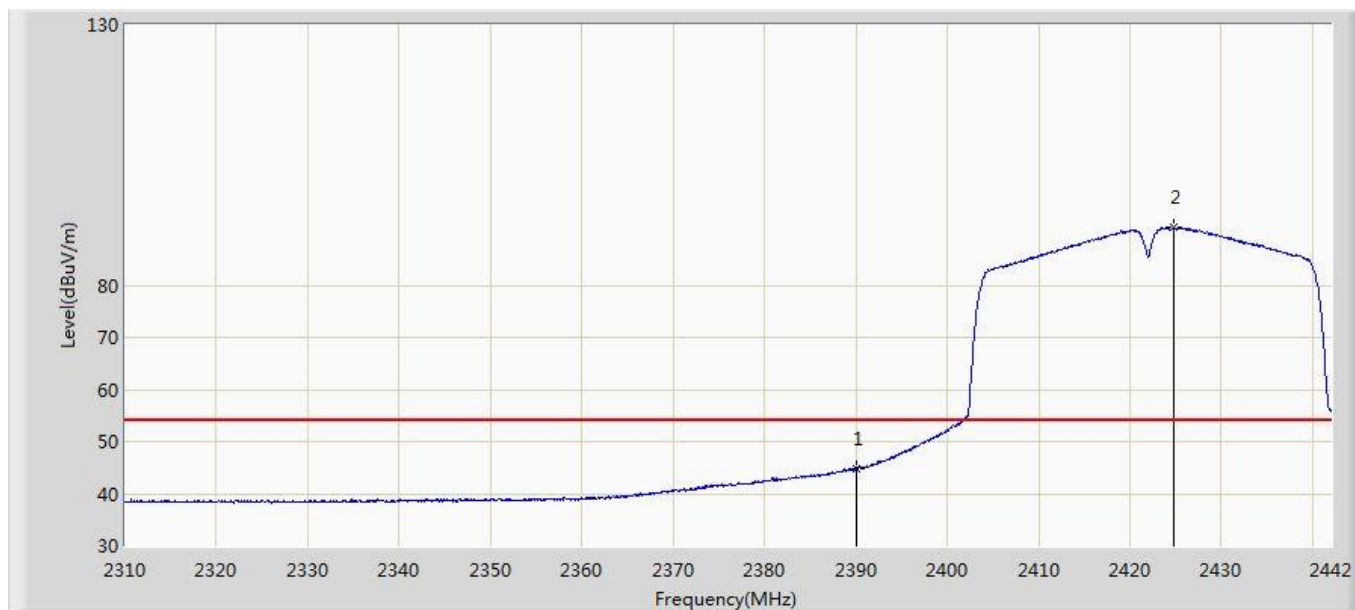


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	44.855	55.294	-9.145	54.000	-10.439	AV
2	*	2424.840	91.141	101.424	N/A	N/A	-10.283	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2422MHz Ant 1	

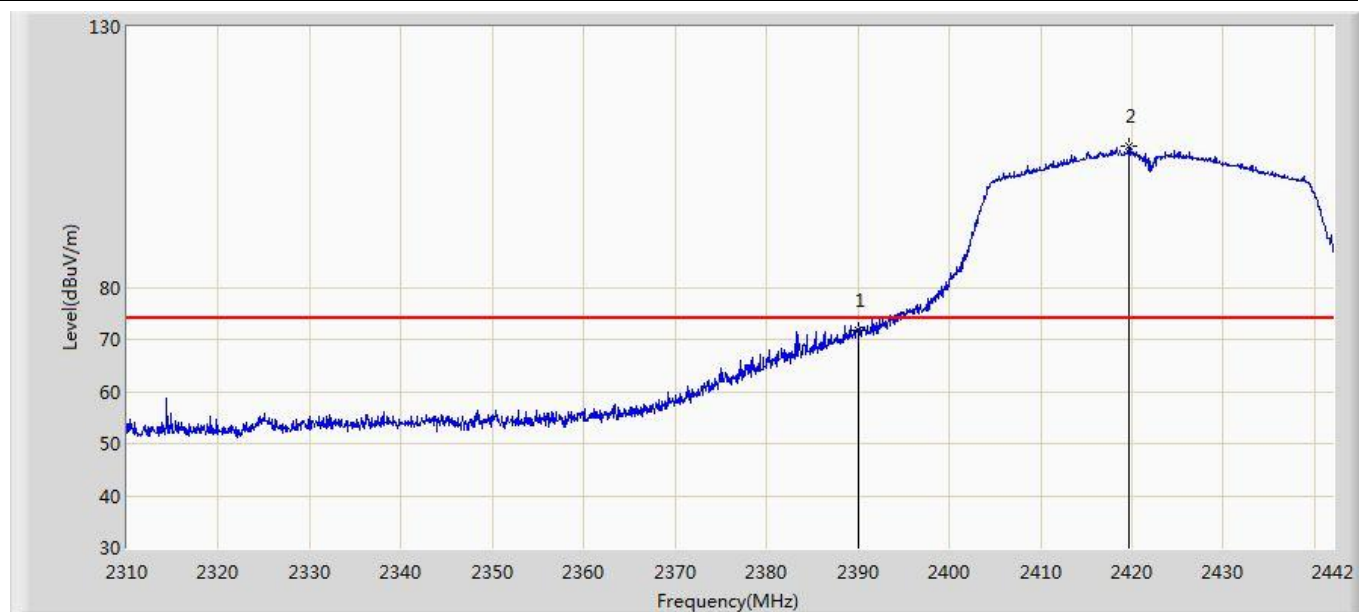


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	71.790	82.229	-2.210	74.000	-10.439	PK
2	*	2419.626	107.189	117.495	N/A	N/A	-10.306	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2422MHz Ant 1	

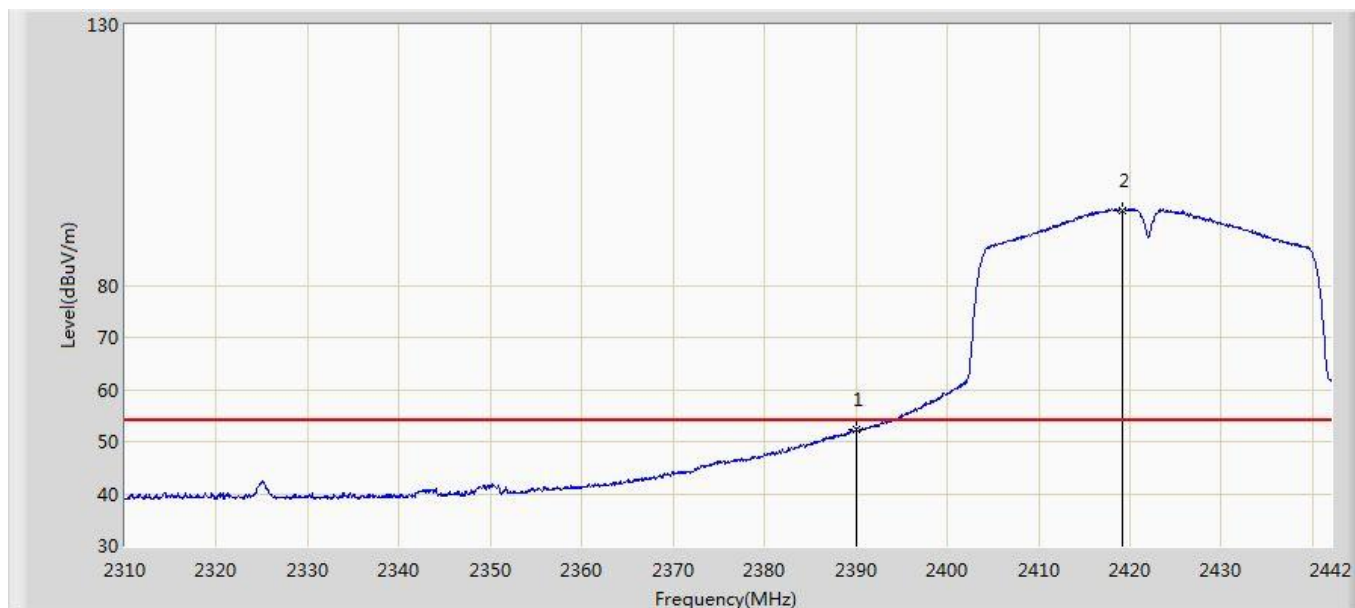


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	52.359	62.798	-1.641	54.000	-10.439	AV
2	*	2419.230	94.446	104.754	N/A	N/A	-10.308	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2452MHz Ant 1	

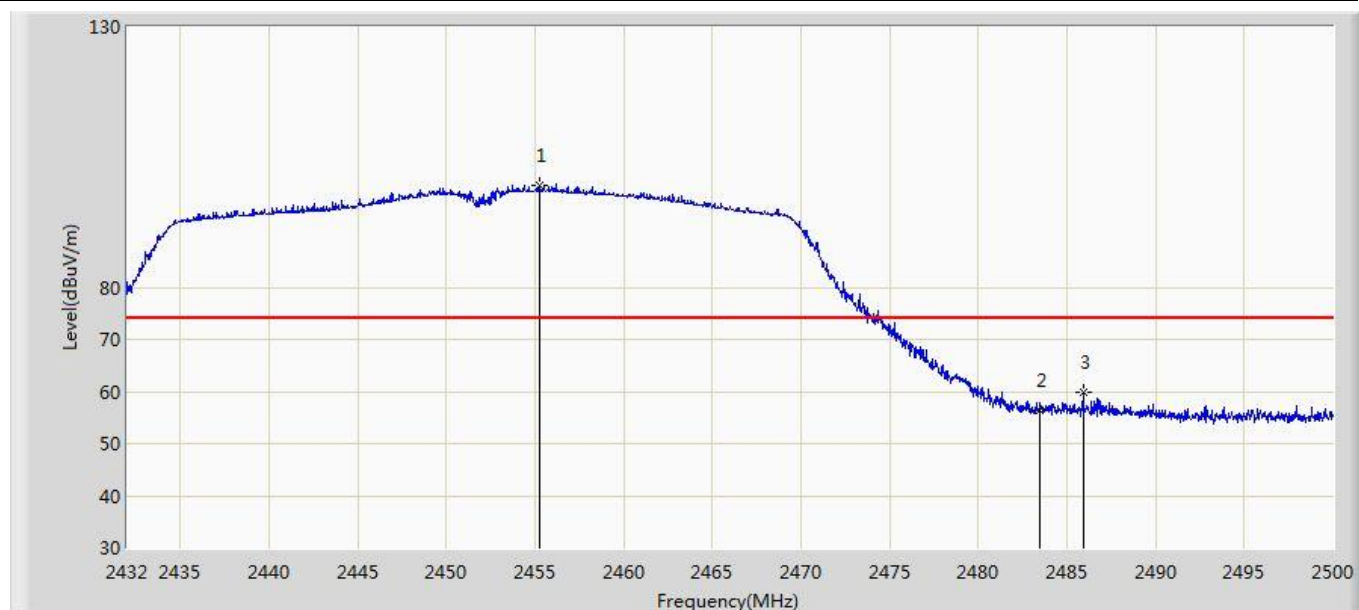


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2455.222	99.623	109.771	N/A	N/A	-10.148	PK
2		2483.500	56.442	66.465	-17.558	74.000	-10.023	PK
3		2485.924	59.868	69.880	-14.132	74.000	-10.012	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2452MHz Ant 1	

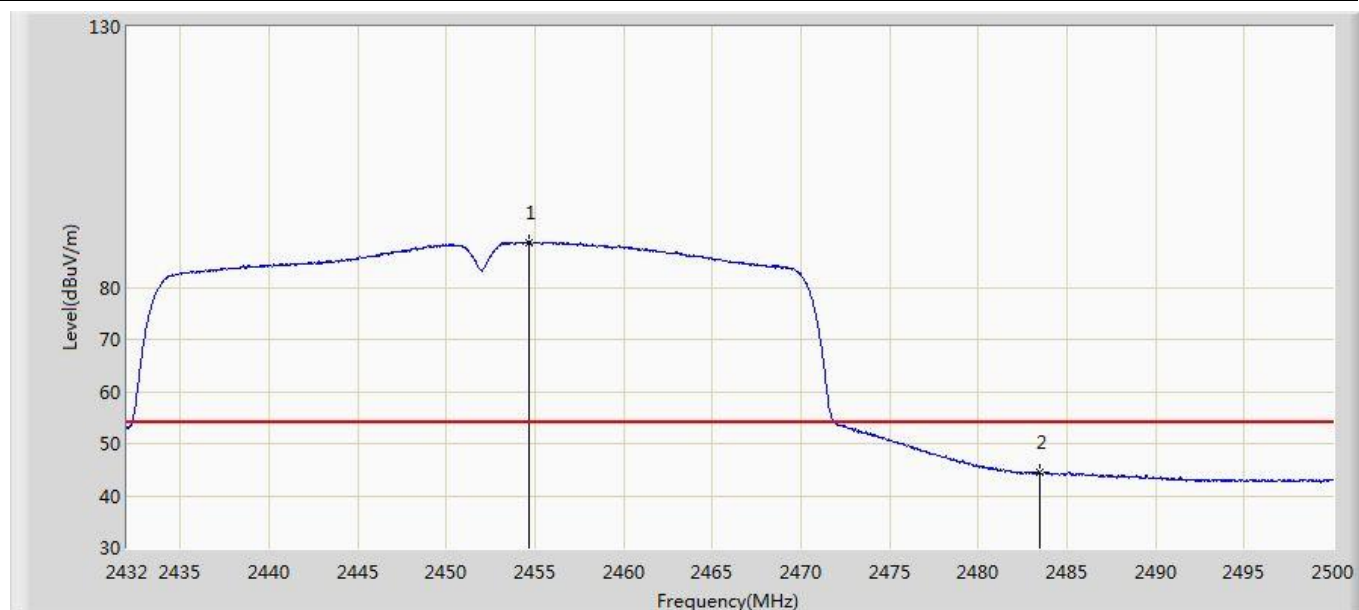

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2454.644	88.643	98.794	N/A	N/A	-10.151	AV
2		2483.500	44.427	54.450	-9.573	54.000	-10.023	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2452MHz Ant 1	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2455.426	106.306	116.454	N/A	N/A	-10.148	PK
2		2483.500	68.466	78.489	-5.534	74.000	-10.023	PK
3		2485.686	70.503	80.516	-3.497	74.000	-10.013	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2452MHz Ant 1	

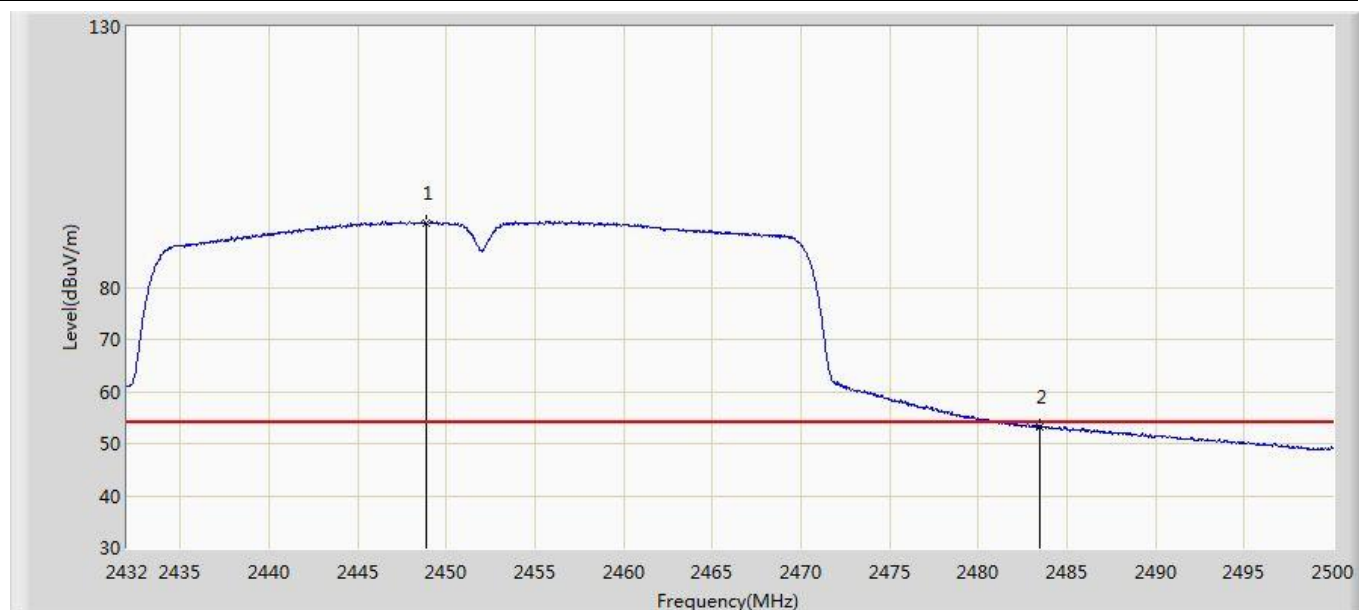


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2448.898	92.421	102.598	N/A	N/A	-10.177	AV
2		2483.500	53.172	63.195	-0.828	54.000	-10.023	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2412MHz Ant 2	

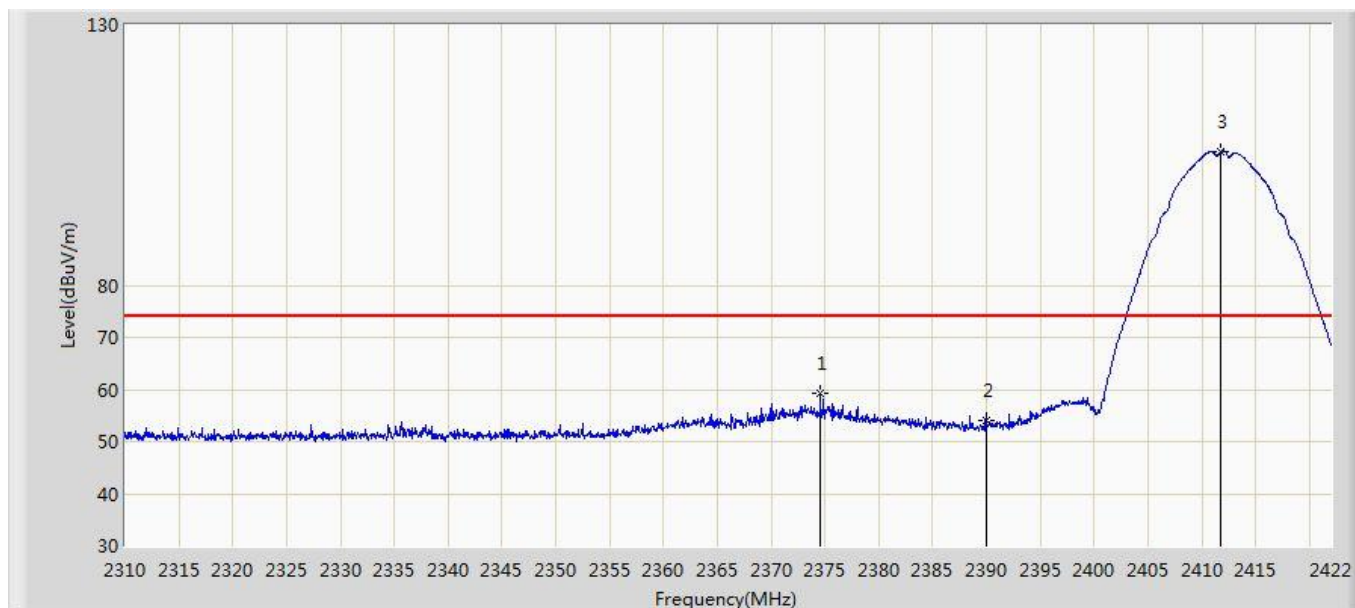


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2374.568	59.298	69.805	-14.702	74.000	-10.507	PK
2		2390.000	54.031	64.470	-19.969	74.000	-10.439	PK
3	*	2411.808	105.637	115.978	N/A	N/A	-10.341	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2412MHz Ant 2	

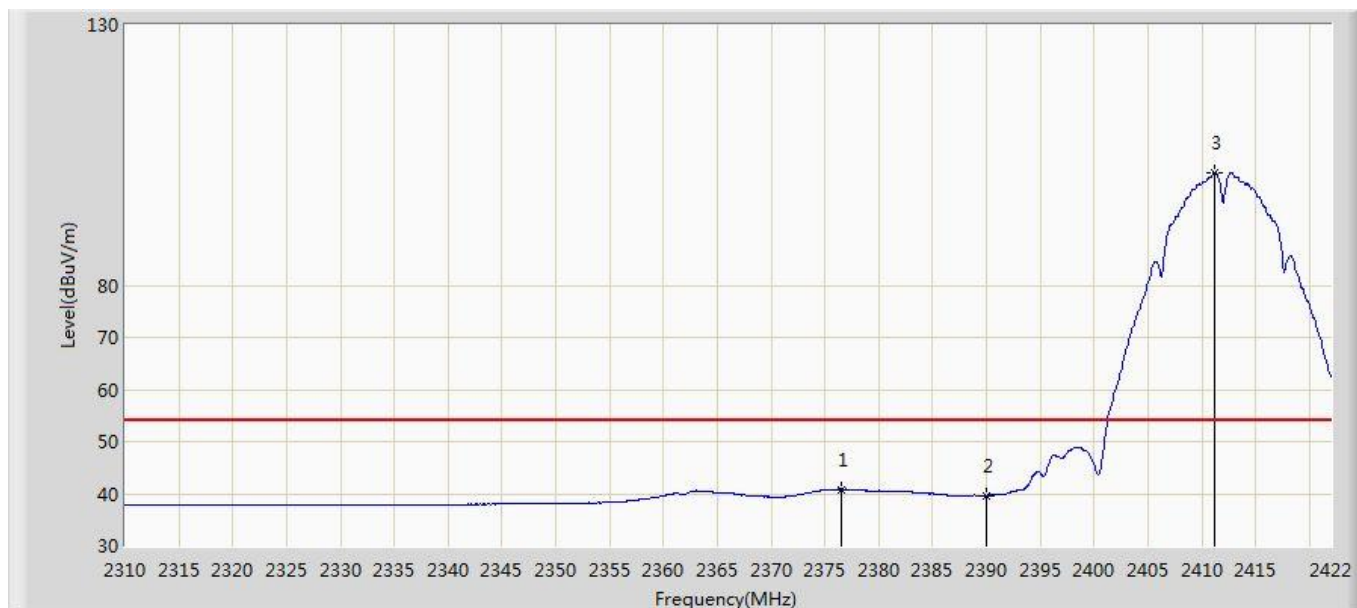


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2376.528	40.864	51.363	-13.136	54.000	-10.499	AV
2		2390.000	39.609	50.048	-14.391	54.000	-10.439	AV
3	*	2411.136	101.646	111.990	N/A	N/A	-10.344	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2412MHz Ant 2	

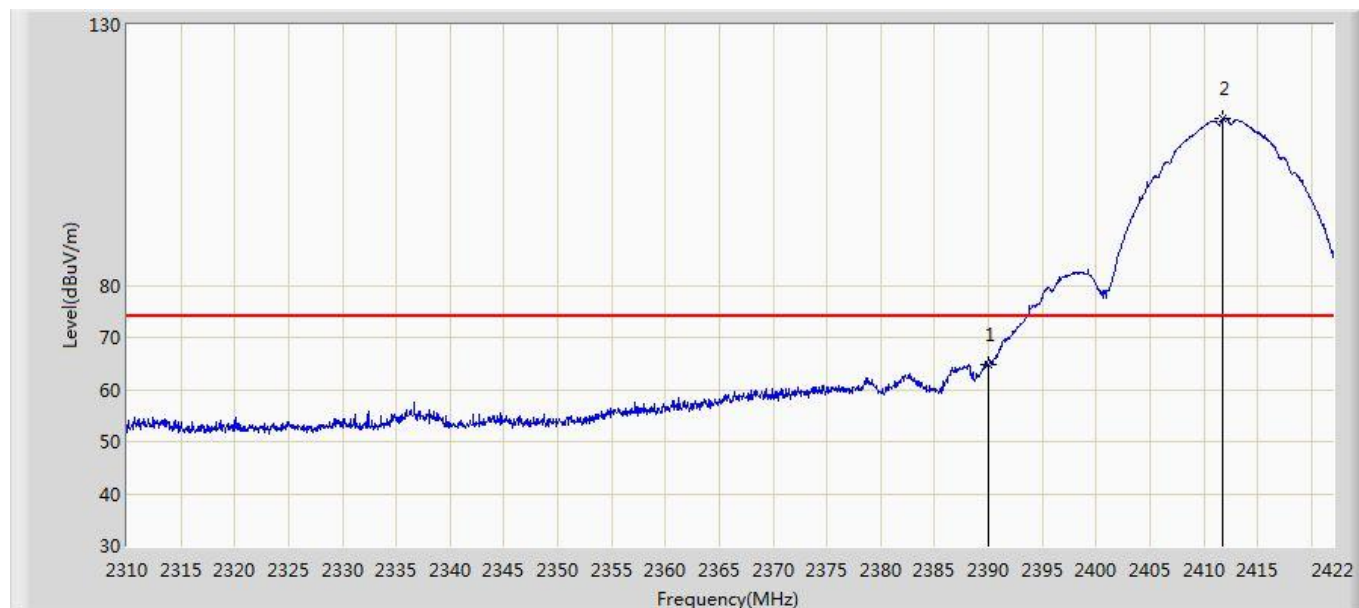

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	64.903	75.342	-9.097	74.000	-10.439	PK
2	*	2411.808	111.886	122.227	N/A	N/A	-10.341	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2412MHz Ant 2	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2389.184	49.759	60.201	-4.241	54.000	-10.442	AV
2		2390.000	46.748	57.187	-7.252	54.000	-10.439	AV
3	*	2411.136	107.918	118.262	N/A	N/A	-10.344	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2462MHz Ant 2	

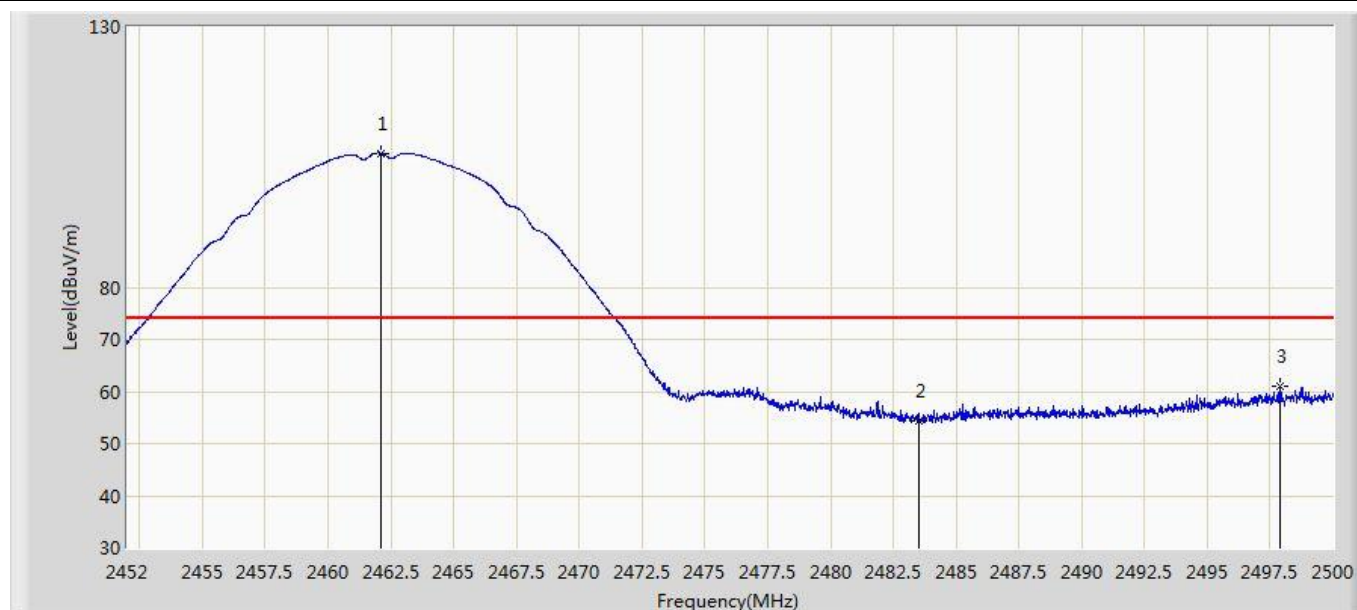


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.104	105.723	115.841	N/A	N/A	-10.118	PK
2		2483.500	54.264	64.287	-19.736	74.000	-10.023	PK
3		2497.888	60.987	70.950	-13.013	74.000	-9.963	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2462MHz Ant 2	

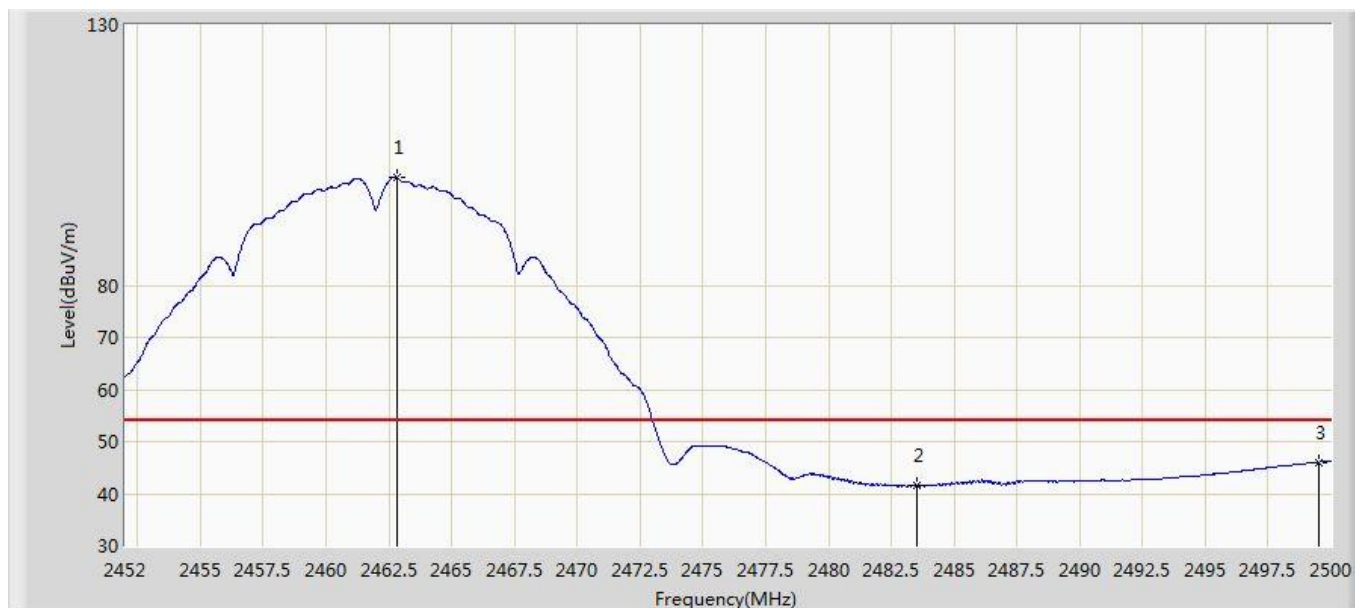


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.800	100.688	110.803	N/A	N/A	-10.115	AV
2		2483.500	41.570	51.593	-12.430	54.000	-10.023	AV
3		2499.520	46.058	56.014	-7.942	54.000	-9.956	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2462MHz Ant 2	

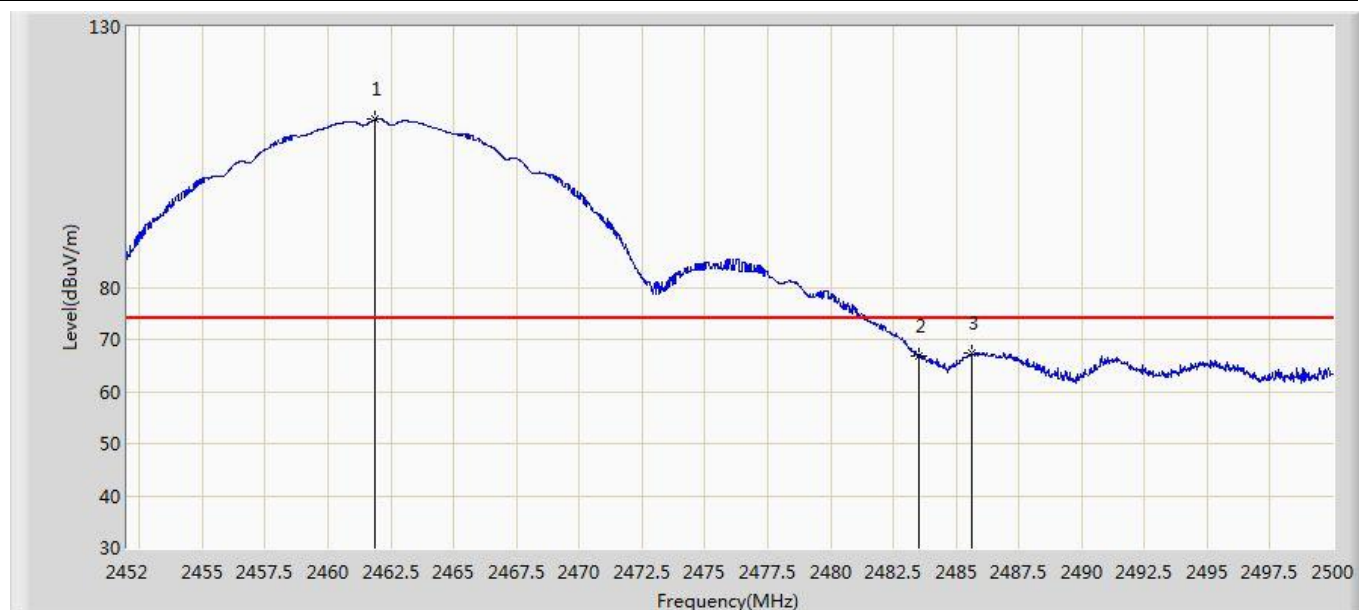

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2461.840	112.237	122.356	N/A	N/A	-10.119	PK
2		2483.500	66.918	76.941	-7.082	74.000	-10.023	PK
3		2485.624	67.462	77.476	-6.538	74.000	-10.014	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2462MHz Ant 2	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.656	108.435	118.550	N/A	N/A	-10.115	AV
2		2483.500	46.478	56.501	-7.522	54.000	-10.023	AV
3		2484.808	50.129	60.146	-3.871	54.000	-10.017	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2412MHz Ant 2	

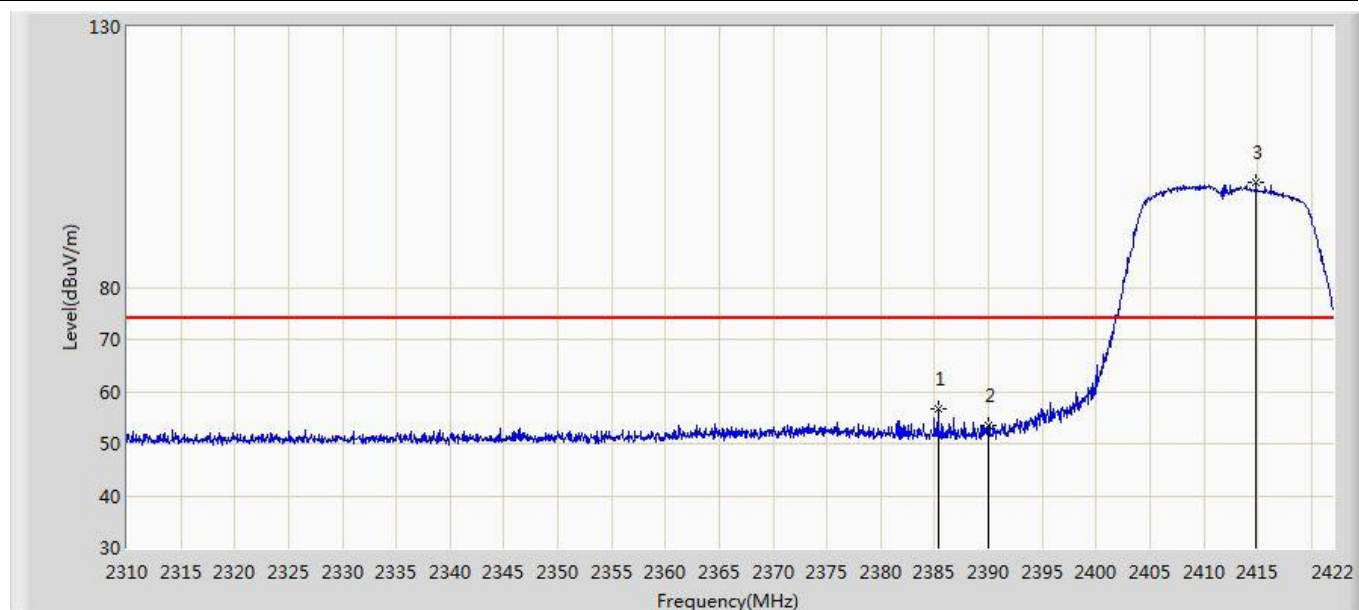


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2385.320	56.758	67.218	-17.242	74.000	-10.460	PK
2		2390.000	53.349	63.788	-20.651	74.000	-10.439	PK
3	*	2414.832	100.086	110.414	N/A	N/A	-10.328	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2412MHz Ant 2	

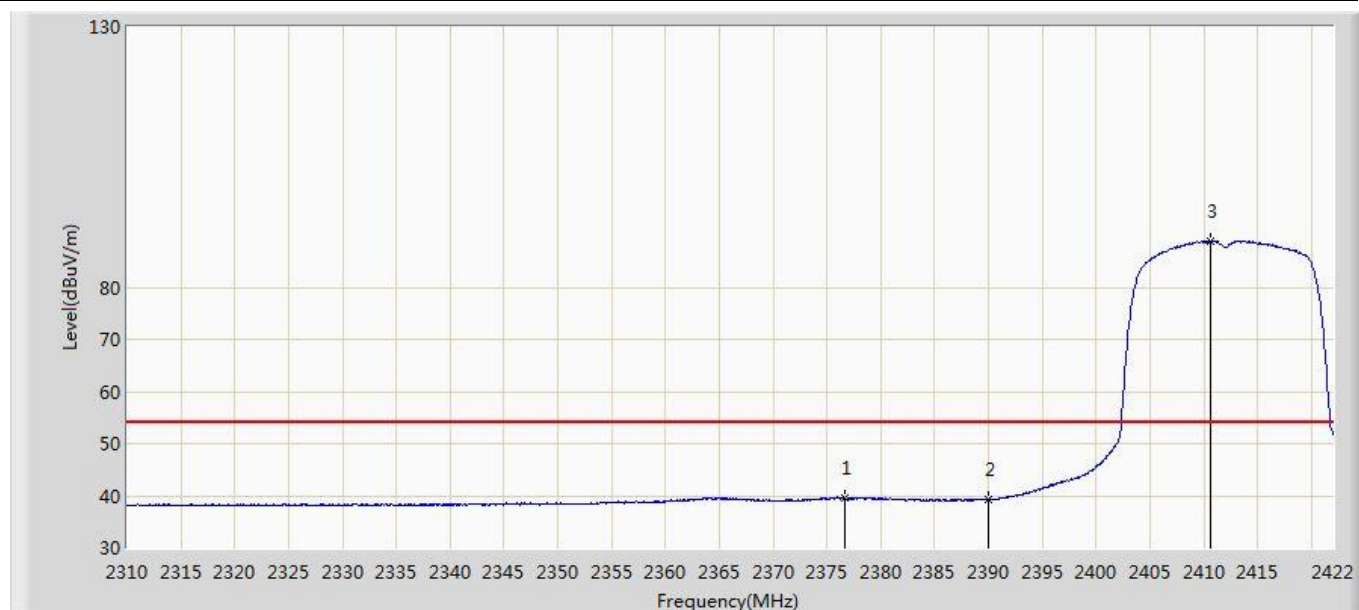


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2376.696	39.498	49.996	-14.502	54.000	-10.498	AV
2		2390.000	39.400	49.839	-14.600	54.000	-10.439	AV
3	*	2410.576	88.888	99.235	N/A	N/A	-10.347	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2412MHz Ant 2	

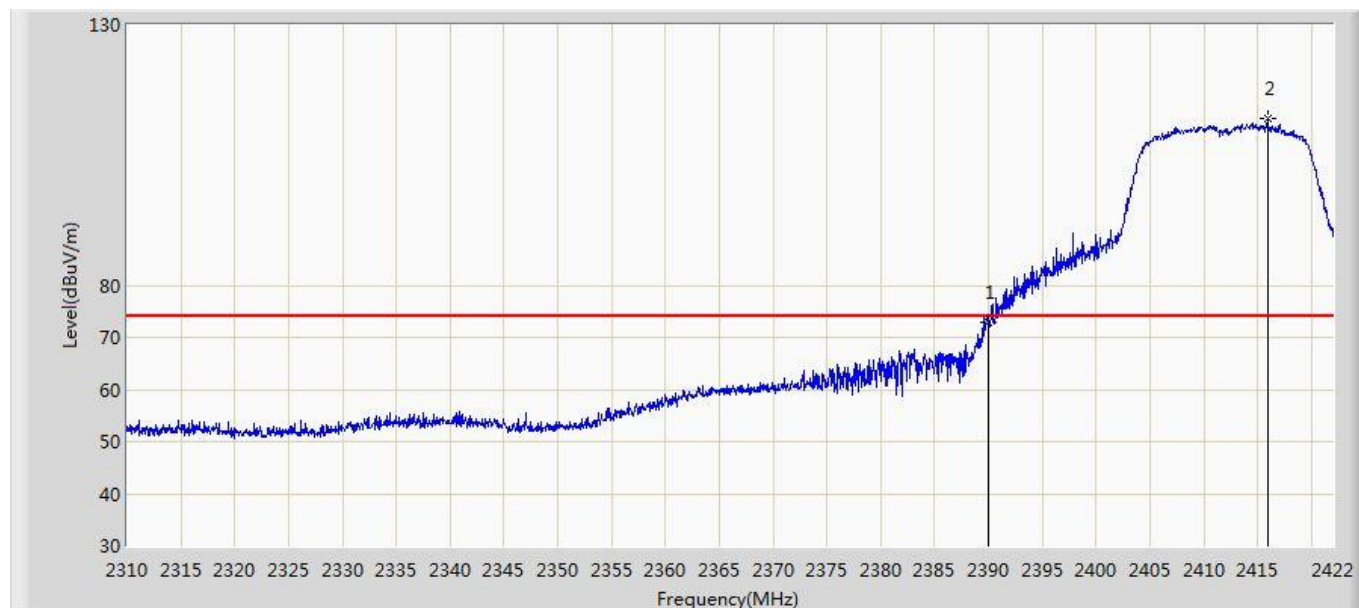


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	72.911	83.350	-1.089	74.000	-10.439	PK
2	*	2415.896	111.973	122.296	N/A	N/A	-10.323	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2412MHz Ant 2	

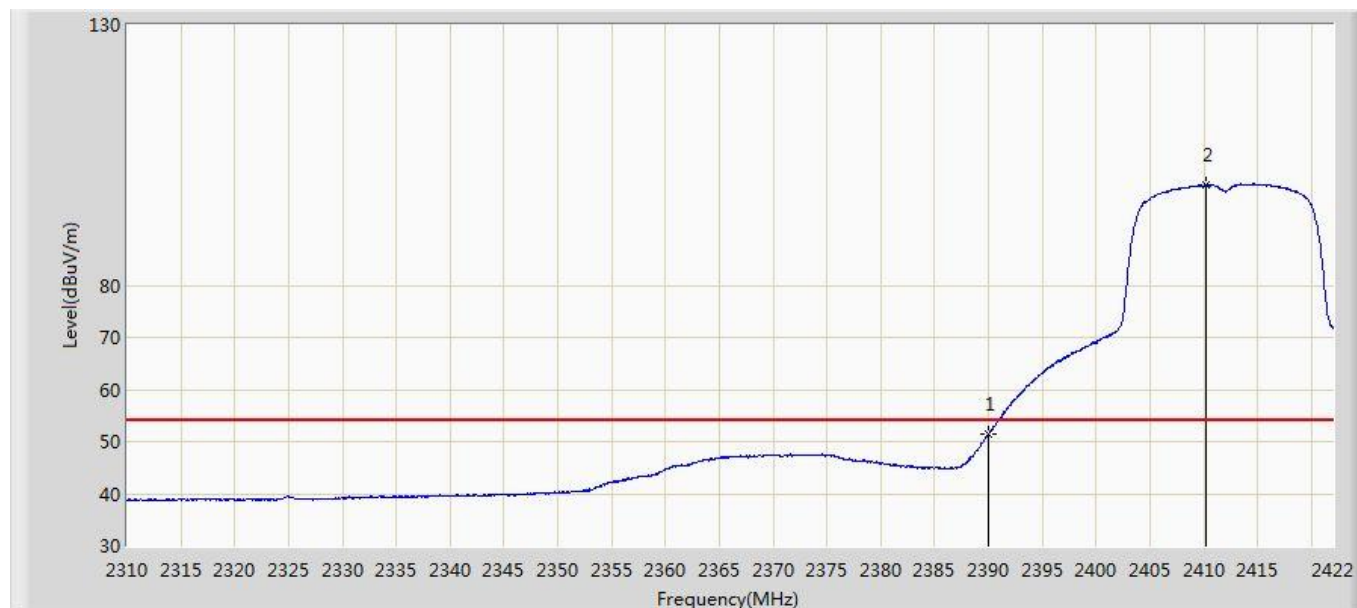


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.433	61.872	-2.567	54.000	-10.439	AV
2	*	2410.240	99.164	109.512	N/A	N/A	-10.348	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2462MHz Ant 2	

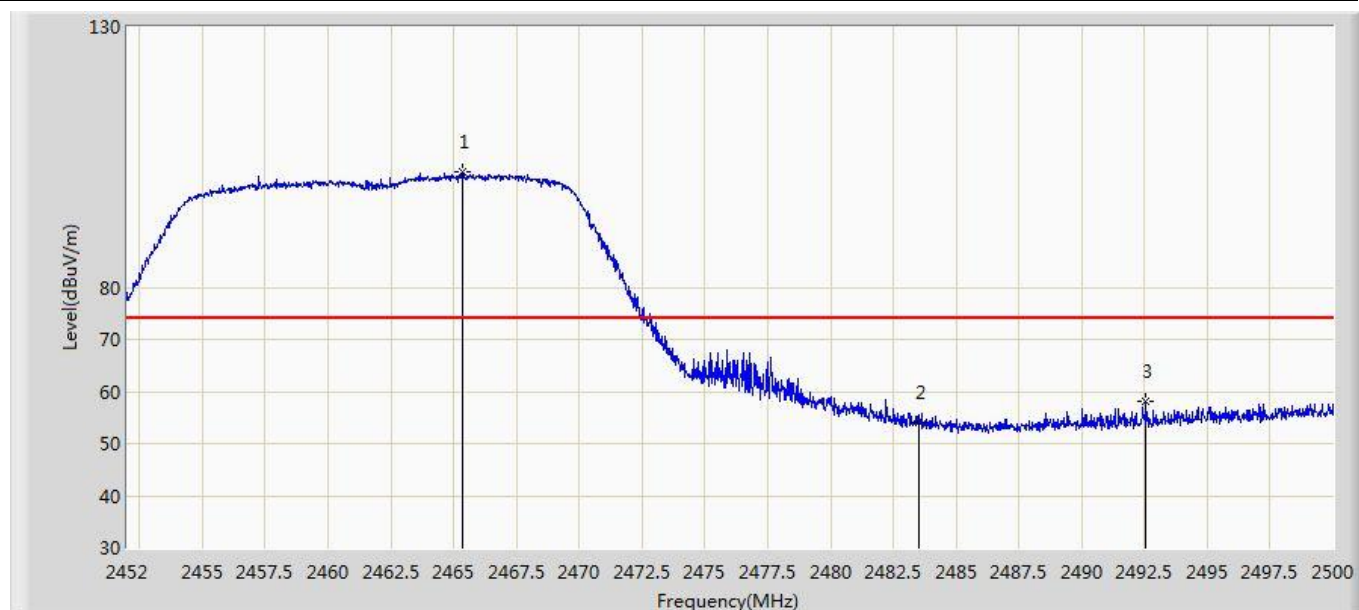


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2465.368	102.255	112.358	N/A	N/A	-10.103	PK
2		2483.500	54.050	64.073	-19.950	74.000	-10.023	PK
3		2492.560	58.184	68.168	-15.816	74.000	-9.984	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2462MHz Ant 2	

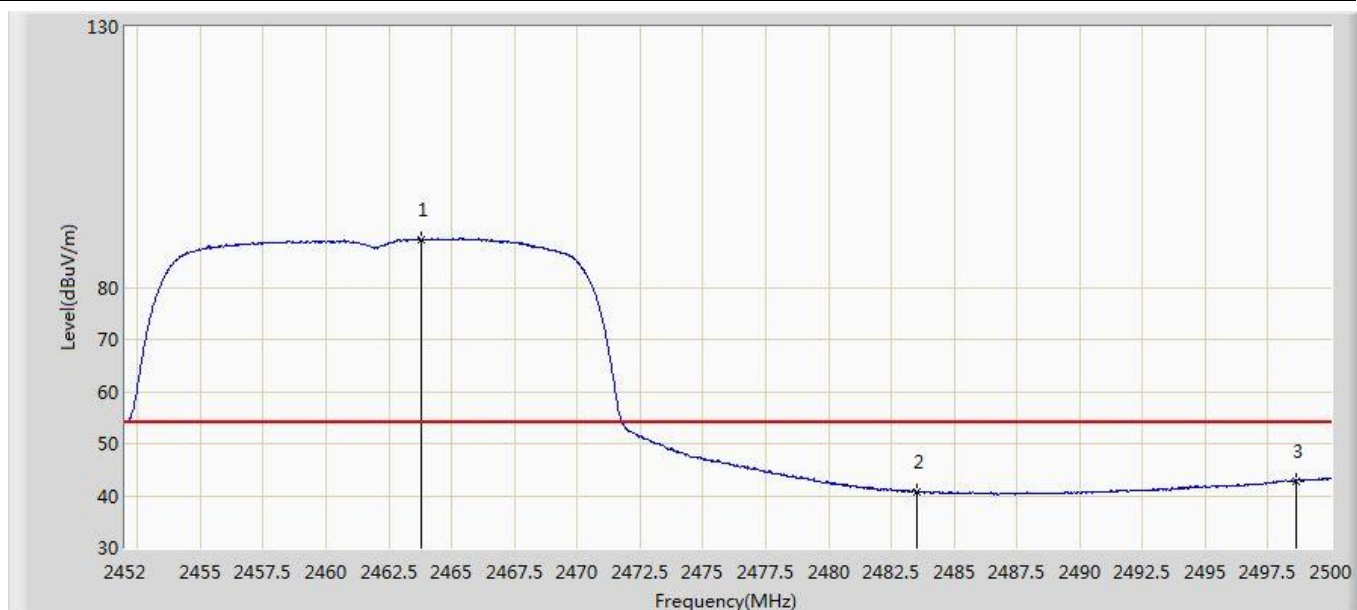


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.760	89.208	99.319	N/A	N/A	-10.111	AV
2		2483.500	40.782	50.805	-13.218	54.000	-10.023	AV
3		2498.632	42.895	52.855	-11.105	54.000	-9.960	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2462MHz Ant 2	

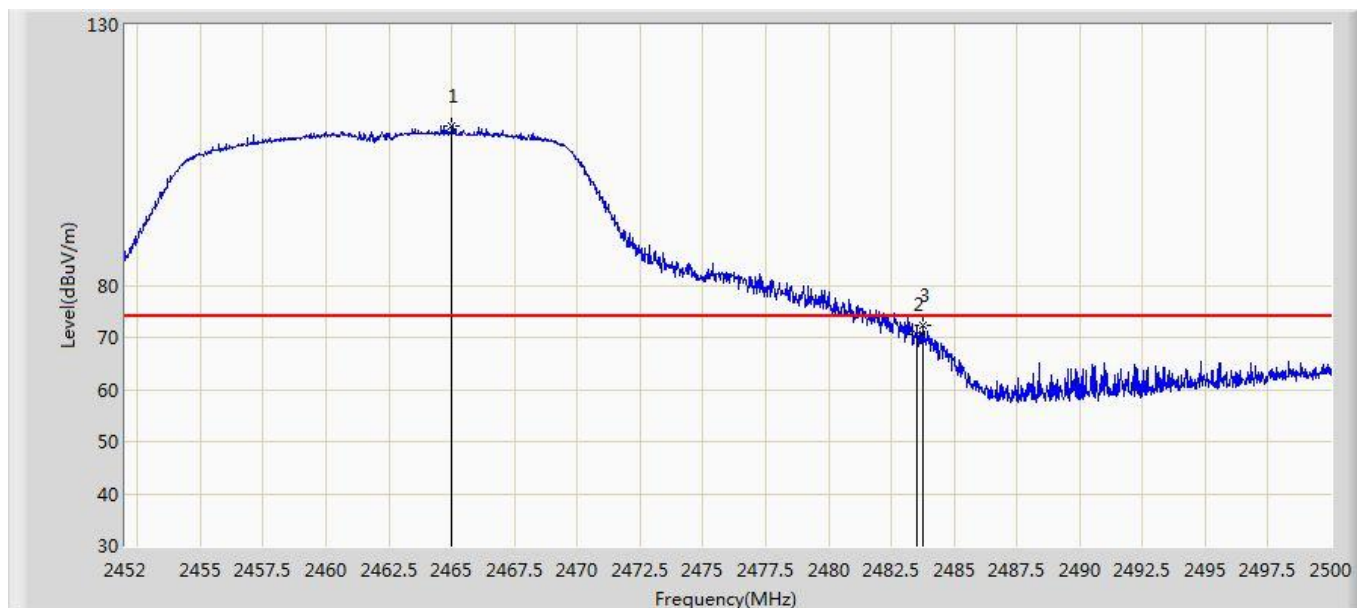


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2465.008	110.633	120.738	N/A	N/A	-10.105	PK
2		2483.500	70.629	80.652	-3.371	74.000	-10.023	PK
3		2483.776	72.351	82.373	-1.649	74.000	-10.022	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2462MHz Ant 2	

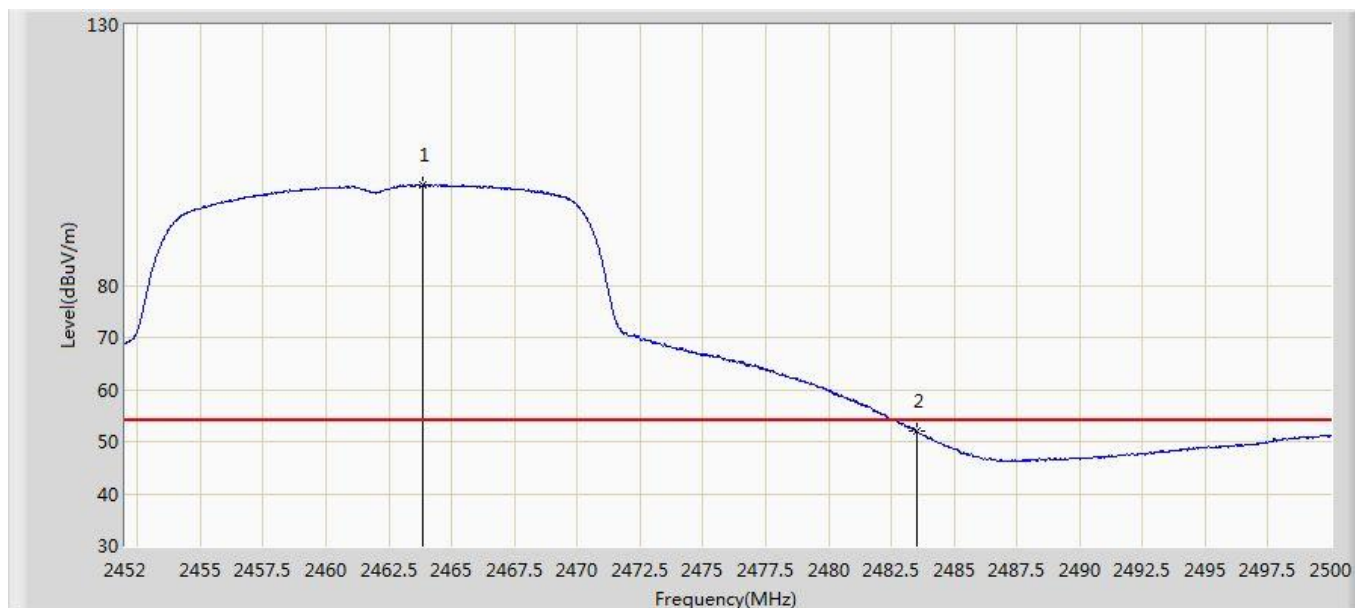


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.832	99.272	109.382	N/A	N/A	-10.110	AV
2		2483.500	51.955	61.978	-2.045	54.000	-10.023	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 14:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2412MHz Ant 2	

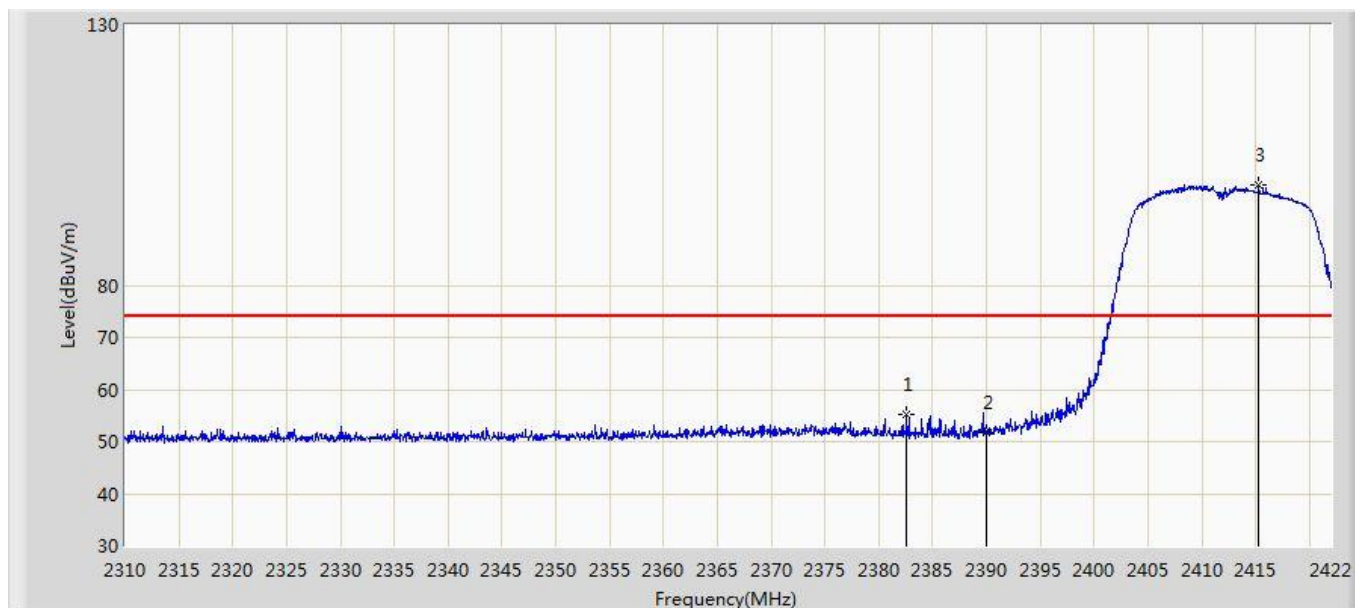


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2382.576	55.264	65.736	-18.736	74.000	-10.472	PK
2		2390.000	51.640	62.079	-22.360	74.000	-10.439	PK
3	*	2415.280	99.179	109.505	N/A	N/A	-10.326	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2412MHz Ant 2	

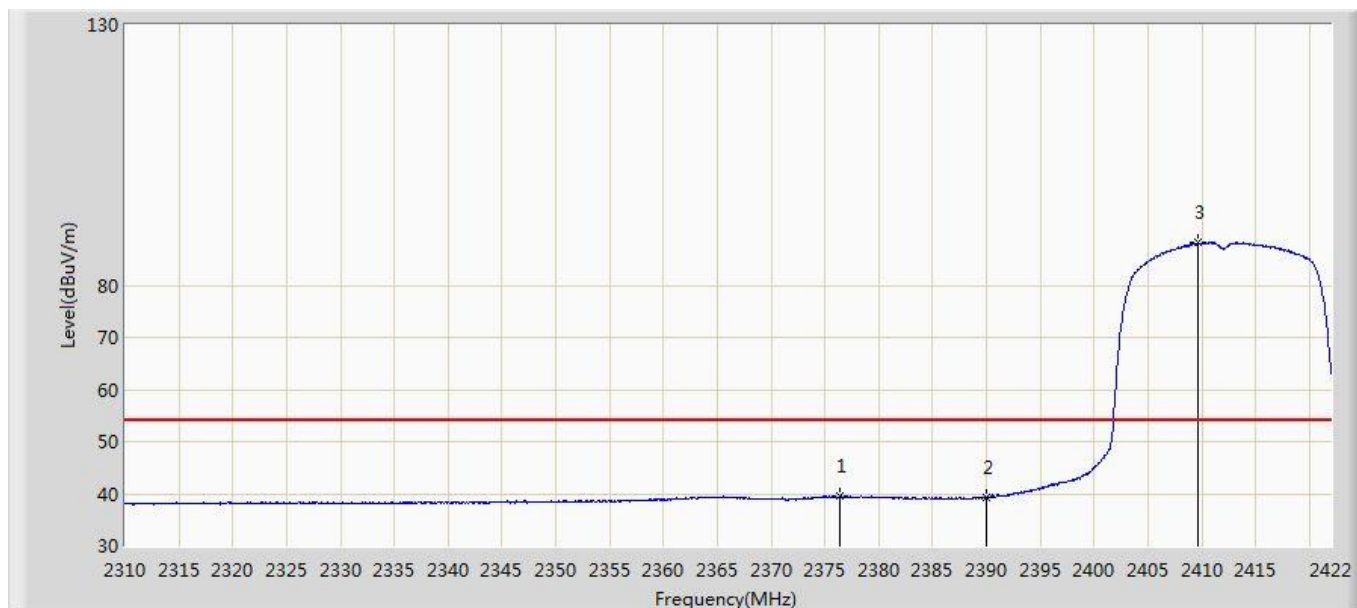


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2376.416	39.558	50.057	-14.442	54.000	-10.499	AV
2		2390.000	39.371	49.810	-14.629	54.000	-10.439	AV
3	*	2409.680	88.148	98.499	N/A	N/A	-10.351	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2412MHz Ant 2	

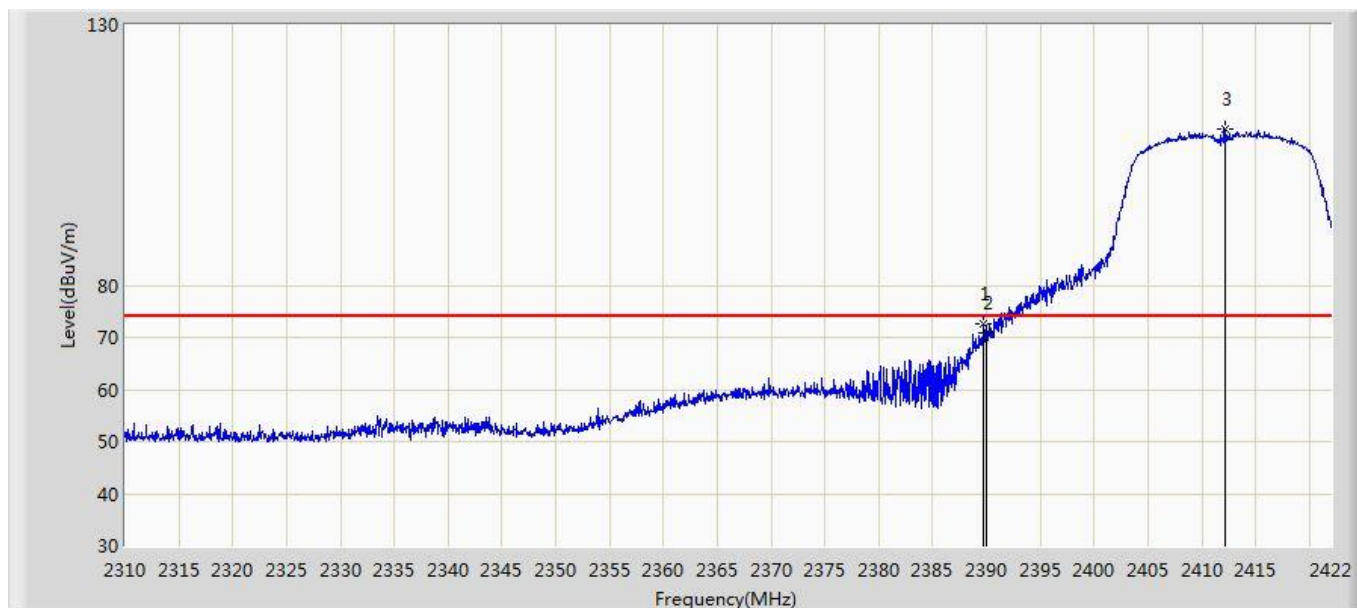


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2389.744	72.714	83.154	-1.286	74.000	-10.440	PK
2		2390.000	70.987	81.426	-3.013	74.000	-10.439	PK
3	*	2412.200	109.904	120.243	N/A	N/A	-10.339	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2412MHz Ant 2	

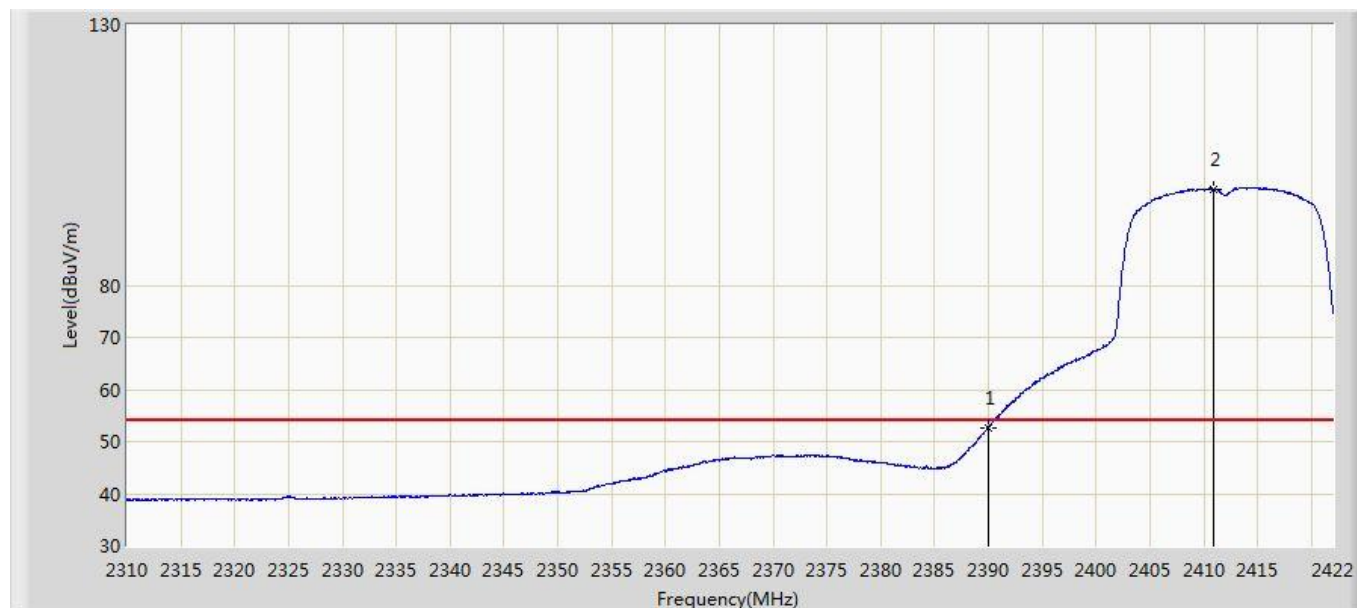


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	52.693	63.132	-1.307	54.000	-10.439	AV
2	*	2410.968	98.491	108.836	N/A	N/A	-10.345	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2462MHz Ant 2	

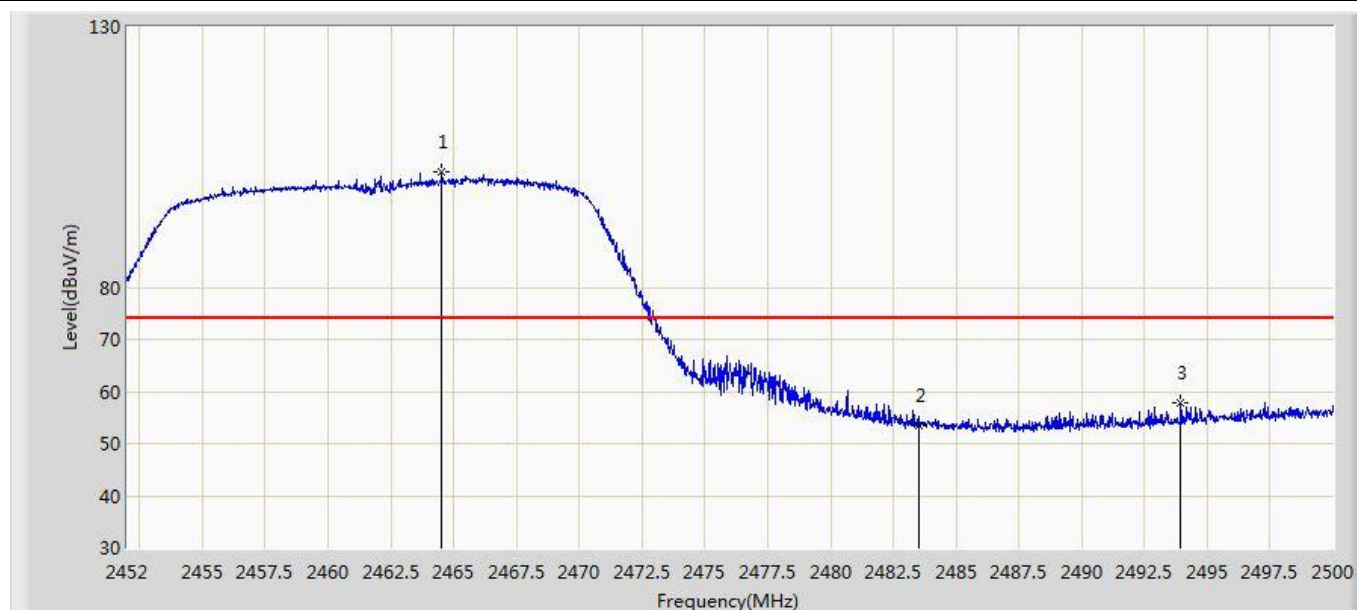


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2464.528	102.193	112.300	N/A	N/A	-10.107	PK
2		2483.500	53.406	63.429	-20.594	74.000	-10.023	PK
3		2493.952	57.833	67.812	-16.167	74.000	-9.979	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2462MHz Ant 2	

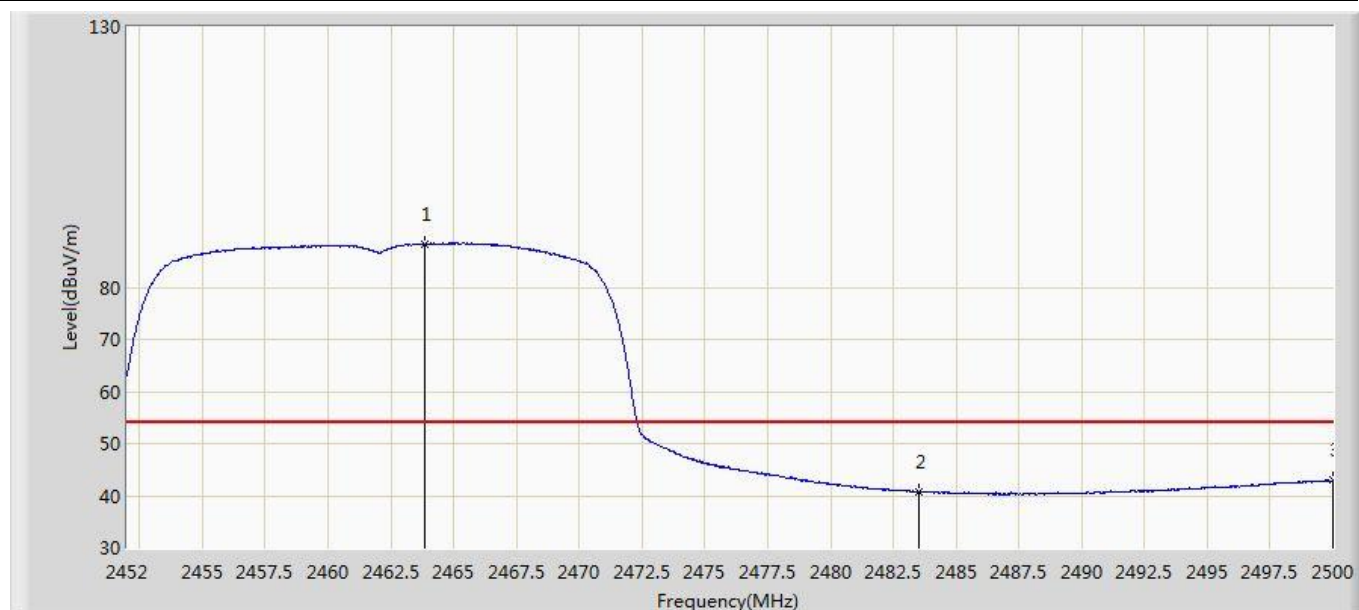


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.856	88.231	98.341	N/A	N/A	-10.110	AV
2		2483.500	40.770	50.793	-13.230	54.000	-10.023	AV
3		2500.000	42.915	52.869	-11.085	54.000	-9.954	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2462MHz Ant 2	

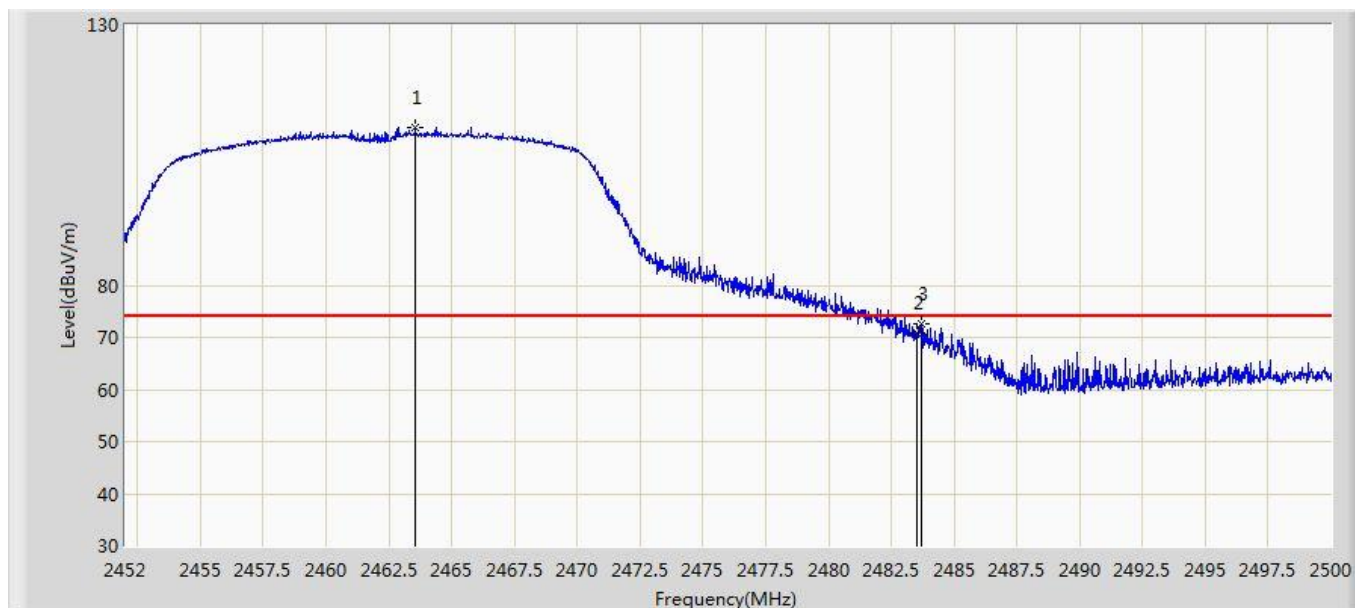


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.544	110.425	120.537	N/A	N/A	-10.112	PK
2		2483.500	70.826	80.849	-3.174	74.000	-10.023	PK
3		2483.704	72.544	82.566	-1.456	74.000	-10.022	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2462MHz Ant 2	

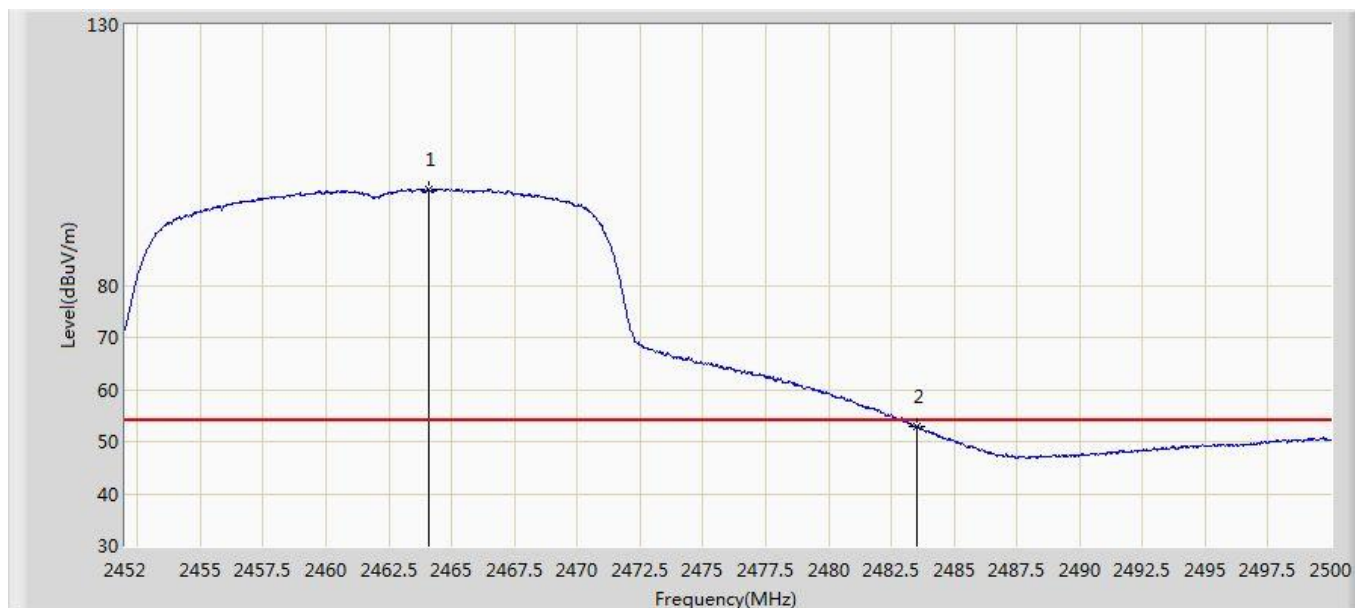


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2464.072	98.503	108.612	N/A	N/A	-10.109	AV
2		2483.500	52.789	62.812	-1.211	54.000	-10.023	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2422MHz Ant 2	

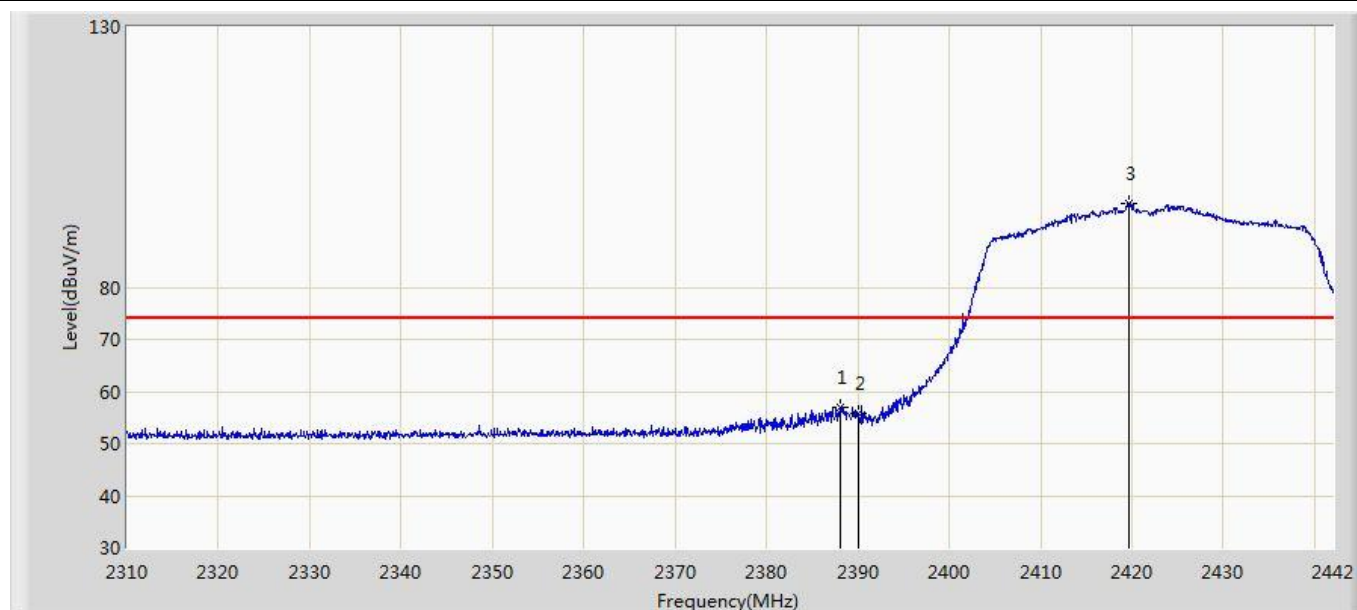


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2388.012	56.906	67.354	-17.094	74.000	-10.448	PK
2		2390.000	55.659	66.098	-18.341	74.000	-10.439	PK
3	*	2419.626	96.065	106.371	N/A	N/A	-10.306	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2422MHz Ant 2	

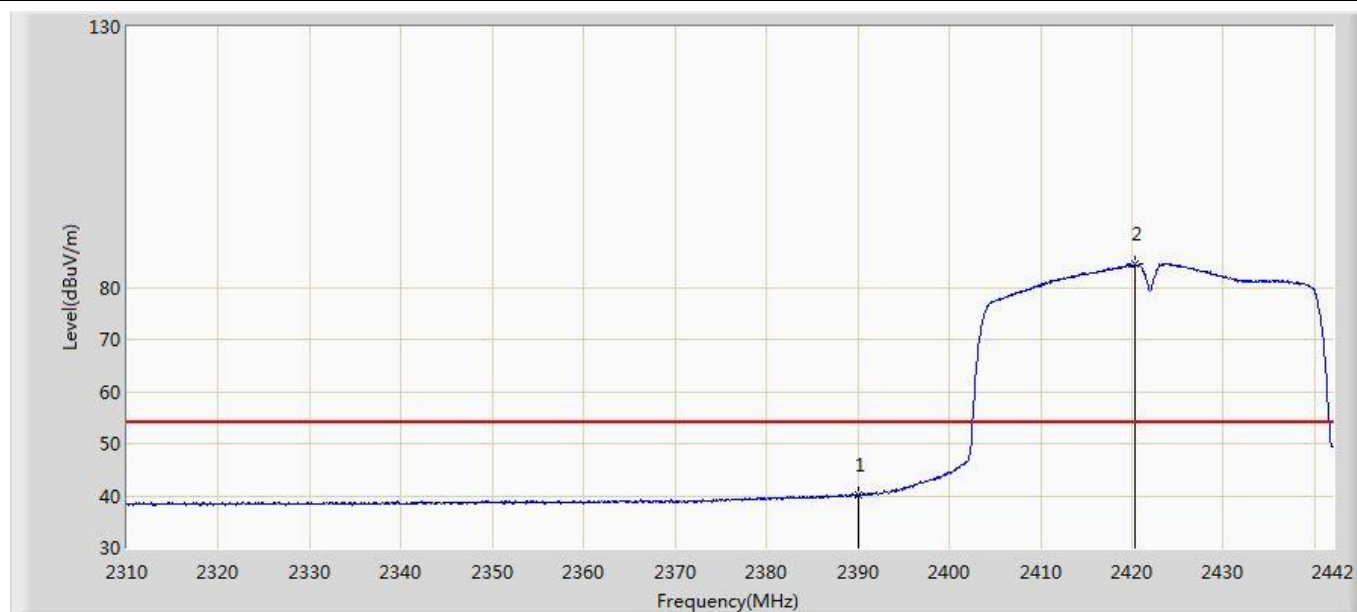


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	40.020	50.459	-13.980	54.000	-10.439	AV
2	*	2420.352	84.505	94.808	N/A	N/A	-10.303	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2422MHz Ant 2	

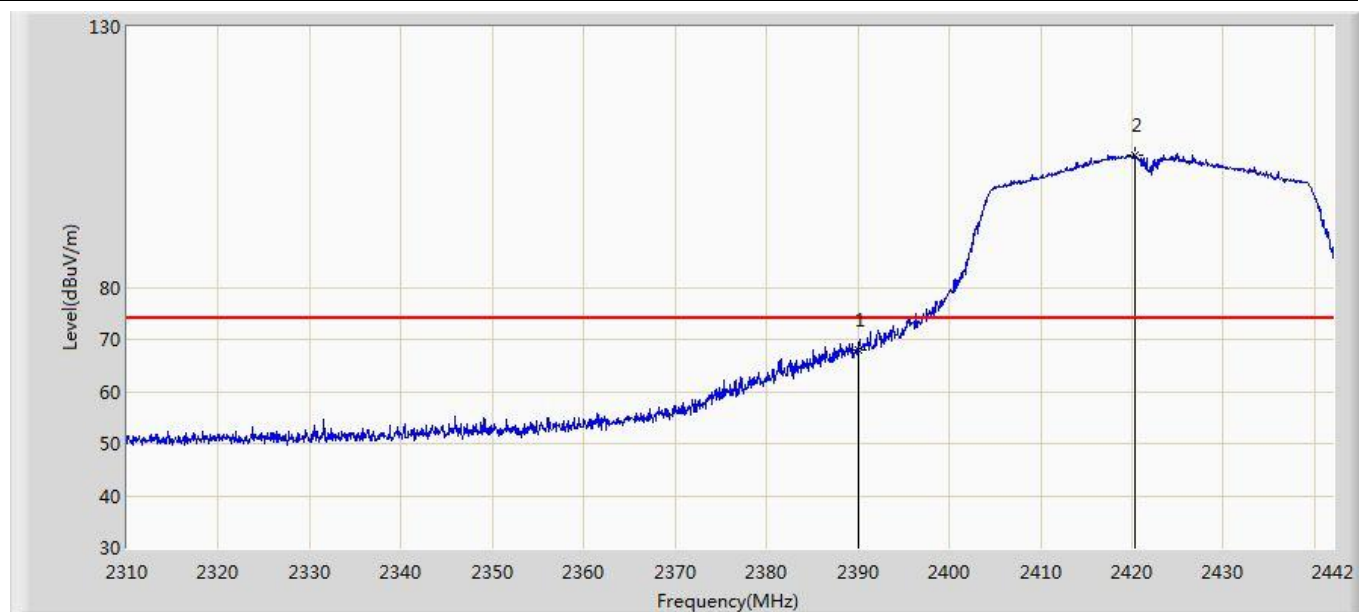


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	67.911	78.350	-6.089	74.000	-10.439	PK
2	*	2420.286	105.460	115.763	N/A	N/A	-10.303	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2422MHz Ant 2	

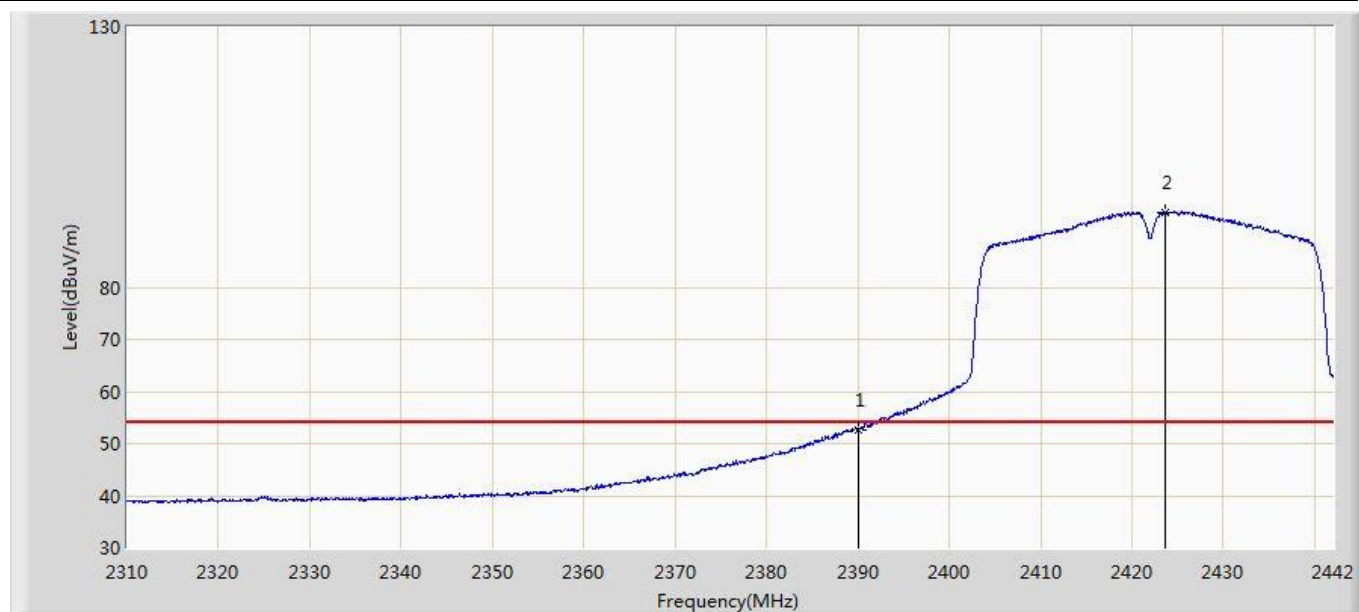


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	52.600	63.039	-1.400	54.000	-10.439	AV
2	*	2423.718	94.453	104.741	N/A	N/A	-10.288	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2452MHz Ant 2	

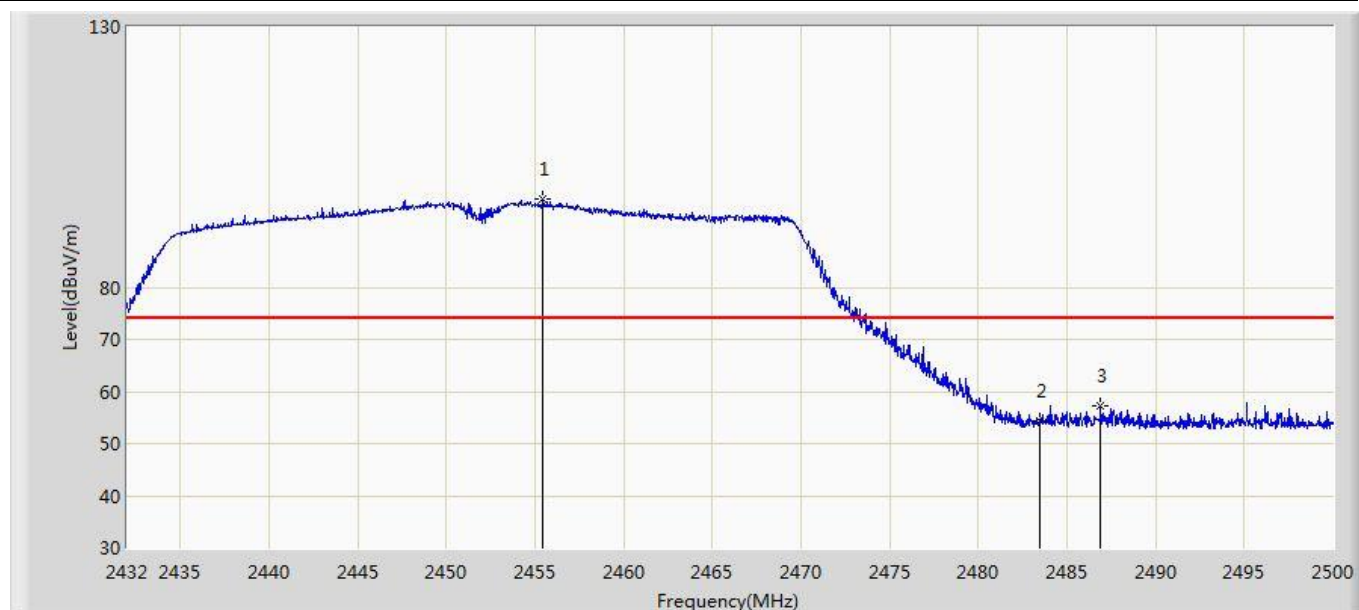


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2455.460	97.038	107.185	N/A	N/A	-10.147	PK
2		2483.500	54.351	64.374	-19.649	74.000	-10.023	PK
3		2486.910	57.306	67.314	-16.694	74.000	-10.008	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2452MHz Ant 2	

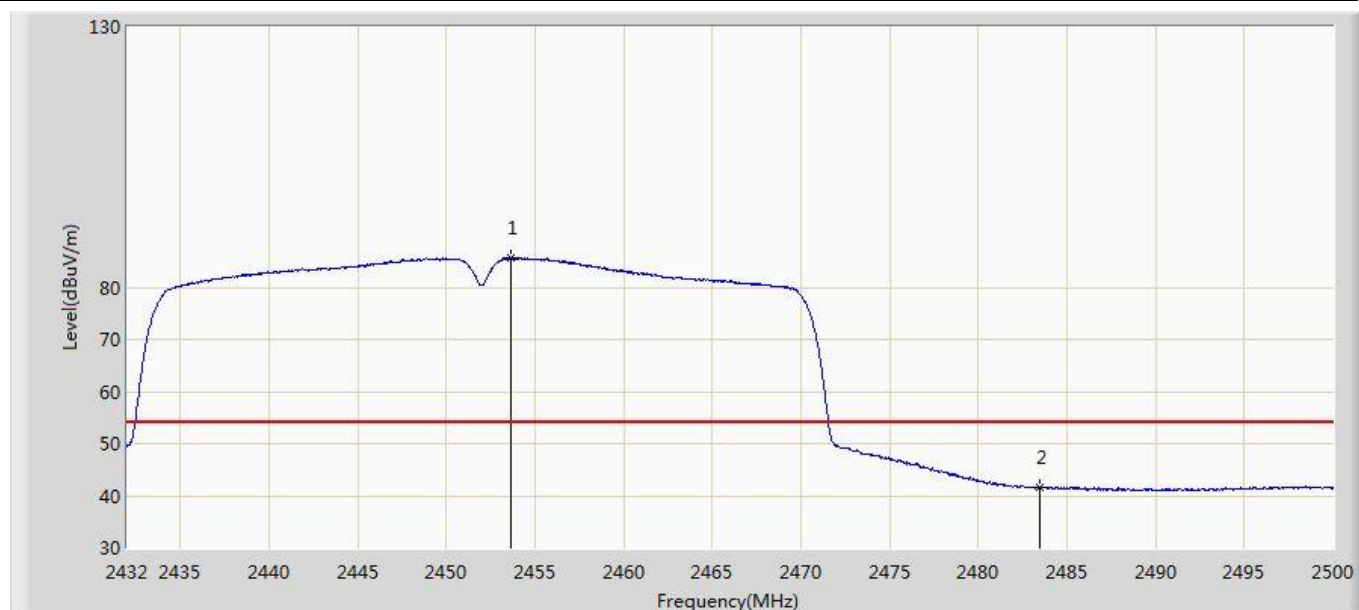


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2453.658	85.519	95.674	N/A	N/A	-10.155	AV
2		2483.500	41.645	51.668	-12.355	54.000	-10.023	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2452MHz Ant 2	

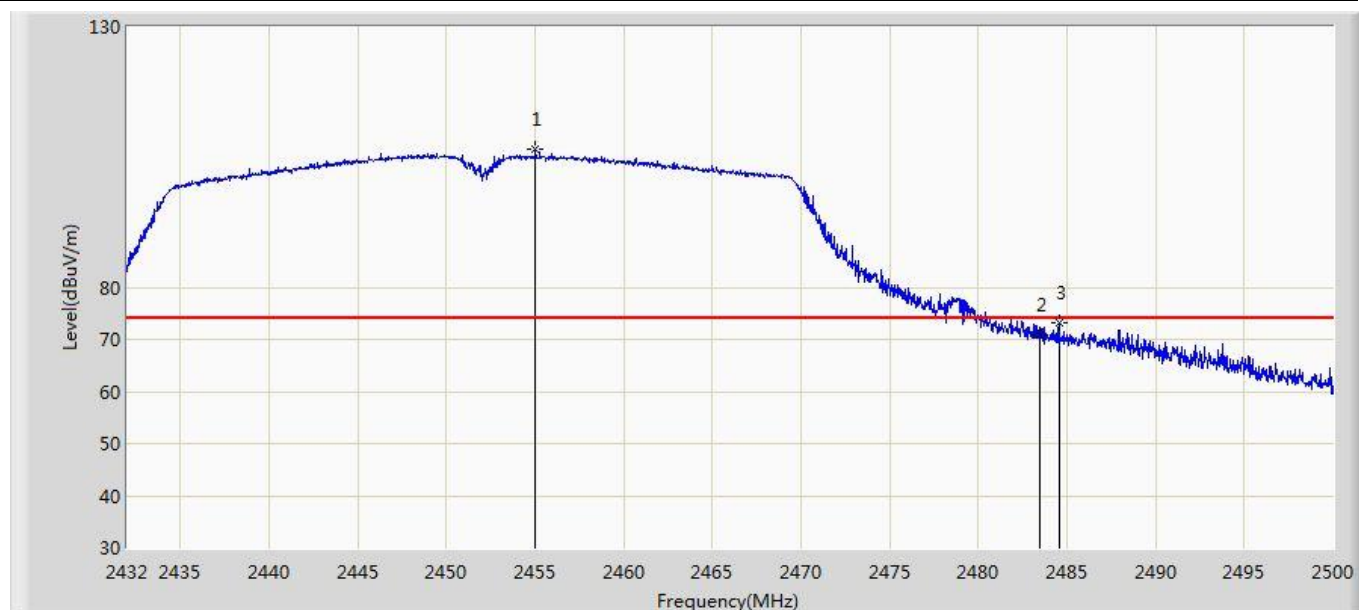


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2455.018	106.412	116.561	N/A	N/A	-10.149	PK
2		2483.500	70.839	80.862	-3.161	74.000	-10.023	PK
3		2484.564	73.311	83.329	-0.689	74.000	-10.018	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2452MHz Ant 2	

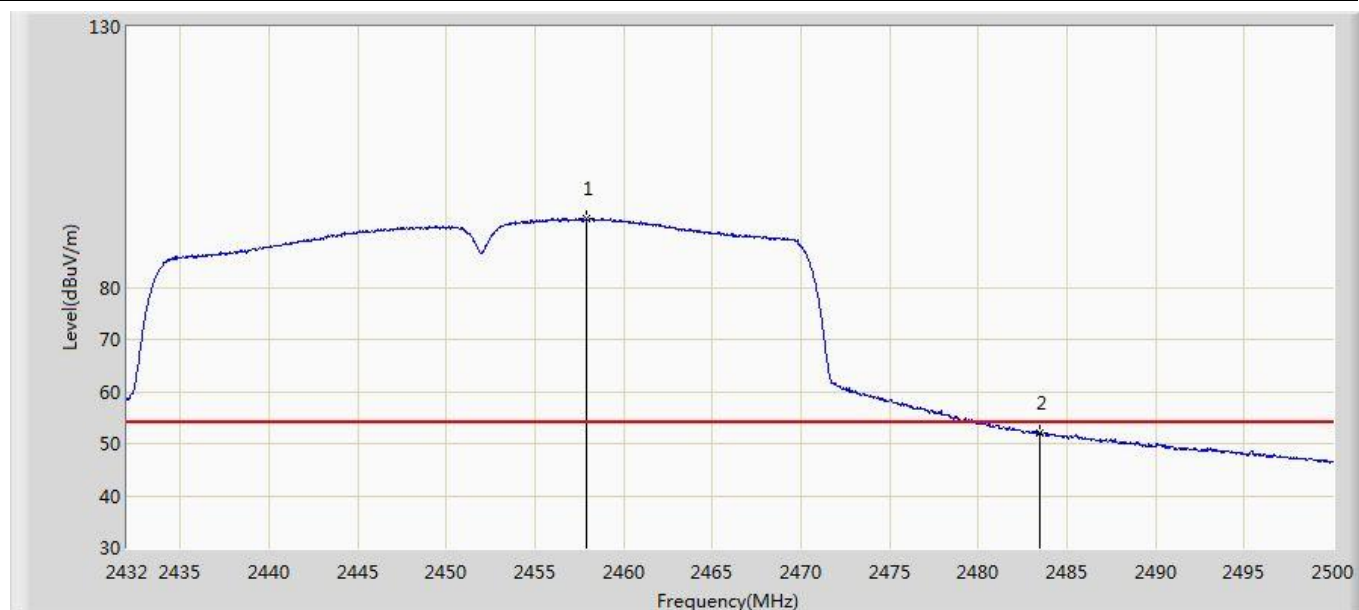


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2457.874	93.228	103.365	N/A	N/A	-10.137	AV
2		2483.500	52.079	62.102	-1.921	54.000	-10.023	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2412MHz Ant 3	

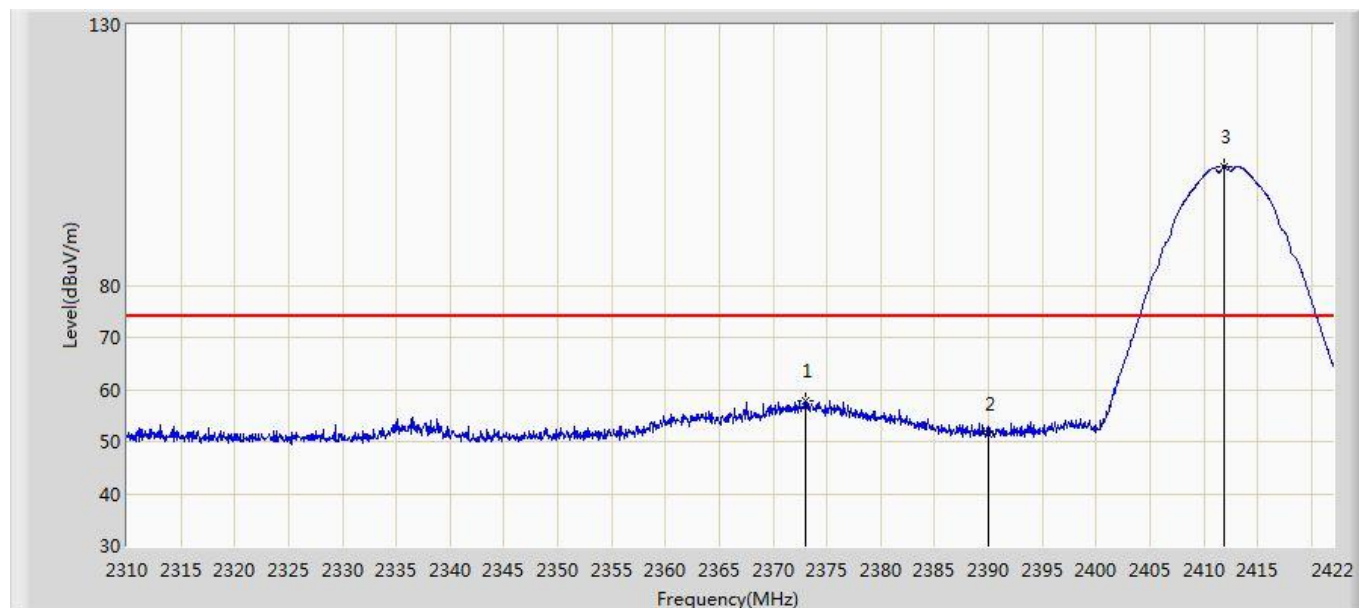


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2373.056	57.808	68.322	-16.192	74.000	-10.514	PK
2		2390.000	51.506	61.945	-22.494	74.000	-10.439	PK
3	*	2411.864	102.874	113.215	N/A	N/A	-10.341	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2412MHz Ant 3	

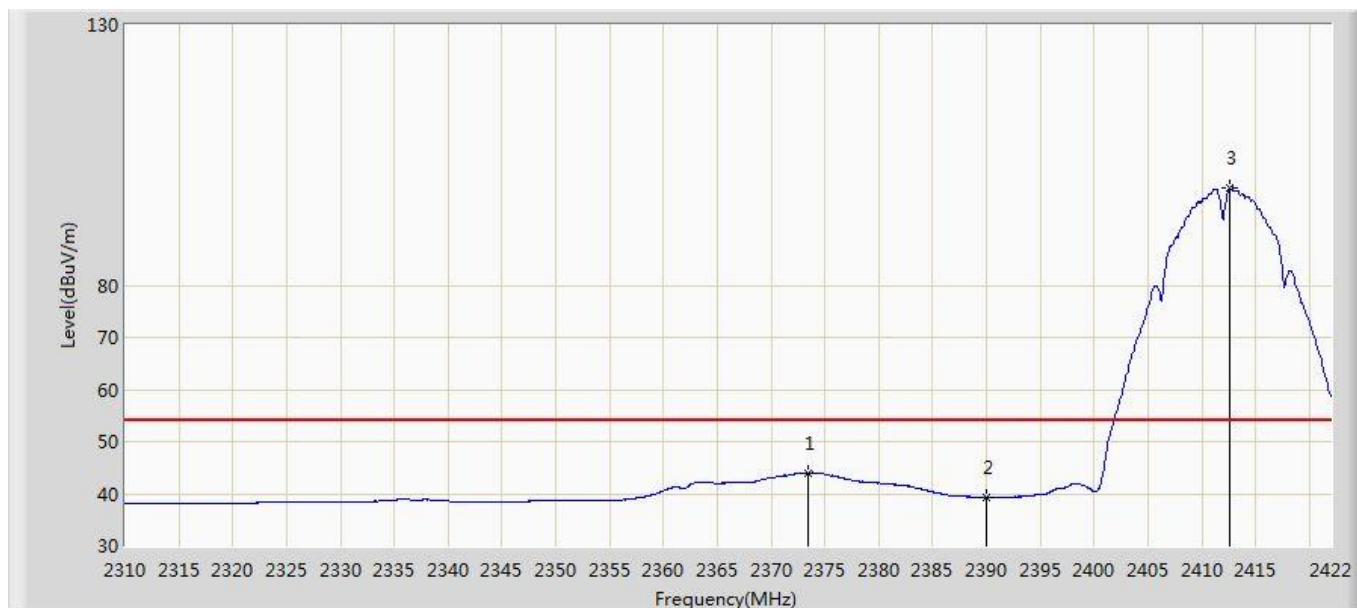


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2373.392	44.001	54.514	-9.999	54.000	-10.513	AV
2		2390.000	39.331	49.770	-14.669	54.000	-10.439	AV
3	*	2412.648	98.811	109.148	N/A	N/A	-10.337	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2412MHz Ant 3	

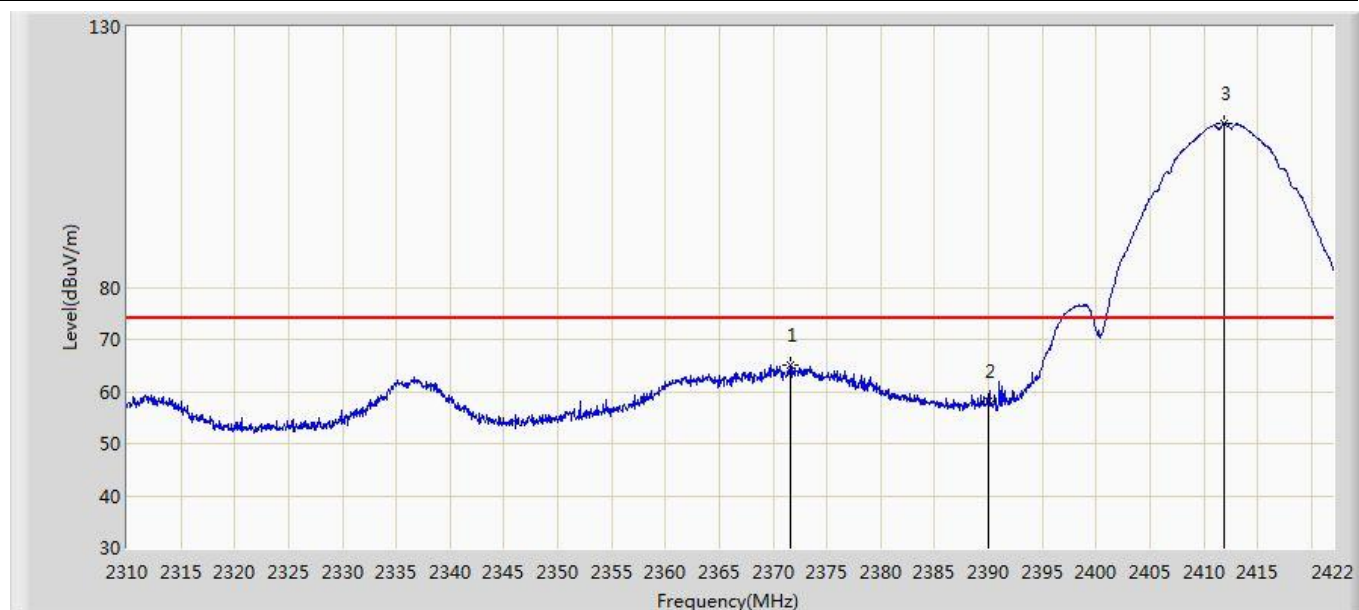

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2371.544	64.997	75.518	-9.003	74.000	-10.521	PK
2		2390.000	58.142	68.581	-15.858	74.000	-10.439	PK
3	*	2411.864	111.528	121.869	N/A	N/A	-10.341	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2412MHz Ant 3	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2370.760	46.424	56.948	-7.576	54.000	-10.524	AV
2		2390.000	44.823	55.262	-9.177	54.000	-10.439	AV
3	*	2411.080	107.505	117.849	N/A	N/A	-10.344	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2462MHz Ant 3	

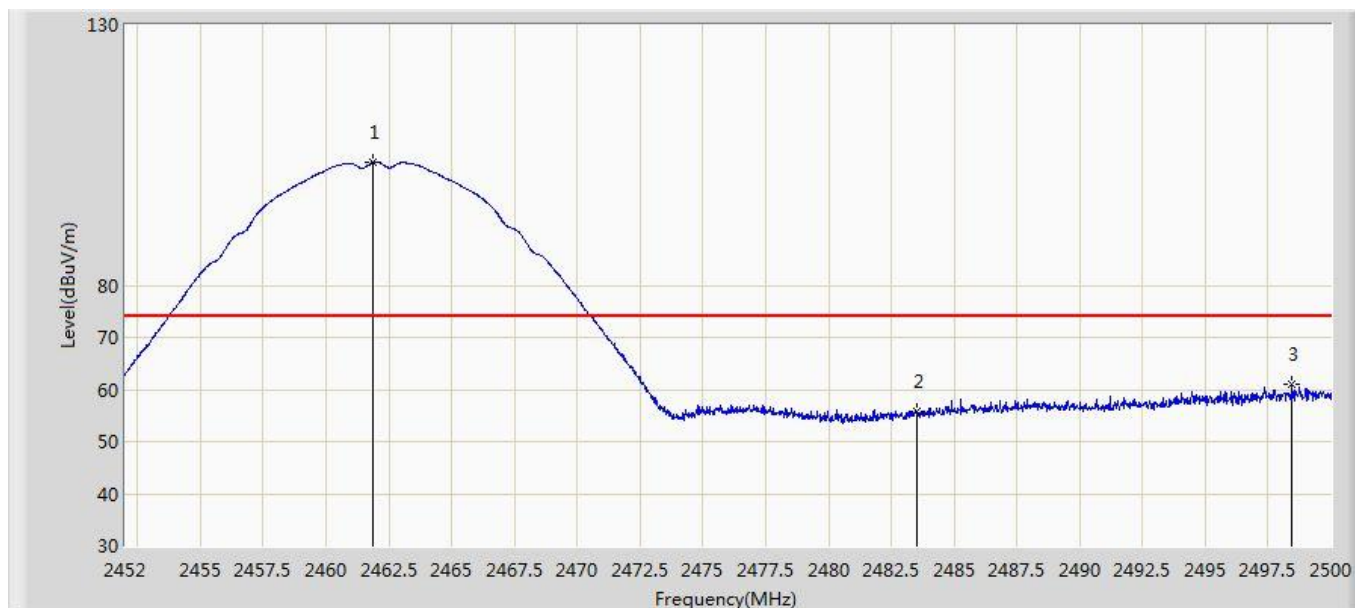


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2461.888	103.595	113.714	N/A	N/A	-10.119	PK
2		2483.500	55.736	65.759	-18.264	74.000	-10.023	PK
3		2498.464	60.968	70.928	-13.032	74.000	-9.960	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2462MHz Ant 3	

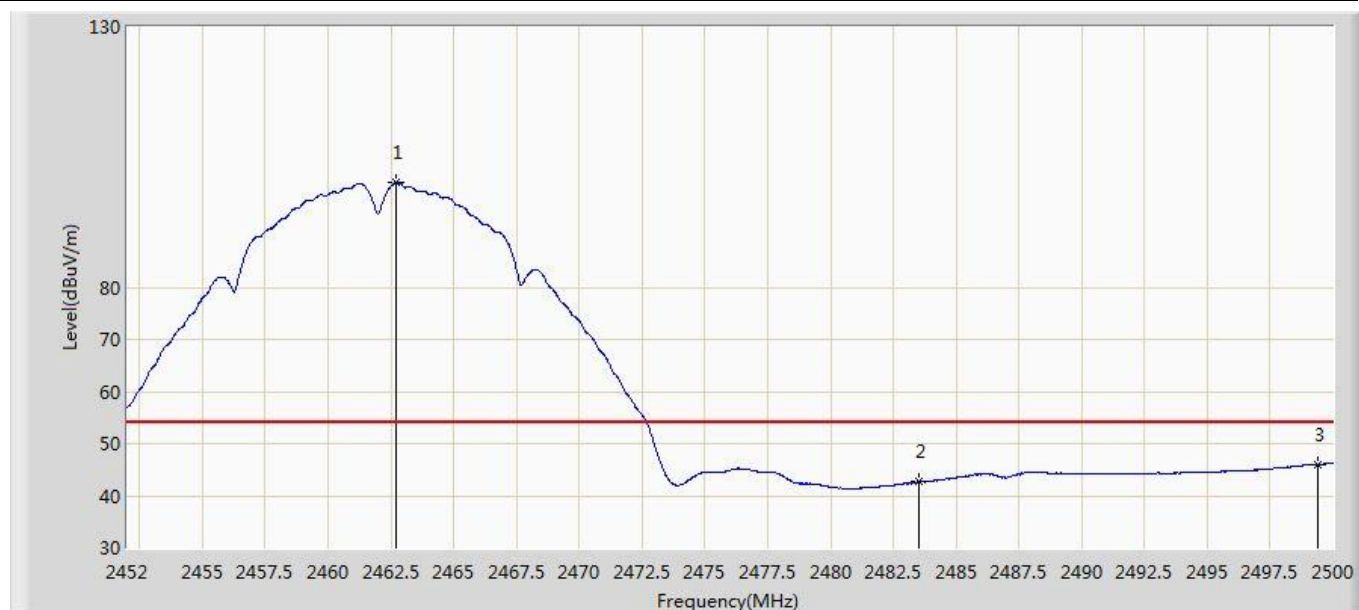


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.728	100.103	110.218	N/A	N/A	-10.115	AV
2		2483.500	42.632	52.655	-11.368	54.000	-10.023	AV
3		2499.376	46.069	56.026	-7.931	54.000	-9.957	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2462MHz Ant 3	

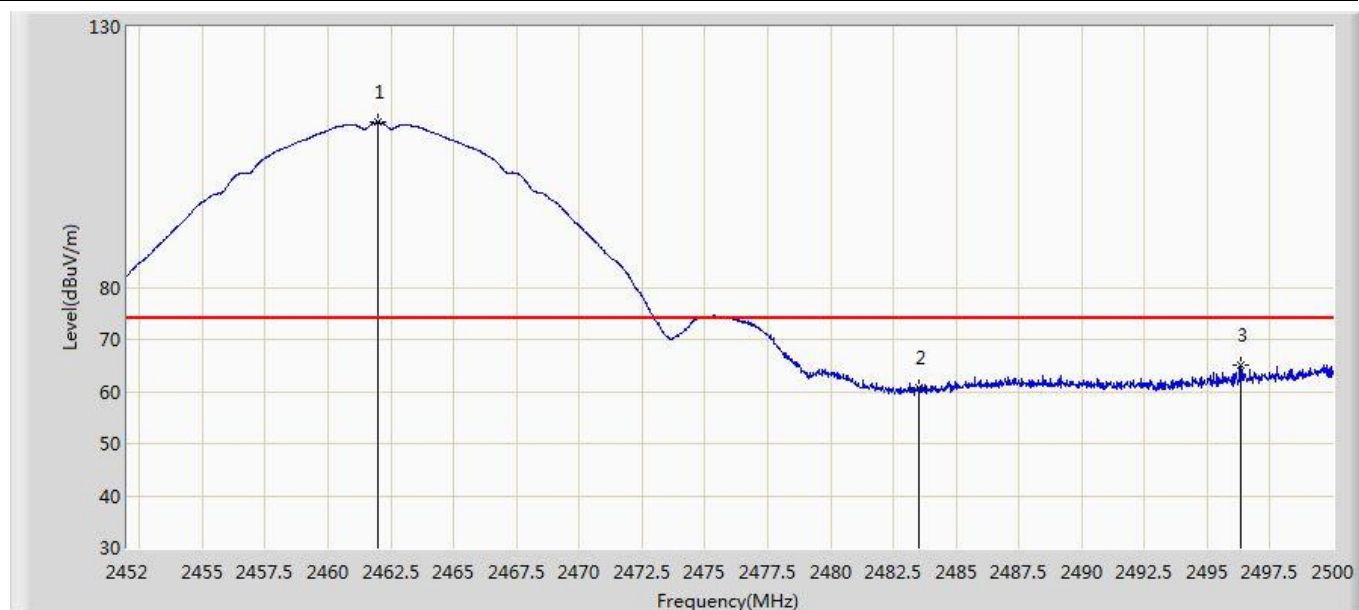

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2461.960	111.643	121.762	N/A	N/A	-10.119	PK
2		2483.500	60.659	70.682	-13.341	74.000	-10.023	PK
3		2496.304	64.930	74.899	-9.070	74.000	-9.969	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 1:Transmit 802.11b at 2462MHz Ant 3	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.632	107.526	117.642	N/A	N/A	-10.116	AV
2		2483.500	47.870	57.893	-6.130	54.000	-10.023	AV
3		2486.224	50.360	60.371	-3.640	54.000	-10.011	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2412MHz Ant 3	

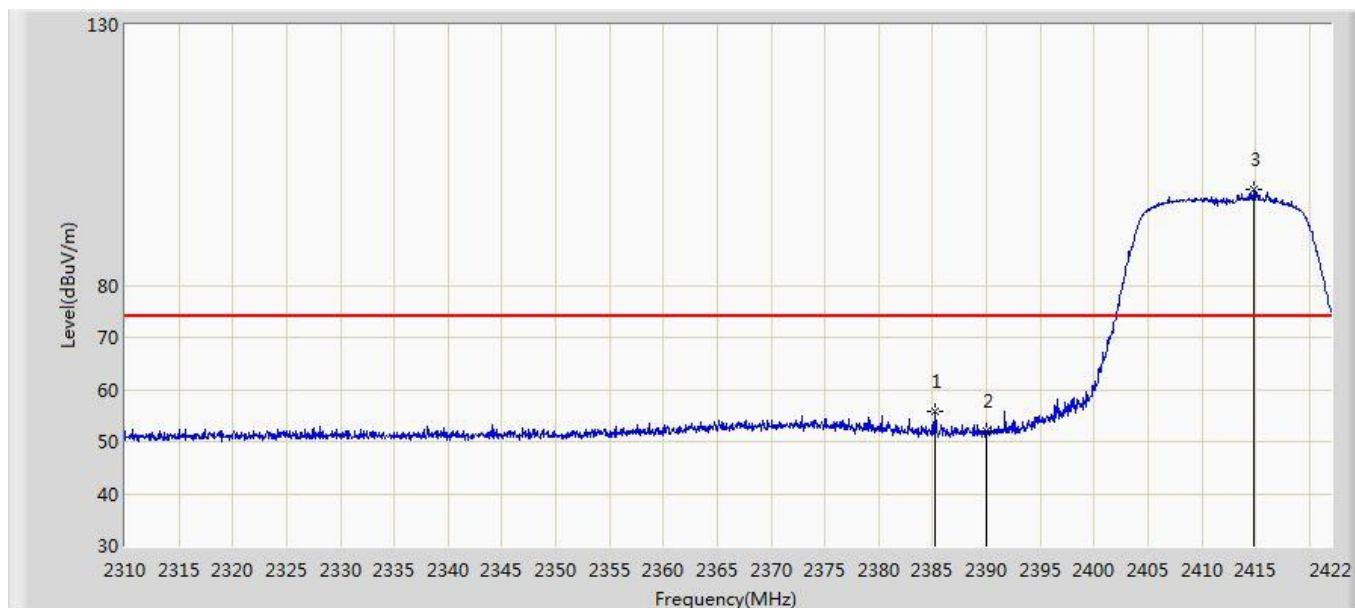


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2385.208	55.684	66.144	-18.316	74.000	-10.460	PK
2		2390.000	51.955	62.394	-22.045	74.000	-10.439	PK
3	*	2414.832	98.395	108.723	N/A	N/A	-10.328	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2412MHz Ant 3	

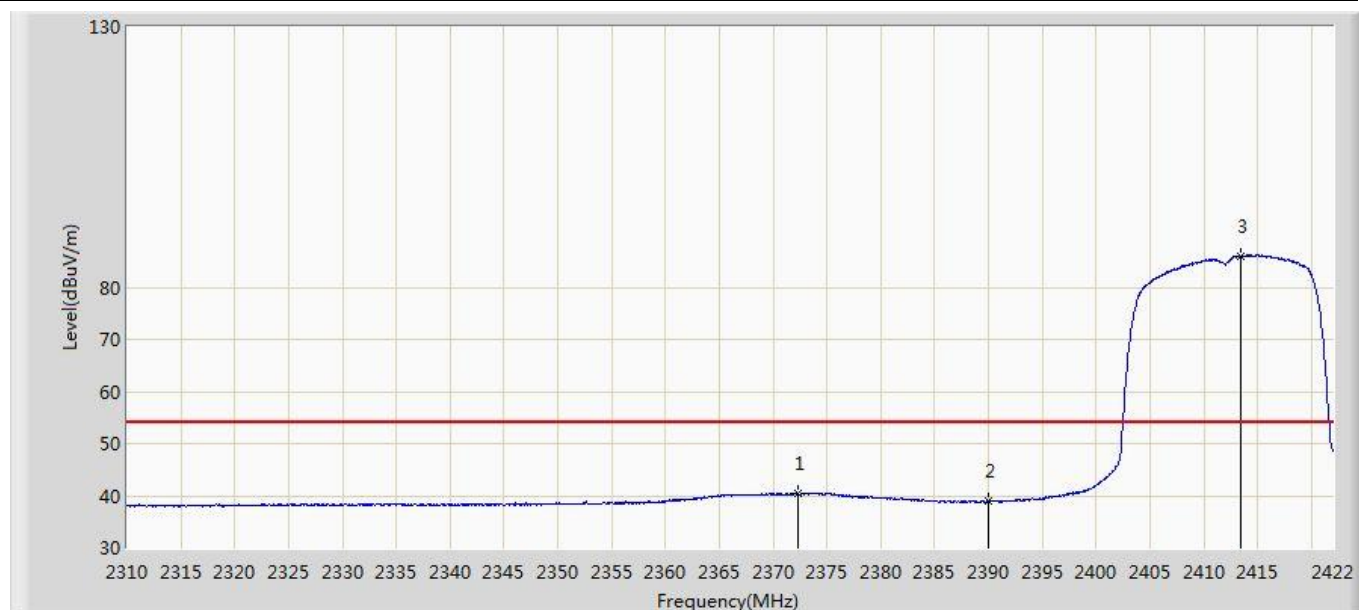


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2372.272	40.479	50.997	-13.521	54.000	-10.518	AV
2		2390.000	38.904	49.343	-15.096	54.000	-10.439	AV
3	*	2413.376	86.076	96.410	N/A	N/A	-10.334	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2412MHz Ant 3	

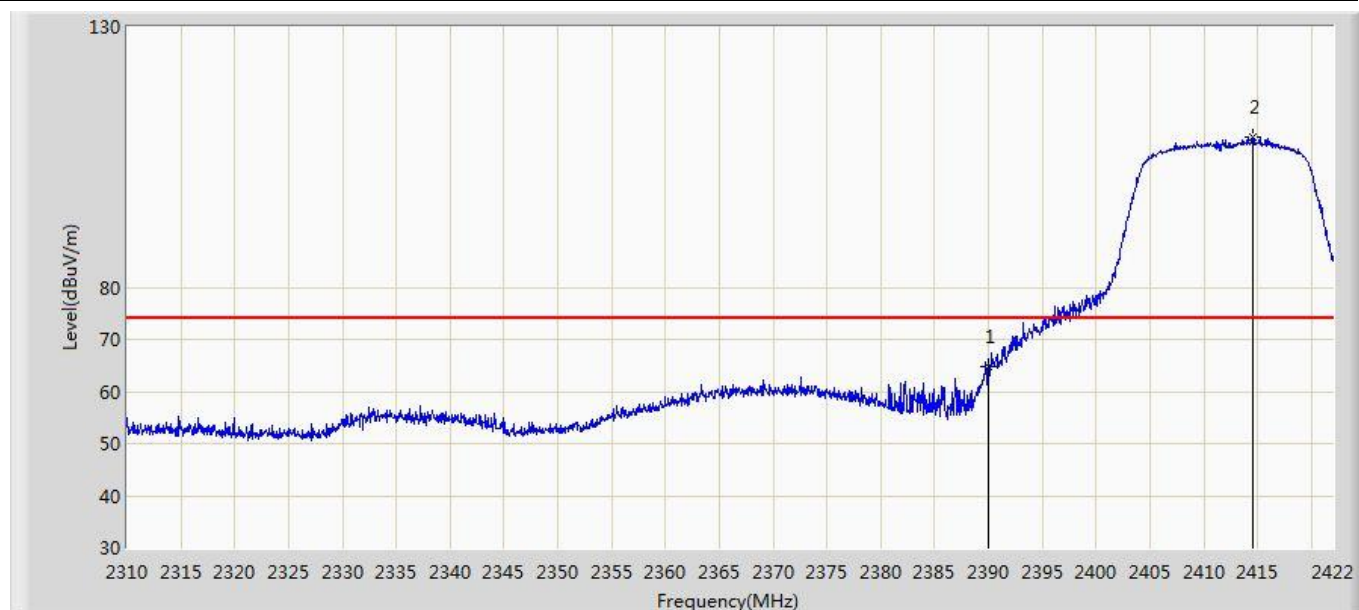


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	64.795	75.234	-9.205	74.000	-10.439	PK
2	*	2414.608	108.742	119.071	N/A	N/A	-10.329	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 15:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2412MHz Ant 3	

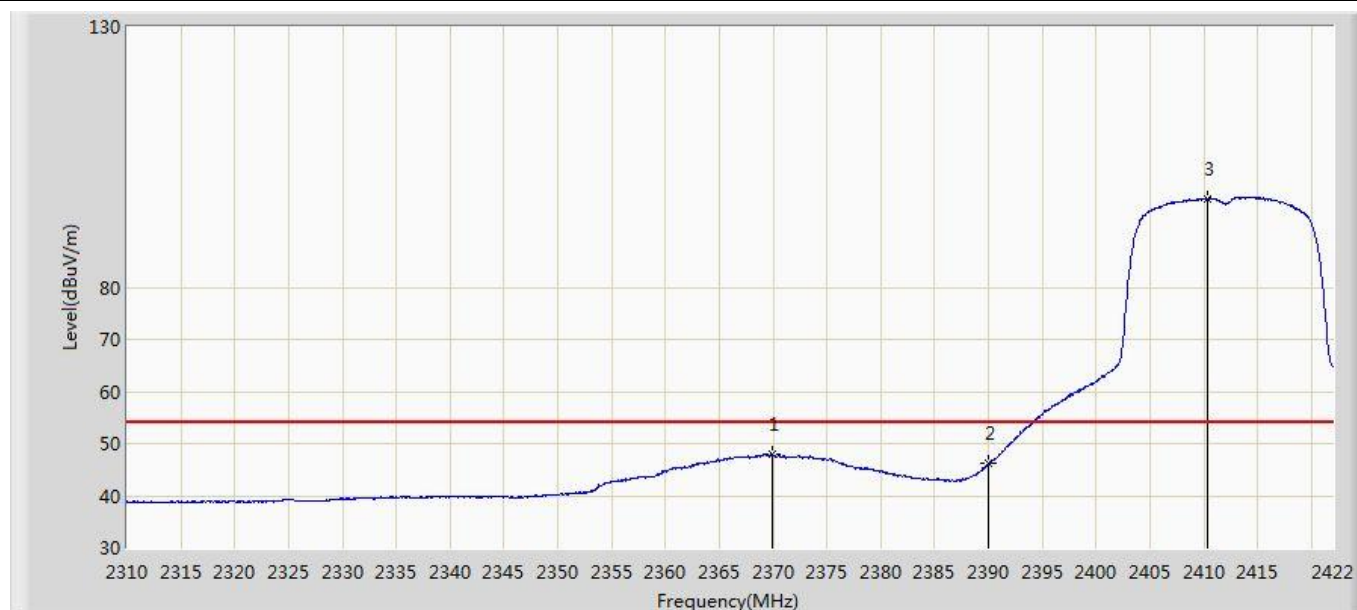


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2369.864	47.996	58.524	-6.004	54.000	-10.528	AV
2		2390.000	46.091	56.530	-7.909	54.000	-10.439	AV
3	*	2410.408	97.017	107.364	N/A	N/A	-10.347	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2462MHz Ant 3	

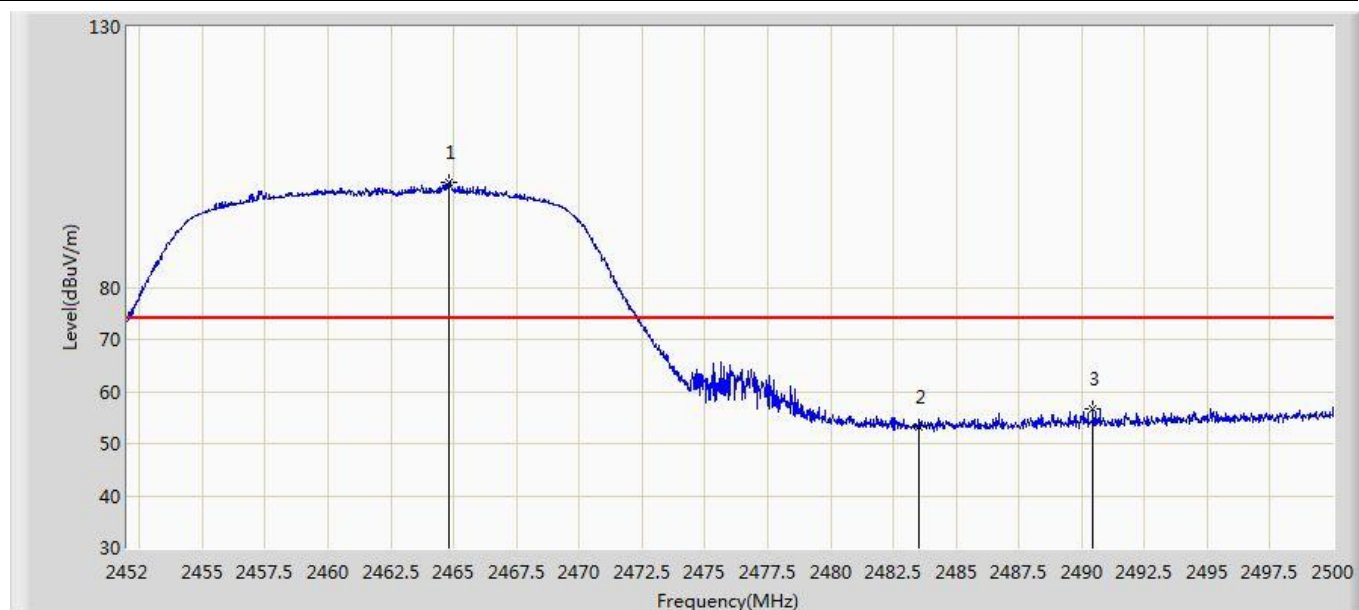


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2464.816	100.041	110.147	N/A	N/A	-10.106	PK
2		2483.500	53.253	63.276	-20.747	74.000	-10.023	PK
3		2490.448	56.679	66.672	-17.321	74.000	-9.993	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2462MHz Ant 3	

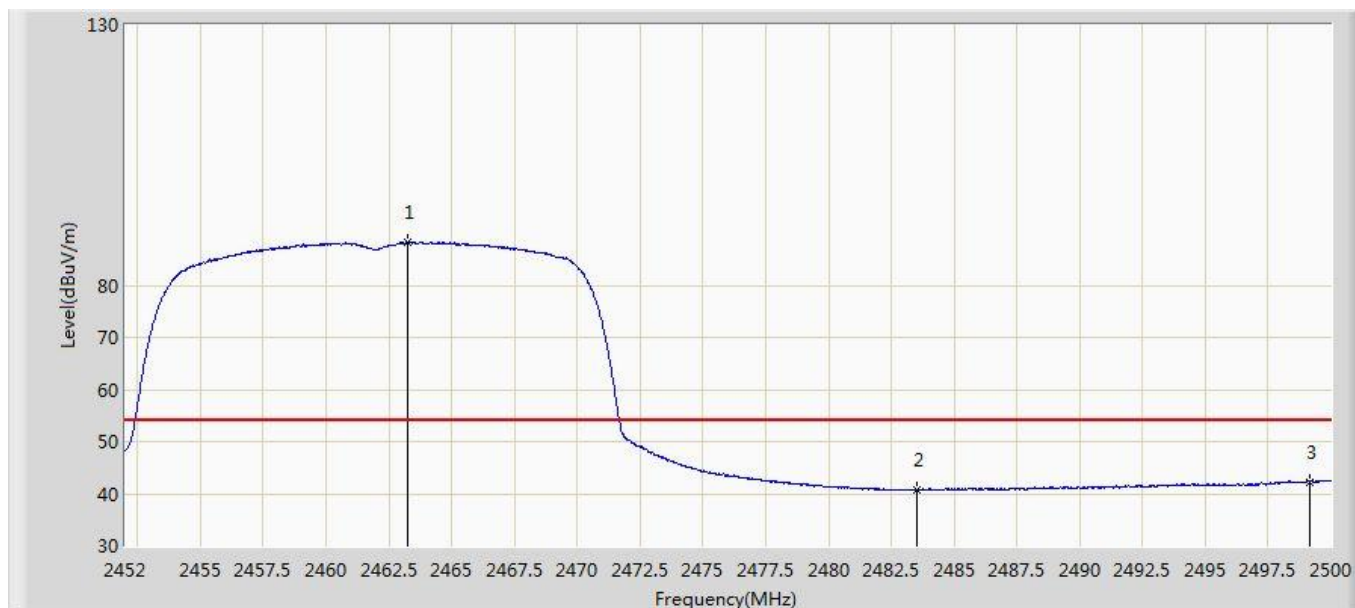


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.256	88.303	98.416	N/A	N/A	-10.113	AV
2		2483.500	40.684	50.707	-13.316	54.000	-10.023	AV
3		2499.160	42.285	52.243	-11.715	54.000	-9.958	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2462MHz Ant 3	

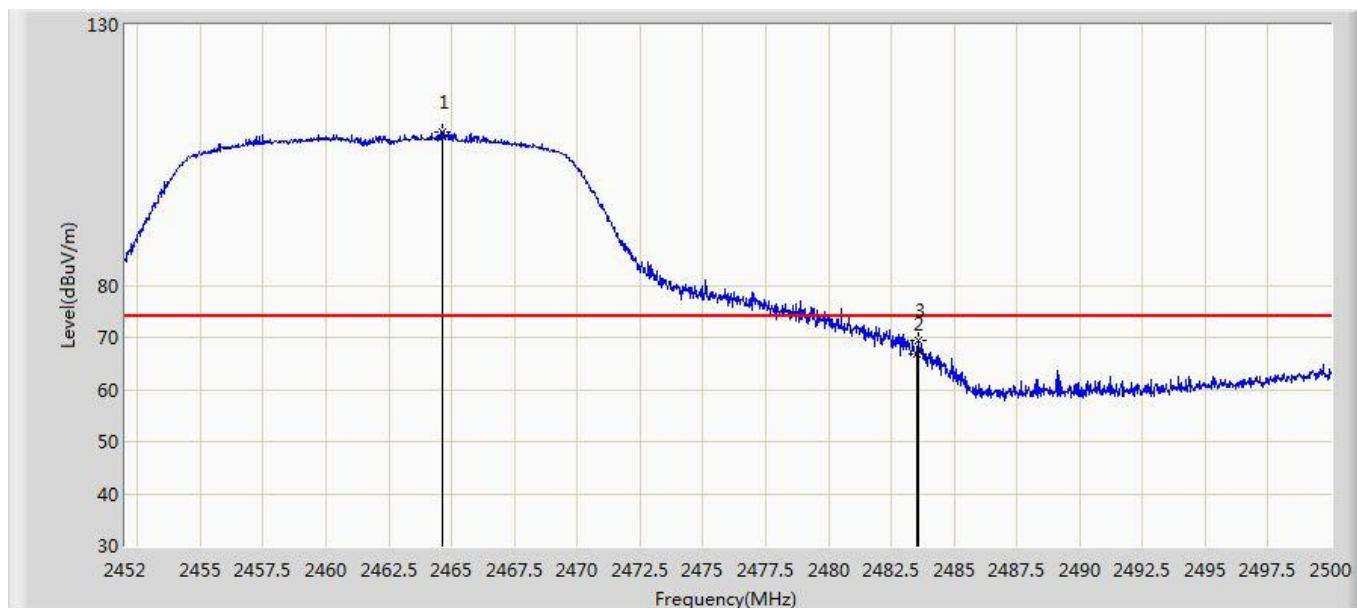


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2464.648	109.390	119.497	N/A	N/A	-10.107	PK
2		2483.500	66.739	76.762	-7.261	74.000	-10.023	PK
3		2483.608	69.445	79.467	-4.555	74.000	-10.022	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 2:Transmit 802.11g at 2462MHz Ant 3	

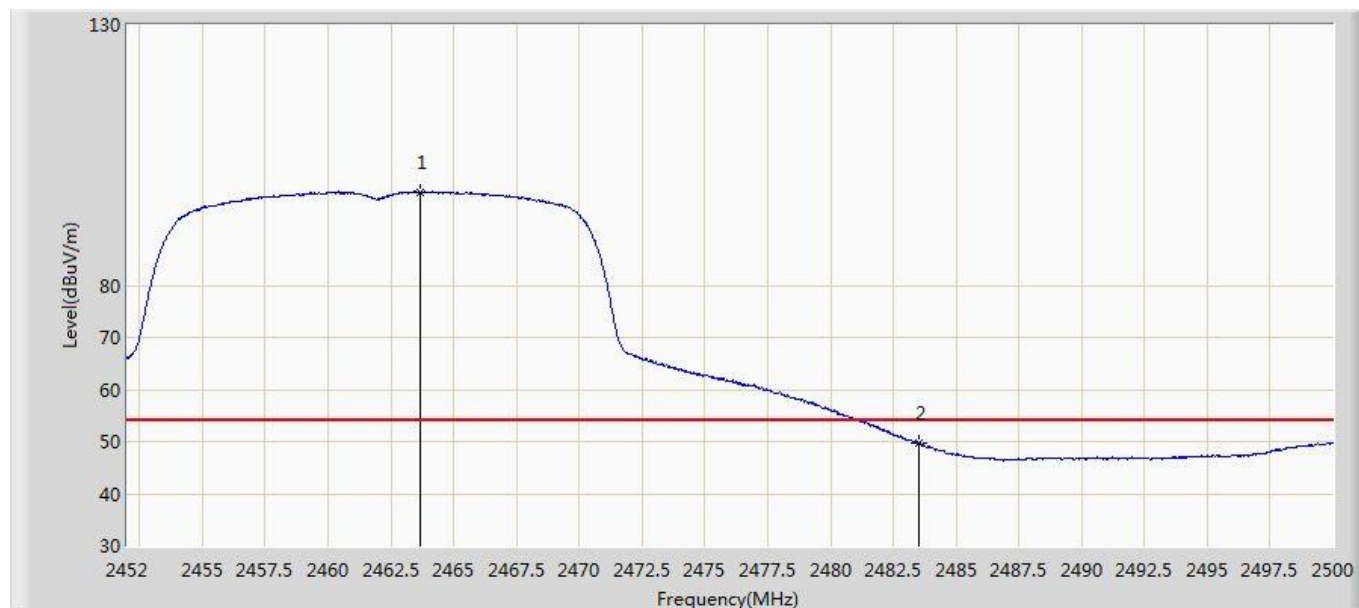


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.640	97.892	108.003	N/A	N/A	-10.111	AV
2		2483.500	49.590	59.613	-4.410	54.000	-10.023	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2412MHz Ant 3	

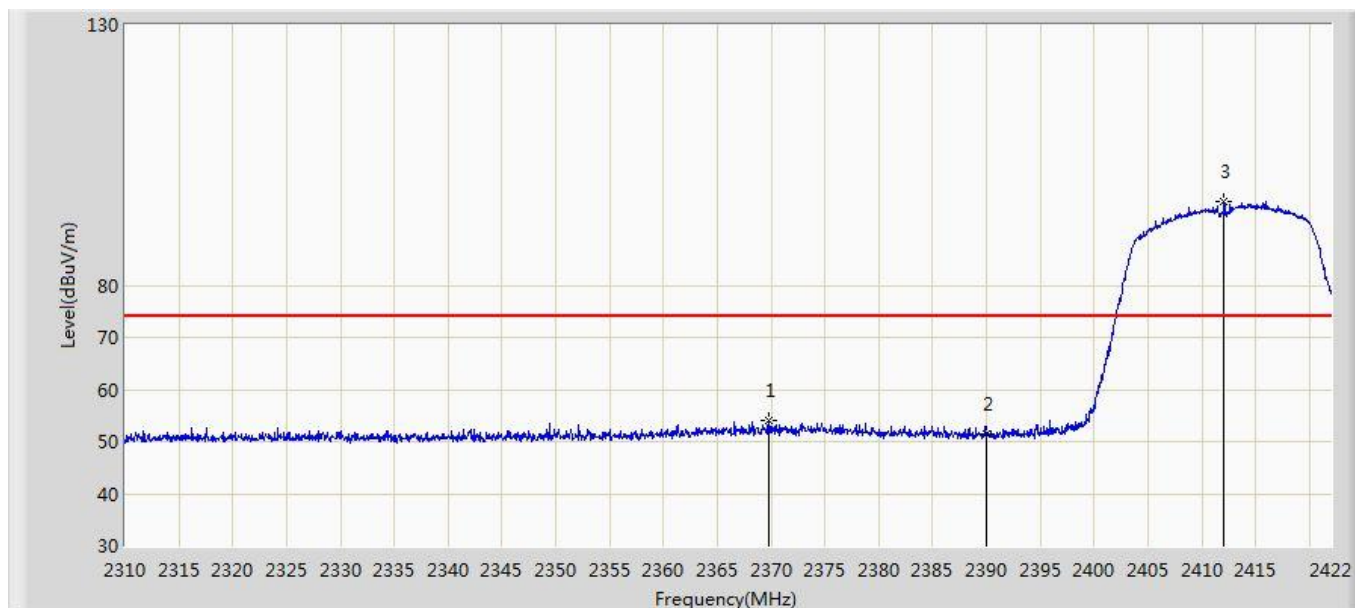


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2369.752	53.992	64.521	-20.008	74.000	-10.529	PK
2		2390.000	51.332	61.771	-22.668	74.000	-10.439	PK
3	*	2412.032	96.110	106.450	N/A	N/A	-10.340	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2412MHz Ant 3	

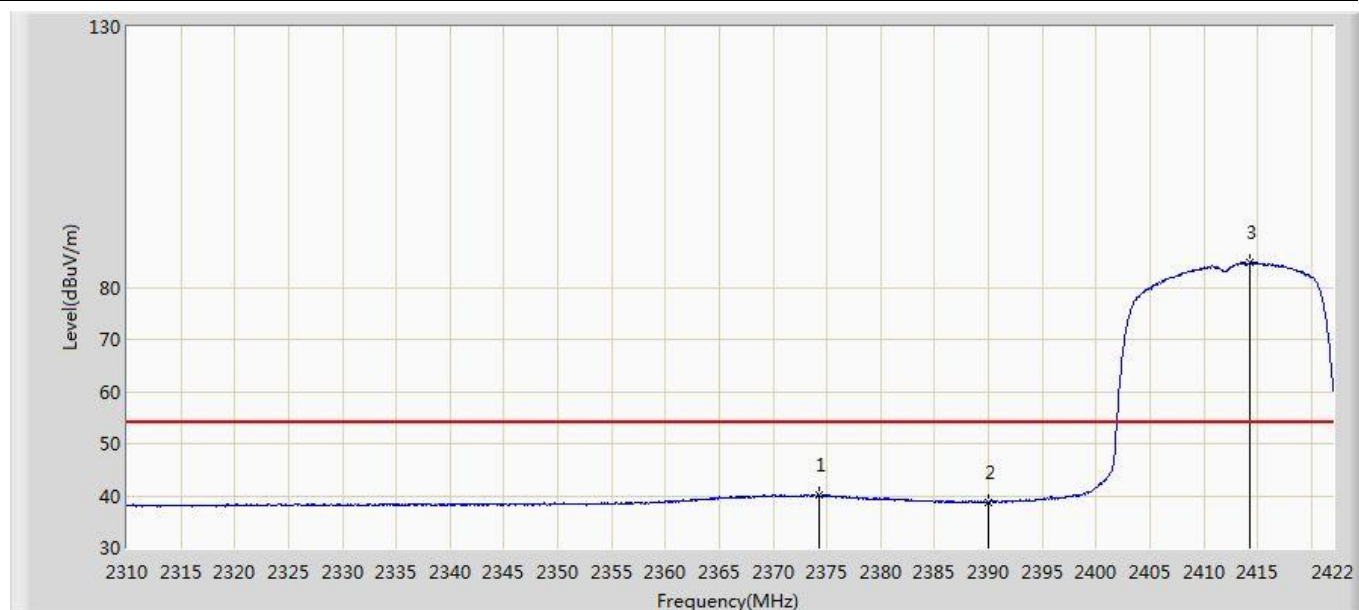


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2374.288	40.108	50.617	-13.892	54.000	-10.509	AV
2		2390.000	38.812	49.251	-15.188	54.000	-10.439	AV
3	*	2414.216	84.644	94.974	N/A	N/A	-10.330	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2412MHz Ant 3	

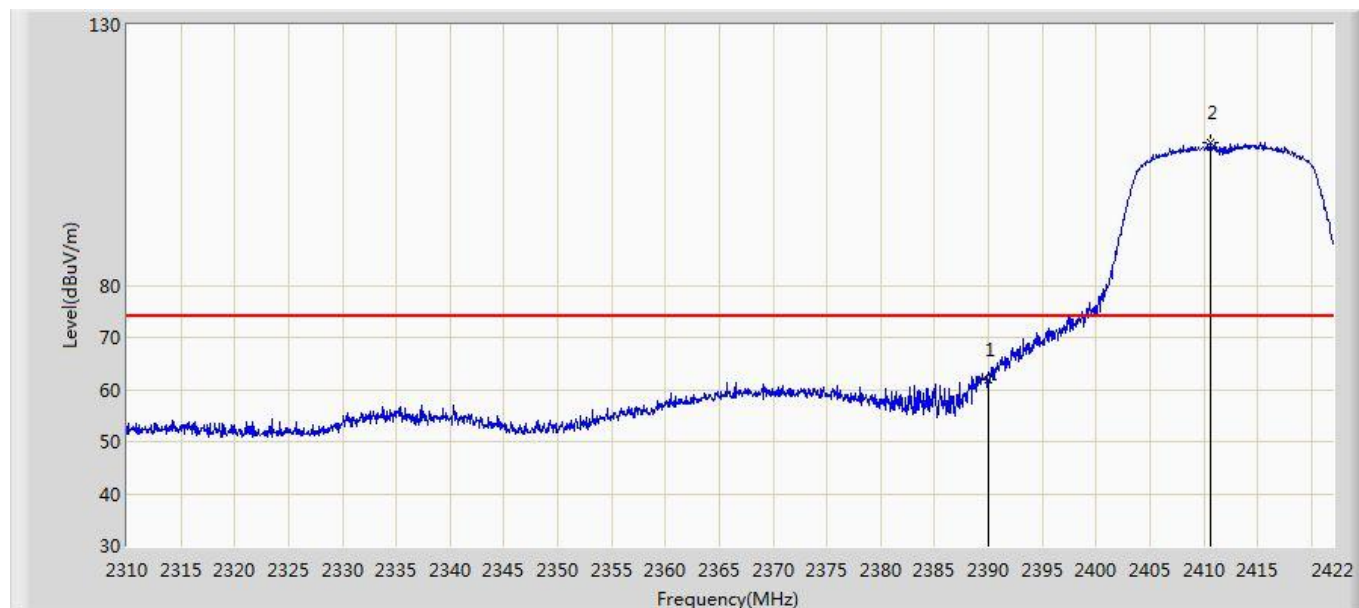


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	61.869	72.308	-12.131	74.000	-10.439	PK
2	*	2410.688	107.274	117.620	N/A	N/A	-10.346	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2412MHz Ant 3	

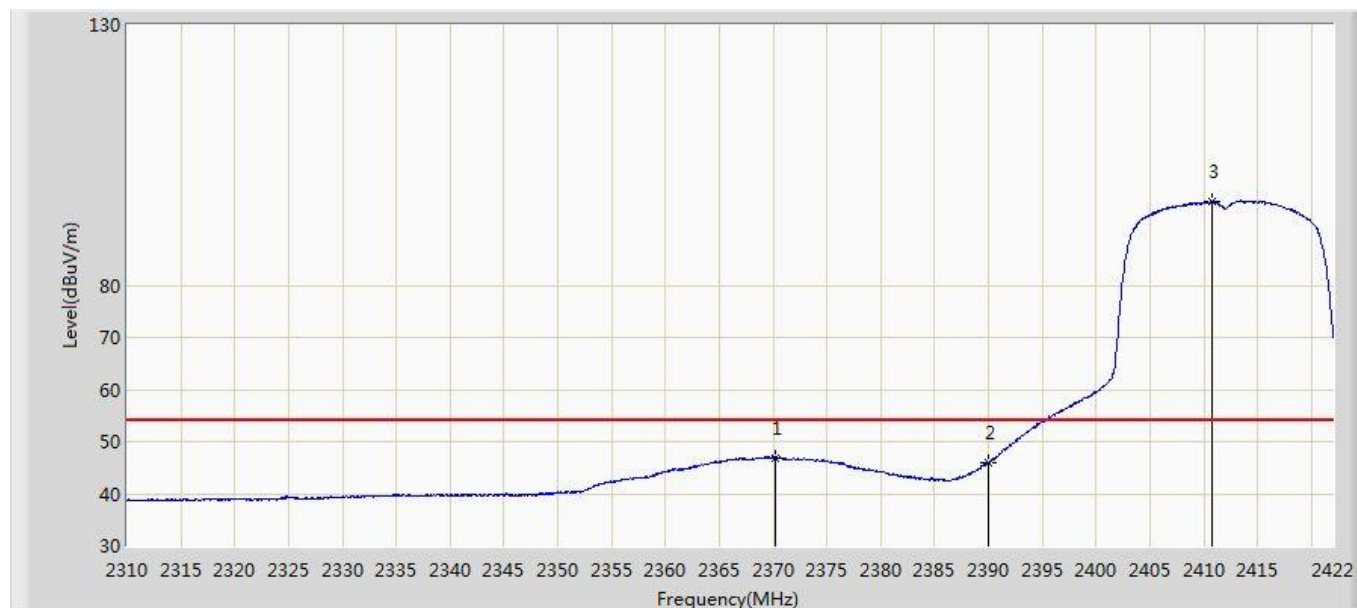


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2370.256	46.945	57.471	-7.055	54.000	-10.526	AV
2		2390.000	45.981	56.420	-8.019	54.000	-10.439	AV
3	*	2410.744	96.109	106.455	N/A	N/A	-10.346	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2462MHz Ant 3	

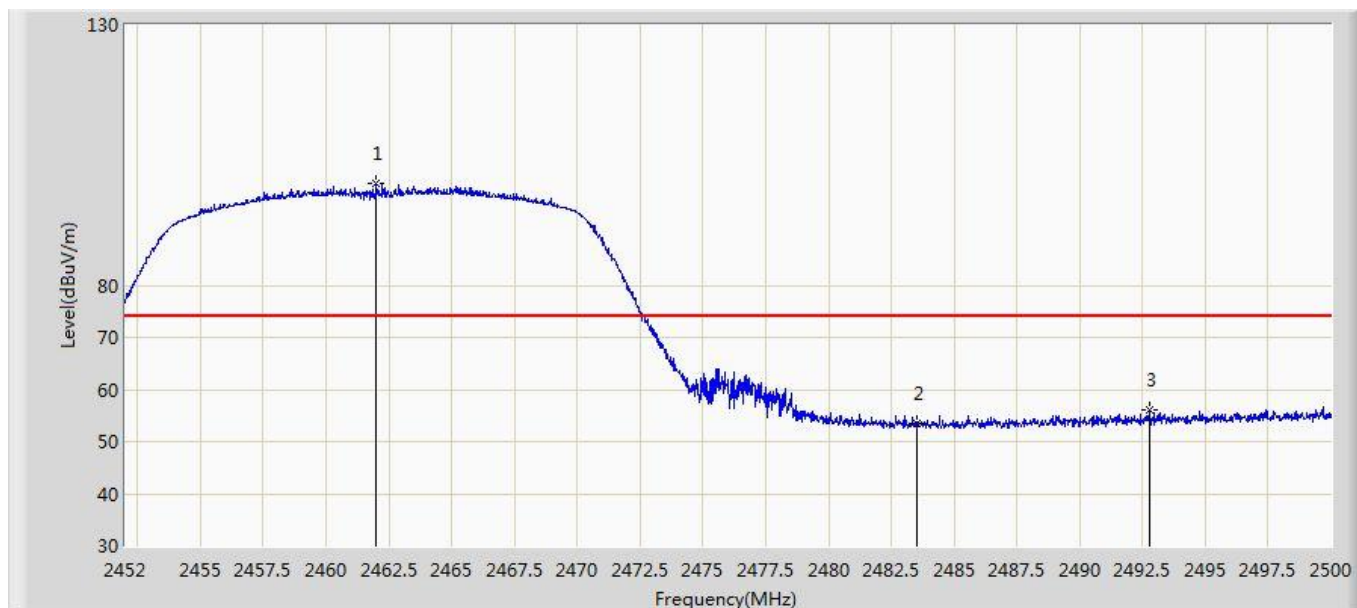


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2462.008	99.495	109.613	N/A	N/A	-10.118	PK
2		2483.500	53.474	63.497	-20.526	74.000	-10.023	PK
3		2492.752	56.071	66.055	-17.929	74.000	-9.984	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2462MHz Ant 3	

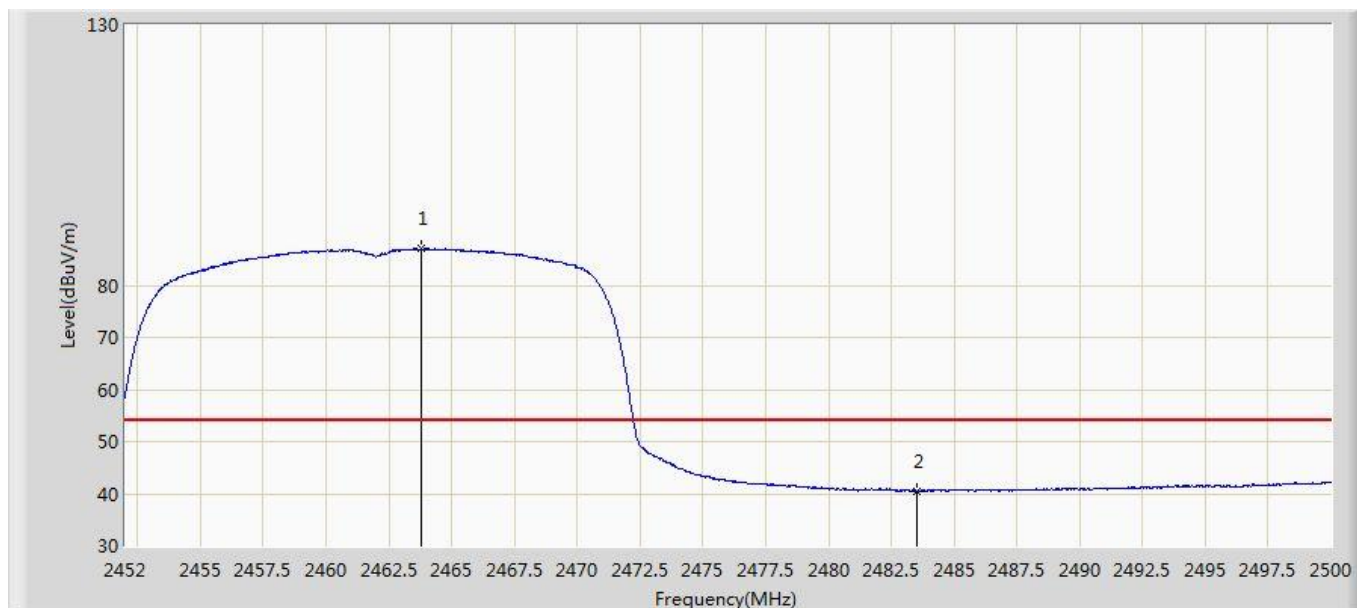


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.784	87.017	97.127	N/A	N/A	-10.110	AV
2		2483.500	40.513	50.536	-13.487	54.000	-10.023	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2462MHz Ant 3	

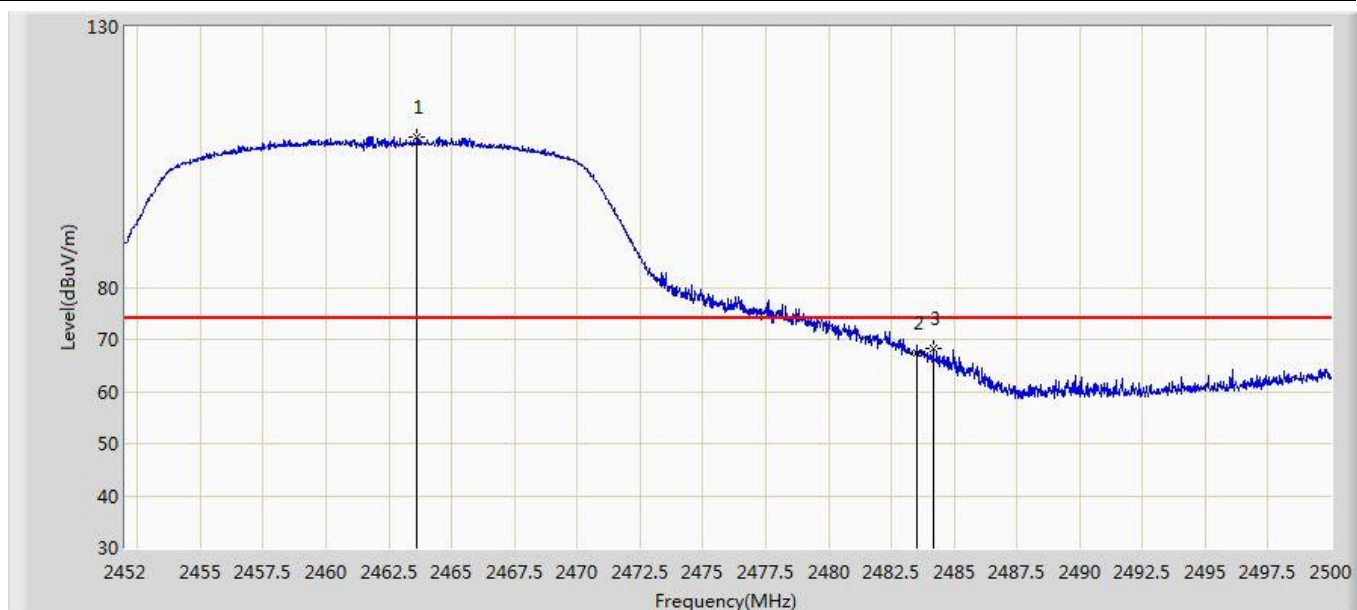


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.616	108.719	118.830	N/A	N/A	-10.111	PK
2		2483.500	67.413	77.436	-6.587	74.000	-10.023	PK
3		2484.160	68.270	78.290	-5.730	74.000	-10.020	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at 2462MHz Ant 3	

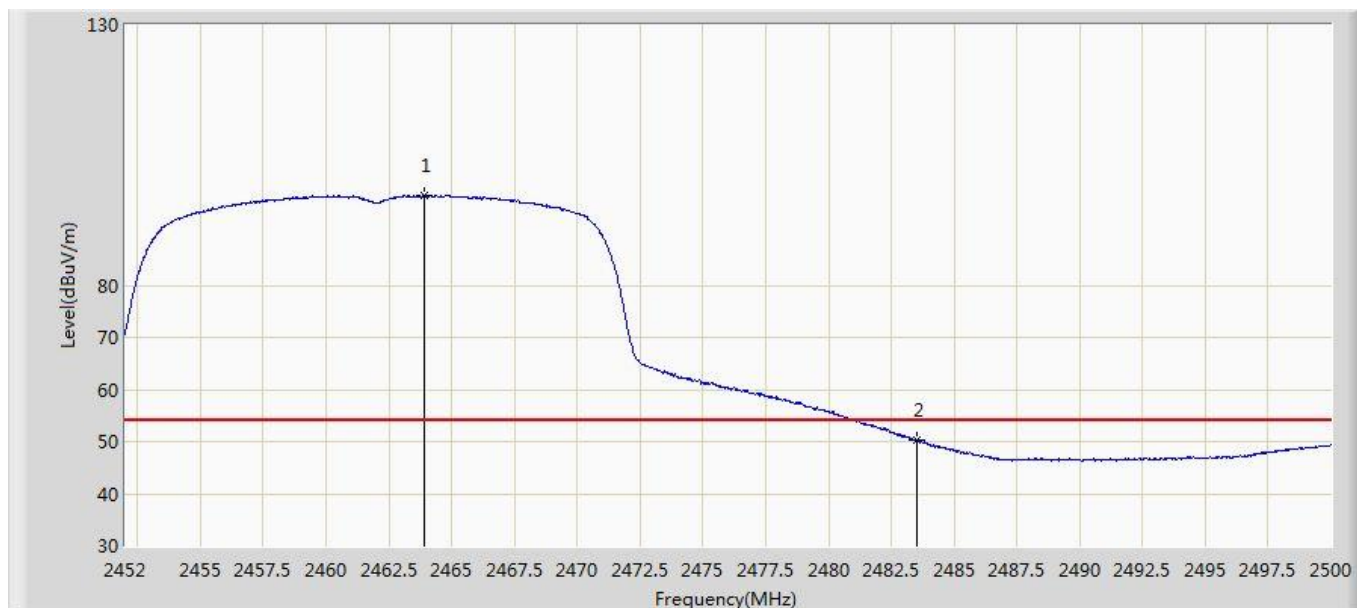


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2463.904	97.276	107.386	N/A	N/A	-10.110	AV
2		2483.500	50.278	60.301	-3.722	54.000	-10.023	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2422MHz Ant 3	

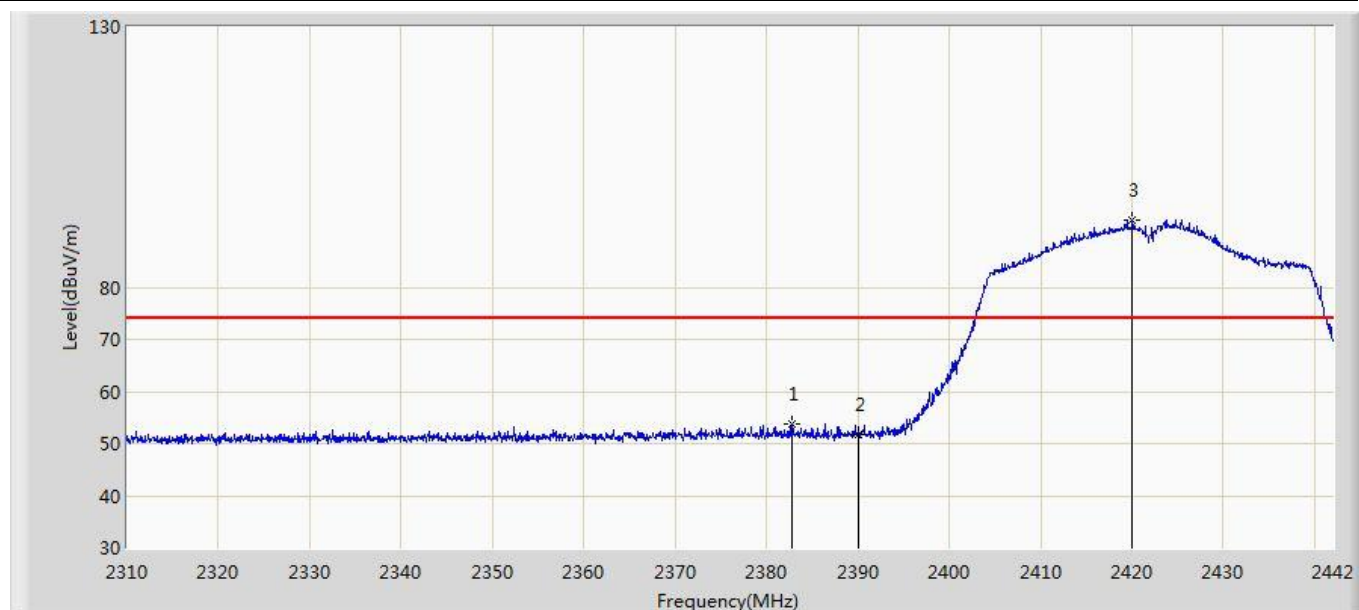


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2382.864	53.789	64.260	-20.211	74.000	-10.471	PK
2		2390.000	51.798	62.237	-22.202	74.000	-10.439	PK
3	*	2420.022	92.932	103.237	N/A	N/A	-10.305	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2422MHz Ant 3	

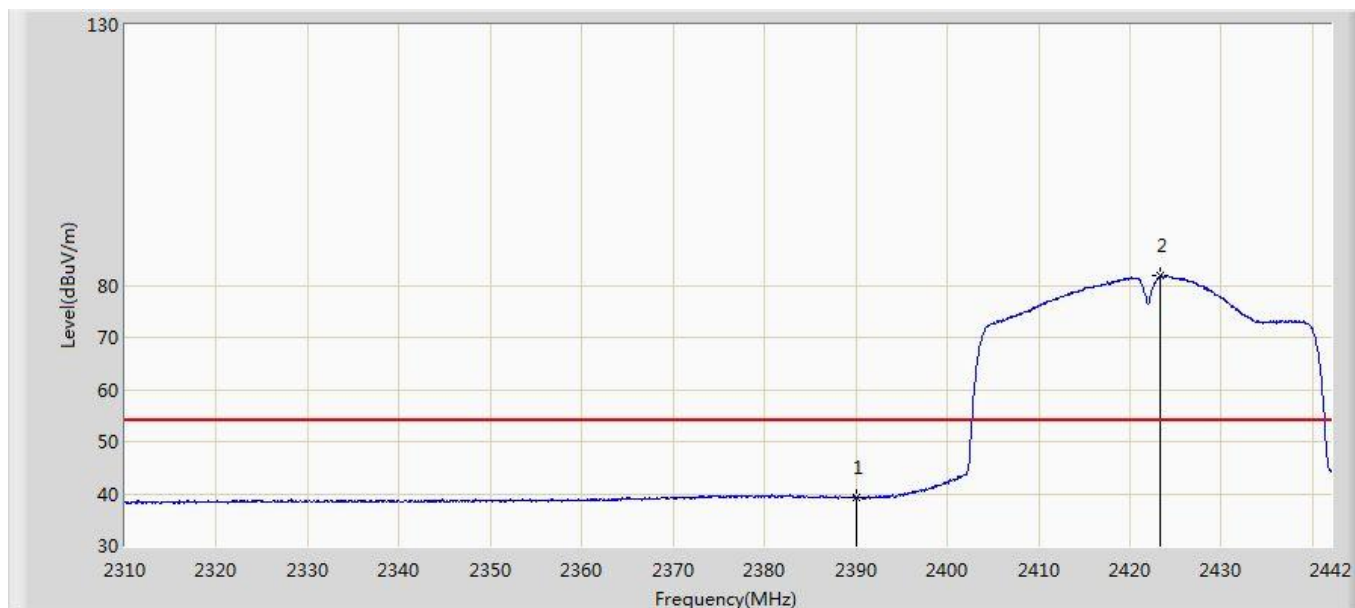


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	39.158	49.597	-14.842	54.000	-10.439	AV
2	*	2423.322	81.964	92.254	N/A	N/A	-10.290	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2422MHz Ant 3	

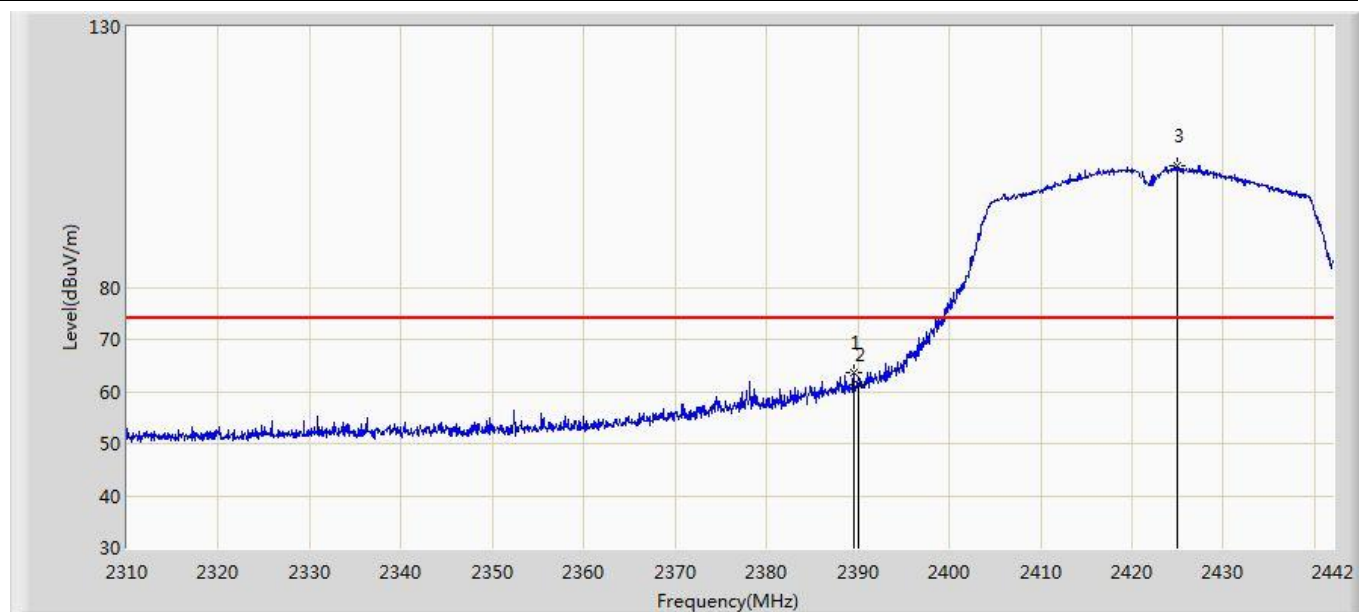


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2389.530	63.759	74.200	-10.241	74.000	-10.441	PK
2		2390.000	61.290	71.729	-12.710	74.000	-10.439	PK
3	*	2424.906	103.257	113.540	N/A	N/A	-10.283	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2422MHz Ant 3	

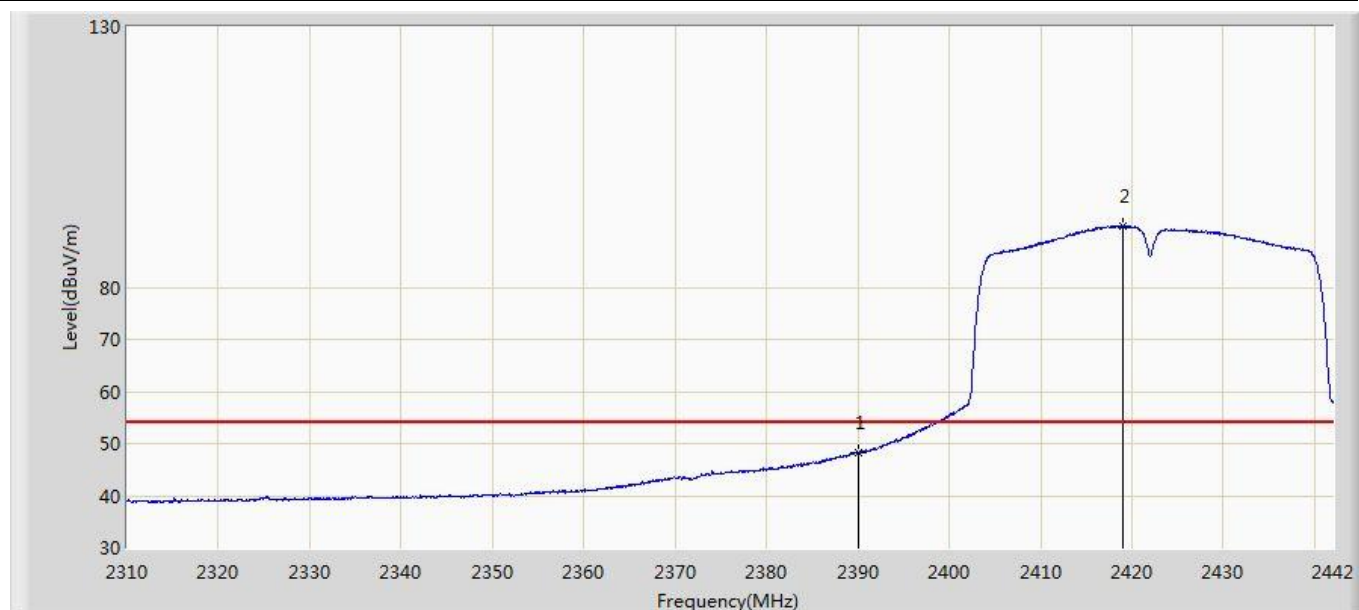


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	48.257	58.696	-5.743	54.000	-10.439	AV
2	*	2419.032	91.662	101.971	N/A	N/A	-10.309	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2452MHz Ant 3	

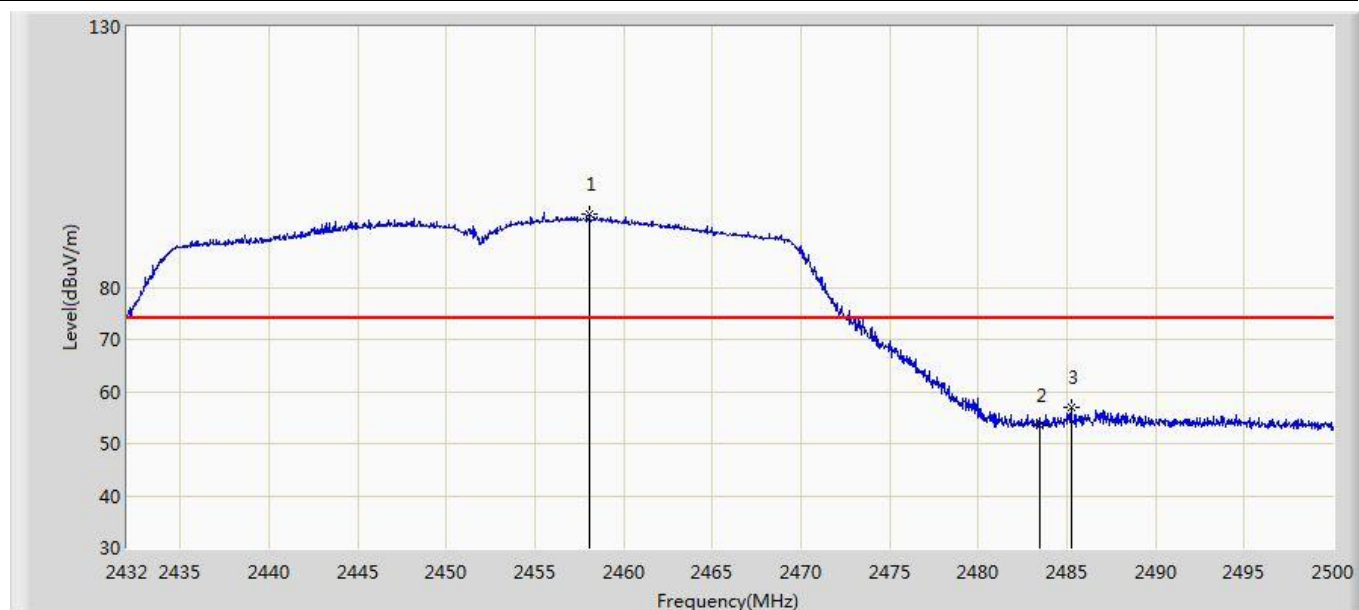


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2458.078	93.945	104.081	N/A	N/A	-10.136	PK
2		2483.500	53.464	63.487	-20.536	74.000	-10.023	PK
3		2485.244	56.886	66.901	-17.114	74.000	-10.015	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2452MHz Ant 3	

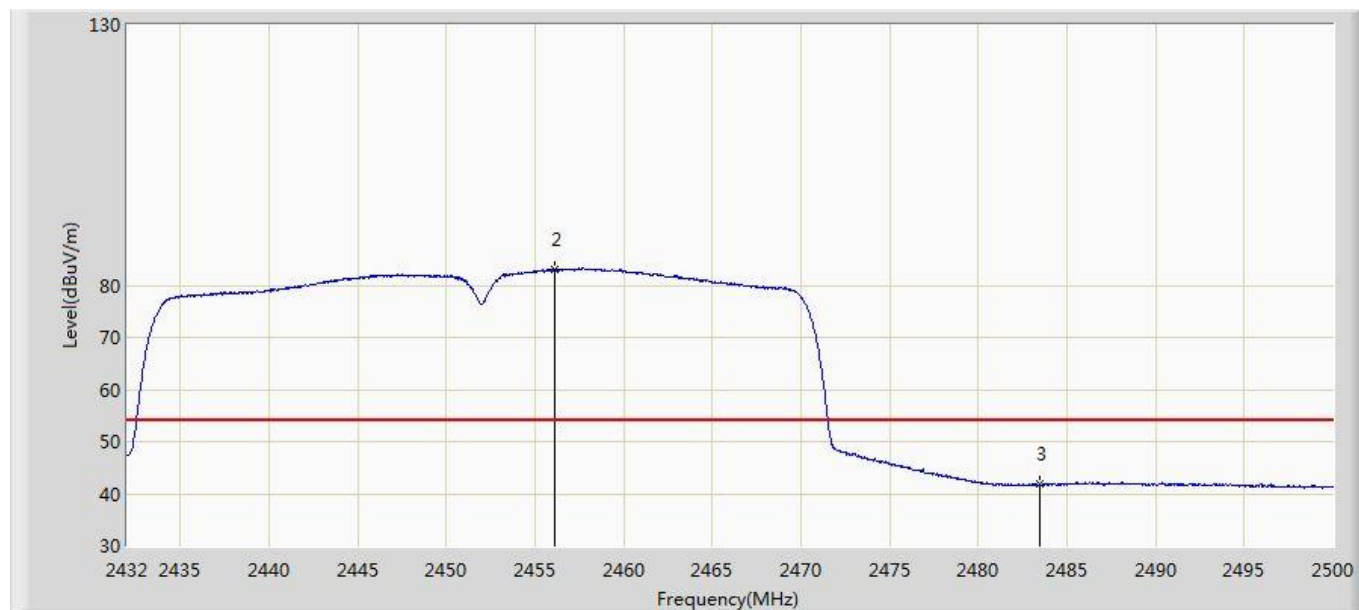


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
2	*	2456.106	83.111	93.256	N/A	N/A	-10.145	AV
3		2483.500	41.748	51.771	-12.252	54.000	-10.023	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2452MHz Ant 3	

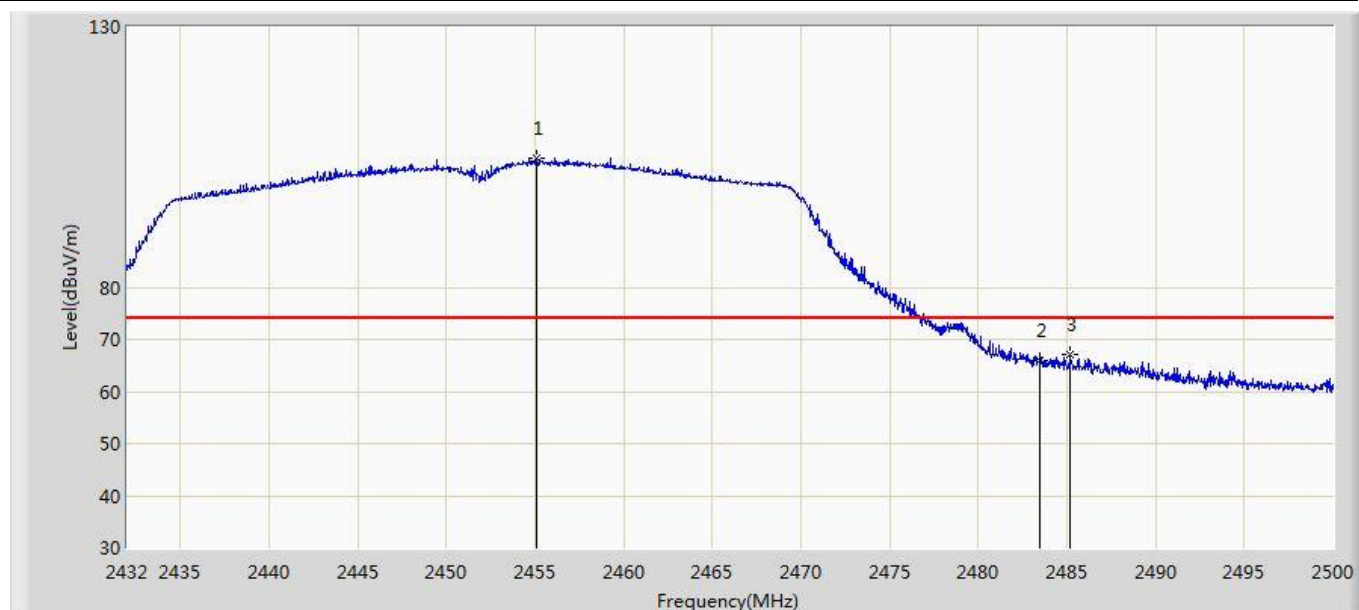


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2455.052	104.855	115.004	N/A	N/A	-10.149	PK
2		2483.500	65.972	75.995	-8.028	74.000	-10.023	PK
3		2485.210	66.987	77.002	-7.013	74.000	-10.015	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/09/03 - 16:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at 2452MHz Ant 3	

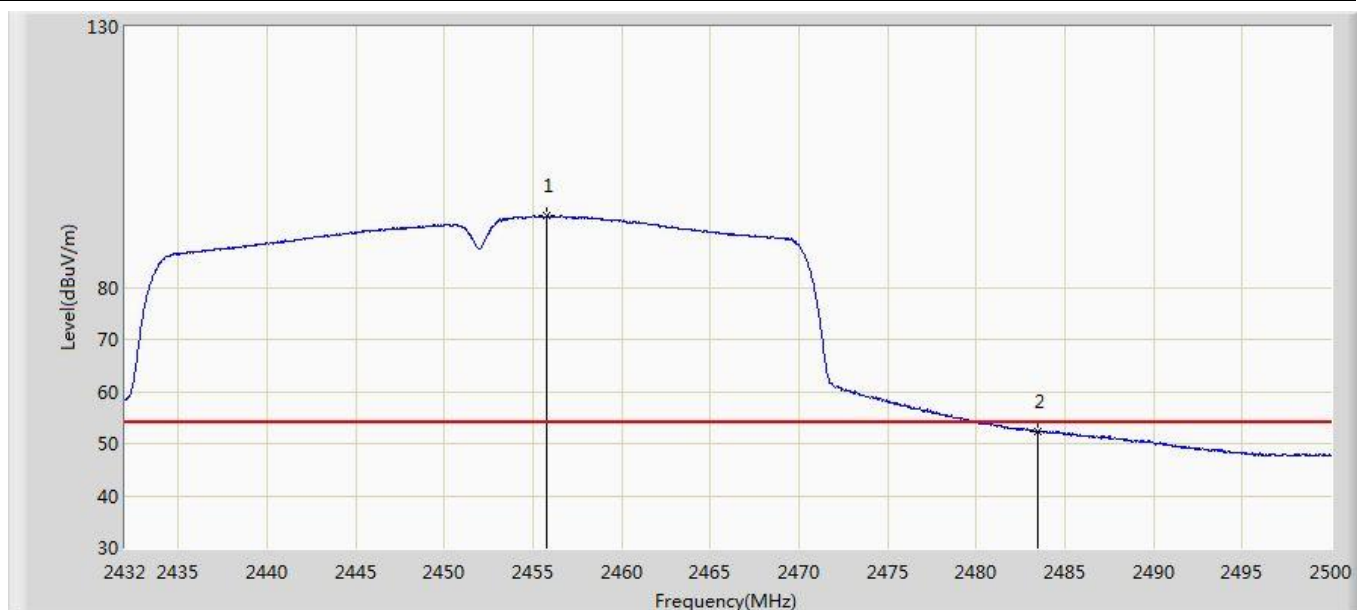


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2455.800	93.849	103.995	N/A	N/A	-10.146	AV
2		2483.500	52.384	62.407	-1.616	54.000	-10.023	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 19:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at2412MHz Ant1+2+3	

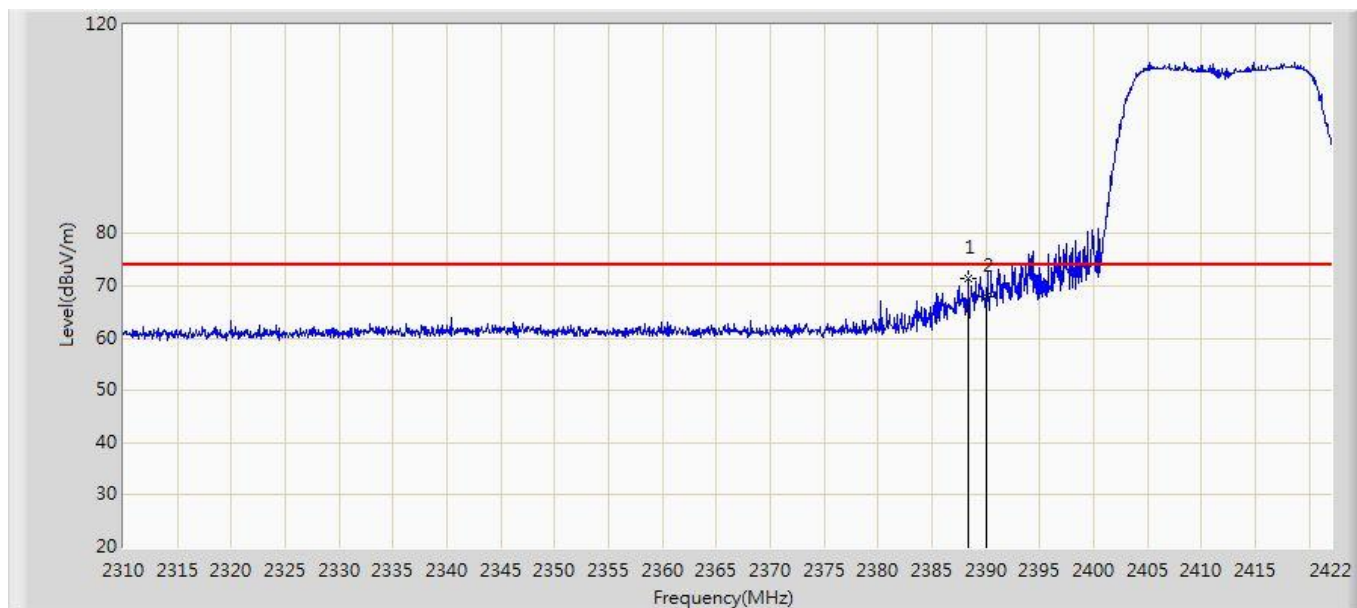


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2388.344	71.429	38.325	-2.571	74.000	33.104	PK
2		2390.000	67.848	34.737	-6.152	74.000	33.111	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 19:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at2412MHz Ant1+2+3	

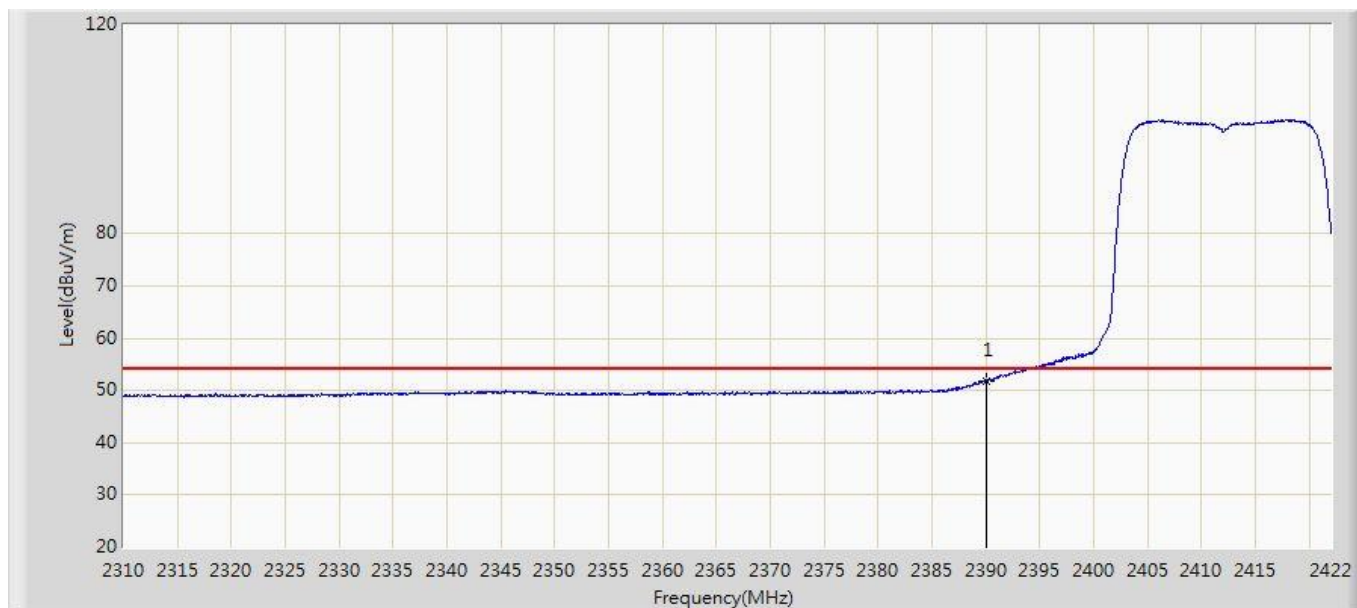


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	51.803	18.692	-2.197	54.000	33.111	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 20:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at2412MHz Ant1+2+3	

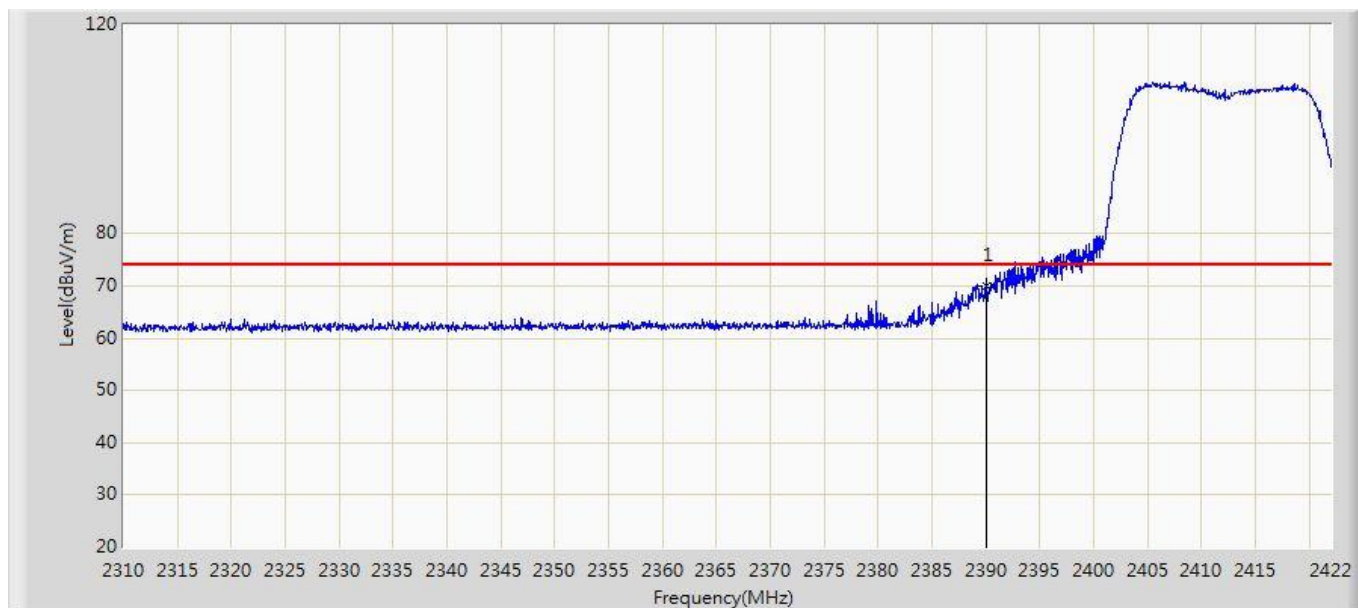


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	69.903	36.792	-4.097	74.000	33.111	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 20:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at2412MHz Ant1+2+3	

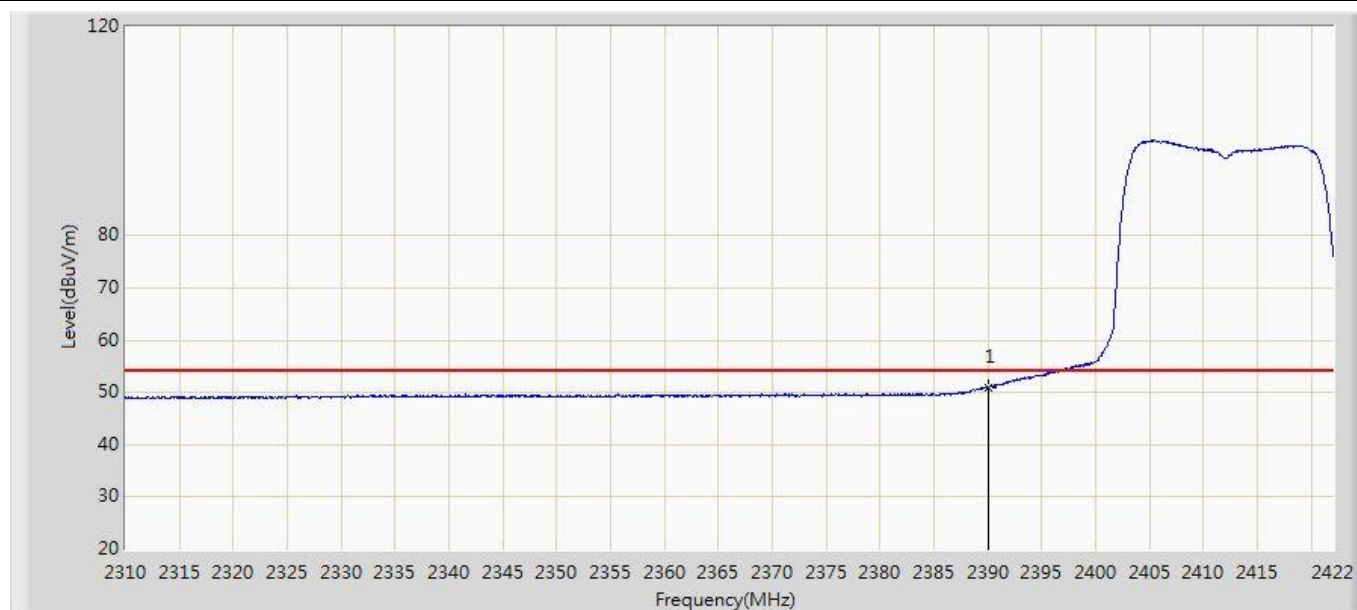


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.937	17.826	-3.063	54.000	33.111	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 20:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at2462MHz Ant1+2+3	

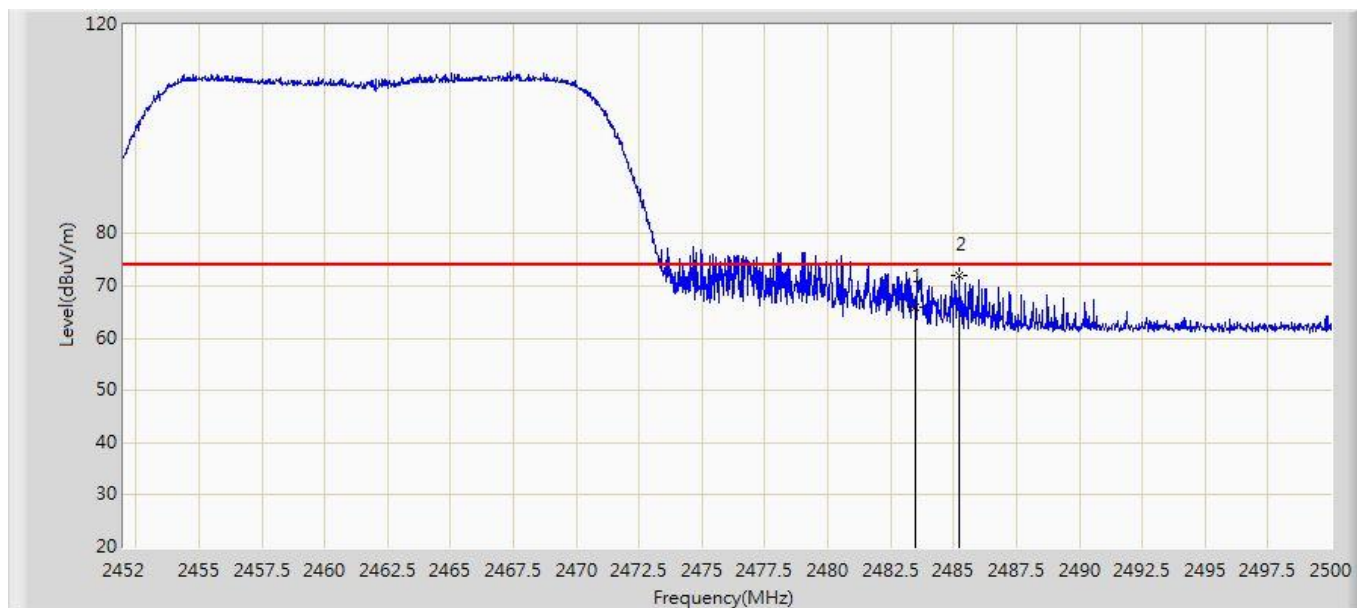


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	65.885	32.393	-8.115	74.000	33.493	PK
2	*	2485.240	71.900	38.401	-2.100	74.000	33.500	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 20:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at2462MHz Ant1+2+3	

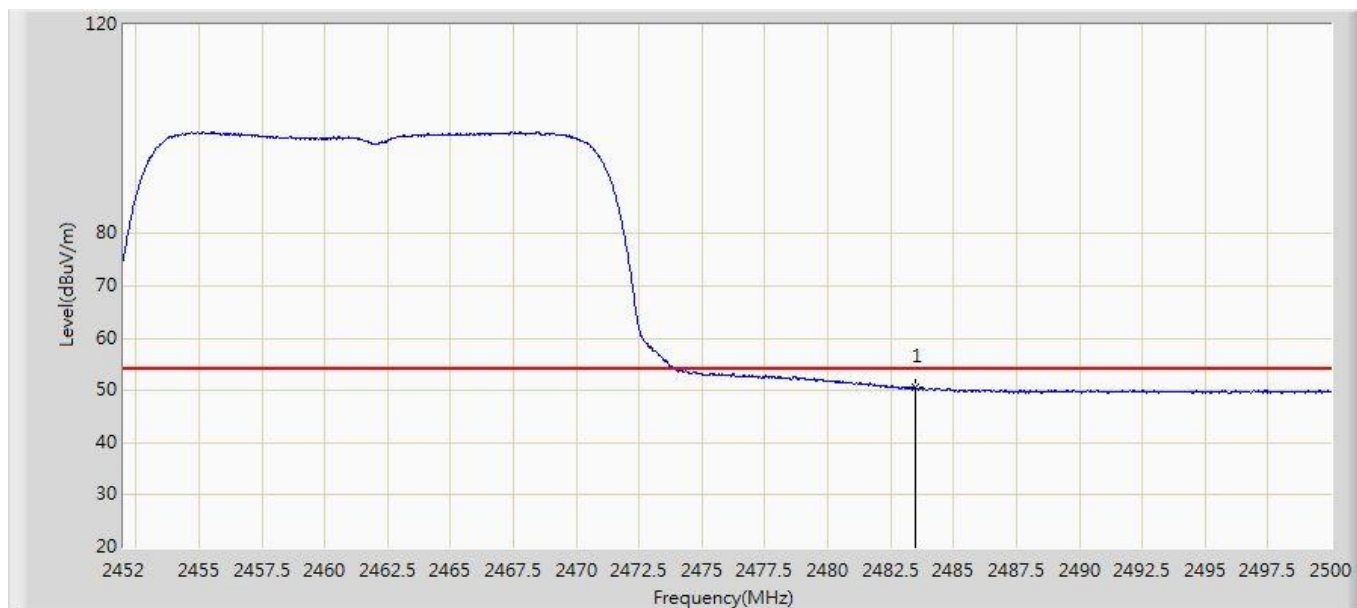


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.492	17.000	-3.508	54.000	33.493	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 20:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at2462MHz Ant1+2+3	

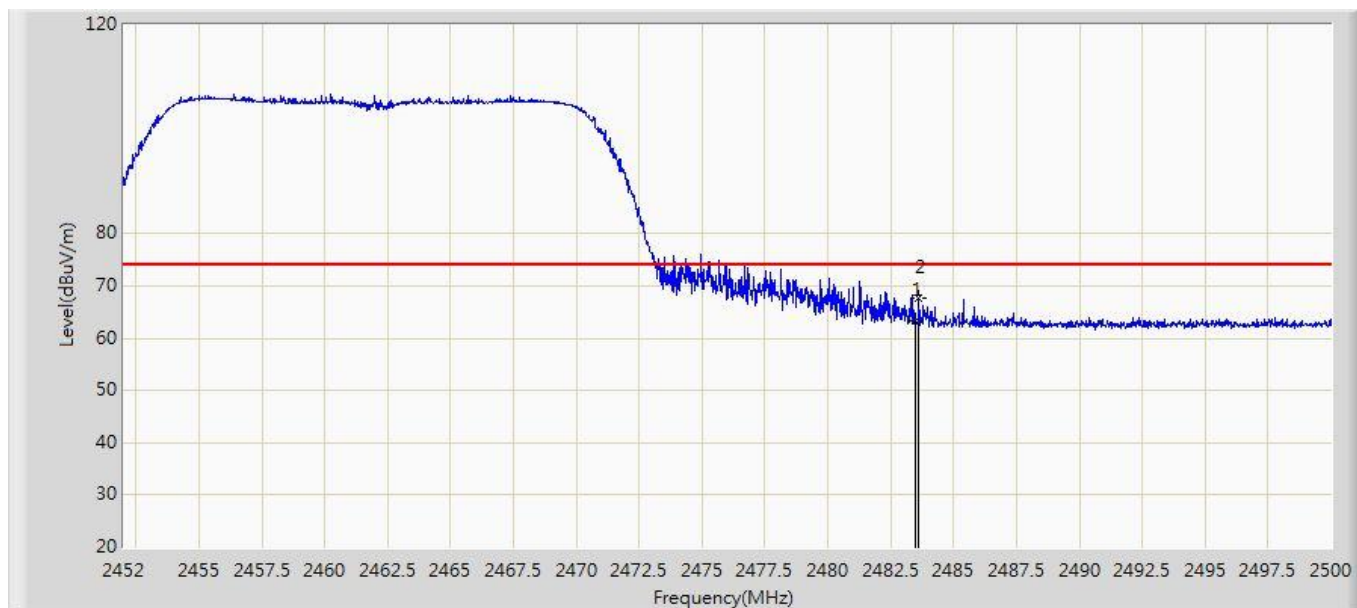


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	63.254	29.762	-10.746	74.000	33.493	PK
2	*	2483.608	67.698	34.205	-6.302	74.000	33.492	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 20:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 3:Transmit 802.11n(20MHz) at2462MHz Ant1+2+3	

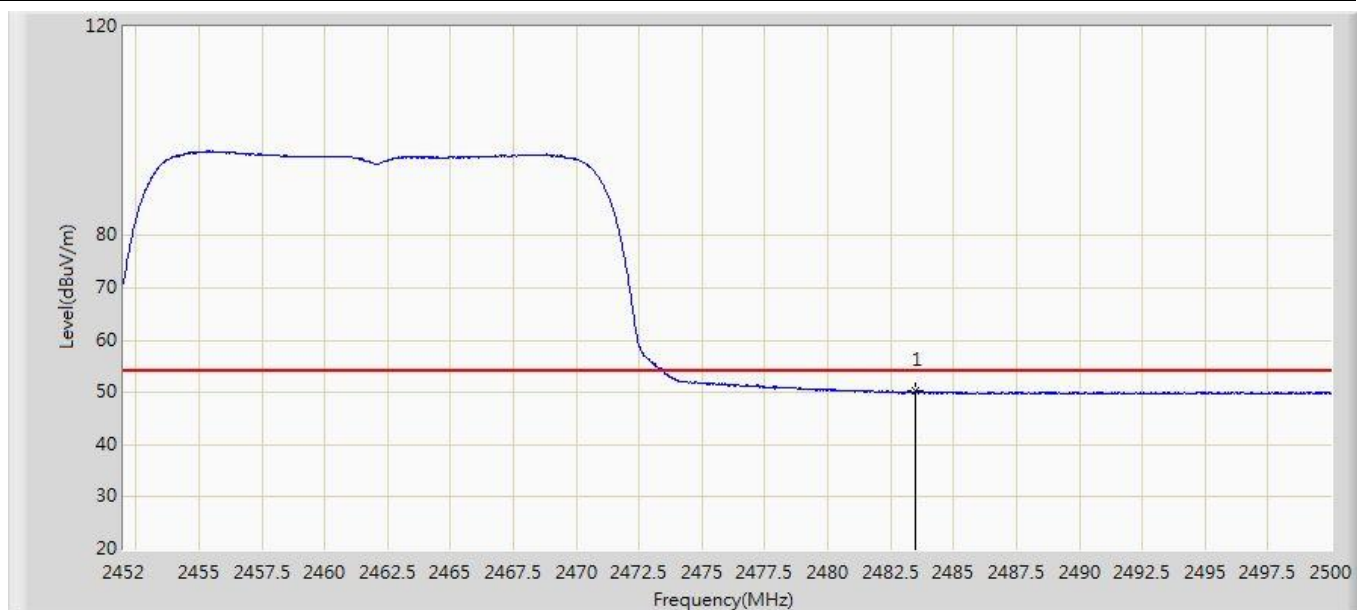


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.309	16.817	-3.691	54.000	33.493	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 19:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at2422MHz Ant1+2+3	

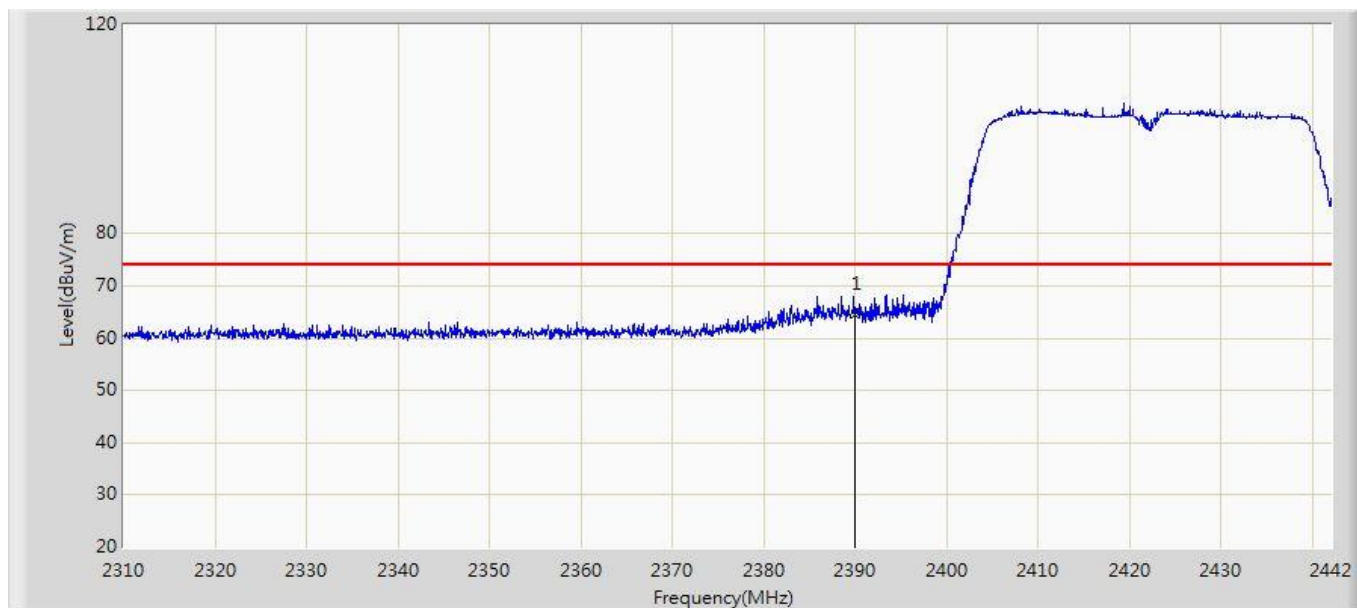


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	64.437	31.326	-9.563	74.000	33.111	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 19:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at2422MHz Ant1+2+3	

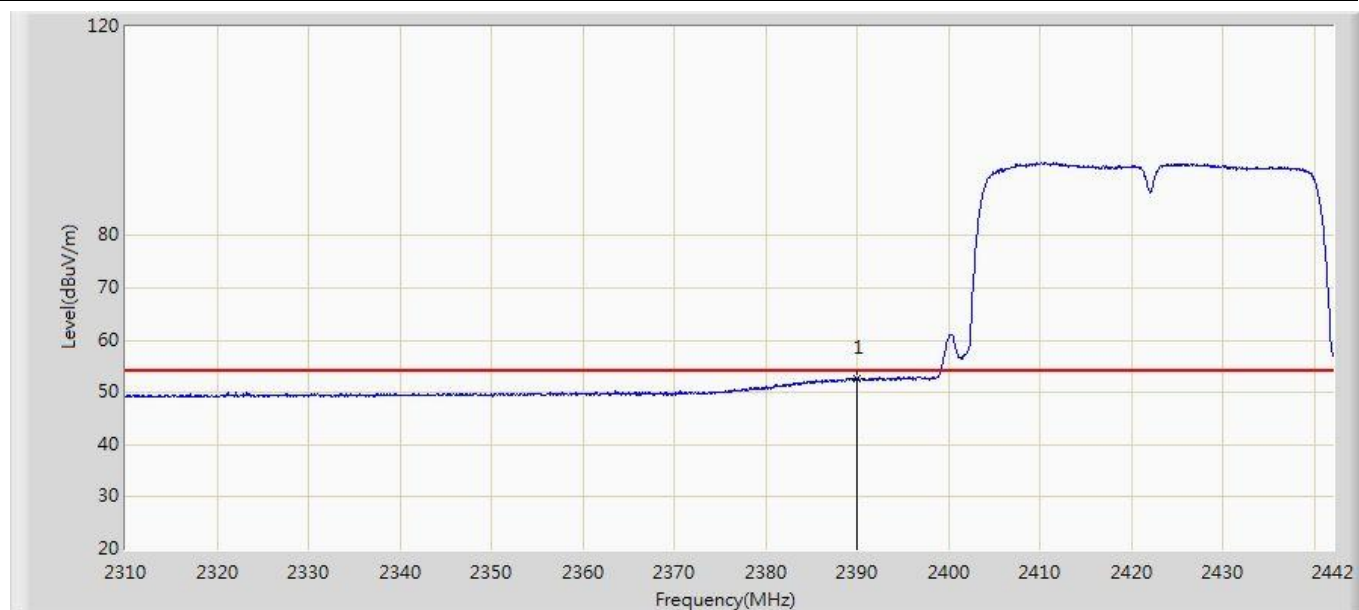


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	52.653	19.542	-1.347	54.000	33.111	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 19:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at2422MHz Ant1+2+3	

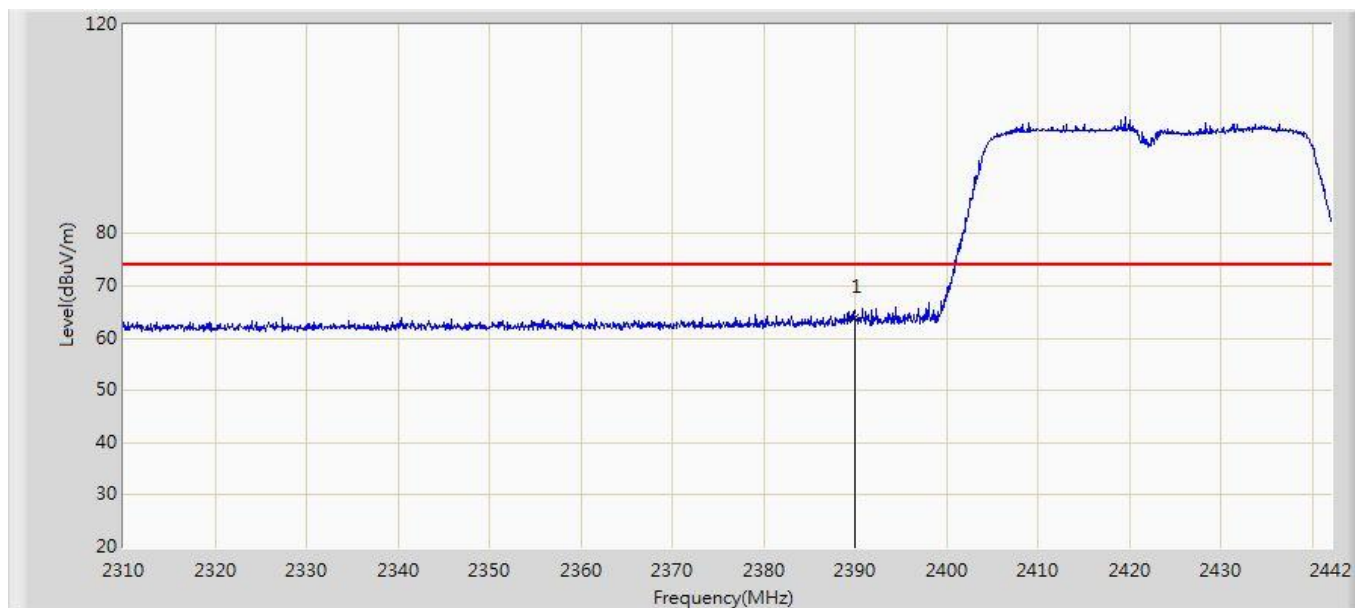


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	64.067	30.956	-9.933	74.000	33.111	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 19:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at2422MHz Ant1+2+3	

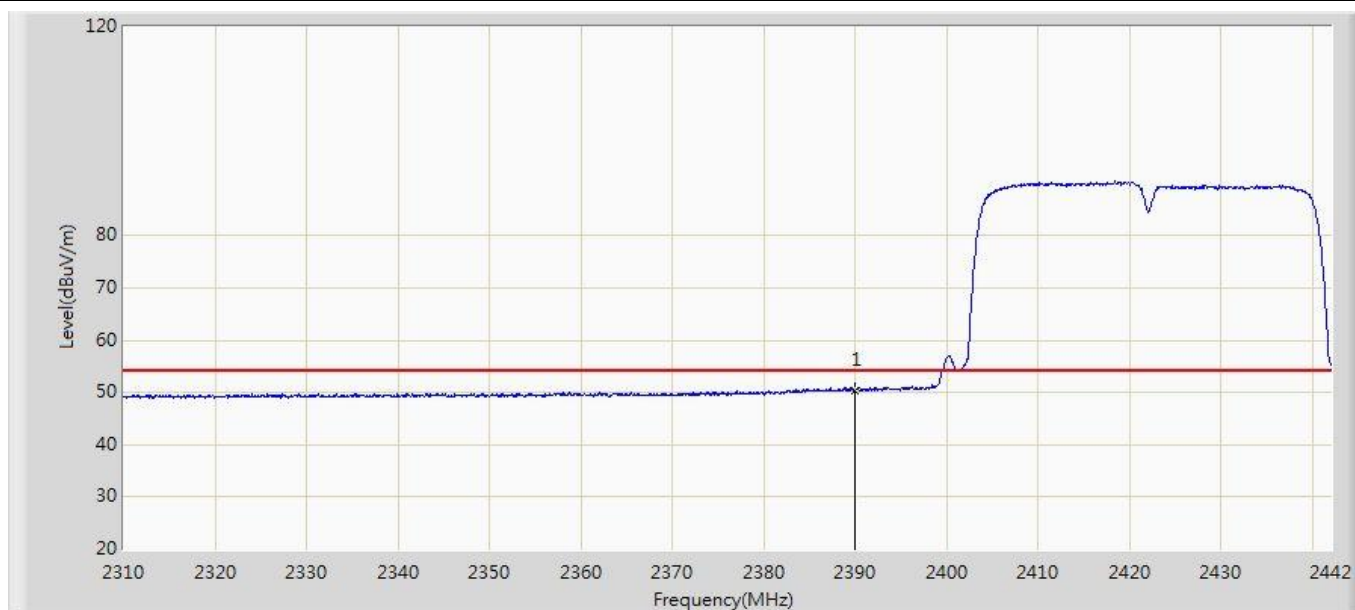


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.418	17.307	-3.582	54.000	33.111	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 12:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at2452MHz Ant1+2+3	

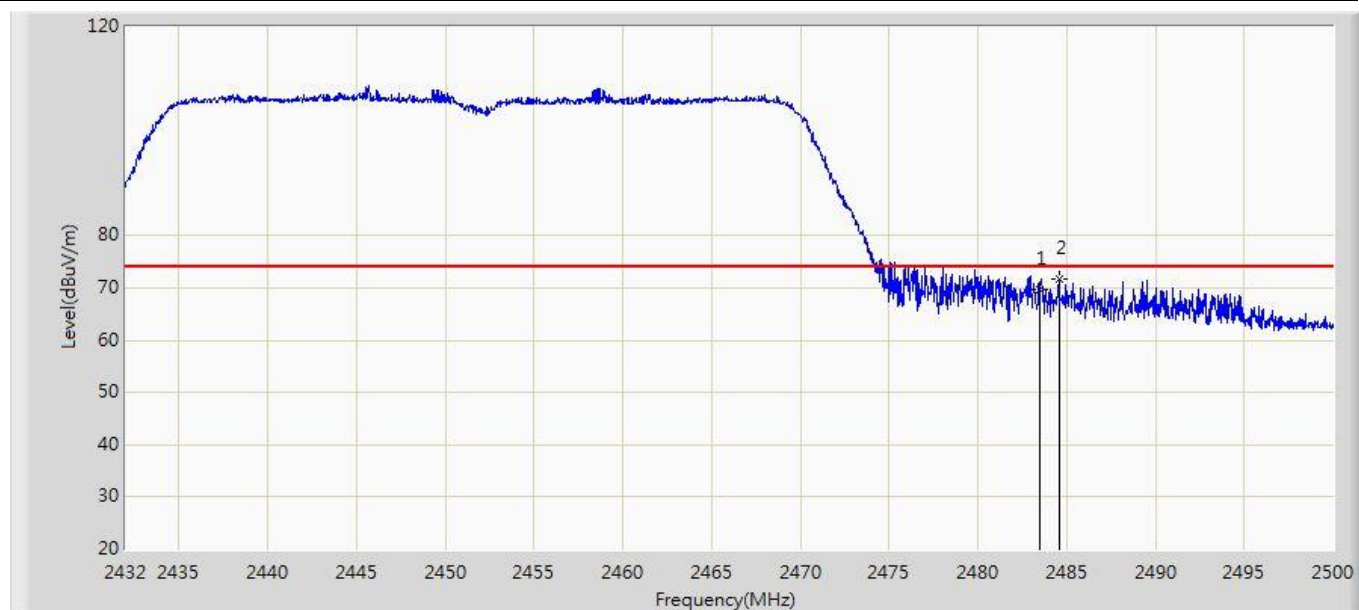


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	69.594	36.102	-4.406	74.000	33.493	PK
2	*	2484.598	71.664	38.167	-2.336	74.000	33.497	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 12:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Horizontal
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at2452MHz Ant1+2+3	

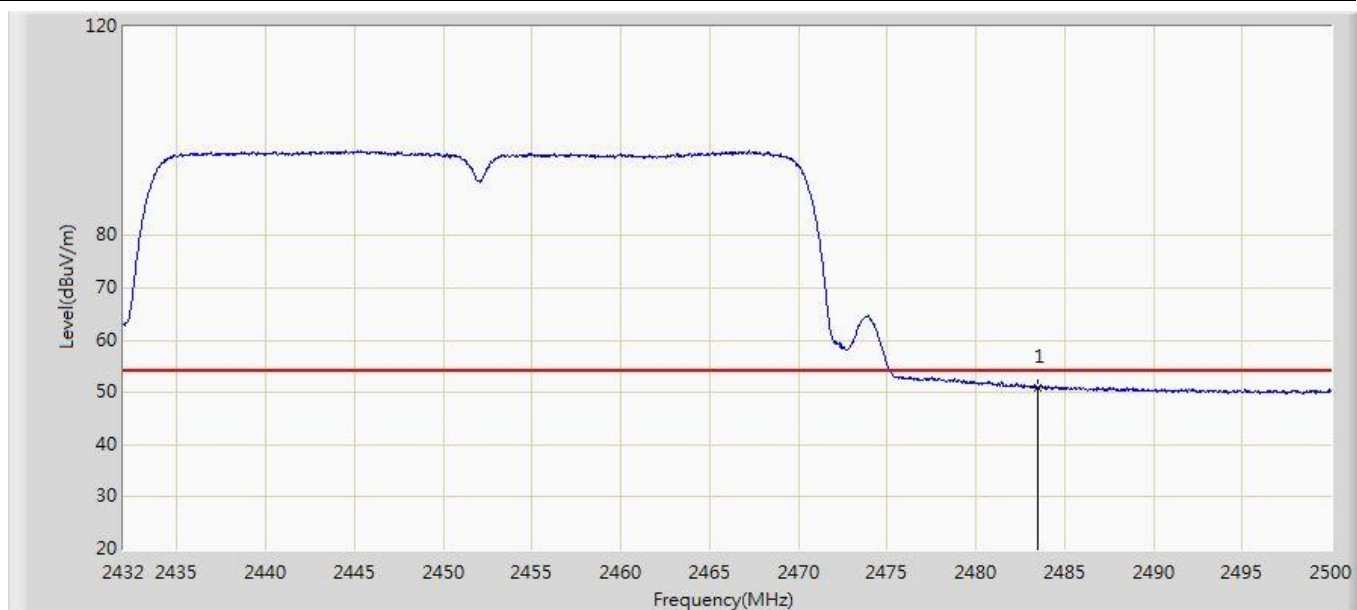


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.915	17.423	-3.085	54.000	33.493	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 12:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at2452MHz Ant1+2+3	

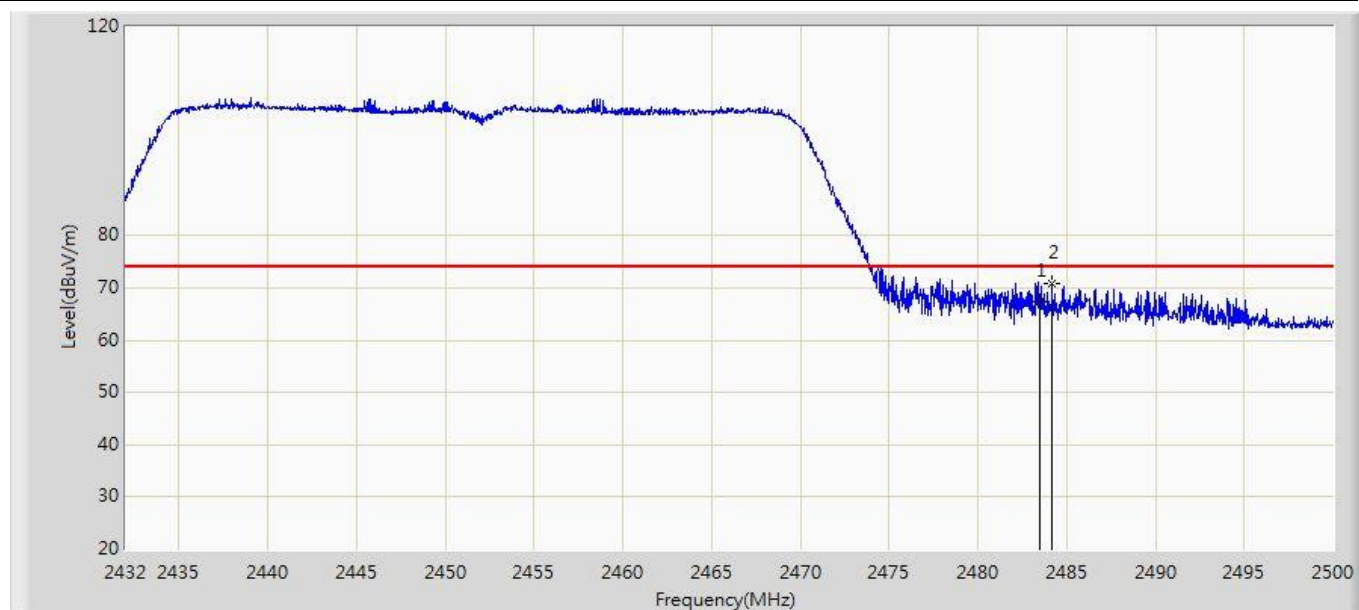


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	67.404	33.912	-6.596	74.000	33.493	PK
2	*	2484.190	70.844	37.349	-3.156	74.000	33.495	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: AC102	Time: 2016/11/09 - 12:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: N/A	Polarity: Vertical
EUT: NVR	Power: AC 120V/60Hz
Note: Mode 4:Transmit 802.11n(40MHz) at2452MHz Ant1+2+3	

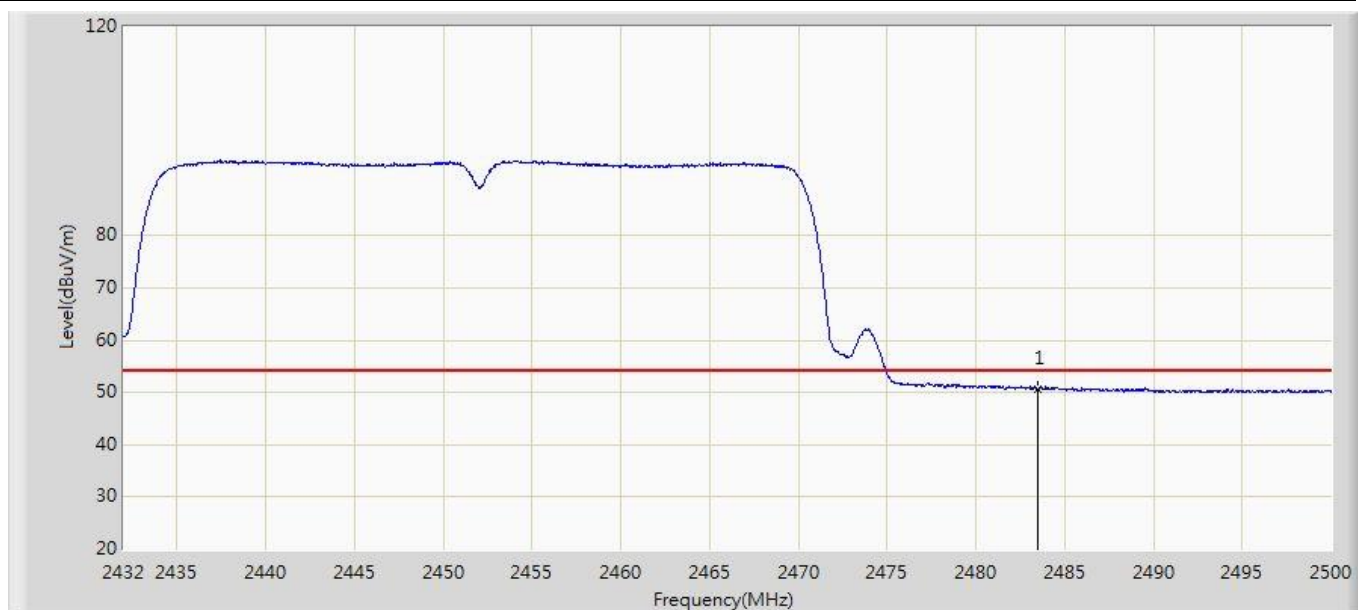

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.683	17.191	-3.317	54.000	33.493	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

_____ The End _____