



# CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhuhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-27521059 Fax: +86-755-27521011 Http://www.sz-ctc.org.cn

## TEST REPORT

**Report No.** ..... : **CTC2024193201**

**FCC ID**..... : **2A22Z-C203**

**Applicant** ..... : **Botslab Inc.**

Address..... : 919 North Market Street, Suite 950, Wilmington, New Castle, Delaware, USA

Manufacturer..... : Botslab Inc.

Address..... : 919 North Market Street, Suite 950, Wilmington, New Castle, Delaware, USA

**Product Name** ..... : **Battery Camera**

Trade Mark ..... : Botslab

Model/Type reference..... : BC-2401-M3

Listed Model(s) ..... : BC-2401-M3-V0,BC-2401-M3-V1,BC-2401-M3-V2,BC-2401-M3-V3,BC-2401-M3-V4,BC-2401-M3-V5,BC-2401-M3-V6,BC-2401-M3-V7,BC-2401-M3-V8,BC-2401-M3-V9




**Standard** ..... : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample..... : Aug. 07, 2024

Date of testing..... : Aug. 08, 2024 ~ Aug. 17, 2024

Date of issue..... : Sep. 18, 2024

**Result**..... : **PASS**

Compiled by:		
(Printed name+signature)	Lucy Lan	
Supervised by:		
(Printed name+signature)	Eric Zhang	
Approved by:		
(Printed name+signature)	Totti Zhao	

**Testing Laboratory Name** ..... : **CTC Laboratories, Inc.**

Address..... : Room 101 Building B, No. 7, Lanqing 1st Road, Luhuhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample.



Table of Contents

Page

- 1. TEST SUMMARY ..... 3
  - 1.1. TEST STANDARDS..... 3
  - 1.2. REPORT VERSION ..... 3
  - 1.3. TEST DESCRIPTION..... 3
  - 1.4. TEST FACILITY ..... 4
  - 1.5. MEASUREMENT UNCERTAINTY ..... 5
  - 1.6. ENVIRONMENTAL CONDITIONS..... 5
- 2. GENERAL INFORMATION ..... 6
  - 2.1. CLIENT INFORMATION ..... 6
  - 2.2. GENERAL DESCRIPTION OF EUT ..... 6
  - 2.3. ACCESSORY EQUIPMENT INFORMATION ..... 7
  - 2.4. OPERATION STATE ..... 8
  - 2.5. MEASUREMENT INSTRUMENTS LIST ..... 9
- 3. TEST ITEM AND RESULTS ..... 10
  - 3.1. CONDUCTED EMISSION..... 10
  - 3.2. RADIATED EMISSION..... 13
  - 3.3. BAND EDGE EMISSIONS (RADIATED) ..... 21
  - 3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED) ..... 26
  - 3.5. DTS BANDWIDTH..... 32
  - 3.6. PEAK OUTPUT POWER ..... 36
  - 3.7. POWER SPECTRAL DENSITY ..... 38
  - 3.8. DUTY CYCLE ..... 40
  - 3.9. ANTENNA REQUIREMENT ..... 42



# 1. TEST SUMMARY

## 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

## 1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2024193201	Sep. 18, 2024	Original

## 1.3. Test Description

FCC Part 15 Subpart C (15.247)			
Test Item	Standard Section	Result	Test Engineer
Antenna Requirement	15.203	Pass	Kyrie Ye
Conducted Emission	15.207	Pass	Cary
Conducted Band Edge and Spurious Emissions	15.247(d)	Pass	Kyrie Ye
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	Pass	Kyrie Ye
6dB Bandwidth	15.247(a)(2)	Pass	Kyrie Ye
Conducted Max Output Power	15.247(b)(3)	Pass	Kyrie Ye
Power Spectral Density	15.247(e)	Pass	Kyrie Ye
Transmitter Radiated Spurious	15.209&15.247(d)	Pass	Kyrie Ye

Note:

- The measurement uncertainty is not included in the test result.
- N/A: means this test item is not applicable for this device according to the technology characteristic of device.



## 1.4. Test Facility

### Address of the report laboratory

#### CTC Laboratories, Inc.

Add: Room 101 of Building B, Room 107, 108, 207, 208 of Building A, No. 7, Lanqing 1st Road, Luhuhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

### Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

#### FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
DTS Bandwidth	±0.0196%	(1)
Maximum Conducted Output Power	±0.686 dB	(1)
Maximum Power Spectral Density Level	±0.743 dB	(1)
Band-edge Compliance	±1.328 dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB	(1)
Conducted Emissions 9kHz~30MHz	±3.08 dB	(1)
Radiated Emissions 30~1000MHz	±4.51 dB	(1)
Radiated Emissions 1~18GHz	±5.84 dB	(1)
Radiated Emissions 18~40GHz	±6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa



## 2. GENERAL INFORMATION

### 2.1. Client Information

Applicant:	Botslab Inc.
Address:	919 North Market Street, Suite 950, Wilmington, New Castle, Delaware, USA
Manufacturer:	Botslab Inc.
Address:	919 North Market Street, Suite 950, Wilmington, New Castle, Delaware, USA
Factory:	Shenzhen Baofeng Weishi Technology Co., Ltd
Address:	2/F, Building G, No.8, East District, Shangxue Science Park, Bantian Street, Longgang District, Shenzhen

### 2.2. General Description of EUT

Product Name:	Battery Camera
Trade Mark:	Botslab
Model/Type reference:	BC-2401-M3
Listed Model(s):	BC-2401-M3-V0,BC-2401-M3-V1,BC-2401-M3-V2,BC-2401-M3-V3,BC-2401-M3-V4,BC-2401-M3-V5,BC-2401-M3-V6,BC-2401-M3-V7,BC-2401-M3-V8,BC-2401-M3-V9
Model Difference:	All Listed Model(s) are same electrically identical as Tested Model Number. Only models name are different for market purpose.
Power Supply:	DC5V 1A from AC/DC Adapter
Hardware Version:	A60_BellCam_V3-1
Software Version:	06.01.43/64
<b>Bluetooth 5.0 / BLE</b>	
Modulation:	GFSK
Operation Frequency:	2402MHz~2480MHz
Channel Number:	40
Channel Separation:	2MHz
Data Rate:	1Mbps
Antenna Type:	FPC
Antenna Gain:	3.78dBi



## 2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	DESKTOP-SKJ3JH9	/	Lenovo
USB TO TTL	/	/	/
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	100cm
Test Software Information			
Name	Version	/	/
sscom	5.13.1	/	/



### 2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT BLE, 40 channels are provided to the EUT. Channels 00/19/39 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
<b>00</b>	<b>2402</b>
01	2404
:	:
18	2438
<b>19</b>	<b>2440</b>
20	2442
:	:
38	2478
<b>39</b>	<b>2480</b>

Note: The display in grey were the channel selected for testing.

Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.





## 2.5. Measurement Instruments List

RF Test System - SRD					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 21, 2025
2	RF Control Unit	Tonscend	JS0806-2	/	Aug. 22, 2024
3	Test Software	Tonscend	JS1120-3	V2.6.88.0346	/

Radiated emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 18, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Sep. 25, 2025
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2024
4	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 12, 2024
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 12, 2024
6	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026
7	Test Software	FARA	EZ-EMC	FA-03A2	/

Conducted emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 12, 2024
2	LISN	R&S	ENV216	101113	Dec. 12, 2024
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2024
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2024
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2024
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

### 3. TEST ITEM AND RESULTS

#### 3.1. Conducted Emission


**Limit**

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

\* Decreases with the logarithm of the frequency.

**Test Configuration**

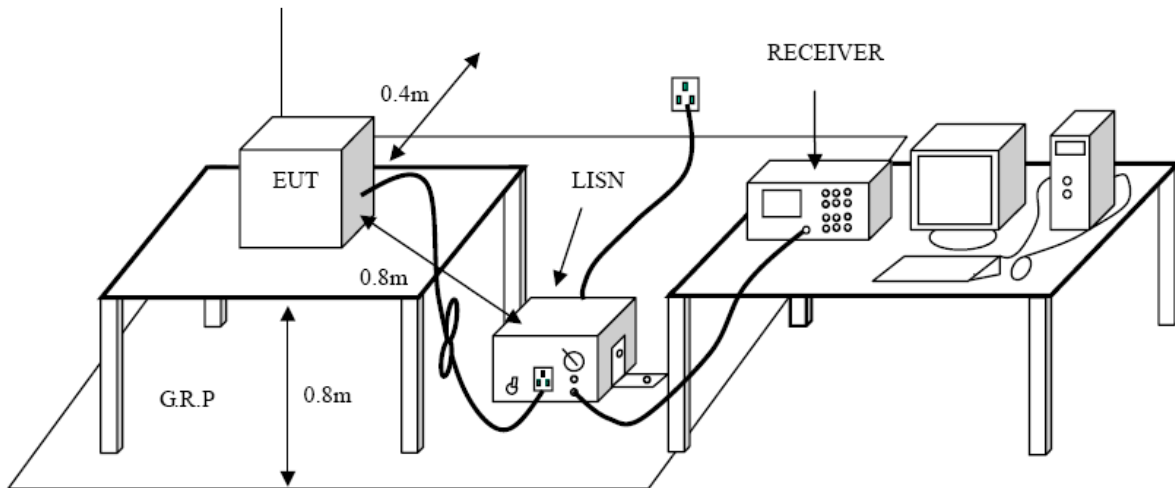

**Test Procedure**

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

**Test Mode**


Please refer to the clause 2.4.





**Test Result**

<b>Test Voltage:</b>	AC 120V/60Hz
<b>Terminal:</b>	Line
<b>Remark:</b>	Only worse case is reported

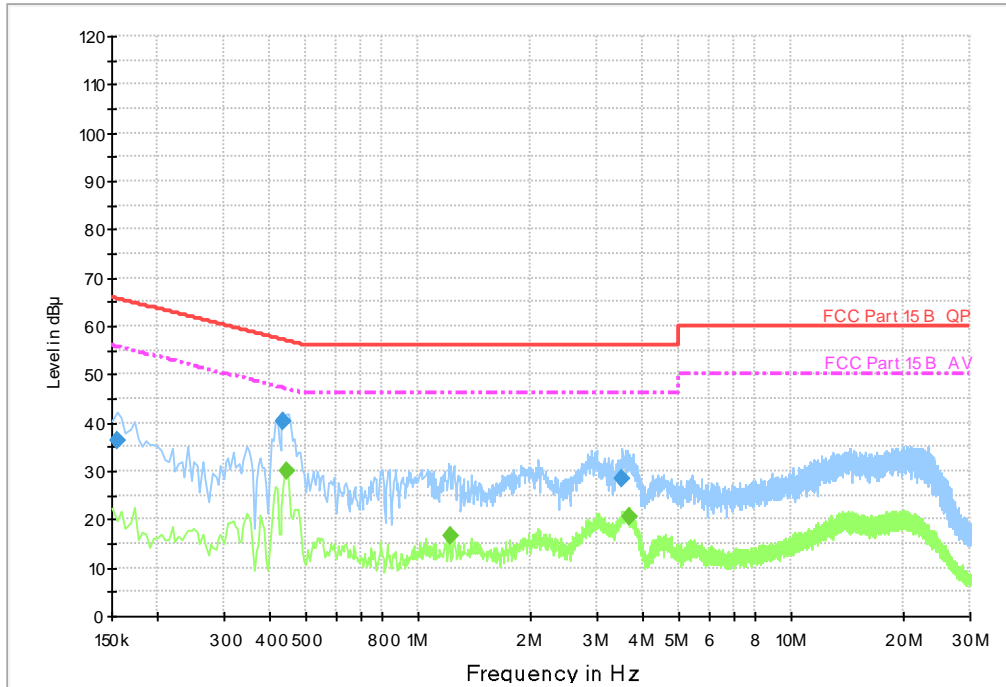

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.154500	36.2	1000.00	9.000	On	L1	9.5	29.6	65.8	
0.433500	40.1	1000.00	9.000	On	L1	9.5	17.1	57.2	
3.511500	28.4	1000.00	9.000	On	L1	9.5	27.6	56.0	


**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.442500	30.1	1000.00	9.000	On	L1	9.5	16.9	47.0	
1.207500	16.6	1000.00	9.000	On	L1	9.7	29.4	46.0	
3.646500	20.3	1000.00	9.000	On	L1	9.5	25.7	46.0	

Emission Level = Read Level + Correct Factor



<b>Test Voltage:</b>	AC 120V/60Hz
<b>Terminal:</b>	Neutral
<b>Remark:</b>	Only worse case is reported

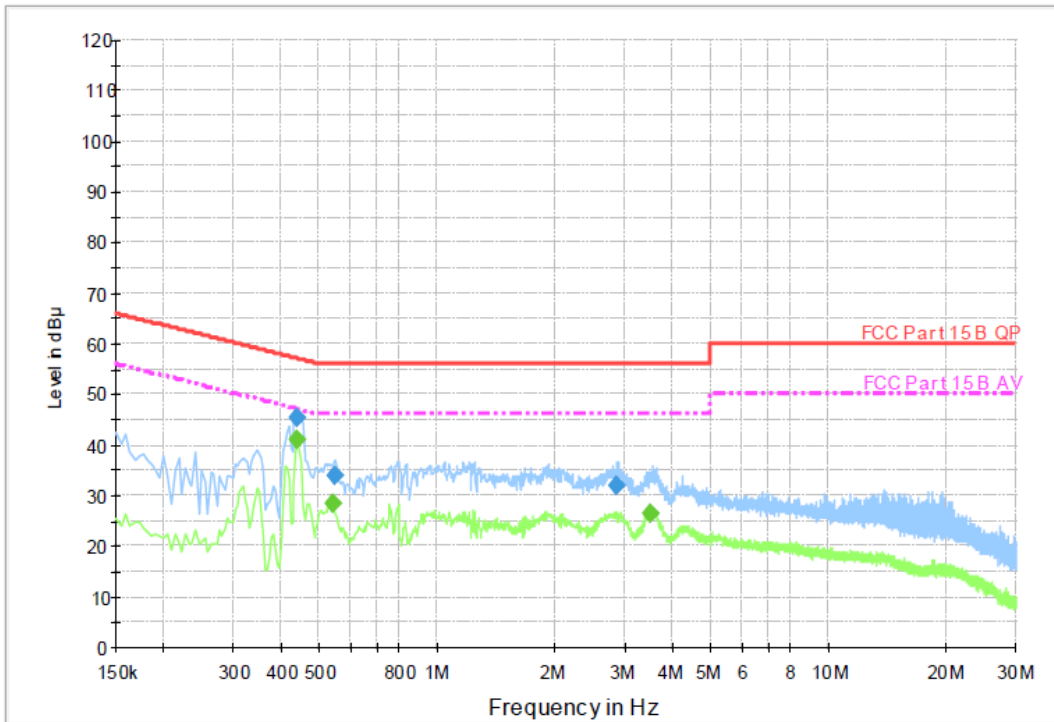

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.438000	45.3	1000.00	9.000	On	N	9.4	11.8	57.1	
0.546000	34.1	1000.00	9.000	On	N	9.4	21.9	56.0	
2.854500	32.0	1000.00	9.000	On	N	9.4	24.0	56.0	

**Final Measurement Detector 2**

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.438000	41.0	1000.00	9.000	On	N	9.4	6.1	47.1	
0.537000	28.4	1000.00	9.000	On	N	9.4	17.6	46.0	
3.484500	26.6	1000.00	9.000	On	N	9.4	19.4	46.0	

Emission Level = Read Level + Correct Factor

### 3.2. Radiated Emission

**Limit**

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dBµV/m (at 3 meters)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBµV/m)=20log Emission Level (µV/m).


**Test Configuration**

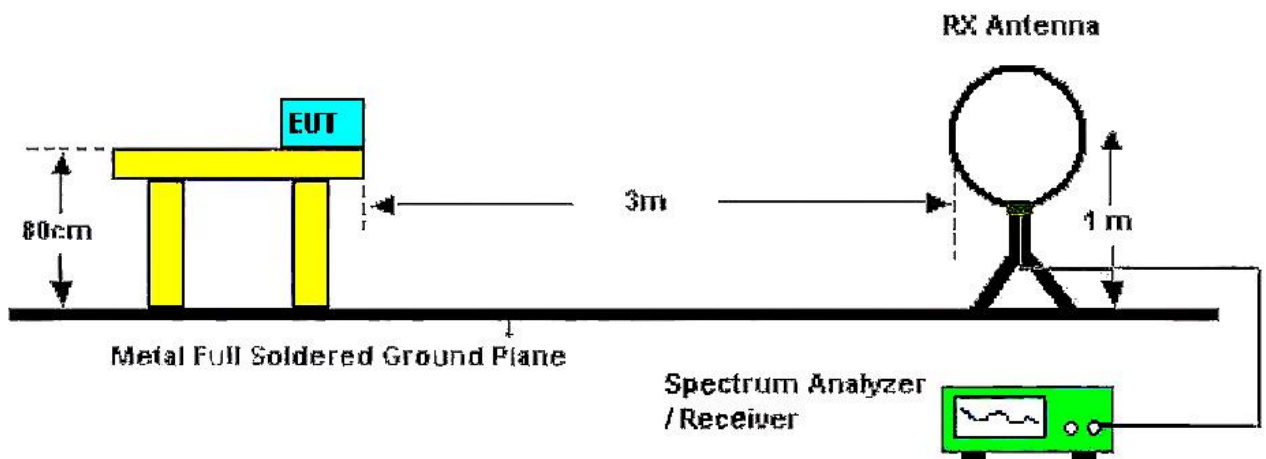

Below 30MHz Test Setup

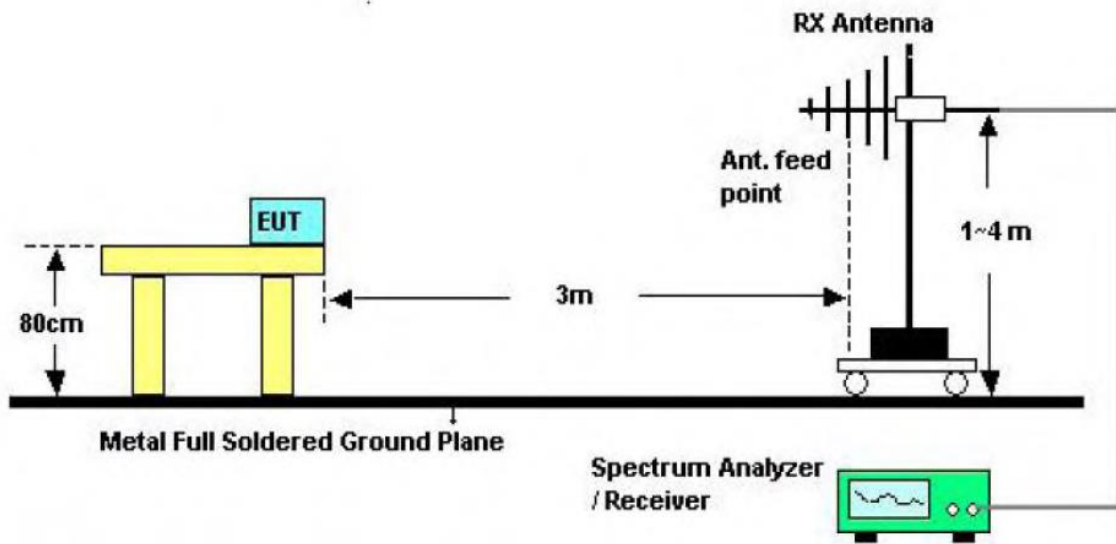

30-1000MHz Test Setup

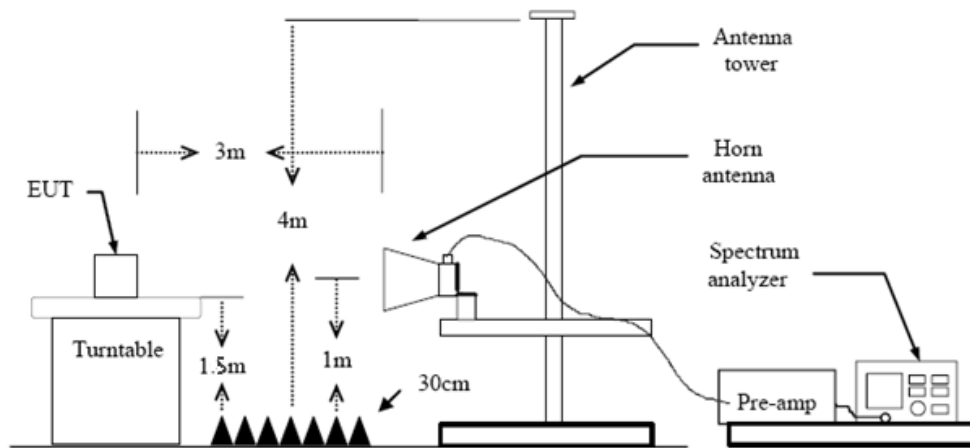

Above 1GHz Test Setup

**Test Procedure**

1. The EUT was setup and tested according to ANSI C63.10:2013.
  2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
  3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
  4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
  5. Set to the maximum power setting and enable the EUT transmit continuously.
  6. Use the following spectrum analyzer settings
    - (1) Span shall wide enough to fully capture the emission being measured;
    - (2) 9k – 150kHz:  
RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
    - (3) 0.15M – 30MHz:  
RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
    - (4) 30M - 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold
- If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the



peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10<sup>th</sup> harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.

### **Test Mode**

Please refer to the clause 2.4.

### **Test Result**

#### **9 kHz~30 MHz**

From 9 kHz to 30 MHz: The conclusion is PASS.


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.





30MHz-1GHz

Ant. Pol.	Horizontal
Test Mode:	TX 1Mbps Mode 2402MHz
Remark:	Only worse case is reported

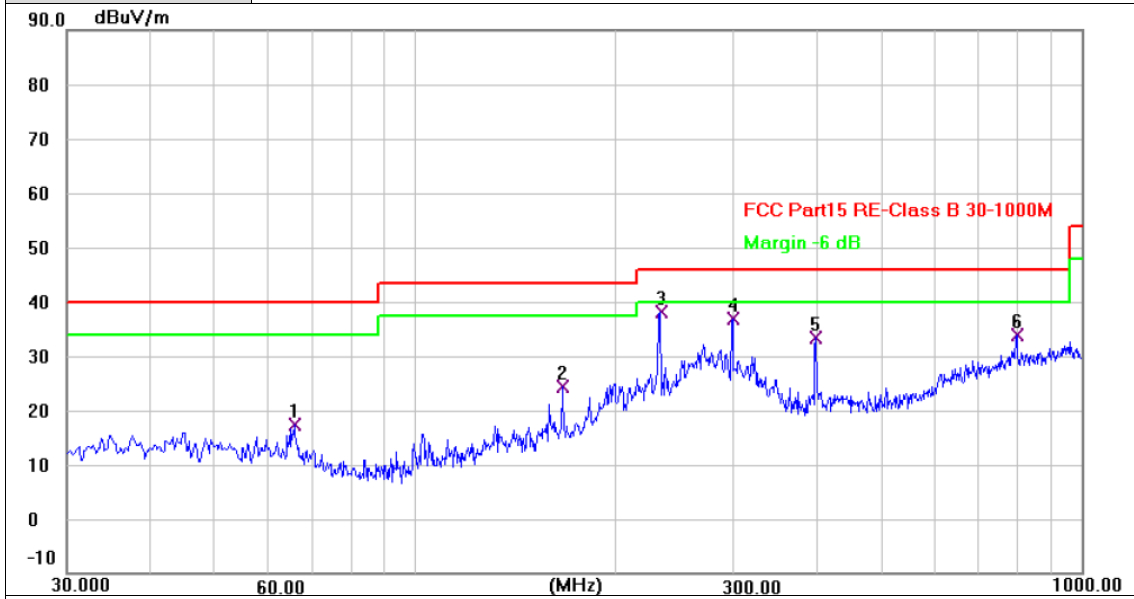

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	65.8900	35.43	-18.10	17.33	40.00	-22.67	QP
2	166.4467	40.57	-16.31	24.26	43.50	-19.24	QP
3 *	233.3767	56.22	-18.19	38.03	46.00	-7.97	QP
4	299.9833	52.46	-15.67	36.79	46.00	-9.21	QP
5	399.8933	46.21	-12.93	33.28	46.00	-12.72	QP
6	799.8567	37.65	-3.78	33.87	46.00	-12.13	QP


Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value







<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 1Mbps Mode 2402MHz
<b>Remark:</b>	Only worse case is reported

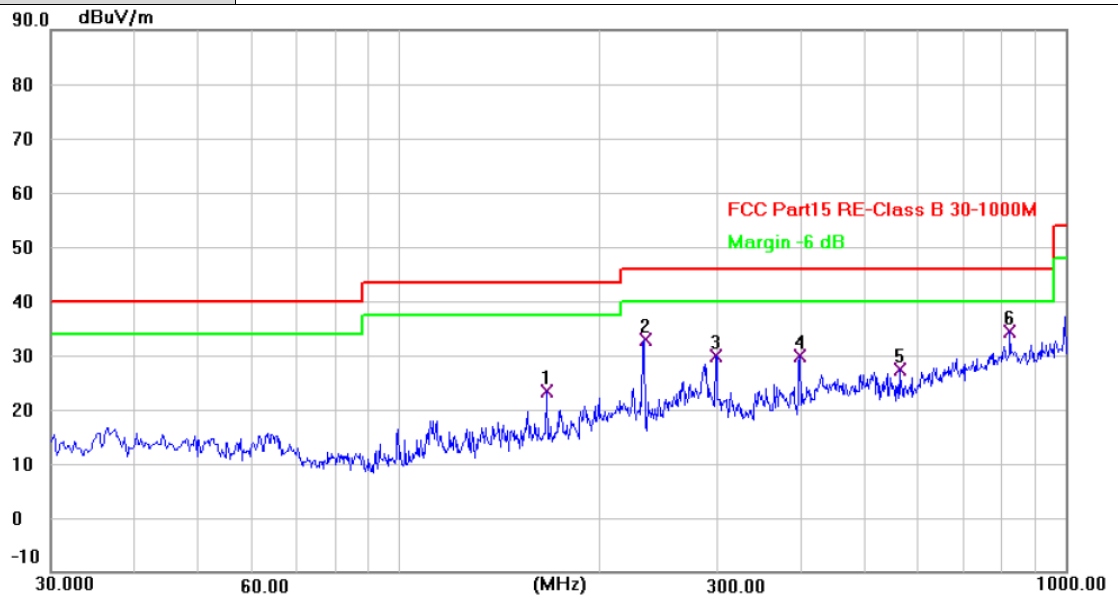

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	166.4467	39.58	-16.31	23.27	43.50	-20.23	QP
2	233.3767	51.18	-18.19	32.99	46.00	-13.01	QP
3	299.0133	45.61	-15.70	29.91	46.00	-16.09	QP
4	399.8933	42.78	-12.93	29.85	46.00	-16.15	QP
5	564.1467	36.19	-8.77	27.42	46.00	-18.58	QP
6 *	826.6933	37.96	-3.50	34.46	46.00	-11.54	QP

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value





## Above 1GHz

<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX BLE 1M Mode 2402MHz																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4803.911</td> <td>40.78</td> <td>2.00</td> <td>42.78</td> <td>74.00</td> <td>-31.22</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4804.161</td> <td>26.23</td> <td>2.00</td> <td>28.23</td> <td>54.00</td> <td>-25.77</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4803.911	40.78	2.00	42.78	74.00	-31.22	peak	2 *	4804.161	26.23	2.00	28.23	54.00	-25.77	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4803.911	40.78	2.00	42.78	74.00	-31.22	peak																								
2 *	4804.161	26.23	2.00	28.23	54.00	-25.77	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX BLE 1M Mode 2402MHz																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4804.266</td> <td>27.08</td> <td>2.00</td> <td>29.08</td> <td>54.00</td> <td>-24.92</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4804.323</td> <td>40.87</td> <td>2.00</td> <td>42.87</td> <td>74.00</td> <td>-31.13</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4804.266	27.08	2.00	29.08	54.00	-24.92	AVG	2	4804.323	40.87	2.00	42.87	74.00	-31.13	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4804.266	27.08	2.00	29.08	54.00	-24.92	AVG																								
2	4804.323	40.87	2.00	42.87	74.00	-31.13	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. Pol.</b>	Horizontal																														
<b>Test Mode:</b>	TX BLE 1M Mode 2440MHz																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4880.435</td> <td>17.74</td> <td>2.09</td> <td>19.83</td> <td>54.00</td> <td>-34.17</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4880.861</td> <td>35.63</td> <td>2.09</td> <td>37.72</td> <td>74.00</td> <td>-36.28</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4880.435	17.74	2.09	19.83	54.00	-34.17	AVG	2	4880.861	35.63	2.09	37.72	74.00	-36.28	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4880.435	17.74	2.09	19.83	54.00	-34.17	AVG																								
2	4880.861	35.63	2.09	37.72	74.00	-36.28	peak																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

<b>Ant. Pol.</b>	Vertical																														
<b>Test Mode:</b>	TX BLE 1M Mode 2440MHz																														
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.																														
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.313</td> <td>35.34</td> <td>2.09</td> <td>37.43</td> <td>74.00</td> <td>-36.57</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4880.663</td> <td>17.72</td> <td>2.09</td> <td>19.81</td> <td>54.00</td> <td>-34.19</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4880.313	35.34	2.09	37.43	74.00	-36.57	peak	2 *	4880.663	17.72	2.09	19.81	54.00	-34.19	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4880.313	35.34	2.09	37.43	74.00	-36.57	peak																								
2 *	4880.663	17.72	2.09	19.81	54.00	-34.19	AVG																								
<b>Remarks:</b> 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX BLE 1M Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4959.408	25.40	2.21	27.61	54.00	-26.39	AVG
2	4960.391	39.58	2.21	41.79	74.00	-32.21	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX BLE 1M Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.923	39.87	2.21	42.08	74.00	-31.92	peak
2 *	4960.490	25.22	2.21	27.43	54.00	-26.57	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value


### 3.3. Band Edge Emissions (Radiated)

**Limit**

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)**

Restricted Frequency Band (MHz)	(dBµV/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

**Test Configuration**

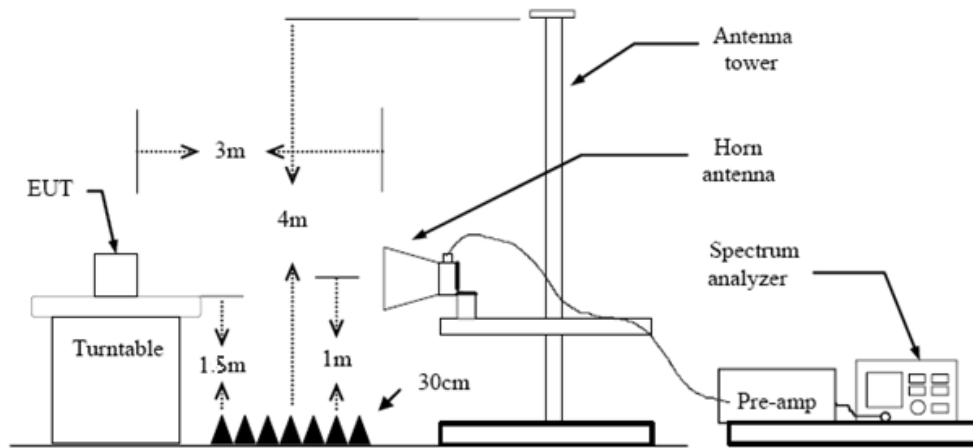

**Test Procedure**

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
 RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
 RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.


**Test Mode**

Please refer to the clause 2.4.




Test Result

Ant. Pol.	Horizontal
Test Mode:	BLE 1Mbps Mode 2402MHz

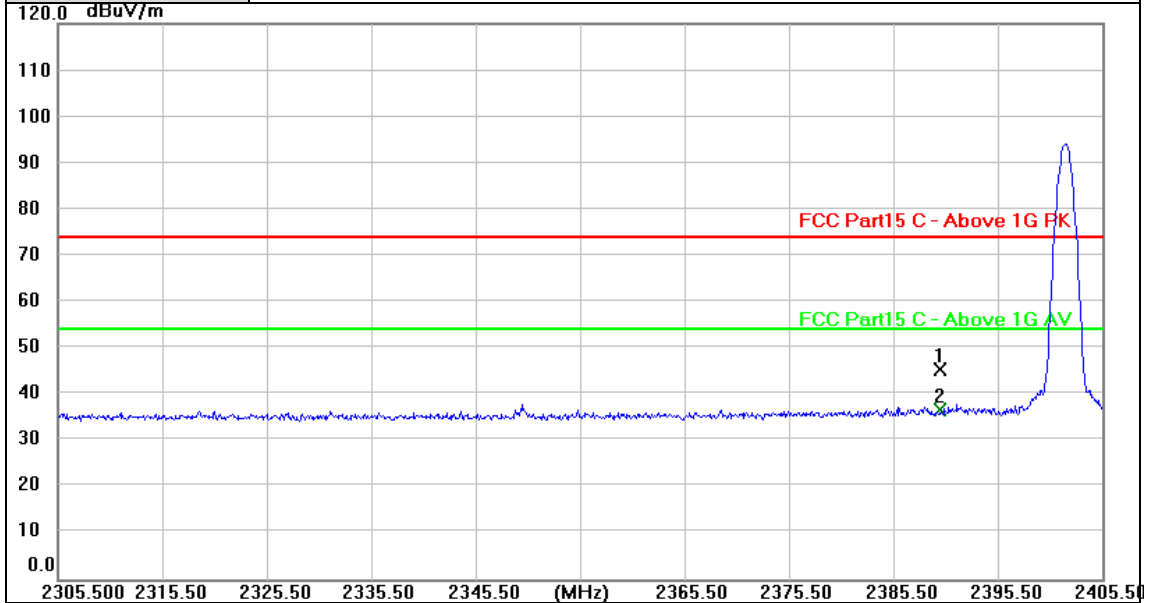

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	14.23	31.31	45.54	74.00	-28.46	peak
2 *	2390.000	5.41	31.31	36.72	54.00	-17.28	AVG

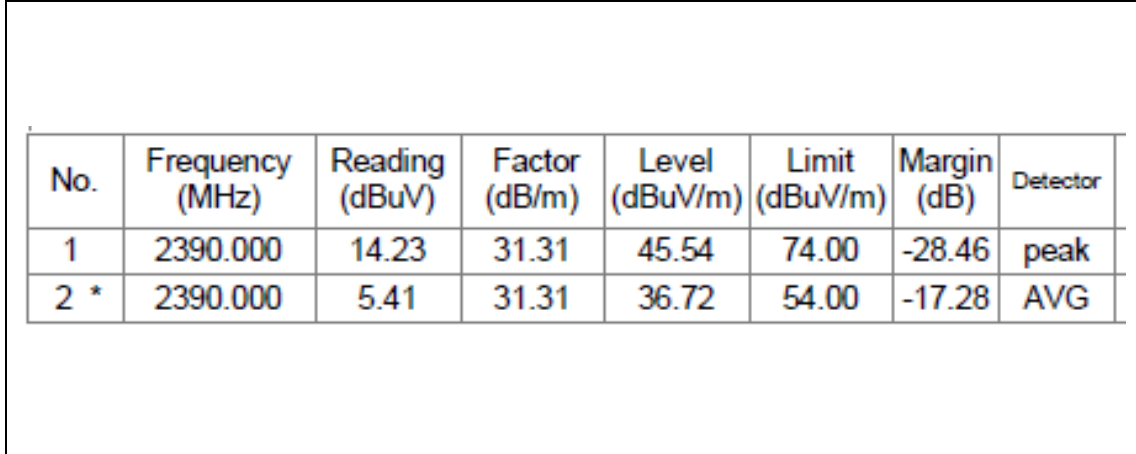


Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value





<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	BLE 1Mbps Mode 2402MHz

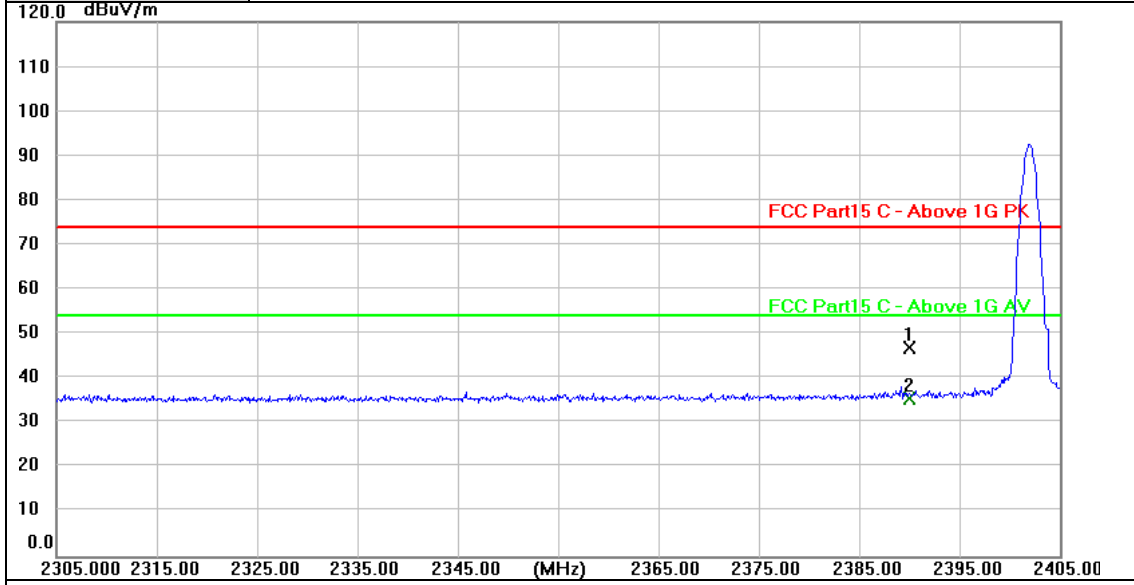


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	15.65	31.31	46.96	74.00	-27.04	peak
2 *	2390.000	4.26	31.31	35.57	54.00	-18.43	AVG

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value





<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	BLE 1Mbps Mode 2480 MHz

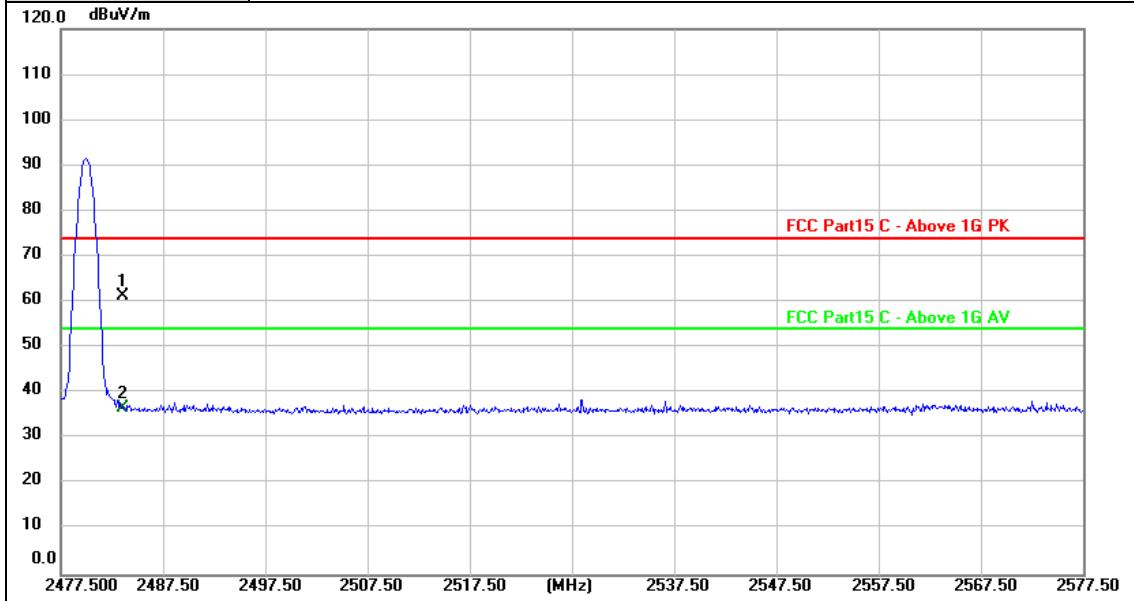

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	2483.500	29.78	31.48	61.26	74.00	-12.74	peak
2	2483.500	5.14	31.48	36.62	54.00	-17.38	AVG


Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value







<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	BLE 1Mbps Mode 2480 MHz

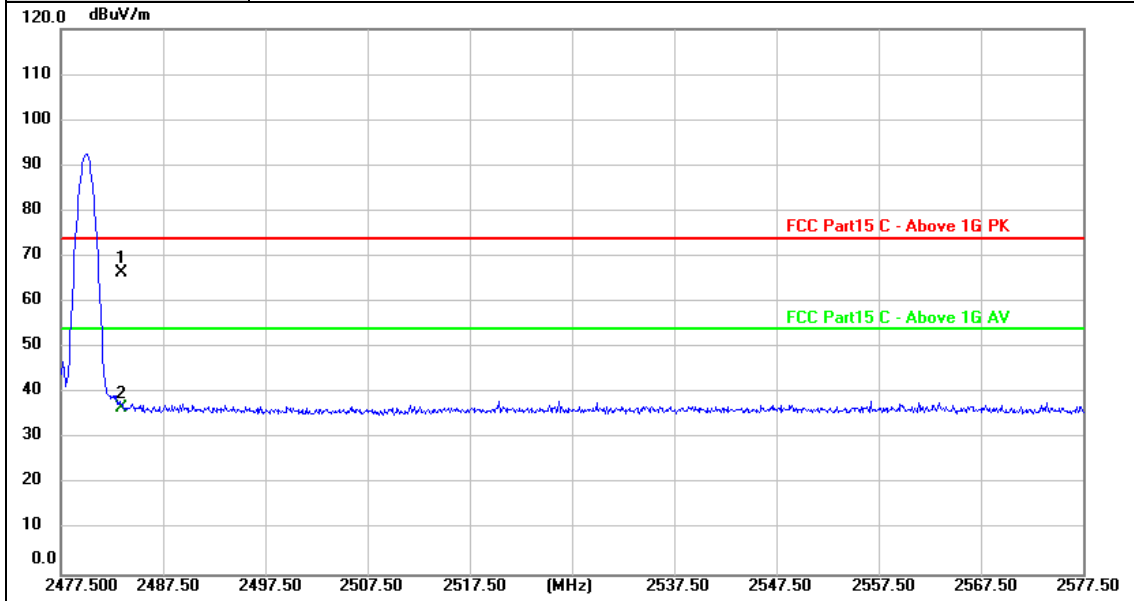

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	2483.500	35.07	31.48	66.55	74.00	-7.45	peak
2	2483.500	5.40	31.48	36.88	54.00	-17.12	AVG

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value






### 3.4. Band Edge and Spurious Emissions (Conducted)

#### Limit

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### Test Configuration



#### Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
RBW = 100 kHz, VBW  $\geq$  RBW, scan up through 10<sup>th</sup> harmonic.  
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

#### Test Mode

Please refer to the clause 2.4.

**Test Result****Band Edge Conducted Test**



TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	5.11	-33.54	≤-14.89	PASS
		High	2480	4.15	-42.07	≤-15.85	PASS

**Conducted Spurious Emissions Test**

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	5.20	5.20	---	PASS
			30~1000	5.20	-58.3	≤-14.8	PASS
			1000~26500	5.20	-50.01	≤-14.8	PASS
		2440	Reference	5.31	5.31	---	PASS
			30~1000	5.31	-58.69	≤-24.69	PASS
			1000~26500	5.31	-50.96	≤-24.69	PASS
		2480	Reference	4.29	4.29	---	PASS
			30~1000	4.29	-59.06	≤-15.71	PASS
			1000~26500	4.29	-50.78	≤-15.71	PASS





Band Edge Conducted Test plot as follows:

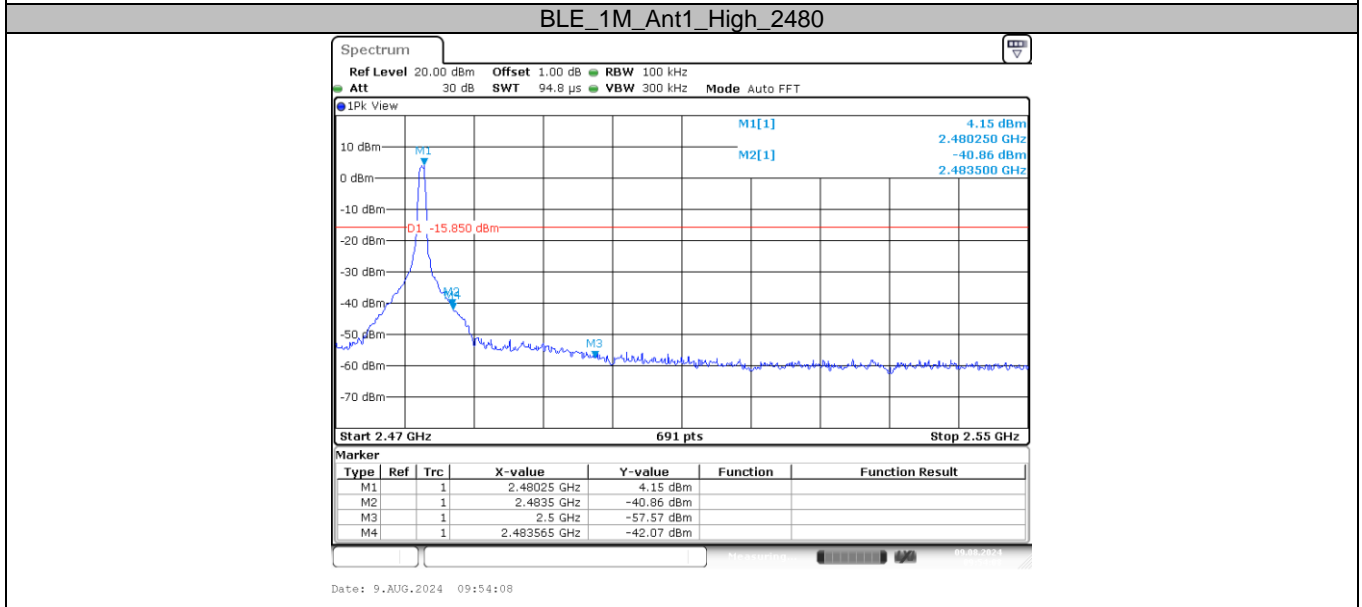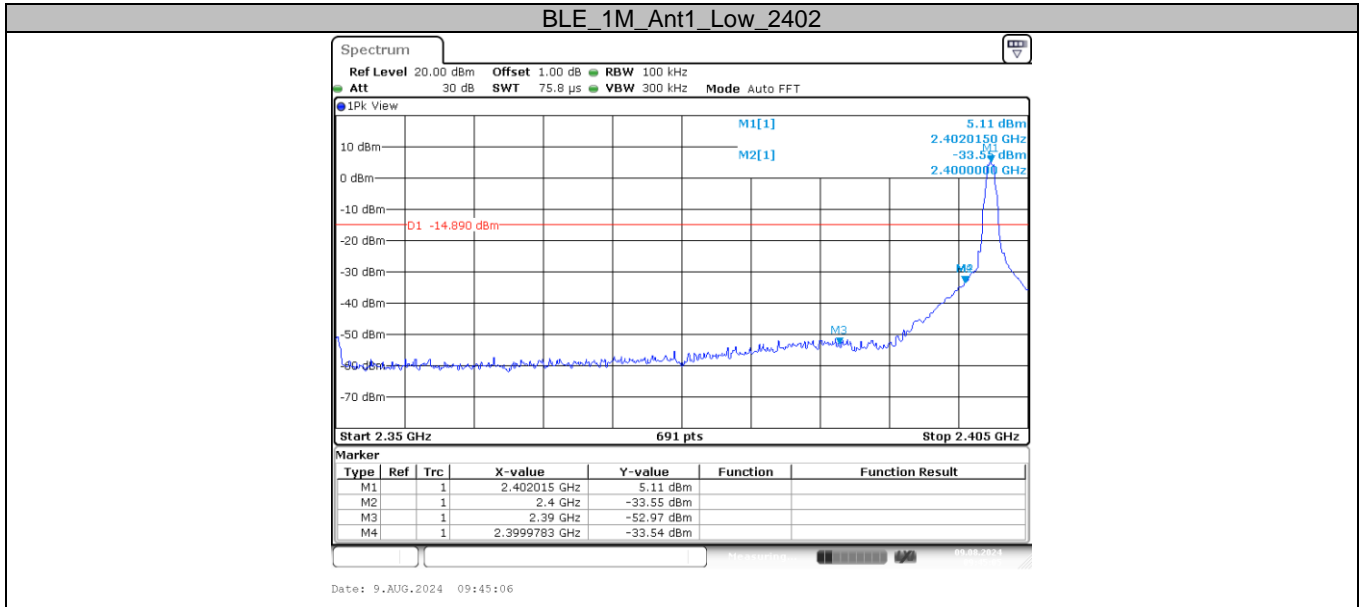




Conducted Spurious Emissions Test plot as follows:

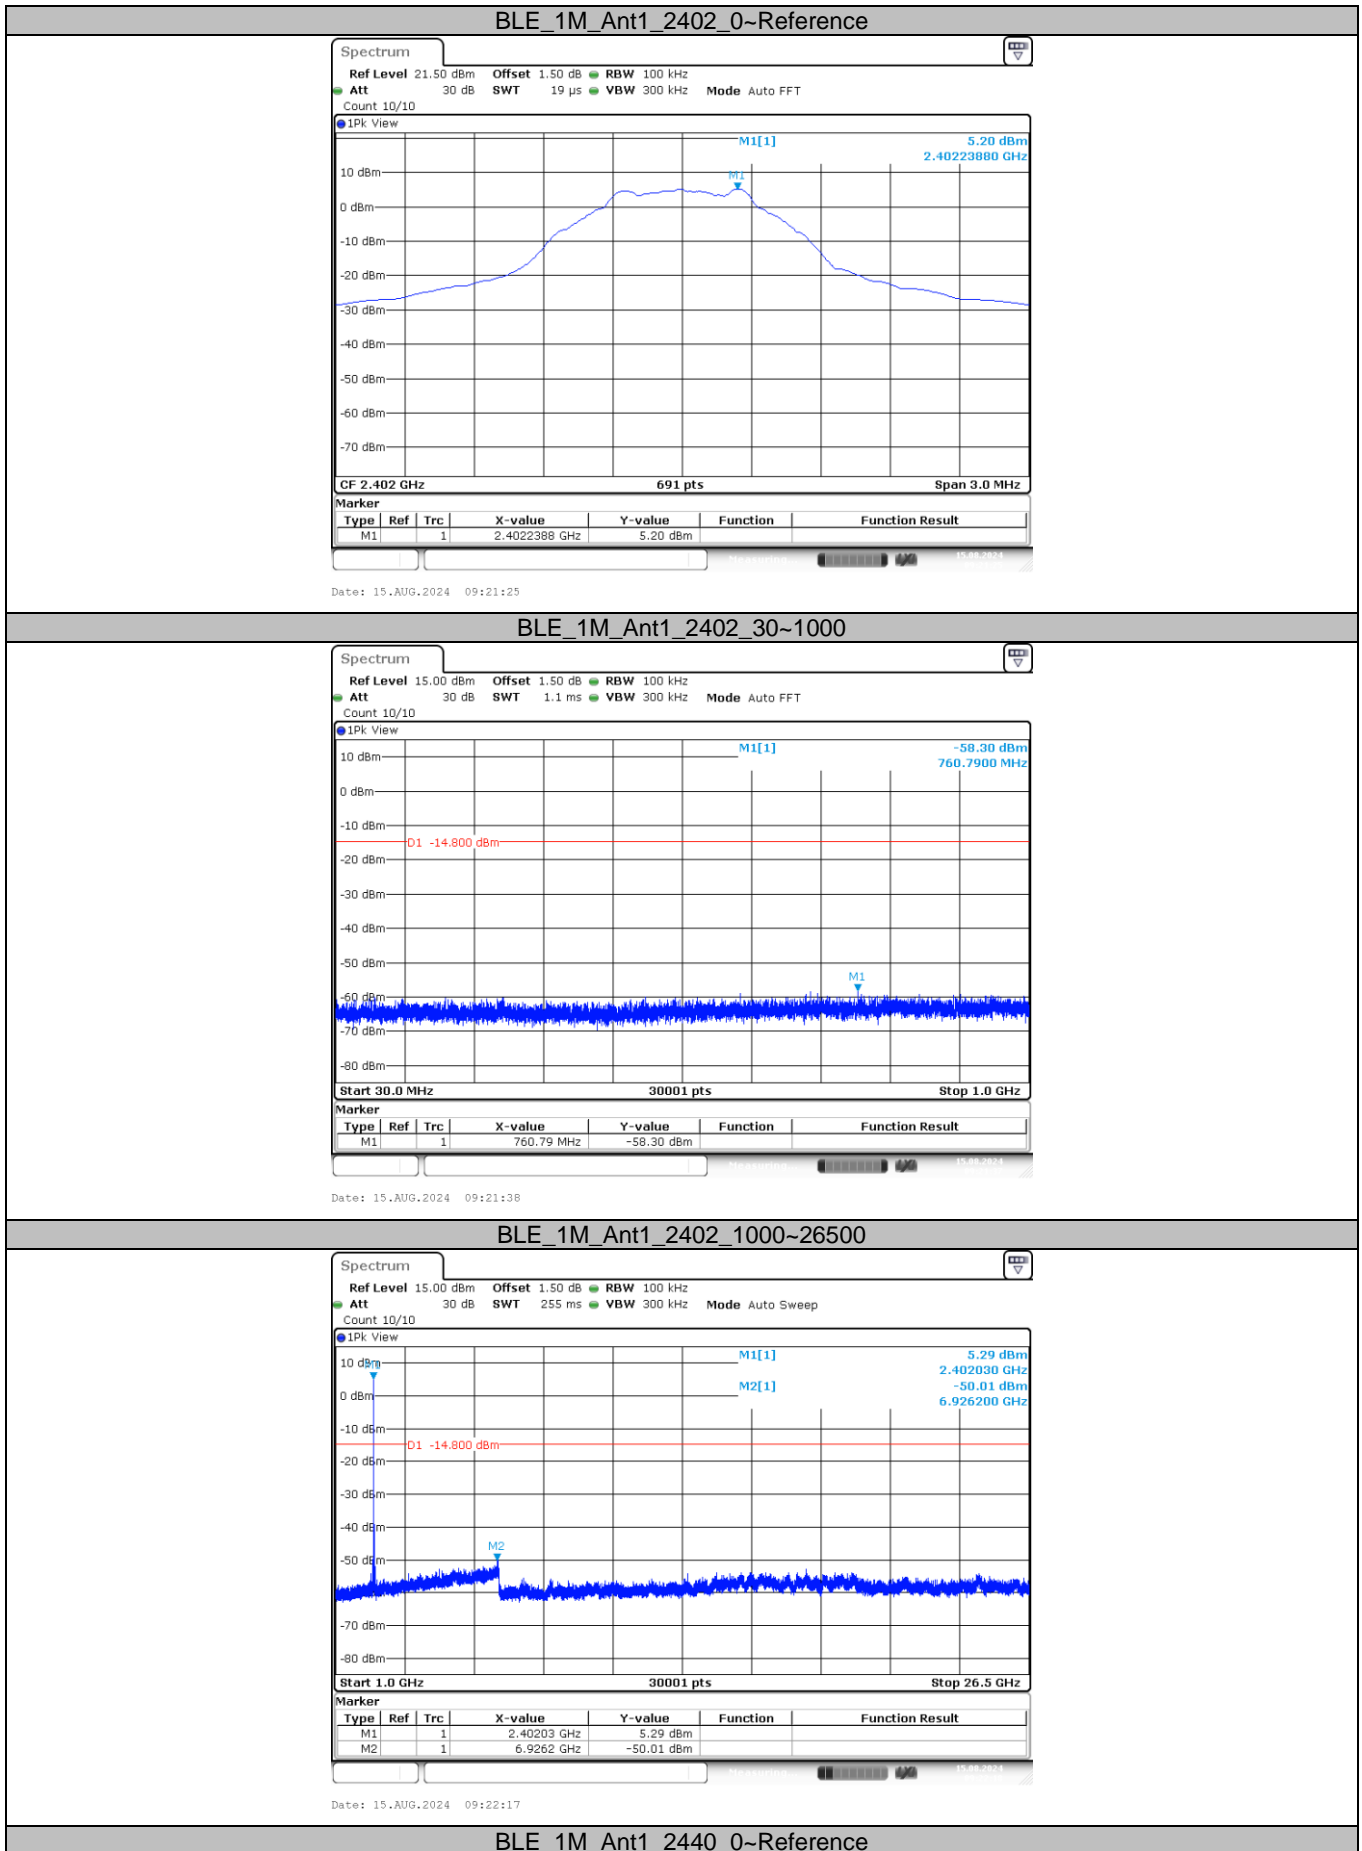

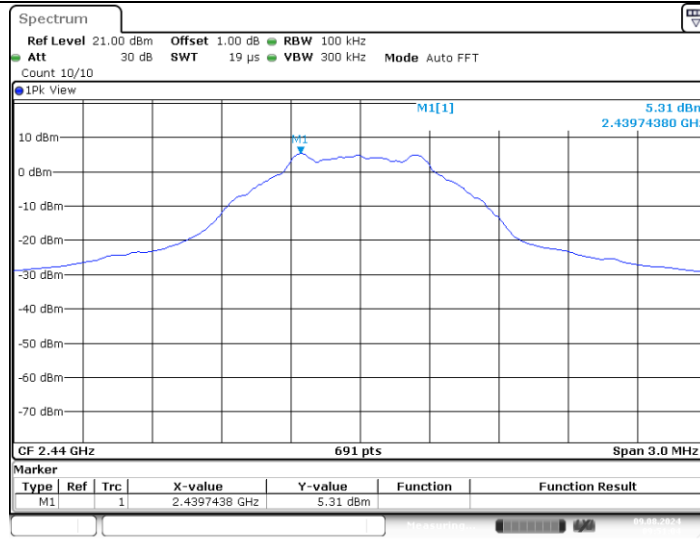


Date: 9.AUG.2024 09:51:03

BLE\_1M\_Ant1\_2440\_30~1000

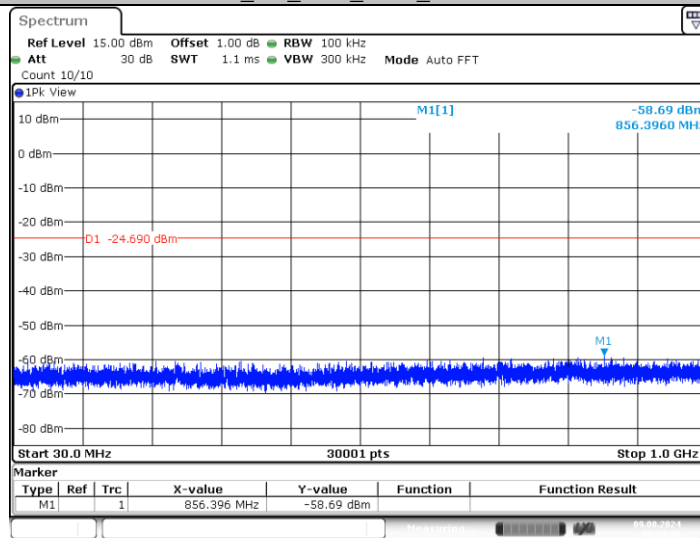

Date: 9.AUG.2024 09:51:16


BLE\_1M\_Ant1\_2440\_1000~26500

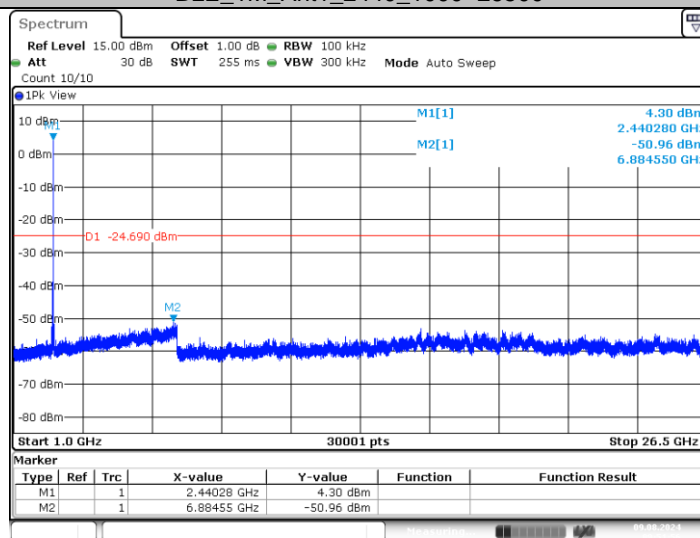

Date: 9.AUG.2024 09:51:56


BLE\_1M\_Ant1\_2480\_0~Reference



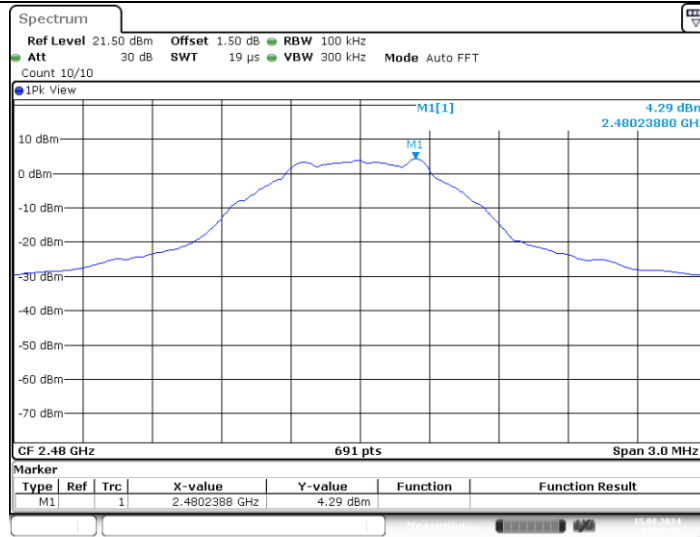


Date: 15.AUG.2024 09:22:48

BLE\_1M\_Ant1\_2480\_30~1000

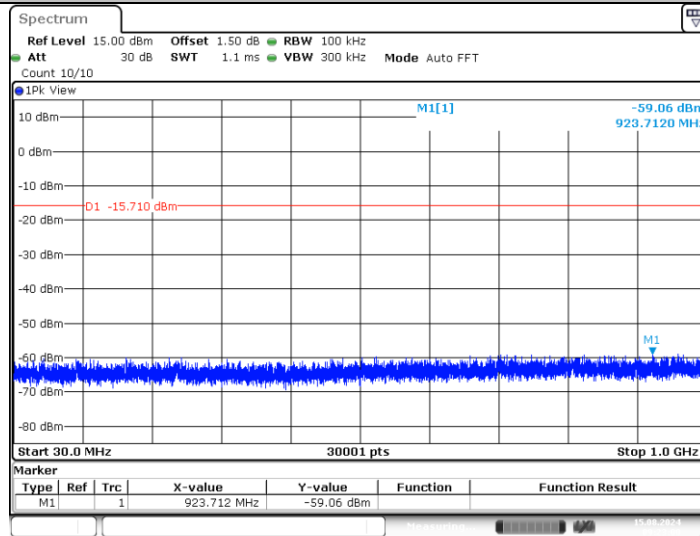

Date: 15.AUG.2024 09:23:00

BLE\_1M\_Ant1\_2480\_1000~26500

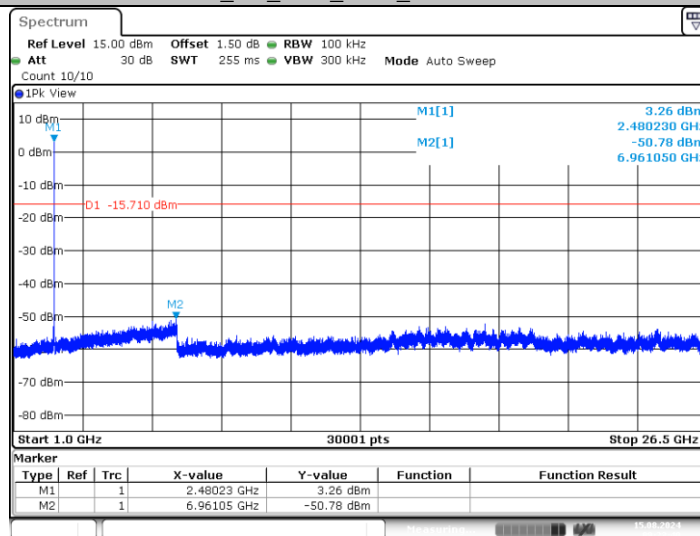

Date: 15.AUG.2024 09:23:40






### 3.5. DTS Bandwidth

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2)

Test Item	Limit	Frequency Range (MHz)
DTS Bandwidth	≥500 kHz (6dB bandwidth)	2400~2483.5

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
  2. DTS Spectrum Setting:
    - (1) Set RBW = 100 kHz.
    - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
    - (3) Detector = Peak.
    - (4) Trace mode = Max hold.
    - (5) Sweep = Auto couple.
- OCB Spectrum Setting:
- (1) Set RBW = 1% ~ 5% occupied bandwidth.
  - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

#### Test Mode

Please refer to the clause 2.4.

#### Test Result



**Occupied Channel Bandwidth Test Results**


TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.071	2401.4605	2402.5315	---	PASS
		2440	1.071	2439.4645	2440.5355	---	PASS
		2480	1.071	2479.4565	2480.5275	---	PASS

**DTS Bandwidth Test Results**

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.71	2401.64	2402.34	0.5	PASS
		2440	0.71	2439.64	2440.34	0.5	PASS
		2480	0.72	2479.63	2480.35	0.5	PASS



### DTS Bandwidth Test Graphs

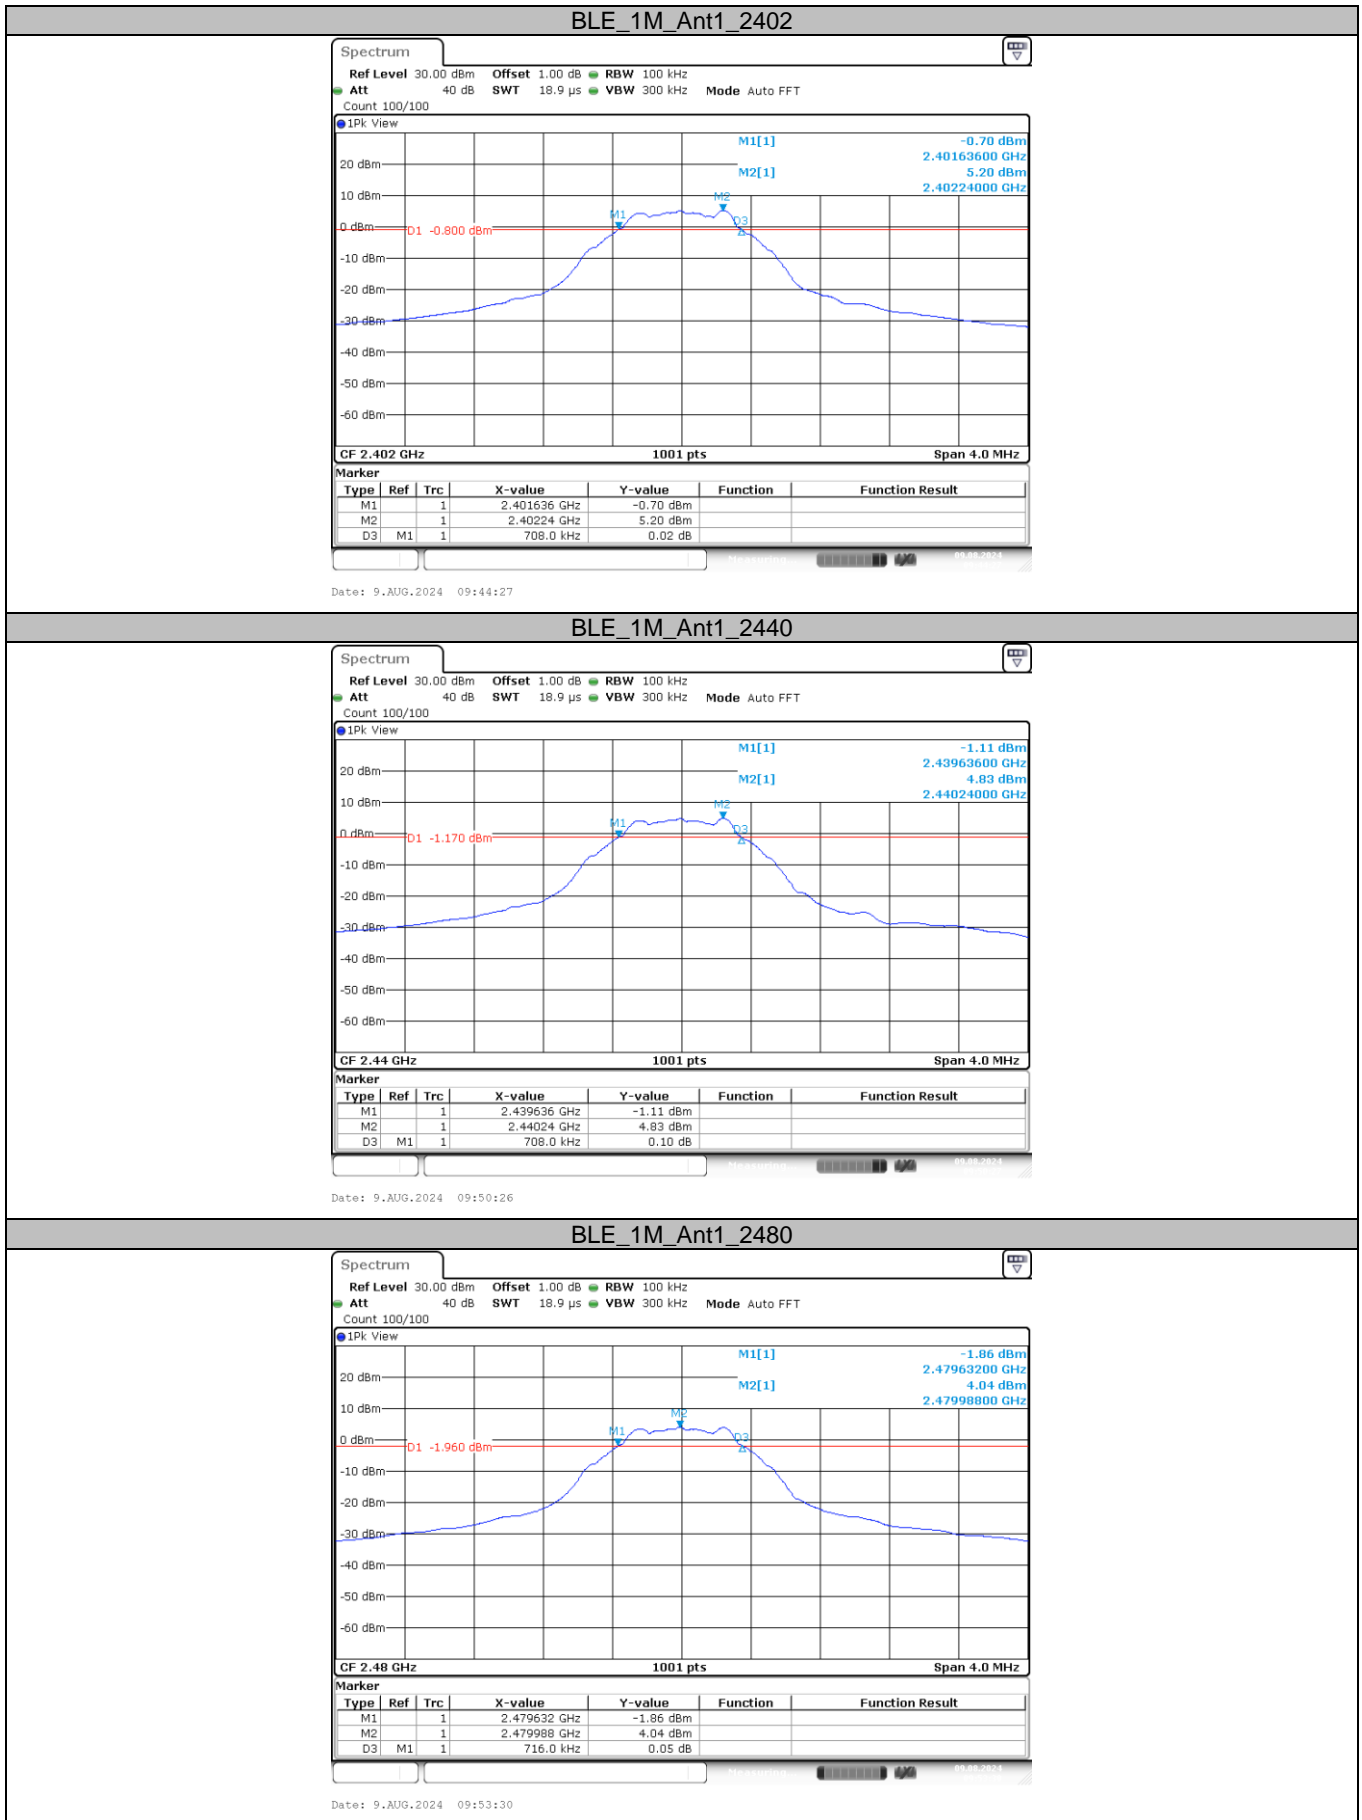

CTC Laboratories, Inc.




Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



### Occupied Channel Bandwidth Test Graphs

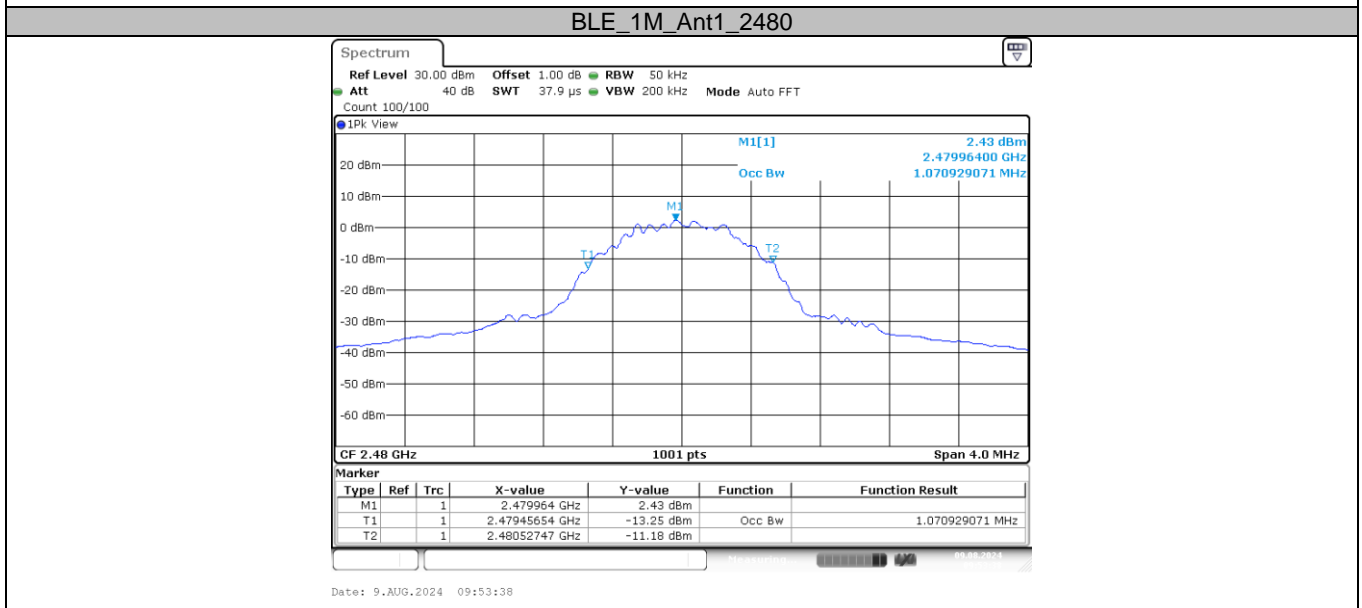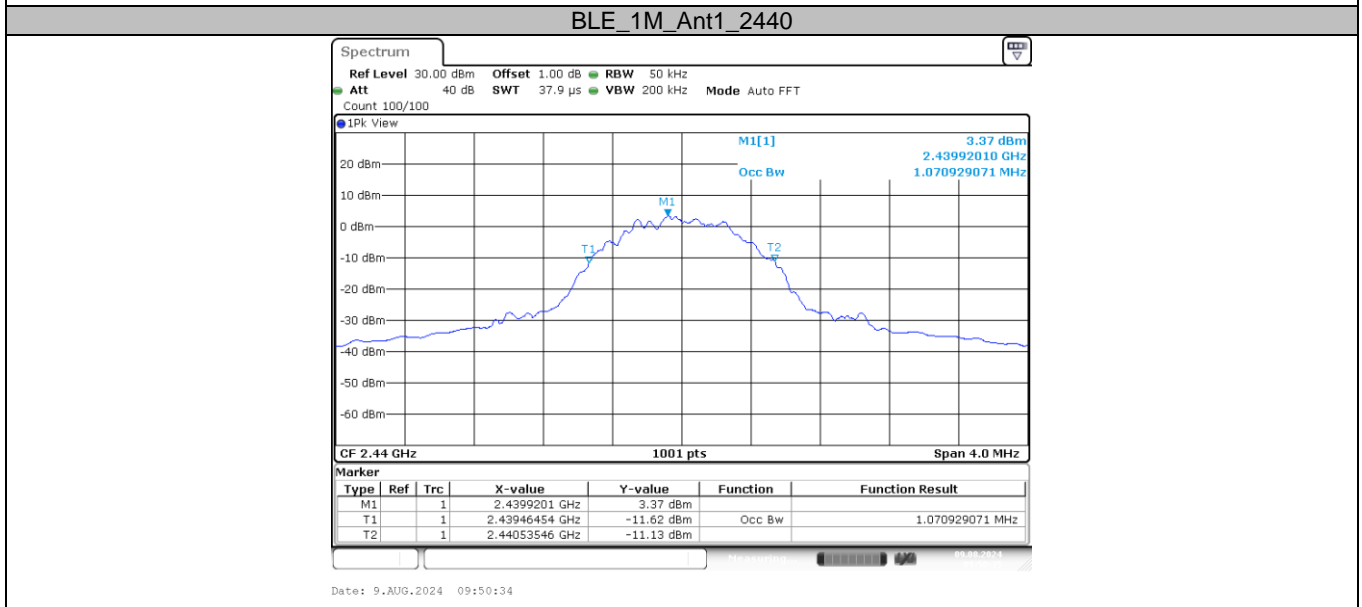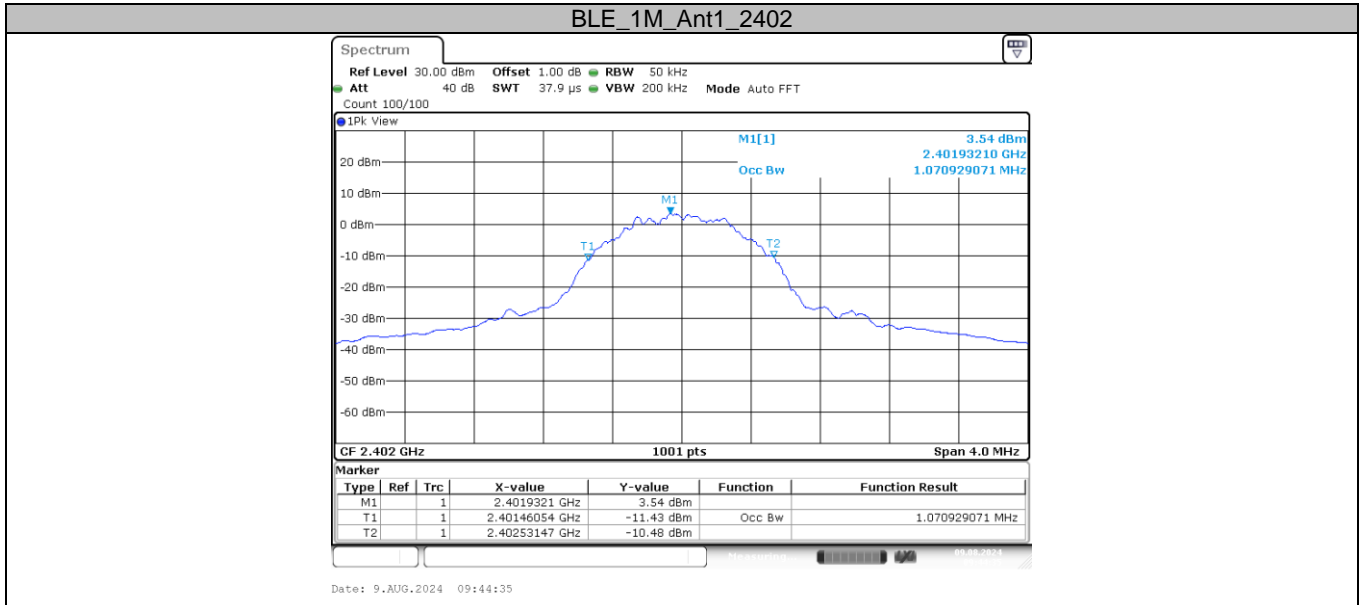




### 3.6. Peak Output Power

#### Limit

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3)

Section	Test Item	Limit	Frequency Range (MHz)
FCC CFR 47 Part15.247 (b)(3)	Maximum Conducted Output Power	1 Watt or 30dBm	2400~2483.5

#### Test Configuration



#### Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- Spectrum Setting:
  - Set RBW  $\geq$  DTS Bandwidth.
  - Set VBW  $\geq$  3\*RBW.
  - Set Span  $\geq$  3\*RBW.
  - Sweep time = Auto couple.
  - Detector = Peak.
  - Trace mode = Max hold.
 Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

#### Test Mode




Please refer to the clause 2.4.

#### Test Result

Test Mode	Frequency (MHz)	Conducted Output Power (dBm)	FCC Limit (dBm)	Verdict
BLE_1M	2402	6.05	$\leq 30$	Pass
	2440	5.75	$\leq 30$	Pass
	2480	5.07	$\leq 30$	Pass



Test plot as follows:

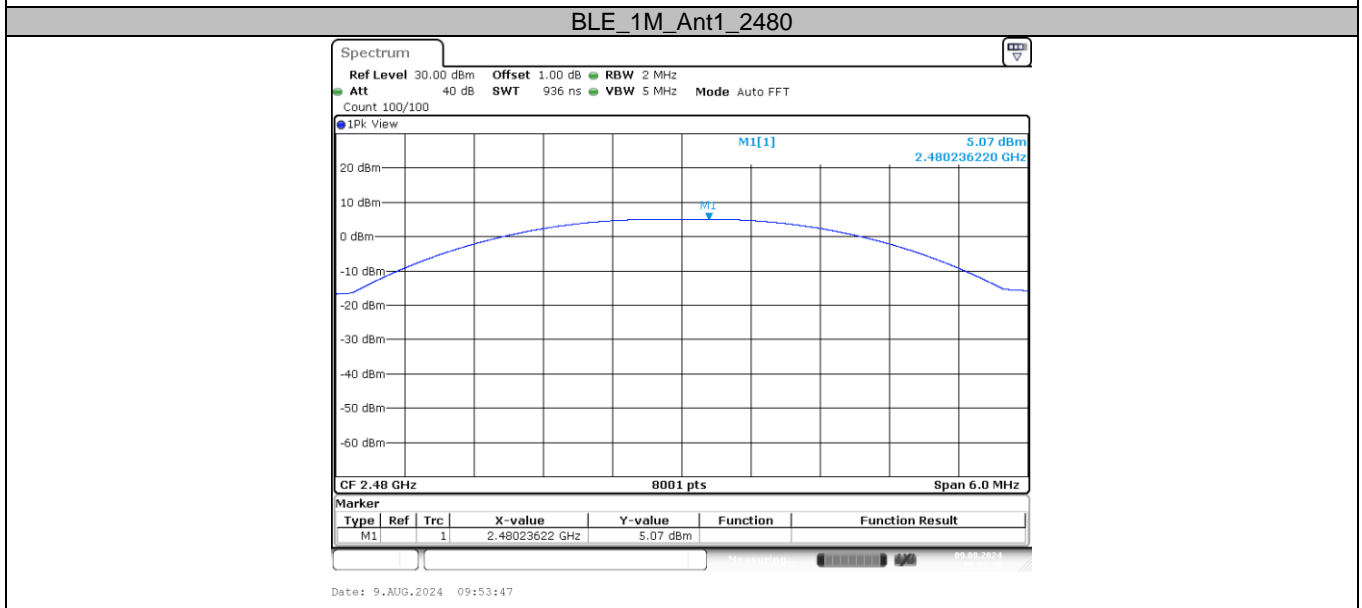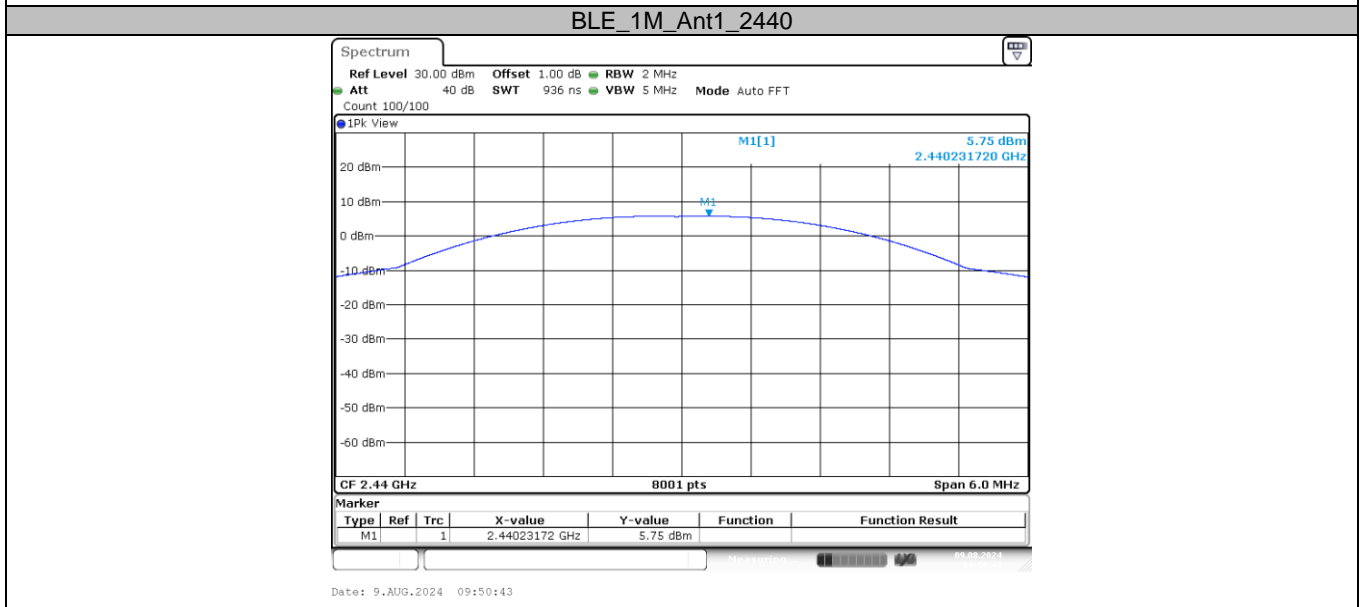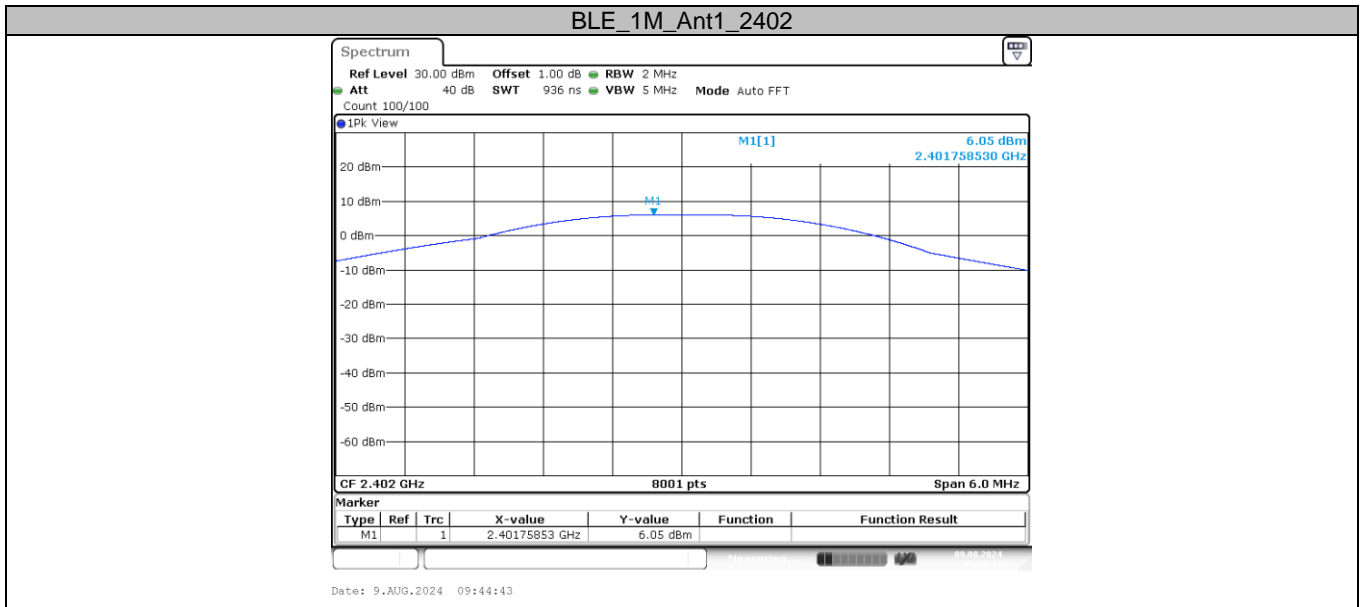




### 3.7. Power Spectral Density

#### Limit

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e)

Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	8 dBm (in any 3 kHz)	2400~2483.5

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:  
 Set analyzer center frequency to DTS channel center frequency.  
 Set the span to 1.5 times the DTS bandwidth.  
 Set the RBW to: 3 kHz.  
 Set the VBW to: 10 kHz.  
 Detector: peak.  
 Sweep time: auto.  
 Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

#### Test Mode

Please refer to the clause 2.4.


#### Test Result

TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-8.64	≤8	PASS
		2440	-8.18	≤8	PASS
		2480	-9.70	≤8	PASS





Test plot as follows:

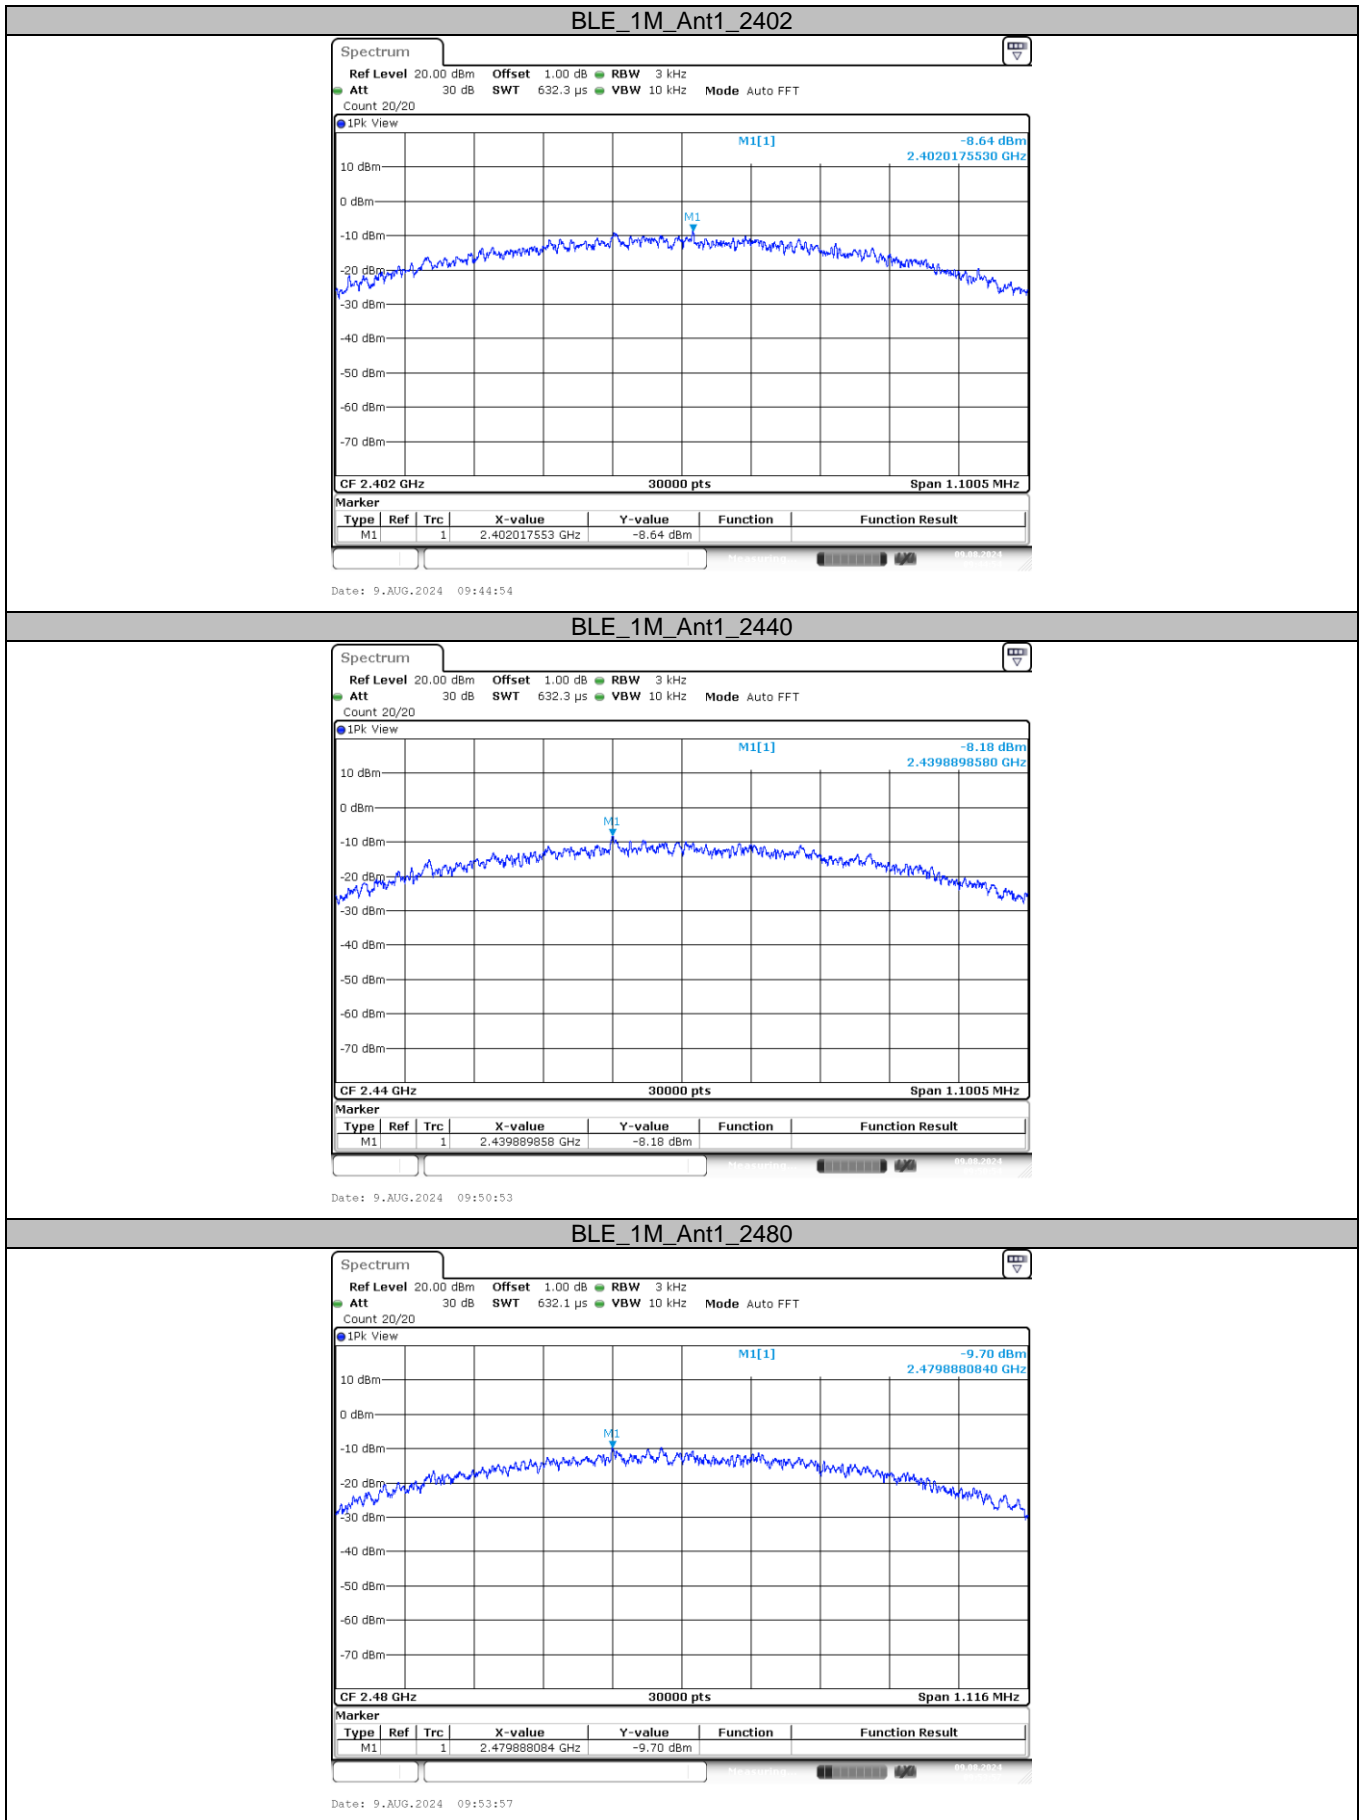




### 3.8. Duty Cycle

#### Limit

None, for report purposes only.

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:  
 Set analyzer center frequency to test channel center frequency.  
 Set the span to 0Hz.  
 Set the RBW to 10MHz.  
 Set the VBW to 10MHz.  
 Detector: Peak.  
 Sweep time: Auto.  
 Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

#### Test Mode

Please refer to the clause 2.4.

#### Test Result




Test Mode	Frequency (MHz)	Transmission Duration (ms)	Transmission Period (ms)	Duty Cycle (%)	1/T Minimum VBW (kHz)	Final Setting for VBW (kHz)
BLE_1M	2402	0.38	0.62	61.29	2.63	3
	2440	0.38	0.63	60.32	2.63	3
	2480	0.38	0.62	61.29	2.63	3







Test plot as follows:

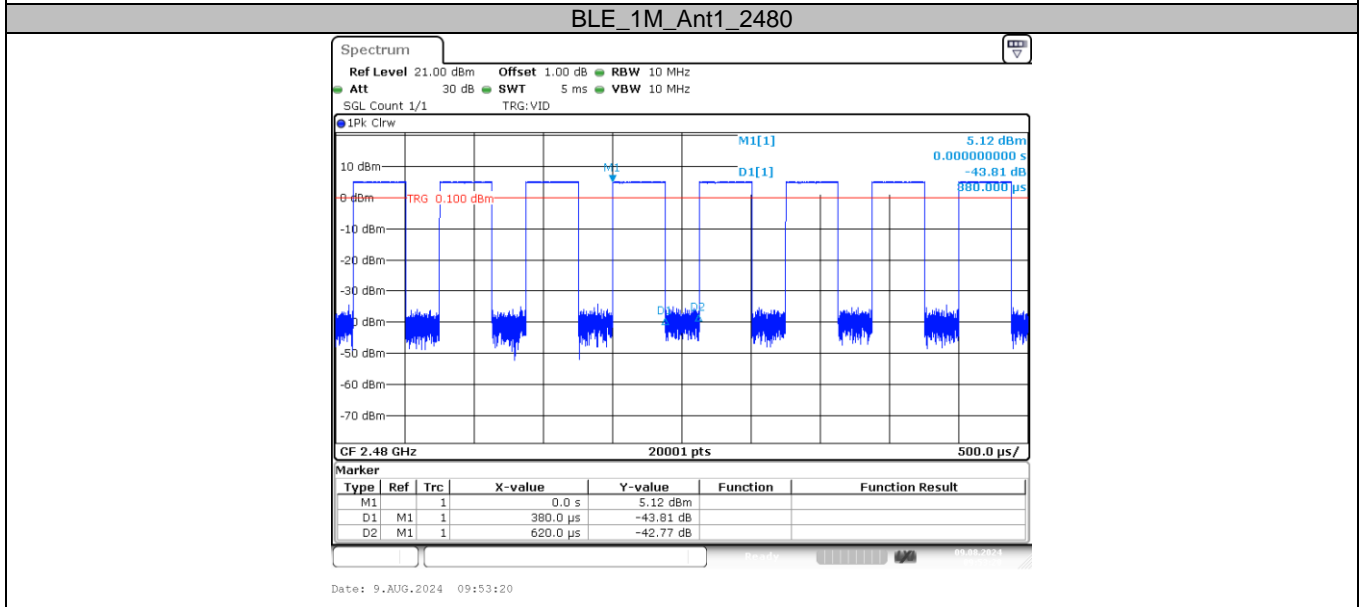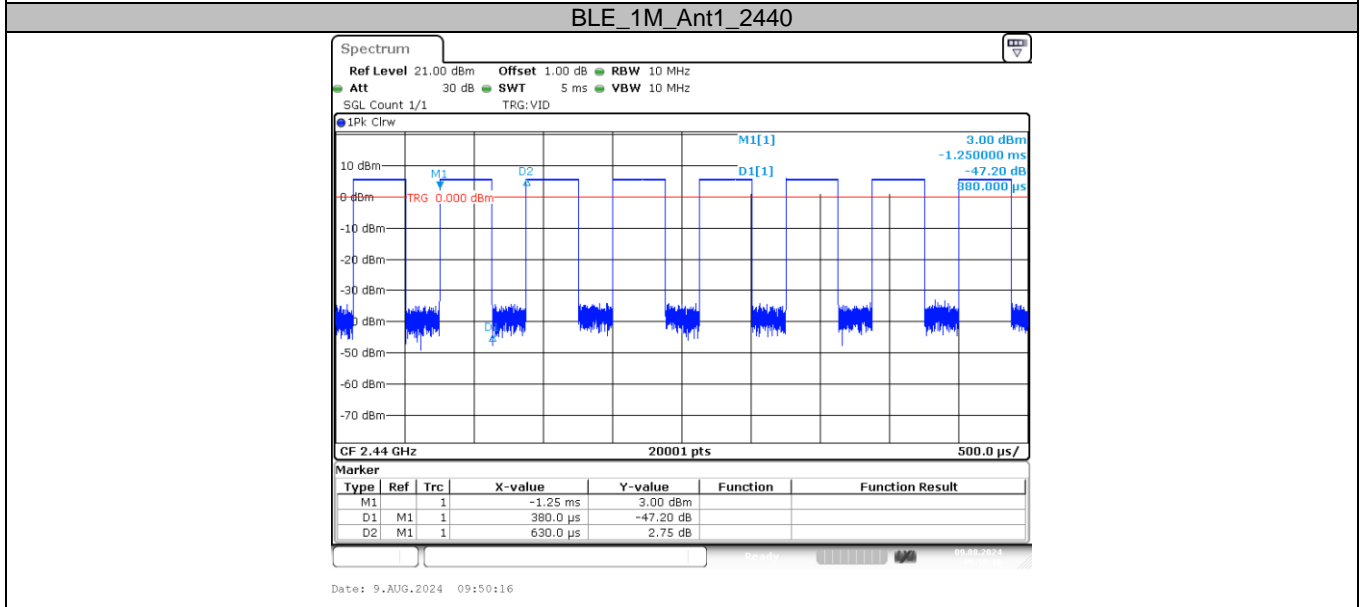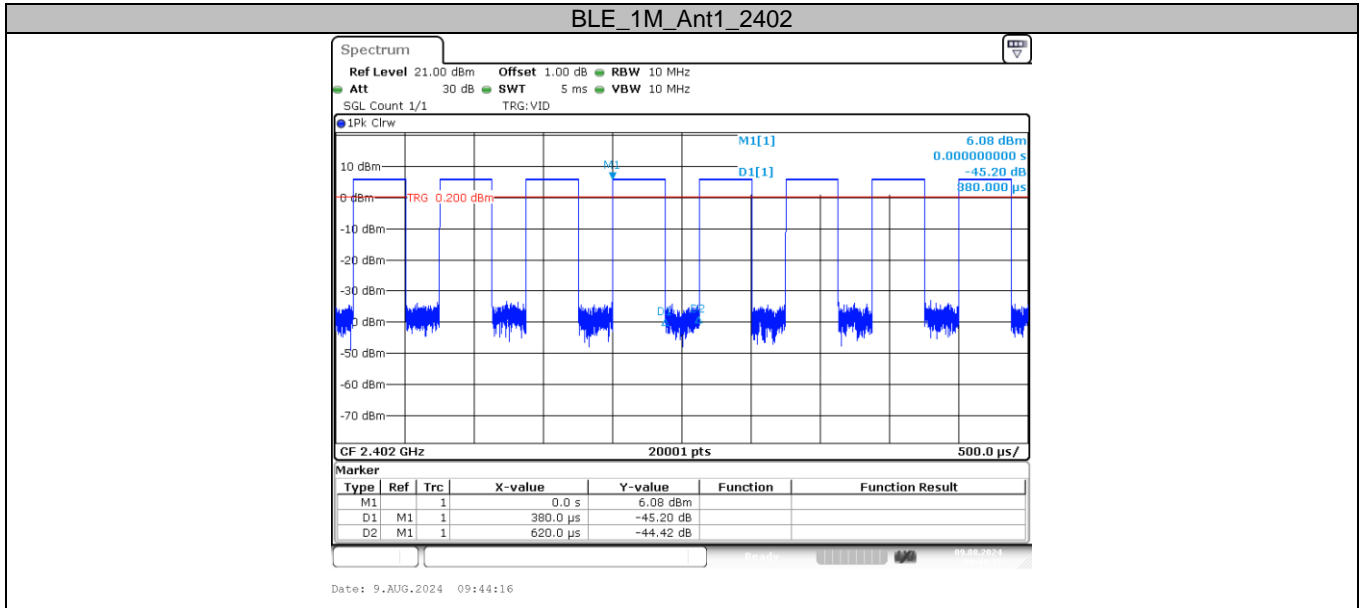



### 3.9. Antenna Requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)**

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### Test Result

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.

\*\*\*\*\*THE END\*\*\*\*\*