

RF TEST REPORT

Applicant	Tag-N-Trac Inc.
FCC ID	2A24I-V07G0BJ17
Product	SmartSense Label
Brand	Tag-N-Trac Inc.
Model	SSL300
Report No.	R2306A0684-R5
Issue Date	August 18, 2023

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2022)/ FCC CFR47 Part 27C (2022)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Xu Ying

Approved by: Xu Kai

TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2.	Test facility.....	4
1.3	Testing Location.....	4
2	General Description of Equipment under Test.....	5
2.1	Applicant and Manufacturer Information.....	5
2.2	General information.....	5
3	Applied Standards.....	7
4	Test Configuration.....	8
5	Test Case.....	9
5.1	RF Power Output and Effective Isotropic Radiated Power.....	9
5.2	Radiated Spurious Emission.....	11
6	Test Results.....	15
6.1	RF Power Output and Effective Isotropic Radiated Power.....	15
6.2	Radiated Spurious Emission.....	17
7	Main Test Instruments.....	25
	ANNEX A: The EUT Appearance.....	26
	ANNEX B: Test Setup Photos.....	27

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Isotropic Radiated Power	2.1046 /27.50(d)(4) /27.50(b)(10) /27.50(c)(10)	PASS
2	Radiated Spurious Emission	2.1053 /27.53(h) /27.53(g) /27.53(f) /27.53(c)	PASS
Date of Testing: June 19, 2023 and July 7, 2023 Date of Sample Received: June 15, 2023			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

Only Radiated Spurious Emission is tested for SSL300 in this report, and because of the change of antenna gain, Effective Isotropic Radiated Power also re evaluated.
Other test items refer to the Module report (Report No.: R2112A1193-R7, FCC ID: XMR2022BG772AGL).

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
 Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
 City: Shanghai
 Post code: 201201
 Country: P. R. China
 Contact: Xu Kai
 Telephone: +86-021-50791141/2/3
 Fax: +86-021-50791141/2/3-8000
 Website: <http://www.ta-shanghai.com>
 E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

Applicant	Tag-N-Trac Inc.
Applicant address	4250 Executive Sq, #675, La Jolla, California, United States, 92037
Manufacturer	Tag-N-Trac Inc.
Manufacturer address	4250 Executive Sq, #675, La Jolla, California, United States, 92037

2.2 General information

EUT Description		
Model	SSL300	
IMEI	868617060225648	
Hardware Version	V1.1	
Software Version	IRONHIDE_00_11_LO	
Power Supply	Battery / External power supply	
Antenna Type	PCB Antenna	
Antenna Gain	Band	Gain (dBi)
	NB-IoT Band 4	2.32
	NB-IoT Band 12	1.67
	NB-IoT Band 13	3.61
	NB-IoT Band 17	1.67
	NB-IoT Band 66	2.41
Test Mode(s)	NB-IoT Band 4/12/13/17/66;	
Test Modulation	BPSK, QPSK	
Category	NB2	
Deployment	stand-alone, In-band, Guard-band	
Sub-carrier spacing	3.75KHz, 15KHz	
Ntones	single-tone, multi-tone	
Maximum E.I.R.P. / E.R.P.	NB-IoT Band 4:	26.00 dBm
	NB-IoT Band 12:	23.47 dBm
	NB-IoT Band 13:	25.35 dBm
	NB-IoT Band 17:	23.14 dBm
	NB-IoT Band 66:	26.09 dBm
Rated Power Supply Voltage	3.7V	
Operating Voltage	Minimum: 2.5V Maximum: 4.2V	
Operating Temperature	Lowest: -20°C Highest: 60°C	
Testing Temperature	Lowest: -30°C Highest: 50°C	

Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)
	NB-IoT Band 4	1710 ~ 1755	2110 ~ 2155
	NB-IoT Band 12	699 ~ 716	729 ~ 746
	NB-IoT Band 13	777 ~ 787	746 ~ 756
	NB-IoT Band 17	704 ~ 716	734 ~ 746
	NB-IoT Band 66	1710 ~ 1780	2110 ~ 2180
EUT Accessory			
Battery	Manufacturer: Shenzhen Yabo Power Technology Co., Ltd Mode: LP 218880 DC 3.7V, 1600mAh		
Note: The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			

3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 27C (2022)

FCC CFR47 Part 2 (2022)

Reference standard:

ANSI C63.26-2015

KDB 971168 D01 Power Meas License Digital Systems v03r01

4 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, vertical polarization) and the worst case was recorded.

All modes as Subcarrier Spacing, modulations, Channel were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in NB-IoT is set based on the maximum RF Output Power.

The following testing in different mode is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for NB-IoT Band 4/12/13/17/66:

Test items	Mode	Deployment mode	Subcarrier Spacing (kHz)		Modulation		Test Channel		
		Stand-alone	3.75	15	BPSK	QPSK	L	M	H
RF Power Output and Effective Isotropic Radiated Power	NB-IoT B4	O	O	O	O	O	O	O	O
	NB-IoT B12	O	O	O	O	O	O	O	O
	NB-IoT B13	O	O	O	O	O	O	O	O
	NB-IoT B17	O	O	O	O	O	O	O	O
	NB-IoT B66	O	O	O	O	O	O	O	O
Radiated Spurious Emission	NB-IoT B4	O	-	O	-	O	O	O	O
	NB-IoT B12	O	-	O	-	O	O	O	O
	NB-IoT B13	O	-	O	-	O	O	O	O
	NB-IoT B17	O	-	O	-	O	O	O	O
	NB-IoT B66	O	-	O	-	O	O	O	O
Note 1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.									

5 Test Case

5.1 RF Power Output and Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity
20°C ~ 25°C	45% ~ 50%

Methods of Measurement


During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.

ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} + \text{Antenna Gain (dBi)}$$

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB.)}$$

Test Setup

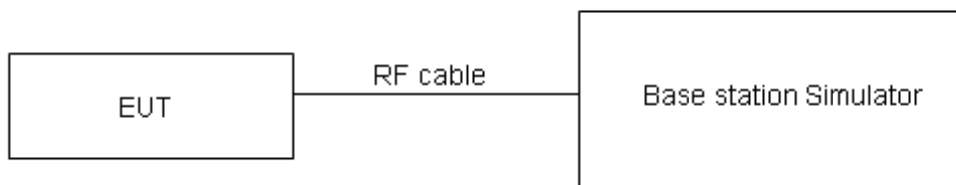

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 27.50(b) (10) specifies that “Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP”

Rule Part 27.50(c) (10) specifies that “Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP”

Rule Part 27.50(d) (4) specifies that “Fixed, mobile and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP”

Part 27.50(b)(10)Limit	≤ 3 W (34.77 dBm)
Part 27.50(c)(10)Limit	≤ 3 W (34.77 dBm)
Part 27.50(d)(4)Limit	≤ 1 W (30 dBm)

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4$ dB for RF power output, $k = 2$, $U= 1.19$ dB for ERP/EIRP.

Test Results

Refer to the section 6.1 of this report for test data.

5.2 Radiated Spurious Emission

Ambient condition

Temperature	Relative humidity
20°C ~ 25°C	45% ~ 50%

Method of Measurement

- The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26-2015.
- Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
- A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, and the maximum value of the receiver should be recorded as (Pr).
- The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
 The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dB.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz~ 30MHz

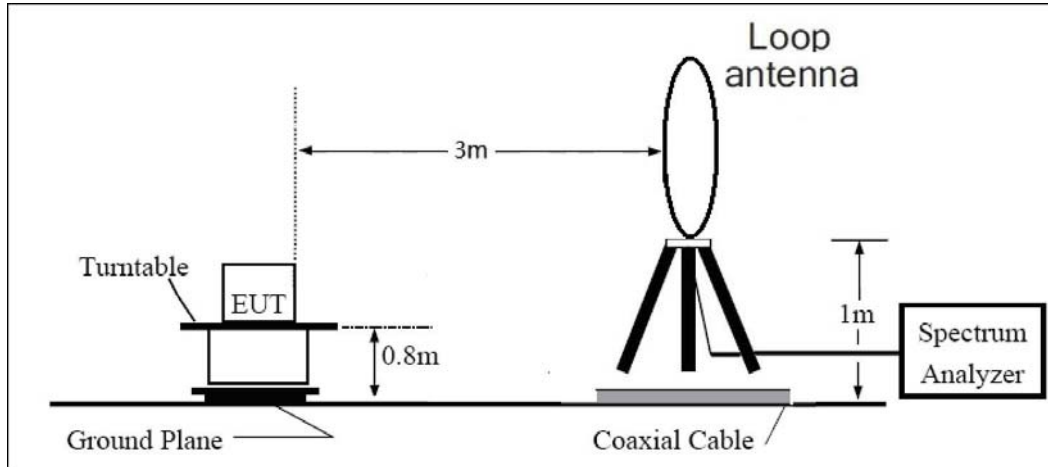

30MHz~ 1GHz

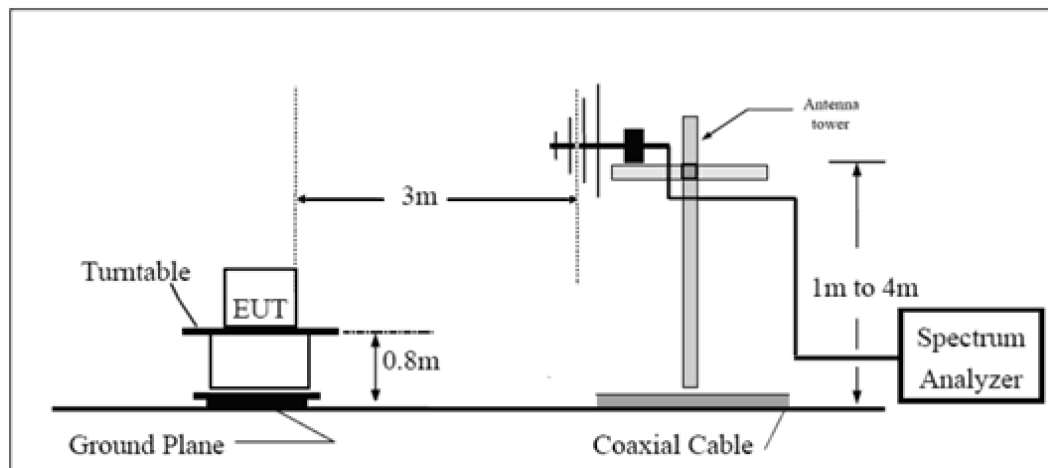

Above 1GHz

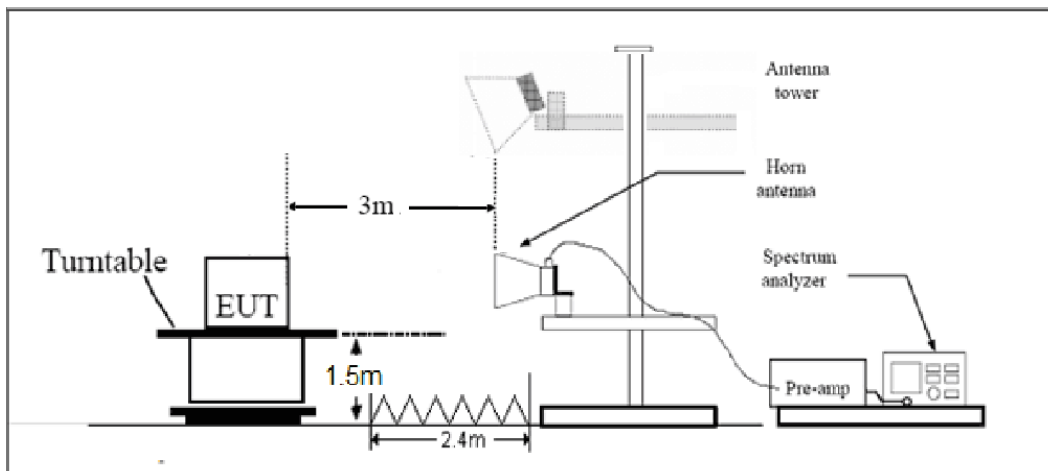

Note: Area side:2.4mX3.6m

Limits

LTE -4/66 Rule Part 27.53(h) specifies that “for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.”

LTE -12 Rule Part 27.53 (g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

LTE -13 Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

LTE 13 Part 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

Part 27.53 (h)/(g) Limit		-13 dBm
Part 27.53(f) Limit	Limit out of the band 1559-1610 MHz	-13 dBm
	Limit in the band 1559-1610 MHz	-40 dBm

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

Test Results

Refer to the section 6.2 of this report for test data.

6 Test Results

6.1 RF Power Output and Effective Isotropic Radiated Power

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Maximum Output Power (dBm) for low/middle/high channel			EIRP (dBm)		
				19952/ 1710.2MHz	20175/ 1732.5 MHz	20398/ 1754.8 MHz	19952/ 1710.2MHz	20175/ 1732.5 MHz	20398/ 1754.8 MHz
				NB-IoT Band 4	BPSK	3.75	1@0	23.29	23.37
1@47	23.30	23.39	23.68				25.62	25.71	26.00
15	1@0	23.51	23.32			23.59	25.83	25.64	25.91
	1@11	23.44	23.38			23.47	25.76	25.70	25.79
QPSK	3.75	1@0	23.31		23.33	23.65	25.63	25.65	25.97
		1@47	23.28		23.37	23.64	25.60	25.69	25.96
	15	1@0	23.35		23.32	23.41	25.67	25.64	25.73
		1@11	23.51		23.45	23.51	25.83	25.77	25.83
		12@0	21.90		21.62	21.78	24.22	23.94	24.10

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Maximum Output Power (dBm) for low/middle/high channel			ERP (dBm)		
				23012/ 699.2 MHz	23095/ 707.5 MHz	23178/ 715.8 MHz	23012/ 699.2 MHz	23095/ 707.5 MHz	23178/ 715.8 MHz
				NB-IoT Band 12	BPSK	3.75	1@0	22.83	22.95
1@47	22.78	22.97	23.15				22.30	22.49	22.67
15	1@0	23.78	23.84			23.65	23.30	23.36	23.17
	1@11	23.95	23.75			23.63	23.47	23.27	23.15
QPSK	3.75	1@0	22.73		22.92	23.17	22.25	22.44	22.69
		1@47	22.77		22.94	23.12	22.29	22.46	22.64
	15	1@0	23.75		23.70	23.55	23.27	23.22	23.07
		1@11	23.75		23.64	23.74	23.27	23.16	23.26
	15	12@0	22.08		22.11	21.95	21.60	21.63	21.47

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Maximum Output Power (dBm) for low/middle/high channel			ERP (dBm)		
				23182/ 777.2 MHz	23230/ 782MHz	23278/ 786.8 MHz	23182/ 777.2 MHz	23230/ 782MHz	23278/ 786.8 MHz
NB-IoT Band 13	BPSK	3.75	1@0	23.70	23.55	23.48	25.16	25.01	24.94
			1@47	23.63	23.54	23.40	25.09	25.00	24.86
		15	1@0	23.73	23.78	23.78	25.19	25.24	25.24
			1@11	23.68	23.74	23.75	25.14	25.20	25.21
	QPSK	3.75	1@0	23.61	23.50	23.42	25.07	24.96	24.88
			1@47	23.58	23.52	23.44	25.04	24.98	24.90
		15	1@0	23.66	23.70	23.67	25.12	25.16	25.13
			1@11	23.79	23.89	23.82	25.25	25.35	25.28
		15	12@0	22.16	22.21	22.18	23.62	23.67	23.64

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Maximum Output Power (dBm) for low/middle/high channel			ERP (dBm)		
				23732/ 704.2 MHz	23790/ 710 MHz	23848/ 715.8 MHz	23732/ 704.2 MHz	23790/ 710 MHz	23848/ 715.8 MHz
NB-IoT Band 17	BPSK	3.75	1@0	22.84	22.88	23.02	22.36	22.40	22.54
			1@47	22.82	22.92	23.05	22.34	22.44	22.57
		15	1@0	23.56	23.42	23.54	23.08	22.94	23.06
			1@11	23.62	23.59	23.52	23.14	23.11	23.04
	QPSK	3.75	1@0	22.76	22.88	23.03	22.28	22.40	22.55
			1@47	22.78	22.87	23.04	22.30	22.39	22.56
		15	1@0	23.52	23.44	23.36	23.04	22.96	22.88
			1@11	23.59	23.55	23.54	23.11	23.07	23.06
		15	12@0	21.99	21.89	21.84	21.51	21.41	21.36

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Maximum Output Power (dBm) for low/middle/high channel			EIRP (dBm)		
				131974/ 1710.2 MHz	132322/ 1745 MHz	132670/ 1779.8 MHz	131974/ 1710.2 MHz	132322/ 1745 MHz	132670/ 1779.8 MHz
NB-IoT Band 66	BPSK	3.75	1@0	23.28	23.50	23.67	25.69	25.91	26.08
			1@47	23.32	23.52	23.68	25.73	25.93	26.09
		15	1@0	23.44	23.49	23.50	25.85	25.90	25.91
			1@11	23.47	23.60	23.58	25.88	26.01	25.99
	QPSK	3.75	1@0	23.31	23.51	23.63	25.72	25.92	26.04
			1@47	23.26	23.44	23.64	25.67	25.85	26.05
		15	1@0	23.39	23.34	23.45	25.80	25.75	25.86
			1@11	23.48	23.48	23.56	25.89	25.89	25.97
		15	12@0	21.96	21.68	21.73	24.37	24.09	24.14

6.2 Radiated Spurious Emission

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

NB-IoT Band 4 15KHz+QPSK CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3420.00	-46.58	2.70	12.70	Vertical	-36.58	-13.00	23.58	117
3	5130.00	-52.89	3.20	12.50	Vertical	-43.59	-13.00	30.59	168
4	6840.00	-56.24	4.20	11.80	Vertical	-48.64	-13.00	35.64	28
5	8550.00	-57.23	4.40	12.50	Vertical	-49.13	-13.00	36.13	167
6	10260.00	-51.98	4.70	11.30	Vertical	-45.38	-13.00	32.38	135
7	11970.00	-56.19	5.20	13.80	Vertical	-47.59	-13.00	34.59	178
8	13680.00	-50.85	5.70	11.30	Vertical	-45.25	-13.00	32.25	174
9	15390.00	-58.36	6.10	16.80	Vertical	-47.66	-13.00	34.66	25
10	17100.00	-51.17	6.10	14.20	Vertical	-43.07	-13.00	30.07	168

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 4 15KHz+QPSK CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3465.00	-40.38	2.70	12.70	Vertical	-30.38	-13.00	17.38	2
3	5197.50	-56.97	3.20	12.50	Vertical	-47.67	-13.00	34.67	84
4	6930.00	-53.49	4.20	11.80	Vertical	-45.89	-13.00	32.89	22
5	8662.50	-55.68	4.40	12.50	Vertical	-47.58	-13.00	34.58	83
6	10395.00	-51.67	4.70	11.30	Vertical	-45.07	-13.00	32.07	62
7	12127.50	-55.91	5.20	13.80	Vertical	-47.31	-13.00	34.31	312
8	13860.00	-49.98	5.70	11.30	Vertical	-44.38	-13.00	31.38	245
9	15592.50	-58.08	6.10	16.80	Vertical	-47.38	-13.00	34.38	287
10	17325.00	-53.48	6.10	14.20	Vertical	-45.38	-13.00	32.38	264

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 4 15KHz+QPSK CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3509.80	-44.46	2.70	12.70	Vertical	-34.46	-13.00	21.46	287
3	5264.70	-53.92	3.20	12.50	Vertical	-44.62	-13.00	31.62	24
4	7019.60	-51.61	4.20	11.80	Vertical	-44.01	-13.00	31.01	182
5	8774.50	-55.81	4.40	12.50	Vertical	-47.71	-13.00	34.71	28
6	10529.40	-50.07	4.70	11.30	Vertical	-43.47	-13.00	30.47	164
7	12284.30	-56.11	5.20	13.80	Vertical	-47.51	-13.00	34.51	285
8	14039.20	-50.20	5.70	11.30	Vertical	-44.60	-13.00	31.60	1
9	15794.10	-59.23	6.10	16.80	Vertical	-48.53	-13.00	35.53	17
10	17549.00	-54.76	6.10	14.20	Vertical	-46.66	-13.00	33.66	28

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 12 15KHz+QPSK CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1398.20	-48.13	1.70	8.70	Vertical	-43.28	-13.00	30.28	227
3	2097.30	-43.95	2.10	11.10	Vertical	-37.10	-13.00	24.10	15
4	2796.40	-57.14	2.30	13.10	Vertical	-48.49	-13.00	35.49	38
5	3495.50	-62.15	2.60	12.70	Vertical	-54.20	-13.00	41.20	187
6	4194.60	-57.77	3.30	12.50	Vertical	-50.72	-13.00	37.72	35
7	4893.70	-60.32	3.40	12.50	Vertical	-53.37	-13.00	40.37	185
8	5592.80	-51.05	3.30	12.50	Vertical	-44.00	-13.00	31.00	167
9	6291.90	-58.09	3.80	11.50	Vertical	-52.54	-13.00	39.54	312
10	6991.00	-56.28	4.20	11.80	Vertical	-50.83	-13.00	37.83	245

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 12 15KHz+QPSK CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1415.00	-49.07	1.70	8.70	Vertical	-44.22	-13.00	31.22	17
3	2122.50	-43.03	2.10	11.10	Vertical	-36.18	-13.00	23.18	165
4	2830.00	-52.19	2.30	13.10	Vertical	-43.54	-13.00	30.54	28
5	3525.50	-63.95	2.60	12.70	Vertical	-56.00	-13.00	43.00	264
6	4230.60	-59.88	3.30	12.50	Vertical	-52.83	-13.00	39.83	24
7	4935.70	-60.11	3.40	12.50	Vertical	-53.16	-13.00	40.16	135
8	5640.80	-52.36	3.30	12.50	Vertical	-45.31	-13.00	32.31	22
9	6345.90	-58.51	3.80	11.50	Vertical	-52.96	-13.00	39.96	78
10	7051.00	-55.94	4.20	11.80	Vertical	-50.49	-13.00	37.49	35

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 12 15KHz+QPSK CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1431.80	-46.40	1.70	8.70	Vertical	-41.55	-13.00	28.55	47
3	2147.70	-43.31	2.10	11.10	Vertical	-36.46	-13.00	23.46	168
4	2863.60	-54.28	2.30	13.10	Vertical	-45.63	-13.00	32.63	315
5	3579.50	-63.10	2.60	12.70	Vertical	-55.15	-13.00	42.15	315
6	4295.40	-61.79	3.30	12.50	Vertical	-54.74	-13.00	41.74	86
7	5011.30	-59.81	3.40	12.50	Vertical	-52.86	-13.00	39.86	36
8	5727.20	-50.42	3.30	12.50	Vertical	-43.37	-13.00	30.37	315
9	6443.10	-58.39	3.80	11.50	Vertical	-52.84	-13.00	39.84	85
10	7159.00	-54.38	4.20	11.80	Vertical	-48.93	-13.00	35.93	67

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 13 15KHz+QPSK CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1554.20	-59.49	1.70	8.70	Vertical	-54.64	-13.00	41.64	168
3	2331.30	-60.14	2.30	12.00	Vertical	-52.59	-13.00	39.59	315
4	3108.40	-60.76	2.70	12.70	Vertical	-52.91	-13.00	39.91	312
5	3885.50	-55.78	3.00	12.50	Vertical	-48.43	-13.00	35.43	245
6	4662.60	-60.46	3.40	12.50	Vertical	-53.51	-13.00	40.51	287
7	5439.70	-59.83	3.40	12.80	Vertical	-52.58	-13.00	39.58	264
8	6216.80	-49.13	4.10	11.50	Vertical	-43.88	-13.00	30.88	24
9	6993.90	-56.53	4.20	12.20	Vertical	-50.68	-13.00	37.68	135
10	7771.00	-56.06	4.30	12.50	Vertical	-50.01	-13.00	37.01	84

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 13 15KHz+QPSK CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1564.00	-63.06	1.70	8.70	Vertical	-56.06	-40.00	16.06	187
Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
3	2346.00	-60.61	2.10	12.00	Vertical	-52.86	-13.00	39.86	35
4	3128.00	-63.07	2.30	13.10	Vertical	-54.42	-13.00	41.42	83
5	3910.00	-61.80	2.90	12.50	Vertical	-54.35	-13.00	41.35	62
6	4692.00	-60.92	3.10	12.50	Vertical	-53.67	-13.00	40.67	312
7	5474.00	-59.12	3.30	12.50	Vertical	-52.07	-13.00	39.07	245
8	6256.00	-52.30	3.50	12.80	Vertical	-45.15	-13.00	32.15	287
9	7038.00	-55.29	4.20	11.80	Vertical	-49.84	-13.00	36.84	264
10	7820.00	-55.14	4.40	12.30	Vertical	-49.39	-13.00	36.39	24

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 13 15KHz+QPSK CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1573.80	-63.31	1.70	8.70	Vertical	-56.31	-40.00	16.31	185
Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
3	2360.70	-60.79	2.10	12.00	Vertical	-53.04	-13.00	40.04	167
4	3147.60	-63.24	2.30	13.10	Vertical	-54.59	-13.00	41.59	241
5	3934.50	-61.65	2.90	12.50	Vertical	-54.20	-13.00	41.20	38
6	4721.40	-61.36	3.10	12.50	Vertical	-54.11	-13.00	41.11	36
7	5508.30	-59.62	3.30	12.50	Vertical	-52.57	-13.00	39.57	75
8	6295.20	-50.91	3.50	12.80	Vertical	-43.76	-13.00	30.76	28
9	7082.10	-55.58	4.20	11.80	Vertical	-50.13	-13.00	37.13	0
10	7869.00	-54.25	4.40	12.30	Vertical	-48.50	-13.00	35.50	68

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 17 15KHz+QPSK CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1408.20	-52.91	1.70	8.70	Vertical	-45.91	-13.00	32.91	47
3	2112.30	-48.94	2.10	11.10	Vertical	-39.94	-13.00	26.94	168
4	2816.40	-56.74	2.50	13.10	Vertical	-46.14	-13.00	33.14	315
5	3520.50	-65.00	2.60	12.70	Vertical	-54.90	-13.00	41.90	174
6	4224.60	-64.66	3.30	12.50	Vertical	-55.46	-13.00	42.46	25
7	4928.70	-63.03	3.40	12.50	Vertical	-53.93	-13.00	40.93	168
8	5632.80	-55.05	3.40	12.80	Vertical	-45.65	-13.00	32.65	23
9	6336.90	-60.56	4.10	11.50	Vertical	-53.16	-13.00	40.16	2
10	7041.00	-58.69	4.20	12.20	Vertical	-50.69	-13.00	37.69	84

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 17 15KHz+QPSK CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1420.00	-56.39	1.70	8.70	Vertical	-49.39	-13.00	36.39	187
3	2130.00	-49.19	2.10	11.10	Vertical	-40.19	-13.00	27.19	35
4	2840.00	-57.28	2.50	13.10	Vertical	-46.68	-13.00	33.68	185
5	3550.00	-65.91	2.60	12.70	Vertical	-55.81	-13.00	42.81	83
6	4260.00	-64.74	3.30	12.50	Vertical	-55.54	-13.00	42.54	62
7	4970.00	-62.55	3.40	12.50	Vertical	-53.45	-13.00	40.45	312
8	5680.00	-54.37	3.40	12.80	Vertical	-44.97	-13.00	31.97	245
9	6390.00	-59.64	4.10	11.50	Vertical	-52.24	-13.00	39.24	287
10	7100.00	-57.92	4.20	12.20	Vertical	-49.92	-13.00	36.92	264

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 17 15KHz+QPSK CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1431.80	-60.74	1.70	8.70	Vertical	-53.74	-13.00	40.74	167
3	2147.70	-53.93	2.10	11.10	Vertical	-44.93	-13.00	31.93	312
4	2863.60	-60.93	2.50	13.10	Vertical	-50.33	-13.00	37.33	178
5	3579.50	-63.49	2.60	12.70	Vertical	-53.39	-13.00	40.39	24
6	4295.40	-62.43	3.30	12.50	Vertical	-53.23	-13.00	40.23	24
7	5011.30	-62.51	3.40	12.50	Vertical	-53.41	-13.00	40.41	34
8	5727.20	-53.86	3.40	12.80	Vertical	-44.46	-13.00	31.46	278
9	6443.10	-60.18	4.10	11.50	Vertical	-52.78	-13.00	39.78	275
10	7159.00	-57.30	4.20	12.20	Vertical	-49.30	-13.00	36.30	185

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 66 15KHz+QPSK CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3420.20	-60.59	2.70	12.70	Vertical	-50.59	-13.00	37.59	314
3	5130.30	-60.95	3.20	12.50	Vertical	-51.65	-13.00	38.65	90
4	6840.40	-57.13	4.20	11.80	Vertical	-49.53	-13.00	36.53	5
5	8550.50	-55.68	4.40	12.50	Vertical	-47.58	-13.00	34.58	27
6	10260.60	-52.20	4.70	11.80	Vertical	-45.10	-13.00	32.10	19
7	11970.70	-55.18	5.20	13.80	Vertical	-46.58	-13.00	33.58	186
8	13680.80	-51.42	5.70	13.20	Vertical	-43.92	-13.00	30.92	24
9	15390.90	-59.89	6.10	16.80	Vertical	-49.19	-13.00	36.19	90
10	17101.00	-51.63	6.10	14.20	Vertical	-43.53	-13.00	30.53	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 66 15KHz+QPSK CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3489.70	-59.52	2.70	12.70	Vertical	-49.52	-13.00	36.52	90
3	5234.00	-61.02	3.20	12.50	Vertical	-51.72	-13.00	38.72	46
4	6979.00	-58.03	4.20	11.80	Vertical	-50.43	-13.00	37.43	18
5	8724.00	-55.21	4.40	12.50	Vertical	-47.11	-13.00	34.11	304
6	10530.00	-50.35	4.70	11.80	Vertical	-43.25	-13.00	30.25	9
7	12285.00	-54.81	5.20	13.80	Vertical	-46.21	-13.00	33.21	224
8	14040.00	-52.23	5.70	13.20	Vertical	-44.73	-13.00	31.73	164
9	15795.00	-58.85	6.10	16.80	Vertical	-48.15	-13.00	35.15	22
10	17550.00	-52.75	6.10	14.20	Vertical	-44.65	-13.00	31.65	183

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Vertical position.

NB-IoT Band 66 15KHz+QPSK CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3559.80	-63.26	2.70	12.70	Vertical	-53.26	-13.00	40.26	46
3	5339.70	-57.48	3.20	12.50	Vertical	-48.18	-13.00	35.18	187
4	7119.60	-56.27	4.20	11.80	Vertical	-48.67	-13.00	35.67	304
5	8899.50	-55.37	4.40	12.50	Vertical	-47.27	-13.00	34.27	49
6	10679.40	-49.95	4.70	11.80	Vertical	-42.85	-13.00	29.85	184
7	12459.30	-54.10	5.20	13.80	Vertical	-45.50	-13.00	32.50	304
8	14239.20	-51.99	5.70	13.20	Vertical	-44.49	-13.00	31.49	99
9	16019.10	-57.61	6.10	16.80	Vertical	-46.91	-13.00	33.91	26
10	17799.00	-51.22	6.10	14.20	Vertical	-43.12	-13.00	30.12	18

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Vertical position.

7 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Signal Analyzer	R&S	FSV30	100815	2022-12-10	2023-12-09
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	391	2022-09-29	2025-09-28
Horn Antenna	Schwarzbeck	BBHA 9120D	1594	2020-12-17	2023-12-16
Software	R&S	EMC32	10.35.10	/	/

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

***** END OF REPORT *****