



RADIO TEST REPORT

Report No: STS2109116H01

Issued for

TerreStar Corporation

344 Maple Avenue NW, #275 Vienna VA 22180 USA

Product Name:	Access Point
Brand Name:	N/A
Model Name:	AP1400A
Series Model:	N/A
FCC ID:	2A24SAP1400A
Test Standard:	FCC 47CFR §2.1091

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.





Test Report Certification

Applicant's Name..... : TerreStar Corporation
 Address : 344 Maple Avenue NW, #275 Vienna VA 22180 USA
Manufacturer's Name : TerreStar Corporation
 Address : 344 Maple Avenue NW, #275 Vienna VA 22180 USA

Product Description

Product Name..... : Access Point
 Brand Name : N/A
 Model Name : AP1400A
 Series Model..... : N/A

Standards : FCC 47CFR §2.1091

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test

Date of receipt of test item : Sept. 14, 2021
 Date (s) of performance of tests : Sept. 14, 2021~ Sept. 22, 2021
 Date of Issue..... : Sept. 22, 2021
 Test Result..... : **Pass**

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sean she)

Authorized Signatory :

(Vita Li)





TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 GENERAL DESCRIPTION OF THE EUT	5
1.2 TEST FACTORY	5
2. FCC 47CFR §2.1091 REQUIREMENT	6
2.1 TEST STANDARDS	6
2.2 LIMIT	6
2.3 EUT OPERATION CONDITION	6
2.4 CLASSIFICATION	6
2.5 TEST RESULT	7





Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	Sept. 22, 2021	STS2109116H01	ALL	Initial Issue





1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Access Point	
Brand Name	N/A	
Model Name	AP1400A	
Series Model	N/A	
Model Difference	N/A	
Product Description	The EUT is Access Point	
	Licensed frequency range	1390-1392 MHz, 1392-1395 MHz, 1432-1435 MHz
	Operating frequency range	1390-1395 MHz; 1432-1435 MHz
	Modulation Type:	GFSK
	Antenna gain:	Antenna 1: 2 dBi Antenna 2: 2 dBi
	Antenna Designation:	Rod Antenna
Power input	PoE (minimum 44V DC and 350 mA) 15.4W	
Hardware Version	N/A	
Software Version	N/A	

Note: Antenna 1 and Antenna 2 do not support simultaneous transmission. Both antenna 1 and antenna 2 have been tested, and the worst case is antenna 1. This report only shows the worst case.

1.2 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01



2. FCC 47CFR §2.1091 REQUIREMENT

2.1 TEST STANDARDS

The limit for Maximum Permissible Exposure (MPE) specified in FCC 1.1310 is followed. The gain of the antennas used in the product is extracted from the Antenna data sheets provided and also the maximum total power input to the antenna is measured. Through the Friis transmission formula and the maximum gain of the antenna, we can calculate the distance, away from the product, where the limit of MPE is reached.

Although the Friis Transmission formula is far field assumption, the calculated result of that is an over-prediction for near field power density. It is taken as worst case to specify the safety range.

2.2 LIMIT

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environmental impact of the human exposure to radio-frequency (RF) radiation as specified in 1.1307 (b)

Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)
Limits for Occupational / controlled Exposures			
300 - 1500	--	--	F/300
1500 – 100000	--	--	5.0
Limits for General population / Uncontrolled Exposure			
300 - 1500	--	--	F/1500
1500 – 100000	--	--	1.0

F= Frequency in MHz

Friss Formula

Friss Transmission Formula: $Pd = (Pout * G) / (4*pi*r^2)$

Where

Pd = power density in mW/cm²

Pout = output power to antenna in mW

G = gain of antenna in linear scale

Pi = 3.1416

R = Distance between observation point and the center of radiator in cm

If we know the maximum gain of the antenna and the total output power to the antenna, through calculation, we will know MPE value at distance 20cm.

2.3 EUT OPERATION CONDITION

EUT was enabled to transmit and receive at lowest, middle and highest channels.

2.4 CLASSIFICATION

The antenna of this product, under normal use condition, is at least 20cm away from the body of the user. Warning statement to the user for keeping at least 20cm or more separation distance from the antenna should be included in the User manual. So, this device is classified as Mobile device.




2.5 TEST RESULT

MAX Power:

RF Function	Peak Power (dBm)	AVG Power (dBm)	Duty cycle fator (dB)	T (ms)	Ton (ms)	Duty cycle (%)
1391.650	15	-6.71	21.7075051	26.67	0.18	0.67%
1433.544	14	-7.71	21.7075051	26.67	0.18	0.67%

Duty cycle

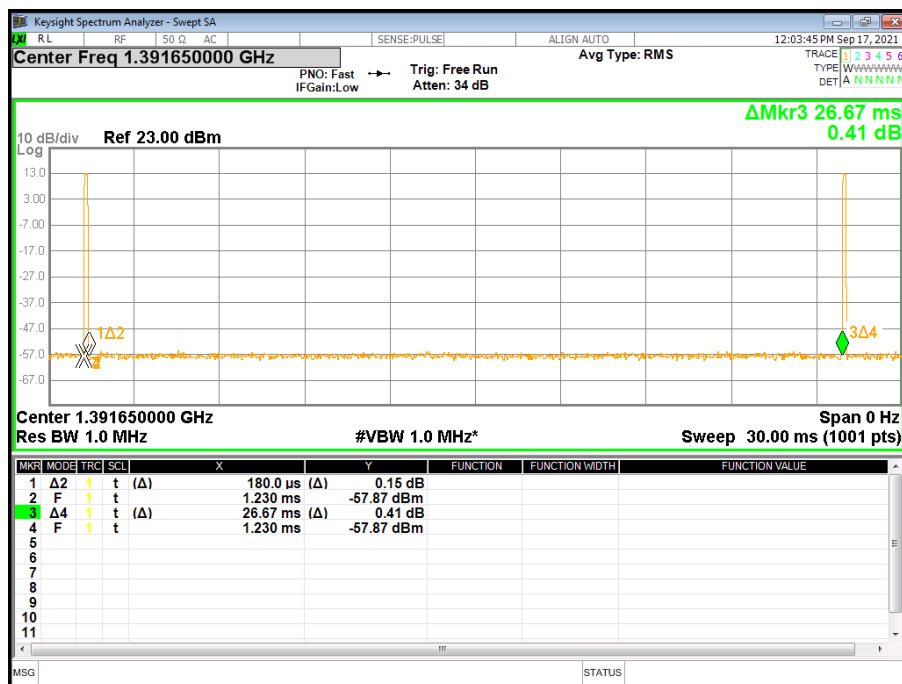

ANT Gain (G)

2dBi (gain of antenna in linear scale=1.58)

Protocol	Max Turn up Power (dBm)	Max Turn up Power (mW)	ANT Gain(gain of antenna in linear scale)	Power Density (mW/cm ²)	Limit (mW/c m ²)	Result
1391.650	-6.71	0.21	1.58	0.0001	0.928	Pass
1433.544	-7.71	0.17	1.58	0.0001	0.956	Pass

XXXXXXXXXXEND OF THE REPORTXXXXXXXXXX