

SPECIFICATIONS FOR APPROVAL

Customer Name: _____ 伊欧乐 _____

Product Name: _____ BT 天线 _____

Product Model: _____ C21001I10 _____

Part Number: _____

Write By : _____ 李志鹏 _____

Issued Date: _____ 2022-7-27 _____


CUSTOMER

ENGINEER R&D DEPT	BUSSINESS DEPT	APPROVED BY

SOUTHSTAR

R & D D E P T	ENGINEER R&D DEPT	APPROVAL

The basic parameters:

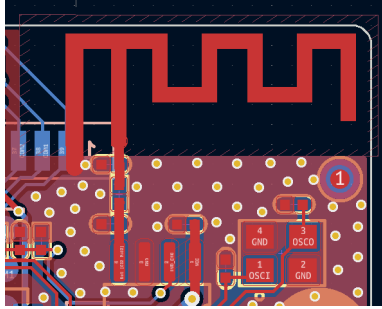
A. Electrical Characteristics	
Frequency	2400 MHz ~2500 MHz
VSWR	< 2
Efficiency	>40%
Impedance	50 Ohm
Polarization	Linear
Max. Gain	1.85dbi
B. Material & Mechanical Characteristics	
Material of Radiator	<u>PCB</u> <u>black</u>
Cable Type	
Connector Type	
Dimension	
C. Environmental	
Operation Temperature	-10 °C ~ + 50 °C
Storage Temperature	- 30 °C ~ + 85 °C

Test Equipment & Conditions


1. Network Analyzers :

Agilent 8753D 5071B


2. 3D Chamber Test System

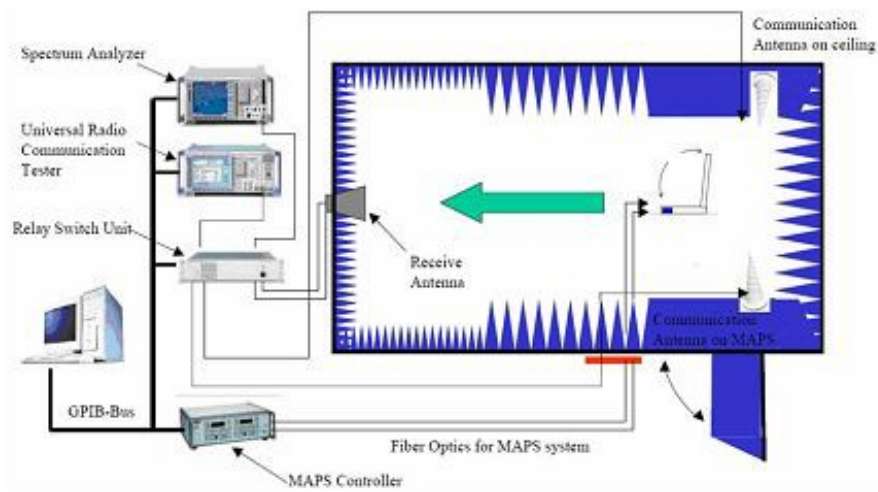

(Testing by 3D anechoic chamber)


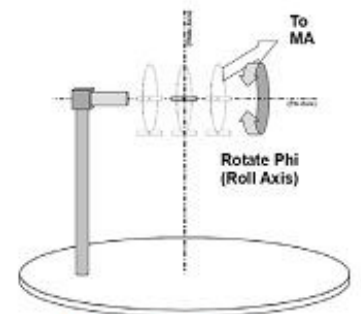


Phi axis test

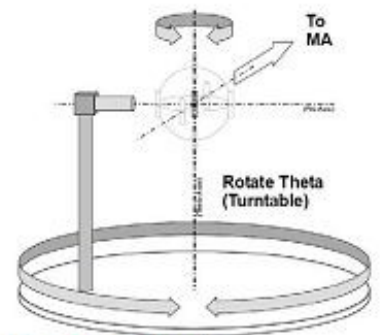


Theta axis test


3. Antenna Impedance: S11 (parameter)

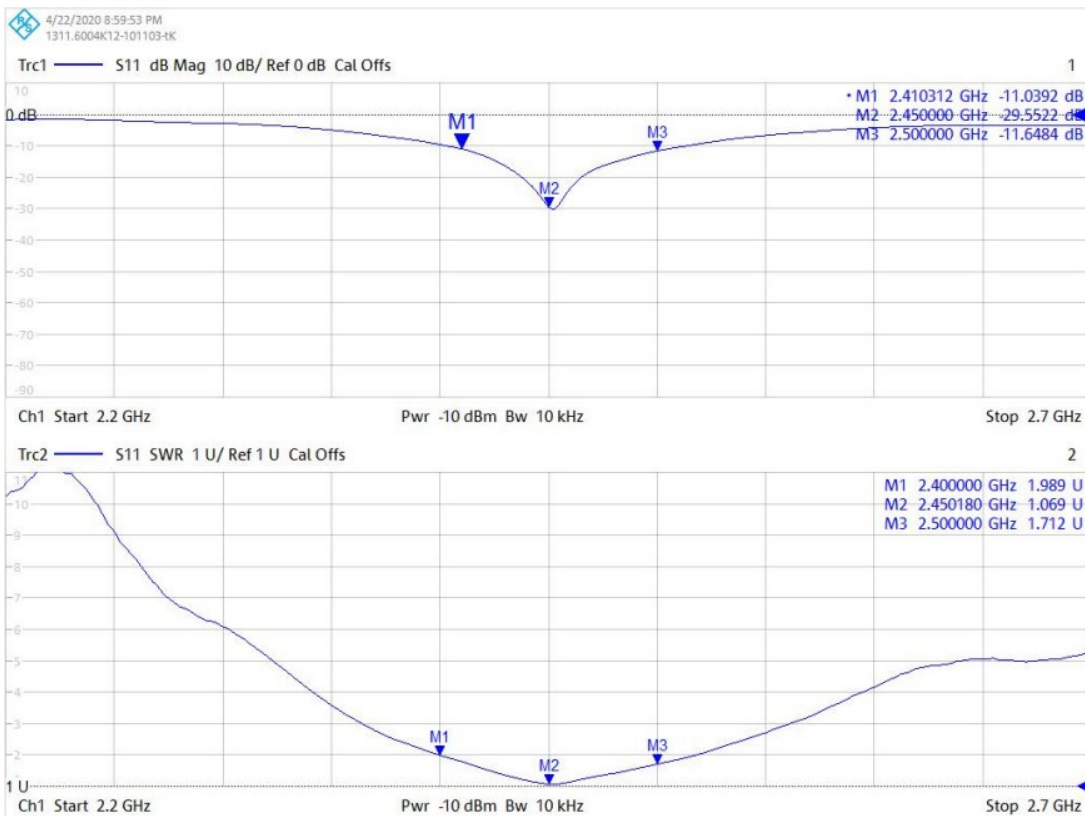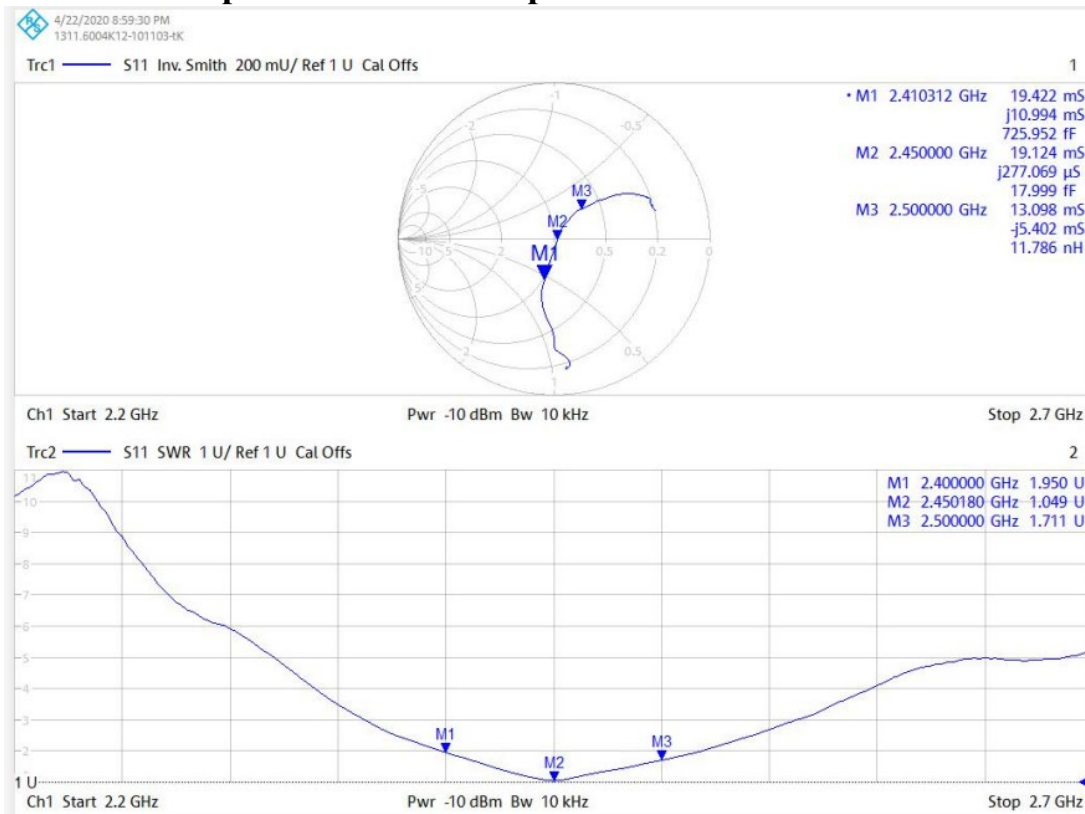


4. Total Efficiency-2.4G:

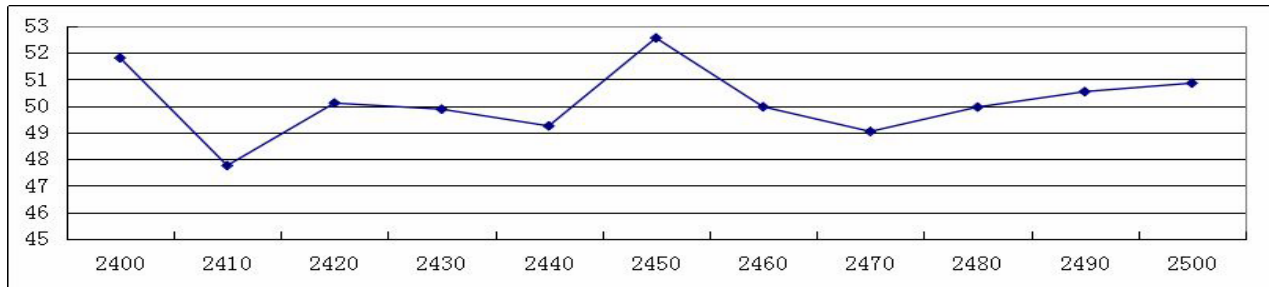


5. GAIN-2.4G:

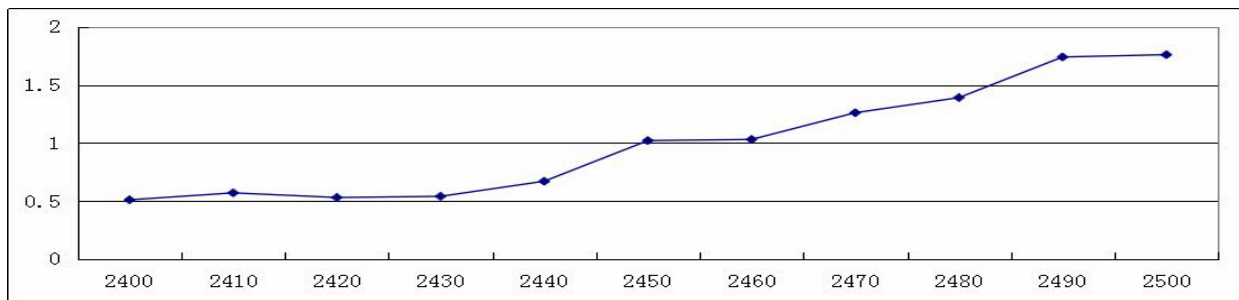


6.01 directional diagram (xy plane, Z=0)

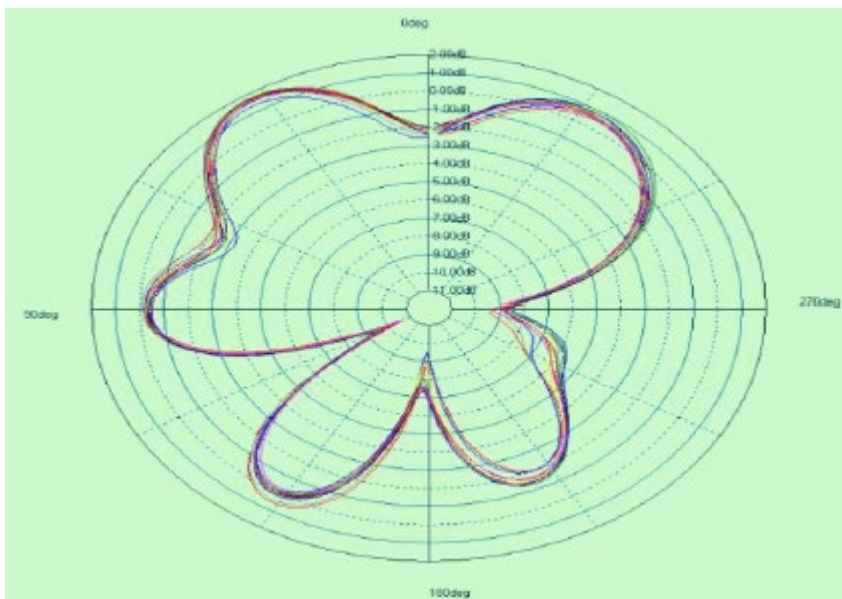


6.02 directional diagram (xy plane, Y=0)

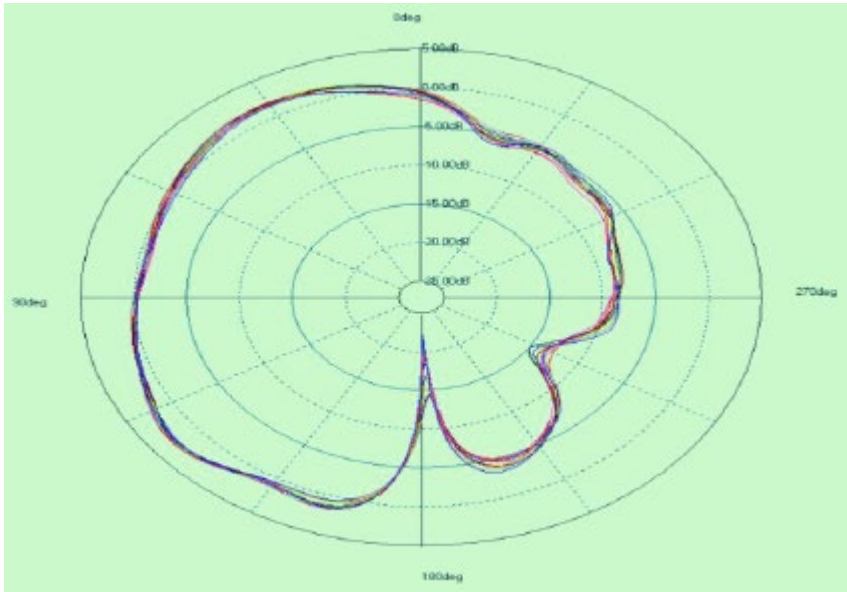

6.03 directional diagram(YZ plane, X=0)

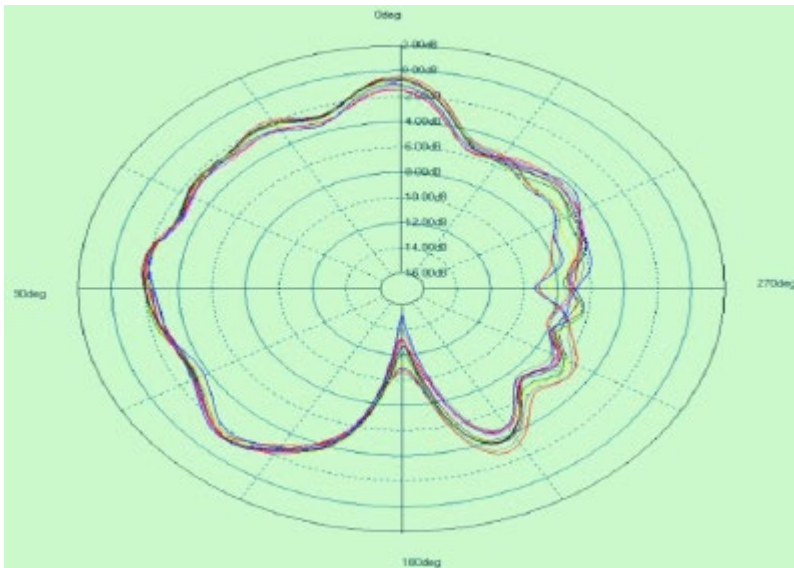

6.03 Apple Chart

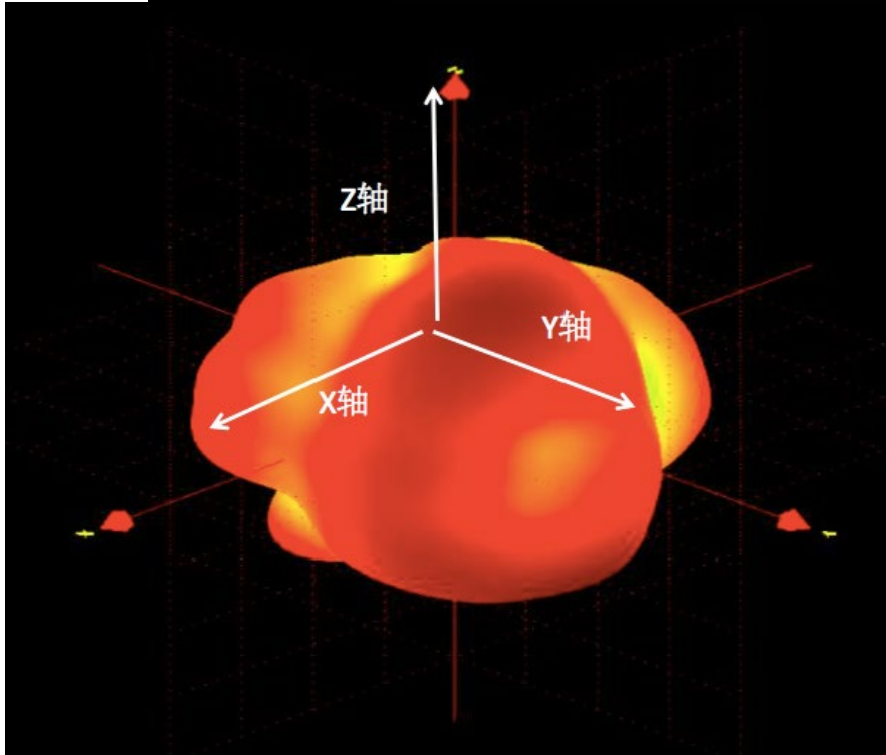

7. Installation method

