




TEST REPORT

Report Number	90534-21-72-21-PP022	
Date of issue	Oct.09.2021	
Tested by (+signature)	Duke	<i>Duke Chen</i>
Approved by (+signature)	Jason	<i>Jason gao</i>
Testing Laboratory name	SLG-CPC Testlaboratory Co., Ltd.	
Address	No. 11, Wu Song Road, Dongcheng District, Dongguan, Guangdong Province, China 523117	
Applicant's name	NANJING MIDAS TECHNOLOGY CO., LTD	
Address	Block A, Kechuang Building, Lishui District, Nanjing City, Jiangsu Province	
Manufacturer's name	NANJING MIDAS TECHNOLOGY CO., LTD	
Address	Block A, Kechuang Building, Lishui District, Nanjing City, Jiangsu Province	
Factory's name	NANJING MIDAS TECHNOLOGY CO., LTD	
Address	Block A, Kechuang Building, Lishui District, Nanjing City, Jiangsu Province	
Standard(s)	FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	
Test item description	Midas-926 Gateway	
Trade Mark		
Model/Type reference	Midas-926.GB915	
FCC ID	2A293M926GB915	
Date of receipt of test item	Sep.07.2021	
Date (s) of performance of test:	Sep.08.2021 to Sep.30.2021	
Summary of Test Results	Pass	

The Summary of Test Results based on a technical opinion belongs to the standard(s).

General disclaimer:

This report shall not be reproduced except in full, without the written approval of SLG-CPC Testlaboratory Co., Ltd. The test results in the report only apply to the tested sample.



Table of Contents

1	EUT TECHNICAL DESCRIPTION	3
2	SUMMARY OF TEST RESULT	4
3	TEST METHODOLOGY	5
3.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	5
3.2	MEASUREMENT EQUIPMENT USED	5
3.3	DESCRIPTION OF TEST MODES	6
4	FACILITIES AND ACCREDITATIONS	7
4.1	FACILITIES	7
4.2	LABORATORY ACCREDITATIONS AND LISTINGS	7
5	TEST SYSTEM UNCERTAINTY	8
6	SETUP OF EQUIPMENT UNDER TEST	9
6.1	RADIO FREQUENCY TEST SETUP 1	9
6.2	RADIO FREQUENCY TEST SETUP 2	9
6.3	CONDUCTED EMISSION TEST SETUP	11
6.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	12
6.5	SUPPORT EQUIPMENT	12
7	TEST REQUIREMENTS	13
7.1	20DB BANDWIDTH	13
7.2	DTS 6DB BANDWIDTH	16
7.3	CARRIER FREQUENCY SEPARATION	19
7.4	NUMBER OF HOPPING FREQUENCIES	22
7.5	AVERAGE TIME OF OCCUPANCY (DWELL TIME)	23
7.6	MAXIMUM PEAK CONDUCTED OUTPUT POWER	25
7.7	MAXIMUM POWER SPECTRAL DENSITY	29
7.8	CONDUCTED SUPRIIOUS EMISSION	32
7.9	RADIATED SPURIOUS EMISSION	37
7.10	CONDUCTED EMISSION TEST	42
7.11	ANTENNA APPLICATION	45



1 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product	Midas-926 Gateway
Model Number	Midas-926.GB915
Modulation:	Lora modulation for 915M
Antenna Type	External Antenna
Antenna Gain	3 dBi
Power supply	<input checked="" type="checkbox"/> DC supply: DC 5V
	<input checked="" type="checkbox"/> Adapter supply: Model:AS2401A-0503000US IN PUT:100~240V 50/60Hz 0.8A MAX OUT PUT: 5V 3000mA
Temperature Range:	-20°C ~ +55°C
Technicale Specification of Lora Hybrid	
Operating Frequency Range(s):	903.9-905.3MHz
Number of Channels:	8 channels
Channel Separation:	200 Khz
Occupied Bandwith:	125 Khz

Note: for more details, please refer to the User's manual of the EUT.



2 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(1)	20 dB Bandwidth	PASS	
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(a)(1)	Carrier Frequency Separation	PASS	
15.247(a)(1)	Number of Hopping Frequencies	N/A	
15.247(a)(1)	Average Time of Occupancy (Dwell Time)	PASS	
15.247(b)(1)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(c)	Conducted Spurious Emissions	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emissions	PASS	
15.207	Conducted Emission	PASS	
15.203	Antenna Application	PASS	
15.247 (a) (1)/g/h	Frequency Hopping System	PASS	
NOTE1: N/A (Not Applicable)			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2A293M926GB915 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.



3 TEST METHODOLOGY

3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

3.2 MEASUREMENT EQUIPMENT USED

Equipment	Model	Manufacturer	S/N	Cal. Due
RF Connected Test				
Vector Signal Generator	Rohde & Schwarz	SMBV100B(6G)	101166	2022/07/30
Analog Signal Generator	Rohde & Schwarz	SMB100A(40G)	181333	2022/07/30
Signal Analyzer	Rohde & Schwarz	FSV40	101527	2022/05/24
Power Analyzer	Rohde & Schwarz	OSP-B157W8	N/A	2022/09/23
Wideband Radio Communication Tester	R&S	CMW270	101985	2022/07/30
Temperature&Humidity test chamber	ESPEC	VC 4018	/	2022/04/02
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	166898	2022/09/07
Radiated Emission Test				
EMI Test Receiver	KEYSIGHT	N9010A	MY56070465	2021/12/23
EMI Test Receiver	Rohde & Schwarz	FSV40	101511	2022/05/24
Bilog Antenna	Schwarzbeck	VULB 9163	01335	2023/04/28
Power Amplifier	EMEC	EM330	060676	2021/12/23
Cable	Tuyue	F4309	L-400-NmNm-12000	2021/12/23
Signal Analyzer	Rohde & Schwarz	FSV40	101511	2022/05/24
Horn Antenna	Schwarzbeck	BBHA9170	/	2022/10/09
Power Amplifier	Rohde & Schwarz	SCU-18F	180118	2022/05/17
Active Loop Antenna	ETS LINDGREN	6512	41623	2022/04/26
Test Software	Farad	EZ-EMC	Ver.CPC-3A1	/
Conducted Emission Test				
LISN	Schwarzbeck	NSLK 8127	8127-892	2022-03-19
EMI Test Receiver	R&S	ESR3	102124	2021-12-23
Pulse Limiter	R&S	ESH3-Z2	357.8810.52	2021-12-22
Test Software	Farad	EZ-EMC	Ver.CPC-3A1	/



3.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates Lora modulation were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Hybrid

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	903.9	5	904.7		
2	904.1	6	904.9		
3	904.3	7	905.1		
4	904.5	8	905.3		

Test Frequency and channel for Hybrid

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	903.9	4	904.5	8	905.3



4 FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 11, Wu Song Road, Dongcheng District, Dongguan, Guangdong Province, China 523117

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

4.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by A2LA
The Certificate Number is 6325.01.

Name of Firm : SLG-CPC Testlaboratory Co., Ltd.
Site Location : No. 11, Wu Song Road, Dongcheng District, Dongguan,
Guangdong Province, China 523117



5 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\%$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$


Measurement Uncertainty for a level of Confidence of 95%



6 SETUP OF EQUIPMENT UNDER TEST

6.1 RADIO FREQUENCY TEST SETUP 1

The 915M component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



6.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)


The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

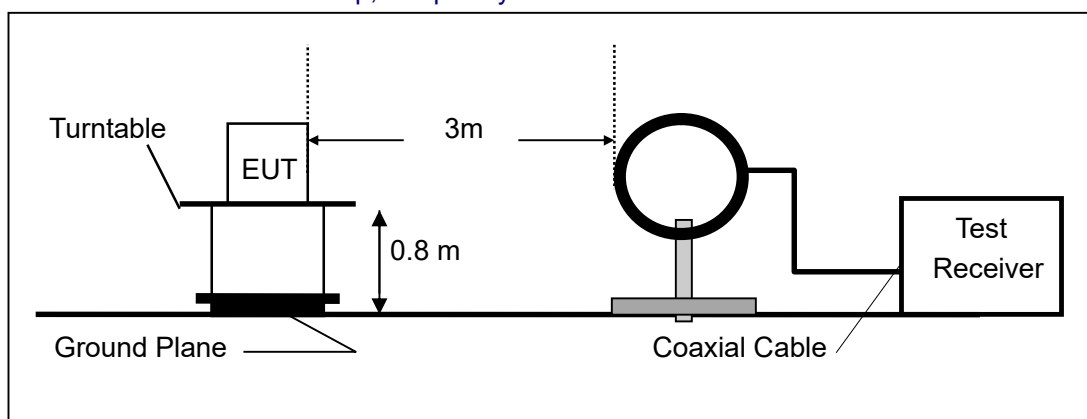




(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

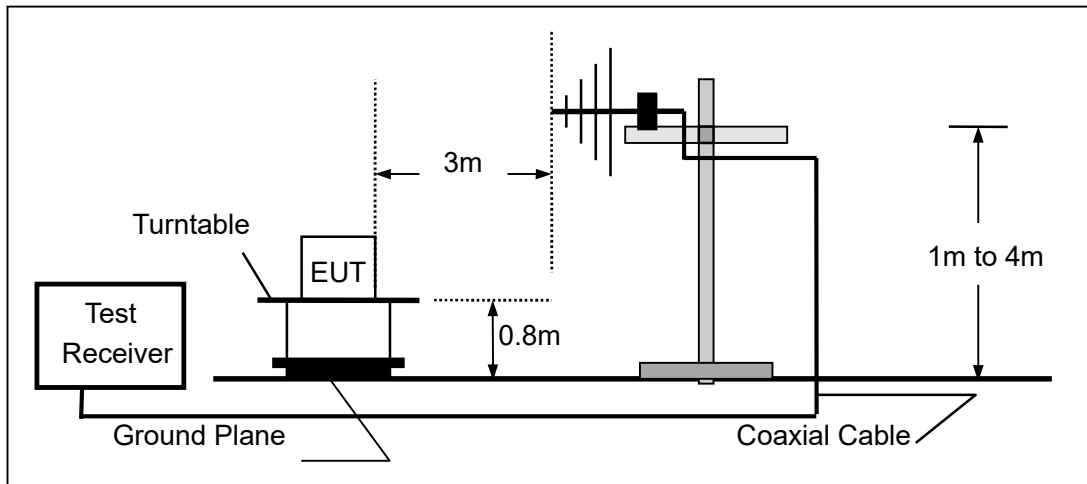

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

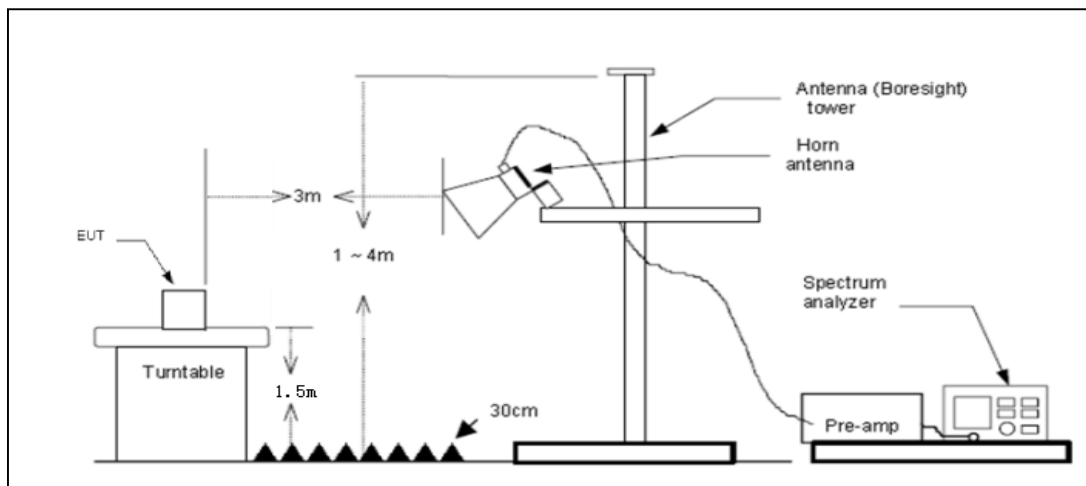




6.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Perfect Share Mini) must be connected to LISN. The LISN shall be placed 0.8m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.


Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

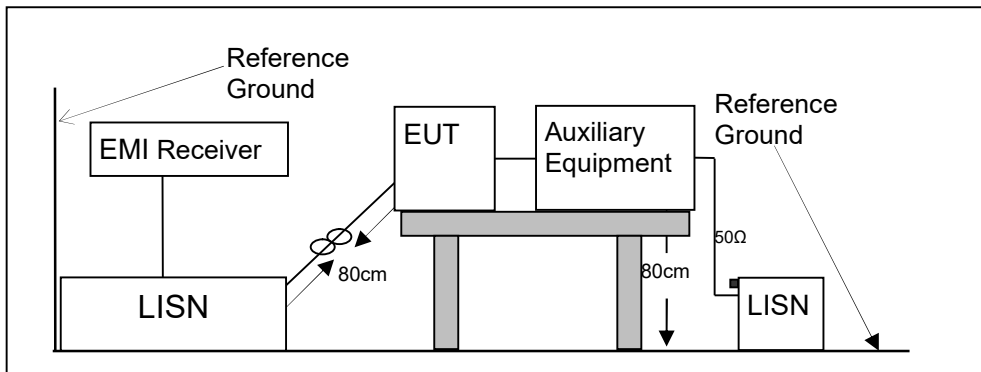



6.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

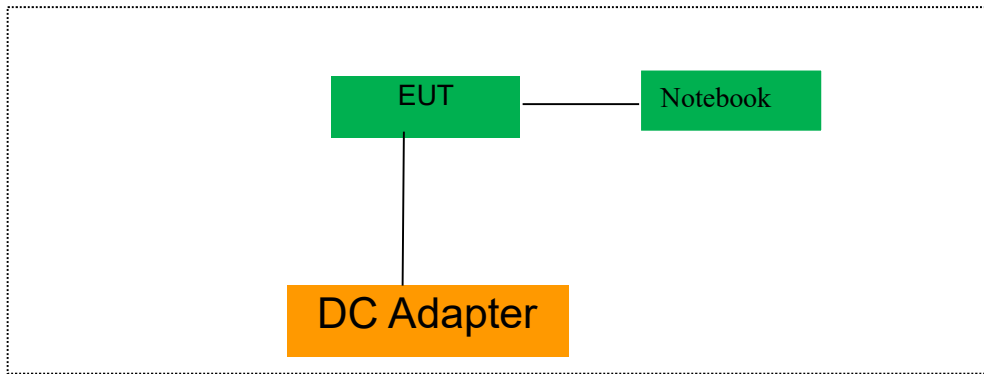

6.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC cable	1.0	Unshielded	Without Ferrite

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	MPNXB1505007	MP1XHYV7

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7 TEST REQUIREMENTS

7.1 20DB BANDWIDTH

7.1.1 Applicable Standard

According to FCC Part 15.247(f) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

7.1.2 Conformance Limit

No limit requirement.

7.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.1.4 Test Procedure

The EUT was operating in 915M mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 3 kHz.

Set the video bandwidth (VBW) =10 kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.


If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Modulation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (kHz)	Limit (kHz)	Verdict
Lora	1	903.9	137	N/A	PASS
	5	904.5	137	N/A	PASS
	8	905.3	137	N/A	PASS




20dB Bandwidth
 Test Model 915M
 Channel 1: 903.9MHz Lora Modulation



20dB Bandwidth
 Test Model 915M
 Channel 5: 904.5MHz Lora Modulation





Test Model 20dB Bandwidth
 915M
 Channel 8: 905.3MHz Lora Modulation





7.2 DTS 6DB BANDWIDTH

7.2.1 Applicable Standard

According to FCC Part 15.247(f) and KDB 558074 D01 15.247 Meas Guidance v05r02

7.2.2 Conformance Limit

There is no requirement for this type of hybrid system to comply with the 500 kHz minimum bandwidth normally associated with a DTS device.

7.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.2.4 Test Procedure

The EUT was operating in DTS mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.

Test Results


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (kHz)	Limit (kHz)	Verdict
DTS	1	903.9	161	N/A	PASS
	5	904.5	161	N/A	PASS
	8	905.3	161	N/A	PASS



DTS (6dB) Bandwidth
DTS


Test Model Channel 1: 923.3MHz

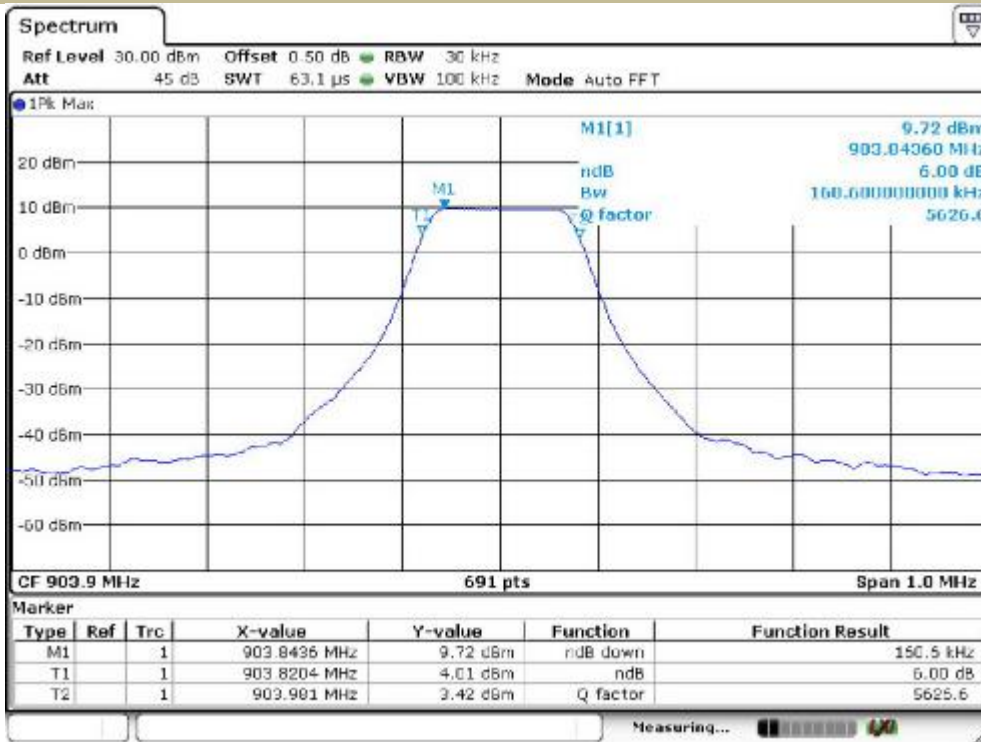

DTS (6dB) Bandwidth
DTS

Test Model Channel 5: 925.7MHz






Test Model

DTS (6dB) Bandwidth
DTS

Channel 8: 927.5MHz

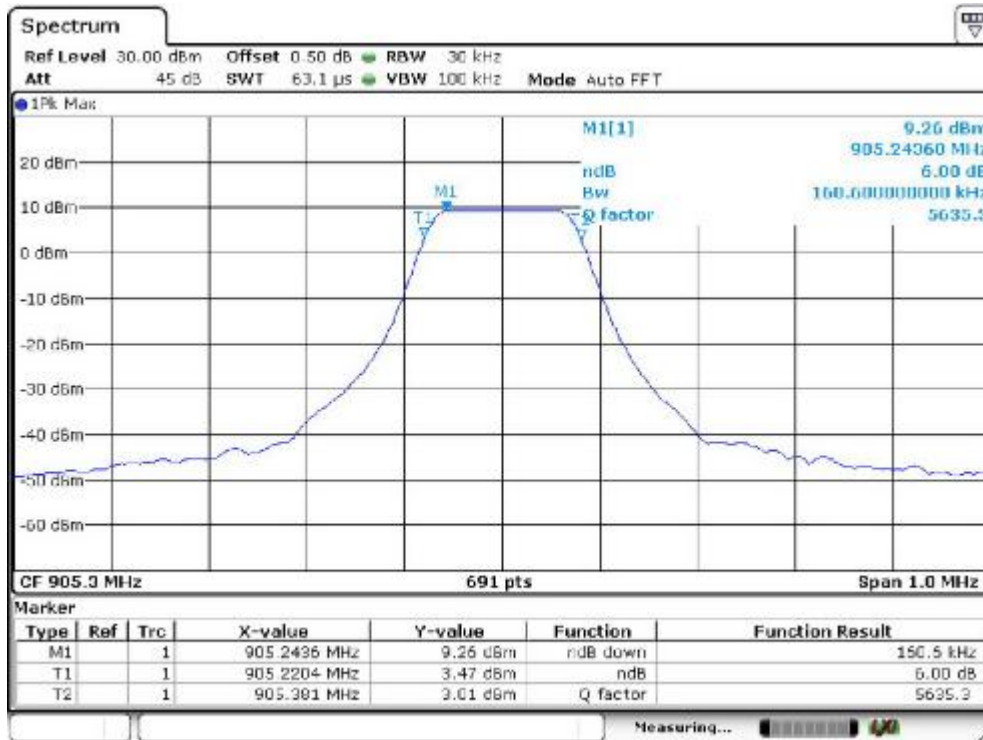



7.3 CARRIER FREQUENCY SEPARATION

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

7.3.2 Conformance Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater..

In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

7.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.3.4 Test Procedure

n According to FCC Part15.247(a)(1)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Set the RBW =1% of the 20 dB BW. Set VBW =3 * RBW.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.


Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Modulation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (kHz)	Limit (kHz)	Verdict
Lora	1	903.9	203	>137	PASS
	5	904.5	201	>137	PASS
	8	905.3	201	>137	PASS


Note: Limit = 20dB bandwidth




Carrier Frequency Separation
Test Model 915M
Channel 1: 903.9MHz Lora Modulation



Carrier Frequency Separation
Test Model 915M
Channel 5: 904.5MHz Lora Modulation

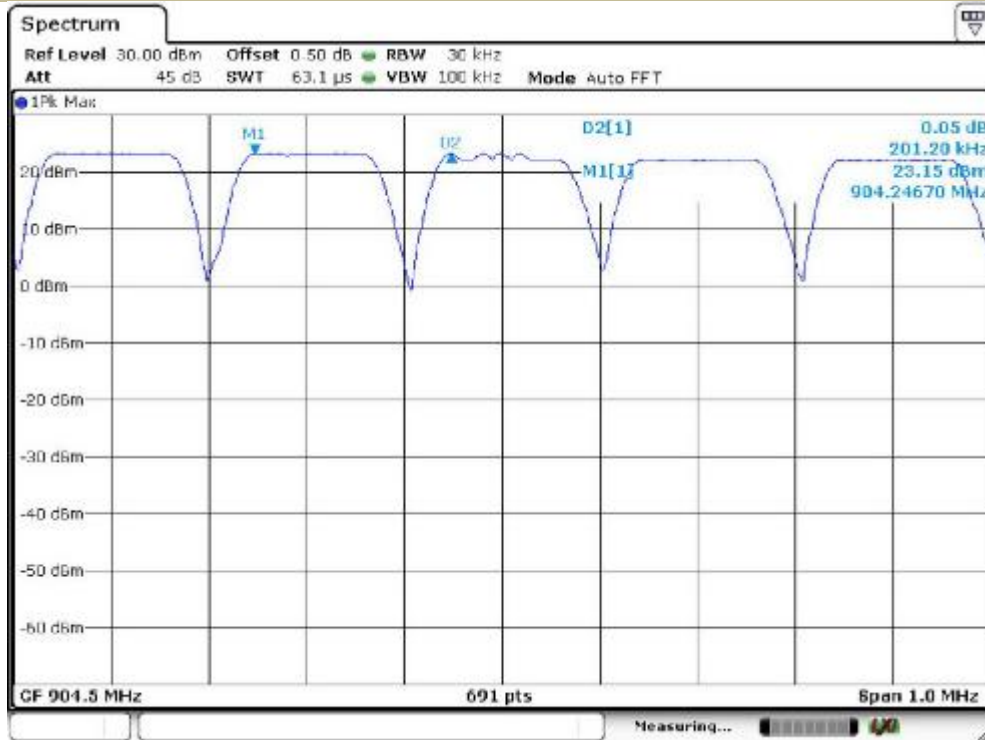



Carrier Frequency Separation
Test Model 915M
Channel 8: 905.3MHz Lora Modulation





7.4 NUMBER OF HOPPING FREQUENCIES

7.4.1 Applicable Standard

According to FCC Part 15.247(f) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

7.4.2 Conformance Limit

There is no minimum number of hopping channels associated with this type of hybrid system. While there is not a specific minimum limit, the hop sequence is required to appear as pseudorandom per Section 15.247(a)(1) (see Section 3 of this document).

7.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.4.4 Test Procedure

n According to FCC Part 15.247(a)(1)(i)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation (902-928MHz)

RBW \geq 100KHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

Test Results

N/A

Because the device is a hybrid device.



7.5 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

7.5.1 Applicable Standard

According to FCC Part 15.247(a)(1)(i) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

7.5.2 Conformance Limit

The transmission must comply with a 0.4 second/channel maximum dwell time when the hopping function is turned on.

7.5.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.5.4 Test Procedure

n According to FCC Part 15.247(a)(1)(i)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW \geq RBW

Sweep = as necessary to capture the entire dwell time per hopping channel


Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section.


7.5.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar



All mode have been tested, and the worst result was report as below:

	Average Time Of Occupancy (Dwell Time)	
Test Model	915M	
CH 1: 903.9MHz		Lora

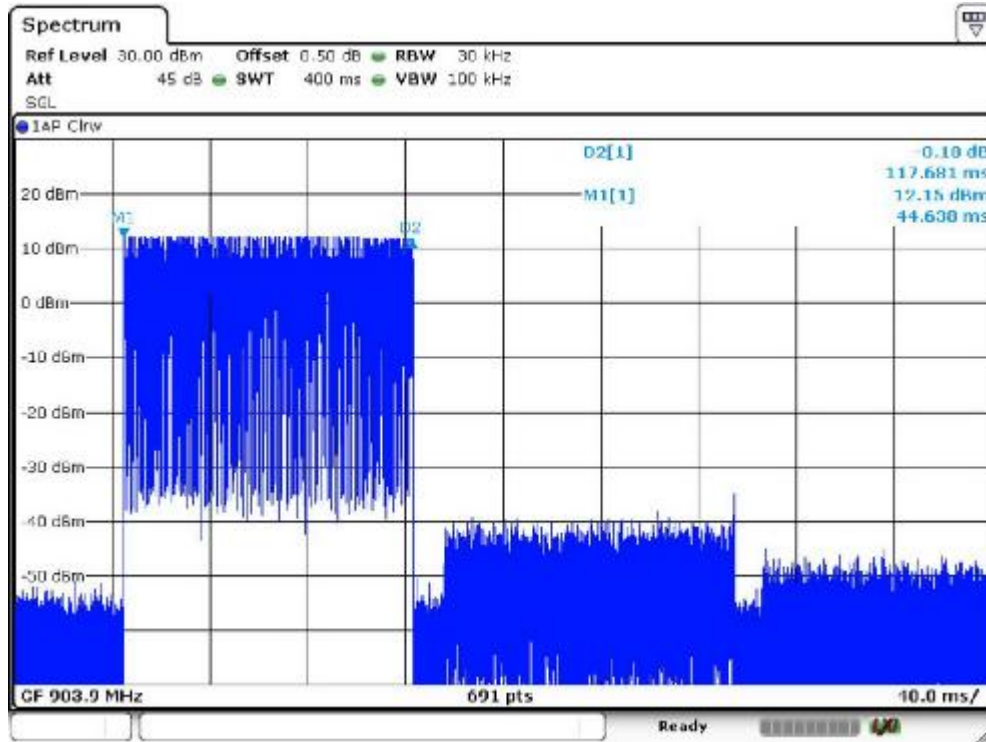



7.6 MAXIMUM PEAK CONDUCTED OUTPUT POWER

7.6.1 Applicable Standard

According to FCC Part 15.247(b)(2) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

7.6.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 902 - 928 MHz bands shall not exceed: 1 Watt (30dBm).

7.6.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.6.4 Test Procedure

n According to FCC Part 15.247(b)(2)

To demonstrate compliance with Part 15.247(b)(3) we implement the maximum conducted (average) output power method, AVGSA-1, of 558074 D01 15.247 Meas Guidance v05r02, since we will use averaging methods to show compliance with the power spectral density requirements of 15.247(e).

Use the following spectrum analyzer settings:

Set the RBW = 1 % to 5 % of the OBW

Set $VBW \geq 3 \cdot RBW$

Set the span = 1.5 times to 5.0 times the OBW.

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.


Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
Lora	1	903.9	16.62	30	PASS
	5	904.5	16.41	30	PASS
	8	905.3	16.05	30	PASS
Note: N/A					






Maximum Peak Conducted Output Power
 Test Model 915M
 Channel 1: 903.9MHz Lora

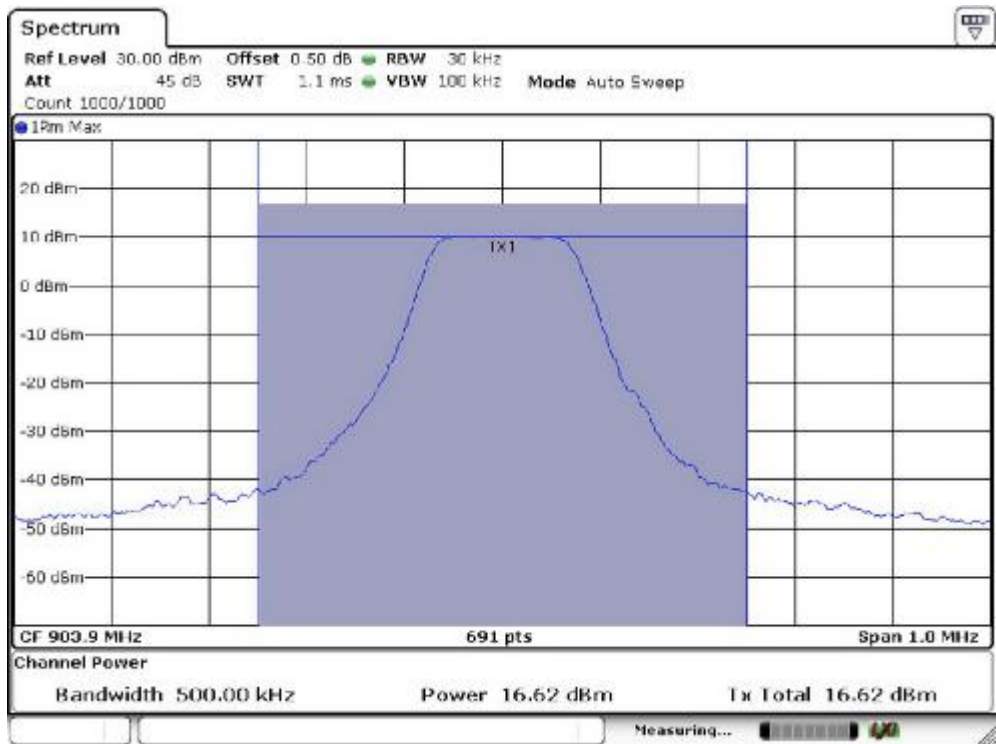




Test Model
Maximum Peak Conducted Output Power
915M
Channel 5: 904.5MHz
Lora

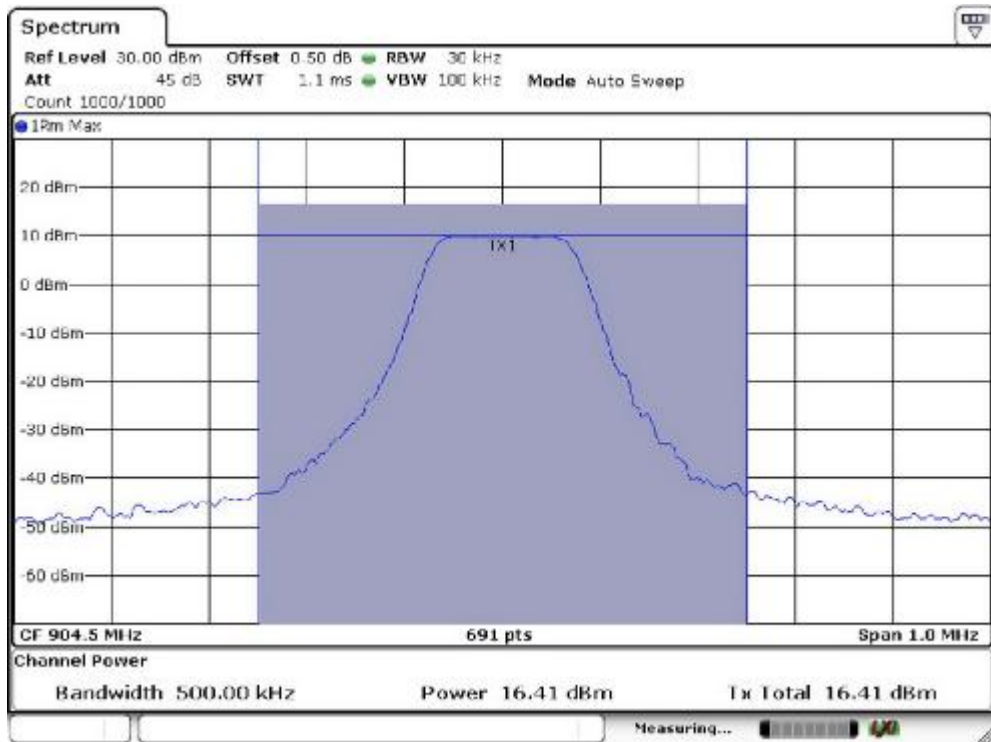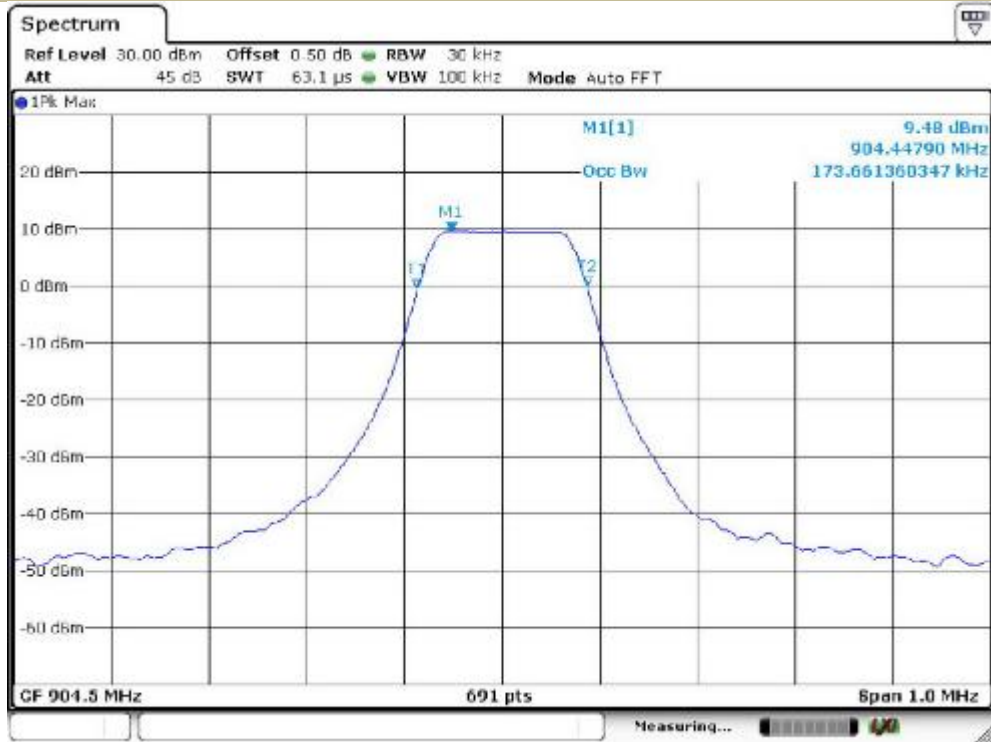



Maximum Peak Conducted Output Power
Test Model 915M
Channel 8: 905.3MHz Lora

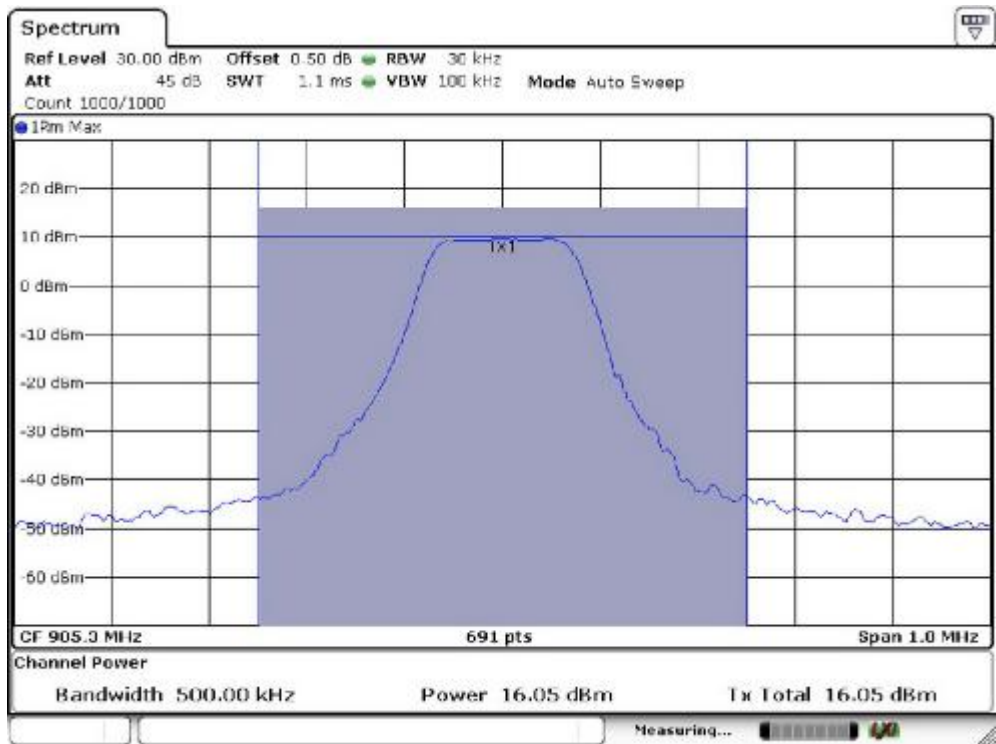



7.7 MAXIMUM POWER SPECTRAL DENSITY

7.7.1 Applicable Standard

According to FCC Part 15.247(f) and KDB 558074 D01 15.247 Meas Guidance v05r02

7.7.2 Conformance Limit

As specified in Section 15.247(f), a hybrid system must comply with the power density standard of 8 dBm in any 3 kHz band when the frequency hopping function is turned off..

7.7.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.7.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

7.7.5 Test Results


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Band1:


Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
DTS	1	923.3	7.16	<8	PASS
	5	925.7	6.66	<8	PASS
	8	927.5	6.59	<8	PASS
Note: N/A					



Test Model Power Spectral Density
DTS
Channel 1: 923.3MHz

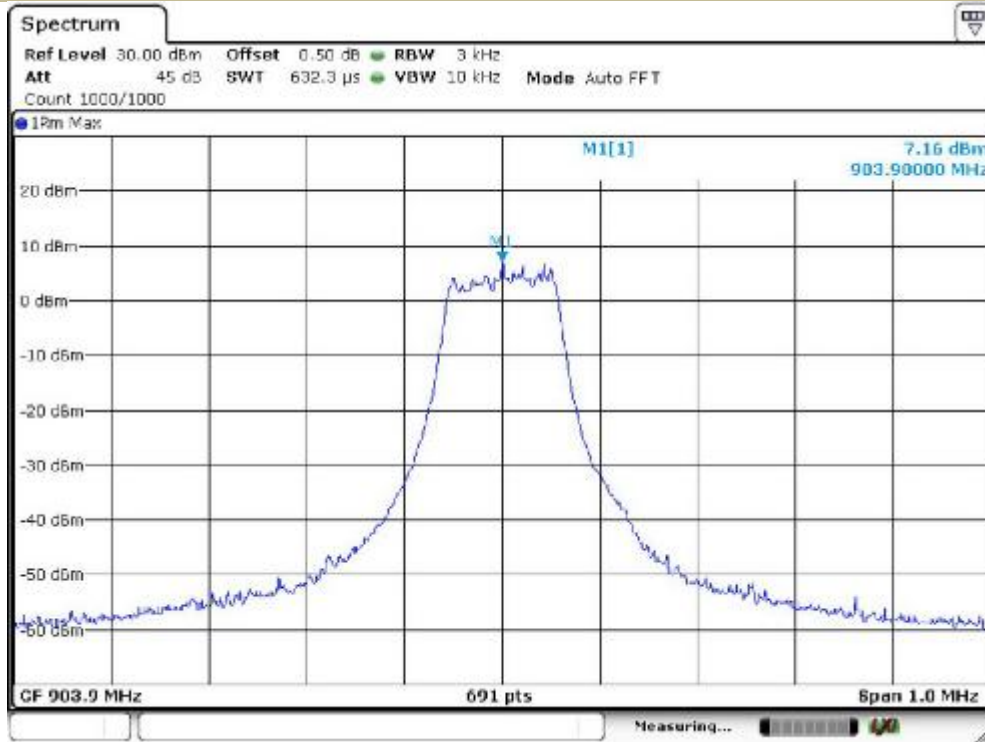

Test Model Power Spectral Density
DTS
Channel 5: 925.7MHz

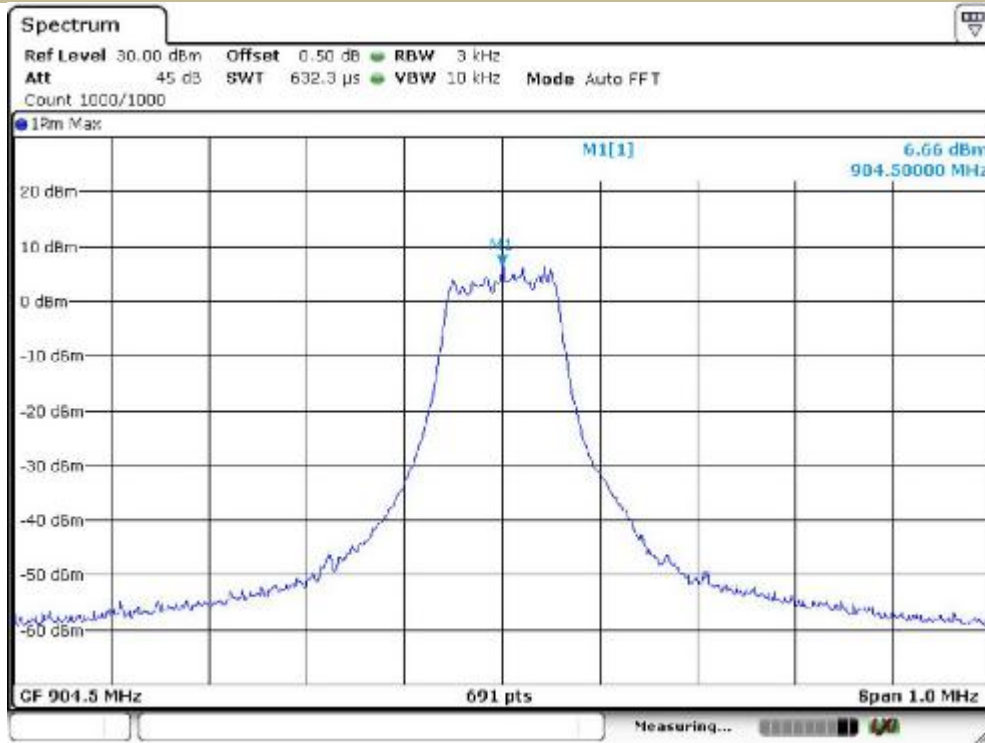




Test Model

Power Spectral Density
DTS

Channel 8: 927.5MHz

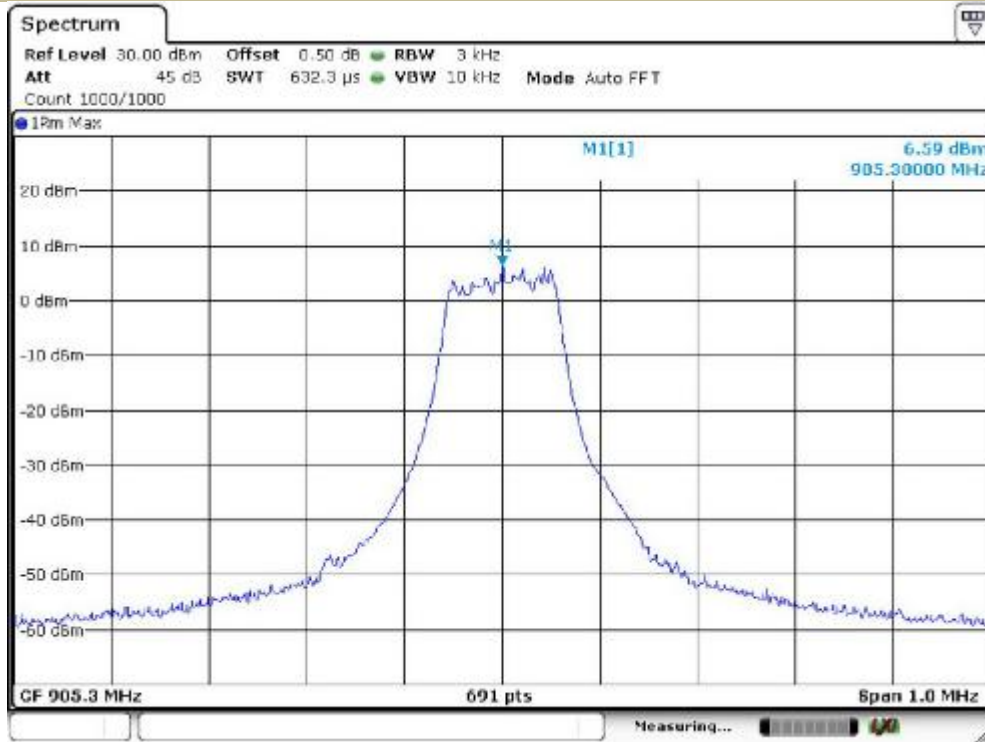



7.8 CONDUCTED SUPRIIOUS EMISSION

7.8.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

7.8.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

7.8.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.8.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

n Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conduceted level.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

n Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW $\geq 1\%$ of the span=100kHz Set VBW $\geq 3 \times$ RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

n Conduceted Spurious RF Conducted Emission

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz). Set RBW = 100 kHz Set VBW $\geq 3 \times$ RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

7.8.5 Test Results


All mode have been tested, and the worst result was report as below:



Test Model Maximum Conducted Level RBW=100kHz
915M
Channel 1: 903.9MHz Lora




Test Model Conducted Spurious RF Conducted Emission
915M
Channel 1: 903.9MHz Lora

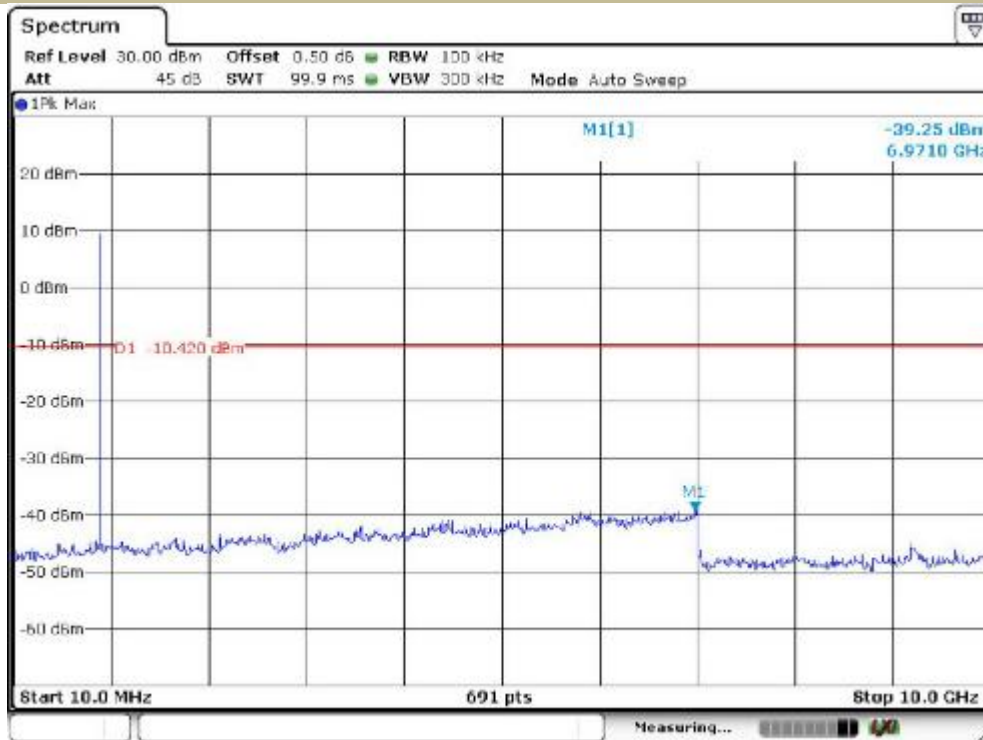




Band-edge Conducted Emissions
Test Model 915M
Channel 1: 903.9MHz Lora

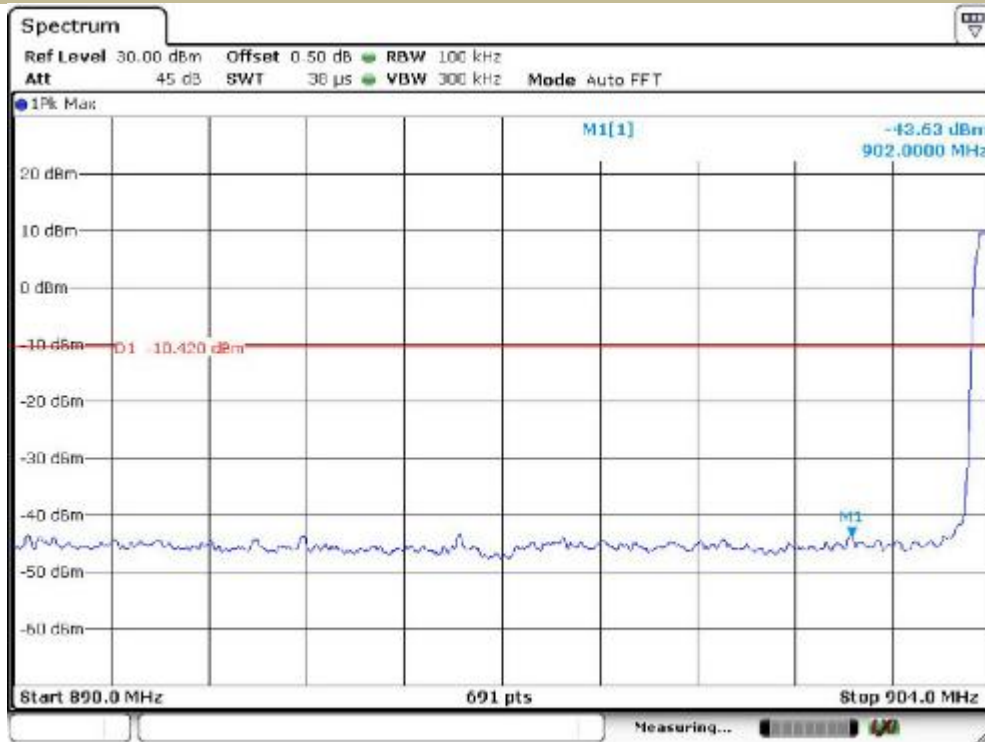


Maximum Conducted Level RBW=100kHz
Test Model 915M
Channel 5: 904.5MHz Lora






Conducted Spurious RF Conducted Emission
Test Model 915M
Channel 5: 904.5MHz Lora

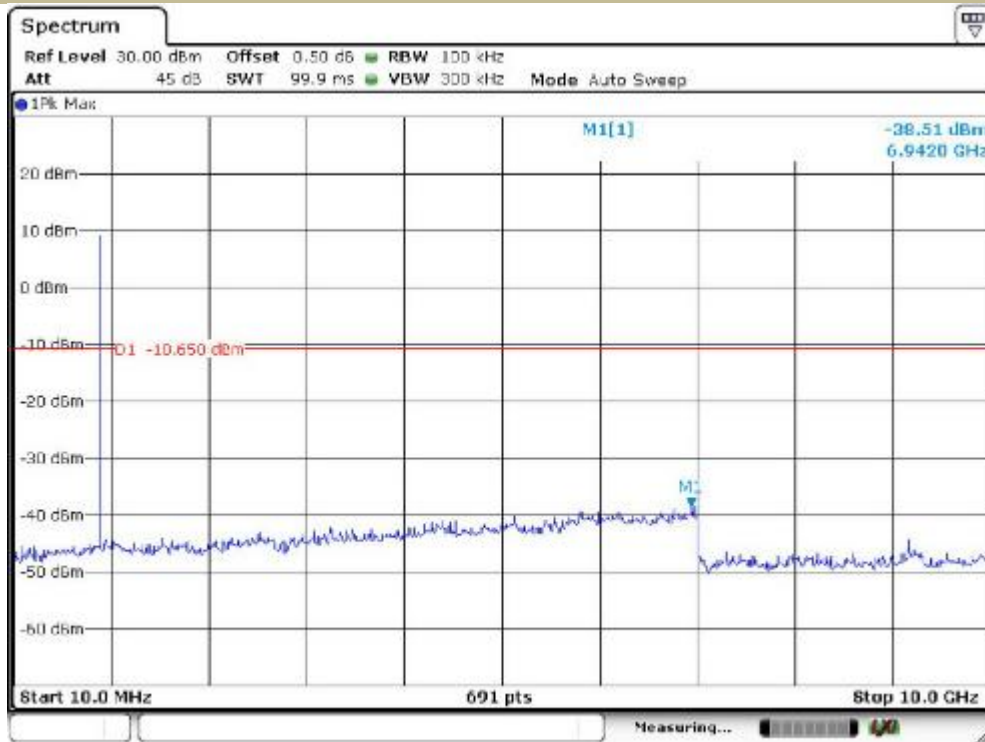


Maximum Conducted Level RBW=100kHz
Test Model 915M
Channel 8: 905.3MHz Lora






Conducted Spurious RF Conducted Emission
Test Model 915M
Channel 8: 905.3MHz Lora

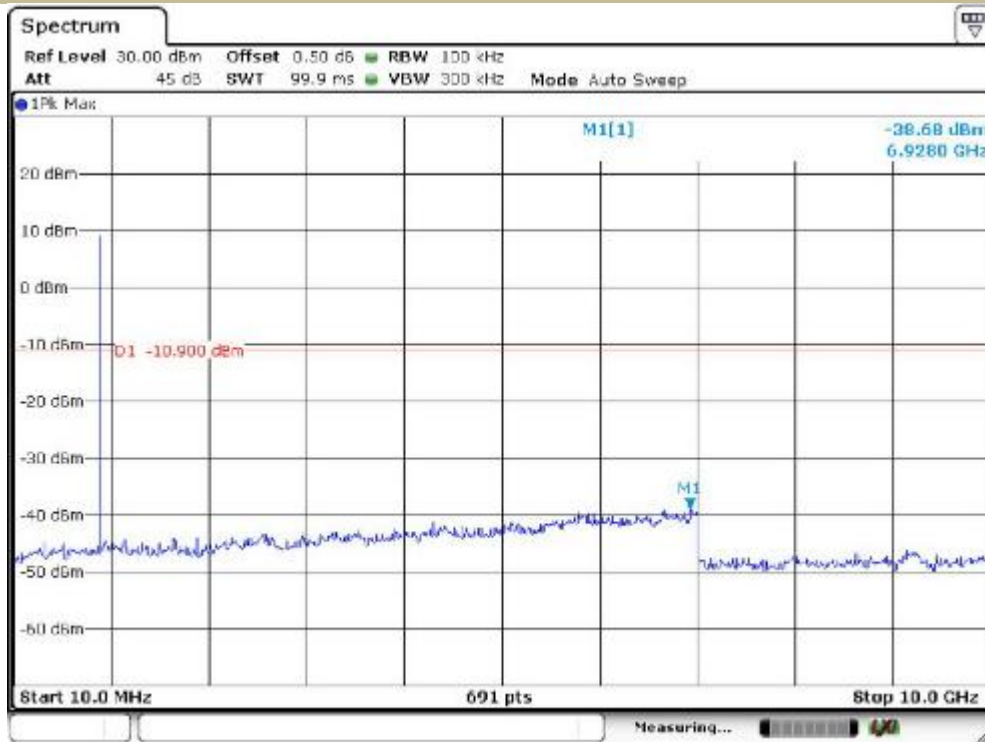

Band-edge Conducted Emissions
Test Model 915M
Channel 8: 905.3MHz Lora

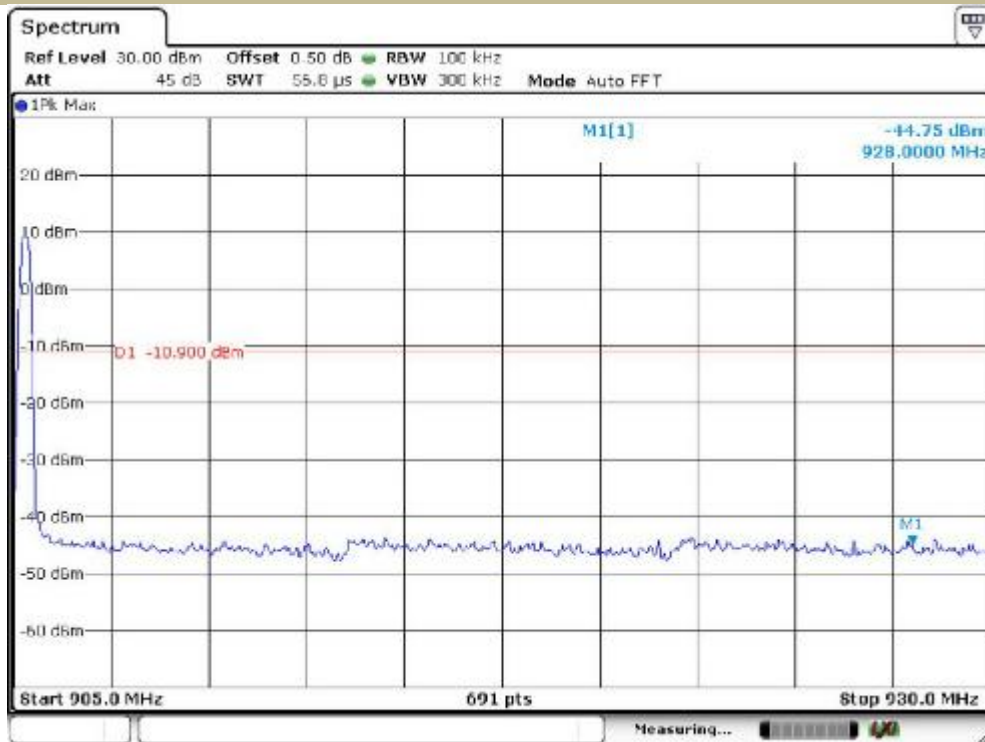



7.9 RADIATED SPURIOUS EMISSION

7.9.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

7.9.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ($\mu\text{V}/\text{m}$)	300
0.490-1.705	24000/F(KHz)	20 log ($\mu\text{V}/\text{m}$)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

7.9.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

7.9.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW ³ RBW

Sweep = auto

Detector function = peak



Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW ³ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW ³ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW ³ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

7.9.5 Test Results

n Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/ \text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor



n Spurious Emission Above 1GHz (1GHz to 25GHz)

All mode have been tested, and the worst result was report as below:

Test mode: Lora Frequency: Channel 1: 903.9MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1808.23	V	56.1	48.09	74	54	-17.9	-5.91
2712.24	V	59.19	45.22	74	54	-14.81	-8.78
4313.37	V	59.93	49.57	74	54	-14.07	-4.43
1808.36	H	58.89	47.90	74	54	-15.11	-6.10
2714.07	H	58.85	46.93	74	54	-15.15	-7.07
4502.69	H	55.75	49.12	74	54	-18.25	-4.88

Test mode: Lora Frequency: Channel 5: 904.5MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1809.74	V	55.03	48.84	74	54	-18.97	-5.16
2713.81	V	58.69	49.32	74	54	-15.31	-4.68
4314.10	V	56.57	47.12	74	54	-17.43	-6.88
1809.31	H	55.08	46.75	74	54	-18.92	-7.25
2716.75	H	57.06	47.89	74	54	-16.94	-6.11
4518.17	H	55.67	47.45	74	54	-18.33	-6.55

Test mode: Lora Frequency: Channel 8: 905.3MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1811.23	V	57.62	49.05	74	54	-16.38	-4.95
2716.40	V	55.68	45.87	74	54	-18.32	-8.13
4310.48	V	55.96	46.78	74	54	-18.04	-7.22
1813.39	H	55.26	48.62	74	54	-18.74	-5.38
2716.32	H	56.58	45.49	74	54	-17.42	-8.51
4500.07	H	57.84	47.01	74	54	-16.16	-6.99

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



n Spurious Emission below 1GHz (30MHz to 1GHz)


All mode have been tested, and the worst result was report as below:



Site: Polarization: **Vertical** Temperature: 24 °C
 Limit: FCC Part15 C 30-1 GHz Power: AC 120 V/60 Hz Humidity: 51 %
 Mode: Fybird Mode
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	61.0400	54.23	-23.88	30.35	40.00	-9.65	QP
2		85.2900	58.59	-28.36	30.23	40.00	-9.77	QP
3		214.3000	54.31	-26.01	28.30	43.50	-15.20	QP
4		277.3500	53.26	-24.37	28.89	46.00	-17.11	QP
5		550.8900	49.51	-20.54	28.97	46.00	-17.03	QP
6		754.5900	46.29	-16.42	29.87	46.00	-16.13	QP

*:Maximum data x:Over limit l:over margin j:Reference Only

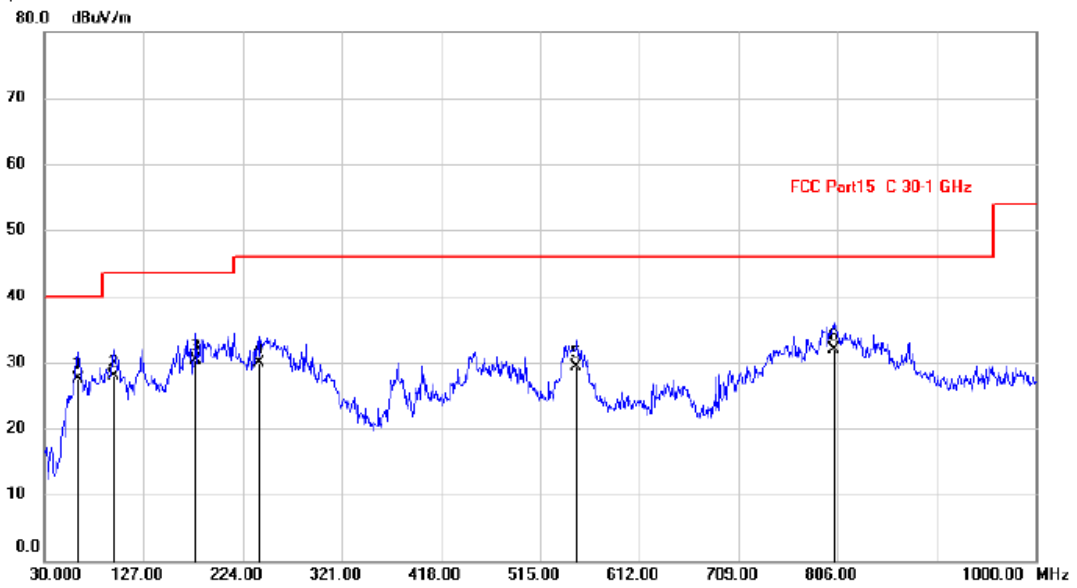

Site: Polarization: **Horizontal** Temperature: 24 °C
 Limit: FCC Part15 C 30-1 GHz Power: AC 120 V/60 Hz Humidity: 51 %
 Mode: Fybird Mode
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	62.9800	52.38	-24.89	27.49	40.00	-12.51	QP
2		97.9000	52.75	-24.83	27.92	43.50	-15.58	QP
3		178.4100	57.36	-27.06	30.30	43.50	-13.20	QP
4		240.4900	54.81	-24.89	29.92	46.00	-16.08	QP
5		550.8900	49.80	-20.54	29.26	46.00	-16.74	QP
6		803.0900	47.05	-15.22	31.83	46.00	-14.17	QP

*:Maximum data x:Over limit l:over margin

⌋ Reference Only



7.10 CONDUCTED EMISSION TEST

7.10.1 Applicable Standard

According to FCC Part 15.207(a)

7.10.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.10.3 Test Configuration

Test according to clause 7.3 conducted emission test setup


7.10.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

7.10.5 Test Results

Pass

All mode been tested, and the worst result recorded was report as below:

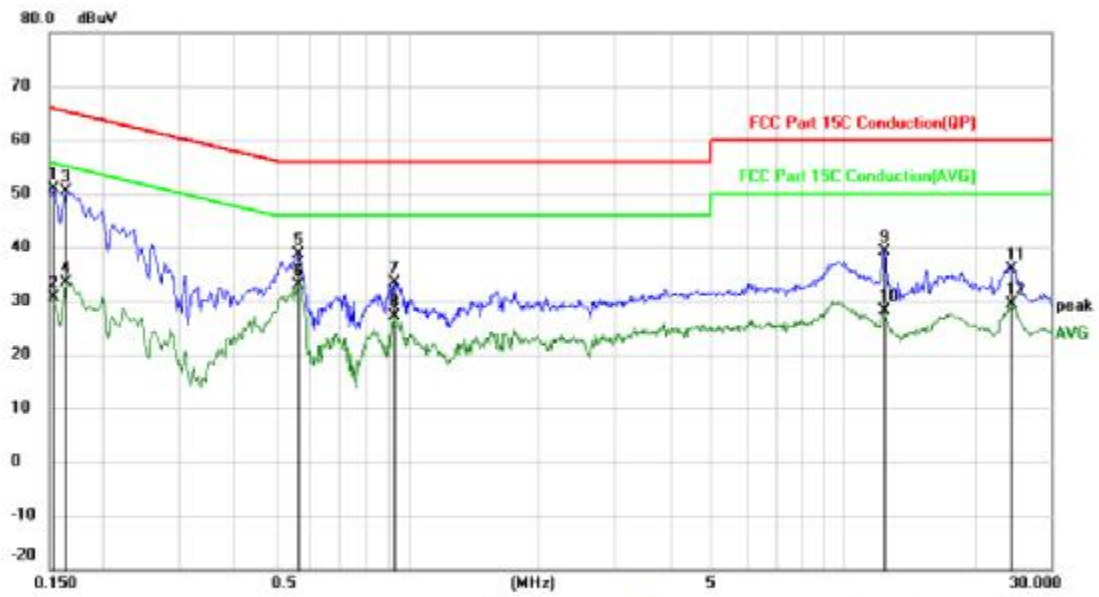


Site: Phase: **N** Temperature: 23
 Limit: FCC Part 15C Conduction(QP) Power: AC 120 V/60 Hz Humidity: 55 %
 Mode: Fybird Mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1539	40.90	10.05	50.95	65.79	-14.84	QP	
2		0.1539	20.62	10.05	30.67	55.79	-25.12	AVG	
3		0.1633	40.29	10.05	50.34	65.29	-14.95	QP	
4		0.1633	23.43	10.05	33.48	55.29	-21.81	AVG	
5		0.5611	28.57	10.07	38.64	56.00	-17.36	QP	
6	*	0.5611	22.93	10.07	33.00	46.00	-13.00	AVG	
7		0.9282	23.13	10.14	33.27	56.00	-22.73	QP	
8		0.9282	17.01	10.14	27.15	46.00	-18.85	AVG	
9		12.4495	28.28	10.80	39.08	60.00	-20.92	QP	
10		12.4495	17.32	10.80	28.12	50.00	-21.88	AVG	
11		24.3993	25.09	10.82	35.91	60.00	-24.09	QP	
12		24.3993	18.57	10.82	29.39	50.00	-20.61	AVG	

*:Maximum data x:Over limit !:over margin

<Reference Only

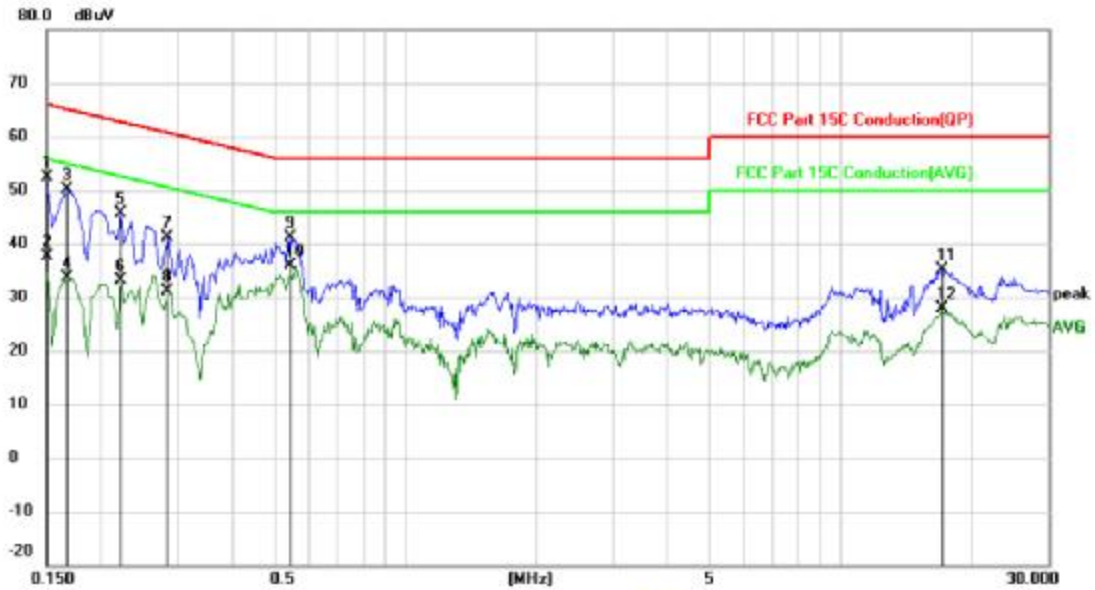

Site: Phase: **L1** Temperature: 23
 Limit: FCC Part 15C Conduction(QP) Power: AC 120 V/60 Hz Humidity: 55%
 Mode: Fybird Mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	42.45	10.05	52.50	66.00	-13.50	QP	
2		0.1500	27.56	10.05	37.61	56.00	-18.39	AVG	
3		0.1675	39.96	10.05	50.01	65.08	-15.07	QP	
4		0.1675	23.70	10.05	33.75	55.08	-21.33	AVG	
5		0.2220	35.67	10.05	45.72	62.74	-17.02	QP	
6		0.2220	22.97	10.05	33.02	52.74	-19.72	AVG	
7		0.2847	31.16	10.05	41.21	60.68	-19.47	QP	
8		0.2847	21.13	10.05	31.18	50.68	-19.50	AVG	
9		0.5433	30.97	10.06	41.03	56.00	-14.97	QP	
10	*	0.5433	25.75	10.06	35.81	46.00	-10.19	AVG	
11		17.1082	24.12	11.02	35.14	60.00	-24.86	QP	
12		17.1082	16.76	11.02	27.78	50.00	-22.22	AVG	

*:Maximum data x:Over limit !:over margin

⟨Reference Only



7.11 ANTENNA APPLICATION

7.11.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

7.11.2 Result

PASS.

The EUT has 1 antenna: a External Antenna for 915M with classic model, the gain is 3 dBi;

- Note:
- Antenna use a permanently attached antenna which is not replaceable.
 - Not using a standard antenna jack or electrical connector for antenna replacement
 - The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

----- END OF REPORT -----