



FCC TEST REPORT

FCC ID: 2A2F7-G10

On Behalf of

Shenzhen Xingman Smart Technology Co., Ltd.

TWS gaming earbuds

Model No.: G10, G1, G2, G3, G4, G5, G6, G7, G8, G9, G11, G12,
G13, G14, G16, G17, G18, G19, G20, G30, G40, G50, G60, G70,
G80, G90, G100

Prepared for : Shenzhen Xingman Smart Technology Co., Ltd.
Address : 3F, Building E , No.2 Lixin Road, Fu yong, Bao'an District, Shenzhen,
China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2306160-C01-R08
Date of Receipt : July 5 2023
Date of Test : July 5 2023-July 19, 2023
Date of Report : July 20, 2023
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information.....	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description	8
2.6. Test Conditions	9
2.7. Test Facility.....	9
2.8. Measurement Uncertainty	9
2.9. Test Equipment List	10
3. Maximum Peak Output power	12
3.1. Limit	12
3.2. Test Procedure	12
3.3. Test Setup.....	12
3.4. Test Result.....	12
4. Bandwidth	13
4.1. Limit	13
4.2. Test Procedure	13
4.3. Test Result.....	13
5. Carrier Frequency Separation	24
5.1. Limit	24
5.2. Test Procedure	24
5.3. Test Result.....	24
6. Number Of Hopping Channel	26
6.1. Limit	26
6.2. Test Procedure	26
6.3. Test Result.....	26
7. Dwell Time	28
7.1. Test limit.....	28
7.2. Test Procedure	28
7.3. Test Result.....	28
8. Radiated emissions	39
8.1. Limit	39
8.2. Block Diagram of Test setup.....	40
8.3. Test Procedure	41
8.4. Test Result.....	41
9. Band Edge Compliance	56
9.1. Block Diagram of Test Setup	56

9.2. Limit	56
9.3. Test Procedure	56
9.4. Test Result.....	56
10. Power Line Conducted Emissions.....	73
10.1. Block Diagram of Test Setup	73
10.2. Limit	73
10.3. Test Procedure	73
10.4. Test Result.....	73
11. Antenna Requirements	76
11.1. Limit	76
11.2. Result	76
12. Test setup photo.....	77
12.1. Photos of Radiated emission.....	77
12.2. Photos of Conducted Emission test	78
13. Photos of EUT	79

TEST REPORT DECLARATION

Applicant : Shenzhen Xingman Smart Technology Co., Ltd.
 Address : 3F, Building E , No.2 Lixin Road, Fu yong, Bao'an District, Shenzhen, China
 Manufacturer : Shenzhen Xingman Smart Technology Co., Ltd.
 Address : 3F, Building E , No.2 Lixin Road, Fu yong, Bao'an District, Shenzhen, China
 EUT Description : TWS gaming earbuds

(A) Model No. : G10, G1, G2, G3, G4, G5, G6, G7, G8, G9, G11, G12, G13, G14, G16, G17, G18, G19, G20, G30, G40, G50, G60, G70, G80, G90, G100
 (B) Trademark : N/A

Measurement Standard Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.247


ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Lucas Pang
 Project Engineer 

Approved by (name + signature).....: Reak Yang
 Project Manager 

Date of issue.....: July 20, 2023

Revision History

Revision	Issue Date	Revisions	Revised By
V0	July 20, 2023	Initial released Issue	Lucas Pang

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	P
Antenna requirement	FCC Part 15: 15.203	P
Note:	1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.	

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	:	TWS gaming earbuds
Model Number	:	G10, G1, G2, G3, G4, G5, G6, G7, G8, G9, G11, G12, G13, G14, G16, G17, G18, G19, G20, G30, G40, G50, G60, G70, G80, G90, G100
Diff	:	There is no difference except the name of the model. All tests are made with the G10 model.
Power supply	:	DC 3.7V from battery, DC 5V from USB
Radio Technology	:	Bluetooth V5.0 EDR
Operation frequency	:	2402-2480MHz
Channel No.	:	79 Channels
Channel spacing	:	1MHz
Modulation type	:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type	:	Internal antenna, Maximum Gain is 0.16dBi (Antenna information is provided by applicant.)
Software version	:	V1.0
Hardware version	:	V1.0

Note: The EUT includes two earphones on the left and right, and their circuit principles are the same.
Select any one for testing and represent the data of all samples.


2.2. Accessories of Device (EUT)

Accessories : /
 Manufacturer : /
 Model : /
 Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1.	Adapter	Huoniu	HNFCQC3024UU	--	--
2.	Notebook PC	Lenovo	Thinkpad E14		

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
$\pi/4$ DQPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
8DPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

September 15, 2019 Certificated by IC

Registration Number: 12135A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2022.08.22	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2022.08.22	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2022.08.22	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2022.08.22	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2021.08.30	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2021.08.30	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00059	2021.08.30	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2022.08.22	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2022.08.22	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2022.08.22	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2022.08.22	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2022.08.22	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2022.08.22	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2022.08.23	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	/	00946	2021.08.30	2 Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2022.08.22	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2022.08.22	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2022.08.22	1 Year
Temp. & Humid. Chamber	Teelong	WHTH-1000 -40-880	/	TL-20191205-01	2022.07.28	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2022.08.22	1 Year
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit


Please refer section 15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-0.601	30	Pass
NVNT	1-DH1	2441	Ant1	-0.863	30	Pass
NVNT	1-DH1	2480	Ant1	-2.024	30	Pass
NVNT	1-DH3	2441	Ant1	-0.946	30	Pass
NVNT	1-DH5	2441	Ant1	-1.011	30	Pass
NVNT	2-DH1	2402	Ant1	-0.032	21	Pass
NVNT	2-DH1	2441	Ant1	-0.958	21	Pass
NVNT	2-DH1	2480	Ant1	-2.067	21	Pass
NVNT	2-DH3	2441	Ant1	-0.779	21	Pass
NVNT	2-DH5	2441	Ant1	-0.944	21	Pass
NVNT	3-DH1	2402	Ant1	-0.916	21	Pass
NVNT	3-DH1	2441	Ant1	-0.797	21	Pass
NVNT	3-DH1	2480	Ant1	-1.501	21	Pass
NVNT	3-DH3	2441	Ant1	-1.091	21	Pass
NVNT	3-DH5	2441	Ant1	-0.723	21	Pass

4. BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH1	2402	Ant1	0.914
NVNT	1-DH1	2441	Ant1	0.914
NVNT	1-DH1	2480	Ant1	0.994
NVNT	2-DH1	2402	Ant1	1.242
NVNT	2-DH1	2441	Ant1	1.234
NVNT	2-DH1	2480	Ant1	1.244
NVNT	3-DH1	2402	Ant1	1.214
NVNT	3-DH1	2441	Ant1	1.21
NVNT	3-DH1	2480	Ant1	1.202

-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

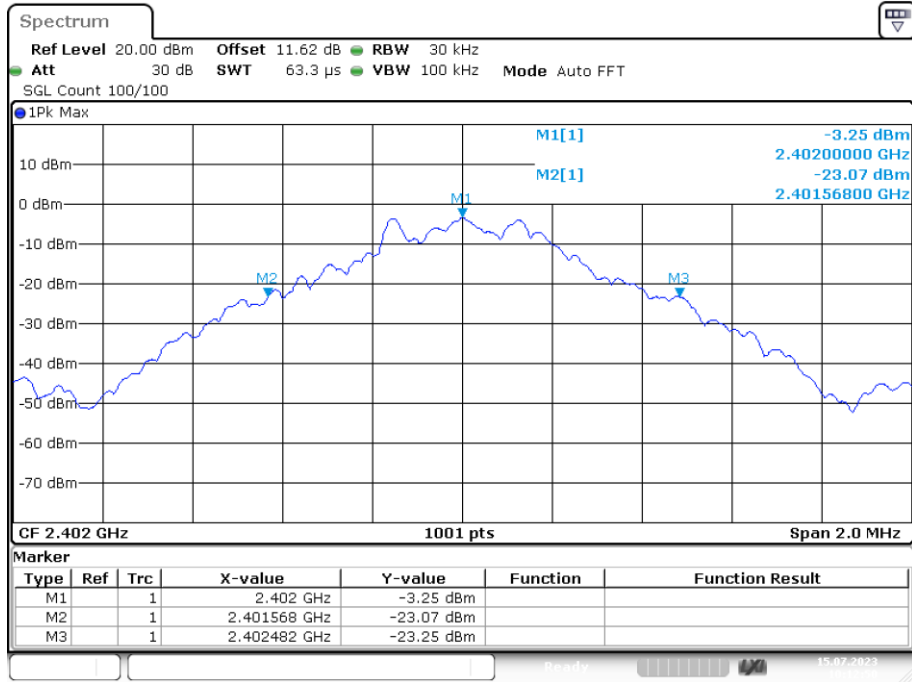


Date: 15.JUL.2023 10:12:50

-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

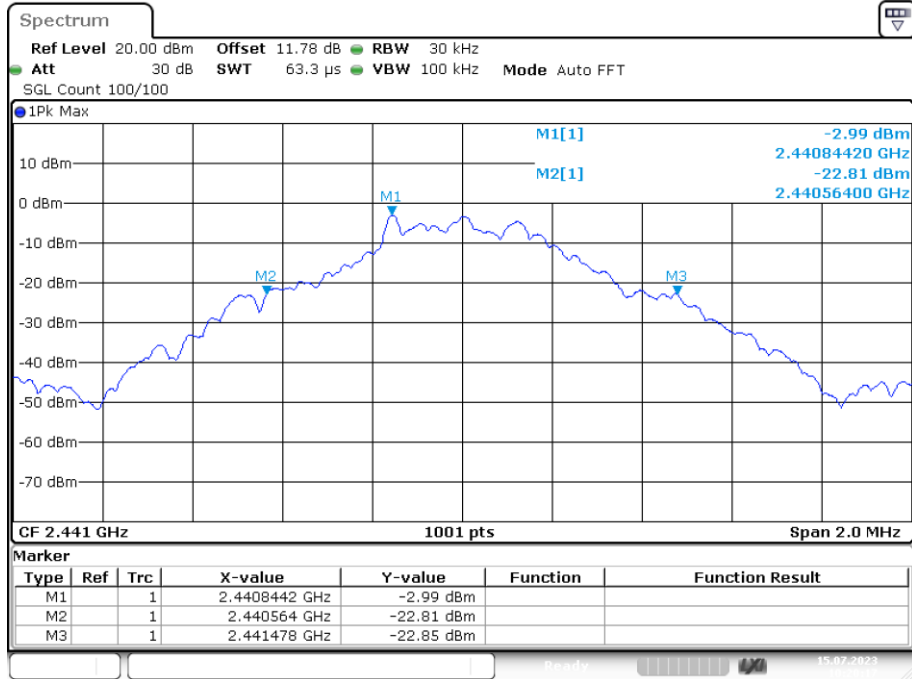


Date: 15.JUL.2023 10:20:17

-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

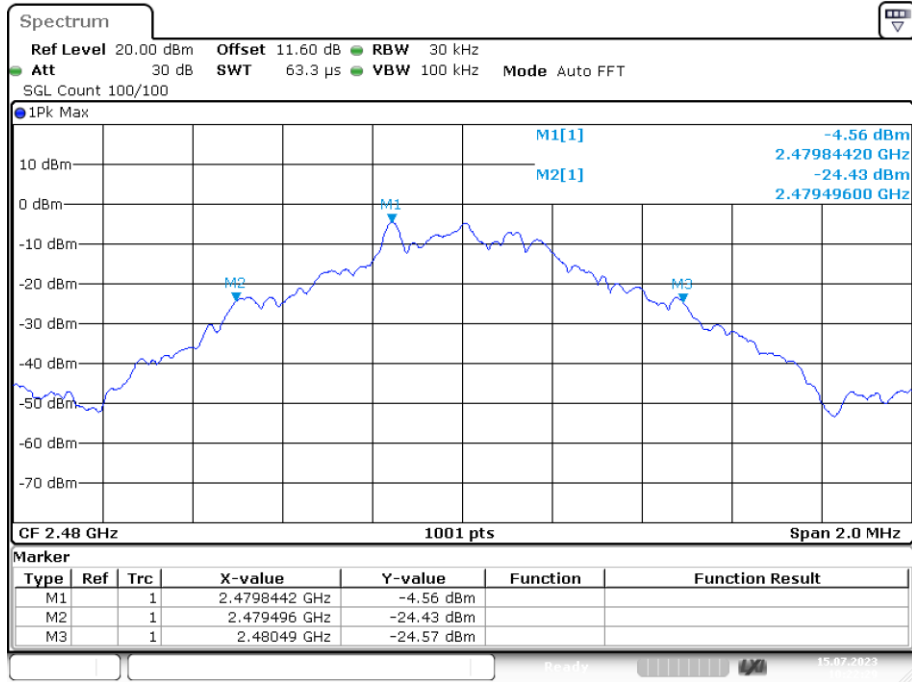


Date: 15.JUL.2023 10:22:29

-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

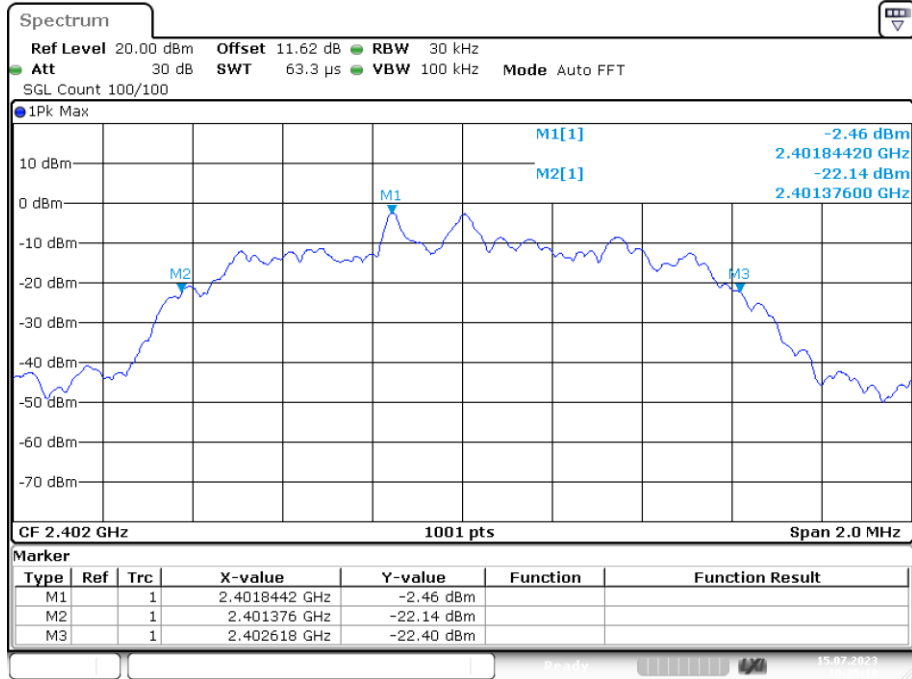


Date: 15.JUL.2023 10:25:10

-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

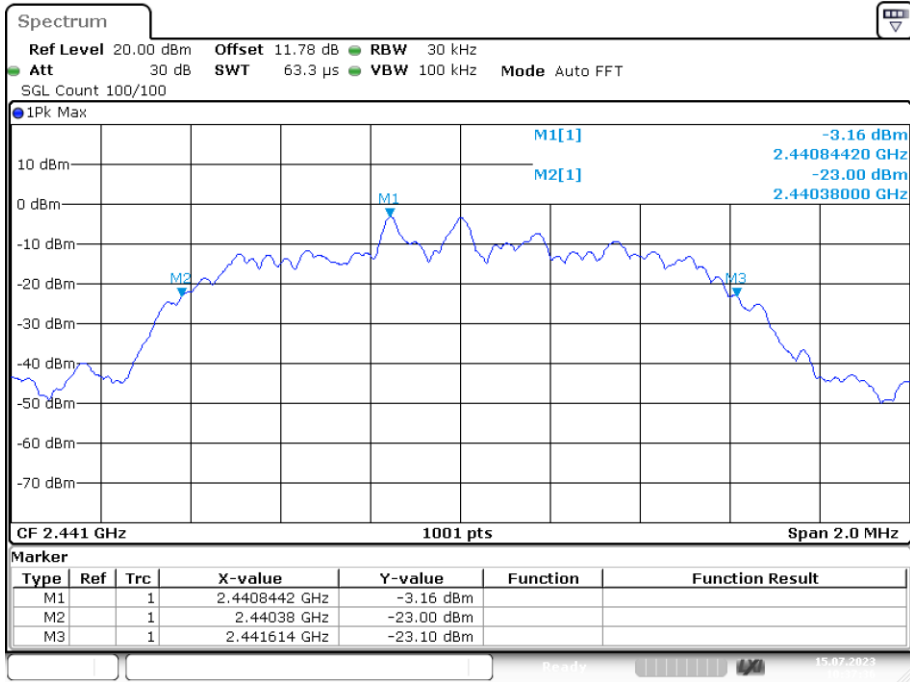


Date: 15.JUL.2023 10:37:36

-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

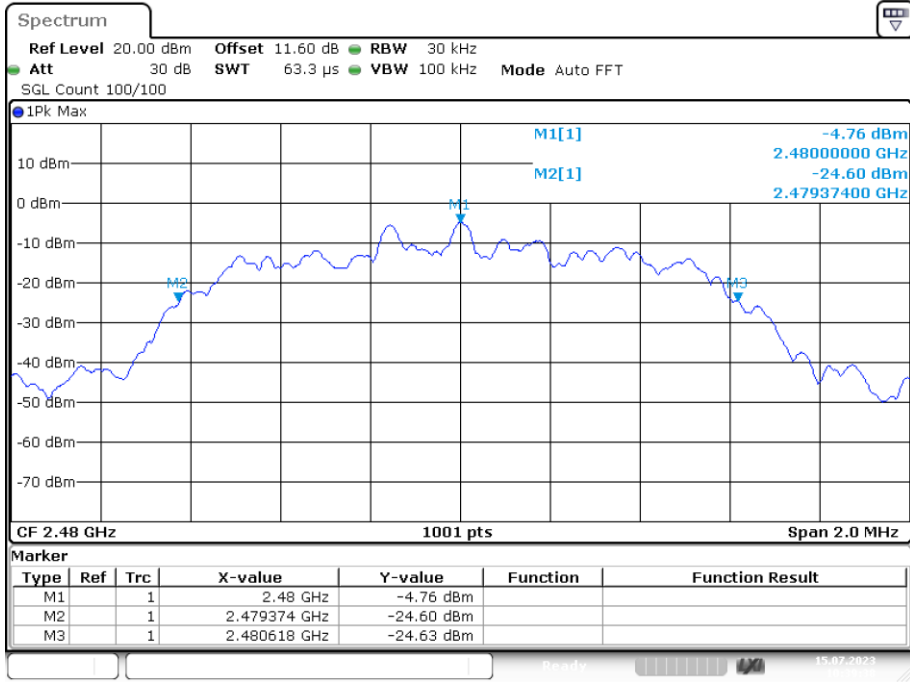


Date: 15.JUL.2023 10:39:39

-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

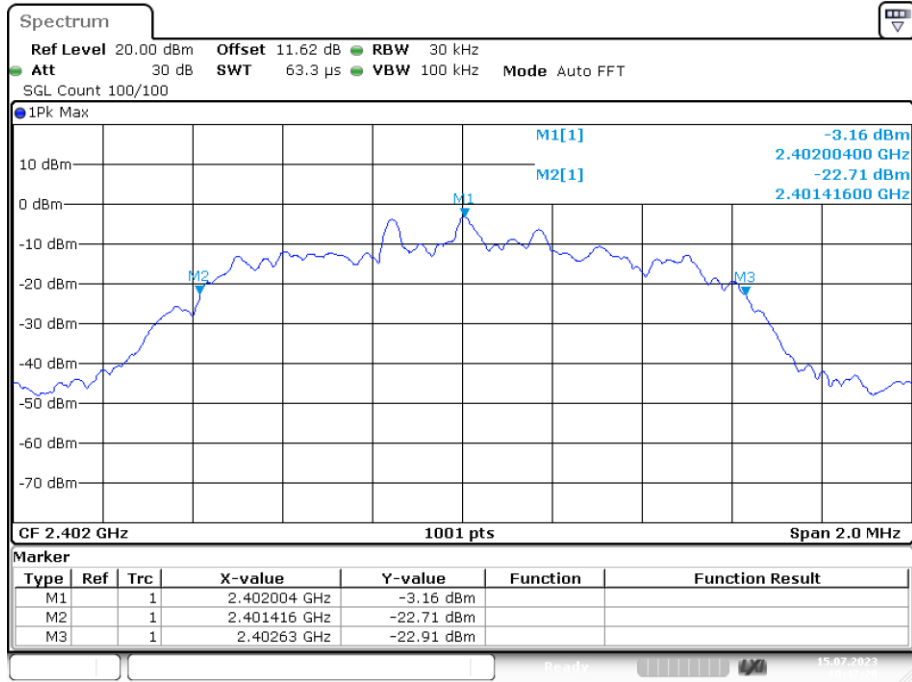


Date: 15.JUL.2023 10:47:19

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

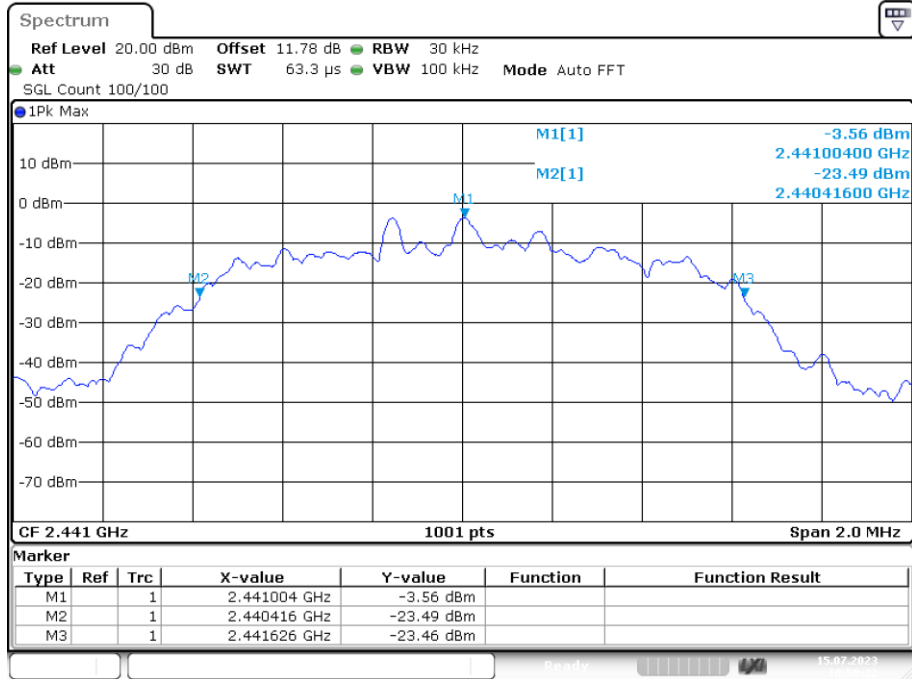

Date: 15.JUL.2023 10:50:21


-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

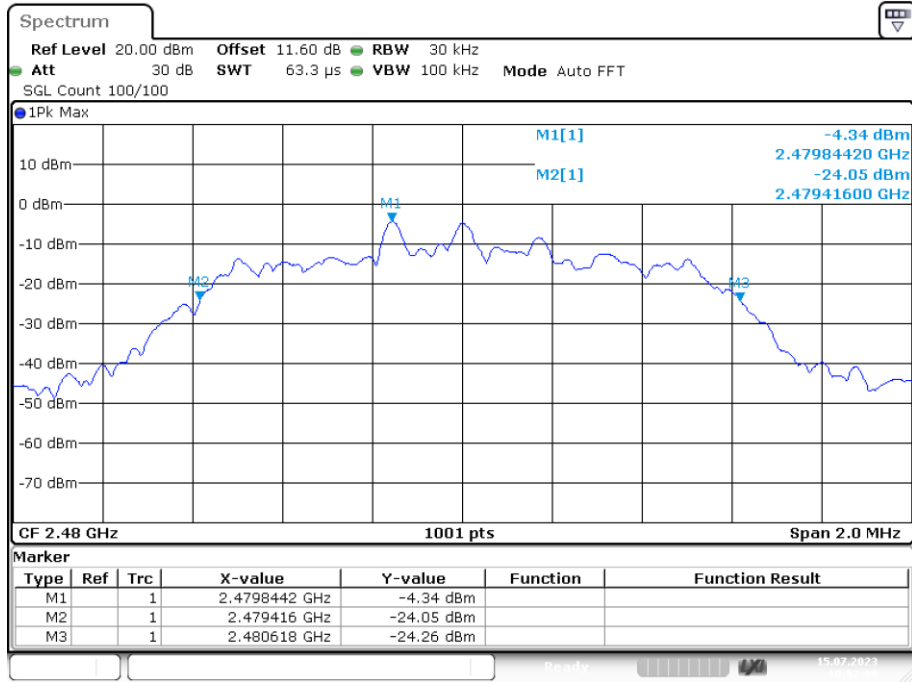

Date: 15.JUL.2023 10:52:08


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.843
NVNT	1-DH1	2441	Ant1	0.855
NVNT	1-DH1	2480	Ant1	0.895
NVNT	2-DH1	2402	Ant1	1.165
NVNT	2-DH1	2441	Ant1	1.165
NVNT	2-DH1	2480	Ant1	1.169
NVNT	3-DH1	2402	Ant1	1.149
NVNT	3-DH1	2441	Ant1	1.153
NVNT	3-DH1	2480	Ant1	1.149

OBW NVNT 1-DH1 2402MHz Ant1

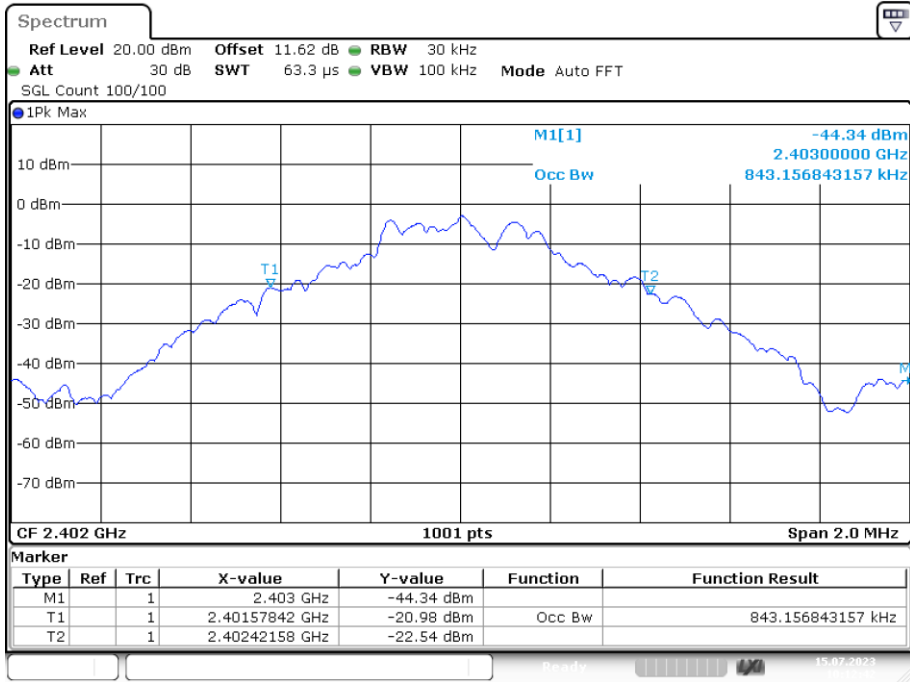


Date: 15.JUL.2023 10:12:42

OBW NVNT 1-DH1 2441MHz Ant1

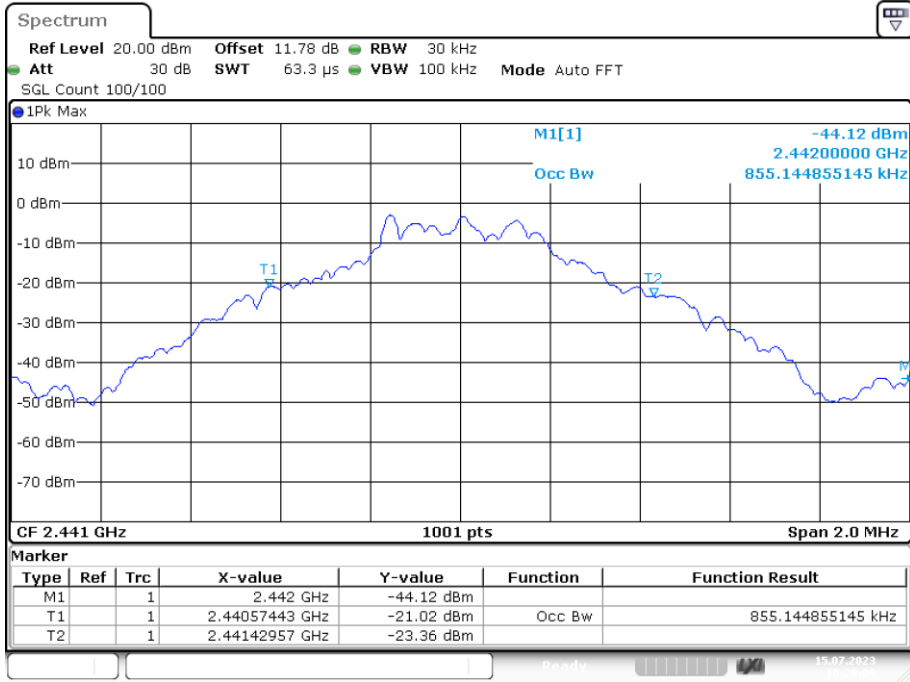


Date: 15.JUL.2023 10:20:08

OBW NVNT 1-DH1 2480MHz Ant1

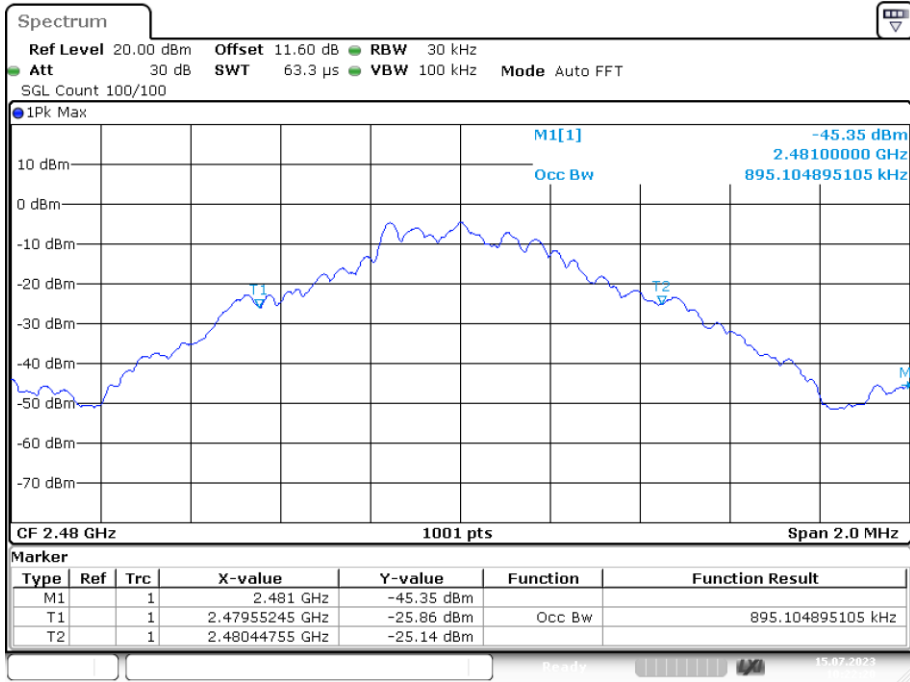


Date: 15.JUL.2023 10:22:20

OBW NVNT 2-DH1 2402MHz Ant1

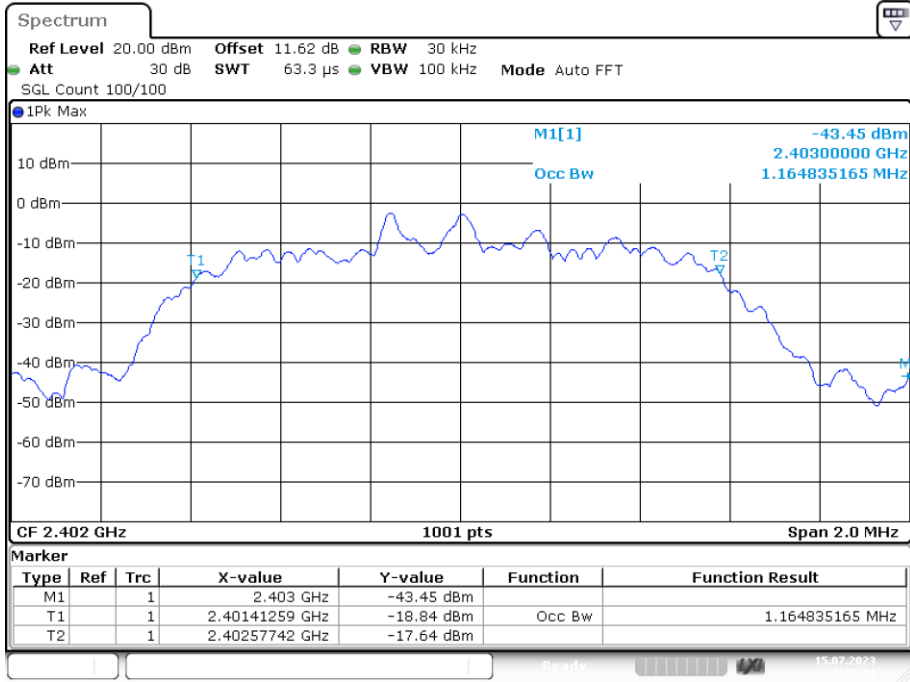


Date: 15.JUL.2023 10:25:01

OBW NVNT 2-DH1 2441MHz Ant1

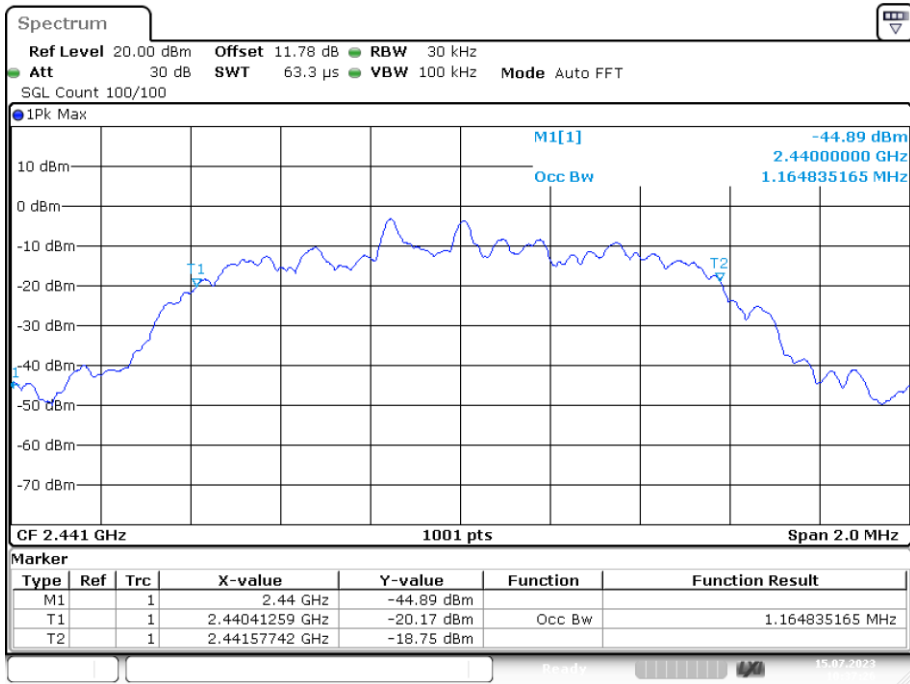


Date: 15.JUL.2023 10:37:25

OBW NVNT 2-DH1 2480MHz Ant1

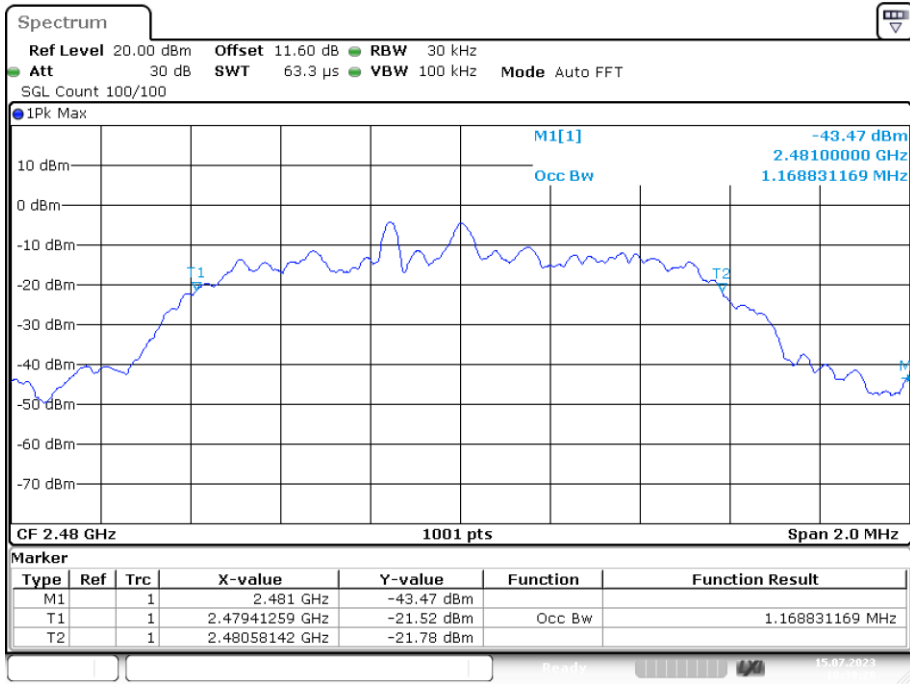


Date: 15.JUL.2023 10:39:28

OBW NVNT 3-DH1 2402MHz Ant1

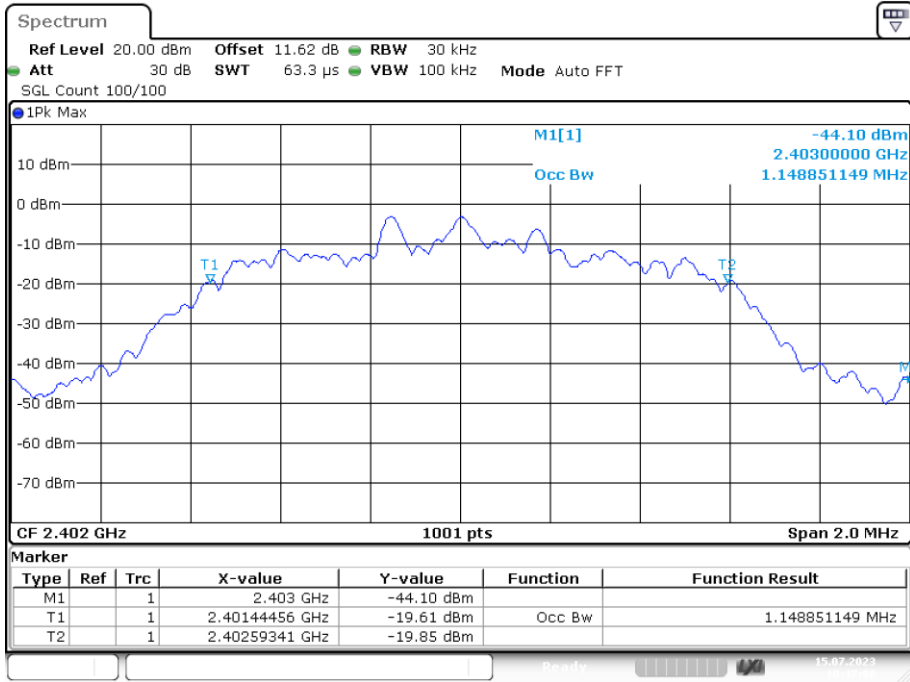


Date: 15.JUL.2023 10:47:08

OBW NVNT 3-DH1 2441MHz Ant1

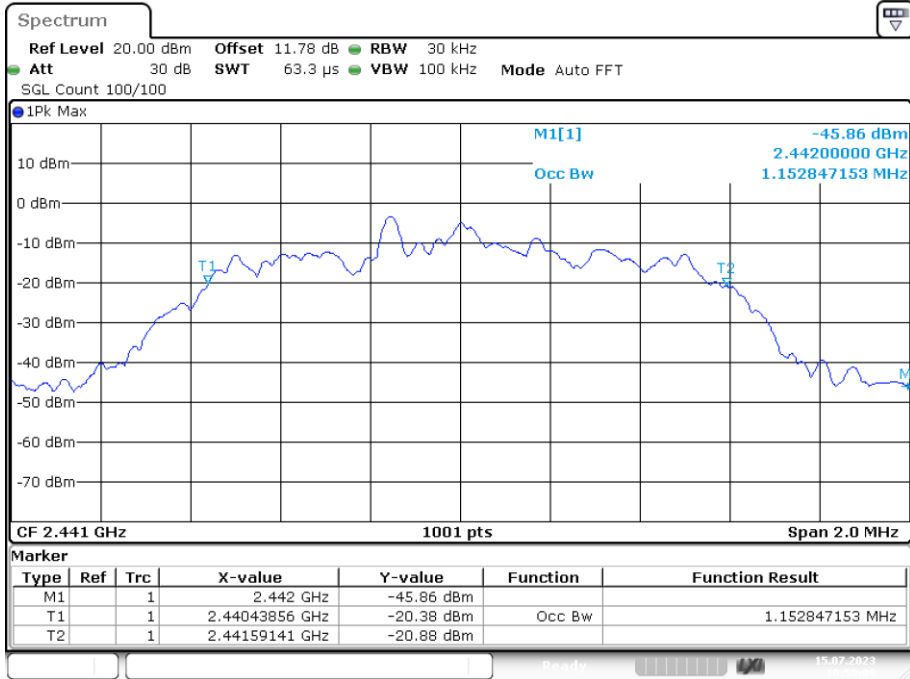

Date: 15.JUL.2023 10:50:09

OBW NVNT 3-DH1 2480MHz Ant1

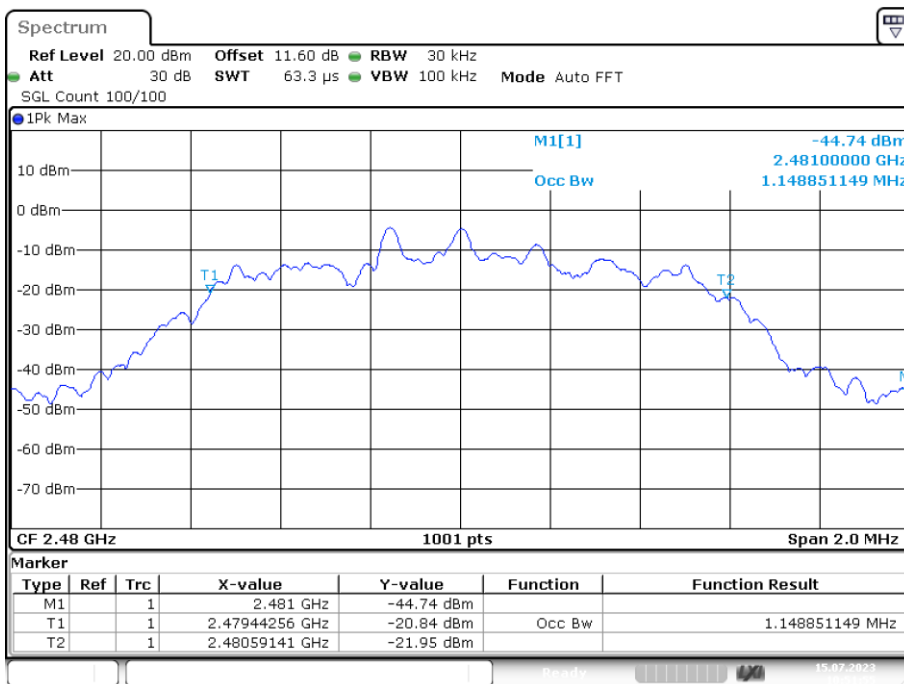

Date: 15.JUL.2023 10:51:55

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Result


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	Ant1	2440.844	2441.844	1	0.914	Pass
NVNT	2-DH1	Ant1	2440.844	2441.844	1	0.823	Pass
NVNT	3-DH1	Ant1	2440.844	2441.844	1	0.807	Pass

CFS NVNT 1-DH1 2441MHz Ant1

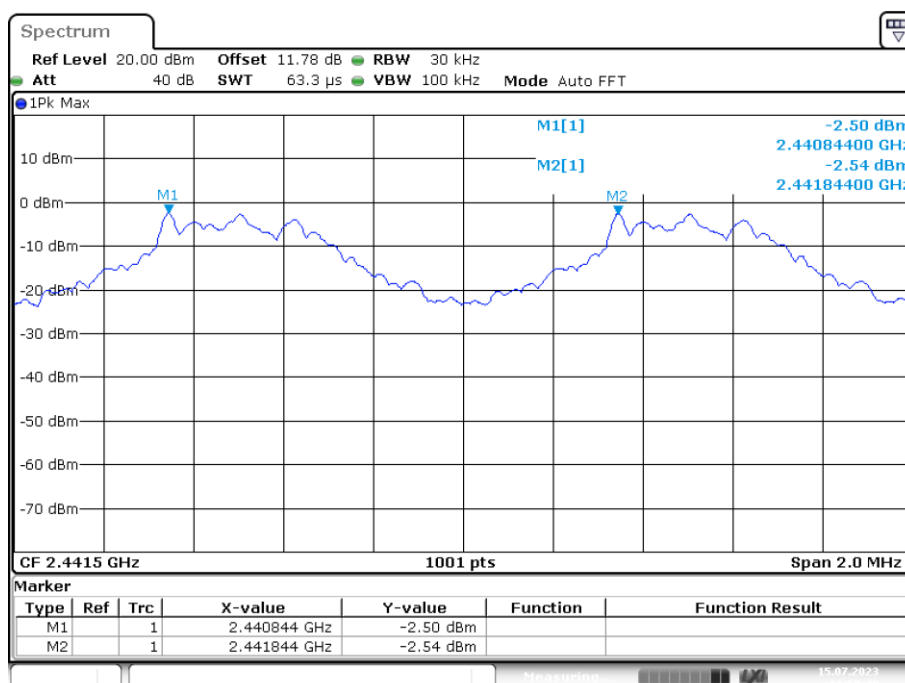


Date: 15.JUL.2023 11:59:39

CFS NVNT 2-DH1 2441MHz Ant1

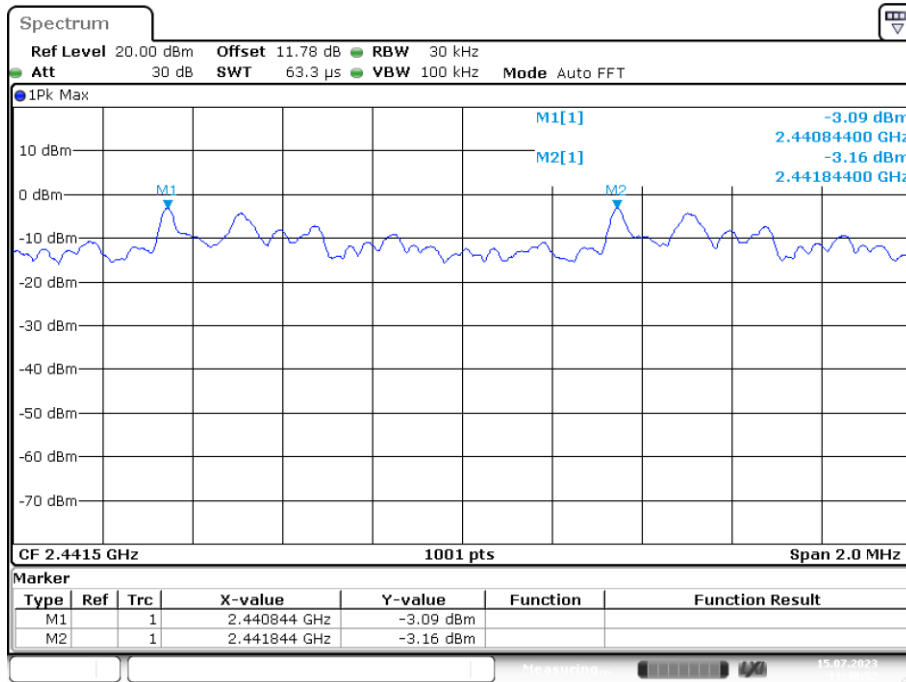

Date: 15.JUL.2023 11:40:52

CFS NVNT 3-DH1 2441MHz Ant1

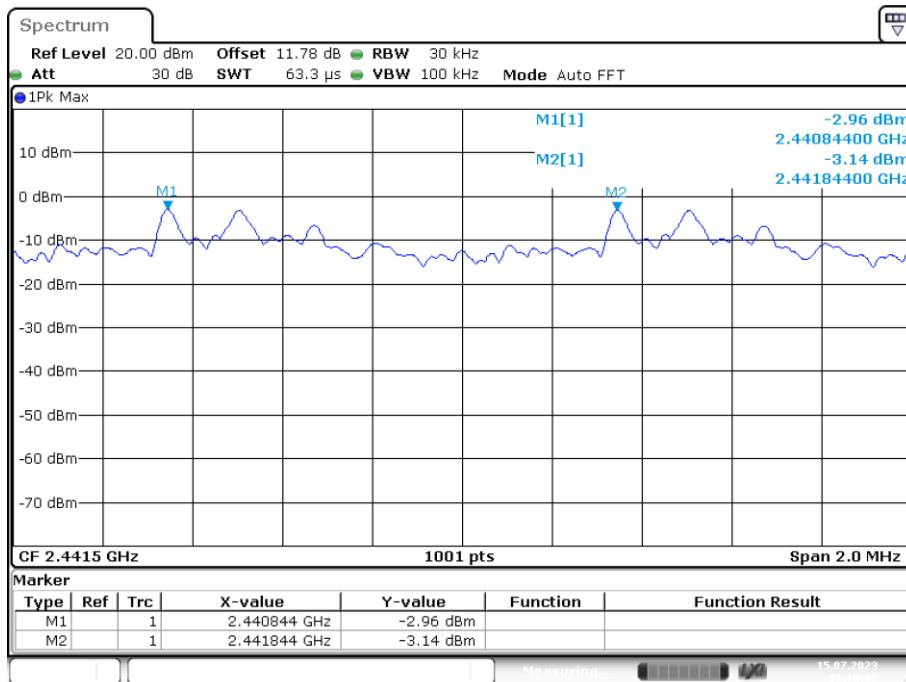

Date: 15.JUL.2023 11:16:32

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.


6.3. Test Result

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH1	Ant1	79	15	Pass
NVNT	2-DH1	Ant1	79	15	Pass
NVNT	3-DH1	Ant1	79	15	Pass

Hopping No. NVNT 1-DH1 2441MHz Ant1

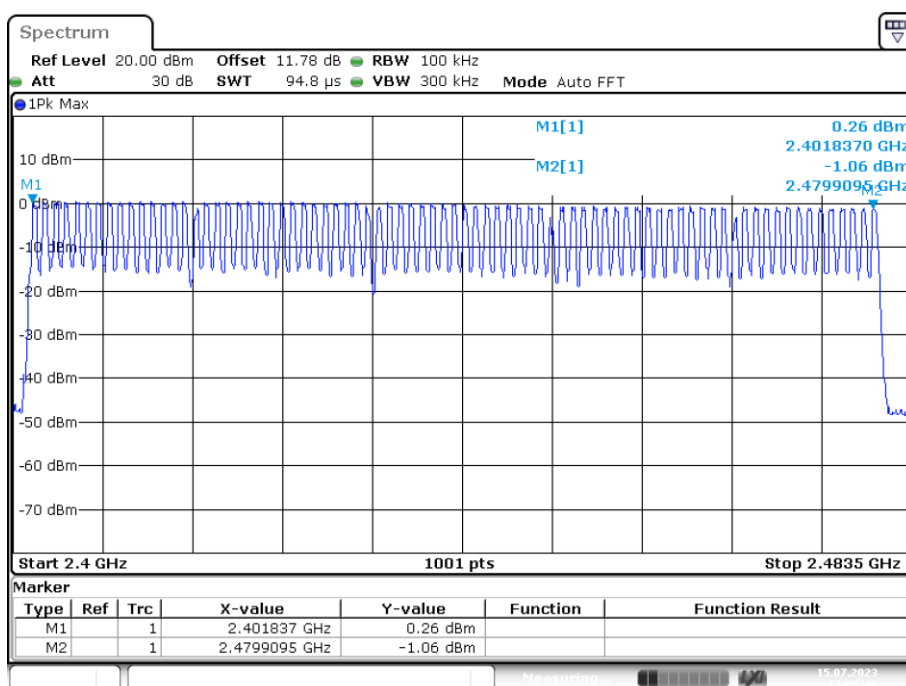


Hopping No. NVNT 2-DH1 2441MHz Ant1

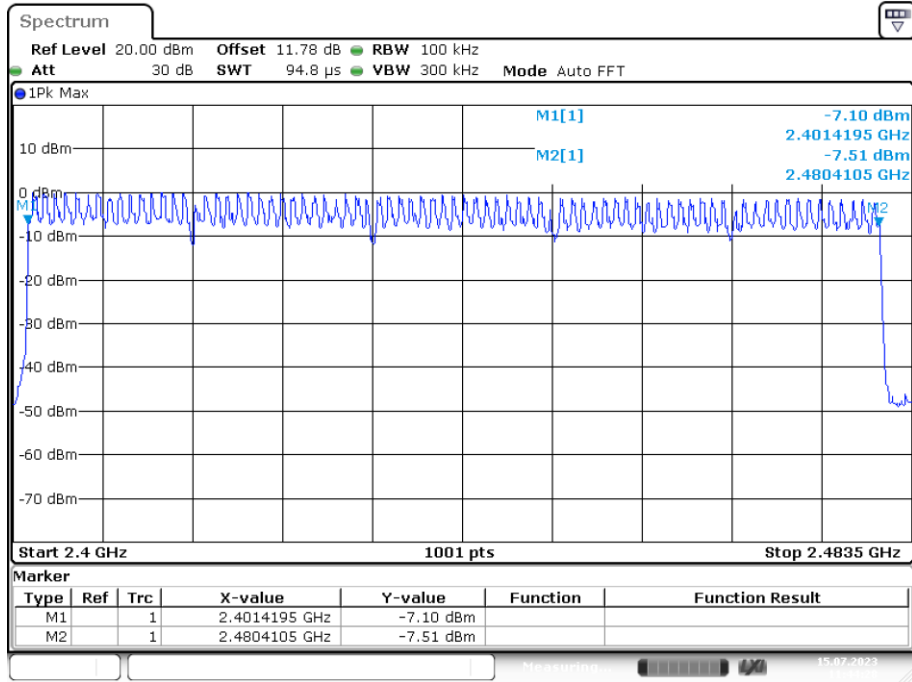

Date: 15.JUL.2023 11:44:28

Hopping No. NVNT 3-DH1 2441MHz Ant1

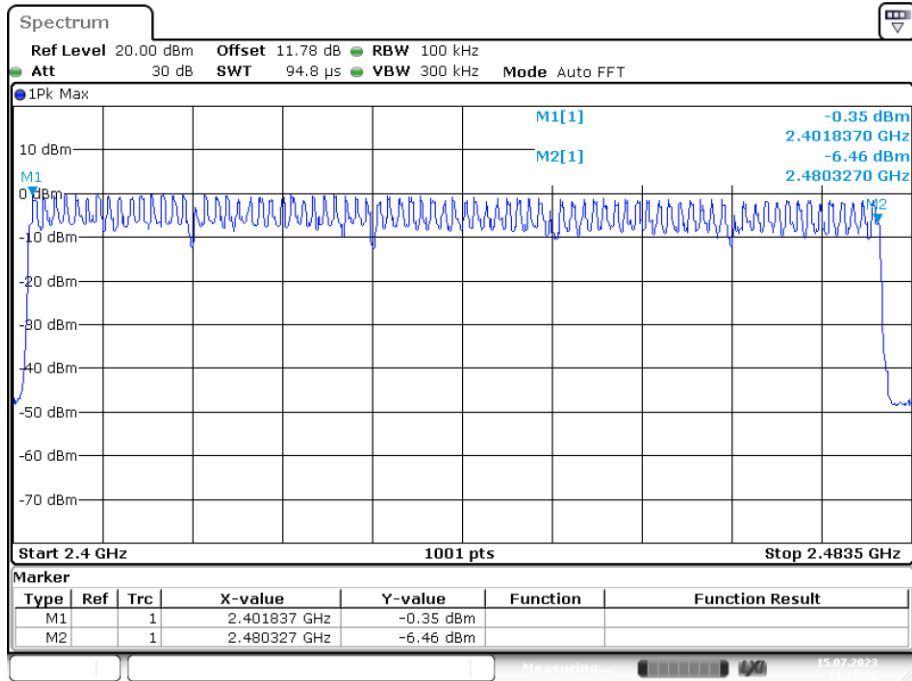

Date: 15.JUL.2023 11:20:06

7. DWELL TIME

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

- 7.2.1. Place the EUT on the table and set it in transmitting mode.
- 7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 7.2.3. Set center frequency of spectrum analyzer = operating frequency.
- 7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.
- 7.2.5. Repeat above procedures until all frequency measured were complete.


7.3. Test Result

PASS.

Detailed information please see the following page.


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.377	119.886	318	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.632	266.016	163	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.88	316.8	110	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.387	123.453	319	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.638	245.7	150	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.885	300.04	104	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.387	123.066	318	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.637	253.735	155	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.887	280.039	97	31600	400	Pass

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

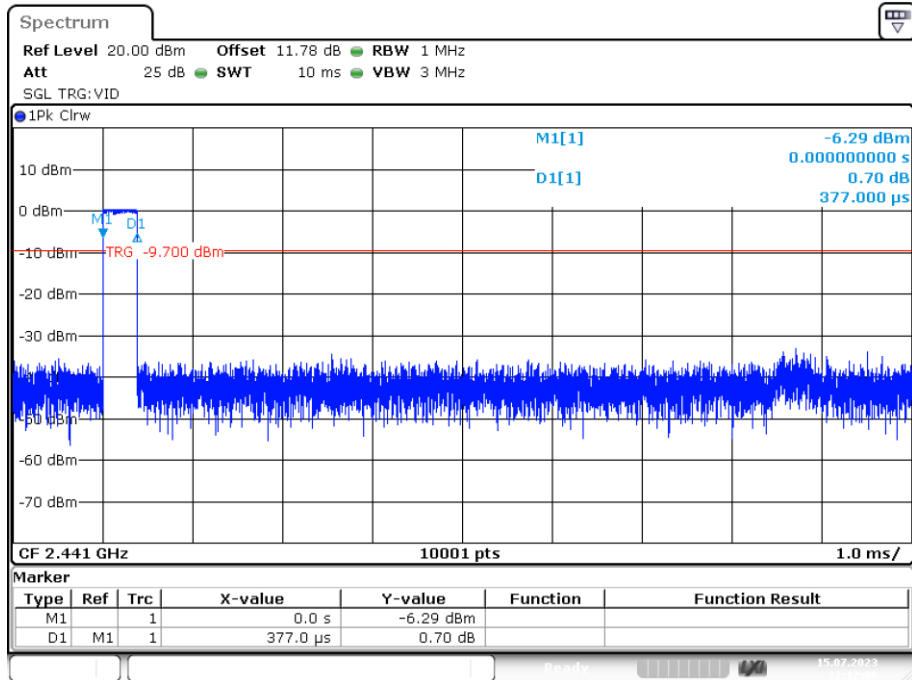


Date: 15.JUL.2023 12:12:06

Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

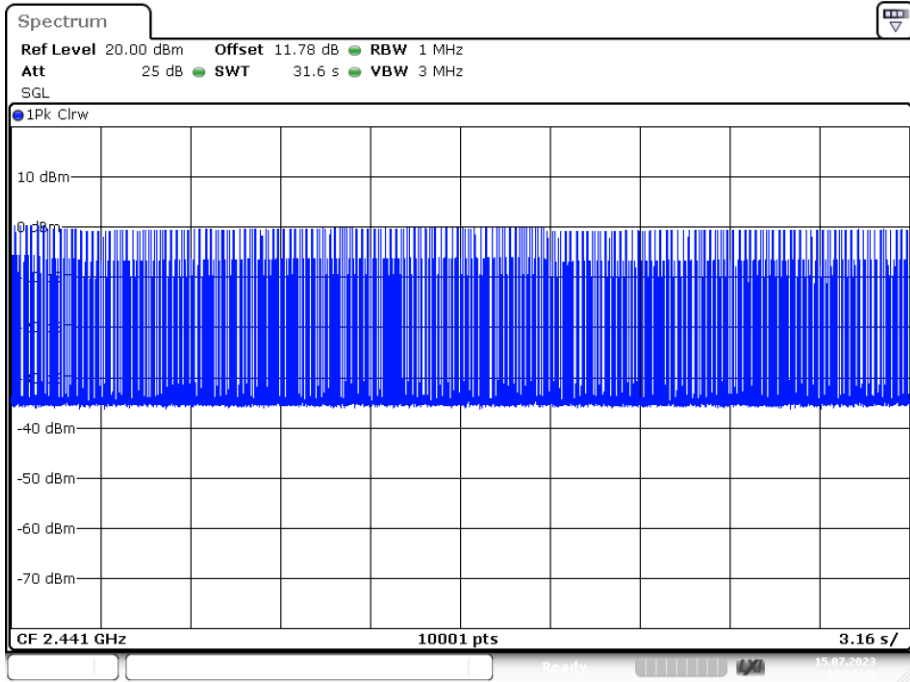


Date: 15.JUL.2023 12:12:40

Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

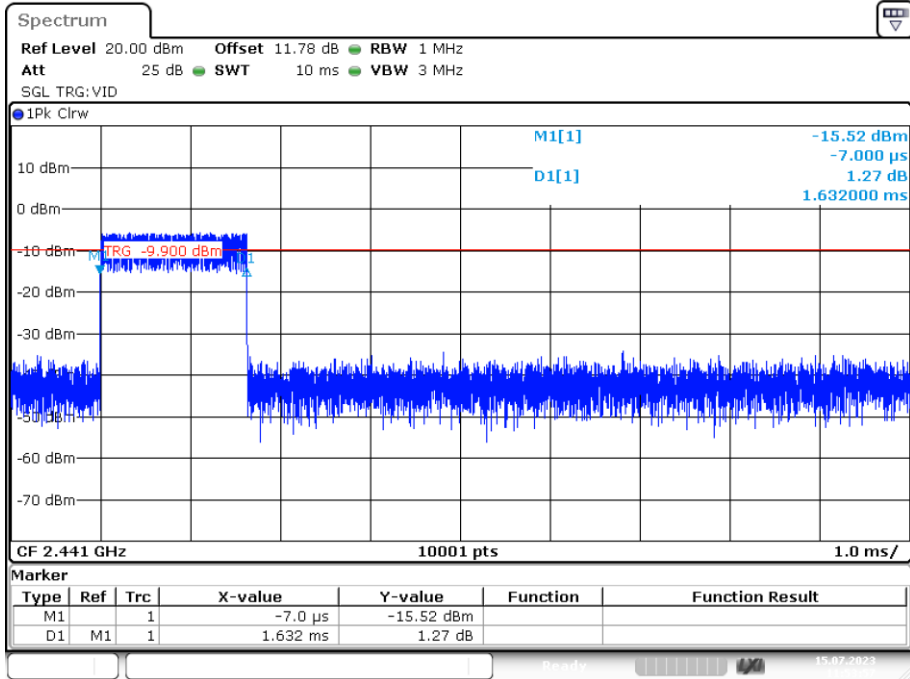


Date: 15.JUL.2023 11:53:56

Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

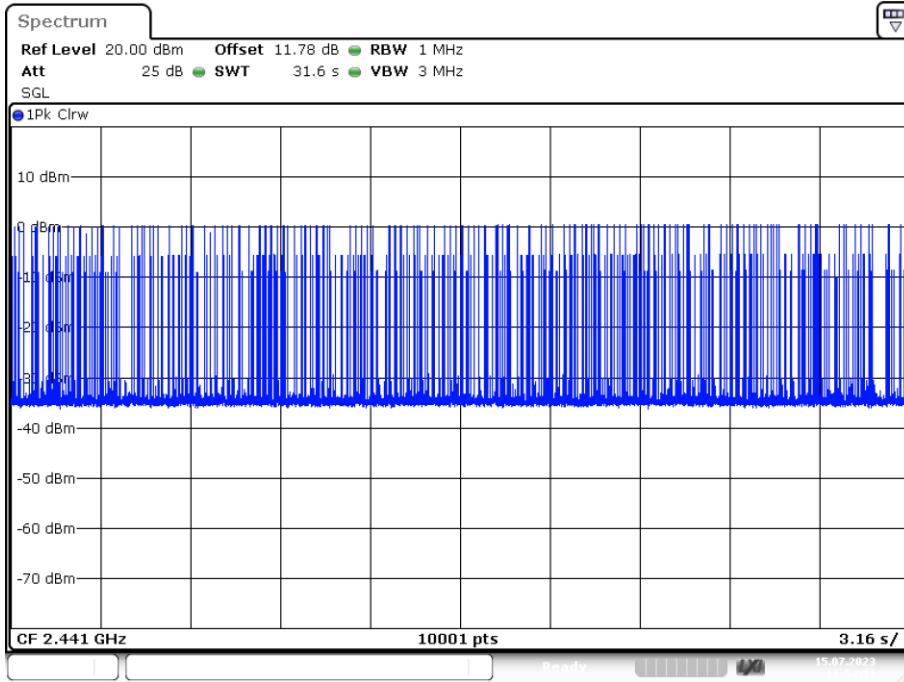


Date: 15.JUL.2023 11:54:31

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

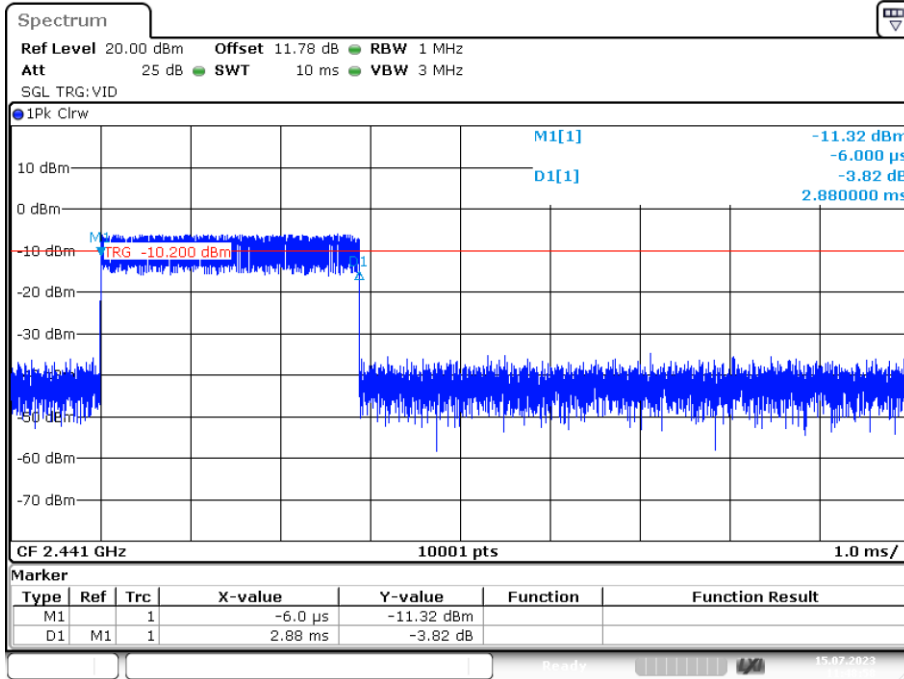


Date: 15.JUL.2023 11:48:58

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

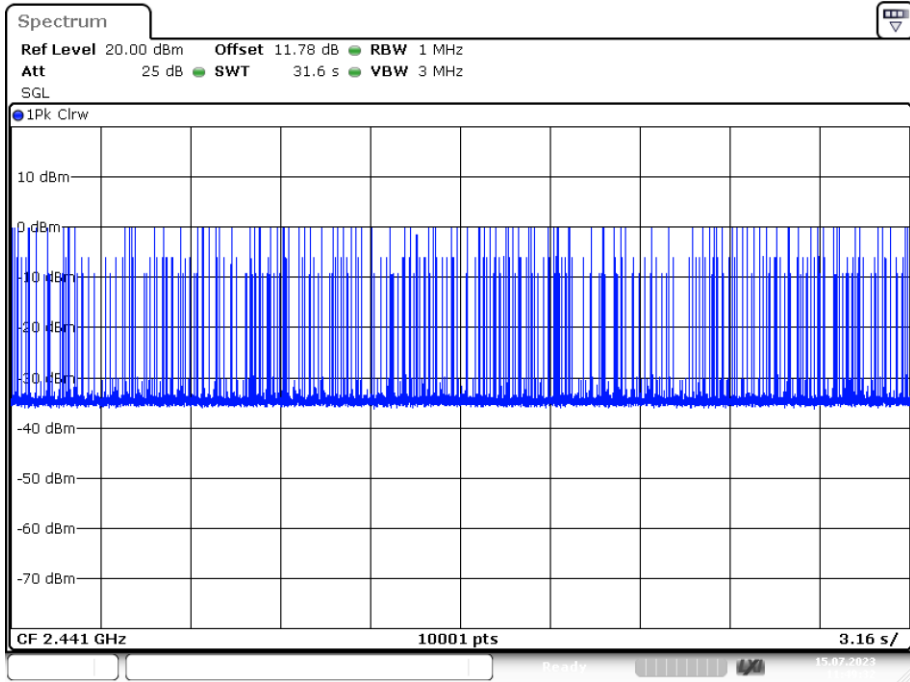


Date: 15.JUL.2023 11:49:32

Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

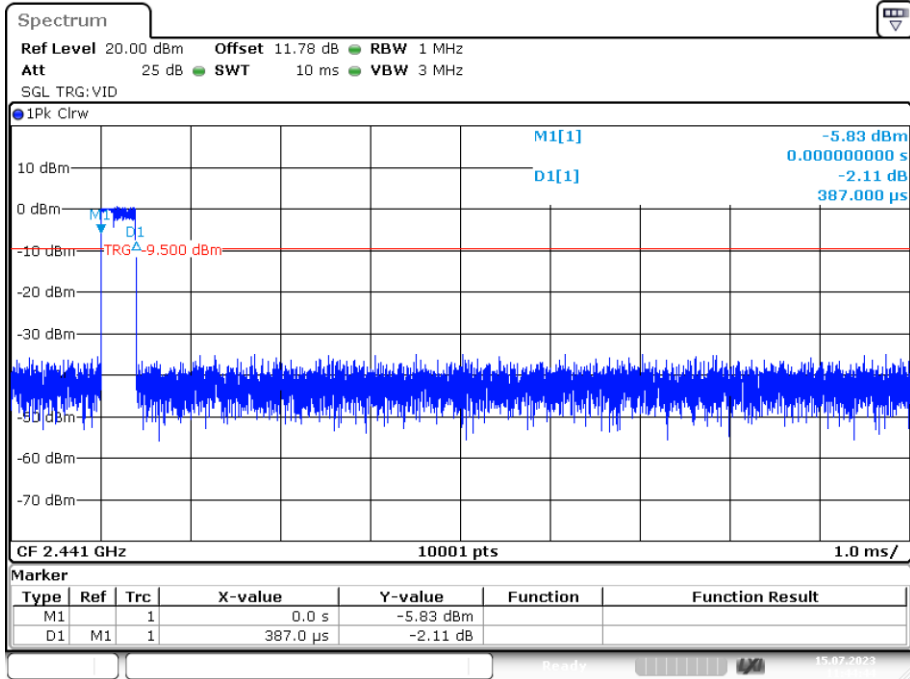


Date: 15.JUL.2023 11:44:44

Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

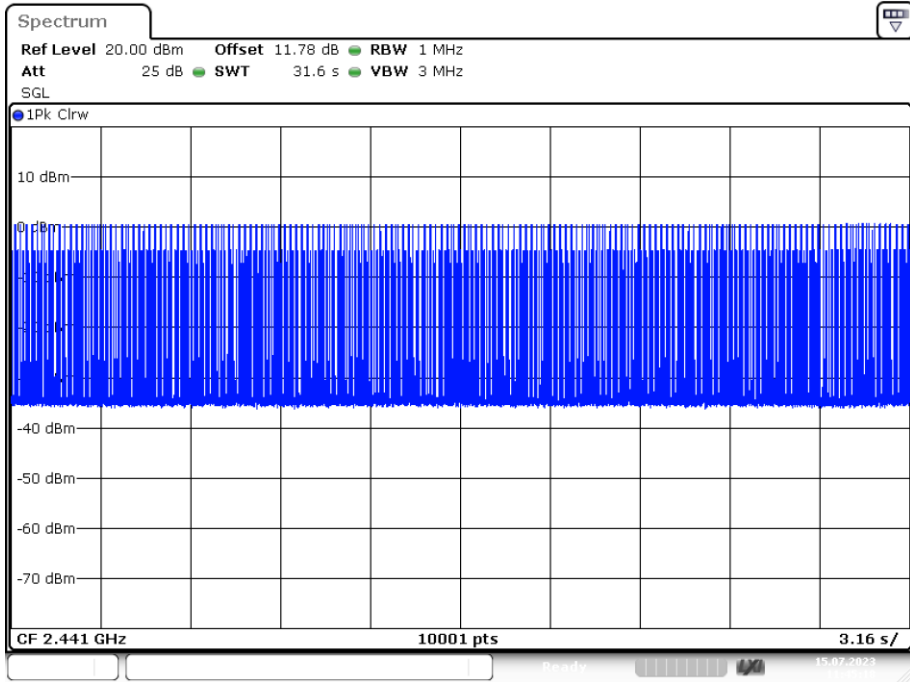


Date: 15.JUL.2023 11:45:18

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst

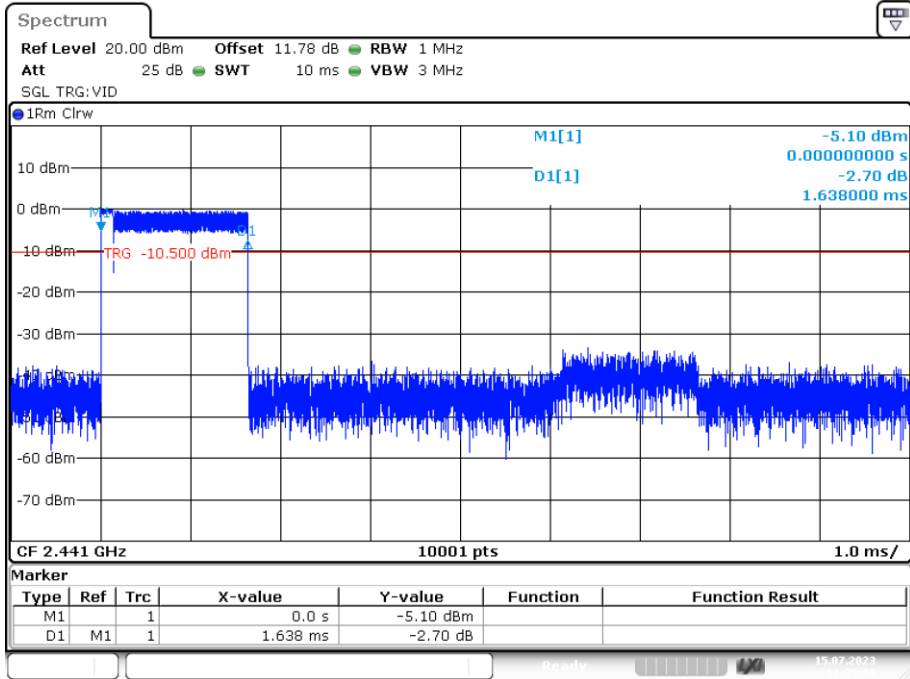


Date: 15.JUL.2023 11:35:09

Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

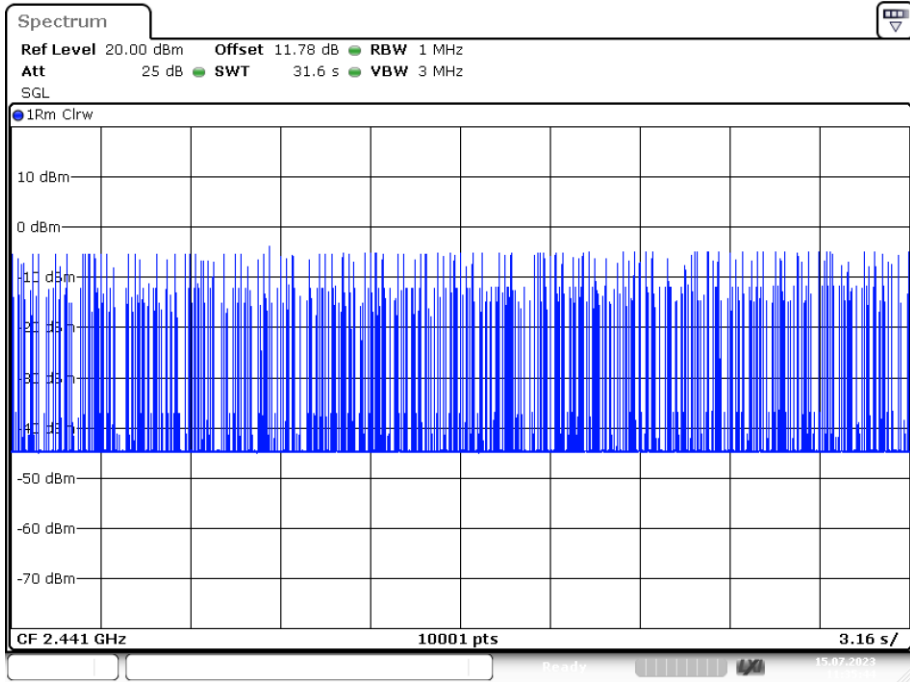


Date: 15.JUL.2023 11:35:44

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

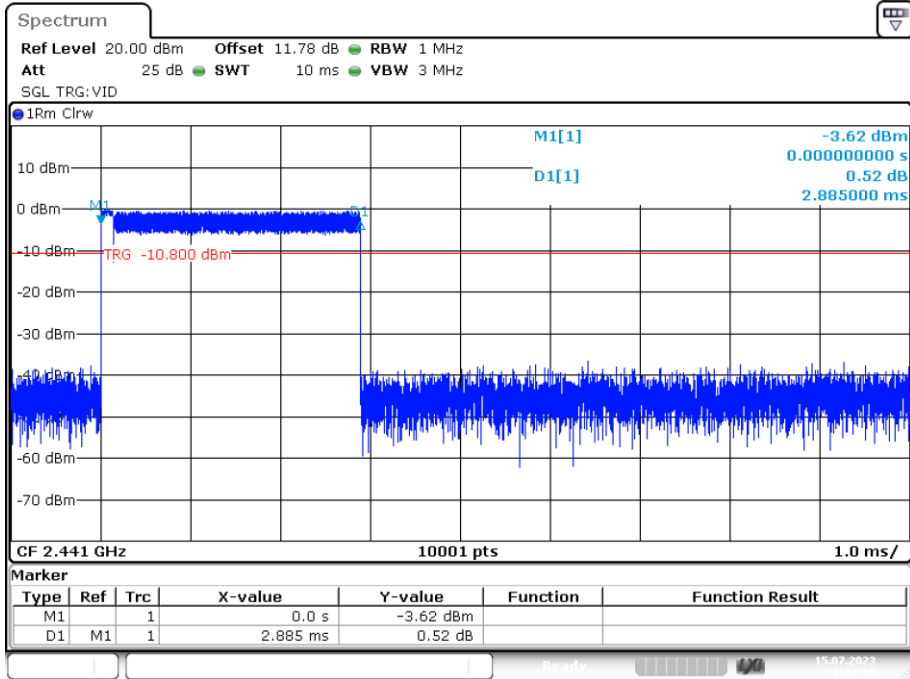


Date: 15.JUL.2023 11:30:16

Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

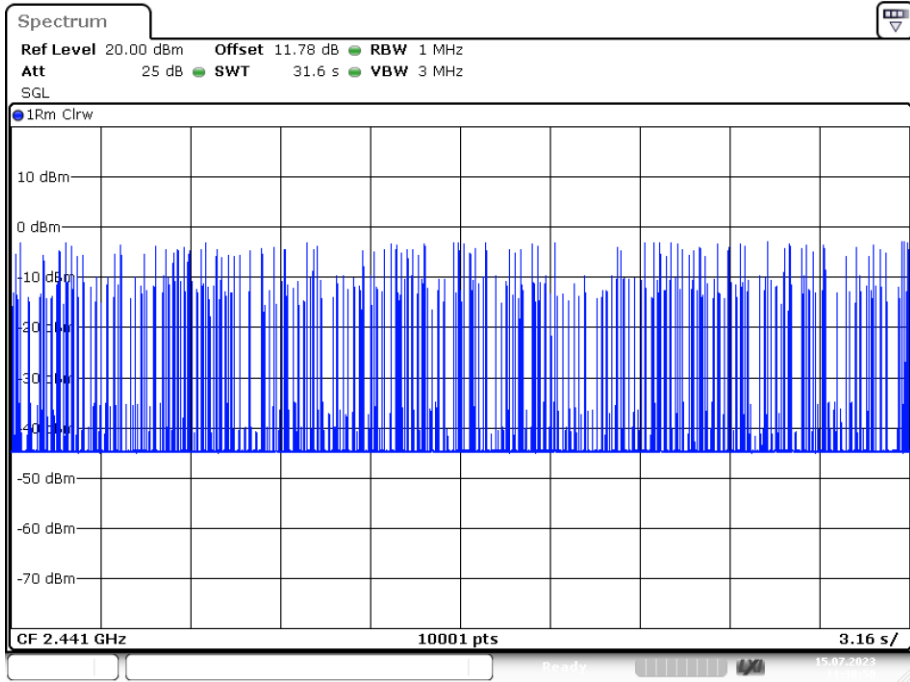


Date: 15.JUL.2023 11:30:50

Dwell NVNT 3-DH1 2441MHz Ant1 One Burst

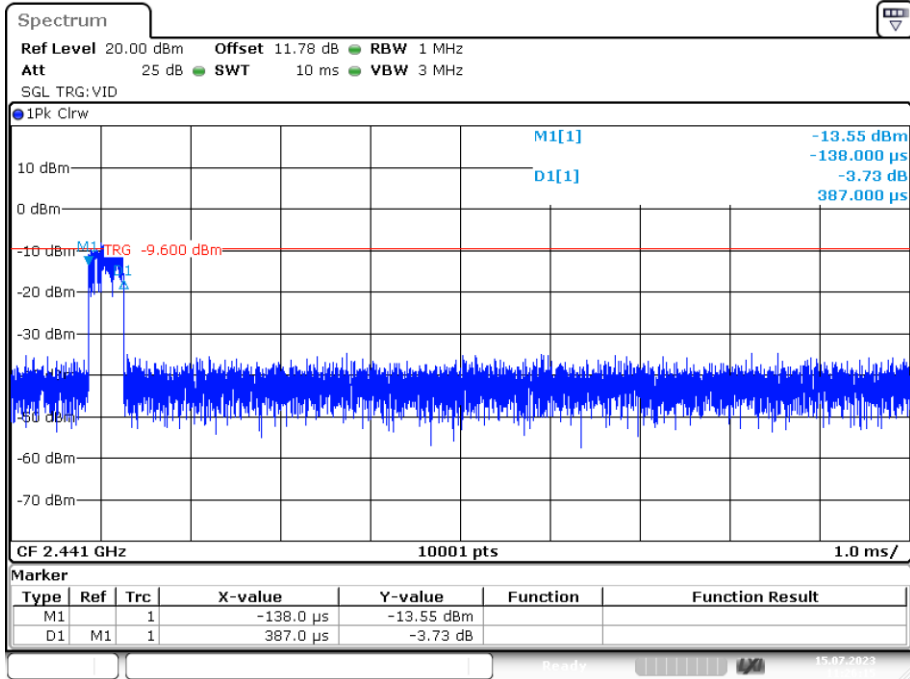


Date: 15.JUL.2023 11:26:14

Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

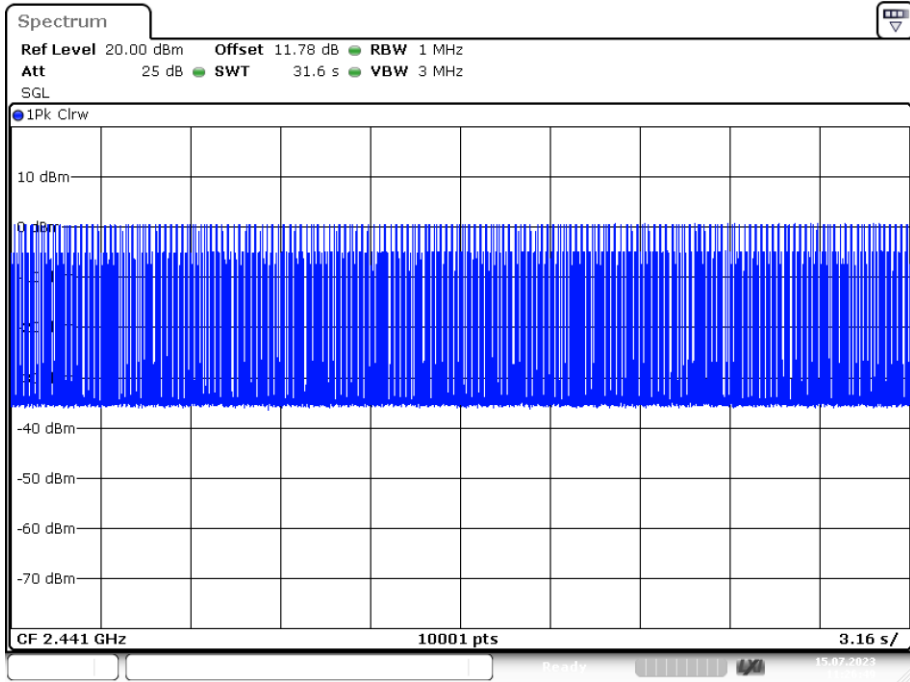


Date: 15.JUL.2023 11:26:48

Dwell NVNT 3-DH3 2441MHz Ant1 One Burst

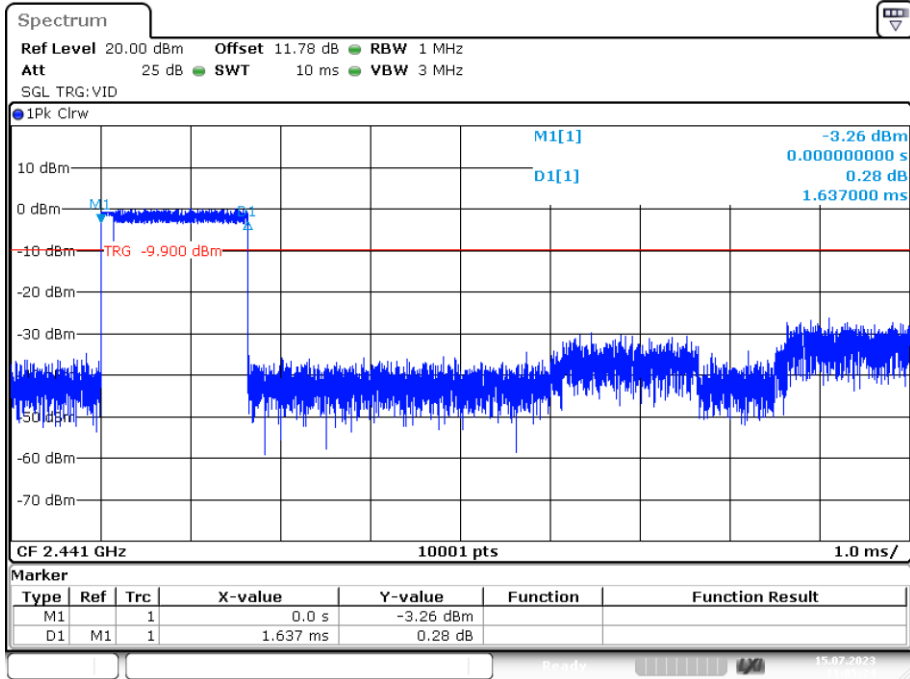


Date: 15.JUL.2023 11:05:24

Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

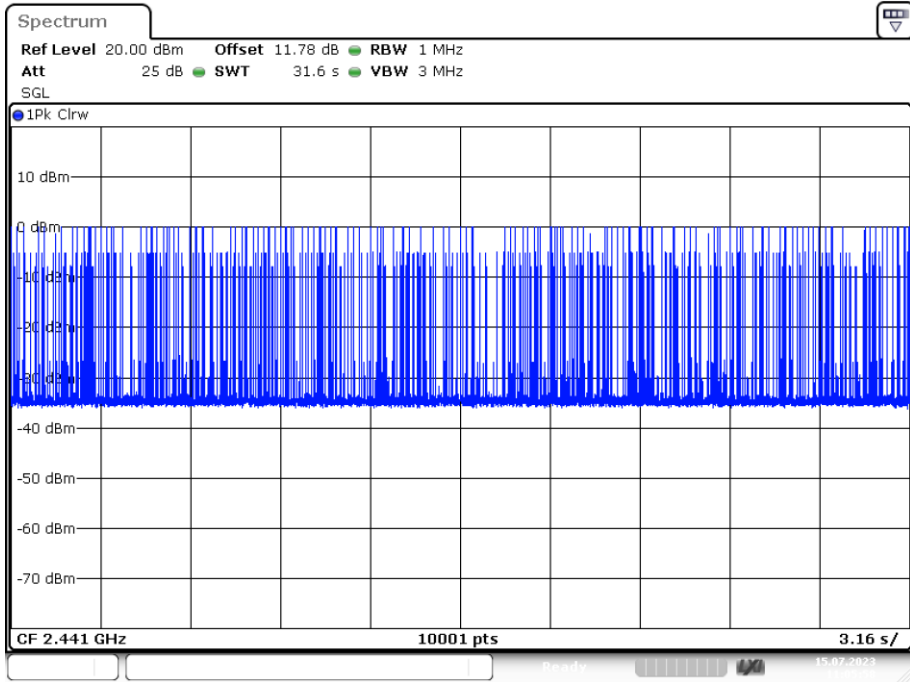


Date: 15.JUL.2023 11:05:58

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

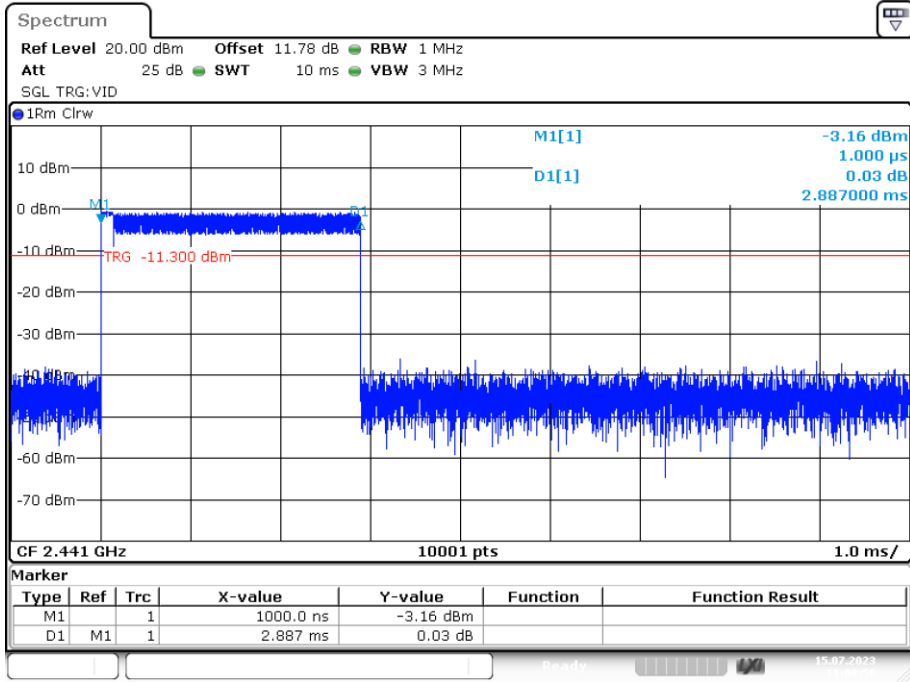

Date: 15.JUL.2023 11:00:55

Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

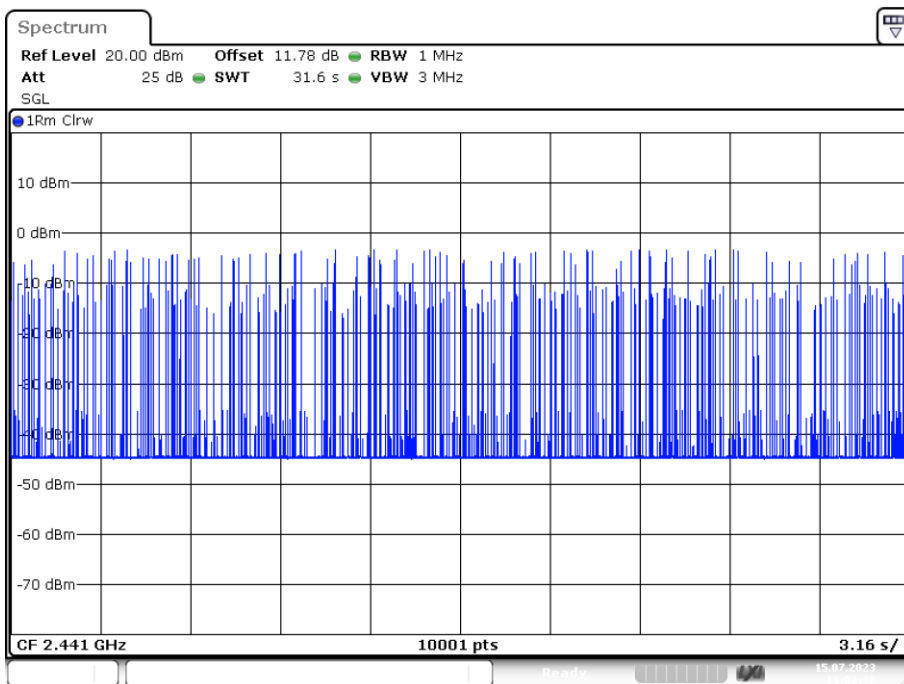

Date: 15.JUL.2023 11:01:30

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

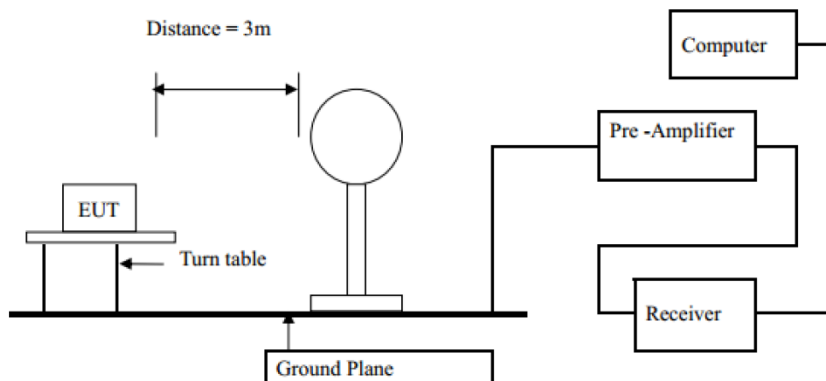

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

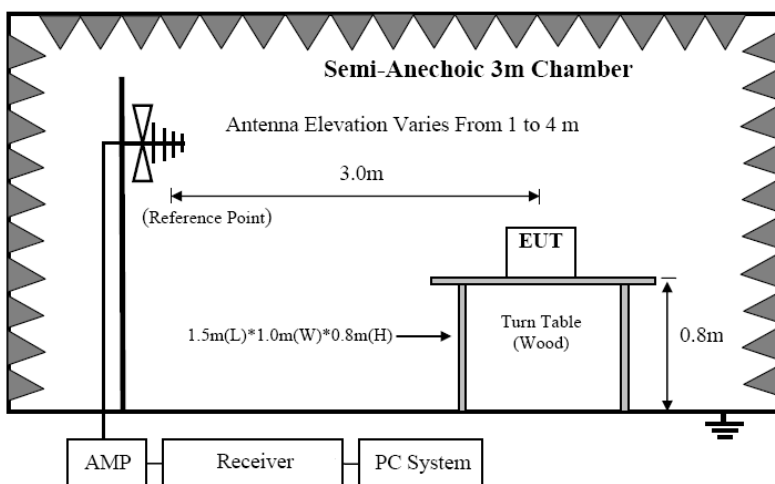

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

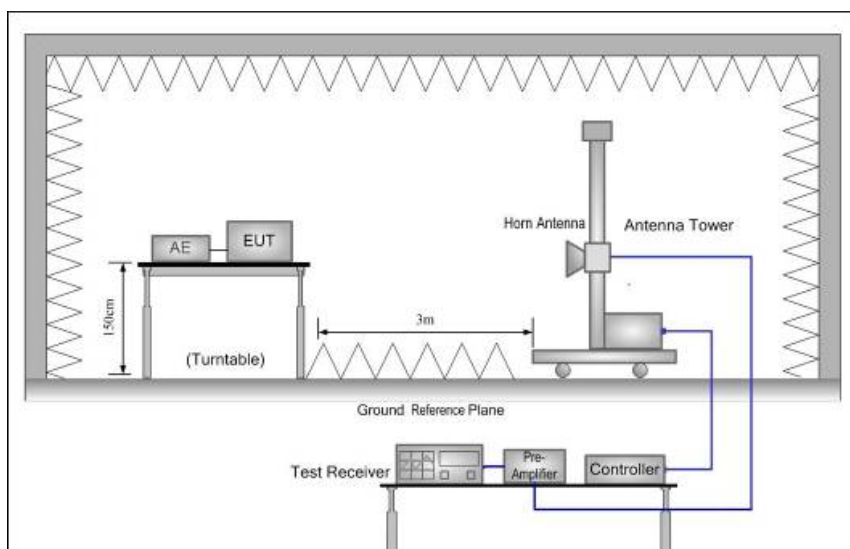

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

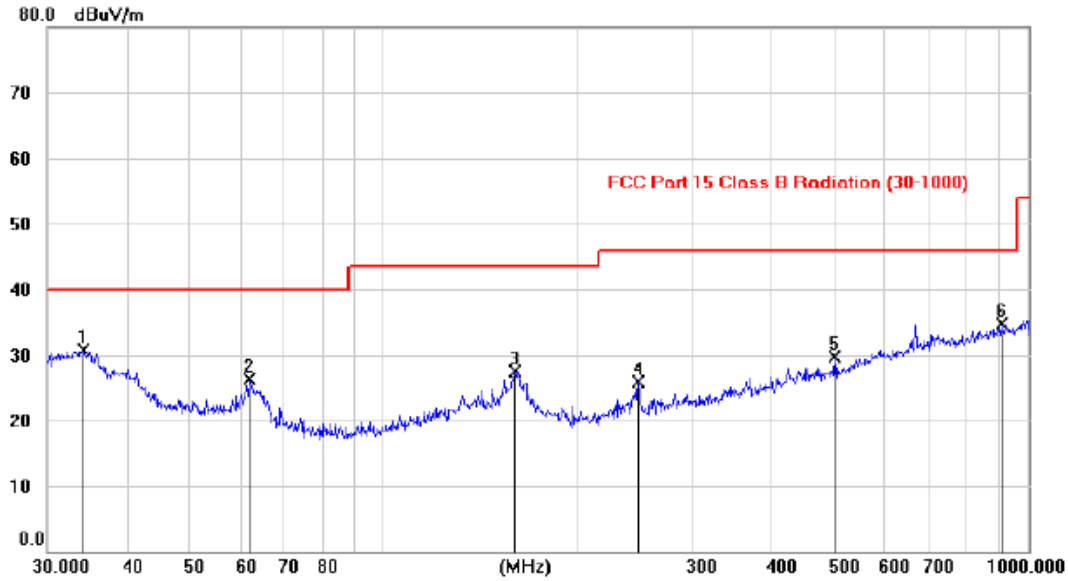


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	34.0763	17.04	13.70	30.74	40.00	-9.26	peak			
2		61.9733	13.46	12.88	26.34	40.00	-13.66	peak			
3		159.4672	12.53	15.04	27.57	43.50	-15.93	peak			
4		248.3777	13.20	12.73	25.93	46.00	-20.07	peak			
5		500.0088	11.56	18.21	29.77	46.00	-16.23	peak			
6		907.3305	10.56	24.14	34.70	46.00	-11.30	peak			

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Horizontal:

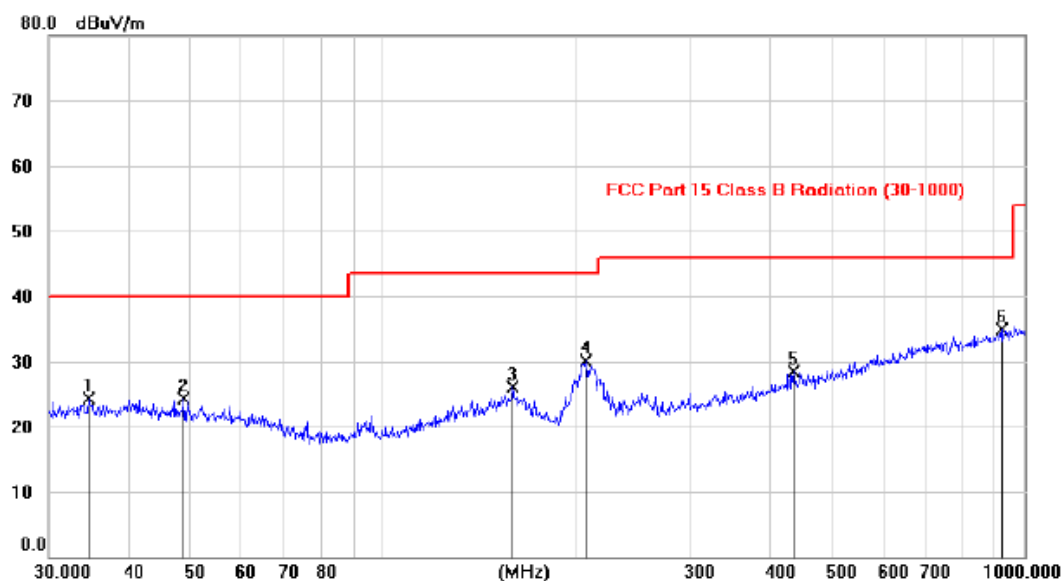

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		34.6426	10.55	13.73	24.28	40.00	-15.72	peak	
2		48.8372	10.19	14.04	24.23	40.00	-15.77	peak	
3		158.8533	11.16	15.04	26.20	43.50	-17.30	peak	
4		206.8323	19.15	11.02	30.17	43.50	-13.33	peak	
5		435.7935	11.20	17.22	28.42	46.00	-17.58	peak	
6	*	922.4079	10.55	24.34	34.89	46.00	-11.11	peak	

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	48.65	V	33.93	10.18	34.26	58.50	74	-15.50	PK
4804	36.28	V	33.93	10.18	34.26	46.13	54	-7.87	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	47.90	H	33.93	10.18	34.26	57.75	74	-16.25	PK
4804	35.79	H	33.93	10.18	34.26	45.64	54	-8.36	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	49.32	V	33.95	10.20	34.26	59.21	74	-14.79	PK
4882	35.50	V	33.95	10.20	34.26	45.39	54	-8.61	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	48.69	H	33.95	10.20	34.26	58.58	74	-15.42	PK
4882	34.60	H	33.95	10.20	34.26	44.49	54	-9.51	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	47.32	V	33.98	10.22	34.25	57.27	74	-16.73	PK
4960	33.82	V	33.98	10.22	34.25	43.77	54	-10.23	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	46.93	H	33.98	10.22	34.25	56.88	74	-17.12	PK
4960	32.17	H	33.98	10.22	34.25	42.12	54	-11.88	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

From 1G-25GHz


Test Mode: $\pi/4$ DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	48.03	V	33.93	10.18	34.26	57.88	74	-16.12	PK
4804	36.26	V	33.93	10.18	34.26	46.11	54	-7.89	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	47.40	H	33.93	10.18	34.26	57.25	74	-16.75	PK
4804	35.27	H	33.93	10.18	34.26	45.12	54	-8.88	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX Mid									
4882	49.06	V	33.95	10.20	34.26	58.95	74	-15.05	PK
4882	35.82	V	33.95	10.20	34.26	45.71	54	-8.29	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	48.56	H	33.95	10.20	34.26	58.45	74	-15.55	PK
4882	34.58	H	33.95	10.20	34.26	44.47	54	-9.53	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX High									
4960	47.71	V	33.98	10.22	34.25	57.66	74	-16.34	PK
4960	33.07	V	33.98	10.22	34.25	43.02	54	-10.98	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	46.63	H	33.98	10.22	34.25	56.58	74	-17.42	PK
4960	32.26	H	33.98	10.22	34.25	42.21	54	-11.79	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

From 1G-25GHz

Test Mode: 8DPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	48.04	V	33.93	10.18	34.26	57.89	74	-16.11	PK
4804	36.35	V	33.93	10.18	34.26	46.20	54	-7.80	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	47.32	H	33.93	10.18	34.26	57.17	74	-16.83	PK
4804	35.61	H	33.93	10.18	34.26	45.46	54	-8.54	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: 8DPSK TX Mid									
4882	49.22	V	33.95	10.20	34.26	59.11	74	-14.89	PK
4882	35.34	V	33.95	10.20	34.26	45.23	54	-8.77	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	48.40	H	33.95	10.20	34.26	58.29	74	-15.71	PK
4882	34.32	H	33.95	10.20	34.26	44.21	54	-9.79	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: 8DPSK TX High									
4960	47.50	V	33.98	10.22	34.25	57.45	74	-16.55	PK
4960	33.25	V	33.98	10.22	34.25	43.20	54	-10.80	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	46.26	H	33.98	10.22	34.25	56.21	74	-17.79	PK
4960	32.89	H	33.98	10.22	34.25	42.84	54	-11.16	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									


Conducted RF Spurious Emission

Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Ref

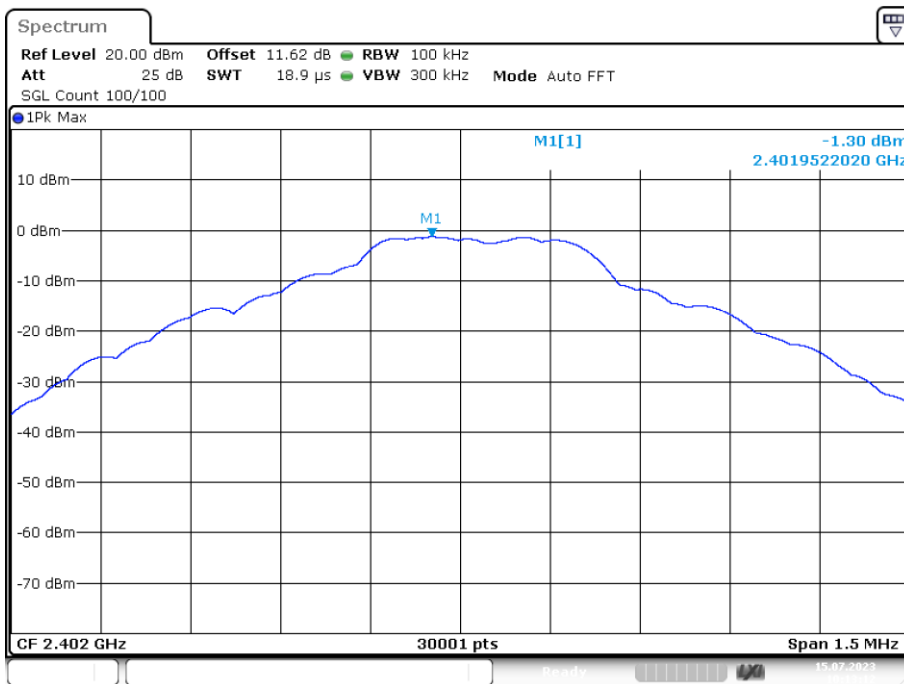


Date: 15.JUL.2023 10:13:12

Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission

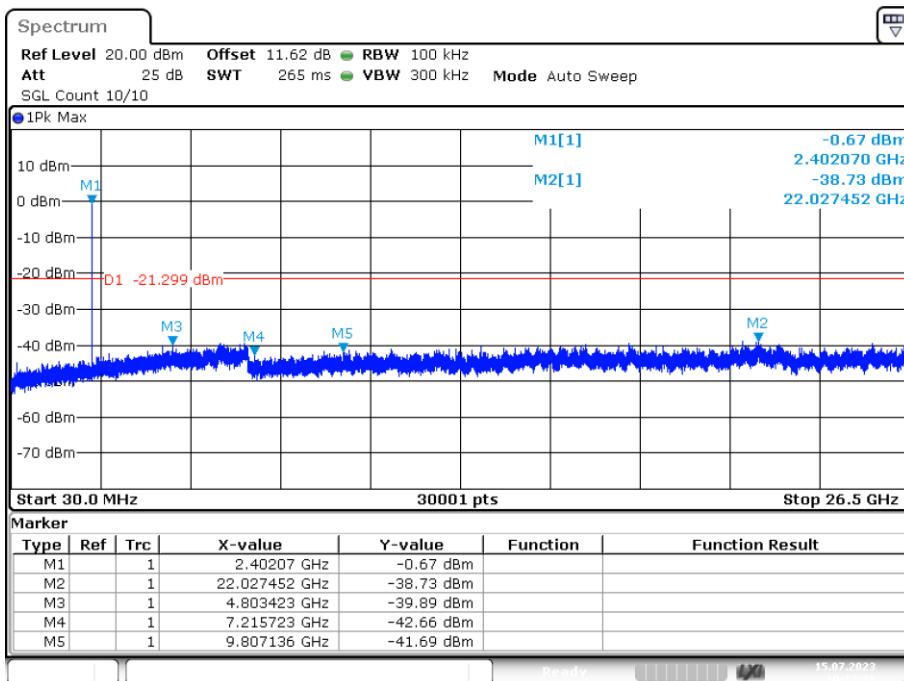


Date: 15.JUL.2023 10:13:26

Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Ref

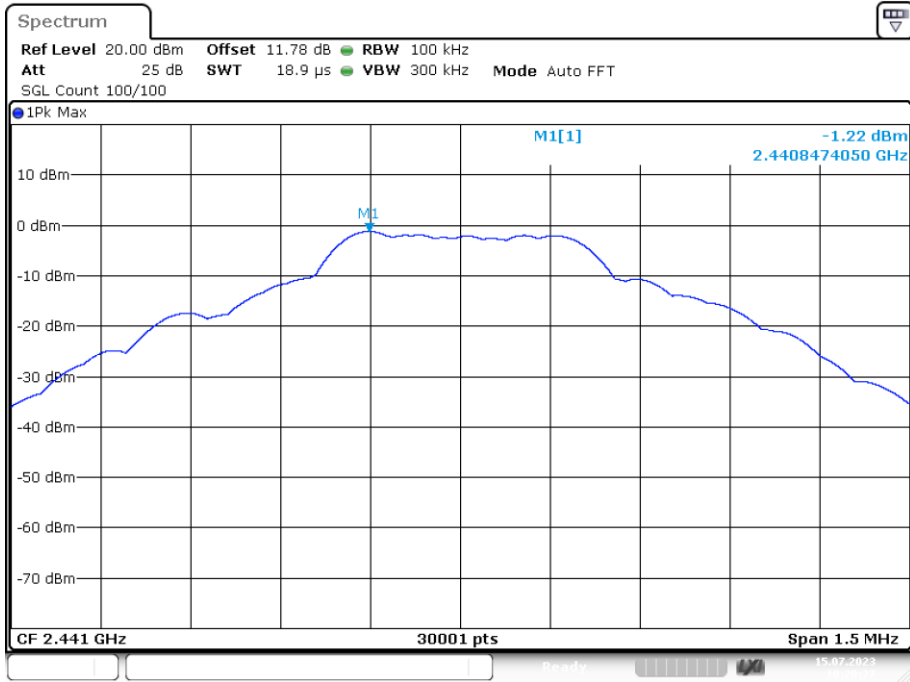


Date: 15.JUL.2023 10:20:27

Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission

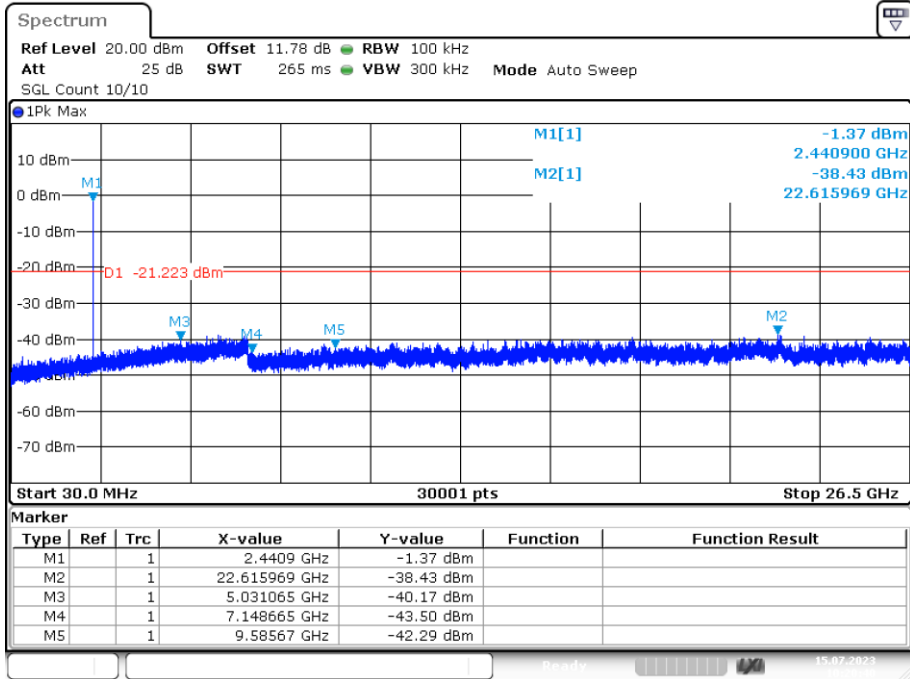


Date: 15.JUL.2023 10:20:40

Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Ref

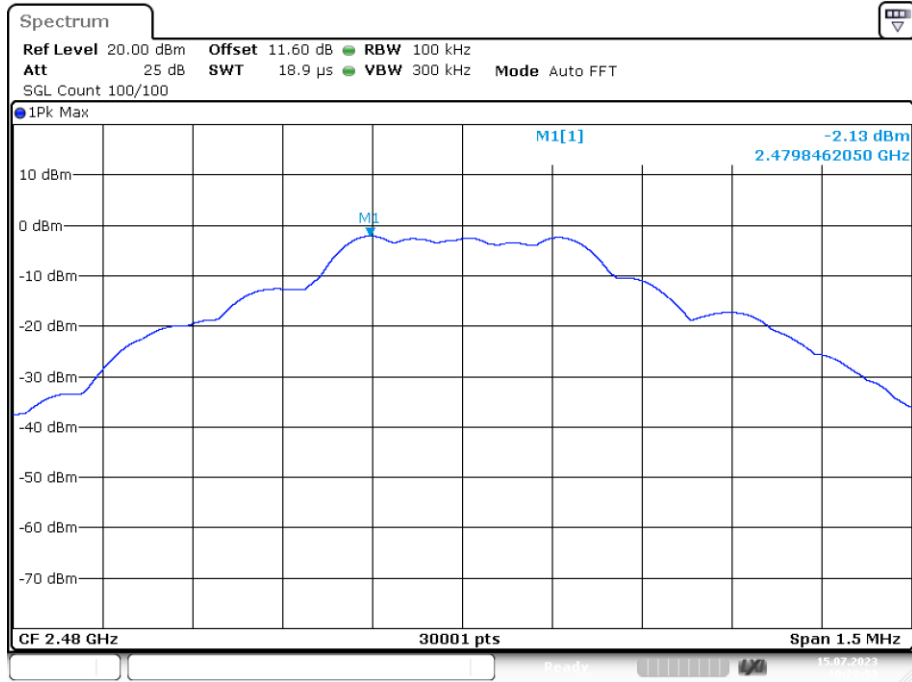


Date: 15.JUL.2023 10:22:53

Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

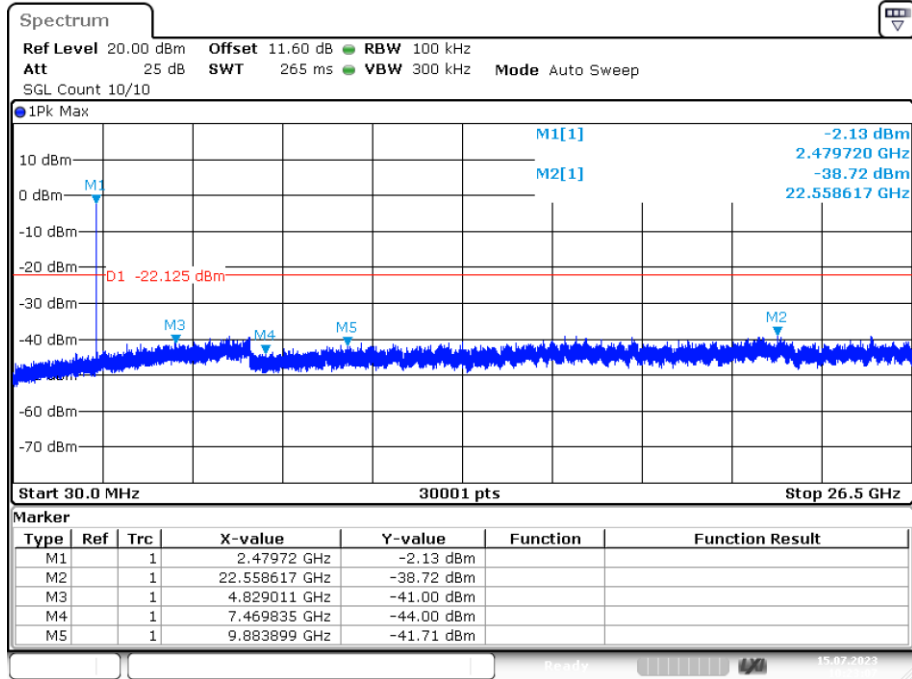


Date: 15.JUL.2023 10:23:07

Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Ref

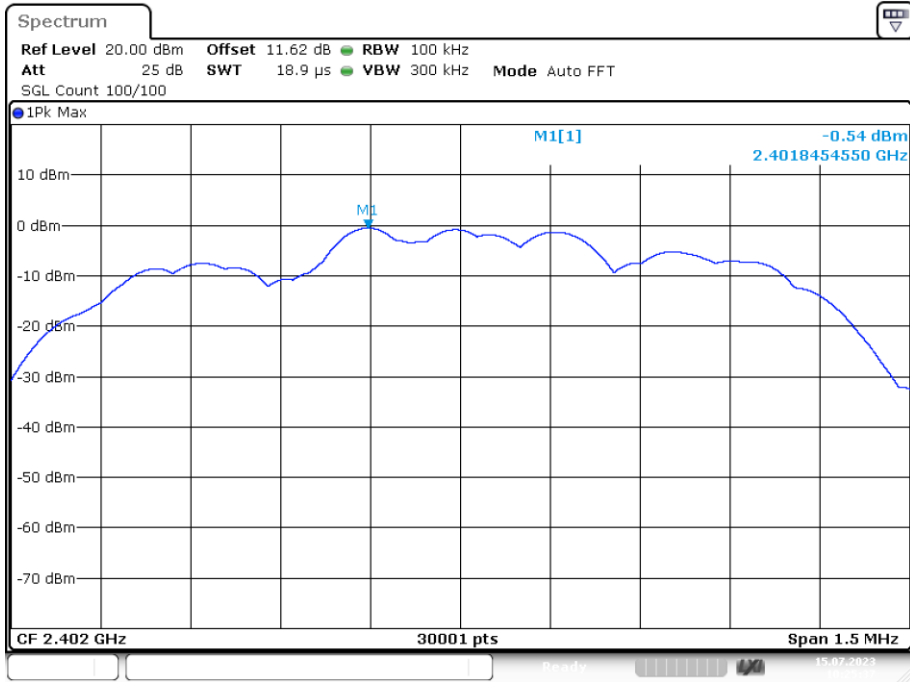


Date: 15.JUL.2023 10:25:36

Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission

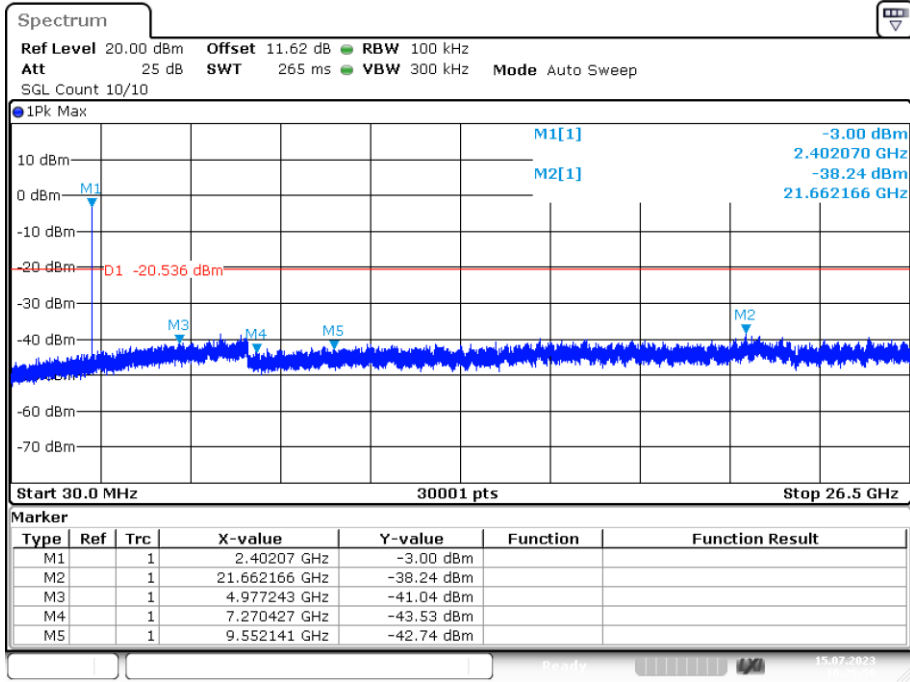


Date: 15.JUL.2023 10:25:50

Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Ref

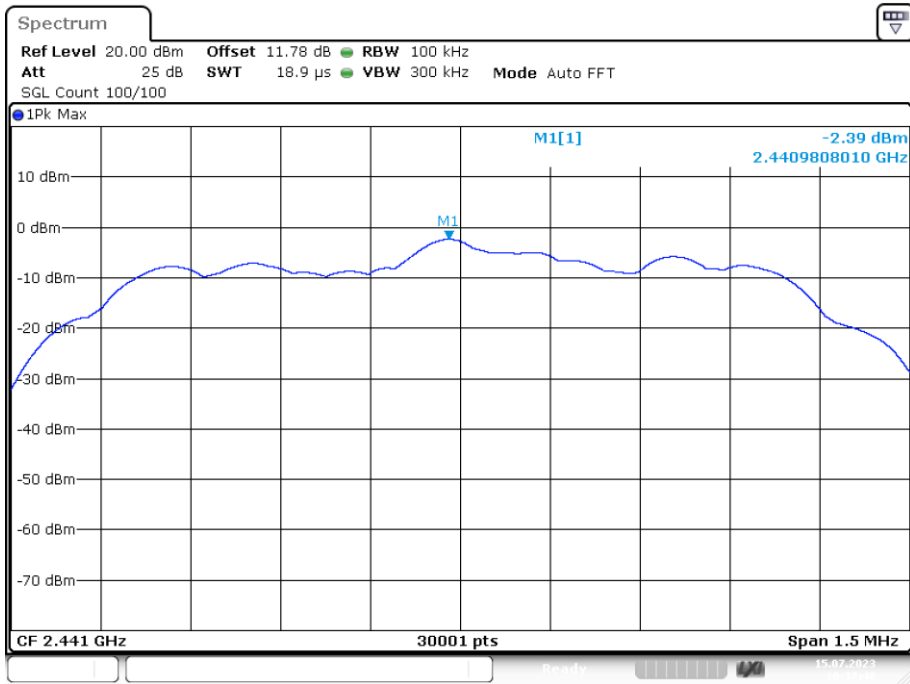


Date: 15.JUL.2023 10:37:47

Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

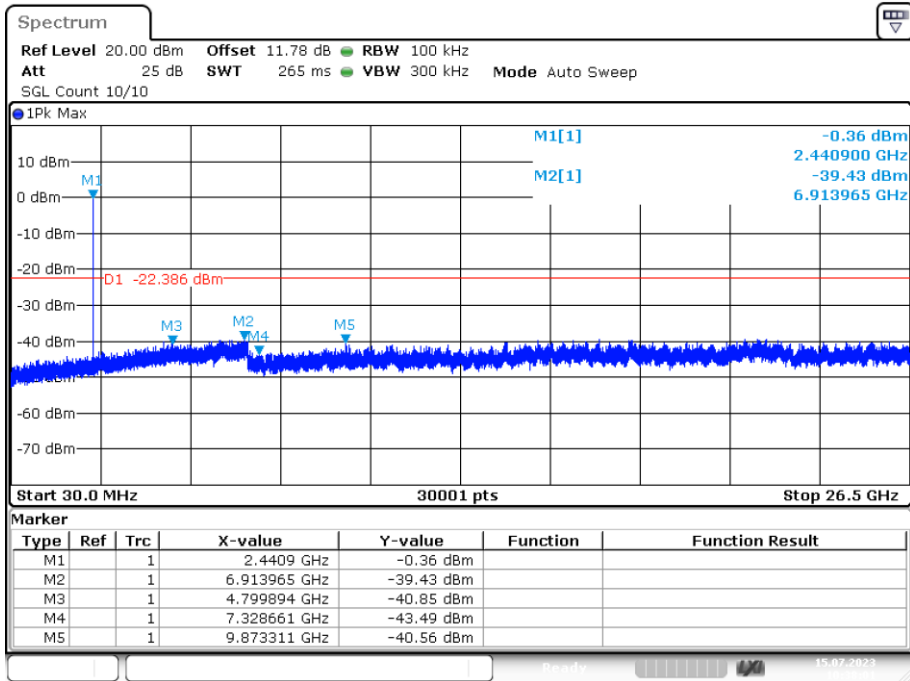


Date: 15.JUL.2023 10:38:01

Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Ref

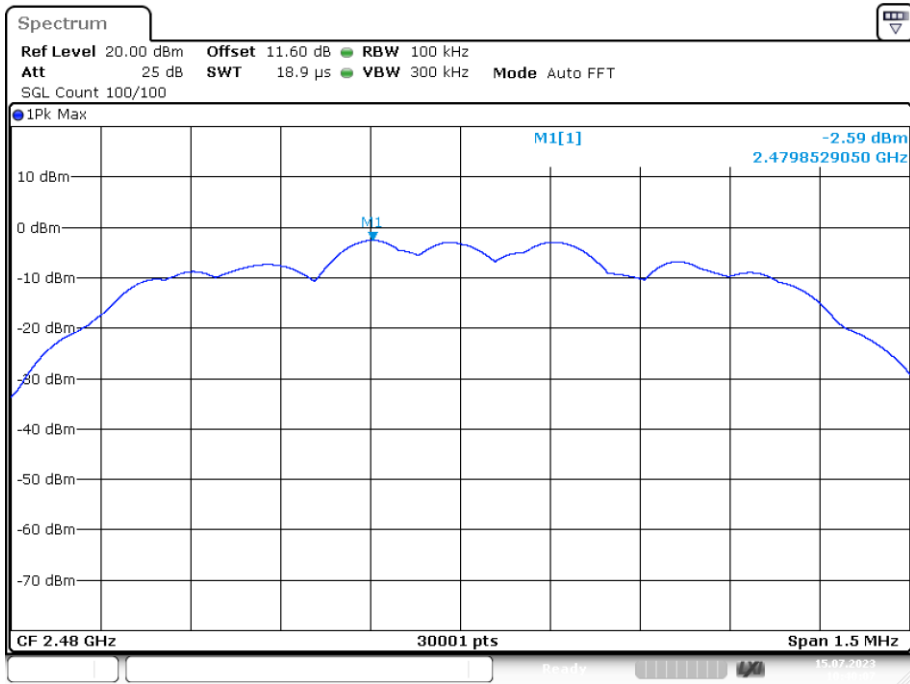

Date: 15.JUL.2023 10:40:07

Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission

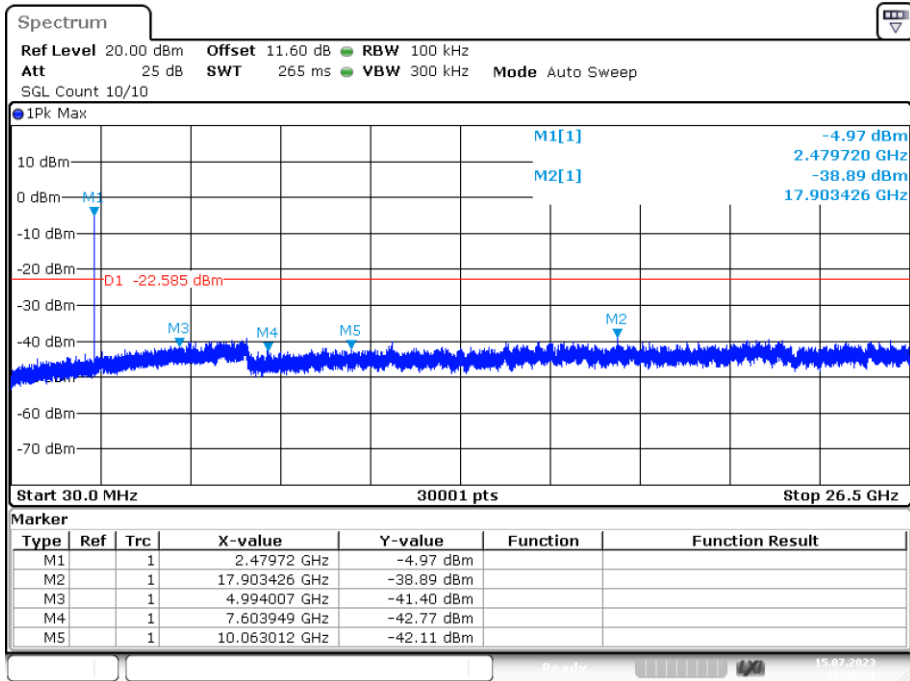

Date: 15.JUL.2023 10:40:21