





Milent Spectrum /	Analyzer - Swept SA F 50 Ω DC		SENSE:INT			
Marker 1 31.	743858128604	PNO: Fast 😱	Trig: Free Run Atten: 10 dB	Avg Type: Log-Pwr Avg Hold:>100/100	TRACE 1 2 3 4 5 6 TYPE MWWWWW DET P NNNN	Peak Search
10 dB/div Re	ef 0.00 dBm	FGain:Low	Atten. 10 dB	Mk	r1 31.743 9 GHz -62.459 dBm	Next Peak
-10.0						Next Pk Right
-20.0					-27.00 dBm	Next Pk Left
-40.0						Marker Delta
-60.0	an an an tao an an tao an t		And the second state of th	ng ti ngga ng kang ng k	n a fa shi a mi a sa ga ca da ta shi a sa s	Mkr→CF
-70.0	sha, an an a suithflish this shake to a					Mkr→RefLv
-90.0					Stop 40 000 GHz	More 1 of 2
Start 27.000 (#Res BW 1.0		#VBW 3	.0 MHz	Sweep 2	Stop 40.000 GHz 2.00 ms (30000 pts) s	
Te	est_Graph_8	302.11ac	80_ANT1_	5210_MCS9_	Frequency Ba	nd 5







Test Graphs of Spurious Emissions outside of the 5.725-5.85 GHz band for transmitters operating in the 5.725-5.85 GHz band

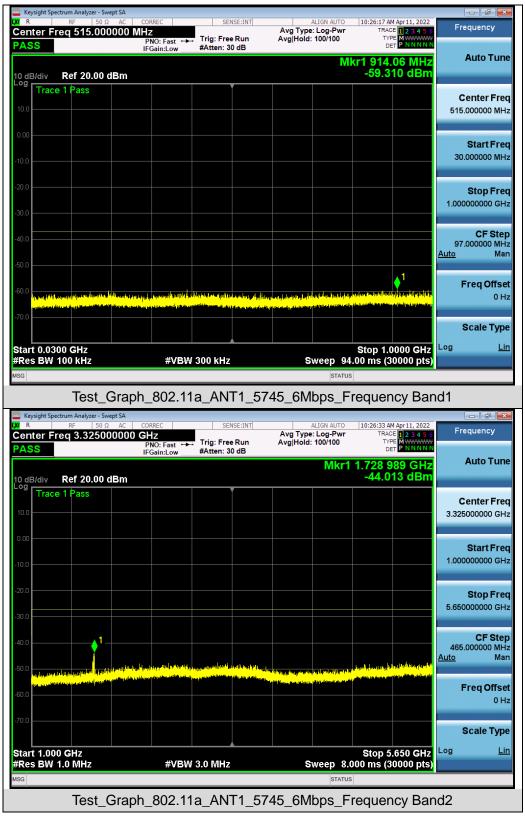




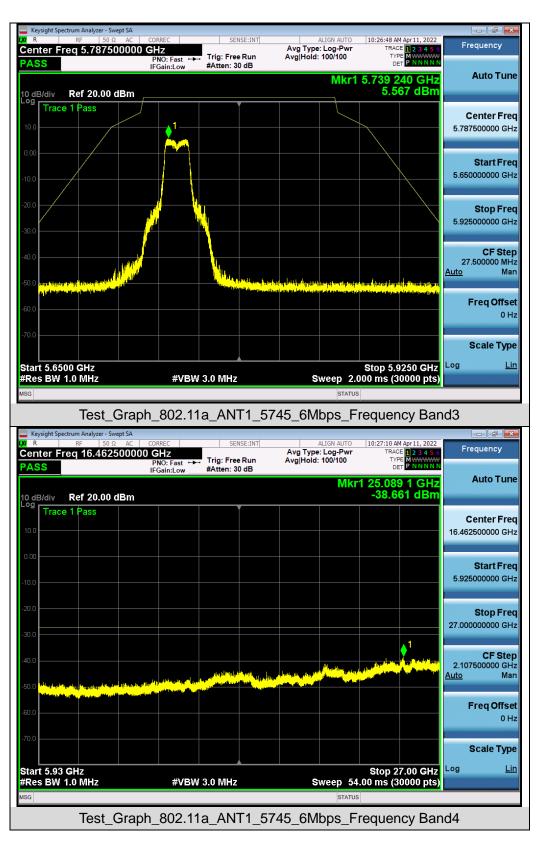




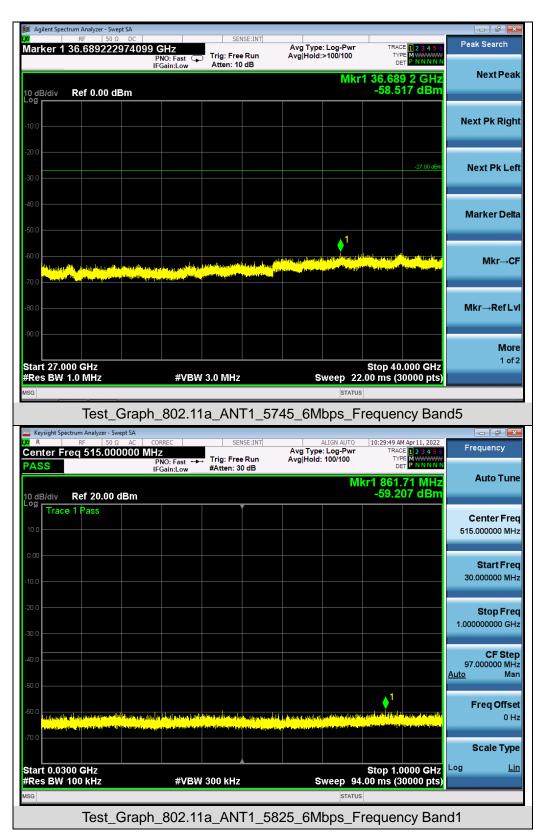




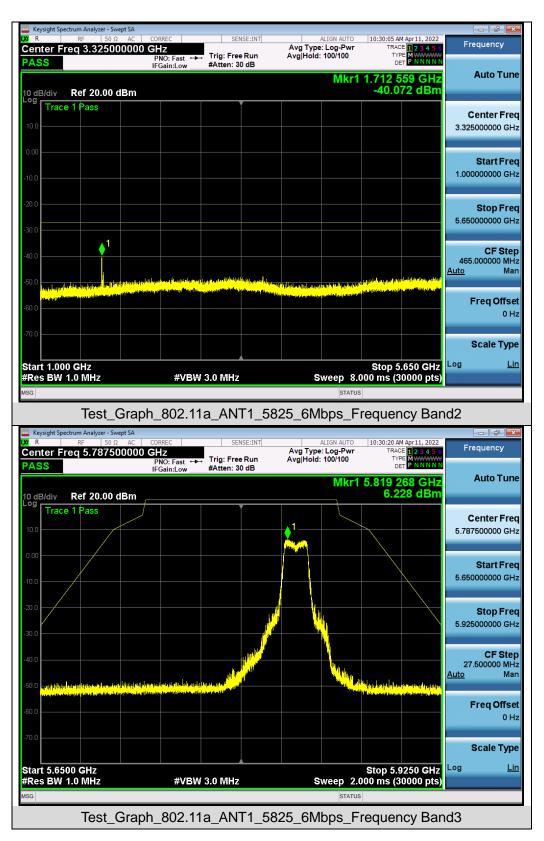




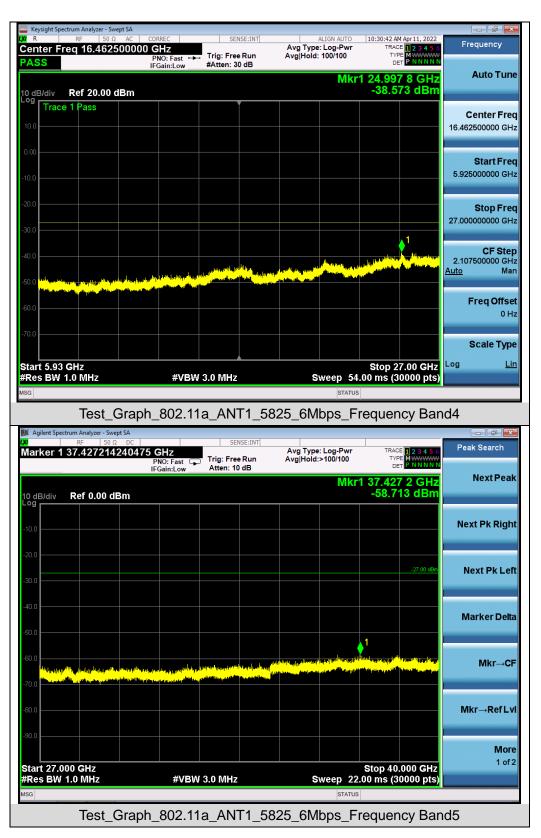




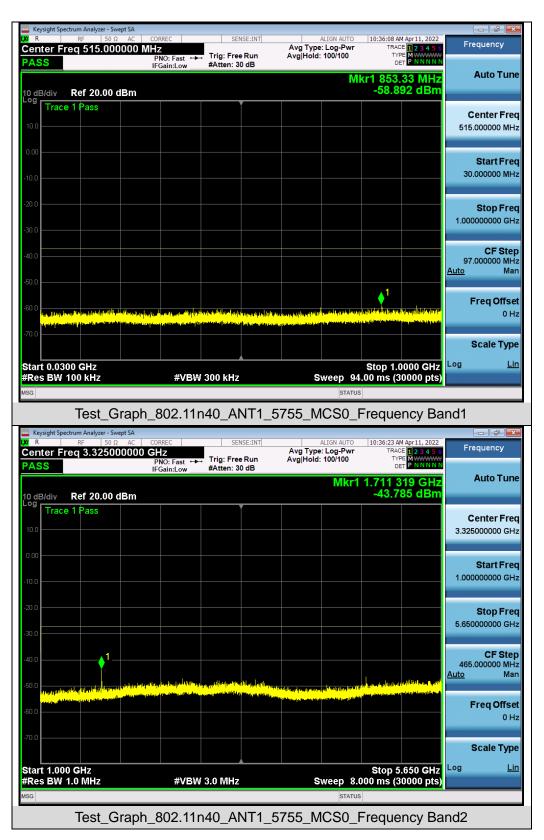




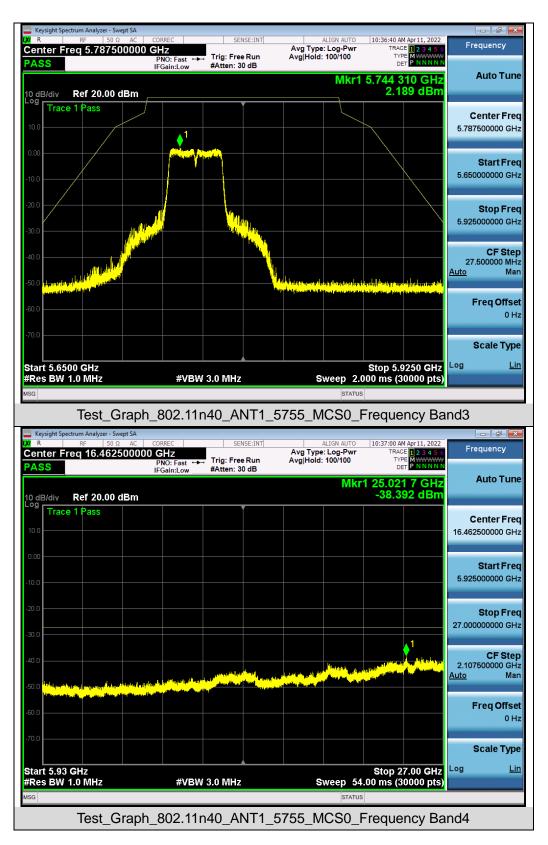




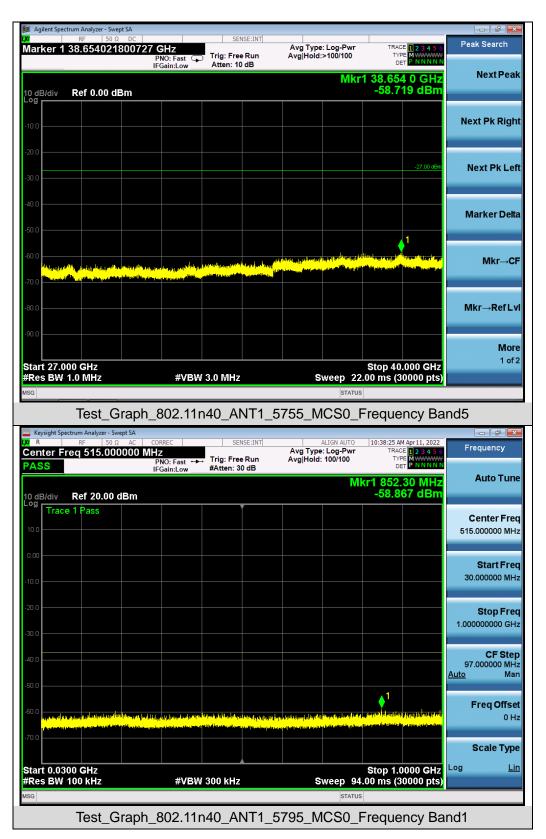




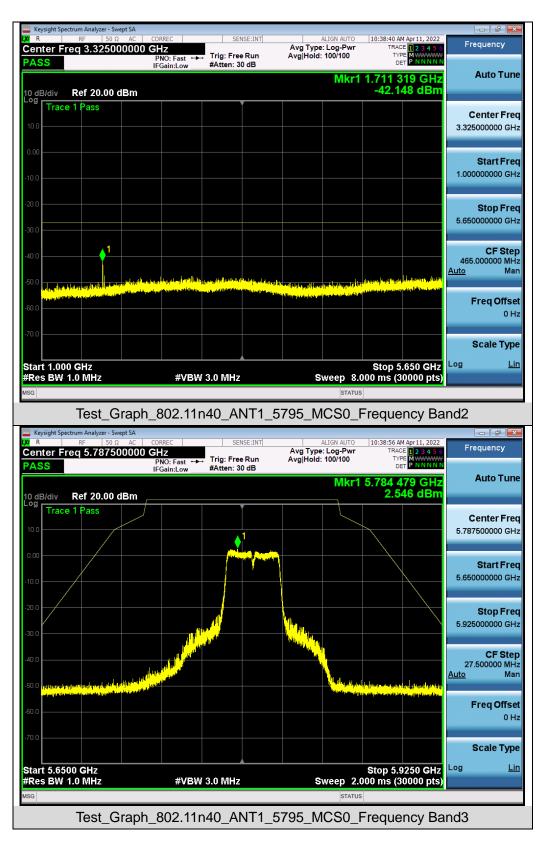




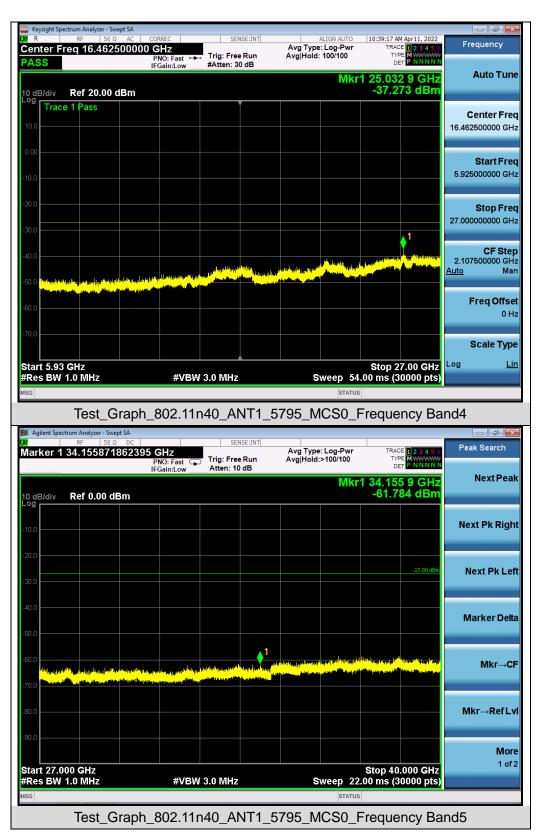



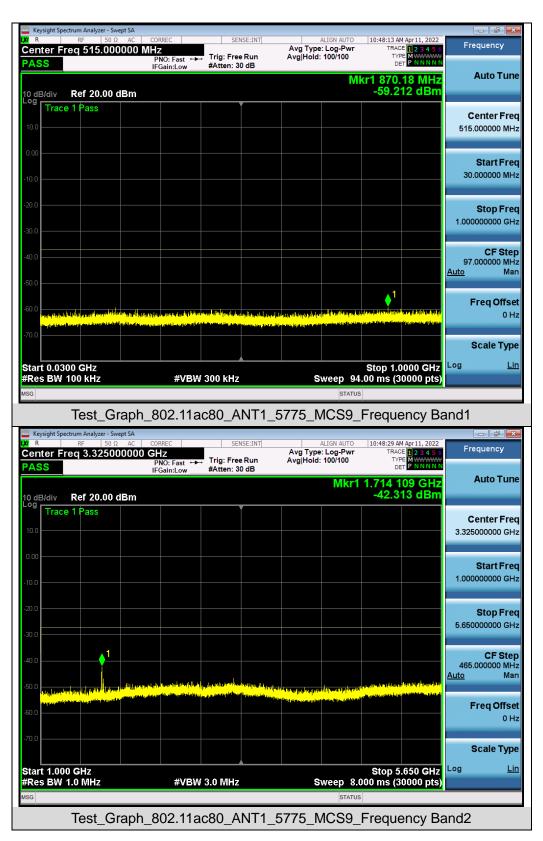



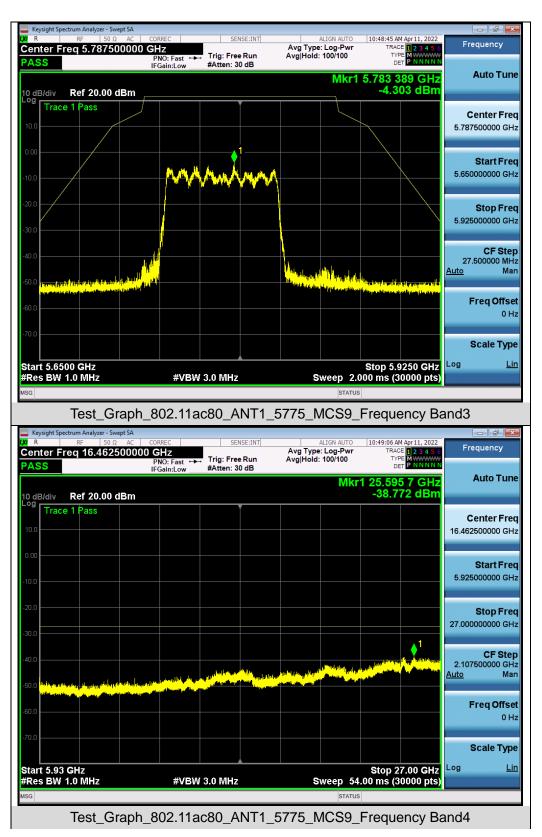



IXI IXI	trum Analyzer - Swept SA RF 50 Ω DC 31.8014933831 1	3 GHz PNO: Fast ♀ IFGain:Low	SENSE:INT Trig: Free Run Atten: 10 dB	Avg Type: Log-Pwr Avg Hold:>100/100	TRACE 123456 TYPE MWWWW DET PNNNNN	Peak Search
10 dB/div	Ref 0.00 dBm	I Guilleon		Mkr	1 31.801 5 GHz -62.205 dBm	Next Peak
-10.0						Next Pk Righ
-20.0					-27.00 dBm	Next Pk Lef
-40.0						Marker Delta
-60.0	aliti ka parta parta parta per ante para ante de la composicio de la composicio de la composicio de la composi Nomena de la composicio de	and the second sec	telantes espected at the product of the second s	n fel fel same gen blever se fræge af berefen fel se se fræge Se ste fel se	t Materia and a state of the first of the state of the state I and the state of the	Mkr→Cł
80.0						Mkr→RefLv
-90.0 Start 27.0 #Res BW		#VBW :	3.0 MHz	Sweep 22	Stop 40.000 GHz 2.00 ms (30000 pts)	More 1 of 2
MSG	Test_Graph	_802.11ac	:80_ANT1_	5775_MCS9_	Frequency Ba	ind5



11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3M VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

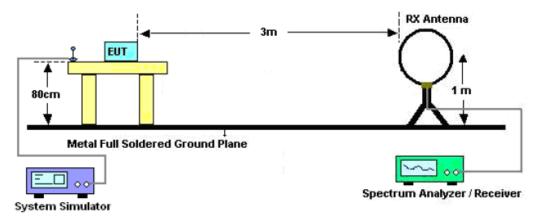

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

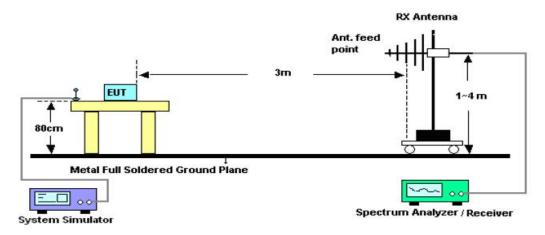

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

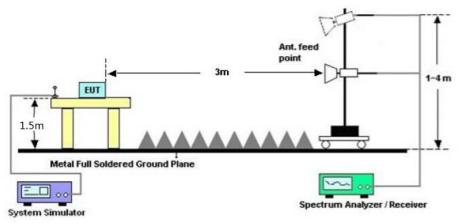



11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



EUT	4K UST Laser Projector	Model Name	PE-LT002	
Temperature	25°C	Relative Humidity	60%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11a20 5180MHz	Antenna	Horizontal	

Radiated emission from 30MHz to 1000MHz

																		mit: argin:	_	-
32	TXX		Ner set also						M M			3 X X		Unintend	Makina of		Werksoft	55X	E M	
- [.000	40	50	60	70	80			(MH:	z)			300)	400	500	600	700	10	DO. 0
	No.	Mk.	F	req.	I		adin vel	g	Correc Factor		Meas mer		-	Lin	nit	Ov	er			-
_			N	I Hz		dB	Bu∨		dB		dBuV/	'n		dBu	V/m	d	В	Det	ecto	r
_	1		32.7	486		16	.90		13.25		30.1	5		40.0	00	-9.	85	pe	eak	_
-	2	-	050.2	264		10	42		17.24		26.7	0		46.0	0	0	24		aak	_

	1	32.7486	16.90	13.25	30.15	40.00	-9.85	peak
-	2	258.3264	19.42	17.34	36.76	46.00	-9.24	peak
-	3!	282.9852	20.72	20.61	41.33	46.00	-4.67	peak
-	4 *	307.8313	18.07	24.38	42.45	46.00	-3.55	QP
-	5	706.6999	10.49	24.23	34.72	46.00	-11.28	peak
	6	875.2470	11.29	28.01	39.30	46.00	-6.70	peak

RESULT: PASS




EUT	4K UST Laser Projecto	r Model Name	PE-LT002
Temperature	25°C	Relative Hun	nidity 60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical
72.0 dBuV/m		•	Linit —
			Limit — Margin: —
			5 8
1			where hours and the
32	3	3 X	
w where	Muranet All Marson	manager and the second and a second a second a	he was here with a fertile
	Augurt Theyday I	anterior and all the	
-8			
30.000 40 5	50 60 70 80	(MHz) 300	400 500 600 700 1000.000
	Reading C	orrect Measure-	
No. Mk.	Freq. Level F	actor ment Li	mit Over
	MHz dBuV	dB dBuV/m dB	uV/m dB Detector
1 3	3.4449 21.46 1	3.27 34.73 40.	.00 -5.27 peak
2 10	6.0126 11.89 1	5.50 27.39 43.	50 -16.11 peak
3 28	2.9852 9.26 2	0.87 30.13 46.	.00 -15.87 peak
4 30	7.8313 11.20 2	0.43 31.63 46.	.00 -14.37 peak
5 * 68	4.7454 16.10 2	6.12 42.22 46.	.00 -3.78 peak
6 95	2.0937 10.10 2	9.64 39.74 46.	00 -6.26 peak



EUT	4K UST Laser Projector	Model Name	PE-LT002	
Temperature	25°C	Relative Humidity	60%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11a20 5200MHz	Antenna	Horizontal	

72.0 dBuV/m

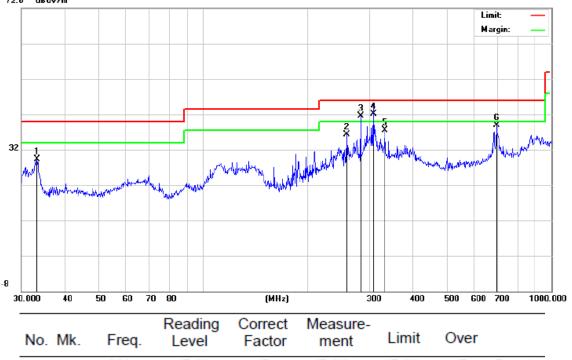

			2010.		mont			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		33.3279	16.10	13.27	29.37	40.00	-10.63	peak
2		258.3264	19.00	17.34	36.34	46.00	-9.66	peak
3	İ	282.9852	20.98	20.61	41.59	46.00	-4.41	peak
4	*	307.8313	17.76	24.38	42.14	46.00	-3.86	QP
5		332.5187	13.25	24.19	37.44	46.00	-8.56	peak
6		694.4174	14.90	24.08	38.98	46.00	-7.02	peak


RESULT: PASS



EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5200MHz	Antenna	Vertical
72.0 dBuV/m			Limit — Margin: —
32 32 -8		2 2 3 2 2 3 2 3 3 3 3 3 3 3 3 3 3 3 3 3	
30.000 40	50 G0 70 80 (MHz)	300 400 500	600 700 1000.000
No. Mk.	Reading Correct M Freq. Level Factor	/leasure- ment Limit Ov	er
	MHz dBuV dB	dBuV/m dBuV/m dB	B Detector
1 ! 3	3.3279 21.76 13.27	35.03 40.00 -4.9	•
	2.9852 9.74 20.87	30.61 46.00 -15.	•
	7.8313 10.82 20.43	31.25 46.00 -14.	•
	2.7425 14.20 25.44	39.64 46.00 -6.3	· ·
	2.3484 16.01 26.11	42.12 46.00 -3.8	
6 91	9.2866 9.44 29.01	38.45 46.00 -7.5	55 peak



EUT	4K UST Laser Projector	Model Name	PE-LT002	
Temperature	25°C	Relative Humidity	60%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11a20 5240MHz	Antenna	Horizontal	

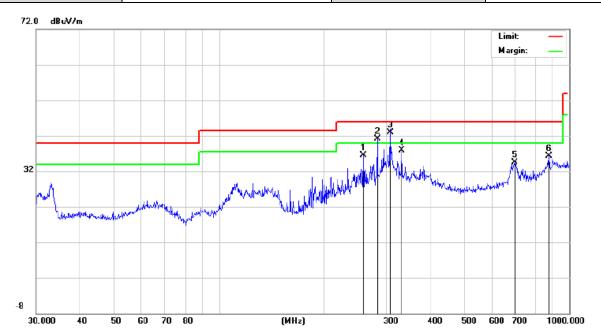

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		258.3264	19.11	17.34	36.45	46.00	-9.55	peak
2	İ	282.9852	20.46	20.61	41.07	46.00	-4.93	peak
3	*	307.8313	18.50	24.38	42.88	46.00	-3.12	QP
4		332.5187	13.64	24.19	37.83	46.00	-8.17	peak
5		699.3046	10.40	24.14	34.54	46.00	-11.46	peak
6		875.2470	8.34	28.01	36.35	46.00	-9.65	peak



EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5240MHz	Antenna	Vertical
72.0 dBuW/m 32	When we way the second se		Limit: Margin: 5 6 6 6 6 7 7 6 7 7 6 7 7 7 7 7 7 7 7 7
30.000 40 5	D 60 70 80	(MHz) 300 400	500 600 700 1000.000
No. Mk.	<u> </u>	orrect Measure- actor ment Limit	Over
	MHz dBuV	dB dBuV/m dBuV/m	dB Detector
		3.27 33.86 40.00	-6.14 peak
			-16.98 peak
			-14.58 peak
			-14.74 peak
5 * 684	4.7454 16.67 20	6.12 42.79 46.00	-3.21 QP
6 922	2.5157 10.18 29	9.07 39.25 46.00	-6.75 peak

Note: All test channels had been tested. The 802.11a20 at 5180MHz and 5200MHz, 5240MHz is the worst case and recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



Radiated emission above 1GHz

EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10360.042	46.35	9.14	55.49	68.20	-12.71	peak
15540.063	40.18	10.22	50.40	74.00	-23.60	peak
15540.063	31.57	10.22	41.79	54.00	-12.21	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
10360.042	47.51	9.14	56.65	68.20	-11.55	peak		
15540.063	42.15	10.22	52.37	74.00	-21.63	peak		
15540.063	32.67	10.22	42.89	54.00	-11.11	AVG		
Remark:	Remark:							
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



Report No.: AGC13454220318FE06 Page 91 of 111

EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5200MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10400.042	47.86	9.14	57.00	68.20	-11.20	peak
15600.063	42.37	10.22	52.59	74.00	-21.41	peak
15600.063	32.59	10.22	42.81	54.00	-11.19	AVG
15600.063 Remark:	32.59	10.22	42.81	54.00	-11.19	AVG

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10400.042	46.28	9.14	55.42	68.20	-12.78	peak			
15600.063	40.27	10.22	50.49	74.00	-23.51	peak			
15600.063	15600.063 31.69 10.22 41.91 54.00 -12.09 AVG								
Remark:									
Eactor - Antor	Factor = Antenna Factor + Cable Loss - Pre-amplifier								

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: AGC13454220318FE06 Page 92 of 111

EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5240MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10480.042	47.28	9.27	56.55	68.20	-11.65	peak
15720.063	42.16	10.38	52.54	74.00	-21.46	peak
15720.063	31.97	10.38	42.35	54.00	-11.65	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
10480.042	46.38	9.27	55.65	68.20	-12.55	peak		
15720.063	42.15	10.38	52.53	74.00	-21.47	peak		
15720.063	15720.063 31.59 10.38 41.97 54.00 -12.03 AVG							
Remark:								
Factor = Anter	na Factor + Cab	la Loss - Pra-a	molifier					

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: AGC13454220318FE06 Page 93 of 111

EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11490.042	46.65	9.42	56.07	74.00	-17.93	peak
11490.042	37.81	9.42	47.23	54.00	-6.77	AVG
17235.063	40.16	10.51	50.67	68.20	-17.53	peak
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
11490.042	46.25	9.42	55.67	74.00	-18.33	peak
11490.042	36.57	9.42	45.99	54.00	-8.01	AVG
17235.063	41.16	10.51	51.67	68.20	-16.53	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Report No.: AGC13454220318FE06 Page 94 of 111

EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5785MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11570.042	46.39	9.42	55.81	74.00	-18.19	peak
11570.042	35.27	9.42	44.69	54.00	-9.31	AVG
17355.063	41.15	10.51	51.66	68.20	-16.54	peak
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11570.042	47.63	9.42	57.05	74.00	-16.95	peak
11570.042	35.27	9.42	44.69	54.00	-9.31	AVG
17355.063	42.16	10.51	52.67	68.20	-15.53	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5825MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11650.042	48.61	9.62	52.98	74.00	-21.02	peak
11650.042	38.54	9.62	45.05	54.00	-8.95	AVG
17475.063	42.16	10.75	47.61	68.20	-26.39	peak
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11650.042	46.38	9.62	53.55	74.00	-20.45	peak
11650.042	36.57	9.62	47.64	54.00	-6.36	AVG
17475.063	42.16	10.75	48.61	68.20	-25.39	peak
Remark:						
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					

Note: All test channels had been tested. The 802.11a20 is the worst case and recorded in the test report. Other frequencies radiation emission from 1GHz to 40GHz at least have 20dB margin and not recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11a20 is the worst case and recorded in the report.




EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

Frequency q 5.100000000 GHz PNO: Fast ↔ IFGain:Low Avg Type: Log-Pw Avg|Hold: 100/100 Trig: Free Run #Atten: 30 dB Auto Tune Ref 126.99 dBµV/m B/div Center Fred 5.10000000 GHz Start Freq 5.00000000 GHz Stop Freq 5.20000000 GH 5.0000 GHz Stop 5.2000 GHz 1.066 ms (1000 pts) CF Step 20.00000 MHz #VBW 3.0 MHz Pes Sweep Ма 5.174 97 GHz 103.693 dBµV 5.150 00 GHz 58.285 dBµV 5.147 15 GHz 61.270 dBµV Freq Offse 0 Hz Scale Type Lin

Test Graph for Peak Measurement

Test Graph for Average Measurement

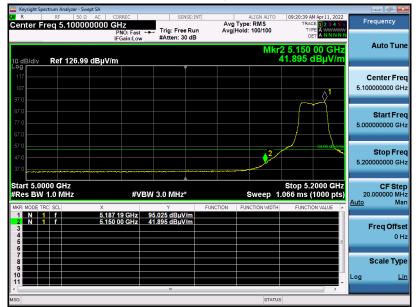

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd




Report No.: AGC13454220318FE06 Page 97 of 111

EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

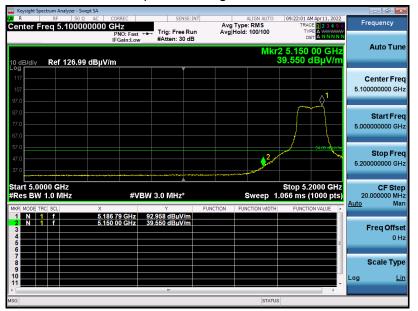

RESULT: PASS




Report No.: AGC13454220318FE06 Page 98 of 111

EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

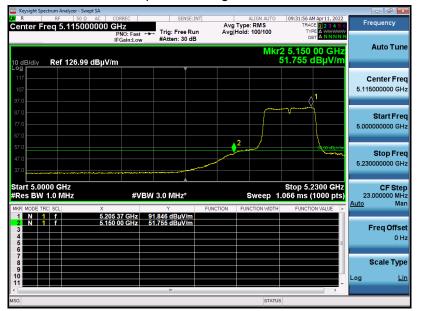

RESULT: PASS




Report No.: AGC13454220318FE06 Page 99 of 111

EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

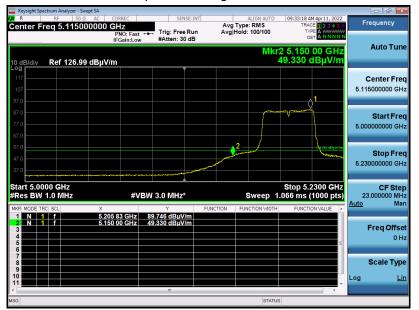

RESULT: PASS



Report No.: AGC13454220318FE06 Page 100 of 111

EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS



Report No.: AGC13454220318FE06 Page 101 of 111

EUT	4K UST Laser Projector	Model Name	PE-LT002
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS



Note: 1. All the 20MHz bandwidth modulation had been tested, the 802.11a20 at 5180MHz was the worst case and record in his test report. All the 40MHz bandwidth modulation had been tested, the 802.11N40 at 5190MHz was the worst case and record in his test report. All the 80MHz bandwidth modulation had been tested, the 802.11AC80 at 5210MHz was the worst case and record in his test report.

2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.

3. Only the data of band edge emission at the restricted band 4.5GHz-5.15GHz and 5.35GHz-5.46GHz record in the report. Other restricted band 7.25GHz-7.77GHz were considered as ambient noise. No recording in the test report.



12. LINE CONDUCTED EMISSION TEST

12.1. LIMITS OF LINE CONDUCTED EMISSION TEST


Frequency	Maximum RF Line Voltage				
Frequency	Q.P (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

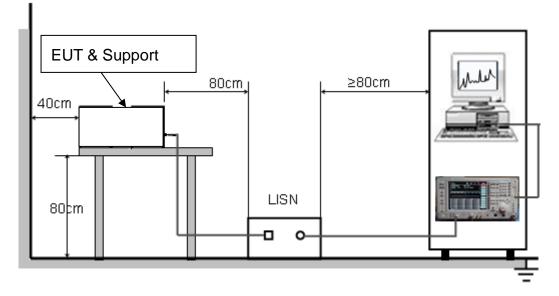



12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.



12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

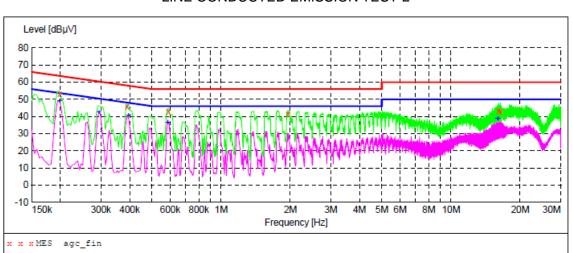

802.11a20 5180MHz LINE CONDUCTED EMISSION TEST-L

MEASUREMENT RESULT: "agc fin"

2022/4/1 21:27

Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.198000 0.390000 0.590000 1.954000 16.098000 16.418000	53.30 45.80 42.90 41.20 43.50 42.80	6.6 5.7 5.4 6.4 8.4 8.5	64 58 56 60 60	10.4 12.3 13.1 14.8 16.5 17.2	QP QP QP QP	L1 L1 L1 L1 L1 L1

MEASUREMENT RESULT: "agc_fin2"

2022/4/1 21:2 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.198000 0.294000 0.394000 0.586000 15.898000 16.030000	48.90 42.30 40.30 36.40 38.80 38.60	6.6 6.1 5.7 5.4 8.4 8.4	54 50 48 46 50 50	4.8 8.1 7.7 9.6 11.2 11.4	AV AV AV	L1 L1 L1 L1 L1 L1

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd


 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



LINE CONDUCTED EMISSION TEST-N

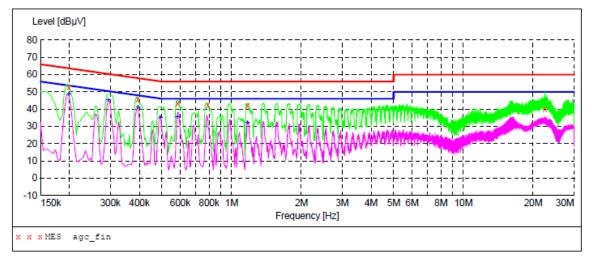

MEASUREMENT RESULT: "agc_fin"

2022/4/1 21:53

Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.198000	52.90	6.6	64	10.8	QP	N
0.394000	45.50	5.7	58	12.5	QP	Ν
0.586000	43.40	5.4	56	12.6	QP	Ν
0.790000	42.40	5.4	56	13.6	QP	Ν
1.170000	41.90	5.7	56	14.1	QP	Ν
22.470000	39.80	9.0	60	20.2	QP	N

MEASUREMENT RESULT: "agc fin2"

2022/4/1 21:53 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.198000	48.30	6.6	54	5.4	AV	N
0.294000	45.30	6.1	50	5.1	AV	N
0.394000	41.00	5.7	48	7.0	AV	N
0.494000	35.00	5.4	46	11.1	AV	N
0.582000	35.20	5.4	46	10.8	AV	N
1.170000	32.10	5.7	46	13.9	AV	N


RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



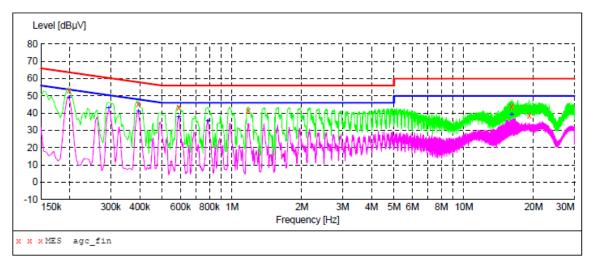

802.11a20 5200MHz LINE CONDUCTED EMISSION TEST-L

MEASUREMENT RESULT: "agc_fin"

2022/4/1 21:32

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.198000	53.00	6.6	64	10.7	-	L1
0.394000 0.590000	45.40 43.20	5.7 5.4	58 56	12.6 12.8	-	L1 L1
1.174000	41.50	5.7	56	14.5	-	L1
16.098000	43.70	8.4 8.7	60	16.3	-	L1
19.166000	38.80	8.7	60	21.2	QP	ь1

MEASUREMENT RESULT: "agc_fin2"

2022/4/1 21:32 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.198000	48.80	6.6	54	4.9	AV	L1
0.294000	42.70	6.1	50	7.7	AV	ь1
0.394000	41.00	5.7	48	7.0	AV	ь1
0.590000	37.70	5.4	46	8.3	AV	ь1
0.786000	35.30	5.4	46	10.7	AV	ь1
16.094000	39.20	8.4	50	10.8	AV	L1

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com
 Web: http://www.agccert.com/



LINE CONDUCTED EMISSION TEST-N

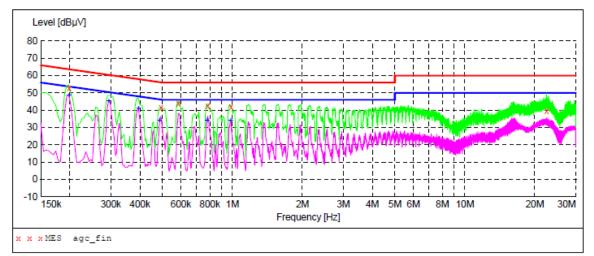

MEASUREMENT RESULT: "agc_fin"

2022/4/1 Frequen M			Limit dBµV	Margin dB	Detector	Line
0.1980 0.4940 0.5860 0.7820 0.9860 22.4700	000 41.20 000 43.70 000 42.40 000 41.90	5.4 5.4 5.4 5.4 5.4	64 56 56 56 56 60	12.3 13.6	QP QP QP QP	N N N N N

MEASUREMENT RESULT: "agc_fin2"

2022/4/1 Frequen M			Limit dBµV	Margin dB	Detector	Line
0.1980 0.2940 0.3940 0.4860 0.7780 0.9820	00 45.30 00 40.90 00 34.10 00 33.70	6.1 5.7 5.4 5.4	54 50 48 46 46 46	5.3 5.1 7.1 12.1 12.3 12.1	AV AV AV AV	N N N N N


RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



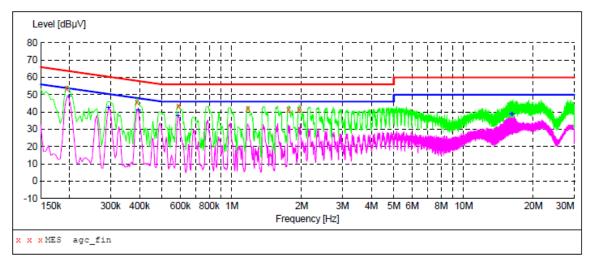

802.11a20 5240MHz LINE CONDUCTED EMISSION TEST-L

MEASUREMENT RESULT: "agc_fin"

2022/4/1 21:34 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.194000 0.390000 0.590000 1.174000 1.758000 1.954000	53.70 45.90 43.10 41.70 41.40 41.20	6.6 5.7 5.4 5.7 6.3 6.4	64 58 56 56 56 56	10.2 12.2 12.9 14.3 14.6 14.8	QP QP QP	L1 L1 L1 L1 L1 L1

MEASUREMENT RESULT: "agc fin2"

2022/4/1 21:34 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.198000 0.294000 0.394000 0.586000 16.026000 16.222000	49.00 42.60 41.00 37.50 38.60 38.70	6.6 6.1 5.7 5.4 8.4 8.5	54 50 48 46 50 50	4.7 7.8 7.0 8.5 11.4 11.3	AV AV AV AV	L1 L1 L1 L1 L1 L1


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





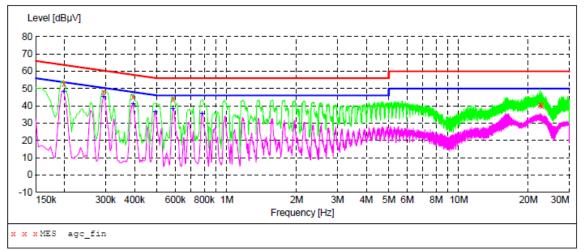

MEASUREMENT RESULT: "agc_fin"

2022/4/1 21:49

Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.198000	52.80	6.6	64	10.9	QP	N
0.294000	48.20	6.1	60	12.2	QP	Ν
0.394000	45.40	5.7	58	12.6	QP	N
0.586000	43.70	5.4	56	12.3	QP	N
22.470000	40.40	9.0	60	19.6	QP	Ν
22.806000	40.00	9.0	60	20.0	QP	N

MEASUREMENT RESULT: "agc_fin2"

2022/4/1 21 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.198000	48.20	6.6	54	5.5	AV	N
0.294000	45.20	6.1	50	5.2	AV	N
0.394000	41.00	5.7	48	7.0	AV	N
0.490000	36.20	5.4	46	10.0	AV	N
0.586000	38.00	5.4	46	8.0	AV	Ν
0.782000	35.50	5.4	46	10.5	AV	N

RESULT: PASS

Note: 1. All test channels had been tested. The 802.11a20 at 5180MHz and 5200MHz, 5240MHz is the worst case and recorded in the test report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd



APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC13454220318AP02

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC13454220318AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

 All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
 Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.