


Inverted F Antenna Specification

Summary


ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2400MHz	2500MHz	2400MHz	2400MHz	2500MHz
	-3.28	-1.52	-1.59	2.24	2.91	2.54
MAX. Gain	2.91dB					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	12.5mm					
Manufacture	Hangzhou Adaprox Intelligent Technology Co., Ltd.					
Address	Unit 907, Yanxiang Science & Technology Mansion No. A, 333 Jianghong Road, Binjiang District, Hangzhou, Binjiang District, Hangzhou, Zhejiang 310052, China					

Antenna Photo & Length (mm)

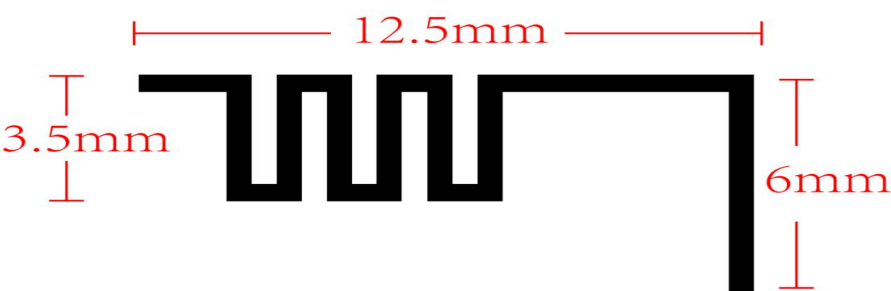

Horizontal: 2400 MHz 2450 MHz 2500 MHz
Power (dBm)

Max: 0 Min: -40 Scale: 5/div

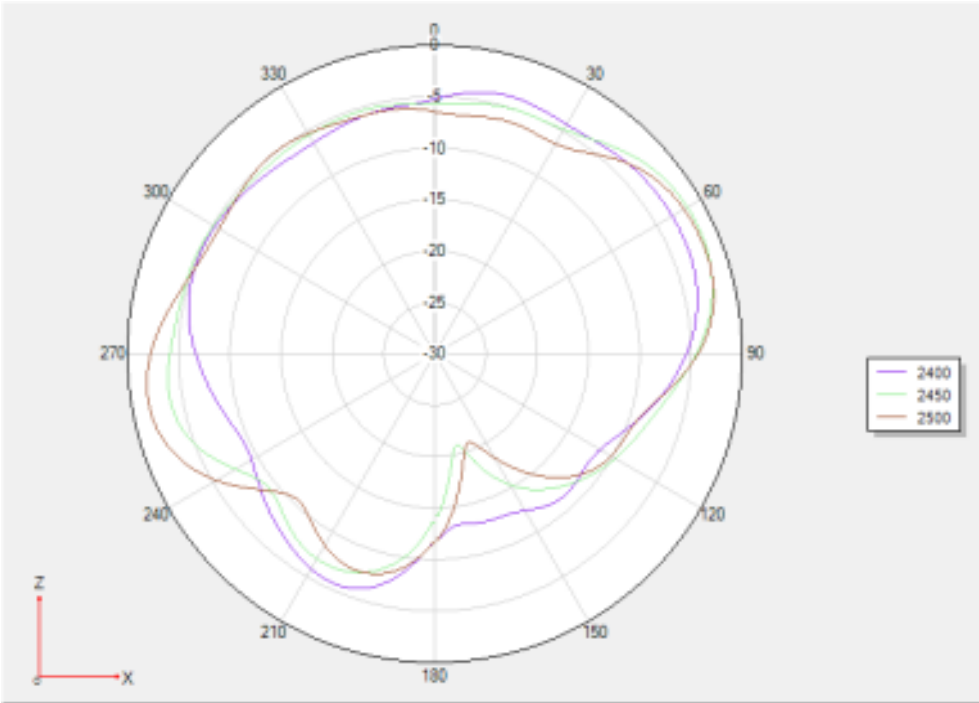


Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-3.28	-13.25	-6.67
2450	-1.52	-20.88	-6.27
2500	-1.59	-20.78	-6.32

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div

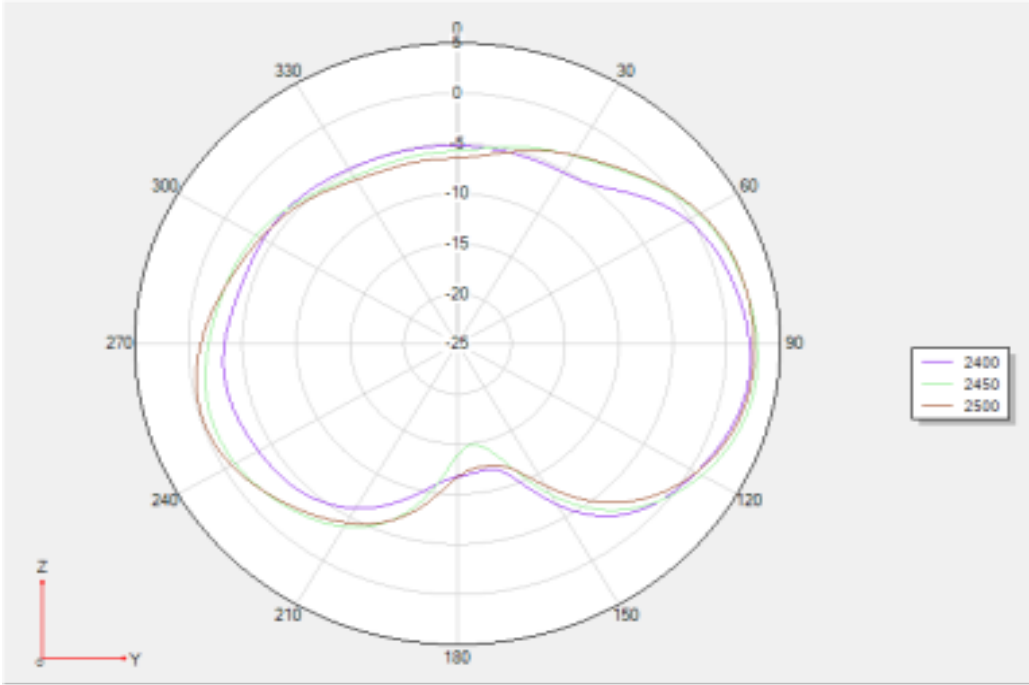

Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	2.24	-12.15	-3.36
2450	2.91	-14.85	-2.54
2500	2.54	-12.54	-2.62

ANT Test Labs : Attestation of Global Compliance Co., Ltd.