

# FCC TEST REPORT

Client Name : Shenzhen Radiomaster Technology Co.,Ltd  
Address : 411, building 11, Shenzhen Bay science and technology ecological park, No. 16, Keji South Road, community, high tech Zone, Nanshan District, Shenzhen, China  
Product Name : ZORRO 4IN1  
Date : Mar. 18, 2022



**Shenzhen Anbotek Compliance Laboratory Limited**

# Contents

- 1. General Information.....5
  - 1.1. Client Information..... 5
  - 1.2. Description of Device (EUT)..... 5
  - 1.3. Auxiliary Equipment Used During Test..... 6
  - 1.4. Description of Test Modes..... 6
  - 1.5. List of channels..... 7
  - 1.6. Description Of Test Setup..... 8
  - 1.7. Test Equipment List..... 9
  - 1.8. Measurement Uncertainty..... 10
  - 1.9. Description of Test Facility..... 10
- 2. Summary of Test Results..... 11
- 3. Conducted Emission Test..... 12
  - 3.1. Test Standard and Limit..... 12
  - 3.2. Test Setup..... 12
  - 3.3. Test Procedure..... 12
  - 3.4. Test Data..... 12
- 4. Radiation Spurious Emission and Band Edge..... 15
  - 4.1. Test Standard and Limit..... 15
  - 4.2. Test Setup..... 15
  - 4.3. Test Procedure..... 16
  - 4.4. Test Data..... 17
- 5. Maximum Peak Output Power Test..... 25
  - 5.1. Test Standard and Limit..... 25
  - 5.2. Test Setup..... 25
  - 5.3. Test Procedure..... 25
  - 5.4. Test Data..... 25
- 6. 20DB Occupy Bandwidth Test..... 26
  - 6.1. Test Standard..... 26
  - 6.2. Test Setup..... 26
  - 6.3. Test Procedure..... 26
  - 6.4. Test Data..... 26
- 7. Carrier Frequency Separation Test..... 27
  - 7.1. Test Standard and Limit..... 27
  - 7.2. Test Setup..... 27
  - 7.3. Test Procedure..... 27
  - 7.4. Test Data..... 27
- 8. Number of Hopping Channel Test..... 28
  - 8.1. Test Standard and Limit..... 28

8.2. Test Setup..... 28

8.3. Test Procedure..... 28

8.4. Test Data..... 28

9. Dwell Time Test..... 29

9.1. Test Standard and Limit..... 29

9.2. Test Setup..... 29

9.3. Test Procedure..... 29

9.4. Test Data..... 29

10. 100kHz Bandwidth of Frequency Band Edge Requirement..... 30

10.1. Test Standard and Limit..... 30

10.2. Test Setup..... 30

10.3. Test Procedure..... 30

10.4. Test Data..... 30

11. Antenna Requirement..... 31

11.1. Test Standard and Requirement..... 31

11.2. Antenna Connected Construction..... 31

APPENDIX I -- TEST SETUP PHOTOGRAPH..... 32

APPENDIX II -- EXTERNAL PHOTOGRAPH..... 34

APPENDIX III -- INTERNAL PHOTOGRAPH..... 38

APPENDIX IV -- Appendix Test Data..... 45



# TEST REPORT

Applicant : Shenzhen Radiomaster Technology Co.,Ltd  
Manufacturer : Shenzhen Radiomaster Technology Co.,Ltd  
Product Name : ZORRO 4IN1  
Model No. : ZORRO-, ZORRO 4IN1, ZORRO Max, ZORRO Maxpro, ZORRO Lite,  
ZORRO Master fire, ZORRO Mark II , ZORRO Glider, ZORRO CC2500,  
ZORRO LE, ZORRO CNC  
Trade Mark : Radiomaster  
Rating(s) : Input: DC 6.6-8.4V, 160mA

**Test Standard(s) : FCC Part15 Subpart C, Section 15.247**

**Test Method(s) : ANSI C63.10: 2020**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of receipt

Dec. 23, 2021

Date of Test

Dec. 23, 2021~Feb. 23, 2022

Prepared by



(TuTu Hong)

Approved & Authorized Signer



(Tom Chen)

# 1. General Information

## 1.1. Client Information

Applicant	:	Shenzhen Radiomaster Technology Co.,Ltd
Address	:	411, building 11, Shenzhen Bay science and technology ecological park, No. 16, Keji South Road, community, high tech Zone, Nanshan District, Shenzhen, China
Manufacturer	:	Shenzhen Radiomaster Technology Co.,Ltd
Address	:	411, building 11, Shenzhen Bay science and technology ecological park, No. 16, Keji South Road, community, high tech Zone, Nanshan District, Shenzhen, China
Factory	:	Shenzhen Radiomaster Technology Co.,Ltd
Address	:	411, building 11, Shenzhen Bay science and technology ecological park, No. 16, Keji South Road, community, high tech Zone, Nanshan District, Shenzhen, China

## 1.2. Description of Device (EUT)

Product Name	:	ZORRO 4IN1
Model No.	:	ZORRO-, ZORRO 4IN1, ZORRO Max, ZORRO Maxpro, ZORRO Lite, ZORRO Master fire, ZORRO Mark II , ZORRO Glider, ZORRO CC2500, ZORRO LE, ZORRO CNC (Note: All samples are the same except the model number, so we prepare "ZORRO-" for test only.)
Trade Mark	:	Radiomaster
Test Power Supply	:	AC 120V, 60Hz for adapter/DC 8.4V battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	2403.965-2472.935MHz
	Number of Channel:	47 Channels
	Modulation Type:	GFSK
	Antenna Type:	Monopole Antenna
	Antenna Gain(Peak):	2 dBi (Provided by customer)
	Adapter:	N/A

**Remark:** 1) For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual.

### 1.3. Auxiliary Equipment Used During Test

<b>Adapter</b>	<b>:</b>	M/N: A2023 Input: AC 100-240V 0.7A 50-60Hz USB1 Output: DC 5V 2.4A USB2 Output: DC 5V 2.4A
----------------	----------	---

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

#### TEST MODE:

Pretest Mode	Description	
Mode 1	CH01	TX Only/TX+Charging
Mode 2	CH24	
Mode 3	CH47	

#### Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2)The data rate was set in 1Mbps for radiated emission due to the highest RF output power.





**1.5. List of channels**

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2403.965	18	2429.45	35	2454.95
02	2405.46	19	2431.25	36	2456.45
03	2406.955	20	2432.45	37	2457.945
04	2408.45	21	2433.95	38	2459.445
05	2409.95	22	2435.45	39	2460.945
06	2411.47	23	2436.95	40	2462.445
07	2412.96	24	2438.45	41	2463.945
08	2414.46	25	2439.955	42	2465.445
09	2415.95	26	2441.45	43	2466.945
10	2417.45	27	2442.95	44	2468.445
11	2418.95	28	2444.45	45	2470.425
12	2420.45	29	2445.95	46	2471.44
13	2421.95	30	2447.445	47	2472.935
14	2423.45	31	2448.95	48	
15	2424.95	32	2450.45	49	
16	2426.46	33	2451.95	50	
17	2427.945	34	2453.95	51	

**Note:**

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

### 1.6. Description Of Test Setup

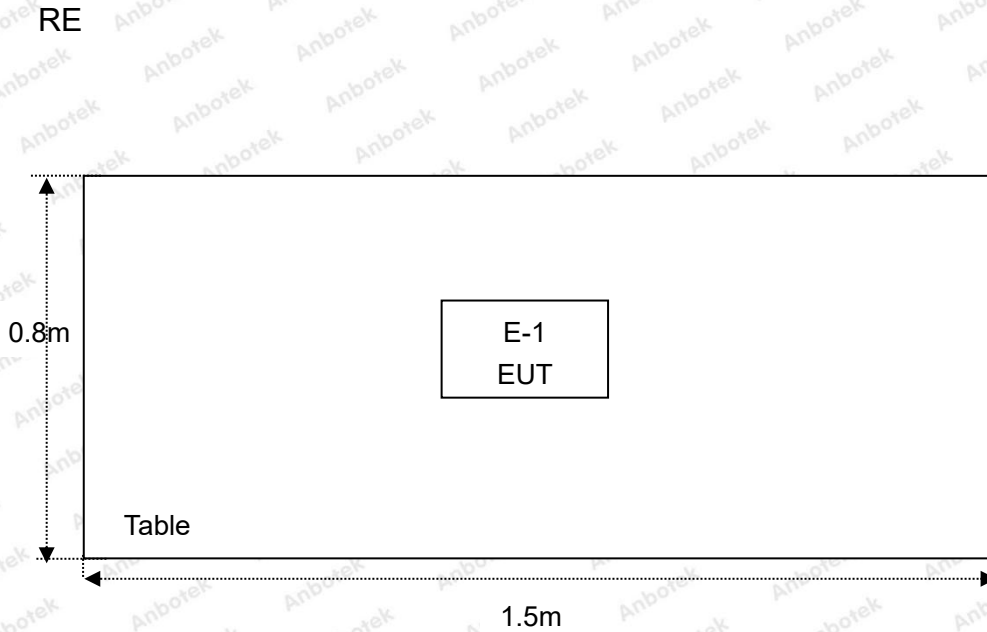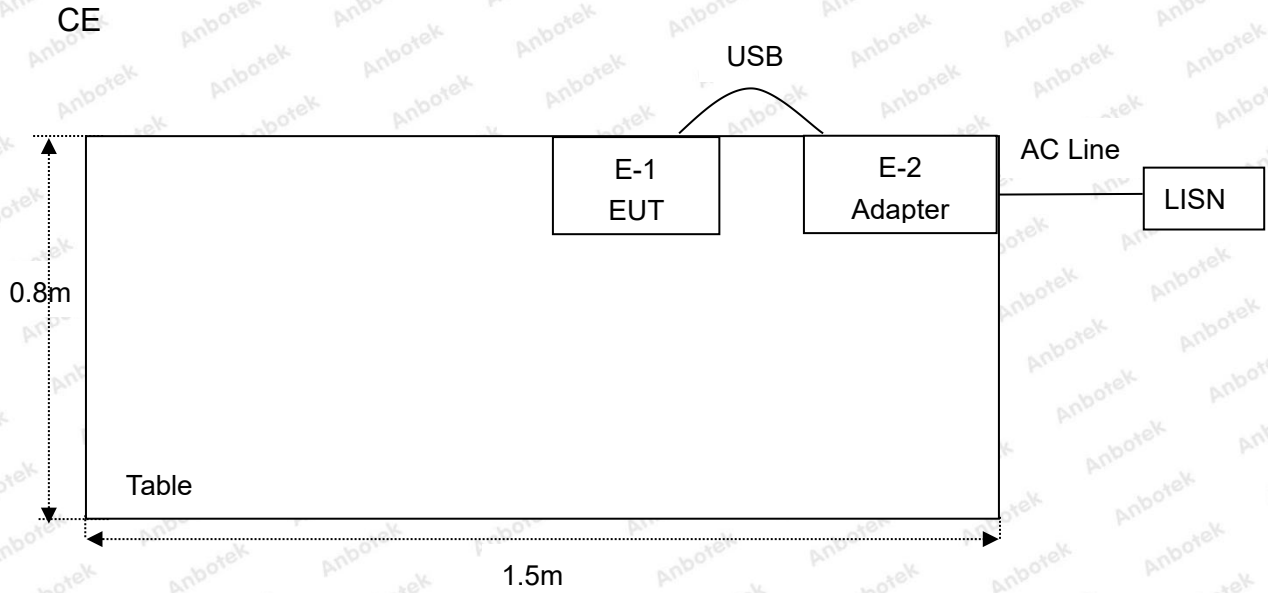



## 1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul 05, 2021	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15100041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15100041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 22, 2021	1 Year

**1.8. Measurement Uncertainty**

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

**1.9. Description of Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 184111**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

**ISED-Registration No.: 8058A**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

**Test Location**

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

## 2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(1)	Conducted Peak Output Power	PASS
15.247(a)(1)	20dB Occupied Bandwidth	PASS
15.247(a)(1)	Carrier Frequencies Separation	PASS
15.247(a)(1)	Hopping Channel Number	PASS
15.247(a)(1)	Dwell Time	PASS
15.247(d)	Band Edge	PASS
<b>Remark:</b> "N/A" is an abbreviation for Not Applicable.		




## 3. Conducted Emission Test

### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
Test Limit	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
 (2) The lower limit shall apply at the transition frequency.

### 3.2. Test Setup

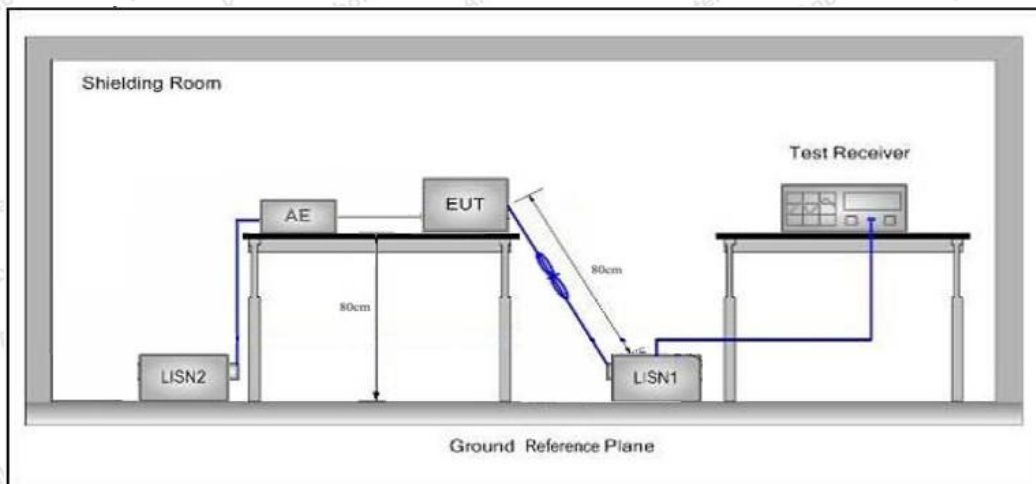

### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.


### 3.4. Test Data

During the test, pre-scan the GFSK modulation, and found the GFSK modulation Low channel (TX+Charging Mode) which is the worst case, only the worst case is recorded in the report.

Please to see the following pages.

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 24.2°C Hum.: 49%

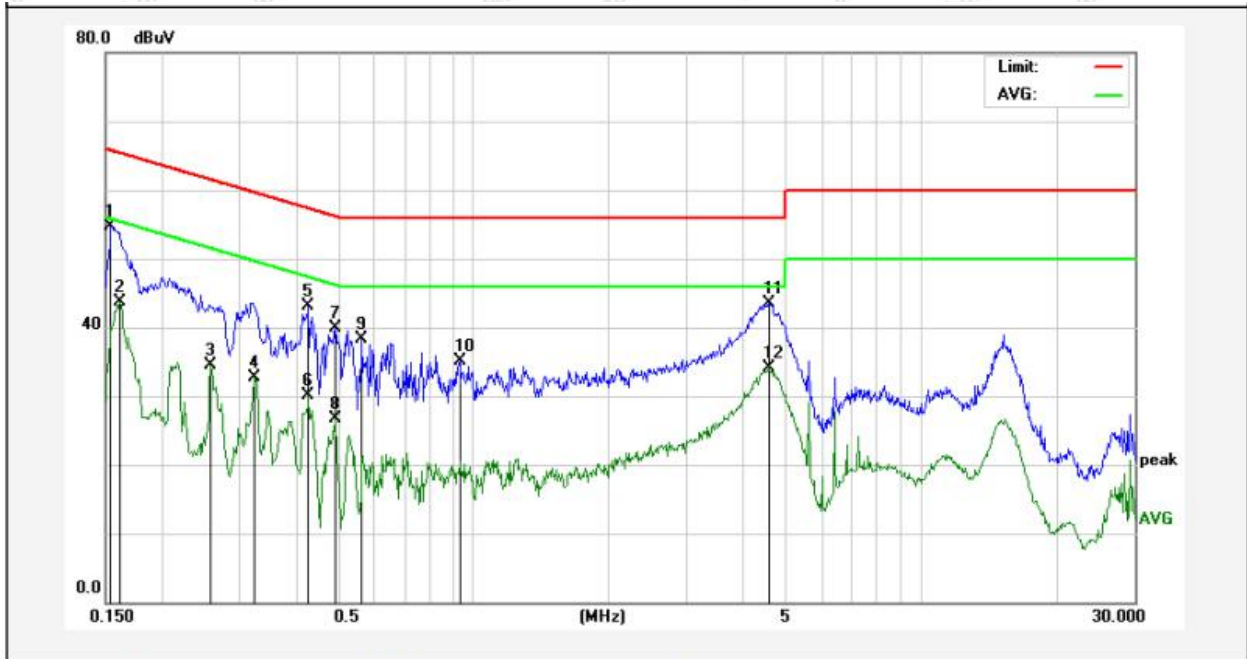


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	54.67	0.12	54.79	65.78	-10.99	QP	
2	0.1620	43.49	0.12	43.61	55.36	-11.75	AVG	
3	0.2580	34.37	0.13	34.50	51.49	-16.99	AVG	
4	0.3220	32.59	0.13	32.72	49.65	-16.93	AVG	
5	0.4260	43.00	0.12	43.12	57.33	-14.21	QP	
6	0.4260	29.94	0.12	30.06	47.33	-17.27	AVG	
7	0.4900	39.76	0.15	39.91	56.17	-16.26	QP	
8	0.4900	26.47	0.15	26.62	46.17	-19.55	AVG	
9	0.5620	38.15	0.15	38.30	56.00	-17.70	QP	
10	0.9300	34.90	0.15	35.05	56.00	-20.95	QP	
11	4.5580	43.41	0.11	43.52	56.00	-12.48	QP	
12	4.5580	34.09	0.11	34.20	46.00	-11.80	AVG	



### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 24.2°C Hum.: 49%

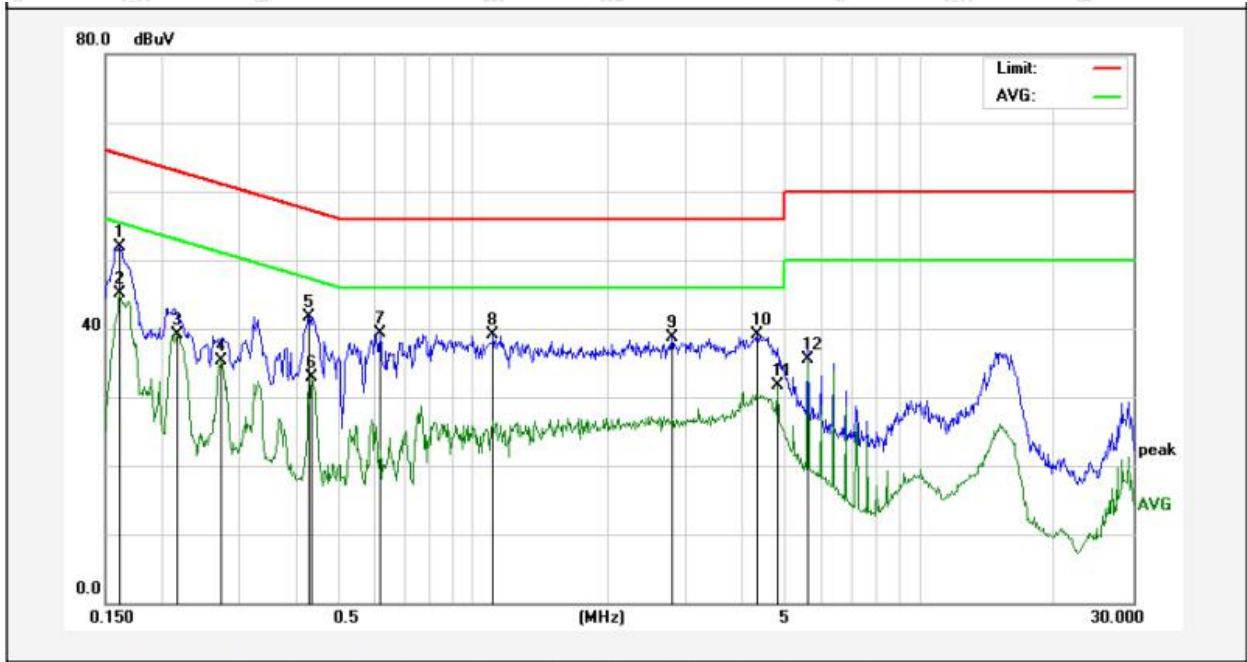

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1620	51.76	0.12	51.88	65.36	-13.48	QP	
2	0.1620	44.94	0.12	45.06	55.36	-10.30	AVG	
3	0.2180	39.03	0.12	39.15	52.89	-13.74	AVG	
4	0.2740	35.27	0.13	35.40	50.99	-15.59	AVG	
5	0.4300	41.60	0.12	41.72	57.25	-15.53	QP	
6	0.4340	32.78	0.12	32.90	47.18	-14.28	AVG	
7	0.6180	39.14	0.15	39.29	56.00	-16.71	QP	
8	1.1100	38.88	0.15	39.03	56.00	-16.97	QP	
9	2.7900	38.64	0.12	38.76	56.00	-17.24	QP	
10	4.3340	38.90	0.11	39.01	56.00	-16.99	QP	
11	4.8100	31.51	0.11	31.62	46.00	-14.38	AVG	
12	5.6100	35.43	0.11	35.54	50.00	-14.46	AVG	



## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

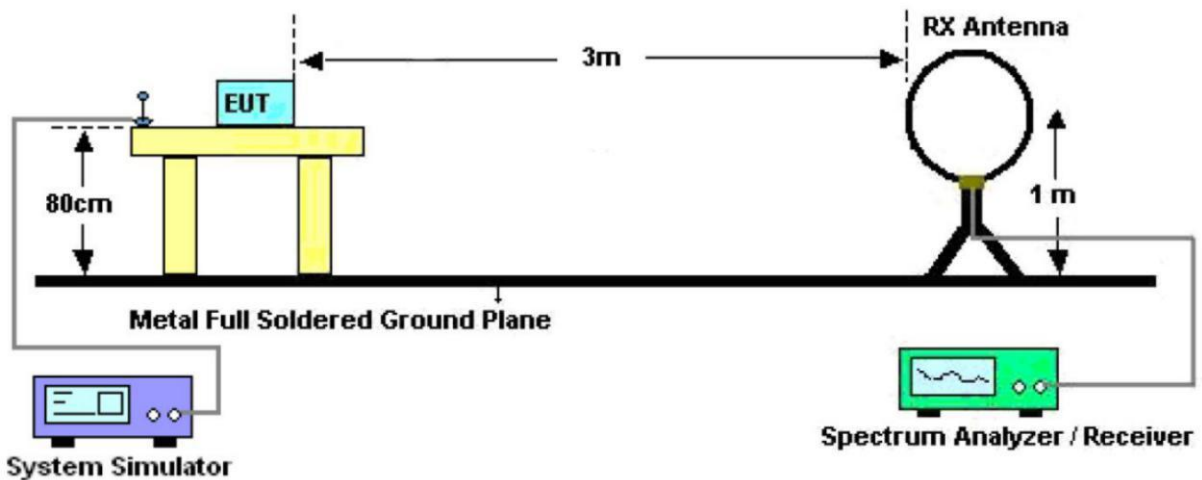


Figure 1. Below 30MHz

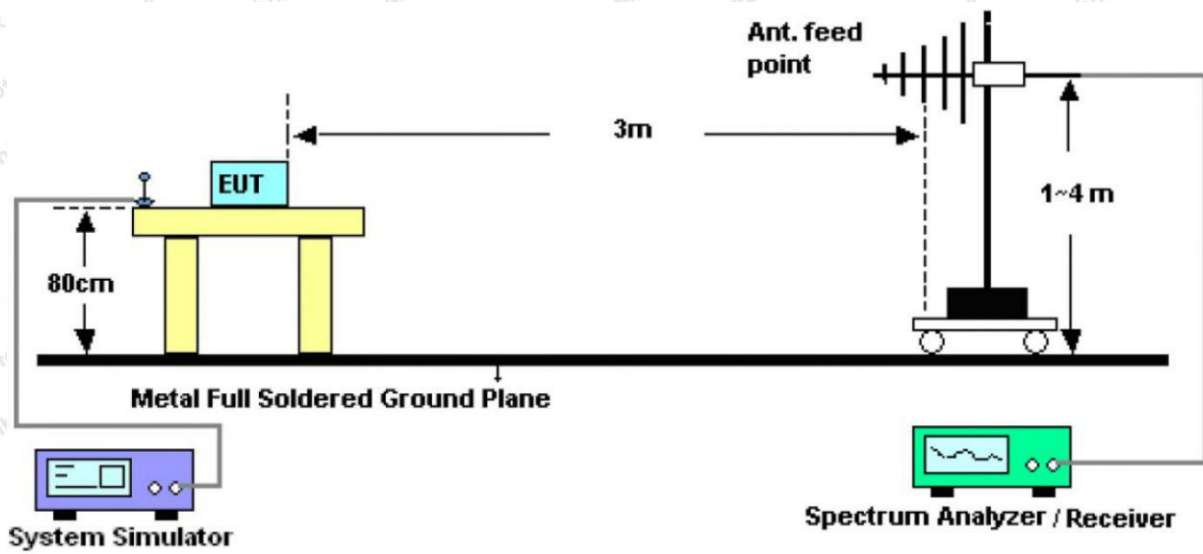


Figure 2. 30MHz to 1GHz

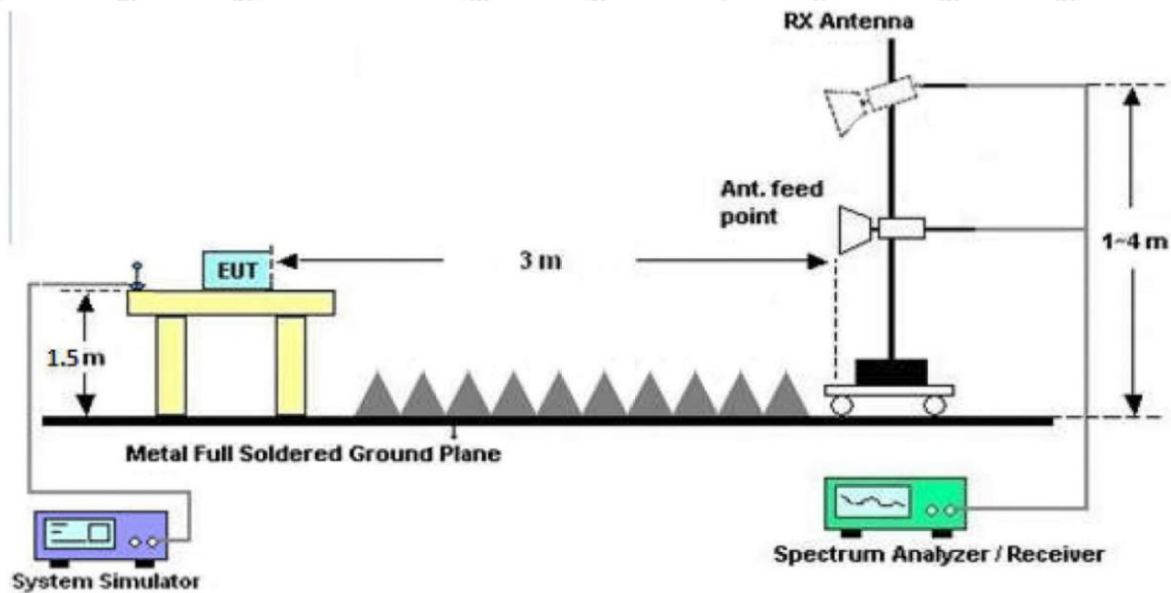


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 120kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

For average measurement: use duty cycle correction factor method (DCCF)

Average level = Peak level + DCCF

#### 4.4. Test Data

##### PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

During the test, pre-scan the GFSK modulation, and found the GFSK modulation Low channel(TX+Charging Mode) which is the worst case, only the worst case is recorded in the report


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.





**Test Results (30~1000MHz)**


Test Mode: Mode 1  
 Power Source: DC 8.4V battery inside  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 22.1°C/52%RH

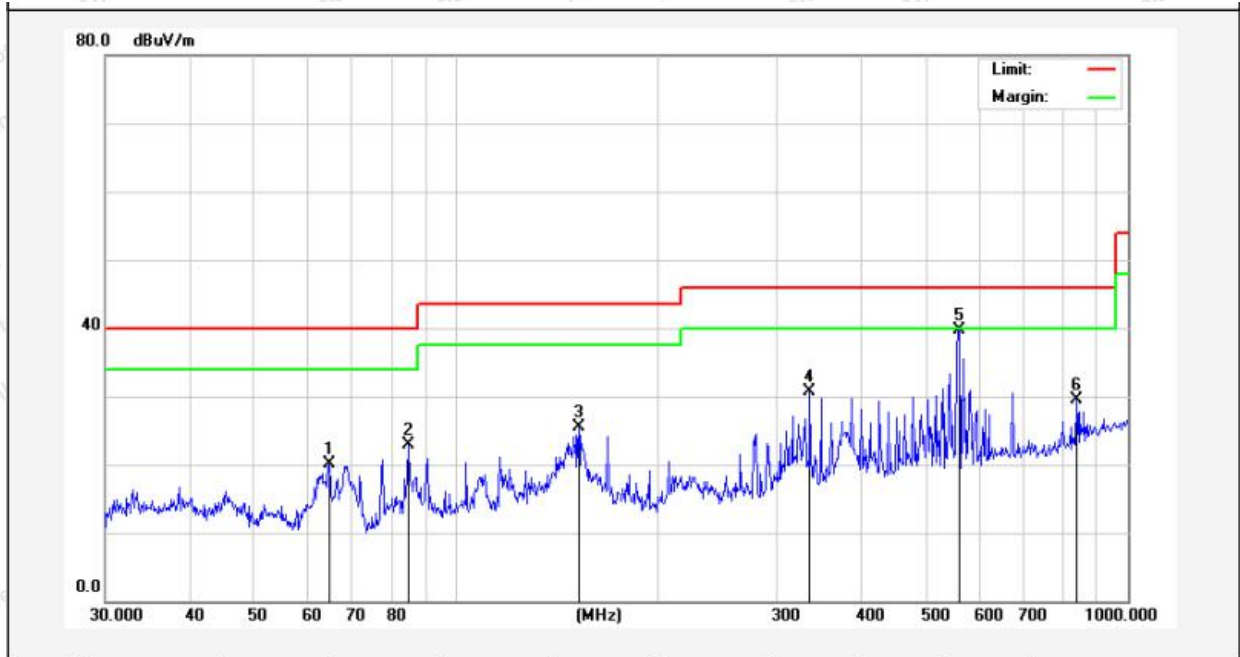

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	64.6594	39.29	-19.19	20.10	40.00	-19.90	QP			
2	84.7019	41.53	-18.59	22.94	40.00	-17.06	QP			
3	152.1297	47.49	-22.00	25.49	43.50	-18.01	QP			
4	336.0352	46.04	-15.35	30.69	46.00	-15.31	QP			
5	560.6928	51.29	-11.51	39.78	46.00	-6.22	QP			
6	839.1818	37.14	-7.66	29.48	46.00	-16.52	QP			

**Test Results (30~1000MHz)**

Test Mode: Mode 1  
 Power Source: DC 8.4V battery inside  
 Polarization: Horizontal  
 Temp.(°C)/Hum.(%RH): 22.1°C/52%RH

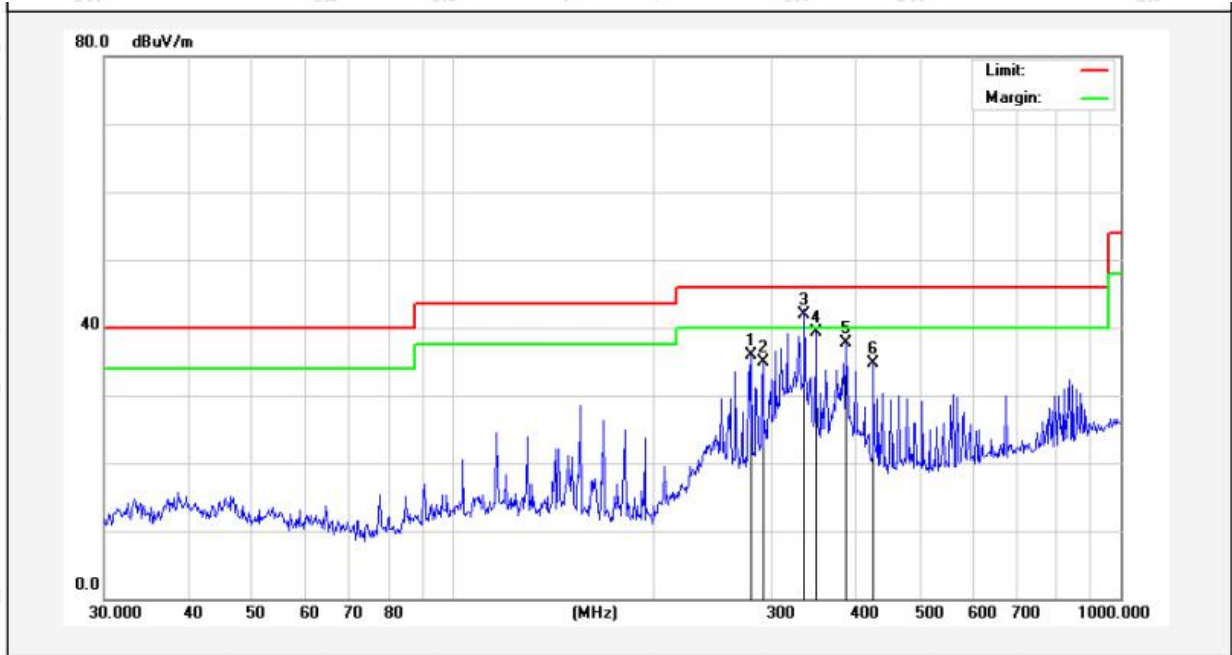

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	280.0237	54.72	-18.89	35.83	46.00	-10.17	QP			
2	291.0360	52.92	-17.94	34.98	46.00	-11.02	QP			
3	336.0352	58.32	-16.32	42.00	46.00	-4.00	QP			
4	349.2500	55.25	-16.01	39.24	46.00	-6.76	QP			
5	387.9920	53.72	-16.10	37.62	46.00	-8.38	QP			
6	426.5210	50.51	-15.78	34.73	46.00	-11.27	QP			

**Test Results (1GHz-25GHz)**

Test Mode: CH01	Test channel: Lowest
-----------------	----------------------

**Peak value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4807.93	27.01	15.27	42.28	74.00	-31.72	Vertical
7211.895	28.20	18.09	46.29	74.00	-27.71	Vertical
9615.86	28.97	23.76	52.73	74.00	-21.27	Vertical
12019.825	*			74.00		Vertical
14423.79	*			74.00		Vertical
4807.93	27.40	15.27	42.67	74.00	-31.33	Horizontal
7211.895	28.31	18.09	46.40	74.00	-27.60	Horizontal
9615.86	28.17	23.76	51.93	74.00	-22.07	Horizontal
12019.825	*			74.00		Horizontal
14423.79	*			74.00		Horizontal

**Average value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4807.93	16.39	15.27	31.66	54.00	-22.34	Vertical
7211.895	17.23	18.09	35.32	54.00	-18.68	Vertical
9615.86	17.99	23.76	41.75	54.00	-12.25	Vertical
12019.825	*			54.00		Vertical
14423.79	*			54.00		Vertical
4807.93	15.75	15.27	31.02	54.00	-22.98	Horizontal
7211.895	17.37	18.09	35.46	54.00	-18.54	Horizontal
9615.86	17.48	23.76	41.24	54.00	-12.76	Horizontal
12019.825	*			54.00		Horizontal
14423.79	*			54.00		Horizontal



**Test Results (1GHz-25GHz)**

Test Mode: CH24	Test channel: Middle
-----------------	----------------------

**Peak value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4876.9	27.03	15.42	42.45	74.00	-31.55	Vertical
7315.35	28.05	18.02	46.07	74.00	-27.93	Vertical
9753.8	27.98	23.80	51.78	74.00	-22.22	Vertical
12192.25	*			74.00		Vertical
14630.7	*			74.00		Vertical
4876.9	27.10	15.42	42.52	74.00	-31.48	Horizontal
7315.35	28.30	18.02	46.32	74.00	-27.68	Horizontal
9753.8	27.87	23.80	51.67	74.00	-22.33	Horizontal
12192.25	*			74.00		Horizontal
14630.7	*			74.00		Horizontal

**Average value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4876.9	16.12	15.42	31.54	54.00	-22.46	Vertical
7315.35	17.33	18.02	35.35	54.00	-18.65	Vertical
9753.8	17.85	23.80	41.65	54.00	-12.35	Vertical
12192.25	*			54.00		Vertical
14630.7	*			54.00		Vertical
4876.9	15.66	15.42	31.08	54.00	-22.92	Horizontal
7315.35	16.93	18.02	34.95	54.00	-19.05	Horizontal
9753.8	17.99	23.80	41.79	54.00	-12.21	Horizontal
12192.25	*			54.00		Horizontal
14630.7	*			54.00		Horizontal

**Test Results (1GHz-25GHz)**

Test Mode: CH47	Test channel: Highest
-----------------	-----------------------

**Peak value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4945.87	27.30	15.58	42.88	74.00	-31.12	Vertical
7418.805	28.06	17.93	45.99	74.00	-28.01	Vertical
9891.74	28.53	23.83	52.36	74.00	-21.64	Vertical
12364.675	*			74.00		Vertical
14837.61	*			74.00		Vertical
4945.87	27.17	15.58	42.75	74.00	-31.25	Horizontal
7418.805	28.33	17.93	46.26	74.00	-27.74	Horizontal
9891.74	28.55	23.83	52.38	74.00	-21.62	Horizontal
12364.675	*			74.00		Horizontal
14837.61	*			74.00		Horizontal

**Average value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4945.87	17.24	15.58	32.82	54.00	-21.18	Vertical
7418.805	18.34	17.93	36.27	54.00	-17.73	Vertical
9891.74	18.40	23.83	42.23	54.00	-11.77	Vertical
12364.675				54.00		Vertical
14837.61				54.00		Vertical
4945.87	17.10	15.58	32.68	54.00	-21.32	Horizontal
7418.805	18.30	17.93	36.23	54.00	-17.77	Horizontal
9891.74	17.89	23.83	41.72	54.00	-12.28	Horizontal
12364.675	*			54.00		Horizontal
14837.61	*			54.00		Horizontal

Remark:


1.Result =Read level + Factor

2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

**Radiated Band Edge:**





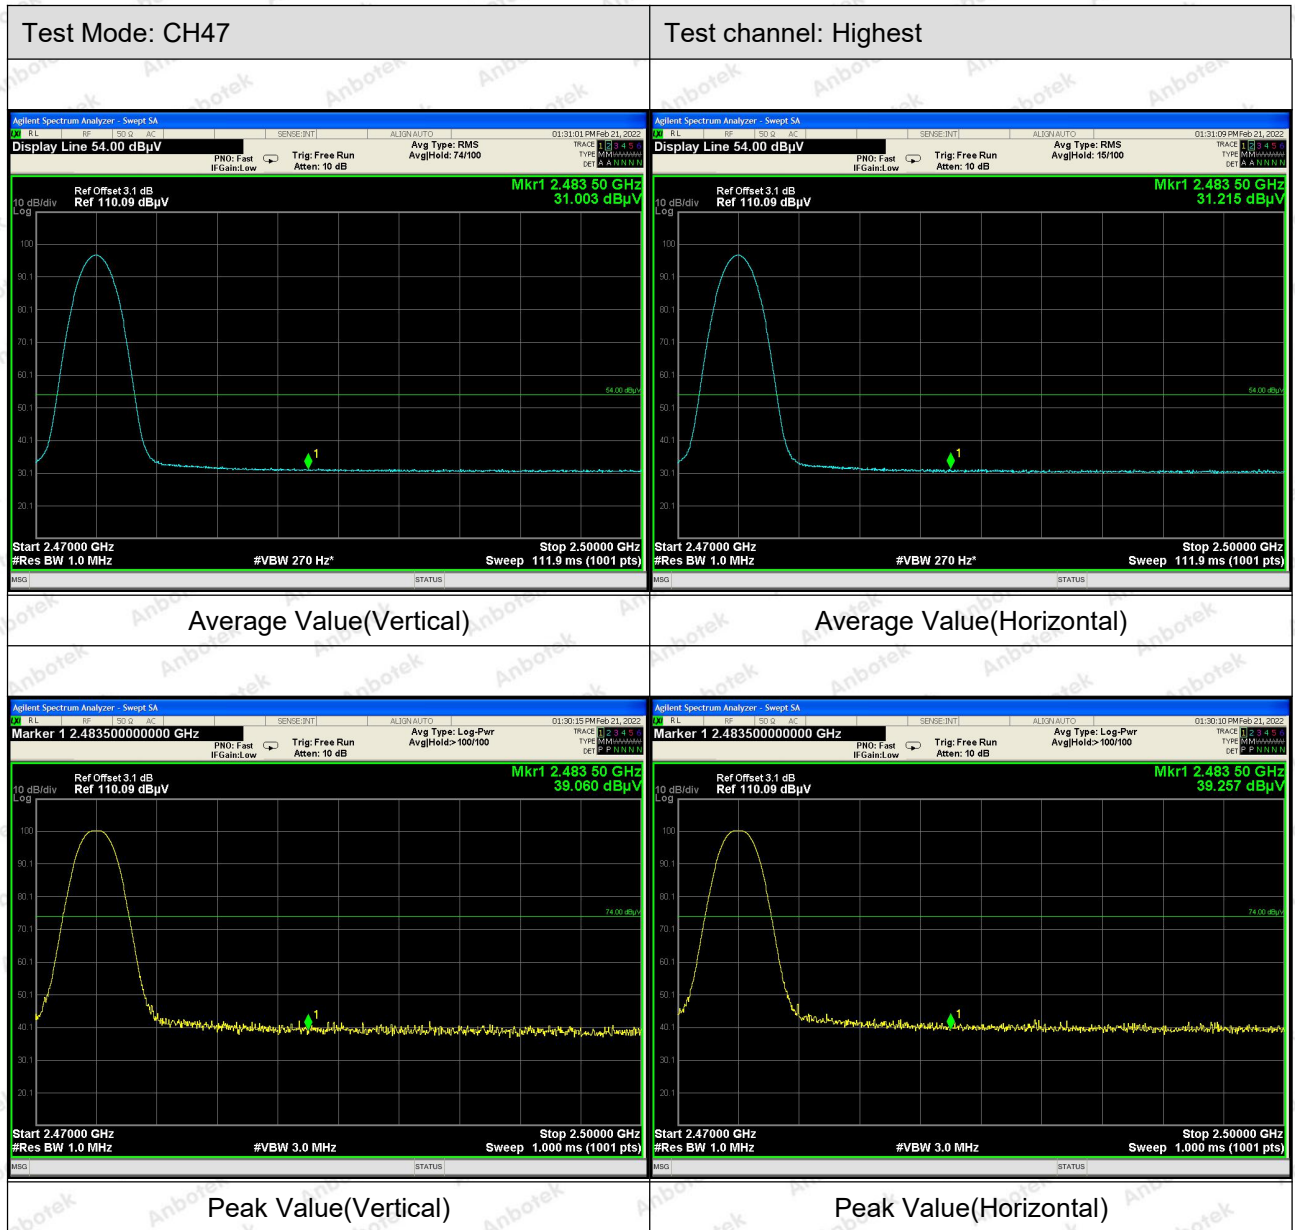


## 5. Maximum Peak Output Power Test

### 5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(1)
Test Limit	According to §15.247(b) (1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 5.2. Test Setup

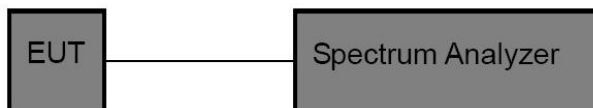

### 5.3. Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
  - RBW > the 20 dB bandwidth of the emission being measured
  - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
  - VBW ≥ RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold

### 5.4. Test Data

Pass


Please refer to Appendix C of the Appendix Test Data.

## 6. 20DB Occupy Bandwidth Test

### 6.1. Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

### 6.2. Test Setup

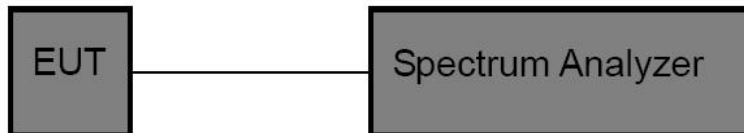

### 6.3. Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW  $\geq 1\%$  of the 20 dB bandwidth.
3. Set the VBW  $\geq$ RBW
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 6.4. Test Data

Pass

Please refer to Appendix A of the Appendix Test Data.




## 7. Carrier Frequency Separation Test

### 7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

### 7.2. Test Setup

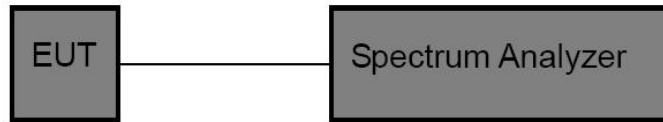

### 7.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW =approximately 30% of the channel spacing.
3. Set the VBW  $\geq$  RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 7.4. Test Data

Pass


Please refer to Appendix D of the Appendix Test Data.

## 8. Number of Hopping Channel Test

### 8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

### 8.2. Test Setup

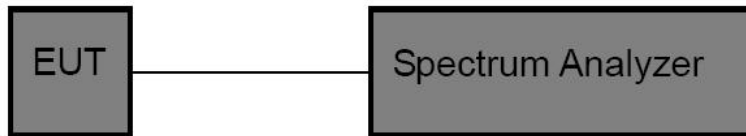

### 8.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. Set the VBW  $\geq$  RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 8.4. Test Data

Pass


Please refer to Appendix F of the Appendix Test Data.

## 9. Dwell Time Test

### 9.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

### 9.2. Test Setup

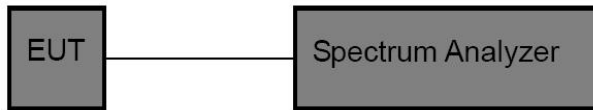

### 9.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 9.4. Test Data

Pass

Please refer to Appendix E of the Appendix Test Data.




## 10. 100kHz Bandwidth of Frequency Band Edge Requirement

### 10.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 10.2. Test Setup

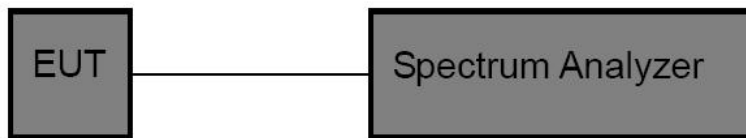

### 10.3. Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

### 10.4. Test Data

Pass

Please refer to Appendix G & Appendix H of the Appendix Test Data.

## 11. Antenna Requirement

### 11.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

### 11.2. Antenna Connected Construction

The antenna is Monopole Antenna which permanently attached, and the best case gain of the antenna is 2 dBi. It complies with the standard requirement.



## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test








## APPENDIX II -- EXTERNAL PHOTOGRAPH










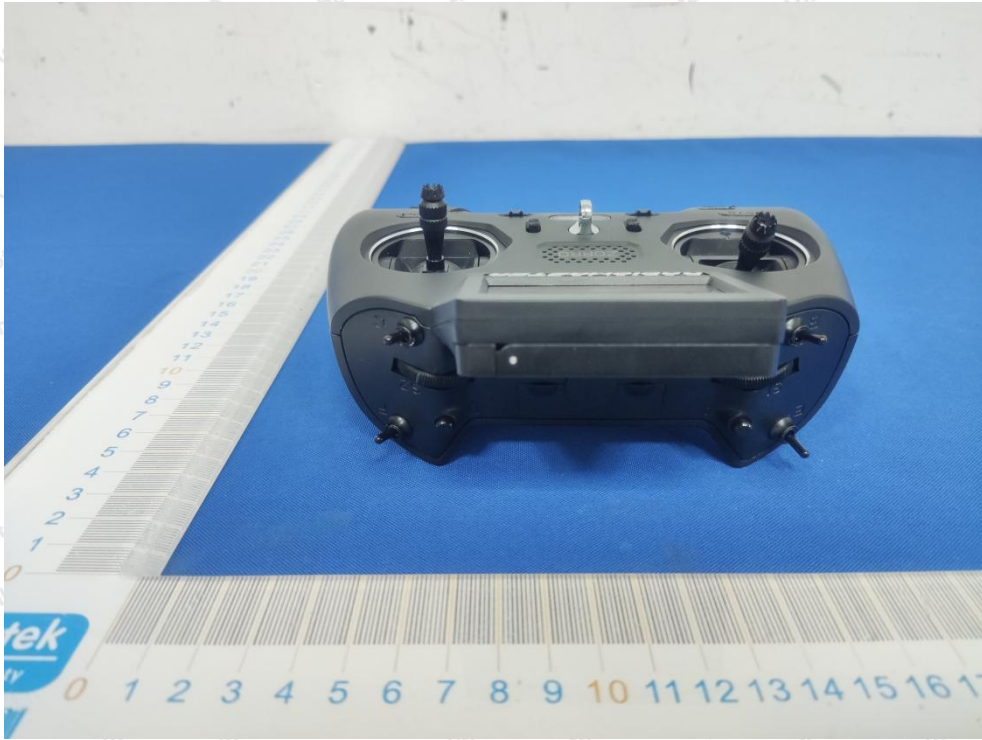






ANT





### APPENDIX III -- INTERNAL PHOTOGRAPH

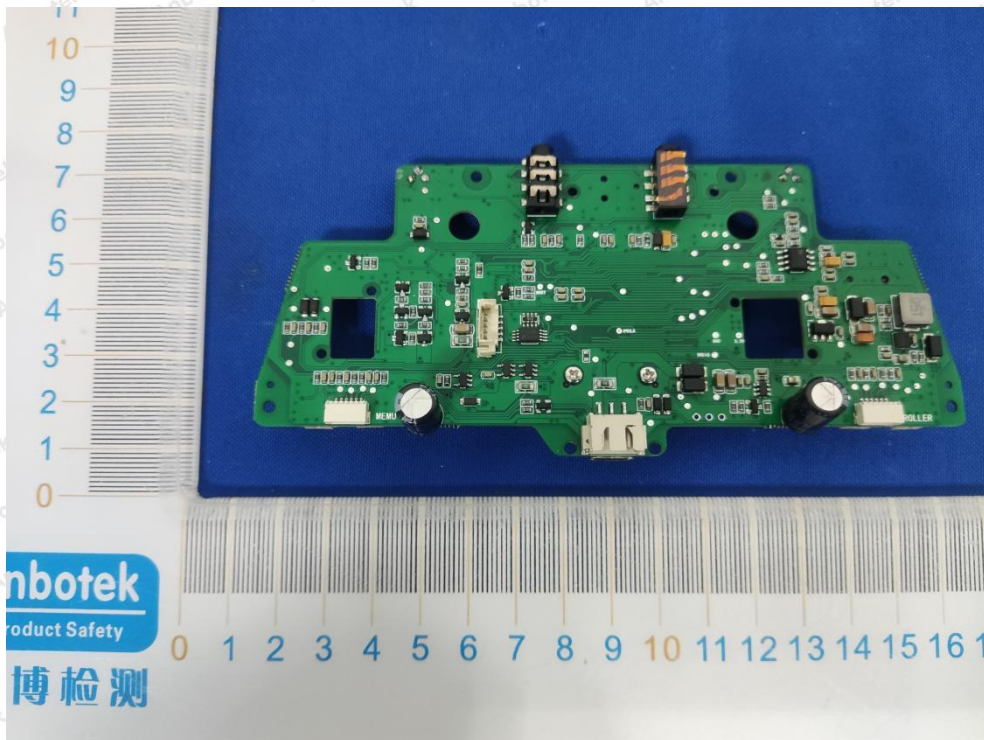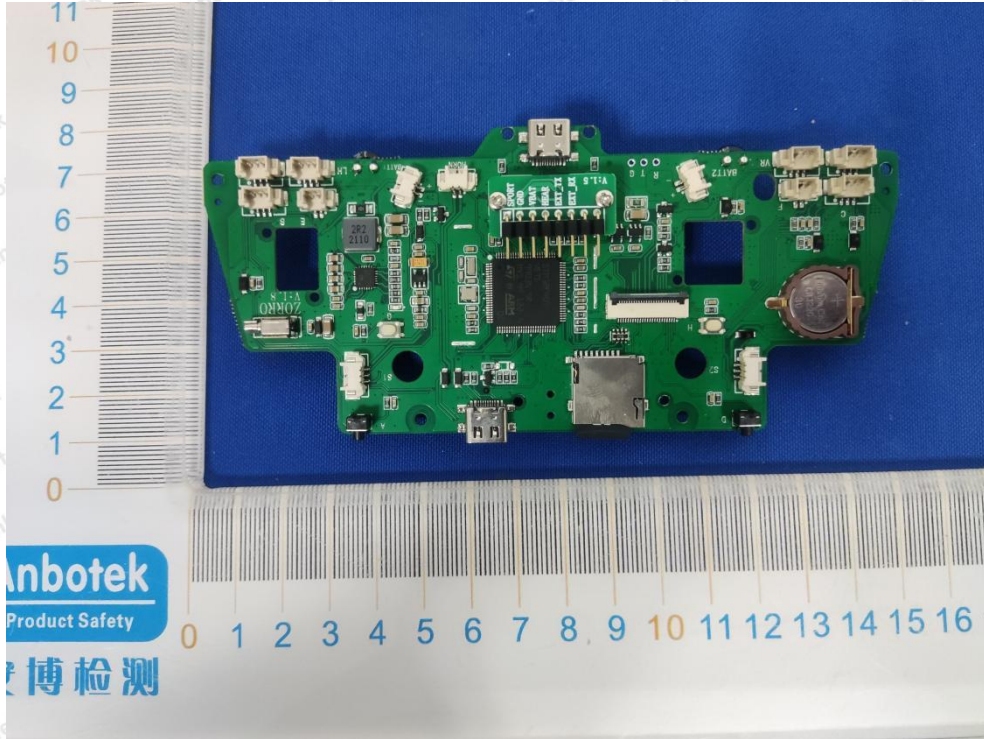





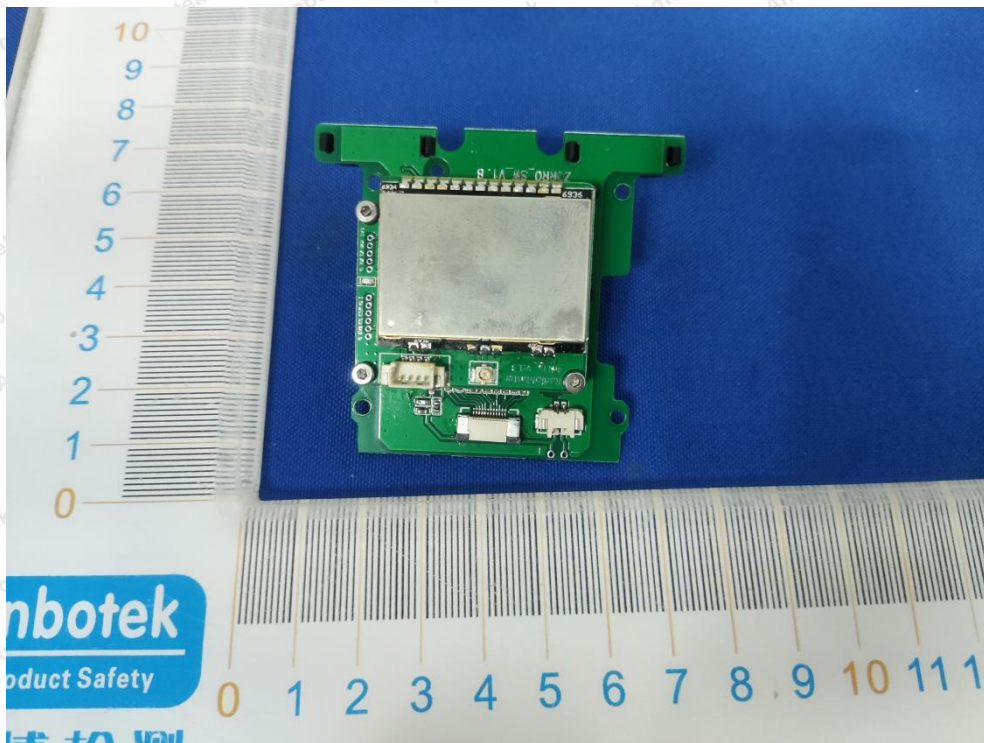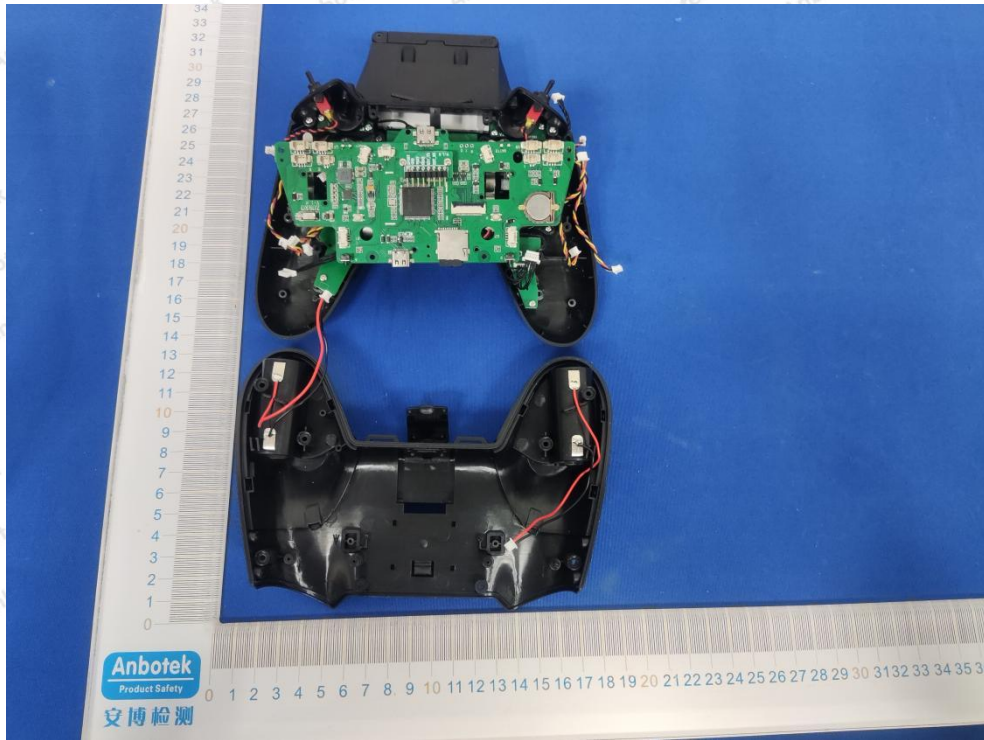





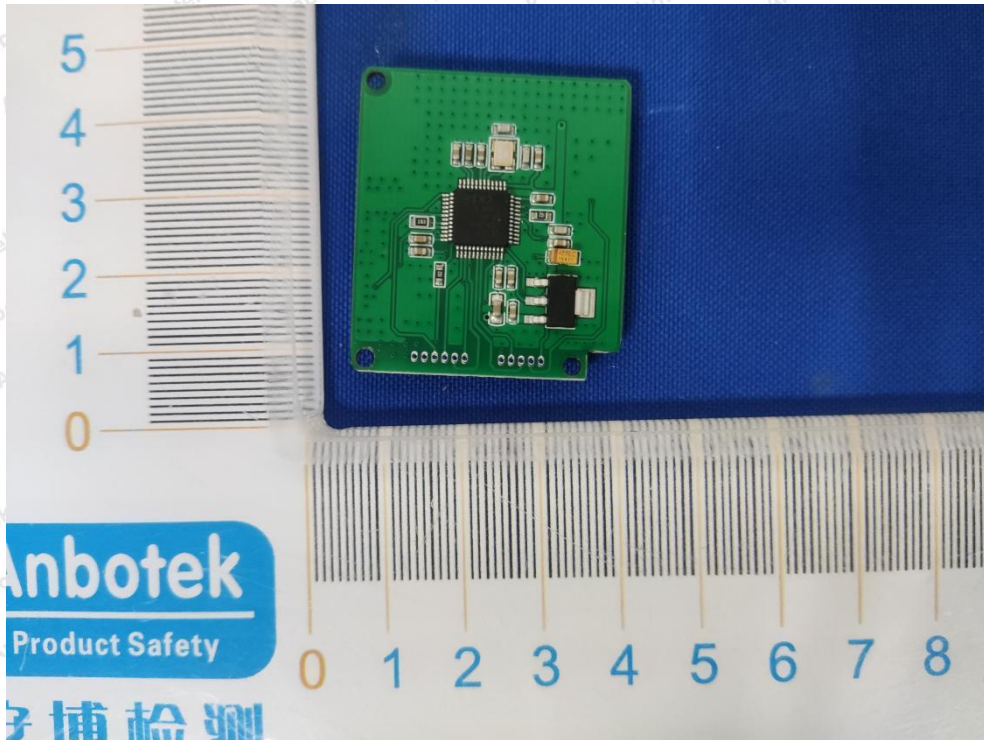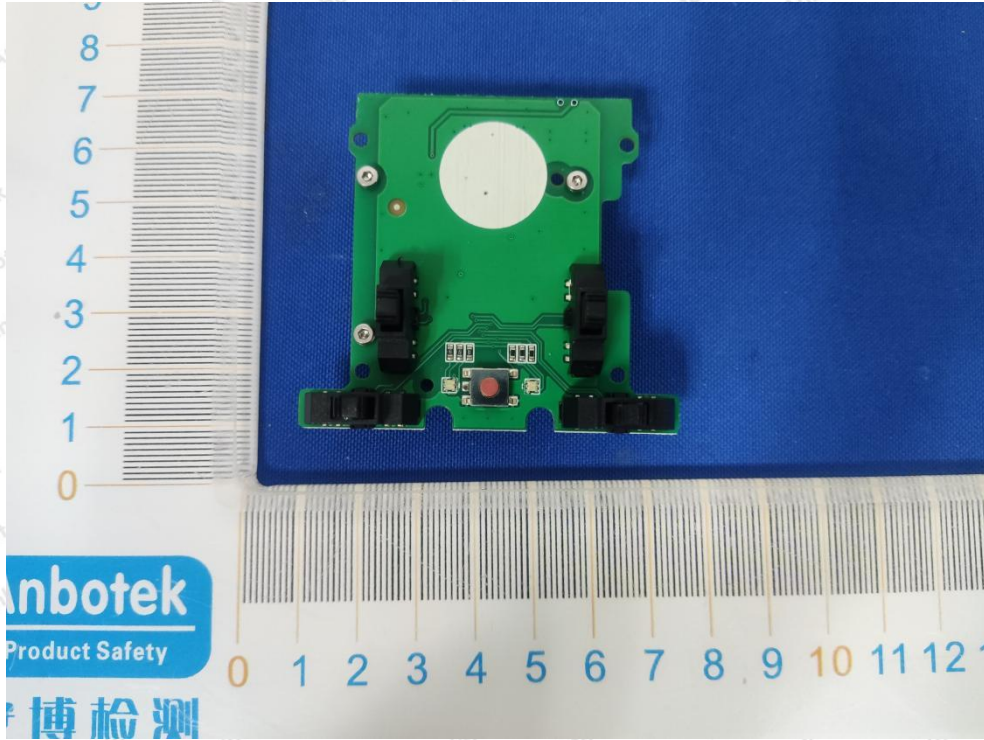





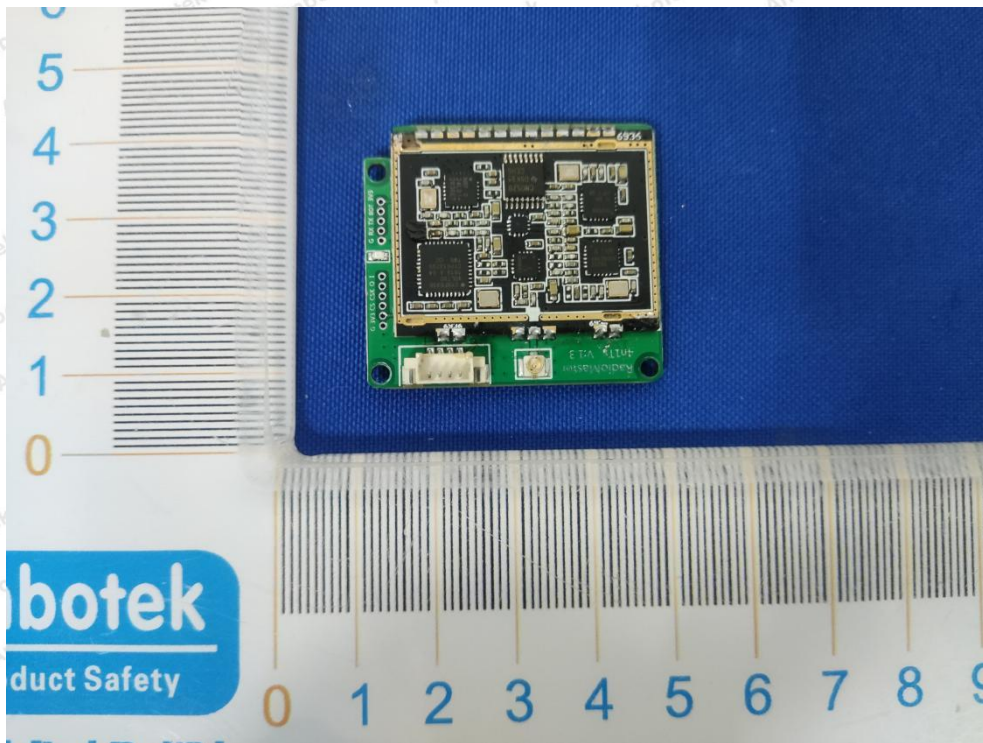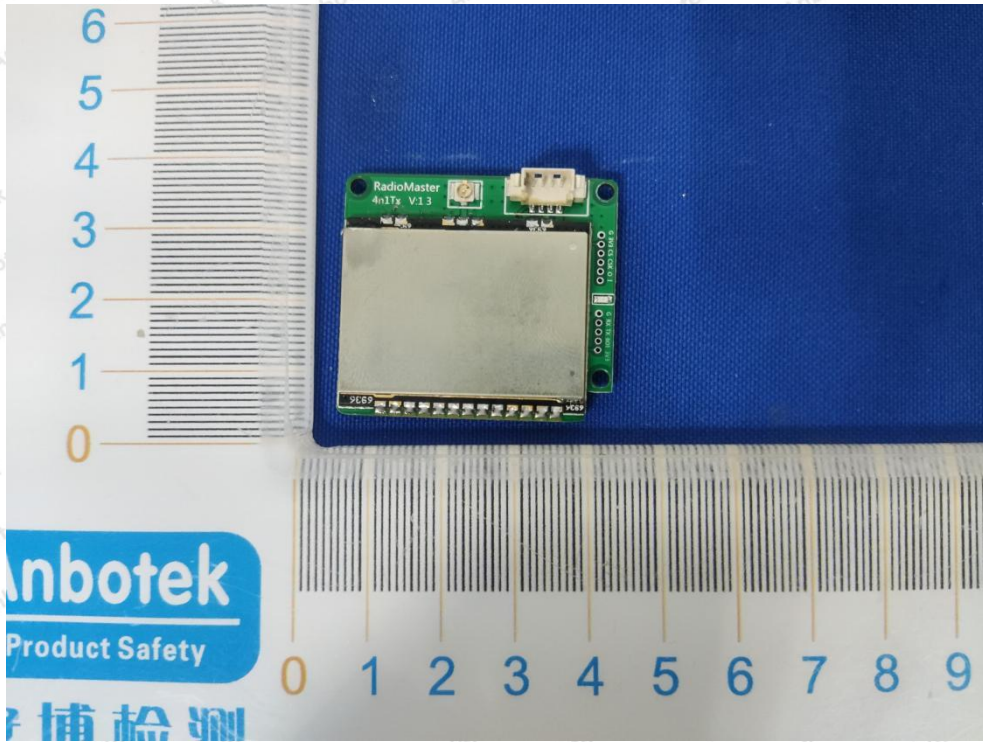




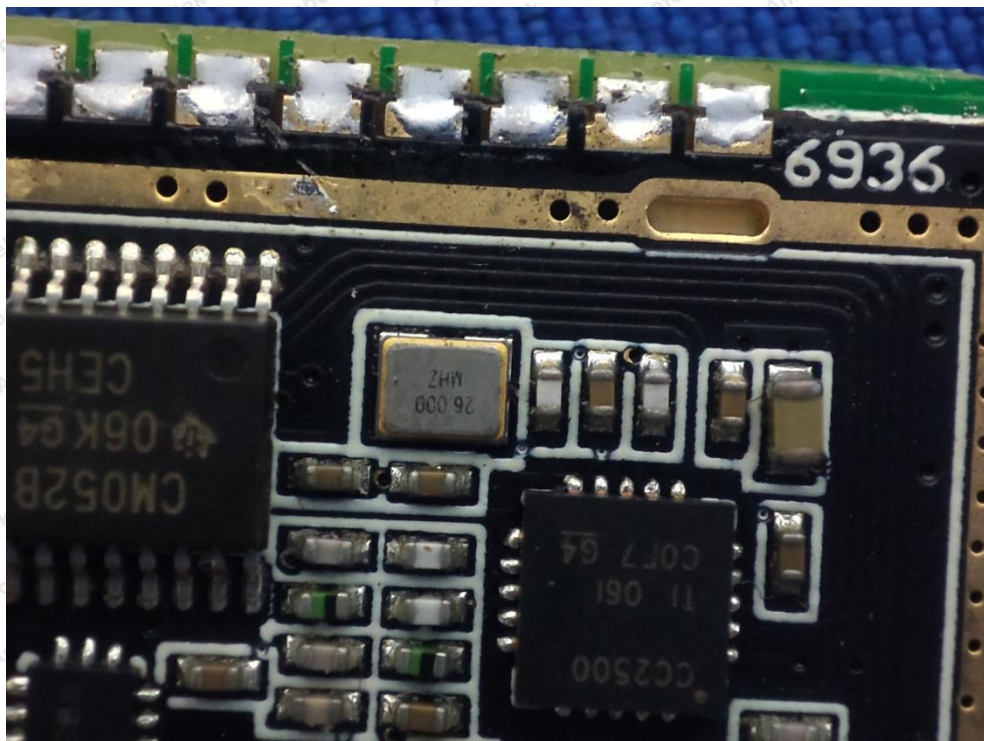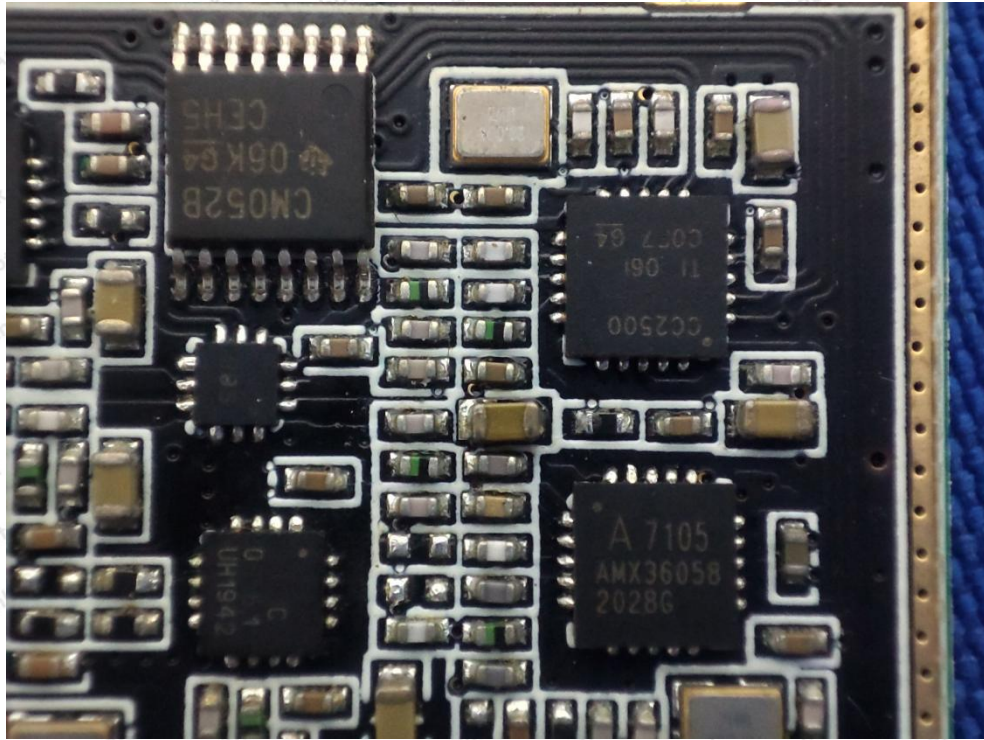



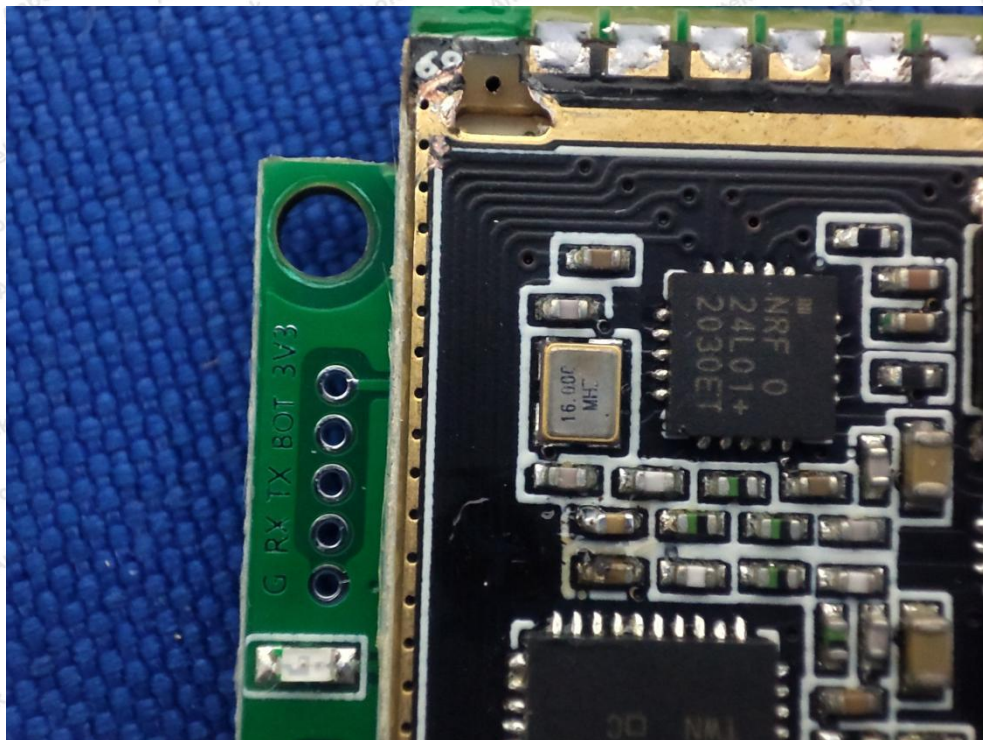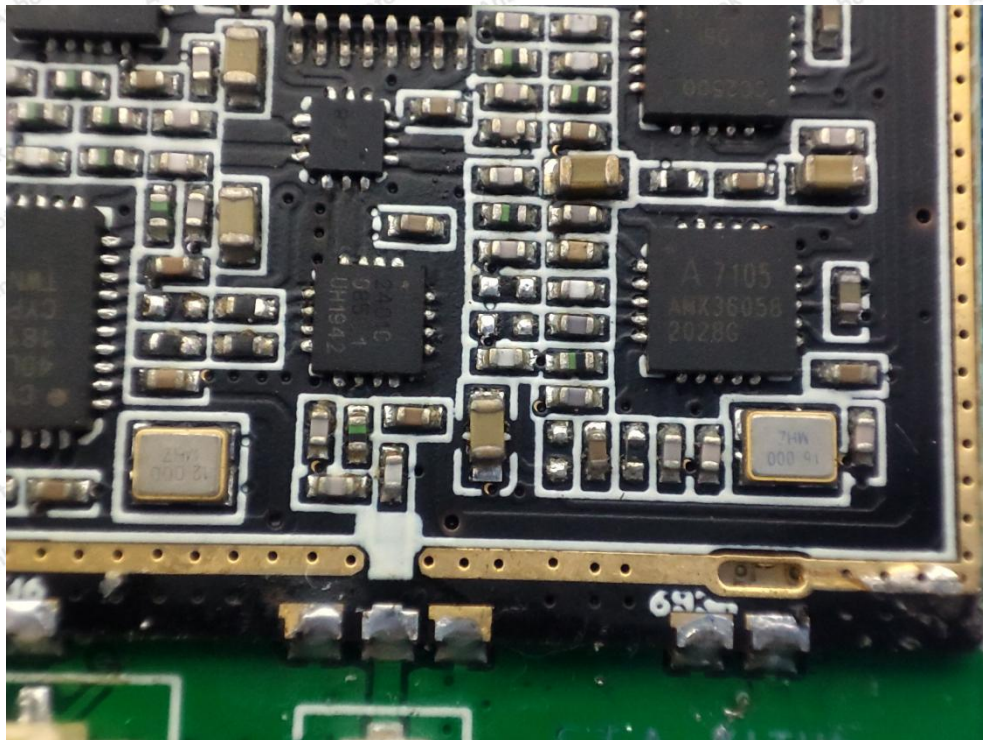



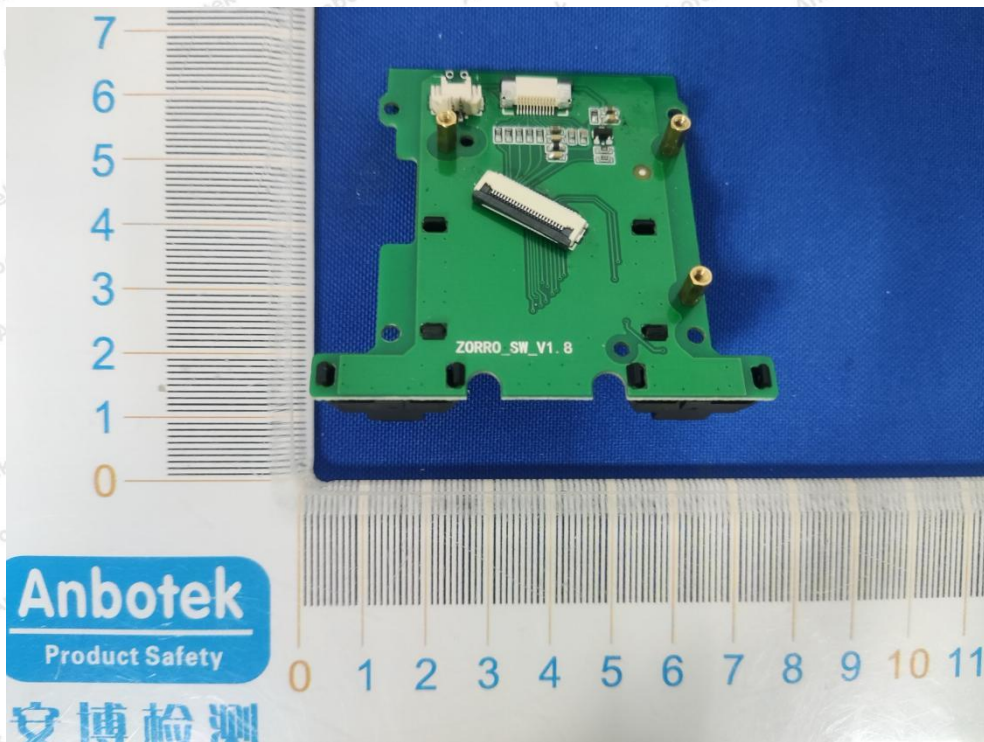



## APPENDIX IV – Appendix Test Data