



RADIO TEST REPORT

Report No.: STS2306300W05

Issued for

Hot Pepper Mobile Inc.

350 10th Ave 1000 Ste San Diego California United States
92101-8705

Product Name:	Tablet
Brand:	Hot Pepper
Model Number:	AP32
Series Model(s):	N/A
FCC ID:	2A33N-AP32
Test Standard:	FCC Part 15.407

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.

Shenzhen STS Test Services Co., Ltd.
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com





TEST RESULT CERTIFICATION

Applicant's Name..... : Hot Pepper Mobile Inc.
Address : 350 10th Ave 1000 Ste San Diego California United States 92101-8705
Manufacturer's Name : Shenzhen Mediafly Technology CO.,LTD
Address : 1/F, Building A, WeiXing Science And Technology Park, No. 268-3, BaoShi East Rd, ShuiTian Community, ShiYan Street, BaoAn District, ShenZhen, China

Product Description

Product Name..... : Tablet
Brand : Hot Pepper
Model Number : AP32
Series Model(s)..... : N/A


Test Standards..... : FCC Part15.407

Test Procedure..... ANSI C63.10-2013


This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.


Date of Test..... :
Date of receipt of test item : 02 June 2023
Date (s) of performance of tests : 02 June 2023 ~ 10 June 2023
Date of Issue..... : 10 June 2023
Test Result..... : **Pass**

Testing Engineer : 

 (Chris Chen)

Technical Manager : 

 (Sean she)

Authorized Signatory : 

 (Bovey Yang)





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3 . EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT	18
4. POWER SPECTRAL DENSITY TEST	46
4.1 LIMIT	46
4.2 TEST PROCEDURE	46
4.3 DEVIATION FROM STANDARD	47
4.4 TEST SETUP	47
4.5 EUT OPERATION CONDITIONS	47
4.6 TEST RESULTS	47
5. BANDWIDTH MEASUREMENT	48
5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	48
5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	49
5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	50
6. MAXIMUM CONDUCTED OUTPUT POWER	51
6.1 LIMIT	51
6.2 TEST PROCEDURE	51
6.3 DEVIATION FROM STANDARD	51
6.4 TEST SETUP	51
6.5 EUT OPERATION CONDITIONS	51
6.6 TEST RESULTS	51
7. AUTOMATICALLY DISCONTINUE TRANSMISSION	52
7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	52
7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	52



Table of Contents	Page
8. ANTENNA REQUIREMENT	53
8.1 STANDARD REQUIREMENT	53
8.2 EUT ANTENNA	53
APPENDIX - PHOTOS OF TEST SETUP	54





Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	10 June 2023	STS2306300W05	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
15.407 (a) /15.407 (e)	26dB/6dB &99% Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(b)/15.205/15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(a)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

NOTE:

(1) 'N/A' denotes test is not applicable in this Test Report.

(2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 1.197\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.896\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 3.94\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.59\text{dB}$
6	All emissions, radiated >6G	$\pm 5.22\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.14\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.54\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Tablet							
Brand	Hot Pepper							
Model Number	AP32							
Series Model(s)	N/A							
Model Difference	N/A							
Product Description	The EUT is a Tablet							
	<table border="1"> <tr> <td rowspan="6">Operation Frequency:</td> <td>IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz</td> </tr> <tr> <td>IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz</td> </tr> <tr> <td>IEEE 802.11ac(VHT80): 5.210GHz</td> </tr> <tr> <td>IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz</td> </tr> <tr> <td>IEEE 802.11n(HT40)/ac(VHT40): 5.755GHz-5.795GHz</td> </tr> <tr> <td>IEEE 802.11ac(VHT80): 5.775GHz</td> </tr> </table>	Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz	IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz	IEEE 802.11ac(VHT80): 5.210GHz	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz	IEEE 802.11n(HT40)/ac(VHT40): 5.755GHz-5.795GHz	IEEE 802.11ac(VHT80): 5.775GHz
	Operation Frequency:		IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz					
			IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz					
			IEEE 802.11ac(VHT80): 5.210GHz					
			IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz					
IEEE 802.11n(HT40)/ac(VHT40): 5.755GHz-5.795GHz								
IEEE 802.11ac(VHT80): 5.775GHz								
Modulation Type:	<table border="1"> <tr> <td>802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM</td> </tr> <tr> <td>802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM</td> </tr> <tr> <td>802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM</td> </tr> </table>	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM	802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM	802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM				
802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM								
802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM								
802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM								
Antenna Designation:	PIFA							
Max.Output Power(Conducted):	11.5 dBm							
More details of EUT technical specification, please refer to the User Manual.								
Test Channel	Please refer to the Note 1.							
Adapter	Input: 100-240Vac 50/60Hz 0.4A max Output: DC 5V, 2A							
Battery	Rated Voltage: 3.8V Charge Limit Voltage: 5.0V Capacity: 5000mAh							
Hardware version number	M863YAR310-VB44CF							
Software version number	HPP-AP32-A-V1_20230525							
Connecting I/O Port(s)	Please refer to the Note 1.							

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.



1. Operation Frequency of channel

5.180GHz-5.240GHz		5.745GHz-5.825GHz	
Channel	Frequency	Channel	Frequency
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	157	5785
44	5220	159	5795
46	5230	161	5805
48	5240	165	5825

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

5GHz:

For 802.11a/n(HT20) /ac (VHT20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11n(HT40) /ac (VHT40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
38	5190	151	5755
46	5230	159	5795

For 802.11ac (VHT80)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
42	5210	155	5775



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 3	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 4	TX IEEE 802.11ac VHT20 CH36&CH40&CH48	NSS1 MCS0
Mode 5	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 6	TX IEEE 802.11ac VHT20 CH149&CH157&CH165	NSS1 MCS0
Mode 7	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 8	TX IEEE 802.11ac VHT40 CH38&CH46	NSS1 MCS0
Mode 9	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 10	TX IEEE 802.11ac VHT40 CH151&CH159	NSS1 MCS0
Mode 11	TX IEEE 802.11ac VHT80 CH42	NSS1 MCS0
Mode 12	TX IEEE 802.11ac VHT80 CH155	NSS1 MCS0

- Note: (1) The measurements are performed at the highest, middle, lowest available channels.
 (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
 (3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.
 (4) The battery is fully-charged during the radiated and RF conducted test.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 13: Keeping TX + WLAN Link


2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
WIFI(5G)	U-NII-1 (5150MHz-5250MHz)	802.11a	-2.78	16	Engineering mode
		802.11n(HT20)		16	
		802.11n(HT40)		16	
		802.11ac(VHT20)		16	
		802.11ac(VHT40)		16	
		802.11ac(VHT80)		16	
RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
WIFI(5G)	U-NII-3 (5725MHz-5875MHz)	802.11a	-0.21	16	DRTU
		802.11n(HT20)		16	
		802.11n(HT40)		16	
		802.11ac(VHT20)		16	
		802.11ac(VHT40)		16	
		802.11ac(VHT80)		16	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

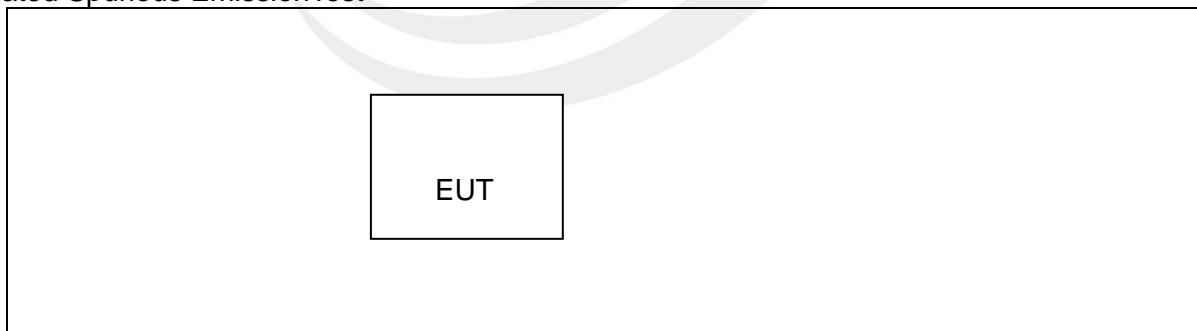

Conducted Emission Test

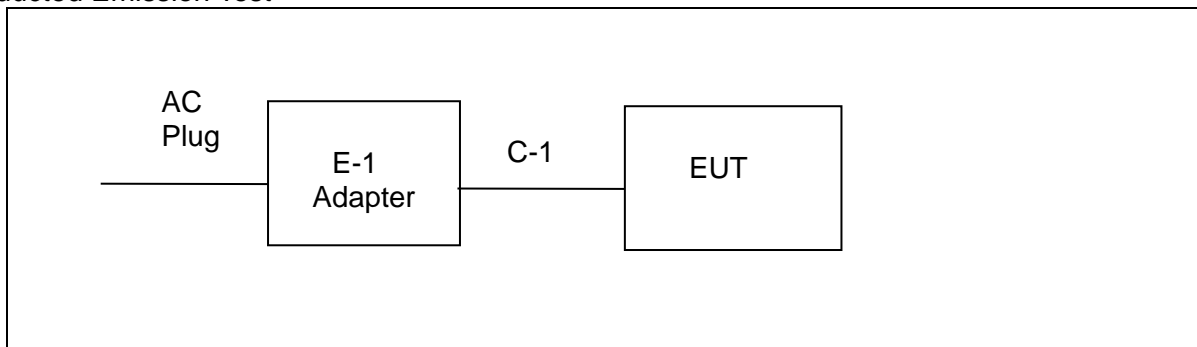



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-1	Adapter	Fxin	WRP2E-050200U	N/A	N/A
C-1	USB Cable	N/A	N/A	70cm	YES

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2023.03.01	2024.02.28
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2022.07.04	2023.07.03
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2022.09.29	2023.09.28
Pre-mpifier (18G-40G)	SKET	LNPA_1840-50	SK2018101801	2022.07.23	2023.07.22
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2022.09.29	2023.09.28
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Active loop Antenna	ZHINAN	ZN30900C	16035	2023.02.28	2024.02.27
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2021.10.11	2023.10.10
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2021.09.28	2023.09.27
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC Power Supply	Zhaoxin	RXN 605D	20R605D11010081	N/A	N/A
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2022.09.29	2023.09.28
LISN	R&S	ENV216	101242	2022.09.28	2023.09.27
LISN	EMCO	3810/2NM	23625	2022.09.28	2023.09.27
Temperature & Humidity	HH660	Mieo	N/A	2022.09.30	2023.09.29
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2023.03.01	2024.02.28
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Temperature & Humidity	HH660	Mieo	N/A	2022.09.30	2023.09.29
Test SW	MW	MTS 8310_2.0.0.0			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN is at least 80 cm from the nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

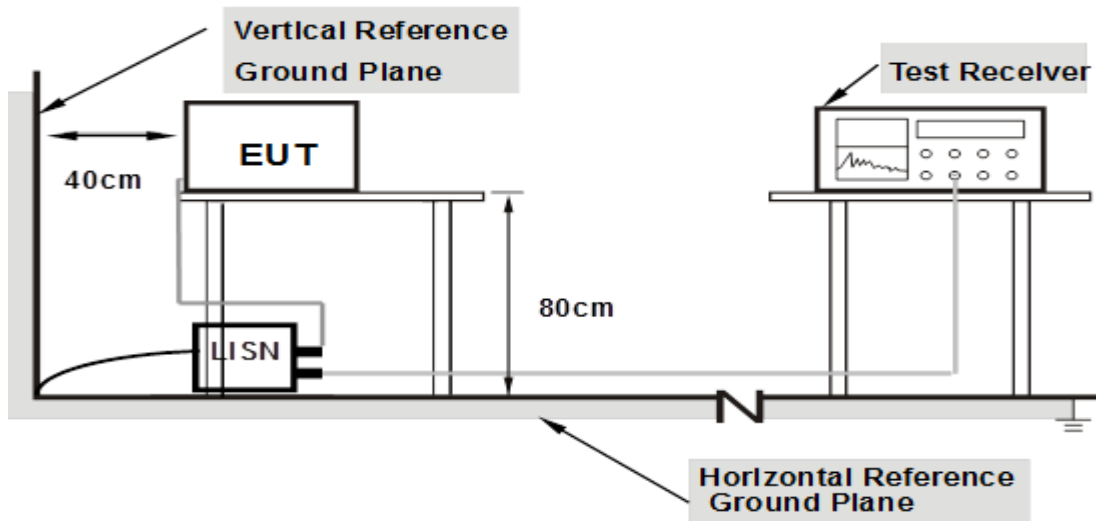

- Note:**
- 1. Support units were connected to second LISN.
 - 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.6 TEST RESULTS

Temperature:	25.6(C)	Relative Humidity:	45%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode :	Mode 13		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Remark
1	0.1580	33.16	10.33	43.49	65.57	-22.08	QP
2	0.1580	18.69	10.33	29.02	55.57	-26.55	AVG
3	0.3060	31.56	10.74	42.30	60.08	-17.78	QP
4	0.3060	17.73	10.74	28.47	50.08	-21.61	AVG
5	0.6220	35.63	10.42	46.05	56.00	-9.95	QP
6	0.6220	25.67	10.42	36.09	46.00	-9.91	AVG
7	1.1620	29.99	10.30	40.29	56.00	-15.71	QP
8	1.1620	15.59	10.30	25.89	46.00	-20.11	AVG
9	3.5140	21.78	10.38	32.16	56.00	-23.84	QP
10	3.5140	9.35	10.38	19.73	46.00	-26.27	AVG
11	15.3620	24.93	11.81	36.74	60.00	-23.26	QP
12	15.3620	11.58	11.81	23.39	50.00	-26.61	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

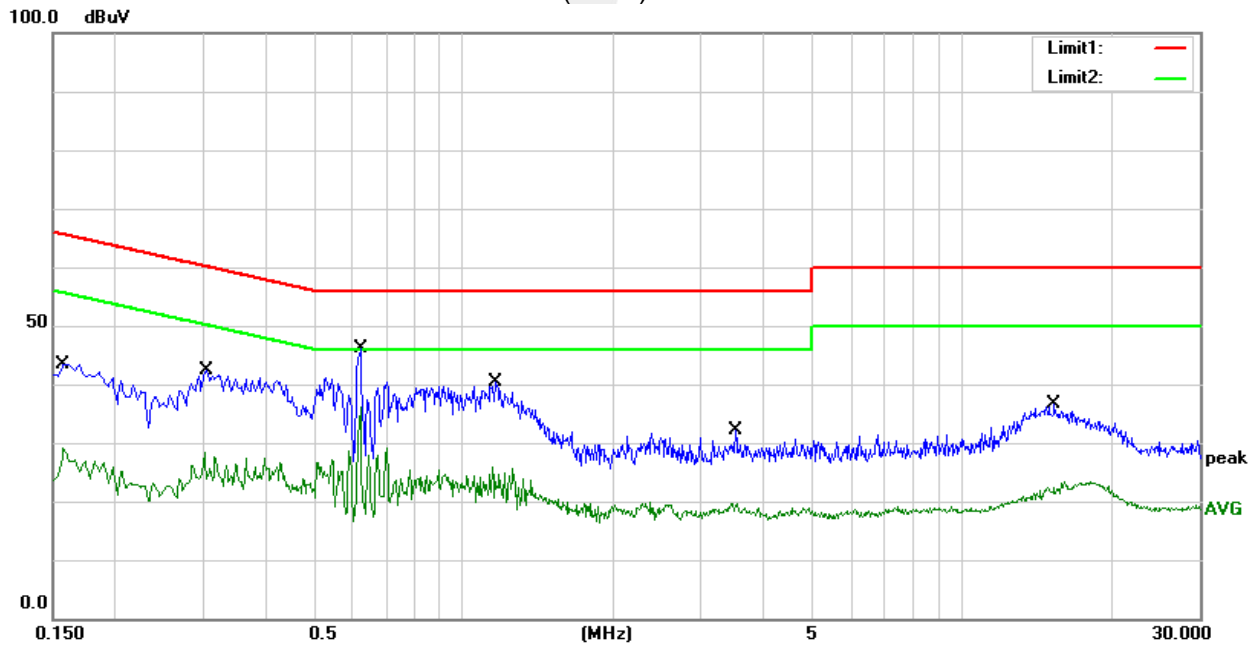




Temperature:	25.6(C)	Relative Humidity:	45%RH
Test Voltage	AC 120V/60Hz	Phase:	N
Test Mode	Mode 13		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1620	33.87	10.33	44.20	65.36	-21.16	QP
2	0.1620	17.46	10.33	27.79	55.36	-27.57	AVG
3	0.3060	31.83	10.74	42.57	60.08	-17.51	QP
4	0.3060	16.84	10.74	27.58	50.08	-22.50	AVG
5	0.6180	35.14	10.43	45.57	56.00	-10.43	QP
6	0.6180	25.22	10.43	35.65	46.00	-10.35	AVG
7	1.0380	29.48	10.30	39.78	56.00	-16.22	QP
8	1.0380	16.04	10.30	26.34	46.00	-19.66	AVG
9	3.6460	21.96	10.38	32.34	56.00	-23.66	QP
10	3.6460	9.57	10.38	19.95	46.00	-26.05	AVG
11	14.3660	24.62	11.66	36.28	60.00	-23.72	QP
12	14.3660	12.13	11.66	23.79	50.00	-26.21	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result =Reading + Factor) –Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

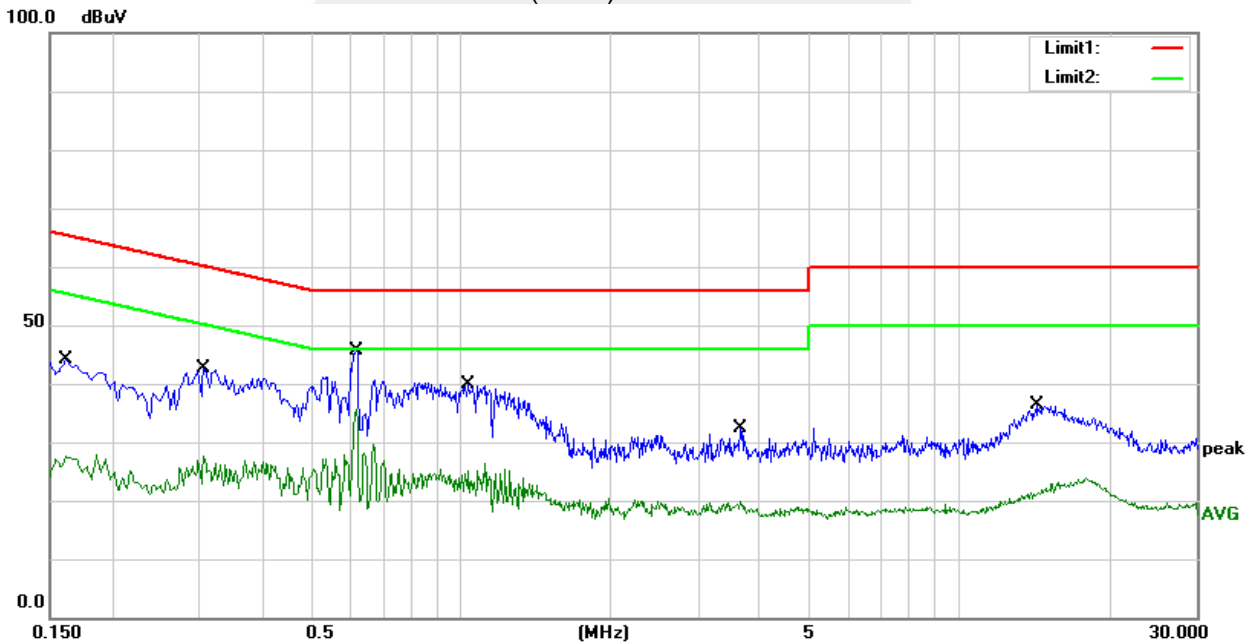

3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7&15.205/209(a), then the limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	68.2	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Note: In case the emission radiated emission above 1000MHz fall within the restricted band the restricted frequency bands, the peak limit is 74 dBuV/m.

**LIMITS OF EMISSIONS OUTSIDE OF THE FREQUENCY BANDS**

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note: $\text{dBuV/m(at 3M)} = \text{EIRP(dBm)} + 95.2$.

Peak Limit = $-27\text{dBm/MHz} + 95.2 = 68.2$ dBuV/m.

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.


3.2.2 DEVIATION FROM TEST STANDARD

No deviation




3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

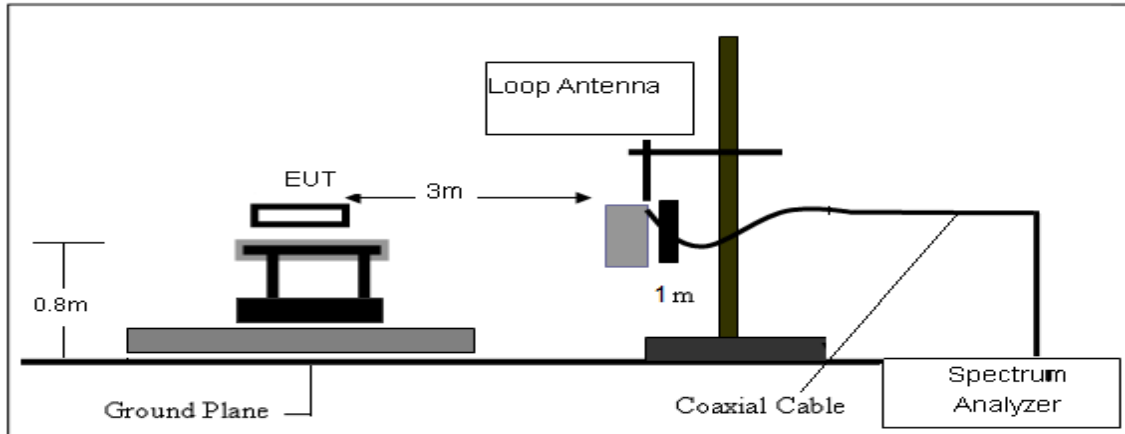

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

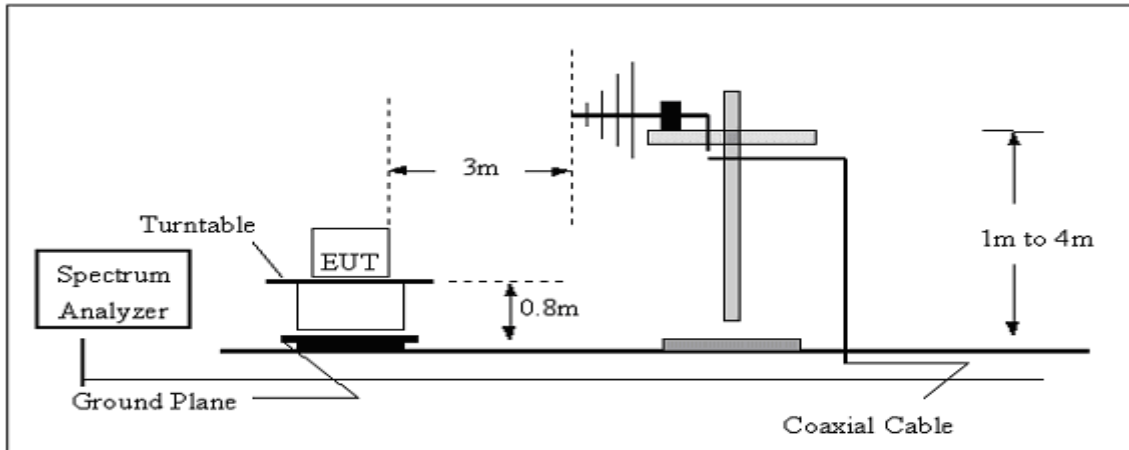

(C) Radiated Emission Test-Up Frequency Above 1GHz

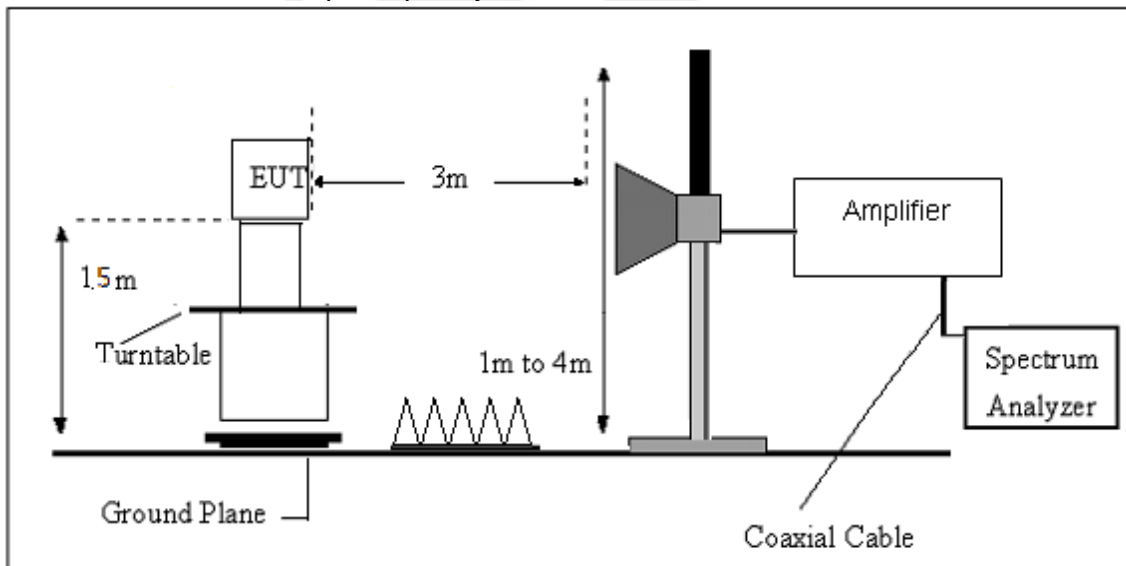



3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude


AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB μ V/m)	RA (dB μ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

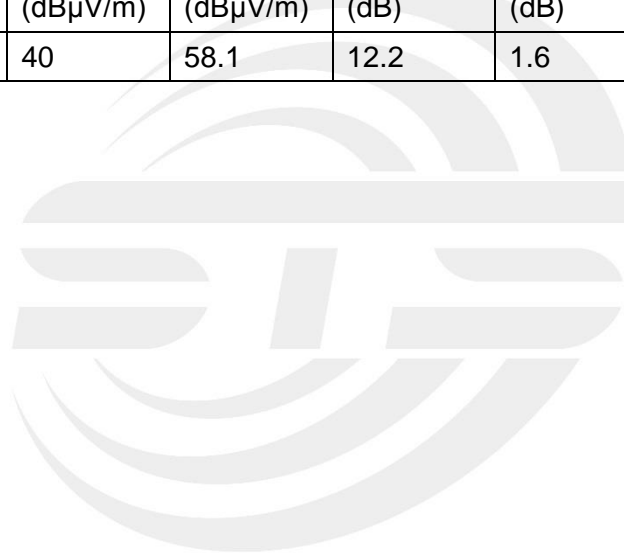

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 5V	Polarization :	--
Test Mode:	TX Mode		


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

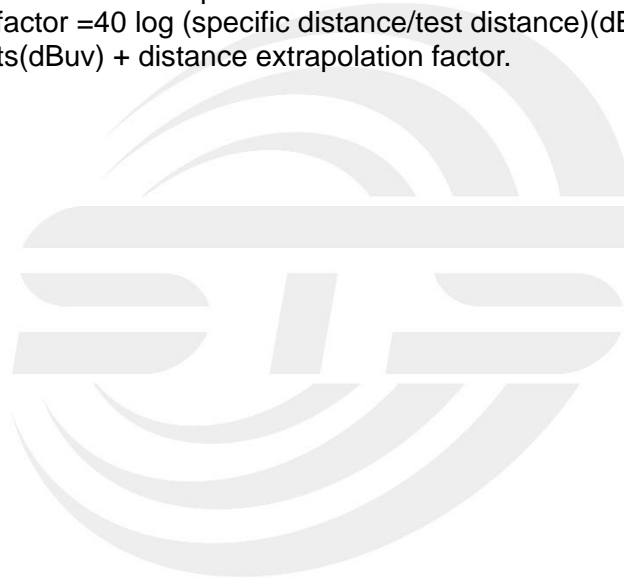




3.2.7 TEST RESULTS (Between 30MHz – 1GHz)

Temperature	23.1(C)	Relative Humidity:	60%RH
Test Voltage	DC 5V	Polarization:	Horizontal
Test Mode	Mode 1~12(Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	34.70	-13.35	21.35	40.00	-18.65	peak
2	91.1100	42.01	-21.31	20.70	43.50	-22.80	peak
3	380.1700	32.40	-12.26	20.14	46.00	-25.86	peak
4	574.1700	29.72	-5.67	24.05	46.00	-21.95	peak
5	776.9000	31.02	-2.25	28.77	46.00	-17.23	peak
6	990.3000	28.56	2.05	30.61	54.00	-23.39	peak

Remark:

- Margin = Result (Result =Reading + Factor) –Limit
- Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

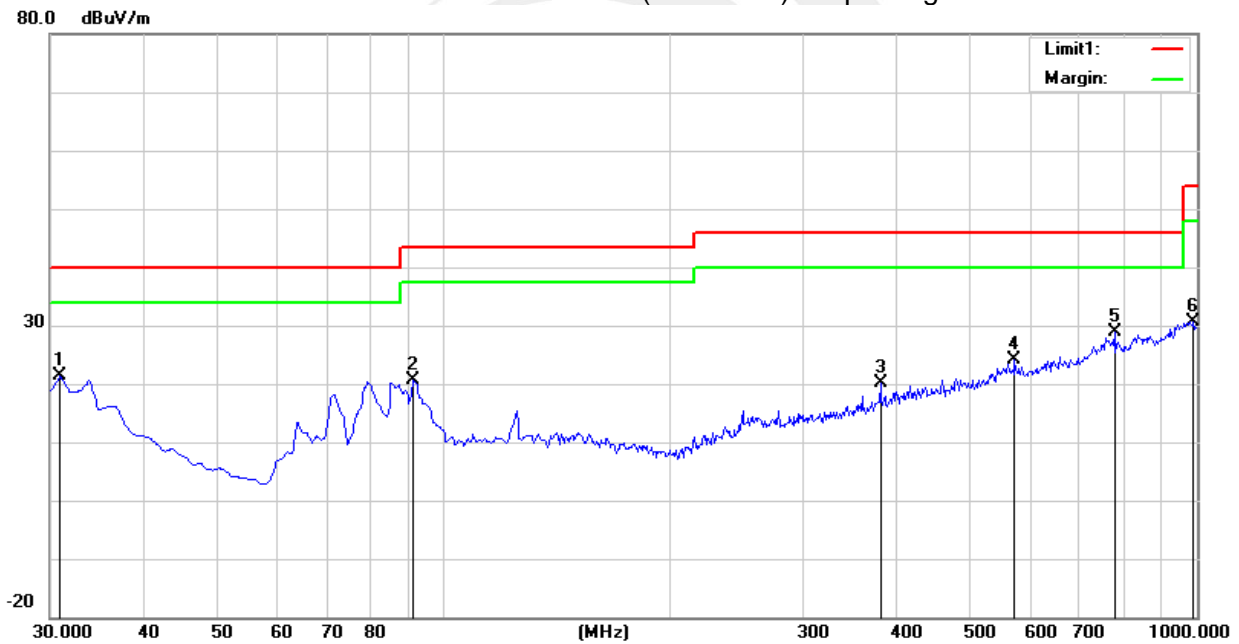




Temperature	23.1(C)	Relative Humidity:	60%RH
Test Voltage	DC 5V	Polarization:	Vertical
Test Mode	Mode 1~12(Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	47.40	-13.35	34.05	40.00	-5.95	peak
2	63.9500	48.22	-25.64	22.58	40.00	-17.42	peak
3	125.0600	37.11	-18.22	18.89	43.50	-24.61	peak
4	553.8000	28.72	-5.67	23.05	46.00	-22.95	peak
5	761.3800	30.34	-2.19	28.15	46.00	-17.85	peak
6	977.6900	29.08	2.52	31.60	54.00	-22.40	peak

Remark:

1. Margin = Result (Result =Reading + Factor) –Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

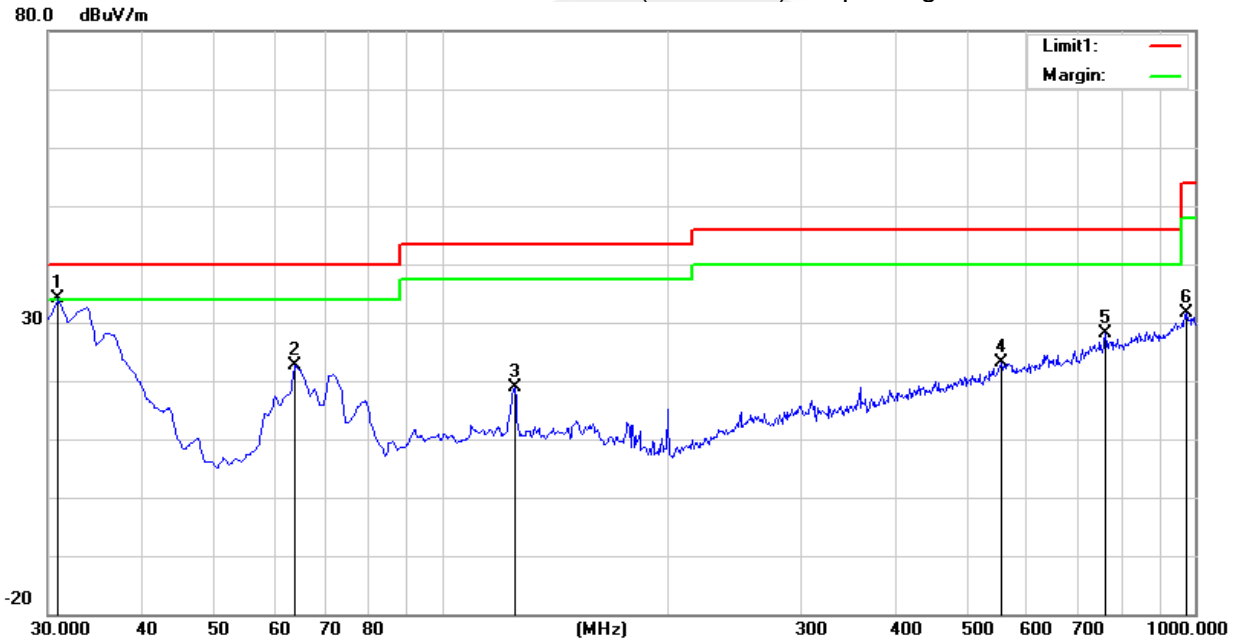



3.2.8 TEST RESULTS (Above 1000 MHz)

U-NII-1 5150-5250MHz

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11a/ 5180 MHz)										
3245.37	44.00	44.70	6.70	28.20	-9.80	34.20	68.20	-34.00	Pk	Vertical
3245.37	41.93	44.70	6.70	28.20	-9.80	32.13	54.00	-21.87	AV	Vertical
3260.01	44.77	44.70	6.70	28.20	-9.80	34.97	74.00	-39.03	Pk	Horizontal
3260.01	41.14	44.70	6.70	28.20	-9.80	31.34	54.00	-22.66	AV	Horizontal
3983.26	39.61	44.20	7.90	29.70	-6.60	33.01	74.00	-40.99	Pk	Vertical
3983.26	36.78	44.20	7.90	29.70	-6.60	30.18	54.00	-23.82	AV	Vertical
3987.12	39.41	44.20	7.90	29.70	-6.60	32.81	74.00	-41.19	Pk	Horizontal
3987.12	36.03	44.20	7.90	29.70	-6.60	29.43	54.00	-24.57	AV	Horizontal
7227.69	37.86	43.50	11.40	35.50	3.40	41.26	68.20	-26.94	Pk	Vertical
7227.69	33.54	43.50	11.40	35.50	3.40	36.94	54.00	-17.06	AV	Vertical
7230.81	37.02	43.50	11.40	35.50	3.40	40.42	68.20	-27.78	Pk	Horizontal
7230.81	33.47	43.50	11.40	35.50	3.40	36.87	54.00	-17.13	AV	Horizontal
10360.18	40.05	44.50	13.80	38.80	8.10	48.15	68.20	-20.05	Pk	Vertical
10360.18	37.05	44.50	13.80	38.80	8.10	45.15	54.00	-8.85	AV	Vertical
10360.20	39.31	44.50	13.80	38.80	8.10	47.41	68.20	-20.79	Pk	Horizontal
10360.20	36.35	44.50	13.80	38.80	8.10	44.45	54.00	-9.55	AV	Horizontal
11034.80	33.01	43.60	14.30	39.50	10.20	43.21	74.00	-30.79	Pk	Vertical
11034.80	31.03	43.60	14.30	39.50	10.20	41.23	54.00	-12.77	AV	Vertical
11026.59	32.90	43.60	14.30	39.50	10.20	43.10	74.00	-30.90	Pk	Horizontal
11026.59	30.70	43.60	14.30	39.50	10.20	40.90	54.00	-13.10	AV	Horizontal
13288.80	32.40	42.60	15.90	38.90	12.20	44.60	74.00	-29.40	Pk	Vertical
13288.80	29.41	42.60	15.90	38.90	12.20	41.61	54.00	-12.39	AV	Vertical
13295.97	31.96	42.60	15.90	38.90	12.20	44.16	74.00	-29.84	Pk	Horizontal
13295.97	29.01	42.60	15.90	38.90	12.20	41.21	54.00	-12.79	AV	Horizontal
Mid Channel (802.11a/ 5200 MHz)										
3246.62	44.06	44.70	6.70	28.20	-9.80	34.26	68.20	-33.94	Pk	Vertical
3246.62	40.94	44.70	6.70	28.20	-9.80	31.14	54.00	-22.86	AV	Vertical
3253.35	44.87	44.70	6.70	28.20	-9.80	35.07	68.20	-33.13	Pk	Horizontal
3253.35	41.27	44.70	6.70	28.20	-9.80	31.47	54.00	-22.53	AV	Horizontal
3991.62	39.36	44.20	7.90	29.70	-6.60	32.76	74.00	-41.24	Pk	Vertical
3991.62	35.75	44.20	7.90	29.70	-6.60	29.15	54.00	-24.85	AV	Vertical
3989.77	38.76	44.20	7.90	29.70	-6.60	32.16	74.00	-41.84	Pk	Horizontal
3989.77	36.35	44.20	7.90	29.70	-6.60	29.75	54.00	-24.25	AV	Horizontal
7236.28	37.25	43.50	11.40	35.50	3.40	40.65	68.20	-27.55	Pk	Vertical
7236.28	34.17	43.50	11.40	35.50	3.40	37.57	54.00	-16.43	AV	Vertical
7219.37	37.38	43.50	11.40	35.50	3.40	40.78	68.20	-27.42	Pk	Horizontal
7219.37	33.66	43.50	11.40	35.50	3.40	37.06	54.00	-16.94	AV	Horizontal
10400.14	39.62	44.50	13.80	38.80	8.10	47.72	68.20	-20.48	Pk	Vertical
10400.14	36.64	44.50	13.80	38.80	8.10	44.74	54.00	-9.26	AV	Vertical
10400.23	40.05	44.50	13.80	38.80	8.10	48.15	68.20	-20.05	Pk	Horizontal



10400.23	36.59	44.50	13.80	38.80	8.10	44.69	54.00	-9.31	AV	Horizontal
11024.18	34.01	43.60	14.30	39.50	10.20	44.21	74.00	-29.79	Pk	Vertical
11024.18	30.82	43.60	14.30	39.50	10.20	41.02	54.00	-12.98	AV	Vertical
11026.81	33.59	43.60	14.30	39.50	10.20	43.79	74.00	-30.21	Pk	Horizontal
11026.81	29.71	43.60	14.30	39.50	10.20	39.91	54.00	-14.09	AV	Horizontal
13282.15	32.23	42.60	15.90	38.90	12.20	44.43	74.00	-29.57	Pk	Vertical
13282.15	29.94	42.60	15.90	38.90	12.20	42.14	54.00	-11.86	AV	Vertical
13281.08	32.95	42.60	15.90	38.90	12.20	45.15	74.00	-28.85	Pk	Horizontal
13281.08	28.83	42.60	15.90	38.90	12.20	41.03	54.00	-12.97	AV	Horizontal
High Channel (802.11a/ 5240 MHz)										
3253.60	44.35	44.70	6.70	28.20	-9.80	34.55	68.20	-33.65	Pk	Vertical
3253.60	41.10	44.70	6.70	28.20	-9.80	31.30	54.00	-22.70	AV	Vertical
3247.14	44.81	44.70	6.70	28.20	-9.80	35.01	68.20	-33.19	Pk	Horizontal
3247.14	40.81	44.70	6.70	28.20	-9.80	31.01	54.00	-22.99	AV	Horizontal
3994.74	39.54	44.20	7.90	29.70	-6.60	32.94	74.00	-41.06	Pk	Vertical
3994.74	36.61	44.20	7.90	29.70	-6.60	30.01	54.00	-23.99	AV	Vertical
3995.22	39.28	44.20	7.90	29.70	-6.60	32.68	74.00	-41.32	Pk	Horizontal
3995.22	36.65	44.20	7.90	29.70	-6.60	30.05	54.00	-23.95	AV	Horizontal
7228.22	36.72	43.50	11.40	35.50	3.40	40.12	68.20	-28.08	Pk	Vertical
7228.22	33.89	43.50	11.40	35.50	3.40	37.29	54.00	-16.71	AV	Vertical

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Scan with 802.11a,802.11n (HT-20),802.11n (HT-40), 802.11ac (VHT-20),802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11n (HT-20).
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
- Pre-scan the SISO mode, only the worst-case results were reported.



U-NII-3 (5.725-5.850) GHz

Frequency (MHz)	Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limit (dBuV/m)	Margin	Detector	Comment
	(dBuV)	(dB)	(dB)	(dB/m)	(dB)	(dBuV/m)		(dB)		
Low Channel (802.11a/ 5745 MHz)										
3254.96	44.63	44.70	6.70	28.20	-9.80	34.83	68.20	-33.37	Pk	Vertical
3254.96	42.00	44.70	6.70	28.20	-9.80	32.20	54.00	-21.80	AV	Vertical
3260.00	45.16	44.70	6.70	28.20	-9.80	35.36	74.00	-38.64	Pk	Horizontal
3260.00	41.75	44.70	6.70	28.20	-9.80	31.95	54.00	-22.05	AV	Horizontal
3997.44	39.77	44.20	7.90	29.70	-6.60	33.17	74.00	-40.83	Pk	Vertical
3997.44	36.71	44.20	7.90	29.70	-6.60	30.11	54.00	-23.89	AV	Vertical
3999.17	39.78	44.20	7.90	29.70	-6.60	33.18	74.00	-40.82	Pk	Horizontal
3999.17	35.86	44.20	7.90	29.70	-6.60	29.26	54.00	-24.74	AV	Horizontal
7231.30	36.88	43.50	11.40	35.50	3.40	40.28	68.20	-27.92	Pk	Vertical
7231.30	33.54	43.50	11.40	35.50	3.40	36.94	54.00	-17.06	AV	Vertical
7227.24	37.69	43.50	11.40	35.50	3.40	41.09	68.20	-27.11	Pk	Horizontal
7227.24	33.79	43.50	11.40	35.50	3.40	37.19	54.00	-16.81	AV	Horizontal
10518.52	39.47	44.50	13.90	38.80	8.20	47.67	68.20	-20.53	Pk	Vertical
10518.52	35.75	44.50	13.90	38.80	8.20	43.95	54.00	-10.05	AV	Vertical
10520.02	39.68	44.50	13.90	38.80	8.20	47.88	68.20	-20.32	Pk	Horizontal
10520.02	36.97	44.50	13.90	38.80	8.20	45.17	54.00	-8.83	AV	Horizontal
11490.39	33.40	43.60	14.30	39.50	10.20	43.60	74.00	-30.40	Pk	Vertical
11490.39	30.75	43.60	14.30	39.50	10.20	40.95	54.00	-13.05	AV	Vertical
11490.13	33.32	43.60	14.30	39.50	10.20	43.52	74.00	-30.48	Pk	Horizontal
11490.13	30.45	43.60	14.30	39.50	10.20	40.65	54.00	-13.35	AV	Horizontal
13286.77	32.25	42.60	15.90	38.90	12.20	44.45	74.00	-29.55	Pk	Vertical
13286.77	29.74	42.60	15.90	38.90	12.20	41.94	54.00	-12.06	AV	Vertical
13283.78	32.06	42.60	15.90	38.90	12.20	44.26	74.00	-29.74	Pk	Horizontal
13283.78	28.97	42.60	15.90	38.90	12.20	41.17	54.00	-12.83	AV	Horizontal
Mid Channel (802.11a/ 5785 MHz)										
3253.57	44.84	44.70	6.70	28.20	-9.80	35.04	68.20	-33.16	Pk	Vertical
3253.57	41.26	44.70	6.70	28.20	-9.80	31.46	54.00	-22.54	AV	Vertical
3252.66	44.49	44.70	6.70	28.20	-9.80	34.69	68.20	-33.51	Pk	Horizontal
3252.66	41.99	44.70	6.70	28.20	-9.80	32.19	54.00	-21.81	AV	Horizontal
3991.77	39.84	44.20	7.90	29.70	-6.60	33.24	74.00	-40.76	Pk	Vertical
3991.77	36.75	44.20	7.90	29.70	-6.60	30.15	54.00	-23.85	AV	Vertical
3990.14	39.78	44.20	7.90	29.70	-6.60	33.18	74.00	-40.82	Pk	Horizontal
3990.14	36.30	44.20	7.90	29.70	-6.60	29.70	54.00	-24.30	AV	Horizontal
7224.41	37.60	43.50	11.40	35.50	3.40	41.00	68.20	-27.20	Pk	Vertical
7224.41	33.60	43.50	11.40	35.50	3.40	37.00	54.00	-17.00	AV	Vertical
7232.48	37.10	43.50	11.40	35.50	3.40	40.50	68.20	-27.70	Pk	Horizontal
7232.48	34.51	43.50	11.40	35.50	3.40	37.91	54.00	-16.09	AV	Horizontal
10584.75	38.79	44.50	13.80	38.80	8.10	46.89	68.20	-21.31	Pk	Vertical
10584.75	36.70	44.50	13.80	38.80	8.10	44.80	54.00	-9.20	AV	Vertical
10581.76	39.01	44.50	13.80	38.80	8.10	47.11	68.20	-21.09	Pk	Horizontal
10581.76	36.78	44.50	13.80	38.80	8.10	44.88	54.00	-9.12	AV	Horizontal
11570.16	34.03	43.60	14.30	39.50	10.20	44.23	74.00	-29.77	Pk	Vertical
11570.16	30.80	43.60	14.30	39.50	10.20	41.00	54.00	-13.00	AV	Vertical
11570.03	33.68	43.60	14.30	39.50	10.20	43.88	74.00	-30.12	Pk	Horizontal
11570.03	29.97	43.60	14.30	39.50	10.20	40.17	54.00	-13.83	AV	Horizontal
13296.01	32.45	42.60	15.90	38.90	12.20	44.65	74.00	-29.35	Pk	Vertical
13296.01	29.10	42.60	15.90	38.90	12.20	41.30	54.00	-12.70	AV	Vertical
13297.45	32.11	42.60	15.90	38.90	12.20	44.31	74.00	-29.69	Pk	Horizontal
13297.45	29.48	42.60	15.90	38.90	12.20	41.68	54.00	-12.32	AV	Horizontal



High Channel (802.11a/ 5825 MHz)										
3249.54	44.31	44.70	6.70	28.20	-9.80	34.51	68.20	-33.69	Pk	Vertical
3249.54	40.74	44.70	6.70	28.20	-9.80	30.94	54.00	-23.06	AV	Vertical
3247.02	43.98	44.70	6.70	28.20	-9.80	34.18	68.20	-34.02	Pk	Horizontal
3247.02	40.81	44.70	6.70	28.20	-9.80	31.01	54.00	-22.99	AV	Horizontal
3983.91	39.38	44.20	7.90	29.70	-6.60	32.78	74.00	-41.22	Pk	Vertical
3983.91	35.81	44.20	7.90	29.70	-6.60	29.21	54.00	-24.79	AV	Vertical
3989.08	40.14	44.20	7.90	29.70	-6.60	33.54	74.00	-40.46	Pk	Horizontal
3989.08	35.89	44.20	7.90	29.70	-6.60	29.29	54.00	-24.71	AV	Horizontal
7231.58	36.44	43.50	11.40	35.50	3.40	39.84	68.20	-28.36	Pk	Vertical
7231.58	33.67	43.50	11.40	35.50	3.40	37.07	54.00	-16.93	AV	Vertical
7224.11	36.57	43.50	11.40	35.50	3.40	39.97	68.20	-28.23	Pk	Horizontal
7224.11	34.71	43.50	11.40	35.50	3.40	38.11	54.00	-15.89	AV	Horizontal
10636.60	39.38	44.50	13.80	38.80	8.10	47.48	74.00	-26.52	Pk	Vertical
10636.60	35.81	44.50	13.80	38.80	8.10	43.91	54.00	-10.09	AV	Vertical
10640.13	39.80	44.50	13.80	38.80	8.10	47.90	74.00	-26.10	Pk	Horizontal
10640.13	36.22	44.50	13.80	38.80	8.10	44.32	54.00	-9.68	AV	Horizontal
11650.11	34.15	43.60	14.30	39.50	10.20	44.35	74.00	-29.65	Pk	Vertical
11650.11	30.57	43.60	14.30	39.50	10.20	40.77	54.00	-13.23	AV	Vertical
11650.37	33.24	43.60	14.30	39.50	10.20	43.44	74.00	-30.56	Pk	Horizontal
11650.37	30.76	43.60	14.30	39.50	10.20	40.96	54.00	-13.04	AV	Horizontal
13287.31	32.20	42.70	18.00	37.10	12.40	44.60	74.00	-29.40	Pk	Vertical
13287.31	29.67	42.70	18.00	37.10	12.40	42.07	54.00	-11.93	AV	Vertical
13297.89	31.83	42.70	18.00	37.10	12.40	44.23	74.00	-29.77	Pk	Horizontal
13297.89	28.72	42.70	18.00	37.10	12.40	41.12	54.00	-12.88	AV	Horizontal


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Scan with 802.11a,802.11n (HT-20),802.11n (HT-40), 802.11ac (VHT-20),802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11n (HT-20).
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
- Pre-scan the SISO mode, only the worst-case results were reported.




3.2.9 RESTRICTED FREQUENCY BANDS AND BAND EDGE
U-NII-1 5150-5250MHz

802.11a20-L-H

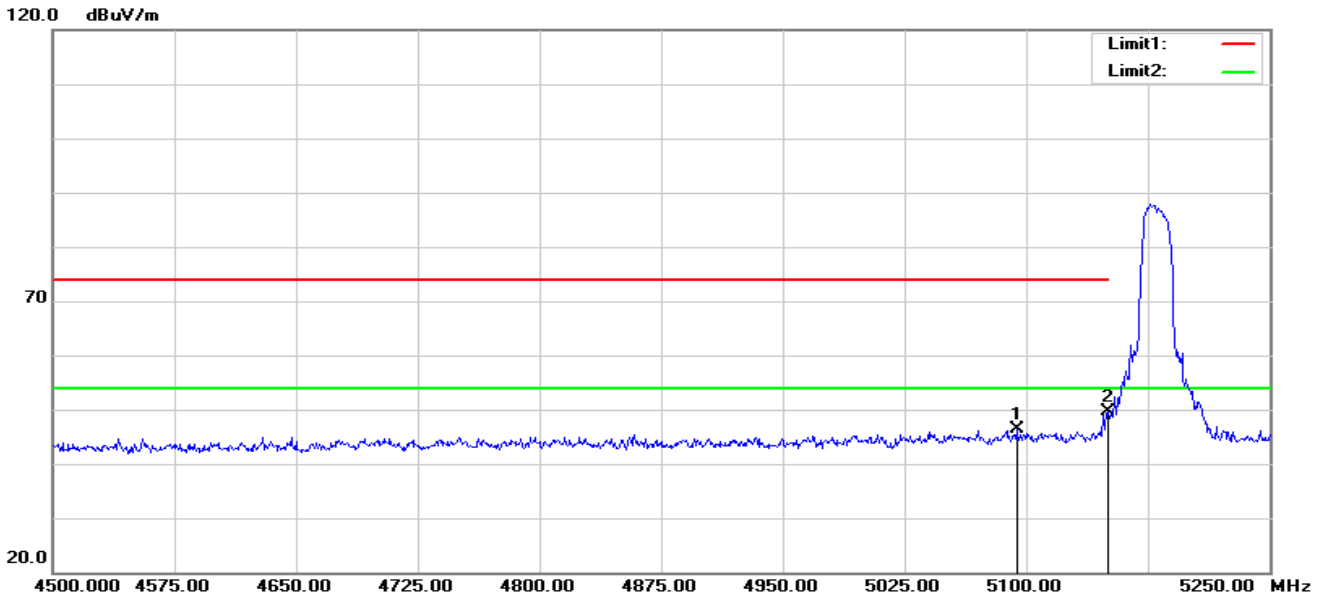

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5094.000	52.15	-5.76	46.39	74.00	-27.61	peak
2	5150.000	55.38	-5.73	49.65	74.00	-24.35	peak


802.11a20-L-V

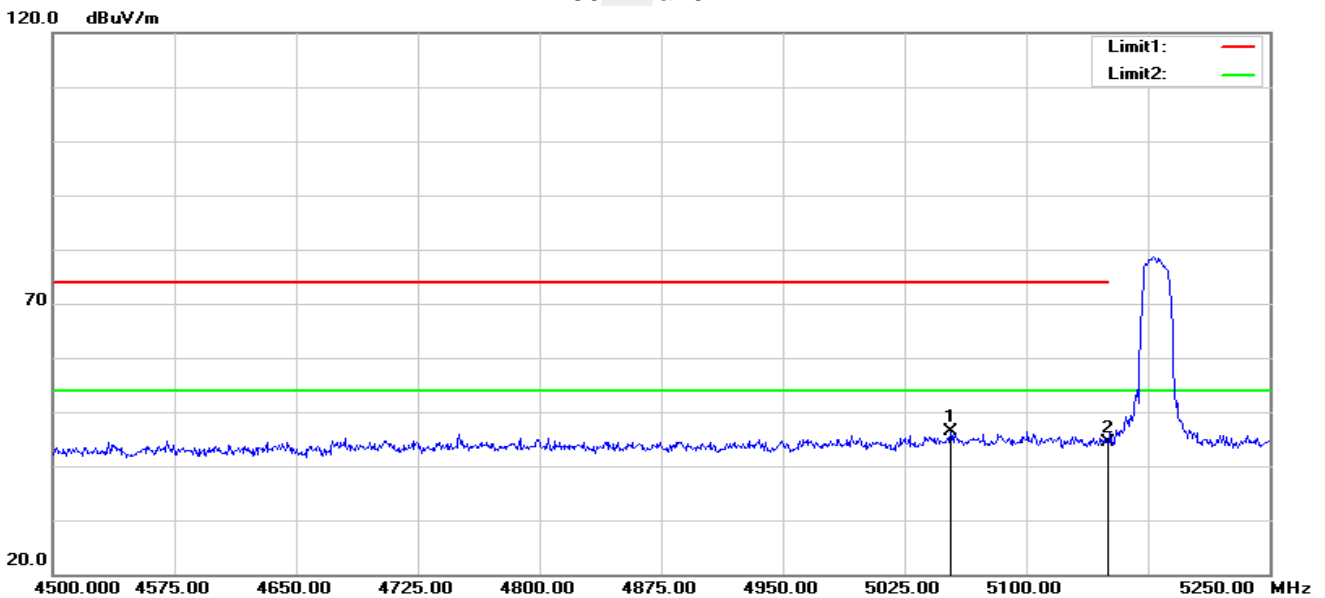

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5053.500	52.27	-5.95	46.32	74.00	-27.68	peak
2	5150.000	50.18	-5.73	44.45	74.00	-29.55	peak




802.11a20-H-H

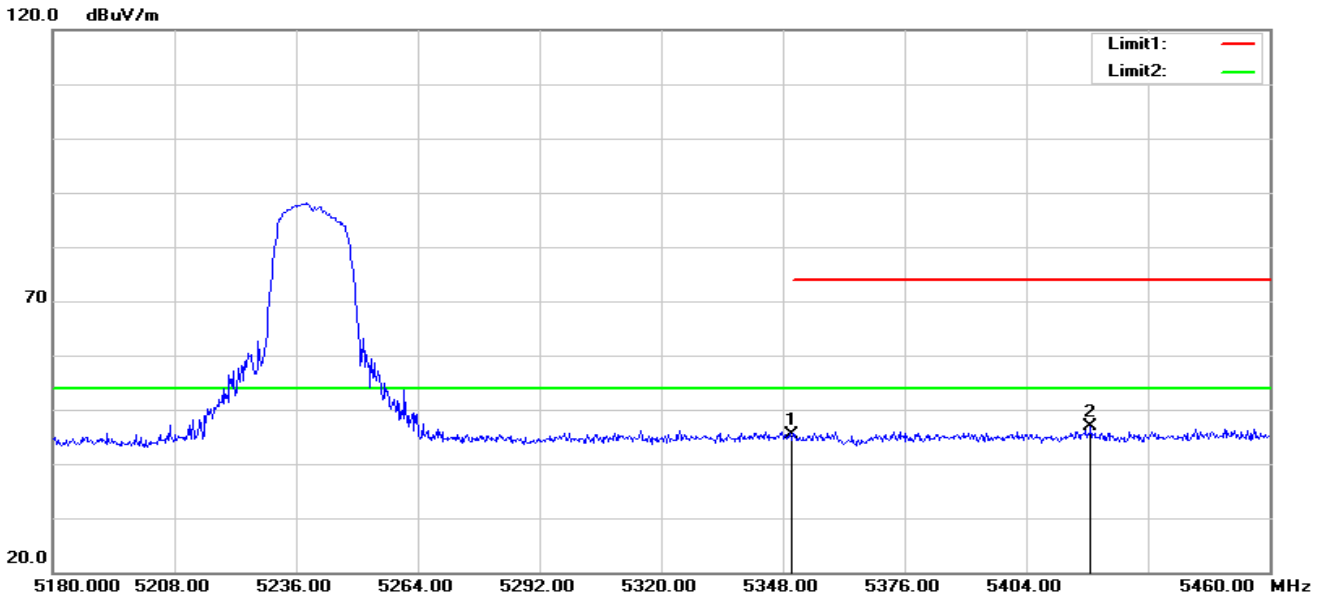

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	50.62	-5.23	45.39	74.00	-28.61	peak
2	5418.840	51.97	-5.20	46.77	74.00	-27.23	peak


802.11a20-H-V

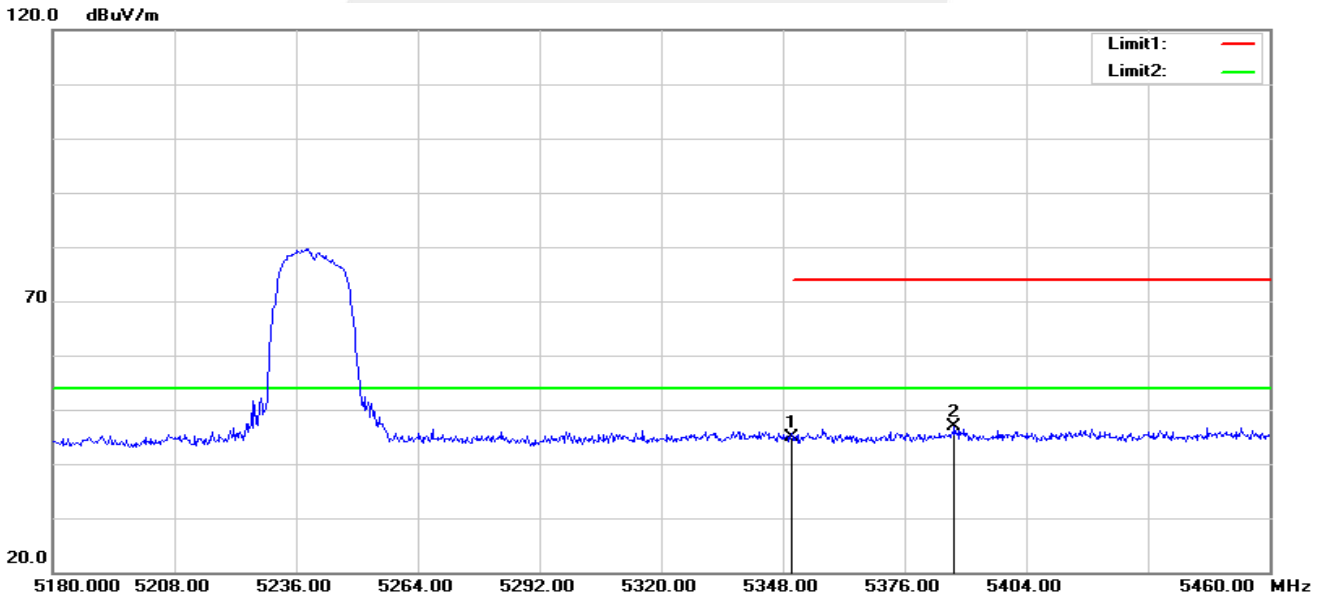

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	50.19	-5.23	44.96	74.00	-29.04	peak
2	5387.480	52.08	-5.24	46.84	74.00	-27.16	peak




802.11n40-L-H

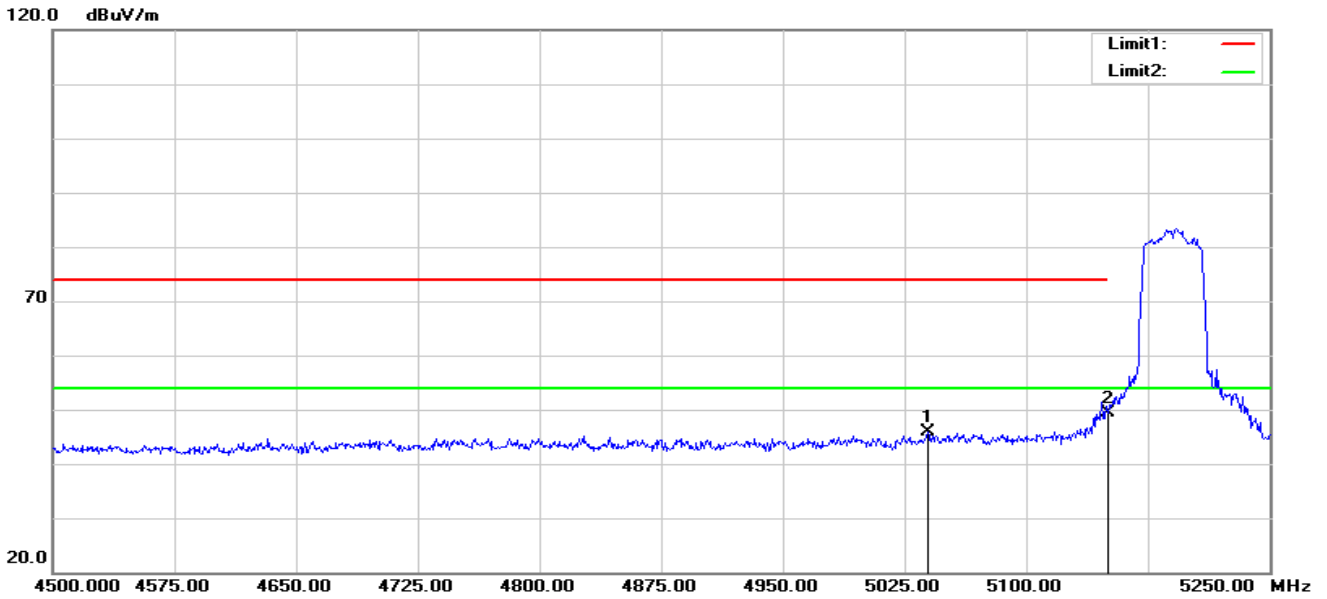

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5039.250	51.90	-6.01	45.89	74.00	-28.11	peak
2	5150.000	55.02	-5.73	49.29	74.00	-24.71	peak


802.11n40-L-V

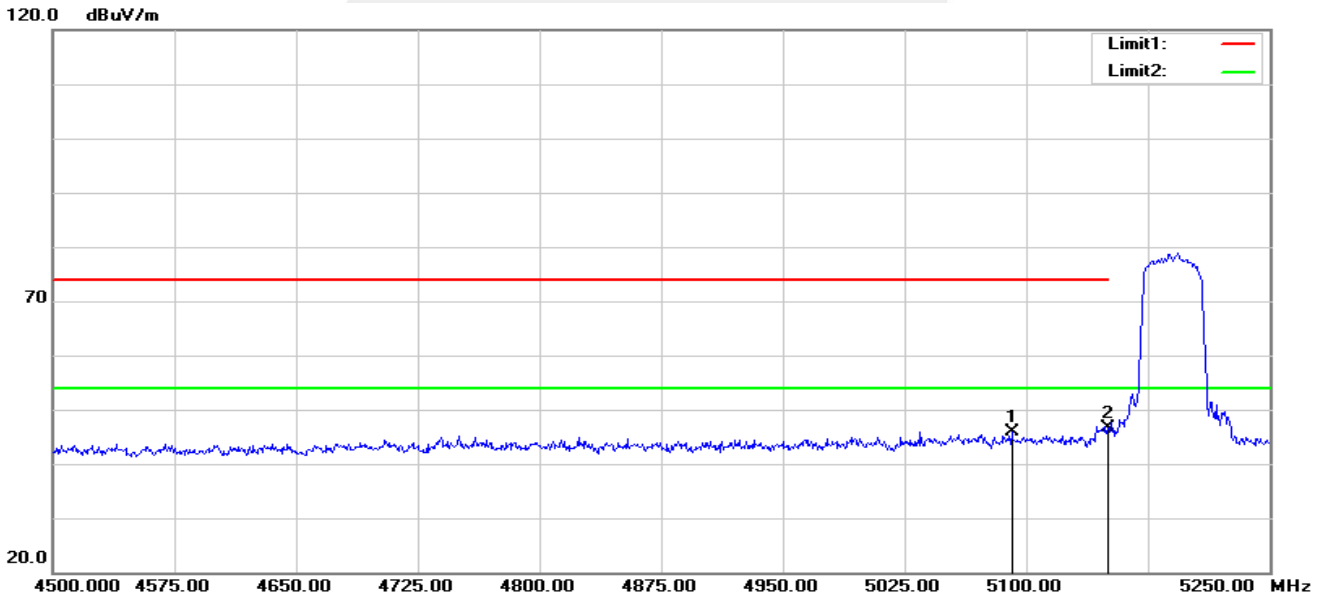

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5091.000	51.67	-5.78	45.89	74.00	-28.11	peak
2	5150.000	52.31	-5.73	46.58	74.00	-27.42	peak




802.11n40-H-H

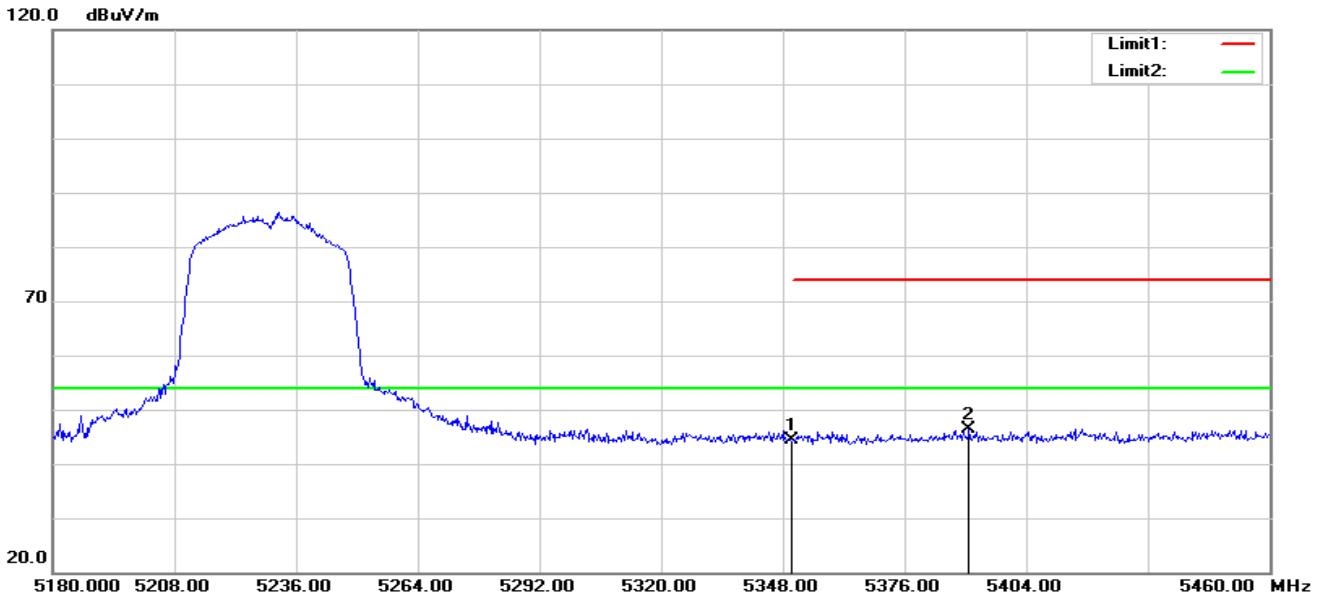

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.67	-5.23	44.44	74.00	-29.56	peak
2	5390.840	51.53	-5.25	46.28	74.00	-27.72	peak


802.11n40-H-V

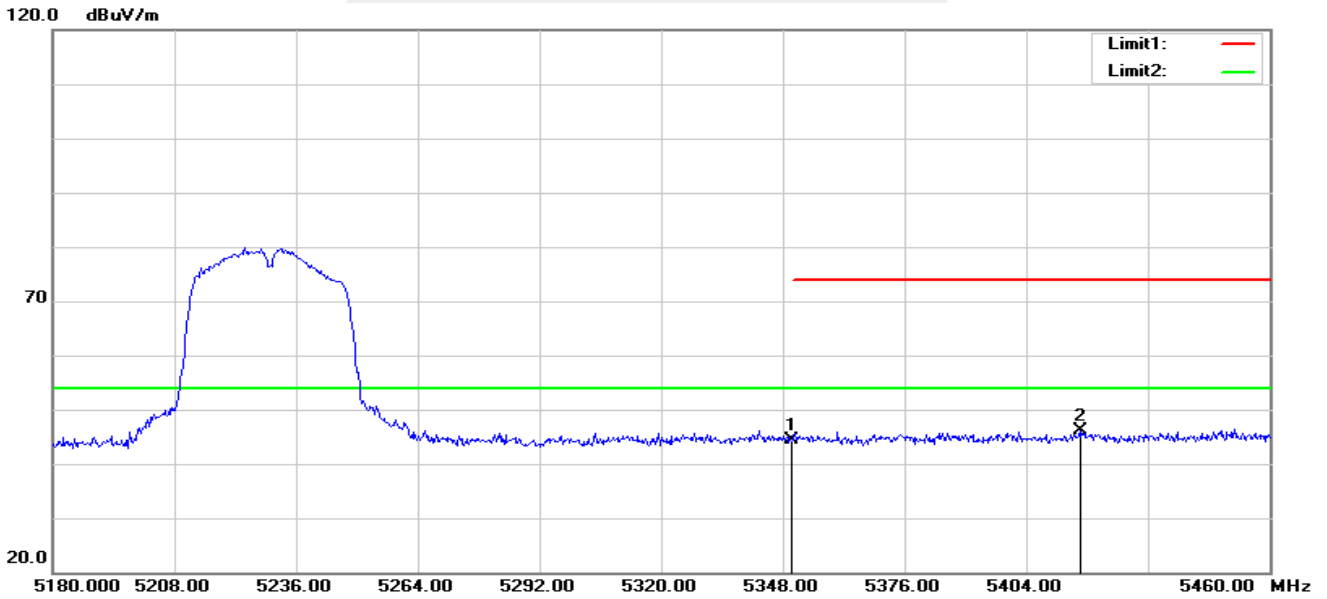

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.58	-5.23	44.35	74.00	-29.65	peak
2	5416.320	51.32	-5.22	46.10	74.00	-27.90	peak




802.11ac80-L-H

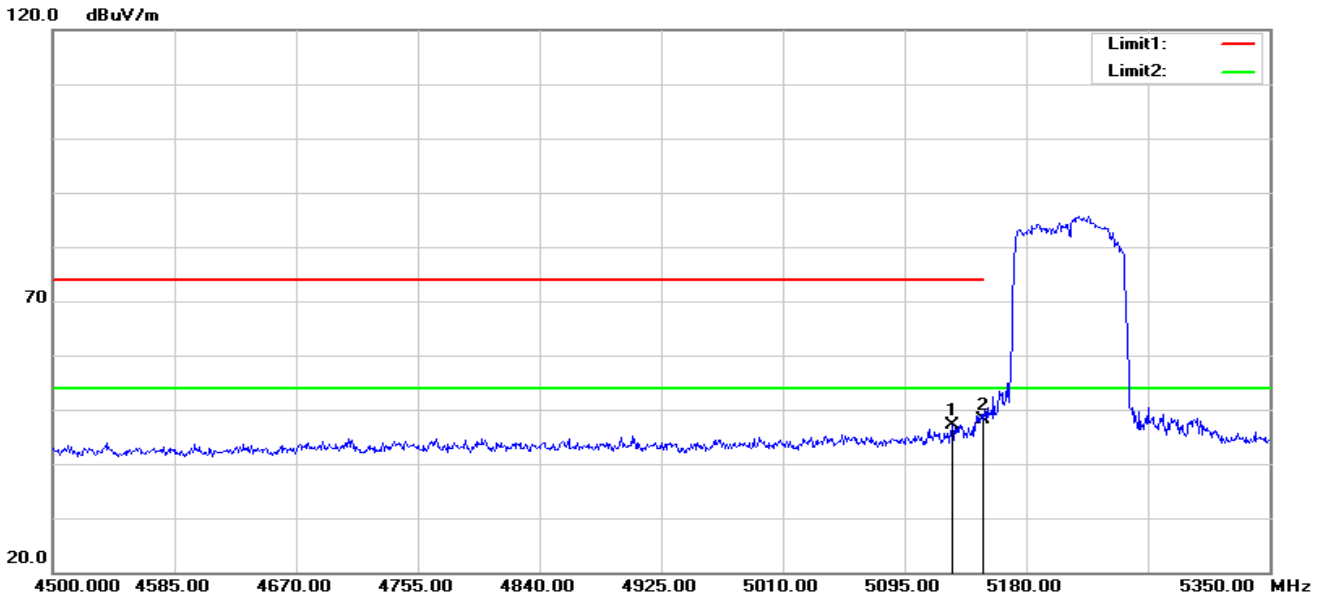

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5128.150	52.85	-5.74	47.11	74.00	-26.89	peak
2	5150.000	53.78	-5.73	48.05	74.00	-25.95	peak


802.11ac80-L-V

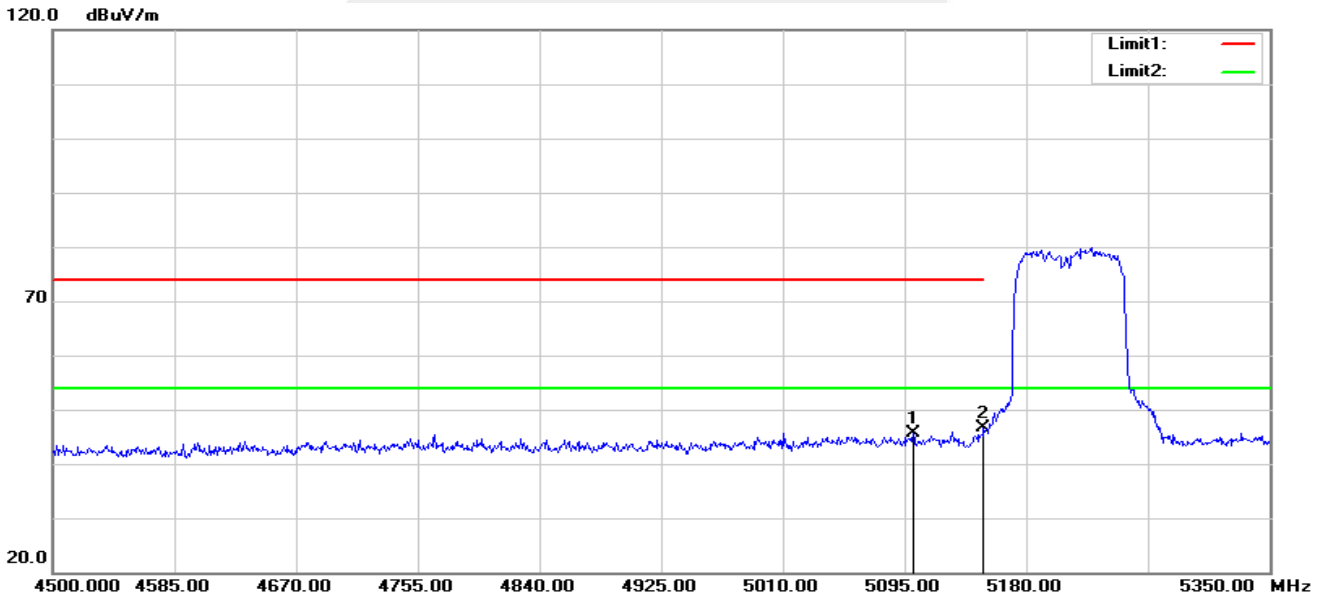

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5100.950	51.47	-5.74	45.73	74.00	-28.27	peak
2	5150.000	52.43	-5.73	46.70	74.00	-27.30	peak




802.11ac80-H-H

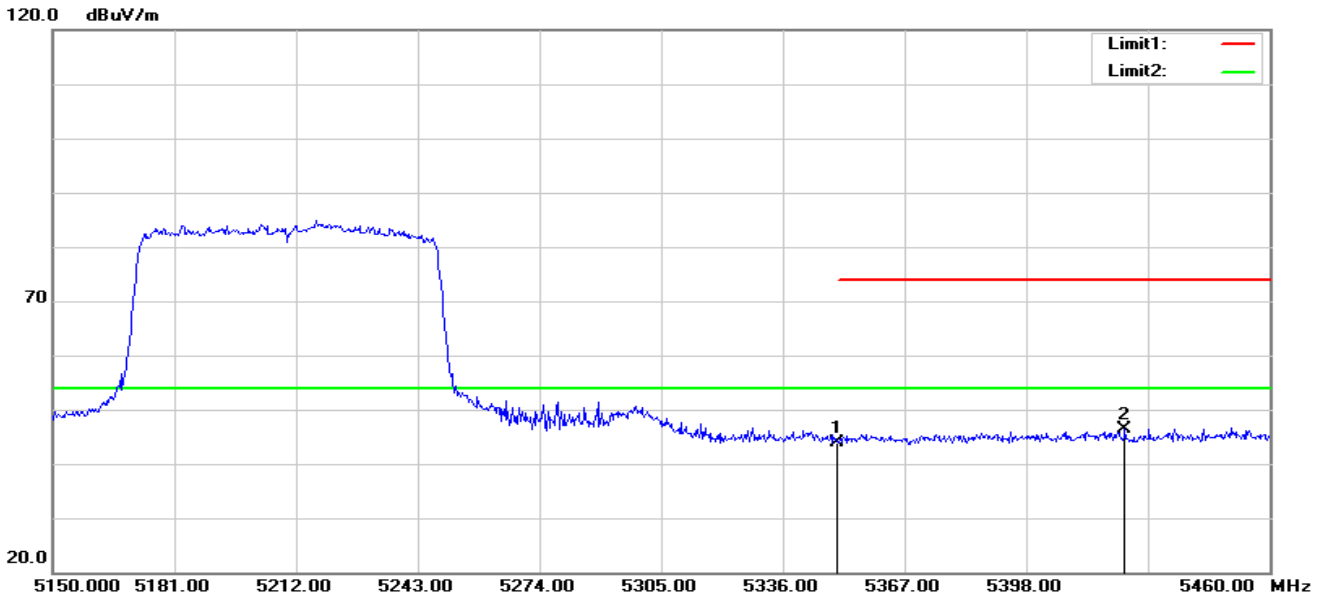

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.22	-5.23	43.99	74.00	-30.01	peak
2	5423.110	51.55	-5.20	46.35	74.00	-27.65	peak

802.11ac80-H-V

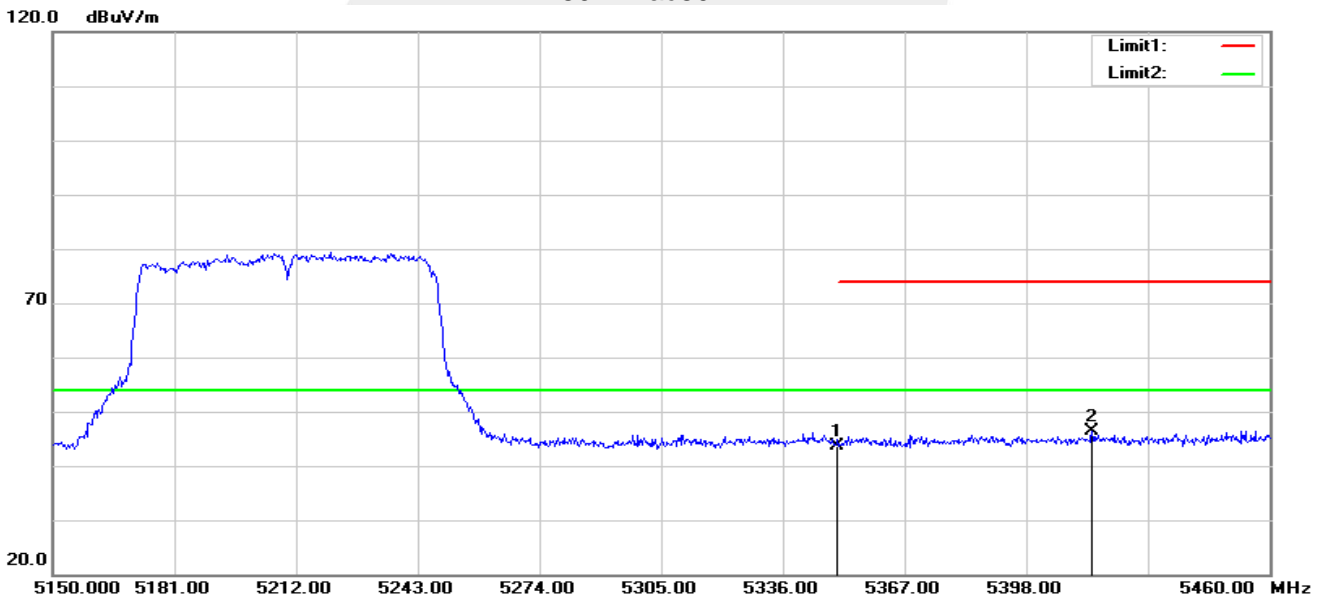


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	48.98	-5.23	43.75	74.00	-30.25	peak
2	5414.740	51.63	-5.22	46.41	74.00	-27.59	peak

Note: All modes have been tested. Only the worst mode shown in the report.



U-NII-3 (5.725-5.85 GHz)


802.11a20-L-H

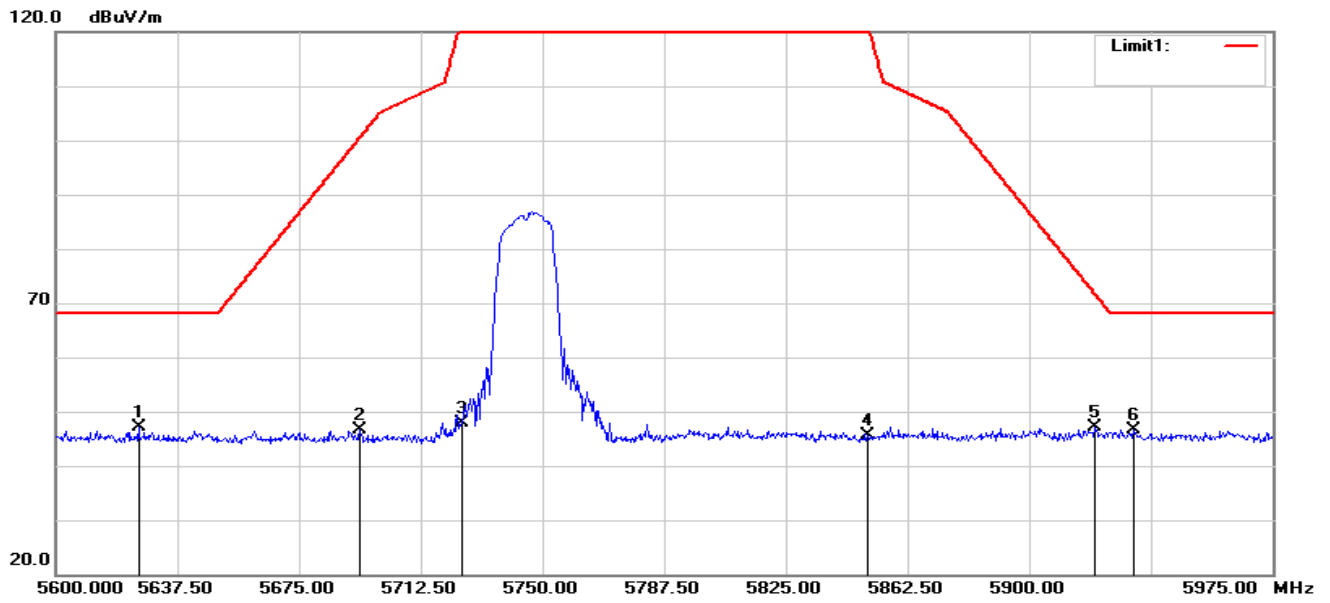

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5625.500	51.87	-4.69	47.18	68.20	-21.02	peak
2	5693.750	51.21	-4.66	46.55	100.58	-54.03	peak
3	5725.000	52.49	-4.57	47.92	122.20	-74.28	peak
4	5850.000	49.75	-4.10	45.65	122.20	-76.55	peak
5	5920.250	51.07	-3.92	47.15	71.72	-24.57	peak
6	5932.250	50.55	-3.94	46.61	68.20	-21.59	peak




802.11a20-L-V

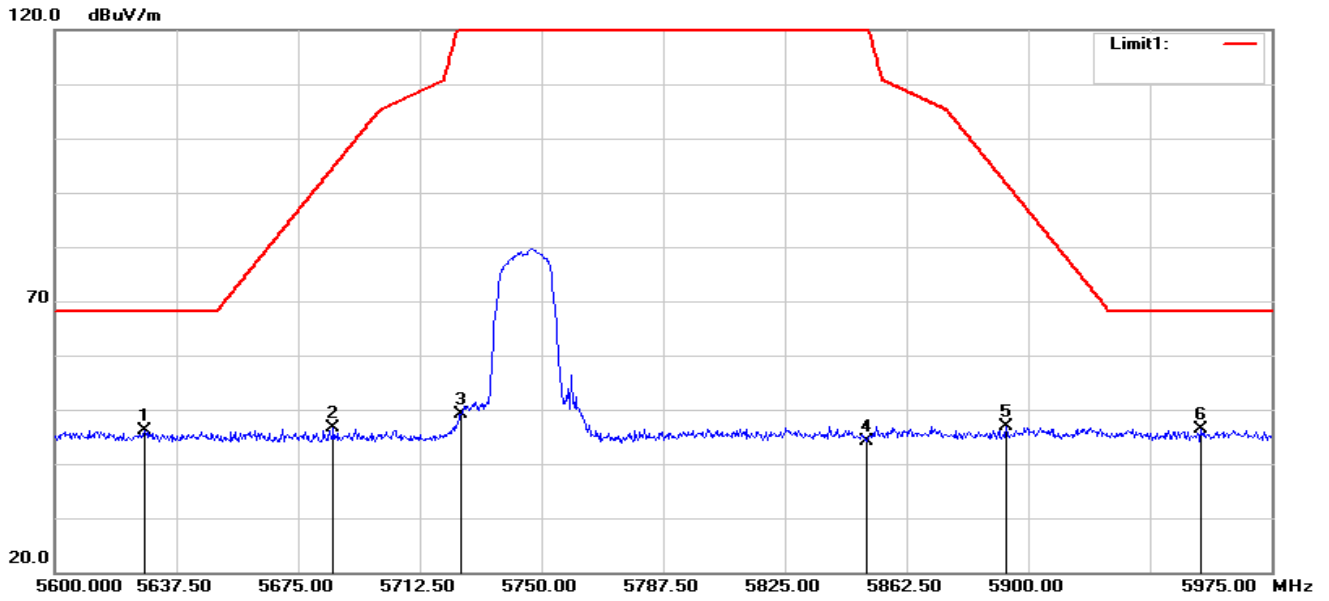

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5627.750	50.81	-4.69	46.12	68.20	-22.08	peak
2	5685.875	51.27	-4.66	46.61	94.75	-48.14	peak
3	5725.000	53.58	-4.57	49.01	122.20	-73.19	peak
4	5850.000	48.35	-4.10	44.25	122.20	-77.95	peak
5	5893.250	50.76	-3.91	46.85	91.70	-44.85	peak
6	5953.250	50.46	-3.97	46.49	68.20	-21.71	peak




802.11a20-H-H

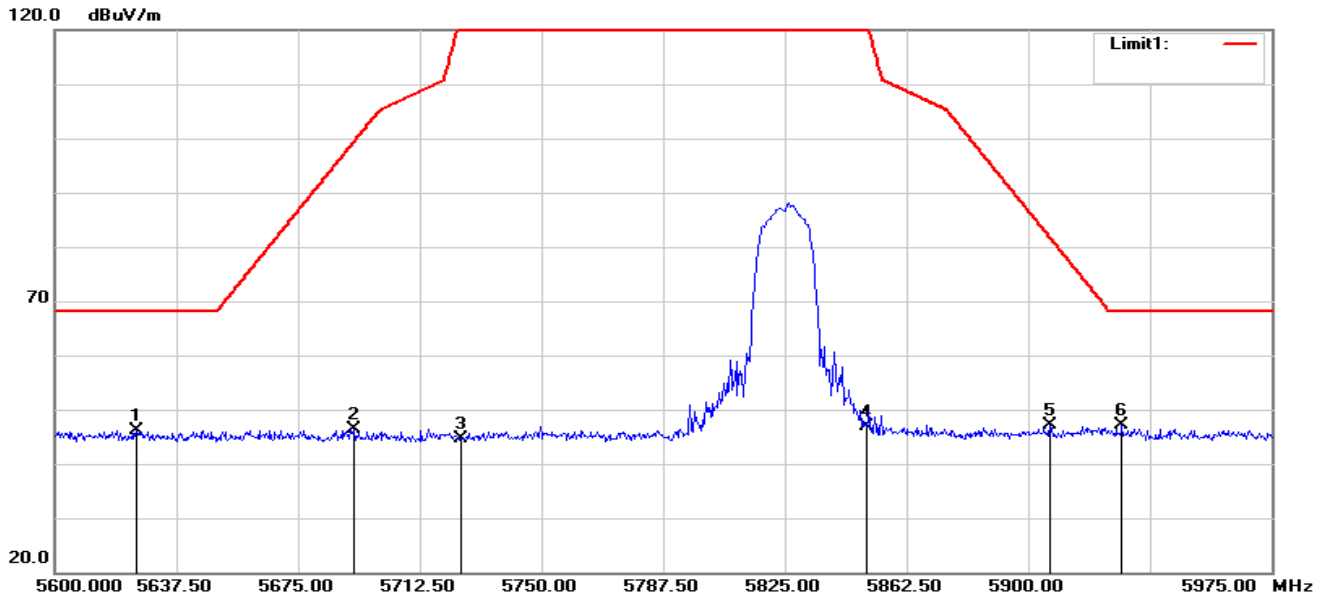

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5625.125	50.72	-4.69	46.03	68.20	-22.17	peak
2	5692.250	51.01	-4.66	46.35	99.47	-53.12	peak
3	5725.000	49.19	-4.57	44.62	122.20	-77.58	peak
4	5850.000	50.93	-4.10	46.83	122.20	-75.37	peak
5	5906.750	50.91	-3.89	47.02	81.70	-34.68	peak
6	5928.875	51.14	-3.93	47.21	68.20	-20.99	peak




802.11a20-H-V

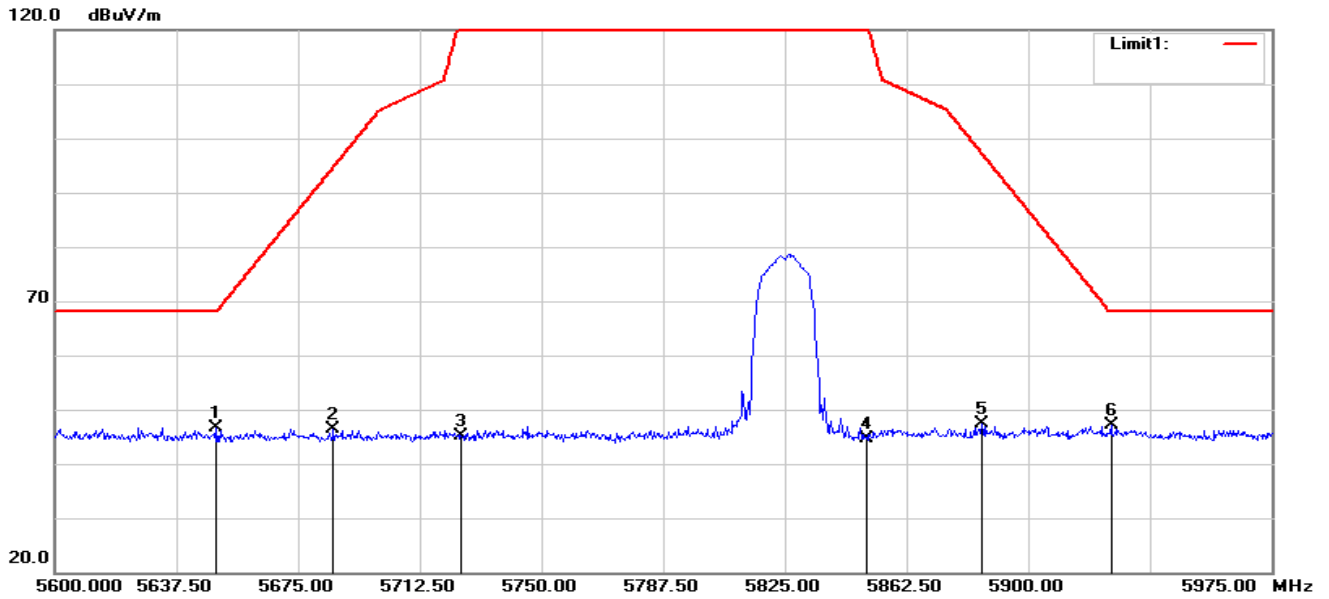

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5649.875	51.21	-4.68	46.53	68.20	-21.67	peak
2	5685.875	51.04	-4.66	46.38	94.75	-48.37	peak
3	5725.000	49.68	-4.57	45.11	122.20	-77.09	peak
4	5850.000	48.80	-4.10	44.70	122.20	-77.50	peak
5	5885.750	51.41	-3.94	47.47	97.25	-49.78	peak
6	5925.500	51.03	-3.92	47.11	68.20	-21.09	peak




802.11ac40-L-H

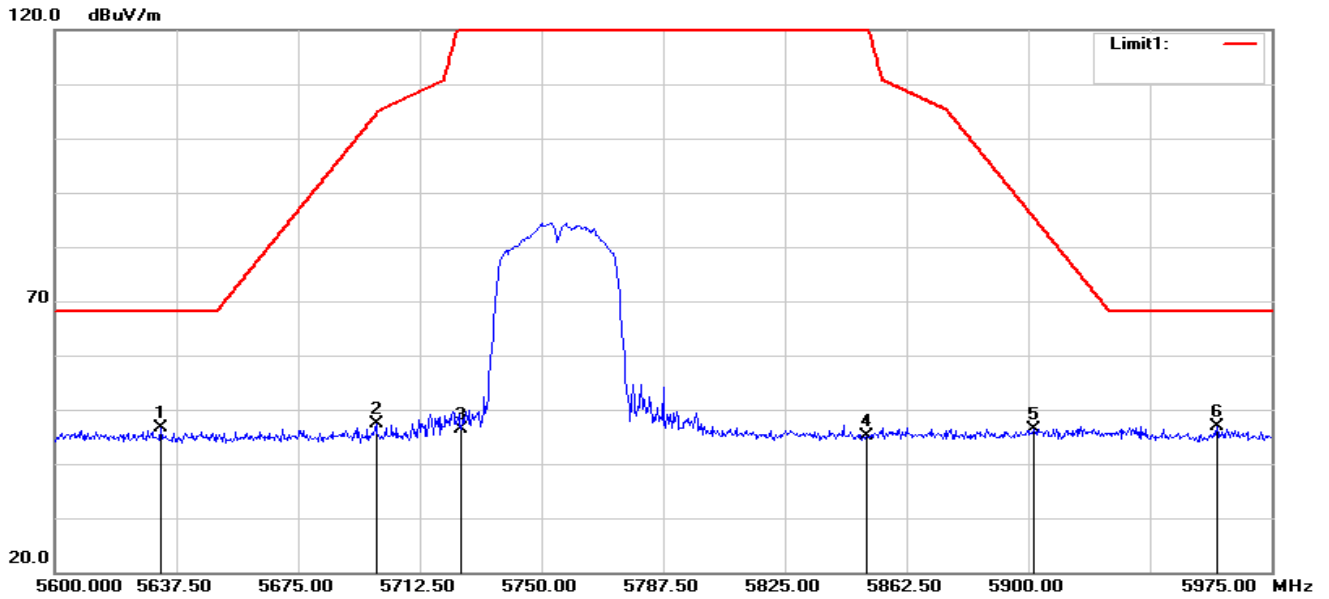

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5632.625	51.20	-4.69	46.51	68.20	-21.69	peak
2	5699.000	51.94	-4.66	47.28	104.46	-57.18	peak
3	5725.000	50.92	-4.57	46.35	122.20	-75.85	peak
4	5850.000	49.29	-4.10	45.19	122.20	-77.01	peak
5	5901.875	50.37	-3.89	46.48	85.31	-38.83	peak
6	5958.125	50.91	-3.98	46.93	68.20	-21.27	peak




802.11ac40-L-V

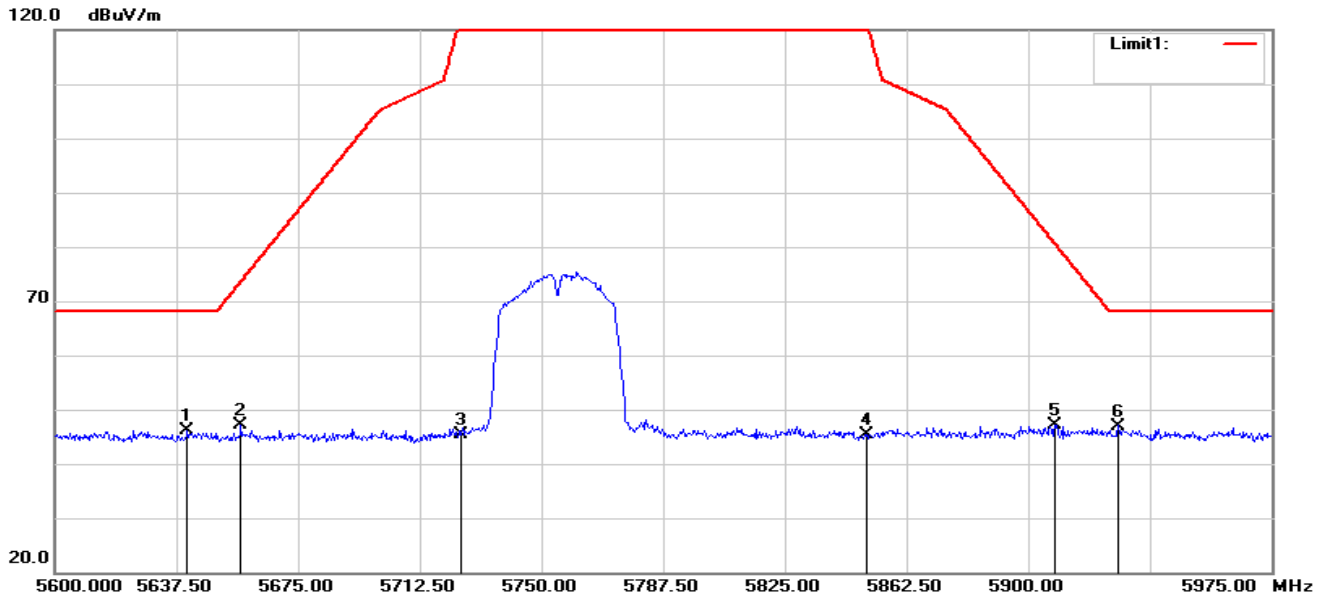

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.875	50.76	-4.68	46.08	68.20	-22.12	peak
2	5657.375	51.83	-4.68	47.15	73.66	-26.51	peak
3	5725.000	50.05	-4.57	45.48	122.20	-76.72	peak
4	5850.000	49.53	-4.10	45.43	122.20	-76.77	peak
5	5908.250	51.13	-3.90	47.23	80.59	-33.36	peak
6	5927.750	50.93	-3.93	47.00	68.20	-21.20	peak




802.11ac40-H-H

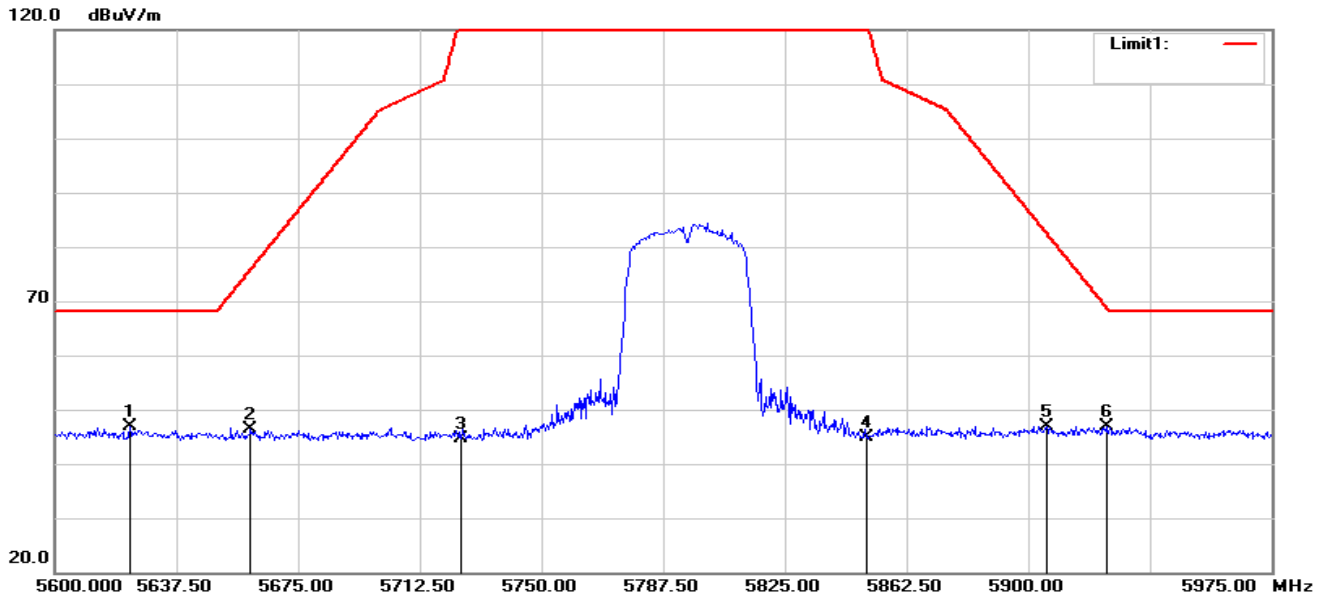

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5623.250	51.55	-4.69	46.86	68.20	-21.34	peak
2	5660.375	51.10	-4.67	46.43	75.88	-29.45	peak
3	5725.000	49.25	-4.57	44.68	122.20	-77.52	peak
4	5850.000	49.09	-4.10	44.99	122.20	-77.21	peak
5	5905.625	50.82	-3.89	46.93	82.54	-35.61	peak
6	5924.000	50.78	-3.92	46.86	68.94	-22.08	peak




802.11ac40-H-V

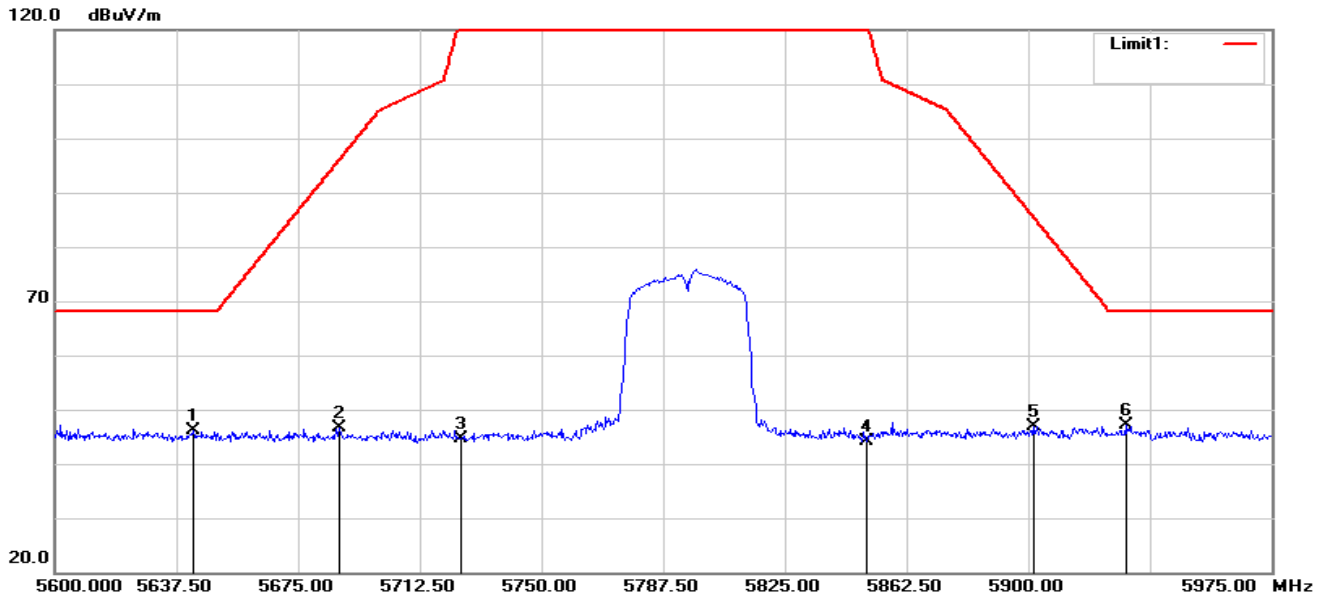

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5642.750	50.72	-4.68	46.04	68.20	-22.16	peak
2	5687.750	51.40	-4.67	46.73	96.14	-49.41	peak
3	5725.000	49.25	-4.57	44.68	122.20	-77.52	peak
4	5850.000	48.31	-4.10	44.21	122.20	-77.99	peak
5	5901.500	50.68	-3.88	46.80	85.59	-38.79	peak
6	5930.000	51.07	-3.93	47.14	68.20	-21.06	peak




802.11ac80-H

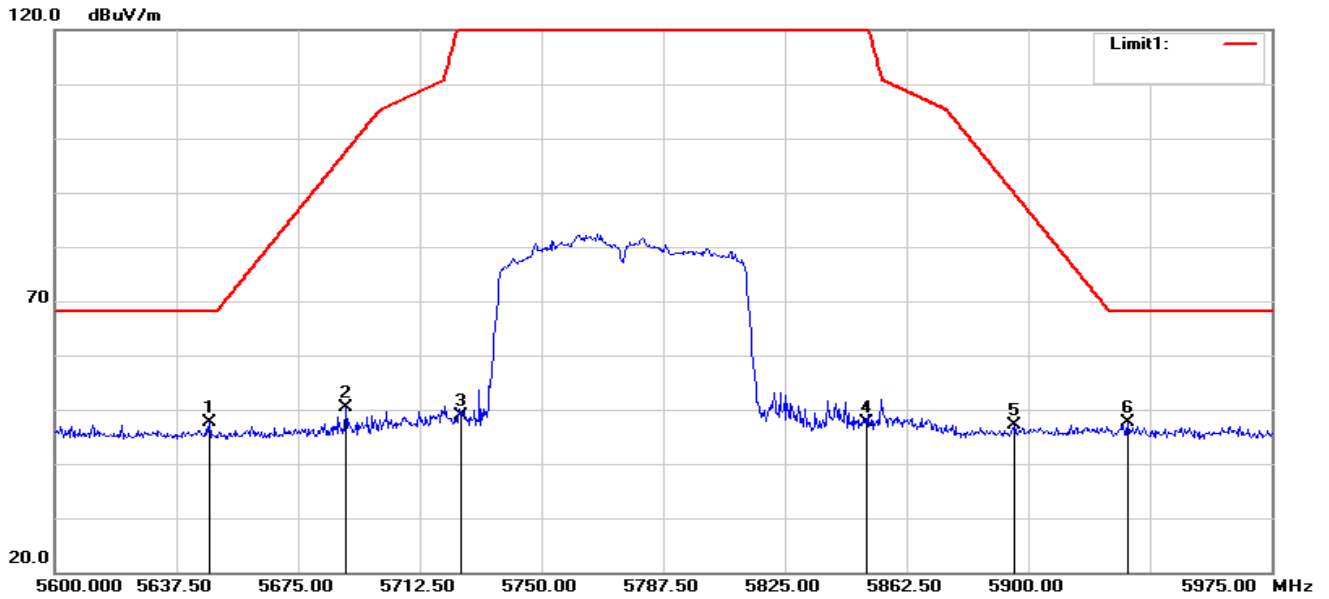

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5647.625	52.29	-4.68	47.61	68.20	-20.59	peak
2	5689.625	55.00	-4.67	50.33	97.52	-47.19	peak
3	5725.000	53.54	-4.57	48.97	122.20	-73.23	peak
4	5850.000	51.73	-4.10	47.63	122.20	-74.57	peak
5	5895.875	51.10	-3.90	47.20	89.75	-42.55	peak
6	5930.750	51.44	-3.93	47.51	68.20	-20.69	peak



802.11ac80-V

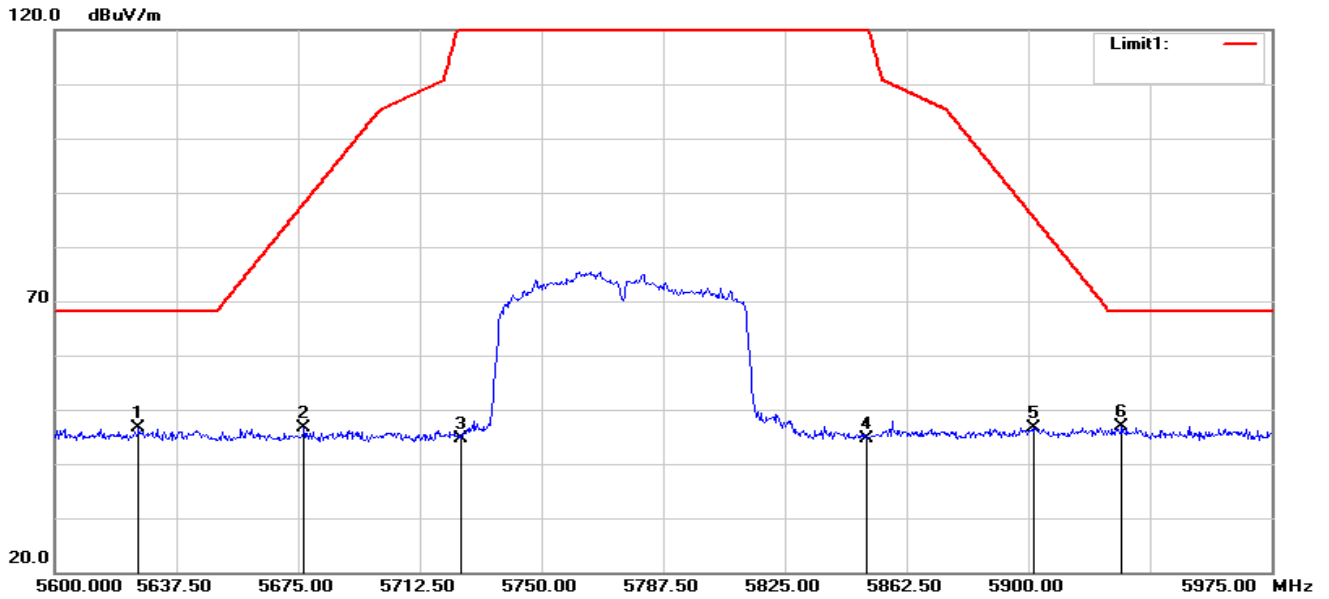

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5625.875	51.33	-4.69	46.64	68.20	-21.56	peak
2	5676.875	51.22	-4.67	46.55	88.09	-41.54	peak
3	5725.000	49.15	-4.57	44.58	122.20	-77.62	peak
4	5850.000	48.84	-4.10	44.74	122.20	-77.46	peak
5	5901.875	50.62	-3.89	46.73	85.31	-38.58	peak
6	5928.875	50.84	-3.93	46.91	68.20	-21.29	peak

Note: All modes have been tested. Only the worst mode shown in the report.



4. POWER SPECTRAL DENSITY TEST

4.1 LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB D02 General UNII Test Procedures New Rules v01r03.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz.

Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used.

The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHZ}$ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP




4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

Note: The test data please reference to attachment “STS2306300W05_Appendix 5G WIFI”.

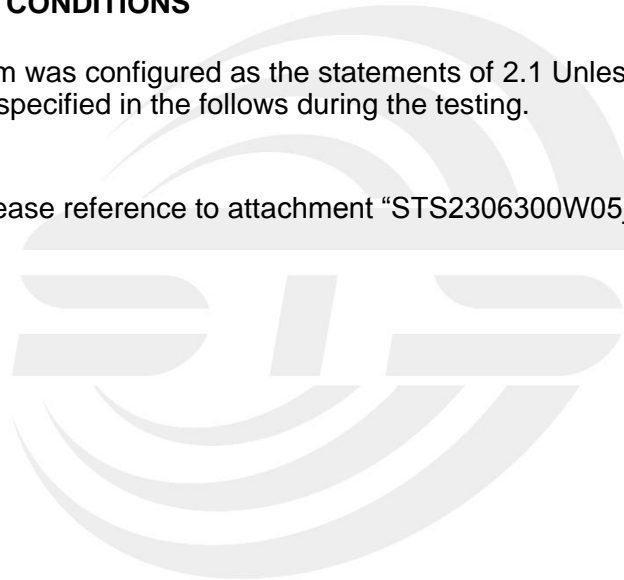

5. BANDWIDTH MEASUREMENT

5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

The following procedure shall be used for measuring 26 bandwidth.

5.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW \geq RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

Note: 1. The test data please reference to attachment "STS2306300W05_Appendix 5G WIFI".

5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth.

5.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

5.2.2 DEVIATION FROM STANDARD

No deviation.

5.2.3 TEST SETUP



5.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.2.5 TEST RESULTS

Note: 1. The test data please reference to attachment “STS2306300W05_Appendix 5G WIFI”.

5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

5.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.2 DEVIATION FROM STANDARD

No deviation.

5.3.3 TEST SETUP



5.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.3.5 TEST RESULTS

Note: 1. The test data please reference to attachment “STS2306300W05_Appendix 5G WIFI”.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Peak Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or 11 dBm + 10 log (26 dB emission bandwidth)	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5825	


6.2 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Note: The test data please reference to attachment “STS2306300W05_Appendix 5G WIFI”.




7. AUTOMATICALLY DISCONTINUE TRANSMISSION

7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

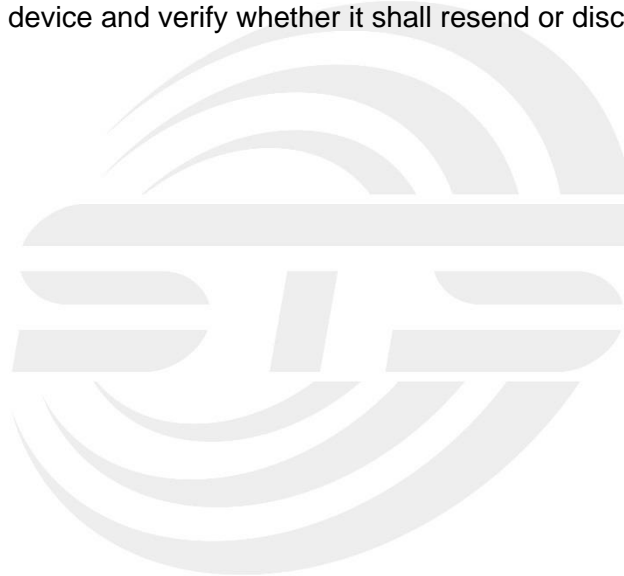



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is PIFA Antenna. It comply with the standard requirement.





APPENDIX - PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※

