



# TEST REPORT

**APPLICANT** : Hot Pepper Mobile Inc.  
**PRODUCT NAME** : Feature Phone  
**MODEL NAME** : HPPL62A  
**BRAND NAME** : Hot Pepper  
**FCC ID** : 2A33N-L62A  
**STANDARD(S)** : 47 CFR Part 2  
: 47 CFR Part 90, Subpart S  
**RECEIPT DATE** : 2022-09-06  
**TEST DATE** : 2022-09-08 to 2022-10-27  
**ISSUE DATE** : 2022-11-07

Edited by:

*Zeng Xiaoying*  
Zeng Xiaoying (Rapporteur)

Approved by:

*Shen Junsheng*  
Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information ..... 3**
- 1.1. Applicant and Manufacturer Information ..... 3**
- 1.2. Equipment Under Test (EUT) Description ..... 3**
- 1.3. Maximum E.R.P./E.I.R.P. and Emission Designator ..... 4**
- 1.4. Test Standards and Results ..... 5**
- 1.5. Environmental Conditions ..... 6**
- 2. 47 CFR Part 2, Part 90S Requirements ..... 7**
- 2.1. Transmitter Conducted Output Power and E.R.P./E.I.R.P. .... 7**
- 2.2. Occupied Bandwidth ..... 16**
- 2.3. Frequency Stability ..... 22**
- 2.4. Conducted Spurious Emissions ..... 24**
- 2.5. Band Edge ..... 29**
- 2.6. Radiated Spurious Emissions ..... 32**
- Annex A Test Uncertainty ..... 38**
- Annex B Testing Laboratory Information ..... 39**

Change History		
Version	Date	Reason for change
1.0	2022-11-07	First edition



# 1. Technical Information

Note: Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Hot Pepper Mobile Inc.
<b>Applicant Address:</b>	350 10th Ave 1000 Ste San Diego CA 92101-8705
<b>Manufacturer:</b>	Hot Pepper Mobile Inc.
<b>Manufacturer Address:</b>	350 10th Ave 1000 Ste San Diego CA 92101-8705

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	Feature Phone	
<b>Sample No.:</b>	4#	
<b>Hardware Version:</b>	AA30_P2	
<b>Software Version:</b>	HPP-L62A-1.0.11	
<b>Modulation Type:</b>	QPSK, 16QAM	
<b>Operation Band:</b>	Band 26	
<b>Frequency Range:</b>	LTE Band 26	Tx: 814MHz–824MHz
		Rx: 859MHz–869MHz
<b>Channel Bandwidth</b>	LTE Band 26	1.4MHz, 3MHz, 5MHz, 10MHz
<b>Antenna Type:</b>	Fixed Internal Antenna	
<b>Antenna Gain:</b>	LTE Band 26	-0.59dBi
<b>Accessory Information:</b>	Battery	
	Brand Name:	N/A
	Model No.:	HLI2205G
	Serial No.:	N/A
	Capacity:	2000mAh
	Rated Voltage:	3.8V
	Charge Limit:	4.35V
	Manufacturer:	Shenzhen Aerospace Electronic Co., Ltd.



<b>Accessory Information:</b>	AC Adapter	
	Brand Name:	N/A
	Model No.:	TPA-46050130UU
	Serial No.:	N/A
	Rated Output:	5V=1.3A
	Rated Input:	100-240V~50/60Hz, 0.3A
	Manufacturer:	Shenzhen Tianyin Electronics Co., Ltd.
	USB Cable	
	Model No.:	HY-036024
	Manufacturer:	Hengyue Communication Technology Co., Ltd.

**Note 1:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

### 1.3. Maximum E.R.P./E.I.R.P. and Emission Designator

LTE Band 26	Maximum E.R.P./E.I.R.P. (W)		Emission Designator (99%OBW)	
	BW(MHz)	QPSK	16QAM	QPSK
10	0.120	0.107	9M00G7D	8M95W7D
5	0.124	0.111	4M50G7D	4M51W7D
3	0.123	0.109	2M69G7D	2M69W7D
1.4	0.123	0.114	1M10G7D	1M10W7D



## 1.4. Test Standards and Results

The objective of the report is to perform testing according to Part 2 and Part 90 for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 90	Miscellaneous Wireless Communications Services

Test detailed items/section required by FCC rules and results are as below:

Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
2.1046, 90.635(b)	Transmitter Conducted Output Power and E.R.P./E.I.R.P.	Oct. 27, 2022	Yu Xiaoming Li Huaijie	PASS	No deviation
90.209	Occupied Bandwidth	Sep. 09, 2022	Li Huaijie	PASS	No deviation
2.1055, 90.213	Frequency Stability	Sep. 19, 2022	Li Huaijie	PASS	No deviation
2.1051, 90.691	Conducted Spurious Emissions	Sep. 13, 2022	Li Huaijie	PASS	No deviation
2.1051, 90.691	Band Edge	Sep. 08, 2022	Li Huaijie	PASS	No deviation
2.1053, 90.691	Radiated Spurious Emissions	Sep. 12, 2022	Gao Jianrou	PASS	No deviation

**Note 1:** The tests were performed according to the method of measurements prescribed in KDB971168 D01 v03 and ANSI/TIA-603-E-2016.

**Note 2:** The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 24.5dB contains two parts that cable loss 14.5dB and Attenuator 10dB.

**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 4:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



## 1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

## 2.47 CFR Part 2, Part 90S Requirements


### 2.1. Transmitter Conducted Output Power and E.R.P./E.I.R.P.

#### 2.1.1. Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

According to FCC section 90.635(b) for LTE Band 26, the maximum output power of the transmitter for mobile stations is 100 watts.

#### 2.1.2. Test Description

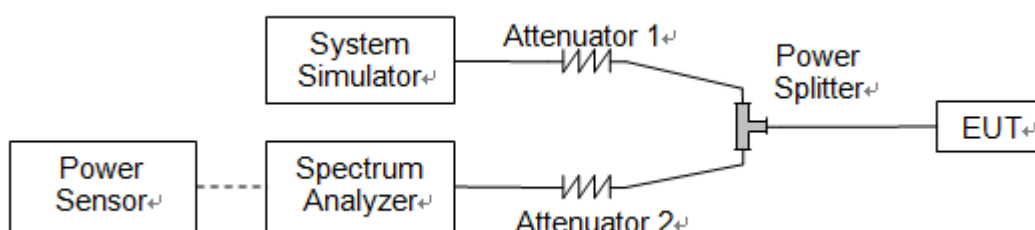

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

#### 2.1.3. Test procedure

KDB 971168 D01v03 Section 5.2 and ANSI/TIA-603-E-2016.

$EIRP \text{ (dBm)} = \text{Conducted Output Power (dBm)} + \text{Antenna Gain (dBi)}$

$ERP \text{ (dBm)} = EIPR \text{ (dBm)} - 2.15$

**2.1.4. Result****Conducted Output Power**

<b>LTE Band 26</b>						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				/	26740	/
Frequency (MHz)				/	819.0	/
10	QPSK	1	0	/	23.52	/
10	QPSK	1	25	/	23.52	/
10	QPSK	1	49	/	23.39	/
10	QPSK	25	0	/	22.59	/
10	QPSK	25	12	/	22.71	/
10	QPSK	25	25	/	22.50	/
10	QPSK	50	0	/	22.74	/
10	16QAM	1	0	/	22.90	/
10	16QAM	1	25	/	22.93	/
10	16QAM	1	49	/	23.02	/
10	16QAM	25	0	/	21.82	/
10	16QAM	25	12	/	21.51	/
10	16QAM	25	25	/	21.50	/
10	16QAM	50	0	/	21.63	/





LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				26715	26740	26765
Frequency (MHz)				816.5	819.0	821.5
5	QPSK	1	0	23.64	23.52	23.55
5	QPSK	1	12	23.69	23.66	23.63
5	QPSK	1	24	23.68	23.63	23.67
5	QPSK	12	0	22.63	22.53	22.53
5	QPSK	12	7	22.63	22.53	22.61
5	QPSK	12	13	22.67	22.66	22.63
5	QPSK	25	0	22.75	22.70	22.69
5	16QAM	1	0	23.19	23.15	23.09
5	16QAM	1	12	23.16	23.07	23.09
5	16QAM	1	24	23.01	22.93	22.91
5	16QAM	12	0	21.90	21.78	21.87
5	16QAM	12	7	21.60	21.51	21.48
5	16QAM	12	13	21.51	21.44	21.50
5	16QAM	25	0	21.90	21.86	21.87



LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				26705	26740	26775
Frequency (MHz)				815.5	819.0	822.5
3	QPSK	1	0	23.40	23.36	23.37
3	QPSK	1	8	23.46	23.40	23.45
3	QPSK	1	14	23.65	23.57	23.61
3	QPSK	8	0	22.67	22.55	22.55
3	QPSK	8	4	22.94	22.93	22.88
3	QPSK	8	7	22.80	22.68	22.78
3	QPSK	15	0	22.67	22.58	22.65
3	16QAM	1	0	23.03	22.98	22.91
3	16QAM	1	8	23.04	22.98	23.00
3	16QAM	1	14	23.11	23.03	23.05
3	16QAM	8	0	21.67	21.64	21.60
3	16QAM	8	4	21.76	21.68	21.70
3	16QAM	8	7	21.49	21.38	21.37
3	16QAM	15	0	21.91	21.86	21.84



LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				26697	26740	26783
Frequency (MHz)				814.7	819.0	823.3
1.4	QPSK	1	0	23.58	23.49	23.54
1.4	QPSK	1	3	23.64	23.54	23.52
1.4	QPSK	1	5	23.58	23.55	23.51
1.4	QPSK	3	0	22.75	22.71	22.67
1.4	QPSK	3	1	22.90	22.88	22.86
1.4	QPSK	3	3	22.57	22.54	22.56
1.4	QPSK	6	0	22.55	22.44	22.50
1.4	16QAM	1	0	22.90	22.89	22.80
1.4	16QAM	1	3	23.31	23.28	23.30
1.4	16QAM	1	5	23.10	22.99	23.06
1.4	16QAM	3	0	21.53	21.52	21.50
1.4	16QAM	3	1	21.58	21.55	21.51
1.4	16QAM	3	3	21.71	21.67	21.66
1.4	16QAM	6	0	21.91	21.81	21.83



**Effective Radiated Power and Effective Isotropic Radiated Power**

LTE Band 26				Measured E.R.P.			
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.	Middle Ch. / Freq.	High Ch. / Freq.	
Channel				/	26740	/	
Frequency (MHz)				/	819	/	
				/	dBm	W	/
10	QPSK	1	0	/	20.78	0.120	/
10	QPSK	1	25	/	20.78	0.120	/
10	QPSK	1	49	/	20.65	0.116	/
10	QPSK	25	0	/	19.85	0.097	/
10	QPSK	25	12	/	19.97	0.099	/
10	QPSK	25	25	/	19.76	0.095	/
10	QPSK	50	0	/	20.00	0.100	/
10	16QAM	1	0	/	20.16	0.104	/
10	16QAM	1	25	/	20.19	0.104	/
10	16QAM	1	49	/	20.28	0.107	/
10	16QAM	25	0	/	19.08	0.081	/
10	16QAM	25	12	/	18.77	0.075	/
10	16QAM	25	25	/	18.76	0.075	/
10	16QAM	50	0	/	18.89	0.077	/



LTE Band 26				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				26715		26740		26765	
Frequency (MHz)				816.5		819.0		821.5	
				dBm	W	dBm	W	dBm	W
5	QPSK	1	0	20.90	0.123	20.78	0.120	20.81	0.121
5	QPSK	1	12	20.95	0.124	20.92	0.124	20.89	0.123
5	QPSK	1	24	20.94	0.124	20.89	0.123	20.93	0.124
5	QPSK	12	0	19.89	0.097	19.79	0.095	19.79	0.095
5	QPSK	12	7	19.89	0.097	19.79	0.095	19.87	0.097
5	QPSK	12	13	19.93	0.098	19.92	0.098	19.89	0.097
5	QPSK	25	0	20.01	0.100	19.96	0.099	19.95	0.099
5	16QAM	1	0	20.45	0.111	20.41	0.110	20.35	0.108
5	16QAM	1	12	20.42	0.110	20.33	0.108	20.35	0.108
5	16QAM	1	24	20.27	0.106	20.19	0.104	20.17	0.104
5	16QAM	12	0	19.16	0.082	19.04	0.080	19.13	0.082
5	16QAM	12	7	18.86	0.077	18.77	0.075	18.74	0.075
5	16QAM	12	13	18.77	0.075	18.70	0.074	18.76	0.075
5	16QAM	25	0	19.16	0.082	19.12	0.082	19.13	0.082



LTE Band 26				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				26705		26740		26775	
Frequency (MHz)				815.5		819.0		822.5	
				dBm	W	dBm	W	dBm	W
3	QPSK	1	0	20.66	0.116	20.62	0.115	20.63	0.116
3	QPSK	1	8	20.72	0.118	20.66	0.116	20.71	0.118
3	QPSK	1	14	20.91	0.123	20.83	0.121	20.87	0.122
3	QPSK	8	0	19.93	0.098	19.81	0.096	19.81	0.096
3	QPSK	8	4	20.20	0.105	20.19	0.104	20.14	0.103
3	QPSK	8	7	20.06	0.101	19.94	0.099	20.04	0.101
3	QPSK	15	0	19.93	0.098	19.84	0.096	19.91	0.098
3	16QAM	1	0	20.29	0.107	20.24	0.106	20.17	0.104
3	16QAM	1	8	20.30	0.107	20.24	0.106	20.26	0.106
3	16QAM	1	14	20.37	0.109	20.29	0.107	20.31	0.107
3	16QAM	8	0	18.93	0.078	18.90	0.078	18.86	0.077
3	16QAM	8	4	19.02	0.080	18.94	0.078	18.96	0.079
3	16QAM	8	7	18.75	0.075	18.64	0.073	18.63	0.073
3	16QAM	15	0	19.17	0.083	19.12	0.082	19.10	0.081




LTE Band 26				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				26697		26740		26783	
Frequency (MHz)				814.7		819.0		823.3	
				dBm	W	dBm	W	dBm	W
1.4	QPSK	1	0	20.84	0.121	20.75	0.119	20.80	0.120
1.4	QPSK	1	3	20.90	0.123	20.80	0.120	20.78	0.120
1.4	QPSK	1	5	20.84	0.121	20.81	0.121	20.77	0.119
1.4	QPSK	3	0	20.01	0.100	19.97	0.099	19.93	0.098
1.4	QPSK	3	1	20.16	0.104	20.14	0.103	20.12	0.103
1.4	QPSK	3	3	19.83	0.096	19.80	0.095	19.82	0.096
1.4	QPSK	6	0	19.81	0.096	19.70	0.093	19.76	0.095
1.4	16QAM	1	0	20.16	0.104	20.15	0.104	20.06	0.101
1.4	16QAM	1	3	20.57	0.114	20.54	0.113	20.56	0.114
1.4	16QAM	1	5	20.36	0.109	20.25	0.106	20.32	0.108
1.4	16QAM	3	0	18.79	0.076	18.78	0.076	18.76	0.075
1.4	16QAM	3	1	18.84	0.077	18.81	0.076	18.77	0.075
1.4	16QAM	3	3	18.97	0.079	18.93	0.078	18.92	0.078
1.4	16QAM	6	0	19.17	0.083	19.07	0.081	19.09	0.081

## 2.2. Occupied Bandwidth

### 2.2.1. Requirement

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Occupied bandwidth is also known as the 99% emission bandwidth.

### 2.2.2. Test Description

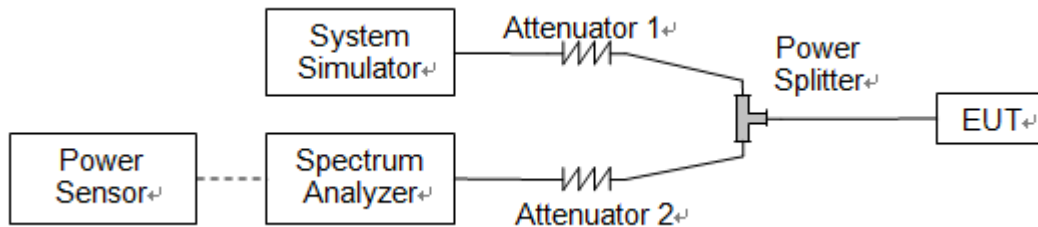

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

### 2.2.3. Test procedure

KDB 971168 D01v03 Section 4.1 and ANSI/TIA-603-E-2016.






2.2.4. Test Result


LTE Band 26				
BW(MHz)	Channel Level	Modulation	99% BW(MHz)	26dB BW(MHz)
1.4	Low	QPSK	1.09	1.27
	Low	16QAM	1.10	1.29
	Mid	QPSK	1.10	1.26
	Mid	16QAM	1.10	1.28
	High	QPSK	1.10	1.26
	High	16QAM	1.10	1.29
3	Low	QPSK	2.69	2.92
	Low	16QAM	2.69	2.93
	Mid	QPSK	2.69	2.92
	Mid	16QAM	2.69	2.93
	High	QPSK	2.68	2.91
	High	16QAM	2.69	2.94
5	Low	QPSK	4.49	4.92
	Low	16QAM	4.50	4.91
	Mid	QPSK	4.49	4.93
	Mid	16QAM	4.50	4.92
	High	QPSK	4.50	5.07
	High	16QAM	4.51	4.90
10	Mid	QPSK	9.00	9.70
	Mid	16QAM	8.95	9.65



Band26Part90 / 1.4MHz / Low CH / QPSK

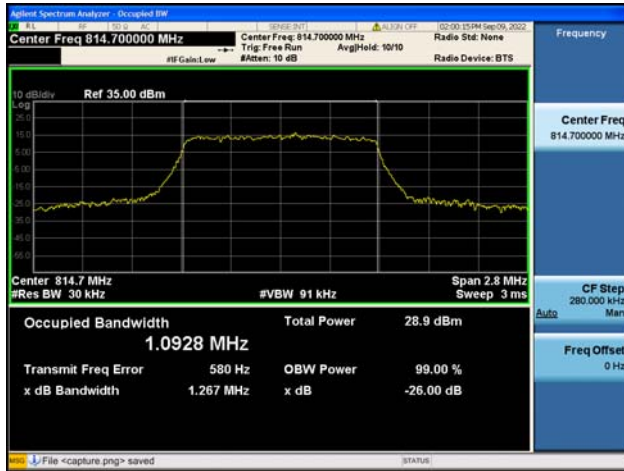


Band26Part90 / 1.4MHz / Low CH / 16QAM

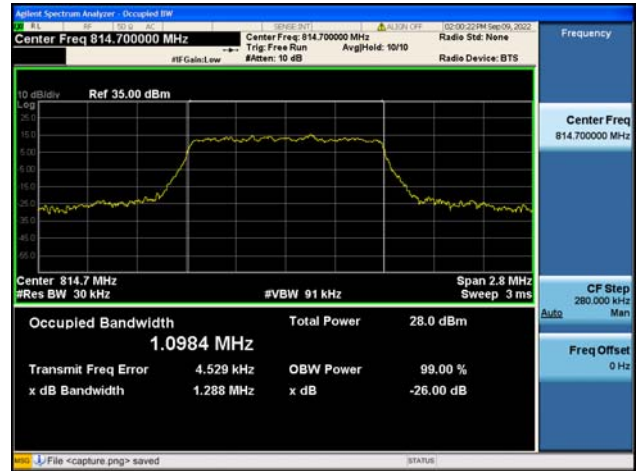

Band26Part90 / 1.4MHz / Mid CH / QPSK




Band26Part90 / 1.4MHz / Mid CH / 16QAM

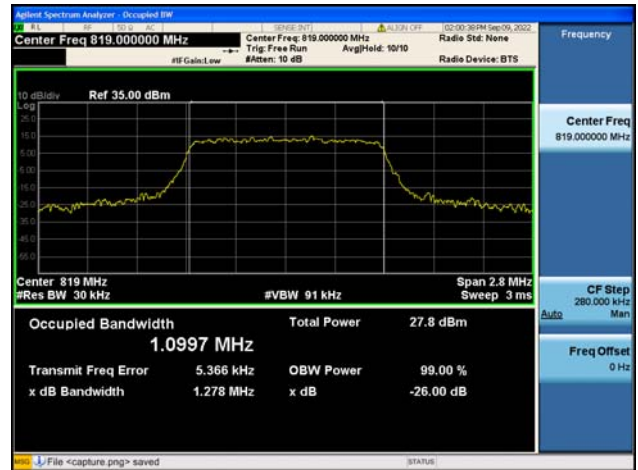

Band26Part90 / 1.4MHz / High CH / QPSK




Band26Part90 / 1.4MHz / High CH / 16QAM

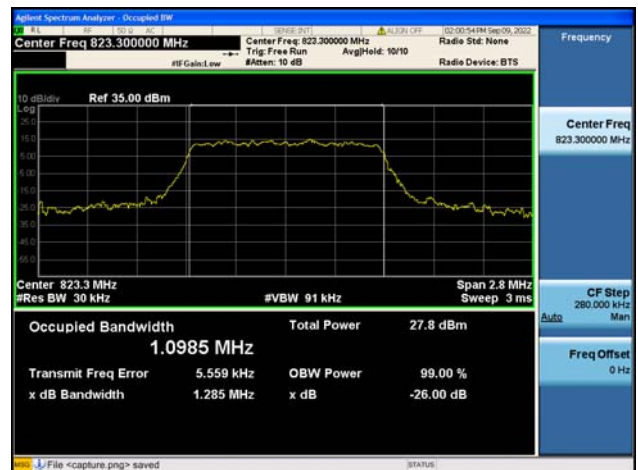




Band26Part90 / 3MHz / Low CH / QPSK

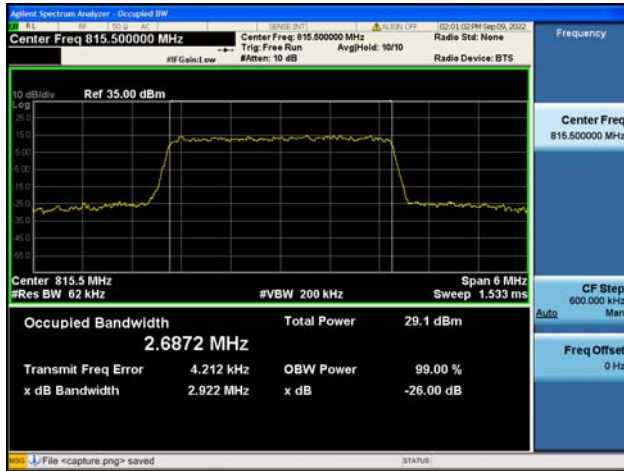


Band26Part90 / 3MHz / Low CH / 16QAM

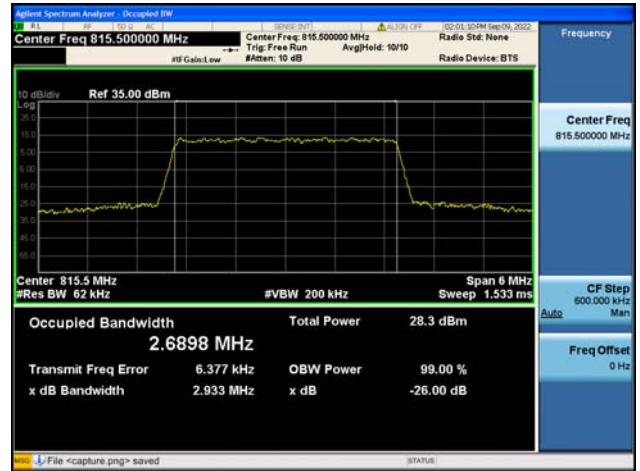


Band26Part90 / 3MHz / Mid CH / QPSK



Band26Part90 / 3MHz / Mid CH / 16QAM

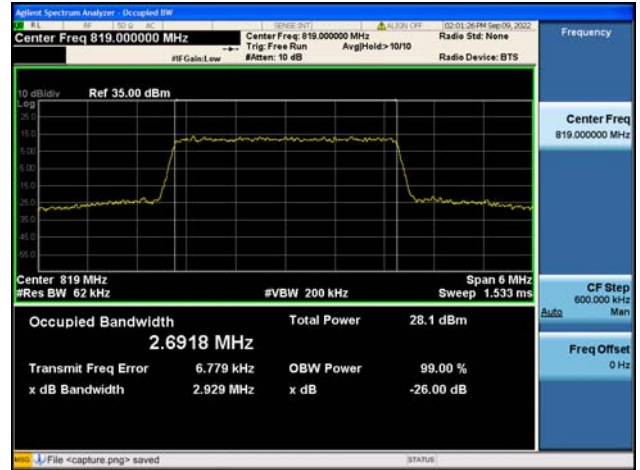

Band26Part90 / 3MHz / High CH / QPSK

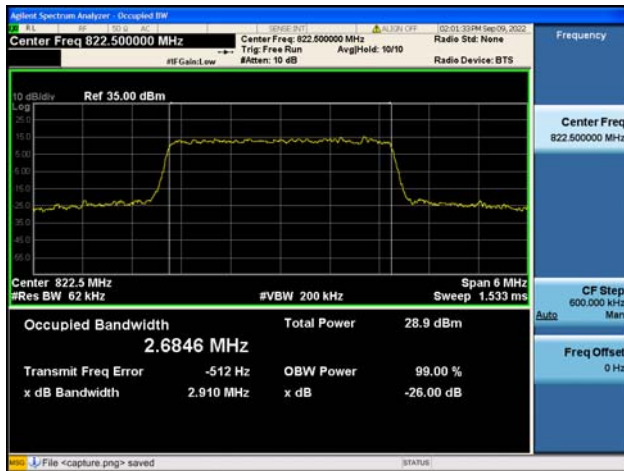


Band26Part90 / 3MHz / High CH / 16QAM






Band26Part90 / 5MHz / Low CH / QPSK

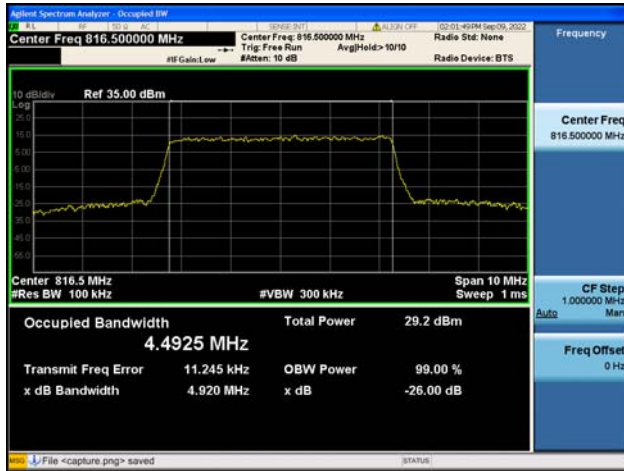


Band26Part90 / 5MHz / Low CH / 16QAM

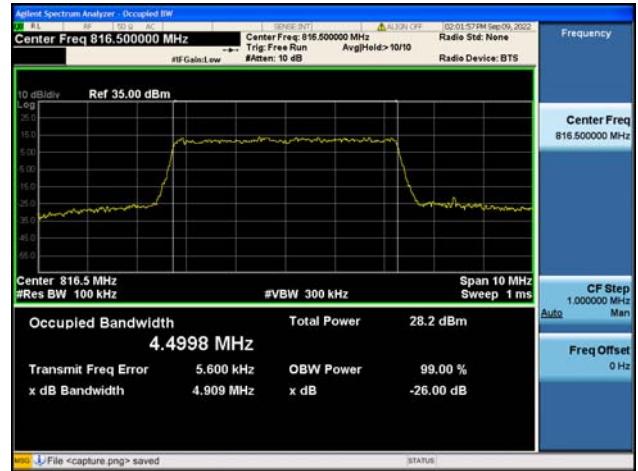

Band26Part90 / 5MHz / Mid CH / QPSK




Band26Part90 / 5MHz / Mid CH / 16QAM

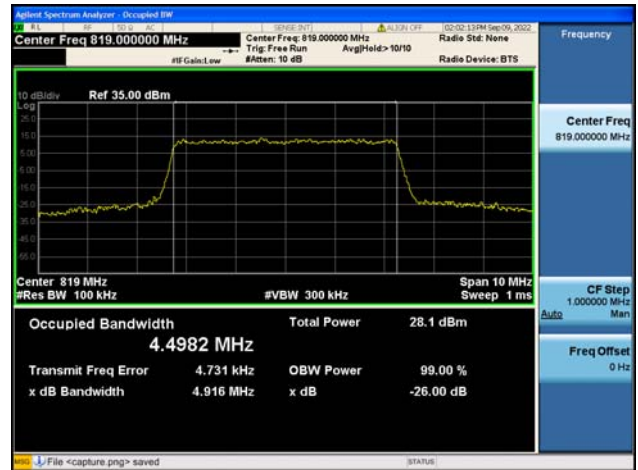


Band26Part90 / 5MHz / High CH / QPSK



Band26Part90 / 5MHz / High CH / 16QAM

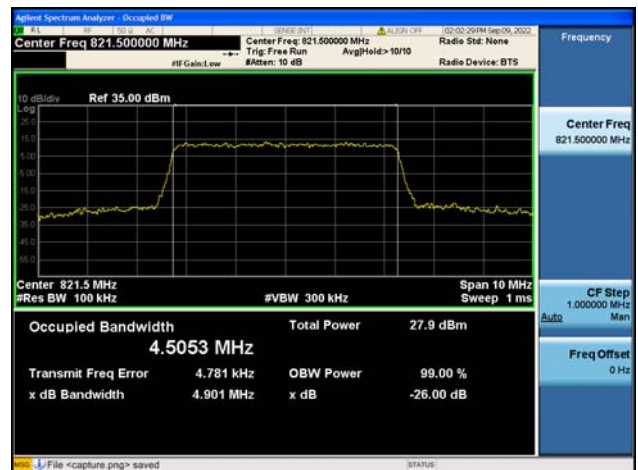

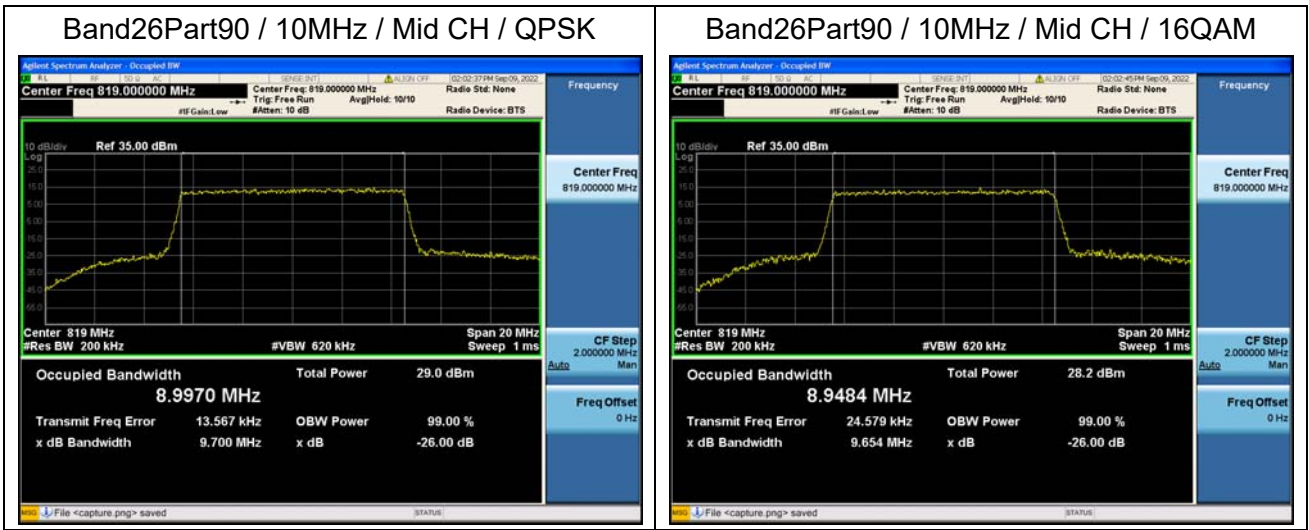

## 2.3. Frequency Stability


### 2.3.1. Requirement

According to FCC section 2.1055 & 90.213, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  at intervals of not more than  $10^{\circ}\text{C}$ .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

**Note:** The operating temperature of EUT is from  $-10^{\circ}\text{C}$  to  $55^{\circ}\text{C}$ , which are specified by the applicant.

### 2.3.2. Test Description

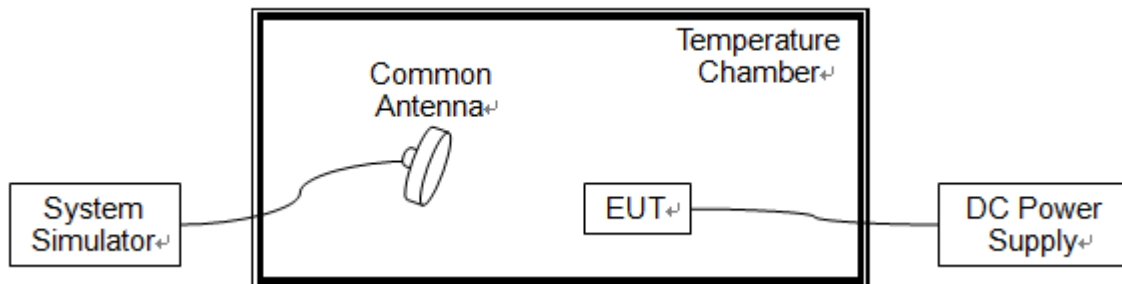

The EUT which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power. A call is established between the EUT and the SS via a Common Antenna.

### 2.3.3. Test procedure

KDB 971168 D01v03 Section 9.0 and ANSI/TIA-603-E-2016.

**2.3.4. Test Result**

The nominal, highest and lowest extreme voltages are separately 3.80V, 4.35V and 3.40V, which are specified by the applicant; the normal temperature here used is 20°C.


<b>LTE Band 26, QPSK, Channel 26740, Frequency 819MHz</b>					
<b>Limit =±2.5ppm</b>					
<b>Voltage (%)</b>	<b>Power (VDC)</b>	<b>Temp (°C)</b>	<b>Fre. Dev. (Hz)</b>	<b>Deviation (ppm)</b>	<b>Result</b>
Normal	3.80	+20(Ref)	52	0.063	PASS
Normal		-10	-47	-0.057	
Normal		0	18	0.022	
Normal		+10	17	0.021	
Normal		+20	-48	-0.059	
Normal		+30	43	0.053	
Normal		+40	33	0.040	
Normal		+50	52	0.063	
Normal		+55	-56	-0.068	
High		4.35	+20	16	
BATT.ENDPOINT	3.40	+20	15	0.018	

## 2.4. Conducted Spurious Emissions

### 2.4.1. Requirement

According to FCC section 2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB. This calculated to be -13dBm.

### 2.4.2. Test Description

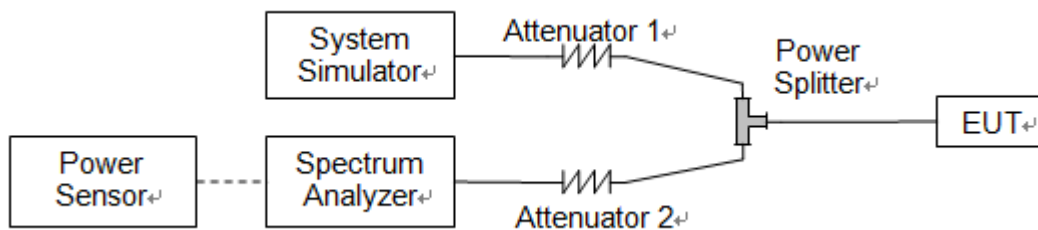

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.


### 2.4.3. Test procedure

KDB 971168 D01v03 Section 6.0 and ANSI/TIA-603-E-2016.






2.4.4. Test Result

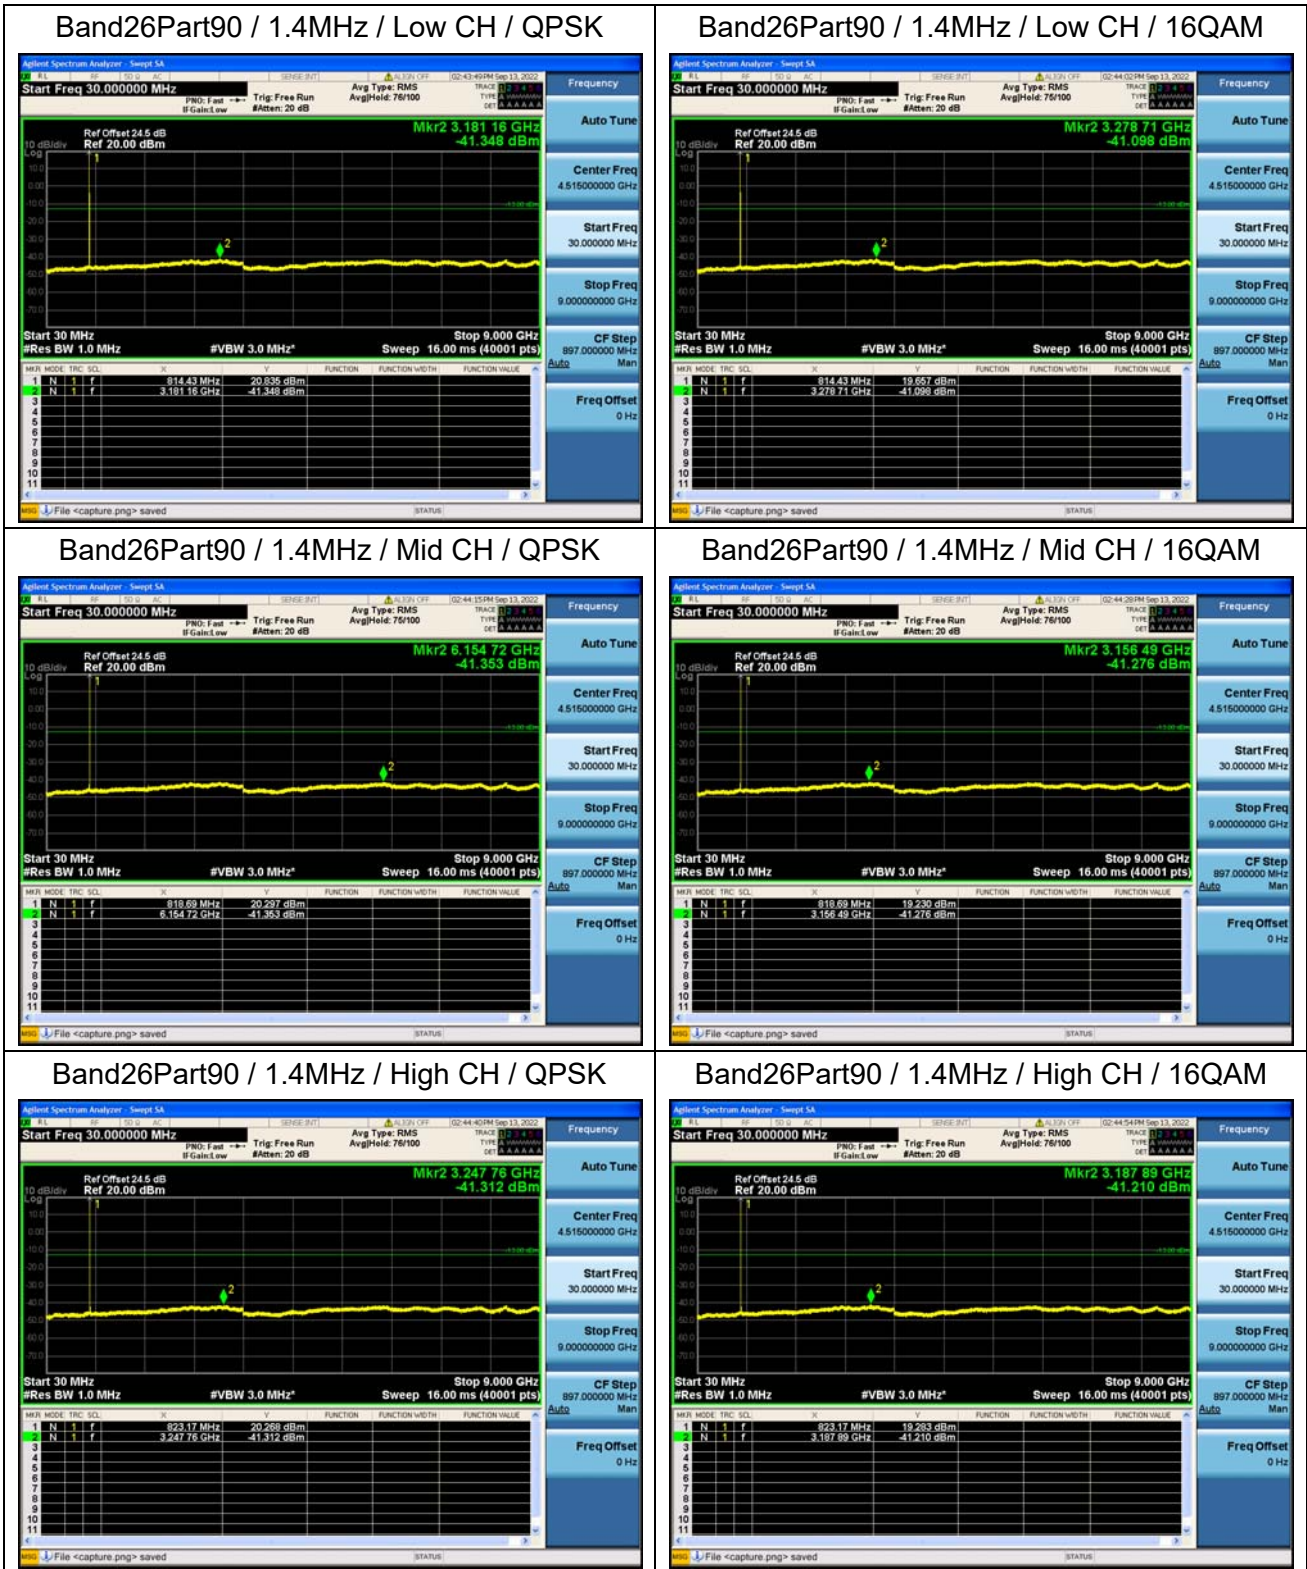




Band26Part90 / 3MHz / Low CH / QPSK

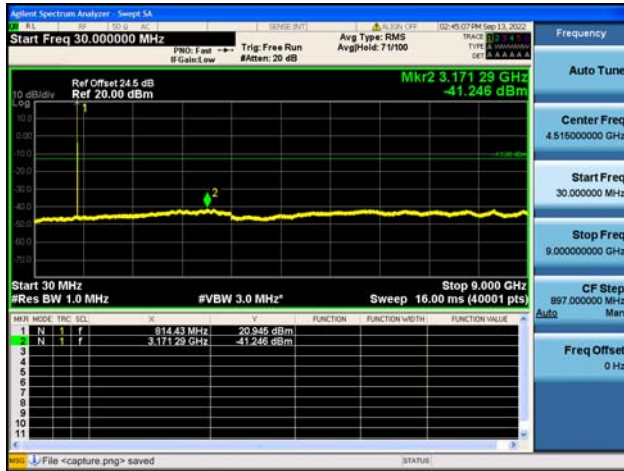


Band26Part90 / 3MHz / Low CH / 16QAM




Band26Part90 / 3MHz / Mid CH / QPSK

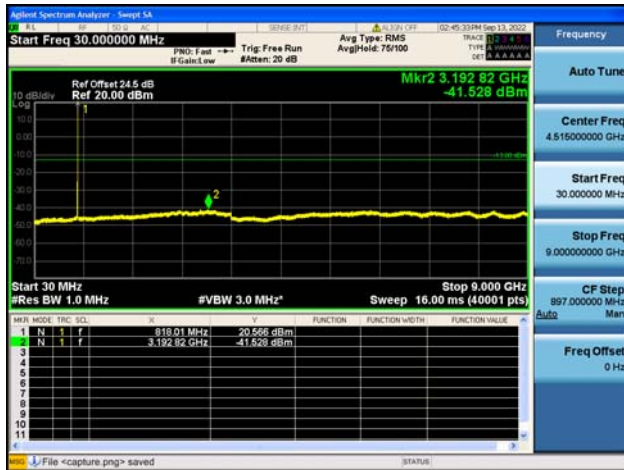


Band26Part90 / 3MHz / Mid CH / 16QAM

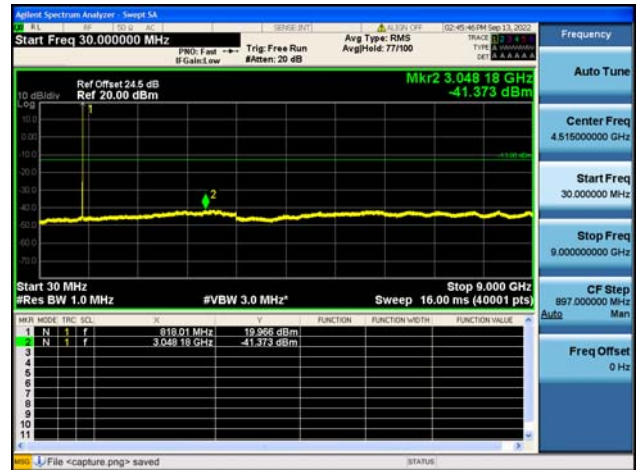

Band26Part90 / 3MHz / High CH / QPSK

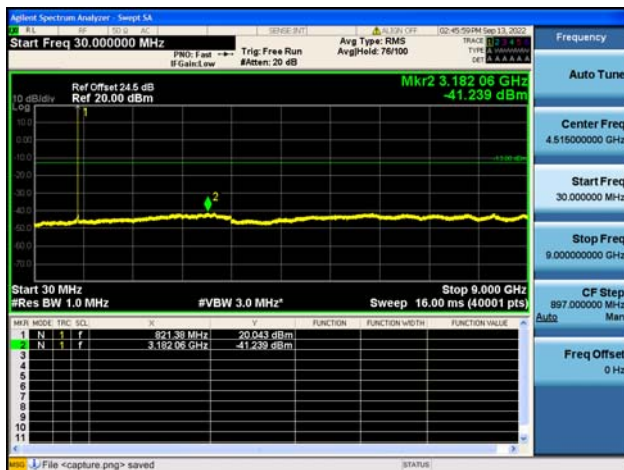


Band26Part90 / 3MHz / High CH / 16QAM

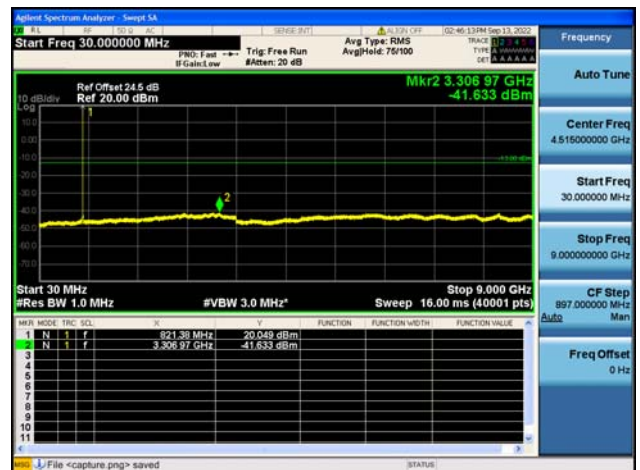





Band26Part90 / 5MHz / Low CH / QPSK

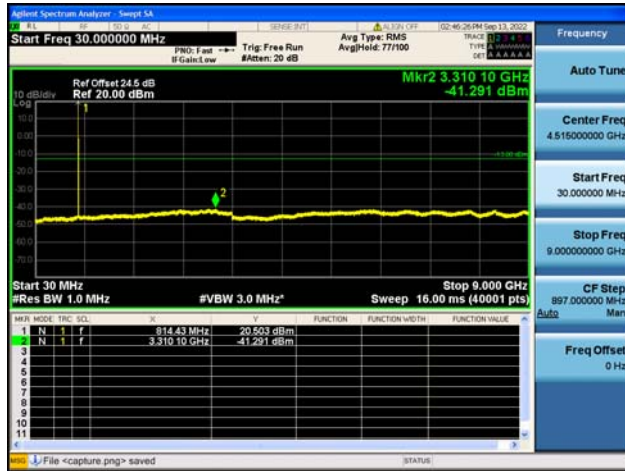


Band26Part90 / 5MHz / Low CH / 16QAM

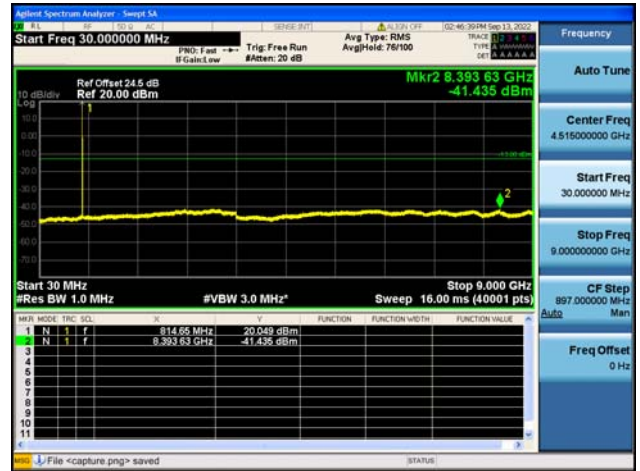


Band26Part90 / 5MHz / Mid CH / QPSK

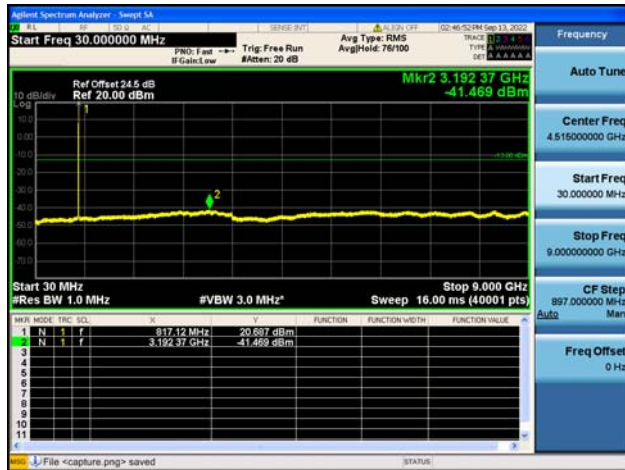


Band26Part90 / 5MHz / Mid CH / 16QAM

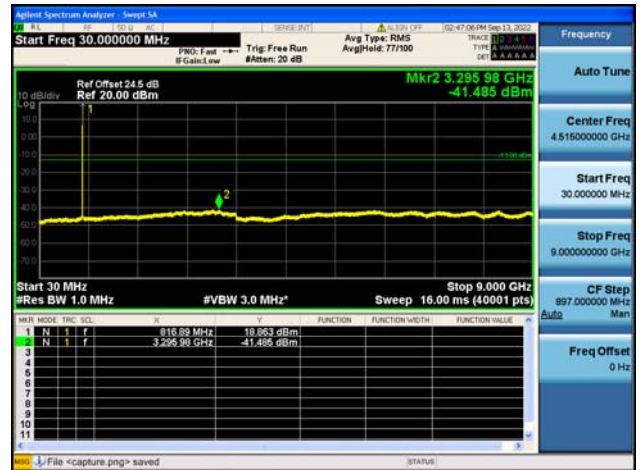

Band26Part90 / 5MHz / High CH / QPSK

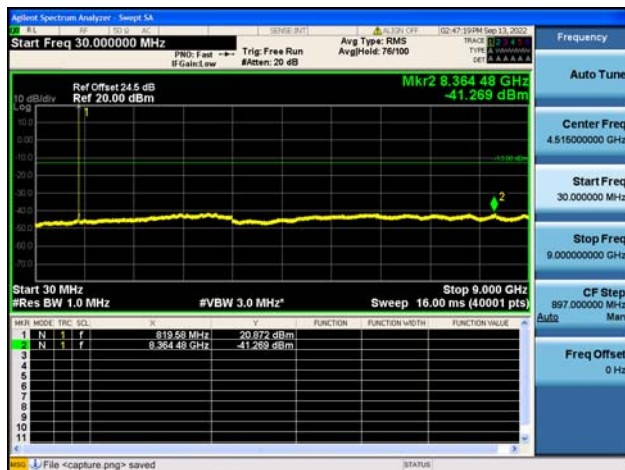


Band26Part90 / 5MHz / High CH / 16QAM

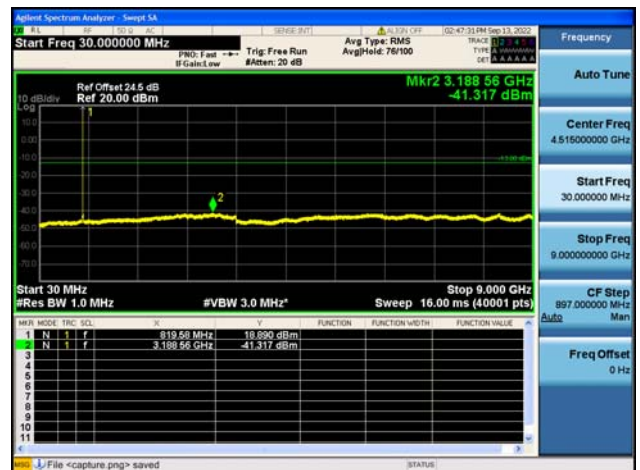




Band26Part90 / 10MHz / Mid CH / QPSK

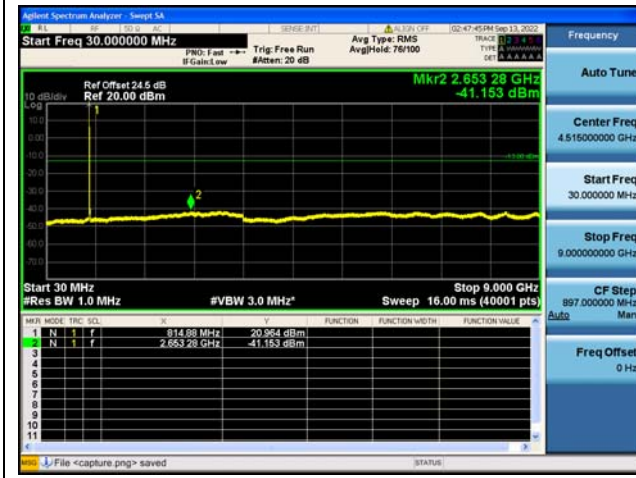

Band26Part90 / 10MHz / Mid CH / 16QAM

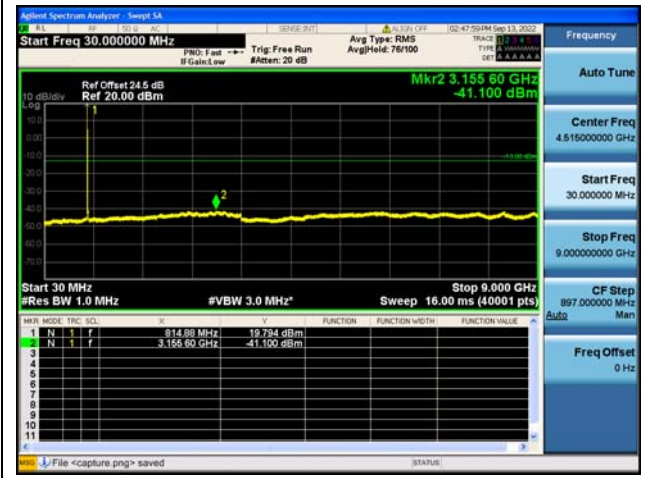


## 2.5. Band Edge

### 2.5.1. Requirement

Band26

According to FCC section 90.961(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 2.5.2. Test Description

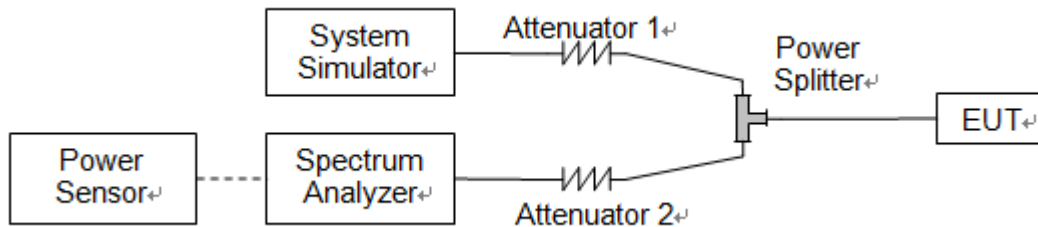


The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.


### 2.5.3. Test procedure

KDB 971168 D01v03 Section 6.0 and ANSI/TIA-603-E-2016.



2.5.4. Test Result

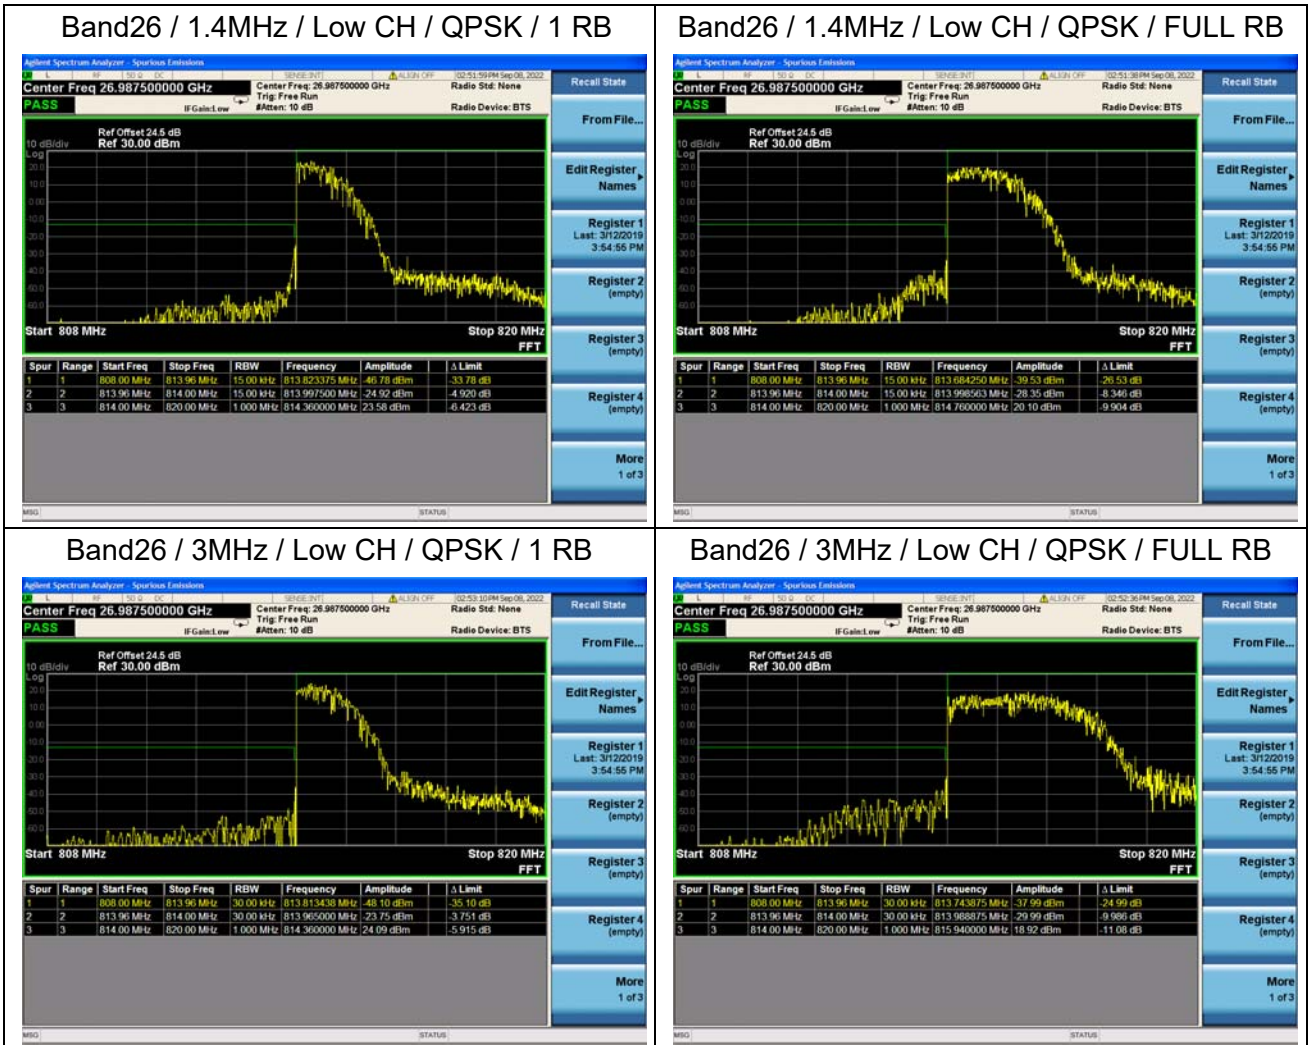

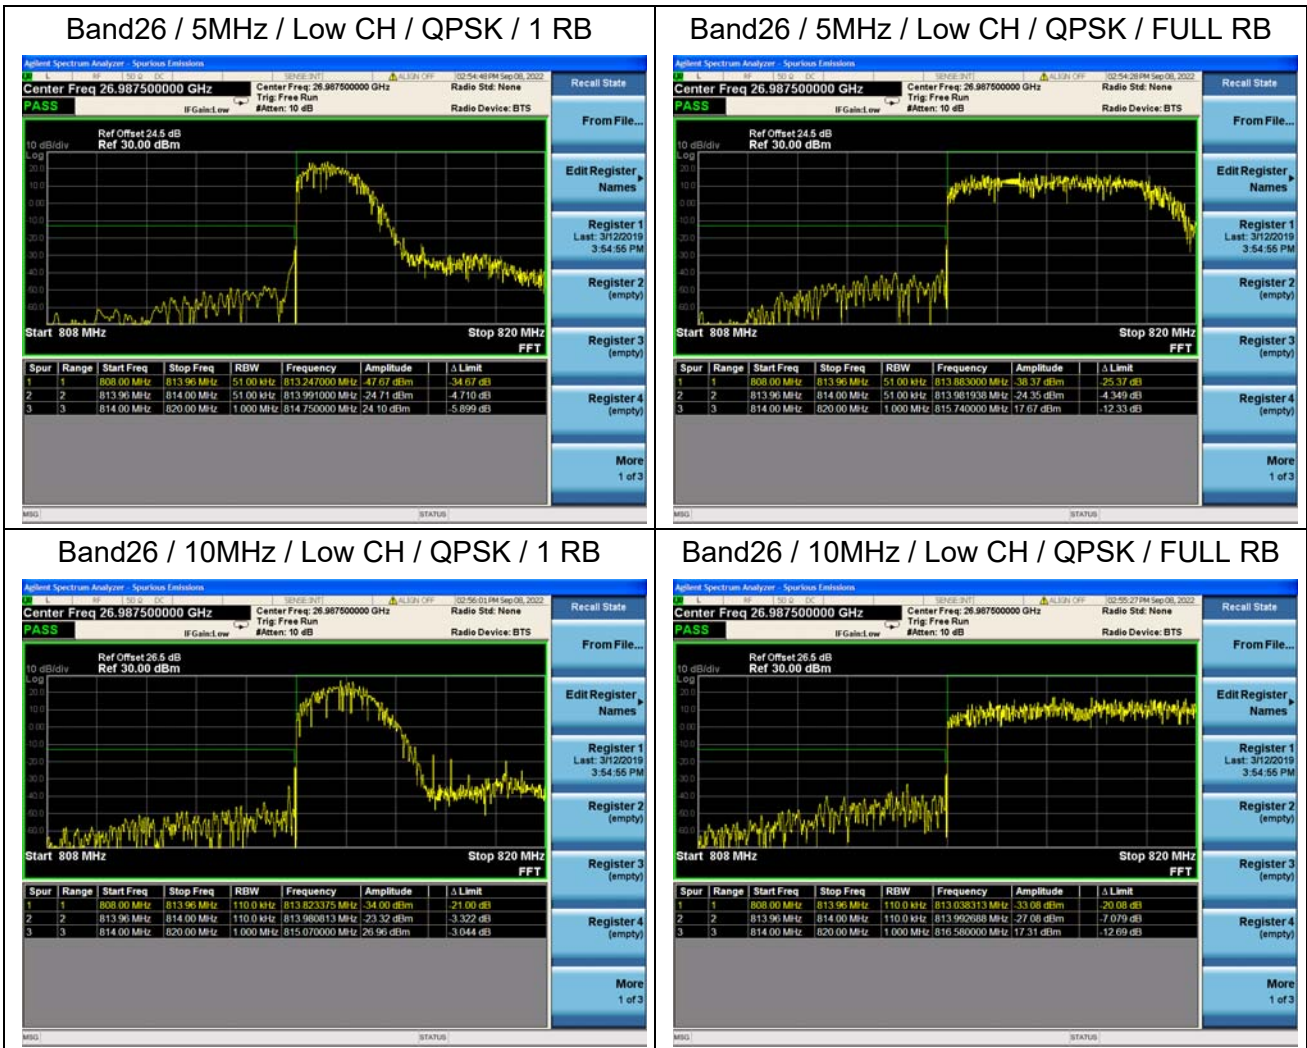


## 2.6. Radiated Spurious Emissions


### 2.6.1. Requirement

According to FCC section 2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB. This calculated to be -13dBm.

### 2.6.2. Test Description

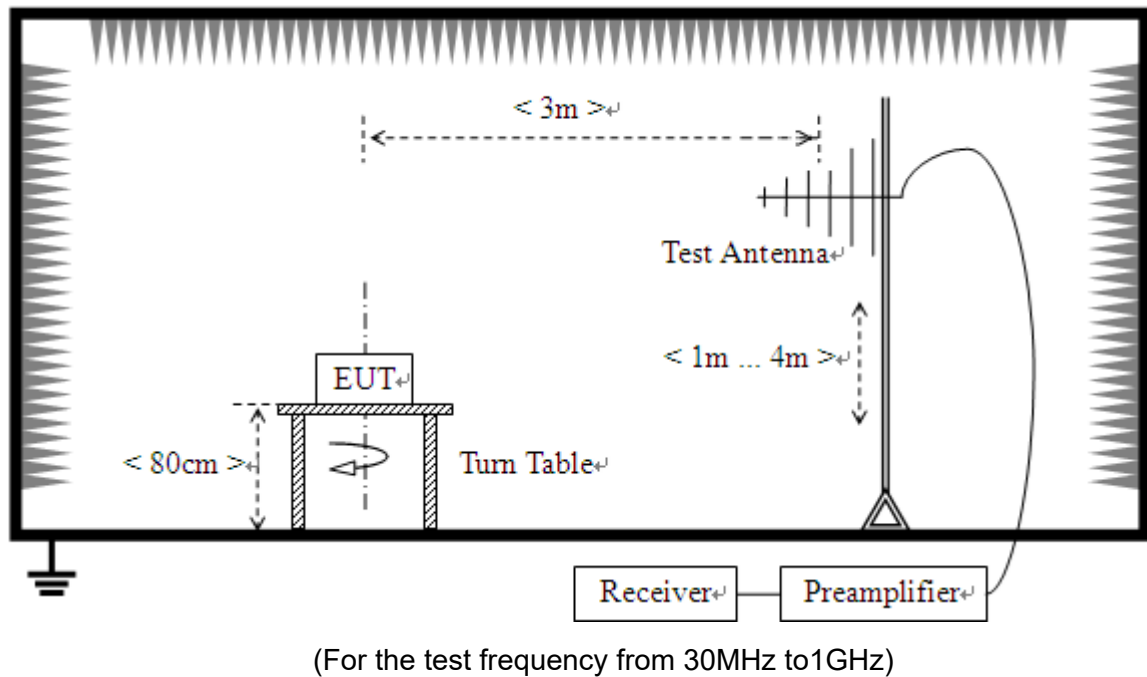



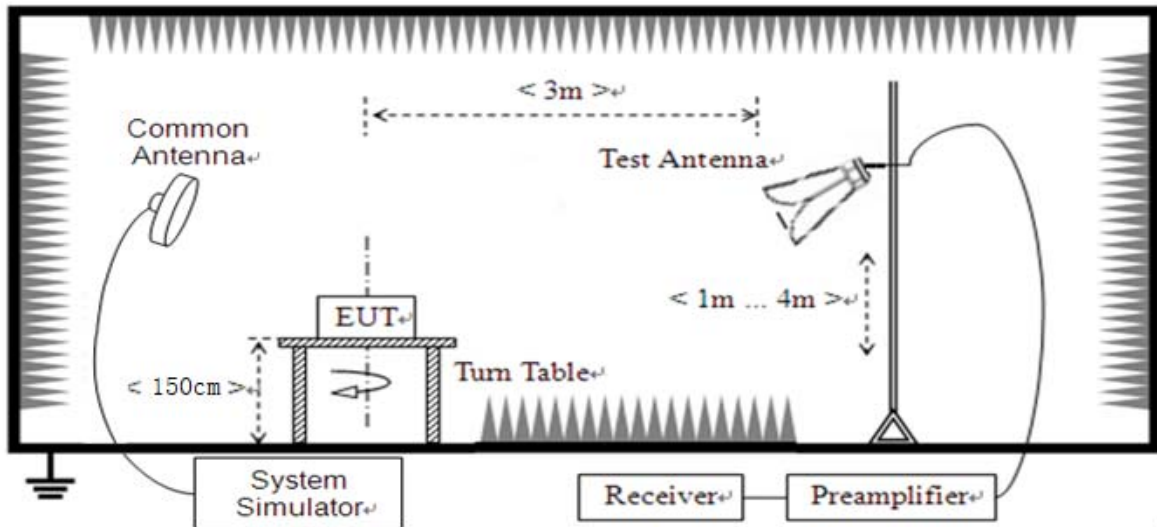

(For the test frequency above 1GHz)

The EUT is located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading. A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power, and only the test result of the maximum output power was recorded.

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground and the Turn Table is actuated to turn from 0° to 360° to determine the maximum value of the radiated power. The emission levels at both horizontal and vertical polarizations should be tested. The Filters consists of Notch Filters and High Pass Filter.

**Note:** when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

### 2.6.3. Test procedure

KDB 971168 D01v03 Section 5.8 and ANSI/TIA-603-E-2016.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements.



#### 2.6.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST\_TX}} - P_{\text{SUBST\_RX}} - L_{\text{SUBST\_CABLES}} + G_{\text{SUBST\_TX\_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where  $A_{\text{SUBST}}$  is the final substitution correction including receive antenna gain.

$P_{\text{SUBST\_TX}}$  is signal generator level,

$P_{\text{SUBST\_RX}}$  is receiver level,

$L_{\text{SUBST\_CABLES}}$  is cable losses including TX cable,

$G_{\text{SUBST\_TX\_ANT}}$  is substitution antenna gain.

$A_{\text{TOT}}$  is total correction factor including cable loss and substitution correction

During the test, the data of  $A_{\text{TOT}}$  was added in the test spectrum analyze, so spectrum analyze reading is the final values which contain the data of  $A_{\text{TOT}}$ .

**Note1:** The power of the EUT transmitting frequency should be ignored.


**Note2:** All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note3:** All bandwidth and modulation were considered and evaluated respectively by performing full test for each band, only the worst cases (Max Bandwidth and QPSK mode) were recorded in this test report.


**Note 4:** N/A means the frequency is the basic frequency or the base station frequency, they are no need to verdict.

**Note 5:** The amplitude of emissions(18GHz to 10th harmonics) which are attenuated more than 20 dB below the limit are not be reported.

LTE Band 26, 5MHz BW, Low Channel, QPSK

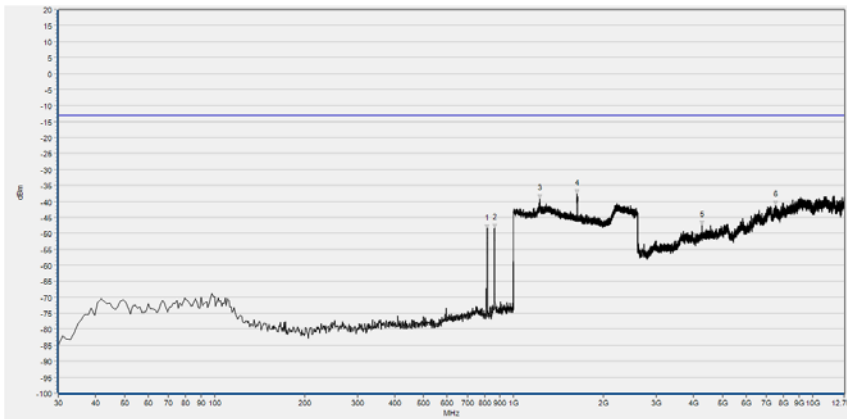


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	815.700	-48.71	-13.00	Horizontal	N/A
2	863.230	-48.43	-13.00	Horizontal	N/A
3	1222.809	-39.26	-13.00	Horizontal	PASS
4	1633.213	-37.76	-13.00	Horizontal	PASS
5	4264.903	-47.56	-13.00	Horizontal	PASS
6	7519.031	-41.28	-13.00	Horizontal	PASS

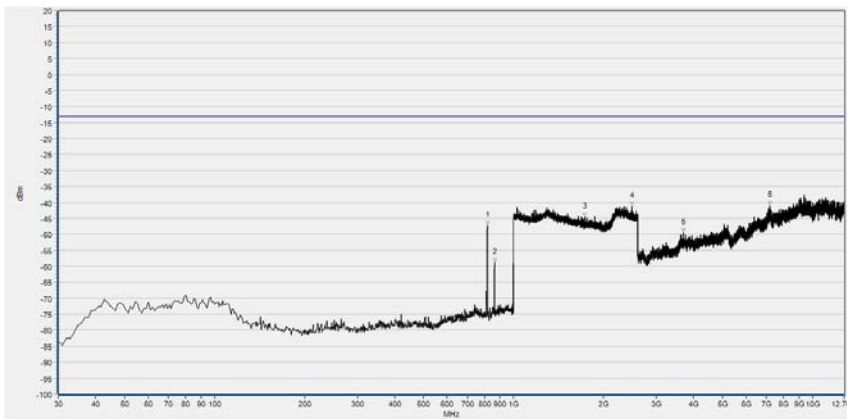


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	816.670	-47.22	-13.00	Vertical	N/A
2	863.230	-58.98	-13.00	Vertical	N/A
3	1734.374	-44.67	-13.00	Vertical	PASS
4	2483.473	-41.28	-13.00	Vertical	PASS
5	3690.862	-49.58	-13.00	Vertical	PASS
6	7177.560	-41.01	-13.00	Vertical	PASS

LTE Band 26, 5MHz BW, Mid Channel, QPSK

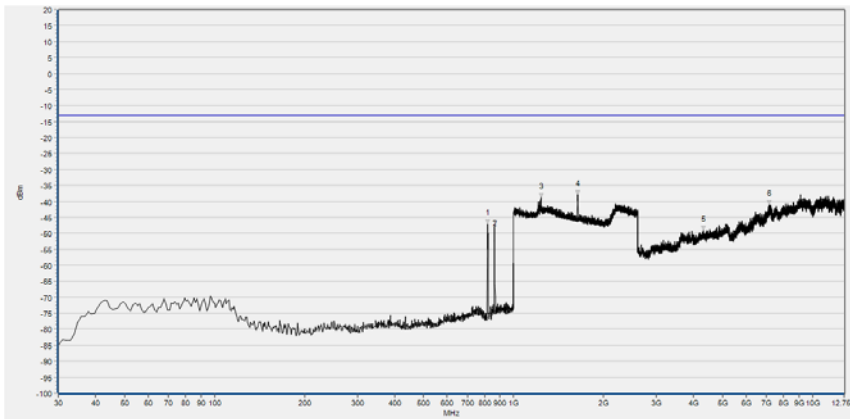


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	816.670	-47.12	-13.00	Horizontal	N/A
2	864.200	-47.22	-13.00	Horizontal	N/A
3	1233.693	-38.74	-13.00	Horizontal	PASS
4	1635.774	-37.87	-13.00	Horizontal	PASS
5	4309.202	-49.14	-13.00	Horizontal	PASS
6	7172.022	-41.00	-13.00	Horizontal	PASS

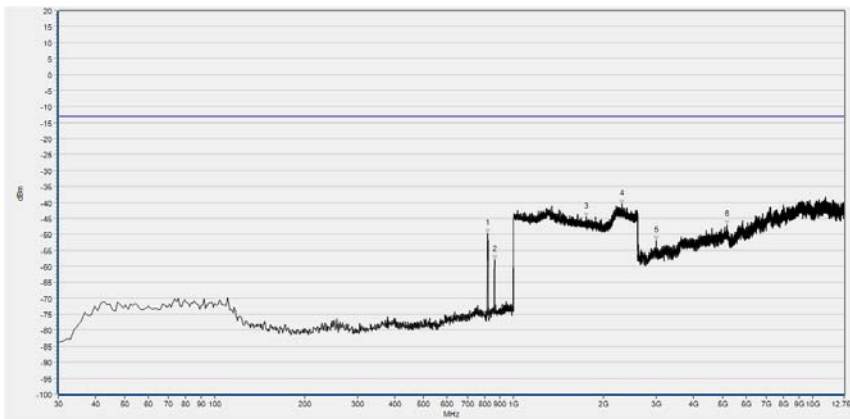


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	816.670	-49.80	-13.00	Vertical	N/A
2	864.200	-57.99	-13.00	Vertical	N/A
3	1748.459	-44.65	-13.00	Vertical	PASS
4	2304.202	-40.58	-13.00	Vertical	PASS
5	3006.074	-52.00	-13.00	Vertical	PASS
6	5174.877	-47.11	-13.00	Vertical	PASS

LTE Band 26, 5MHz BW, High Channel, QPSK

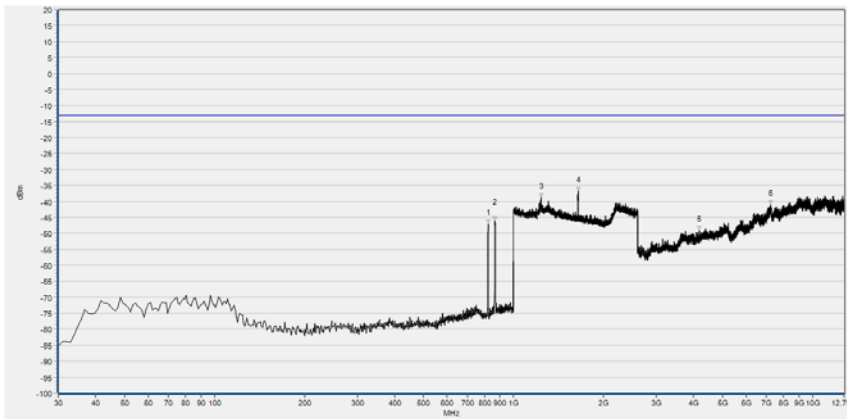

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	822.490	-47.05	-13.00	Horizontal	N/A
2	866.140	-46.22	-13.00	Horizontal	N/A
3	1233.693	-38.73	-13.00	Horizontal	PASS
4	1642.817	-36.87	-13.00	Horizontal	PASS
5	4183.688	-48.95	-13.00	Horizontal	PASS
6	7234.779	-41.10	-13.00	Horizontal	PASS

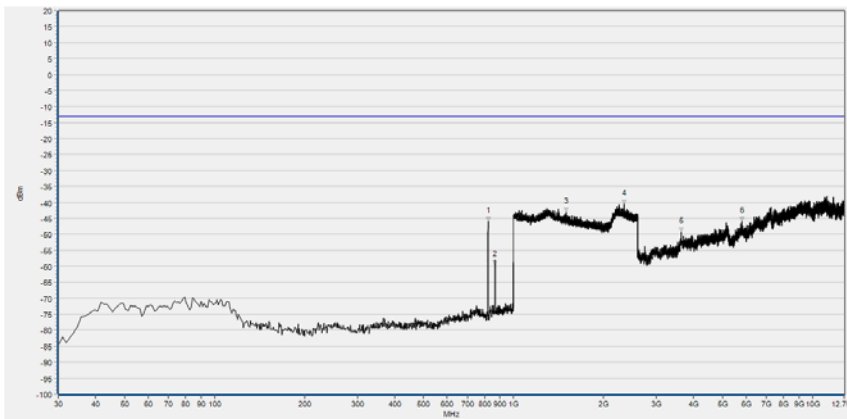

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	822.490	-45.98	-13.00	Vertical	N/A
2	864.200	-59.62	-13.00	Vertical	N/A
3	1496.198	-42.96	-13.00	Vertical	PASS
4	2341.337	-40.61	-13.00	Vertical	PASS
5	3639.180	-49.30	-13.00	Vertical	PASS
6	5800.600	-46.03	-13.00	Vertical	PASS



## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Output Power	$\pm 2.22$ dB
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77$ dB
Band Edge	$\pm 2.77$ dB
Equivalent Isotropic Radiated Power	$\pm 2.22$ dB
Radiated Spurious Emissions	$\pm 6$ dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipments Utilized

##### 4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY51511149	N9020A	Agilent	2022.07.04	2023.07.03
EXA Signal Analyzer	MY54170556	N9030A	Agilent	2021.10.20	2022.10.19
				2022.10.10	2023.10.09
System Simulator	6200995016	MT8820C	Anritsu	2021.10.21	2022.10.20
				2022.10.11	2023.10.10
System Simulator	6261830572	MT8821C	Anritsu	2022.02.14	2023.02.13
Temperature Chamber	20171112102	HZ-2019	Dongguan Lixian Instrument Technology Co., Ltd	2021.10.20	2022.10.19
				2022.10.10	2023.10.09

##### 4.2 List of Software Used

Description	Manufacturer	Software Version
Morlab FCC LTE Test System	MORLAB	V2.9
MORLAB EMCR V1.2	MORLAB	V1.0



**4.3 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
System Simulator	152038	CMW500	R&S	2021.10.21	2022.10.20
				2022.10.11	2023.10.10
System Simulator	MY48364176	8960-E5515C	Agilent	2022.03.01	2023.02.28
Receiver	MY54130016	N9038A	Agilent	2022.07.07	2023.07.06
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Horn	9120D-963	BBHA 9120D	Schwarzbeck	2022.05.23	2025.05.24
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L320 3	Tonscend	2022.07.08	2023.07.07
18-26.5GHz pre-Amplifier	46732	S10M100L380 2	Tonscend	2022.07.08	2023.07.07
26-40GHz pre-Amplifier	56774	S40M400L400 2	Tonscend	2022.07.08	2023.07.07
Notch Filter	N/A	WRCGV -LTE 26	Wainwright	2022.07.08	2023.07.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

END OF REPORT