

RF Exposure Evaluation

Client Information:

Applicant: Jenmart Industrial (HK) Co., Limited
Applicant add.: Units A&B, 15/F, Neich Tower, 128 Gloucester Road, Wanchai, Hong Kong
Manufacturer: Rich Glory Electronics Co., Ltd.
Manufacturer add.: No.10 Xiling Road, Fengcheng Street, Xinfeng County, Shaoguan City, Guangdong Province, China

Product Information:

Product Name: TECHMATE Multi-Function Travel Companion
Model No.: SB3590
Brand Name: Studebaker
FCC ID: 2A38HSB3590

Applicable standards: FCC CFR 47 PART 1, § 1.1310
KDB 680106 D01 Wireless Power Transfer v04

Prepared By:

Guangdong Asia Hongke Test Technology Limited

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

Date of Receipt: Apr. 17, 2024


Date of Test: Apr. 17, 2024 ~ Apr. 27, 2024

Date of Issue: Apr. 27, 2024


Test Result: Pass

This device described above has been tested by Guangdong Asia Hongke Test Technology Limited and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Guangdong Asia Hongke Test Technology Limited, this document may be altered or revised by Guangdong Asia Hongke Test Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Reviewed by: 

Sean She

Approved by: 

Eder Zhan



1 CONTENTS

COVER PAGE		Page
1	CONTENTS	2
2	TEST FACILITY	4
	2.1 Deviation from standard	4
	2.2 Abnormalities from standard conditions	4
	2.3 Test Location	4
3	GENERAL INFORMATION	5
4	TEST METHODOLOGY	6
	4.1 Measuring Standard	6
	4.2 Requirements	6
	4.3 Limits	6
	4.4 Test Setup	7
	4.5 Test Procedure	7
5	EQUIPMENT APPROVAL CONSIDERATIONS	8
	5.1 Description of the test mode	9
	5.2 Peripheral List	9
	5.3 Test Instruments list	9
	5.4 Compliance Location: Center vs Tip-Surface of the Probe	10
	5.5 Test Result	12
	5.6 Test Setup photo	23



Revision History

Revision	Issue Date	Revisions	Revised By
00	Apr. 27, 2024	Initial Issue	Eder Zhan

2 TEST FACILITY

The test facility is recognized, certified or accredited by the following organizations:

FCC-Registration No.: 251906 Designation Number: CN1376

Guangdong Asia Hongke Test Technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

IC —Registration No.: 31737 CAB identifier: CN0165

The 3m Semi-anechoic chamber of Guangdong Asia Hongke Test Technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 31737

A2LA-Lab Cert. No.: 7133.01

Guangdong Asia Hongke Test Technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

2.1 Deviation from standard

None

2.2 Abnormalities from standard conditions

None

2.3 Test Location

Guangdong Asia Hongke Test Technology Limited

Address: B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

3 GENERAL INFORMATION

EUT Name:	TECHMATE Multi-Function Travel Companion
Model No:	SB3590
Serial Model:	SB3590B, SB3590RG, SB3590L, SB3590XXXXX(Where XXXXX denote any printable characters in the ASCII standard character Table to represent variances in cosmetics or buyers)
Brand Name:	Studebaker
Test sample(s) ID:	AITSZ24041701001
Sample(s) Status:	Engineer sample
Operation frequency:	113~205KHz
Modulation Technology:	MSK
Antenna Type:	Coil Antenna
Antenna gain:	0dBi
Hardware version.:	N/A
Software version.:	N/A
Power supply:	Input(USB-C):5V13A,9V12.3A,12V11.5A Output(USB-A): 5V13.1A, 9V12A,12V11.5A Output(USB-C): 5V13.1A,9V12A, 12V11.5A
Model different:	Different model names.
Note:	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

4 TEST METHODOLOGY

4.1 Measuring Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01: KDB 680106 D01 Wireless Power Transfer v04.

4.2 Requirements

According to the item 3 of KDB 680106 D01v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

- (1) Mobile Device and Portable Device Configurations
- (2) Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz
- (3) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the top surface.

4.3 Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30


F=frequency in MHz
 *Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

Note 1: f = frequency in MHz; *Plane-wave equivalent power density

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03r01

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

4.4 Test Setup

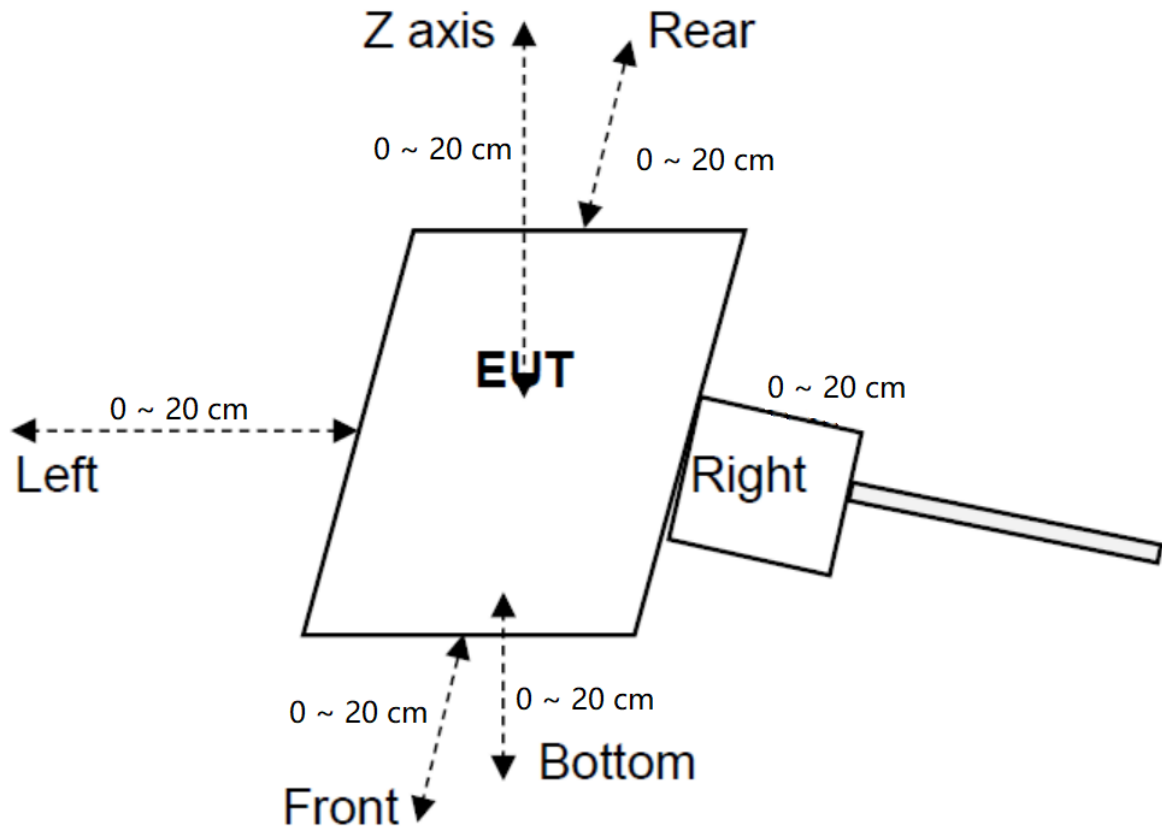

4.5 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (2cm increments from 0 ~ 20 cm for all sides) which is between the edge of the charger and the geometric edge of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

Remark: The EUT's test position A, B, C, D, E and F is valid for the E and H field measurements.

5 EQUIPMENT APPROVAL CONSIDERATIONS

The EUT does comply with KDB 680106 D01 as follow table.

Requirements of section 5 of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operated in the frequency range 113-205KHz.
Output power from each primary coil is less than or equal to 15 watts	Yes	The maximum output power of the primary coil is 15W.
The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time	Yes	The transfer system includes 1 primary coils.
Client device is placed directly in contact with the transmitter	Yes	Client device is placed directly in contact with the transmitter
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)	No	EUT is a portable power bank
The aggregate E-field and H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.	No	H-field and E-field measurement taken every 2 cm (starting as close to 20 cm as possible) on each edge/top surface of the host/client pair were also evaluated for portable use conditions.

5.1 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

Test Mode	Description	
Mode 1	Adapter + EUT + Mobile phone	Record
Note: 1. All test modes were pre-tested, but we only recorded the worst case in this report. 2. Unfolded and folded mode were tested, but we only recorded the worst case.		

5.2 Peripheral List

No.	Equipment	Manufacturer	Model No.	Serial No.	Power cord	signal cable
1	Phone	Apple	iphone 14 Pro max	N/A	N/A	N/A
2	Adapter	HNT	HNT-QC530	N/A	N/A	N/A

5.3 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Magnetic Amplitude and Gradient Probe System	SPEAG	MAGPy-8H3D+E3D V2 & MAGPy-DAS V2	3107 & 3097	03.15.2024	03.14.2025

Parameter	Specs
PROBE DESIGN	
Diameter	60 mm
8 isotropic <i>H</i> -field sensors	concentric loops of 1 cm ² arranged at the corner of a cube of 22 mm side length
1 isotropic <i>E</i> -field sensor	orthogonal dipole/monopole (arm length: 50 mm)
Measurement center	18.5 mm from the probe tip
Temperature range	0–40 °C
Dimensions	110 × 635 × 35 mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
<i>H</i>-FIELD SPECIFICATION	
Frequency range	3 kHz–10 MHz
Measurement range	0.1–3200 A/m, 0.12 μT–4 mT
Gradient range	0–80 T/m/T
<i>E</i>-FIELD SPECIFICATION	
Frequency range	3 kHz–10 MHz
Measurement range	0.08–2000 V/m

5.4 Compliance Location: Center vs Tip-Surface of the Probe

The following information is from the equipment manual:

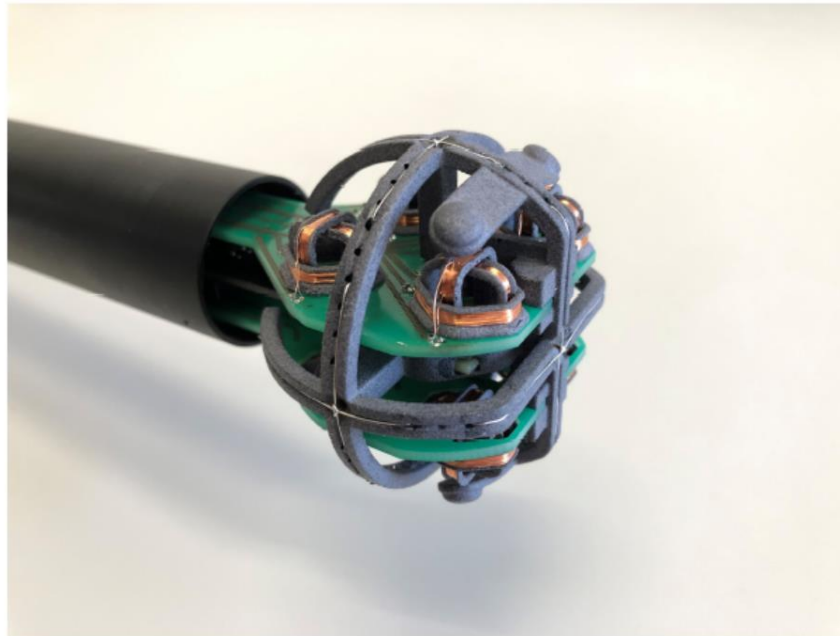


Figure 2.1: MAGPy-8H3D+E3D V2 probe, without the casing

In the MAGPy V2.0 implementation, the H -field is evaluated at the center of the probe (which is 18.5mm above the surface of its tip) and also at the surface of its tip.

In the MAGPy V2.0 implementation, the H -field is evaluated at the center of the probe (which is 18.5 mm above the surface of its tip) and also at the surface of its tip.

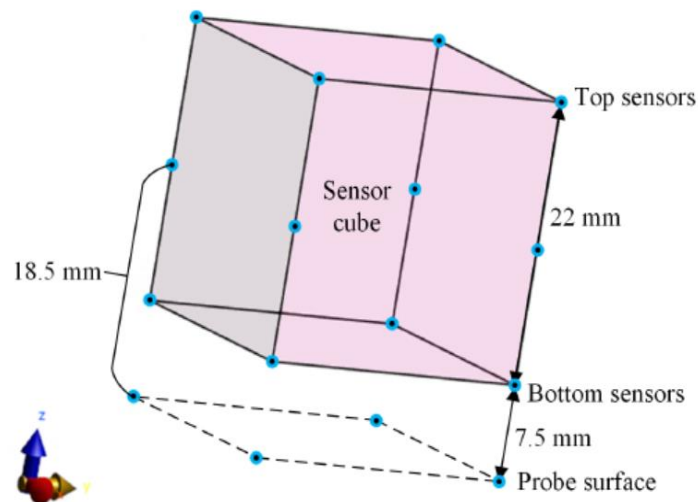


Figure 2.5: Extrapolation of the total H -field at the probe surface is made at each pair of sensors (i.e., bottom and top sensors) around the sensor cube

The total H -field at the tip-surface $H_{tip-surface}$ can be extrapolated using the total H -field measured at the top and bottom sensors (Figure 2.5), H_{top} and H_{bottom} , as well as the normalized H -field gradient G_n . The field extrapolation formula is a polynomial function of G_n ($\Delta d = 18.5$ mm) [7].

$$H_{tip-surface} = \frac{H_{bottom} + H_{top}}{2} \sum_{i=0}^7 c_i (G_n \Delta d)^i \quad (1.6)$$

The polynomial coefficients c_i are given in Table 2.2. They have been determined from simulations of 70 coils covering normalized gradients up to 80 for the 97.5th percentile (Figure 2.6). This provides a conservative estimate of the total H -field at the tip-surface without large overestimation.

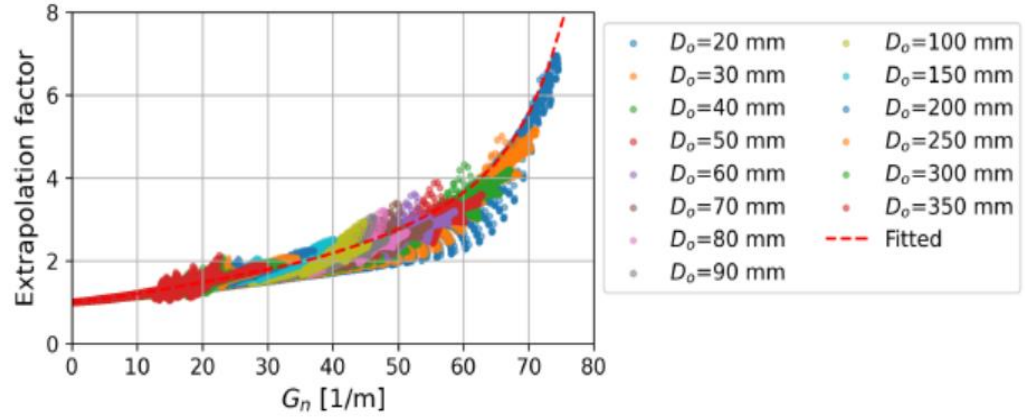


Figure 2.6: Extrapolation factors (i.e., ratios between the simulated results of $H_{tip-surface}$ and $\frac{H_{bottom} + H_{top}}{2}$) plotted as a function of the normalized H -field gradient. The data are from simulations of 70 coils with varying outer diameters D_o and filling ratios (0.1–0.9). The prediction of the polynomial function $\sum_{i=0}^7 c_i (G_n \Delta d)^i$ with coefficients fitted for 97.5th percentile (i.e., the red dashed line) is also shown.

Coefficient	Value
c_0	1.00
c_1	1.00
c_2	-1.01
c_3	15.9
c_4	-50.8
c_5	74.7
c_6	-51.4
c_7	13.7

Table 2.2: Coefficients of the polynomial function for the H -field extrapolation to the tip-surface of the probe, determined with 0.975 quantile regression (i.e., the 97.5th percentile)

5.5 Test Result

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
0cm	< 1%	Top	13.51	0.43
0cm	< 1%	Bottom	13.61	0.45
0cm	< 1%	Left	13.48	0.43
0cm	< 1%	Right	13.58	0.43
0cm	< 1%	Front	13.66	0.39
0cm	< 1%	Rear	13.60	0.40
Limit			614	1.63
Margin Limit (%)			2.22%	27.61%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
0cm	< 50%	Top	13.61	0.25
0cm	< 50%	Bottom	13.60	0.46
0cm	< 50%	Left	13.48	0.36
0cm	< 50%	Right	13.56	0.37
0cm	< 50%	Front	13.59	0.38
0cm	< 50%	Rear	13.60	0.43
Limit			614	1.63
Margin Limit (%)			2.22%	28.22%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
0cm	< 99%	Top	13.50	0.25
0cm	< 99%	Bottom	13.61	0.42
0cm	< 99%	Left	13.49	0.36
0cm	< 99%	Right	13.53	0.31
0cm	< 99%	Front	13.60	0.29
0cm	< 99%	Rear	13.74	0.42
Limit			614	1.63
Margin Limit (%)			2.24%	25.77%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
2cm	< 1%	Top	13.49	0.40
2cm	< 1%	Bottom	13.47	0.47
2cm	< 1%	Left	13.51	0.43
2cm	< 1%	Right	13.51	0.43
2cm	< 1%	Front	13.56	0.40
2cm	< 1%	Rear	13.50	0.33
Limit			614	1.63
Margin Limit (%)			2.21%	28.83%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
2cm	< 50%	Top	13.55	0.25
2cm	< 50%	Bottom	13.42	0.44
2cm	< 50%	Left	13.55	0.46
2cm	< 50%	Right	13.39	0.41
2cm	< 50%	Front	13.53	0.33
2cm	< 50%	Rear	13.35	0.29
Limit			614	1.63
Margin Limit (%)			2.21%	28.22%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
2cm	< 99%	Top	13.60	0.27
2cm	< 99%	Bottom	13.34	0.41
2cm	< 99%	Left	13.38	0.35
2cm	< 99%	Right	13.30	0.34
2cm	< 99%	Front	13.52	0.26
2cm	< 99%	Rear	13.33	0.29
Limit			614	1.63
Margin Limit (%)			2.21%	25.15%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
4cm	< 1%	Top	13.33	0.41
4cm	< 1%	Bottom	13.24	0.39
4cm	< 1%	Left	13.20	0.37
4cm	< 1%	Right	13.18	0.35
4cm	< 1%	Front	13.35	0.40
4cm	< 1%	Rear	13.33	0.38
Limit			614	1.63
Margin Limit (%)			2.17%	25.15%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
4cm	< 50%	Top	13.37	0.27
4cm	< 50%	Bottom	13.22	0.36
4cm	< 50%	Left	13.17	0.42
4cm	< 50%	Right	13.12	0.32
4cm	< 50%	Front	13.33	0.28
4cm	< 50%	Rear	13.34	0.45
Limit			614	1.63
Margin Limit (%)			2.18%	27.61%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
4cm	< 99%	Top	13.36	0.26
4cm	< 99%	Bottom	13.17	0.32
4cm	< 99%	Left	13.31	0.28
4cm	< 99%	Right	13.18	0.32
4cm	< 99%	Front	13.39	0.36
4cm	< 99%	Rear	13.36	0.33
Limit			614	1.63
Margin Limit (%)			2.18%	22.09%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
6cm	< 1%	Top	13.28	0.41
6cm	< 1%	Bottom	13.11	0.43
6cm	< 1%	Left	13.02	0.43
6cm	< 1%	Right	13.03	0.46
6cm	< 1%	Front	12.88	0.41
6cm	< 1%	Rear	12.95	0.44
Limit			614	1.63
Margin Limit (%)			2.16%	28.22%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
6cm	< 50%	Top	13.28	0.30
6cm	< 50%	Bottom	13.11	0.33
6cm	< 50%	Left	12.95	0.46
6cm	< 50%	Right	12.93	0.45
6cm	< 50%	Front	12.93	0.43
6cm	< 50%	Rear	12.90	0.40
Limit			614	1.63
Margin Limit (%)			2.16%	28.22%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
6cm	< 99%	Top	13.24	0.27
6cm	< 99%	Bottom	13.17	0.31
6cm	< 99%	Left	12.91	0.39
6cm	< 99%	Right	12.92	0.38
6cm	< 99%	Front	13.07	0.37
6cm	< 99%	Rear	12.91	0.29
Limit			614	1.63
Margin Limit (%)			2.16%	23.93%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
8cm	< 1%	Top	13.21	0.39
8cm	< 1%	Bottom	13.26	0.42
8cm	< 1%	Left	13.24	0.37
8cm	< 1%	Right	13.30	0.34
8cm	< 1%	Front	13.34	0.30
8cm	< 1%	Rear	13.37	0.31
Limit			614	1.63
Margin Limit (%)			2.18%	25.77%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
8cm	< 50%	Top	13.33	0.28
8cm	< 50%	Bottom	13.34	0.39
8cm	< 50%	Left	13.26	0.37
8cm	< 50%	Right	13.35	0.24
8cm	< 50%	Front	13.26	0.21
8cm	< 50%	Rear	13.29	0.17
Limit			614	1.63
Margin Limit (%)			2.17%	23.93%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
8cm	< 99%	Top	13.36	0.35
8cm	< 99%	Bottom	13.46	0.37
8cm	< 99%	Left	13.26	0.28
8cm	< 99%	Right	13.34	0.14
8cm	< 99%	Front	13.32	0.11
8cm	< 99%	Rear	13.33	0.18
Limit			614	1.63
Margin Limit (%)			2.19%	22.70%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
10cm	< 1%	Top	13.13	0.38
10cm	< 1%	Bottom	13.15	0.40
10cm	< 1%	Left	13.09	0.37
10cm	< 1%	Right	13.04	0.36
10cm	< 1%	Front	13.00	0.37
10cm	< 1%	Rear	13.08	0.34
Limit			614	1.63
Margin Limit (%)			2.14%	24.54%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
10cm	< 50%	Top	13.06	0.34
10cm	< 50%	Bottom	13.30	0.41
10cm	< 50%	Left	13.18	0.37
10cm	< 50%	Right	13.06	0.42
10cm	< 50%	Front	12.96	0.20
10cm	< 50%	Rear	13.20	0.42
Limit			614	1.63
Margin Limit (%)			2.17%	25.77%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
10cm	< 99%	Top	13.09	0.39
10cm	< 99%	Bottom	13.30	0.38
10cm	< 99%	Left	13.09	0.37
10cm	< 99%	Right	12.91	0.43
10cm	< 99%	Front	12.95	0.09
10cm	< 99%	Rear	13.25	0.38
Limit			614	1.63
Margin Limit (%)			2.17%	26.38%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
12cm	< 1%	Top	13.08	0.35
12cm	< 1%	Bottom	13.21	0.34
12cm	< 1%	Left	13.23	0.31
12cm	< 1%	Right	13.27	0.34
12cm	< 1%	Front	13.36	0.30
12cm	< 1%	Rear	13.48	0.33
Limit			614	1.63
Margin Limit (%)			2.20%	21.47%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
12cm	< 50%	Top	13.15	0.34
12cm	< 50%	Bottom	13.11	0.24
12cm	< 50%	Left	13.25	0.28
12cm	< 50%	Right	13.27	0.38
12cm	< 50%	Front	13.50	0.41
12cm	< 50%	Rear	13.57	0.42
Limit			614	1.63
Margin Limit (%)			2.21%	25.77%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
12cm	< 99%	Top	13.27	0.31
12cm	< 99%	Bottom	13.07	0.21
12cm	< 99%	Left	13.30	0.28
12cm	< 99%	Right	13.16	0.39
12cm	< 99%	Front	13.52	0.33
12cm	< 99%	Rear	13.63	0.38
Limit			614	1.63
Margin Limit (%)			2.22%	23.93%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
14cm	< 1%	Top	13.01	0.37
14cm	< 1%	Bottom	12.98	0.40
14cm	< 1%	Left	13.03	0.38
14cm	< 1%	Right	13.12	0.33
14cm	< 1%	Front	13.10	0.28
14cm	< 1%	Rear	13.17	0.28
Limit			614	1.63
Margin Limit (%)			2.14%	24.54%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
14cm	< 50%	Top	13.07	0.42
14cm	< 50%	Bottom	12.95	0.39
14cm	< 50%	Left	13.19	0.39
14cm	< 50%	Right	13.23	0.25
14cm	< 50%	Front	13.16	0.23
14cm	< 50%	Rear	13.30	0.11
Limit			614	1.63
Margin Limit (%)			2.17%	25.77%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
14cm	< 99%	Top	12.93	0.26
14cm	< 99%	Bottom	13.05	0.39
14cm	< 99%	Left	13.04	0.34
14cm	< 99%	Right	13.18	0.12
14cm	< 99%	Front	13.09	0.27
14cm	< 99%	Rear	13.30	0.12
Limit			614	1.63
Margin Limit (%)			2.17%	23.93%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
16cm	< 1%	Top	12.95	0.34
16cm	< 1%	Bottom	12.89	0.27
16cm	< 1%	Left	12.78	0.31
16cm	< 1%	Right	12.86	0.26
16cm	< 1%	Front	12.98	0.25
16cm	< 1%	Rear	12.89	0.22
Limit			614	1.63
Margin Limit (%)			2.11%	20.86%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
16cm	< 50%	Top	13.00	0.20
16cm	< 50%	Bottom	12.88	0.23
16cm	< 50%	Left	12.77	0.23
16cm	< 50%	Right	12.69	0.33
16cm	< 50%	Front	13.02	0.29
16cm	< 50%	Rear	12.84	0.17
Limit			614	1.63
Margin Limit (%)			2.12%	20.25%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
16cm	< 99%	Top	13.15	0.29
16cm	< 99%	Bottom	12.98	0.22
16cm	< 99%	Left	12.69	0.24
16cm	< 99%	Right	12.51	0.38
16cm	< 99%	Front	12.97	0.31
16cm	< 99%	Rear	12.97	0.17
Limit			614	1.63
Margin Limit (%)			2.14%	23.31%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
18cm	< 1%	Top	12.88	0.31
18cm	< 1%	Bottom	12.82	0.29
18cm	< 1%	Left	12.76	0.32
18cm	< 1%	Right	12.85	0.32
18cm	< 1%	Front	12.73	0.29
18cm	< 1%	Rear	12.75	0.22
Limit			614	1.63
Margin Limit (%)			2.10%	19.63%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
18cm	< 50%	Top	12.86	0.14
18cm	< 50%	Bottom	12.81	0.23
18cm	< 50%	Left	12.76	0.28
18cm	< 50%	Right	12.85	0.31
18cm	< 50%	Front	12.73	0.25
18cm	< 50%	Rear	12.72	0.13
Limit			614	1.63
Margin Limit (%)			2.09%	19.02%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
18cm	< 99%	Top	12.99	0.11
18cm	< 99%	Bottom	12.88	0.19
18cm	< 99%	Left	12.67	0.28
18cm	< 99%	Right	12.82	0.29
18cm	< 99%	Front	12.73	0.25
18cm	< 99%	Rear	12.75	0.18
Limit			614	1.63
Margin Limit (%)			2.12%	17.79%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
20cm	< 1%	Top	12.69	0.27
20cm	< 1%	Bottom	12.61	0.24
20cm	< 1%	Left	12.65	0.15
20cm	< 1%	Right	12.68	0.17
20cm	< 1%	Front	12.70	0.17
20cm	< 1%	Rear	12.65	0.16
Limit			614	1.63
Margin Limit (%)			2.07%	16.56%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
20cm	< 50%	Top	12.74	0.25
20cm	< 50%	Bottom	12.68	0.07
20cm	< 50%	Left	12.50	0.20
20cm	< 50%	Right	12.80	0.18
20cm	< 50%	Front	12.76	0.07
20cm	< 50%	Rear	12.76	0.26
Limit			614	1.63
Margin Limit (%)			2.08%	15.95%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
20cm	< 99%	Top	12.92	0.24
20cm	< 99%	Bottom	12.76	0.13
20cm	< 99%	Left	12.57	0.09
20cm	< 99%	Right	12.76	0.17
20cm	< 99%	Front	12.81	0.07
20cm	< 99%	Rear	12.79	0.10
Limit			614	1.63
Margin Limit (%)			2.10%	14.72%

5.6 Test Setup photo

0mm-Botton



0mm-Front



0mm-Left



0mm-Rear



0mm-Right



0mm-Top



End of report